

# FCC TEST REPORT

**REPORT NO.:** RF110920C26

**MODEL NO.:** DVDOAT-1

**FCC ID:** PQP-SPLDT1

**RECEIVED:** Sep. 20, 2011

**TESTED:** Feb. 14 to 21, 2012

**ISSUED:** May 16, 2012

**APPLICANT:** Prime Electronics & Satellitics inc.

**ADDRESS:** 69, Tung Yuan Rd., Chung Li Industrial Park, Chung Li City, Taoyuan Taiwan, R.O.C

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C

This test report consists of 88 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or TAF and any government agencies. The test results in the report only apply to the tested sample.





A D T

## Table of Contents

RELEASE CONTROL RECORD .....	5
1. CERTIFICATION .....	6
2. SUMMARY OF TEST RESULTS .....	7
2.1 MEASUREMENT UNCERTAINTY .....	8
3. GENERAL INFORMATION .....	9
3.1 GENERAL DESCRIPTION OF EUT .....	9
3.2 DESCRIPTION OF TEST MODES .....	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	15
3.4 DESCRIPTION OF SUPPORT UNITS.....	16
3.5 CONFIGURATION OF SYSTEM UNDER TEST .....	17
4. TEST TYPES AND RESULTS .....	18
4.1 AC POWER LINE CONDUCTED EMISSION MEASUREMENT .....	18
4.1.1 LIMITS OF AC POWER LINE CONDUCTED EMISSION MEASUREMENT .....	18
4.1.2 TEST INSTRUMENTS.....	18
4.1.3 TEST PROCEDURES .....	19
4.1.4 DEVIATION FROM TEST STANDARD .....	19
4.1.5 TEST SETUP .....	20
4.1.6 EUT OPERATING CONDITIONS .....	20
4.1.7 TEST RESULTS .....	21
4.2 SURIOUS EMISSIONS .....	23
4.2.1 LIMIT OF SURIOUS EMISSIONS.....	23
4.2.2 TEST INSTRUMENTS.....	24
4.2.3 TEST PROCEDURES .....	25
4.2.4 DEVIATION FROM TEST STANDARD .....	26
4.2.5 TEST SETUP .....	27
4.2.6 EUT OPERATING CONDITIONS .....	27
4.2.7 TEST RESULTS-LRP MODE.....	28
4.2.8 TEST RESULTS-HRP MODE .....	42
4.3 6DB BANDWIDTH MEASUREMENT .....	48
4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT .....	48
4.3.2 TEST INSTRUMENTS.....	48
4.3.3 TEST PROCEDURE.....	48
4.3.4 DEVIATION FROM TEST STANDARD .....	49
4.3.5 TEST SETUP .....	49
4.3.6 EUT OPERATING CONDITIONS .....	49
4.3.7 TEST RESULTS-LRP MODE.....	50
4.3.8 TEST RESULTS-HRP MODE .....	54
4.4 POWER DENSITY MEASUREMENT .....	56
4.4.1 LIMITS OF POWER DENSITY MEASUREMENT .....	56



A D T

4.4.2	TEST INSTRUMENTS.....	57
4.4.3	TEST PROCEDURE.....	58
4.4.4	DEVIATION FROM TEST STANDARD .....	59
4.4.5	TEST SETUP .....	59
4.4.6	EUT OPERATING CONDITION .....	59
4.4.7	TEST RESULTS-LRP MODE.....	60
4.4.8	TEST RESULTS-HRP MODE .....	66
4.5	PEAK OUTPUT POWER .....	68
4.5.1	LIMITS OF PEAK OUTPUT POWER MEASUREMENT .....	68
4.5.2	INSTRUMENTS.....	68
4.5.3	TEST PROCEDURES .....	69
4.5.4	DEVIATION FROM TEST STANDARD .....	69
4.5.5	TEST SETUP .....	69
4.5.6	EUT OPERATING CONDITIONS .....	69
4.5.7	TEST RESULTS-LRP MODE.....	70
4.5.8	TEST RESULTS-HRP MODE .....	71
4.6	26DB BANDWIDTH MEASUREMENT.....	72
4.6.1	LIMITS OF 26DB BANDWIDTH MEASUREMENT .....	72
4.6.2	TEST INSTRUMENTS.....	72
4.6.3	TEST PROCEDURE.....	73
4.6.4	DEVIATION FROM TEST STANDARD .....	73
4.6.5	TEST SETUP .....	73
4.6.6	EUT OPERATING CONDITIONS .....	73
4.6.7	TEST RESULTS-LRP MODE.....	74
4.6.8	TEST RESULTS-LRP MODE.....	78
4.7	FREQUENCY STABILITY.....	80
4.7.1	LIMITS OF FREQUENCY STABILITY .....	80
4.7.2	TEST INSTRUMENTS.....	80
4.7.3	TEST PROCEDURE.....	81
4.7.4	DEVIATION FROM TEST STANDARD .....	81
4.7.5	TEST SETUP .....	81
4.7.6	EUT OPERATING CONDITIONS .....	82
4.7.7	TEST RESULTS .....	83
4.8	PUBLICLY-ACCESSIBLE COORDINATION CHANNEL .....	84
4.8.1	LIMITS OF PUBLICLY-ACCESSIBLE COORDINATION CHANNEL .....	84
4.8.2	TEST RESULTS .....	84
4.9	OPERATION RESTRICTION AND GROUP INSTALLATION .....	85
4.9.1	LIMITS OF OPERATION RESTRICTION AND GROUP INSTALLATION .....	85
4.9.2	TEST RESULTS .....	85
4.10	TRANSMITTER IDENTIFICATION .....	86
4.10.1	LIMITS OF TRANSMITTER IDENTIFICATION .....	86
4.10.2	TEST RESULTS .....	86



A D T

5.	INFORMATION ON THE TESTING LABORATORIES .....	87
6.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	88



## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF110920C26	Original release	May 16, 2012



A D T

## 1. CERTIFICATION

**PRODUCT:** Wireless HD Transmitter  
**BRAND NAME:** DVDO  
**MODEL NO.:** DVDOAT-1  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**APPLICANT:** Prime Electronics & Satellitics inc.  
**TESTED:** Feb. 14 to 21, 2012  
**STANDARDS:** FCC Part 15, Subpart C (Section 15.255)  
ANSI C63.10-2009

The above equipment (Model: DVDOAT-1) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Claire Kuan , **DATE:** May 16, 2012  
(Claire Kuan, Specialist )

**APPROVED BY :** May Chen , **DATE:** May 16, 2012  
(May Chen, Deputy Manager )

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC POWER LINE Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -9.02dB at 0.52500MHz
15.255(e)	Occupied Bandwidth	PASS	Meet the requirement of limit.
15.255(b)(1)	Power Density	PASS	Meet the requirement of limit.
15.255(e)	Peak Output Power	PASS	Meet the requirement of limit.
15.255(c)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -2.9dB at 23530.58MHz
15.255(f)	Frequency Stability	PASS	Meet the requirement of limit.
15.255(d)	Publicly-accessible Coordination Channel	PASS	Meet the requirement of limit.
15.255(a), (h)	Operation Restriction and Group installation	PASS	Meet the requirement.
15.255(i)	Transmitter Identification	PASS	Meet the requirement.

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.81 dB
Radiated emissions (1GHz -18GHz)	2.19 dB
Radiated emissions (18GHz -40GHz)	2.56 dB



### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	Wireless HD Transmitter
<b>MODEL NO.</b>	DVDOAT-1
<b>POWER SUPPLY</b>	DC 5V from power adapter
<b>MODULATION TYPE</b>	BPSK,QPSK,16QAM
<b>MODULATION TECHNOLOGY</b>	OFDM
<b>TRANSFER RATE</b>	LRP-BPSK (20.337Mb/s) HRP-QPSK (0.952Gbs -Quarter Rate,1.904Gb/s-Half Rate) HRP-16QAM (3.807 Gb/s-Full Rate)
<b>FREQUENCY RANGE</b>	LRP: 60.32-60.64 GHz / 62.48 - 62.8GHz HRP: 60.48GHz/62.64GHz
<b>MAXIMUM OUTPUT POWER</b>	LRP: 20.4dBm HRP: 34.6dBm
<b>ANTENNA TYPE</b>	LRP: 16 dBi HRP: 22 dBi
<b>DATA CABLE</b>	HDMI cable (Shielded, 1.5m)
<b>I/O PORTS</b>	Please refer User's manual
<b>ASSOCIATED DEVICES</b>	Power adapter x 1

#### NOTE:

1. The EUT is a Wireless HD Device. It is operate in the 57 to 64GHz band for Wireless Video Audio Network (WVAN).

2. There is one antenna provided to this EUT, please refer to the following table:

LRP			
Maximum Antenna Gain	Antenna Type	Connector Type	Frequency range (MHz)
16 dBi	Scanning beam-steering array	NA	60.32 to 60.64GHz

HRP			
Maximum Antenna Gain	Antenna Type	Connector Type	Frequency range (MHz)
22 dBi	Scanning beam-steering array	NA	60.48GHz.

3. The LRP modulation is BPSK. The HRP modulation can be either QPSK or 16QAM. Three system data rates are implemented: QPSK at 0.952 Gb/s (Quarter Rate), QPSK at 1.904 Gb/s (Half Rate) and 16-QAM at 3.807 Gb/s (Full Rate).

4. The EUT must be supplied with a power adapter as the following table:

<b>Brand:</b>	APD
<b>Model No.:</b>	WA-10I5R
<b>Input power :</b>	AC100-240V, 0.3A Max
<b>Output power :</b>	DC 5V, 2A DC output cable (Unshielded, 1.5m)

5. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

### 3.2 DESCRIPTION OF TEST MODES

Test Channel frequency:

LRP MODE				
FREQUENCY BAND	CHANNEL PLAN	L (LOW CHANNEL)	M (MIDDLE CHANNEL)	H (HIGH CHANNEL)
60.32 – 60.64GHz	1	60.32GHz	60.48GHz	60.64GHz
62.48 – 62.80GHz	2	62.48GHz	62.64GHz	62.80GHz

HRP MODE		
FREQUENCY BAND	CHANNEL PLAN	CENTER FREQUENCY
60.48GHz	1	60.48GHz
62.64GHz	2	62.64GHz

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	PLC	OB	PD	POP	FS	RE < 1G	RE ≥ 1G	
L	-	√	√	√	√	√	√	LRP Mode
H	√	√	√	√	-	√	√	HRP Mode

Where **PLC**: Power Line Conducted Emission

**OB**: Occupied Bandwidth

**PD**: Power Density

**PCP**: Peak Output Power

**FS**: Frequency Stability

**RE < 1G**: Radiated Emission below 1GHz

**RE ≥ 1G**: Radiated Emission above 1GHz

#### **POWER LINE CONDUCTED EMISSION TEST:**

☒ Pre-Scan has been radiated to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna beam in various orientations.

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	ANTENNA BEAM	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE
H	1	Channel plan 1: Center frequency	Main lobe (perpendicular)	OFDM	QPSK	3.807Gb/s

#### **OCCUPIED BANDWIDTH TEST:**

☒ Pre-Scan has been radiated to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna beam in various orientations.

☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	ANTENNA BEAM	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE
L	3	Channel plan 1 & 2: L,M,H	Main lobe (perpendicular)	OFDM	BPSK	20.337 Mb/s
H	1	Channel plan 1 & 2: Center frequency	Main lobe (perpendicular)	OFDM	QPSK	3.807Gb/s

### **POWER DENSITY:**

- ☒ Pre-Scan has been radiated to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna beam in various orientations.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	ANTENNA BEAM	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE
L	3	Channel plan 1 & 2: L,M,H	Main lobe (perpendicular)	OFDM	BPSK	20.337 Mb/s
H	1	Channel plan 1 & 2: Center frequency	Main lobe (perpendicular)	OFDM	QPSK	3.807Gb/s

### **POWER OUTPUT POWER:**

- ☒ Pre-Scan has been radiated to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna beam in various orientations.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	ANTENNA BEAM	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE
L	3	Channel plan 1 & 2: L,M,H	Main lobe (perpendicular)	OFDM	BPSK	20.337 Mb/s
H	1	Channel plan 1 & 2: Center frequency	Main lobe (perpendicular)	OFDM	QPSK	3.807Gb/s

### **FREQUENCY STABILITY TEST:**

- ☒ Pre-Scan has been radiated to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna beam in various orientations.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	ANTENNA BEAM	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE
L	1	Channel plan 1: M	Main lobe (perpendicular)	OFDM	BPSK	20.337 Mb/s

### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- ☒ Pre-Scan has been radiated to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna beam in various orientations.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	ANTENNA BEAM	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE
L	1	Channel plan 1: L Channel plan 2: M	Main lobe (perpendicular)	OFDM	BPSK	20.337 Mb/s
H	1	Channel plan 1 & 2: Center frequency	Main lobe (perpendicular)	OFDM	QPSK	3.807Gb/s

### **RADIATED EMISSION TEST (ABOVE 1 GHz):**

- ☒ Pre-Scan has been radiated to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna beam in various orientations.
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	ANTENNA BEAM	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE
L	3	Channel plan 1 & 2: L, M, H	Main lobe (perpendicular)	OFDM	BPSK	20.337 Mb/s
H	1	Channel plan 1 & 2: Center frequency	Main lobe (perpendicular)	OFDM	QPSK	3.807Gb/s

### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE <sup>3</sup> 1G	23deg. C, 62%RH	120Vac, 60Hz	Nelson Tseng
RE<1G	23deg. C, 62%RH	120Vac, 60Hz	Nelson Tseng
PLC	25deg. C, 63%RH	120Vac, 60Hz	Kyle Huang
APCM	20deg. C, 60%RH	120Vac, 60Hz	Wen Yu

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C. (15.255)**  
**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**NOTE:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

### 3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PLAYSTATION. 3	SONY	CECH-2507A	03-27457231-562693 8-CECH-2507A	NA
2	LCD TV	SONY	KDL-32CX520	3676813	NA
3	Wireless HD Receiver	DVDO	DVDOAR-1	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	HDMI cable (1.5m)
2	HDMI cable (1.5m)
3	NA

**NOTE:** 1. All power cords of the above support units are non shielded (1.8m).



### 3.5 CONFIGURATION OF SYSTEM UNDER TEST

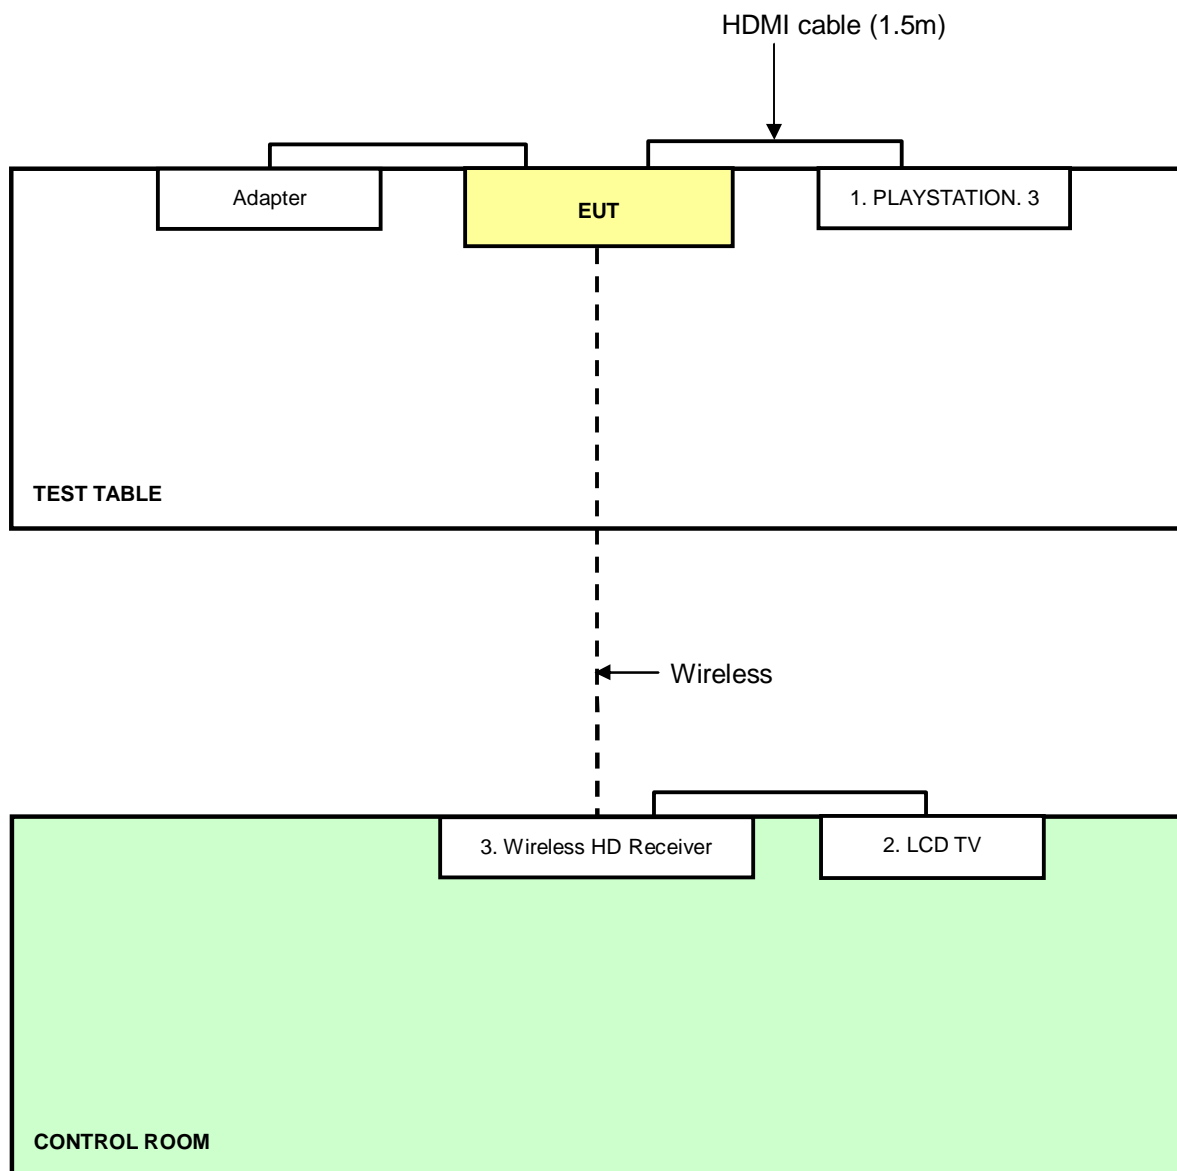

## 4. TEST TYPES AND RESULTS

### 4.1 AC POWER LINE CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF AC POWER LINE CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Mar. 02, 2011	Mar. 01, 2012
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 10, 2011	June 09, 2012
RF Cable (JYEBAO)	5DFB	CONCAB-003	Aug. 05, 2011	Aug. 04, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested date: Feb. 15, 2012


#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

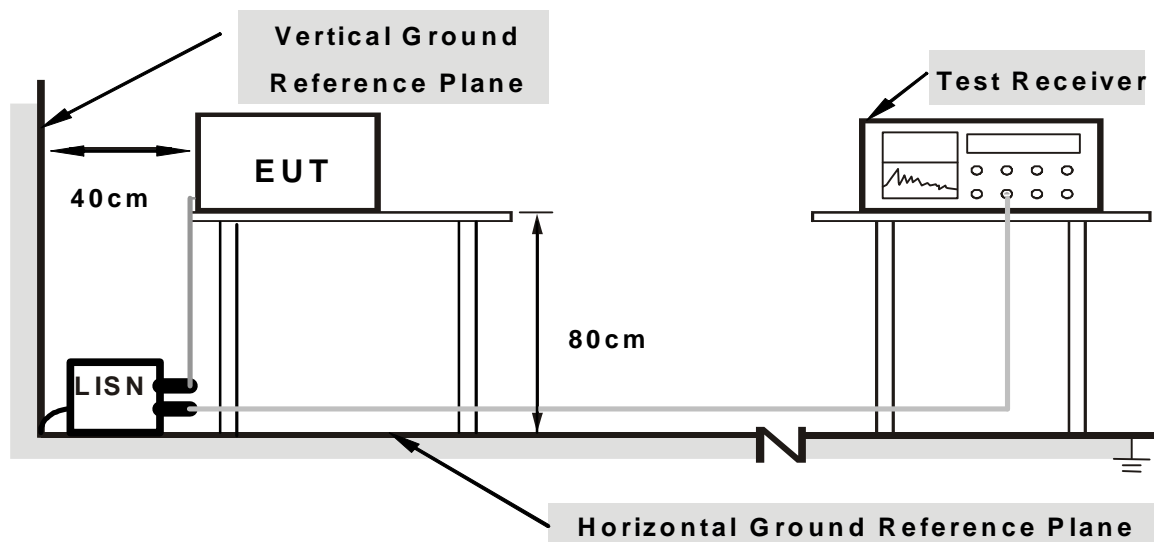

**Note: 1.Support units were connected to second LISN.**

**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS


High Definition Audio/Video in the 1080p format was sent from transmitter to the Receiver via the wireless link. The BD Player (PS3) equipped HD A/V to the transmitter. The receiver got the HD A/V signal and transfer to the television. The television was placed outside the test table. A laptop computer with test software was utilized to vary the radio configuration and antenna beam orientation for testing purposes. This computer was not connected during measurements.

#### 4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
-------	----------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.31603	0.07	40.56	27.11	40.63	27.18	59.81	49.81	-19.18	-22.63
2	0.50000	0.08	39.96	25.23	40.04	25.31	56.00	46.00	-15.96	-20.69
3	0.62656	0.09	40.73	26.80	40.82	26.89	56.00	46.00	-15.18	-19.11
4	0.78281	0.09	39.77	25.35	39.86	25.44	56.00	46.00	-16.14	-20.56
5	1.19141	0.12	37.73	24.06	37.85	24.18	56.00	46.00	-18.15	-21.82
6	1.81250	0.19	37.02	23.95	37.21	24.14	56.00	46.00	-18.79	-21.86


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

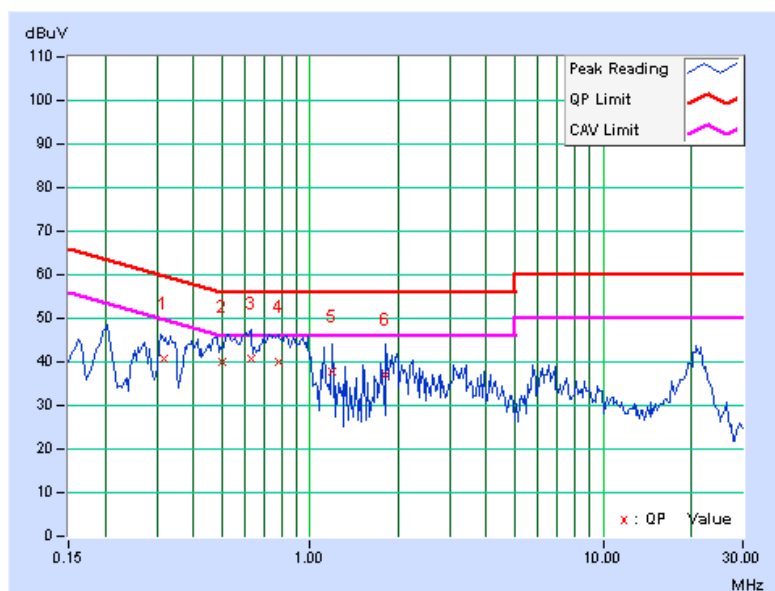

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
-------	-------------	---------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.32188	0.09	47.92	36.23	48.01	36.32	59.66	49.66	-11.65	-13.34
2	0.40391	0.09	46.11	36.23	46.20	36.32	57.77	47.77	-11.57	-11.45
3	<b>0.52500</b>	<b>0.09</b>	<b>46.89</b>	<b>34.18</b>	<b>46.98</b>	<b>34.27</b>	<b>56.00</b>	<b>46.00</b>	<b>-9.02</b>	<b>-11.73</b>
4	0.71250	0.10	45.16	34.10	45.26	34.20	56.00	46.00	-10.74	-11.80
5	0.95469	0.11	46.34	36.38	46.45	36.49	56.00	46.00	-9.55	-9.51
6	1.37891	0.15	42.05	32.22	42.20	32.37	56.00	46.00	-13.80	-13.63
7	2.07422	0.22	42.64	33.63	42.86	33.85	56.00	46.00	-13.14	-12.15
8	3.00391	0.29	41.13	32.11	41.42	32.40	56.00	46.00	-14.58	-13.60

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. The emission levels of other frequencies were very low against the limit.
  3. Margin value = Emission level - Limit value
  4. Correction factor = Insertion loss + Cable loss
  5. Emission Level = Correction Factor + Reading Value.

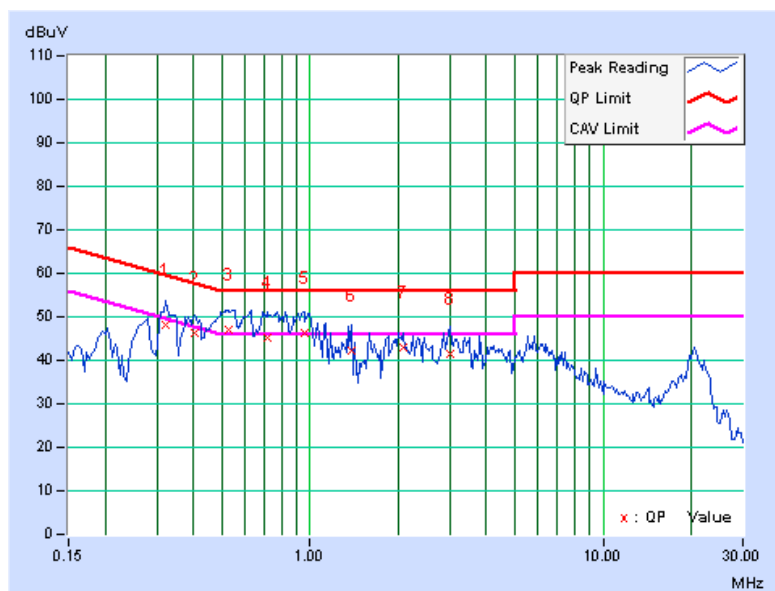

## 4.2 SURIOUS EMISSIONS

### 4.2.1 LIMIT OF SURIOUS EMISSIONS

#### 15.255 (c)

Frequency Range	Average
Radiated emissions below 40GHz	Follow part 15.209
Between 40GHz and 200GHz	90pW/cm <sup>2</sup> (at 3 meter)
Note: The levels of the spurious emissions shall not exceed the level of the fundamental emission	

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Section 15.205 restricted bands of operation shall compliance with the limits in Section 15.209.



A D T

#### 4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATE D DATE	CALIBRATE D UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS-Amplifier	SLKKA-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
*OML Harmonic Mixer (33~55GHz)	M22HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (33~55GHz)	M22RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Harmonic Mixer (50~75GHz)	M15RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (50~75GHz)	M15HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Harmonic Mixer (75~110GHz)	M10HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (75~110GHz)	M10RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Harmonic Mixer (110~170GHz)	M06RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (110~170GHz)	M06HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Harmonic Mixer (140~220GHz)	M05HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (140~220GHz)	M05RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*Diplexer	DPL26	110215-1	Feb. 16, 2011	Feb. 15, 2013
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	NA	NA
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments (Except \*) is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.  
2. \* = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.  
3. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.  
4. The test was performed in 966 Chamber No. G.  
5. The FCC Site Registration No. is 966073.  
6. The VCCI Site Registration No. is G-137.  
7. The CANADA Site Registration No. is IC 7450H-2.  
8. Tested date: Feb. 14, 2012.



### 4.2.3 TEST PROCEDURES

#### **PROCEDURE FOR 30 MHz TO 40 GHz**

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

#### **NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 10Hz for Average detection (AV) at frequency above 1GHz.

## PROCEDURE FOR 40 TO 200 GHz

External harmonic mixers are utilized.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The distance at which limits are typically specified is 3 meter; however, closer measurement distances may be utilized.
- c. Begin handheld measurements with the test antenna (horn) at a distance of 1 meter from the EUT, in a horizontally polarized position. Slowly adjust its position, entirely covering the plane 1 meter from the EUT.
- d. Repeat (c) with the horn in a vertically polarized position.
- e. If the emission cannot be detected at 1 meter, reduce the RBW in order to increase system sensitivity. Note the value. If the emission still cannot be detected, move the horn closer to the EUT, noting the distance at which a measurement is made.
- f. Note the maximum level indicated on the Spectrum Analyzer.
- g. Based on the distance at which the measurement was made and the calculated distance to the edge of the far field, determine the appropriate distance attenuation factor. Apply this factor to the calculated field strength in order to determine the equivalent field strength at the distance at which the regulatory limit is specified. Compare to the appropriate limits
- h. Repeat (a) - (f) for every emission that must be measured, up through the required frequency range of investigation


### NOTE:

1. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 50MHz for Peak and Average detection at frequency above 40GHz.

## 4.2.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.5 TEST SETUP

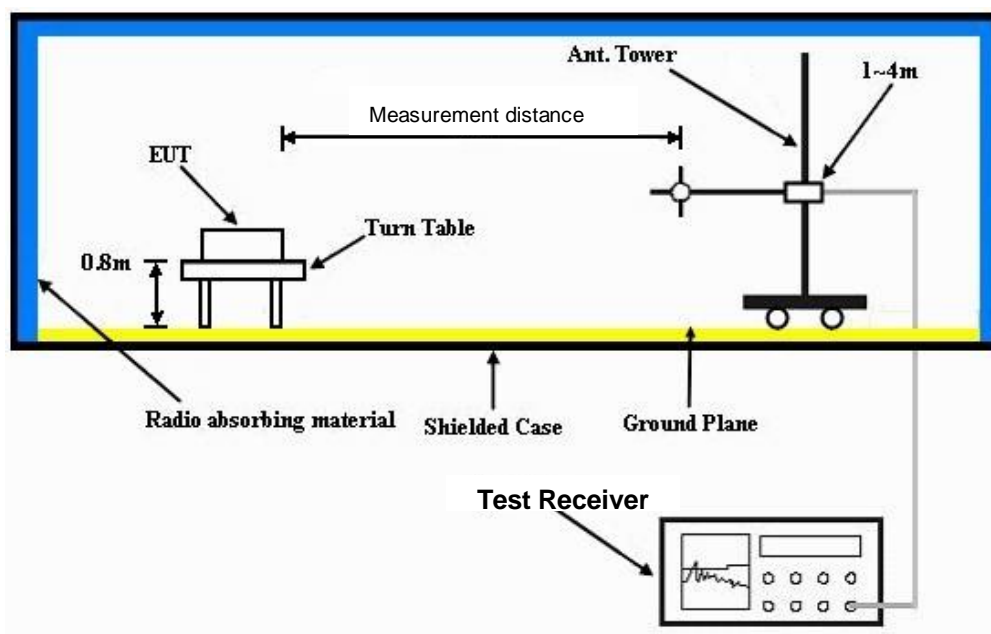

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.6 EUT OPERATING CONDITIONS

High Definition Audio/Video in the 1080p format was sent from transmitter to the Receiver via the wireless link. The BD Player (PS3) equipped HD A/V to the transmitter. The receiver got the HD A/V signal and transfer to the television. The television was placed outside the test table. A laptop computer with test software was utilized to vary the radio configuration and antenna beam orientation for testing purposes. This computer was not connected during measurements.

## 4.2.7 TEST RESULTS-LRP MODE

### BELOW 1GHz WORST-CASE DATA : CHANNEL PLAN 1

CHANNEL	TX Channel L	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	89.33	37.7 QP	43.5	-5.8	1.00 H	264	29.01	8.67
2	162.04	38.8 QP	43.5	-4.7	2.00 H	61	24.30	14.51
3	218.77	39.3 QP	46.0	-6.7	1.50 H	240	27.21	12.08
4	289.82	38.3 QP	46.0	-7.8	1.25 H	103	23.46	14.79
5	405.04	35.9 QP	46.0	-10.1	1.00 H	34	18.08	17.79
6	945.05	34.6 QP	46.0	-11.4	1.50 H	291	7.74	26.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.19	38.6 QP	43.5	-4.9	1.00 V	261	29.66	8.96
2	156.00	39.6 QP	43.5	-3.9	1.25 V	3	24.89	14.69
3	217.58	33.2 QP	46.0	-12.8	1.25 V	105	21.15	12.03
4	405.04	31.6 QP	46.0	-14.4	1.75 V	185	13.80	17.79
5	540.05	31.6 QP	46.0	-14.4	1.00 V	262	10.76	20.81
6	971.34	37.7 QP	54.0	-16.3	1.25 V	323	10.67	27.05

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

# ABOVE 1GHz WORST-CASE DATA

CHANNEL	TX Channel L	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1560.83	52.6 PK	74.0	-21.4	1.00 H	21	24.22	28.36
2	1560.83	26.4 AV	54.0	-27.6	1.00 H	21	-1.94	28.36
3	1949.24	59.9 PK	74.0	-14.1	1.00 H	150	29.64	30.22
4	1949.24	28.8 AV	54.0	-25.2	1.00 H	150	-1.45	30.22
5	2390.71	54.8 PK	74.0	-19.2	1.00 H	315	23.08	31.75
6	2390.71	33.0 AV	54.0	-21.0	1.00 H	315	1.26	31.75
7	3186.40	51.3 PK	74.0	-22.8	1.00 H	350	17.38	33.87
8	3186.40	32.7 AV	54.0	-21.3	1.00 H	350	-1.20	33.87
9	3985.72	50.5 PK	74.0	-23.6	2.00 H	190	14.16	36.29
10	3985.72	35.9 AV	54.0	-18.1	2.00 H	190	-0.41	36.29
11	6373.70	57.1 PK	74.0	-16.9	1.25 H	75	13.05	44.01
12	6373.70	44.0 AV	54.0	-10.0	1.25 H	75	-0.03	44.01
13	23530.58	66.9 PK	74.0	-7.2	1.75 H	320	7.96	58.89
14	23530.58	51.0 AV	54.0	-3.1	1.75 H	320	-7.94	58.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1312.65	51.2 PK	74.0	-22.8	1.00 V	336	23.72	27.51
2	1312.65	38.2 AV	54.0	-15.8	1.00 V	336	10.67	27.51
3	1941.65	66.5 PK	74.0	-7.5	1.00 V	264	36.30	30.18
4	1941.65	34.4 AV	54.0	-19.6	1.00 V	264	4.26	30.18
5	2183.74	53.6 PK	74.0	-20.4	1.25 V	358	22.52	31.10
6	2183.74	38.0 AV	54.0	-16.0	1.25 V	358	6.90	31.10
7	3195.76	54.4 PK	74.0	-19.6	1.00 V	27	20.47	33.89
8	3195.76	33.8 AV	54.0	-20.2	1.00 V	27	-0.12	33.89
9	4985.74	61.5 PK	74.0	-12.5	1.00 V	350	21.58	39.91
10	4985.74	37.1 AV	54.0	-16.9	1.00 V	350	-2.80	39.91
11	6391.28	59.9 PK	74.0	-14.1	1.75 V	39	15.82	44.09
12	6391.28	45.4 AV	54.0	-8.6	1.75 V	39	1.34	44.09
13	17364.67	64.9 PK	74.0	-9.1	1.00 V	330	9.73	55.13
14	17364.67	49.5 AV	54.0	-4.5	1.00 V	330	-5.60	55.13

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel L	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	40GHz ~ 200GHz		Average (AV)

No spurious emissions were detected in the band 40 to 200GHz for both Hor. Ver. polarities at 1m measurement distance.

CHANNEL	TX Channel M	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1560.83	52.5 PK	74.0	-21.5	1.00 H	23	24.18	28.36
2	1560.83	26.5 AV	54.0	-27.6	1.00 H	23	-1.91	28.36
3	1949.24	59.9 PK	74.0	-14.1	1.00 H	152	29.65	30.22
4	1949.24	28.8 AV	54.0	-25.3	1.00 H	152	-1.47	30.22
5	2390.71	54.9 PK	74.0	-19.1	1.00 H	318	23.12	31.75
6	2390.71	33.1 AV	54.0	-20.9	1.00 H	318	1.37	31.75
7	3186.40	51.3 PK	74.0	-22.7	1.00 H	352	17.46	33.87
8	3186.40	32.7 AV	54.0	-21.3	1.00 H	352	-1.18	33.87
9	3985.72	50.5 PK	74.0	-23.5	2.00 H	193	14.20	36.29
10	3985.72	35.9 AV	54.0	-18.1	2.00 H	193	-0.38	36.29
11	6373.70	57.1 PK	74.0	-16.9	1.25 H	74	13.10	44.01
12	6373.70	44.0 AV	54.0	-10.0	1.25 H	74	-0.04	44.01
13	23530.58	66.9 PK	74.0	-7.1	1.75 H	326	8.01	58.89
14	23530.58	51.1 AV	54.0	-2.9	1.75 H	326	-7.78	58.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1312.65	51.3 PK	74.0	-22.7	1.00 V	335	23.75	27.51
2	1312.65	38.1 AV	54.0	-15.9	1.00 V	335	10.63	27.51
3	1941.65	66.5 PK	74.0	-7.5	1.00 V	263	36.33	30.18
4	1941.65	34.4 AV	54.0	-19.6	1.00 V	263	4.23	30.18
5	2183.74	53.7 PK	74.0	-20.4	1.25 V	357	22.55	31.10
6	2183.74	38.1 AV	54.0	-15.9	1.25 V	357	7.00	31.10
7	3195.76	54.3 PK	74.0	-19.7	1.00 V	28	20.38	33.89
8	3195.76	33.7 AV	54.0	-20.3	1.00 V	28	-0.16	33.89
9	4985.74	61.5 PK	74.0	-12.5	1.00 V	351	21.62	39.91
10	4985.74	37.2 AV	54.0	-16.8	1.00 V	351	-2.70	39.91
11	6391.28	59.9 PK	74.0	-14.1	1.75 V	34	15.78	44.09
12	6391.28	45.5 AV	54.0	-8.5	1.75 V	34	1.37	44.09
13	17364.67	64.9 PK	74.0	-9.1	1.00 V	332	9.75	55.13
14	17364.67	49.6 AV	54.0	-4.4	1.00 V	332	-5.57	55.13

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel M	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	40GHz ~ 200GHz		Average (AV)

No spurious emissions were detected in the band 40 to 200GHz for both Hor. Ver. polarities at 1m measurement distance.



CHANNEL	TX Channel H	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1560.83	52.5 PK	74.0	-21.5	1.00 H	27	24.10	28.36
2	1560.83	26.5 AV	54.0	-27.5	1.00 H	27	-1.87	28.36
3	1949.24	59.8 PK	74.0	-14.2	1.00 H	156	29.55	30.22
4	1949.24	28.7 AV	54.0	-25.3	1.00 H	156	-1.50	30.22
5	2390.71	54.9 PK	74.0	-19.1	1.00 H	319	23.12	31.75
6	2390.71	33.2 AV	54.0	-20.9	1.00 H	319	1.40	31.75
7	3186.40	51.3 PK	74.0	-22.7	1.00 H	352	17.41	33.87
8	3186.40	32.7 AV	54.0	-21.3	1.00 H	352	-1.18	33.87
9	3985.72	50.5 PK	74.0	-23.5	2.00 H	199	14.23	36.29
10	3985.72	35.9 AV	54.0	-18.1	2.00 H	199	-0.37	36.29
11	6373.70	57.1 PK	74.0	-16.9	1.25 H	77	13.13	44.01
12	6373.70	43.9 AV	54.0	-10.1	1.25 H	77	-0.15	44.01
13	23530.58	66.8 PK	74.0	-7.2	1.75 H	326	7.93	58.89
14	23530.58	50.9 AV	54.0	-3.2	1.75 H	326	-8.04	58.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1312.65	51.2 PK	74.0	-22.8	1.00 V	334	23.70	27.51
2	1312.65	38.1 AV	54.0	-15.9	1.00 V	334	10.62	27.51
3	1941.65	66.5 PK	74.0	-7.5	1.00 V	266	36.28	30.18
4	1941.65	34.5 AV	54.0	-19.6	1.00 V	266	4.27	30.18
5	2183.74	53.6 PK	74.0	-20.4	1.25 V	352	22.52	31.10
6	2183.74	38.2 AV	54.0	-15.9	1.25 V	352	7.05	31.10
7	3195.76	54.3 PK	74.0	-19.7	1.00 V	25	20.44	33.89
8	3195.76	33.7 AV	54.0	-20.3	1.00 V	25	-0.15	33.89
9	4985.74	61.5 PK	74.0	-12.5	1.00 V	356	21.57	39.91
10	4985.74	37.3 AV	54.0	-16.7	1.00 V	356	-2.65	39.91
11	6391.28	59.8 PK	74.0	-14.2	1.75 V	38	15.69	44.09
12	6391.28	45.5 AV	54.0	-8.5	1.75 V	38	1.42	44.09
13	17364.67	64.9 PK	74.0	-9.1	1.00 V	337	9.76	55.13
14	17364.67	49.6 AV	54.0	-4.5	1.00 V	337	-5.58	55.13

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel H	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	40GHz ~ 200GHz		Average (AV)

No spurious emissions were detected in the band 40 to 200GHz for both Hor. Ver. polarities at 1m measurement distance.

# BELOW 1GHz WORST-CASE DATA : CHANNEL PLAN 2

CHANNEL	TX Channel M	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	89.33	37.8 QP	43.5	-5.8	1.00 H	262	29.08	8.67
2	162.04	38.9 QP	43.5	-4.6	2.00 H	65	24.35	14.51
3	218.77	39.3 QP	46.0	-6.7	1.50 H	245	27.26	12.08
4	289.82	38.3 QP	46.0	-7.7	1.25 H	105	23.50	14.79
5	405.04	35.8 QP	46.0	-10.2	1.00 H	36	18.03	17.79
6	945.05	34.6 QP	46.0	-11.4	1.50 H	295	7.78	26.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.19	38.6 QP	43.5	-4.9	1.00 V	262	29.65	8.96
2	156.00	39.6 QP	43.5	-3.9	1.25 V	5	24.93	14.69
3	217.58	33.2 QP	46.0	-12.8	1.25 V	101	21.20	12.03
4	405.04	31.7 QP	46.0	-14.3	1.75 V	184	13.88	17.79
5	540.05	31.6 QP	46.0	-14.4	1.00 V	267	10.81	20.81
6	971.34	37.7 QP	54.0	-16.3	1.25 V	326	10.63	27.05

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

# ABOVE 1GHz WORST-CASE DATA

CHANNEL	TX Channel L	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1560.83	52.6 PK	74.0	-21.4	1.00 H	22	24.23	28.36
2	1560.83	26.4 AV	54.0	-27.6	1.00 H	22	-1.95	28.36
3	1949.24	59.9 PK	74.0	-14.1	1.00 H	152	29.67	30.22
4	1949.24	28.7 AV	54.0	-25.3	1.00 H	152	-1.48	30.22
5	2390.71	54.9 PK	74.0	-19.2	1.00 H	314	23.10	31.75
6	2390.71	33.1 AV	54.0	-20.9	1.00 H	314	1.36	31.75
7	3186.40	51.3 PK	74.0	-22.7	1.00 H	354	17.42	33.87
8	3186.40	32.7 AV	54.0	-21.3	1.00 H	354	-1.13	33.87
9	3985.72	50.5 PK	74.0	-23.5	2.00 H	192	14.19	36.29
10	3985.72	35.8 AV	54.0	-18.2	2.00 H	192	-0.47	36.29
11	6373.70	57.1 PK	74.0	-16.9	1.25 H	79	13.11	44.01
12	6373.70	43.9 AV	54.0	-10.1	1.25 H	79	-0.09	44.01
13	23530.58	66.8 PK	74.0	-7.2	1.75 H	322	7.89	58.89
14	23530.58	50.9 AV	54.0	-3.2	1.75 H	322	-8.04	58.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1312.65	51.3 PK	74.0	-22.7	1.00 V	337	23.77	27.51
2	1312.65	38.2 AV	54.0	-15.8	1.00 V	337	10.71	27.51
3	1941.65	66.5 PK	74.0	-7.5	1.00 V	265	36.34	30.18
4	1941.65	34.5 AV	54.0	-19.5	1.00 V	265	4.29	30.18
5	2183.74	53.7 PK	74.0	-20.4	1.25 V	357	22.55	31.10
6	2183.74	38.1 AV	54.0	-16.0	1.25 V	357	6.95	31.10
7	3195.76	54.4 PK	74.0	-19.6	1.00 V	29	20.53	33.89
8	3195.76	33.8 AV	54.0	-20.2	1.00 V	29	-0.07	33.89
9	4985.74	61.5 PK	74.0	-12.5	1.00 V	351	21.62	39.91
10	4985.74	37.2 AV	54.0	-16.8	1.00 V	351	-2.69	39.91
11	6391.28	60.0 PK	74.0	-14.1	1.75 V	33	15.86	44.09
12	6391.28	45.4 AV	54.0	-8.6	1.75 V	33	1.31	44.09
13	17364.67	64.8 PK	74.0	-9.2	1.00 V	335	9.71	55.13
14	17364.67	49.5 AV	54.0	-4.5	1.00 V	335	-5.61	55.13

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel L	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	40GHz ~ 200GHz		Average (AV)

No spurious emissions were detected in the band 40 to 200GHz for both Hor. Ver. polarities at 1m measurement distance.

CHANNEL	TX Channel M	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1560.83	52.5 PK	74.0	-21.5	1.00 H	22	24.11	28.36
2	1560.83	26.5 AV	54.0	-27.5	1.00 H	22	-1.88	28.36
3	1949.24	59.8 PK	74.0	-14.2	1.00 H	151	29.55	30.22
4	1949.24	28.8 AV	54.0	-25.3	1.00 H	151	-1.47	30.22
5	2390.71	54.8 PK	74.0	-19.2	1.00 H	316	23.09	31.75
6	2390.71	33.1 AV	54.0	-20.9	1.00 H	316	1.39	31.75
7	3186.40	51.3 PK	74.0	-22.7	1.00 H	352	17.41	33.87
8	3186.40	32.7 AV	54.0	-21.3	1.00 H	352	-1.18	33.87
9	3985.72	50.5 PK	74.0	-23.5	2.00 H	193	14.20	36.29
10	3985.72	36.0 AV	54.0	-18.1	2.00 H	193	-0.34	36.29
11	6373.70	57.1 PK	74.0	-16.9	1.25 H	73	13.13	44.01
12	6373.70	43.9 AV	54.0	-10.1	1.25 H	73	-0.14	44.01
13	23530.58	66.8 PK	74.0	-7.2	1.75 H	325	7.87	58.89
14	23530.58	50.9 AV	54.0	-3.2	1.75 H	325	-8.04	58.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1312.65	51.3 PK	74.0	-22.7	1.00 V	335	23.82	27.51
2	1312.65	38.3 AV	54.0	-15.7	1.00 V	335	10.83	27.51
3	1941.65	66.5 PK	74.0	-7.6	1.00 V	260	36.27	30.18
4	1941.65	34.4 AV	54.0	-19.6	1.00 V	260	4.24	30.18
5	2183.74	53.7 PK	74.0	-20.3	1.25 V	358	22.57	31.10
6	2183.74	38.1 AV	54.0	-15.9	1.25 V	358	6.99	31.10
7	3195.76	54.5 PK	74.0	-19.5	1.00 V	26	20.63	33.89
8	3195.76	33.9 AV	54.0	-20.1	1.00 V	26	-0.03	33.89
9	4985.74	61.6 PK	74.0	-12.4	1.00 V	352	21.66	39.91
10	4985.74	37.3 AV	54.0	-16.7	1.00 V	352	-2.64	39.91
11	6391.28	59.9 PK	74.0	-14.1	1.75 V	31	15.85	44.09
12	6391.28	45.5 AV	54.0	-8.6	1.75 V	31	1.36	44.09
13	17364.67	64.9 PK	74.0	-9.1	1.00 V	333	9.78	55.13
14	17364.67	49.6 AV	54.0	-4.4	1.00 V	333	-5.51	55.13

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Channel M	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	40GHz ~ 200GHz		Average (AV)

No spurious emissions were detected in the band 40 to 200GHz for both Hor. Ver. polarities at 1m measurement distance.

CHANNEL	TX Channel H	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1560.83	52.6 PK	74.0	-21.4	1.00 H	24	24.27	28.36
2	1560.83	26.5 AV	54.0	-27.5	1.00 H	24	-1.83	28.36
3	1949.24	60.0 PK	74.0	-14.0	1.00 H	152	29.75	30.22
4	1949.24	28.9 AV	54.0	-25.2	1.00 H	152	-1.37	30.22
5	2390.71	54.9 PK	74.0	-19.1	1.00 H	314	23.11	31.75
6	2390.71	33.2 AV	54.0	-20.8	1.00 H	314	1.41	31.75
7	3186.40	51.3 PK	74.0	-22.7	1.00 H	352	17.46	33.87
8	3186.40	32.6 AV	54.0	-21.4	1.00 H	352	-1.23	33.87
9	3985.72	50.6 PK	74.0	-23.5	2.00 H	192	14.26	36.29
10	3985.72	35.8 AV	54.0	-18.2	2.00 H	192	-0.46	36.29
11	6373.70	57.1 PK	74.0	-16.9	1.25 H	74	13.11	44.01
12	6373.70	44.0 AV	54.0	-10.1	1.25 H	74	-0.06	44.01
13	23530.58	66.9 PK	74.0	-7.1	1.75 H	322	8.02	58.89
14	23530.58	51.0 AV	54.0	-3.0	1.75 H	322	-7.86	58.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1312.65	51.4 PK	74.0	-22.6	1.00 V	335	23.85	27.51
2	1312.65	38.2 AV	54.0	-15.8	1.00 V	335	10.73	27.51
3	1941.65	66.5 PK	74.0	-7.5	1.00 V	266	36.34	30.18
4	1941.65	34.5 AV	54.0	-19.5	1.00 V	266	4.33	30.18
5	2183.74	53.6 PK	74.0	-20.4	1.25 V	355	22.51	31.10
6	2183.74	38.1 AV	54.0	-15.9	1.25 V	355	7.04	31.10
7	3195.76	54.5 PK	74.0	-19.5	1.00 V	28	20.58	33.89
8	3195.76	33.8 AV	54.0	-20.3	1.00 V	28	-0.14	33.89
9	4985.74	61.5 PK	74.0	-12.5	1.00 V	351	21.61	39.91
10	4985.74	37.2 AV	54.0	-16.8	1.00 V	351	-2.72	39.91
11	6391.28	60.0 PK	74.0	-14.1	1.75 V	37	15.86	44.09
12	6391.28	45.5 AV	54.0	-8.5	1.75 V	37	1.40	44.09
13	17364.67	65.0 PK	74.0	-9.0	1.00 V	337	9.84	55.13
14	17364.67	49.7 AV	54.0	-4.3	1.00 V	337	-5.41	55.13

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.





A D T

CHANNEL	TX Channel H	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	40GHz ~ 200GHz		Average (AV)

No spurious emissions were detected in the band 40 to 200GHz for both Hor. Ver. polarities at 1m measurement distance.

## 4.2.8 TEST RESULTS-HRP MODE

### BELOW 1GHz WORST-CASE DATA : CHANNEL PLAN 1

<b>CHANNEL</b>	TX Center frequency	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	89.33	37.7 QP	43.5	-5.8	1.00 H	267	29.04	8.67
2	162.04	38.8 QP	43.5	-4.7	2.00 H	62	24.32	14.51
3	218.77	39.3 QP	46.0	-6.7	1.50 H	242	27.25	12.08
4	289.82	38.3 QP	46.0	-7.7	1.25 H	101	23.48	14.79
5	405.04	35.9 QP	46.0	-10.1	1.00 H	37	18.11	17.79
6	945.05	34.7 QP	46.0	-11.4	1.50 H	293	7.80	26.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.19	38.7 QP	43.5	-4.8	1.00 V	268	29.70	8.96
2	156.00	39.8 QP	43.5	-3.7	1.25 V	0	25.09	14.69
3	217.58	33.1 QP	46.0	-12.9	1.25 V	104	21.10	12.03
4	405.04	31.7 QP	46.0	-14.3	1.75 V	185	13.88	17.79
5	540.05	31.4 QP	46.0	-14.6	1.00 V	264	10.55	20.81
6	971.34	37.7 QP	54.0	-16.3	1.25 V	312	10.64	27.05

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

# ABOVE 1GHz WORST-CASE DATA

CHANNEL	TX Center frequency	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1560.83	52.7 PK	74.0	-21.3	1.00 H	25	24.31	28.36
2	1560.83	26.4 AV	54.0	-27.6	1.00 H	25	-1.92	28.36
3	1949.24	60.0 PK	74.0	-14.1	1.00 H	156	29.73	30.22
4	1949.24	28.8 AV	54.0	-25.2	1.00 H	156	-1.40	30.22
5	2390.71	54.8 PK	74.0	-19.2	1.00 H	318	23.05	31.75
6	2390.71	33.1 AV	54.0	-20.9	1.00 H	318	1.35	31.75
7	3186.40	51.3 PK	74.0	-22.7	1.00 H	360	17.43	33.87
8	3186.40	32.7 AV	54.0	-21.3	1.00 H	360	-1.15	33.87
9	3985.72	50.5 PK	74.0	-23.5	2.00 H	193	14.22	36.29
10	3985.72	36.0 AV	54.0	-18.0	2.00 H	193	-0.32	36.29
11	6373.70	57.1 PK	74.0	-16.9	1.25 H	72	13.13	44.01
12	6373.70	44.1 AV	54.0	-10.0	1.25 H	72	0.04	44.01
13	23530.58	67.0 PK	74.0	-7.0	1.75 H	321	8.10	58.89
14	23530.58	51.1 AV	54.0	-2.9	1.75 H	321	-7.78	58.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1312.65	51.3 PK	74.0	-22.7	1.00 V	337	23.76	27.51
2	1312.65	38.2 AV	54.0	-15.8	1.00 V	337	10.72	27.51
3	1941.65	66.5 PK	74.0	-7.5	1.00 V	265	36.33	30.18
4	1941.65	34.5 AV	54.0	-19.5	1.00 V	265	4.28	30.18
5	2183.74	53.7 PK	74.0	-20.3	1.25 V	360	22.57	31.10
6	2183.74	38.1 AV	54.0	-16.0	1.25 V	360	6.95	31.10
7	3195.76	54.4 PK	74.0	-19.6	1.00 V	26	20.51	33.89
8	3195.76	33.8 AV	54.0	-20.2	1.00 V	26	-0.09	33.89
9	4985.74	61.5 PK	74.0	-12.5	1.00 V	349	21.61	39.91
10	4985.74	37.1 AV	54.0	-16.9	1.00 V	349	-2.81	39.91
11	6391.28	60.0 PK	74.0	-14.1	1.75 V	40	15.86	44.09
12	6391.28	45.5 AV	54.0	-8.5	1.75 V	40	1.38	44.09
13	17364.67	65.0 PK	74.0	-9.0	1.00 V	333	9.87	55.13
14	17364.67	49.6 AV	54.0	-4.4	1.00 V	333	-5.51	55.13

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Center frequency	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	40GHz ~ 200GHz		Average (AV)

No spurious emissions were detected in the band 40 to 200GHz for both Hor. Ver. polarities at 1m measurement distance.

# BELOW 1GHz WORST-CASE DATA : CHANNEL PLAN 2

CHANNEL	TX Center frequency	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	89.33	37.6 QP	43.5	-5.9	1.00 H	265	28.89	8.67
2	162.04	38.9 QP	43.5	-4.6	2.00 H	61	24.36	14.51
3	218.77	39.4 QP	46.0	-6.6	1.50 H	241	27.34	12.08
4	289.82	38.3 QP	46.0	-7.7	1.25 H	100	23.54	14.79
5	405.04	35.8 QP	46.0	-10.2	1.00 H	35	17.99	17.79
6	945.05	34.8 QP	46.0	-11.3	1.50 H	292	7.90	26.85
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	94.19	38.6 QP	43.5	-4.9	1.00 V	265	29.63	8.96
2	156.00	39.7 QP	43.5	-3.8	1.25 V	1	24.97	14.69
3	217.58	33.2 QP	46.0	-12.8	1.25 V	102	21.19	12.03
4	405.04	31.6 QP	46.0	-14.4	1.75 V	188	13.82	17.79
5	540.05	31.4 QP	46.0	-14.6	1.00 V	261	10.63	20.81
6	971.34	37.7 QP	54.0	-16.3	1.25 V	321	10.69	27.05

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.

# ABOVE 1GHz WORST-CASE DATA

CHANNEL	TX Center frequency	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1560.83	52.6 PK	74.0	-21.4	1.00 H	26	24.27	28.36
2	1560.83	26.4 AV	54.0	-27.6	1.00 H	26	-1.95	28.36
3	1949.24	59.9 PK	74.0	-14.1	1.00 H	155	29.70	30.22
4	1949.24	28.8 AV	54.0	-25.2	1.00 H	155	-1.44	30.22
5	2390.71	54.8 PK	74.0	-19.2	1.00 H	319	23.01	31.75
6	2390.71	33.0 AV	54.0	-21.0	1.00 H	319	1.29	31.75
7	3186.40	51.3 PK	74.0	-22.7	1.00 H	359	17.39	33.87
8	3186.40	32.7 AV	54.0	-21.3	1.00 H	359	-1.19	33.87
9	3985.72	50.5 PK	74.0	-23.5	2.00 H	192	14.19	36.29
10	3985.72	35.9 AV	54.0	-18.1	2.00 H	192	-0.36	36.29
11	6373.70	57.1 PK	74.0	-16.9	1.25 H	71	13.10	44.01
12	6373.70	44.0 AV	54.0	-10.0	1.25 H	71	0.00	44.01
13	23530.58	66.9 PK	74.0	-7.1	1.75 H	322	8.04	58.89
14	23530.58	51.1 AV	54.0	-2.9	1.75 H	322	-7.83	58.89
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	1312.65	51.3 PK	74.0	-22.7	1.00 V	336	23.82	27.51
2	1312.65	38.2 AV	54.0	-15.8	1.00 V	336	10.69	27.51
3	1941.65	66.5 PK	74.0	-7.5	1.00 V	266	36.30	30.18
4	1941.65	34.4 AV	54.0	-19.6	1.00 V	266	4.25	30.18
5	2183.74	53.7 PK	74.0	-20.4	1.25 V	355	22.55	31.10
6	2183.74	38.0 AV	54.0	-16.0	1.25 V	355	6.91	31.10
7	3195.76	54.4 PK	74.0	-19.6	1.00 V	25	20.49	33.89
8	3195.76	33.8 AV	54.0	-20.2	1.00 V	25	-0.12	33.89
9	4985.74	61.5 PK	74.0	-12.5	1.00 V	348	21.58	39.91
10	4985.74	37.1 AV	54.0	-16.9	1.00 V	348	-2.85	39.91
11	6391.28	59.9 PK	74.0	-14.1	1.75 V	41	15.82	44.09
12	6391.28	45.4 AV	54.0	-8.6	1.75 V	41	1.33	44.09
13	17364.67	64.9 PK	74.0	-9.1	1.00 V	332	9.76	55.13
14	17364.67	49.6 AV	54.0	-4.4	1.00 V	332	-5.55	55.13

**REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).  
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).  
3. The other emission levels were very low against the limit.  
4. Margin value = Emission level – Limit value.



A D T

CHANNEL	TX Center frequency	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	40GHz ~ 200GHz		Average (AV)

No spurious emissions were detected in the band 40 to 200GHz for both Hor. Ver. polarities at 1m measurement distance.

### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

##### APPLICABLE RULE

15.255 (e) (1) For the purposes of this paragraph (e) (1), emission bandwidth is defined as the instantaneous frequency range occupied by a steady state radiated signal with modulation, outside which the radiated power spectral density never exceeds 6 dB below the maximum radiated power spectral density in the band, as measured with a 100 kHz resolution bandwidth spectrum analyzer. The center frequency must be stationary during the measurement interval, even if not stationary during normal operation (e.g. for frequency hopping devices).

##### LIMIT

None: For reporting purposes only.

#### 4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
*OML Harmonic Mixer (50~75GHz)	M15RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (50~75GHz)	M15HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*Diplexer	DPL26	110215-1	Feb. 16, 2011	Feb. 15, 2013
SPACEK LABS-Amplifier	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
CT Antenna Tower & Turn Table	NA	NA	NA	NA

##### NOTE:

1. The calibration interval of the above test instruments (Except \*) is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \* = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested date: Feb. 14, 2012

#### 4.3.3 TEST PROCEDURE


The spectrum analyzer and external mixer are set up to measure the radiated output of the transmitter.



#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.3.5 TEST SETUP

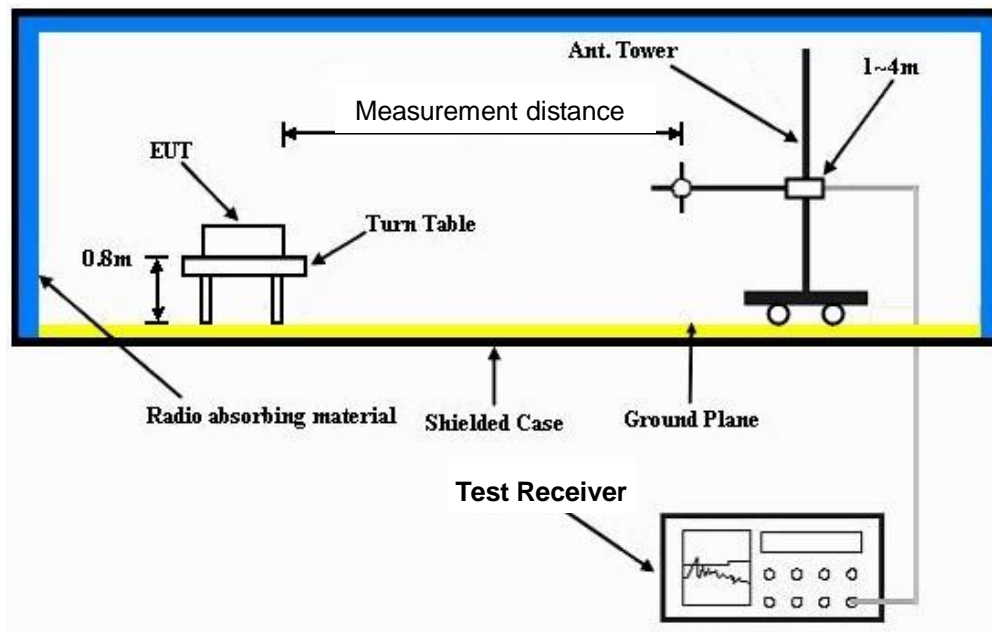

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.3.6 EUT OPERATING CONDITIONS


High Definition Audio/Video in the 1080p format was sent from transmitter to the Receiver via the wireless link. The BD Player (PS3) equipped HD A/V to the transmitter. The receiver got the HD A/V signal and transfer to the television. The television was placed outside the test table. A laptop computer with test software was utilized to vary the radio configuration and antenna beam orientation for testing purposes. This computer was not connected during measurements.

### 4.3.7 TEST RESULTS-LRP MODE


#### CHANNEL PLAN 1

CHANNEL	CHANNEL FREQUENCY (GHz)	6dB BANDWIDTH (MHz)	PASS / FAIL
Low	60.32	91.782	NA
Middle	60.48	89.605	NA
High	60.64	89.587	NA


#### Low Channel

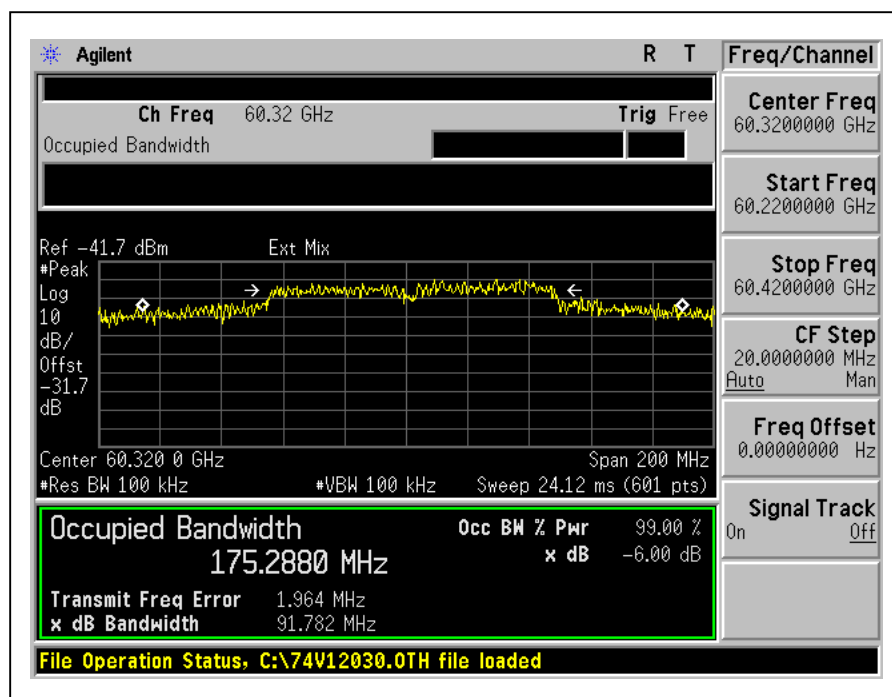

## Middle Channel

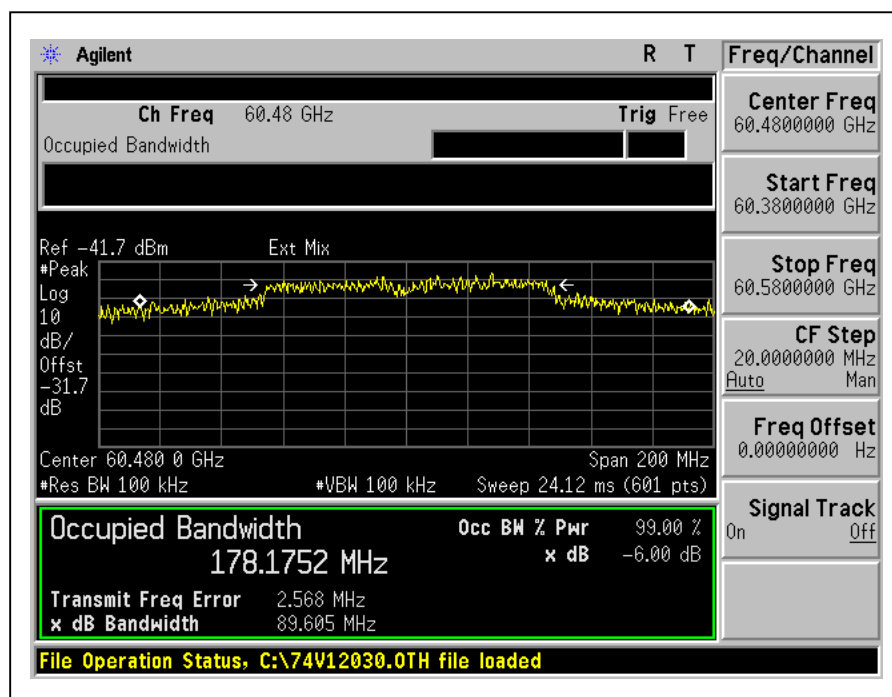


## High Channel

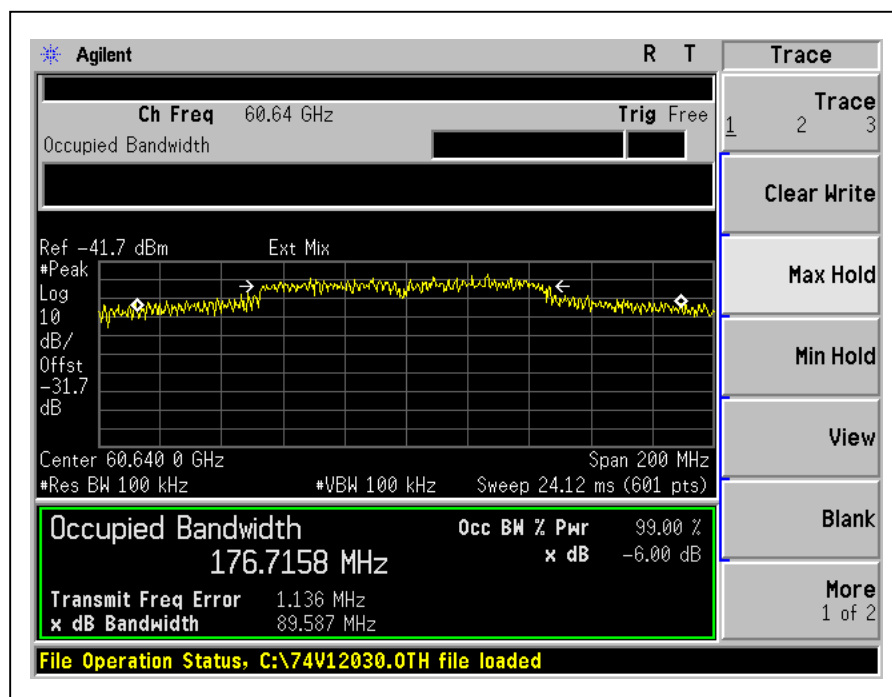


## CHANNEL PLAN 2

CHANNEL	CHANNEL FREQUENCY (GHz)	6dB BANDWIDTH (MHz)	PASS / FAIL
Low	62.48	89.047	NA
Middle	62.64	90.840	NA
High	62.80	89.260	NA


### Low Channel

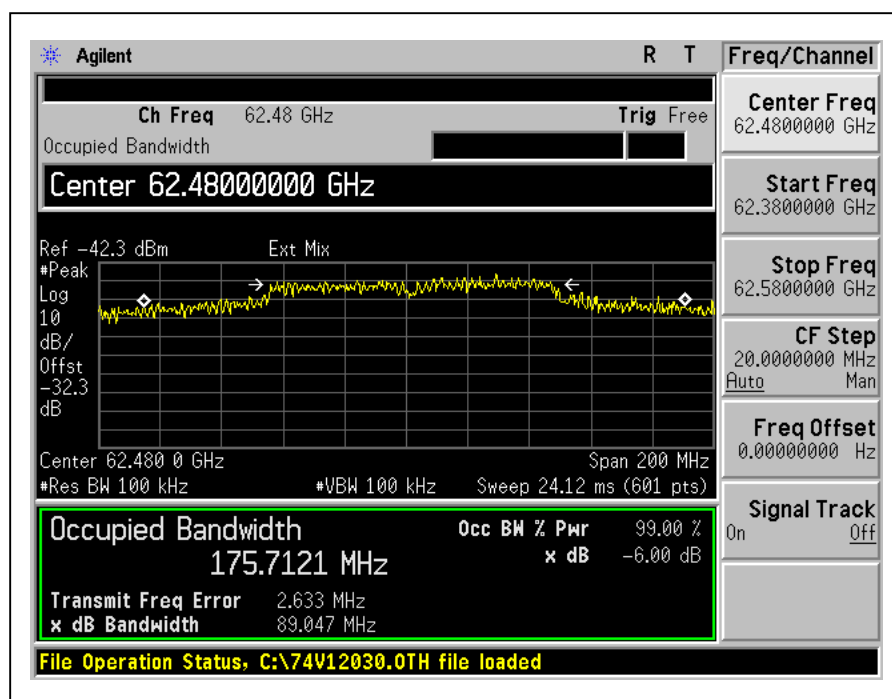

## Middle Channel

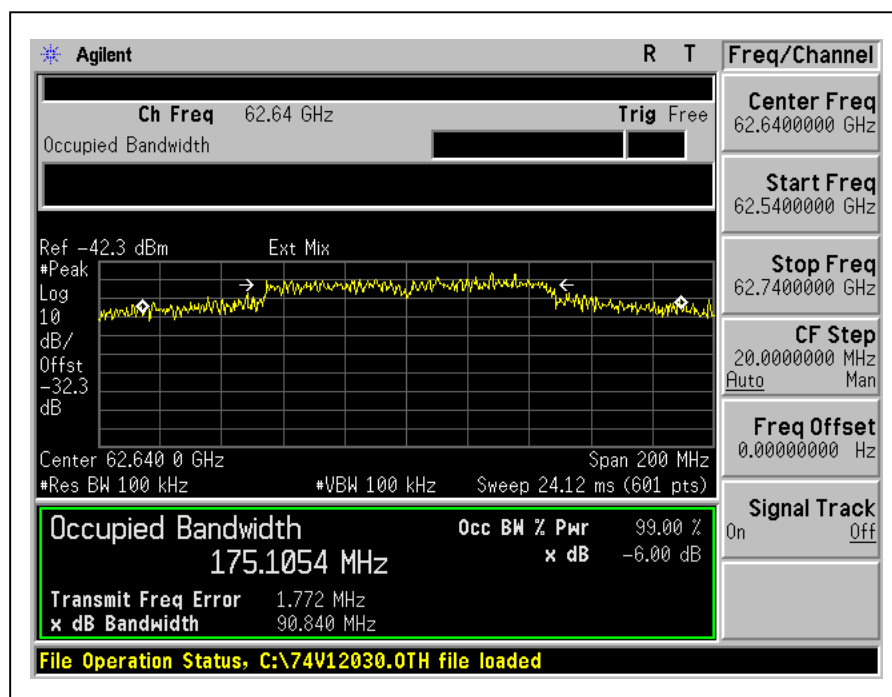

## High Channel

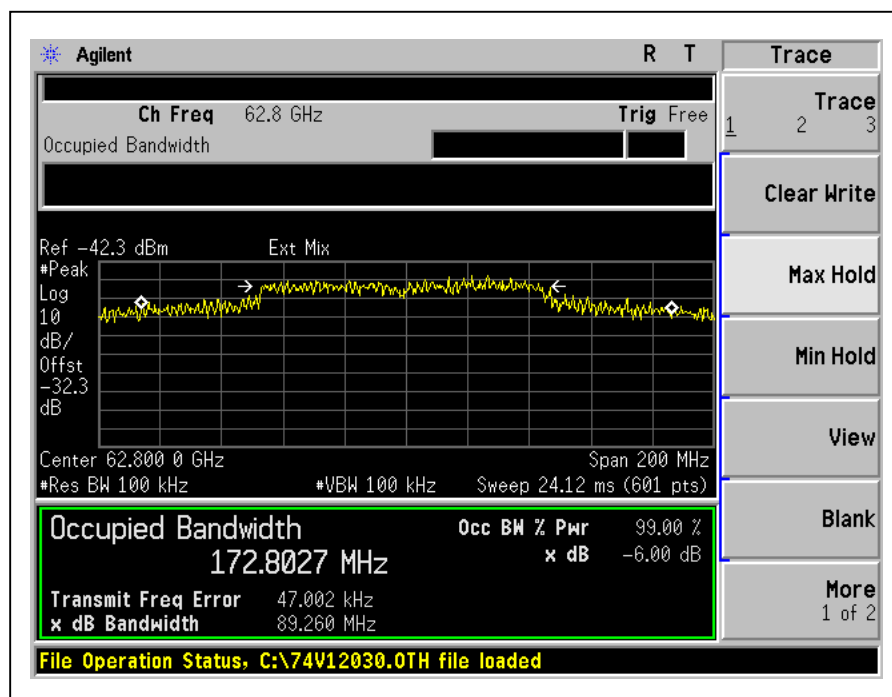




## CHANNEL PLAN 2

CHANNEL	CHANNEL FREQUENCY (GHz)	6dB BANDWIDTH (GHz)	PASS / FAIL
Center frequency	62.64	1.626	NA

Center frequency

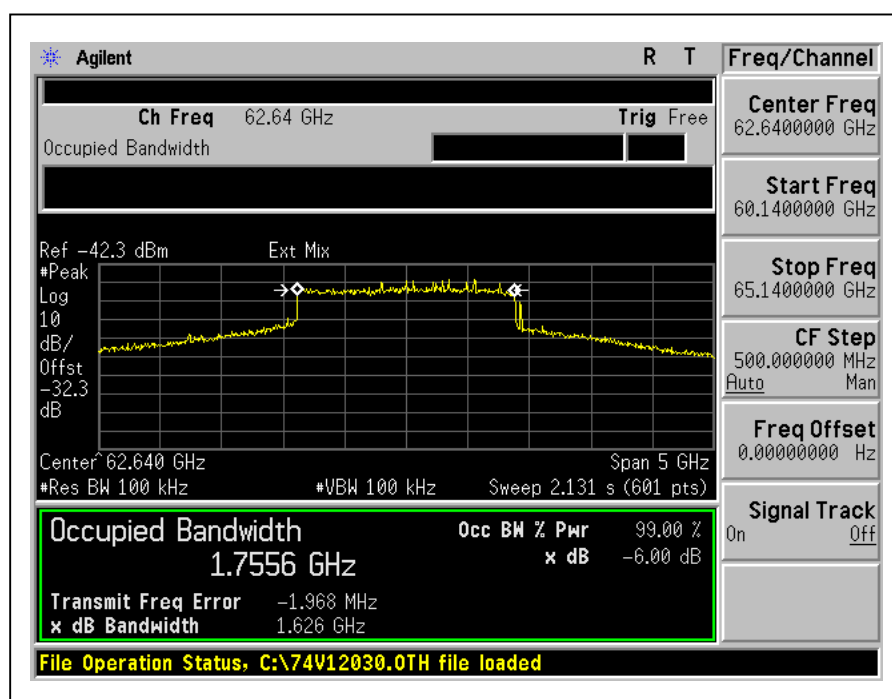

## 4.4 POWER DENSITY MEASUREMENT

### 4.4.1 LIMITS OF POWER DENSITY MEASUREMENT

15.255 (b) Within the 57-64 GHz band, emission levels shall not exceed the following:

Power Density Limit		
Application	EIRP Average Power Density	EIRP Peak Power Density
(15.255 (b)(1) )- Other than Fixed field disturbance sensors	9uW/cm <sup>2</sup>	18uW/cm <sup>2</sup>
(15.255 (b)(2) )- Fixed field disturbance sensors that occupy 500 MHz or less of bandwidth (wholly within the 61-61.5GHz)	9uW/cm <sup>2</sup>	18uW/cm <sup>2</sup>
(15.255 (b)(2) )- Fixed field disturbance sensors that occupy 500 MHz or less of bandwidth (outside of the 61–61.5 GHz band, but still within the 57–64 GHz band)	9nW/cm <sup>2</sup>	18nW/cm <sup>2</sup>
(15.255 (b)(3) )- Other fixed field disturbance sensors	NA	9nW/cm <sup>2</sup>
Note: 1. The measurement distance is based on 3 meters. 2. The average emission limits shall be calculated, based on the measured peak levels, over the actual time period during which transmission occurs.		

Per FCC KDB Publication 200443, Millimeter Wave Test Procedures, If the emission under investigation is not pulsed, then the average levels may be measured by using a video filtering technique (i.e., VBW << RBW).



#### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
*OML Harmonic Mixer (50~75GHz)	M15RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (50~75GHz)	M15HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*Diplexer	DPL26	110215-1	Feb. 16, 2011	Feb. 15, 2013
SPACEK LABS-Amplifier	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
CT Antenna Tower & Turn Table	NA	NA	NA	NA

#### NOTE:

1. The calibration interval of the above test instruments (Except \*) is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \* = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested date: Feb. 14, 2012

#### 4.4.3 TEST PROCEDURE

Measurements are made at a distance greater than or equal to the far field boundary distance.

The peak power is measured by integrating the spectral envelope over the 26 dB EBW.

The measured power level is converted to EIRP using the Friis equation:

$$\text{EIRP} = P_T * G_T = (P_R / G_R) * (4 * \pi * D / \lambda)^2$$

where:

$G_R$  is the gain of the receive measurement antenna

$D$  is the measurement distance is the wavelength

The EIRP is converted to Power Density using the equation:

$$P_D = \text{EIRP} / (4 * \pi * D^2)$$

where:

$D$  is the specification distance

#### FAR FIELD BOUNDARY CALCULATIONS

The far-field boundary is given in FCC KDB Publication 200443 as:

$$R_{\text{far field}} = (2 * L^2) / \lambda$$

where:  $L$  = Largest Antenna Dimension, including the reflector, in meters


$\lambda$  = wavelength in meters

FREQUENCY (GHz)	L (m)	Lambda (m)	R (Far Field) (m)
60.48	0.025	0.0050	0.25

#### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP

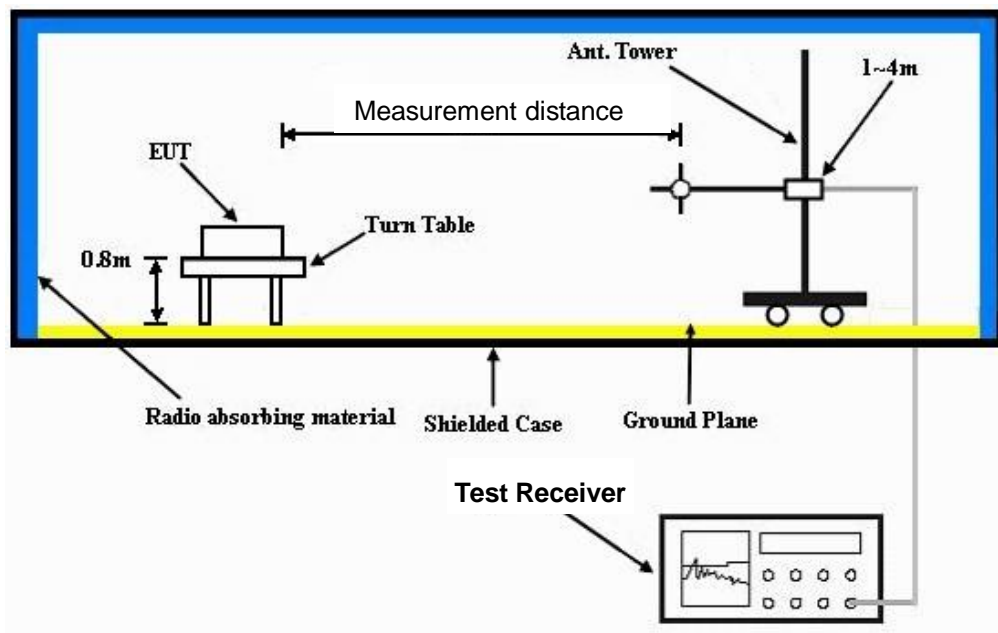

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.4.6 EUT OPERATING CONDITION


Same as Item 4.3.6

#### 4.4.7 TEST RESULTS-LRP MODE

##### CHANNEL PLAN 1


Channel	FREQ. (GHz)	Measurement Distance (m)	Peak Power (dBm)	RX Antenna Gain (dB)	EIRP (dBm)
Low Channel	60.32	2.5	-31.6	24	20.4
	Specification Distance (m)	Power Density (uW/cm <sup>2</sup> )	Peak Limit (uW/cm <sup>2</sup> )	Average Limit (uW/cm <sup>2</sup> )	
	3	0.1	18	9	

Note: The Peak Power Density complies with both the peak and average limits.

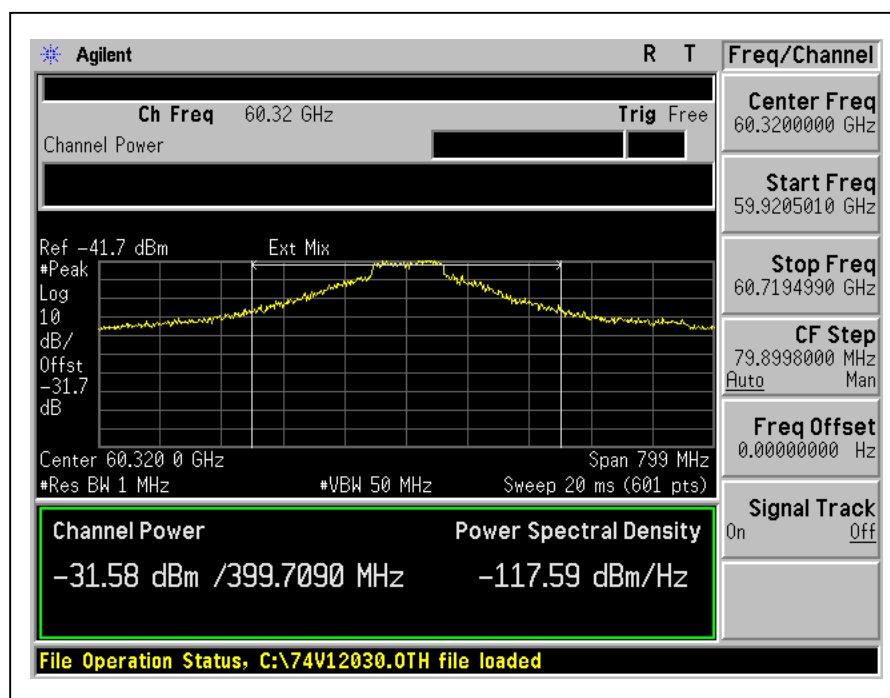


Channel	FREQ. (GHz)	Measurement Distance (m)	Peak Power (dBm)	RX Antenna Gain (dB)	EIRP (dBm)
Middle Channel	60.48	2.5	-31.7	24	20.3
	Specification Distance (m)	Power Density ( $\mu\text{W}/\text{cm}^2$ )	Peak Limit ( $\mu\text{W}/\text{cm}^2$ )	Average Limit ( $\mu\text{W}/\text{cm}^2$ )	
	3	0.1	18	9	

Note: The Peak Power Density complies with both the peak and average limits.

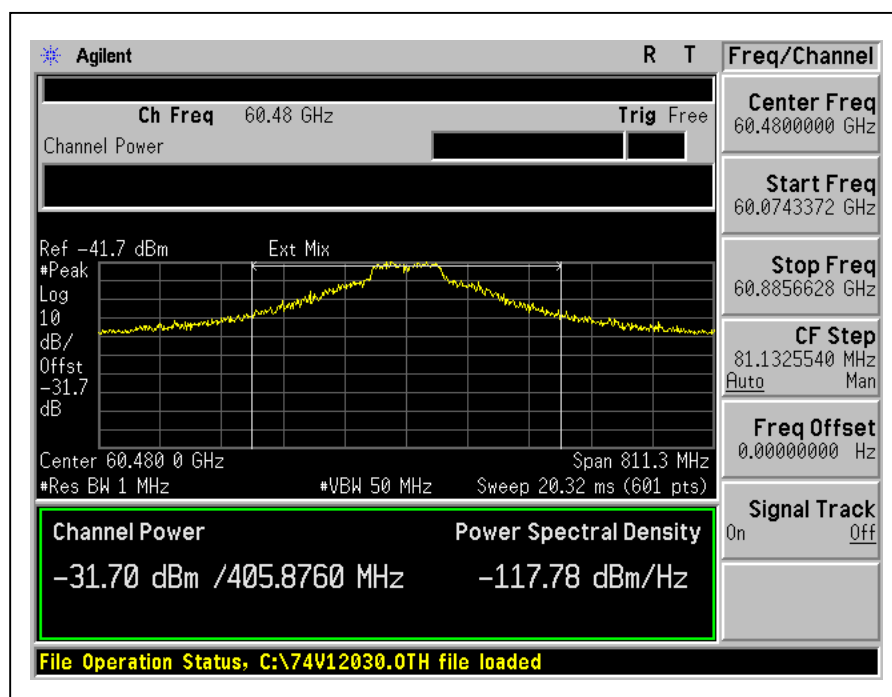

Channel	FREQ. (GHz)	Measurement Distance (m)	Peak Power (dBm)	RX Antenna Gain (dB)	EIRP (dBm)
High Channel	60.64	2.5	-31.7	24	20.3
	Specification Distance (m)	Power Density ( $\mu\text{W}/\text{cm}^2$ )	Peak Limit ( $\mu\text{W}/\text{cm}^2$ )	Average Limit ( $\mu\text{W}/\text{cm}^2$ )	
	3	0.1	18	9	


Note: The Peak Power Density complies with both the peak and average limits.

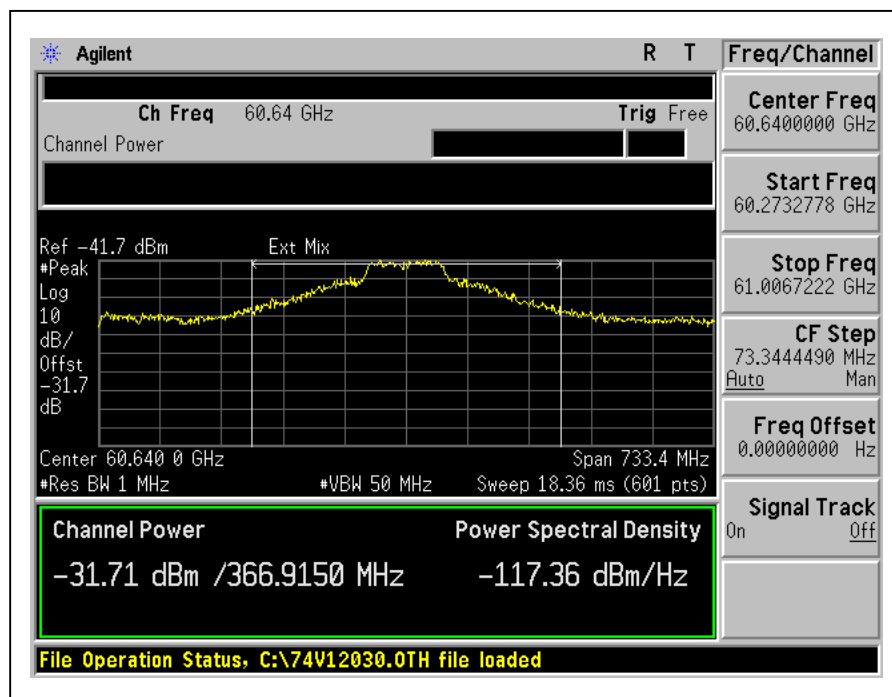

## CHANNEL PLAN 2


Channel	FREQ. (GHz)	Measurement Distance (m)	Peak Power (dBm)	RX Antenna Gain (dB)	EIRP (dBm)
Low Channel	62.48	2.5	-32.3	24	20.0
	Specification Distance (m)	Power Density ( $\mu\text{W}/\text{cm}^2$ )	Peak Limit ( $\mu\text{W}/\text{cm}^2$ )	Average Limit ( $\mu\text{W}/\text{cm}^2$ )	
	3	0.09	18	9	

Note: The Peak Power Density complies with both the peak and average limits.

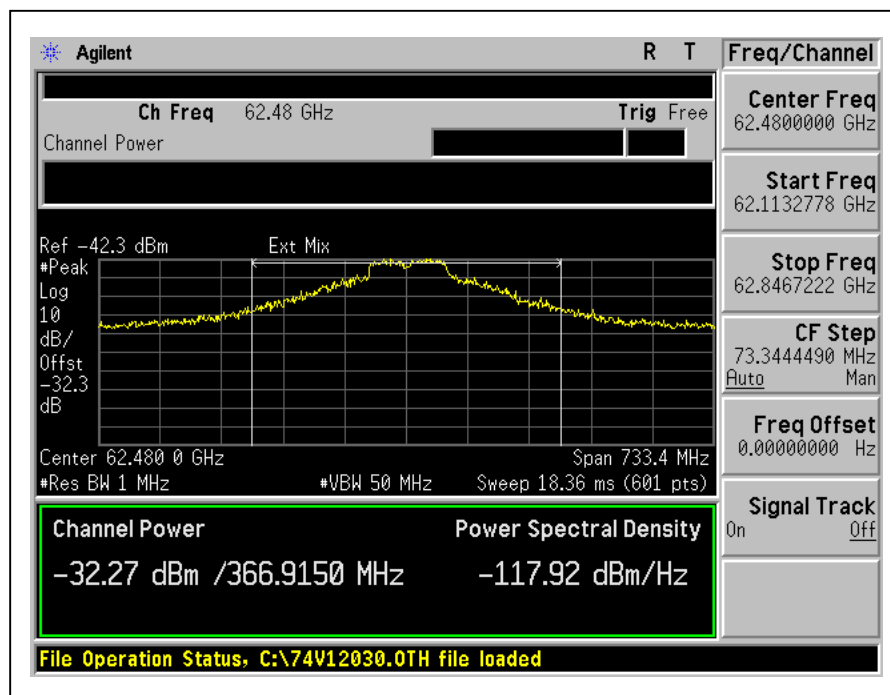

Channel	FREQ. (GHz)	Measurement Distance (m)	Peak Power (dBm)	RX Antenna Gain (dB)	EIRP (dBm)
Middle Channel	62.64	2.5	-32.1	24	20.2
	Specification Distance (m)	Power Density ( $\mu\text{W}/\text{cm}^2$ )	Peak Limit ( $\mu\text{W}/\text{cm}^2$ )	Average Limit ( $\mu\text{W}/\text{cm}^2$ )	
	3	0.09	18	9	


Note: The Peak Power Density complies with both the peak and average limits.

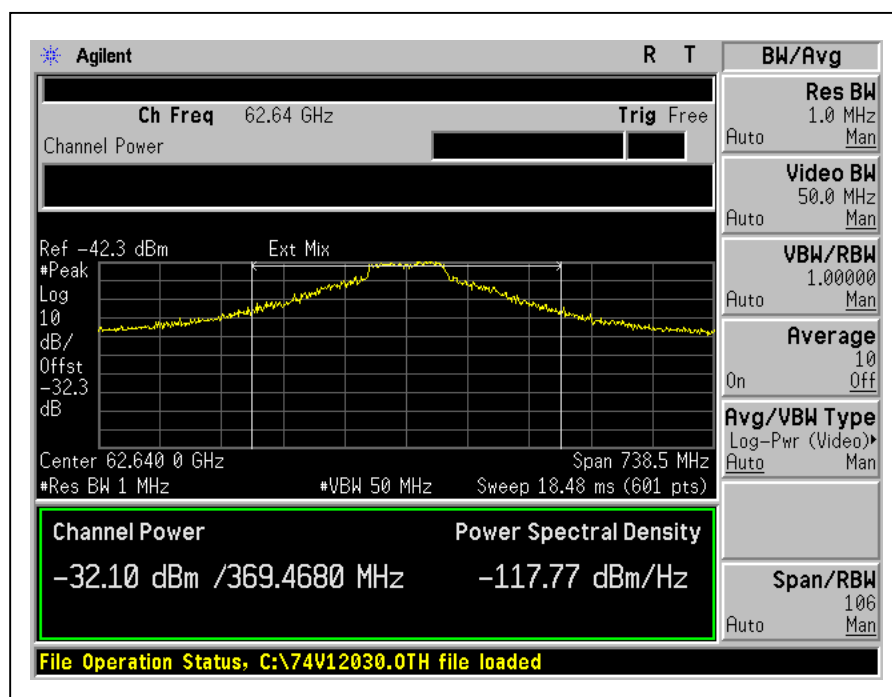



Channel	FREQ. (GHz)	Measurement Distance (m)	Peak Power (dBm)	RX Antenna Gain (dB)	EIRP (dBm)
High Channel	62.80	2.5	-32.8	24	19.5
	Specification Distance (m)	Power Density ( $\mu\text{W}/\text{cm}^2$ )	Peak Limit ( $\mu\text{W}/\text{cm}^2$ )	Average Limit ( $\mu\text{W}/\text{cm}^2$ )	
	3	0.08	18	9	

Note: The Peak Power Density complies with both the peak and average limits.

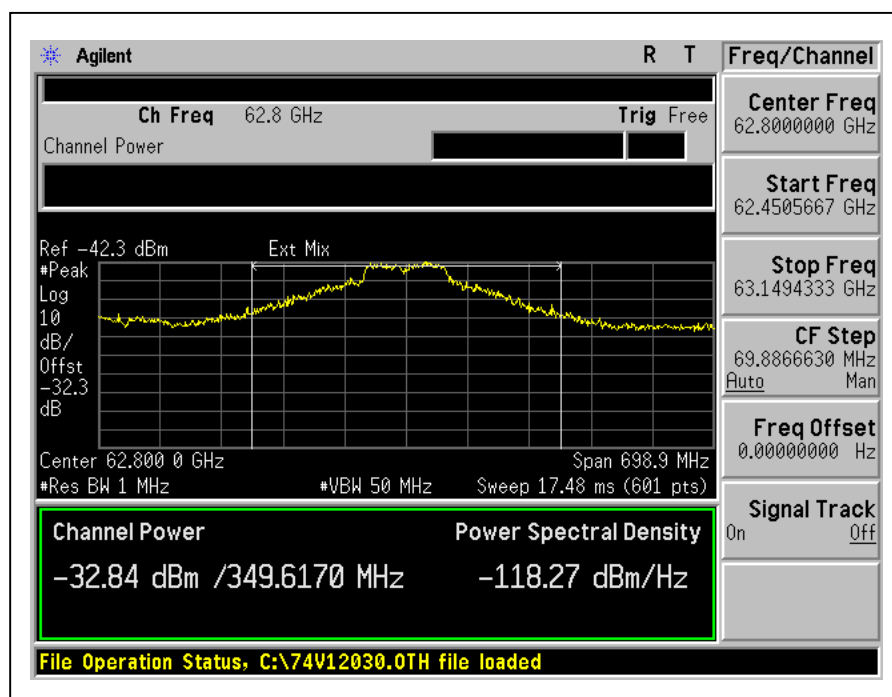


#### 4.4.8 TEST RESULTS-HRP MODE

##### CHANNEL PLAN 1

Channel	FREQ. (GHz)	Measurement Distance (m)	Peak Power (dBm)	RX Antenna Gain (dB)	EIRP (dBm)
Center frequency	60.48	2.5	-19.4	24	32.6
	Specification Distance (m)	Power Density ( $\mu\text{W}/\text{cm}^2$ )	Peak Limit ( $\mu\text{W}/\text{cm}^2$ )	Average Limit ( $\mu\text{W}/\text{cm}^2$ )	
	3	1.62	18	9	


Note: The Peak Power Density complies with both the peak and average limits.

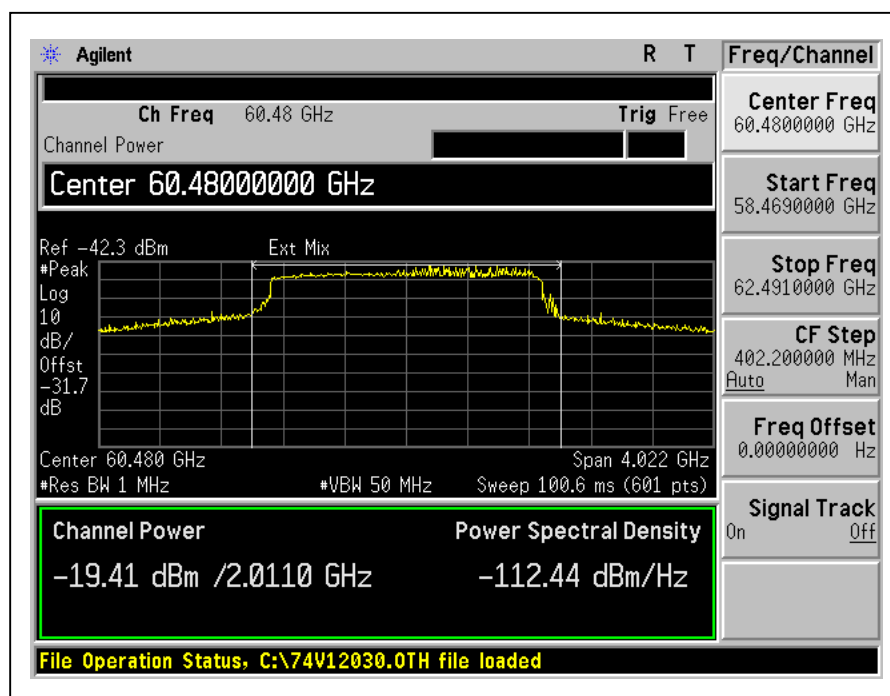

## CHANNEL PLAN 2

Channel	FREQ. (GHz)	Measurement Distance (m)	Peak Power (dBm)	RX Antenna Gain (dB)	EIRP (dBm)
Center frequency	62.64	2.5	-17.7	24	34.6
	<b>Specification Distance (m)</b>	<b>Power Density (uW/cm<sup>2</sup>)</b>	<b>Peak Limit (uW/cm<sup>2</sup>)</b>	<b>Average Limit (uW/cm<sup>2</sup>)</b>	
	3	2.55	18	9	

Note: The Peak Power Density complies with both the peak and average limits.

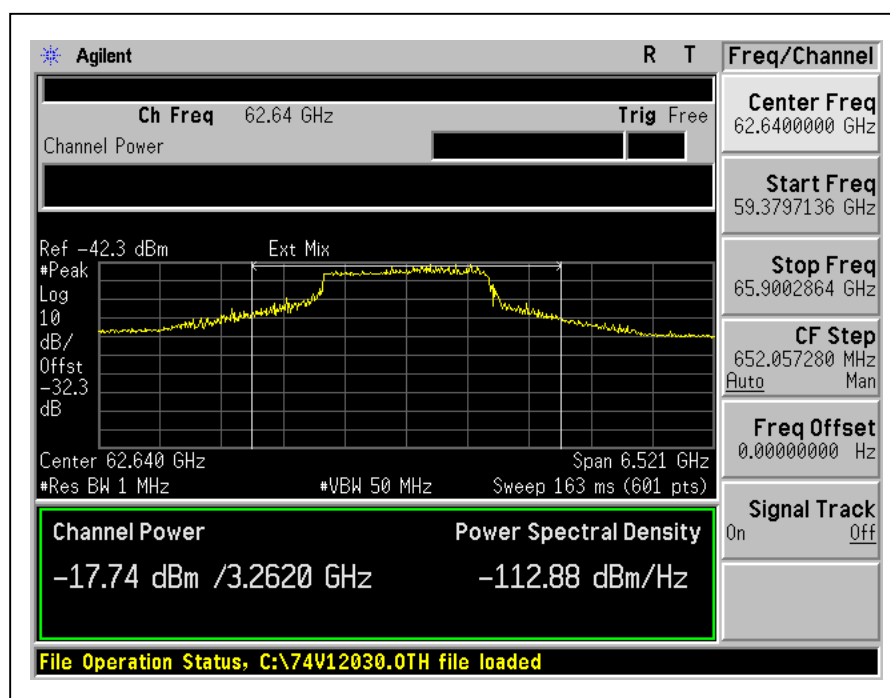

## 4.5 PEAK OUTPUT POWER

### 4.5.1 LIMITS OF PEAK OUTPUT POWER MEASUREMENT

15.255 (e)

Peak Output Power		
Type	6dB Bandwidth	Maximum Conducted Power
Fixed field disturbance sensors (Exclude 61-61.5GHz)	-	$\leq 0.1\text{mW}$
Other	Other	500mW
	Less than 100MHz	500mW x (B/100)

Note:

1. B is 6dB Bandwidth (measured with a 100kHz resolution bandwidth)
2. Peak transmitter output power shall be measured with an RF detector that has a detection bandwidth that encompasses the 57-64 GHz band and the has a video bandwidth of at least 10 MHz, or using an equivalent measurement method.
3. For purposes of demonstrating compliance with this paragraph (e), corrections to the transmitter output power may be made due to the antenna and circuit loss.

### 4.5.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
*OML Harmonic Mixer (50~75GHz)	M15RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (50~75GHz)	M15HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*Diplexer	DPL26	110215-1	Feb. 16, 2011	Feb. 15, 2013
CT Antenna Tower & Turn Table	NA	NA	NA	NA

**NOTE:**

1. The calibration interval of the above test instruments (Except \*) is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \* = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested date: Feb. 14, 2012


### 4.5.3 TEST PROCEDURES

The maximum EUT antenna gain is subtracted from the Peak EIRP.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP

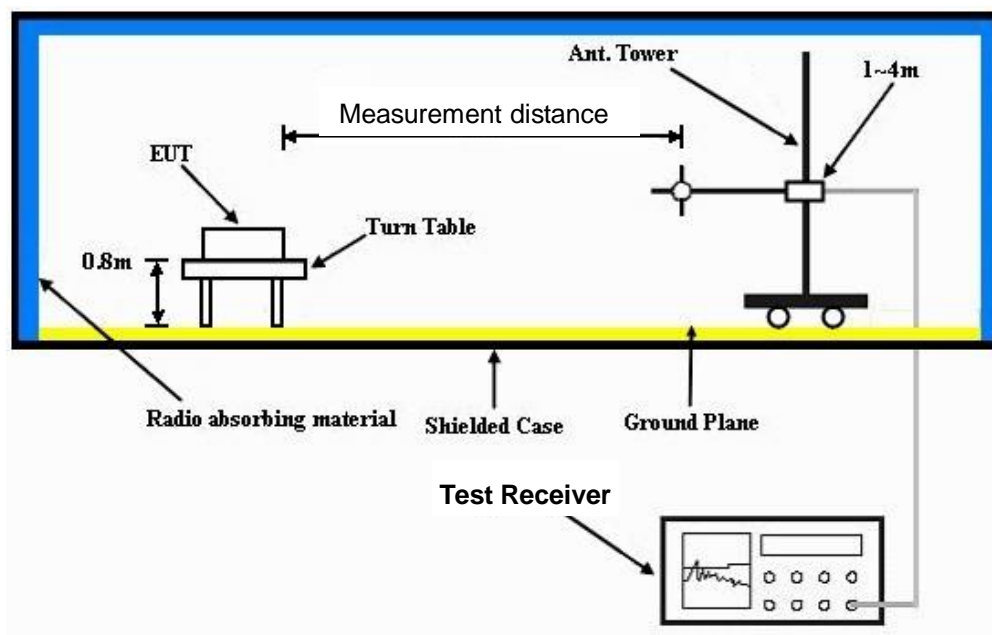

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 4.5.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

## 4.5.7 TEST RESULTS-LRP MODE

### CHANNEL PLAN 1

Channel	FREQ. (GHz)	EIRP (dBm)	Max. Antenna Gain (dBi)	Output Power (dBm)	Output Power (mW)	6dB Bandwidth (MHz)	Peak Power limit (mW)
Low	60.32	20.4	16	4.4	2.8	91.78	458.9
Middle	60.48	20.3	16	4.3	2.7	89.6	448
High	60.64	20.3	16	4.3	2.7	89.58	447.9

### CHANNEL PLAN 2

Channel	FREQ. (GHz)	EIRP (dBm)	Max. Antenna Gain (dBi)	Output Power (dBm)	Output Power (mW)	6dB Bandwidth (MHz)	Peak Power limit (mW)
Low	62.48	20.0	16	4.0	2.5	89.04	445.2
Middle	62.64	20.2	16	4.2	2.7	90.84	454.2
High	62.80	19.5	16	3.5	2.2	89.26	446.3

#### 4.5.8 TEST RESULTS-HRP MODE

##### CHANNEL PLAN 1

Channel	FREQ. (GHz)	EIRP (dBm)	Max. Antenna Gain (dBi)	Output Power (dBm)	Output Power (mW)	6dB Bandwidth (MHz)	Peak Power limit (mW)
Center frequency	60.48	32.6	22	10.6	11.5	1723	500

##### CHANNEL PLAN 2

Channel	FREQ. (GHz)	EIRP (dBm)	Max. Antenna Gain (dBi)	Output Power (dBm)	Output Power (mW)	6dB Bandwidth (MHz)	Peak Power limit (mW)
Center frequency	62.64	34.6	22	12.6	18.2	1626	500

## 4.6 26dB BANDWIDTH MEASUREMENT

### 4.6.1 LIMITS OF 26dB BANDWIDTH MEASUREMENT

#### APPLICABLE RULE

15.403 (c) as referenced by FCC KDB Publication 200443, Millimeter Wave Test Procedures.

#### LIMIT

None; for reporting purposes only.

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
*OML Harmonic Mixer (50~75GHz)	M15RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (50~75GHz)	M15HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*Diplexer	DPL26	110215-1	Feb. 16, 2011	Feb. 15, 2013
SPACEK LABS-Amplifier	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
CT Antenna Tower & Turn Table	NA	NA	NA	NA

#### NOTE:

1. The calibration interval of the above test instruments (Except \*) is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \* = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested date: Feb. 14, 2012




#### 4.6.3 TEST PROCEDURE

The spectrum analyzer and external mixer are set up to measure the radiated output of the transmitter.

#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP

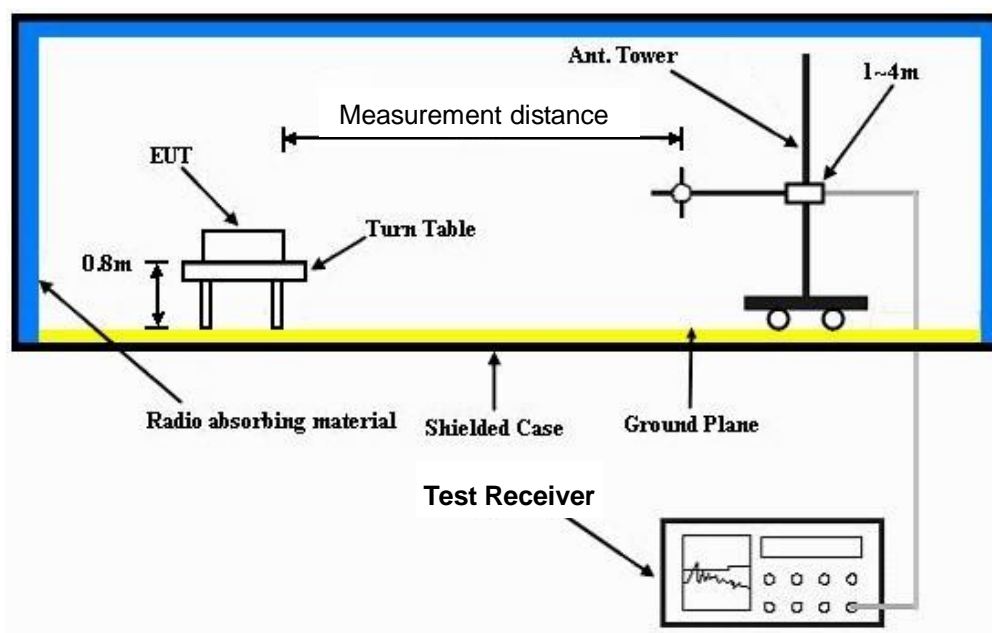

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.6.6 EUT OPERATING CONDITIONS


The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

#### 4.6.7 TEST RESULTS-LRP MODE


##### CHENNEL PLAN 1

CHANNEL	CHANNEL FREQUENCY (GHz)	26dB BANDWIDTH (MHz)	PASS / FAIL
Low	60.32	399.709	NA
Middle	60.48	405.876	NA
High	60.64	366.915	NA


#### Low Channel

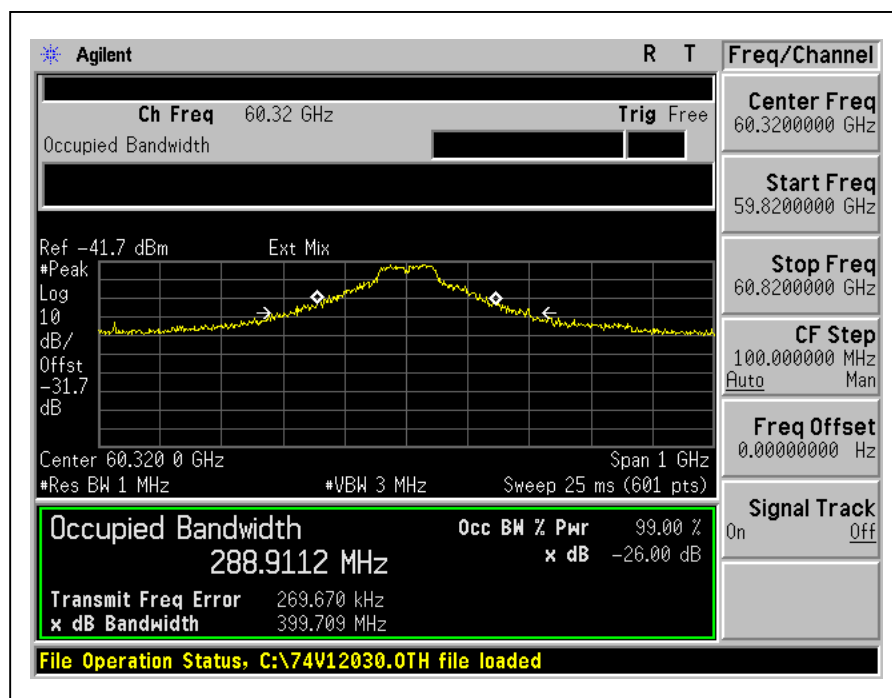

## Middle Channel

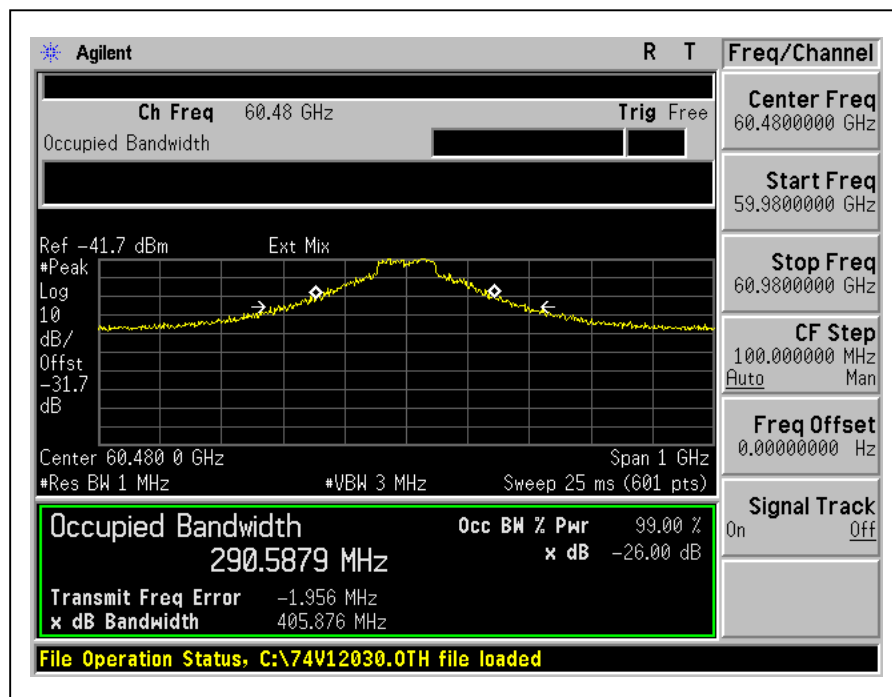


## High Channel

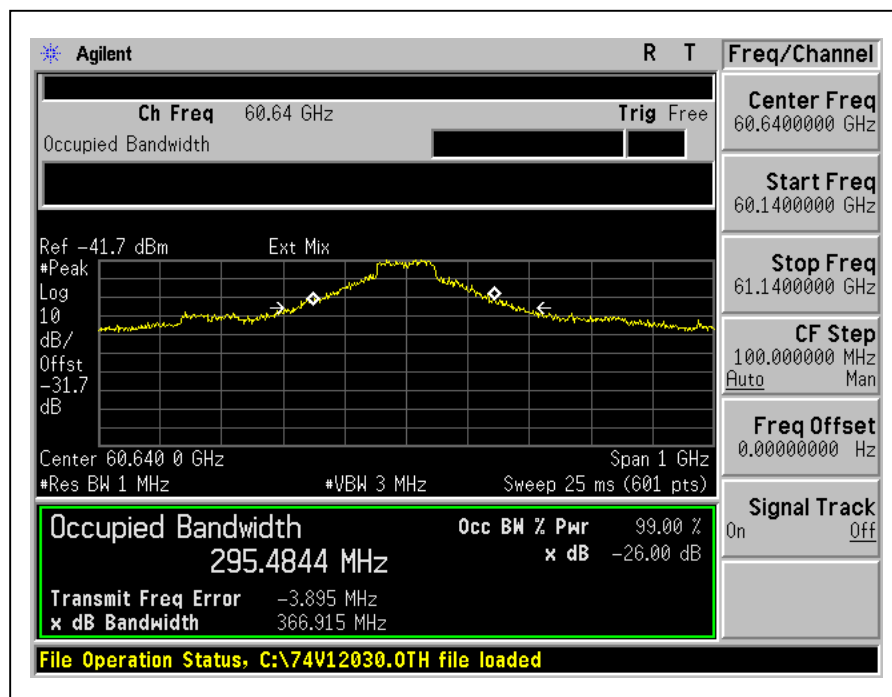


## LRP Mode: CHENNEL PLAN 2

CHANNEL	CHANNEL FREQUENCY (GHz)	26dB BANDWIDTH (MHz)	PASS / FAIL
Low	62.48	355.023	NA
Middle	62.64	369.468	NA
High	62.80	349.617	NA


## Low Channel

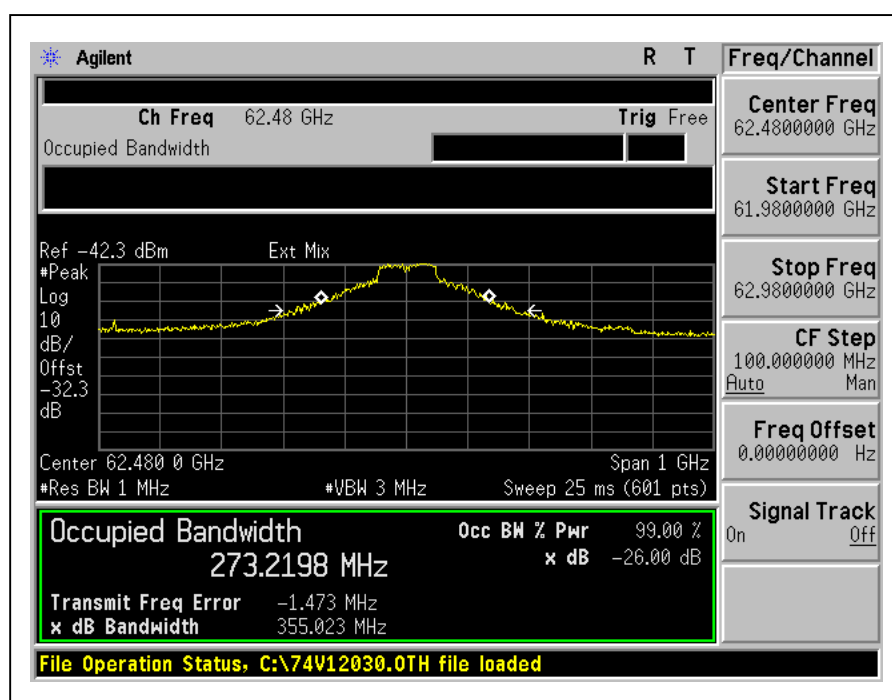

## Middle Channel

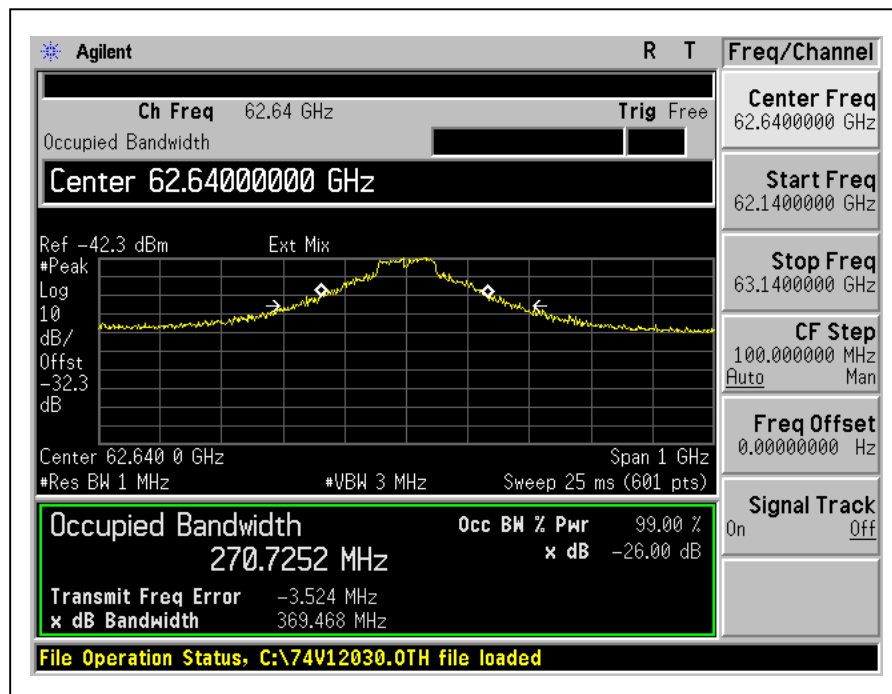

## High Channel

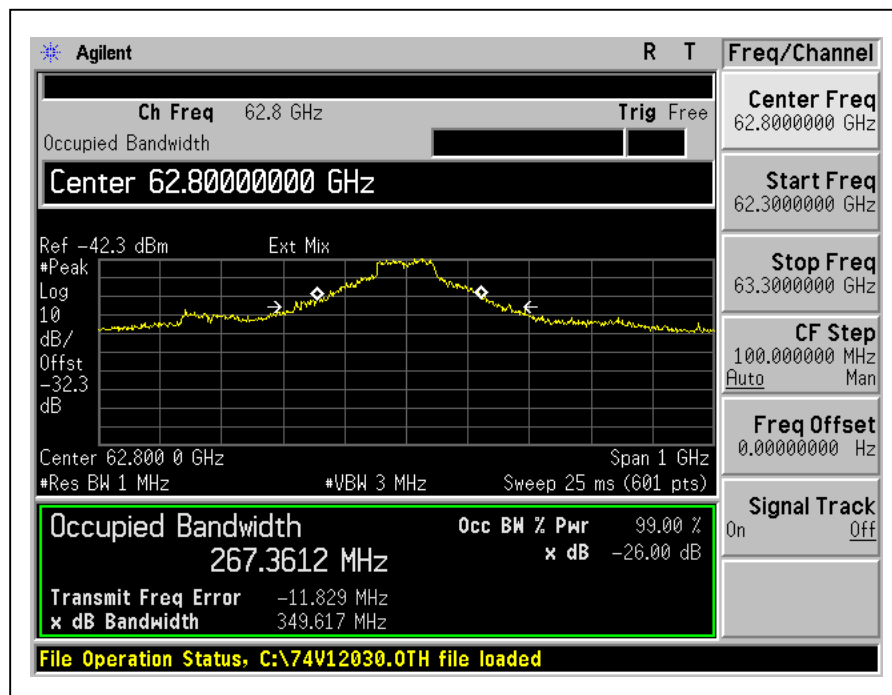


## 4.6.8 TEST RESULTS-HRP MODE

### CHENNEL PLAN 1

CHANNEL	CHANNEL FREQUENCY (GHz)	26dB BANDWIDTH (GHz)	PASS / FAIL
Center frequency	60.48	2.011	NA


Center frequency

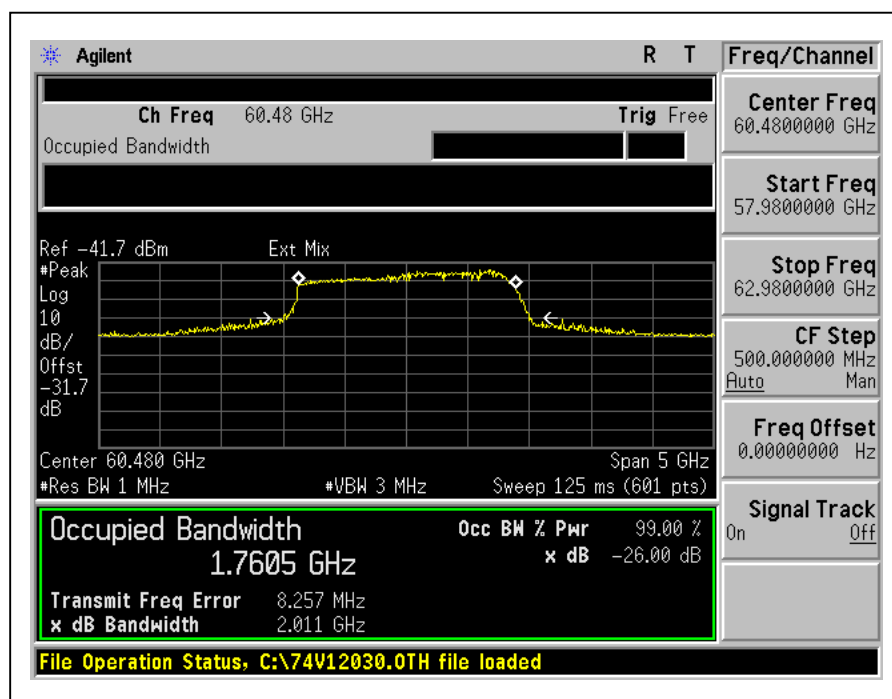

## CHENNEL PLAN 2

CHANNEL	CHANNEL FREQUENCY (GHz)	26dB BANDWIDTH (GHz)	PASS / FAIL
Center frequency	62.64	3.262	NA

Center frequency

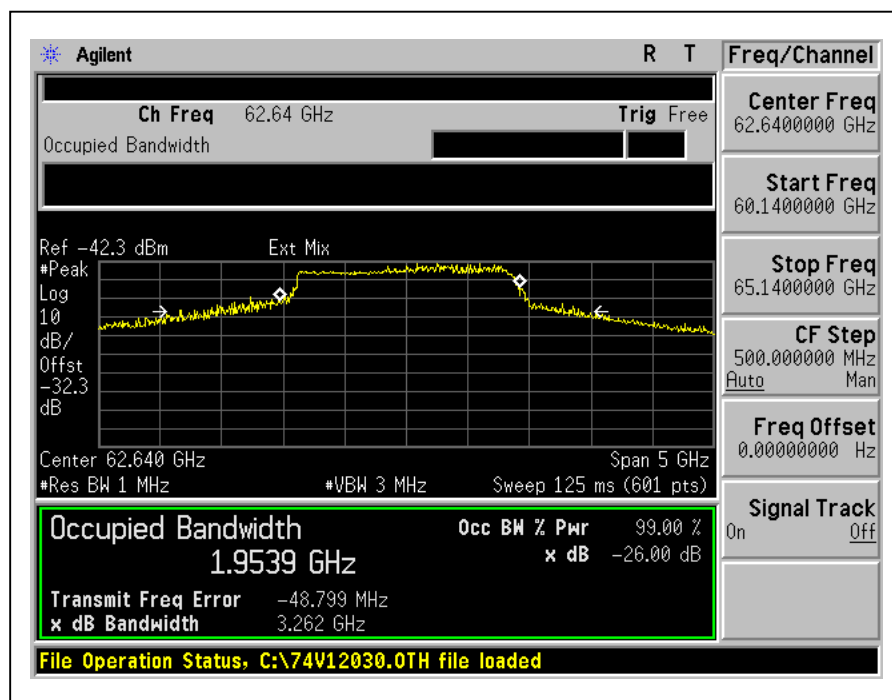

## 4.7 FREQUENCY STABILITY

### 4.7.1 LIMITS OF FREQUENCY STABILITY

15.255(f) Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to +50 degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

### 4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
*OML Harmonic Mixer (50~75GHz)	M15RH	110215-1	Feb. 16, 2011	Feb. 15, 2013
*OML Horn Antenna (50~75GHz)	M15HWD	110215-1	Feb. 16, 2011	Feb. 15, 2013
*Diplexer	DPL26	110215-1	Feb. 16, 2011	Feb. 15, 2013
CT Antenna Tower & Turn Table	NA	NA	NA	NA
OVEN	MHU-225AU	911033	Dec. 12, 2011	Dec. 11, 2012
Electronics AC Power Source	6205	1440452	NA	NA

#### NOTE:

1. The calibration interval of the above test instruments (Except \*) is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. \* = The calibration interval of the above test instruments is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. Tested date: Feb. 21, 2012



### 4.7.3 TEST PROCEDURE


The radio module is placed in an environmental chamber, with power furnished by an adjustable source. The carrier frequency is counted at each condition and compared with the reference condition.

The EUT is intended for indoor use only; the manufacturer's specified temperature range is 40 degrees Celsius.

### 4.7.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.7.5 TEST SETUP

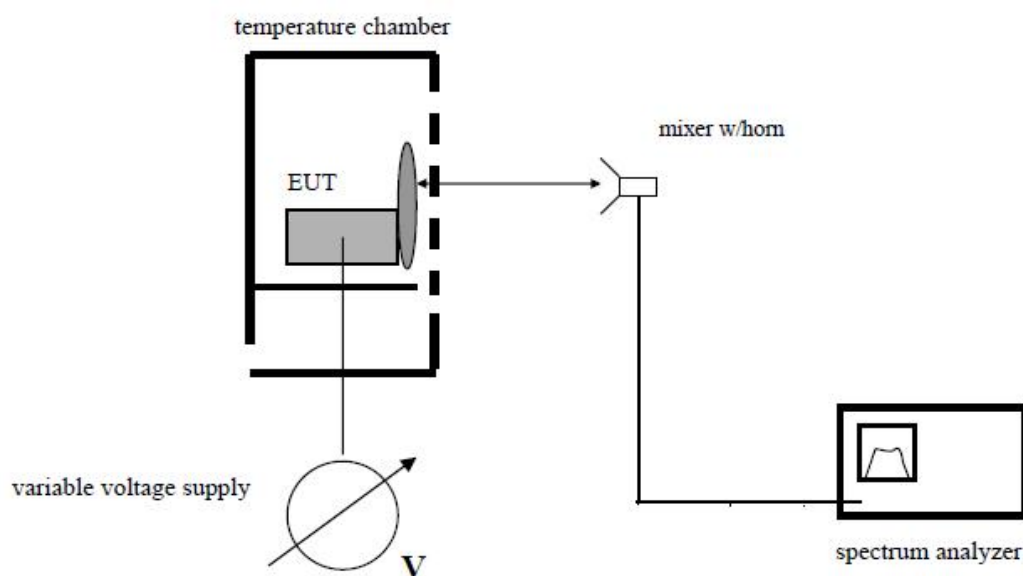

#### 4.7.6 EUT OPERATING CONDITIONS

High Definition Audio/Video in the 1080p format was sent from transmitter to the Receiver via the wireless link. The BD Player (PS3) equipped HD A/V to the transmitter. The receiver got the HD A/V signal and transfer to the television. The television was placed outside the test table. A laptop computer with test software was utilized to vary the radio configuration and antenna beam orientation for testing purposes. This computer was not connected during measurements.

#### 4.7.7 TEST RESULTS

AFC FREQUENCY ERROR vs. VOLTAGE								
Voltage (Volts)	0Minutes		2Minutes		5Minutes		10Minutes	
	Frequency (MHz)	p.p.m.	Frequency (MHz)	p.p.m.	Frequency (MHz)	p.p.m.	Frequency (MHz)	p.p.m.
126.5	60481.308	21.6204	60481.303	21.5410	60481.303	21.5443	60481.303	21.5493
110	60481.208	19.9669	60481.206	19.9372	60481.204	19.9074	60481.204	19.9058
93.5	60479.006	16.4418	60479.003	16.4881	60479.003	16.4848	60479.004	16.4732

AFC FREQUENCY ERROR vs. TEMP								
Temp (°C)	0Minutes		2Minutes		5Minutes		10Minutes	
	Frequency (MHz)	p.p.m.	Frequency (MHz)	p.p.m.	Frequency (MHz)	p.p.m.	Frequency (MHz)	p.p.m.
50	60483.015	49.8512	60483.016	49.8644	60483.014	49.8347	60483.015	49.8462
40	60482.521	41.6832	60482.521	41.6898	60482.522	41.6964	60482.523	41.7080
30	60482.115	34.9636	60482.113	34.9339	60482.109	34.8710	60482.108	34.8495
20	60481.208	19.9669	60481.206	19.9372	60481.204	19.9074	60481.204	19.9058
10	60477.977	33.4524	60477.977	33.4507	60477.977	33.4524	60477.976	33.4606
0	60477.292	44.7784	60477.292	44.7751	60477.292	44.7768	60477.292	44.7834
-10	60477.073	48.3995	60477.082	48.2407	60477.083	48.2391	60477.082	48.2440
-20	60476.996	49.6660	60476.996	49.6677	60476.996	49.6677	60476.995	49.6941

## **4.8 PUBLICLY-ACCESSIBLE COORDINATION CHANNEL**

### **4.8.1 LIMITS OF PUBLICLY-ACCESSIBLE COORDINATION CHANNEL**

15.255(h) Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase- locking inputs that permit beam-forming arrays to be realized.

### **4.8.2 TEST RESULTS**

No spurious emission were detected in 57GHz ~57.05GHz.

## **4.9 OPERATION RESTRICTION AND GROUP INSTALLATION**

### **4.9.1 LIMITS OF OPERATION RESTRICTION AND GROUP INSTALLATION**

15.255(a) Operation under the provisions of this section is not permitted for the following products:

- (1) Equipment used on aircraft or satellites.
- (2) Field disturbance sensors, including vehicle radar systems, unless the field disturbance sensors are employed for fixed operation. For the purposes of this section, the reference to fixed operation includes field disturbance sensors installed in fixed equipment, even if the sensor itself moves within the equipment.

15.255(h) Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase- locking inputs that permit beam-forming arrays to be realized.

### **4.9.2 TEST RESULTS**

#### **Operation Restriction**

Manufacturer declares the EUT will not been used on aircraft or satellites. User manual will include a statement to caution EUT is not permitted for used on aircraft or satellites.

#### **Group Installation:**

The frequency, amplitude and phase of the transmit signal are set within the EUT. There are no external phase-locking inputs or any other means of combining two or more units together to realize a beam-forming array.

## 4.10 TRANSMITTER IDENTIFICATION

### 4.10.1 LIMITS OF TRANSMITTER IDENTIFICATION

15.255(i) For all transmissions that emanate from inside of a building, within any one second interval of signal transmission, each transmitter with a peak output power equal to or greater than 0.1 mW or a peak power density equal to or greater than 3 nW/cm<sup>2</sup>, as measured 3 meters from the radiating structure, must transmit a transmitter identification at least once. Each application for equipment authorization for equipment that will be used inside of a building must declare that the equipment contains the required transmitter identification feature and must specify a method whereby interested parties can obtain sufficient information, at no cost, to enable them to fully detect and decode this transmitter identification information. Upon the completion of decoding, the transmitter identification data block must provide the following fields:

(1) FCC Identifier, which shall be programmed at the factory.

(2) Manufacturer's serial number, which shall be programmed at the factory.

(3) Provision for at least 24 bytes of data relevant to the specific device, which shall be field programmable. The grantee must implement a method that makes it possible for users to specify and update this data. The recommended content of this field is information to assist in contacting the operator.

### 4.10.2 TEST RESULTS

Not Applicable.

The EUT is part of a WVAN. All components of the WVAN are for indoor operation only. There are no outdoor units therefore no transmissions are directed outside the building.

## 5. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

[www.adt.com.tw/index.5.phtml](http://www.adt.com.tw/index.5.phtml).

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Email:** [service@adt.com.tw](mailto:service@adt.com.tw)

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)

The address and road map of all our labs can be found in our web site also.



A D T

## **6.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**--- END ---**