

FCC TEST REPORT

FCC ID : PVB-ROOTSROCK
Applicant : The House of Marley. LLC
Address : 3000 Pontiac Trail Commerce Township , MI 48390 USA
Manufacturer : Shenzhen 3nod Electronics Co., Ltd.
Address : 3NOD High-Tech Park 15# Zhongfu Road Tangxiayong Village, Industrial Zone Songgang Town, Baoan District, Shenzhen City, China

Equipment Under Test (EUT) :

Product Name : Portable Bluetooth Speaker (Product name: Roots Rock)
Model No. : EM-JA002-MI

Standards : FCC CFR47 Part 15 Section 15.247:2010

Date of Test : February 5~26,2013

Date of Issue : February 26,2013

Test Result : **PASS**

Remark:

* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,


Shenzhen 518105, China

Tel: +86-755-83551033

Fax: +86-755-83552400

Compiled by:

Approved by:



Zero Zhou / Project Engineer

Philo Zhong / Manager

Waltek Services (Shenzhen) Co.,Ltd.

<http://www.waltek.com.cn>

2 Test Summary

Test Items	Test Requirement	Result
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge Emissions	15.247(d)	PASS
Spurious RF Conducted Emissions from out of band	15.247(d)	PASS
Duty Cycle	15.35	PASS
Conducted Emissions	15.207	PASS
20dB Bandwidth	15.215c 15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 TEST FACILITY	6
4.4 TEST LOCATION	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 MEASUREMENT UNCERTAINTY	7
5.3 TEST EQUIPMENT CALIBRATION	8
6 CONDUCTED EMISSION	9
6.1 E.U.T. OPERATION	9
6.2 EUT SETUP	10
6.3 CONDUCTED EMISSION TEST RESULT	10
7 SPURIOUS RADIATED EMISSIONS	15
7.1 EUT OPERATION :	15
7.2 TEST SETUP	16
7.3 SPECTRUM ANALYZER SETUP	17
7.4 TEST PROCEDURE	18
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
7.6 SUMMARY OF TEST RESULTS	19
8 SPURIOUS RF CONDUCTED EMISSIONS FROM OUT OF BAND	35
8.1 TEST PROCEDURE	35
8.2 TEST RESULT	35
9 DUTY CYCLE	45
9.1 TEST PROCEDURE	45
9.2 TEST RESULT	45
10 BAND EDGE MEASUREMENT	47
10.1 TEST PROCEDURE	47
10.2 TEST RESULT:	48
11 20 DB BANDWIDTH MEASUREMENT	52
11.1 TEST PROCEDURE:	52
11.2 TEST RESULT:	52
12 MAXIMUM PEAK OUTPUT POWER	58
12.1 TEST PROCEDURE:	58
12.2 TEST RESULT:	58
13 HOPPING CHANNEL SEPARATION	64
13.1 TEST PROCEDURE:	64
13.2 TEST RESULT:	64
14 NUMBER OF HOPPING FREQUENCY	70
14.1 TEST PROCEDURE:	70

14.2	TEST RESULT:	70
15	DWELL TIME.....	72
15.1	TEST PROCEDURE:.....	72
15.2	TEST RESULT:	72
16	ANTENNA REQUIREMENT.....	88
17	RF EXPOSURE	89
17.1	REQUIREMENTS:	89
17.2	THE PROCEDURES / LIMIT	89
17.3	MPE CALCULATION METHOD	90
18	PHOTOGRAPHS – TEST SETUP	91
18.1	CONDUCTED EMISSIONS	91
18.2	RADIATED EMISSIONS	91
19	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	93
19.1	EUT – EXTERNAL VIEW	93
19.2	EUT – INTERNAL VIEW	97
19.3	EUT-RF MODULE VIEW	100
19.4	ADAPTER VIEW	101

4 General Information

4.1 General Description of E.U.T.

Product Name	: Portable Bluetooth Speaker (Product name: Roots Rock)
Model No.	: EM-JA002-MI
Model Description	: N/A
Operation Frequency	: 2402MHz ~ 2480MHz,79 channels in total,separated by 1MHz
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Oscillator	: Crystal 12.228MHz for CPU,26MHz for RF module
Antenna installation	: PCB Printed Antenna
Antenna Gain	: 0 dBi

4.2 Details of E.U.T.

Technical Data	: DC 15V powered by external adapter; or Built-in battery: 11.1V, 1800mAh
Remark	: The EUT was tested with the following adapters respectively and all test data passed. The worst case is the adapter which was made by the manufacturer Ktec and the data is shown in this report.
Adapter1	: Manufacturer: Ktec M/N: KSASB0241500150D5 Input: AC 100-240V, 50/60Hz, 0.6A Output: DC 15V, 1.5A
Adapter2	: Manufacturer: MASS POWER M/N: SHF1500200U1BA Input: AC 100-240V, 50/60Hz, 0.8A Output: DC 15V, 2.0A

4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.4 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101178	Aug. 13,2012	Aug. 13,2013
2.	LISN	R&S	ENV216	101215	Aug. 13,2012	Aug. 13,2013
3.	Cable	HUBER+SUHNER	CBL2-NN-3M	2230300	Aug. 13,2012	Aug. 13,2013
4.	Switch	---	RSU/M2	---	Aug. 13,2012	Aug. 13,2013
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Aug. 13,2012	Aug. 13,2013
2.	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Aug. 13,2012	Aug. 13,2013
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Aug. 13,2012	Aug. 13,2013
4.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Aug. 13,2012	Aug. 13,2013
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Aug. 13,2012	Aug. 13,2013
6.	Broadband Preamplifier	SCHWARZBECK	BBV 9719	9719-254	Aug. 13,2012	Aug. 13,2013
7.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Aug. 13,2012	Aug. 13,2013
8.	10m Coaxial Cable with N- plug	SCHWARZBECK	AK 9515 H	-	Aug. 13,2012	Aug. 13,2013
9.	10m 50 Ohm Coaxial Cable with N-plug	SCHWARZBECK	AK 9513	-	Aug. 13,2012	Aug. 13,2013
10.	Positioning Controller	C&C LAB	CC-C-IF	-	Aug. 13,2012	Aug. 13,2013
11.	Color Monitor	SUNSP0	SP-14C	-	Aug. 13,2012	Aug. 13,2013

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Temperature	± 1 °C
DC Source	$\pm 0.05\%$
Radiated Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 4.74 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 0.5 dB (9KHz~1000MHz)
	± 1 dB(1000M~26500MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

EUT Operation:


The EUT was tested in BT linking and AUX in mode. The worst test data were shown as follow.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup

The EUT was placed on the test table in shielding room.

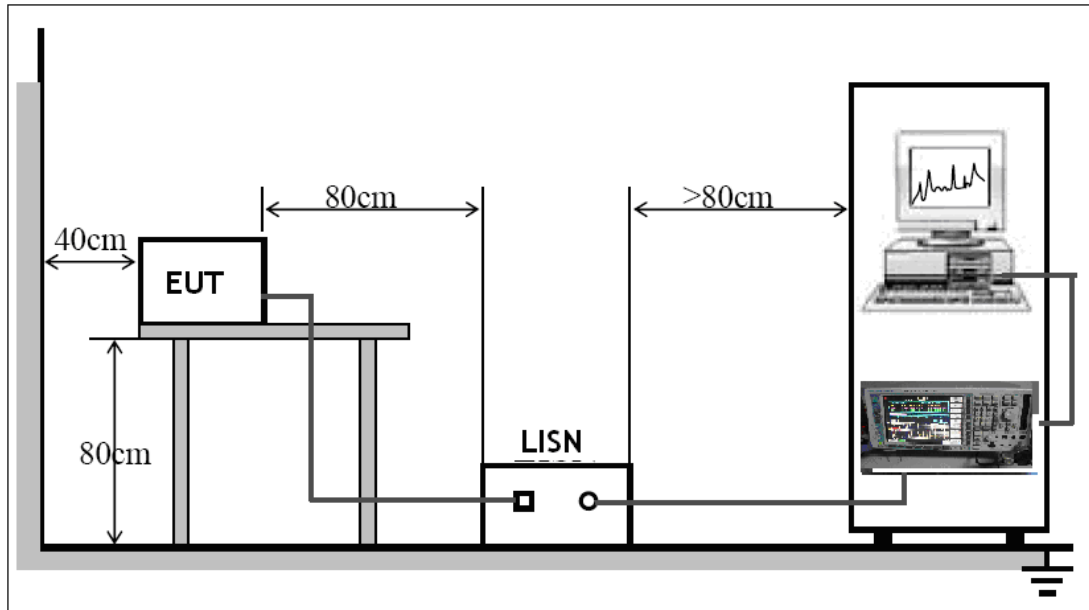


6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Test Mode: BT linking

Live line:

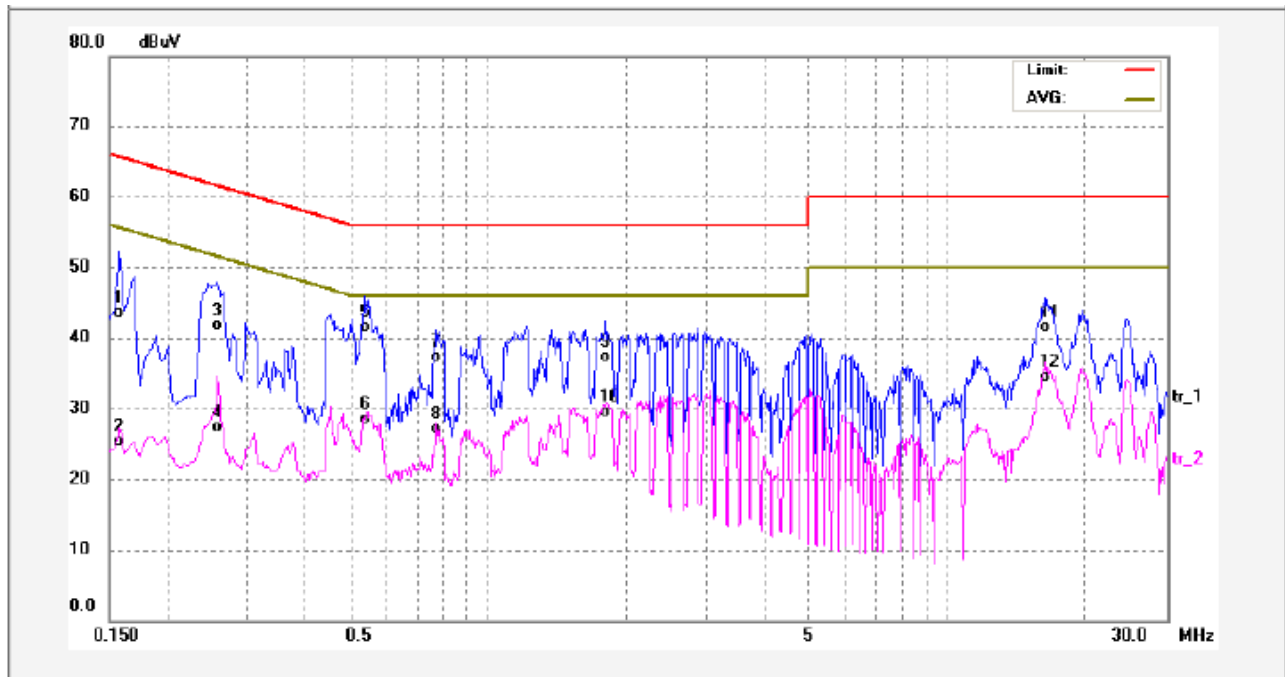

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	31.56	11.19	42.75	65.56	-22.81	QP	
2	0.1580	13.38	11.19	24.57	55.56	-30.99	AVG	
3	0.2580	29.58	11.30	40.88	61.49	-20.61	QP	
4	0.2580	15.16	11.30	26.46	51.49	-25.03	AVG	
5	0.5380	29.32	11.32	40.64	56.00	-15.36	QP	
6	0.5380	16.34	11.32	27.66	46.00	-18.34	AVG	
7	0.7740	25.16	11.30	36.46	56.00	-19.54	QP	
8	0.7740	15.01	11.30	26.31	46.00	-19.69	AVG	
9	1.8020	25.23	11.20	36.43	56.00	-19.57	QP	
10	1.8020	17.51	11.20	28.71	46.00	-17.29	AVG	
11	16.2660	29.19	11.47	40.66	60.00	-19.34	QP	
12	16.2660	22.26	11.47	33.73	50.00	-16.27	AVG	


Neutral line:

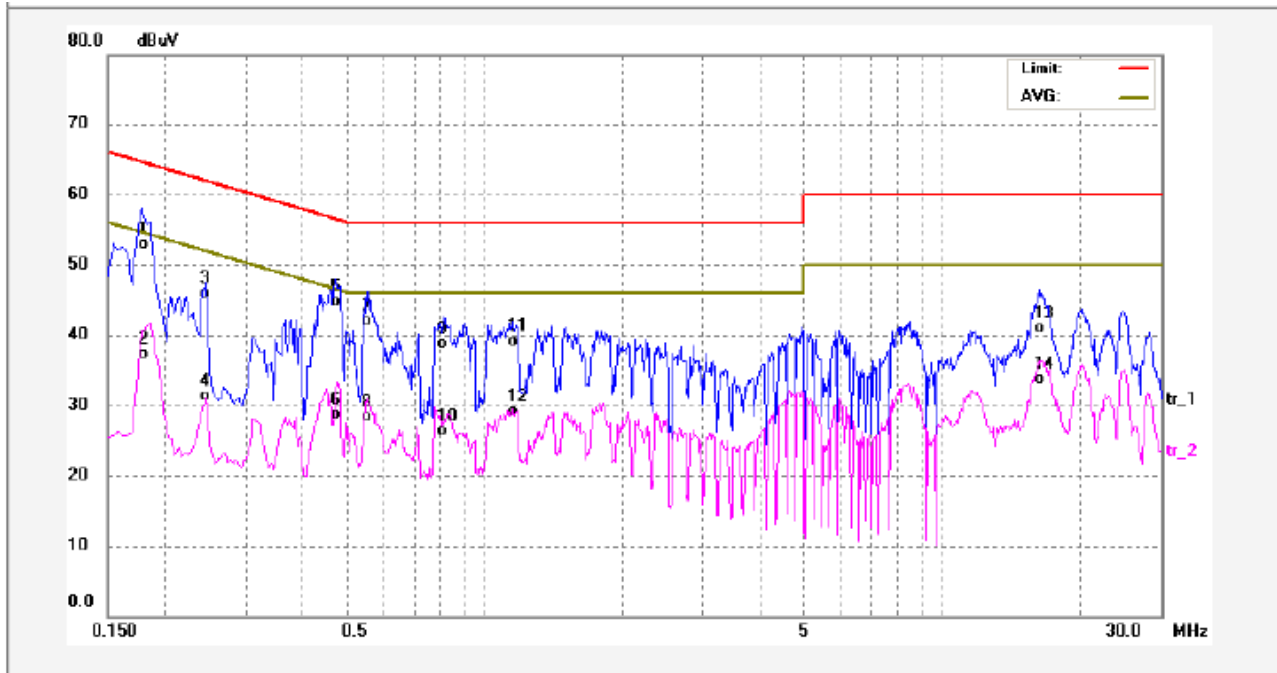

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1780	40.96	11.24	52.20	64.57	-12.37	QP	
2	0.1780	25.24	11.24	36.48	54.57	-18.09	AVG	
3	0.2460	33.72	11.30	45.02	61.89	-16.87	QP	
4	0.2460	19.19	11.30	30.49	51.89	-21.40	AVG	
5	0.4700	32.51	11.31	43.82	56.51	-12.69	QP	
6	0.4700	16.67	11.31	27.98	46.51	-18.53	AVG	
7	0.5540	29.79	11.32	41.11	56.00	-14.89	QP	
8	0.5540	16.09	11.32	27.41	46.00	-18.59	AVG	
9	0.8139	26.64	11.28	37.92	56.00	-18.08	QP	
10	0.8139	14.14	11.28	25.42	46.00	-20.58	AVG	
11	1.1500	27.13	11.18	38.31	56.00	-17.69	QP	
12	1.1500	17.04	11.18	28.22	46.00	-17.78	AVG	
13	16.3860	28.72	11.47	40.19	60.00	-19.81	QP	
14	16.3860	21.45	11.47	32.92	50.00	-17.08	AVG	


Test Mode: AUX in mode

Live line:

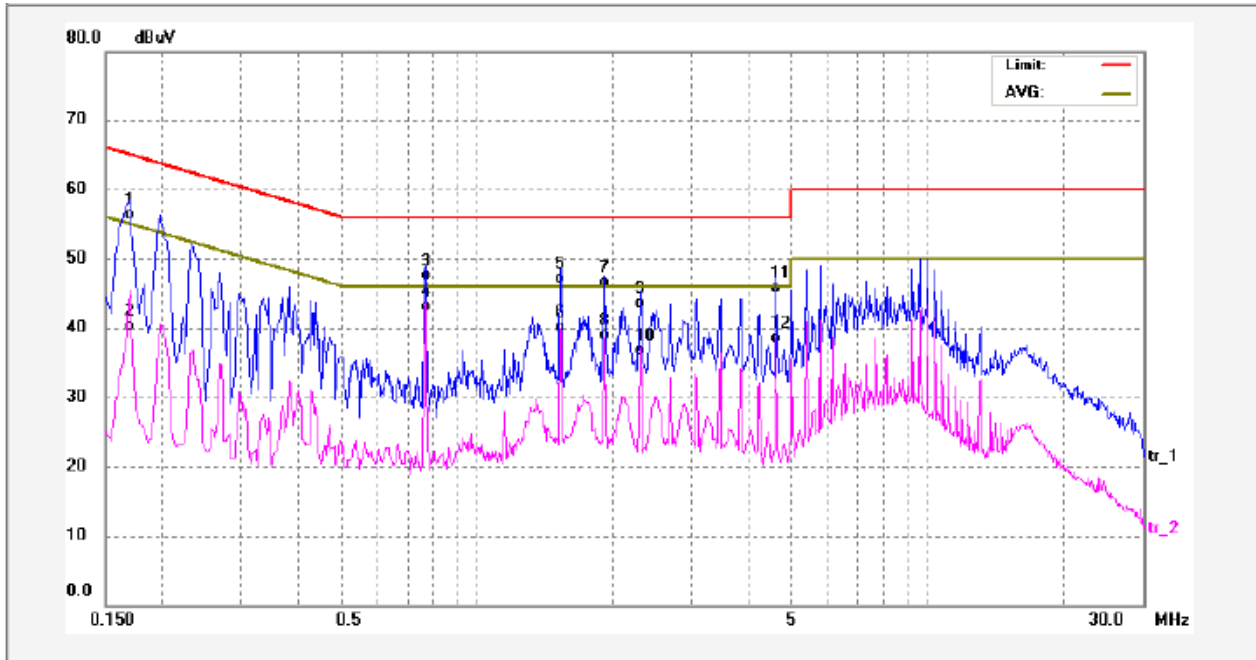

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1700	44.25	11.22	55.47	64.96	-9.49	QP	
2	0.1700	28.26	11.22	39.48	54.96	-15.48	AVG	
3	0.7700	35.42	11.30	46.72	56.00	-9.28	QP	
4	0.7700	30.92	11.30	42.22	46.00	-3.78	AVG	
5	1.5380	35.11	11.19	46.30	56.00	-9.70	QP	
6	1.5380	28.11	11.19	39.30	46.00	-6.70	AVG	
7	1.9220	34.48	11.20	45.68	56.00	-10.32	QP	
8	1.9220	26.88	11.20	38.08	46.00	-7.92	AVG	
9	2.3060	31.50	11.20	42.70	56.00	-13.30	QP	
10	2.3060	24.76	11.20	35.96	46.00	-10.04	AVG	
11	4.6060	33.64	11.23	44.87	56.00	-11.13	QP	
12	4.6060	26.50	11.23	37.73	46.00	-8.27	AVG	

Neutral line:

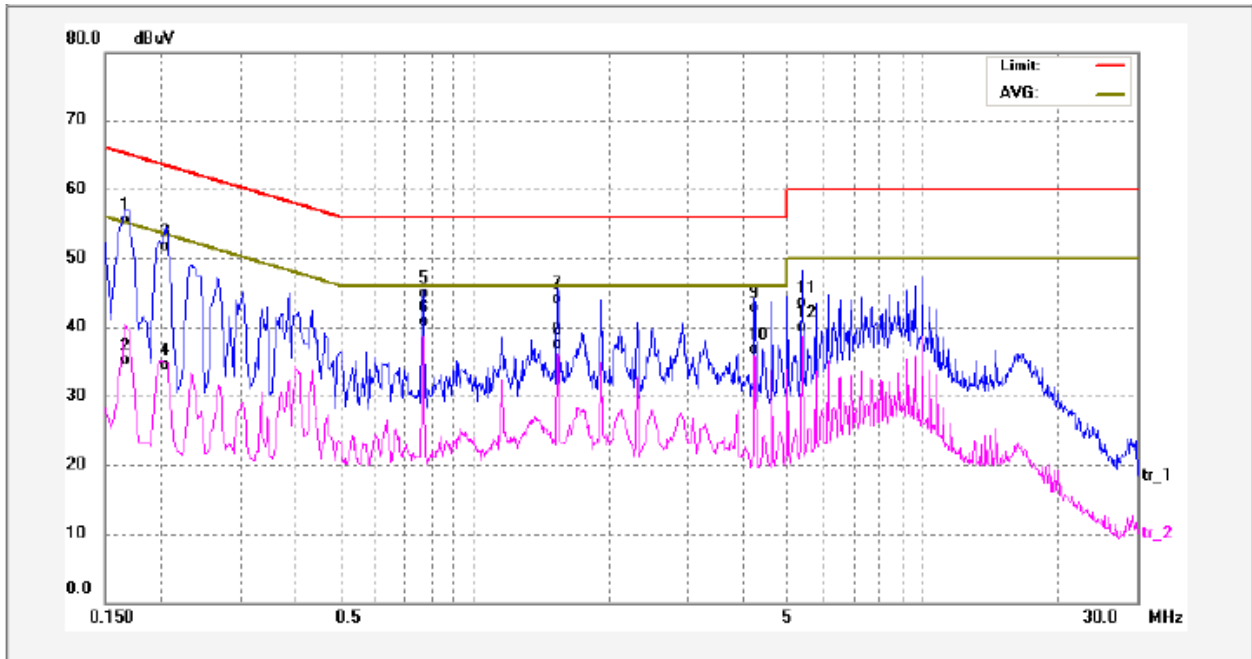

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1660	43.51	11.21	54.72	65.15	-10.43	QP	
2	0.1660	23.16	11.21	34.37	55.15	-20.78	AVG	
3	0.2060	39.70	11.30	51.00	63.36	-12.36	QP	
4	0.2060	22.35	11.30	33.65	53.36	-19.71	AVG	
5	0.7700	32.77	11.30	44.07	56.00	-11.93	QP	
6	0.7700	28.52	11.30	39.82	46.00	-6.18	AVG	
7	1.5339	32.10	11.19	43.29	56.00	-12.71	QP	
8	1.5339	25.45	11.19	36.64	46.00	-9.36	AVG	
9	4.2220	30.70	11.23	41.93	56.00	-14.07	QP	
10	4.2220	24.62	11.23	35.85	46.00	-10.15	AVG	
11	5.3780	31.49	11.24	42.73	60.00	-17.27	QP	
12	5.3780	27.86	11.24	39.10	50.00	-10.90	AVG	

7 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Frequency Range: 12MHz to 25GHz

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C


Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

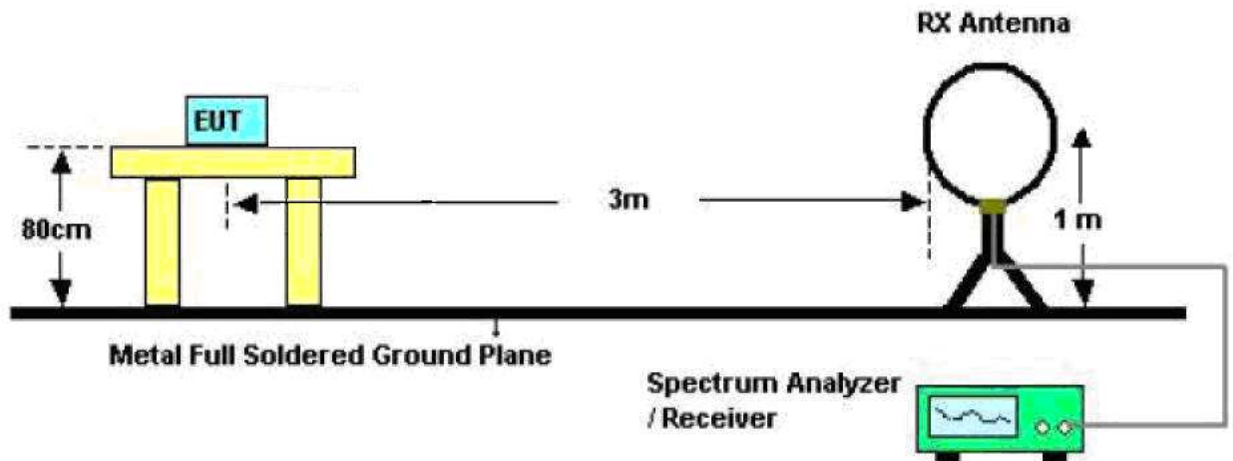

The test setup for emission measurement from 30 MHz to 1 GHz.

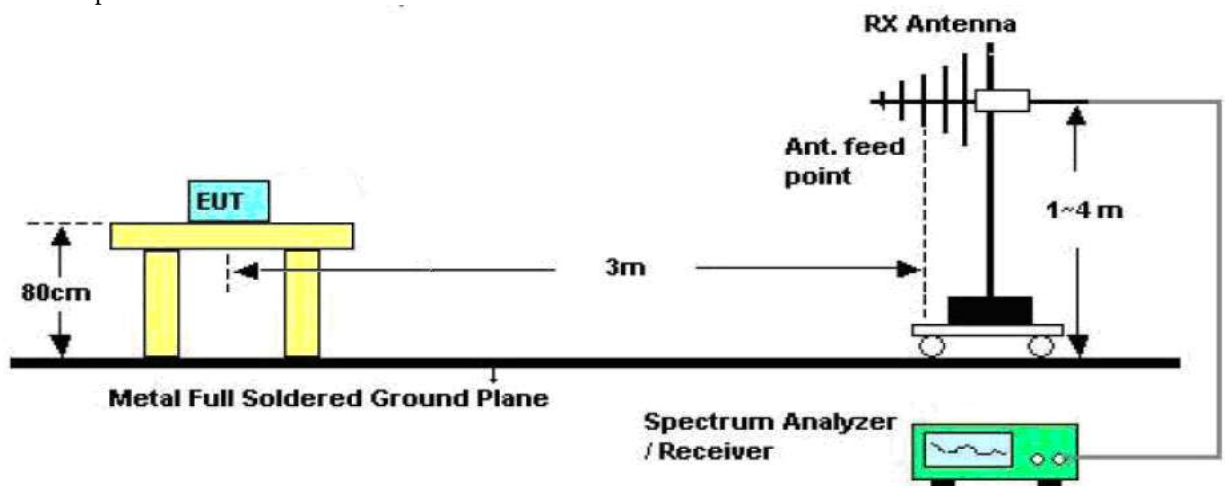

The test setup for emission measurement above 1 GHz.

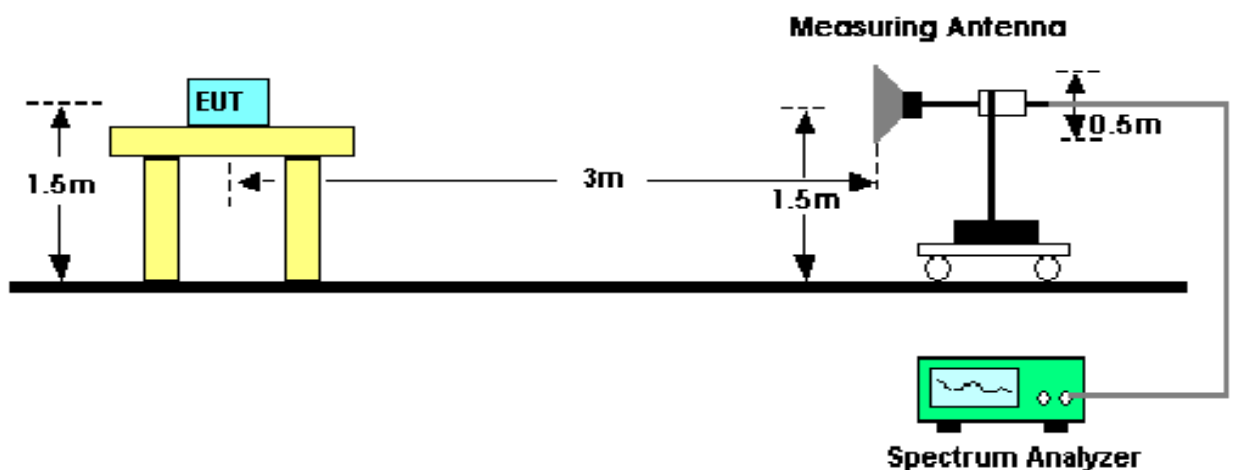

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 12MHz to 25000MHz.

Below 30MHz

Sweep SpeedAuto
IF Bandwidth10KHz
Video Bandwidth10KHz
Resolution Bandwidth10KHz

30MHz ~ 1GHz

Sweep SpeedAuto
IF Bandwidth120 KHz
Video Bandwidth100KHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth100KHz

Above 1GHz

Sweep SpeedAuto
IF Bandwidth120 KHz
Video Bandwidth3MHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth1MHz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency :Below 30MHz


All emissions were more than 20 dB below the limit and therefore not reported

Test Frequency : 30MHz ~ 1000MHz


Test voltage: AC 120V/60Hz for adapter

Test Mode: BT linking

Antenna polarization: Vertical

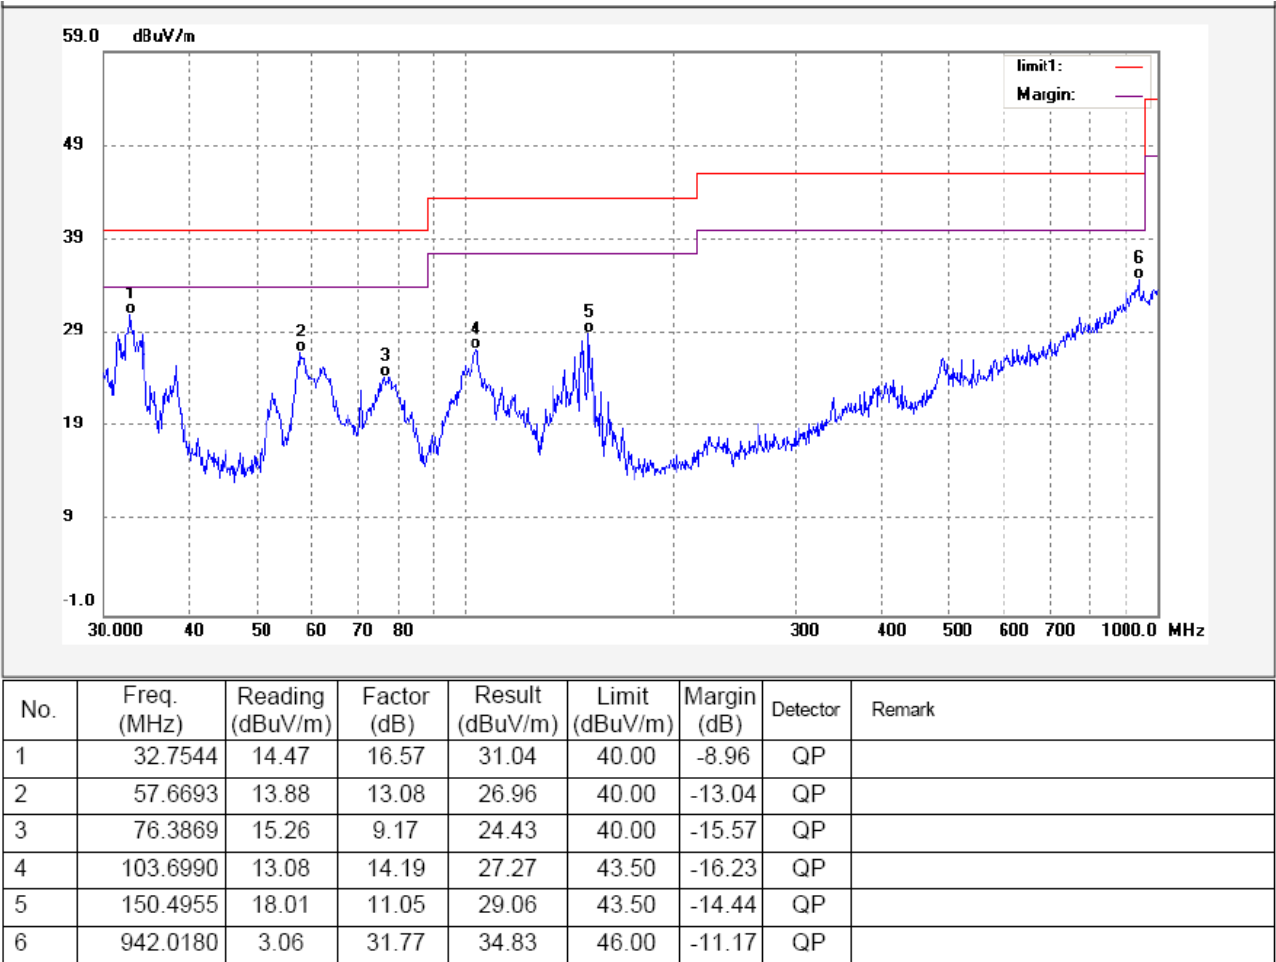


Antenna polarization: Horizontal

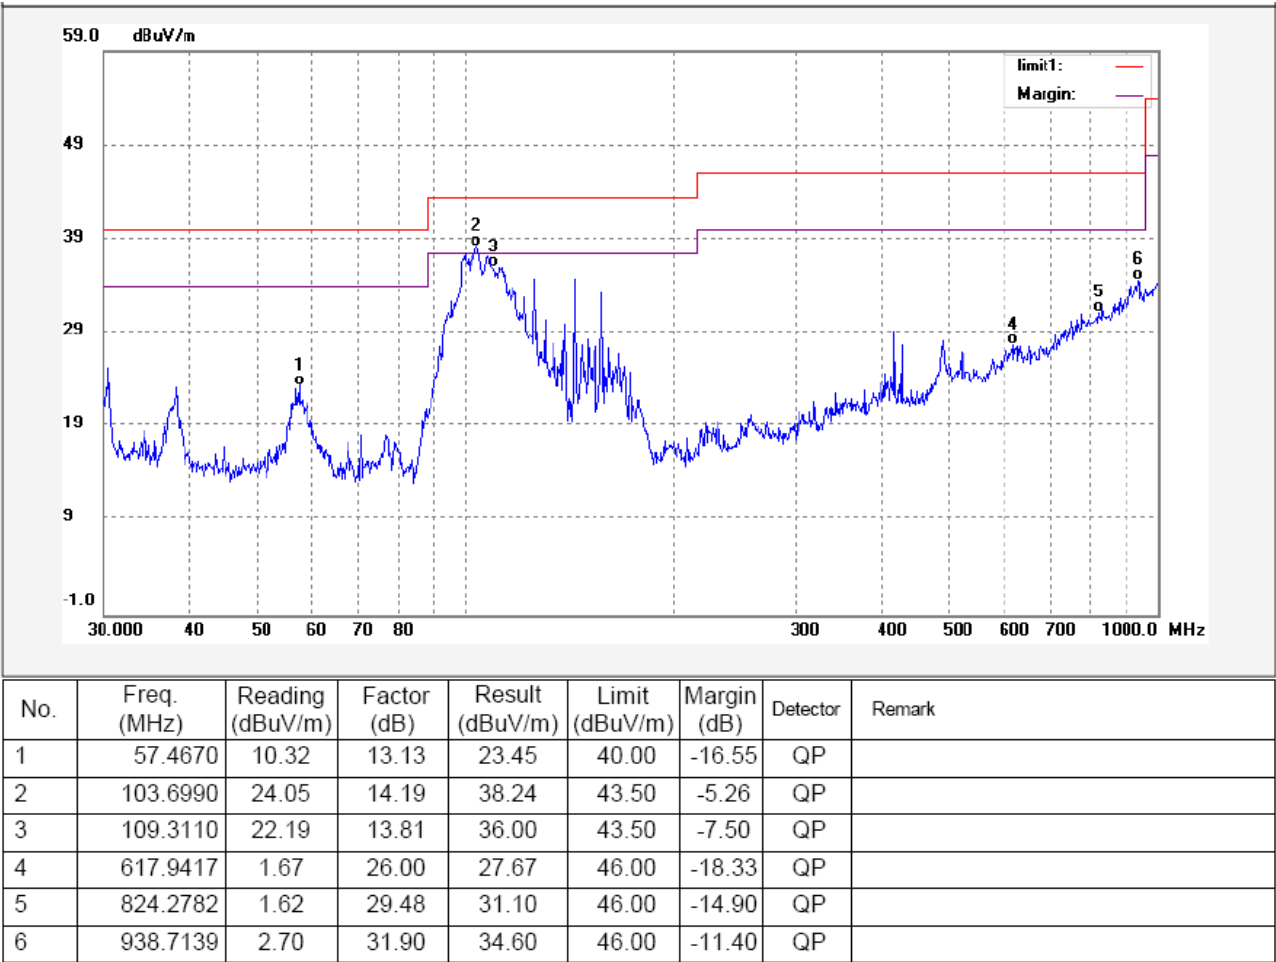


Test voltage: AC 120V/60Hz for adapter

Test Mode: AUX in

Antenna polarization: Vertical

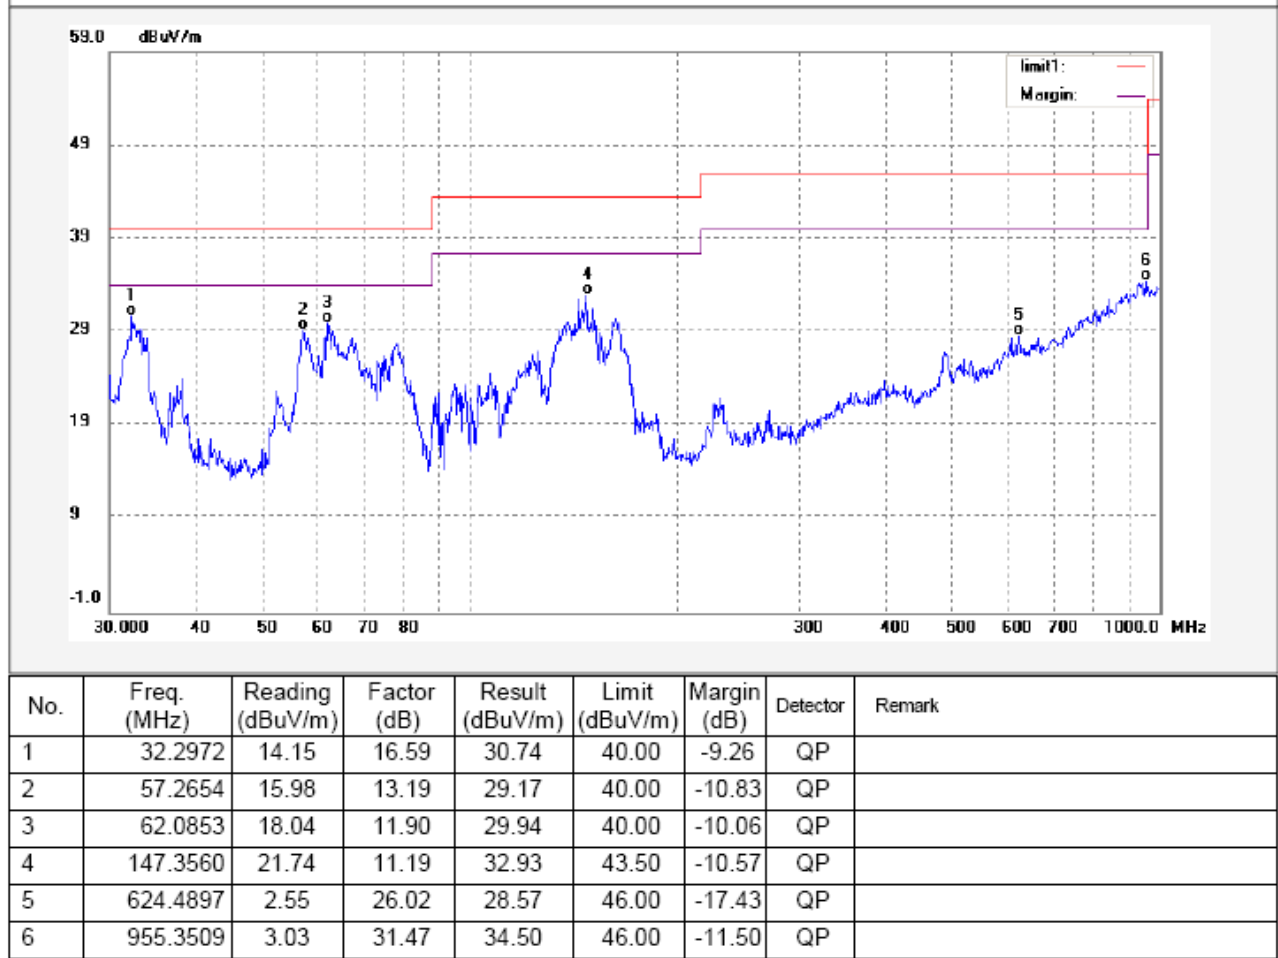


Antenna polarization: Horizontal

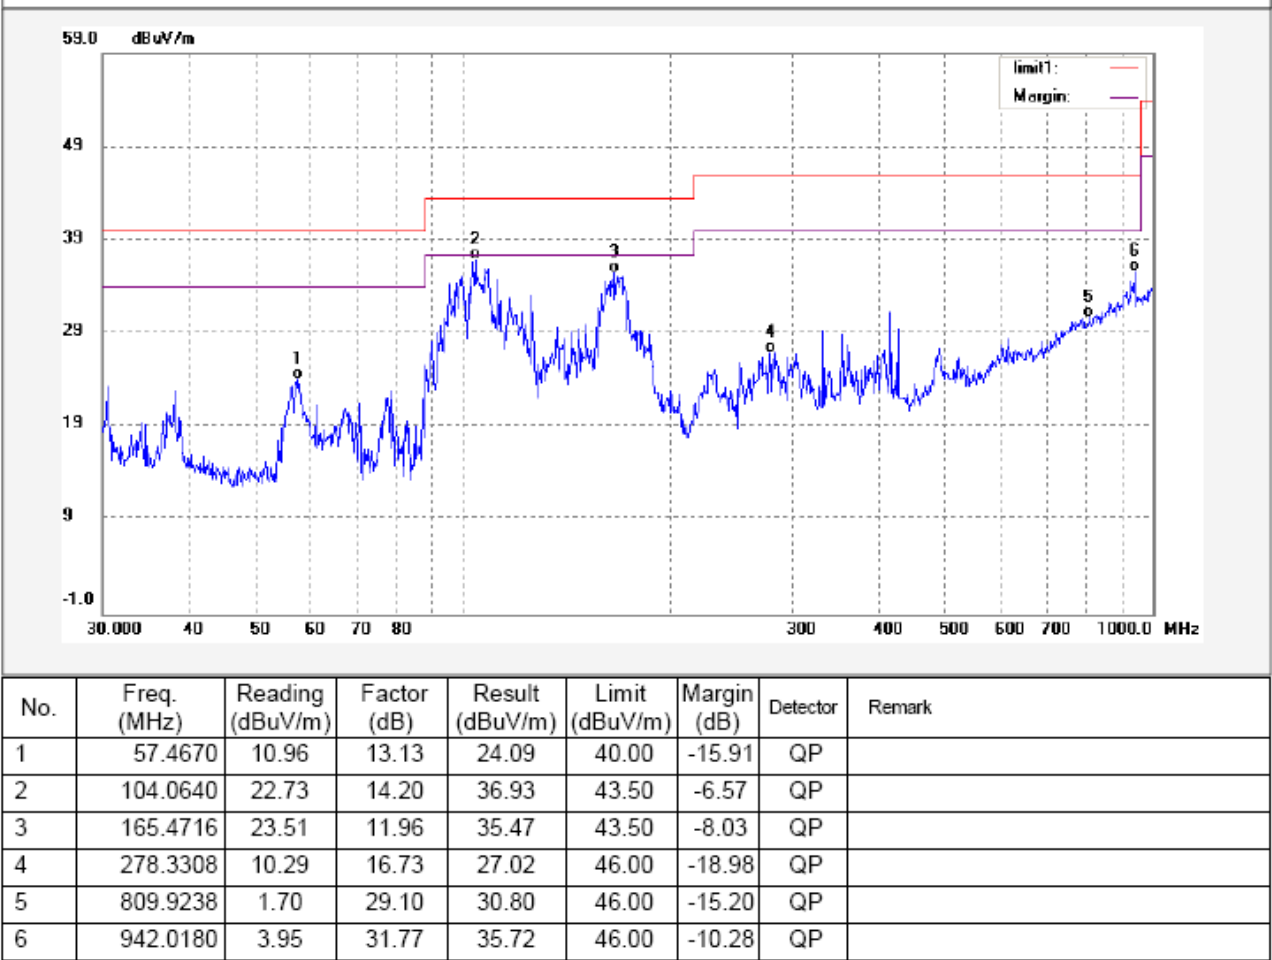


Test voltage: DC 11.1V for battery

Test Mode: BT linking

Antenna polarization: Vertical

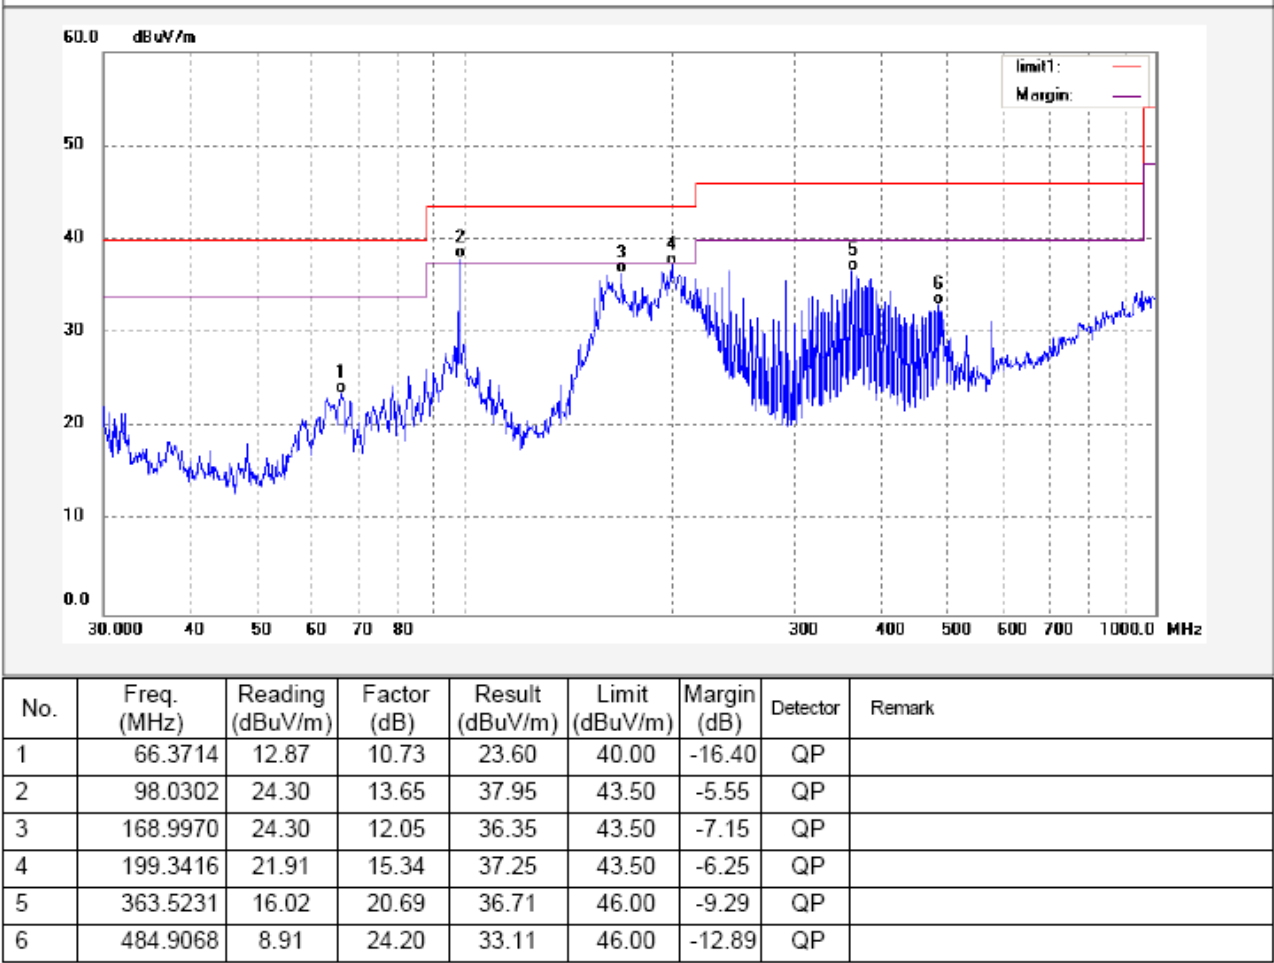

Antenna polarization: Horizontal

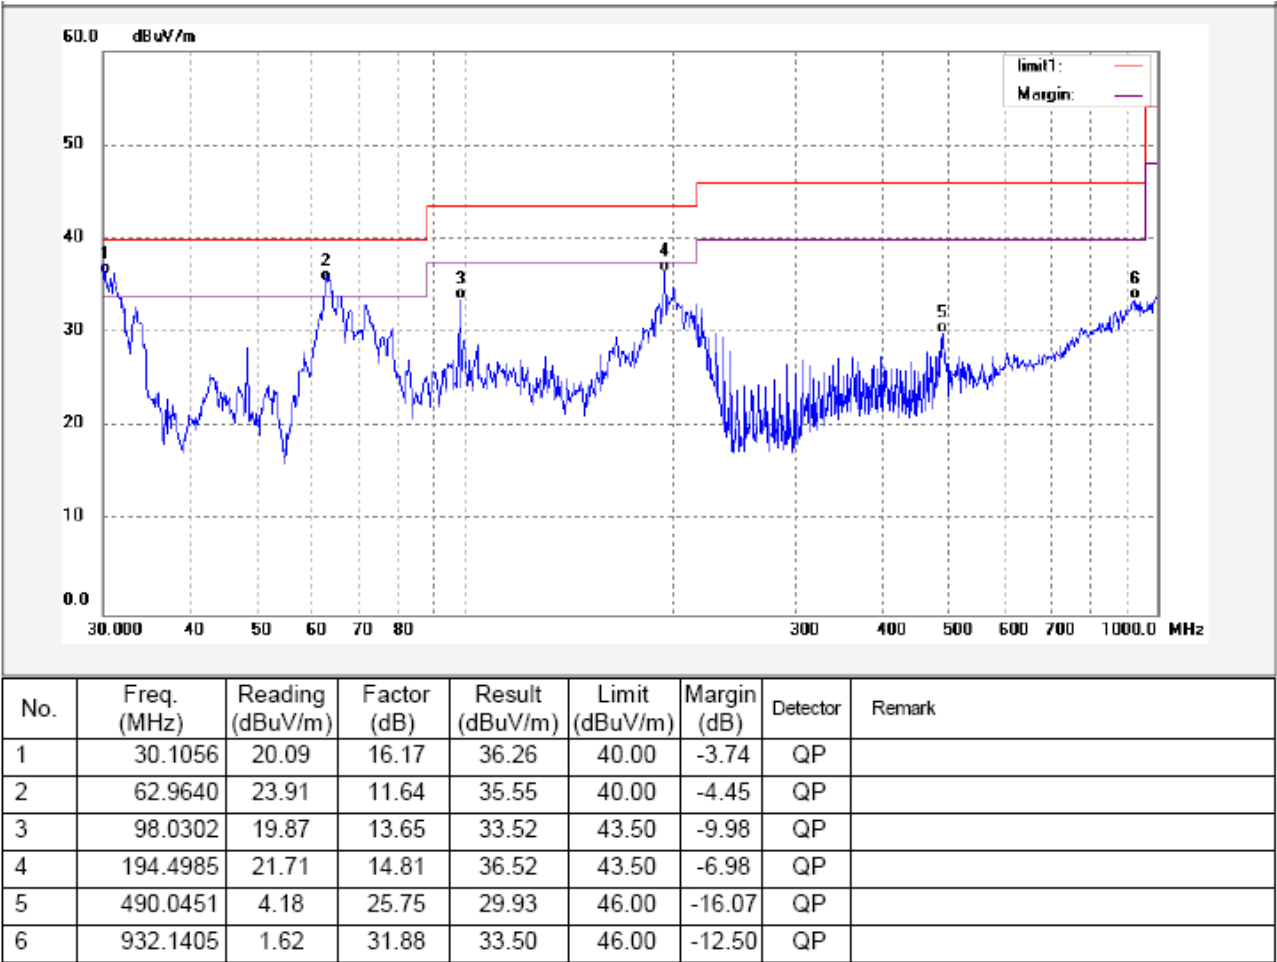


Test voltage: AC 120V 60Hz for adapter


Test mode: transmitting at lower channel

Remark: the EUT was pretested at the upper, middle and lower channel, and the worse case was the low Channel, so the data show was the lower channel only.

Antenna polarization: Vertical

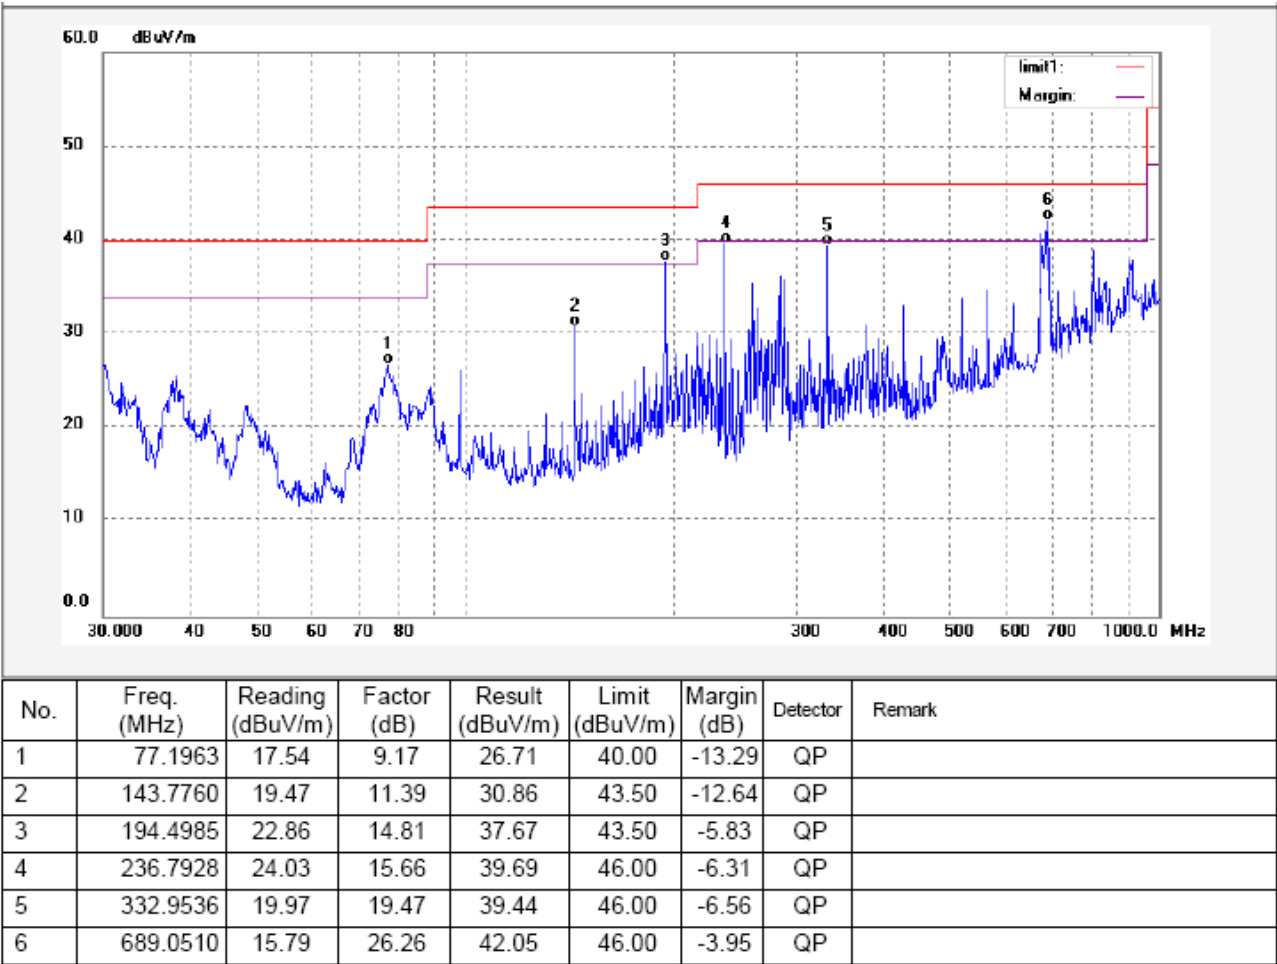

Antenna polarization: Horizontal

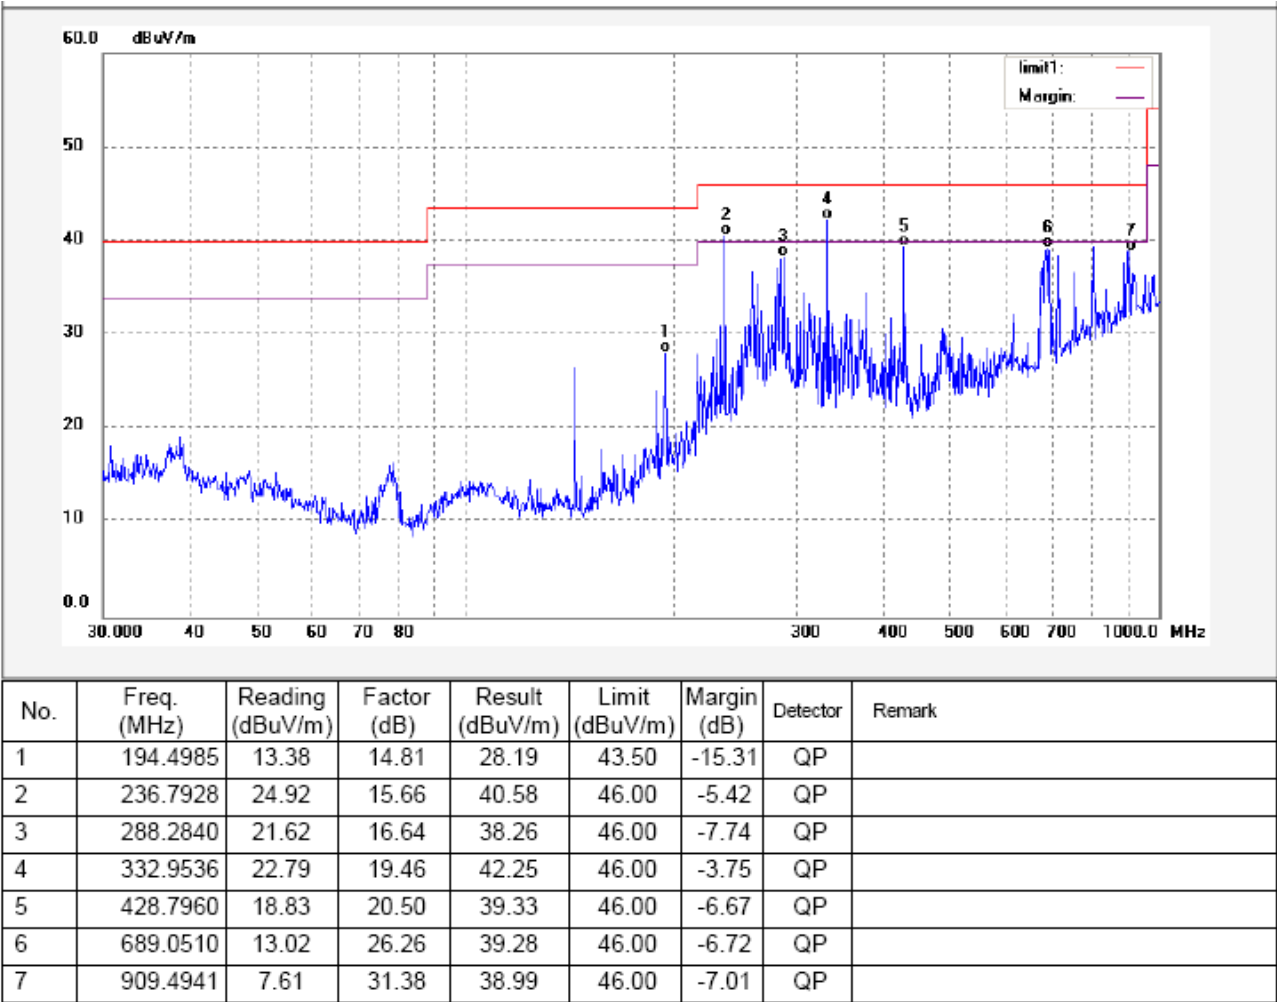


Test Frequency: 1GHz ~ 18GHz

All the modulation modes were tested, the data of the worst mode (GFSK) were recorded in the following pages.

AV = Peak +20Log₁₀(duty cycle) =PK+(-9)=PK-9 [refer to section 8 for more detail]

Test mode: transmitting at lower channel


Antenna polarization: Vertical

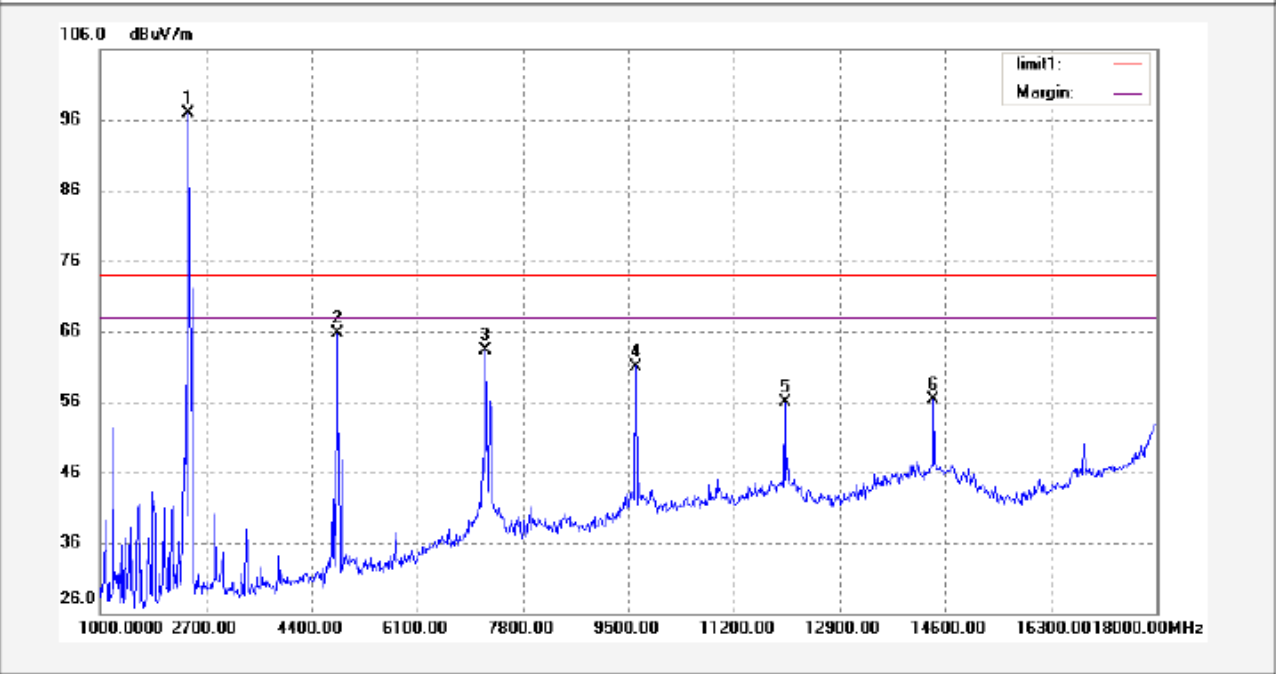

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	112.61	-15.61	97.00	74.00	23.00	peak	
2	4808.000	77.70	-11.97	65.73	74.00	-8.27	peak	
3	7205.000	70.54	-7.21	63.33	74.00	-10.67	peak	
4	9619.000	66.70	-5.70	61.00	74.00	-13.00	peak	
5	12016.000	60.45	-4.47	55.98	74.00	-18.02	peak	
6	14413.000	55.94	0.41	56.35	74.00	-17.65	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	-9	88	54.00	34.00	AV	
2	4808.000	-9	52.73	54.00	-2.73	AV	
3	7205.000	-9	51.33	54.00	-2.33	AV	
4	9619.000	-9	52	54.00	-2.00	AV	
5	12016.000	-9	46.98	54.00	-7.02	AV	
6	14413.000	-9	47.35	54.00	-6.65	AV	


Antenna polarization: Horizontal

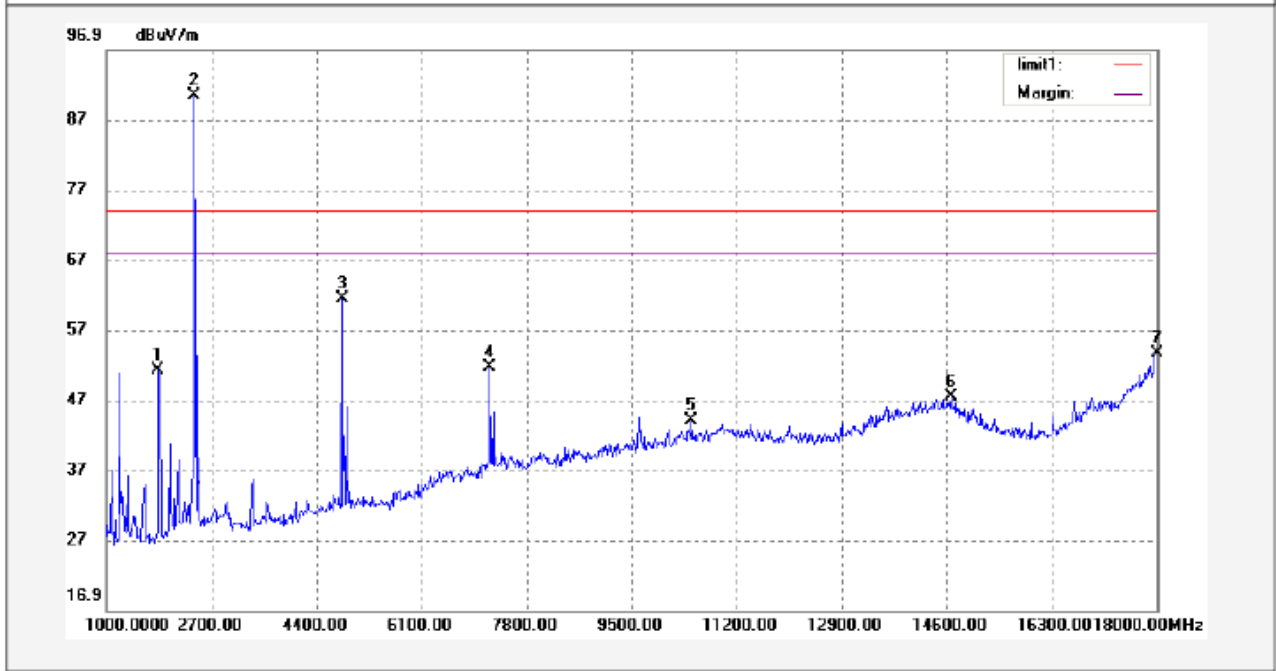

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	68.78	-17.50	51.28	74.00	-22.72	peak	
2	2402.000	106.06	-15.59	90.47	74.00	16.47	peak	
3	4808.000	73.29	-11.97	61.32	74.00	-12.68	peak	
4	7205.000	58.74	-7.21	51.53	74.00	-22.47	peak	
5	10469.000	48.17	-4.26	43.91	74.00	-30.09	peak	
6	14668.000	47.04	0.33	47.37	74.00	-26.63	peak	
7	18000.000	46.60	7.08	53.68	74.00	-20.32	peak	


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	-9	42.28	54.00	-11.72	AV	
2	2402.000	-9	81.47	54.00	27.47	AV	
3	4808.000	-9	52.32	54.00	-1.68	AV	
4	7205.000	-9	42.53	54.00	-11.47	AV	
5	10469.000	-9	34.91	54.00	-19.09	AV	
6	14668.000	-9	38.37	54.00	-15.63	AV	
7	18000.000	-9	44.68	54.00	-9.32	AV	

Test Frequency: 1GHz ~ 18GHz
Test mode: transmitting at middle channel
Antenna polarization: Vertical

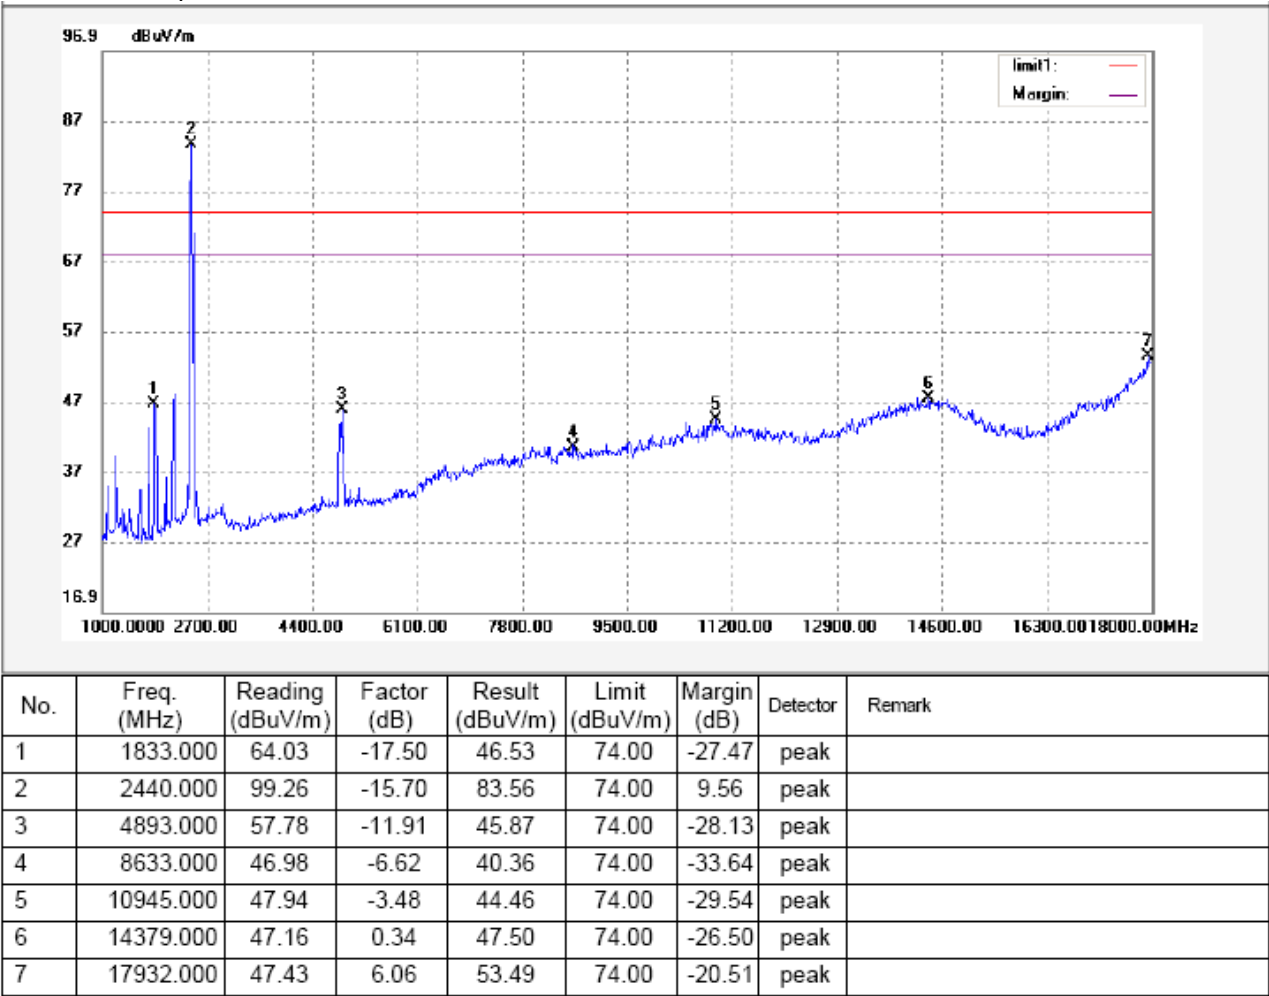

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	-9	37.53	54.00	-16.47	AV	
2	2440.000	-9	74.56	54.00	20.56	AV	
3	4893.000	-9	36.87	54.00	-17.13	AV	
4	8633.000	-9	31.36	54.00	-22.64	AV	
5	10945.000	-9	35.46	54.00	-18.54	AV	
6	14379.000	-9	38.5	54.00	-15.5	AV	
7	17932.000	-9	44.49	54.00	-9.51	AV	

Antenna polarization: Horizontal

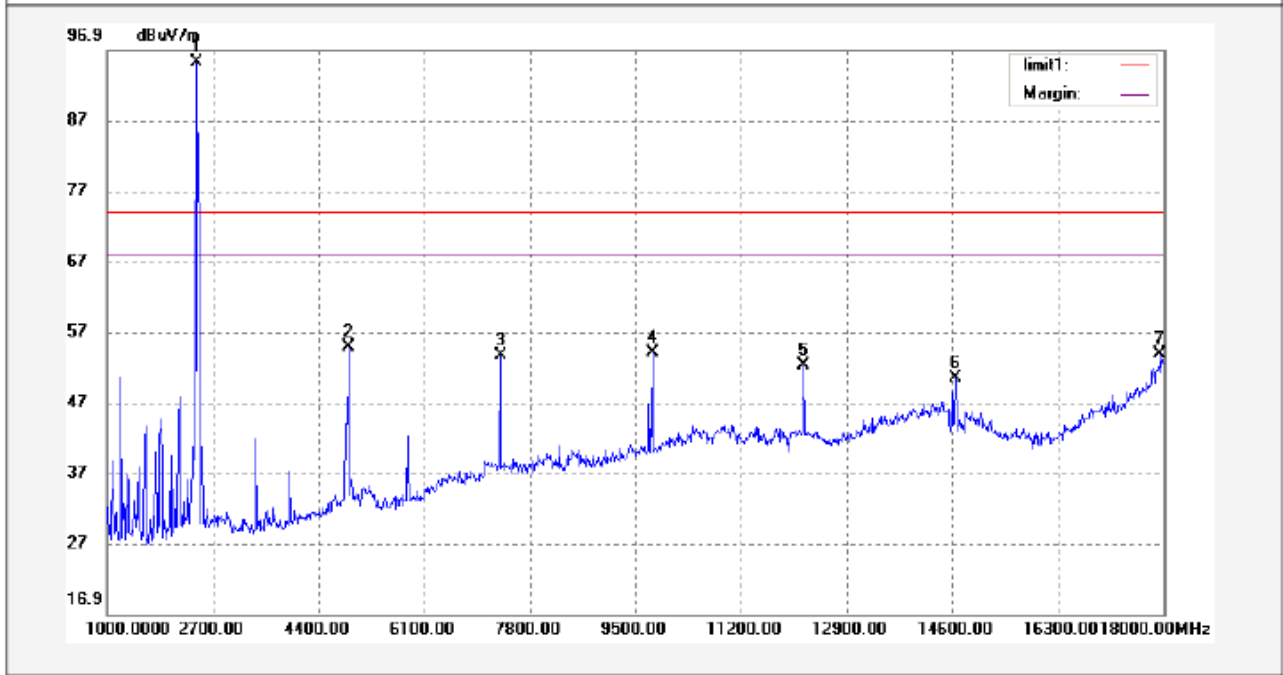


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	110.86	-15.70	95.16	74.00	21.16	peak	
2	4893.000	66.66	-11.91	54.75	74.00	-19.25	peak	
3	7324.000	60.72	-7.13	53.59	74.00	-20.41	peak	
4	9772.000	59.20	-5.28	53.92	74.00	-20.08	peak	
5	12203.000	56.60	-4.40	52.20	74.00	-21.80	peak	
6	14651.000	50.12	0.37	50.49	74.00	-23.51	peak	
7	17949.000	47.52	6.31	53.83	74.00	-20.17	peak	


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	-9	86.16	54.00	32.16	AV	
2	4893.000	-9	45.75	54.00	-8.25	AV	
3	7324.000	-9	44.59	54.00	-9.41	AV	
4	9772.000	-9	44.92	54.00	-9.08	AV	
5	12203.000	-9	43.2	54.00	-10.8	AV	
6	14651.000	-9	41.49	54.00	-12.51	AV	
7	17949.000	-9	44.83	54.00	-9.17	AV	

Test mode: transmitting at upper channel

Antenna polarization: Vertical

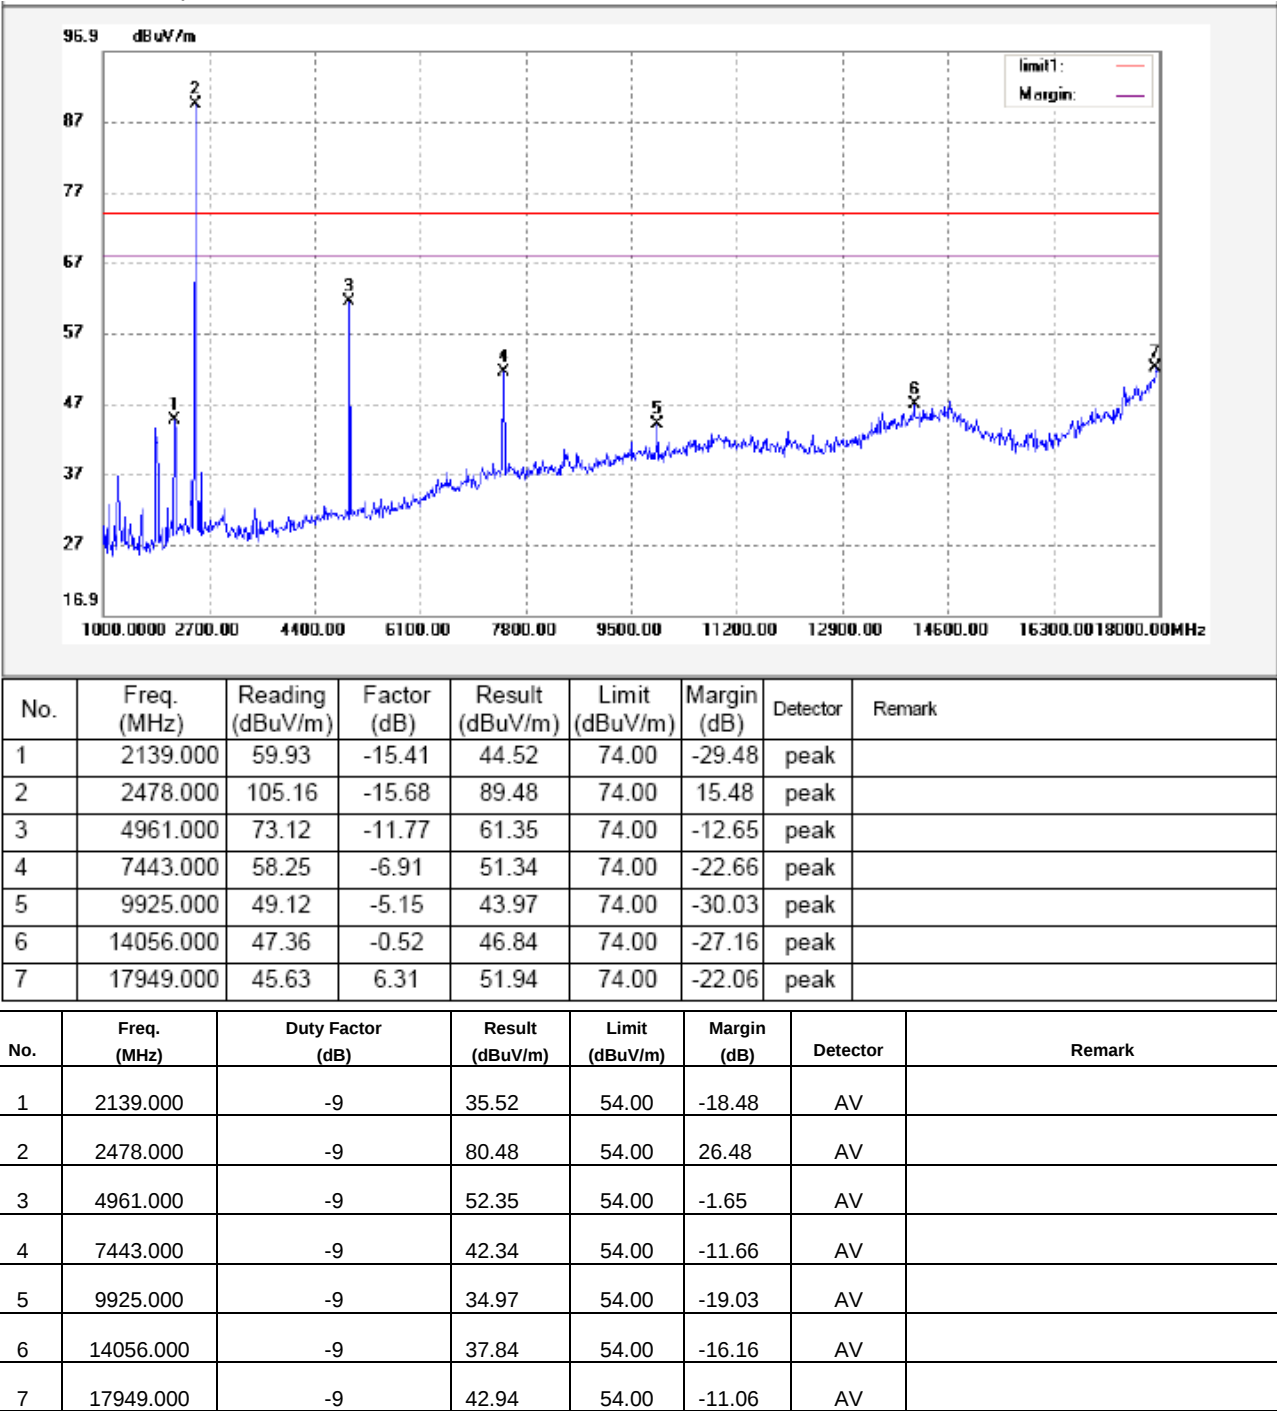

Antenna polarization: Horizontal

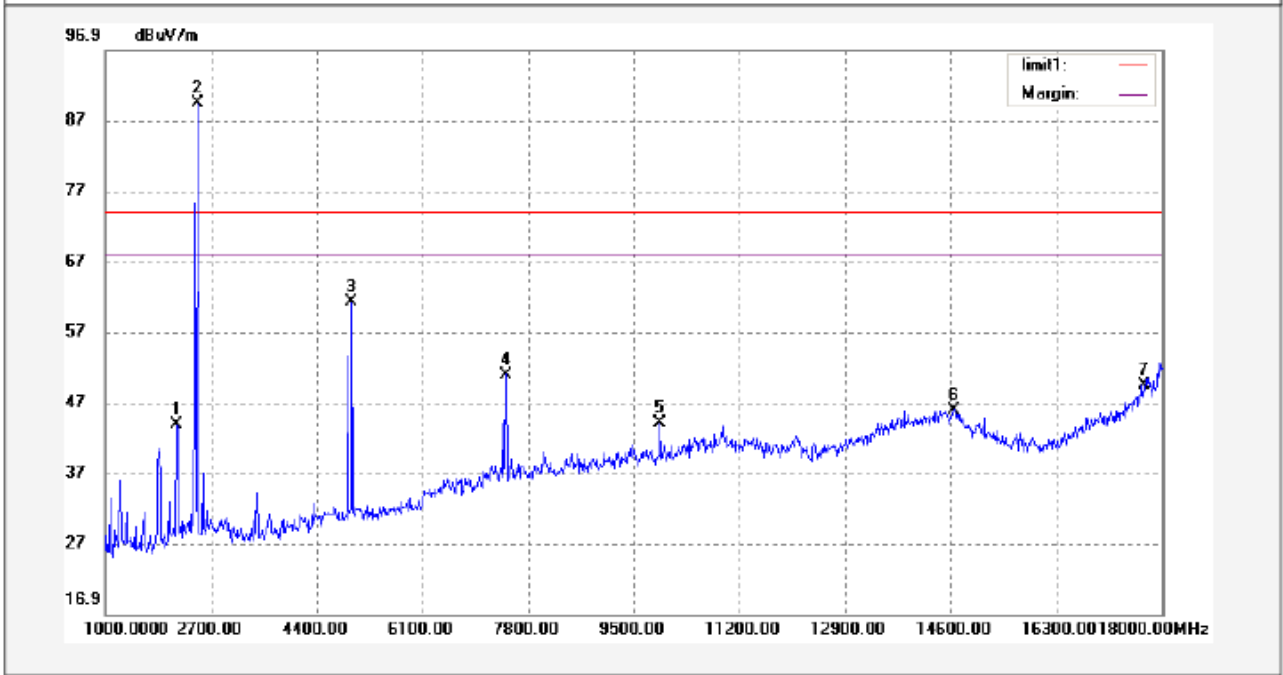


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	59.20	-15.41	43.79	74.00	-30.21	peak	
2	2478.000	105.16	-15.68	89.48	74.00	15.48	peak	
3	4961.000	72.89	-11.77	61.12	74.00	-12.88	peak	
4	7443.000	57.81	-6.91	50.90	74.00	-23.10	peak	
5	9925.000	49.20	-5.15	44.05	74.00	-29.95	peak	
6	14651.000	45.53	0.37	45.90	74.00	-28.10	peak	
7	17711.000	45.65	3.71	49.36	74.00	-24.64	peak	


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	-9	34.79	54.00	-19.21	AV	
2	2478.000	-9	80.48	54.00	26.48	AV	
3	4961.000	-9	52.12	54.00	-1.88	AV	
4	7443.000	-9	41.9	54.00	-12.1	AV	
5	9925.000	-9	35.05	54.00	-18.95	AV	
6	14651.000	-9	36.9	54.00	-17.1	AV	
7.	17711.000	-9	40.36	54.00	-13.64	AV	

Test mode: receiving whole band

Antenna polarization: Vertical

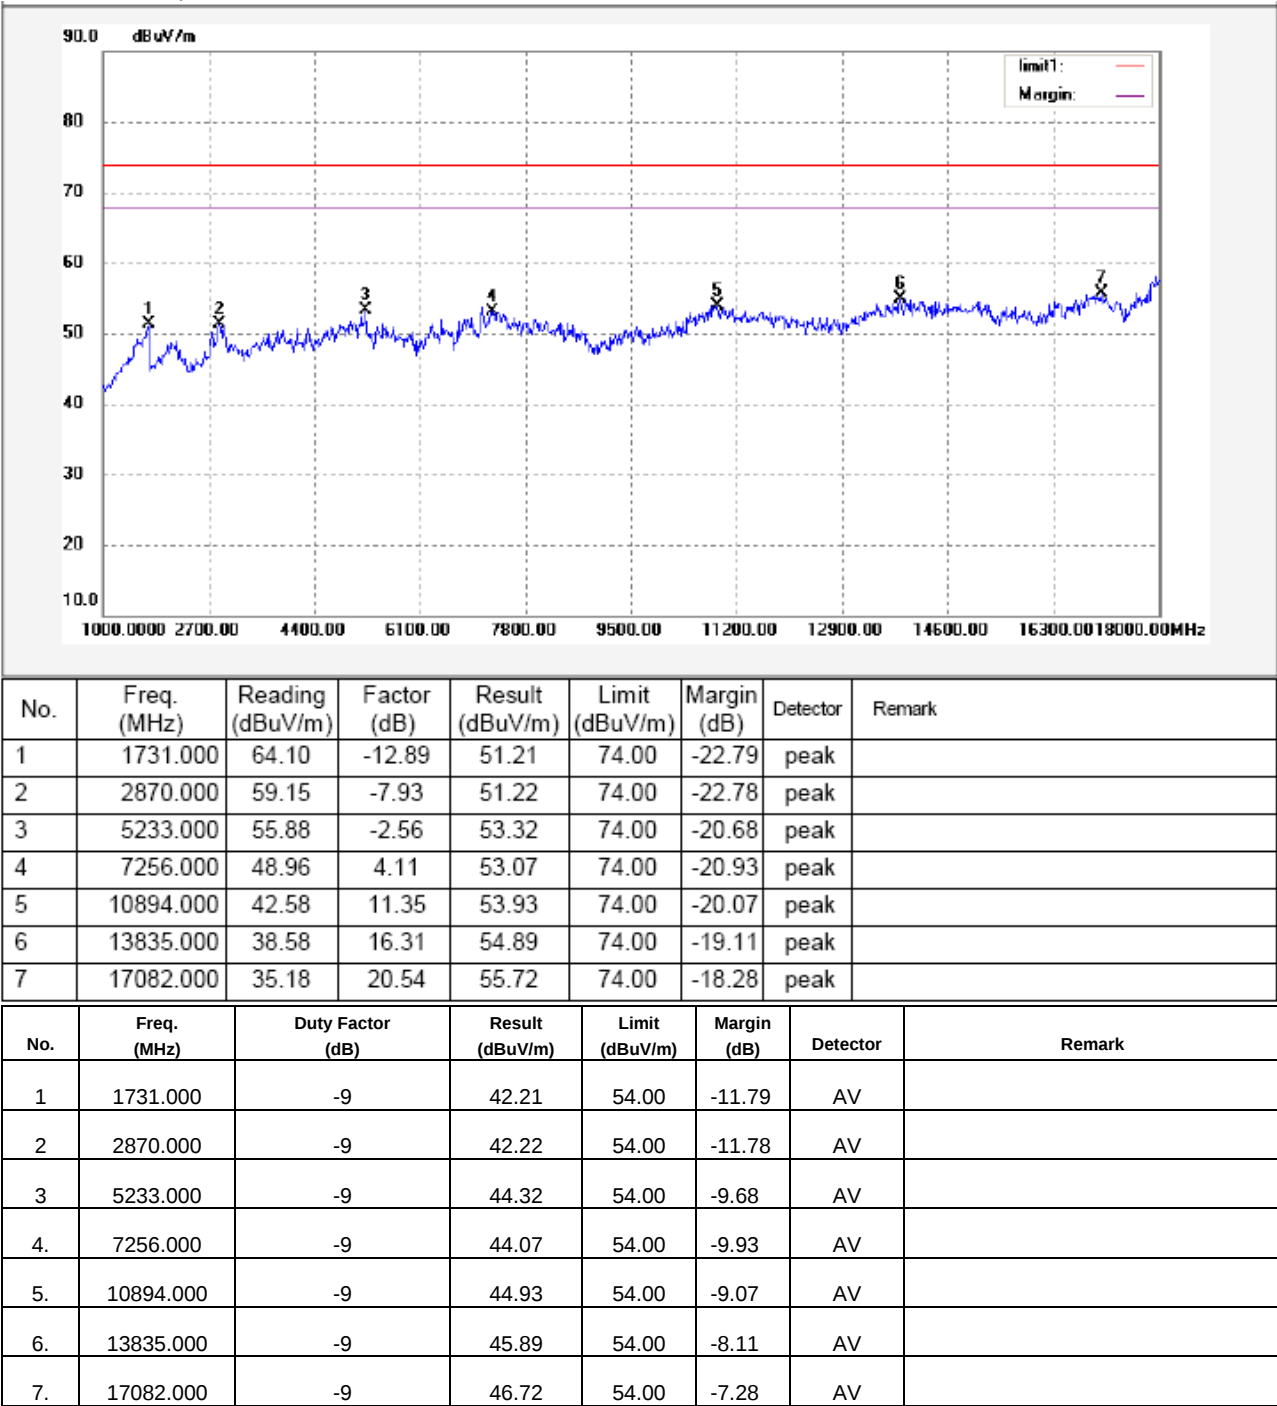

Antenna polarization: Horizontal

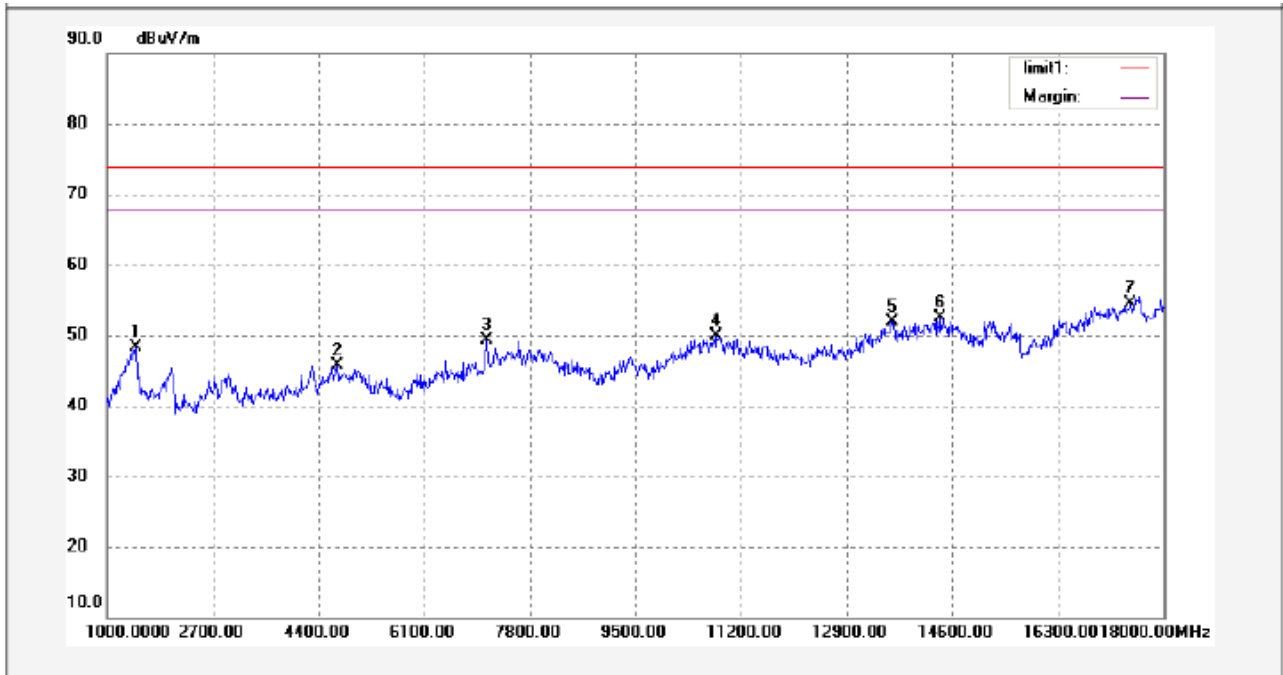

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1459.000	61.19	-12.94	48.25	74.00	-25.75	peak	
2	4706.000	49.24	-3.46	45.78	74.00	-28.22	peak	
3	7103.000	45.83	3.44	49.27	74.00	-24.73	peak	
4	10809.000	38.91	11.02	49.93	74.00	-24.07	peak	
5	13631.000	36.22	15.63	51.85	74.00	-22.15	peak	
6	14396.000	34.15	18.38	52.53	74.00	-21.47	peak	
7	17473.000	31.71	22.70	54.41	74.00	-19.59	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1459.000	-9	39.25	54.00	-14.75	AV	
2	4706.000	-9	36.78	54.00	-17.22	AV	
3	7103.000	-9	40.27	54.00	-13.73	AV	
4.	10809.000	-9	40.93	54.00	-13.07	AV	
5.	13631.000	-9	42.85	54.00	-11.15	AV	
6.	14396.000	-9	43.53	54.00	-10.47	AV	
7.	17473.000	-9	45.41	54.00	-8.59	AV	

Test Frequency : Above 18GHz

All emissions were more than 20 dB below the limit and therefore not reported

8 Spurious RF Conducted Emissions from out of band

Test Requirement: FCC Part 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: DA 00-705

Test Status: TX mode

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency.
3. Set RBW = 100kHz and VBW = 300kHz. Sweep = auto.
4. mark the worst point and record.

8.2 Test Result



Test Frequency: Below 30MHz

Remark: For emissions below 30MHz, no emission higher than background level, so the data does not show in the report.



Test Frequency: 30MHz ~ 25GHz

Test result plots shown as follows:



Modulation:GFSK
Lower Channel

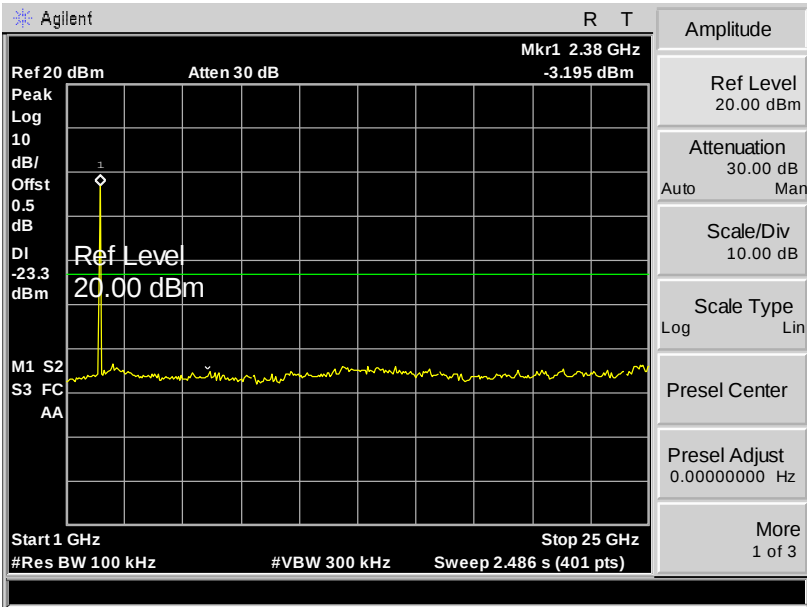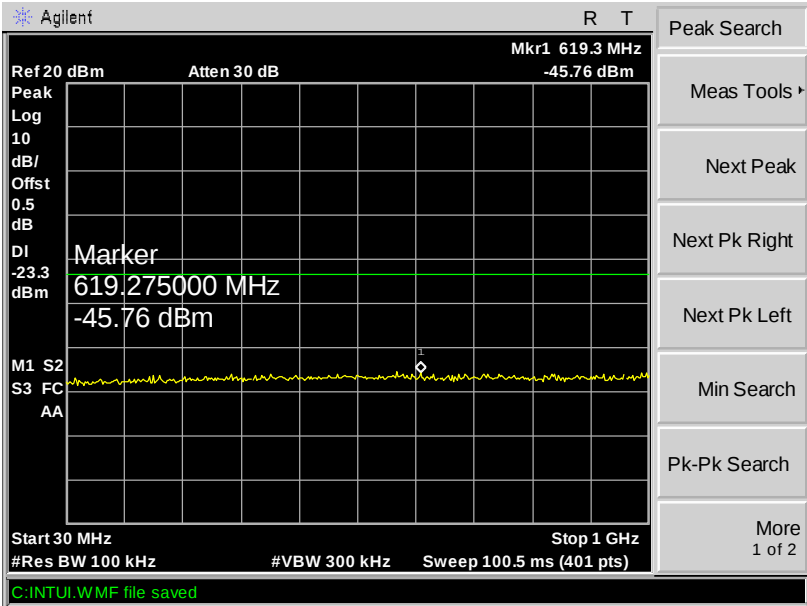

Middle Channel

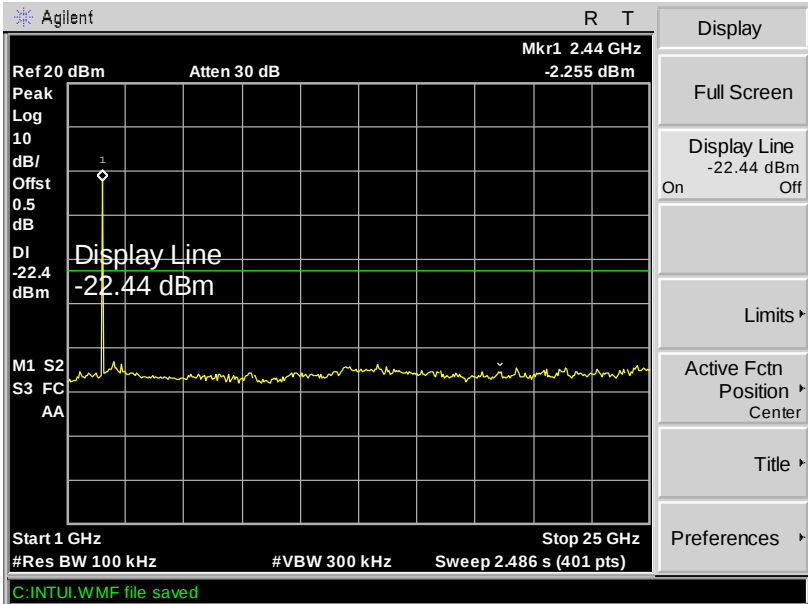
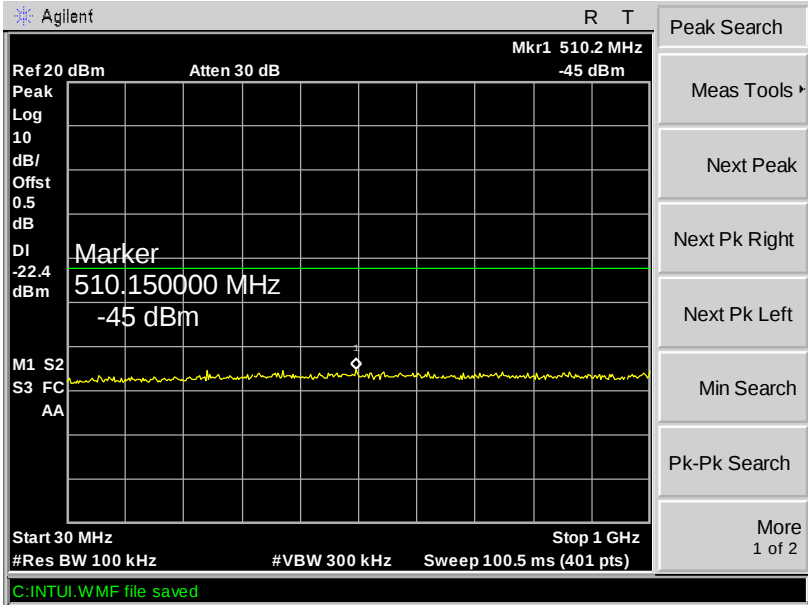




Upper Channel

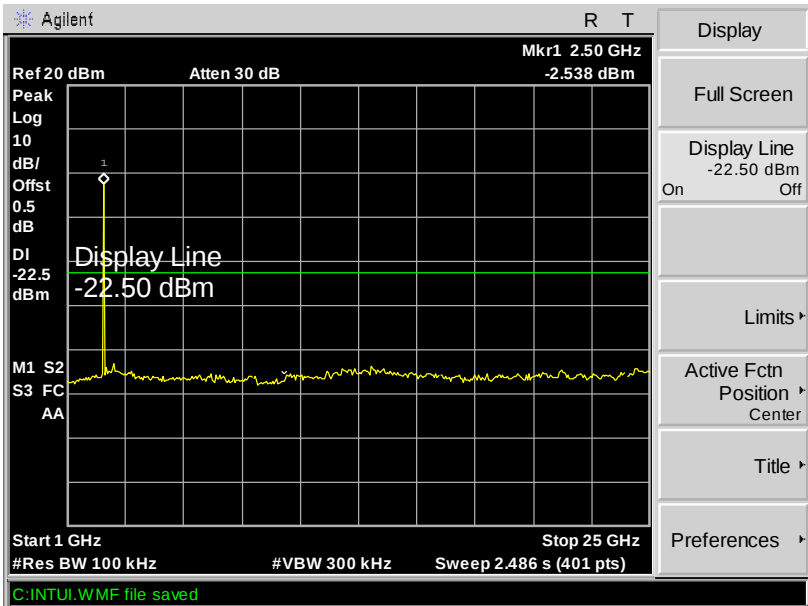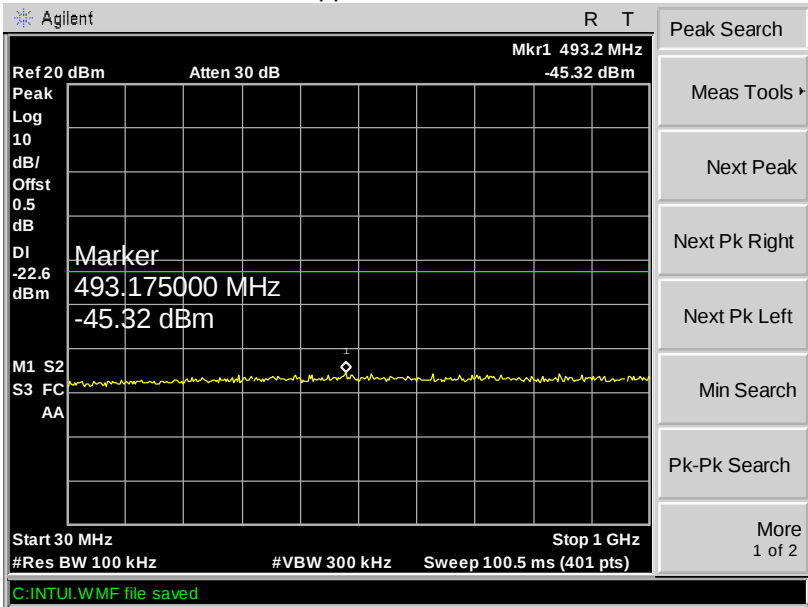



Modulation: Pi/4DQPSK

Lower Channel

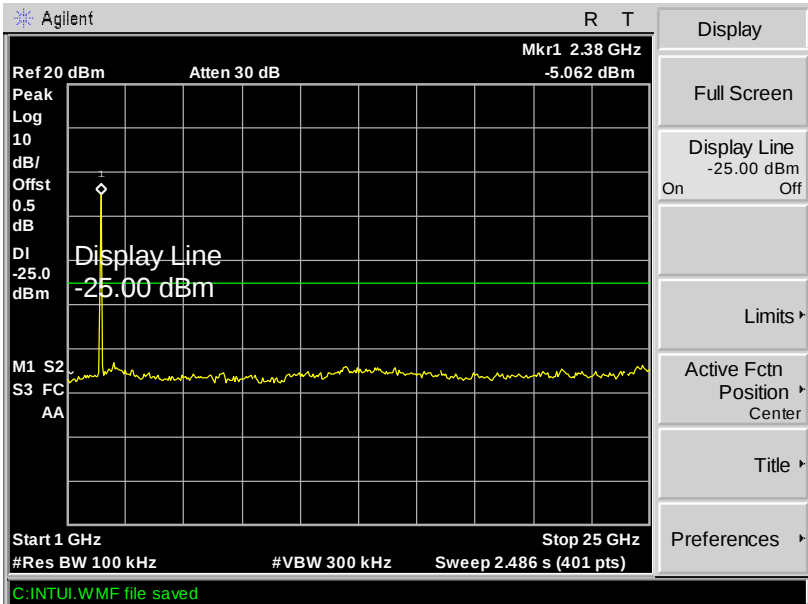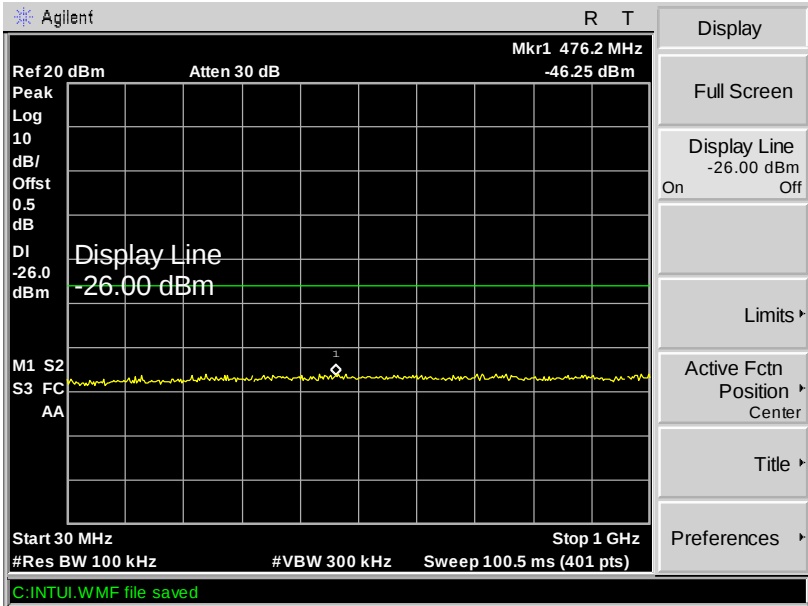

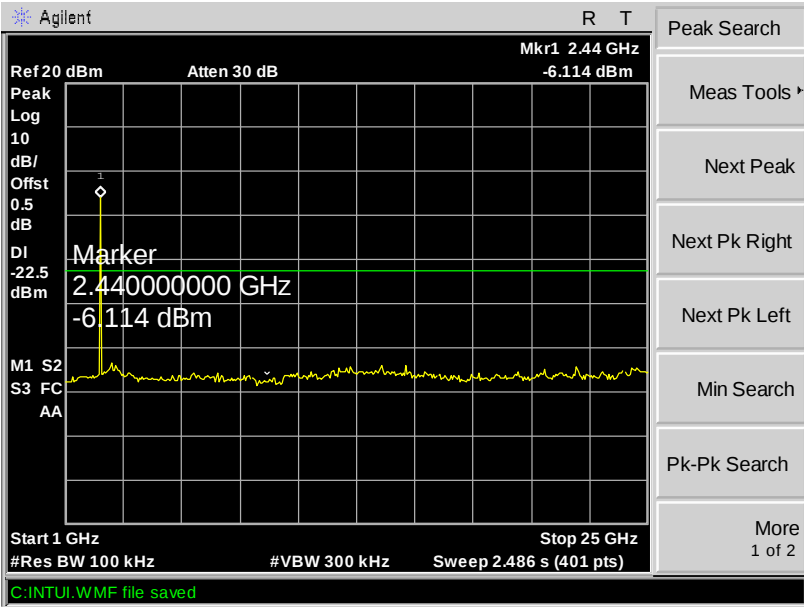
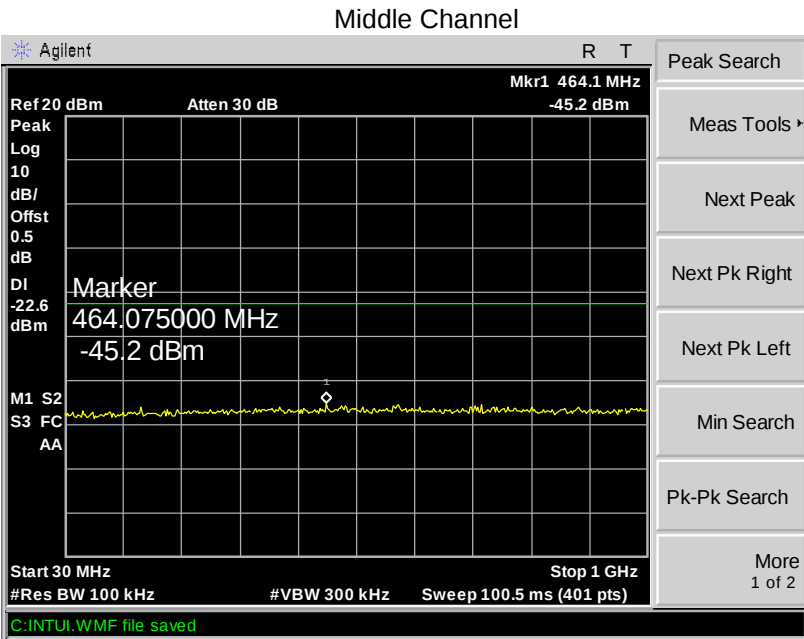




Upper Channel

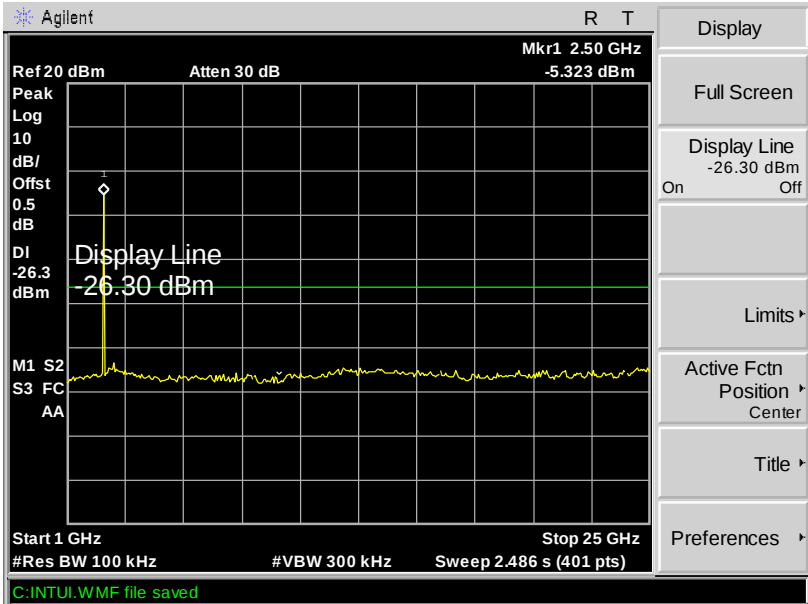
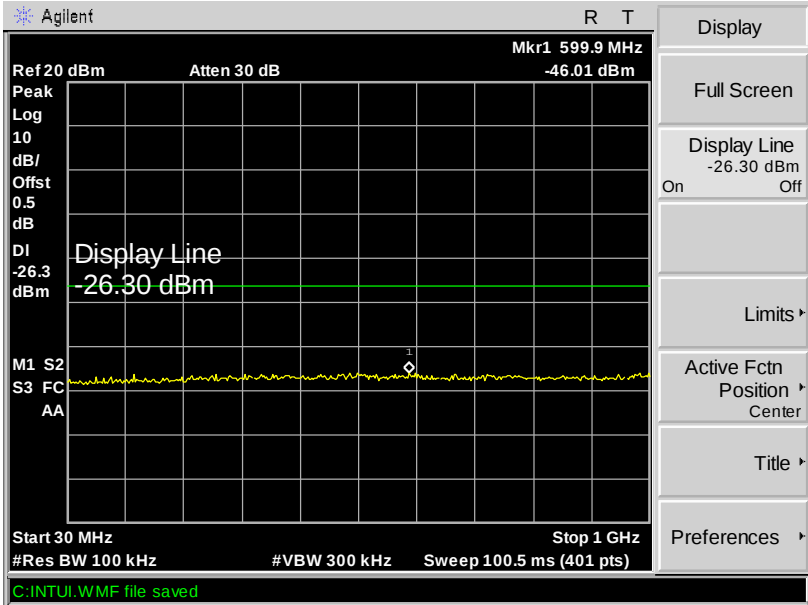


Modulation: 8DPSK

Lower Channel

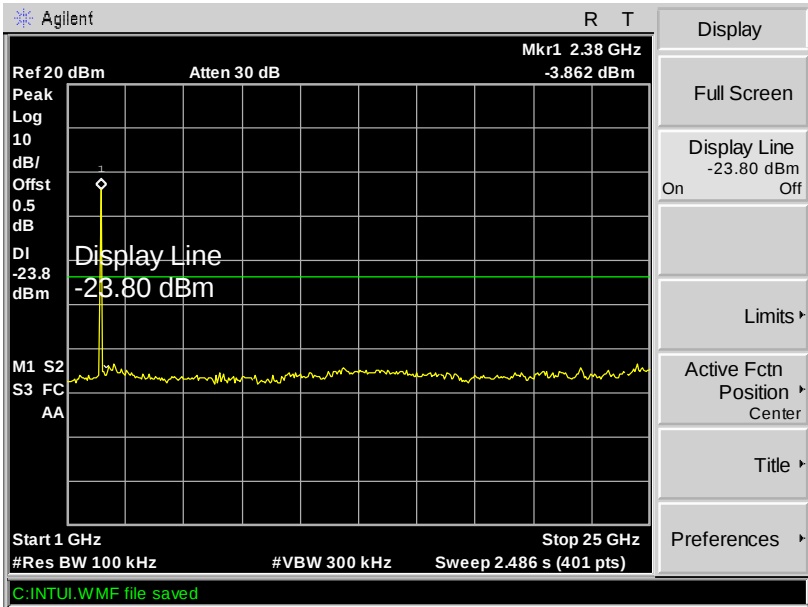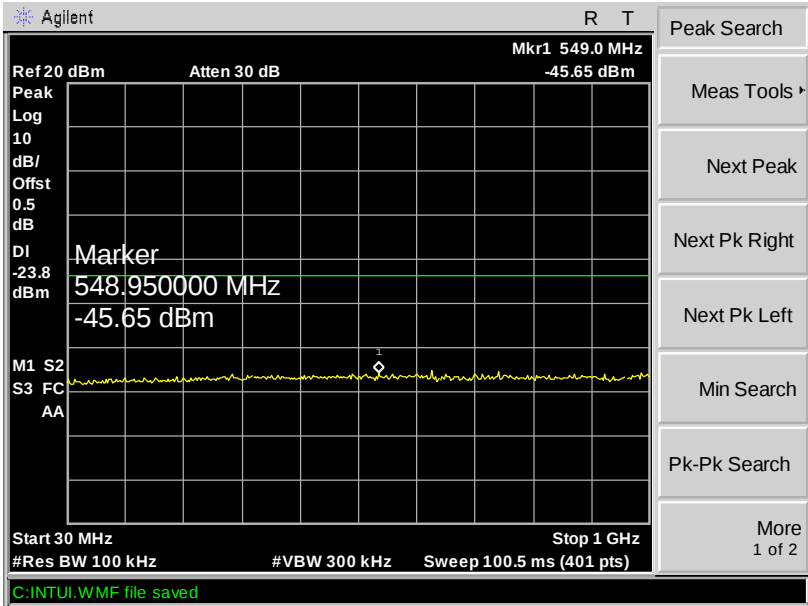

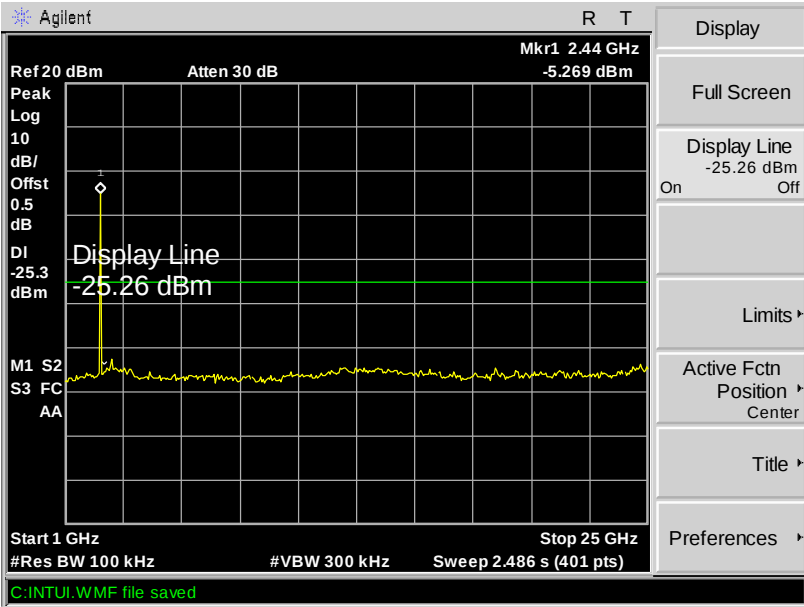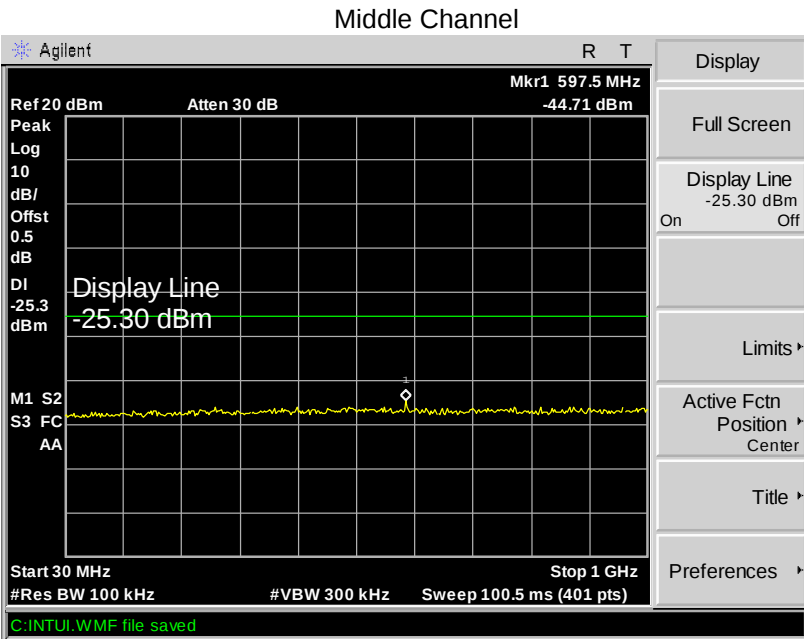

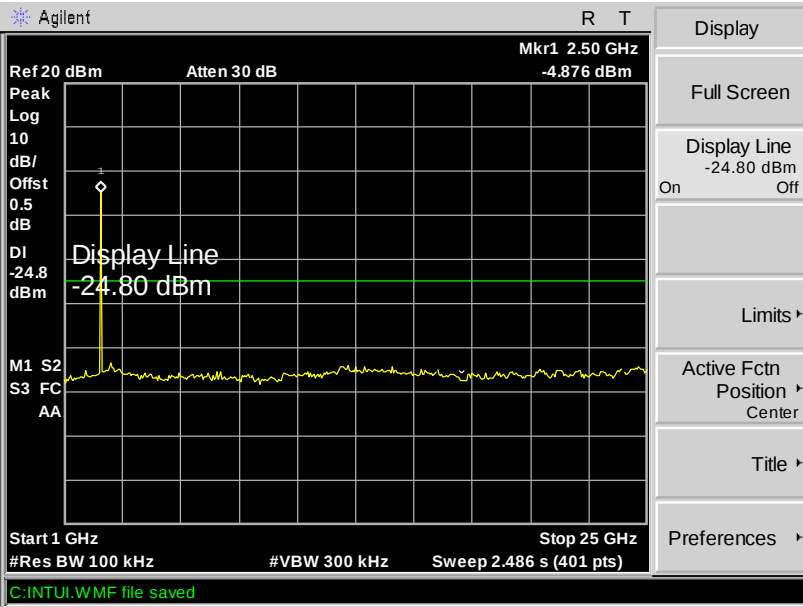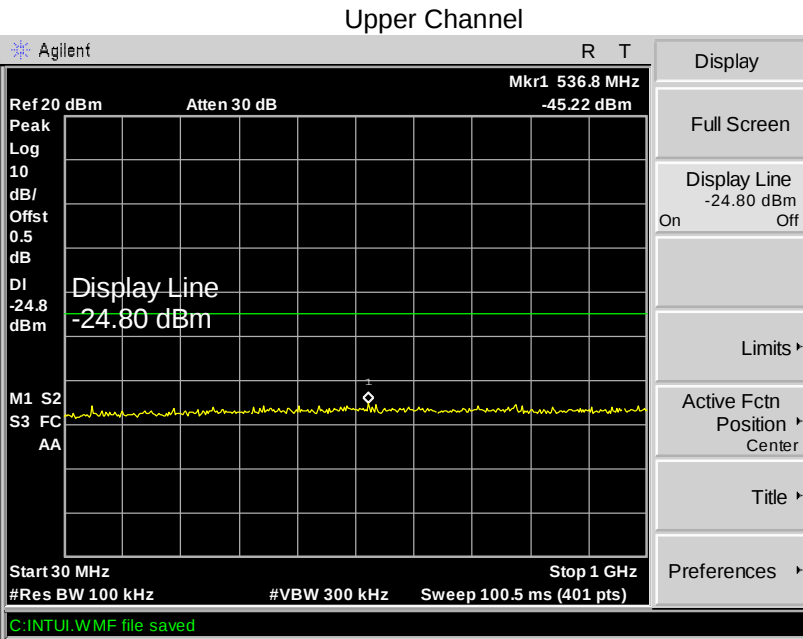

9 Duty Cycle

Test Requirement: FCC Part 15.35
Test Method: ANSI C63.4:2003
Test Status: TX mode.


9.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Set EUT as normal working mode
3. Set SPA center frequency = fundamental frequency, RBW = 100 kHz, VBW = 100 kHz, Span = 0 Hz, Adjacent sweep time.


9.2 Test Result

(a) transmission period is 0.445ms

(b)

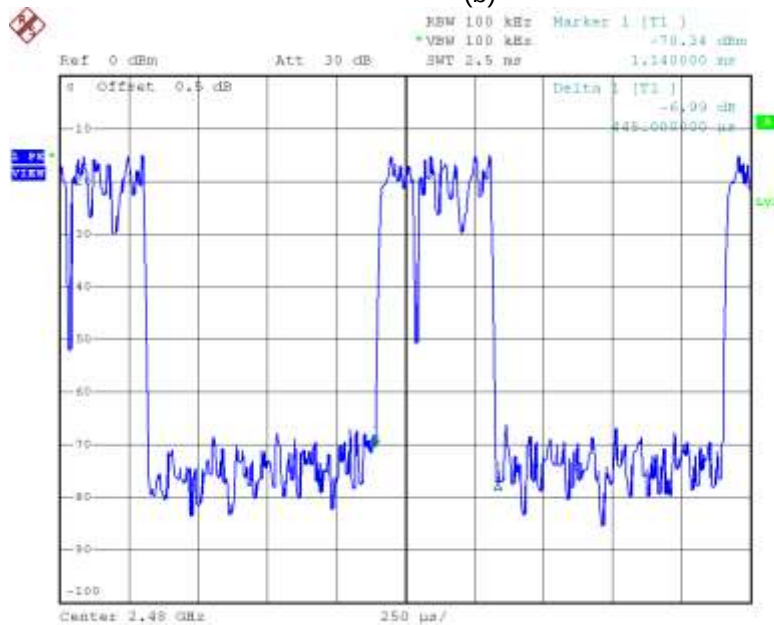

(b) Single pulse time is 1.25ms

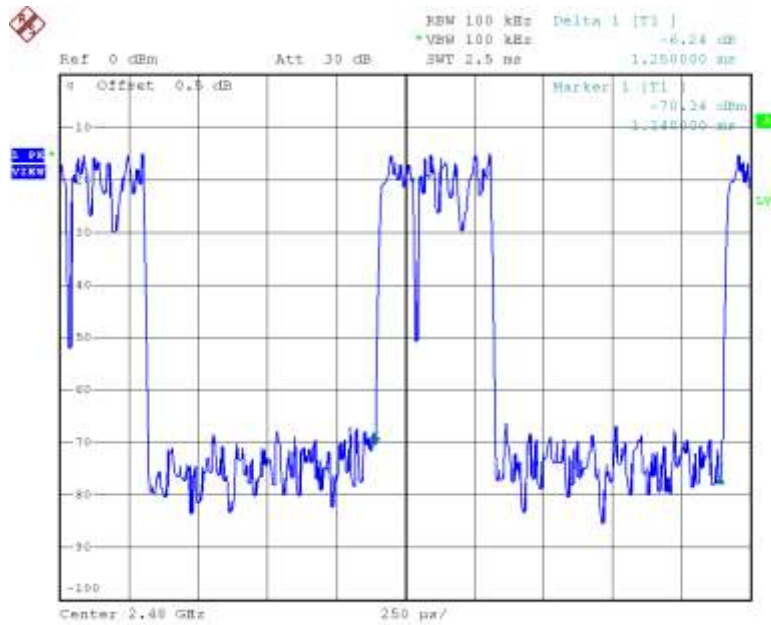

The EUT is auto. operation for transmitter, it is declared by the manufacturer as a duty cycle ratio of less than 100%.

The EUT's work time : T_{on} = pulse time = 0.445 ms

The EUT's work period : $T = T_{ON} + T_{OFF}$ = transmission period = 1.25 ms

The EUT's duty cycle : $D = T_{on} / T = 0.445 / 1.25 * 100\% = 35.6\%$

Duty Cycle Correction Factor(dB) = $20 * \log_{10}(\text{Duty Cycle}) = 20 * \log_{10}(35.6\%)$

= -9dB

10 Band Edge Measurement


Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz

10.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Measurement Distance is 3m
3. Detector:
 - For Peak value:
 - RBW = 1 MHz for $f \geq 1$ GHz
 - VBW $\geq$ RBW; Sweep = auto
 - Detector function = peak
 - Trace = max hold
 - For AVG value:
 - RBW = 1 MHz for $f \geq 1$ GHz
 - VBW = 10Hz; Sweep = auto
 - Detector function = AVG
 - Trace = max hold


10.2 Test Result:

Lower Channel – Peak, Vertical

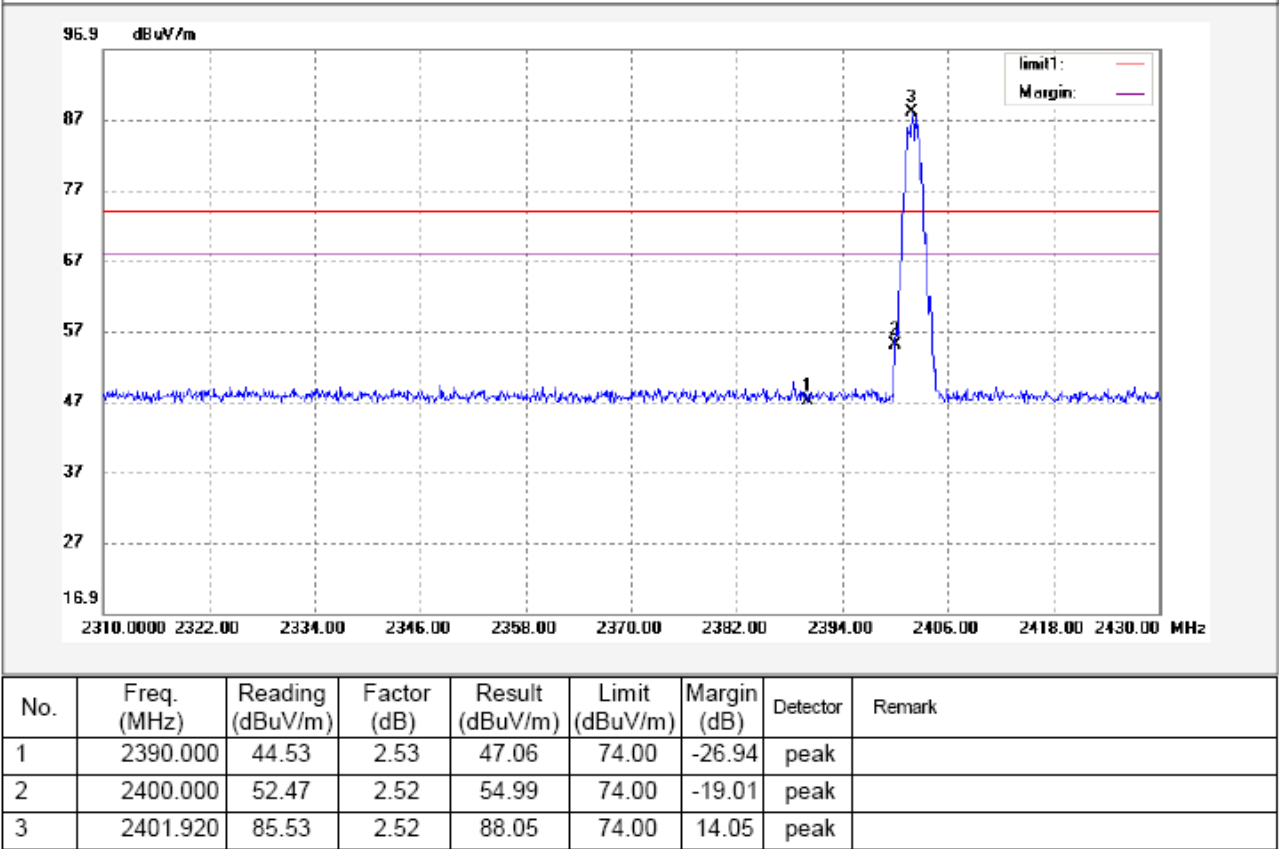


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-9	38.06	54.00	-15.94	AV	
2	2400.000	-9	45.99	54.00	-8.01	AV	
3	2401.920	-9	79.05	54.00	25.05	AV	

Lower Channel – Peak, Horizontal

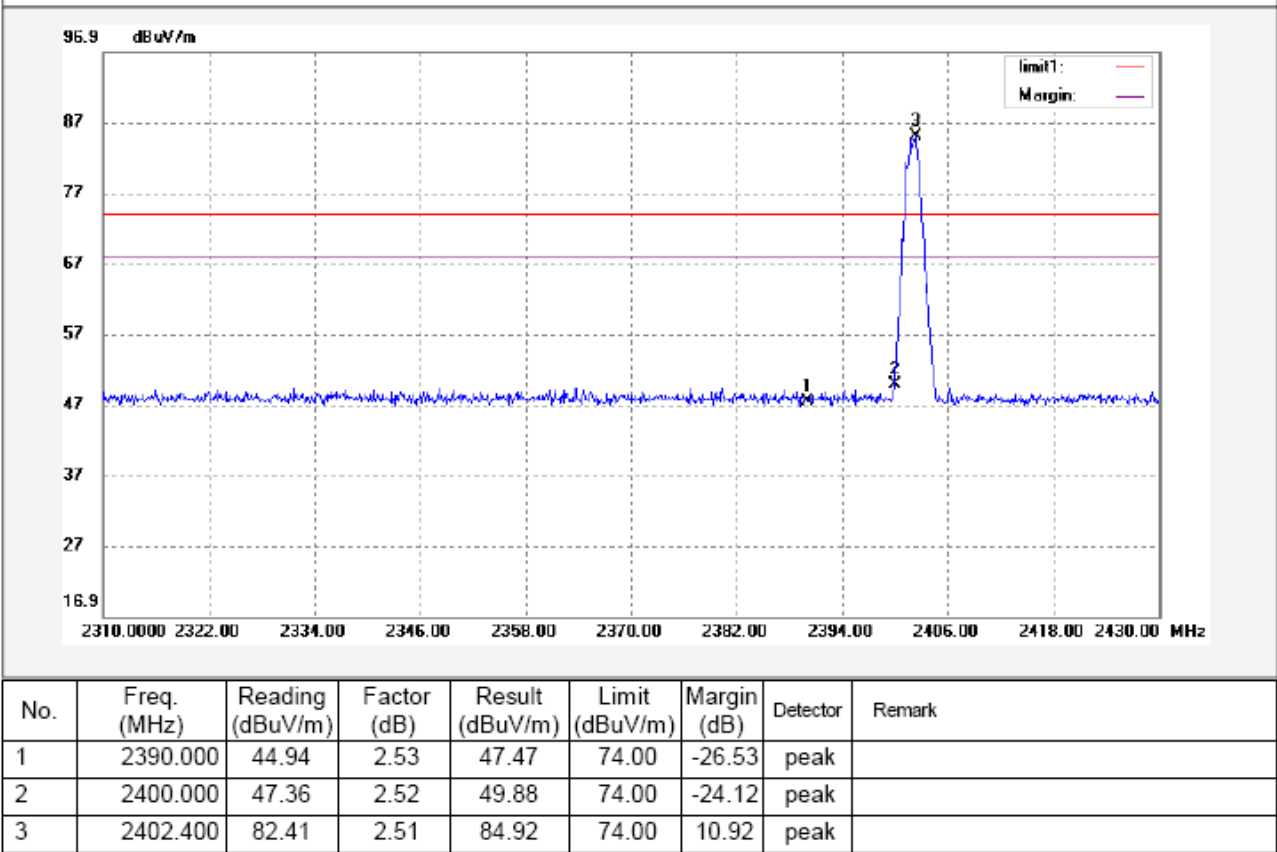


No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-9	38.47	54.00	-15.53	AV	
2	2400.000	-9	40.88	54.00	-13.12	AV	
3	2402.400	-9	75.92	54.00	21.92	AV	

Upper Channel – Peak, Vertical

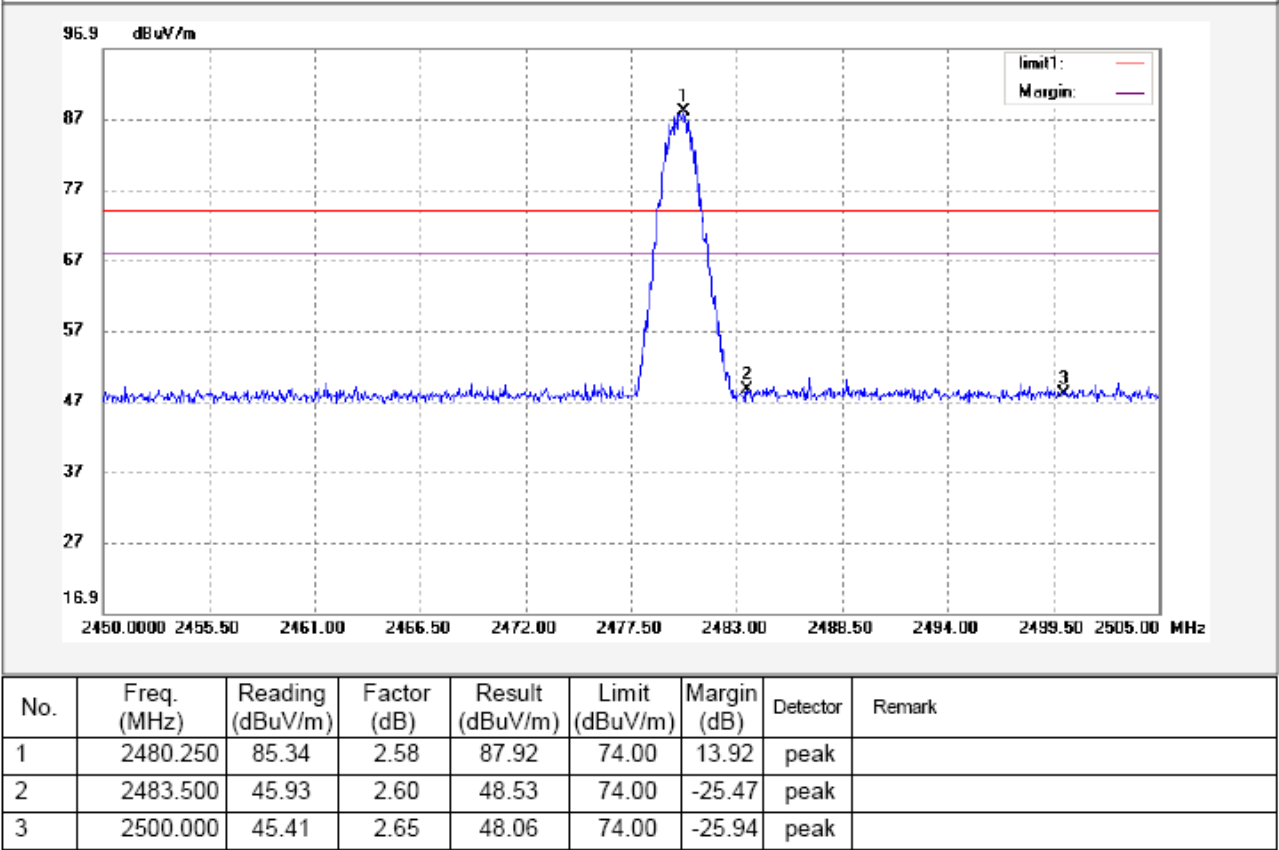

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.250	-9	78.92	54.00	24.92	AV	
2	2483.500	-9	39.53	54.00	-14.47	AV	
3	2500.00	-9	39.06	54.00	-14.94	AV	

Upper Channel – Peak, Horizontal

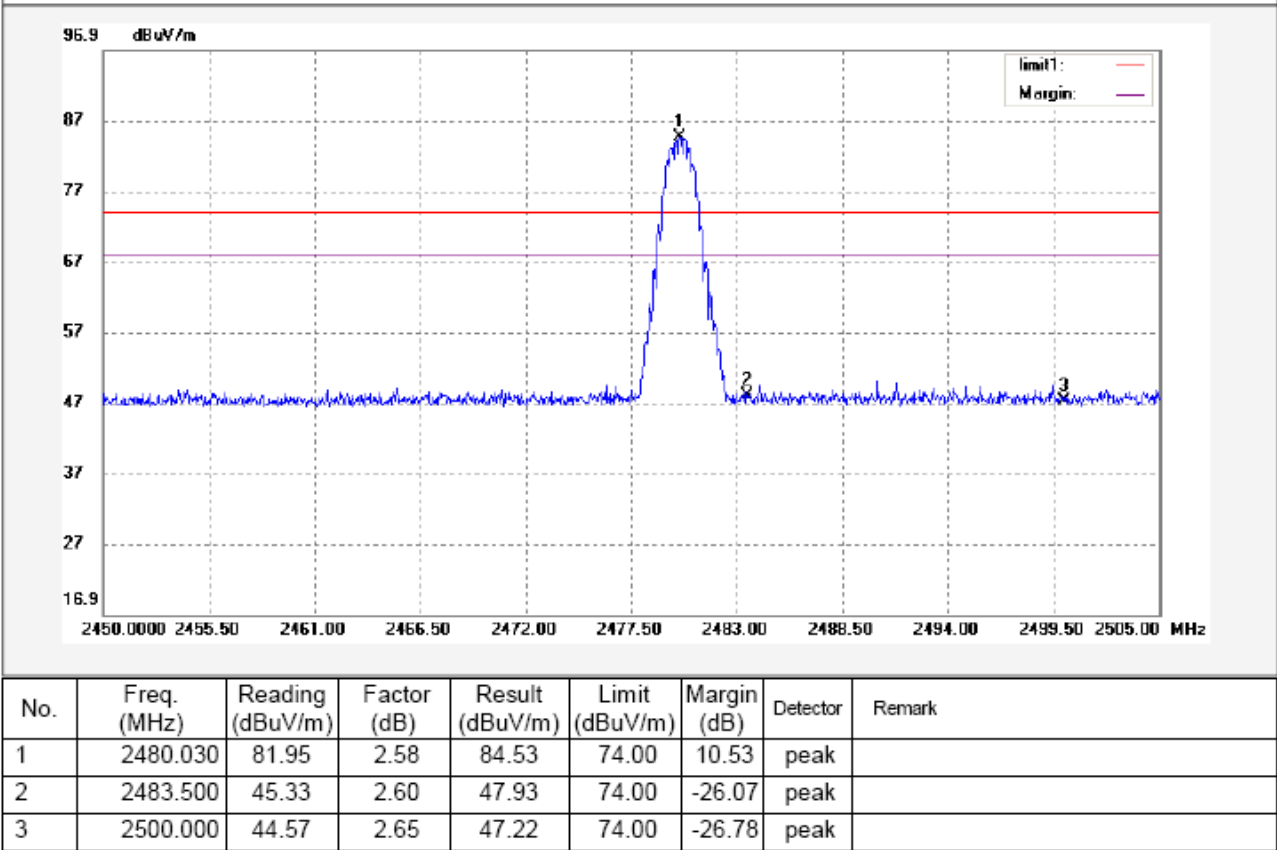

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2478.050	-9	75.53	54.00	21.53	AV	
2	2483.500	-9	38.93	54.00	-15.07	AV	
3	2500.000	-9	38.22	54.00	-15.78	AV	

11 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
Test Method: DA 00-705
Test Mode: Test in fixing operating frequency at low, Middle, high channel.

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


11.2 Test Result:

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Lower	1.3749
	Middle	1.3665
	Upper	1.3749
Pi/4DQPSK	Lower	1.4461
	Middle	1.4551
	Upper	1.4551
8DPSK	Lower	1.4451
	Middle	1.4501
	Upper	1.4641


Test result plot as follows:


Modulation:GFSK

Lower Channel

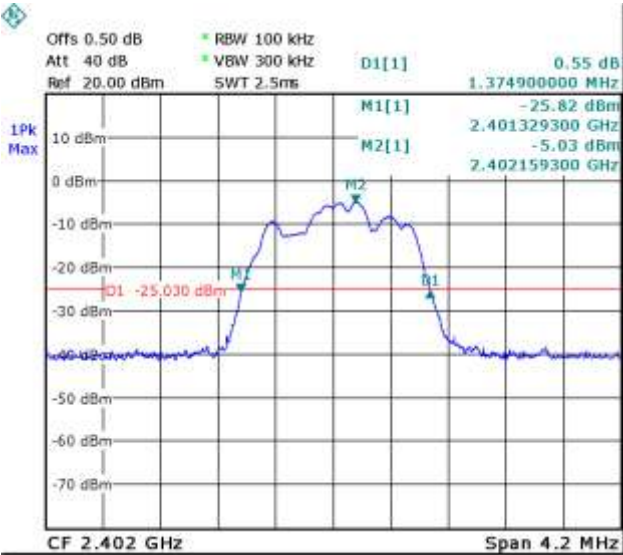


Middle Channel

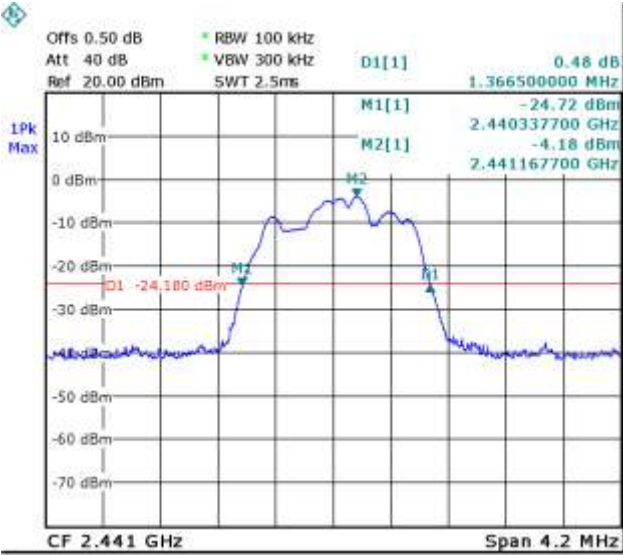


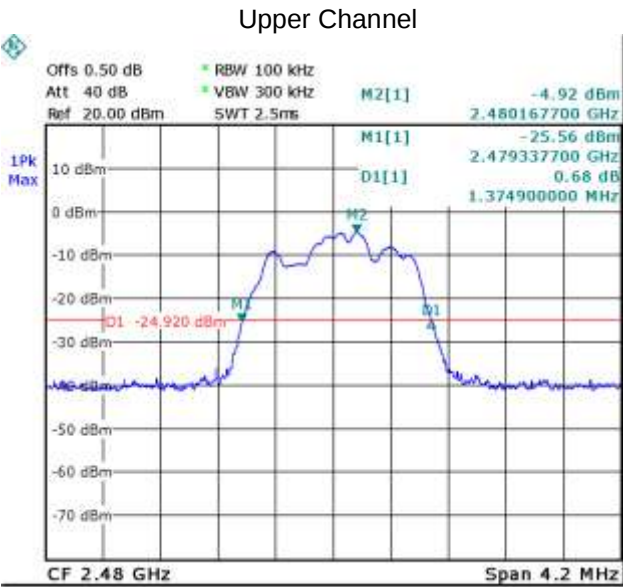


Modulation: Pi/4DQPSK

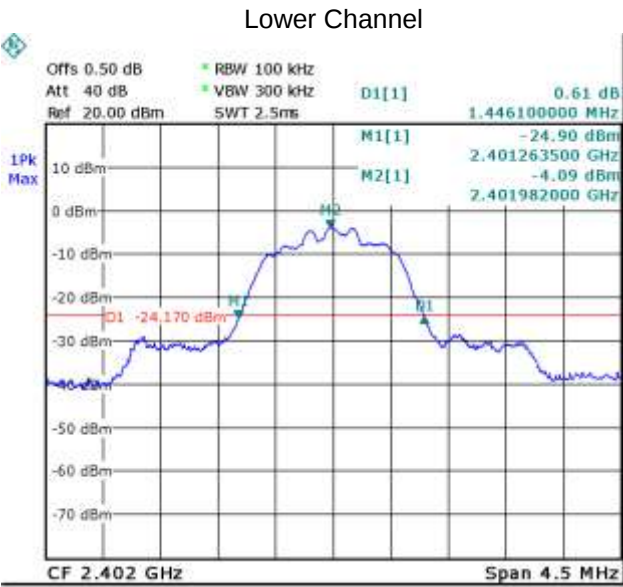

Middle Channel

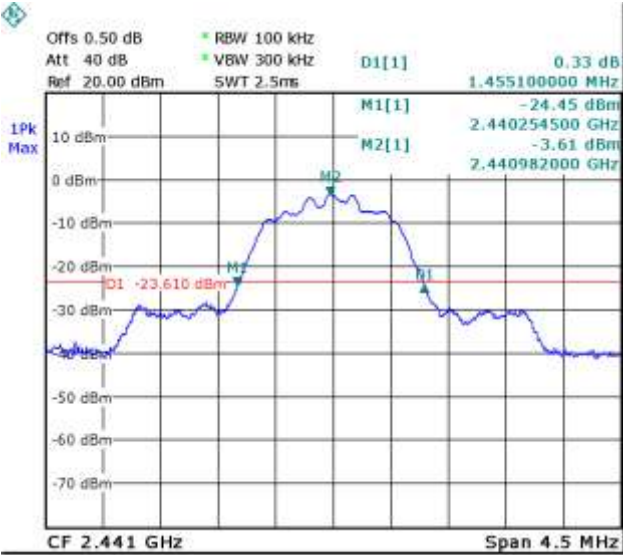


Upper Channel

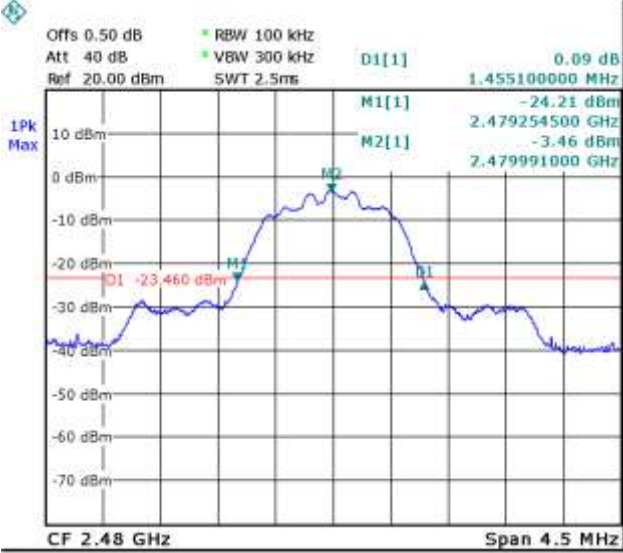



Modulation: 8DPSK

Lower Channel

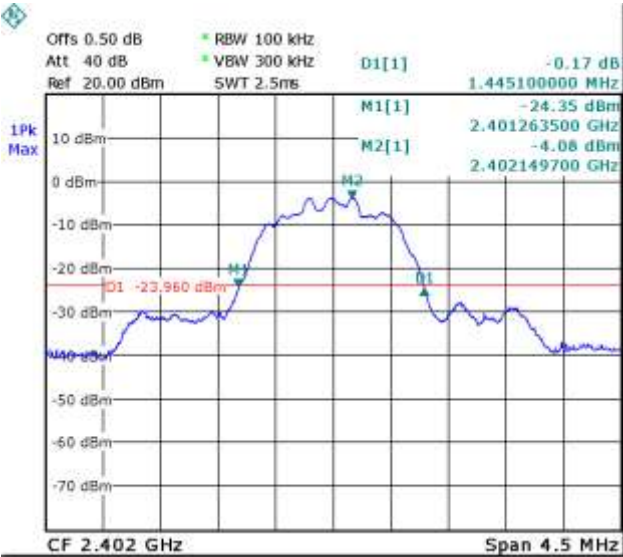

Middle Channel

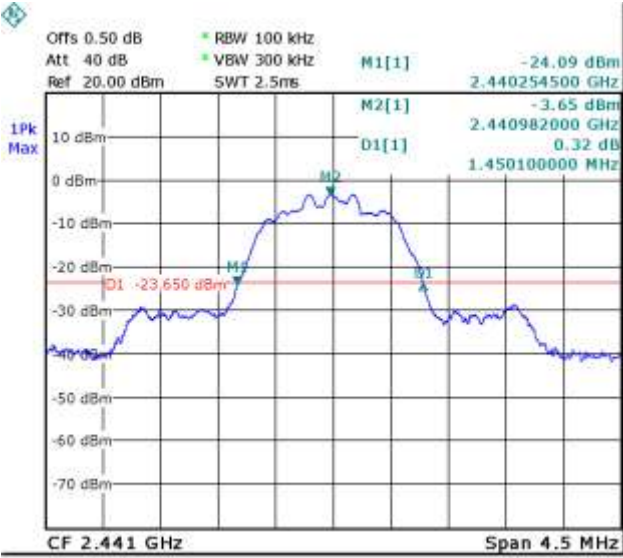

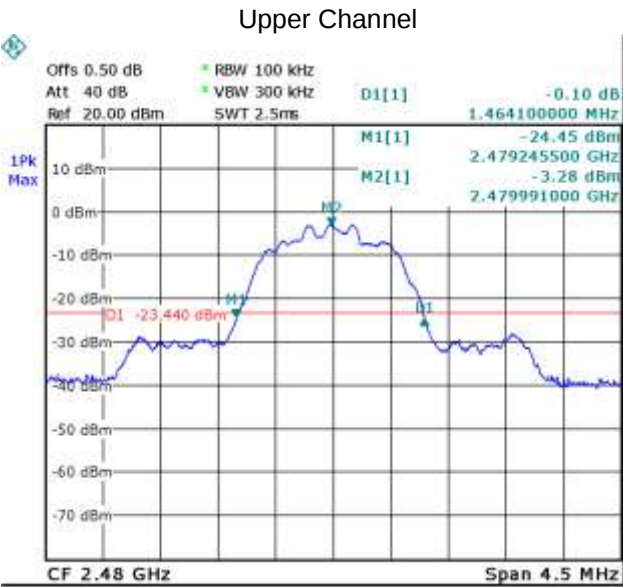

12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 1 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


12.2 Test Result:

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Lower	-3.35	30
	Middle	-2.49	30
	Upper	-3.22	30
Pi/4DQPSK	Lower	-3.42	30
	Middle	-2.98	30
	Upper	-2.86	30
8DPSK	Lower	-3.40	30
	Middle	-2.82	30
	Upper	-2.66	30


Test result plot as follows:


Modulation:GFSK

Lower Channel

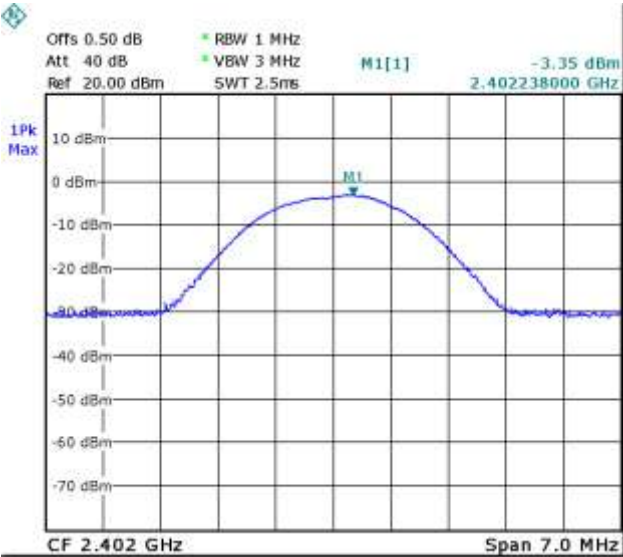




Middle Channel

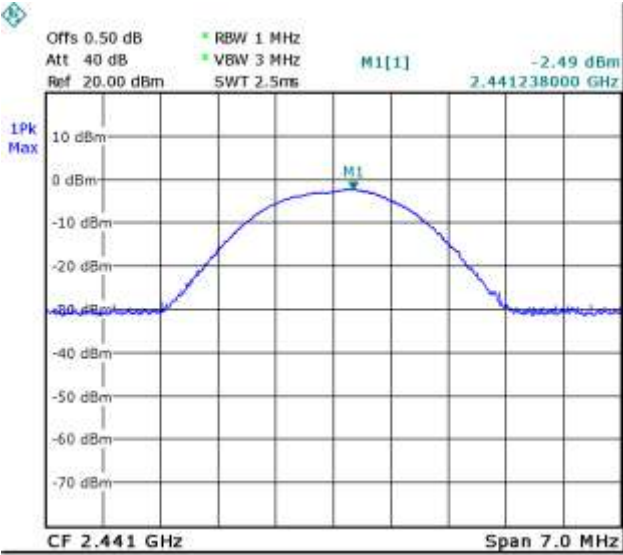

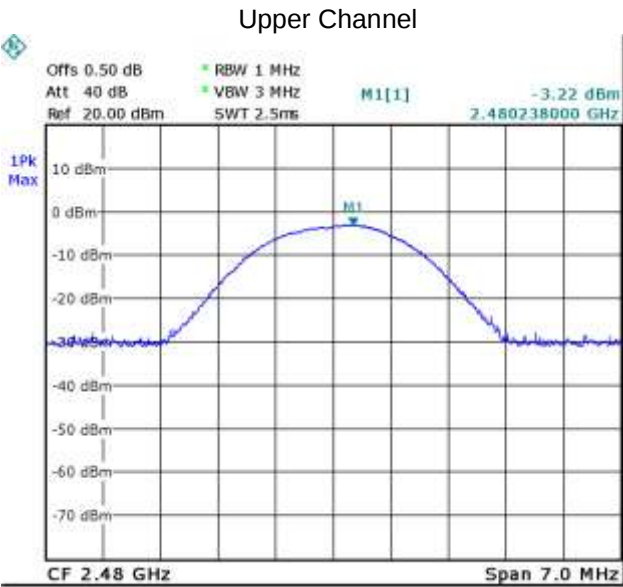


Modulation: Pi/4DQPSK

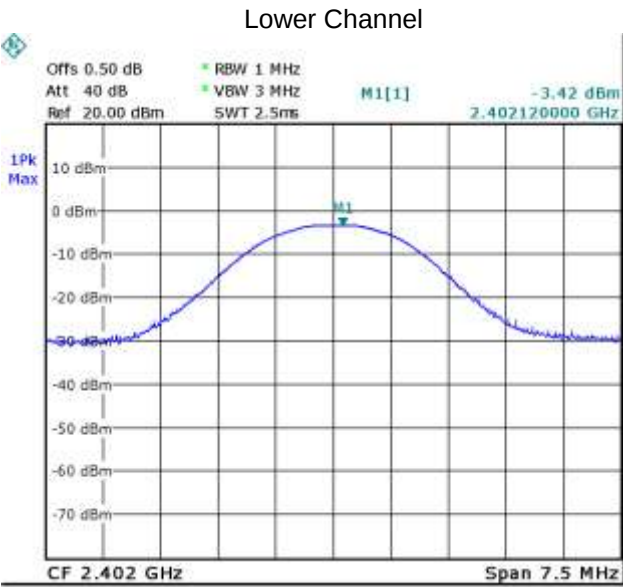

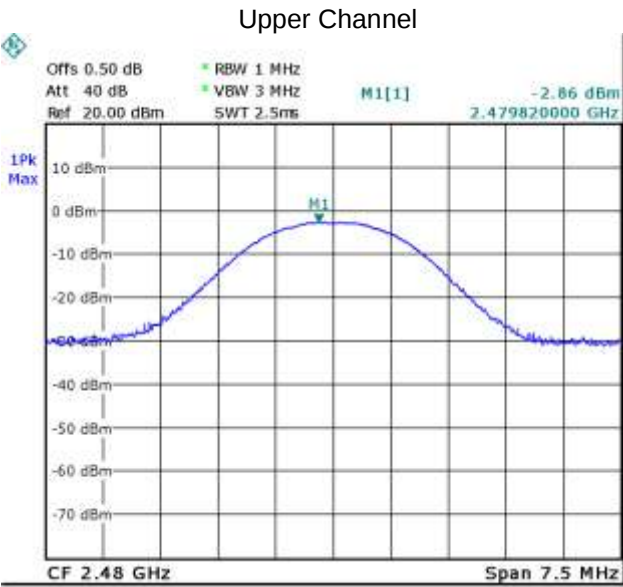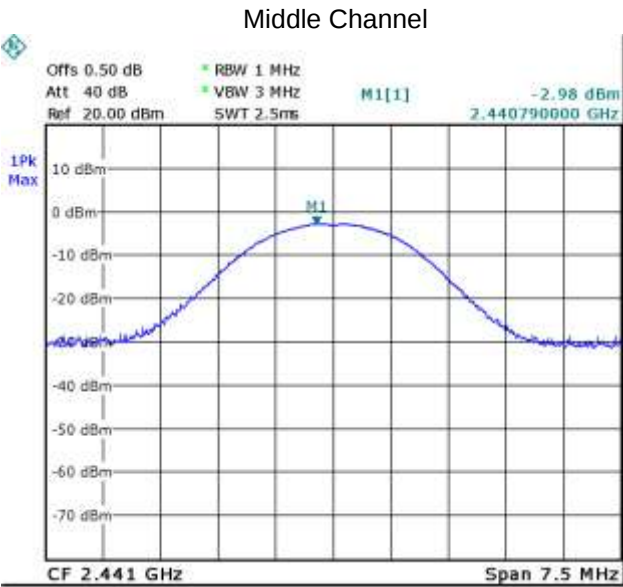



Modulation: 8DPSK

Lower Channel

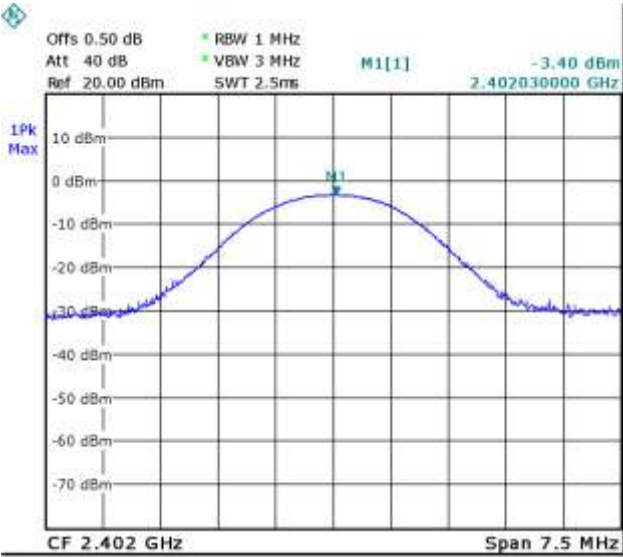

Middle Channel

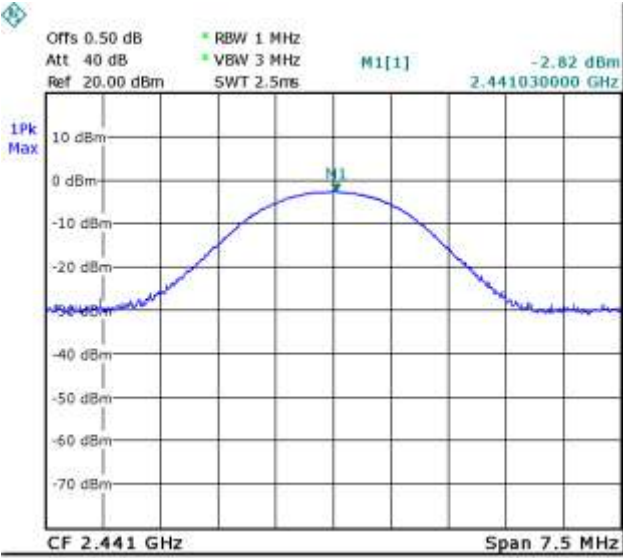

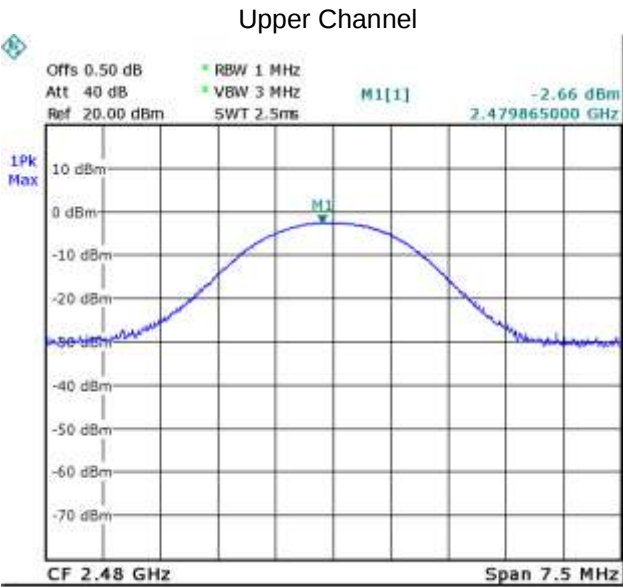

13 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 300KHz , Span = 5MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


13.2 Test Result:

Modulation	Test Channel	Separation (MHz)
GFSK	Lower	1.008
	Middle	1.008
	Upper	1.008
Pi/4DQPSK	Lower	1.008
	Middle	1.018
	Upper	1.005
8DPSK	Lower	1.008
	Middle	1.008
	Upper	1.008


Test result plot as follows:

Modulation:GFSK


Lower Channel

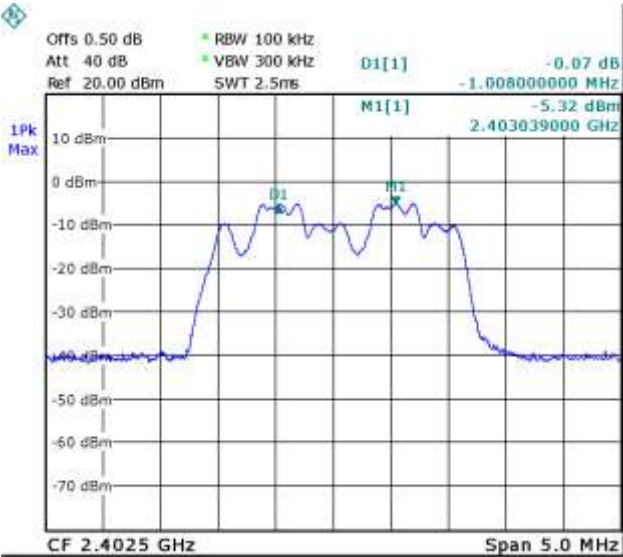

Middle Channel

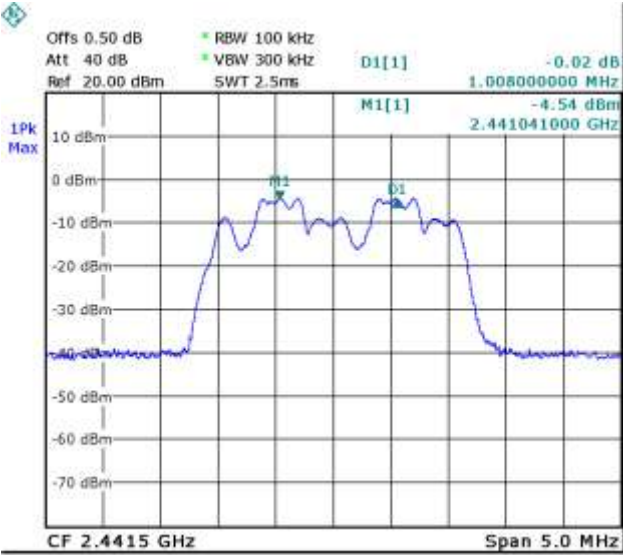


Upper Channel

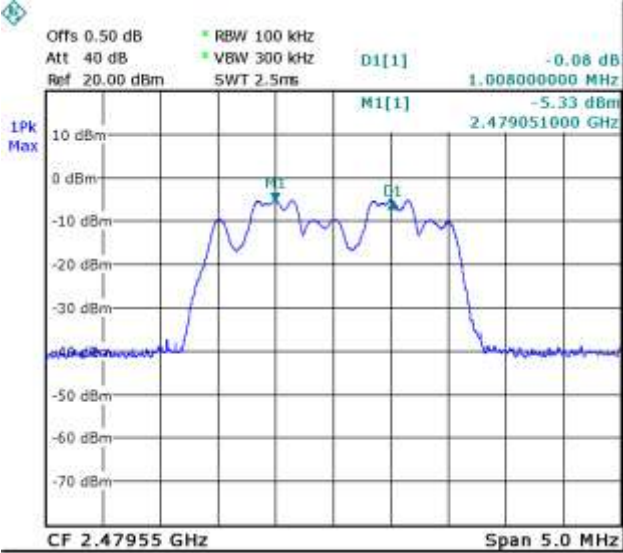


Modulation: Pi/4DQPSK


Lower Channel

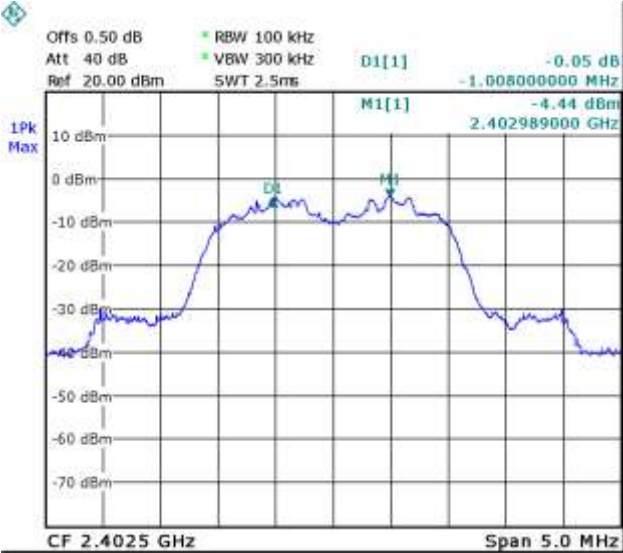

Middle Channel

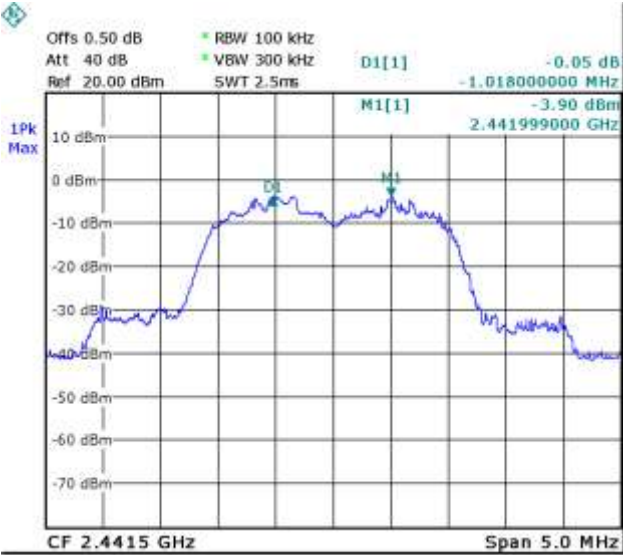


Upper Channel

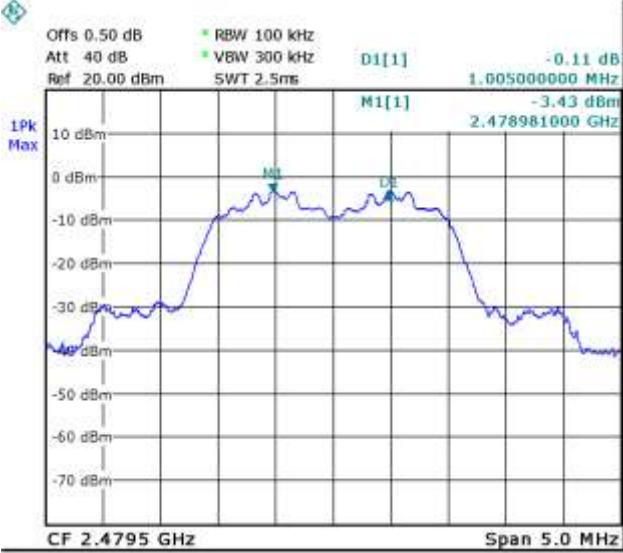



Modulation: 8DPSK

Lower Channel

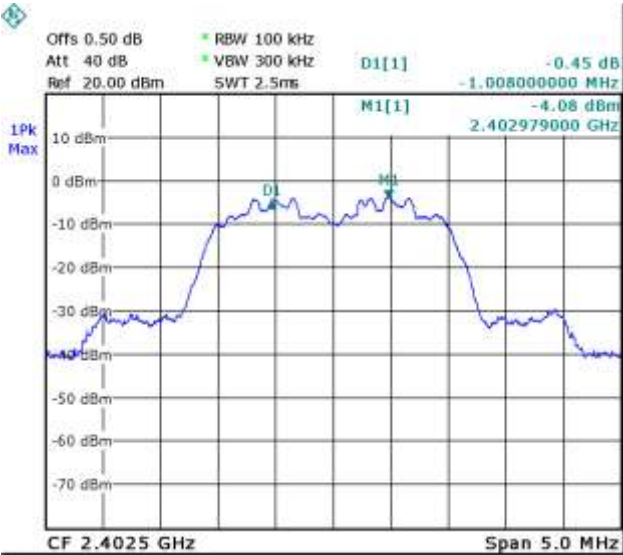

Middle Channel

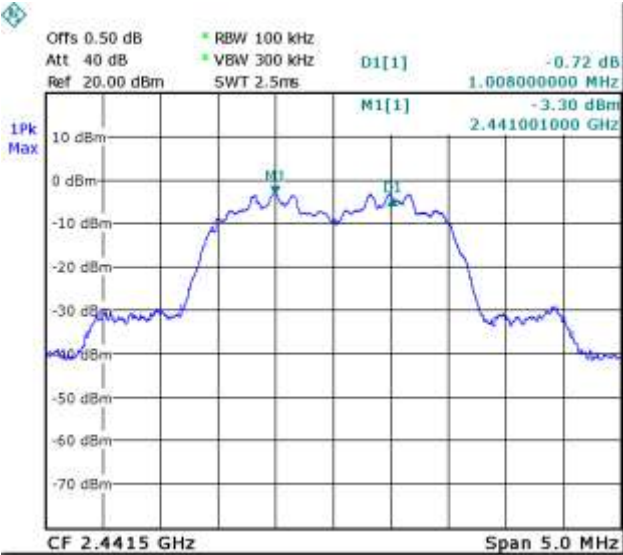

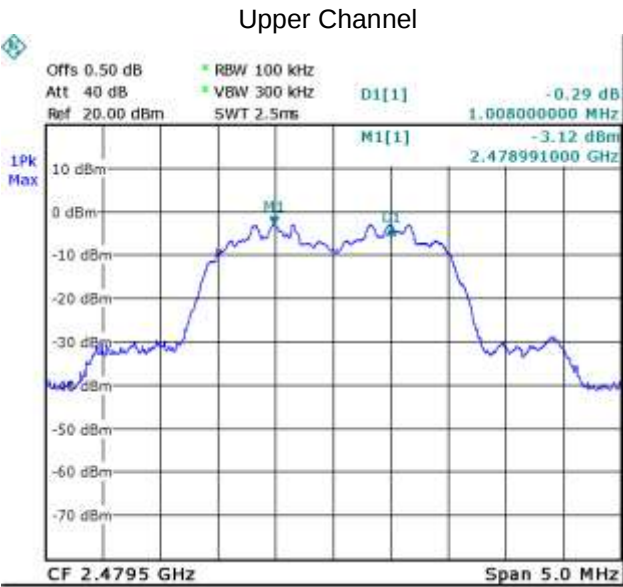

14 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.



14.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;

14.2 Test Result:

Total Channels are 79 Channels.

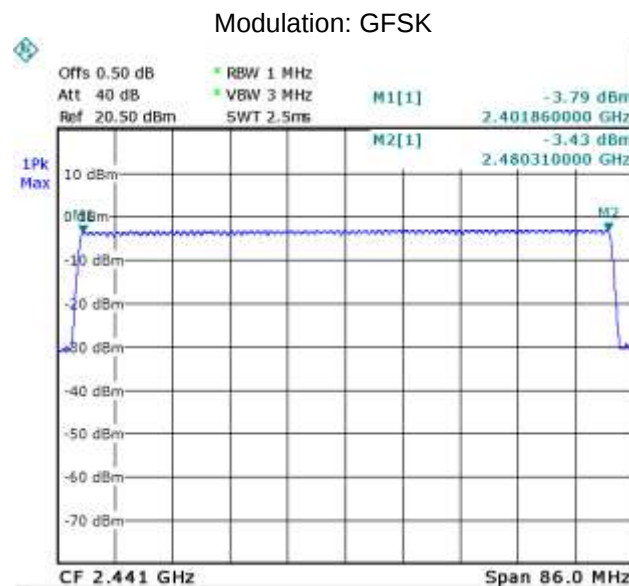

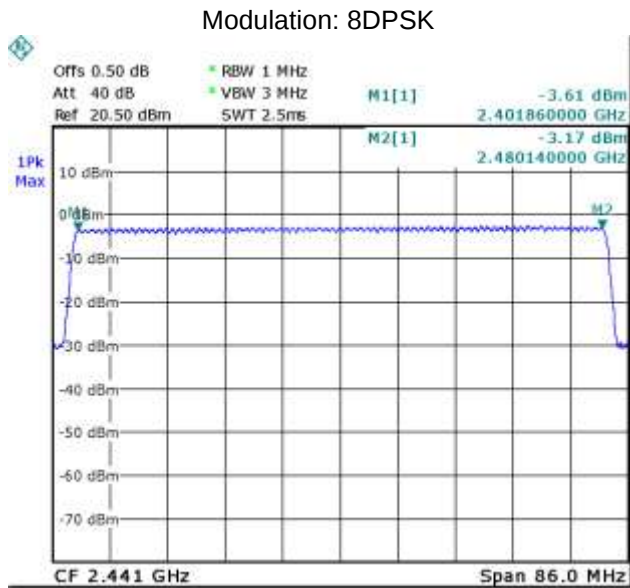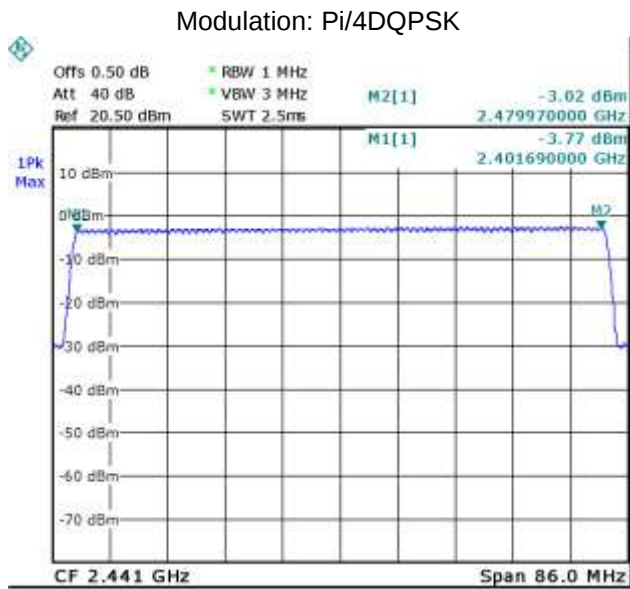

15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

15.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.


Modulation	Frequency	Data Packet	Mkr Delta(ms)	Dwell Time(s)	Limits(s)
GFSK	Lower channel	DH1	0.440	0.1408	0.400
	Middle channel		0.420	0.1344	0.400
	Upper channel		0.440	0.1408	0.400
	Lower channel	DH3	1.680	0.2688	0.400
	Middle channel		1.680	0.2688	0.400
	Upper channel		1.700	0.2720	0.400
	Lower channel	DH5	2.940	0.3136	0.400
	Middle channel		2.980	0.3179	0.400
	Upper channel		2.940	0.3136	0.400
Pi/4DQPSK	Lower channel	DH1	0.480	0.1536	0.400
	Middle channel		0.520	0.1664	0.400
	Upper channel		0.480	0.1536	0.400
	Lower channel	DH3	1.720	0.2752	0.400
	Middle channel		1.740	0.2784	0.400
	Upper channel		1.740	0.2784	0.400
	Lower channel	DH5	2.960	0.3157	0.400
	Middle channel		3.020	0.3221	0.400
	Upper channel		3.000	0.3200	0.400
8DPSK	Lower channel	DH1	0.460	0.1472	0.400
	Middle channel		0.460	0.1472	0.400
	Upper channel		0.440	0.1408	0.400
	Lower channel	DH3	1.820	0.2912	0.400
	Middle channel		1.760	0.2816	0.400
	Upper channel		1.700	0.2720	0.400
	Lower channel	DH5	3.020	0.3221	0.400
	Middle channel		3.020	0.3221	0.400
	Upper channel		2.980	0.3179	0.400



Modulation:GFSK

Data Packet:DH1,Lower channel

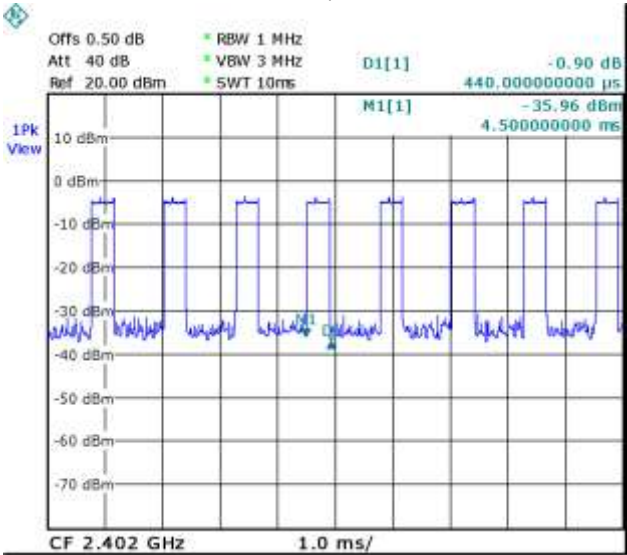


Data Packet:DH1,Middle channel

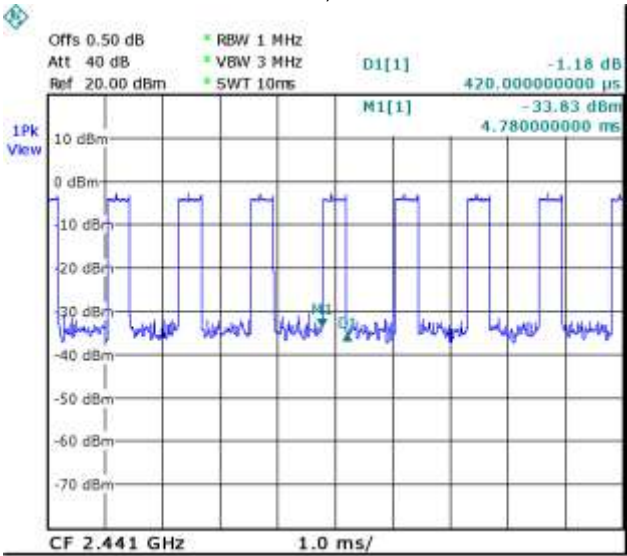


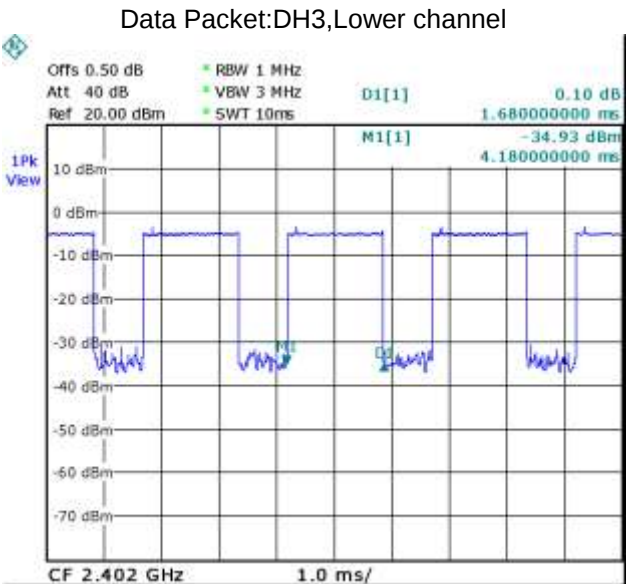
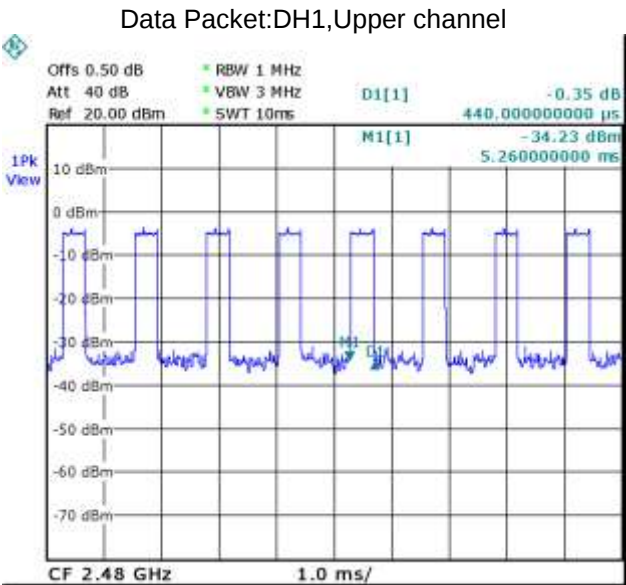



Data Packet:DH3,Middle channel

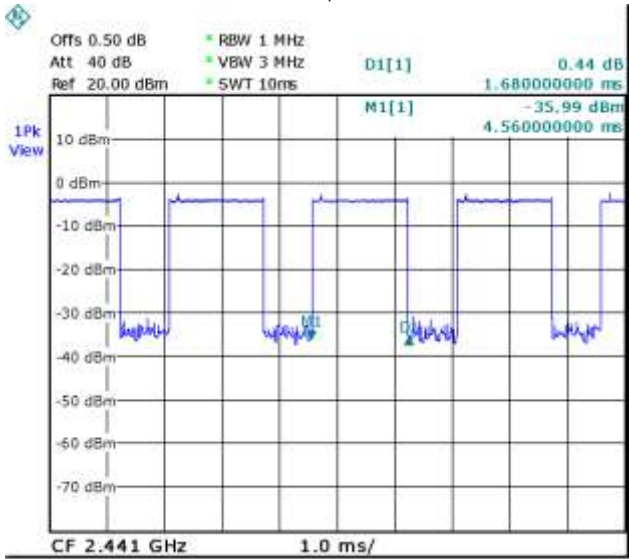


Data Packet:DH3,Upper channel


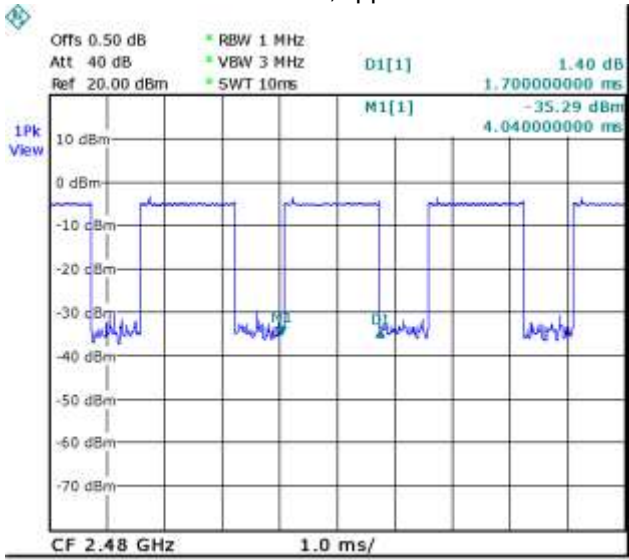


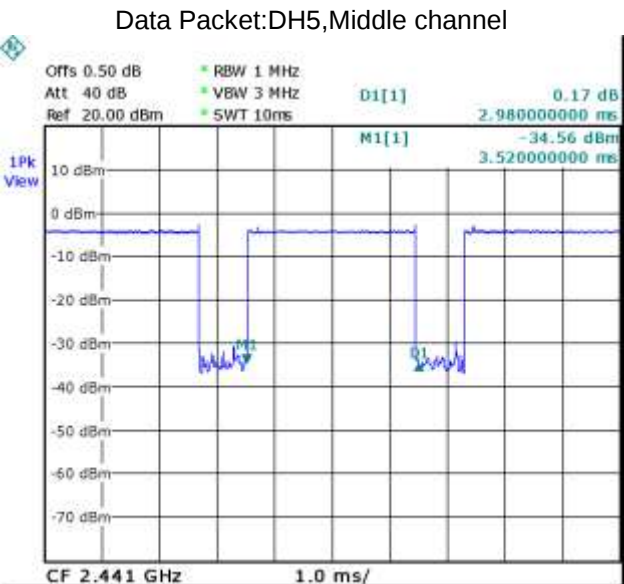
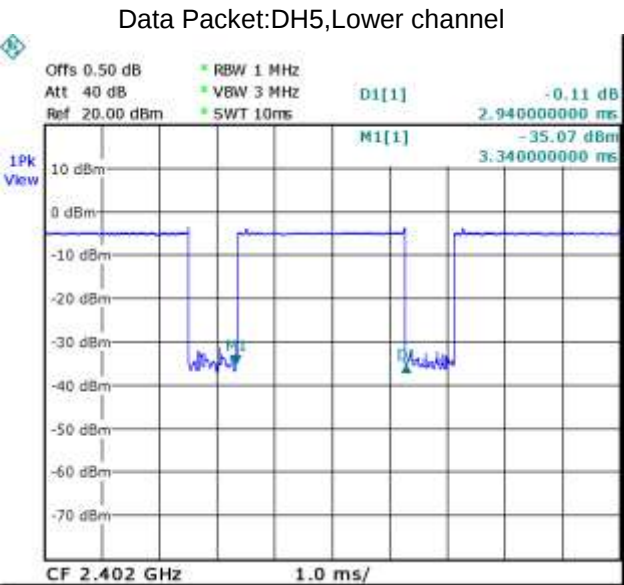



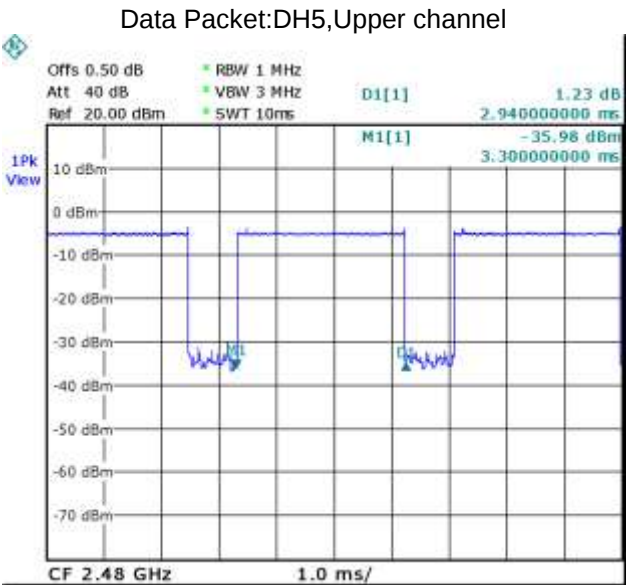




Modulation: Pi/4DQPSK

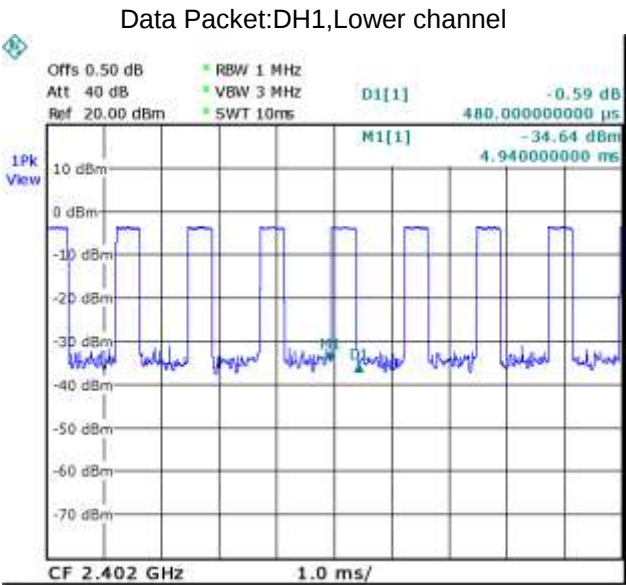

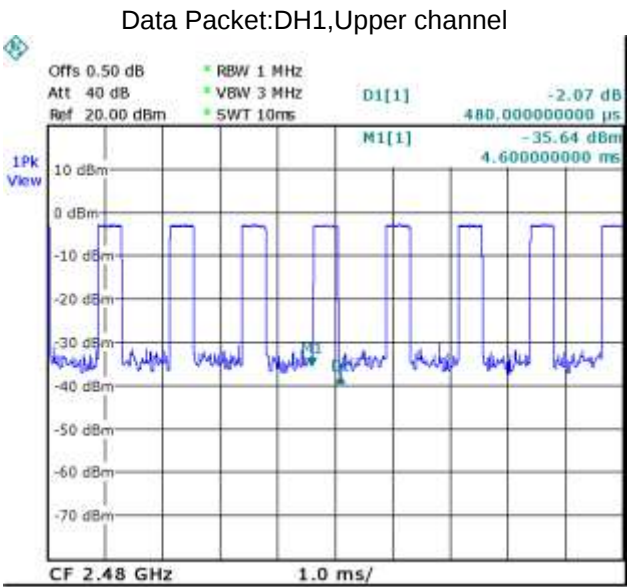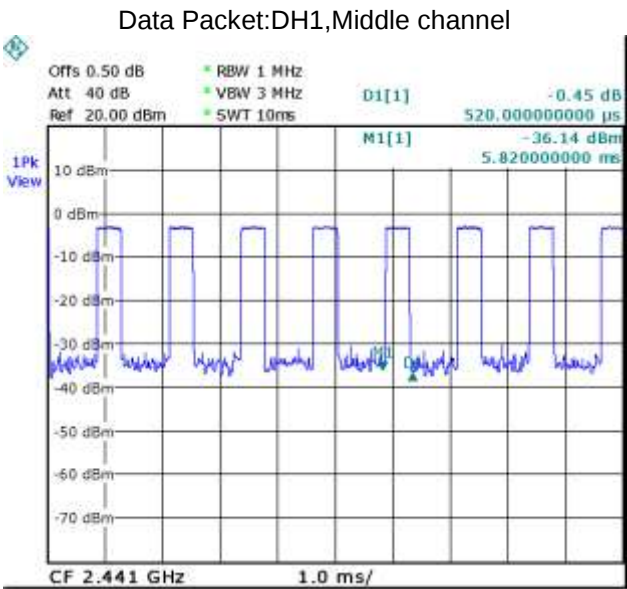

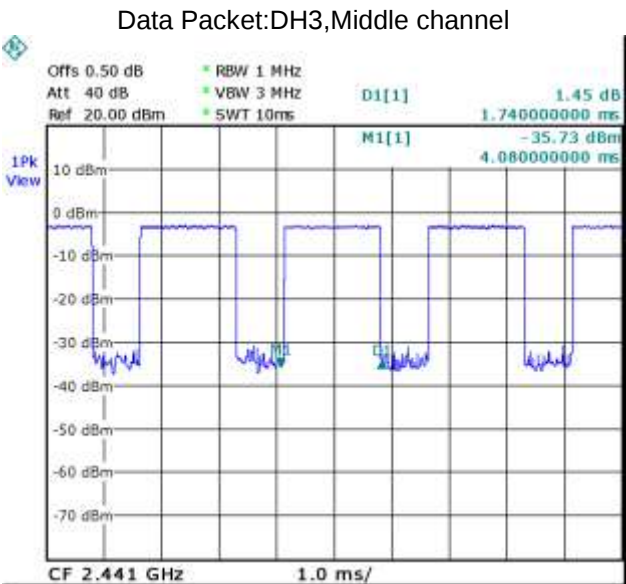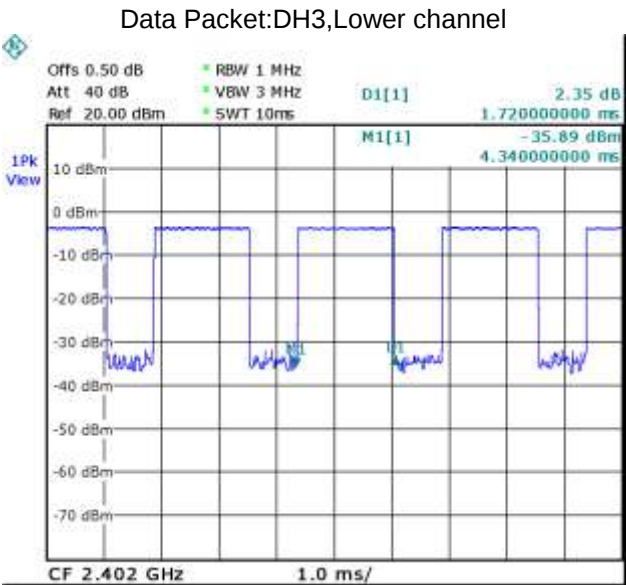


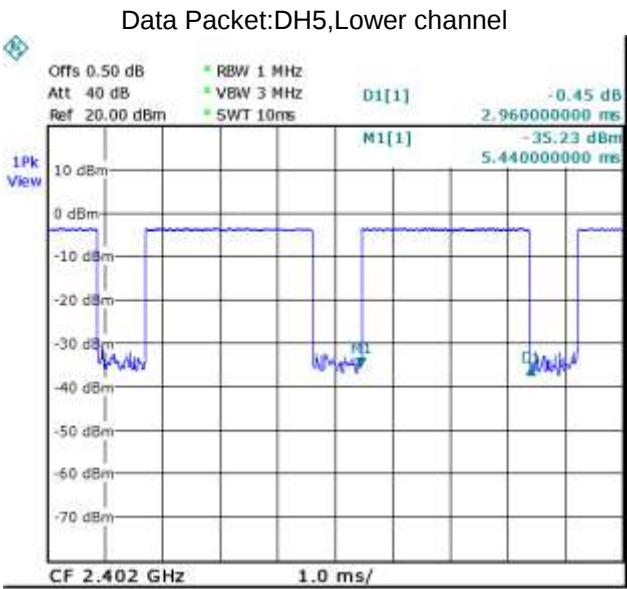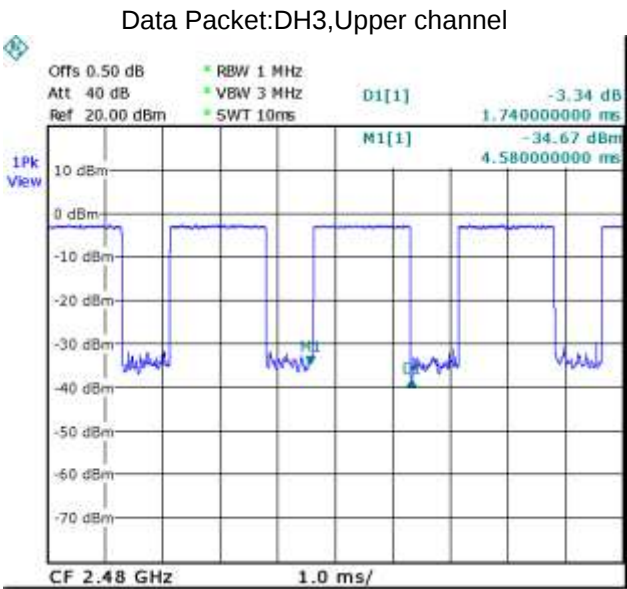

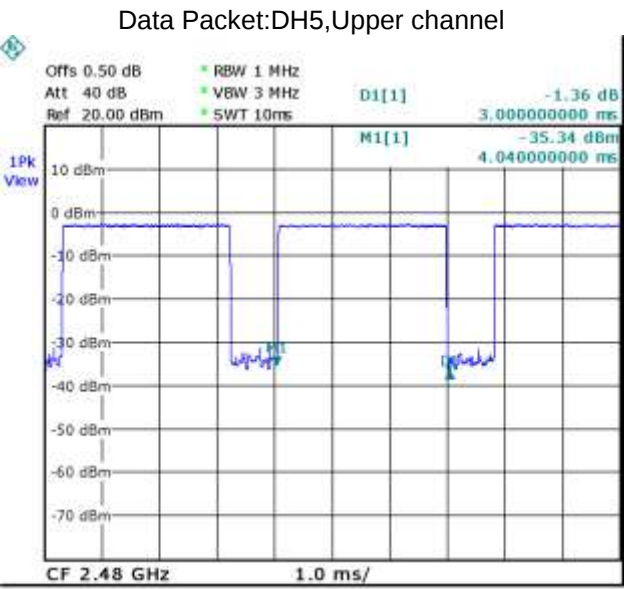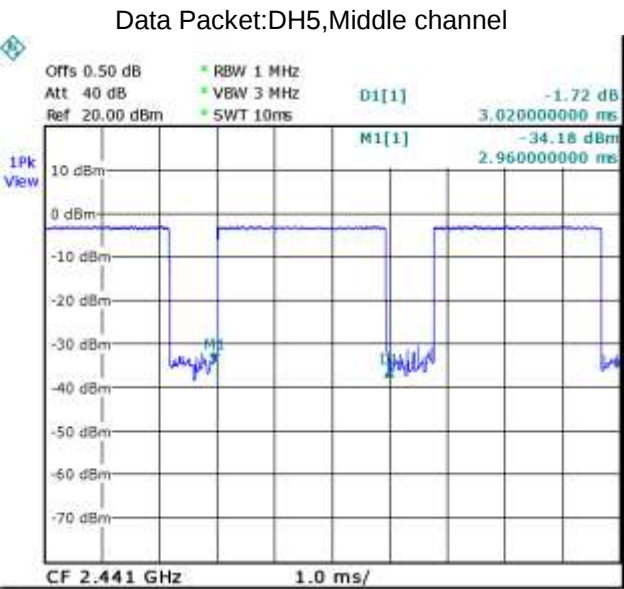




Modulation: 8DPSK

Data Packet:DH1,Lower channel

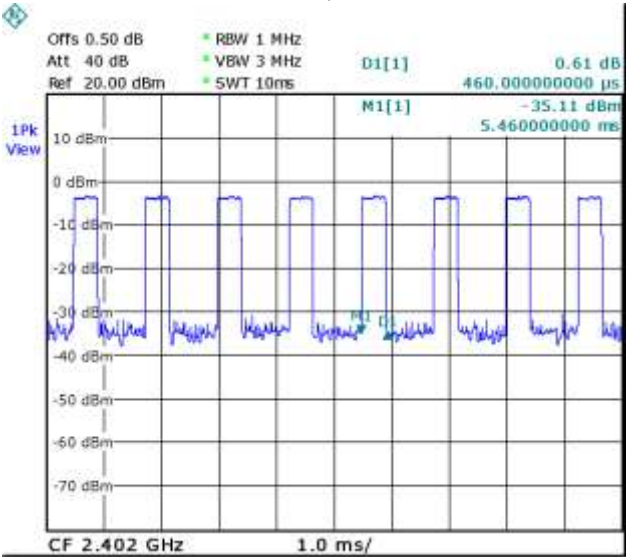


Data Packet:DH1,Middle channel

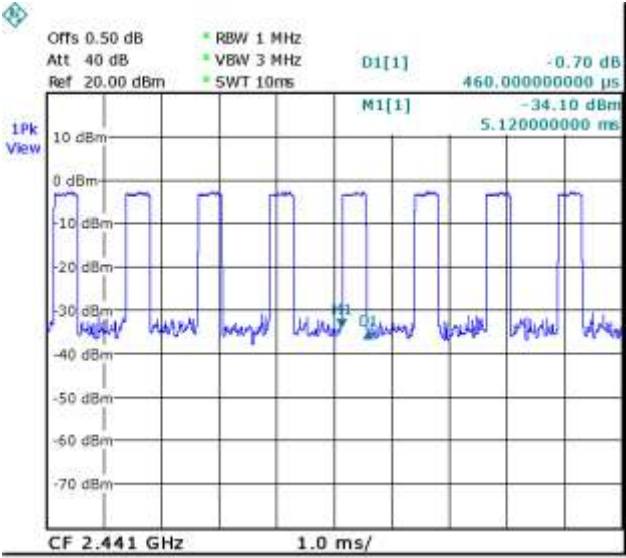


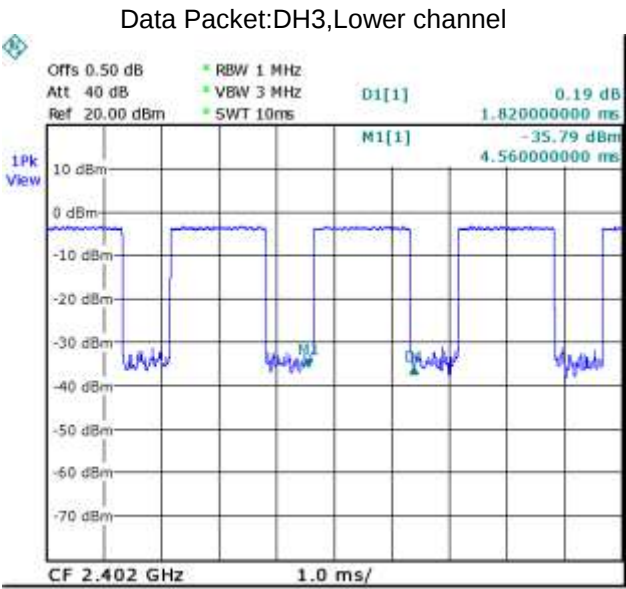
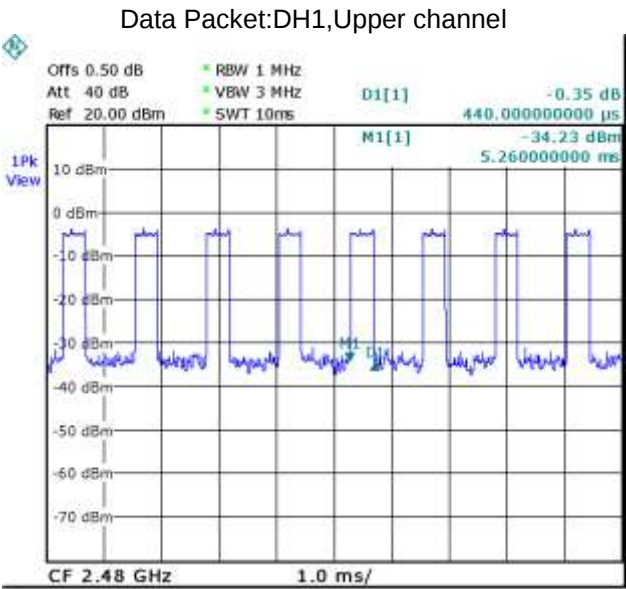



Data Packet:DH3,Middle channel

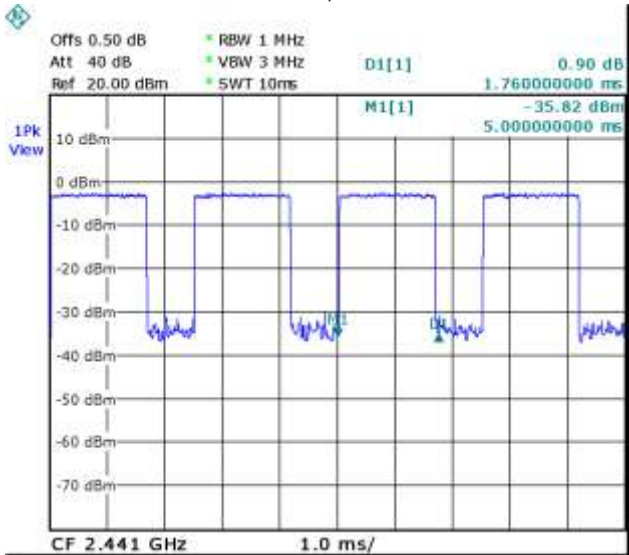

Data Packet:DH3,Upper channel

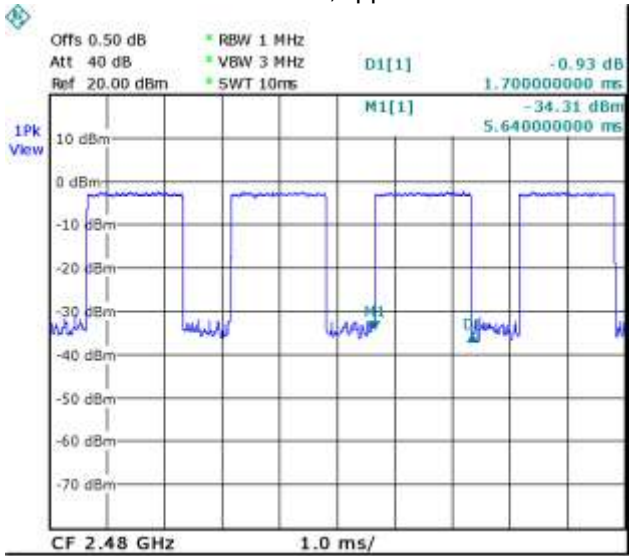

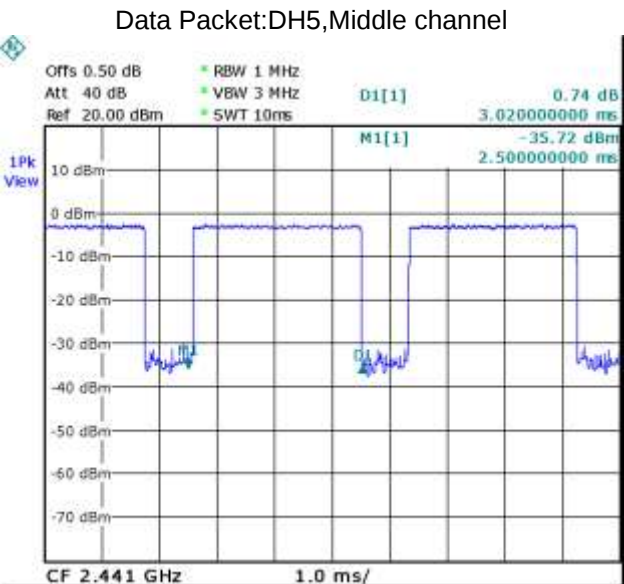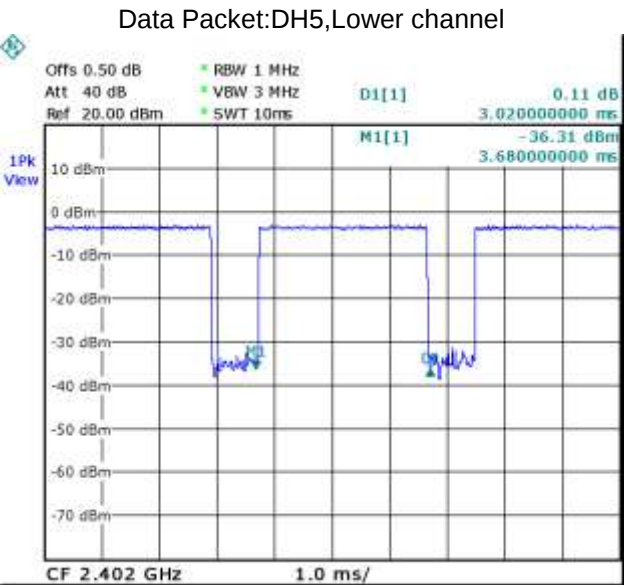

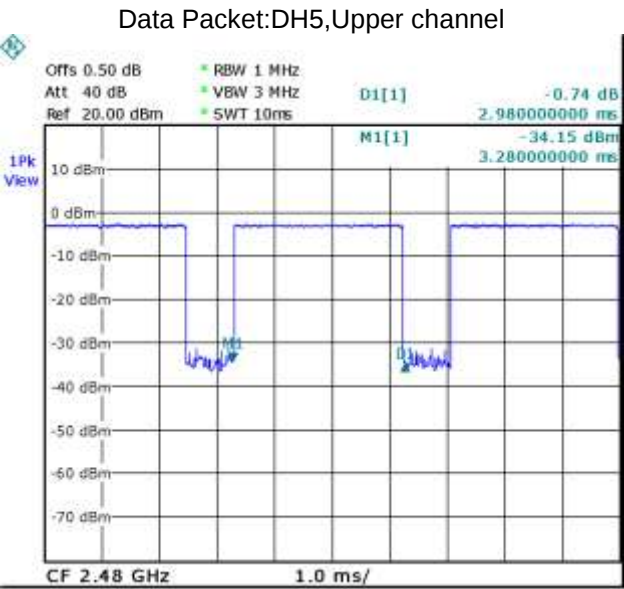

16 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

17 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

17.1 Requirements:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

17.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

17.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric) ,Gain_{numeric}=10^(dBi/10)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Modulation	Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
GFSK	0	1	-2.49	0.5636	0.000112122	1
Pi/4DQPSK	0	1	-2.86	0.5176	0.000102971	1
8DPSK	0	1	-2.66	0.5420	0.000107825	1


18 Photographs – Test Setup

18.1 Conducted Emissions



18.2 Radiated Emissions

Below 30MHz

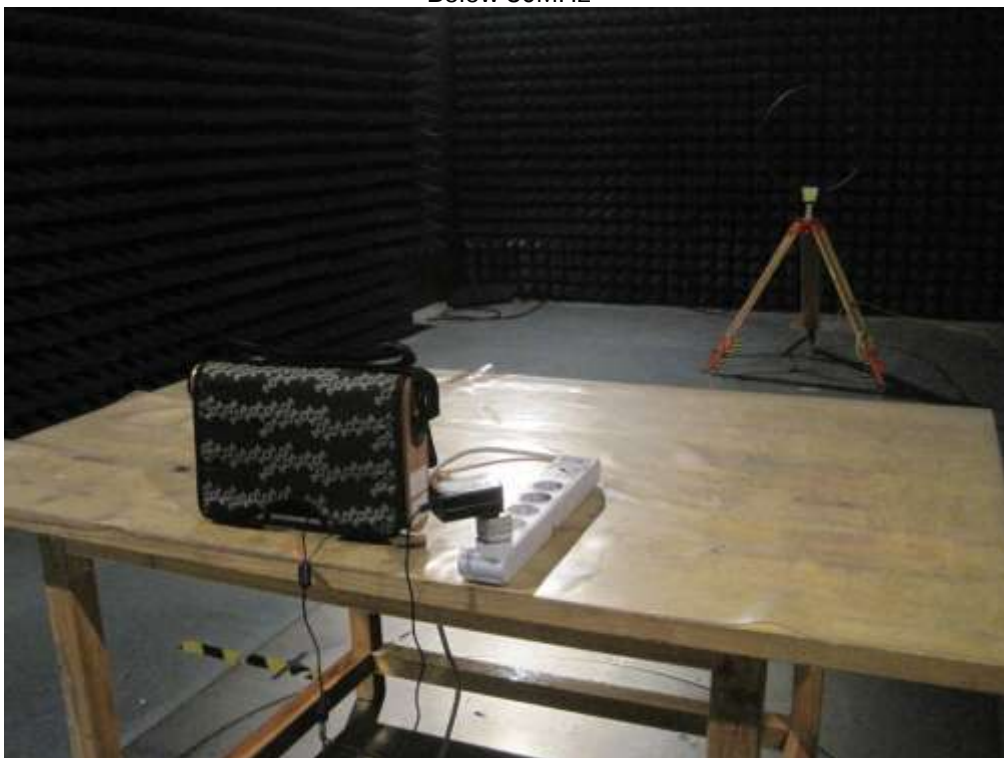

From 30-1000MHz



Above 1GHz




19 Photographs - Constructional Details

19.1 EUT – External View








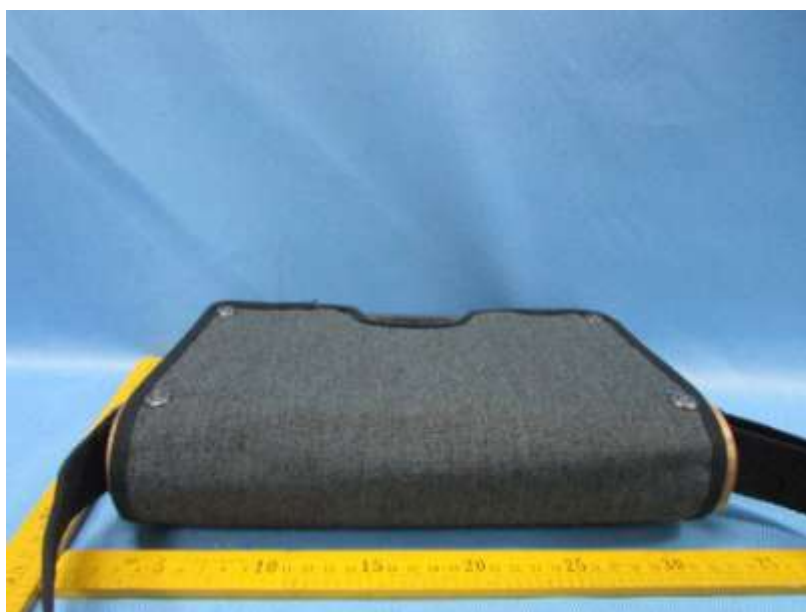





19.2 EUT – Internal View



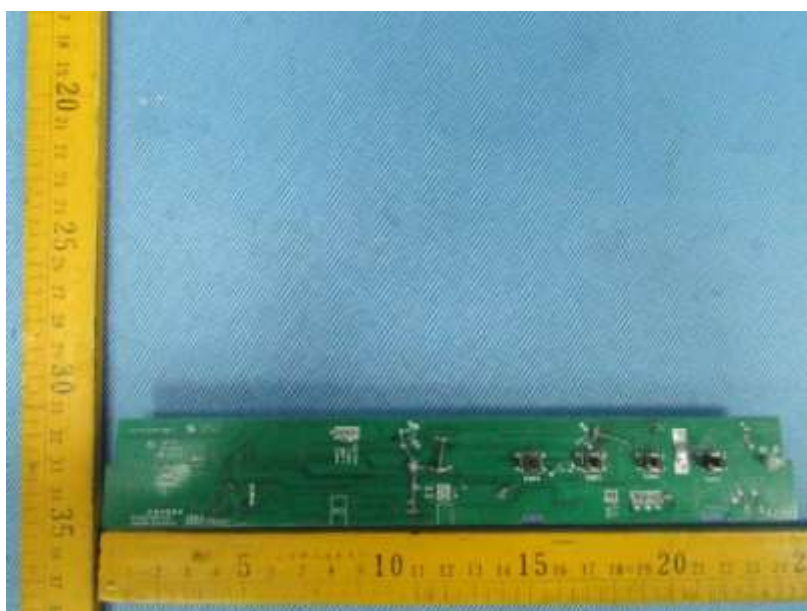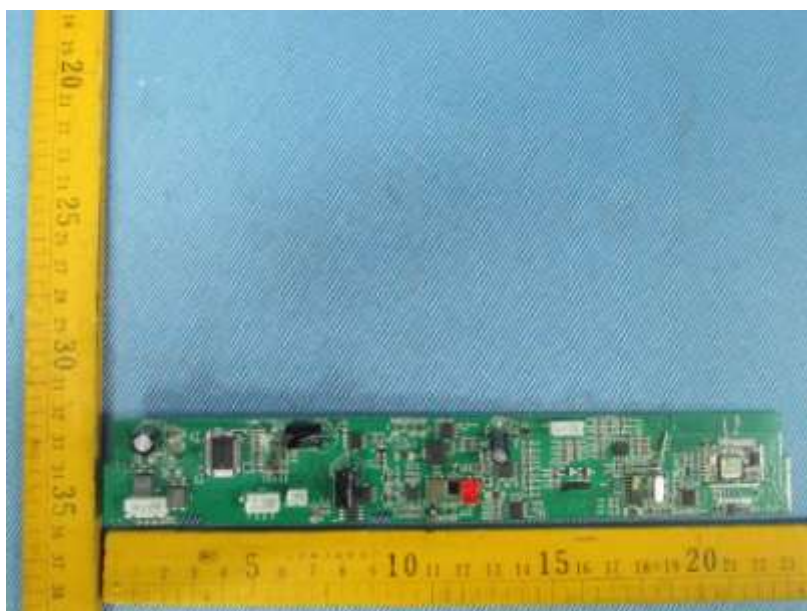

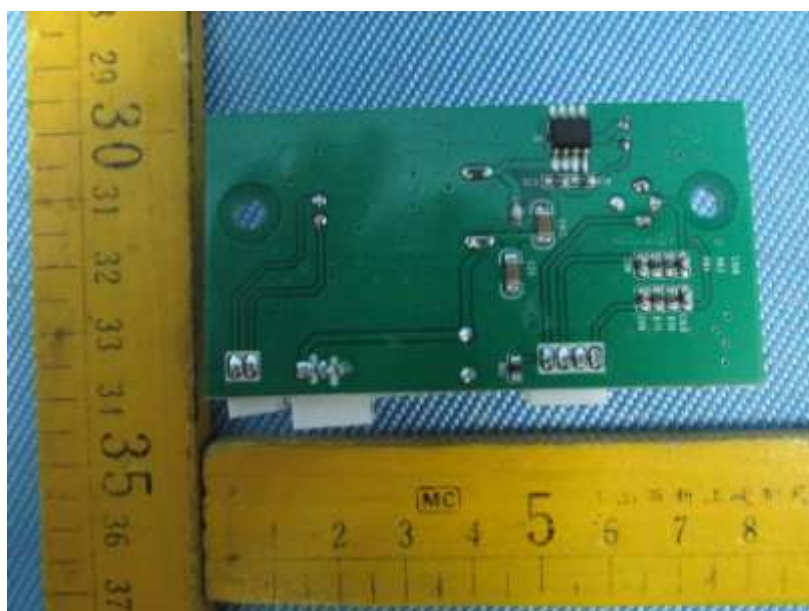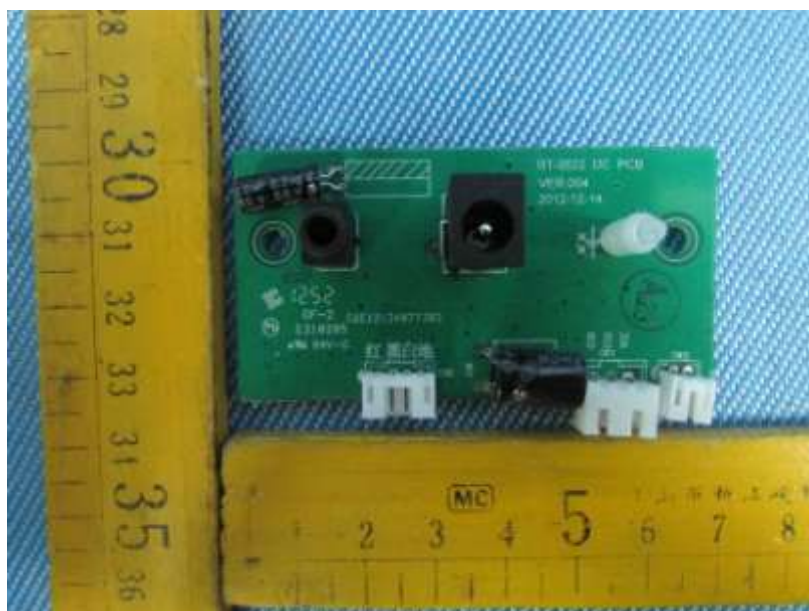

19.3 EUT-RF Module View

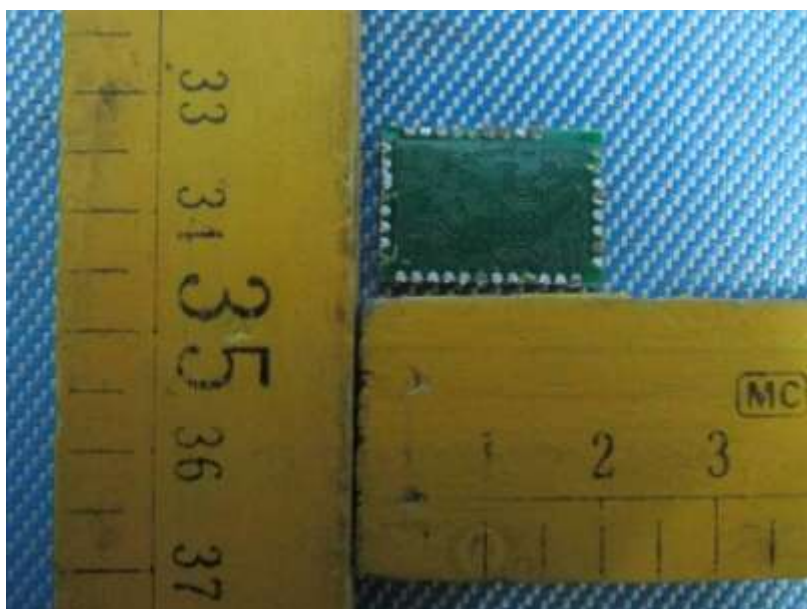

19.4 Adapter View





=End of test report=