

TEST REPORT

Test Report Reference: R62678_A Edition 1

Equipment under Test: cB-OWLAN211bx-02

FCC ID: PVH090402

Serial Number: none

Applicant: connectBlue AB

Manufacturer: connectBlue AB

**Test Laboratory
(CAB)
accredited by
DATech GmbH
in compliance with DIN EN ISO/IEC 17025
under the
Reg. No. DAT-P-105/99-21 and
FCC Test site registration number 90877**

TEST REPORT REFERENCE: R62678_A Edition 1

Contents:	Page
1 IDENTIFICATION	3
1.1 APPLICANT	3
1.2 MANUFACTURER	3
1.3 DATES	3
1.4 TEST LABORATORY	4
1.5 RESERVATION	4
1.6 NORMATIVE REFERENCES	4
1.7 TEST RESULTS	4
2 TECHNICAL DATA OF EQUIPMENT	5
2.1 DEVICE UNDER TEST	5
2.2 PERIPHERY DEVICES	6
3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES	6
4 ADDITIONAL INFORMATION	7
5 APPLICATION OVERVIEW	7
6 TEST RESULTS	8
6.1 RADIATED EMISSIONS (TRANSMITTER)	8
6.1.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)	8
6.1.2 TEST RESULTS (RADIATED EMISSIONS)	13
6.1.2.1 PRELIMINARY MEASUREMENT (30 MHz to 25 GHz)	13
6.1.2.2 FINAL MEASUREMENT (1 GHz to 25 GHz)	21
7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	23
8 LIST OF ANNEXES	27

TEST REPORT REFERENCE: R62678_A Edition 1

1 IDENTIFICATION

1.1 APPLICANT

Name:	connectBlue AB
Address:	Norra Vallgatan 64 3V
	Malmö SE-211 19
Country:	Sweden
Name for contact purposes:	Mr. Martin Engdahl
Tel:	+ 46 40 63 07 100
Fax:	+ 46 40 23 71 37
e-mail address:	martin.engdahl@connectblue.se

1.2 MANUFACTURER

Name:	connectBlue AB
Address:	Norra Vallgatan 64 3V
	Malmö SE-211 19
Country:	Sweden
Name for contact purposes:	Mr. Martin Engdahl
Tel:	+ 46 40 63 07 100
Fax:	+ 46 40 23 71 37
e-mail address:	martin.engdahl@connectblue.se

1.3 DATES

Date of receipt of test sample:	10 January 2007
Start of test:	19 January 2007
End of test:	19 January 2007

TEST REPORT REFERENCE: R62678_A Edition 1

1.4 TEST LABORATORY

The tests were carried out at: **PHOENIX TESTLAB GmbH**
Königswinkel 10
D-32825 Blomberg Phone: **+49 (0) 52 35 / 95 00-0**
Germany Fax: **+49 (0) 52 35 / 95 00-10**

accredited by DATech GmbH in compliance with DIN EN ISO/IEC 17025 under Reg. No. DAT-P-105/99-21 and FCC Test site registration number 90877

Test engineer: Thomas KÜHN
Name

T. Li
Signature

25 January 2007
Date

Test report checked: Bernd STEINER
Name

B. Steiner

25 January 2007
Date

PHOENIX TESTLAB GmbH
Königswinkel 10
32825 Blomberg
Tel. 0 52 35 / 95 00-0
Fax 0 52 35 / 95 00-10

Stamp

1.5 RESERVATION

This test report is only valid in its original form.

Any reproduction of its contents without written permission of the accredited test laboratory PHOENIX TESTLAB GmbH is prohibited.

The test results herein refer only to the tested sample. PHOENIX TESTLAB GmbH is not responsible for any generalisations or conclusions drawn from these test results concerning further samples. Any modification of the tested samples is prohibited and leads to the invalidity of this test report. Each page necessarily contains the PHOENIX TESTLAB Logo and the TEST REPORT REFERENCE.

1.6 NORMATIVE REFERENCES

- [1] **ANSI C63.4-2003** American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
- [2] **FCC CFR 47 Part 15 (August 2006)** Radio Frequency Devices
- [3] **FCC KDB Publication No. 55807 (March 2005)** Measurement of Digital Transmission Systems Operating under Section 15.247

1.7 TEST RESULTS

The requirements of this test document are fulfilled by the equipment under test. The complete test results are presented in the following.

TEST REPORT REFERENCE: R62678_A Edition 1

2 TECHNICAL DATA OF EQUIPMENT

2.1 DEVICE UNDER TEST

Type of equipment: *	802.11b Wireless LAN module
Type designation: *	cB-OWLAN211bx-02
FCC ID: *	PVH090402
Antenna type: *	External
Antenna gain: *	Refer table below
Antenna connector: *	UFL connector
Power supply: *	3.3 V DC to 5.0 V DC
Type of modulation: *	DSSS (CCK and DQPSK, depends on data-rate)
Operating frequency range:*	2.412 to 2.462 GHz (11 channels with 5 MHz channel separation)
Data rate:*	1, 2, 5.5 and 11 MBit/s
Number of channels: *	11
Temperature range: *	-30 °C to +85 °C

*: declared by the applicant

Used antennas:

model name*	Antenna type	Rated Antenna gain*
SDM2-2400/1575 Rev B	external	+2.0 dBi

*: declared by the applicant

The following external I/O cables were used:

Cable	Length	Shielding	Connector
DC in	2 m *	No	6.3 mm jack plug
SPI bus (not connected during test)	40 cm	No	20 pole terminal block

*: Length during the test if no other specified.

TEST REPORT REFERENCE: R62678_A Edition 1

2.2 PERIPHERY DEVICES

The following equipment was used as control unit and ancillary equipment:

- The EUT was connected to a carrier board (cB-0703-02), which was delivered by the applicant. The carrier board was supplied via an external power supply with 5.0 V DC.
- A personal computer (ACER TravelMate 525TXV, model No. 1904) with a configuration-software was used, connected temporary to the EUT via a Ethernet switch (NETGEAR ProSafe 5 Port 10/100 switch FS105 v2) and a EUT initiator (cB-0717-02), for setting the equipment into the necessary operation mode. During the measurement procedures the personal computer, the Ethernet switch and the EUT initiator were disconnected.

3 OPERATIONAL STATES AND PHYSICAL BOUNDARIES

The EUT is intended to be used in several WLAN applications. Because the EUT is a module, which will be implemented in a final application, it was mounted on a carrier board to change the operation modes of the EUT from a Laptop with test software. The tests were carried out with one unmodified sample with integral antenna and another unmodified sample with an antenna connector and external antennas.

The EUT has a UFL connector, which is regarded to be unique.

During the tests the test sample was powered by an external power supply via the carrier board with 5.0 V DC.

If not otherwise stated, for modulating the transmitter, a pseudo random bit sequence with a data rate of 11 MBit/s was used because pretests have shown that this is the operation mode, which causes the highest spurious emissions and occupies the largest bandwidth.


For selecting an operation mode, a personal computer with a software delivered by the applicant was connected to the EUT via a Ethernet switch (NETGEAR ProSafe 5 Port 10/100 switch FS105 v2) and a EUT initiator (cB-0717-02). After adjusting the operating mode, the personal computer, the Ethernet switch and the EUT initiator were removed. To do this the test-engineer was instructed by the applicant.

During the tests, the EUT was not labelled with a FCC-label.

The following operation modes were used during the tests:

Operation mode	Description of the operation mode
1	Continuous transmitting on 2412 MHz
2	Continuous transmitting on 2437 MHz
3	Continuous transmitting on 2462 MHz

TEST REPORT REFERENCE: R62678_A Edition 1

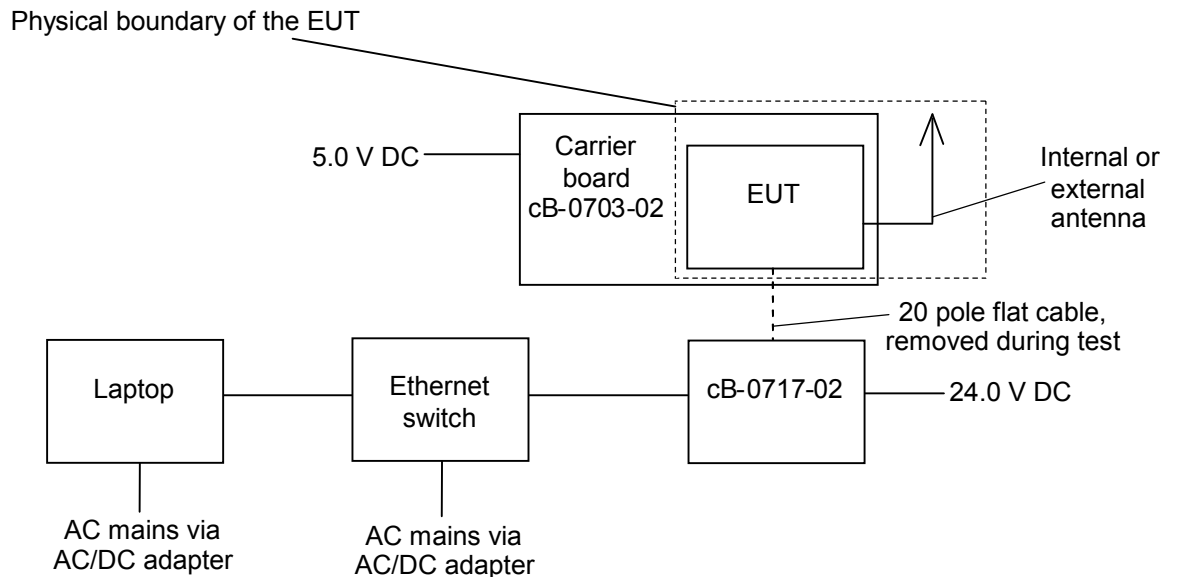

4 ADDITIONAL INFORMATION

The cB-OWLAN211bx-02 is already tested under PHOENIX-TESTLAB test report reference R60502_A. The reason for this report is the additional antenna SDM2-2400/1575 Rev B, which should be listed in combination with the cB-OWLAN211bx-02. With this antenna the radiated spurious emission measurement was carried out to show the compliance with the requirements. The measurements were carried out with the same test sample than the measurements, which were carried out under R60502_A.

5 APPLICATION OVERVIEW

Application	Frequency range [MHz]	FCC 47 CFR Part 15 section	Status	Refer page
6 dB bandwidth	General	15.247 (a) (2)	Reported under R60502_A	8 et seq. (R60502_A)
Maximum peak output power	2400.0 – 2483.5	15.247 (b) (3), (4)	Reported under R60502_A	11 et seq. (R60502_A)
Power spectral density	2400.0 – 2483.5	15.247 (e)	Reported under R60502_A	13 et seq. (R60502_A)
Band edge compliance	2400.0 – 2483.5	15.247 (d)	Reported under R60502_A	16 et seq. (R60502_A)
Radiated emissions (transmitter)	30 – 25,000	15.205 (a), 15.209 (a)	Passed	8 et seq.
Conducted emissions on supply line	0.15 – 30	15.207 (a)	Reported under R60502_A	54 et seq. (R60502_A)

TEST REPORT REFERENCE: R62678_A Edition 1

6 TEST RESULTS

6.1 RADIATED EMISSIONS (TRANSMITTER)

6.1.1 METHOD OF MEASUREMENT (RADIATED EMISSIONS)

The radiated emission measurement is subdivided into three stages.

- A preliminary measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 30 MHz to 25 GHz.
- A final measurement carried out on an open area test site with reflecting ground plane and various antenna height in the frequency range 30 MHz to 1 GHz.
- A final measurement carried out in a fully anechoic chamber with a fixed antenna height in the frequency range 1 GHz to 25 GHz.

All measurements will be carried out with the EUT working on the middle and upper and lower edge of the assigned frequency band.


Preliminary measurement (30 MHz to 1 GHz)

In the first stage a preliminary measurement will be performed in a fully anechoic chamber with a measuring distance of 3 meter. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].

The frequency range 30 MHz to 1 GHz will be measured with an EMI Receiver set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 °.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 230 MHz	100 kHz
230 MHz to 1 GHz	100 kHz

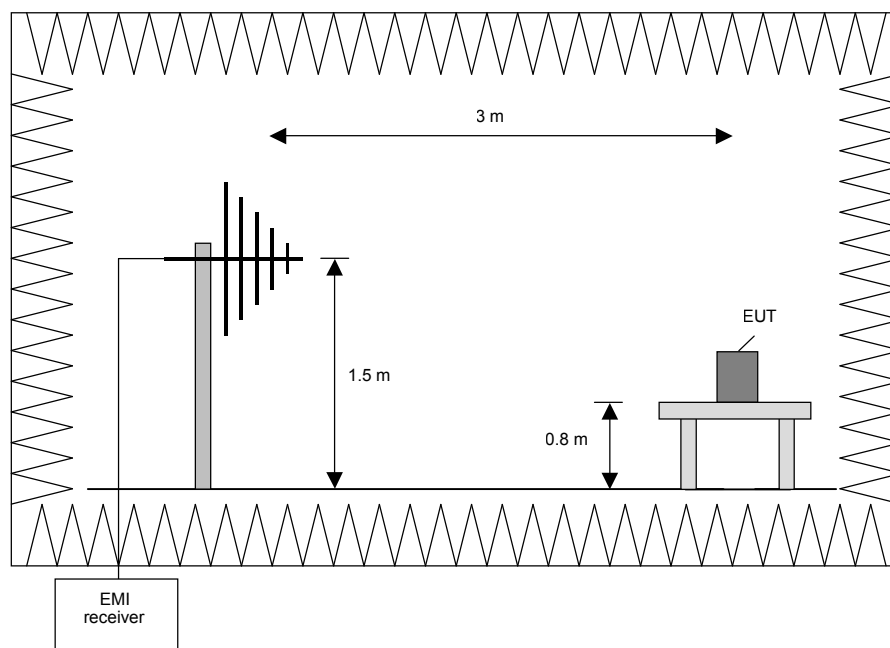

TEST REPORT REFERENCE: R62678_A Edition 1

Procedure preliminary measurement:

Prescans were performed in the frequency range 30 MHz to 230 MHz and 230 MHz to 1 GHz.

The following procedure will be used:


1. Monitor the frequency range at horizontal polarisation and a EUT azimuth of 0 °.
2. Manipulate the system cables within the range to produce the maximum level of emission.
3. Rotate the EUT by 360 ° to maximize the detected signals.
4. Make a hardcopy of the spectrum.
5. Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
6. Repeat 1) to 4) with the other orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).
7. Repeat 1) to 5) with the vertical polarisation of the measuring antenna.

Final measurement (30 MHz to 1 GHz)

A final measurement on an open area test site will be performed on selected frequencies found in the preliminary measurement. During this test the EUT will be rotated in the range of 0 ° to 360 °, the measuring antenna will be set to horizontal and vertical polarisation and raised and lowered in the range from 1 m to 4 m to find the maximum level of emissions.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
30 MHz to 1 GHz	120 kHz

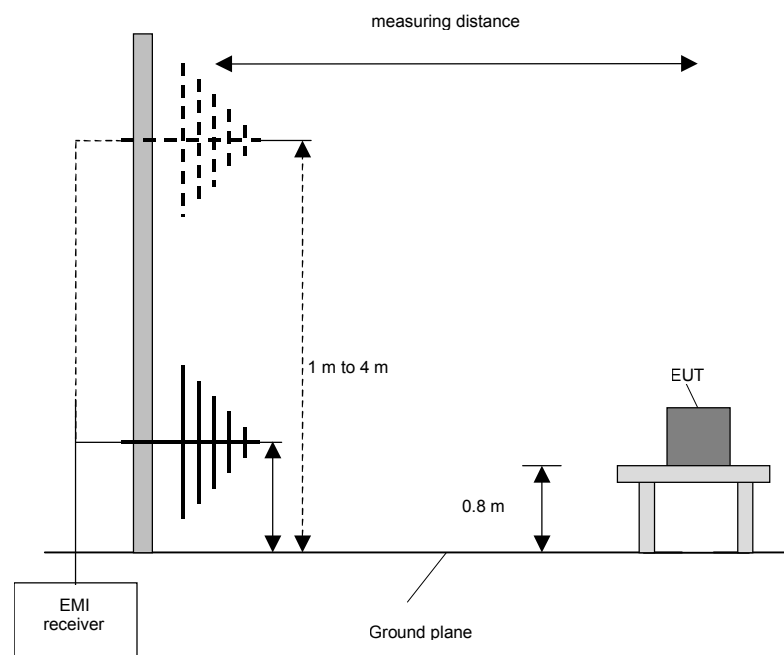

TEST REPORT REFERENCE: R62678_A Edition 1

Procedure final measurement:

The following procedure will be used:

- 1) Measure on the selected frequencies at an antenna height of 1 m and a EUT azimuth of 23 °.
- 2) Move the antenna from 1 m to 4 m and note the maximum value at each frequency.
- 3) Rotate the EUT by 45 ° and repeat 2) until an azimuth of 337 ° is reached.
- 4) Repeat 1) to 3) for the other orthogonal antenna polarization.
- 5) Move the antenna and the turntable to the position where the maximum value is detected.
- 6) Measure while moving the antenna slowly +/- 1 m.
- 7) Set the antenna to the position where the maximum value is found.
- 8) Measure while moving the turntable +/- 45 °.
- 9) Set the turntable to the azimuth where the maximum value is found.
- 10) Measure with Final detector (QP and AV) and note the value.
- 11) Repeat 5) to 10) for each frequency.
- 12) Repeat 1) to 11) for each orthogonal axes of the EUT (because of EUT is a module and might be used in a handheld equipment application).

Preliminary and final measurement (1 GHz to 25 GHz)

This measurement will be performed in a fully anechoic chamber. Tabletop devices will set up on a non-conducting support with a size of 1 m by 1.5 m and a height of 80 cm. Floor-standing devices will be placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003 [1].


Preliminary measurement (1 GHz to 25 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The spectrum analyser set to MAX Hold mode and a resolution bandwidth of 100 kHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna, the antenna close to the EUT and while moving the antenna over all sides of the EUT. With the spectrum analyser in CLEAR / WRITE mode the cone of the emission should be found and than the measuring distance will be set to 3 m with the receiving antenna moving in this cone of emission. At this position the final measurement will be carried out.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	100 kHz
4 GHz to 12 GHz	100 kHz
12 GHz to 18 GHz	100 kHz
18 GHz to 25 GHz	100 kHz

TEST REPORT REFERENCE: R62678_A Edition 1

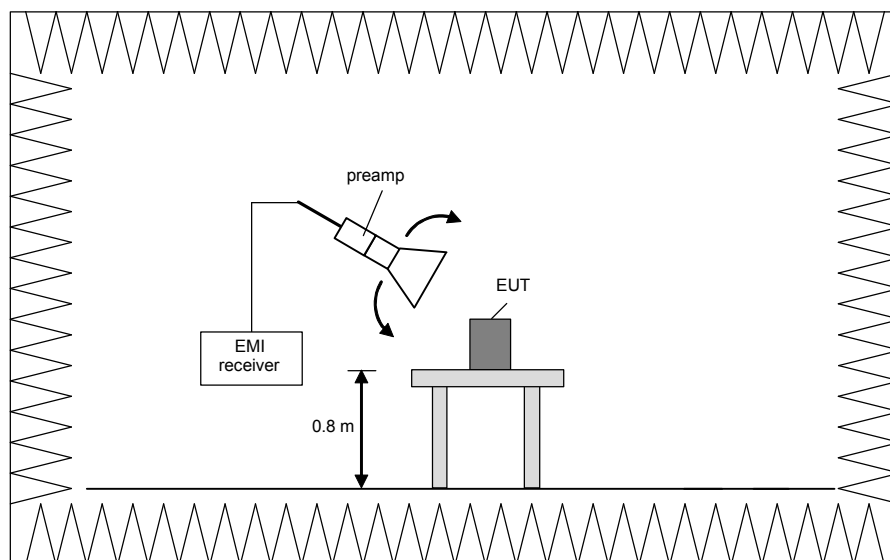


Final measurement (1 GHz to 25 GHz)

The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1 MHz. The measurement will be performed in horizontal and vertical polarisation of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 ° to 360 ° in order to have the antenna inside the cone of radiation.

The resolution bandwidth of the EMI Receiver will be set to the following values:

Frequency range	Resolution bandwidth
1 GHz to 4 GHz	1 MHz
4 GHz to 12 GHz	1 MHz
12 GHz to 18 GHz	1 MHz
18 GHz to 25 GHz	1 MHz

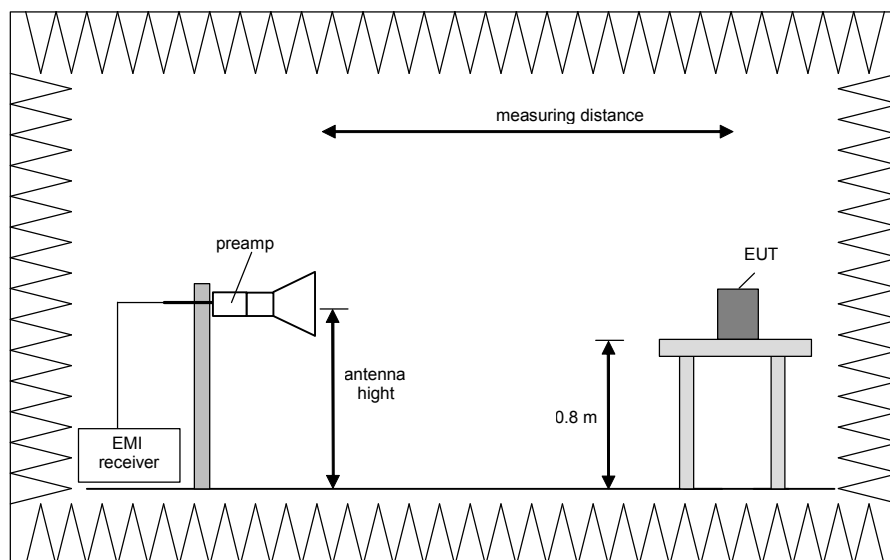

TEST REPORT REFERENCE: R62678_A Edition 1

Procedure of measurement:

The measurements were performed in the frequency range 1 GHz to 4 GHz, 4 GHz to 12 GHz, 12 GHz to 18 GHz and 18 GHz to 25 GHz.

The following procedure will be used:

- 1) Monitor the frequency range at horizontal polarisation and move the antenna over all sides of the EUT (if necessary move the EUT to another orthogonal axis).
- 2) Change the antenna polarisation and repeat 1) with vertical polarisation.
- 3) Make a hardcopy of the spectrum.
- 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
- 5) Change the analyser mode to Clear / Write and found the cone of emission.
- 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3 m and the antenna will be still inside the cone of emission.
- 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarisation and azimuth and the peak and average detector, which causes the maximum emission.
- 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beam width.

Step 1) to 6) are defined as preliminary measurement.

TEST REPORT REFERENCE: R62678_A Edition 1

6.1.2 TEST RESULTS (RADIATED EMISSIONS)

6.1.2.1 PRELIMINARY MEASUREMENT (30 MHz to 25 GHz)

Ambient temperature	20 °C	Relative humidity	38 %
---------------------	-------	-------------------	------


Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Test record: Where not otherwise stated the test was carried out in test mode 2 of the EUT, because there was no difference to the other test modes. All results are shown in the following.

Supply voltage: During all measurements the EUT was supplied with 5.0 V DC via the carrier board.

62678_7.wmf (30 MHz to 230 MHz):

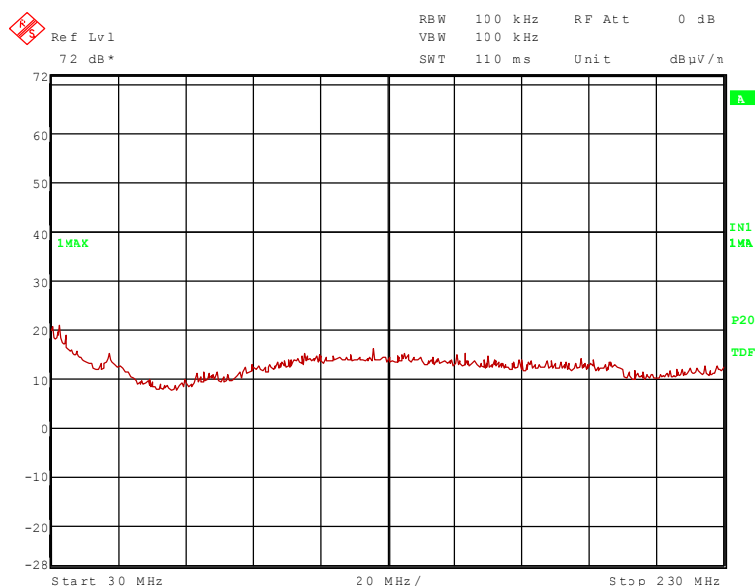


TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R62678_A Edition 1

62678_8.wmf (230 MHz to 1 GHz):

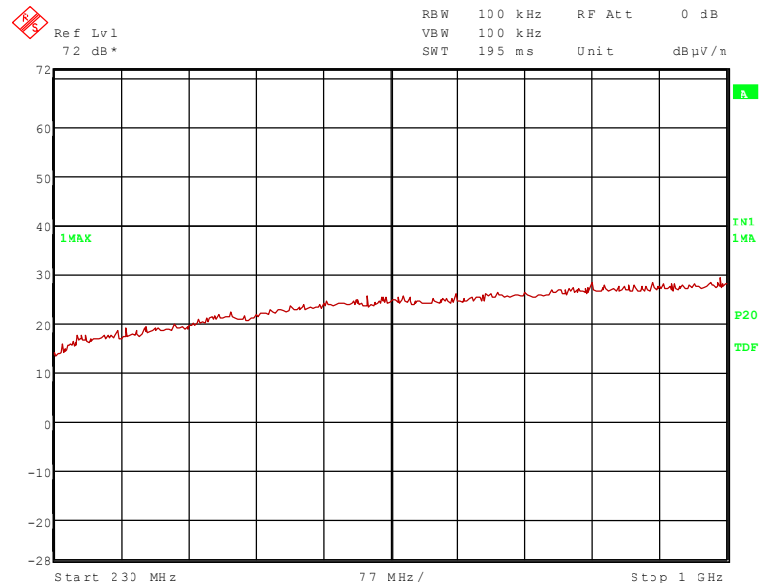


No significant frequencies above the noise floor of the system were found during the preliminary radiated emission test, so no measurements were carried out on the open area test site.


TEST REPORT REFERENCE: R62678_A Edition 1

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

62678_4.wmf (1 GHz to 4 GHz):

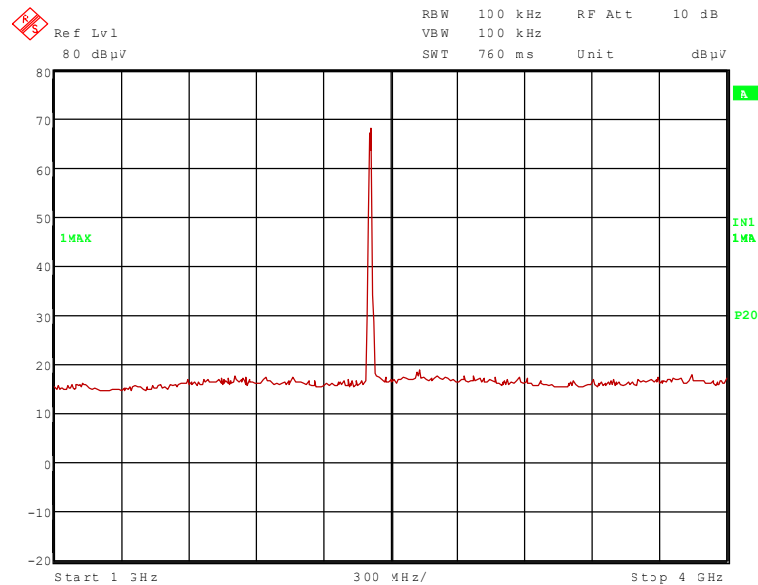


62678_3.wmf (4 GHz to 12 GHz):

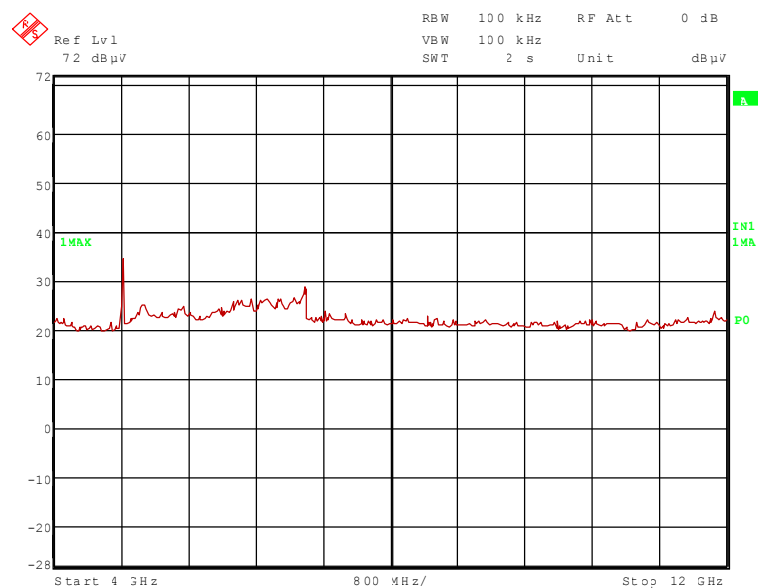


TEST REPORT REFERENCE: R62678_A Edition 1

62678_15.wmf (12 GHz to 18 GHz):

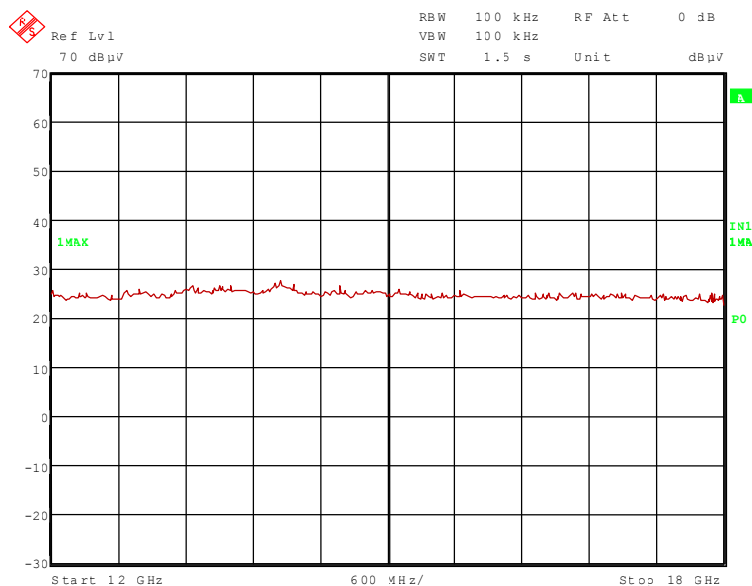

62678_14.wmf (18 GHz to 25 GHz):

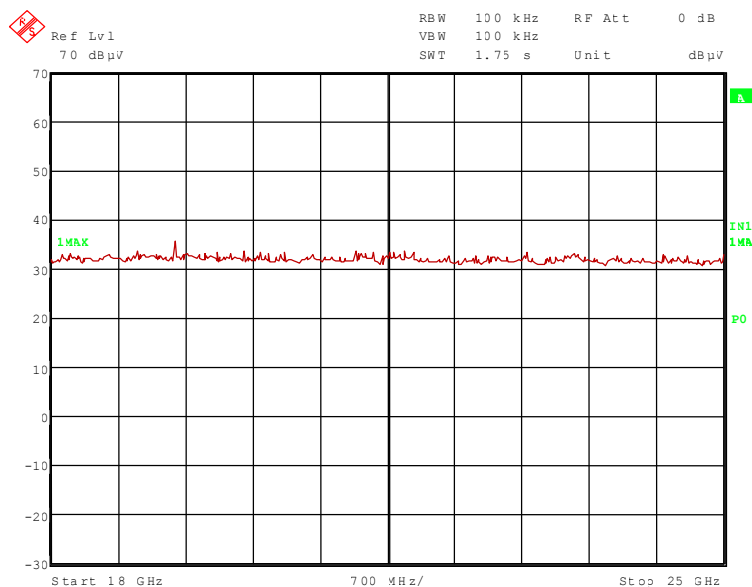

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.824 GHz and 19.296 GHz.

The following frequency was found outside the restricted bands during the preliminary radiated emission test:


- 2.412 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.


TEST REPORT REFERENCE: R62678_A Edition 1

Transmitter operates at the middle of the assigned frequency band (operation mode 2)

62678_1.wmf (1 GHz to 4 GHz):

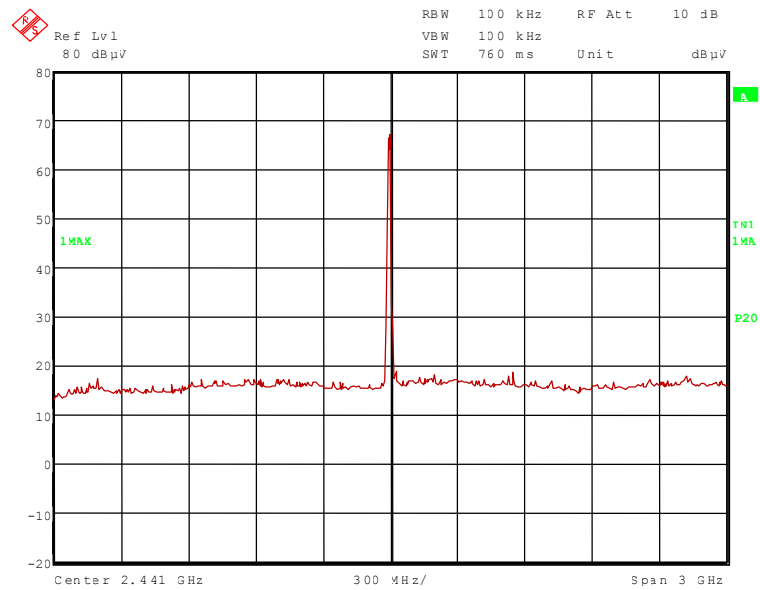


63678_2.wmf (4 GHz to 12 GHz):

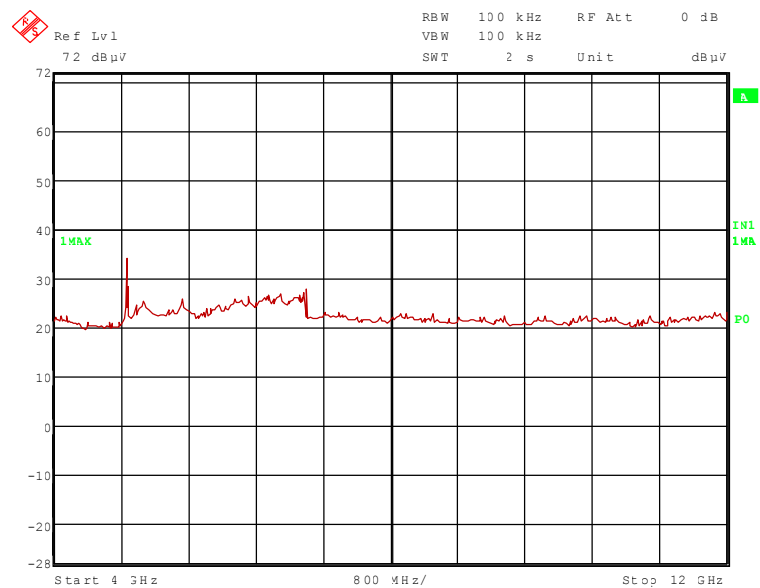


TEST REPORT REFERENCE: R62678_A Edition 1

62678_12.wmf (12 GHz to 18 GHz):

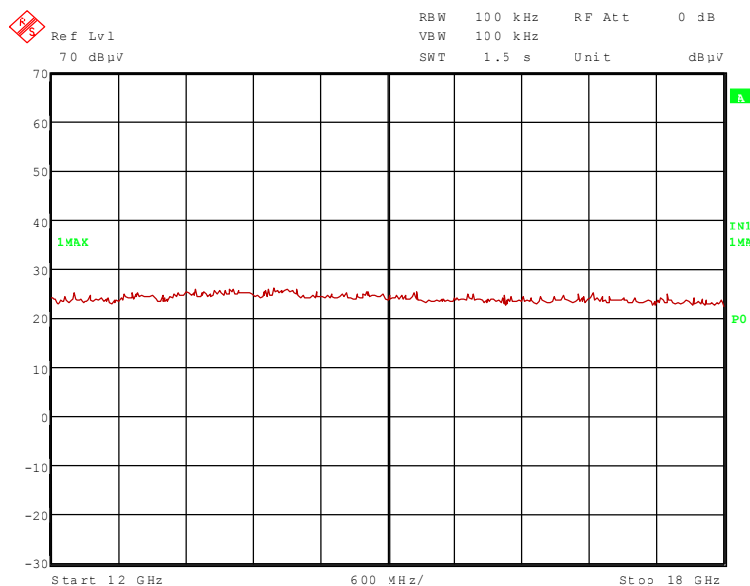

63678_13.wmf (18 GHz to 25 GHz):

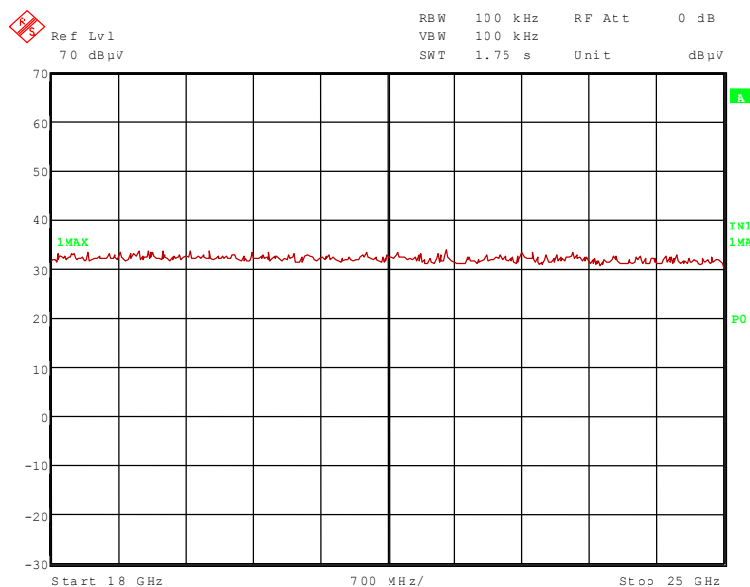

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.874 GHz.

The following frequency was found outside the restricted bands during the preliminary radiated emission test:


- 2.437 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.


TEST REPORT REFERENCE: R62678_A Edition 1

Transmitter operates at the upper end of the assigned frequency band (operation mode 3)

63678_5.wmf (1 GHz to 4 GHz):

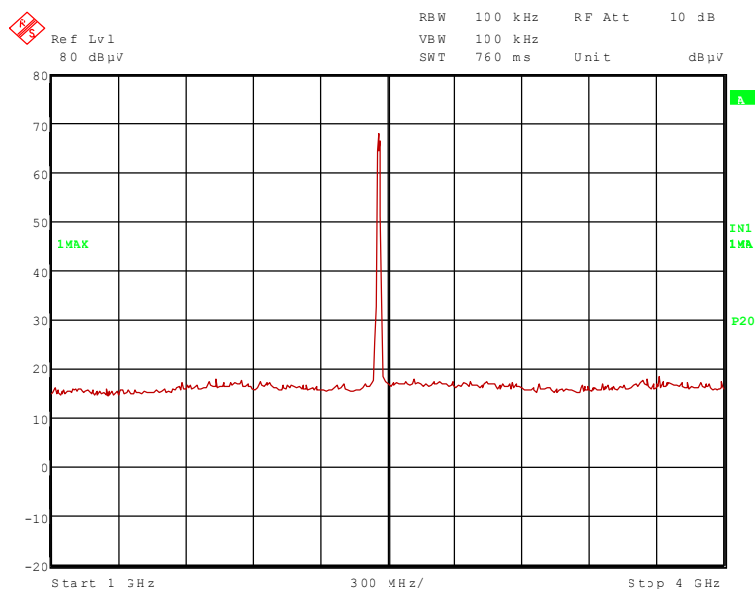


62678_6.wmf (4 GHz to 12 GHz):

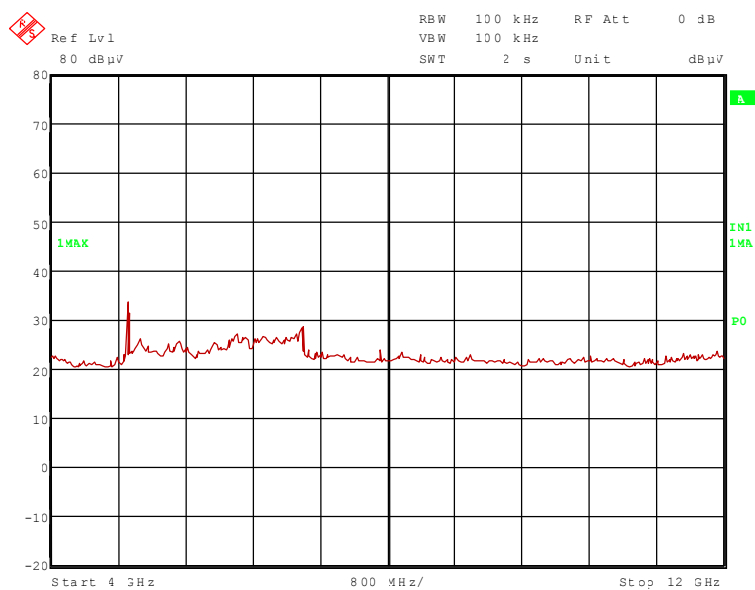


TEST REPORT REFERENCE: R62678_A Edition 1

62678_16.wmf (12 GHz to 18 GHz):

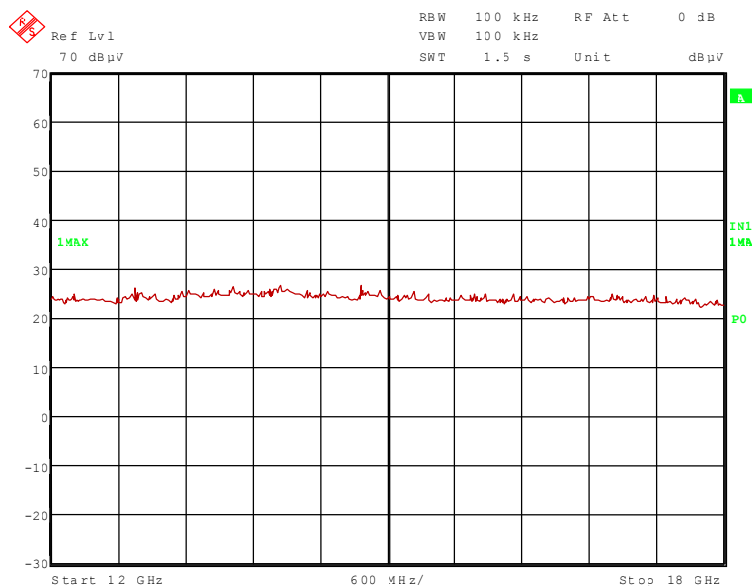

62678_17.wmf (18 GHz to 25 GHz):

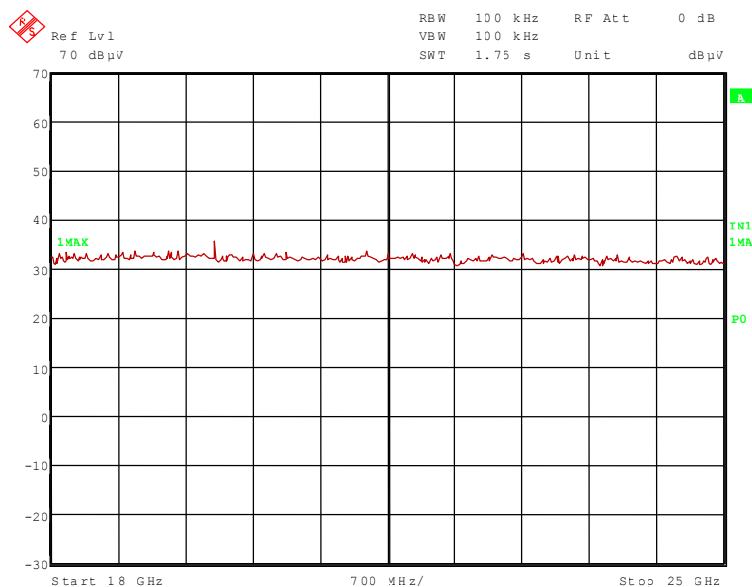

The following frequency was found inside the restricted bands during the preliminary radiated emission test:

- 4.924 GHz and 19.696 GHz.

The following frequency was found outside the restricted bands during the preliminary radiated emission test:

- 2.462 GHz.

These frequencies have to be measured in a final measurement. The results were presented in the following.

TEST REPORT REFERENCE: R62678_A Edition 1

6.1.2.2 FINAL MEASUREMENT (1 GHz to 25 GHz)

Ambient temperature	21 °C	Relative humidity	35 %
---------------------	-------	-------------------	------

Position of EUT: The EUT was set-up on a non-conducting table of a height of 0.8 m. The distance between EUT and antenna was 3 m.

Cable guide: The cable of the EUT was fixed on the non-conducting table. For further information of the cable guide refer to the pictures in annex A of this test report.

Supply voltage: During all measurements the EUT was supplied with 5.0 V DC via the carrier board.

Resolution bandwidth: For all measurements a resolution bandwidth of 1 MHz was used.

Transmitter operates at the lower end of the assigned frequency band (operation mode 1)

Result measured with the peak detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.412	107.6	-	-	76.3	28.5	0.0	2.8	150	Vert.	-
4.824	57.2	74.0	16.8	46.0	33.1	25.7	3.8	150	Vert.	Yes
19.296	46.2	74.0	27.8	44.6	37.0	37.0	1.6	100	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dBμV/m	Limit dBμV/m	Margin dB	Readings dBμV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.412	99.0	-	-	67.7	28.5	0.0	2.8	150	Vert.	-
4.824	42.3	54.0	11.7	31.1	33.1	25.7	3.8	150	Vert.	Yes
19.296	33.4	54.0	20.6	31.8	37.0	37.0	1.6	100	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

TEST REPORT REFERENCE: R62678_A Edition 1

Transmitter operates at the middle of the assigned frequency band (operation mode 2)

Result measured with the peak detector:

Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height Cm	Pol.	Restr. Band
2.437	107.3	-	-	75.8	28.7	0.0	2.8	150	Vert.	-
4.874	58.0	74.0	16.0	46.5	33.4	25.7	3.8	150	Vert.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height Cm	Pol.	Restr. Band
2.437	98.5	-	-	67.0	28.7	0.0	2.8	150	Vert.	-
4.874	43.1	54.0	10.9	31.6	33.4	25.7	3.8	150	Vert.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Transmitter operates at the upper end of the assigned frequency band (operation mode 3)

Result measured with the peak detector:

Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.462	107.2	-	-	75.7	28.7	0.0	2.8	150	Vert.	-
4.924	58.5	74.0	15.5	46.8	33.5	25.6	3.8	150	Vert.	Yes
19.696	46.3	74.0	27.7	44.7	37.0	37.0	1.6	100	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Result measured with the average detector:

Frequency GHz	Corr. value dBµV/m	Limit dBµV/m	Margin dB	Readings dBµV	Antenna factor 1/m	Preamp dB	Cable loss dB	Height cm	Pol.	Restr. Band
2.462	98.3	-	-	66.8	28.7	0.0	2.8	150	Vert.	-
4.924	43.5	54.0	10.5	31.8	33.5	25.6	3.8	150	Vert.	Yes
19.696	33.5	54.0	20.5	31.9	37.0	37.0	1.6	100	Hor.	Yes
Measurement uncertainty						+2.2 dB / -3.6 dB				

Test: Passed

TEST EQUIPMENT USED FOR THE TEST:

29, 31 – 37, 39, 43, 46, 49 – 51, 54

TEST REPORT REFERENCE: R62678_A Edition 1

7 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

TEST REPORT REFERENCE: R62678_A Edition 1

Emission measurement at AC mains and DC in / out ports at M4					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
1	Shielded chamber M4	-	Siemens	B83117S1-X158	480088
2	Measuring receiver	ESAI	Rohde & Schwarz	831953/001 833181/018	480025 480026
3	LISN	NSLK8128	Schwarzbeck	8128155	480058
4	DC-filter	B84266-A21-E13	Siemens	940164525	480099
5	AC-filter	B84299-D87-E3	Siemens	930262292	480097
6	EMI-Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M5					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
7	Fully anechoic chamber M5	-	Siemens	B83177-S1-X156	480073
8	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
9	Controller	HD100	Deisel	100/324	480067
10	Antenna support	MA240	Deisel	228/314	480069
11	Turntable	DS412	Deisel	412/317	480070
12	Antenna	CBL6112C	Chase	2689	480327
13	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M6					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
14	Open area test site	-	Phoenix Test-Lab	-	480085
15	Measuring receiver	ESVS30	Rohde & Schwarz	829673/012	480024
16	Controller	HD100	Deisel	100/670	480139
17	Turntable	DS420HE	Deisel	420/620/80	480087
18	Antenna support	AS615P	Deisel	615/310	480086
19	Antenna	CBL6111 A	Chase	1643	480147
20	EMI Software	ES-K1	Rohde & Schwarz	-	480111

TEST REPORT REFERENCE: R62678_A Edition 1

Radiated emission measurement at M8					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
21	Fully anechoic chamber M8	-	Siemens	B83117-E7019-T231	480190
22	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
23	Measuring receiver	ESCS 30	Rohde & Schwarz	828985/014	480270
24	Controller	HD100	Deisel	100/427	480181
25	Turntable	DS420	Deisel	420/435/97	480186
26	Antenna support	AS615P	Deisel	615/310	480187
27	Antenna	CBL6112 A	Chase	2034	480185
28	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Radiated emission measurement at M20					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
29	Fully anechoic chamber M20	-	Albatross Projects	B83107-E2439-T232	480303
30	Measuring receiver	ESMI	Rohde & Schwarz	843977/001 843530/018	480179 480180
31	Measuring receiver	ESI 40	Rohde & Schwarz	100064	480355
32	Controller	HD100	Deisel	100/670	480326
33	Turntable	DS420HE	Deisel	420/620/80	480315
34	Antenna support	AS615P	Deisel	615/310	480187
35	Antenna	CBL6112 B	Chase	2688	480328
36	Antenna	3115 A	EMCO	9609-4918	480183
37	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	483	480294
38	Standard Gain Horn 11.9 GHz – 18 GHz	18240-20	Flann Microwave	482	480295
39	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	411	480297
40	Standard Gain Horn 17.9 GHz – 26.7 GHz	20240-20	Flann Microwave	410	480296
41	Standard Gain Horn 26.4 GHz – 40.1 GHz	22240-20	Flann Microwave	469	480299

TEST REPORT REFERENCE: R62678_A Edition 1

No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
42	Standard Gain Horn 26.4 GHz – 40.1 GHz	22240-20	Flann Microwave	468	480298
43	RF-cable No. 30	RTK 081	Rosenberger	-	410141
44	RF-cable No. 31	RTK 081	Rosenberger	-	410142
45	RF-cable 1m	KPS-1533- 400-KPS	Insulated Wire	-	480300
46	RF-cable 1m	KPS-1533- 400-KPS	Insulated Wire	-	480301
47	RF-cable 2m	KPS-1533- 400-KPS	Insulated Wire	-	480302
48	RF-cable No. 5	RTK 081	Rosenberger		410097
49	Preamplifier	JS3- 00101200- 23-5A	Miteq	681851	480337
50	Preamplifier	JS3- 12001800- 16-5A	Miteq	571667	480343
51	Preamplifier	JS3- 18002600- 20-5A	Miteq	658697	480342
52	Preamplifier	JS3- 26004000- 25-5A	Miteq	563593	480344
53	EMI Software	ES-K1	Rohde & Schwarz	-	480111

Ancillary equipment used for testing					
No.	Test equipment	Type	Manufacturer	Serial No.	PM-No
54	Power supply	TOE 8852	Toellner	51712	480233
55	Peak Power Sensor	NRV-Z32	Rohde & Schwarz	849745/016	480551
-	-	-	-	-	-
-	-	-	-	-	-

All used measurement equipment was calibrated (if necessary). The calibration intervals and the calibration history will be given out on request.

TEST REPORT REFERENCE: R62678_A Edition 1

8 LIST OF ANNEXES

Annex A	Photographs of the test set-ups:	4 pages
	cB-OWLAN211bx-02, test set-up fully anechoic chamber	62678_5.jpg
	cB-OWLAN211bx-02, test set-up fully anechoic chamber	62678_2.jpg
	cB-OWLAN211bi-02, test set-up fully anechoic chamber	62678_6.jpg
	cB-OWLAN211bx-02, test set-up fully anechoic chamber	62678_4.jpg
ANNEX B	INTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	6 pages
	cB-OWLAN211bx-02, top view	62678_c.jpg
	cB-OWLAN211bx-02, bottom view	62678_b.jpg
	cB-0703-02, carrier board with cB-OWLAN211bx-02, top view	62678_g.jpg
	cB-0703-02, carrier board, top view	62678_f.jpg
	cB-0703-02, carrier board, bottom view	62678_e.jpg
	EUT initiator, top view	62678_a.jpg
ANNEX C	EXTERNAL PHOTOGRAPHS OF THE TEST SAMPLE:	- pages
	Because the EUT is a module, which is intended to be implemented inside a final application, no external photographs were available	