



FCC SAR TEST REPORT

Report No.: STS2002171H01

Issued for

Winmate Inc.

9F, No.111-6, Shing-De Rd., San-Chung Dist., New Taipei
City, 24158, Taiwan, R.O.C

Product Name:	Rugged Tablet PC
Brand Name:	Winmate
Model Name:	M133WK
Series Model:	M133WK-DW, M133XXXXXXXXXXXX (Where X can be A-Z,a-z ,0-9, "-", Blank or Slash)
FCC ID:	PX9M133WK001
Test Standard:	ANSI/IEEE Std. C95.1
	FCC 47 CFR Part 2 (2.1093)
	IEEE 1528: 2013
Max. Report SAR (1g):	Body:0.840 W/kg

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





Test Report Certification

Applicant's name : Winmate Inc.
Address : 9F, No.111-6, Shing-De Rd., San-Chung Dist., New Taipei City, 24158, Taiwan, R.O.C
Manufacture's Name..... : Winmate Inc.
Address : 9F, No.111-6, Shing-De Rd., San-Chung Dist., New Taipei City, 24158, Taiwan, R.O.C

Product description

Product name : Rugged Tablet PC
Brand name : Winmate
Model name : M133WK
Series Model..... : M133WK-DW, M133XXXXXXXXXXXX
 (Where X can be A-Z,a-z ,0-9, “-”, Blank or Slash)
Standards..... : ANSI/IEEE Std. C95.1-1992
 FCC 47 CFR Part 2 (2.1093)
 IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Date of Test :
Date (s) of performance of tests..... : 13 Apr. 2020~20 Apr. 2020
Date of Issue..... : 21 Apr. 2020
Test Result..... : **Pass**

Testing Engineer : *Aaron Bu*

 (Aaron Bu)

Technical Manager : *Jason Lu*

 (Jason Lu)

Authorized Signatory : *Vita Li*

 (Vita Li)





Table of Contents

1.General Information	5
1.1 EUT Description	5
1.2 Test Environment	7
1.3 Test Factory	7
2. Test Standards and Limits	8
3. SAR Measurement System	9
3.1 Definition Of Specific Absorption Rate (SAR)	9
3.2 SAR System	9
4. Tissue Simulating Liquids	12
4.1 Simulating Liquids Parameter Check	12
5. SAR System Validation	14
5.1 Validation System	14
5.2 Validation Result	14
6. SAR Evaluation Procedures	15
7. EUT Antenna Location Sketch	16
7.1 SAR test exclusion consider table	17
8. EUT Test Position	20
8.1 Define Two Imaginary Lines On The Handset	20
9. Uncertainty	21
9.1 Measurement Uncertainty	21
9.2 System validation Uncertainty	22
10. Conducted Power Measurement	23
10.1 Test Result (Intel Module)	23
10.2 Test Result (Realtek Module)	27
11. EUT And Test Setup Photo	30
11.1 EUT Photo	30
11.2 Setup Photo	33
12. SAR Result Summary	35
12.1 Body SAR	35
12.2 repeated SAR measurement	40
13. Equipment List	44
Appendix A. System Validation Plots	45
Appendix B. SAR Test Plots	55
Appendix C. Probe Calibration And Dipole Calibration Report	80



Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	21 Apr. 2020	STS2002171H01	ALL	Initial Issue

Note: **Format version** of the report -V01





1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

1.1 EUT Description

Product Name	Rugged Tablet PC		
Brand Name	Winmate		
Model Name	M133WK		
Series Model	M133WK-DW, M133XXXXXXXXXXXX (Where X can be A-Z,a-z ,0-9, “-”, Blank or Slash)		
Model Difference	Only for marketing purpose		
Battery	Rated Voltage: 15.4V Charge Limit: 17.6V Capacity: 5900mAh		
Device Category	Portable		
Product stage	Production unit		
RF Exposure Environment	General Population / Uncontrolled		
Hardware Version	M133DA-100		
Software Version	20.90.0		
Frequency Range	2.4GHz WLAN IEEE 802.11b/g/n(HT20/40): 2412MHz to 2462MHz 5GHz WLAN IEEE 802.11a/n/ac (20MHz): 5180MHz to 5825MHz 5GHz WLAN IEEE 802.11n/ac (40MHz):5190MHz to 5795MHz 5GHz WLAN IEEE 802.11ac (80MHz): 5210MHz, 5290MHz, 5530MHz to 5610MHz, 5775MHz Bluetooth: 2402MHz to 2480MHz		
Max. Reported SAR(1g): (Limit:1.6W/kg)	Intel Module		
	Band	Mode	Body (W/kg)
	DTS	2.4G WLAN ANT A	0.210
	DTS	2.4G WLAN ANT B	0.333
	DTS	2.4G WLAN ANT A+B	0.271
	NII	5.2G WLAN ANT A	0.816
	NII	5.2G WLAN ANT B	0.227
	NII	5.2G WLAN ANT A+B	0.582
	NII	5.3G WLAN ANT A	0.652
	NII	5.3G WLAN ANT B	0.516
	NII	5.3G WLAN ANT A+B	0.685
	NII	5.6G WLAN ANT A	0.766
	NII	5.6G WLAN ANT B	0.286
	NII	5.6G WLAN ANT A+B	0.840
	NII	5.8G WLAN ANT A	0.663
	NII	5.8G WLAN ANT B	0.437
	NII	5.8G WLAN ANT A+B	0.465
	DTS	Bluetooth ^{Note}	0.167
	Realtek Module		
	DTS	2.4G WLAN	0.344
NII	5.2G WLAN	0.385	
NII	5.3G WLAN	0.479	
NII	5.6G WLAN	0.340	
NII	5.8G WLAN	0.205	
1-g Sum SAR			1.486



FCC Equipment Class	Digital Transmission System (DTS) Unlicensed National Information Infrastructure TX (NII)
Operating Mode:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM Bluetooth: 5.0+EDR (GFSK + π /4DQPSK+8DPSK) BLE
Antenna Specification:	BT,WLAN: PIFA Antenna
Hotspot Mode:	Not Support
DTM Mode:	Not Support
Note: 1. Bluetooth SAR was estimated 2. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power	





1.2 Test Environment

Ambient conditions in the SAR laboratory:

Items	Required
Temperature (°C)	18-25
Humidity (%RH)	30-70

1.3 Test Factory

ShenZhen STS Test Services Co.,Ltd.

A 1/F, Building B, Zhuoke Science Park, No.190 Chongqing Road, HepingShequ, Fuyong Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration No.: 625569

IC Registration No.: 12108A

A2LA Certificate No.: 4338.01





2. Test Standards and Limits

No.	Identity	Document Title
1	47 CFR Part 2	Frequency Allocations and Radio Treaty Matters; General Rules and Regulations
2	ANSI/IEEE Std. C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	IEEE Std. 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
4	FCC KDB 447498 D01 v06	Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
5	FCC KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
6	FCC KDB 865664 D02 v01r02	RF Exposure Reporting
10	FCC KDB 648474 D04 v01r03	SAR Evaluation Considerations for Wireless Handsets
11	FCC KDB 248227 D01 Wi-Fi SAR v02r02	SAR Considerations for 802.11 Devices
12	FCC KDB 616217 D04 v01r02	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Population/Uncontrolled Environments:

Are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Occupational/Controlled Environments:

Are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

NOTE

GENERAL POPULATION/UNCONTROLLED EXPOSURE

PARTIAL BODY LIMIT

1.6 W/kg

3. SAR Measurement System

3.1 Definition of Specific Absorption Rate (SAR)

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma E^2}{\rho}$$

Where: σ is the conductivity of the tissue,
ρ is the mass density of the tissue and E is the RMS electrical field strength.

3.2 SAR System

MVG SAR System Diagram:

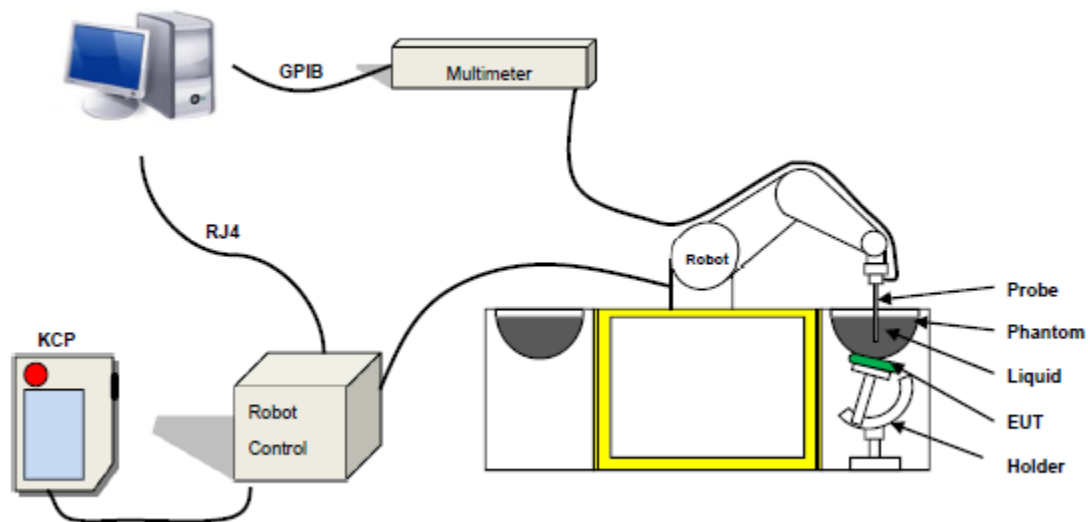

COMOSAR is a system that is able to determine the SAR distribution inside a phantom of human being according to different standards. The COMOSAR system consists of the following items:

- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The Open SAR software computes the results to give a SAR value in a 1g or 10g mass.

3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 41/18 EPG0334 with following specifications is used

- Probe Length: 330 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Probe Tip External Diameter: 2.5 mm
- Distance between dipole/probe extremity: 1 mm
- Dynamic range: 0.01-100 W/kg
- Probe linearity: 3%
- Axial Isotropy: < 0.10 dB
- Spherical Isotropy: < 0.10 dB
- Calibration range: 450 MHz to 6 GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°



Figure 1-MVG COMOSAR Dosimetric E field Dipole

3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.


SN 32/14 SAM115



SN 32/14 SAM116



3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



4. Tissue Simulating Liquids

4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Head Tissue

Frequency (MHz)	cellulose	DGBE	HEC	NaCl	Preventol	Sugar	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	0.2	/	/	1.4	0.2	57.0	/	41.1	0.89	41.9
835	0.2	/	/	1.4	0.2	57.9	/	40.3	0.90	41.5
900	0.2	/	/	1.4	0.2	57.9	/	40.3	0.97	41.5
1800	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
1900	/	44.5	/	0.3	/	/	30.45	55.2	1.4	40.0
2000	/	44.5	/	0.3	/	/	/	55.2	1.4	40.0
2450	/	44.9	/	0.1	/	/	/	55.0	1.80	39.2
2600	/	45.0	/	0.1	/	/	/	54.9	1.96	39.0

Body Tissue

Frequency (MHz)	cellulose	DGBE	HEC	NaCl	Preventol	Sugar	X100	Water	Conductivity	Permittivity
	%	%	%	%	%	%	%	%	σ	ϵ_r
750	0.2	/	/	0.9	0.1	47.2	/	51.7	0.96	55.5
835	0.2	/	/	0.9	0.1	48.2	/	50.8	0.97	55.2
900	0.2	/	/	0.9	0.1	48.2	/	50.8	1.05	55.0
1800	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
1900	/	29.4	/	0.4	/	/	30.45	70.2	1.52	53.3
2000	/	29.4	/	0.4	/	/	/	70.2	1.52	53.3
2450	/	31.3	/	0.1	/	/	/	68.6	1.95	52.7
2600	/	31.7	/	0.1	/	/	/	68.2	2.16	52.3

Tissue dielectric parameters for head and body phantoms				
Frequency	ϵ_r		σ	
	S/m			
	Head	Body	Head	Body
300	45.3	58.2	0.87	0.92
450	43.5	56.7	0.87	0.94
900	41.5	55.0	0.97	1.05
1450	40.5	54.0	1.20	1.30
1800	40.0	53.3	1.40	1.52
2450	39.2	52.7	1.80	1.95
3000	38.5	52.0	2.40	2.73
5800	35.3	48.2	5.27	6.00

**LIQUID MEASUREMENT RESULTS**


Date	Ambient condition		Body Simulating Liquid		Parameters	Target	Measured	Deviation [%]	Limited [%]
	Temp. [°C]	Humidity [%]	Frequency	Temp. [°C]					
2020-04-13	21.4	43	2450 MHz	21.1	Permittivity:	52.7	53.11	0.78	±5
					Conductivity:	1.95	1.98	1.54	±5
2020-04-14	21.6	49	5200 MHz	21.3	Permittivity:	49.0	49.76	1.55	±5
					Conductivity:	5.30	5.32	0.38	±5
2020-04-16	23.1	50	5400 MHz	22.7	Permittivity:	48.70	48.25	-0.92	±5
					Conductivity:	5.53	5.49	-0.72	±5
2020-04-17	22.7	48	5600 MHz	22.4	Permittivity:	48.5	48.93	0.89	±5
					Conductivity:	5.77	5.81	0.69	±5
2020-04-20	22.9	51	5800 MHz	22.7	Permittivity:	48.2	47.86	-0.71	±5
					Conductivity:	6.00	6.13	2.17	±5



5. SAR System Validation

5.1 Validation System

Each MVG system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the MVG software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder. The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

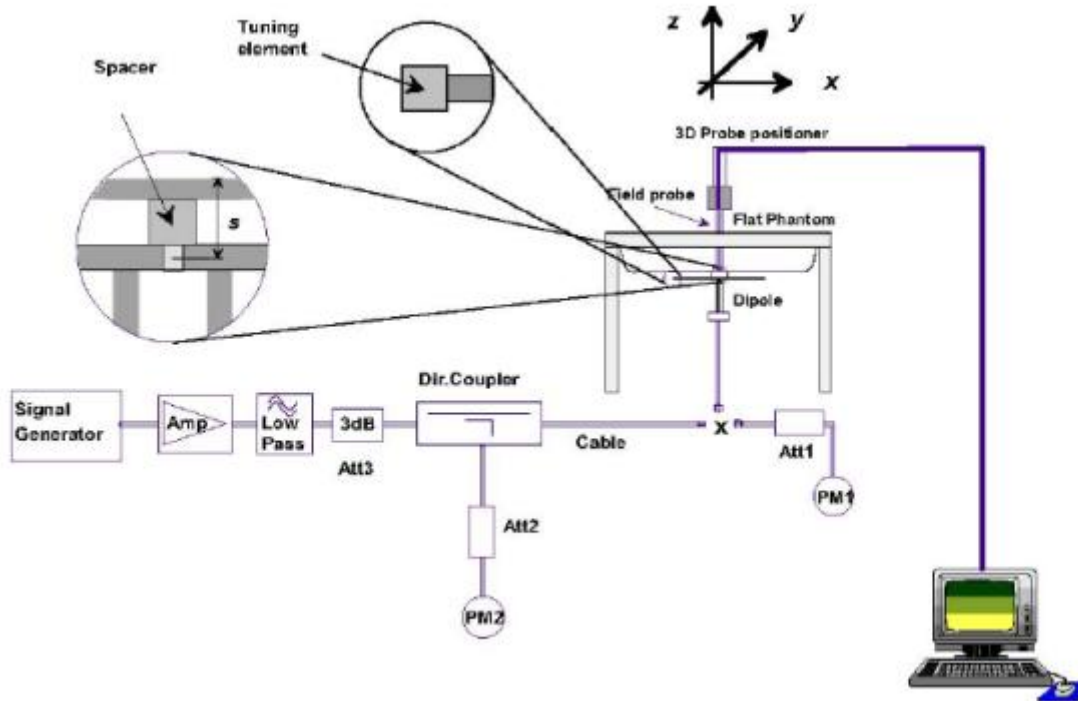

5.2 Validation Result

Comparing to the original SAR value provided by MVG, the validation data should be within its specification of 10 %.

Freq.(MHz)	Power(mW)	Tested Value (W/Kg)	Normalized SAR (W/kg/W)	Target (W/Kg/W)	Tolerance(%)	Date
2450 Body	100	5.473	54.73	52.4	4.45	2020-04-13
5200 Body	100	15.834	158.34	159	-0.42	2020-04-14
5400 Body	100	17.297	172.97	166.4	3.95	2020-04-16
5600 Body	100	17.815	178.15	173.8	2.50	2020-04-17
5800 Body	100	18.073	180.73	181.2	-0.26	2020-04-20

Note:

1. The tolerance limit of System validation $\pm 10\%$.
2. The dipole input power (forward power) was 100 mW.
3. The results are normalized to 1 W input power.



6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:

The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.


➤ Area Scan & Zoom Scan

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

7. EUT Antenna Location Sketch

It is a Rugged Tablet PC, support GSM/WCDMA/LTE mode.

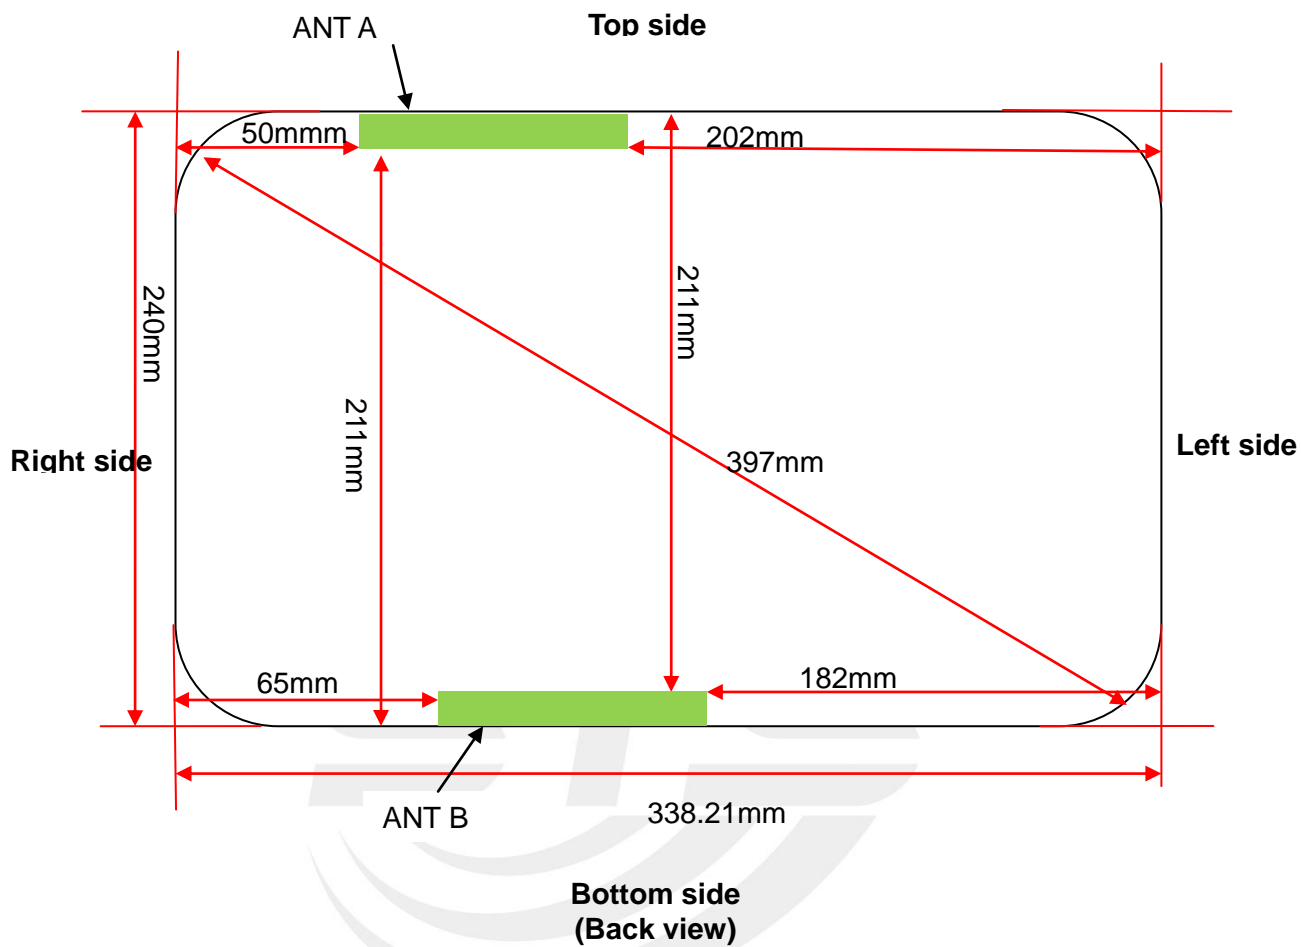

 WLAN/BT Antenna

Note:

1. The antenna information refer the manufacturer provide report, applicable only to the tested sample identified in the report.



7.1 SAR test exclusion consider table

According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz~6GHz and≤50mm>table, this device SAR test configurations consider as following:

Band	Mode	Maxim um power		Test Position Configurations				
		dBm	mW	Back Side	Left Edge	Right Edge	Top Edge	Bottom Edge
WLAN 2.4 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			10	1616	96	10	1706
	802.11b	19	79.433	Yes	No	No	Yes	No
WLAN 2.4 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			10	1416	246	1706	10
	802.11b	19	79.433	Yes	No	No	No	Yes
WLAN 2.4 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			10	1616	96	10	1706
	802.11n	18	63.096	Yes	No	No	Yes	No
WLAN 2.4 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			10	1416	246	1706	10
	802.11n	18	63.096	Yes	No	No	No	Yes
WLAN 5.2 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			7	1586	66	7	1676
	802.11a	11	12.589	Yes	No	No	Yes	No
WLAN 5.2 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			7	1386	216	1676	7
	802.11a	13	19.953	Yes	No	No	No	Yes
WLAN 5.2 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			7	1586	66	7	1676
	802.11n	12	15.849	Yes	No	No	Yes	No
WLAN 5.2 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			7	1386	216	1676	7
	802.11n	12	15.849	Yes	No	No	No	Yes
WLAN 5.3 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			6	1585	65	6	1675
	802.11a	12	15.849	Yes	No	No	Yes	No
WLAN 5.3 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			6	1386	215	1675	6
	802.11a	13	19.953	Yes	No	No	No	Yes



WLAN 5.3 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			6	1585	65	6	1675
	802.11n	12	19.953	Yes	No	No	Yes	No
WLAN 5.3 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			6	1386	215	1675	6
	802.11n	12	15.849	Yes	No	No	No	Yes
WLAN 5.6 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			6	1585	65	6	1675
	802.11a	12	15.849	Yes	No	No	Yes	No
WLAN 5.6 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			6	1386	215	1675	6
	802.11a	12	15.849	Yes	No	No	No	Yes
WLAN 5.6 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			6	1585	65	6	1675
	802.11ac	12	15.849	Yes	No	No	Yes	No
WLAN 5.6 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			6	1386	215	1675	6
	802.11ac	12	15.849	Yes	No	No	No	Yes
WLAN 5.8 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			6	1582	62	6	1672
	802.11a	12	15.849	Yes	No	No	Yes	No
WLAN 5.8 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			6	1383	212	1672	6
	802.11a	13	19.953	Yes	No	No	No	Yes
WLAN 5.8 G ANT A	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			6	1582	62	6	1672
	802.11ac	13	19.953	Yes	No	No	Yes	No
WLAN 5.8 G ANT B	Distance to User			<5mm	182mm	65mm	211mm	<5mm
	exclusion threshold			6	1383	212	1672	6
	802.11ac	13	19.953	Yes	No	No	No	Yes
Bluetooth	Distance to User			<5mm	202mm	50mm	<5mm	211mm
	exclusion threshold			10	1616	96	10	1706
	GFSK	6	3.981	No	No	No	No	No

**Note:**

1. Maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. Per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <5mm, 5mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance $\leq 50\text{mm}$ are determined by:
[(max. power of channel, including tune-up tolerance, Mw)/(min. test separation distance, mm)]* $\sqrt{f(\text{GHZ})} \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR ,f(GHz) is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison
For <50mm distance, we just calculate mW of the exclusion threshold value(3.0)to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
 - a)[threshold at 50mm in step 1]+(test separation distance -50mm)*(f (MHz)/150)]Mw, at 100 MHz to 1500 MHz
 - b) [threshold at 50mm in step1]+(test separation distance -50mm) *10]mW at > 1500MHz and $\leq 6\text{GHz}$
6. Per KDB 447498 D02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/ HSUPA/DC-HSDPA output power is<0.25db higher than RMC 12.2Kbps,or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/Kg}$, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
7. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine futher SAR exclusion 8.for each frequency band,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.
8. Per KDB 616217 D04 Exposures from antennas through the front (top) surface of the display section of a full-size tablet, away from the edges, are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary.


8. EUT Test Position

This EUT was tested in Front Face and Rear Face.

8.1 Define Two Imaginary Lines on The Handset

Body-worn Position Conditions:

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported SAR* for a body-worn accessory, measured without a headset connected to the handset, is $> 1.2 \text{ W/kg}$, the highest *reported SAR* configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

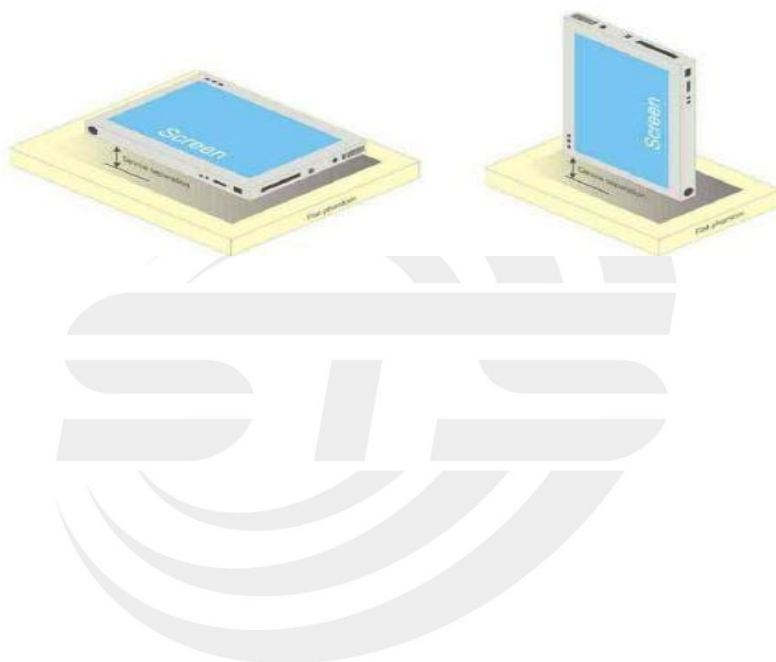



9. Uncertainty

9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Uncertainty Component	Tol (+- %)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.28	0.28	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	$\sqrt{0.5}$	$\sqrt{0.5}$	0.43	0.43	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0	R	$\sqrt{3}$	1	1	0	0	∞
Integration Time	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
Test sample Related								
Test sample positioning	2.6	N	1	1	1	2.6	2.6	∞
Device holder uncertainty	3	N	1	1	1	3	3	∞
SAR drift measurement	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
SAR scaling	5	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Phantom and tissue parameters								
Phantom uncertainty (shape and thickness uncertainty)	4	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.79	9.59	
Expanded Uncertainty (95% Confidence interval)		K=2				19.58	19.18	



9.2 System validation Uncertainty

Uncertainty Component	Tol (+-%)	Prob. Dist.	Div.	Ci (1g)	Ci (10g)	1g Ui (+-%)	10g Ui (+-%)	vi
Measurement System								
Probe calibration	5.831	N	1	1	1	5.83	5.83	∞
Axial Isotropy	0.695	R	$\sqrt{3}$	1	1	0.40	0.40	∞
Hemispherical Isotropy	1.045	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.685	R	$\sqrt{3}$	1	1	0.40	0.40	∞
System detection limits	1.0	R	$\sqrt{3}$	1	1	0.58	0.58	∞
Modulation response	3.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Readout Electronics	0.021	N	1	1	1	0.021	0.021	∞
Response Time	0.0	R	$\sqrt{3}$	0	0	0.00	0.00	∞
Integration Time	1.4	R	$\sqrt{3}$	0	0	0.00	0.00	∞
RF ambient conditions-Noise	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
RF ambient conditions-reflections	3.0	R	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe positioner mechanical tolerance	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Probe positioning with respect to phantom shell	1.4	R	$\sqrt{3}$	1	1	0.81	0.81	∞
Post-Processing	2.3	R	$\sqrt{3}$	1	1	1.33	1.33	∞
System validation source								
Deviation of experimental dipole from numerical dipole	5.0	N	1	1	1	5.00	5.00	∞
Input power and SAR drift measurement	5.0	R	$\sqrt{3}$	1	1	2.89	2.89	∞
Other source contribution Uncertainty	2.0	R	$\sqrt{3}$	1	1	1.15	1.15	∞
Phantom and set-up								
Phantom uncertainty (shape and thickness uncertainty)	4.0	R	$\sqrt{3}$	1	1	2.31	2.31	∞
Uncertainty in SAR correction for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.90	1.60	∞
Liquid conductivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.78	0.71	1.13	1.02	∞
Liquid conductivity (measured)	4	N	1	0.78	0.71	3.12	2.84	M
Liquid permittivity (temperature uncertainty)	2.5	R	$\sqrt{3}$	0.23	0.26	0.33	0.38	∞
Liquid permittivity (measured)	5	N	1	0.23	0.26	1.15	1.30	M
Combined Standard Uncertainty		RSS				9.718	9.517	
Expanded Uncertainty (95% Confidence interval)		K=2				19.44	19.04	



10. Conducted Power Measurement

10.1 Test Result (Intel Module)

WLAN (2.4Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			Antenna A	Antenna B	Antenna A+B
802.11b	1	2412	18.65	18.65	N/A
	6	2437	18.45	18.79	N/A
	11	2462	18.46	18.61	N/A
802.11g	1	2412	14.97	15.06	N/A
	6	2437	14.86	15.16	N/A
	11	2462	14.87	15.07	N/A
802.11n20(HT0)	1	2412	14.94	14.99	17.98
	6	2437	14.80	15.08	17.95
	11	2462	14.79	15.00	17.91
802.11n40(HT0)	3	2422	14.82	15.11	17.98
	6	2437	14.72	14.92	17.83
	9	2452	14.74	14.90	17.83



**WLAN (5.2Gband)**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11a	36	5180	10.81	12.47	N/A
	40	5200	10.77	12.07	N/A
	48	5240	10.58	12.06	N/A
802.11 n20-HT0	36	5180	8.23	9.56	11.96
	40	5200	7.88	9.15	11.57
	48	5240	7.89	9.14	11.57
802.11 n40-HT0	38	5190	8.23	9.39	11.86
	46	5230	7.81	9.01	11.46
802.11 ac20-VHT0	36	5180	7.97	9.05	11.56
	40	5200	7.63	8.55	11.13
	48	5240	7.57	8.60	11.13
802.11 ac40-VHT0	38	5190	8.22	9.53	11.94
	46	5230	7.82	9.43	11.71
802.11 ac80-VHT0	42	5210	5.48	7.26	9.47

WLAN (5.3Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11a	52	5260	10.96	12.23	N/A
	60	5300	10.83	12.09	N/A
	64	5320	11.15	11.94	N/A
802.11 n20-HT0	52	5260	8.05	9.31	11.74
	60	5300	8.20	9.19	11.74
	64	5320	8.23	9.01	11.65
802.11 n40-HT0	54	5270	8.08	9.26	11.72
	62	5310	8.21	9.06	11.66
802.11 ac20-VHT0	52	5260	7.90	9.12	11.57
	60	5300	8.06	9.02	11.58
	64	5320	7.86	8.87	11.41
802.11 ac40-VHT0	54	5270	8.07	9.05	11.60
	62	5310	8.24	8.95	11.62
802.11 ac80-VHT0	58	5290	5.76	7.42	9.68

**WLAN (5.6Gband)**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11a	100	5500	11.34	11.53	N/A
	116	5580	11.15	11.82	N/A
	140	5700	10.81	12.45	N/A
802.11 n20-HT0	100	5500	8.53	8.91	11.74
	116	5580	8.53	8.95	11.76
	140	5700	7.92	9.46	11.77
802.11 n40-HT0	102	5510	8.57	8.80	11.70
	110	5550	8.53	8.74	11.65
	134	5670	7.90	9.30	11.67
802.11 ac20-VHT0	100	5500	8.40	8.43	11.43
	116	5580	8.40	8.63	11.53
	140	5700	7.79	9.15	11.53
802.11 ac40-VHT0	102	5510	8.64	8.73	11.69
	110	5550	8.69	8.76	11.73
	134	5670	8.30	8.95	11.64
802.11 ac80-VHT0	106	5530	6.52	7.63	10.12
	122	5610	5.81	7.45	9.72

WLAN (5.8Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)		
			ANT A	ANT B	ANT A+B
802.11a	149	5745	10.99	12.64	N/A
	157	5785	10.98	12.63	N/A
	165	5825	11.32	12.67	N/A
802.11 n20-HT0	149	5745	8.53	10.37	12.56
	157	5785	8.69	10.39	12.64
	165	5825	9.11	10.40	12.82
802.11 n40-HT0	151	5755	8.69	10.40	12.64
	159	5795	8.79	10.37	12.66
802.11 ac20-VHT0	149	5745	8.80	10.45	12.72
	157	5785	8.83	10.44	12.72
	165	5825	9.20	10.59	12.97
802.11 ac40-VHT0	151	5755	8.76	10.38	12.65
	159	5795	8.82	10.26	12.61
802.11 ac80-VHT0	155	5775	5.42	7.68	9.71

**Bluetooth**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	4.24
	39	2441	4.95
	78	2480	5.12
$\pi/4$ -DQPSK(2Mbps)	0	2402	2.36
	39	2441	2.26
	78	2480	2.34
8DPSK(3Mbps)	0	2402	2.36
	39	2441	2.26
	78	2480	2.31

BLE

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
GFSK(1Mbps)	0	2402	3.97
	19	2440	3.93
	39	2480	4.03
GFSK(2Mbps)	0	2402	3.77
	19	2440	3.79
	39	2480	3.88



10.2 Test Result (Realtek Module)

WLAN (2.4Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11b	1	2412	17.81
	6	2437	17.29
	11	2462	16.61
802.11g	1	2412	10.87
	6	2437	10.54
	11	2462	9.83
802.11n20(HT0)	1	2412	9.91
	6	2437	9.42
	11	2462	8.89
802.11n40(HT0)	3	2422	9.68
	6	2437	9.39
	9	2452	9.14

WLAN (5.2Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11a	36	5180	7.42
	40	5200	7.66
	48	5240	8.26
802.11 n20-HT0	36	5180	7.11
	40	5200	7.43
	48	5240	7.91
802.11 n40-HT0	38	5190	7.08
	46	5230	7.87
802.11 ac20-VHT0	36	5180	7.31
	40	5200	7.66
	48	5240	7.93
802.11 ac40-VHT0	38	5190	7.06
	46	5230	7.74
802.11 ac80-VHT0	42	5210	7.56

**WLAN (5.3Gband)**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11a	52	5260	8.55
	60	5300	8.66
	64	5320	8.54
802.11 n20-HT0	52	5260	8.16
	60	5300	8.38
	64	5320	8.24
802.11 n40-HT0	54	5270	8.34
	62	5310	8.29
802.11 ac20-VHT0	52	5260	8.55
	60	5300	8.61
	64	5320	8.65
802.11 ac40-VHT0	54	5270	8.06
	62	5310	8.25
802.11 ac80-VHT0	58	5290	8.21

WLAN (5.6Gband)

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11a	100	5500	8.29
	116	5580	7.77
	140	5700	7.53
802.11 n20-HT0	100	5500	8.04
	116	5580	7.65
	140	5700	7.91
802.11 n40-HT0	102	5510	8.00
	110	5550	7.66
	134	5670	7.46
802.11 ac20-VHT0	100	5500	8.11
	116	5580	7.65
	140	5700	7.47
802.11 ac40-VHT0	5510	16.48	7.75
	5550	16.47	7.67
	5670	16.24	7.42
802.11 ac80-VHT0	134	5670	9.09
	106	5530	7.87

**WLAN (5.8Gband)**

Mode	Channel Number	Frequency (MHz)	Average Power (dBm)
802.11a	149	5745	7.93
	157	5785	8.37
	165	5825	8.58
802.11 n20-HT0	149	5745	7.73
	157	5785	8.05
	165	5825	8.17
802.11 n40-HT0	151	5755	7.76
	159	5795	8.10
802.11 ac20-VHT0	149	5745	7.94
	157	5785	8.26
	165	5825	8.66
802.11 ac40-VHT0	151	5755	7.82
	159	5795	8.21
802.11 ac80-VHT0	155	5775	7.94



11. EUT and Test Setup Photo

11.1 EUT Photo

Front side



Back side



Top Edge



Bottom Edge



Left Edge



Right Edge



11.2 Setup Photo

Body Back side(separation distance is 0mm)



Top Edge(separation distance is 0mm)



Bottom Edge(separation distance is 0mm)



Liquid depth (15 cm)





12. SAR Result Summary

12.1 Body SAR

Intel Module

Band	Mode	Antenna	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11b	A	Back side	1	0.194	1.80	19	18.65	100	0.210	1
			Top Edge	1	0.081	2.28	19	18.65	100	0.088	/
		B	Back side	6	0.317	1.55	19	18.79	100	0.333	2
			Bottom Edge	6	0.124	1.43	19	18.79	100	0.130	/
	802.11n	A	Back side	1	0.103	3.24	18	17.98	100	0.103	3
			Top Edge	1	0.045	0.83	18	17.98	100	0.045	/
		B	Back side	1	0.167	0.84	18	17.98	100	0.168	4
			Bottom Edge	1	0.059	-2.94	18	17.98	100	0.059	/

Note:

- The test separation of all above table is 0mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was 0.144 W/Kg for Body)



Band	Mode	Antenna	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle (%)	Scaled SAR (W/Kg)	Meas. No.
5.2G WLAN	802.11a	A	Back side	36	0.781	-2.89	11	10.81	100	0.816	5
			Back side	40	0.746	2.14	11	10.77	100	0.787	/
			Back side	48	0.681	-0.52	11	10.58	100	0.750	/
		Top Edge	36	0.253	0.37	11	10.81	100	0.264	/	
		B	Back side	36	0.201	-1.94	13	12.47	100	0.227	6
			Bottom Edge	36	0.084	2.88	13	12.47	100	0.095	/
	802.11n	A	Back side	36	0.383	-0.65	12	11.96	100	0.387	7
			Top Edge	36	0.117	2.05	12	11.96	100	0.118	/
		B	Back side	36	0.193	-0.03	12	11.96	100	0.195	8
			Bottom Edge	36	0.076	-1.25	12	11.96	100	0.077	/

Band	Mode	Antenna	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle (%)	Scaled SAR (W/Kg)	Meas. No.
5.3G WLAN	802.11a	A	Back side	64	0.536	-1.83	12	11.15	100	0.652	9
			Top Edge	64	0.218	2.96	12	11.15	100	0.265	/
		B	Back side	52	0.432	2.92	13	12.23	100	0.516	10
			Bottom Edge	52	0.156	3.47	13	12.23	100	0.186	/
	802.11n	A	Back side	60	0.405	-1.31	12	11.74	100	0.430	11
			Top Edge	60	0.127	2.04	12	11.74	100	0.135	/
		B	Back side	60	0.240	-3.59	12	11.74	100	0.255	12
			Bottom Edge	60	0.113	2.56	12	11.74	100	0.120	/



Band	Mode	Antenna	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle (%)	Scaled SAR (W/Kg)	Meas. No.
5.6G WLAN	802.11a	A	Back side	100	0.658	3.19	12	11.34	100	0.766	13
			Top Edge	100	0.284	0.73	12	11.34	100	0.331	/
		B	Back side	140	0.252	-1.69	13	12.45	100	0.286	14
			Bottom Edge	140	0.086	1.47	13	12.45	100	0.098	/
	802.11n	A	Back side	140	0.285	0.30	12	11.77	100	0.301	15
			Top Edge	140	0.097	1.73	12	11.77	100	0.102	/
		B	Back side	140	0.511	-3.95	12	11.77	100	0.539	16
			Bottom Edge	140	0.145	-1.73	12	11.77	100	0.153	/

Band	Mode	Antenna	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle (%)	Scaled SAR (W/Kg)	Meas. No.
5.8G WLAN	802.11a	A	Back side	165	0.567	-1.81	12	11.32	100	0.663	17
			Top Edge	165	0.212	-2.01	12	11.32	100	0.248	/
		B	Back side	165	0.405	-1.72	13	12.67	100	0.437	18
			Bottom Edge	165	0.124	3.35	13	12.67	100	0.134	/
	802.11 ac	A	Back side	165	0.306	-0.89	13	12.97	100	0.308	19
			Top Edge	165	0.113	-1.40	13	12.97	100	0.114	/
		B	Back side	165	0.156	2.95	13	12.97	100	0.157	20
			Bottom Edge	165	0.084	3.67	13	12.97	100	0.085	/



Band	Mode	Scaled SAR (W/Kg)		A+B
		Antenna A	Antenna B	
WLAN 2.4G	802.11n	Antenna A	0.103	0.271
	802.11n	Antenna B	0.168	
WLAN 5.2G	802.11n	Antenna A	0.387	0.582
	802.11n	Antenna B	0.195	
WLAN 5.3G	802.11n	Antenna A	0.430	0.685
	802.11n	Antenna B	0.255	
WLAN 5.6G	802.11ac	Antenna A	0.301	0.840
	802.11ac	Antenna B	0.539	
WLAN 5.8G	802.11ac	Antenna A	0.308	0.465
	802.11ac	Antenna B	0.157	

Note:

1. The test separation of all above table is 0mm.
2. Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor

**Realtek Module:**

Band	Mode	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-up Power(dBm)	Meas.Output Power(dBm)	Duty cycle(%)	Scaled SAR (W/Kg)	Meas. No.
2.4G WLAN	802.11b	Back side	1	0.329	3.82	18	17.81	100	0.344	21
		Top Edge	1	0.147	-0.62	18	17.81	100	0.154	/
5.2G WLAN	802.11a	Back side	48	0.325	-2.01	9	8.26	100	0.385	22
		Top Edge	48	0.118	-1.94	9	8.26	100	0.140	/
5.3G WLAN	802.11a	Back side	60	0.443	1.25	9	8.66	100	0.479	23
		Top Edge	60	0.168	3.11	9	8.66	100	0.182	/
5.6G WLAN	802.11 ac	Back side	134	0.339	-3.82	9.1	9.09	100	0.340	24
		Top Edge	134	0.117	0.98	9.1	9.09	100	0.117	/
5.8G WLAN	802.11 ac	Back side	165	0.190	-1.12	9	8.66	100	0.205	25
		Top Edge	165	0.073	-2.79	9	8.66	100	0.079	/

Note:

- The test separation of all above table is 0mm.
- Per KDB 447498 D01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For WWAN: Scaled SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was 0.070 W/Kg for Body)



Repeated SAR Intel Module

Band	Mode	Antenna	Test Position	Ch.	Result 1g (W/Kg)	Power Drift(%)	Max.Turn-u p Power(dBm)	Meas.Output Power(dBm)	Scaled SAR (W/Kg)	Meas. No.
5.2G WLAN	802.11a	A	Back Side	36	0.754	1.38	11	10.81	0.788	/

12.2 repeated SAR measurement

Intel Module

Band	Mode	Antenna	Test Position	Ch.	Original Measured SAR 1g(mW/g)	1 st Repeated SAR 1g	Ratio	Original Measured SAR 1g(mW/g)	2nd Repeated SAR 1g	Ratio
5.2G WLAN	802.11a	A	Back Side	36	0.781	0.754	1.04	-	-	-

Note:

1. Per KDB 865664 D01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/Kg.
2. Per KDB 865664 D01, if the ratio of largest to smallest SAR for the original and first repeated measurement is ≤ 1.2 and the measured SAR < 1.45 W/Kg, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/Kg
4. The ratio is the difference in percentage between original and repeated measured SAR.

**Simultaneous Multi-band Transmission Evaluation:**

1. For simultaneous transmission at head and body exposure position, 2 transmitters simultaneous transmission was the worst state.
2. Based upon KDB 447498 D01, BT SAR is excluded as below table.
3. If the test separation distance is <5mm, 5mm is used for excluded SAR calculation.
4. For minimum test separation distance $\leq 50\text{mm}$, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR
5. The reported SAR summation is calculated based on the same configuration and test position.
6. KDB 447498 / 4.3.2 (2) when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:
 - a) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f} (\text{GHz}) / x] \leq 3.0$ W/kg for test separation distances ≤ 50 mm; Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - b) 0.4W/Kg for 1-g SAR and 1.0W/Kg for 10-g SAR, when the separation distance is $>50\text{mm}$.

Estimated SAR		Maximum Power		Antenna to user(mm)	Frequency(GHz)	Stand alone SAR(1g) [W/kg]
		dBm	mW			
BT	Body	6	3.981	5	2.480	0.167

**Sum of the SAR for Wi-Fi and BT (Intel Module)**

Simultaneous Mode	Position	Mode	Max. 1-g SAR (W/kg)	1-g Sum SAR (W/kg)
2.4GHz WLAN ANT A + BT	Body	2.4GHz WLAN	0.210	0.377
		BT	0.167	
2.4GHz WLAN ANT B + BT	Body	2.4GHz WLAN	0.333	0.500
		BT	0.167	
2.4GHz WLAN ANT A+B + BT	Body	2.4GHz WLAN	0.271	0.438
		BT	0.167	
5.2GHz WLAN ANT A + BT	Body	5.2GHz WLAN	0.816	0.983
		BT	0.167	
5.2GHz WLAN ANT B + BT	Body	5.2GHz WLAN	0.227	0.394
		BT	0.167	
5.2GHz WLAN ANT A+B + BT	Body	5.2GHz WLAN	0.582	0.749
		BT	0.167	
5.3GHz WLAN ANT A + BT	Body	5.3GHz WLAN	0.652	0.819
		BT	0.167	
5.3GHz WLAN ANT B + BT	Body	5.3GHz WLAN	0.516	0.683
		BT	0.167	
5.3GHz WLAN ANT A+B + BT	Body	5.3GHz WLAN	0.685	0.852
		BT	0.167	
5.6GHz WLAN ANT A + BT	Body	5.6GHz WLAN	0.766	0.933
		BT	0.167	
5.6GHz WLAN ANT B + BT	Body	5.6GHz WLAN	0.286	0.453
		BT	0.167	
5.6GHz WLAN ANT A+B + BT	Body	5.6GHz WLAN	0.840	1.007
		BT	0.167	
5.8GHz WLAN ANT A + BT	Body	5.8GHz WLAN	0.663	0.830
		BT	0.167	
5.8GHz WLAN ANT B + BT	Body	5.8GHz WLAN	0.437	0.604
		BT	0.167	
5.8GHz WLAN ANT A+B + BT	Body	5.8GHz WLAN	0.465	0.632
		BT	0.167	



Sum of the SAR for Wi-Fi and BT (MIMO: Intel Module+ Realtek Module)

Simultaneous Mode	Position	Mode	Max. 1-g SAR (W/kg)	1-g Sum SAR (W/kg)
2.4GHz WLAN (Intel) ANT A + BT+2.4GHz WLAN(Realtek)	Body	2.4GHz WLAN+BT	0.377	0.721
		2.4GHz WLAN	0.344	
2.4GHz WLAN (Intel) ANT B + BT+2.4GHz WLAN(Realtek)	Body	2.4GHz WLAN+BT	0.500	0.844
		2.4GHz WLAN	0.344	
2.4GHz WLAN (Intel) ANT A+B + BT+2.4GHz WLAN(Realtek)	Body	2.4GHz WLAN+BT	0.438	0.782
		2.4GHz WLAN	0.344	
5.2GHz WLAN (Intel) ANT A + BT+5.2GHz WLAN(Realtek)	Body	5.2GHz WLAN+BT	0.983	1.368
		5.2GHz WLAN	0.385	
5.2GHz WLAN (Intel) ANT B + BT+5.2GHz WLAN(Realtek)	Body	5.2GHz WLAN+BT	0.394	0.779
		5.2GHz WLAN	0.385	
5.2GHz WLAN (Intel) ANT A+B + BT+5.2GHz WLAN(Realtek)	Body	5.2GHz WLAN+BT	0.749	1.134
		5.2GHz WLAN	0.385	
5.3GHz WLAN (Intel) ANT A + BT+5.3GHz WLAN(Realtek)	Body	5.3GHz WLAN+BT	0.819	1.298
		5.3GHz WLAN	0.479	
5.3GHz WLAN (Intel) ANT B + BT+5.3GHz WLAN(Realtek)	Body	5.3GHz WLAN+BT	0.683	1.162
		5.3GHz WLAN	0.479	
5.3GHz WLAN (Intel) ANT A+B + BT+5.3GHz WLAN(Realtek)	Body	5.2GHz WLAN+BT	0.852	1.331
		5.3GHz WLAN	0.479	
5.6GHz WLAN (Intel) ANT A + BT+5.6GHz WLAN(Realtek)	Body	5.6GHz WLAN+BT	0.933	1.273
		5.6GHz WLAN	0.340	
5.6GHz WLAN (Intel) ANT B + BT+5.6GHz WLAN(Realtek)	Body	5.6GHz WLAN+BT	0.453	0.793
		5.6GHz WLAN	0.340	
5.6GHz WLAN (Intel) ANT A+B + BT+5.6GHz WLAN(Realtek)	Body	5.6GHz WLAN+BT	1.007	1.347
		5.6GHz WLAN	0.340	
5.8GHz WLAN (Intel) ANT A + BT+5.8GHz WLAN(Realtek)	Body	5.8GHz WLAN+BT	0.830	1.035
		5.8GHz WLAN	0.205	
5.8GHz WLAN (Intel) ANT B + BT+5.8GHz WLAN(Realtek)	Body	5.8GHz WLAN+BT	0.604	0.809
		5.8GHz WLAN	0.205	
5.8GHz WLAN (Intel) ANT A+B + BT+5.8GHz WLAN(Realtek)	Body	5.8GHz WLAN+BT	0.632	0.837
		5.8GHz WLAN	0.205	
Max: 2.4GHz WLAN (Intel) + BT + 5GHz WLAN(Realtek)	Body	2.4GHz WLAN+BT	0.500	0.979
		5GHz WLAN	0.479	
Max: 2.4GHz WLAN (Intel) + BT + 2.4GHz WLAN(Realtek)		2.4GHz WLAN+BT	0.500	0.844
		2.4GHz WLAN	0.344	
Max: 5GHz WLAN (Intel) + BT + 2.4GHz WLAN(Realtek)	Body	5GHz WLAN+BT	1.007	1.351
		2.4GHz WLAN	0.344	
Max: 5GHz WLAN (Intel) + BT + 5GHz WLAN(Realtek)	Body	5GHz WLAN+BT	1.007	1.486
		5GHz WLAN	0.479	

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna.

When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR-1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR-1g 1.6 W/kg), SAR test exclusion is determined by the SPLSR.



13. Equipment List

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
2450MHzDipole	MVG	SID2450	SN 30/14 DIP2G450-335	2017.08.15	2020.08.14
Waveguide	SATIMO	SWG5500	SN 13/14 WGA32	2017.08.15	2020.08.14
E-Field Probe	MVG	SSE2	SN 41/18 EPGO334	2019.06.04	2020.06.03
Dielectric Probe Kit	MVG	SCLMP	SN 32/14 OCPG67	2019.11.25	2020.11.24
Antenna	MVG	ANTA3	SN 07/13 ZNTA52	N/A	N/A
Phantom1	MVG	SAM	SN 32/14 SAM115	N/A	N/A
Phantom2	MVG	SAM	SN 32/14 SAM116	N/A	N/A
Phone holder	MVG	N/A	SN 32/14 MSH97	N/A	N/A
Laptop holder	MVG	N/A	SN 32/14 LSH29	N/A	N/A
Attenuator	Agilent	99899	DC-18GHz	N/A	N/A
Directional coupler	Narda	4226-20	3305	N/A	N/A
Network Analyzer	Agilent	8753ES	US38432810	2019.10.11	2020.10.10
Multi Meter	Keithley	Multi Meter 2000	4050073	2019.10.11	2020.10.10
Signal Generator	Agilent	N5182A	MY50140530	2019.10.09	2020.10.08
Wireless Communication Test Set	Agilent	8960-E5515C	MY48360751	2019.10.09	2020.10.08
Wireless Communication Test Set	R&S	CMW500	117239	2019.10.09	2020.10.08
Power Amplifier	DESAY	ZHL-42W	9638	2019.10.09	2020.10.08
Power Meter	R&S	NRP	100510	2019.10.16	2020.10.15
Power Meter	Agilent	E4419B	QB43312265	2019.10.12	2020.10.11
Power Sensor	R&S	NRP-Z11	101919	2019.10.12	2020.10.11
Power Sensor	HP	E9300A	US39210170	2019.10.09	2020.10.08
Temperature hygrometer	SuWei	SW-108	N/A	2019.10.13	2020.10.12
Thermograph	Elitech	RC-4	S/N EF7176501537	2019.10.11	2020.10.10

Note:

Per KDB 865664 D01, Dipole SAR Validation Verification, STS LAB has adopted 3 years calibration intervals. On an annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole
2. System validation with specific dipole is within 10% of calibrated value
Return-loss in within 20% of calibrated measurement

Appendix A. System Validation Plots

System Performance Check Data (2450MHz Body)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2020-04-13

Experimental conditions.




Device Position	Validation plane
Band	2450 MHz
Channels	-
Signal	CW
Frequency (MHz)	2450
Relative permittivity	53.11
Conductivity (S/m)	1.98
Power drift (%)	-1.53
Probe	SN 41/18 EPGO334
ConvF	2.02
Crest factor:	1:1

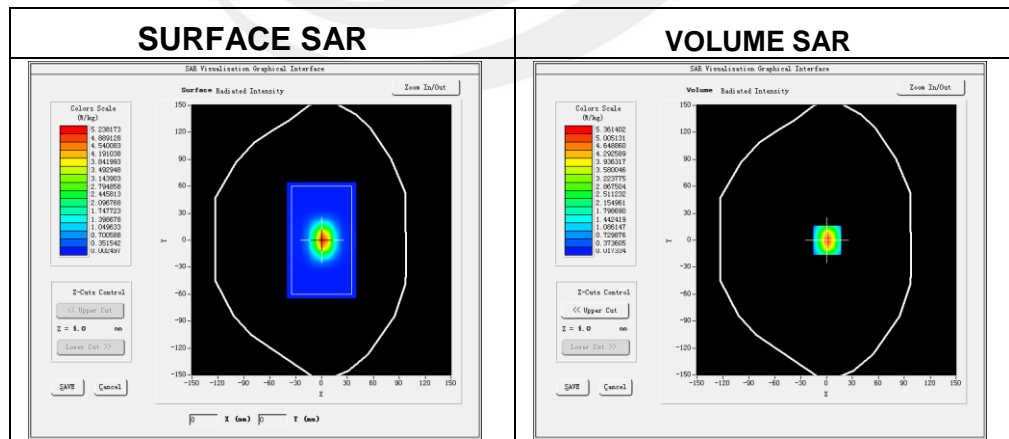

Maximum location: X=1.00, Y=0.00

SAR 10g (W/Kg)	2.536582
SAR 1g (W/Kg)	5.472517

Z Axis Scan

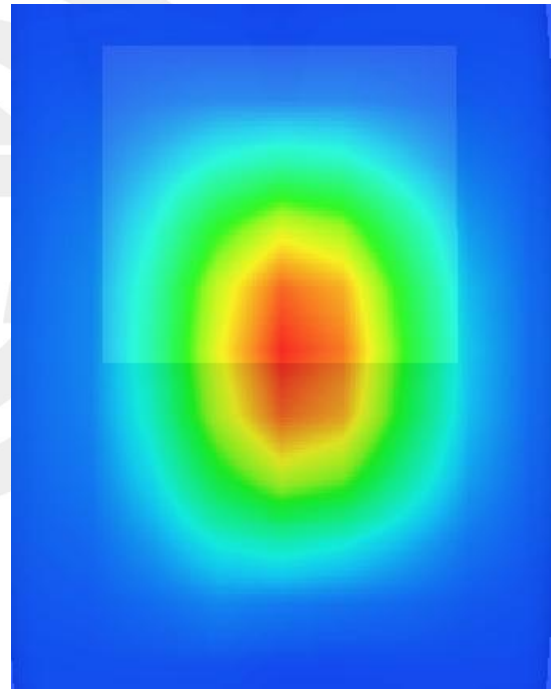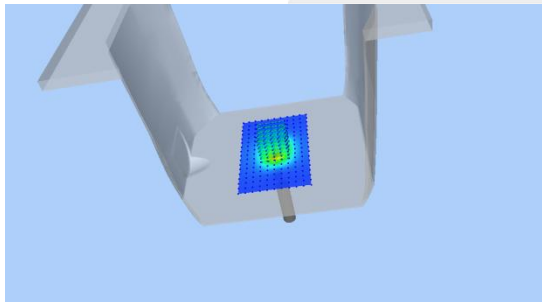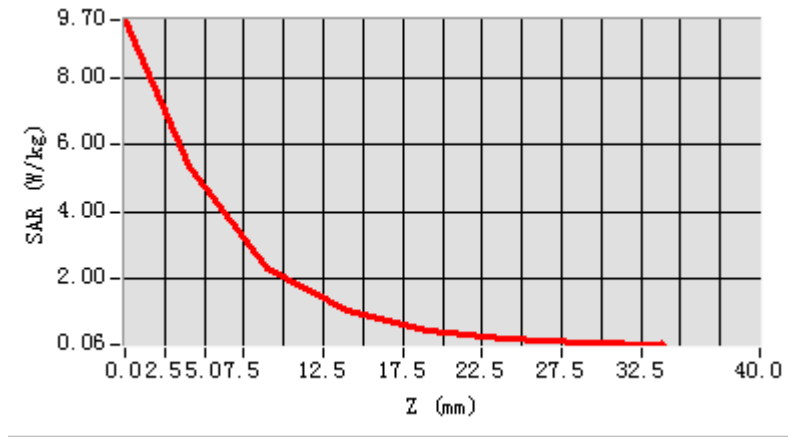


System Performance Check Data(5200MHz Body)

Type: Phone measurement (Complete)
 Area scan resolution: dx=8mm,dy=8mm
 Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm
 Date of measurement: 2020-04-14

Experimental conditions.


Device Position	Validation plane
Band	5200 MHz
Channels	-
Signal	CW
Frequency (MHz)	5200
Relative permittivity	49.76
Conductivity (S/m)	5.32
Power drift (%)	1.29
Probe	SN 41/18 EPGO334
ConvF	1.92
Crest factor:	1:1

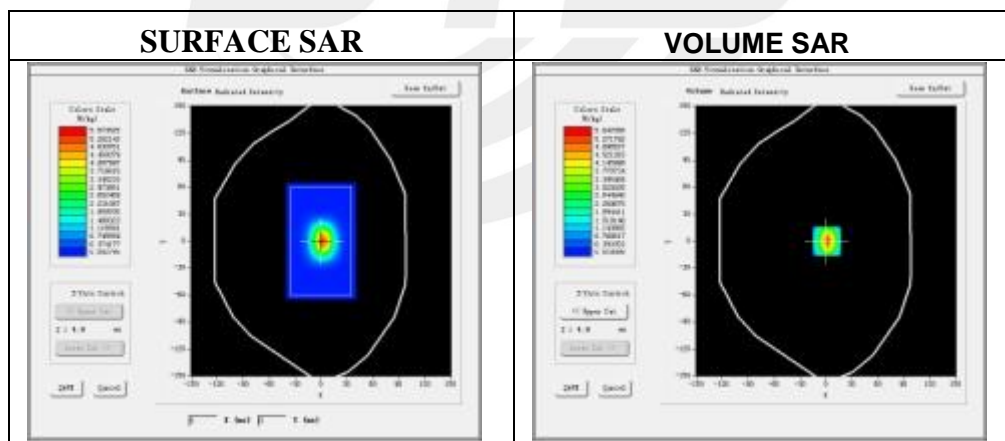

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	5.837146
SAR 1g (W/Kg)	15.834173

Z Axis Scan

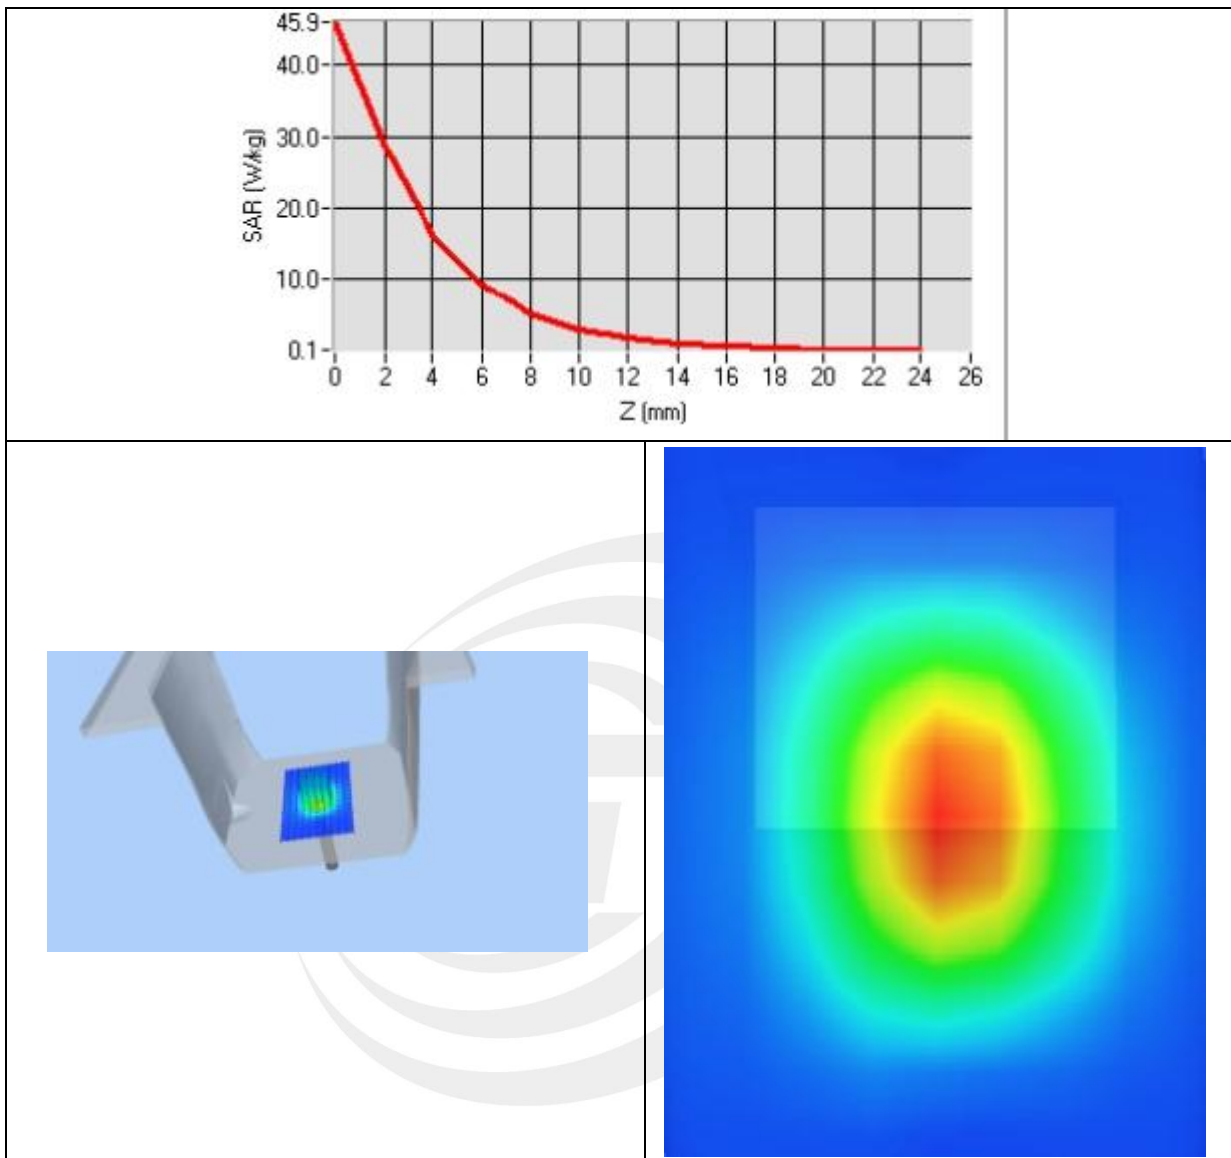

System Performance Check Data(5400MHz Body)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-04-16

Experimental conditions.


Device Position	Validation plane
Band	5400 MHz
Channels	-
Signal	CW
Frequency (MHz)	5400
Relative permittivity	48.25
Conductivity (S/m)	5.49
Power drift (%)	-0.93
Probe	SN 41/18 EPGO334
ConvF	2.12
Crest factor:	1:1

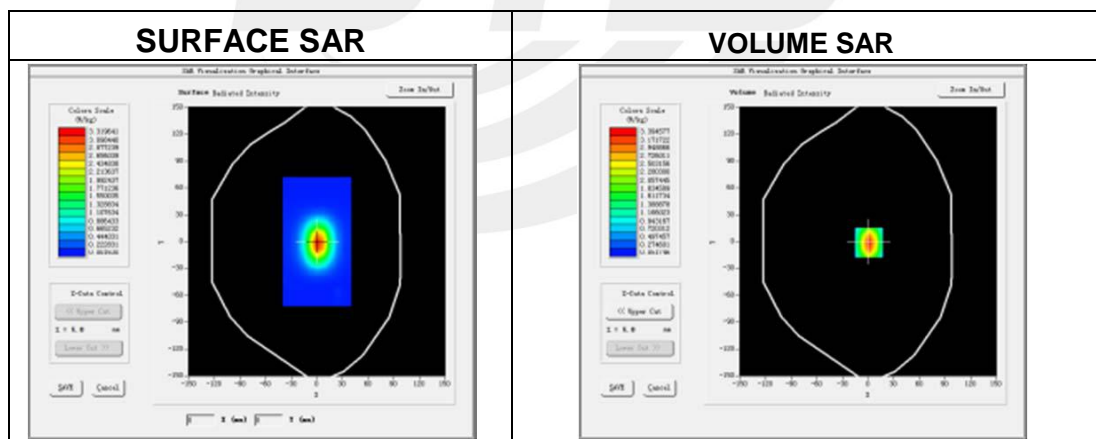

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	6.087115
SAR 1g (W/Kg)	17.296689

Z Axis Scan

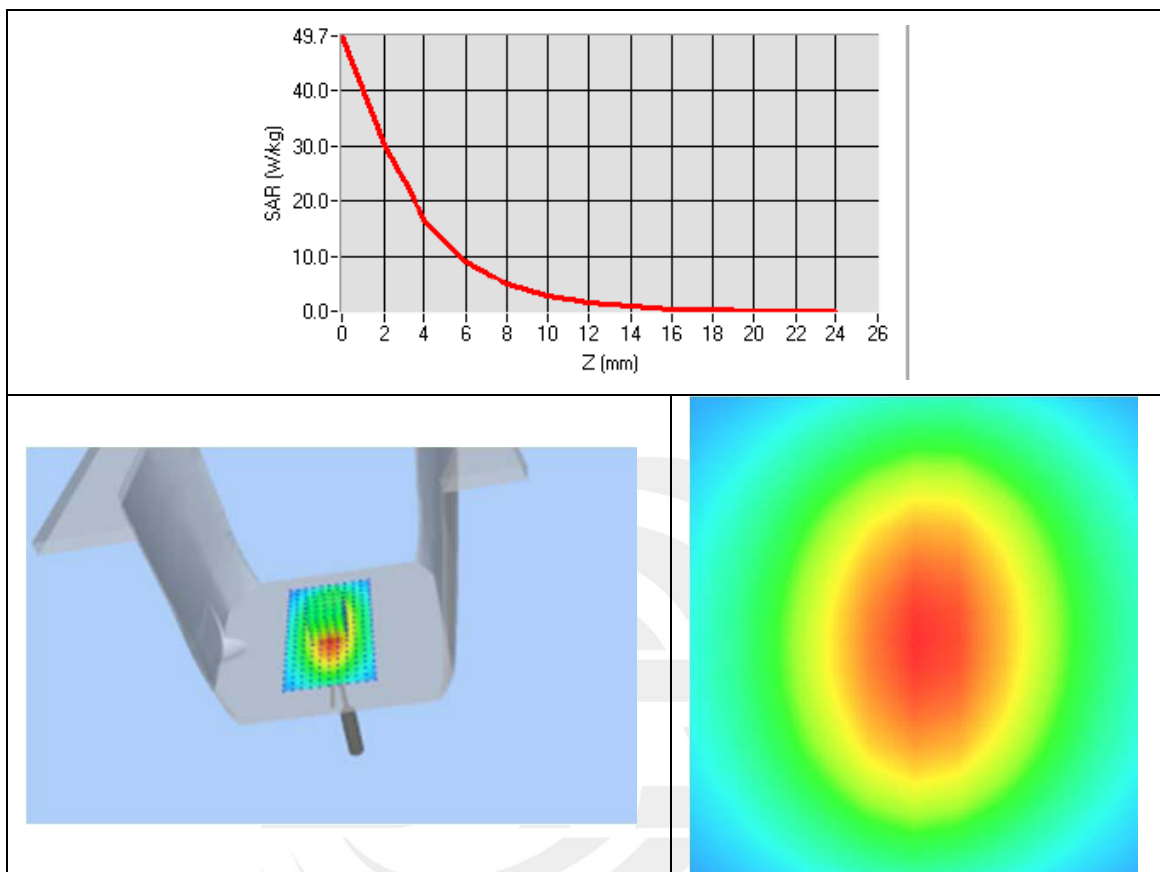

System Performance Check Data(5600MHz Body)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-04-17

Experimental conditions.


Device Position	Validation plane
Band	5600 MHz
Channels	-
Signal	CW
Frequency (MHz)	5600
Relative permittivity	48.93
Conductivity (S/m)	5.81
Power drift (%)	3.36
Probe	SN 41/18 EPGO334
ConvF	2.21
Crest factor:	1:1

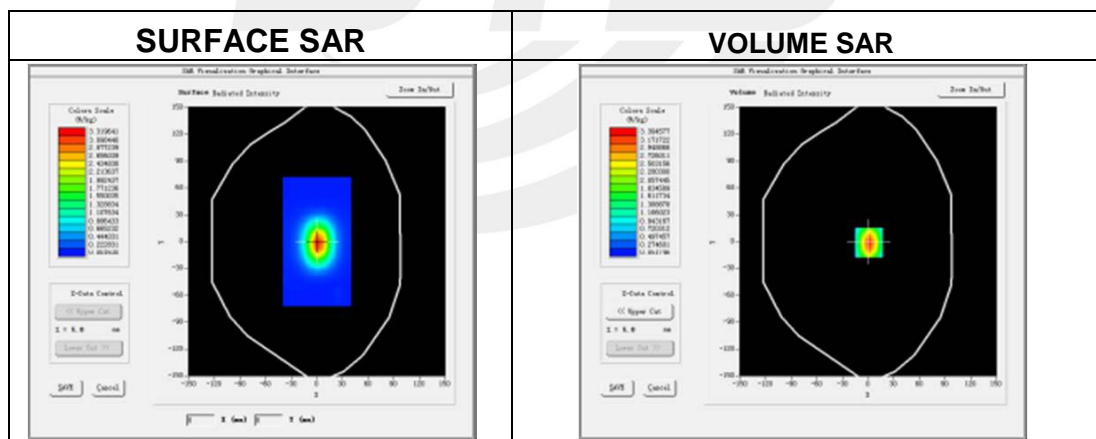

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	6.254793
SAR 1g (W/Kg)	17.814579

Z Axis Scan

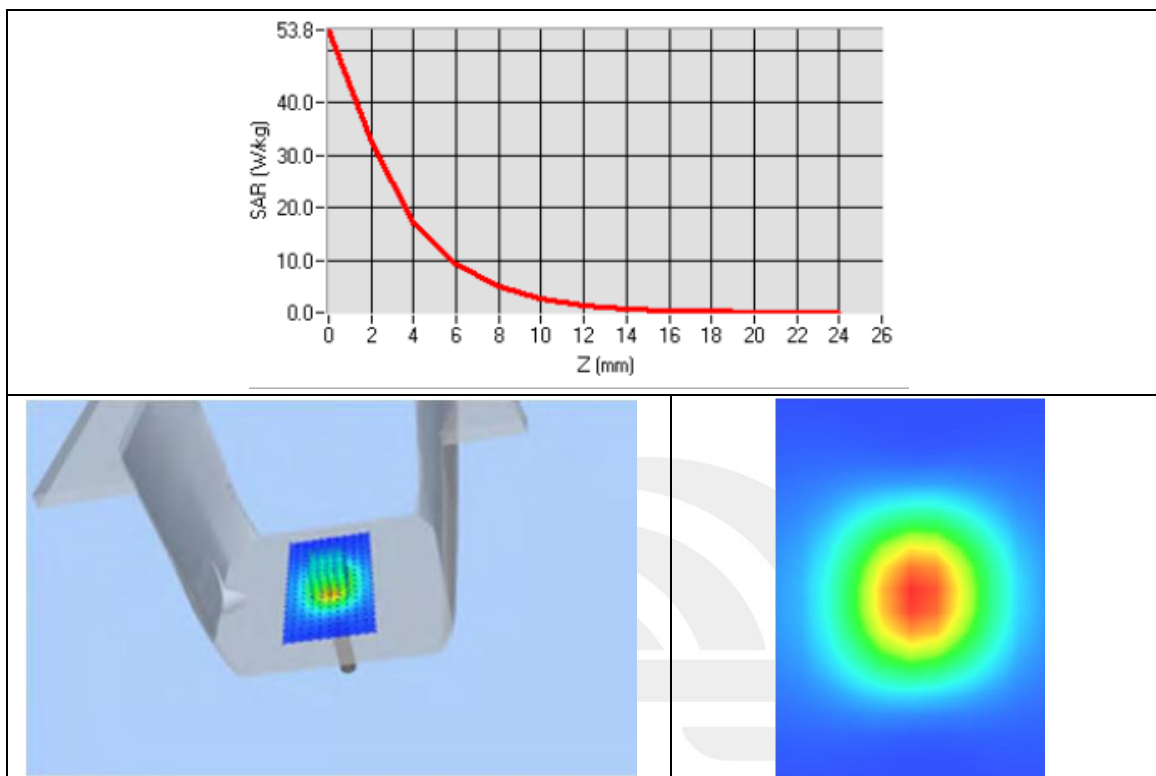

System Performance Check Data(5800MHz Body)

Type: Dipole measurement (Complete)


Area scan resolution: dx=8mm,dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement: 2020-04-20

Experimental conditions.


Device Position	Validation plane
Band	5800 MHz
Channels	-
Signal	CW
Frequency (MHz)	5800
Relative permittivity	47.86
Conductivity (S/m)	6.13
Power drift (%)	-0.57
Probe	SN 41/18 EPGO334
ConvF	2.16
Crest factor:	1:1

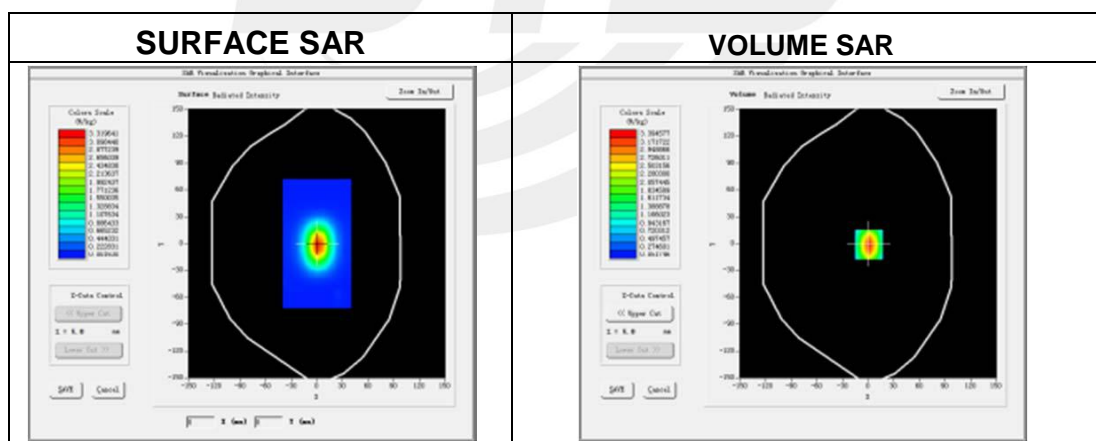

Maximum location: X=7.00, Y=2.00

SAR 10g (W/Kg)	6.178557
SAR 1g (W/Kg)	18.072811

Z Axis Scan

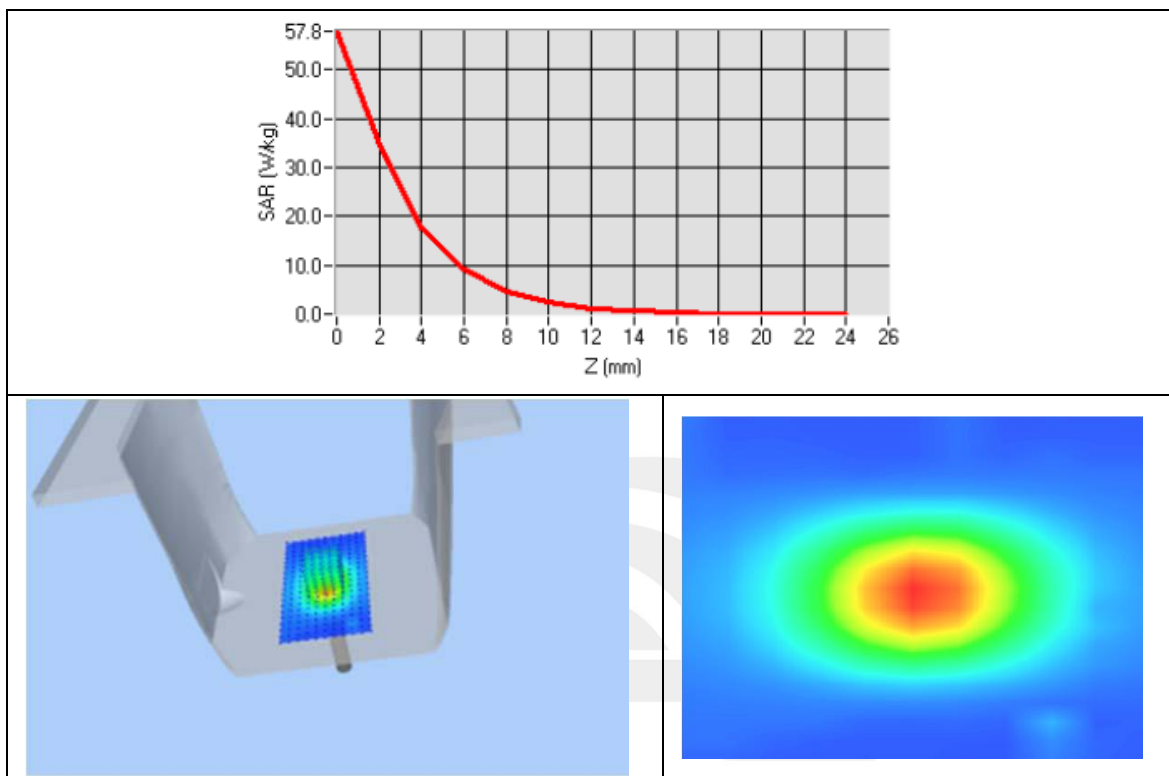


Appendix B. SAR Test Plots

Plot 1: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-13
Probe	SN 41/18 EPGO334
ConvF	2.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Channels	Low
Antenna	A
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.98
Variation (%)	1.80

Maximum location: X=15.00, Y=32.00
SAR Peak: 0.41 W/kg

SAR 10g (W/Kg)	0.070331
SAR 1g (W/Kg)	0.194400

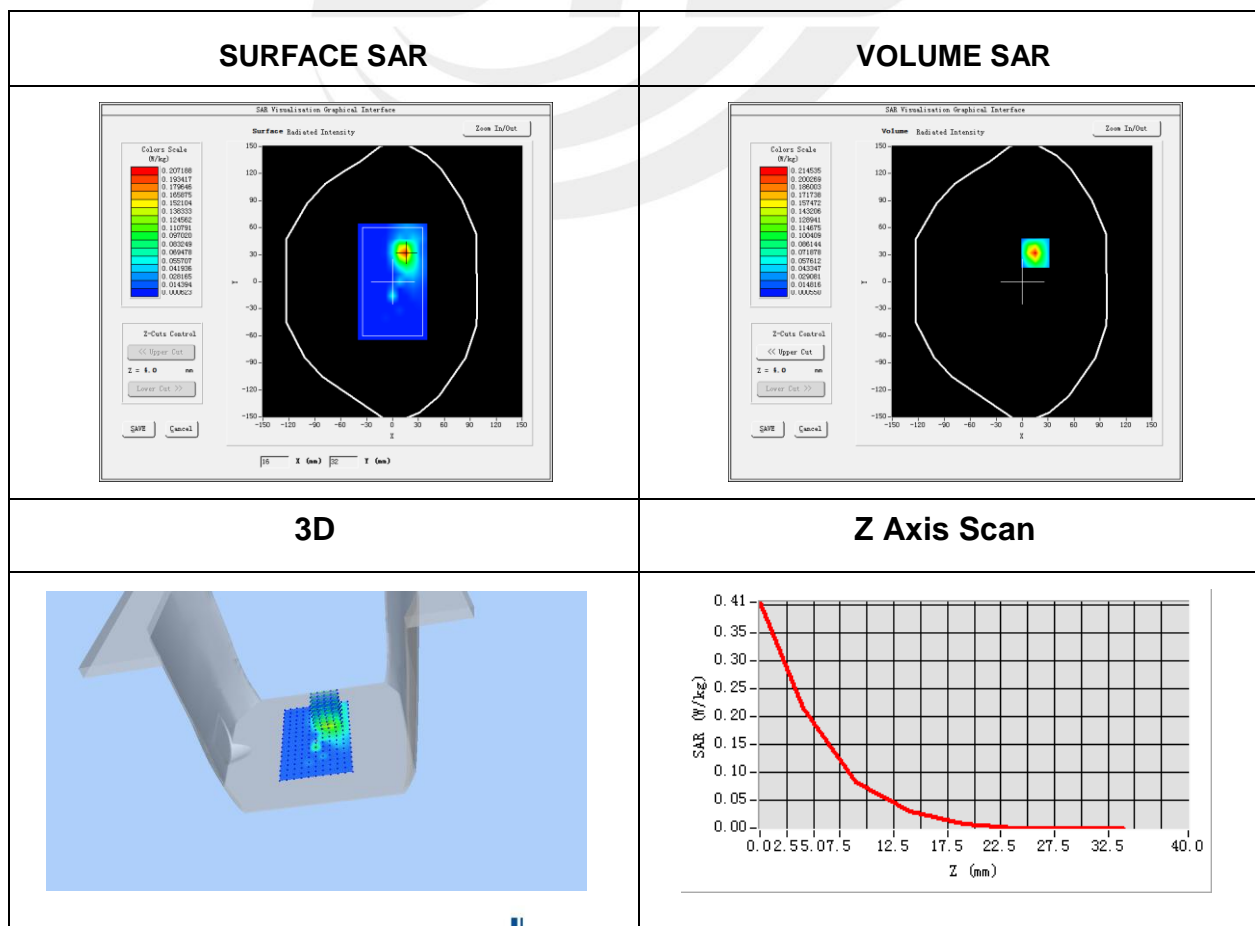


Plot 2: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-13
Probe	SN 41/18 EPGO334
ConvF	2.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Channels	Middle
Antenna	B
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2437
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.98
Variation (%)	1.55

Maximum location: X=6.00, Y=-7.00
SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.119118
SAR 1g (W/Kg)	0.317064

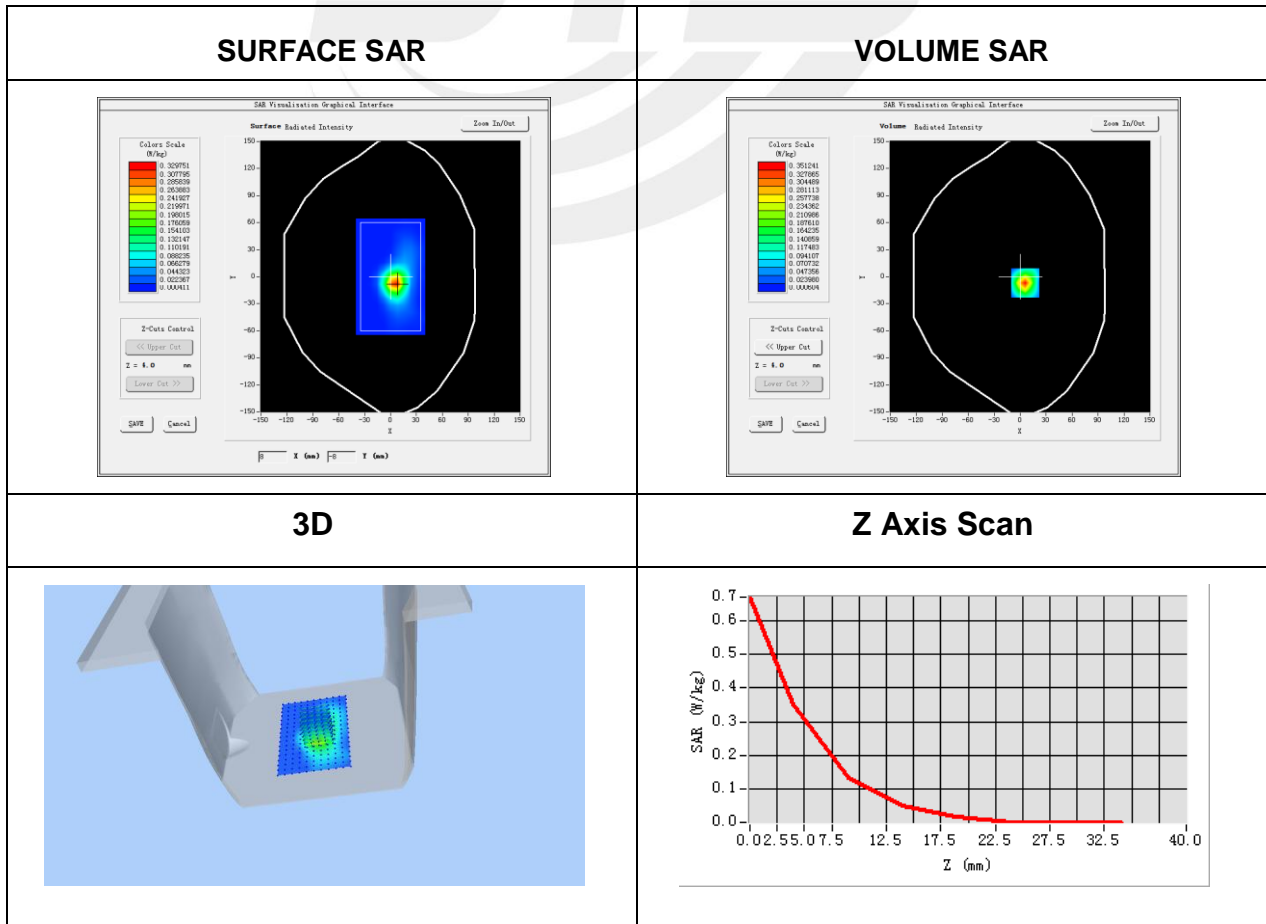


Plot 3: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-13
Probe	SN 41/18 EPGO334
ConvF	2.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n ISM
Channels	Low
Antenna	A
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.98
Variation (%)	3.24

Maximum location: X=7.00, Y=21.00

SAR Peak: 0.23 W/kg

SAR 10g (W/Kg)	0.035324
SAR 1g (W/Kg)	0.102587

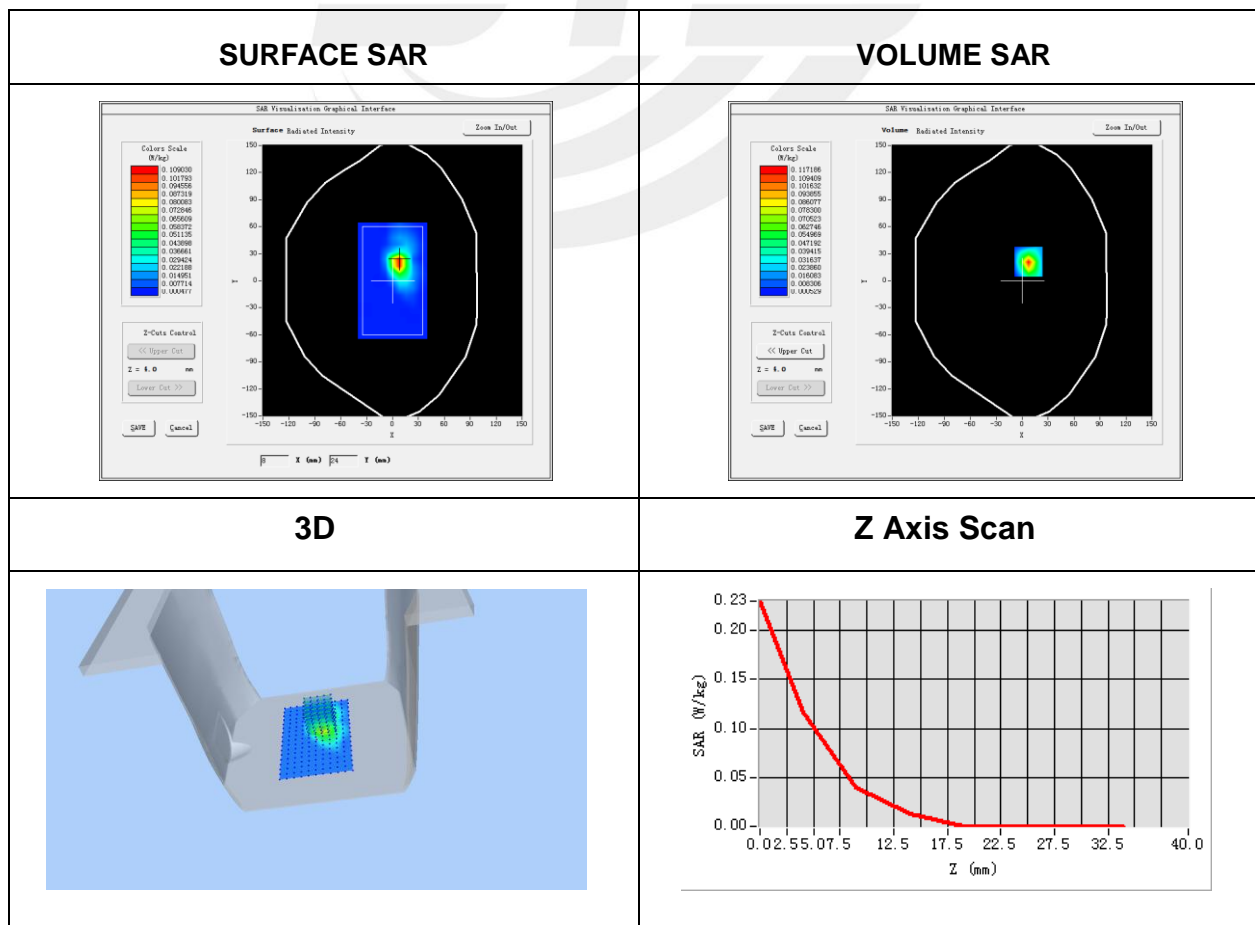


Plot 4: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-13
Probe	SN 41/18 EPGO334
ConvF	2.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n ISM
Channels	Low
Antenna	B
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.98
Variation (%)	0.84

Maximum location: X=22.00, Y=25.00
SAR Peak: 0.37 W/kg

SAR 10g (W/Kg)	0.057230
SAR 1g (W/Kg)	0.166987

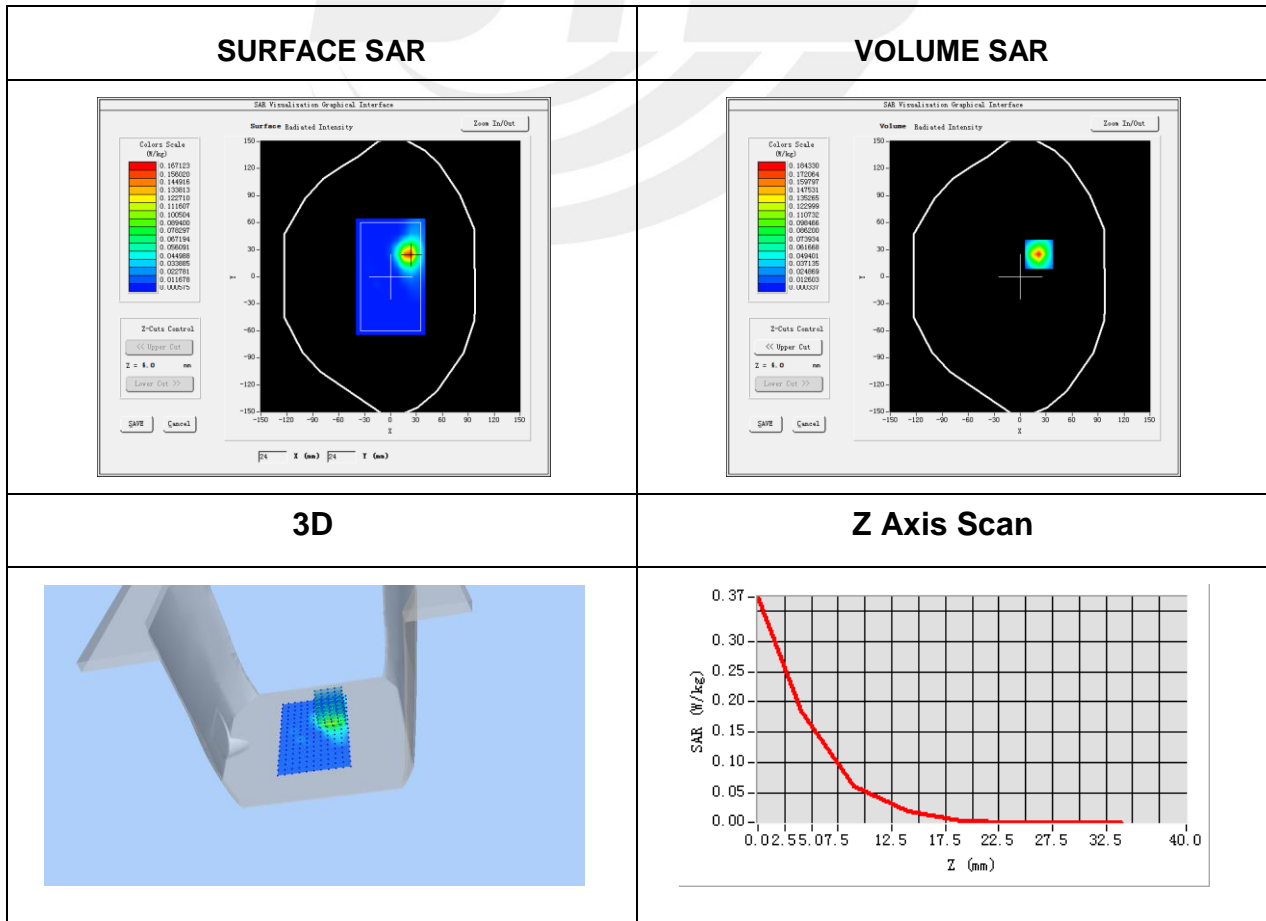


Plot 5: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-14
Probe	SN 41/18 EPGO334
ConvF	1.92
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM
Antenna	A
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	49.76
Conductivity (S/m)	5.32
Variation (%)	-2.89

Maximum location: X=-7.00, Y=31.00
SAR Peak: 2.81 W/kg

SAR 10g (W/Kg)	0.204621
SAR 1g (W/Kg)	0.780726

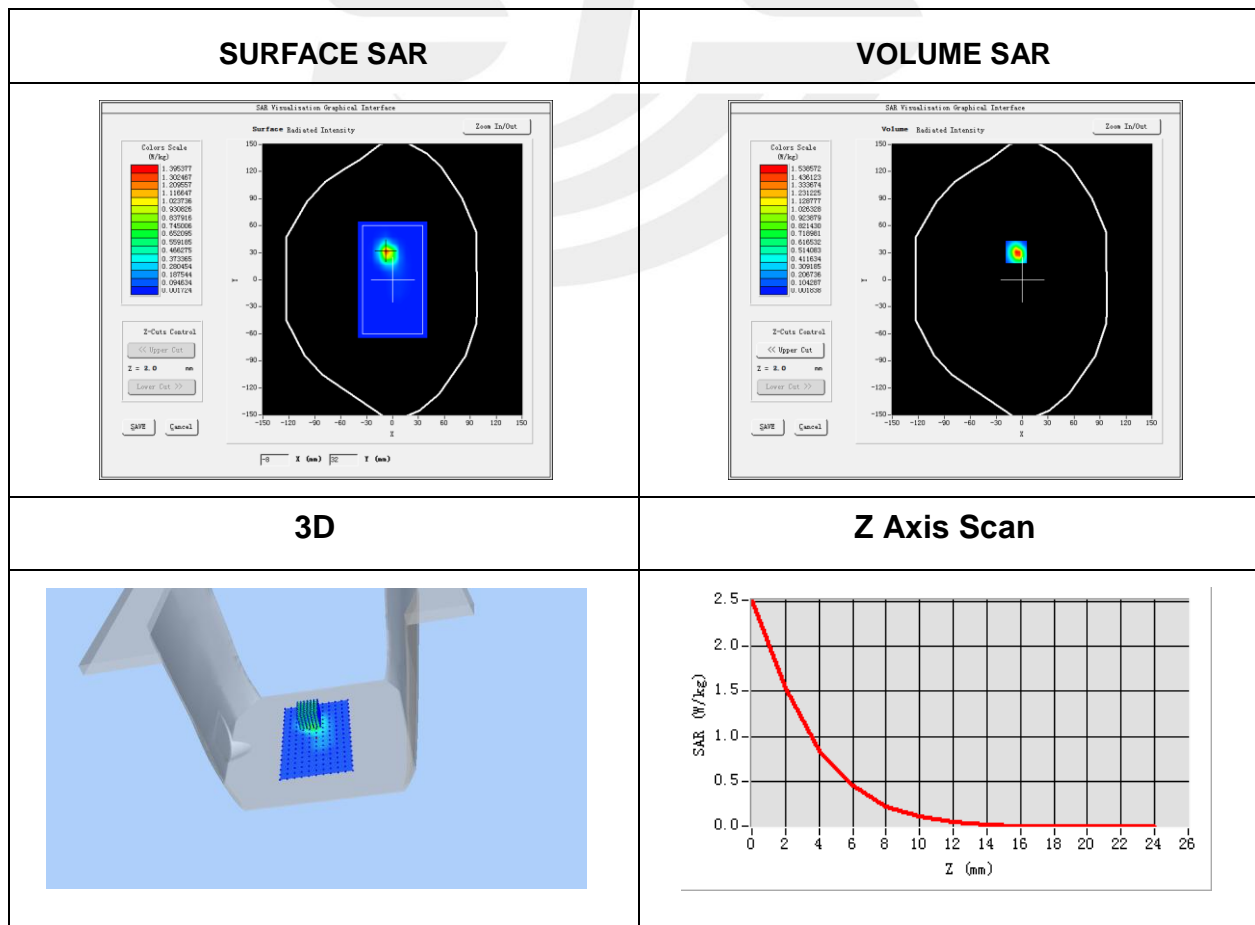


Plot 6: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-14
Probe	SN 41/18 EPGO334
ConvF	1.92
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM
Antenna	B
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	49.76
Conductivity (S/m)	5.32
Variation (%)	-1.94

Maximum location: X=0.00, Y=24.00
 SAR Peak: 0.76 W/kg

SAR 10g (W/Kg)	0.050303
SAR 1g (W/Kg)	0.201303

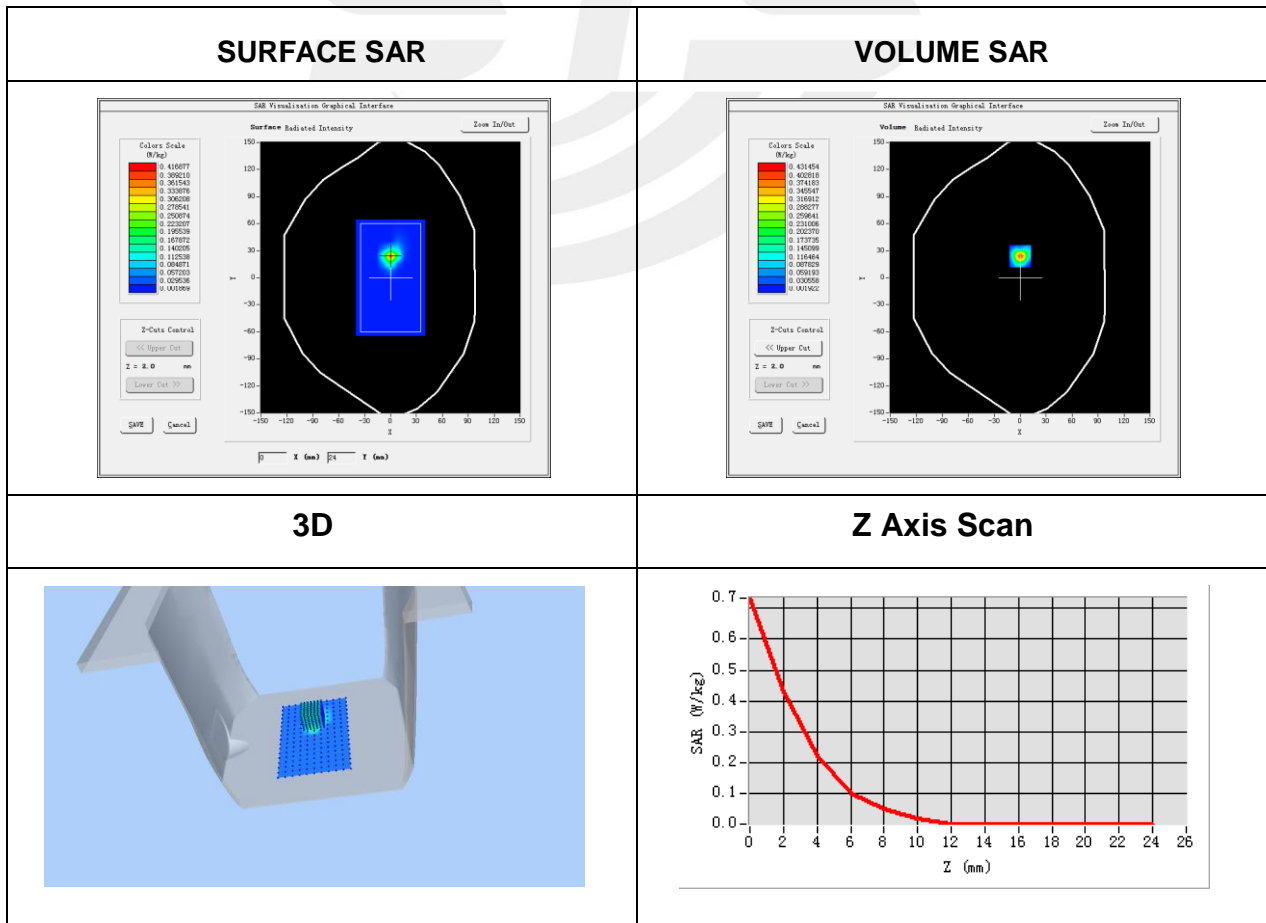


Plot 7: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-14
Probe	SN 41/18 EPGO334
ConvF	1.92
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11n ISM
Antenna	A
Signal	IEEE802.n (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	49.76
Conductivity (S/m)	5.32
Variation (%)	-0.65

Maximum location: X=-9.00, Y=9.00
SAR Peak: 1.40 W/kg

SAR 10g (W/Kg)	0.094001
SAR 1g (W/Kg)	0.382891

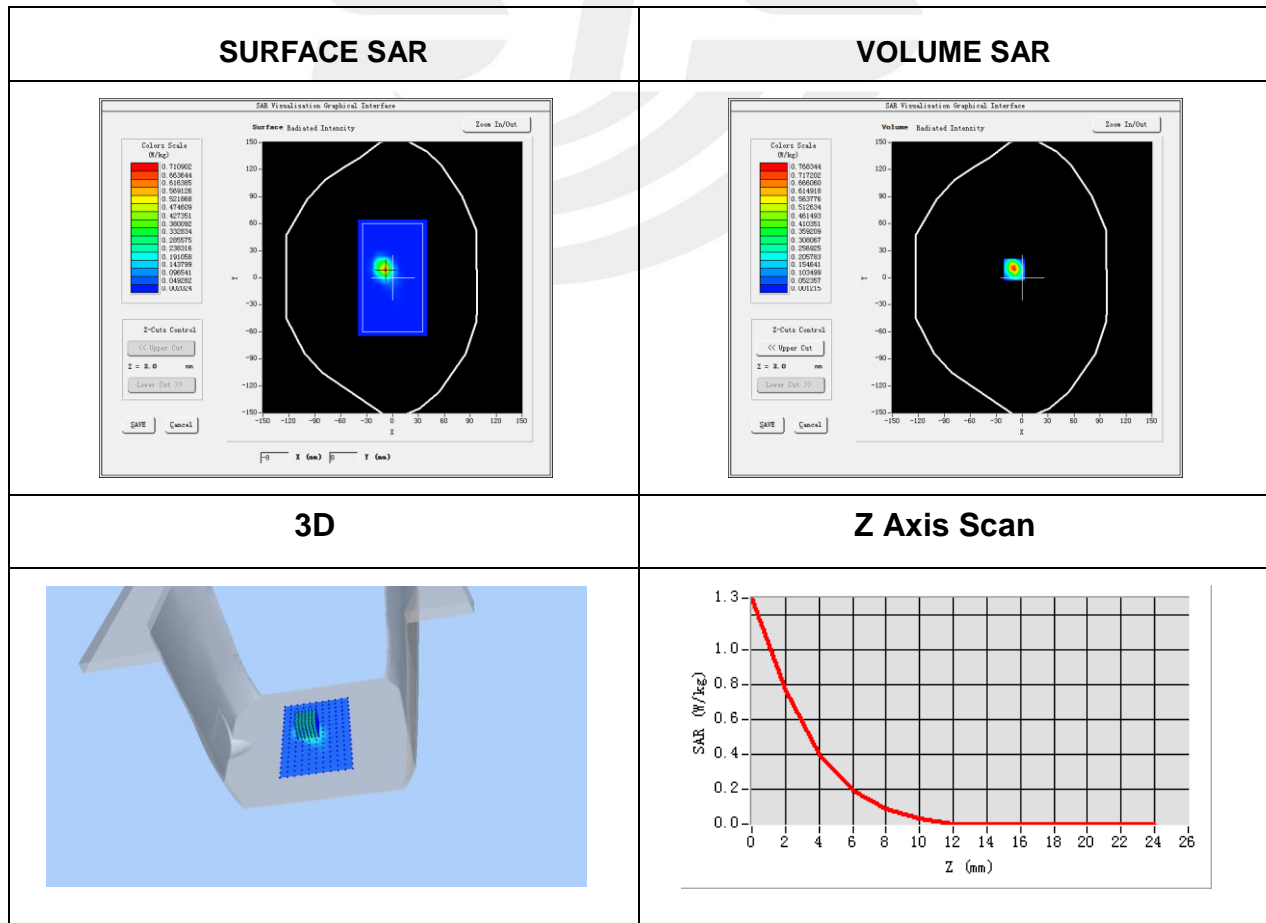


Plot 8: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-14
Probe	SN 41/18 EPGO334
ConvF	1.92
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n ISM
Antenna	B
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5180
Relative permittivity (real part)	49.76
Conductivity (S/m)	5.32
Variation (%)	-0.03

Maximum location: X=2.00, Y=22.00
SAR Peak: 0.78 W/kg

SAR 10g (W/Kg)	0.051917
SAR 1g (W/Kg)	0.193240

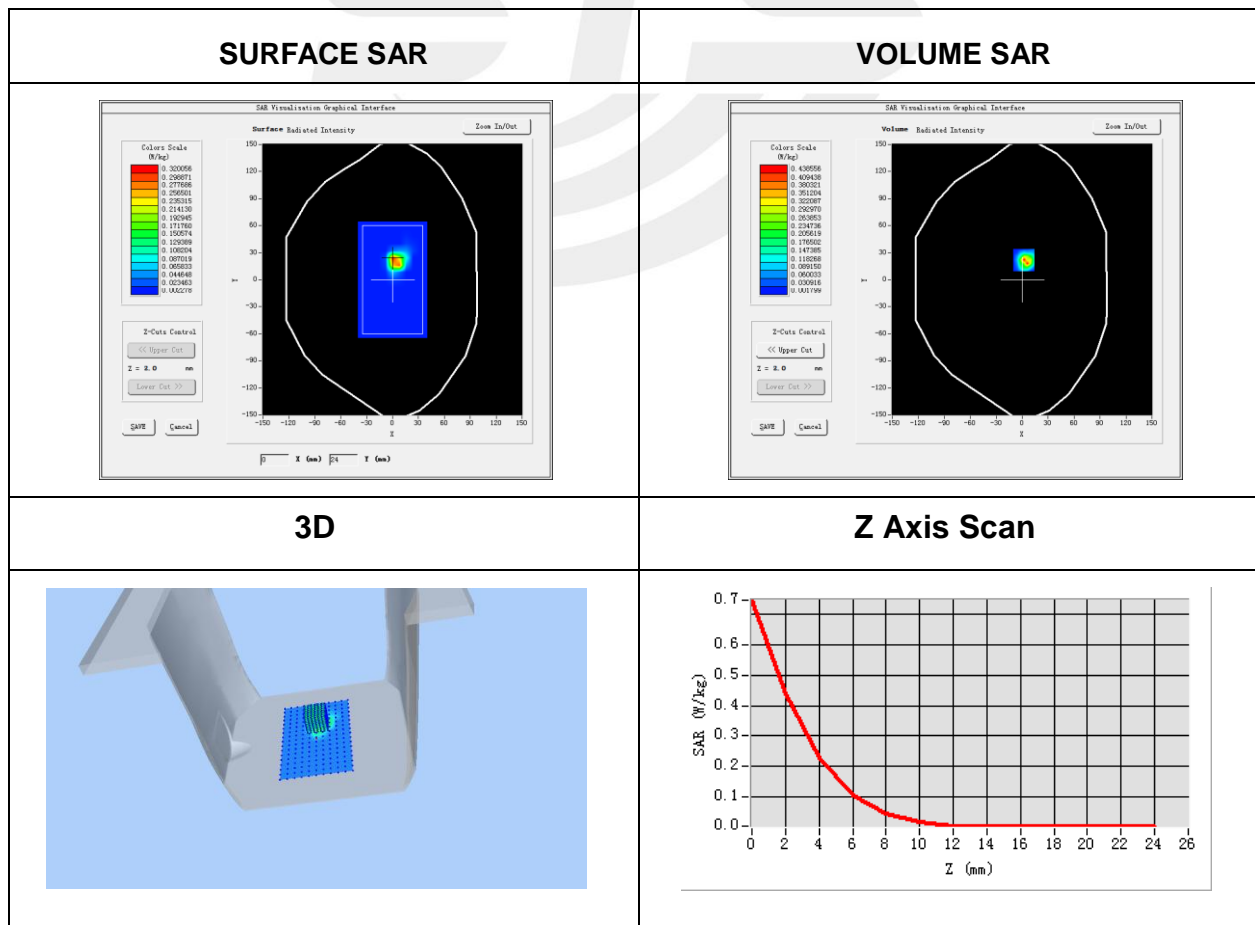


Plot 9: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-16
Probe	SN 41/18 EPGO334
ConvF	2.12
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Antenna	A
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5320
Relative permittivity (real part)	48.25
Conductivity (S/m)	5.49
Variation (%)	-1.83

Maximum location: X=-8.00, Y=48.00
 SAR Peak: 1.85 W/kg

SAR 10g (W/Kg)	0.144353
SAR 1g (W/Kg)	0.535972

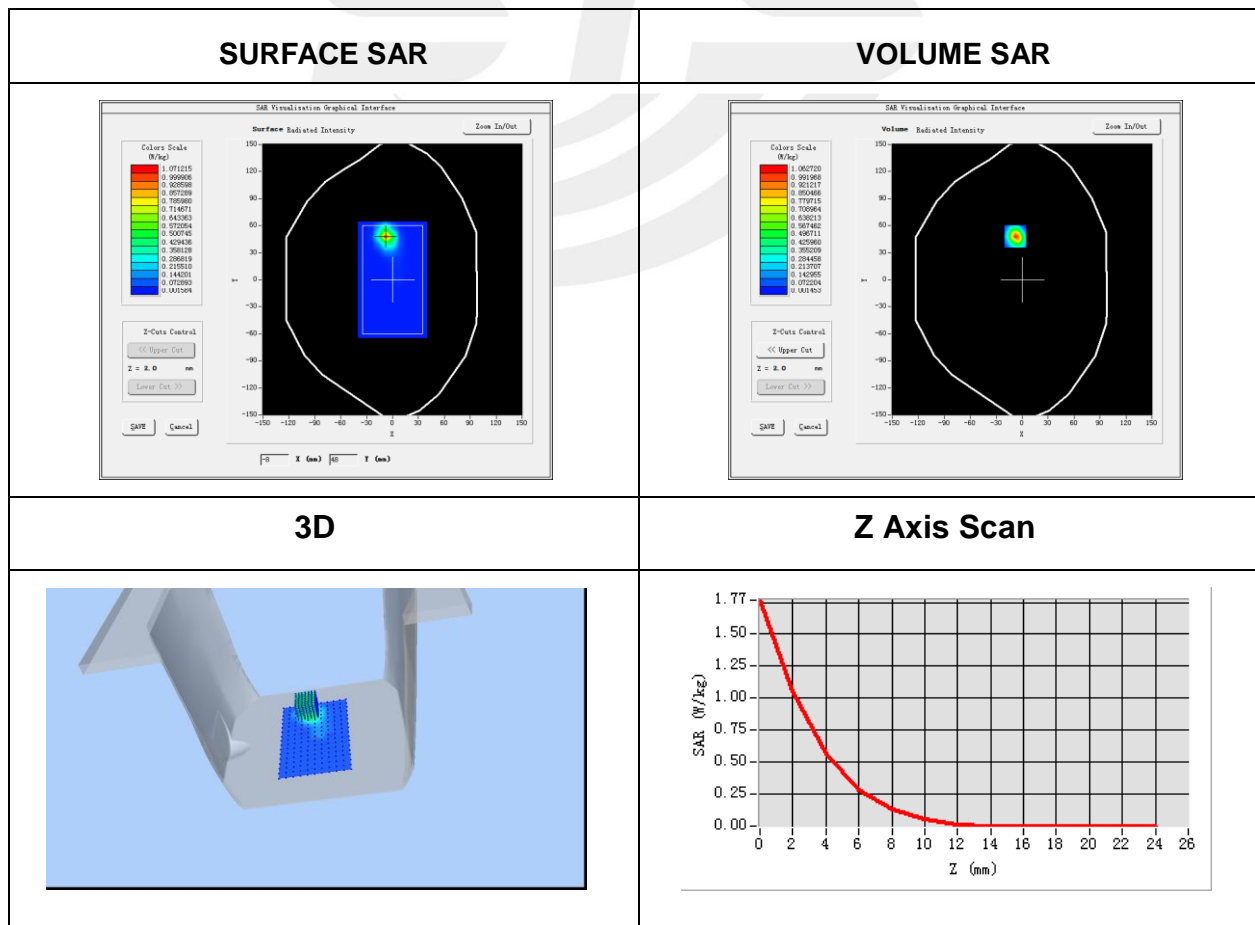


Plot 10: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-16
Probe	SN 41/18 EPGO334
ConvF	2.12
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Antenna	B
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5260
Relative permittivity (real part)	48.25
Conductivity (S/m)	5.49
Variation (%)	2.92

Maximum location: X=8.00, Y=17.00
 SAR Peak: 1.54 W/kg

SAR 10g (W/Kg)	0.110866
SAR 1g (W/Kg)	0.432342

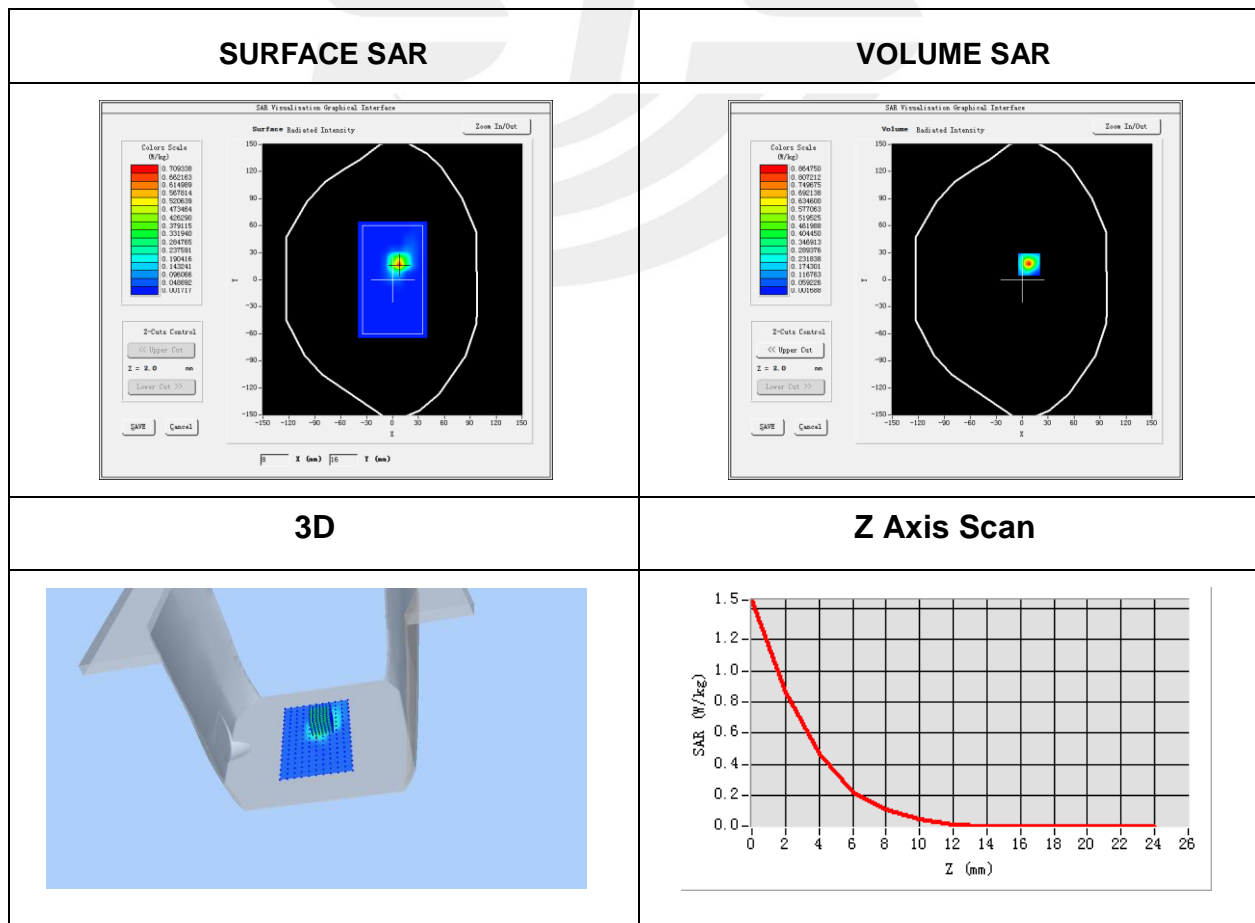


Plot 11: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-16
Probe	SN 41/18 EPGO334
ConvF	2.12
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n ISM
Antenna	A
Signal	IEEE802.n (Crest factor: 1.0)
Frequency (MHz)	5300
Relative permittivity (real part)	48.25
Conductivity (S/m)	5.49
Variation (%)	-1.31

Maximum location: X=9.00, Y=-8.00
 SAR Peak: 1.52 W/kg

SAR 10g (W/Kg)	0.097673
SAR 1g (W/Kg)	0.404854

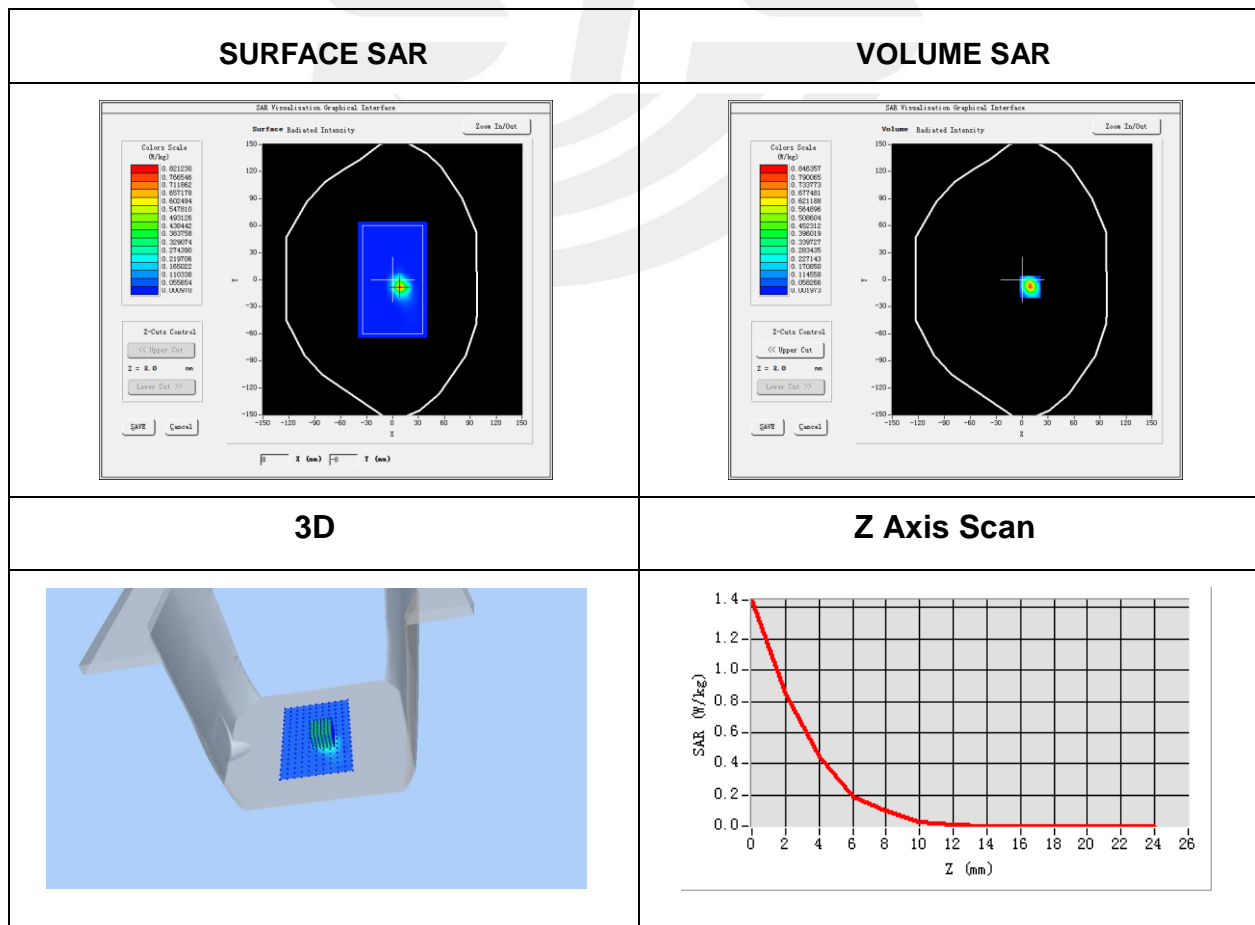


Plot 12: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-16
Probe	SN 41/18 EPGO334
ConvF	2.12
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n ISM
Antenna	B
Signal	IEEE802.n (Crest factor: 1.0)
Frequency (MHz)	5300
Relative permittivity (real part)	48.25
Conductivity (S/m)	5.49
Variation (%)	-3.59

Maximum location: X=1.00, Y=40.00
SAR Peak: 0.97 W/kg

SAR 10g (W/Kg)	0.061981
SAR 1g (W/Kg)	0.239506

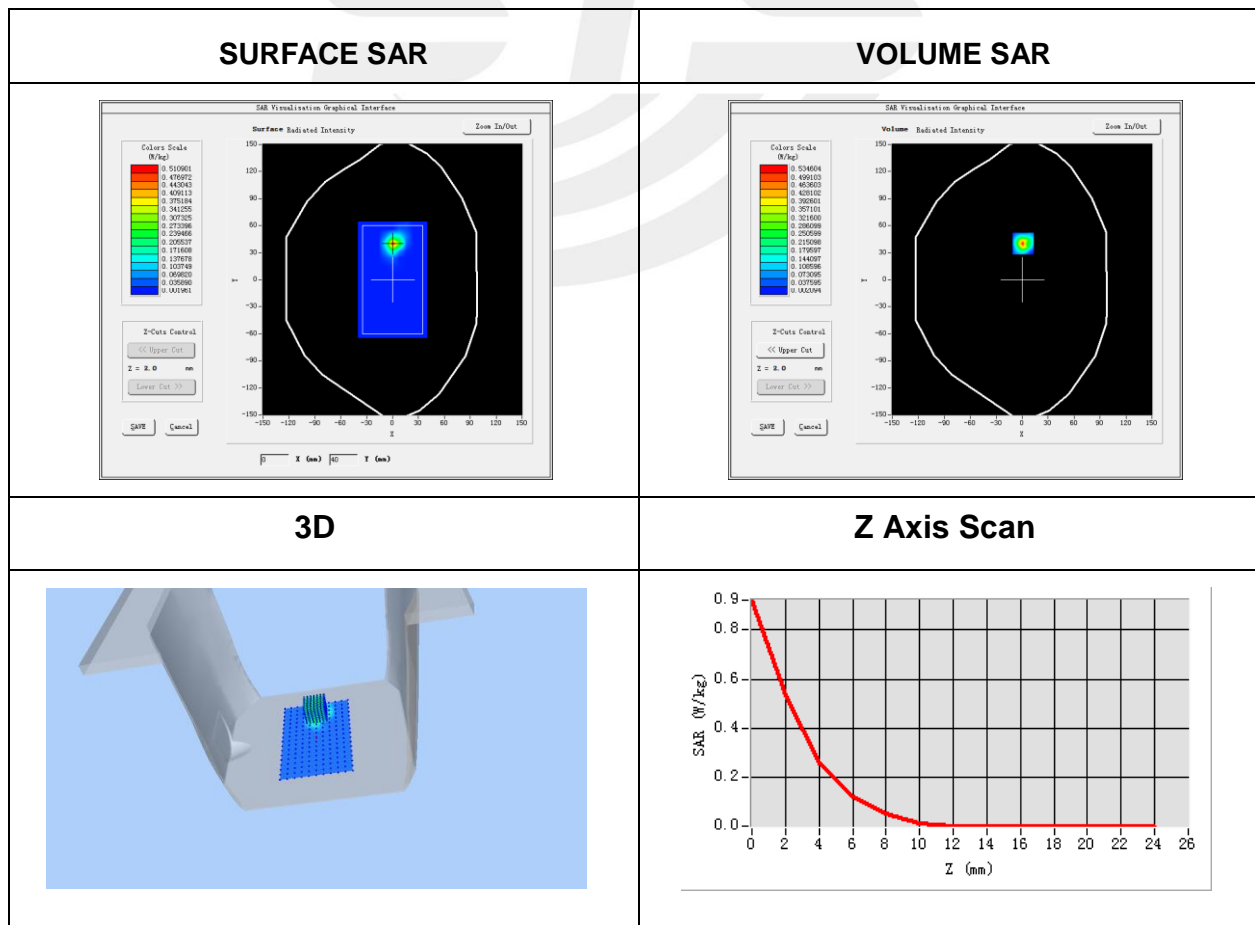


Plot 13: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-17
Probe	SN 41/18 EPGO334
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Antenna	A
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5500
Relative permittivity (real part)	48.93
Conductivity (S/m)	5.81
Variation (%)	3.19

Maximum location: X=1.00, Y=39.00
 SAR Peak: 2.35 W/kg

SAR 10g (W/Kg)	0.176564
SAR 1g (W/Kg)	0.658414

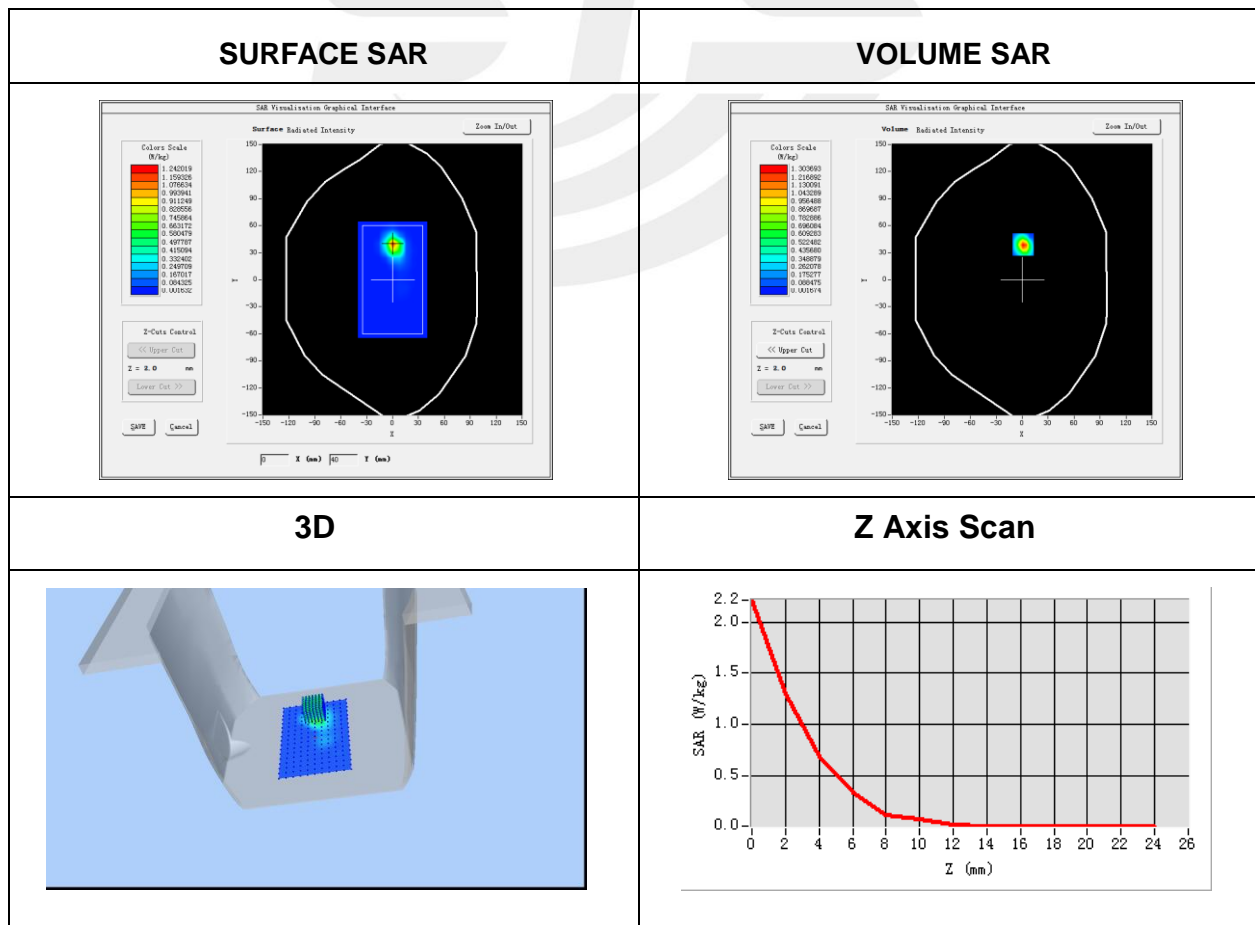


Plot 14: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-17
Probe	SN 41/18 EPGO334
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Antenna	B
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5700
Relative permittivity (real part)	48.93
Conductivity (S/m)	5.81
Variation (%)	-1.69

Maximum location: X=0.00, Y=8.00
 SAR Peak: 0.99 W/kg

SAR 10g (W/Kg)	0.066408
SAR 1g (W/Kg)	0.251528

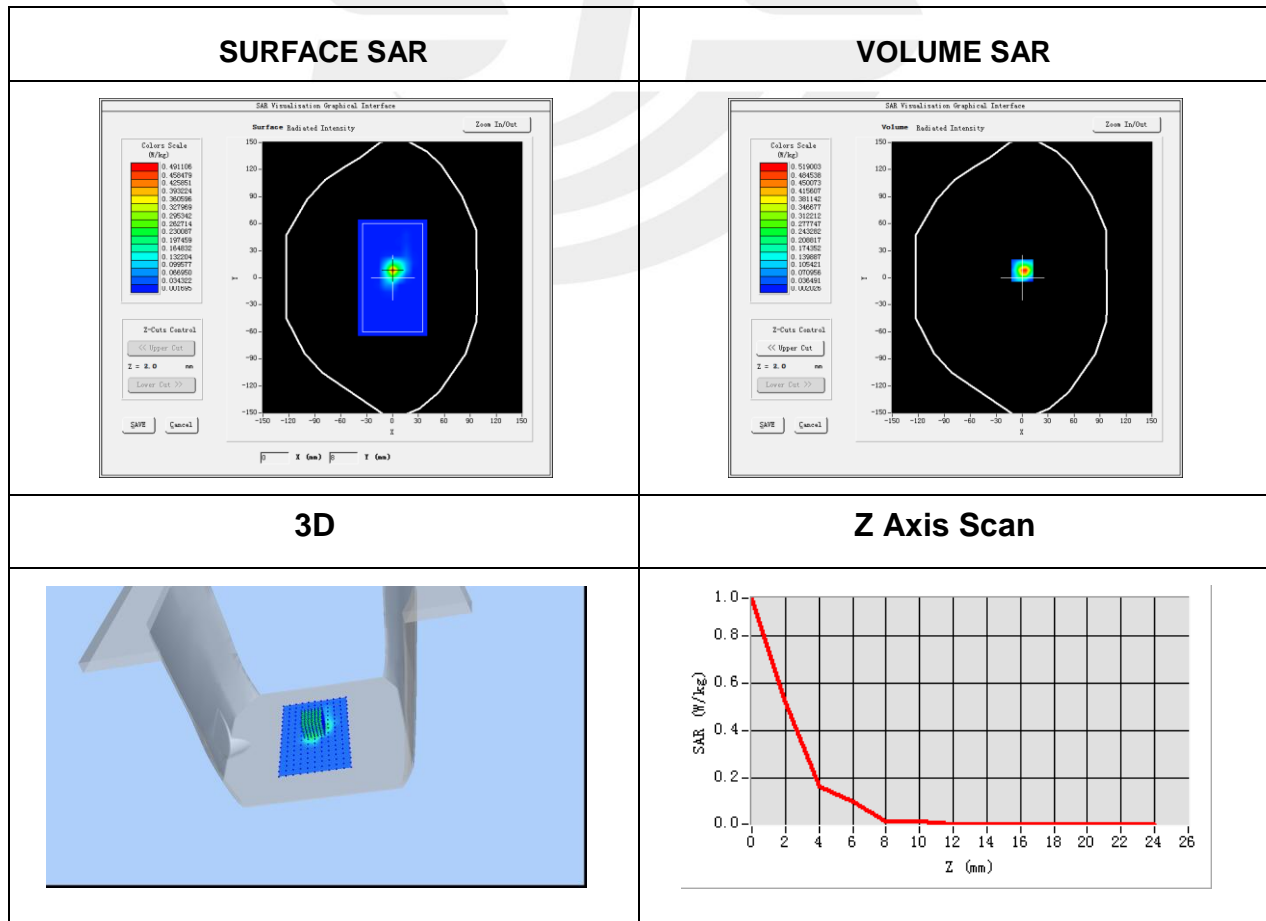


Plot 15: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-17
Probe	SN 41/18 EPGO334
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n ISM
Antenna	A
Signal	IEEE802.n (Crest factor: 1.0)
Frequency (MHz)	5700
Relative permittivity (real part)	48.93
Conductivity (S/m)	5.81
Variation (%)	0.30

Maximum location: X=-5.00, Y=-17.00
 SAR Peak: 1.18 W/kg

SAR 10g (W/Kg)	0.071399
SAR 1g (W/Kg)	0.284732

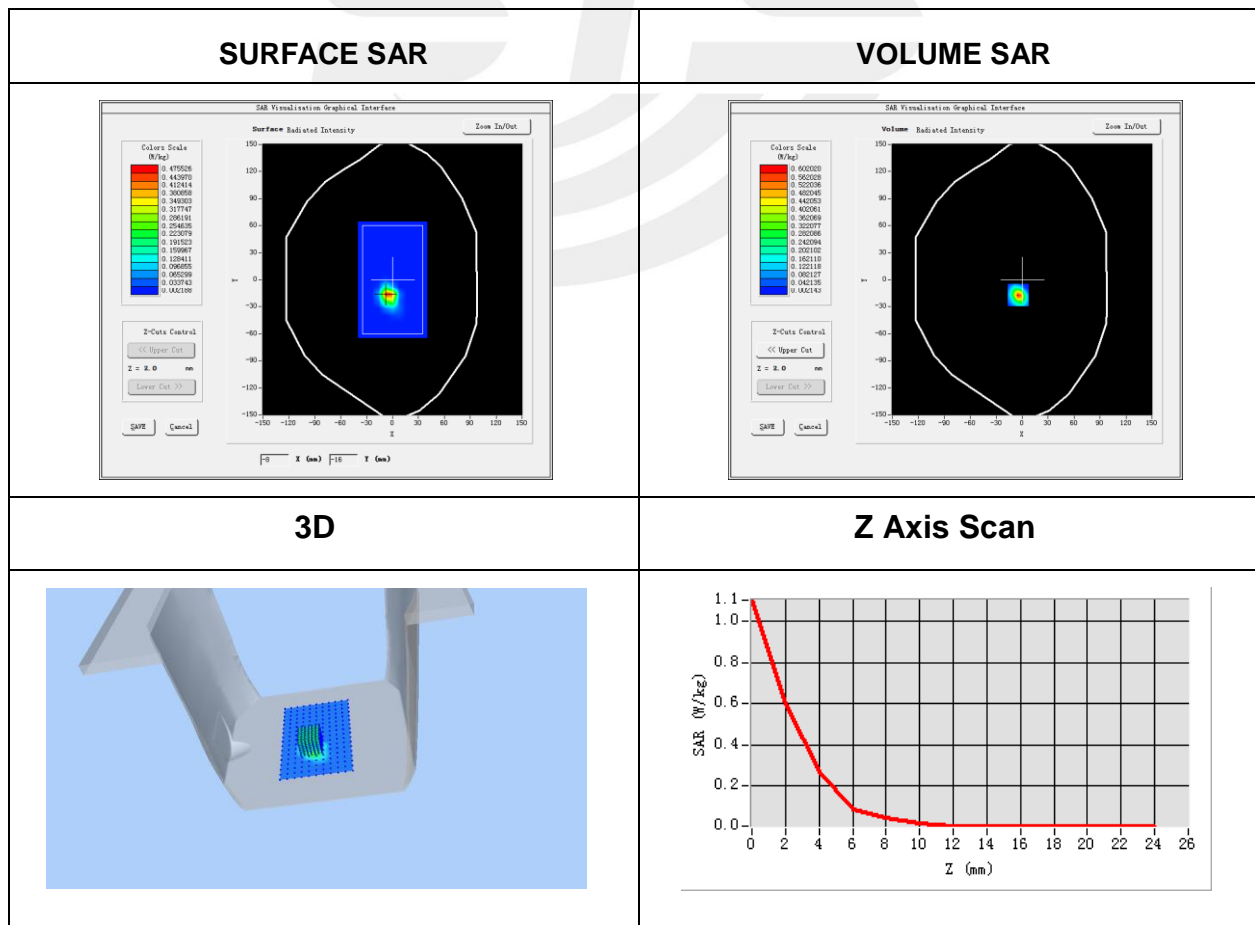


Plot 16: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-17
Probe	SN 41/18 EPGO334
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11n ISM
Antenna	B
Signal	IEEE802.n (Crest factor: 1.0)
Frequency (MHz)	5700
Relative permittivity (real part)	48.93
Conductivity (S/m)	5.81
Variation (%)	-3.95

Maximum location: X=1.00, Y=25.00
 SAR Peak: 1.83 W/kg

SAR 10g (W/Kg)	0.131981
SAR 1g (W/Kg)	0.511031

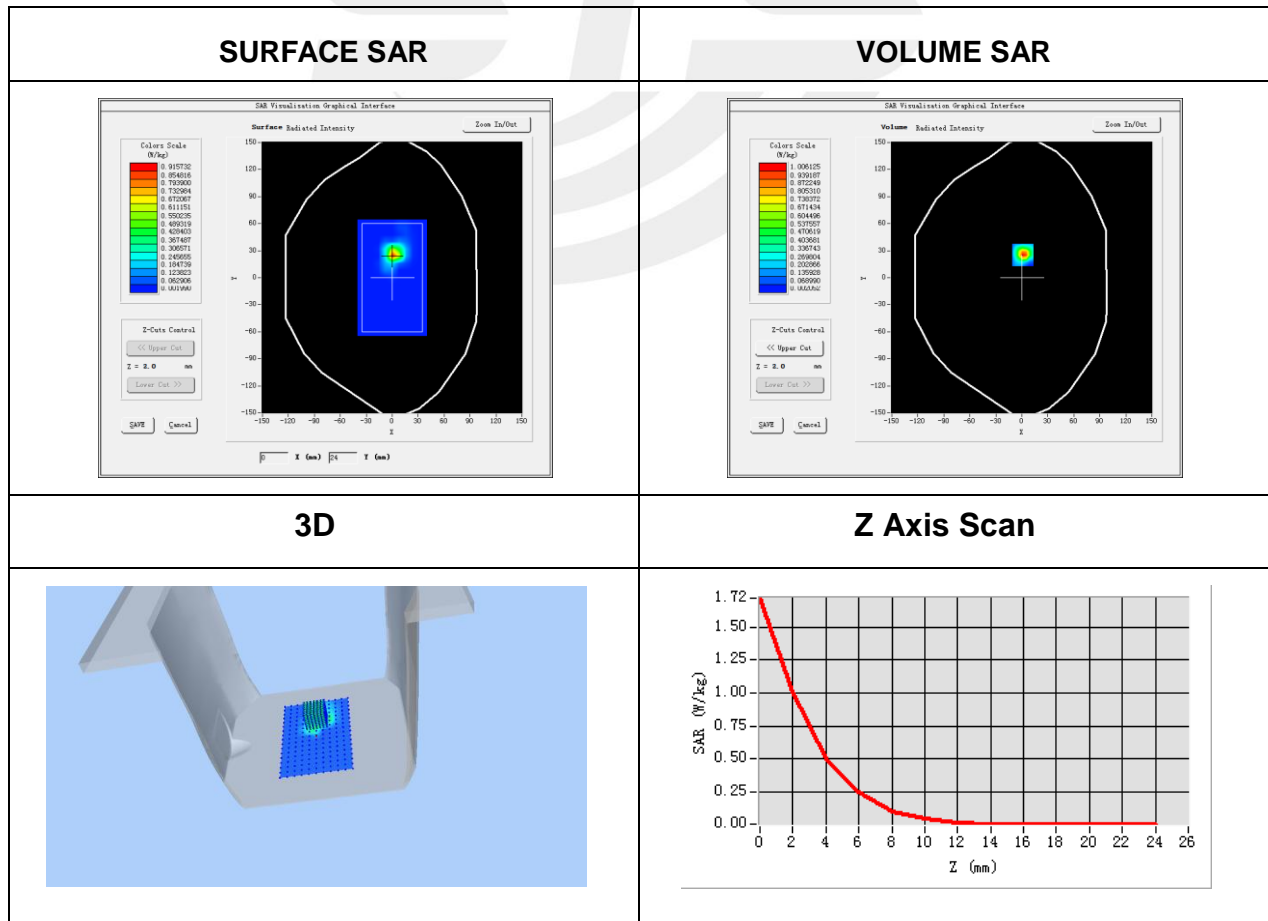


Plot 17: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-20
Probe	SN 41/18 EPGO334
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Antenna	A
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	47.86
Conductivity (S/m)	6.13
Variation (%)	-1.81

Maximum location: X=6.00, Y=-8.00
SAR Peak: 2.22 W/kg

SAR 10g (W/Kg)	0.156816
SAR 1g (W/Kg)	0.567385

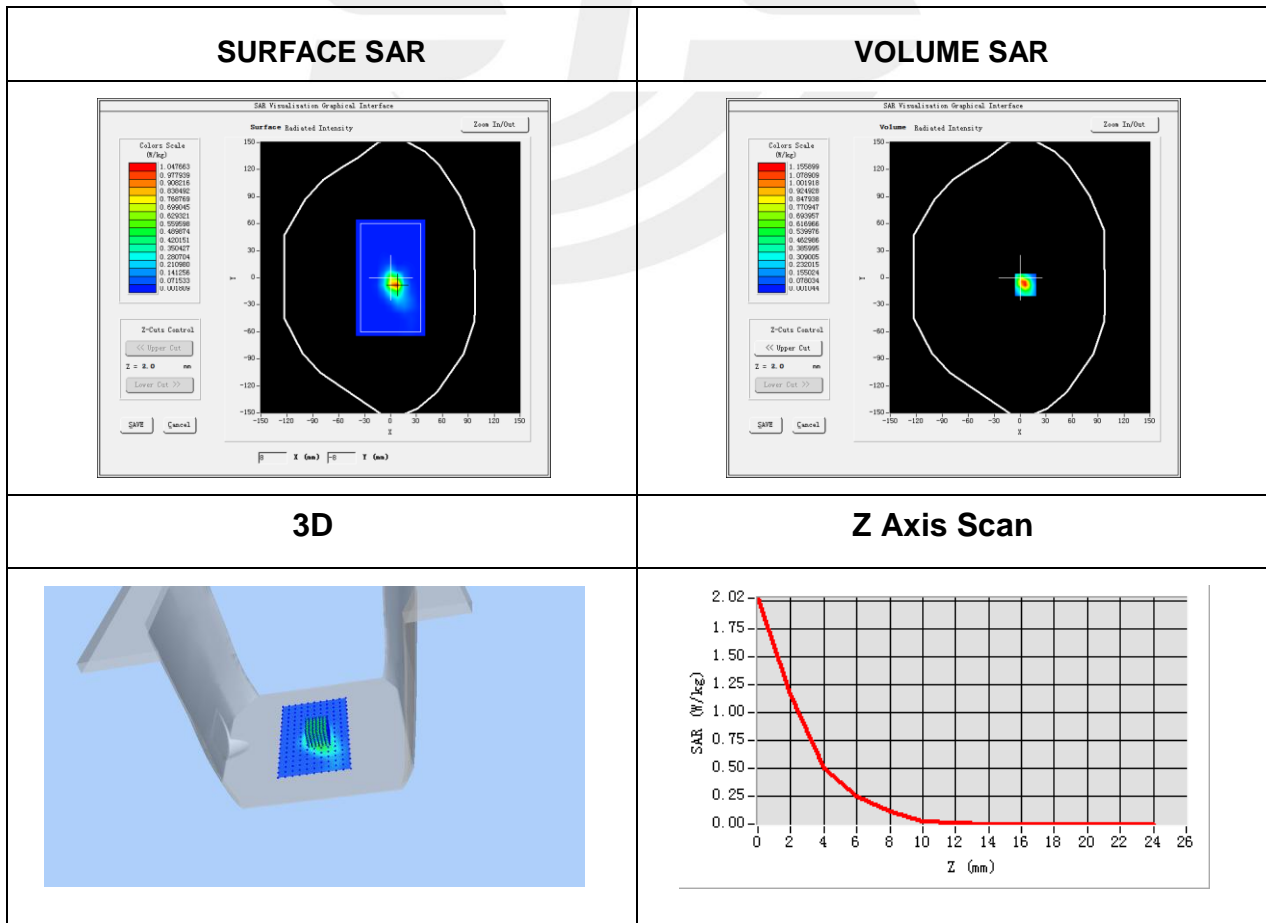


Plot 18: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-20
Probe	SN 41/18 EPGO334
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Antenna	B
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	47.86
Conductivity (S/m)	6.13
Variation (%)	-1.72

Maximum location: X=24.00, Y=25.00
 SAR Peak: 1.61 W/kg

SAR 10g (W/Kg)	0.102319
SAR 1g (W/Kg)	0.404731

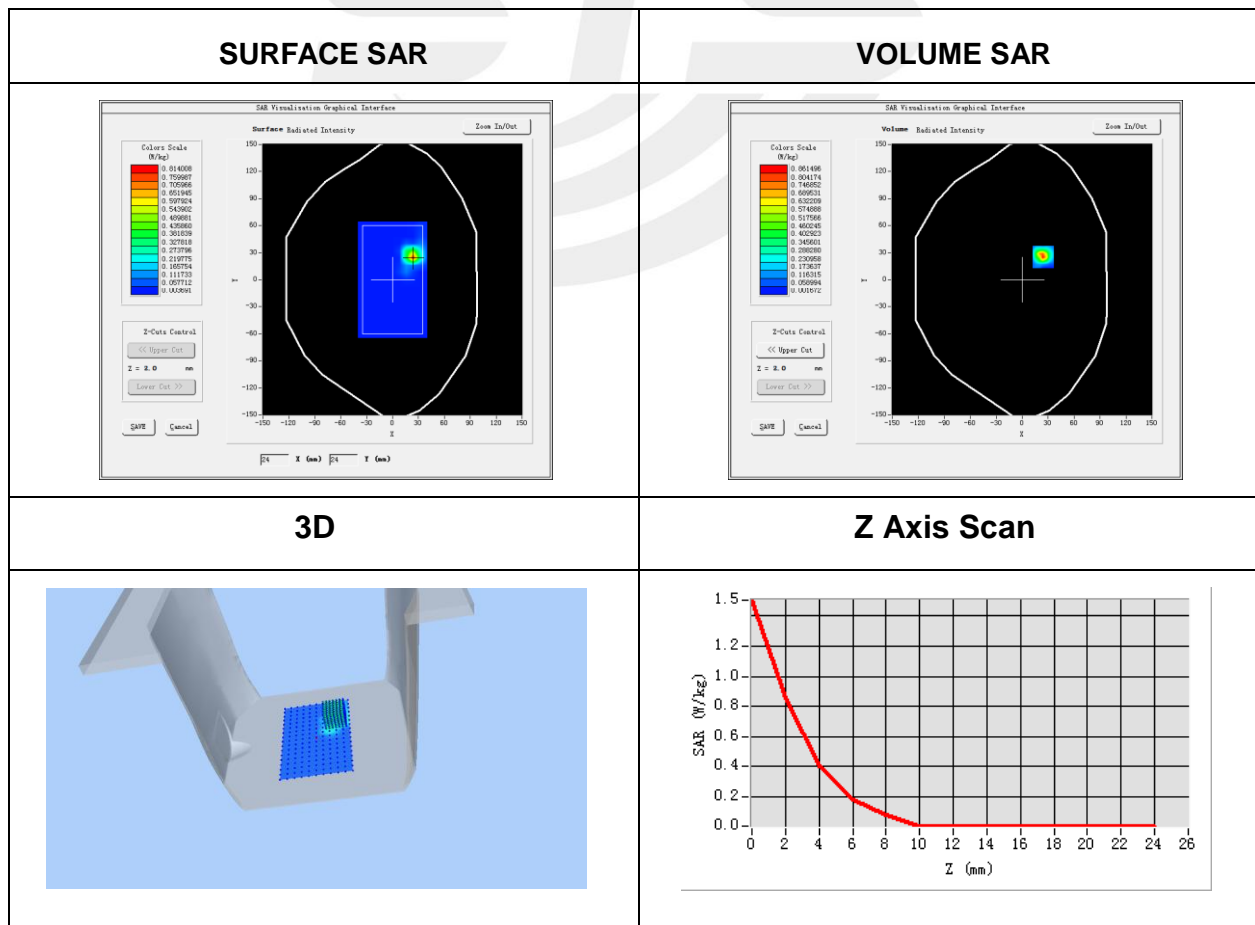


Plot 19: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-20
Probe	SN 41/18 EPGO334
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11ac ISM
Antenna	A
Signal	IEEE802.ac (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	47.86
Conductivity (S/m)	6.13
Variation (%)	-0.89

Maximum location: X=16.00, Y=-30.00
 SAR Peak: 1.19 W/kg

SAR 10g (W/Kg)	0.082721
SAR 1g (W/Kg)	0.305751

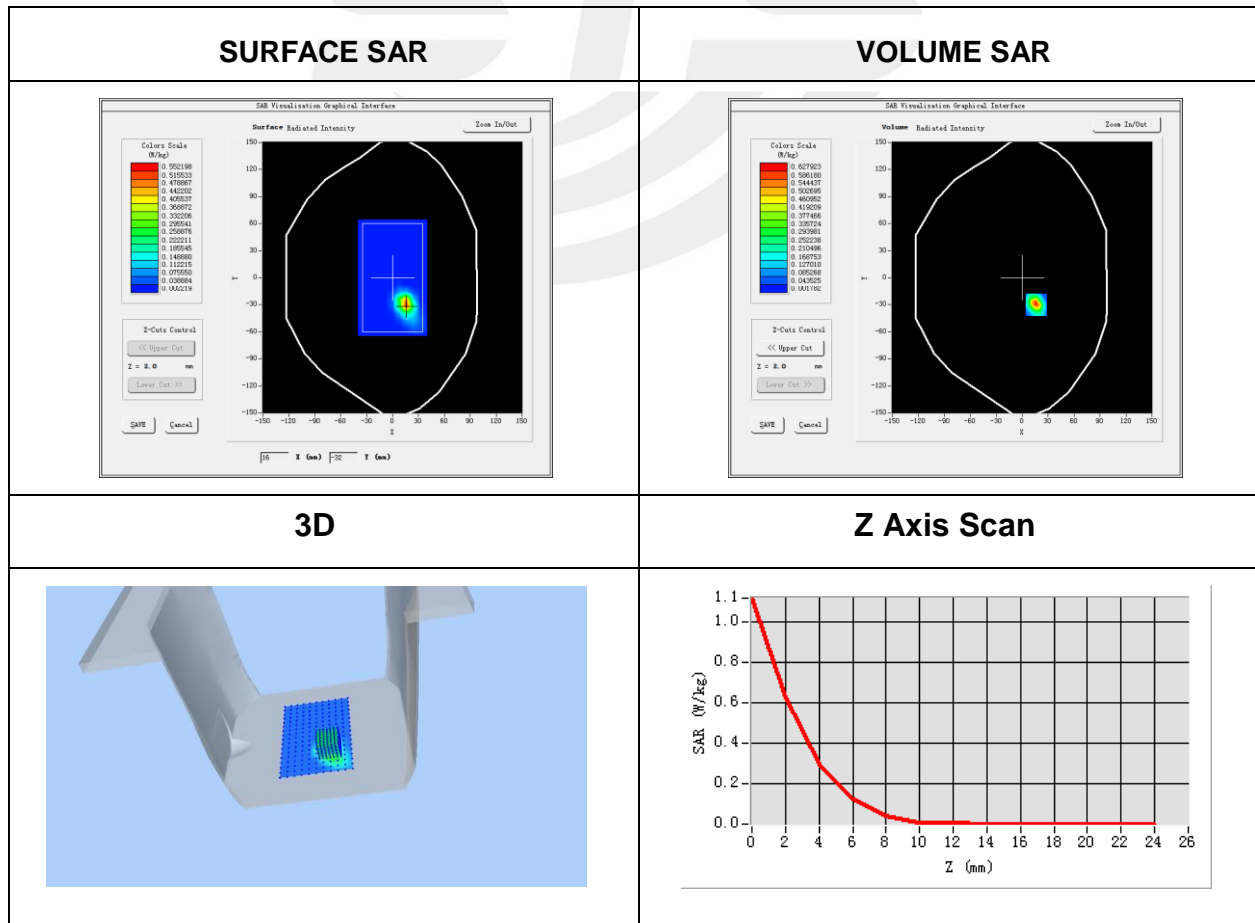


Plot 20: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-20
Probe	SN 41/18 EPGO334
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11ac ISM
Antenna	B
Signal	IEEE802.ac (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	47.86
Conductivity (S/m)	6.13
Variation (%)	2.95

Maximum location: X=7.00, Y=32.00
 SAR Peak: 0.66 W/kg

SAR 10g (W/Kg)	0.040084
SAR 1g (W/Kg)	0.156079

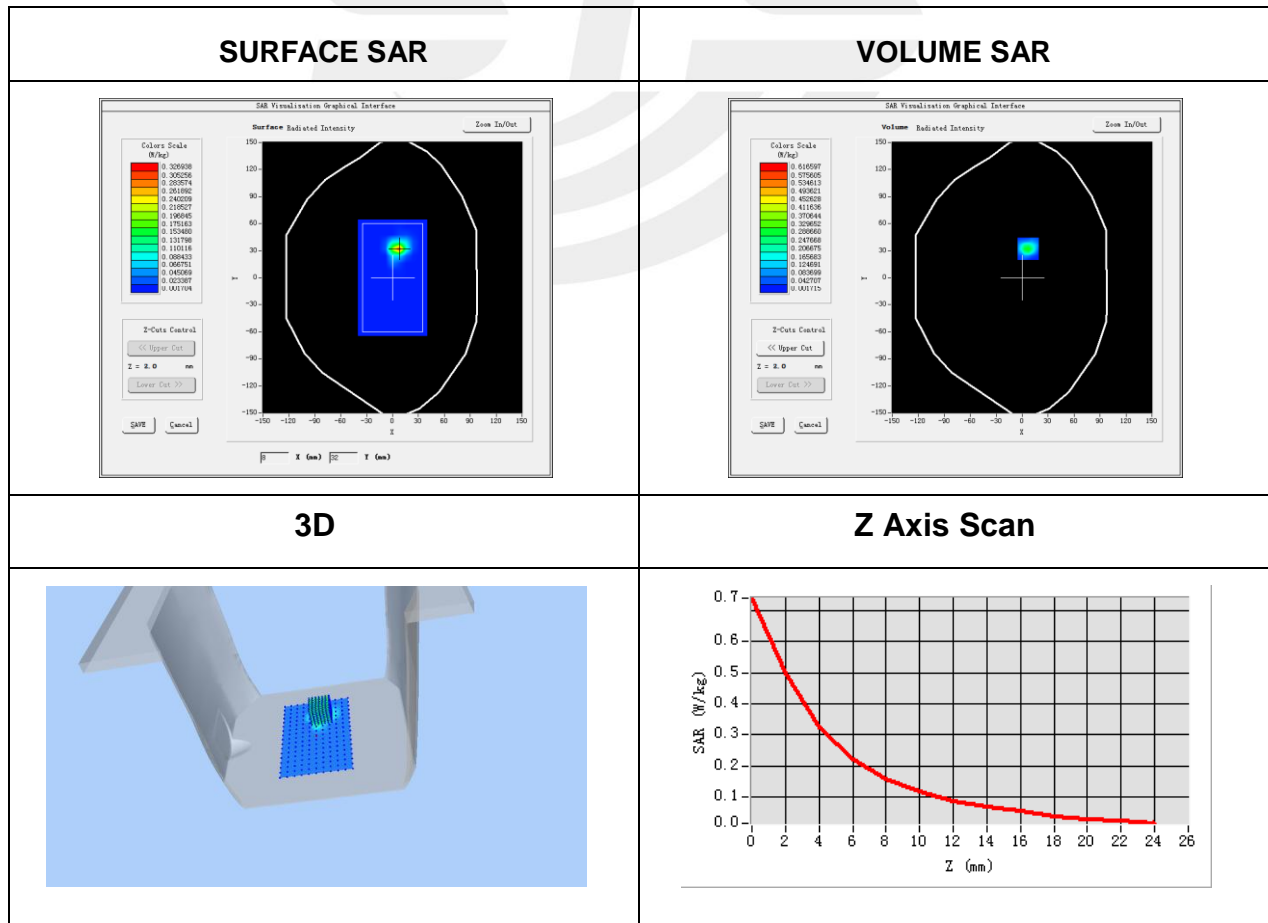


Plot 21: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-13
Probe	SN 41/18 EPGO334
ConvF	2.02
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11b ISM
Channels	Low
Signal	IEEE802.b (Crest factor: 1.0)
Frequency (MHz)	2412
Relative permittivity (real part)	53.11
Conductivity (S/m)	1.98
Variation (%)	3.82

Maximum location: X=16.00, Y=-34.00
SAR Peak: 0.69 W/kg

SAR 10g (W/Kg)	0.126086
SAR 1g (W/Kg)	0.329037

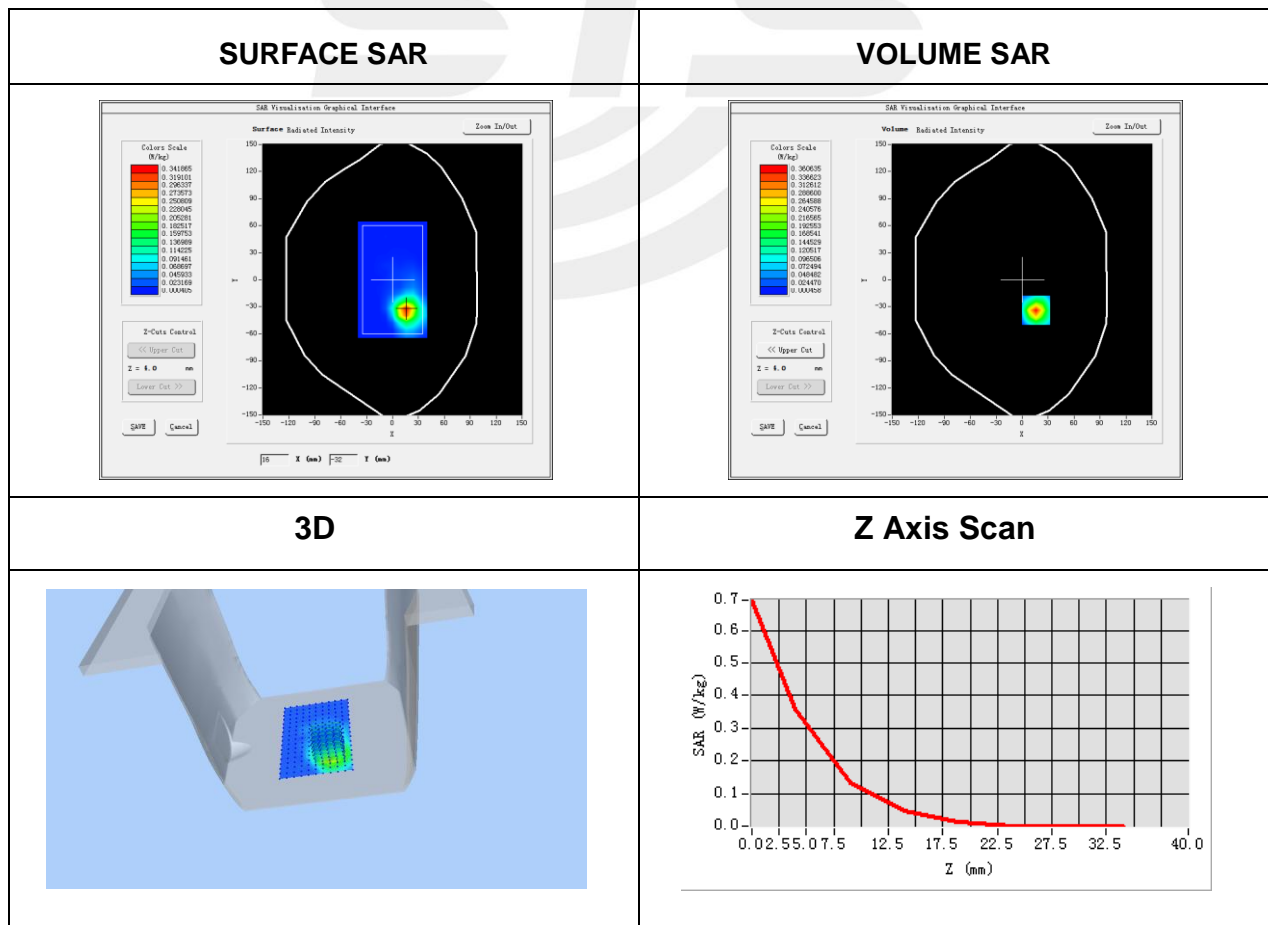


Plot 22: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-14
Probe	SN 41/18 EPGO334
ConvF	1.92
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Body back
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5240
Relative permittivity (real part)	49.76
Conductivity (S/m)	5.32
Variation (%)	-2.01

Maximum location: X=-8.00, Y=-25.00
 SAR Peak: 1.13 W/kg

SAR 10g (W/Kg)	0.089835
SAR 1g (W/Kg)	0.325420

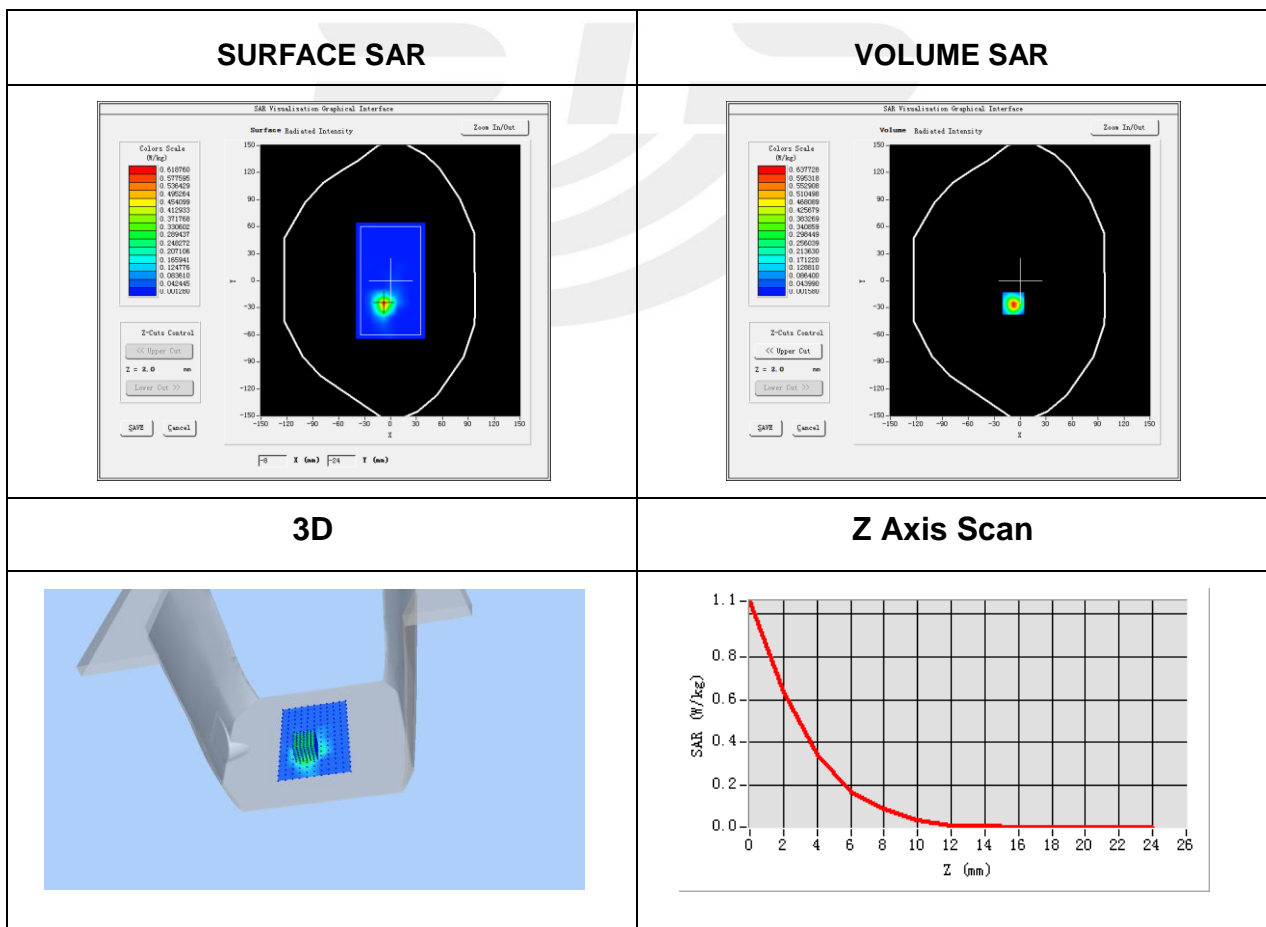


Plot 23: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-16
Probe	SN 41/18 EPGO334
ConvF	2.12
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11a ISM
Signal	IEEE802.a (Crest factor: 1.0)
Frequency (MHz)	5300
Relative permittivity (real part)	48.25
Conductivity (S/m)	5.49
Variation (%)	1.25

Maximum location: X=2.00, Y=-30.00
SAR Peak: 1.54 W/kg

SAR 10g (W/Kg)	0.119402
SAR 1g (W/Kg)	0.443424

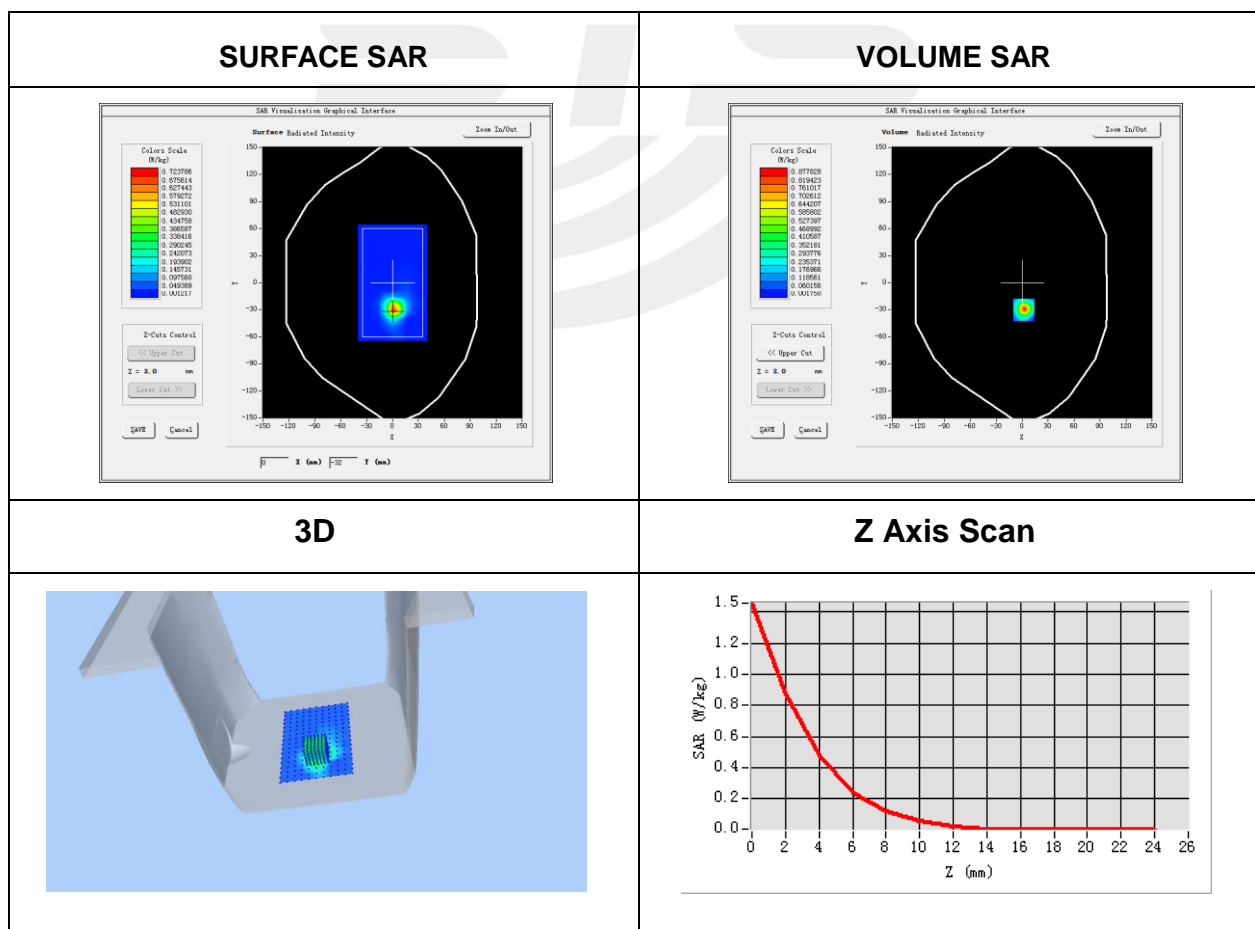


Plot 24: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-17
Probe	SN 41/18 EPGO334
ConvF	2.21
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11ac ISM
Signal	IEEE802.ac (Crest factor: 1.0)
Frequency (MHz)	5670
Relative permittivity (real part)	48.93
Conductivity (S/m)	5.81
Variation (%)	-3.82

Maximum location: X=-8.00, Y=-40.00
 SAR Peak: 1.20 W/kg

SAR 10g (W/Kg)	0.092931
SAR 1g (W/Kg)	0.338844

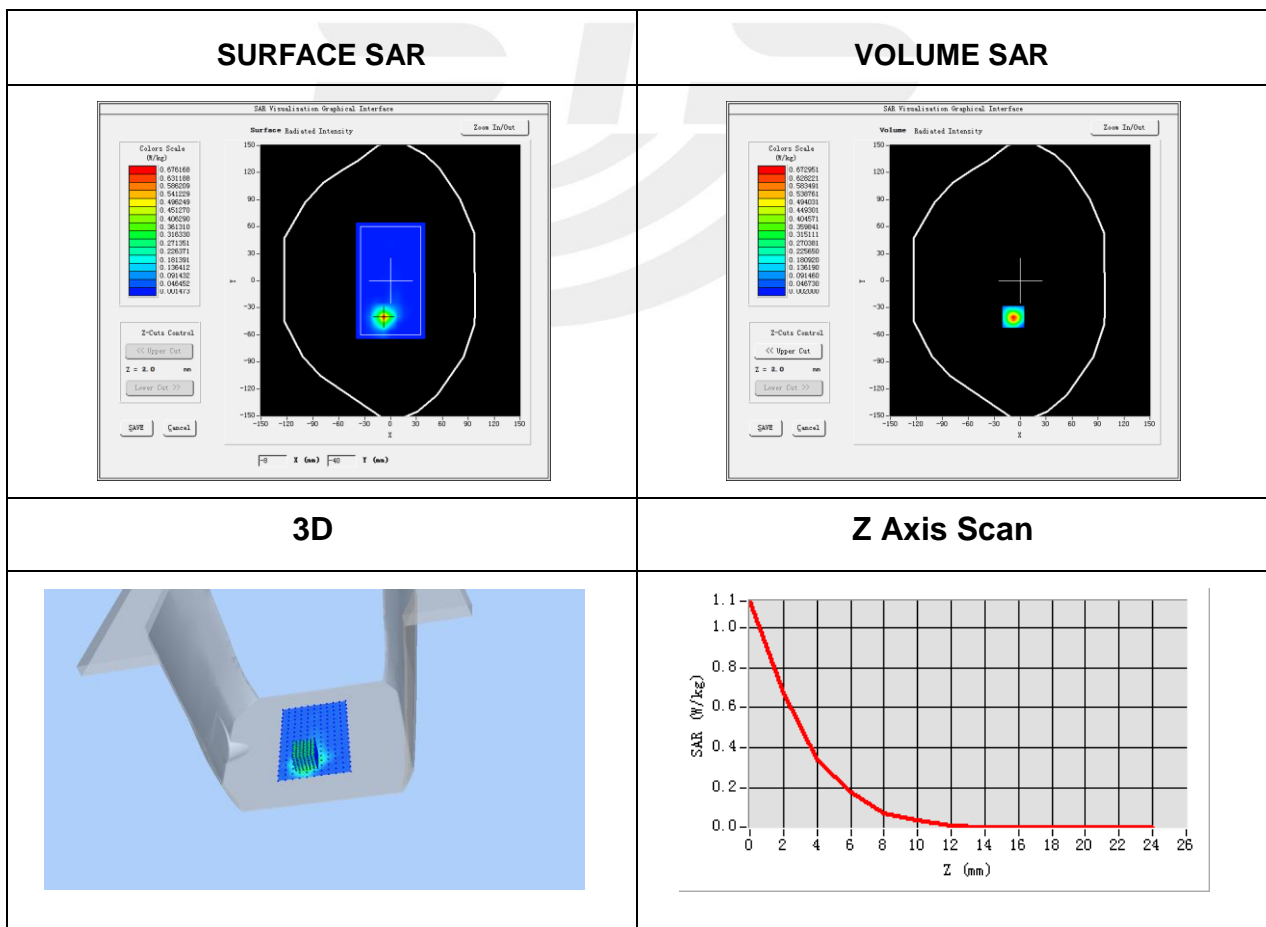


Plot 25: DUT: Rugged Tablet PC; EUT Model: M133WK

Test Date	2020-04-20
Probe	SN 41/18 EPGO334
ConvF	2.16
Area Scan	dx=8mm dy=8mm, h= 5.00 mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm
Phantom	Validation plane
Device Position	Back Side
Band	IEEE 802.11ac ISM
Signal	IEEE802.ac (Crest factor: 1.0)
Frequency (MHz)	5825
Relative permittivity (real part)	47.86
Conductivity (S/m)	6.13
Variation (%)	-1.12

Maximum location: X=7.00, Y=-41.00
SAR Peak: 0.73 W/kg

SAR 10g (W/Kg)	0.050610
SAR 1g (W/Kg)	0.189748

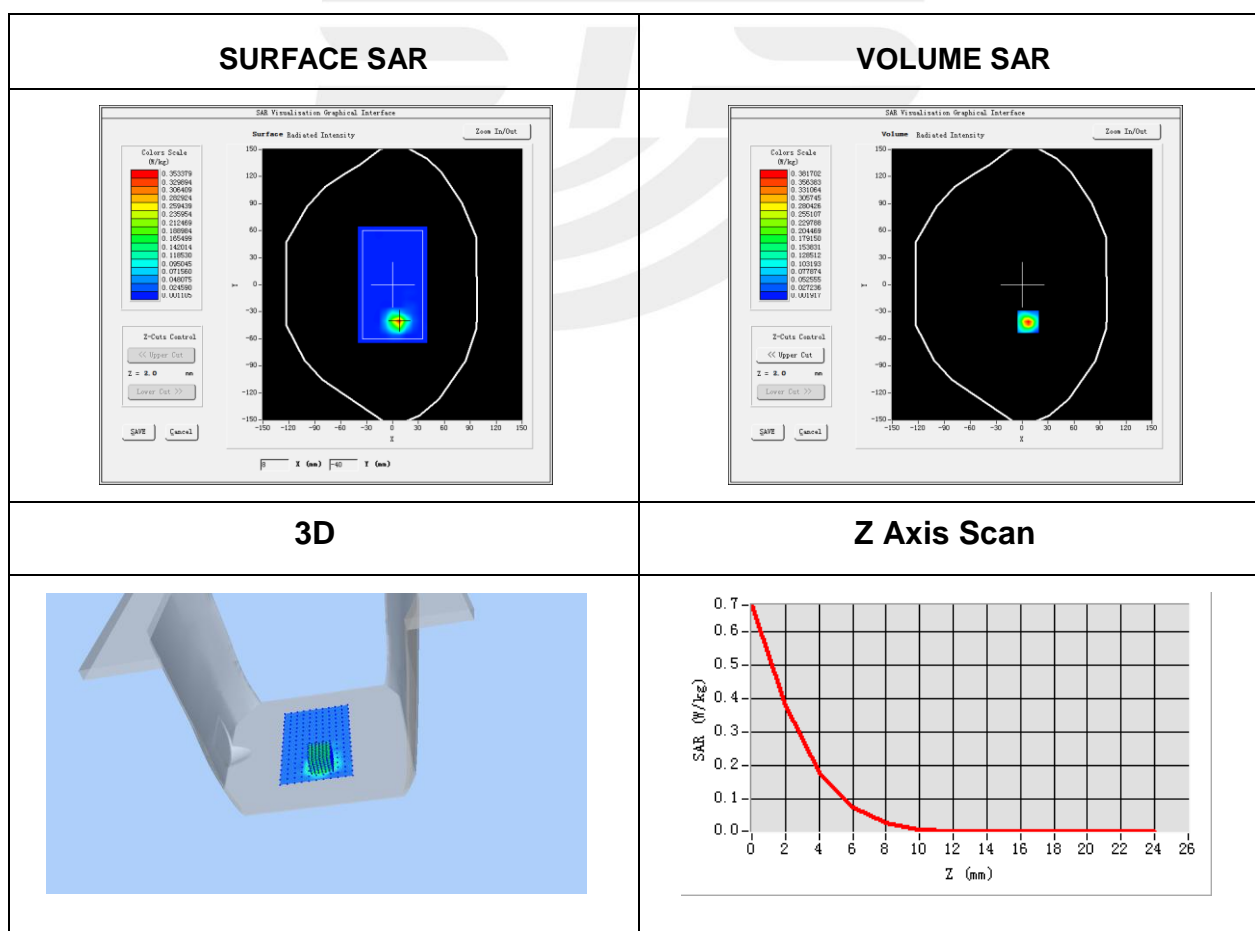



Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

