



SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen,
Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: ZR/2018/A001108

Page : 1 of 68

FCC SAR TEST REPORT

The following samples were submitted and identified on behalf of the client as:

| | |
|-------------------------|---|
| EUT Description | Mobile Phone |
| Company Name | Sony Mobile Communications INC |
| Company Address | 4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan |
| Standards | IEEE/ANSI C95.1-1992, IEEE 1528-2013, KDB248227D01v02r02,KDB865664D01v01r04, KDB865664D02v01r02,KDB941225D01v03r01, KDB941225D06v02r01,KDB447498D01v06, KDB941225D05v02r05, KDB 648474 D04 v01r03 |
| FCC ID | PY7-04605A |
| Date of Receipt: | 2018-10-25 |
| Date of Test: | 2018-11-04 to 2018-11-19 |
| Date of Issue: | 2019-01-09 |
| Test Result: | PASS * |

In the configuration tested, the EUT complied with the standards specified above.

Remarks:

This report details the results of the testing carried out on one sample, the results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

Signed on behalf of SGS

Sr. Engineer

Jackson Li

Date: Jan. 09, 2019

Supervisor

Simon Ling

Date: Jan. 09, 2019

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, -available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only



REVISION HISTORY

| Report Number | Revision | Description | Issue Date |
|-----------------|----------|--|------------|
| ZR/2018/A001108 | 00 | Original | 2018-12-05 |
| ZR/2018/A001108 | 01 | 1) Update the antenna picture for Appendix D 2) Add the BT duty cycle 3) Add the repeated SAR ratios | 2019-01-09 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |



CONTENTS

| | | |
|----------|--|-----------|
| 1 | GENERAL INFORMATION | 4 |
| 1.1 | TESTING LABORATORY | 4 |
| 1.2 | DETAILS OF APPLICANT | 4 |
| 1.3 | TEST FACILITY | 5 |
| 1.4 | DESCRIPTION OF EUT | 6 |
| 1.5 | TEST ENVIRONMENT | 20 |
| 1.6 | OPERATION DESCRIPTION | 20 |
| 1.7 | POSITIONING PROCEDURE | 28 |
| 1.8 | EVALUATION PROCEDURES | 30 |
| 1.9 | PROBE CALIBRATION PROCEDURES | 31 |
| 1.9.1 | Transfer Calibration with Temperature Probes | 31 |
| 1.9.2 | Calibration with Analytical Fields | 32 |
| 1.10 | THE SAR MEASUREMENT SYSTEM | 33 |
| 1.11 | SYSTEM COMPONENT | 34 |
| 1.12 | SAR SYSTEM VERIFICATION | 37 |
| 1.13 | TISSUE SIMULANT FLUID FOR THE FREQUENCY BAND | 39 |
| 1.14 | TEST STANDARDS AND LIMITS | 41 |
| 2 | SUMMARY OF RESULTS | 43 |
| 3 | SIMULTANEOUS TRANSMISSION ANALYSIS | 59 |
| 3.1 | SIMULTANEOUS TRANSMISSION SCENARIOS: | 59 |
| 3.2 | ESTIMATED SAR CALCULATION | 60 |
| 3.3 | SPLSR EVALUATION AND ANALYSIS | 61 |
| 3.1 | SIMULTANEOUS TRANSMISSION COMBINATION SCENARIO | 62 |
| 4 | INSTRUMENTS LIST | 66 |
| 5 | MEASUREMENTS | 68 |
| 6 | SAR SYSTEM PERFORMANCE VERIFICATION | 68 |
| 7 | PHOTOGRAPHS | 68 |
| 8 | DAE & PROBE CALIBRATION CERTIFICATE | 68 |
| 9 | SAR MEASUREMENT VARIABILITY AND UNCERTAINTY | 68 |



1 General Information

1.1 Testing Laboratory

| | |
|------------|---|
| Company: | SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab |
| Address: | No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China |
| Post code: | 518057 |
| Telephone: | +86 (0) 755 2601 2053 |
| Fax: | +86 (0) 755 2671 0594 |
| E-mail: | ee.shenzhen@sgs.com |

1.2 Details of Applicant

| | |
|---------------|--|
| Applicant: | Sony Mobile Communications INC |
| Address: | 4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan |
| Manufacturer: | Sony Mobile Communications INC |
| Address: | 4-12-3 Higashi-shinagawa, Shinagawa-ku, Tokyo, 140-0002, Japan |
| Factory: | Dong Guan Huabel Electronic Technology Co., Ltd |
| Address: | No.9 Industrial Northern Road, National High-Tech Industrial Development Zone, SongShan Lake, Dong Guan City |

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC –Designation Number: CN1178**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been recognized as an accredited testing laboratory.

Designation Number: CN1178. Test Firm Registration Number: 406779.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

1.4 Description of EUT

| | | | | |
|--------------------------|---|--|---|------|
| EUT Description | Mobile Phone | | | |
| FCC ID | PY7-04605A | | | |
| Hardware Version: | A | | | |
| Software Version: | A.1.54 | | | |
| Mode of Operation | <input checked="" type="checkbox"/> GSM | <input checked="" type="checkbox"/> GPRS | <input checked="" type="checkbox"/> EGPRS | |
| | <input checked="" type="checkbox"/> HSDPA | <input checked="" type="checkbox"/> HSUPA | <input checked="" type="checkbox"/> HSPA+ | |
| | <input checked="" type="checkbox"/> LTE TDD | <input checked="" type="checkbox"/> WLAN802.11 a/b/g/n(20M/40M) | <input checked="" type="checkbox"/> Bluetooth | |
| Duty Cycle | GSM | 1/8.3 | | |
| | GPRS (support multi class 12 max) | 1/2.075 (1Dn4UP) 1/2.77 (1Dn3UP) 1/4.15 (1Dn2UP) 1/8.3 (1Dn1UP) | | |
| | LTE FDD | 1:1 | | |
| | LTE TDD | 1:1.58 | | |
| | WCDMA | 1:1 | | |
| | WLAN802.11 b | 99.24% | | |
| | WLAN802.11 a | 96.17% | | |
| | Bluetooth | 76.60% | | |
| TX Frequency Range (MHz) | GSM850 | 824 | — | 849 |
| | GSM1900 | 1850 | — | 1910 |
| | WCDMA Band V | 824 | — | 849 |
| | WCDMA Band II | 1850 | — | 1910 |
| | LTE FDD Band 2 | 1850 | — | 1910 |
| | LTE FDD Band 5 | 824 | — | 849 |
| | LTE FDD Band 7 | 2500 | — | 2570 |
| | LTE TDD Band 41 | 2535 | — | 2655 |
| | WiFi 2.4GHz | 2400 | — | 2462 |
| | WiFi 5GHz | 5150 | — | 5350 |
| | | 5470 | — | 5850 |
| | Bluetooth | 2402 | — | 2480 |

Note: 1) For WiFi 5G, the device does not support channel 144(20M) and channel 142(40M).

2) For WiFi 5G, U-NII-2A and U-NII-2C does not support hotspot function.

TEST SUMMARY

| Frequency Band | Maximum Reported SAR(W/kg) | | | |
|--|----------------------------|-----------|---------|--------------------------|
| | Head | Body-worn | Hotspot | Product specific 10g SAR |
| GSM850 | 0.28 | 0.35 | 0.58 | / |
| GSM1900 | 0.11 | 0.26 | 0.78 | / |
| WCDMA Band II | 0.17 | 0.44 | 0.84 | / |
| WCDMA Band V | 0.21 | 0.33 | 0.40 | / |
| LTE Band 2 | 0.19 | 0.43 | 1.07 | / |
| LTE Band 5 | 0.27 | 0.34 | 0.45 | / |
| LTE Band 7 | 0.44 | 0.64 | 1.19 | / |
| LTE Band 41 | 0.29 | 0.45 | 0.97 | / |
| WI-FI (2.4GHz) | 1.16 | 0.21 | 0.38 | / |
| WI-FI (5GHz) | 0.96 | 0.08 | 0.13 | 0.32 |
| SAR Limited(w/kg) | 1.6 | | | 4 |
| Maximum Simultaneous Transmission SAR (W/kg) | | | | |
| Scenario | Head | Body-worn | Hotspot | Product specific 10g SAR |
| Sum SAR | 1.50 | 0.85 | 1.57 | 0.32 |
| SPLSR | N/A | N/A | N/A | N/A |
| SPLSR Limited | 0.04 | | | 0.1 |

DUT Antenna Locations:

Please see the Appendix D for antenna locations.

The test device is a mobile phone.

According to the distance between LTE/WCDMA/GSM&WIFI&BT antennas and the sides of the EUT we can draw the conclusion that:

| EUT Sides for SAR Testing | | | | | | |
|---------------------------|-------|------|------|-------|-----|--------|
| Mode | Front | Back | Left | Right | Top | Bottom |
| Ant.1(Main Ant.) | Yes | Yes | Yes | Yes | No | Yes |
| Ant.2(WIFI&BT Ant.) | Yes | Yes | No | Yes | Yes | No |

Table 1 : EUT Sides for SAR Testing

Note:

- 1) When the antenna-to-edge distance is greater than 2.5cm, such position does not need to be tested.

GSM - conducted power table:

| GSM 850 | | | | | | | | | | |
|-------------------------|------------|-------|-------|-------|---------|------------------|---------------------------------|-------|-------|--------------|
| Burst Output Power(dBm) | | | | | Tune up | Division Factors | Frame-Average Output Power(dBm) | | | Tune up |
| Channel | | 128 | 190 | 251 | | | 128 | 190 | 251 | |
| GSM(GMSK) | GSM | 32.92 | 32.95 | 32.98 | 33.70 | -9.19 | 23.73 | 23.76 | 23.79 | 24.51 |
| GPRS/EGPRS (GMSK) | 1 TX Slot | 32.91 | 32.94 | 32.98 | 33.70 | -9.19 | 23.72 | 23.75 | 23.79 | 24.51 |
| | 2 TX Slots | 32.27 | 32.33 | 32.40 | 32.70 | -6.18 | 26.09 | 26.15 | 26.22 | 26.52 |
| | 3 TX Slots | 30.67 | 30.65 | 30.68 | 30.70 | -4.42 | 26.25 | 26.23 | 26.26 | 26.28 |
| | 4 TX Slots | 29.65 | 29.68 | 29.69 | 29.70 | -3.17 | 26.48 | 26.51 | 26.52 | 26.53 |
| EGPRS (8PSK) | 1 TX Slot | 27.54 | 27.55 | 27.57 | 28.00 | -9.19 | 18.35 | 18.36 | 18.38 | 18.81 |
| | 2 TX Slots | 26.43 | 26.41 | 26.45 | 27.00 | -6.18 | 20.25 | 20.23 | 20.27 | 20.82 |
| | 3 TX Slots | 24.24 | 24.27 | 24.31 | 25.00 | -4.42 | 19.82 | 19.85 | 19.89 | 20.58 |
| | 4 TX Slots | 23.13 | 23.16 | 23.22 | 24.00 | -3.17 | 19.96 | 19.99 | 20.05 | 20.83 |
| GSM 1900 | | | | | | | | | | |
| Burst Output Power(dBm) | | | | | Tune up | Division Factors | Frame-Average Output Power(dBm) | | | Tune up |
| Channel | | 512 | 661 | 810 | | | 512 | 661 | 810 | |
| GSM(GMSK) | GSM | 28.26 | 28.35 | 28.37 | 28.70 | -9.19 | 19.07 | 19.16 | 19.18 | 19.51 |
| GPRS/EGPRS (GMSK) | 1 TX Slot | 28.24 | 28.27 | 28.21 | 28.70 | -9.19 | 19.05 | 19.08 | 19.02 | 19.51 |
| | 2 TX Slots | 27.06 | 27.08 | 27.04 | 27.70 | -6.18 | 20.88 | 20.90 | 20.86 | 21.52 |
| | 3 TX Slots | 24.94 | 25.03 | 25.02 | 25.70 | -4.42 | 20.52 | 20.61 | 20.60 | 21.28 |
| | 4 TX Slots | 23.90 | 23.94 | 23.96 | 24.70 | -3.17 | 20.73 | 20.77 | 20.79 | 21.53 |
| EGPRS (8PSK) | 1 TX Slot | 26.84 | 26.88 | 26.86 | 27.00 | -9.19 | 17.65 | 17.69 | 17.67 | 17.81 |
| | 2 TX Slots | 25.78 | 25.67 | 25.71 | 26.00 | -6.18 | 19.60 | 19.49 | 19.53 | 19.82 |
| | 3 TX Slots | 23.68 | 23.71 | 23.83 | 24.00 | -4.42 | 19.26 | 19.29 | 19.41 | 19.58 |
| | 4 TX Slots | 22.58 | 22.53 | 22.65 | 23.00 | -3.17 | 19.41 | 19.36 | 19.48 | 19.83 |

Note:

1) . CMU200 measures GSM peak and average output power for active timeslots. For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

| No. of timeslots | 1 | 2 | 3 | 4 |
|--|----------|----------|----------|----------|
| Duty Cycle | 1:8.3 | 1:4.15 | 1:2.77 | 1:2.075 |
| Time based avg. power compared to slotted avg. power | -9.19 | -6.18 | -4.42 | -3.17 |

2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

$$\text{Frame-averaged power} = 10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$$

3) . When the maximum output power variation across the required test channels is > ½ dB, instead of the middle channel, the highest output power channel must be used

WCDMA - conducted power table:

| WCDMA Band II | | | | | |
|------------------------------|--------------|--------------|-------|--------------|---------|
| Average Conducted Power(dBm) | | | | | |
| Channel | | 9262 | 9400 | 9538 | Tune up |
| WCDMA | 12.2kbps RMC | 20.41 | 20.49 | 20.54 | 21.00 |
| | 12.2kbps AMR | 20.40 | 20.46 | 20.51 | 21.00 |
| HSDPA | Subtest 1 | 19.63 | 19.62 | 19.68 | 20.00 |
| | Subtest 2 | 19.58 | 19.60 | 19.61 | 20.00 |
| | Subtest 3 | 19.09 | 19.15 | 19.14 | 19.50 |
| | Subtest 4 | 19.09 | 19.13 | 19.15 | 19.50 |
| HSUPA | Subtest 1 | 17.43 | 17.46 | 17.49 | 18.00 |
| | Subtest 2 | 17.47 | 17.44 | 17.52 | 18.00 |
| | Subtest 3 | 18.43 | 18.44 | 18.49 | 19.00 |
| | Subtest 4 | 16.97 | 17.01 | 17.04 | 17.50 |
| | Subtest 5 | 18.48 | 18.46 | 18.50 | 19.00 |
| DC-HSDPA | Subtest 1 | 19.61 | 19.58 | 19.61 | 20.00 |
| | Subtest 2 | 19.52 | 19.55 | 19.60 | 20.00 |
| | Subtest 3 | 19.02 | 19.11 | 19.10 | 19.50 |
| | Subtest 4 | 19.04 | 19.10 | 19.12 | 19.50 |
| HSPA+ | 16QAM | 17.22 | 17.35 | 17.40 | 18.00 |
| WCDMA Band V | | | | | |
| Average Conducted Power(dBm) | | | | | |
| Channel | | 4132 | 4182 | 4233 | Tune up |
| WCDMA | 12.2kbps RMC | 23.85 | 23.78 | 23.79 | 24.00 |
| | 12.2kbps AMR | 23.81 | 23.76 | 23.80 | 24.00 |
| HSDPA | Subtest 1 | 22.69 | 22.63 | 22.67 | 23.00 |
| | Subtest 2 | 22.57 | 22.56 | 22.54 | 23.00 |
| | Subtest 3 | 22.12 | 22.13 | 22.15 | 22.50 |
| | Subtest 4 | 22.08 | 22.03 | 22.14 | 22.50 |
| HSUPA | Subtest 1 | 20.59 | 20.63 | 20.62 | 21.00 |
| | Subtest 2 | 20.51 | 20.64 | 20.63 | 21.00 |
| | Subtest 3 | 21.56 | 21.57 | 21.62 | 22.00 |
| | Subtest 4 | 20.01 | 20.10 | 20.09 | 20.50 |
| | Subtest 5 | 21.63 | 21.60 | 21.66 | 22.00 |
| DC-HSDPA | Subtest 1 | 22.51 | 22.60 | 22.66 | 23.00 |
| | Subtest 2 | 22.44 | 22.52 | 22.52 | 23.00 |
| | Subtest 3 | 22.10 | 22.11 | 22.10 | 22.50 |
| | Subtest 4 | 22.01 | 22.00 | 22.11 | 22.50 |
| HSPA+ | 16QAM | 20.48 | 20.56 | 20.55 | 21.00 |

LTE - conducted power table:

| LTE Band 2 | | | | Conducted Power(dBm) | | | |
|------------|------------|---------|-----------|----------------------|---------|---------|---------|
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 18607 | 18900 | 19193 | |
| 1.4MHz | QPSK | 1 | 0 | 21.36 | 21.34 | 21.30 | 21.70 |
| | | 1 | 2 | 21.32 | 21.30 | 21.53 | 21.70 |
| | | 1 | 5 | 21.42 | 21.30 | 21.44 | 21.70 |
| | | 3 | 0 | 21.42 | 21.36 | 21.41 | 21.70 |
| | | 3 | 2 | 21.64 | 21.36 | 21.59 | 21.70 |
| | | 3 | 3 | 21.37 | 21.32 | 21.37 | 21.70 |
| | 16QAM | 6 | 0 | 20.41 | 20.32 | 20.43 | 20.70 |
| | | 1 | 0 | 20.66 | 20.11 | 20.54 | 20.70 |
| | | 1 | 2 | 20.68 | 20.48 | 20.56 | 20.70 |
| | | 1 | 5 | 20.51 | 20.70 | 20.68 | 20.70 |
| | | 3 | 0 | 20.32 | 20.38 | 20.39 | 20.70 |
| | | 3 | 2 | 20.33 | 20.46 | 20.56 | 20.70 |
| | | 3 | 3 | 20.40 | 20.19 | 20.57 | 20.70 |
| | | 6 | 0 | 19.57 | 19.43 | 19.62 | 19.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 18615 | 18900 | 19185 | |
| 3MHz | QPSK | 1 | 0 | 21.40 | 21.28 | 21.44 | 21.70 |
| | | 1 | 7 | 21.54 | 21.27 | 21.46 | 21.70 |
| | | 1 | 14 | 21.38 | 21.33 | 21.36 | 21.70 |
| | | 8 | 0 | 20.42 | 20.34 | 20.51 | 20.70 |
| | | 8 | 4 | 20.35 | 20.34 | 20.55 | 20.70 |
| | | 8 | 7 | 20.42 | 20.41 | 20.36 | 20.70 |
| | 16QAM | 15 | 0 | 20.28 | 20.33 | 20.47 | 20.70 |
| | | 1 | 0 | 20.65 | 20.54 | 20.67 | 20.70 |
| | | 1 | 7 | 20.68 | 20.66 | 20.69 | 20.70 |
| | | 1 | 14 | 20.67 | 20.49 | 20.68 | 20.70 |
| | | 8 | 0 | 19.56 | 19.48 | 19.64 | 19.70 |
| | | 8 | 4 | 19.60 | 19.48 | 19.62 | 19.70 |
| | | 8 | 7 | 19.50 | 19.50 | 19.49 | 19.70 |
| | | 15 | 0 | 19.52 | 19.31 | 19.54 | 19.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 18625 | 18900 | 19175 | |
| 5MHz | QPSK | 1 | 0 | 21.20 | 21.29 | 21.38 | 21.70 |
| | | 1 | 13 | 21.36 | 21.42 | 21.42 | 21.70 |
| | | 1 | 24 | 21.15 | 21.26 | 21.38 | 21.70 |
| | | 12 | 0 | 20.42 | 20.37 | 20.38 | 20.70 |
| | | 12 | 6 | 20.50 | 20.36 | 20.55 | 20.70 |
| | | 12 | 13 | 20.43 | 20.33 | 20.52 | 20.70 |
| | 16QAM | 25 | 0 | 20.40 | 20.41 | 20.33 | 20.70 |
| | | 1 | 0 | 20.57 | 20.56 | 20.69 | 20.70 |
| | | 1 | 13 | 20.28 | 20.62 | 20.63 | 20.70 |
| | | 1 | 24 | 20.31 | 20.55 | 20.54 | 20.70 |
| | | 12 | 0 | 19.47 | 19.54 | 19.38 | 19.70 |
| | | 12 | 6 | 19.48 | 19.52 | 19.42 | 19.70 |

| Bandwidth | Modulation | RB size | RB offset | 12 | 13 | 19.56 | 19.36 | 19.45 | 19.70 |
|-----------|------------|---------|-----------|--------------|--------------|--------------|---------|-------|-------|
| | | | | 25 | 0 | 19.50 | 19.38 | 19.62 | 19.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up | | |
| | | | | 18650 | 18900 | 19150 | | | |
| 10MHz | QPSK | 1 | 0 | 21.45 | 21.44 | 21.39 | 21.70 | | |
| | | 1 | 25 | 21.44 | 21.40 | 21.46 | 21.70 | | |
| | | 1 | 49 | 21.40 | 21.33 | 21.43 | 21.70 | | |
| | | 25 | 0 | 20.36 | 20.40 | 20.45 | 20.70 | | |
| | | 25 | 13 | 20.41 | 20.45 | 20.44 | 20.70 | | |
| | | 25 | 25 | 20.40 | 20.39 | 20.47 | 20.70 | | |
| | | 50 | 0 | 20.39 | 20.39 | 20.46 | 20.70 | | |
| | 16QAM | 1 | 0 | 20.59 | 20.53 | 20.57 | 20.70 | | |
| | | 1 | 25 | 20.12 | 20.23 | 20.24 | 20.70 | | |
| | | 1 | 49 | 20.41 | 20.34 | 20.62 | 20.70 | | |
| | | 25 | 0 | 19.57 | 19.41 | 19.53 | 19.70 | | |
| | | 25 | 13 | 19.44 | 19.56 | 19.62 | 19.70 | | |
| | | 25 | 25 | 19.46 | 19.42 | 19.53 | 19.70 | | |
| | | 50 | 0 | 19.47 | 19.33 | 19.53 | 19.70 | | |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up | | |
| | | | | 18675 | 18900 | 19125 | | | |
| 15MHz | QPSK | 1 | 0 | 21.38 | 21.36 | 21.47 | 21.70 | | |
| | | 1 | 38 | 21.54 | 21.34 | 21.41 | 21.70 | | |
| | | 1 | 74 | 21.20 | 21.26 | 21.37 | 21.70 | | |
| | | 36 | 0 | 20.44 | 20.41 | 20.46 | 20.70 | | |
| | | 36 | 18 | 20.39 | 20.42 | 20.55 | 20.70 | | |
| | | 36 | 39 | 20.49 | 20.39 | 20.54 | 20.70 | | |
| | | 75 | 0 | 20.42 | 20.34 | 20.54 | 20.70 | | |
| | 16QAM | 1 | 0 | 20.58 | 20.54 | 20.67 | 20.70 | | |
| | | 1 | 38 | 20.66 | 20.48 | 20.69 | 20.70 | | |
| | | 1 | 74 | 20.55 | 20.46 | 20.69 | 20.70 | | |
| | | 36 | 0 | 19.44 | 19.35 | 19.45 | 19.70 | | |
| | | 36 | 18 | 19.46 | 19.45 | 19.40 | 19.70 | | |
| | | 36 | 39 | 19.52 | 19.32 | 19.41 | 19.70 | | |
| | | 75 | 0 | 19.39 | 19.47 | 19.55 | 19.70 | | |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up | | |
| | | | | 18700 | 18900 | 19100 | | | |
| 20MHz | QPSK | 1 | 0 | 21.33 | 21.28 | 21.30 | 21.70 | | |
| | | 1 | 50 | 21.48 | 21.47 | 21.67 | 21.70 | | |
| | | 1 | 99 | 21.24 | 21.12 | 21.33 | 21.70 | | |
| | | 50 | 0 | 20.46 | 20.41 | 20.41 | 20.70 | | |
| | | 50 | 25 | 20.42 | 20.49 | 20.40 | 20.70 | | |
| | | 50 | 50 | 20.34 | 20.28 | 20.42 | 20.70 | | |
| | | 100 | 0 | 20.42 | 20.34 | 20.40 | 20.70 | | |
| | 16QAM | 1 | 0 | 20.35 | 20.68 | 20.65 | 20.70 | | |
| | | 1 | 50 | 20.52 | 20.53 | 20.57 | 20.70 | | |
| | | 1 | 99 | 20.51 | 20.60 | 20.54 | 20.70 | | |
| | | 50 | 0 | 19.56 | 19.41 | 19.48 | 19.70 | | |
| | | 50 | 25 | 19.49 | 19.52 | 19.46 | 19.70 | | |
| | | 50 | 50 | 19.39 | 19.34 | 19.44 | 19.70 | | |
| | | 100 | 0 | 19.50 | 19.46 | 19.50 | 19.70 | | |

| LTE Band 5 | | | | Conducted Power(dBm) | | | |
|------------|------------|---------|-----------|----------------------|---------|---------|---------|
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 20407 | 20525 | 20643 | |
| 1.4MHz | QPSK | 1 | 0 | 23.85 | 23.94 | 23.80 | 24.70 |
| | | 1 | 2 | 23.99 | 24.08 | 24.11 | 24.70 |
| | | 1 | 5 | 23.98 | 23.89 | 23.88 | 24.70 |
| | | 3 | 0 | 23.96 | 23.98 | 24.06 | 24.70 |
| | | 3 | 2 | 24.05 | 23.95 | 24.04 | 24.70 |
| | | 3 | 3 | 23.95 | 24.02 | 23.90 | 24.70 |
| | 16QAM | 6 | 0 | 22.98 | 23.10 | 22.97 | 23.70 |
| | | 1 | 0 | 23.13 | 23.22 | 23.16 | 23.70 |
| | | 1 | 2 | 23.10 | 23.08 | 22.84 | 23.70 |
| | | 1 | 5 | 22.96 | 22.99 | 22.87 | 23.70 |
| | | 3 | 0 | 22.89 | 23.02 | 22.83 | 23.70 |
| | | 3 | 2 | 23.02 | 22.91 | 23.00 | 23.70 |
| | | 3 | 3 | 22.89 | 23.06 | 22.91 | 23.70 |
| | | 6 | 0 | 22.01 | 22.25 | 21.99 | 22.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 20415 | 20525 | 20635 | |
| 3MHz | QPSK | 1 | 0 | 23.95 | 23.91 | 23.97 | 24.70 |
| | | 1 | 7 | 24.03 | 24.16 | 24.32 | 24.70 |
| | | 1 | 14 | 24.04 | 23.98 | 23.82 | 24.70 |
| | | 8 | 0 | 23.06 | 22.95 | 22.91 | 23.70 |
| | | 8 | 4 | 22.98 | 23.03 | 23.05 | 23.70 |
| | | 8 | 7 | 22.95 | 22.95 | 22.93 | 23.70 |
| | | 15 | 0 | 22.98 | 23.09 | 23.02 | 23.70 |
| | 16QAM | 1 | 0 | 23.29 | 23.30 | 23.14 | 23.70 |
| | | 1 | 7 | 23.41 | 23.04 | 23.41 | 23.70 |
| | | 1 | 14 | 23.36 | 23.39 | 22.72 | 23.70 |
| | | 8 | 0 | 21.96 | 22.09 | 21.99 | 22.70 |
| | | 8 | 4 | 21.96 | 22.07 | 22.07 | 22.70 |
| | | 8 | 7 | 21.92 | 21.96 | 22.00 | 22.70 |
| | | 15 | 0 | 22.08 | 22.15 | 21.98 | 22.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 20425 | 20525 | 20625 | |
| 5MHz | QPSK | 1 | 0 | 23.85 | 23.87 | 23.84 | 24.70 |
| | | 1 | 13 | 24.00 | 23.95 | 24.07 | 24.70 |
| | | 1 | 24 | 23.88 | 23.83 | 23.73 | 24.70 |
| | | 12 | 0 | 22.94 | 23.01 | 23.01 | 23.70 |
| | | 12 | 6 | 23.04 | 23.09 | 23.03 | 23.70 |
| | | 12 | 13 | 23.08 | 23.03 | 23.01 | 23.70 |
| | | 25 | 0 | 23.05 | 23.07 | 23.00 | 23.70 |
| | 16QAM | 1 | 0 | 23.15 | 23.11 | 22.90 | 23.70 |
| | | 1 | 13 | 23.06 | 23.02 | 23.27 | 23.70 |
| | | 1 | 24 | 23.41 | 23.04 | 22.81 | 23.70 |
| | | 12 | 0 | 21.96 | 21.99 | 22.02 | 22.70 |
| | | 12 | 6 | 22.10 | 22.13 | 22.01 | 22.70 |
| | | 12 | 13 | 22.09 | 21.95 | 21.94 | 22.70 |

| Bandwidth | Modulation | 25 | 0 | 22.11 | 22.14 | 21.94 | 22.70 |
|-----------|------------|---------|-----------|------------------|------------------|------------------|---------|
| | | RB size | RB offset | Channel 20450 | Channel 20525 | Channel 20600 | Tune up |
| 10MHz | QPSK | 1 | 0 | 23.83 | 23.89 | 23.80 | 24.70 |
| | | 1 | 25 | 23.96 | 24.22 | 24.23 | 24.70 |
| | | 1 | 49 | 23.87 | 24.00 | 23.92 | 24.70 |
| | | 25 | 0 | 23.04 | 23.13 | 23.18 | 23.70 |
| | | 25 | 13 | 22.96 | 23.07 | 23.08 | 23.70 |
| | | 25 | 25 | 23.14 | 23.01 | 22.97 | 23.70 |
| | | 50 | 0 | 22.96 | 23.05 | 23.03 | 23.70 |
| | 16QAM | 1 | 0 | 23.27 | 23.13 | 23.36 | 23.70 |
| | | 1 | 25 | 23.23 | 22.97 | 23.19 | 23.70 |
| | | 1 | 49 | 23.12 | 23.36 | 22.76 | 23.70 |
| | | 25 | 0 | 21.92 | 22.11 | 22.16 | 22.70 |
| | | 25 | 13 | 21.99 | 22.08 | 22.14 | 22.70 |
| | | 25 | 25 | 22.10 | 22.05 | 22.14 | 22.70 |
| | | 50 | 0 | 22.07 | 22.09 | 22.01 | 22.70 |

| LTE Band 7 | | | | Conducted Power(dBm) | | | |
|------------|------------|---------|-----------|----------------------|---------|---------|---------|
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 20775 | 21100 | 21425 | |
| 5MHz | QPSK | 1 | 0 | 23.08 | 23.10 | 23.38 | 23.70 |
| | | 1 | 13 | 23.28 | 23.22 | 23.36 | 23.70 |
| | | 1 | 24 | 23.23 | 23.10 | 23.26 | 23.70 |
| | | 12 | 0 | 22.30 | 22.29 | 22.47 | 22.70 |
| | | 12 | 6 | 22.38 | 22.25 | 22.42 | 22.70 |
| | | 12 | 13 | 22.27 | 22.21 | 22.27 | 22.70 |
| | | 25 | 0 | 22.32 | 22.21 | 22.35 | 22.70 |
| | 16QAM | 1 | 0 | 22.48 | 22.35 | 22.42 | 22.70 |
| | | 1 | 13 | 22.30 | 22.03 | 22.41 | 22.70 |
| | | 1 | 24 | 22.35 | 22.28 | 22.40 | 22.70 |
| | | 12 | 0 | 21.30 | 21.30 | 21.53 | 21.70 |
| | | 12 | 6 | 21.25 | 21.39 | 21.60 | 21.70 |
| | | 12 | 13 | 21.37 | 21.31 | 21.34 | 21.70 |
| | | 25 | 0 | 21.28 | 21.23 | 21.51 | 21.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 20800 | 21100 | 21400 | |
| 10MHz | QPSK | 1 | 0 | 23.21 | 23.01 | 23.27 | 23.70 |
| | | 1 | 25 | 23.20 | 23.23 | 23.31 | 23.70 |
| | | 1 | 49 | 23.13 | 23.16 | 23.26 | 23.70 |
| | | 25 | 0 | 22.34 | 22.13 | 22.43 | 22.70 |
| | | 25 | 13 | 22.26 | 22.17 | 22.34 | 22.70 |
| | | 25 | 25 | 22.24 | 22.26 | 22.37 | 22.70 |
| | | 50 | 0 | 22.32 | 22.28 | 22.41 | 22.70 |
| | 16QAM | 1 | 0 | 22.49 | 22.52 | 22.35 | 22.70 |
| | | 1 | 25 | 22.67 | 22.43 | 22.66 | 22.70 |
| | | 1 | 49 | 21.99 | 22.31 | 22.51 | 22.70 |
| | | 25 | 0 | 21.36 | 21.32 | 21.48 | 21.70 |
| 25 | 13 | 21.39 | 21.26 | 21.43 | 21.70 | | |



| Bandwidth | Modulation | 25 | 25 | 21.36 | 21.24 | 21.36 | 21.70 |
|-----------|------------|---------|-----------|--------------|--------------|--------------|---------|
| | | 50 | 0 | 21.26 | 21.24 | 21.44 | 21.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 20825 | 21100 | 21375 | |
| 15MHz | QPSK | 1 | 0 | 23.29 | 23.08 | 23.26 | 23.70 |
| | | 1 | 38 | 23.26 | 23.10 | 23.28 | 23.70 |
| | | 1 | 74 | 23.14 | 23.02 | 23.24 | 23.70 |
| | | 36 | 0 | 22.29 | 22.21 | 22.35 | 22.70 |
| | | 36 | 18 | 22.32 | 22.26 | 22.44 | 22.70 |
| | | 36 | 39 | 22.33 | 22.16 | 22.46 | 22.70 |
| | | 75 | 0 | 22.19 | 22.17 | 22.36 | 22.70 |
| | 16QAM | 1 | 0 | 22.44 | 22.67 | 22.69 | 22.70 |
| | | 1 | 38 | 22.62 | 22.32 | 22.68 | 22.70 |
| | | 1 | 74 | 22.62 | 22.67 | 22.69 | 22.70 |
| | | 36 | 0 | 21.31 | 21.33 | 21.39 | 21.70 |
| | | 36 | 18 | 21.28 | 21.25 | 21.46 | 21.70 |
| | | 36 | 39 | 21.21 | 21.22 | 21.43 | 21.70 |
| | | 75 | 0 | 21.18 | 21.27 | 21.41 | 21.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Tune up |
| | | | | 20850 | 21100 | 21350 | |
| 20MHz | QPSK | 1 | 0 | 23.08 | 23.28 | 23.22 | 23.70 |
| | | 1 | 50 | 23.47 | 23.21 | 23.45 | 23.70 |
| | | 1 | 99 | 22.97 | 23.11 | 23.25 | 23.70 |
| | | 50 | 0 | 22.28 | 22.24 | 22.46 | 22.70 |
| | | 50 | 25 | 22.31 | 22.27 | 22.47 | 22.70 |
| | | 50 | 50 | 22.39 | 22.18 | 22.34 | 22.70 |
| | | 100 | 0 | 22.34 | 22.24 | 22.43 | 22.70 |
| | 16QAM | 1 | 0 | 22.29 | 22.29 | 22.68 | 22.70 |
| | | 1 | 50 | 22.46 | 22.63 | 22.69 | 22.70 |
| | | 1 | 99 | 22.41 | 21.98 | 22.70 | 22.70 |
| | | 50 | 0 | 21.26 | 21.33 | 21.47 | 21.70 |
| | | 50 | 25 | 21.38 | 21.39 | 21.51 | 21.70 |
| | | 50 | 50 | 21.34 | 21.28 | 21.37 | 21.70 |
| | | 100 | 0 | 21.36 | 21.34 | 21.39 | 21.70 |

| LTE FDD Band 41 | | | | Conducted Power(dBm) | | | | |
|-----------------|------------|---------|-----------|----------------------|---------|---------|---------|---------|
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Channel | Tune up |
| | | | | 40065 | 40448 | 40832 | 41215 | |
| 5MHz | QPSK | 1 | 0 | 24.48 | 24.40 | 24.33 | 24.33 | 24.70 |
| | | 1 | 13 | 24.59 | 24.55 | 24.44 | 24.49 | 24.70 |
| | | 1 | 24 | 24.39 | 24.38 | 24.31 | 24.32 | 24.70 |
| | | 12 | 0 | 23.62 | 23.60 | 23.50 | 23.51 | 23.70 |
| | | 12 | 6 | 23.66 | 23.62 | 23.49 | 23.64 | 23.70 |
| | | 12 | 13 | 23.65 | 23.57 | 23.50 | 23.51 | 23.70 |
| | | 25 | 0 | 23.61 | 23.52 | 23.43 | 23.52 | 23.70 |
| | 16QAM | 1 | 0 | 23.65 | 23.52 | 23.43 | 23.52 | 23.70 |
| | | 1 | 13 | 23.64 | 23.61 | 23.46 | 23.60 | 23.70 |
| | | 1 | 24 | 23.56 | 23.47 | 23.40 | 23.51 | 23.70 |
| 12 | | 0 | 22.52 | 22.47 | 22.40 | 22.42 | 22.70 | |

| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Channel | Tune up |
|--------------|------------|---------|-----------|--------------|--------------|--------------|--------------|---------|
| | | | | 40090 | 40457 | 40823 | 41190 | |
| | | 12 | 6 | 22.58 | 22.58 | 22.41 | 22.49 | 22.70 |
| | | 12 | 13 | 22.53 | 22.46 | 22.35 | 22.41 | 22.70 |
| | | 25 | 0 | 22.62 | 22.51 | 22.36 | 22.52 | 22.70 |
| 10MHz | QPSK | 1 | 0 | 24.56 | 24.59 | 24.48 | 24.52 | 24.70 |
| | | 1 | 25 | 24.50 | 24.54 | 24.43 | 24.46 | 24.70 |
| | | 1 | 49 | 24.57 | 24.44 | 24.40 | 24.42 | 24.70 |
| | | 25 | 0 | 23.67 | 23.68 | 23.58 | 23.68 | 23.70 |
| | | 25 | 13 | 23.67 | 23.61 | 23.45 | 23.57 | 23.70 |
| | | 25 | 25 | 23.68 | 23.50 | 23.45 | 23.53 | 23.70 |
| | 16QAM | 50 | 0 | 23.63 | 23.57 | 23.47 | 23.54 | 23.70 |
| | | 1 | 0 | 23.64 | 23.67 | 23.51 | 23.67 | 23.70 |
| | | 1 | 25 | 23.67 | 23.57 | 23.50 | 23.55 | 23.70 |
| | | 1 | 49 | 23.64 | 23.53 | 23.45 | 23.60 | 23.70 |
| | | 25 | 0 | 22.64 | 22.58 | 22.47 | 22.60 | 22.70 |
| | | 25 | 13 | 22.64 | 22.55 | 22.45 | 22.56 | 22.70 |
| | | 25 | 25 | 22.65 | 22.53 | 22.43 | 22.53 | 22.70 |
| | | 50 | 0 | 22.66 | 22.45 | 22.37 | 22.57 | 22.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Channel | Tune up |
| | | | | 40115 | 40465 | 40815 | 41165 | |
| 15MHz | QPSK | 1 | 0 | 24.51 | 24.51 | 24.49 | 24.48 | 24.70 |
| | | 1 | 38 | 24.63 | 24.53 | 24.40 | 24.49 | 24.70 |
| | | 1 | 74 | 24.51 | 24.41 | 24.34 | 24.34 | 24.70 |
| | | 36 | 0 | 23.63 | 23.56 | 23.57 | 23.56 | 23.70 |
| | | 36 | 18 | 23.66 | 23.56 | 23.51 | 23.56 | 23.70 |
| | | 36 | 39 | 23.66 | 23.48 | 23.52 | 23.44 | 23.70 |
| | | 75 | 0 | 23.58 | 23.47 | 23.45 | 23.51 | 23.70 |
| | 16QAM | 1 | 0 | 23.65 | 23.54 | 23.47 | 23.55 | 23.70 |
| | | 1 | 38 | 23.66 | 23.52 | 23.49 | 23.56 | 23.70 |
| | | 1 | 74 | 23.63 | 23.54 | 23.39 | 23.49 | 23.70 |
| | | 36 | 0 | 22.57 | 22.50 | 22.37 | 22.57 | 22.70 |
| | | 36 | 18 | 22.59 | 22.46 | 22.38 | 22.51 | 22.70 |
| | | 36 | 39 | 22.57 | 22.44 | 22.39 | 22.37 | 22.70 |
| | | 75 | 0 | 22.58 | 22.44 | 22.39 | 22.48 | 22.70 |
| Bandwidth | Modulation | RB size | RB offset | Channel | Channel | Channel | Channel | Tune up |
| | | | | 40140 | 40473 | 40807 | 41140 | |
| 20MHz | QPSK | 1 | 0 | 24.49 | 24.47 | 24.39 | 24.40 | 24.70 |
| | | 1 | 50 | 24.61 | 24.60 | 24.46 | 24.49 | 24.70 |
| | | 1 | 99 | 24.42 | 24.27 | 24.22 | 24.24 | 24.70 |
| | | 50 | 0 | 23.56 | 23.51 | 23.38 | 23.55 | 23.70 |
| | | 50 | 25 | 23.67 | 23.48 | 23.36 | 23.39 | 23.70 |
| | | 50 | 50 | 23.53 | 23.43 | 23.28 | 23.37 | 23.70 |
| | | 100 | 0 | 23.67 | 23.57 | 23.42 | 23.47 | 23.70 |
| | 16QAM | 1 | 0 | 23.55 | 23.59 | 23.47 | 23.56 | 23.70 |
| | | 1 | 50 | 23.66 | 23.62 | 23.51 | 23.61 | 23.70 |
| | | 1 | 99 | 23.52 | 23.33 | 23.30 | 23.42 | 23.70 |
| | | 50 | 0 | 22.38 | 22.43 | 22.36 | 22.53 | 22.70 |
| | | 50 | 25 | 22.49 | 22.45 | 22.34 | 22.45 | 22.70 |
| | | 50 | 50 | 22.49 | 22.35 | 22.23 | 22.35 | 22.70 |
| | | 100 | 0 | 22.60 | 22.52 | 22.44 | 22.48 | 22.70 |



Downlink LTE CA - conducted power table:

| Configure | PCC | | | | | | | SCC | | | | Power | | |
|-----------|----------|----------|------------|----------------|------------|--------|--------------|----------|----------|----------------|------------|--------------------------|-------------------------|---------|
| | LTE Band | BW (MHz) | Modulation | UL Freq. (MHz) | UL Channel | UL# RB | UL RB Offset | LTE Band | BW (MHz) | DL Freq. (MHz) | DL Channel | LTE Rel 10 Tx.Power(dBm) | LTE Rel 8 Tx.Power(dBm) | Tune-up |
| CA 7A-7A | Band 7 | 20M | QPSK | 2510 | 20850 | 1 | 50 | Band 7 | 20M | 2680 | 3350 | 23.45 | 23.47 | 23.70 |


Note: The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.

WiFi 2.4G - conducted power table:

| Mode | Channel | Frequency(MHz) | Data Rate(Mbps) | Tune up | Average Power (dBm) | SAR Test |
|-------------------|---------|----------------|-----------------|---------|---------------------|----------|
| 802.11b | 1 | 2412 | 1 | 19.00 | 18.26 | Yes |
| | 6 | 2437 | | 19.00 | 18.66 | Yes |
| | 11 | 2462 | | 19.00 | 18.24 | Yes |
| 802.11g | 1 | 2412 | 6 | 16.00 | 15.32 | No |
| | 6 | 2437 | | 16.00 | 15.71 | No |
| | 11 | 2462 | | 16.00 | 15.67 | No |
| 802.11n HT20 SISO | 1 | 2412 | 6.5 | 15.00 | 14.44 | No |
| | 6 | 2437 | | 15.00 | 14.73 | No |
| | 11 | 2462 | | 15.00 | 14.61 | No |
| 802.11n HT40 SISO | 3 | 2422 | 13.5 | 15.00 | 14.34 | No |
| | 6 | 2437 | | 15.00 | 14.58 | No |
| | 9 | 2452 | | 15.00 | 14.89 | No |

Duty cycle: 2.4GHz Wi-Fi 802.11b

Duty cycle= 8.362/8.426=99.24%

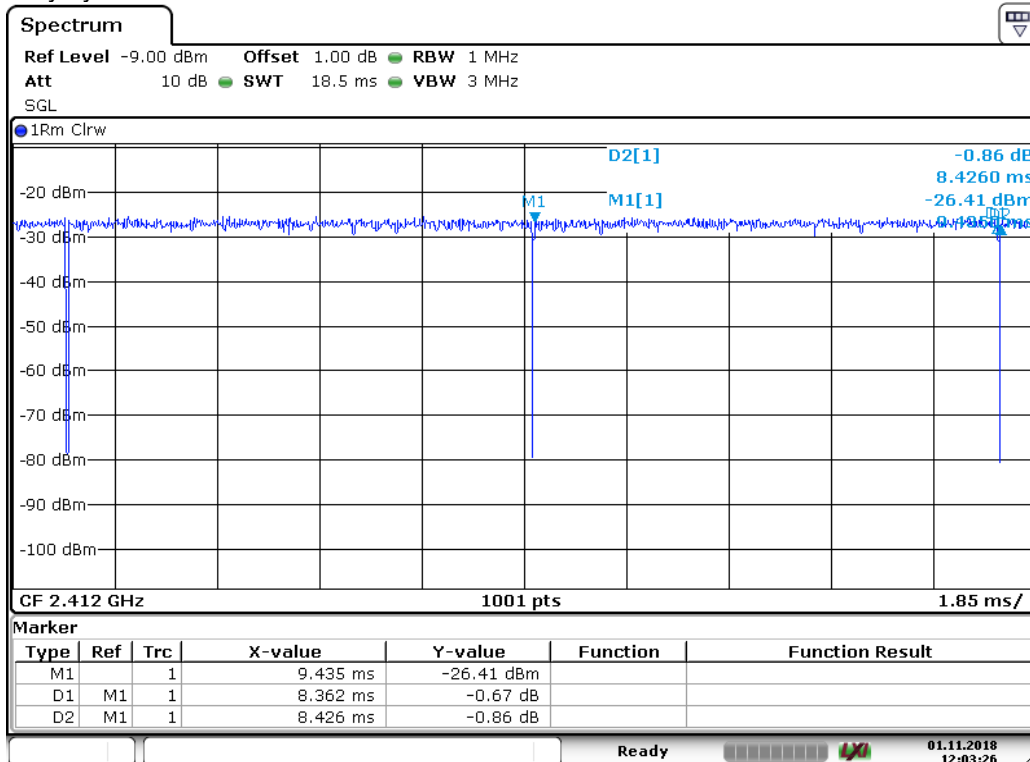

Date: 1 NOV 2018 12:03:27


WiFi 5G - conducted power table:

| 5GHz | mode | Channel | Frequency(MHz) | Data Rate(Mbps) | Tune up | Average Power (dBm) | SAR Test | |
|----------|--------------|----------|----------------|-----------------|---------|---------------------|----------|----|
| 802.11a | U-NII-1 | 36 | 5180 | 6 | 12.00 | 11.41 | Yes | |
| | | 40 | 5200 | | 12.00 | 11.55 | Yes | |
| | | 44 | 5220 | | 12.00 | 11.38 | No | |
| | | 48 | 5240 | | 12.00 | 11.42 | Yes | |
| | U-NII-2A | 52 | 5260 | | 12.00 | 11.36 | Yes | |
| | | 56 | 5280 | | 12.00 | 11.38 | Yes | |
| | | 60 | 5300 | | 12.00 | 11.19 | No | |
| | | 64 | 5320 | | 12.00 | 11.22 | Yes | |
| | U-NII-2C | 100 | 5500 | | 12.00 | 11.79 | Yes | |
| | | 104 | 5520 | | 12.00 | 11.59 | No | |
| | | 108 | 5540 | | 12.00 | 11.56 | No | |
| | | 112 | 5560 | | 12.00 | 11.85 | Yes | |
| | | 116 | 5580 | | 12.00 | 11.59 | No | |
| | | 120 | 5600 | | 12.00 | 11.47 | No | |
| | | 124 | 5620 | | 12.00 | 11.47 | No | |
| | | 128 | 5640 | | 12.00 | 11.49 | No | |
| | U-NII-3 | 132 | 5660 | | 12.00 | 11.36 | No | |
| | | 136 | 5680 | | 12.00 | 11.36 | No | |
| | | 140 | 5700 | | 12.00 | 11.60 | Yes | |
| | | 149 | 5745 | | 12.00 | 11.38 | Yes | |
| 153 | | 5765 | 12.00 | 11.16 | No | | | |
| 157 | | 5785 | 12.00 | 11.42 | Yes | | | |
| | U-NII-3 | 161 | 5805 | 12.00 | 11.37 | No | | |
| | | 165 | 5825 | 12.00 | 11.40 | Yes | | |
| | 802.11n-HT20 | U-NII-1 | 36 | 5180 | MCS0 | 11.00 | 10.53 | No |
| | | | 40 | 5200 | | 11.00 | 10.48 | No |
| | | | 44 | 5220 | | 11.00 | 10.51 | No |
| | | | 48 | 5240 | | 11.00 | 10.53 | No |
| | | U-NII-2A | 52 | 5260 | | 11.00 | 10.56 | No |
| | | | 56 | 5280 | | 11.00 | 10.50 | No |
| 60 | | | 5300 | 11.00 | | 10.45 | No | |
| U-NII-2C | | 64 | 5320 | 11.00 | | 10.49 | No | |
| | | 100 | 5500 | 11.00 | | 10.32 | No | |
| | | 104 | 5520 | 11.00 | | 10.52 | No | |
| | | 108 | 5540 | 11.00 | | 10.59 | No | |
| | | 112 | 5560 | 11.00 | | 10.72 | No | |
| | | 116 | 5580 | 11.00 | | 10.72 | No | |
| | | 120 | 5600 | 11.00 | | 10.65 | No | |
| | | 124 | 5620 | 11.00 | | 10.34 | No | |
| U-NII-3 | | 128 | 5640 | 11.00 | | 10.42 | No | |
| | | 132 | 5660 | 11.00 | | 10.20 | No | |
| | | 136 | 5680 | 11.00 | | 10.15 | No | |
| | | 140 | 5700 | 11.00 | | 10.01 | No | |
| | | 149 | 5745 | 11.00 | | 10.02 | No | |
| | | | | | | | | |

| | | 153 | 5765 | | 11.00 | 10.14 | No | |
|--------------|----------|---------|----------------|-----------------|---------|---------------------|----------|----|
| | | 157 | 5785 | | 11.00 | 10.03 | No | |
| | | 161 | 5805 | | 11.00 | 10.28 | No | |
| | | 165 | 5825 | | 11.00 | 10.39 | No | |
| 5GHz | mode | Channel | Frequency(MHz) | Data Rate(Mbps) | Tune up | Average Power (dBm) | SAR Test | |
| 802.11n-HT40 | U-NII-1 | 38 | 5190 | MCS0 | 11.00 | 10.40 | No | |
| | | 46 | 5230 | | 11.00 | 10.53 | No | |
| | U-NII-2A | 54 | 5270 | | 11.00 | 10.56 | No | |
| | | 62 | 5310 | | 11.00 | 10.43 | No | |
| | U-NII-2C | 102 | 5510 | | 11.00 | 10.30 | No | |
| | | 110 | 5550 | | 11.00 | 10.51 | No | |
| | | 118 | 5590 | | 11.00 | 10.46 | No | |
| | | 126 | 5630 | | 11.00 | 10.26 | No | |
| | U-NII-3 | 134 | 5670 | | 11.00 | 10.04 | No | |
| | | 151 | 5755 | | 11.00 | 10.01 | No | |
| | | | 159 | | 5795 | 11.00 | 10.05 | No |

Duty cycle: 5GHz Wi-Fi 802.11a

Duty cycle= $\frac{1.38}{1.435} = 96.17\%$

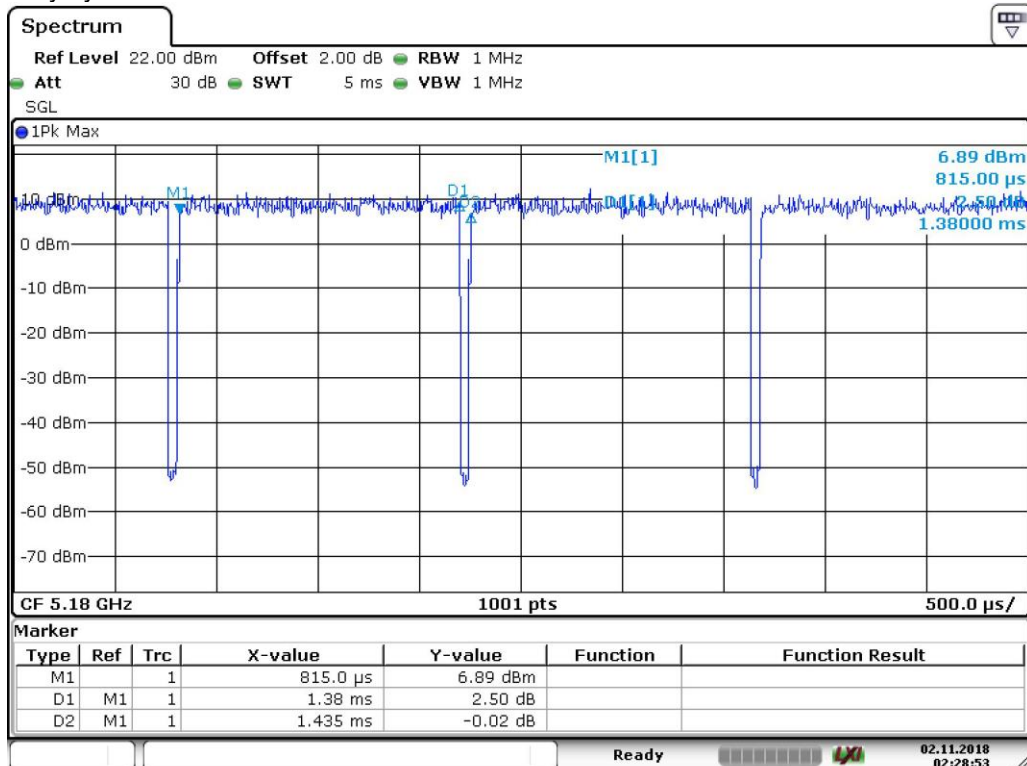


Date: 2.NOV.2018 02:28:53

BT - conducted power table:

| BT | | | Tune up (dBm) | Average Conducted Power(dBm) |
|------------|---------|----------------|---------------|------------------------------|
| Modulation | Channel | Frequency(MHz) | | |
| GFSK | 0 | 2402 | 9.50 | 8.36 |
| | 39 | 2441 | 9.50 | 7.19 |
| | 78 | 2480 | 9.50 | 6.46 |
| π/4DQPSK | 0 | 2402 | 9.50 | 6.75 |
| | 39 | 2441 | 9.50 | 6.62 |
| | 78 | 2480 | 9.50 | 4.48 |
| 8DPSK | 0 | 2402 | 9.50 | 6.70 |
| | 39 | 2441 | 9.50 | 6.68 |
| | 78 | 2480 | 9.50 | 4.52 |

Duty cycle: GFSK

Duty cycle= 2.88/3.76=76.60%

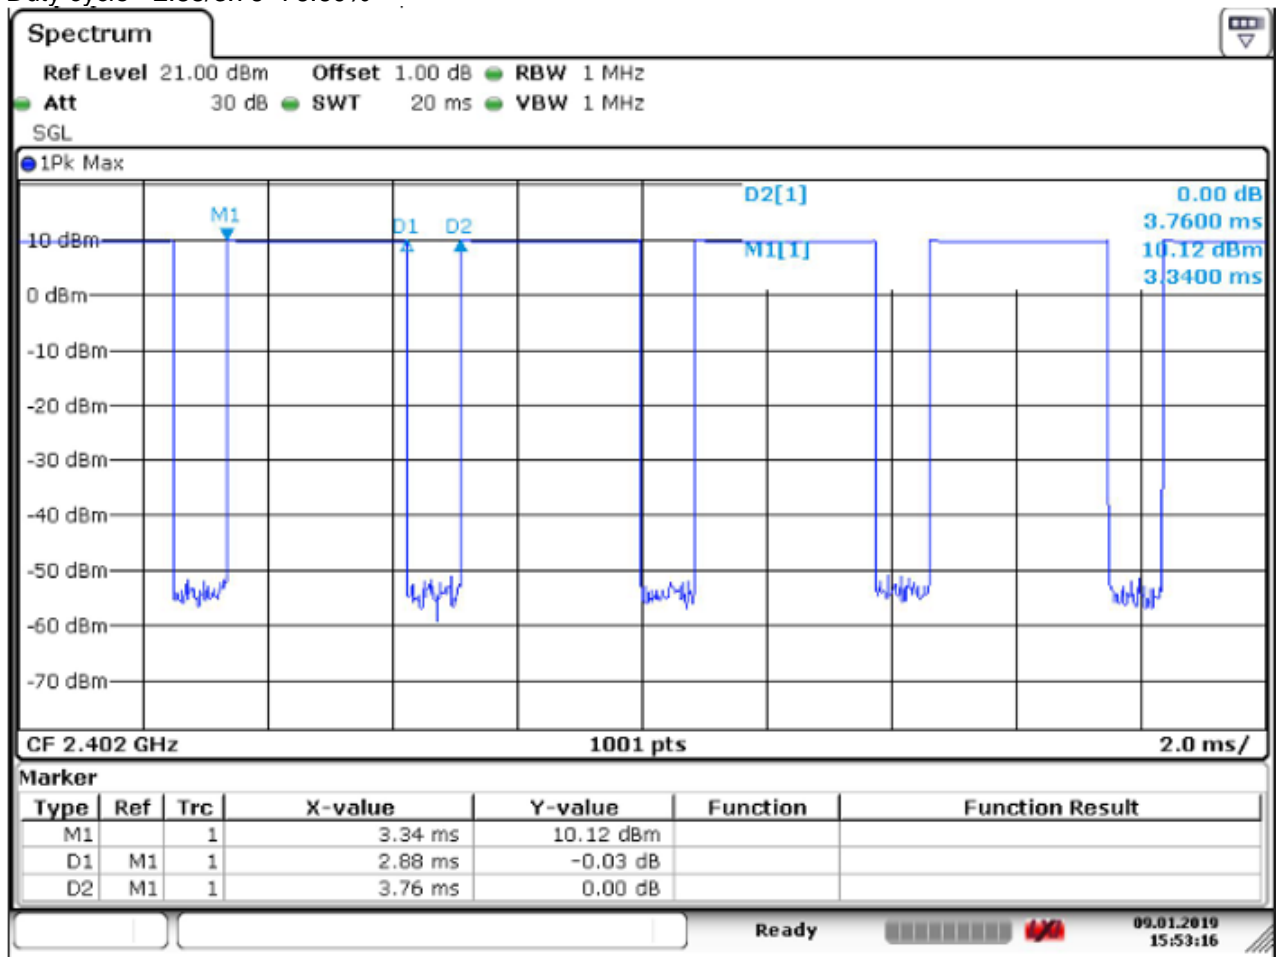



1.5 Test Environment

Ambient Temperature: 22±2° C

Tissue Simulating Liquid: 22±2° C

1.6 Operation Description

1. The EUT is controlled by using a Radio Communication Tester (MT8821C & CMU200), and the communication between the EUT and the tester is established by air link.
2. Measurements are performed respectively on the lowest, middle and highest channels of the operating band(s). The EUT is set to maximum power level during all tests, and at the beginning of each test the battery is fully charged.
3. During the SAR testing, the DASY 5 system checks power drift by comparing the e-field strength of one specific location measured at the beginning with that measured at the end of the SAR testing.
4. SAR test reduction for GPRS mode is determined by the source-based time-averaged output power. The data mode with highest specified time-averaged output power should be tested for SAR compliance.
5. The 3G SAR test reduction procedure is applied to HSDPA with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSDPA) is $\leq \frac{1}{4}$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSDPA).
6. The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) with 12.2 kbps RMC as the primary mode. Since the maximum output power in a secondary mode (HSPA) is $\leq \frac{1}{4}$ dB higher than the primary mode (WCDMA), SAR measurement is not required for the secondary mode (HSPA).

7. LTE modes test according to KDB 941225D05v02r05.

- a. Per Section 5.2.1, the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation.
- Using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel.
 - When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
- b. Per Section 5.2.2, the largest channel bandwidth and measure SAR for QPSK with 50% RB allocation
- The procedures required for 1 RB allocation in 5.2.1 are applied to measure the SAR for QPSK with 50% RB allocation.
- c. Per Section 5.2.3, the largest channel bandwidth and measure SAR for QPSK with 100% RB allocation
- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 5.2.1 and 5.2.2 are ≤ 0.8 W/kg.
 - Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- d. Per Section 5.2.4, Higher order modulations
- For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in sections 5.2.1, 5.2.2 and 5.2.3 to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
- e. Per Section 5.3, other channel bandwidth standalone SAR test requirements
- For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section 5.2 to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg. The equivalent channel configuration for the RB allocation, RB offset and modulation etc. is determined for the smaller channel bandwidth according to the same number of RB allocated in the largest channel bandwidth.

- Downlink LTE CA additional specification

The device supports downlink LTE Carrier Aggregation (CA) only. When carrier aggregation applies, implementation and measurement details for the following are necessary.

a) Intra-band and inter-band carrier aggregation requirements for downlink.

b) Support of contiguous and non-contiguous component carriers for intra-band aggregation.

The possible downlink LTE CA combinations supported by this device are as below tables per 3GPP TS 36.101 V13.2.1. The conducted power measurement results of downlink LTE CA are provided in Section 8.1 of this report per 3GPP TS 36.521-1 V13.0.1. The downlink LTE CA SAR test is not required since the maximum output power for downlink LTE CA was not more than 0.25dB higher than the maximum output power for without downlink LTE CA.

Intra-band contiguous CA operating bands :

| E-UTRA CA Band | E-UTRA Band | Uplink (UL) operating band | | Downlink (DL) operating band | | Duplex Mode |
|----------------|-------------|----------------------------|----------------|------------------------------|----------------|-------------|
| | | BS receive / UE transmit | | BS transmit / UE receive | | |
| | | $F_{UL\ low}$ | $F_{UL\ high}$ | $F_{DL\ low}$ | $F_{DL\ high}$ | |
| CA_7 | 7 | 2500 MHz | 2570 MHz | 2620 MHz | 2690 MHz | FDD |

| E-UTRA CA configuration / Bandwidth combination set | | | | | | | |
|---|-----------------------------------|---|--------------------------------------|--------------------------------------|--------------------------------------|------------------------------------|---------------------------|
| E-UTRA CA configuration | Uplink CA configurations (NOTE 3) | Component carriers in order of increasing carrier frequency | | | | Maximum aggregated bandwidth [MHz] | Bandwidth combination set |
| | | Channel bandwidths for carrier [MHz] | Channel bandwidths for carrier [MHz] | Channel bandwidths for carrier [MHz] | Channel bandwidths for carrier [MHz] | | |
| CA_7A-7A | | 5 | 15 | | | 40 | 0 |
| | | 10 | 10, 15 | | | | |
| | | 15 | 15, 20 | | | | |
| | | 20 | 20 | | | 40 | 1 |
| | | 5, 10, 15, 20 | 5, 10, 15, 20 | | | | |
| | | 5, 10, 15, 20 | 5, 10 | | | | |
| | | 10, 15, 20 | 10, 15, 20 | | | 40 | 2 |

NOTE 1: The CA configuration refers to an operating band and a CA bandwidth class specified in Table 5.6A-1 (the indexing letter). Absence of a CA bandwidth class for an operating band implies support of all classes.

NOTE 2: For the supported CC bandwidth combinations, the CC downlink and uplink bandwidths are equal.

Test frequencies for CA_7A-7A:

| Test Frequency ID | CC-Combo / $N_{RB,agg}$ [RB] | CC1 Note1 | | | | | Wgap [MHz] | CC2 Note1 | | | | |
|-------------------|------------------------------|-----------|----------|----------------|----------|----------------|------------|-----------|----------|----------------|----------|----------------|
| | | BW [RB] | N_{UL} | f_{UL} [MHz] | N_{DL} | f_{DL} [MHz] | | BW [RB] | N_{UL} | f_{UL} [MHz] | N_{DL} | f_{DL} [MHz] |
| Max WGap | 25+25 | 25 | 20775 | 2502.5 | 2775 | 2622.5 | 60 | 25 | 21425 | 2567.5 | 3425 | 2687.5 |
| | 25+50 | 25 | 20775 | 2502.5 | 2775 | 2622.5 | 55 | 50 | 21400 | 2565 | 3400 | 2685 |
| | | 50 | 20800 | 2505 | 2800 | 2625 | 55 | 25 | 21425 | 2567.5 | 3425 | 2687.5 |
| | 25+75 | 25 | 20775 | 2502.5 | 2775 | 2622.5 | 50 | 75 | 21375 | 2562.5 | 3375 | 2682.5 |
| | | 75 | 20825 | 2507.5 | 2825 | 2627.5 | 50 | 25 | 21425 | 2567.5 | 3425 | 2687.5 |
| | 50+50 | 50 | 20800 | 2505 | 2800 | 2625 | 50 | 50 | 21400 | 2565 | 3400 | 2685 |
| | 25+100 | 25 | 20775 | 2502.5 | 2775 | 2622.5 | 45 | 100 | 21350 | 2560 | 3350 | 2680 |
| | | 100 | 20850 | 2510 | 2850 | 2630 | 45 | 25 | 21425 | 2567.5 | 3425 | 2687.5 |
| | 50+75 | 50 | 20800 | 2505 | 2800 | 2625 | 45 | 75 | 21375 | 2562.5 | 3375 | 2682.5 |
| | | 75 | 20825 | 2507.5 | 2825 | 2627.5 | 45 | 50 | 21400 | 2565 | 3400 | 2685 |
| | 50+100 | 50 | 20800 | 2505 | 2800 | 2625 | 40 | 100 | 21350 | 2560 | 3350 | 2680 |
| | | 100 | 20850 | 2510 | 2850 | 2630 | 40 | 50 | 21400 | 2565 | 3400 | 2685 |
| 75+75 | 75 | 20825 | 2507.5 | 2825 | 2627.5 | 40 | 75 | 21375 | 2562.5 | 3375 | 2682.5 | |
| 75+100 | 75 | 20825 | 2507.5 | 2825 | 2627.5 | 35 | 100 | 21350 | 2560 | 3350 | 2680 | |
| | 100 | 20850 | 2510 | 2850 | 2630 | 35 | 75 | 21375 | 2562.5 | 3375 | 2682.5 | |
| 100+100 | 100 | 20850 | 2510 | 2850 | 2630 | 30 | 100 | 21350 | 2560 | 3350 | 2680 | |
| Refsens2 | 75+100 | 75 | 21025 | 2527.5 | 3025 | 2647.5 | 15 | 100 | 21350 | 2560 | 3350 | 2680 |
| | 100+100 | 100 | 21000 | 2525 | 3000 | 2645 | 15 | 100 | 21350 | 2560 | 3350 | 2680 |
| | 25+100 | 25 | 20975 | 2522.5 | 2975 | 2642.5 | 25 | 100 | 21350 | 2560 | 3350 | 2680 |
| | 50+100 | 50 | 21000 | 2525 | 3000 | 2645 | 20 | 100 | 21350 | 2560 | 3350 | 2680 |

Note 1: Carriers in increasing frequency order.



8. WLAN

Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).

2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.

3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to reported SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the reported SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until reported SAR is ≤ 1.2 W/kg or all required channels are tested.

Subsequent Test Configuration Procedure

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.

2) . When the highest reported SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.

a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.

b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the reported SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.

4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:

a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)

b) replace “initial test configuration” with “all tested higher output power configurations”

2.4 GHz WiFi SAR Procedures:

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

802.11b DSSS SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

5 GHz WiFi SAR Procedures:

U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following :

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest reported SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. when Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including



the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - a) The channel closest to mid-band frequency is selected for SAR measurement.
 - b) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

SAR Test Requirements for OFDM configurations:

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the

channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

WiFi CDD/MIMO SAR Considerations

Per KDB 248227D01v02r02, simultaneous transmission provisions in KDB Publication 447498 should be used to determine simultaneous transmission SAR test exclusion for WiFi MIMO. If the sum of 1-g SAR single transmission SAR measurement is <math><1.6\text{W/kg}</math>, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation.


9. According to KDB447498D01v06, testing of other required channels is not required when the reported 1-g SAR for the highest output channel is $\leq 0.8\text{ W/kg}$, when the transmission band is $\leq 100\text{MHz}$.

10. According to KDB865664D01v01r04, SAR measurement variability must be assessed for each frequency band. When the original highest measured SAR is $\geq 0.8\text{ W/kg}$, repeated that measurement once. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is $\geq 1.45\text{ W/kg}$ (~ 10% from the 1-g SAR limit)


11. According to KDB447498D01v06 – The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances $\leq 50\text{ mm}$ are determined by: $[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR, and ≤ 7.5 for product specific 10-g SAR.

1.7 Positioning Procedure

Head SAR measurement statement

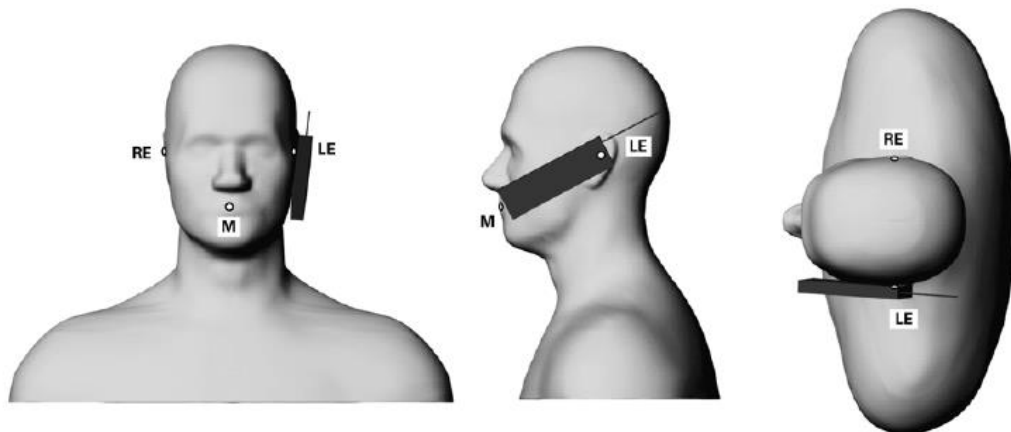

Phone position 1, “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

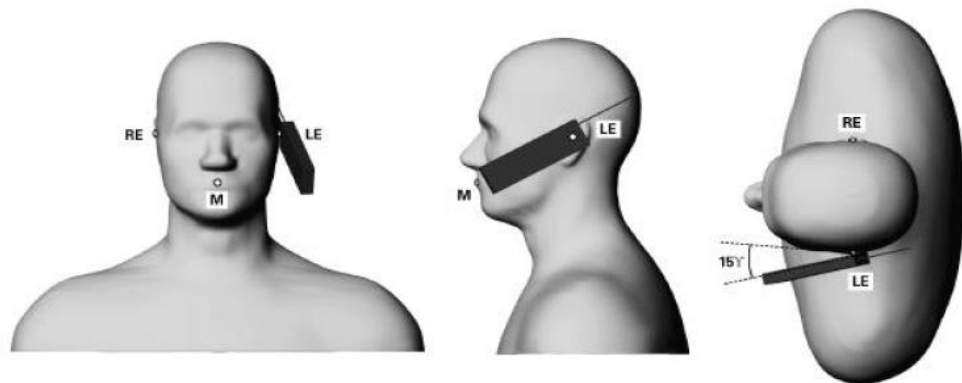

Phone position 2, “tilted position.” The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for phone positioning.

Cheek/Touch Position:

The handset was brought toward the mouth of the head phantom by pivoting against the ear reference point until any point of the mouthpiece or keypad touched the phantom.

Ear/Tilt Position:

With the phone aligned in the Cheek/Touch position, the handset was tilted away from the mouth with respect to the test device reference point by 15 degrees.

Body SAR measurement statement

1. Body-worn exposure: 15mm

Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative test separation distance configuration may be used to support both SAR conditions. When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

2. Hotspot exposure: 10mm

A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge when the form factor of a handset is larger than 9 cm x 5 cm,

Test configurations of WWAN:

- (1) Front side
- (2) Back side
- (3) Bottom side
- (4) Right side
- (5) Left side

Test configurations of WLAN:

- (1) Front side
- (2) Back side
- (3) Top side
- (4) Right side

3. Phablet SAR test consideration

Per FCC KDB 648474D04, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, the device is marketed as "Phablet".

The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for Product Specific 10-g SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions. The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, Product Specific 10-g SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.

Since the device is a phablet (overall diagonal dimension > 16.0 cm), phablet SAR procedure is required for this device.

Due to the SAR result, only the WiFi 5G U-NII-2A and U-NII-2C bands need to test with 0mm for the Product Specific 10-g SAR, the others bands are not required.

1.8 Evaluation Procedures

The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1.The extraction of the measured data (grid and values) from the Zoom Scan.
- 2.The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- 3.The generation of a high-resolution mesh within the measured volume.
- 4.The interpolation of all measured values from the measurement grid to the high-resolution grid.
- 5.The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- 6.The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7x7x7 scans.

The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30x30x30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. Boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume. In the last step, a 1g cube is placed

numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found.

If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

1.9 Probe Calibration Procedures

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

1.9.1 Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field (E) and the temperature gradient ($\delta T / \delta t$) in the liquid.

$$SAR = C \frac{\delta T}{\delta t},$$

Whereby σ is the conductivity, ρ the density and c the heat capacity of the liquid.

1. Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution (<1-2 mm) and fast reaction time (<1 s) are available and can be easily calibrated with high precision [1]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

2. The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.

3. The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.

The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures (~ 2% for c ; much better for ρ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed $\pm 5\%$.

4. Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about $\pm 10\%$ (RSS) [2]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in [3]. The estimated uncertainty of the setup is $\pm 5\%$ (RSS) when the same liquid is used for the calibration and for actual measurements and $\pm 7-9\%$ (RSS) when not, which is in good agreement with the estimates given in [2].

1.9.2 Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

1. The setup must enable accurate determination of the incident power.
2. The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
3. Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

References

- 1) N. Kuster, Q. Balzano, and J.C. Lin, Eds., Mobile Communications Safety, Chapman & Hall, London, 1997.
- 2) K. Meier, M. Burkhardt, T. Schmid, and N. Kuster, "Broadband calibration of E-field probes in lossy media", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1954-1962, Oct. 1996.
- 3) K. Jokela, P. Hyysalo, and L. Puranen, "Calibration of specific absorption rate (SAR) probes in waveguide at 900 MHz", IEEE Transactions on Instrumentation and Measurements, vol. 47, no. 2, pp. 432-438, Apr. 1998.

1.10 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E_i|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

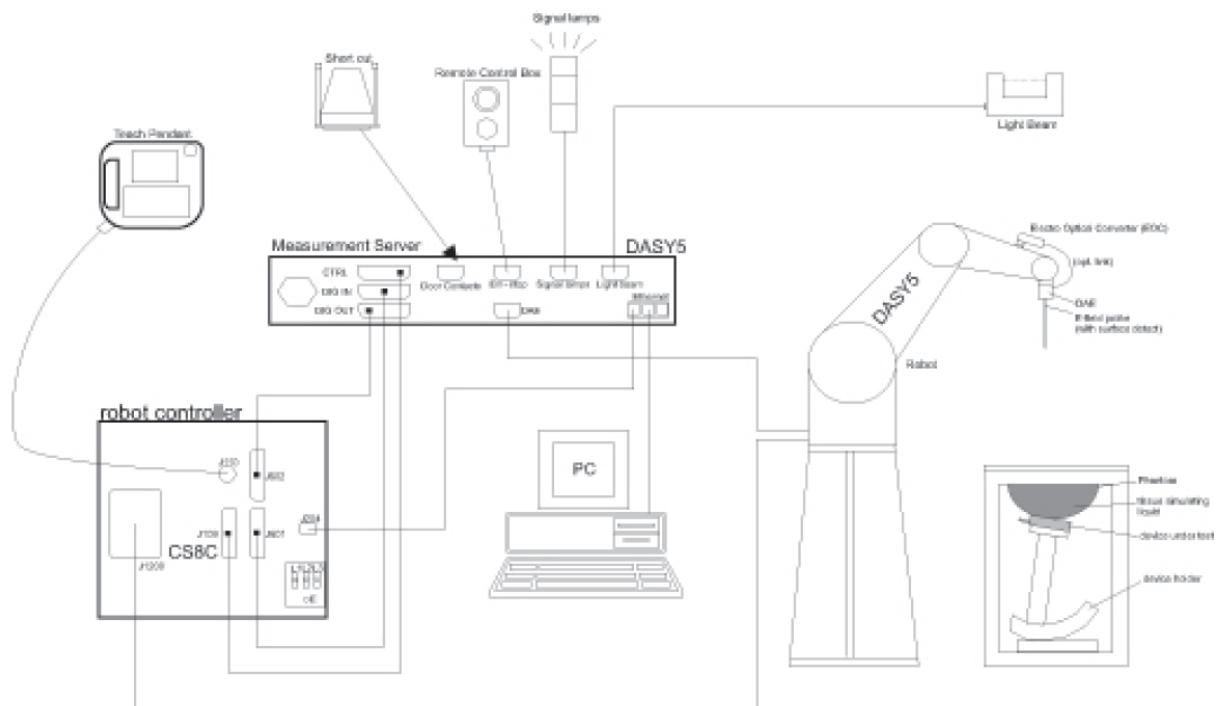


F-1. SAR Measurement System Configuration


- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

1.11 System Component


EX3DV4 E-Field Probe

| | |
|--|--|
|  | <p>Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p> |
| <p>Calibration</p> | <p>ISO/IEC 17025 calibration service available.</p> |
| <p>Frequency</p> | <p>10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)</p> |
| <p>Directivity</p> | <p>± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)</p> |
| <p>Dynamic Range</p> | <p>10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)</p> |
| <p>Dimensions</p> | <p>Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm</p> |
| <p>Application</p> | <p>High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.</p> |
| <p>Compatibility</p> | <p>DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI</p> |

Data Acquisition Electronics (DAE)
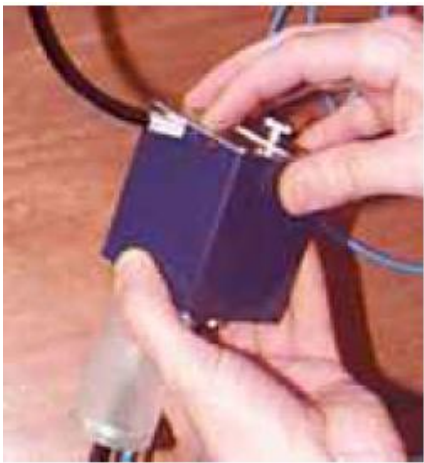
| | | |
|-----------------------------|--|---|
| Model | DAE4 |  |
| Construction | Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop. | |
| Measurement Range | -100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV) | |
| Input Offset Voltage | < 5µV (with auto zero) | |
| Input Bias Current | < 50 f A | |
| Dimensions | 60 x 60 x 68 mm | |


SAM Twin Phantom

| | | |
|--|---|---|
| Material | Vinylester, glass fiber reinforced (VE-GF) |  |
| Liquid Compatibility | Compatible with all SPEAG tissue simulating liquids (incl. DGBE type) | |
| Shell Thickness | 2 ± 0.2 mm (6 ± 0.2 mm at ear point) | |
| Dimensions (incl. Wooden Support) | Length: 1000 mm Width: 500 mm Height: adjustable feet | |
| Filling Volume | approx. 25 liters | |
| Wooden Support | SPEAG standard phantom table | |

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

ELI Phantom
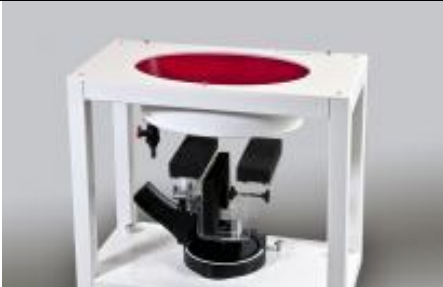
| | | |
|-----------------------------|---|---|
| Material | Vinylester, glass fiber reinforced (VE-GF) |  |
| Liquid Compatibility | Compatible with all SPEAG tissue simulating liquids (incl. DGBE type) | |
| Shell Thickness | 2.0 ± 0.2 mm (bottom plate) | |
| Dimensions | Major axis: 600 mm Minor axis: 400 mm | |

| | | |
|--|------------------------------|--|
| Filling Volume | approx. 30 liters | |
| Wooden Support | SPEAG standard phantom table | |
| <p>Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.</p> <p>ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.</p> | | |

Device Holder for Transmitters




F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

1.12 SAR System Verification

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^{\circ}\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 ± 0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

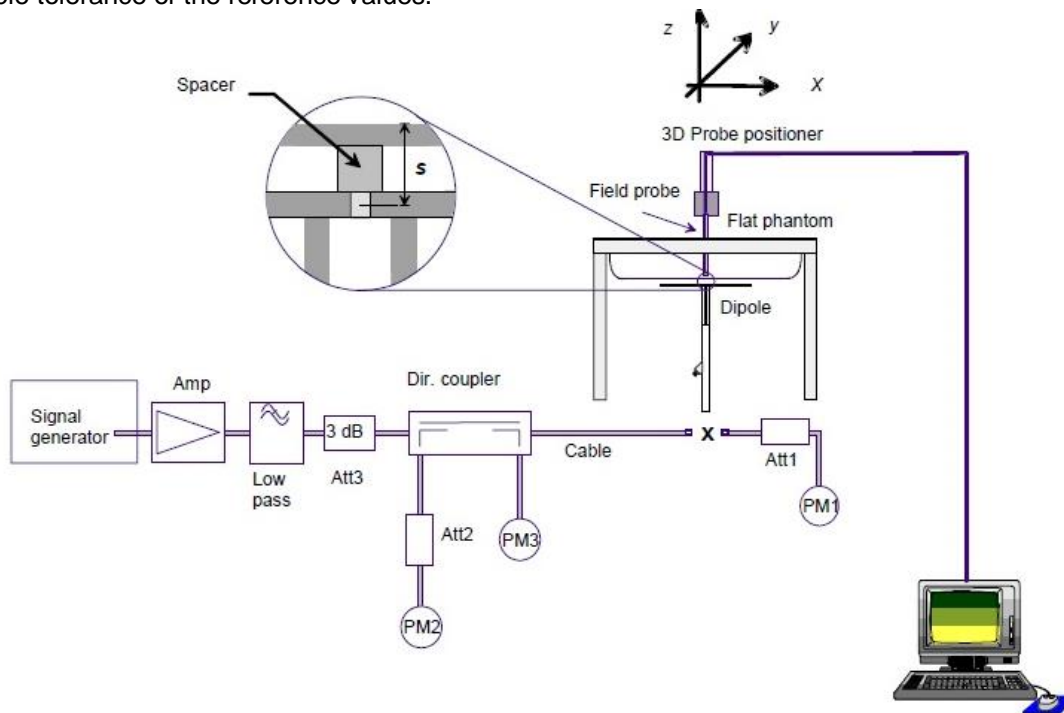

F-12. The block diagram of system verification

| Validation Kit | | Measured SAR 250mW | Measured SAR 250mW | Measured SAR (normalized to 1W) | Measured SAR (normalized to 1W) | Target SAR (normalized to 1W) (±10%) | Target SAR (normalized to 1W) (±10%) | Liquid Temp. (°C) | Measured Date |
|----------------|-------------------|-----------------------|-----------------------|---------------------------------------|---------------------------------------|--|--|-------------------------|------------------|
| | | 1g (W/kg) | 10g (W/kg) | 1g (W/kg) | 10g (W/kg) | 1-g(W/kg) | 10-g(W/kg) | | |
| D835V2 | Head | 2.51 | 1.66 | 10.04 | 6.64 | 9.59 (8.63~10.55) | 6.29 (5.66~6.92) | 22.1 | 2018/11/06 |
| | Body | 2.48 | 1.63 | 9.92 | 6.52 | 9.65 (8.69~10.62) | 6.46 (5.81~7.11) | 22.1 | 2018/11/04 |
| D1900V2 | Head | 10.60 | 5.47 | 42.40 | 21.88 | 40.7 (36.63~44.77) | 21.1 (18.99~23.21) | 22.3 | 2018/11/16 |
| | Body | 10.30 | 5.45 | 41.20 | 21.80 | 41.6 (37.44~45.76) | 21.4 (19.26~23.54) | 22.3 | 2018/11/19 |
| D2450V2 | Head | 13.20 | 6.08 | 52.80 | 24.32 | 53.1 (47.79~58.41) | 24.9 (22.41~27.39) | 22.0 | 2018/11/17 |
| | Body | 12.10 | 5.69 | 48.40 | 22.76 | 51.0 (45.9~56.1) | 23.5 (21.15~25.85) | 22.0 | 2018/11/17 |
| D2600V2 | Head | 14.00 | 6.15 | 56.00 | 24.60 | 56.6 (50.94~62.26) | 25.4 (22.86~27.94) | 22.1 | 2018/11/16 |
| | Body | 12.80 | 5.77 | 51.20 | 23.08 | 54.2 (48.78~59.62) | 24.3 (21.87~26.73) | 22.1 | 2018/11/16 |
| Validation Kit | | Measured SAR 100mW | Measured SAR 100mW | Measured SAR (normalized to 1W) | Measured SAR (normalized to 1W) | Target SAR (normalized to 1W) (±10%) | Target SAR (normalized to 1W) (±10%) | Liquid Temp. (°C) | Measured Date |
| | | 1g (W/kg) | 10g (W/kg) | 1g (W/kg) | 10g (W/kg) | 1-g(W/kg) | 10-g(W/kg) | | |
| D5GHzV2 | Head (5.25GHz) | 7.10 | 2.02 | 71.00 | 20.20 | 76.6 (68.94~84.26) | 21.9 (19.71~24.09) | 22.2 | 2018/11/15 |
| | Body (5.25GHz) | 7.38 | 2.02 | 73.80 | 20.20 | 75.6 (68.04~83.16) | 21.3 (19.17~23.43) | 22.2 | 2018/11/16 |
| | Head (5.6GHz) | 7.67 | 2.16 | 76.70 | 21.60 | 80.4 (72.36~88.44) | 22.8 (20.52~25.08) | 22.2 | 2018/11/15 |
| | Body (5.6GHz) | 8.51 | 2.31 | 85.10 | 23.10 | 81.1 (72.99~89.21) | 22.9 (20.61~25.19) | 22.2 | 2018/11/16 |
| | Head (5.75GHz) | 8.38 | 2.39 | 83.80 | 23.90 | 80 (72~88) | 22.7 (20.43~24.97) | 22.2 | 2018/11/15 |
| | Body (5.75GHz) | 8.10 | 2.21 | 81.00 | 22.10 | 74.8 (67.32~82.28) | 21 (18.9~23.1) | 22.2 | 2018/11/16 |

Table 1. Results of system validation

1.13 Tissue Simulant Fluid for the Frequency Band

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.

| Tissue Type | Measured Frequency (MHz) | Target Tissue ($\pm 5\%$) | | Measured Tissue | | Liquid Temp. ($^{\circ}\text{C}$) | Measured Date |
|-------------|--------------------------|-----------------------------|----------------------|-----------------|----------------------|-------------------------------------|---------------|
| | | ϵ_r | $\sigma(\text{S/m})$ | ϵ_r | $\sigma(\text{S/m})$ | | |
| 835 Head | 835 | 41.5 (39.43~43.58) | 0.90 (0.86~0.95) | 42.668 | 0.909 | 22.1 | 2018/11/06 |
| 835 Body | 835 | 55.2 (52.44~57.96) | 0.97 (0.92~1.02) | 54.389 | 0.986 | 22.1 | 2018/11/04 |
| 1900 Head | 1900 | 40.0 (38.00~42.00) | 1.40 (1.33~1.47) | 41.472 | 1.426 | 22.3 | 2018/11/16 |
| 1900 Body | 1900 | 53.3 (50.64~55.97) | 1.52 (1.44~1.60) | 53.840 | 1.514 | 22.3 | 2018/11/19 |
| 2450 Head | 2450 | 39.20 (37.24~41.16) | 1.80 (1.71~1.89) | 40.177 | 1.803 | 22.0 | 2018/11/17 |
| 2450 Body | 2450 | 52.70 (50.07~55.34) | 1.95 (1.85~2.05) | 51.490 | 1.889 | 22.0 | 2018/11/17 |
| 2600 Head | 2600 | 39.0 (37.05~40.95) | 1.96 (1.86~2.06) | 39.860 | 1.968 | 22.1 | 2018/11/16 |
| 2600 Body | 2600 | 52.50 (49.88~55.13) | 2.16 (2.05~2.27) | 51.268 | 2.072 | 22.1 | 2018/11/16 |
| 5250Head | 5250 | 35.9 (34.11~37.70) | 4.71 (4.47~4.95) | 36.011 | 4.721 | 22.2 | 2018/11/15 |
| 5250 Body | 5250 | 48.9 (46.46~51.35) | 5.36 (5.09~5.63) | 48.122 | 5.426 | 22.2 | 2018/11/16 |
| 5600 Head | 5600 | 35.5 (33.73~37.28) | 5.07 (4.82~5.32) | 35.059 | 5.107 | 22.2 | 2018/11/15 |
| 5600 Body | 5600 | 48.5 (46.08~50.93) | 5.77 (5.48~6.06) | 47.190 | 5.850 | 22.2 | 2018/11/16 |
| 5750 Head | 5750 | 35.4 (33.63~37.17) | 5.22 (4.96~5.48) | 34.695 | 5.279 | 22.2 | 2018/11/15 |
| 5750 Body | 5750 | 48.3 (45.89~50.72) | 5.94 (5.64~6.24) | 46.850 | 6.017 | 22.2 | 2018/11/16 |

Table 2. Dielectric Parameters of Tissue Simulant Fluid

The composition of the tissue simulating liquid:

| Ingredients (% by weight) | Frequency (MHz) | | | | | | | |
|---|-----------------|-------|---------|-----------------------------|-----------|-------|-----------|-------|
| | 450 | | 700-950 | | 1700-2000 | | 2300-2700 | |
| Tissue Type | Head | Body | Head | Body | Head | Body | Head | Body |
| Water | 38.56 | 51.16 | 40.30 | 50.75 | 55.24 | 70.17 | 55.00 | 68.53 |
| Salt (NaCl) | 3.95 | 1.49 | 1.38 | 0.94 | 0.31 | 0.39 | 0.2 | 0.1 |
| Sucrose | 56.32 | 46.78 | 57.90 | 48.21 | 0 | 0 | 0 | 0 |
| HEC | 0.98 | 0.52 | 0.24 | 0 | 0 | 0 | 0 | 0 |
| Bactericide | 0.19 | 0.05 | 0.18 | 0.10 | 0 | 0 | 0 | 0 |
| Tween | 0 | 0 | 0 | 0 | 44.45 | 29.44 | 44.80 | 31.37 |
| Salt: 99+% Pure Sodium Chloride | | | | Sucrose: 98+% Pure Sucrose | | | | |
| Water: De-ionized, 16 MΩ ⁺ resistivity | | | | HEC: Hydroxyethyl Cellulose | | | | |
| Tween: Polyoxyethylene (20) sorbitan monolaurate | | | | | | | | |
| HSL5GHz is composed of the following ingredients: | | | | | | | | |
| Water: 50-65% | | | | | | | | |
| Mineral oil: 10-30% | | | | | | | | |
| Emulsifiers: 8-25% | | | | | | | | |
| Sodium salt: 0-1.5% | | | | | | | | |
| MSL5GHz is composed of the following ingredients: | | | | | | | | |
| Water: 64-78% | | | | | | | | |
| Mineral oil: 11-18% | | | | | | | | |
| Emulsifiers: 9-15% | | | | | | | | |
| Sodium salt: 2-3% | | | | | | | | |

Table 3. Recipes for tissue simulating liquid

1.14 Test Standards and Limits

According to FCC 47CFR §2.1093(d) The limits to be used for evaluation are based generally on criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (“SAR”) in Section 4.2 of “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz,” ANSI/IEEE C95.1, By the Institute of Electrical and Electronics Engineers, Inc., New York, New York 10017.

These criteria for SAR evaluation are similar to those recommended by the National Council on Radiation Protection and Measurements (NCRP) in “Biological Effects and Exposure Criteria for Radio frequency Electromagnetic Fields,” NCRP Report No. 86, Section 17.4.5. Copyright NCRP, 1986, Bethesda, Maryland 20814. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards. The criteria to be used are specified in paragraphs (d)(1) and (d)(2) of this section and shall apply for portable devices transmitting in the frequency range from 100 kHz to 6 GHz. Portable devices that transmit at frequencies above 6 GHz are to be evaluated in terms of the MPE limits specified in § 1.1310 of this chapter.

Measurements and calculations to demonstrate compliance with MPE field strength or power density limits for devices operating above 6 GHz should be made at a minimum distance of 5 cm from the radiating source.

1. Limits for Occupational/Controlled exposure: 0.4 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 8 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube). Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 20 W/kg, as averaged over a 10 grams of tissue (defined as a tissue volume in the shape of a cube).

Occupational/Controlled limits apply when persons are exposed as a consequence of their employment provided these persons are fully aware of and exercise control over their exposure. Awareness of exposure can be accomplished by use of warning labels or by specific training or education through appropriate means, such as an RF safety program in a work environment.

2. Limits for General Population/Uncontrolled exposure: 0.08 W/kg as averaged over the whole-body and spatial peak SAR not exceeding 1.6 W/kg as averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube).



Exceptions are the hands, wrists, feet and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube).

General Population/Uncontrolled limits apply when the general public may be exposed, or when persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or do not exercise control over their exposure.

Warning labels placed on consumer devices such as cellular telephones will not be sufficient reason to allow these devices to be evaluated subject to limits for occupational/controlled exposure in paragraph (d)(1) of this section(Table .4)

| Human Exposure | Uncontrolled Environment General Population | Controlled Environment Occupational |
|--|--|--|
| Spatial Peak SAR (Brain) | 1.60 W/kg | 8.00 W/kg |
| Spatial Average SAR (Whole Body) | 0.08 W/kg | 0.40 W/kg |
| Spatial Peak SAR (Hands/Feet/Ankle/Wrist) | 4.00 W/kg | 20.00 W/kg |

Table 4. RF exposure limits

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

2 Summary of Results

GSM 850

| GSM850 SAR Test Record | | | | | | | | | | |
|------------------------------------|-----------|----------------|------------|----------------|-----------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | Test mode | Test Ch./Freq. | Duty Cycle | SAR (W/kg) 1-g | Power Drift(dB) | Conducted Power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data | | | | | | | | | | |
| Left cheek | GSM | 190/836.6 | 1:8.3 | 0.205 | -0.09 | 32.95 | 33.70 | 1.189 | 0.244 | 22.1 |
| Left tilted | GSM | 190/836.6 | 1:8.3 | 0.125 | 0.19 | 32.95 | 33.70 | 1.189 | 0.149 | 22.1 |
| Right cheek | GSM | 190/836.6 | 1:8.3 | 0.231 | 0.00 | 32.95 | 33.70 | 1.189 | 0.275 | 22.1 |
| Right tilted | GSM | 190/836.6 | 1:8.3 | 0.149 | 0.09 | 32.95 | 33.70 | 1.189 | 0.177 | 22.1 |
| Right cheek | GSM | 128/824.2 | 1:8.3 | 0.164 | -0.03 | 32.92 | 1.00 | 0.001 | 0.000 | 22.1 |
| Right cheek | GSM | 251/848.8 | 1:8.3 | 0.168 | 0.01 | 32.98 | 1.00 | 0.001 | 0.000 | 22.1 |
| Body worn Test data(Separate 15mm) | | | | | | | | | | |
| Front side | GSM | 190/836.6 | 1:8.3 | 0.199 | 0.00 | 32.95 | 33.70 | 1.189 | 0.237 | 22.1 |
| Back side | GSM | 190/836.6 | 1:8.3 | 0.273 | 0.02 | 32.95 | 33.70 | 1.189 | 0.324 | 22.1 |
| Back side | GSM | 128/824.2 | 1:8.3 | 0.294 | -0.03 | 32.92 | 33.70 | 1.197 | 0.352 | 22.1 |
| Back side | GSM | 251/848.8 | 1:8.3 | 0.257 | 0.02 | 32.98 | 33.70 | 1.180 | 0.303 | 22.1 |
| Hotspot Test data(Separate 10mm) | | | | | | | | | | |
| Front side | GPRS 4TS | 190/836.6 | 1:2.075 | 0.377 | 0.08 | 29.68 | 29.70 | 1.005 | 0.379 | 22.1 |
| Back side | GPRS 4TS | 190/836.6 | 1:2.075 | 0.565 | -0.06 | 29.68 | 29.70 | 1.005 | 0.568 | 22.1 |
| Left side | GPRS 4TS | 190/836.6 | 1:2.075 | 0.432 | -0.02 | 29.68 | 29.70 | 1.005 | 0.434 | 22.1 |
| Right side | GPRS 4TS | 190/836.6 | 1:2.075 | 0.578 | -0.02 | 29.68 | 29.70 | 1.005 | 0.581 | 22.1 |
| Bottom side | GPRS 4TS | 190/836.6 | 1:2.075 | 0.131 | 0.06 | 29.68 | 29.70 | 1.005 | 0.132 | 22.1 |
| Right side | GPRS 4TS | 128/824.2 | 1:2.075 | 0.556 | -0.05 | 29.65 | 29.70 | 1.012 | 0.562 | 22.1 |
| Right side | GPRS 4TS | 251/848.8 | 1:2.075 | 0.526 | -0.03 | 29.69 | 29.70 | 1.002 | 0.527 | 22.1 |

GSM 1900

| GSM1900 SAR Test Record | | | | | | | | | | |
|------------------------------------|-----------|----------------|------------|----------------|-----------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | Test mode | Test Ch./Freq. | Duty Cycle | SAR (W/kg) 1-g | Power Drift(dB) | Conducted Power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data | | | | | | | | | | |
| Left cheek | GSM | 661/1880 | 1:8.3 | 0.055 | 0.09 | 28.35 | 28.70 | 1.084 | 0.060 | 22.3 |
| Left tilted | GSM | 661/1880 | 1:8.3 | 0.051 | 0.01 | 28.35 | 28.70 | 1.084 | 0.055 | 22.3 |
| Right cheek | GSM | 661/1880 | 1:8.3 | 0.084 | 0.07 | 28.35 | 28.70 | 1.084 | 0.091 | 22.3 |
| Right tilted | GSM | 661/1880 | 1:8.3 | 0.026 | 0.19 | 28.35 | 28.70 | 1.084 | 0.028 | 22.3 |
| Right cheek | GSM | 512/1850.2 | 1:8.3 | 0.056 | 0.12 | 28.26 | 28.70 | 1.107 | 0.062 | 22.3 |
| Right cheek | GSM | 810/1909.8 | 1:8.3 | 0.100 | 0.02 | 28.37 | 28.70 | 1.079 | 0.108 | 22.3 |
| Body worn Test data(Separate 15mm) | | | | | | | | | | |
| Front side | GSM | 661/1880 | 1:8.3 | 0.165 | 0.08 | 28.35 | 28.70 | 1.084 | 0.179 | 22.3 |
| Back side | GSM | 661/1880 | 1:8.3 | 0.223 | -0.13 | 28.35 | 28.70 | 1.084 | 0.242 | 22.3 |
| Back side | GSM | 512/1850.2 | 1:8.3 | 0.209 | -0.04 | 28.26 | 28.70 | 1.107 | 0.231 | 22.3 |
| Back side | GSM | 810/1909.8 | 1:8.3 | 0.239 | 0.03 | 28.37 | 28.70 | 1.079 | 0.258 | 22.3 |
| Hotspot Test data(Separate 10mm) | | | | | | | | | | |
| Front side | GPRS 4TS | 661/1880 | 1:2.075 | 0.296 | 0.05 | 23.94 | 24.70 | 1.191 | 0.353 | 22.3 |
| Back side | GPRS 4TS | 661/1880 | 1:2.075 | 0.655 | 0.08 | 23.94 | 24.70 | 1.191 | 0.780 | 22.3 |
| Left side | GPRS 4TS | 661/1880 | 1:2.075 | 0.035 | 0.01 | 23.94 | 24.70 | 1.191 | 0.042 | 22.3 |
| Right side | GPRS 4TS | 661/1880 | 1:2.075 | 0.070 | -0.03 | 23.94 | 24.70 | 1.191 | 0.083 | 22.3 |
| Bottom side | GPRS 4TS | 661/1880 | 1:2.075 | 0.497 | 0.07 | 23.94 | 24.70 | 1.191 | 0.592 | 22.3 |
| Back side | GPRS 4TS | 512/1850.2 | 1:8.3 | 0.558 | -0.04 | 23.90 | 24.70 | 1.202 | 0.671 | 22.3 |
| Back side | GPRS 4TS | 810/1909.8 | 1:8.3 | 0.644 | 0.03 | 23.96 | 24.70 | 1.186 | 0.764 | 22.3 |

WCDMA Band II

| WCDMA Band II SAR Test Record | | | | | | | | | | |
|------------------------------------|-----------|----------------|------------|----------------|-----------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | Test mode | Test Ch./Freq. | Duty Cycle | SAR (W/kg) 1-g | Power Drift(dB) | Conducted Power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data | | | | | | | | | | |
| Left cheek | RMC | 9400/1880 | 1:1 | 0.083 | 0.02 | 20.49 | 21.00 | 1.125 | 0.094 | 22.3 |
| Left tilted | RMC | 9400/1880 | 1:1 | 0.087 | 0.07 | 20.49 | 21.00 | 1.125 | 0.098 | 22.3 |
| Right cheek | RMC | 9400/1880 | 1:1 | 0.135 | 0.03 | 20.49 | 21.00 | 1.125 | 0.152 | 22.3 |
| Right tilted | RMC | 9400/1880 | 1:1 | 0.054 | -0.03 | 20.49 | 21.00 | 1.125 | 0.061 | 22.3 |
| Right cheek | RMC | 9262/1852.4 | 1:1 | 0.097 | 0.07 | 20.41 | 21.00 | 1.146 | 0.111 | 22.3 |
| Right cheek | RMC | 9538/1907.6 | 1:1 | 0.150 | 0.16 | 20.54 | 21.00 | 1.112 | 0.167 | 22.3 |
| Body worn Test data(Separate 15mm) | | | | | | | | | | |
| Front side | RMC | 9400/1880 | 1:1 | 0.153 | -0.04 | 20.49 | 21.00 | 1.125 | 0.172 | 22.3 |
| Back side | RMC | 9400/1880 | 1:1 | 0.362 | 0.01 | 20.49 | 21.00 | 1.125 | 0.407 | 22.3 |
| Back side | RMC | 9262/1852.4 | 1:1 | 0.355 | 0.08 | 20.41 | 21.00 | 1.146 | 0.407 | 22.3 |
| Back side | RMC | 9538/1907.6 | 1:1 | 0.391 | 0.10 | 20.54 | 21.00 | 1.112 | 0.435 | 22.3 |
| Hotspot Test data(Separate 10mm) | | | | | | | | | | |
| Front side | RMC | 9400/1880 | 1:1 | 0.430 | -0.17 | 20.49 | 21.00 | 1.125 | 0.484 | 22.3 |
| Back side | RMC | 9400/1880 | 1:1 | 0.694 | 0.02 | 20.49 | 21.00 | 1.125 | 0.780 | 22.3 |
| Left side | RMC | 9400/1880 | 1:1 | 0.051 | -0.03 | 20.49 | 21.00 | 1.125 | 0.057 | 22.3 |
| Right side | RMC | 9400/1880 | 1:1 | 0.097 | 0.10 | 20.49 | 21.00 | 1.125 | 0.109 | 22.3 |
| Bottom side | RMC | 9400/1880 | 1:1 | 0.644 | 0.15 | 20.49 | 21.00 | 1.125 | 0.724 | 22.3 |
| Back side | RMC | 9262/1852.4 | 1:1 | 0.687 | 0.02 | 20.41 | 21.00 | 1.146 | 0.787 | 22.3 |
| Back side | RMC | 9538/1907.6 | 1:1 | 0.753 | -0.05 | 20.54 | 21.00 | 1.112 | 0.837 | 22.3 |

WCDMA Band V

| WCDMA Band V SAR Test Record | | | | | | | | | | |
|------------------------------------|-----------|----------------|------------|----------------|-----------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | Test mode | Test Ch./Freq. | Duty Cycle | SAR (W/kg) 1-g | Power Drift(dB) | Conducted Power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data | | | | | | | | | | |
| Left cheek | RMC | 4182/836.4 | 1:1 | 0.180 | 0.01 | 23.78 | 24.00 | 1.052 | 0.189 | 22.1 |
| Left tilted | RMC | 4182/836.4 | 1:1 | 0.109 | 0.07 | 23.78 | 24.00 | 1.052 | 0.115 | 22.1 |
| Right cheek | RMC | 4182/836.4 | 1:1 | 0.195 | 0.14 | 23.78 | 24.00 | 1.052 | 0.205 | 22.1 |
| Right tilted | RMC | 4182/836.4 | 1:1 | 0.107 | 0.02 | 23.78 | 24.00 | 1.052 | 0.113 | 22.1 |
| Right cheek | RMC | 4132/826.4 | 1:1 | 0.178 | 0.09 | 23.85 | 24.00 | 1.035 | 0.184 | 22.1 |
| Right cheek | RMC | 4233/846.6 | 1:1 | 0.201 | 0.09 | 23.79 | 24.00 | 1.050 | 0.211 | 22.1 |
| Body worn Test data(Separate 15mm) | | | | | | | | | | |
| Front side | RMC | 4182/836.4 | 1:1 | 0.252 | -0.01 | 23.78 | 24.00 | 1.052 | 0.265 | 22.1 |
| Back side | RMC | 4182/836.4 | 1:1 | 0.317 | -0.04 | 23.78 | 24.00 | 1.052 | 0.333 | 22.1 |
| Back side | RMC | 4132/826.4 | 1:1 | 0.259 | 0.02 | 23.85 | 24.00 | 1.035 | 0.268 | 22.1 |
| Back side | RMC | 4233/846.6 | 1:1 | 0.248 | -0.01 | 23.79 | 24.00 | 1.050 | 0.260 | 22.1 |
| Hotspot Test data(Separate 10mm) | | | | | | | | | | |
| Front side | RMC | 4182/836.4 | 1:1 | 0.250 | 0.05 | 23.78 | 24.00 | 1.052 | 0.263 | 22.1 |
| Back side | RMC | 4182/836.4 | 1:1 | 0.365 | -0.02 | 23.78 | 24.00 | 1.052 | 0.384 | 22.1 |
| Left side | RMC | 4182/836.4 | 1:1 | 0.253 | 0.02 | 23.78 | 24.00 | 1.052 | 0.266 | 22.1 |
| Right side | RMC | 4182/836.4 | 1:1 | 0.296 | 0.03 | 23.78 | 24.00 | 1.052 | 0.311 | 22.1 |
| Bottom side | RMC | 4182/836.4 | 1:1 | 0.095 | 0.06 | 23.78 | 24.00 | 1.052 | 0.100 | 22.1 |
| Back side | RMC | 4132/826.4 | 1:1 | 0.389 | -0.01 | 23.85 | 24.00 | 1.035 | 0.403 | 22.1 |
| Back side | RMC | 4233/846.6 | 1:1 | 0.351 | -0.02 | 23.79 | 24.00 | 1.050 | 0.368 | 22.1 |

LTE Band 2

| LTE Band 2 SAR Test Record | | | | | | | | | | | |
|---|-----|--------------|----------------|------------|----------------|-----------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | BW. | Test mode | Test Ch./Freq. | Duty Cycle | SAR (W/kg) 1-g | Power Drift(dB) | Conducted power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data(1RB) | | | | | | | | | | | |
| Left cheek | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.112 | -0.02 | 21.67 | 21.70 | 1.007 | 0.113 | 22.3 |
| Left tilted | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.115 | 0.04 | 21.67 | 21.70 | 1.007 | 0.116 | 22.3 |
| Right cheek | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.185 | 0.08 | 21.67 | 21.70 | 1.007 | 0.186 | 22.3 |
| Right tilted | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.072 | -0.11 | 21.67 | 21.70 | 1.007 | 0.073 | 22.3 |
| Right cheek | 20 | QPSK 1RB_50 | 18700/1860 | 1:1 | 0.131 | 0.03 | 21.48 | 21.70 | 1.052 | 0.138 | 22.3 |
| Right cheek | 20 | QPSK 1RB_50 | 18900/1880 | 1:1 | 0.160 | 0.02 | 21.47 | 21.70 | 1.054 | 0.169 | 22.3 |
| Head Test data(50%RB) | | | | | | | | | | | |
| Left cheek | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.091 | -0.01 | 20.49 | 20.70 | 1.050 | 0.095 | 22.3 |
| Left tilted | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.077 | 0.03 | 20.49 | 20.70 | 1.050 | 0.081 | 22.3 |
| Right cheek | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.129 | 0.04 | 20.49 | 20.70 | 1.050 | 0.135 | 22.3 |
| Right tilted | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.044 | 0.08 | 20.49 | 20.70 | 1.050 | 0.046 | 22.3 |
| Body worn Test data(Separate 15mm 1RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.280 | -0.03 | 21.67 | 21.70 | 1.007 | 0.282 | 22.3 |
| Back side | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.430 | 0.05 | 21.67 | 21.70 | 1.007 | 0.433 | 22.3 |
| Back side | 20 | QPSK 1RB_50 | 18700/1860 | 1:1 | 0.399 | 0.05 | 21.48 | 21.70 | 1.052 | 0.420 | 22.3 |
| Back side | 20 | QPSK 1RB_50 | 18900/1880 | 1:1 | 0.409 | -0.16 | 21.47 | 21.70 | 1.054 | 0.431 | 22.3 |
| Body worn Test data (Separate 15mm 50%RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.189 | 0.11 | 20.49 | 20.70 | 1.050 | 0.198 | 22.3 |
| Back side | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.307 | -0.12 | 20.49 | 20.70 | 1.050 | 0.322 | 22.3 |
| Hotspot Test data(Separate 10mm 1RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.600 | 0.10 | 21.67 | 21.70 | 1.007 | 0.604 | 22.3 |
| Back side | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 1.040 | 0.00 | 21.67 | 21.70 | 1.007 | 1.047 | 22.3 |
| Left side | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.092 | -0.04 | 21.67 | 21.70 | 1.007 | 0.092 | 22.3 |
| Right side | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.138 | 0.02 | 21.67 | 21.70 | 1.007 | 0.139 | 22.3 |
| Bottom side | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 0.854 | 0.13 | 21.67 | 21.70 | 1.007 | 0.860 | 22.3 |
| Back side | 20 | QPSK 1RB_50 | 18700/1860 | 1:1 | 0.870 | 0.05 | 21.48 | 21.70 | 1.052 | 0.915 | 22.3 |
| Back side | 20 | QPSK 1RB_50 | 18900/1880 | 1:1 | 1.010 | 0.09 | 21.47 | 21.70 | 1.054 | 1.065 | 22.3 |
| Bottom side | 20 | QPSK 1RB_50 | 18700/1860 | 1:1 | 0.794 | 0.01 | 21.48 | 21.70 | 1.052 | 0.835 | 22.3 |
| Bottom side | 20 | QPSK 1RB_50 | 18900/1880 | 1:1 | 0.793 | 0.03 | 21.47 | 21.70 | 1.054 | 0.836 | 22.3 |
| Back side -repeat | 20 | QPSK 1RB_50 | 19100/1900 | 1:1 | 1.020 | 0.08 | 21.67 | 21.70 | 1.007 | 1.027 | 22.3 |
| Hotspot Test data (Separate 10mm 50%RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.422 | 0.08 | 20.49 | 20.70 | 1.050 | 0.443 | 22.3 |
| Back side | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.797 | 0.08 | 20.49 | 20.70 | 1.050 | 0.836 | 22.3 |
| Left side | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.050 | -0.06 | 20.49 | 20.70 | 1.050 | 0.053 | 22.3 |
| Right side | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.098 | -0.03 | 20.49 | 20.70 | 1.050 | 0.103 | 22.3 |
| Bottom side | 20 | QPSK 50RB_25 | 18900/1880 | 1:1 | 0.616 | 0.02 | 20.49 | 20.70 | 1.050 | 0.647 | 22.3 |
| Back side | 20 | QPSK 50RB_0 | 18700/1860 | 1:1 | 0.824 | 0.05 | 20.46 | 20.70 | 1.057 | 0.871 | 22.3 |
| Back side | 20 | QPSK 50RB_50 | 19100/1900 | 1:1 | 0.855 | 0.03 | 20.42 | 20.70 | 1.067 | 0.912 | 22.3 |
| Hotspot Test data (Separate 10mm 100%RB) | | | | | | | | | | | |
| Back side | 20 | QPSK 100RB_0 | 18700/1860 | 1:1 | 0.808 | 0.09 | 20.42 | 20.70 | 1.067 | 0.862 | 22.3 |
| Bottom side | 20 | QPSK 100RB_0 | 18700/1860 | 1:1 | 0.606 | 0.08 | 20.42 | 20.70 | 1.067 | 0.646 | 22.3 |

| Test Position | Channel/ Frequency | Measured SAR (1g) | 1 st Repeated | Ratio | 2 nd Repeated | 3 rd Repeated |
|---------------|-----------------------|----------------------|--------------------------|-------|--------------------------|--------------------------|
| | (MHz) | | SAR (1g) | | SAR (1g) | SAR (1g) |
| Back side | 19100/1900 | 1.040 | 1.020 | 1.020 | N/A | N/A |

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

LTE Band 5

| LTE Band 5 SAR Test Record | | | | | | | | | | | |
|---|-----|-------------|----------------|------------|----------------|------------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | BW. | Test mode | Test Ch./Freq. | Duty Cycle | SAR (W/kg) 1-g | Power Drift (dB) | Conducted power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data(1RB) | | | | | | | | | | | |
| Left cheek | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.236 | -0.09 | 24.23 | 24.70 | 1.114 | 0.263 | 22.1 |
| Left tilted | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.150 | 0.07 | 24.23 | 24.70 | 1.114 | 0.167 | 22.1 |
| Right cheek | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.231 | 0.07 | 24.23 | 24.70 | 1.114 | 0.257 | 22.1 |
| Right tilted | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.156 | 0.14 | 24.23 | 24.70 | 1.114 | 0.174 | 22.1 |
| Left cheek | 10 | QPSK 1RB_25 | 20450/829 | 1:1 | 0.225 | 0.08 | 23.96 | 24.70 | 1.186 | 0.267 | 22.1 |
| Left cheek | 10 | QPSK 1RB_25 | 20525/836.5 | 1:1 | 0.239 | 0.07 | 24.22 | 24.70 | 1.117 | 0.267 | 22.1 |
| Head Test data(50%RB) | | | | | | | | | | | |
| Left cheek | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.187 | -0.02 | 23.18 | 23.7 | 1.127 | 0.211 | 22.1 |
| Left tilted | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.109 | 0.12 | 23.18 | 23.7 | 1.127 | 0.123 | 22.1 |
| Right cheek | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.2 | -0.08 | 23.18 | 23.7 | 1.127 | 0.225 | 22.1 |
| Right tilted | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.104 | 0.07 | 23.18 | 23.7 | 1.127 | 0.117 | 22.1 |
| Body worn Test data(Separate 15mm 1RB) | | | | | | | | | | | |
| Front side | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.234 | -0.14 | 24.23 | 24.70 | 1.114 | 0.261 | 22.1 |
| Back side | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.297 | -0.03 | 24.23 | 24.70 | 1.114 | 0.331 | 22.1 |
| Back side | 10 | QPSK 1RB_25 | 20450/829 | 1:1 | 0.295 | -0.02 | 23.96 | 24.70 | 1.186 | 0.350 | 22.1 |
| Back side | 10 | QPSK 1RB_25 | 20525/836.5 | 1:1 | 0.300 | -0.01 | 24.22 | 24.70 | 1.117 | 0.335 | 22.1 |
| Body worn Test data (Separate 15mm 50%RB) | | | | | | | | | | | |
| Front side | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.189 | 0.02 | 23.18 | 23.70 | 1.127 | 0.213 | 22.1 |
| Back side | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.239 | -0.03 | 23.18 | 23.70 | 1.127 | 0.269 | 22.1 |
| Hotspot Test data(Separate 10mm 1RB) | | | | | | | | | | | |
| Front side | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.247 | -0.11 | 24.23 | 24.70 | 1.114 | 0.275 | 22.1 |
| Back side | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.375 | -0.02 | 24.23 | 24.70 | 1.114 | 0.418 | 22.1 |
| Left side | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.268 | 0.04 | 24.23 | 24.70 | 1.114 | 0.299 | 22.1 |
| Right side | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.310 | -0.01 | 24.23 | 24.70 | 1.114 | 0.345 | 22.1 |
| Bottom side | 10 | QPSK 1RB_25 | 20600/844 | 1:1 | 0.108 | 0.03 | 24.23 | 24.70 | 1.114 | 0.120 | 22.1 |
| Back side | 10 | QPSK 1RB_25 | 20450/829 | 1:1 | 0.375 | 0.00 | 23.96 | 24.70 | 1.186 | 0.445 | 22.1 |
| Back side | 10 | QPSK 1RB_25 | 20525/836.5 | 1:1 | 0.387 | -0.01 | 24.22 | 24.70 | 1.117 | 0.432 | 22.1 |
| Hotspot Test data (Separate 10mm 50%RB) | | | | | | | | | | | |
| Front side | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.197 | -0.02 | 23.18 | 23.70 | 1.127 | 0.222 | 22.1 |
| Back side | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.299 | 0.00 | 23.18 | 23.70 | 1.127 | 0.337 | 22.1 |
| Left side | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.217 | 0.01 | 23.18 | 23.70 | 1.127 | 0.245 | 22.1 |
| Right side | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.251 | 0.03 | 23.18 | 23.70 | 1.127 | 0.283 | 22.1 |
| Bottom side | 10 | QPSK 25RB_0 | 20600/844 | 1:1 | 0.084 | -0.06 | 23.18 | 23.70 | 1.127 | 0.095 | 22.1 |

LTE Band 7

| LTE Band 7 SAR Test Record | | | | | | | | | | | |
|---|-----|--------------|----------------|------------|----------------|-----------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | BW. | Test mode | Test Ch./Freq. | Duty Cycle | SAR (W/kg) 1-g | Power Drift(dB) | Conducted power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data(1RB) | | | | | | | | | | | |
| Left cheek | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.292 | 0.07 | 23.47 | 23.70 | 1.054 | 0.308 | 22.1 |
| Left tilted | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.169 | 0.08 | 23.47 | 23.70 | 1.054 | 0.178 | 22.1 |
| Right cheek | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.236 | 0.06 | 23.47 | 23.70 | 1.054 | 0.249 | 22.1 |
| Right tilted | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.229 | 0.05 | 23.47 | 23.70 | 1.054 | 0.241 | 22.1 |
| Left cheek | 20 | QPSK 1RB_0 | 21100/2535.5 | 1:1 | 0.385 | 0.18 | 23.28 | 23.70 | 1.102 | 0.424 | 22.1 |
| Left cheek | 20 | QPSK 1RB_50 | 21350/2560 | 1:1 | 0.419 | 0.09 | 23.45 | 23.70 | 1.059 | 0.444 | 22.1 |
| Head Test data(50%RB) | | | | | | | | | | | |
| Left cheek | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.283 | 0.08 | 22.47 | 22.70 | 1.054 | 0.298 | 22.1 |
| Left tilted | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.087 | -0.03 | 22.47 | 22.70 | 1.054 | 0.092 | 22.1 |
| Right cheek | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.177 | 0.05 | 22.47 | 22.70 | 1.054 | 0.187 | 22.1 |
| Right tilted | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.156 | -0.07 | 22.47 | 22.70 | 1.054 | 0.164 | 22.1 |
| Body worn Test data(Separate 15mm 1RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.333 | 0.08 | 23.47 | 23.70 | 1.054 | 0.351 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.535 | -0.19 | 23.47 | 23.70 | 1.054 | 0.564 | 22.1 |
| Back side | 20 | QPSK 1RB_0 | 21100/2535.5 | 1:1 | 0.528 | -0.10 | 23.28 | 23.70 | 1.102 | 0.582 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 21350/2560 | 1:1 | 0.605 | 0.06 | 23.45 | 23.70 | 1.059 | 0.641 | 22.1 |
| Body worn Test data (Separate 15mm 50%RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.301 | 0.05 | 22.47 | 22.70 | 1.054 | 0.317 | 22.1 |
| Back side | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.483 | 0.04 | 22.47 | 22.70 | 1.054 | 0.509 | 22.1 |
| Hotspot Test data(Separate 10mm 1RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.828 | 0.16 | 23.47 | 23.70 | 1.054 | 0.873 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 1.040 | 0.04 | 23.47 | 23.70 | 1.054 | 1.097 | 22.1 |
| Left side | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.611 | 0.11 | 23.47 | 23.70 | 1.054 | 0.644 | 22.1 |
| Right side | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.157 | 0.04 | 23.47 | 23.70 | 1.054 | 0.166 | 22.1 |
| Bottom side | 20 | QPSK 1RB_50 | 20850/2510 | 1:1 | 0.520 | 0.06 | 23.47 | 23.70 | 1.054 | 0.548 | 22.1 |
| Front side | 20 | QPSK 1RB_0 | 21100/2535.5 | 1:1 | 0.801 | -0.06 | 23.28 | 23.70 | 1.102 | 0.882 | 22.1 |
| Front side | 20 | QPSK 1RB_50 | 21350/2560 | 1:1 | 0.887 | 0.08 | 23.45 | 23.70 | 1.059 | 0.940 | 22.1 |
| Back side | 20 | QPSK 1RB_0 | 21100/2535.5 | 1:1 | 1.000 | 0.02 | 23.28 | 23.70 | 1.102 | 1.102 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 21350/2560 | 1:1 | 1.120 | -0.07 | 23.45 | 23.70 | 1.059 | 1.186 | 22.1 |
| Back side -repeat | 20 | QPSK 1RB_50 | 21350/2560 | 1:1 | 1.120 | 0.04 | 23.45 | 23.70 | 1.059 | 1.186 | 22.1 |
| Hotspot Test data (Separate 10mm 50%RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.708 | -0.13 | 22.47 | 22.70 | 1.054 | 0.747 | 22.1 |
| Back side | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.900 | -0.08 | 22.47 | 22.70 | 1.054 | 0.949 | 22.1 |
| Left side | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.558 | 0.07 | 22.47 | 22.70 | 1.054 | 0.588 | 22.1 |
| Right side | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.129 | -0.04 | 22.47 | 22.70 | 1.054 | 0.136 | 22.1 |
| Bottom side | 20 | QPSK 50RB_25 | 21350/2560 | 1:1 | 0.361 | 0.07 | 22.47 | 22.70 | 1.054 | 0.381 | 22.1 |
| Back side | 20 | QPSK 50RB_50 | 20850/2510 | 1:1 | 0.832 | 0.08 | 22.39 | 22.70 | 1.074 | 0.894 | 22.1 |
| Back side | 20 | QPSK 50RB_25 | 21100/2535.5 | 1:1 | 0.883 | -0.15 | 22.27 | 22.70 | 1.104 | 0.975 | 22.1 |
| Hotspot Test data (Separate 10mm 100%RB) | | | | | | | | | | | |
| Back side | 20 | QPSK 100RB_0 | 21350/2560 | 1:1 | 0.888 | 0.04 | 22.43 | 22.70 | 1.064 | 0.945 | 22.1 |
| Front side | 20 | QPSK 100RB_0 | 21350/2560 | 1:1 | 0.661 | -0.07 | 22.43 | 22.70 | 1.064 | 0.703 | 22.1 |

| Test Position | Channel/ Frequency | Measured SAR (1g) | 1 st Repeated | Ratio | 2 nd Repeated | 3 rd Repeated |
|---------------|-----------------------|----------------------|--------------------------|-------|--------------------------|--------------------------|
| | (MHz) | | SAR (1g) | | SAR (1g) | SAR (1g) |
| Back side | 21350/2560 | 1.120 | 1.120 | 1.000 | N/A | N/A |

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

LTE Band 41

| LTE Band 41 SAR Test Record | | | | | | | | | | | |
|---|-----|--------------|----------------|------------|----------------|-----------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | BW. | Test mode | Test Ch./Freq. | Duty Cycle | SAR (W/kg) 1-g | Power Drift(dB) | Conducted power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data(1RB) | | | | | | | | | | | |
| Left cheek | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.280 | 0.04 | 24.61 | 24.70 | 1.021 | 0.286 | 22.1 |
| Left tilted | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.077 | 0.09 | 24.61 | 24.70 | 1.021 | 0.078 | 22.1 |
| Right cheek | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.152 | 0.02 | 24.61 | 24.70 | 1.021 | 0.155 | 22.1 |
| Right tilted | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.165 | 0.09 | 24.61 | 24.70 | 1.021 | 0.168 | 22.1 |
| Left cheek | 20 | QPSK 1RB_50 | 40473/2578.3 | 1:1.58 | 0.257 | 0.09 | 24.60 | 24.70 | 1.023 | 0.263 | 22.1 |
| Left cheek | 20 | QPSK 1RB_50 | 40807/2611.7 | 1:1.58 | 0.215 | 0.05 | 24.46 | 24.70 | 1.057 | 0.227 | 22.1 |
| Left cheek | 20 | QPSK 1RB_50 | 41140/2645 | 1:1.58 | 0.185 | 0.02 | 24.49 | 24.70 | 1.050 | 0.194 | 22.1 |
| Head Test data(50%RB) | | | | | | | | | | | |
| Left cheek | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.204 | 0.04 | 23.67 | 23.70 | 1.007 | 0.205 | 22.1 |
| Left tilted | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.057 | 0.05 | 23.67 | 23.70 | 1.007 | 0.057 | 22.1 |
| Right cheek | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.115 | 0.06 | 23.67 | 23.70 | 1.007 | 0.116 | 22.1 |
| Right tilted | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.128 | 0.09 | 23.67 | 23.70 | 1.007 | 0.129 | 22.1 |
| Body worn Test data(Separate 15mm 1RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.325 | -0.20 | 24.61 | 24.70 | 1.021 | 0.332 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.437 | -0.13 | 24.61 | 24.70 | 1.021 | 0.446 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 40473/2578.3 | 1:1.58 | 0.420 | -0.09 | 24.60 | 24.70 | 1.023 | 0.430 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 40807/2611.7 | 1:1.58 | 0.374 | -0.01 | 24.46 | 24.70 | 1.057 | 0.395 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 41140/2645 | 1:1.58 | 0.364 | 0.08 | 24.49 | 24.70 | 1.050 | 0.382 | 22.1 |
| Body worn Test data (Separate 15mm 50%RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.261 | -0.16 | 23.67 | 23.70 | 1.007 | 0.263 | 22.1 |
| Back side | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.349 | -0.04 | 23.67 | 23.70 | 1.007 | 0.351 | 22.1 |
| Hotspot Test data(Separate 10mm 1RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.672 | -0.09 | 24.61 | 24.70 | 1.021 | 0.686 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.932 | -0.13 | 24.61 | 24.70 | 1.021 | 0.952 | 22.1 |
| Left side | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.544 | -0.15 | 24.61 | 24.70 | 1.021 | 0.555 | 22.1 |
| Right side | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.152 | 0.05 | 24.61 | 24.70 | 1.021 | 0.155 | 22.1 |
| Bottom side | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.398 | 0.01 | 24.61 | 24.70 | 1.021 | 0.406 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 40473/2578.3 | 1:1.58 | 0.890 | -0.07 | 24.60 | 24.70 | 1.023 | 0.911 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 40807/2611.7 | 1:1.58 | 0.734 | -0.12 | 24.46 | 24.70 | 1.057 | 0.776 | 22.1 |
| Back side | 20 | QPSK 1RB_50 | 41140/2645 | 1:1.58 | 0.670 | -0.17 | 24.49 | 24.70 | 1.050 | 0.703 | 22.1 |
| Back side -repeat | 20 | QPSK 1RB_50 | 40140/2545 | 1:1.58 | 0.949 | 0.04 | 24.61 | 24.70 | 1.021 | 0.969 | 22.1 |
| Hotspot Test data (Separate 10mm 50%RB) | | | | | | | | | | | |
| Front side | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.535 | -0.06 | 23.67 | 23.70 | 1.007 | 0.539 | 22.1 |
| Back side | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.743 | -0.09 | 23.67 | 23.70 | 1.007 | 0.748 | 22.1 |
| Left side | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.418 | -0.11 | 23.67 | 23.70 | 1.007 | 0.421 | 22.1 |
| Right side | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.120 | 0.09 | 23.67 | 23.70 | 1.007 | 0.121 | 22.1 |
| Bottom side | 20 | QPSK 50RB_25 | 40140/2545 | 1:1.58 | 0.315 | 0.19 | 23.67 | 23.70 | 1.007 | 0.317 | 22.1 |
| Hotspot Test data (Separate 10mm 100%RB) | | | | | | | | | | | |
| Back side | 20 | QPSK 100RB_0 | 40140/2545 | 1:1.58 | 0.735 | -0.06 | 24.61 | 24.70 | 1.021 | 0.750 | 22.1 |

| Test Position | Channel/ Frequency | Measured SAR (1g) | 1 st Repeated | Ratio | 2 nd Repeated | 3 rd Repeated |
|---------------|-----------------------|----------------------|--------------------------|-------|--------------------------|--------------------------|
| | (MHz) | | SAR (1g) | | SAR (1g) | SAR (1g) |
| Back side | 40140/2545 | 0.934 | 0.949 | 1.018 | N/A | N/A |

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
- 2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
- 3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
- 4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

WiFi 2.4G

| Wi-Fi 2.4G SAR Test Record | | | | | | | | | | | |
|------------------------------------|-----------|----------------|------------|--------------------------|----------------|-----------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | Test mode | Test Ch./Freq. | Duty Cycle | Duty Cycle Scaled factor | SAR (W/kg) 1-g | Power drift(dB) | Conducted power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data | | | | | | | | | | | |
| Left cheek | 802.11b | 6/2437 | 99.24% | 1.008 | 0.953 | 0.18 | 18.66 | 19.00 | 1.081 | 1.039 | 22.0 |
| Left tilted | 802.11b | 6/2437 | 99.24% | 1.008 | 1.010 | -0.19 | 18.66 | 19.00 | 1.081 | 1.101 | 22.0 |
| Right cheek | 802.11b | 6/2437 | 99.24% | 1.008 | 0.436 | -0.04 | 18.66 | 19.00 | 1.081 | 0.475 | 22.0 |
| Right tilted | 802.11b | 6/2437 | 99.24% | 1.008 | 0.488 | 0.03 | 18.66 | 19.00 | 1.081 | 0.532 | 22.0 |
| Left cheek | 802.11b | 1/2412 | 99.24% | 1.008 | 0.762 | -0.07 | 18.26 | 19.00 | 1.186 | 0.911 | 22.0 |
| Left cheek | 802.11b | 11/2462 | 99.24% | 1.008 | 0.878 | 0.14 | 18.24 | 19.00 | 1.191 | 1.054 | 22.0 |
| Left tilted | 802.11b | 1/2412 | 99.24% | 1.008 | 0.812 | -0.16 | 18.26 | 19.00 | 1.186 | 0.971 | 22.0 |
| Left tilted | 802.11b | 11/2462 | 99.24% | 1.008 | 0.965 | -0.07 | 18.24 | 19.00 | 1.191 | 1.159 | 22.0 |
| Left tilted -Repeat | 802.11b | 6/2437 | 99.24% | 1.008 | 0.929 | 0.08 | 18.24 | 19.00 | 1.191 | 1.116 | 22.0 |
| Body worn Test data(Separate 15mm) | | | | | | | | | | | |
| Front side | 802.11b | 6/2437 | 99.24% | 1.008 | 0.092 | 0.09 | 18.66 | 19.00 | 1.081 | 0.100 | 22.0 |
| Back side | 802.11b | 6/2437 | 99.24% | 1.008 | 0.172 | -0.16 | 18.66 | 19.00 | 1.081 | 0.187 | 22.0 |
| Back side | 802.11b | 1/2412 | 99.24% | 1.008 | 0.177 | 0.09 | 18.26 | 19.00 | 1.186 | 0.212 | 22.0 |
| Back side | 802.11b | 11/2462 | 99.24% | 1.008 | 0.155 | 0.04 | 18.24 | 19.00 | 1.191 | 0.186 | 22.0 |
| Hotspot Test data (Separate 10mm) | | | | | | | | | | | |
| Front side | 802.11b | 6/2437 | 99.24% | 1.008 | 0.177 | 0.08 | 18.66 | 19.00 | 1.081 | 0.193 | 22.0 |
| Back side | 802.11b | 6/2437 | 99.24% | 1.008 | 0.335 | 0.12 | 18.66 | 19.00 | 1.081 | 0.365 | 22.0 |
| Right side | 802.11b | 6/2437 | 99.24% | 1.008 | 0.052 | 0.11 | 18.66 | 19.00 | 1.081 | 0.056 | 22.0 |
| Top side | 802.11b | 6/2437 | 99.24% | 1.008 | 0.257 | -0.08 | 18.66 | 19.00 | 1.081 | 0.280 | 22.0 |
| Back side | 802.11b | 1/2412 | 99.24% | 1.008 | 0.318 | -0.02 | 18.26 | 19.00 | 1.186 | 0.380 | 22.0 |
| Back side | 802.11b | 11/2462 | 99.24% | 1.008 | 0.277 | -0.09 | 18.24 | 19.00 | 1.191 | 0.333 | 22.0 |

| Test Position | Channel/ Frequency | Measured SAR (1g) | 1 st Repeated | Ratio | 2 nd Repeated | 3 rd Repeated |
|---------------|-----------------------|----------------------|--------------------------|-------|--------------------------|--------------------------|
| | (MHz) | | SAR (1g) | | SAR (1g) | SAR (1g) |
| Left tilted | 11/2462 | 0.965 | 0.929 | 1.039 | N/A | N/A |

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

| Mode | Tune-up (dBm) | Tune-up (mw) | Max Reported SAR1-g(W/kg) | Adjusted SAR1-g(W/kg) | SAR test |
|--------------------------|------------------|-----------------|------------------------------|--------------------------|----------|
| Head | | | | | |
| 802.11b | 19.00 | 79.43 | 1.159 | / | Yes |
| 802.11g | 16.00 | 39.81 | / | 0.581 | No |
| 802.11n 20M/40M | 15.00 | 31.62 | / | 0.461 | No |
| Body worn(Separate 15mm) | | | | | |
| 802.11b | 19.00 | 79.43 | 0.212 | / | Yes |
| 802.11g | 16.00 | 39.81 | / | 0.106 | No |
| 802.11n 20M/40M | 15.00 | 31.62 | / | 0.084 | No |
| Hotspot(Separate 10mm) | | | | | |
| 802.11b | 19.00 | 79.43 | 0.38 | / | Yes |
| 802.11g | 16.00 | 39.81 | / | 0.190 | No |
| 802.11n 20M/40M | 15.00 | 31.62 | / | 0.151 | No |

When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, 802.11g/n OFDM SAR Test is not required.

WiFi 5G

| Wi-Fi 5G SAR Test Record | | | | | | | | | | | |
|---|-----------|----------------|------------|--------------------------|----------------|------------------|-----------------------|---------------------|---------------|-------------------|-------------------|
| Test position | Test mode | Test Ch./Freq. | Duty Cycle | Duty Cycle Scaled factor | SAR (W/kg) 1-g | Power drift (dB) | Conducted power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. (°C) |
| Head Test data of U-NII-2A | | | | | | | | | | | |
| Left cheek | 802.11a | 56/5280 | 96.17% | 1.040 | 0.305 | 0.07 | 11.38 | 12.00 | 1.153 | 0.366 | 22.2 |
| Left tilted | 802.11a | 56/5280 | 96.17% | 1.040 | 0.245 | 0.04 | 11.38 | 12.00 | 1.153 | 0.294 | 22.2 |
| Right cheek | 802.11a | 56/5280 | 96.17% | 1.040 | 0.115 | 0.06 | 11.38 | 12.00 | 1.153 | 0.138 | 22.2 |
| Right tilted | 802.11a | 56/5280 | 96.17% | 1.040 | 0.208 | 0.03 | 11.38 | 12.00 | 1.153 | 0.250 | 22.2 |
| Left cheek | 802.11a | 52/5260 | 96.17% | 1.040 | 0.447 | 0.01 | 11.36 | 12.00 | 1.159 | 0.539 | 22.2 |
| Left cheek | 802.11a | 60/5300 | 96.17% | 1.040 | 0.511 | -0.02 | 11.22 | 12.00 | 1.197 | 0.636 | 22.2 |
| Head Test data of U-NII-2C | | | | | | | | | | | |
| Left cheek | 802.11a | 112/5560 | 96.17% | 1.040 | 0.609 | 0.06 | 11.85 | 12.00 | 1.035 | 0.656 | 22.2 |
| Left tilted | 802.11a | 112/5560 | 96.17% | 1.040 | 0.585 | 0.07 | 11.85 | 12.00 | 1.035 | 0.630 | 22.2 |
| Right cheek | 802.11a | 112/5560 | 96.17% | 1.040 | 0.508 | 0.03 | 11.85 | 12.00 | 1.035 | 0.547 | 22.2 |
| Right tilted | 802.11a | 112/5560 | 96.17% | 1.040 | 0.412 | 0.02 | 11.85 | 12.00 | 1.035 | 0.444 | 22.2 |
| Left cheek | 802.11a | 100/5500 | 96.17% | 1.040 | 0.690 | -0.06 | 11.79 | 12.00 | 1.050 | 0.753 | 22.2 |
| Left cheek | 802.11a | 140/5700 | 96.17% | 1.040 | 0.802 | 0.02 | 11.60 | 12.00 | 1.096 | 0.915 | 22.2 |
| Head Test data of U-NII-3 | | | | | | | | | | | |
| Left cheek | 802.11a | 157/5785 | 96.17% | 1.040 | 0.624 | 0.07 | 11.42 | 12.00 | 1.143 | 0.742 | 22.2 |
| Left tilted | 802.11a | 157/5785 | 96.17% | 1.040 | 0.623 | 0.04 | 11.42 | 12.00 | 1.143 | 0.740 | 22.2 |
| Right cheek | 802.11a | 157/5785 | 96.17% | 1.040 | 0.492 | 0.07 | 11.42 | 12.00 | 1.143 | 0.585 | 22.2 |
| Right tilted | 802.11a | 157/5785 | 96.17% | 1.040 | 0.427 | 0.03 | 11.42 | 12.00 | 1.143 | 0.508 | 22.2 |
| Left cheek | 802.11a | 149/5745 | 96.17% | 1.040 | 0.762 | -0.06 | 11.38 | 12.00 | 1.153 | 0.914 | 22.2 |
| Left cheek | 802.11a | 165/5825 | 96.17% | 1.040 | 0.804 | -0.07 | 11.40 | 12.00 | 1.148 | 0.960 | 22.2 |
| Left cheek -repeat | 802.11a | 165/5825 | 96.17% | 1.040 | 0.798 | -0.02 | 11.40 | 12.00 | 1.148 | 0.953 | 22.2 |
| Body worn Test data of U-NII-2A (Separate 15mm) | | | | | | | | | | | |
| Front side | 802.11a | 56/5280 | 96.17% | 1.040 | 0.015 | 0.05 | 11.38 | 12.00 | 1.153 | 0.018 | 22.2 |
| Back side | 802.11a | 56/5280 | 96.17% | 1.040 | 0.011 | 0.03 | 11.38 | 12.00 | 1.153 | 0.013 | 22.2 |
| Front side | 802.11a | 52/5260 | 96.17% | 1.040 | 0.027 | 0.08 | 11.36 | 12.00 | 1.159 | 0.033 | 22.2 |
| Front side | 802.11a | 60/5300 | 96.17% | 1.040 | 0.065 | 0.03 | 11.22 | 12.00 | 1.197 | 0.081 | 22.2 |
| Body worn Test data of U-NII-2C (Separate 15mm) | | | | | | | | | | | |
| Front side | 802.11a | 112/5560 | 96.17% | 1.040 | 0.052 | 0.06 | 11.85 | 12.00 | 1.035 | 0.056 | 22.2 |
| Back side | 802.11a | 112/5560 | 96.17% | 1.040 | 0.019 | 0.03 | 11.85 | 12.00 | 1.035 | 0.020 | 22.2 |
| Front side | 802.11a | 100/5500 | 96.17% | 1.040 | 0.058 | 0.05 | 11.79 | 12.00 | 1.050 | 0.063 | 22.2 |
| Front side | 802.11a | 140/5700 | 96.17% | 1.040 | 0.064 | -0.04 | 11.60 | 12.00 | 1.096 | 0.073 | 22.2 |
| Body worn Test data of U-NII-3 (Separate 15mm) | | | | | | | | | | | |
| Front side | 802.11a | 157/5785 | 96.17% | 1.040 | 0.045 | 0.01 | 11.42 | 12.00 | 1.143 | 0.053 | 22.2 |
| Back side | 802.11a | 157/5785 | 96.17% | 1.040 | 0.031 | 0.02 | 11.42 | 12.00 | 1.143 | 0.037 | 22.2 |

| Front side | 802.11a | 149/5745 | 96.17% | 1.040 | 0.067 | 0.03 | 11.38 | 12.00 | 1.153 | 0.080 | 22.2 |
|--|-----------|----------------|------------|--------------------------|-----------------|-----------------|-----------------------|---------------------|---------------|-------------------|--------------|
| Front side | 802.11a | 165/5825 | 96.17% | 1.040 | 0.073 | 0.05 | 11.40 | 12.00 | 1.148 | 0.087 | 22.2 |
| Hotspot Test data of U-NII-1(Separate 10mm) | | | | | | | | | | | |
| Front side | 802.11a | 40/5200 | 96.17% | 1.040 | 0.089 | 0.03 | 11.55 | 12.00 | 1.109 | 0.102 | 22.2 |
| Back side | 802.11a | 40/5200 | 96.17% | 1.040 | 0.041 | 0.05 | 11.55 | 12.00 | 1.109 | 0.047 | 22.2 |
| Right side | 802.11a | 40/5200 | 96.17% | 1.040 | 0.018 | 0.02 | 11.55 | 12.00 | 1.109 | 0.021 | 22.2 |
| Top side | 802.11a | 40/5200 | 96.17% | 1.040 | 0.025 | 0.06 | 11.55 | 12.00 | 1.109 | 0.029 | 22.2 |
| Front side | 802.11a | 36/5180 | 96.17% | 1.040 | 0.084 | 0.02 | 11.41 | 12.00 | 1.146 | 0.100 | 22.2 |
| Front side | 802.11a | 48/5240 | 96.17% | 1.040 | 0.089 | 0.08 | 11.42 | 12.00 | 1.143 | 0.105 | 22.2 |
| Hotspot Test data of U-NII-3(Separate 10mm) | | | | | | | | | | | |
| Front side | 802.11a | 157/5785 | 96.17% | 1.040 | 0.111 | 0.03 | 11.42 | 12.00 | 1.143 | 0.132 | 22.2 |
| Back side | 802.11a | 157/5785 | 96.17% | 1.040 | 0.084 | 0.03 | 11.42 | 12.00 | 1.143 | 0.100 | 22.2 |
| Right side | 802.11a | 157/5785 | 96.17% | 1.040 | 0.018 | 0.06 | 11.42 | 12.00 | 1.143 | 0.021 | 22.2 |
| Top side | 802.11a | 157/5785 | 96.17% | 1.040 | 0.060 | 0.03 | 11.42 | 12.00 | 1.143 | 0.071 | 22.2 |
| Front side | 802.11a | 149/5745 | 96.17% | 1.040 | 0.104 | 0.03 | 11.38 | 12.00 | 1.153 | 0.125 | 22.2 |
| Front side | 802.11a | 165/5825 | 96.17% | 1.040 | 0.092 | 0.02 | 11.40 | 12.00 | 1.148 | 0.109 | 22.2 |
| Test position | Test mode | Test Ch./Freq. | Duty Cycle | Duty Cycle Scaled factor | SAR (W/kg) 10-g | Power drift(dB) | Conducted power (dBm) | Tune up Limit (dBm) | Scaled factor | Scaled SAR (W/kg) | Liquid Temp. |
| Product specific 10g SAR Test data of U-NII-2A(Separate 0mm) | | | | | | | | | | | |
| Front side | 802.11a | 56/5280 | 96.17% | 1.040 | 0.173 | 0.05 | 11.38 | 12.00 | 1.153 | 0.208 | 22.2 |
| Back side | 802.11a | 56/5280 | 96.17% | 1.040 | 0.086 | 0.03 | 11.38 | 12.00 | 1.153 | 0.103 | 22.2 |
| Right side | 802.11a | 56/5280 | 96.17% | 1.040 | 0.033 | 0.08 | 11.38 | 12.00 | 1.153 | 0.039 | 22.2 |
| Top side | 802.11a | 56/5280 | 96.17% | 1.040 | 0.060 | 0.03 | 11.38 | 12.00 | 1.153 | 0.072 | 22.2 |
| Front side | 802.11a | 52/5260 | 96.17% | 1.040 | 0.197 | 0.02 | 11.36 | 12.00 | 1.159 | 0.237 | 22.2 |
| Front side | 802.11a | 60/5300 | 96.17% | 1.040 | 0.190 | -0.05 | 11.22 | 12.00 | 1.197 | 0.236 | 22.2 |
| Product specific 10g SAR Test data of U-NII-2C(Separate 0mm) | | | | | | | | | | | |
| Front side | 802.11a | 112/5560 | 96.17% | 1.040 | 0.219 | 0.05 | 11.85 | 12.00 | 1.035 | 0.236 | 22.2 |
| Back side | 802.11a | 112/5560 | 96.17% | 1.040 | 0.171 | 0.06 | 11.85 | 12.00 | 1.035 | 0.184 | 22.2 |
| Right side | 802.11a | 112/5560 | 96.17% | 1.040 | 0.045 | 0.06 | 11.85 | 12.00 | 1.035 | 0.048 | 22.2 |
| Top side | 802.11a | 112/5560 | 96.17% | 1.040 | 0.127 | 0.06 | 11.85 | 12.00 | 1.035 | 0.137 | 22.2 |
| Front side | 802.11a | 100/5500 | 96.17% | 1.040 | 0.248 | 0.02 | 11.79 | 12.00 | 1.050 | 0.271 | 22.2 |
| Front side | 802.11a | 140/5700 | 96.17% | 1.040 | 0.280 | 0.06 | 11.60 | 12.00 | 1.096 | 0.319 | 22.2 |

| Test Position | Channel/Frequency (MHz) | Measured SAR (1g) | 1 st Repeated SAR (1g) | Ratio | 2 nd Repeated SAR (1g) | 3 rd Repeated SAR (1g) |
|---------------|-------------------------|-------------------|-----------------------------------|-------|-----------------------------------|-----------------------------------|
| | | | | | | |
| Left cheek | 165/5825 | 0.804 | 0.798 | 1.008 | N/A | N/A |

- Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

| Mode | Tune-up (dBm) | Tune-up (mw) | Max Reported SAR1-g(W/kg) | Adjusted SAR(W/kg) | SAR test |
|--|---------------|--------------|---------------------------|--------------------|----------|
| Head | | | | | |
| 802.11a | 12.00 | 15.85 | 0.96 | / | Yes |
| 802.11n 20M/40M | 11.00 | 12.59 | / | 0.763 | No |
| Body worn(Separate 15mm) | | | | | |
| 802.11a | 12.00 | 15.85 | 0.087 | / | Yes |
| 802.11n 20M/40M | 11.00 | 12.59 | / | 0.069 | No |
| Hotspot(Separate 10mm) | | | | | |
| 802.11a | 12.00 | 15.85 | 0.132 | / | Yes |
| 802.11n 20M/40M | 11.00 | 12.59 | / | 0.105 | No |
| Product specific 10g SAR(Separate 0mm) | | | | | |
| 802.11a | 12.00 | 15.85 | 0.319 | / | Yes |
| 802.11n 20M/40M | 11.00 | 12.59 | / | 0.253 | No |

When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR test for the other 802.11 modes are not required.

| Mode | Tune-up (dBm) | Tune-up (mw) | Max Reported SAR1-g(W/kg) | Adjusted SAR(W/kg) | SAR test |
|--|---------------|--------------|---------------------------|--------------------|----------|
| Head | | | | | |
| U-NII-2A | 12.00 | 15.85 | 0.636 | / | Yes |
| U-NII-1 | 12.00 | 15.85 | / | 0.636 | No |
| Body worn(Separate 15mm) | | | | | |
| U-NII-2A | 12.00 | 15.85 | 0.081 | / | Yes |
| U-NII-1 | 12.00 | 15.85 | / | 0.081 | No |
| Product specific 10g SAR(Separate 0mm) | | | | | |
| U-NII-2A | 12.00 | 15.85 | 0.319 | / | Yes |
| U-NII-1 | 12.00 | 15.85 | / | 0.319 | No |

When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration.

3 Simultaneous Transmission Analysis

3.1 Simultaneous Transmission Scenarios:

| NO. | Simultaneous Transmission Configuration | Head | Body worn | Hotspot | Product Specific 10-g (0mm) |
|-----|--|------|-----------|---------|-----------------------------|
| 1 | GSM(Voice) + WiFi | Yes | Yes | No | Yes |
| 2 | GSM(Voice) + BT | Yes | Yes | No | Yes |
| 3 | WCDMA(Voice) + WiFi | Yes | Yes | No | Yes |
| 4 | WCDMA(Voice) + BT | Yes | Yes | No | Yes |
| 5 | GPRS / EDGE(Data) + WiFi | No | No | Yes | Yes |
| 6 | GPRS / EDGE(Data) + BT | No | No | Yes | Yes |
| 7 | WCDMA(Data) + WiFi | No | No | Yes | Yes |
| 8 | WCDMA(Data) + BT | No | No | Yes | Yes |
| 9 | LTE(Data) + WiFi | Yes | Yes | Yes | Yes |
| 10 | LTE(Data) + BT | Yes | Yes | Yes | Yes |
| 11 | BT+WIFI (They share the same antenna and cannot transmit at the same time by design.) | No | No | No | No |

Note:

- 1) Wi-Fi and Bluetooth share the same Tx antenna and can't transmit simultaneously.
- 2) The device does not support DTM function.
- 3) * VoLTE or pre-installed VOIP applications are considered.
- 4) For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.

3.2 Estimated SAR calculation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

| Freq. Band | Frequency (GHz) | Position | Average Power | | Test Separation (mm) | Calculate Value | Exclusion Threshold | Exclusion (Y/N) |
|------------|-----------------|-----------|---------------|------|----------------------|-----------------|---------------------|-----------------|
| | | | dBm | mW | | | | |
| Bluetooth | 2.48 | Head | 9.5 | 9.33 | 5.0 | 2.8 | 3.0 | Y |
| | | Body-worn | 9.5 | 9.33 | 15.0 | 0.9 | 3.0 | Y |
| | | hotspot | 9.5 | 9.33 | 10.0 | 1.4 | 3.0 | Y |

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$
for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

When the standalone SAR test exclusion is applied to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to the following to determine simultaneous transmission SAR test exclusion:

- $(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})}/x] \text{ W/kg}$
for test separation distances ≤ 50 mm;

Where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.



When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Estimated SAR Result

| Freq. Band | Frequency (GHz) | Test Position | max. power(dBm) | Test Separation (mm) | Estimated |
|------------|-----------------|--------------------------|-----------------|----------------------|---------------|
| | | | | | 1g SAR (W/kg) |
| Bluetooth | 2.48 | Head | 9.50 | 0 | 0.374 |
| | | Body-worn | 9.50 | 15 | 0.125 |
| | | hotspot | 9.50 | 10 | 0.187 |
| | | Product specific 10g SAR | 9.50 | 0 | 0.150 |

3.3 SPLSR evaluation and analysis

Per KDB447498D01, when the sum of SAR is larger than the limit, SAR test exclusion is determined by the SAR sum to peak location separation ratio(SPLSR).

The simultaneous transmitting antennas in each operating mode and exposure condition combination must be considered one pair at a time to determine the SAR to peak location separation ratio to qualify for test exclusion.

The ratio is determined by $(SAR1 + SAR2)^{1.5}/R_i$, rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion.

SAR1 and SAR2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna.

3.1 Simultaneous Transmission Combination Scenario

| 1) Simultaneous Transmission SAR Summation Scenario for head | | | | | | | | | |
|--|-------------------|----------------------------|------------------------------------|----------------------------------|--------------------------|----------------------|----------------------|----------------------|-------------|
| WWAN Band | Exposure position | ① MAX.WWAN SAR(W/kg) | ② MAX.WLAN 2.4G SAR(W/kg) | ③ MAX.WLAN 5G SAR(W/kg) | ④ MAX.BT SAR(W/kg) | Summed SAR①+ ② | Summed SAR①+ ③ | Summed SAR①+ ④ | Case NO. |
| GSM850 | Left Touch | 0.244 | 1.054 | 0.960 | 0.374 | 1.298 | 1.204 | 0.618 | No |
| | Left Tilt | 0.149 | 1.159 | 0.740 | 0.374 | 1.308 | 0.889 | 0.523 | No |
| | Right Touch | 0.275 | 0.475 | 0.585 | 0.374 | 0.750 | 0.860 | 0.649 | No |
| | Right Tilt | 0.177 | 0.532 | 0.508 | 0.374 | 0.709 | 0.685 | 0.551 | No |
| GSM1900 | Left Touch | 0.060 | 1.054 | 0.960 | 0.374 | 1.114 | 1.020 | 0.434 | No |
| | Left Tilt | 0.055 | 1.159 | 0.740 | 0.374 | 1.214 | 0.795 | 0.429 | No |
| | Right Touch | 0.108 | 0.475 | 0.585 | 0.374 | 0.583 | 0.693 | 0.482 | No |
| | Right Tilt | 0.028 | 0.532 | 0.508 | 0.374 | 0.560 | 0.536 | 0.402 | No |
| WCDMA Band II | Left Touch | 0.094 | 1.054 | 0.960 | 0.374 | 1.148 | 1.054 | 0.468 | No |
| | Left Tilt | 0.098 | 1.159 | 0.740 | 0.374 | 1.257 | 0.838 | 0.472 | No |
| | Right Touch | 0.167 | 0.475 | 0.585 | 0.374 | 0.642 | 0.752 | 0.541 | No |
| | Right Tilt | 0.061 | 0.532 | 0.508 | 0.374 | 0.593 | 0.569 | 0.435 | No |
| WCDMA Band V | Left Touch | 0.189 | 1.054 | 0.960 | 0.374 | 1.243 | 1.149 | 0.563 | No |
| | Left Tilt | 0.115 | 1.159 | 0.740 | 0.374 | 1.274 | 0.855 | 0.489 | No |
| | Right Touch | 0.211 | 0.475 | 0.585 | 0.374 | 0.686 | 0.796 | 0.585 | No |
| | Right Tilt | 0.113 | 0.532 | 0.508 | 0.374 | 0.645 | 0.621 | 0.487 | No |
| LTE Band 2 | Left Touch | 0.113 | 1.054 | 0.960 | 0.374 | 1.167 | 1.073 | 0.487 | No |
| | Left Tilt | 0.116 | 1.159 | 0.740 | 0.374 | 1.275 | 0.856 | 0.490 | No |
| | Right Touch | 0.186 | 0.475 | 0.585 | 0.374 | 0.661 | 0.771 | 0.560 | No |
| | Right Tilt | 0.073 | 0.532 | 0.508 | 0.374 | 0.605 | 0.581 | 0.447 | No |
| LTE Band 5 | Left Touch | 0.267 | 1.054 | 0.960 | 0.374 | 1.321 | 1.227 | 0.641 | No |
| | Left Tilt | 0.167 | 1.159 | 0.740 | 0.374 | 1.326 | 0.907 | 0.541 | No |
| | Right Touch | 0.257 | 0.475 | 0.585 | 0.374 | 0.732 | 0.842 | 0.631 | No |
| | Right Tilt | 0.174 | 0.532 | 0.508 | 0.374 | 0.706 | 0.682 | 0.548 | No |
| LTE Band 7 | Left Touch | 0.444 | 1.054 | 0.960 | 0.374 | 1.498 | 1.404 | 0.818 | No |
| | Left Tilt | 0.178 | 1.159 | 0.740 | 0.374 | 1.337 | 0.918 | 0.552 | No |
| | Right Touch | 0.249 | 0.475 | 0.585 | 0.374 | 0.724 | 0.834 | 0.623 | No |
| | Right Tilt | 0.241 | 0.532 | 0.508 | 0.374 | 0.773 | 0.749 | 0.615 | No |
| LTE Band 41 | Left Touch | 0.286 | 1.054 | 0.960 | 0.374 | 1.340 | 1.246 | 0.660 | No |
| | Left Tilt | 0.078 | 1.159 | 0.740 | 0.374 | 1.237 | 0.818 | 0.452 | No |
| | Right Touch | 0.155 | 0.475 | 0.585 | 0.374 | 0.630 | 0.740 | 0.529 | No |
| | Right Tilt | 0.168 | 0.532 | 0.508 | 0.374 | 0.700 | 0.676 | 0.542 | No |

2) Simultaneous Transmission SAR Summation Scenario for body worn

| WWAN Band | Exposure position | ① MAX.WWAN SAR(W/kg) | ② MAX.WLAN 2.4G SAR(W/kg) | ③ MAX.WLAN 5G SAR(W/kg) | ④ MAX.BT SAR(W/kg) | Summed SAR①+ ② | Summed SAR①+ ③ | Summed SAR①+ ④ | Case NO. |
|------------------|-------------------|----------------------------|------------------------------------|----------------------------------|--------------------------|----------------------|----------------------|----------------------|-------------|
| GSM850 | Front | 0.237 | 0.100 | 0.087 | 0.125 | 0.337 | 0.324 | 0.362 | No |
| | Back | 0.352 | 0.212 | 0.037 | 0.125 | 0.564 | 0.389 | 0.477 | No |
| GSM1900 | Front | 0.179 | 0.100 | 0.087 | 0.125 | 0.279 | 0.266 | 0.304 | No |
| | Back | 0.258 | 0.212 | 0.037 | 0.125 | 0.470 | 0.295 | 0.383 | No |
| WCDMA Band II | Front | 0.172 | 0.100 | 0.087 | 0.125 | 0.272 | 0.259 | 0.297 | No |
| | Back | 0.435 | 0.212 | 0.037 | 0.125 | 0.647 | 0.472 | 0.560 | No |
| WCDMA Band V | Front | 0.265 | 0.100 | 0.087 | 0.125 | 0.365 | 0.352 | 0.390 | No |
| | Back | 0.333 | 0.212 | 0.037 | 0.125 | 0.545 | 0.370 | 0.458 | No |
| LTE Band 2 | Front | 0.282 | 0.100 | 0.087 | 0.125 | 0.382 | 0.369 | 0.407 | No |
| | Back | 0.433 | 0.212 | 0.037 | 0.125 | 0.645 | 0.470 | 0.558 | No |
| LTE Band 5 | Front | 0.261 | 0.100 | 0.087 | 0.125 | 0.361 | 0.348 | 0.386 | No |
| | Back | 0.335 | 0.212 | 0.037 | 0.125 | 0.547 | 0.372 | 0.460 | No |
| LTE Band 7 | Front | 0.351 | 0.100 | 0.087 | 0.125 | 0.451 | 0.438 | 0.476 | No |
| | Back | 0.641 | 0.212 | 0.037 | 0.125 | 0.853 | 0.678 | 0.766 | No |
| LTE Band 41 | Front | 0.332 | 0.100 | 0.087 | 0.125 | 0.432 | 0.419 | 0.457 | No |
| | Back | 0.446 | 0.212 | 0.037 | 0.125 | 0.658 | 0.483 | 0.571 | No |

3) Simultaneous Transmission SAR Summation Scenario for hotspot

| WWAN Band | Exposure position | ① MAX.WWAN SAR(W/kg) | ② MAX.WLAN 2.4G SAR(W/kg) | ③ MAX.WLAN 5G SAR(W/kg) | ④ MAX.BT SAR(W/kg) | Summed SAR①+ ② | Summed SAR①+ ③ | Summed SAR①+ ④ | Case NO. |
|-----------|-------------------|----------------------------|------------------------------------|----------------------------------|--------------------------|----------------------|----------------------|----------------------|-------------|
| GSM850 | Front | 0.379 | 0.193 | 0.132 | 0.187 | 0.572 | 0.511 | 0.566 | No |
| | Back | 0.568 | 0.380 | 0.100 | 0.187 | 0.948 | 0.668 | 0.755 | No |
| | Left | 0.434 | 0.000 | 0.000 | 0.187 | 0.434 | 0.434 | 0.621 | No |
| | Right | 0.581 | 0.056 | 0.021 | 0.187 | 0.637 | 0.602 | 0.768 | No |
| | Top | 0.000 | 0.280 | 0.071 | 0.187 | 0.280 | 0.071 | 0.187 | No |
| | Bottom | 0.132 | 0.000 | 0.000 | 0.187 | 0.132 | 0.132 | 0.319 | No |
| GSM1900 | Front | 0.353 | 0.193 | 0.132 | 0.187 | 0.546 | 0.485 | 0.540 | No |
| | Back | 0.780 | 0.380 | 0.100 | 0.187 | 1.160 | 0.880 | 0.967 | No |
| | Left | 0.042 | 0.000 | 0.000 | 0.187 | 0.042 | 0.042 | 0.229 | No |
| | Right | 0.083 | 0.056 | 0.021 | 0.187 | 0.139 | 0.104 | 0.270 | No |
| | Top | 0.000 | 0.280 | 0.071 | 0.187 | 0.280 | 0.071 | 0.187 | No |
| | Bottom | 0.592 | 0.000 | 0.000 | 0.187 | 0.592 | 0.592 | 0.779 | No |
| WCDMA | Front | 0.484 | 0.193 | 0.132 | 0.187 | 0.677 | 0.616 | 0.671 | No |

| | | | | | | | | | |
|-----------------|--------|-------|-------|-------|-------|--------------|-------|-------|----|
| Band II | Back | 0.837 | 0.380 | 0.100 | 0.187 | 1.217 | 0.937 | 1.024 | No |
| | Left | 0.057 | 0.000 | 0.000 | 0.187 | 0.057 | 0.057 | 0.244 | No |
| | Right | 0.109 | 0.056 | 0.021 | 0.187 | 0.165 | 0.130 | 0.296 | No |
| | Top | 0.000 | 0.280 | 0.071 | 0.187 | 0.280 | 0.071 | 0.187 | No |
| | Bottom | 0.724 | 0.000 | 0.000 | 0.187 | 0.724 | 0.724 | 0.911 | No |
| WCDMA Band V | Front | 0.263 | 0.193 | 0.132 | 0.187 | 0.456 | 0.395 | 0.450 | No |
| | Back | 0.403 | 0.380 | 0.100 | 0.187 | 0.783 | 0.503 | 0.590 | No |
| | Left | 0.266 | 0.000 | 0.000 | 0.187 | 0.266 | 0.266 | 0.453 | No |
| | Right | 0.311 | 0.056 | 0.021 | 0.187 | 0.367 | 0.332 | 0.498 | No |
| | Top | 0.000 | 0.280 | 0.071 | 0.187 | 0.280 | 0.071 | 0.187 | No |
| | Bottom | 0.100 | 0.000 | 0.000 | 0.187 | 0.100 | 0.100 | 0.287 | No |
| LTE Band 2 | Front | 0.604 | 0.193 | 0.132 | 0.187 | 0.797 | 0.736 | 0.791 | No |
| | Back | 1.065 | 0.380 | 0.100 | 0.187 | 1.445 | 1.165 | 1.252 | No |
| | Left | 0.092 | 0.000 | 0.000 | 0.187 | 0.092 | 0.092 | 0.279 | No |
| | Right | 0.139 | 0.056 | 0.021 | 0.187 | 0.195 | 0.160 | 0.326 | No |
| | Top | 0.000 | 0.280 | 0.071 | 0.187 | 0.280 | 0.071 | 0.187 | No |
| | Bottom | 0.860 | 0.000 | 0.000 | 0.187 | 0.860 | 0.860 | 1.047 | No |
| LTE Band 5 | Front | 0.275 | 0.193 | 0.132 | 0.187 | 0.468 | 0.407 | 0.462 | No |
| | Back | 0.445 | 0.380 | 0.100 | 0.187 | 0.825 | 0.545 | 0.632 | No |
| | Left | 0.299 | 0.000 | 0.000 | 0.187 | 0.299 | 0.299 | 0.486 | No |
| | Right | 0.345 | 0.056 | 0.021 | 0.187 | 0.401 | 0.366 | 0.532 | No |
| | Top | 0.000 | 0.280 | 0.071 | 0.187 | 0.280 | 0.071 | 0.187 | No |
| | Bottom | 0.120 | 0.000 | 0.000 | 0.187 | 0.120 | 0.120 | 0.307 | No |
| LTE Band 7 | Front | 0.940 | 0.193 | 0.132 | 0.187 | 1.133 | 1.072 | 1.127 | No |
| | Back | 1.186 | 0.380 | 0.100 | 0.187 | 1.566 | 1.286 | 1.373 | No |
| | Left | 0.644 | 0.000 | 0.000 | 0.187 | 0.644 | 0.644 | 0.831 | No |
| | Right | 0.166 | 0.056 | 0.021 | 0.187 | 0.222 | 0.187 | 0.353 | No |
| | Top | 0.000 | 0.280 | 0.071 | 0.187 | 0.280 | 0.071 | 0.187 | No |
| | Bottom | 0.548 | 0.000 | 0.000 | 0.187 | 0.548 | 0.548 | 0.735 | No |
| LTE Band 41 | Front | 0.686 | 0.193 | 0.132 | 0.187 | 0.879 | 0.818 | 0.873 | No |
| | Back | 0.969 | 0.380 | 0.100 | 0.187 | 1.349 | 1.069 | 1.156 | No |
| | Left | 0.555 | 0.000 | 0.000 | 0.187 | 0.555 | 0.555 | 0.742 | No |
| | Right | 0.155 | 0.056 | 0.021 | 0.187 | 0.211 | 0.176 | 0.342 | No |
| | Top | 0.000 | 0.280 | 0.071 | 0.187 | 0.280 | 0.071 | 0.187 | No |
| | Bottom | 0.406 | 0.000 | 0.000 | 0.187 | 0.406 | 0.406 | 0.593 | No |

4) Simultaneous Transmission SAR Summation Scenario for Product specific 10g SAR

| WWAN Band | Exposure position | ① MAX.WWAN SAR(W/kg) | ② MAX.WLAN 2.4G SAR(W/kg) | ③ MAX.WLAN 5G SAR(W/kg) | ④ MAX.BT SAR(W/kg) | Summed SAR①+② | Summed SAR①+③ | Summed SAR①+④ | Case NO. |
|-----------|-------------------|----------------------------|------------------------------------|----------------------------------|--------------------------|------------------|------------------|------------------|-------------|
| WWAN Band | Front | / | / | 0.319 | 0.150 | 0 | 0.319 | 0.150 | No |
| | Back | / | / | 0.184 | 0.150 | 0 | 0.184 | 0.150 | No |
| | Left | / | / | / | 0.150 | 0 | / | 0.150 | No |
| | Right | / | / | 0.048 | 0.150 | 0 | 0.048 | 0.150 | No |
| | Top | / | / | 0.137 | 0.150 | 0 | 0.137 | 0.150 | No |
| | Bottom | / | / | / | 0.150 | 0 | / | 0.150 | No |

4 Instruments List

| | | | | | | |
|-------------------------------------|--------------------------------------|---|-------------|---------------|------------------|-------------------------|
| Test Platform | | SPEAG DASY5 Professional | | | | |
| Location | | SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch | | | | |
| Description | | SAR Test System (Frequency range 300MHz-6GHz) | | | | |
| Software Reference | | DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331) | | | | |
| Hardware Reference | | | | | | |
| | Equipment | Manufacturer | Model | Serial Number | Calibration Date | Due date of calibration |
| <input checked="" type="checkbox"/> | Twin Phantom | SPEAG | SAM 1 | 1283 | NCR | NCR |
| <input checked="" type="checkbox"/> | Twin Phantom | SPEAG | SAM 2 | 1913 | NCR | NCR |
| <input checked="" type="checkbox"/> | Twin Phantom | SPEAG | SAM 1 | 1912 | NCR | NCR |
| <input checked="" type="checkbox"/> | Twin Phantom | SPEAG | SAM 2 | 1640 | NCR | NCR |
| <input checked="" type="checkbox"/> | DAE | SPEAG | DAE4 | 1267 | 2017-11-28 | 2018-11-27 |
| <input checked="" type="checkbox"/> | DAE | SPEAG | DAE4 | 1428 | 2018-01-17 | 2019-01-16 |
| <input checked="" type="checkbox"/> | E-Field Probe | SPEAG | EX3DV4 | 3962 | 2018-01-11 | 2019-01-10 |
| <input checked="" type="checkbox"/> | E-Field Probe | SPEAG | EX3DV4 | 3789 | 2018-02-08 | 2019-02-07 |
| <input checked="" type="checkbox"/> | Validation Kits | SPEAG | D835V2 | 4d105 | 2016-12-08 | 2019-12-07 |
| <input checked="" type="checkbox"/> | Validation Kits | SPEAG | D1750V2 | 1149 | 2016-06-23 | 2019-06-22 |
| <input checked="" type="checkbox"/> | Validation Kits | SPEAG | D1900V2 | 5d028 | 2016-12-07 | 2019-12-06 |
| <input checked="" type="checkbox"/> | Validation Kits | SPEAG | D2450V2 | 733 | 2016-12-07 | 2019-12-06 |
| <input checked="" type="checkbox"/> | Validation Kits | SPEAG | D2600V2 | 1125 | 2016-06-22 | 2019-06-21 |
| <input checked="" type="checkbox"/> | Validation Kits | SPEAG | D5GHzV2 | 1165 | 2016-12-13 | 2019-12-12 |
| <input checked="" type="checkbox"/> | Agilent Network Analyzer | Agilent | E5071C | MY46523590 | 2018-03-13 | 2019-03-12 |
| <input checked="" type="checkbox"/> | Dielectric Probe Kit | Agilent | 85070E | US01440210 | NCR | NCR |
| <input checked="" type="checkbox"/> | Universal Radio Communication Tester | R&S | CMU200 | 123090 | 2018-06-21 | 2019-06-20 |
| <input checked="" type="checkbox"/> | Radio Communication Analyzer | Anritsu Corporation | MT8821C | 6201502984 | 2018-05-02 | 2019-05-01 |
| <input checked="" type="checkbox"/> | RF Bi-Directional Coupler | Agilent | 86205-60001 | MY31400031 | NCR | NCR |
| <input checked="" type="checkbox"/> | Signal Generator | Agilent | N5171B | MY53050736 | 2018-03-13 | 2019-03-12 |
| <input checked="" type="checkbox"/> | Preamplifier | Mini-Circuits | ZHL-42W | 15542 | NCR | NCR |
| <input checked="" type="checkbox"/> | Preamplifier | Compliance Directions Systems Inc. | AMP28-3W | 073501433 | NCR | NCR |
| <input checked="" type="checkbox"/> | Power Meter | Agilent | E4416A | GB41292095 | 2018-03-13 | 2019-03-12 |
| <input checked="" type="checkbox"/> | Power Sensor | Agilent | 8481H | MY41091234 | 2018-03-13 | 2019-03-12 |
| <input checked="" type="checkbox"/> | Power Sensor | R&S | NRP-Z92 | 100025 | 2018-03-13 | 2019-03-12 |
| <input checked="" type="checkbox"/> | Attenuator | SHX | TS2-3dB | 30704 | NCR | NCR |
| <input checked="" type="checkbox"/> | Coaxial low pass filter | Mini-Circuits | VLF-2500(+) | NA | NCR | NCR |
| <input checked="" type="checkbox"/> | Coaxial low pass filter | Microlab Fxr | LA-F13 | NA | NCR | NCR |

| | | | | | | |
|-------------------------------------|------------------------------------|---------------|------------|-------|------------|------------|
| <input checked="" type="checkbox"/> | 50 Ω coaxial load | Mini-Circuits | KARN-50+ | 00850 | NCR | NCR |
| <input checked="" type="checkbox"/> | DC POWER SUPPLY | SAKO | SK1730SL5A | NA | NCR | NCR |
| <input checked="" type="checkbox"/> | Speed reading thermometer | MingGao | T809 | NA | 2018-03-19 | 2019-03-18 |
| <input checked="" type="checkbox"/> | Humidity and Temperature Indicator | KIMTOKA | KIMTOKA | NA | 2018-03-19 | 2019-03-18 |

Note: All the equipments are within the valid period when the tests are performed.

5 Measurements

Please see the Appendix B

6 SAR System Performance Verification

Please see the Appendix A

7 Photographs

Please see the Appendix D

8 DAE & Probe Calibration Certificate

Please see the Appendix C

9 SAR measurement variability and uncertainty

SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

SAR measurement variability

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

---END---



Appendix A

Detailed System Check Results

| |
|---|
| 1. System Performance Check for Head and Body |
| System Performance Check 835 MHz Head |
| System Performance Check 835 MHz Body |
| System Performance Check 1900 MHz Head |
| System Performance Check 1900 MHz Body |
| System Performance Check 2450 MHz Head |
| System Performance Check 2450 MHz Body |
| System Performance Check 2600 MHz Head |
| System Performance Check 2600 MHz Body |
| System Performance Check 5250 MHz Head |
| System Performance Check 5250 MHz Body |
| System Performance Check 5600 MHz Head |
| System Performance Check 5600 MHz Body |
| System Performance Check 5750 MHz Head |
| System Performance Check 5750 MHz Body |

Test Laboratory: SGS-SAR Lab

System Performance Check 835 MHz Head

DUT: D835V2; Type: D835V2; Serial: 4d105

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 835$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.668$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.96, 9.96, 9.96); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=15mm, Pin=250mW/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 3.12 W/kg


Body/d=15mm, Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 55.90 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.51 W/kg; SAR(10 g) = 1.66 W/kg

Maximum value of SAR (measured) = 3.15 W/kg

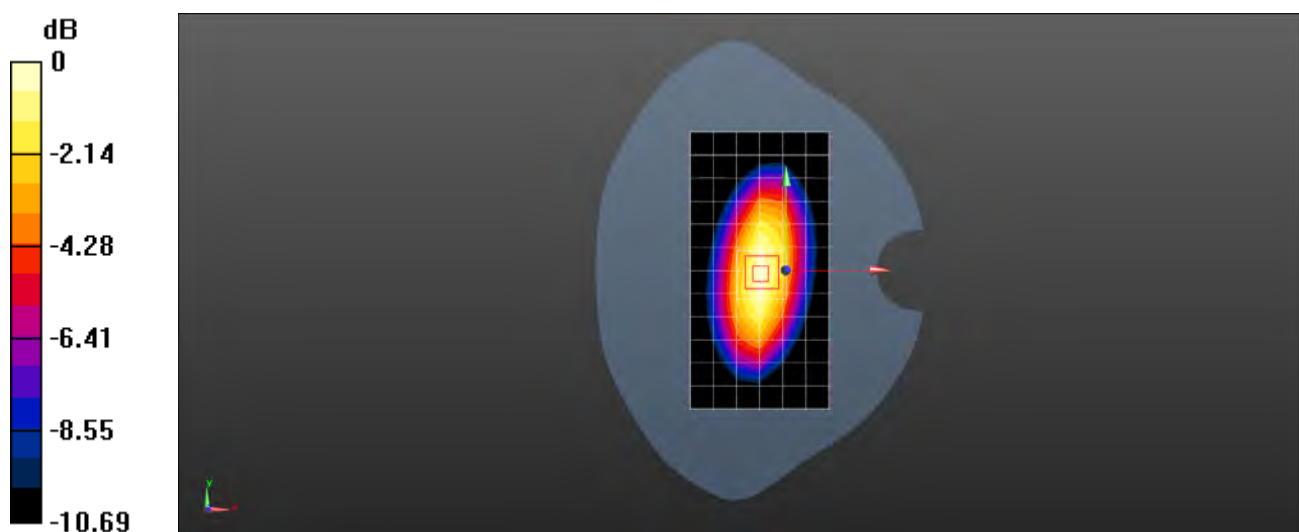

0 dB = 3.15 W/kg = 4.98 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 835 MHz Body

DUT: D835V2; Type: D835V2; Serial: 4d105

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL835; Medium parameters used: $f = 835$ MHz; $\sigma = 0.986$ S/m; $\epsilon_r = 54.389$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.84, 8.84, 8.84); Calibrated: 2018-02-08;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1267; Calibrated: 2017-11-28
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=15mm, Pin=250mW/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 3.11 W/kg


Body/d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 50.78 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.64 W/kg

SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.63 W/kg

Maximum value of SAR (measured) = 3.12 W/kg

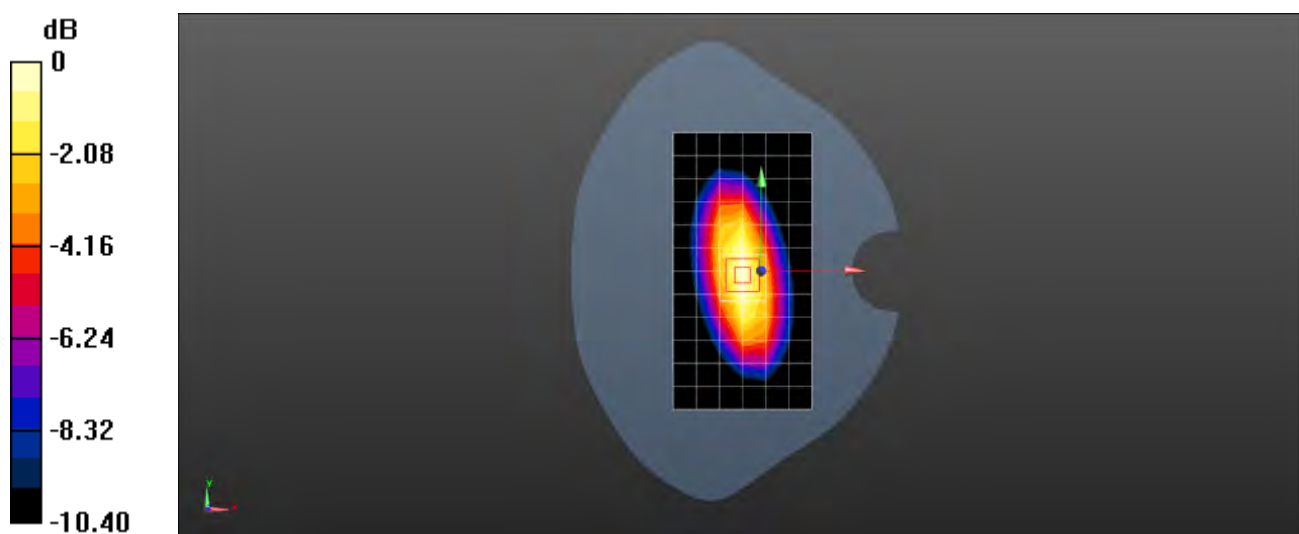

0 dB = 3.12 W/kg = 4.94 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 1900 MHz Head

DUT: D1900V2; Type: D1900V2; Serial: 5d028

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.426$ S/m; $\epsilon_r = 41.472$; $\rho = 1000$ kg/m³


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.35, 7.35, 7.35); Calibrated: 2018-02-08;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1267; Calibrated: 2017-11-28
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=250mW/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 11.8 W/kg

Body/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 84.20 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 20.1 W/kg
SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.47 W/kg

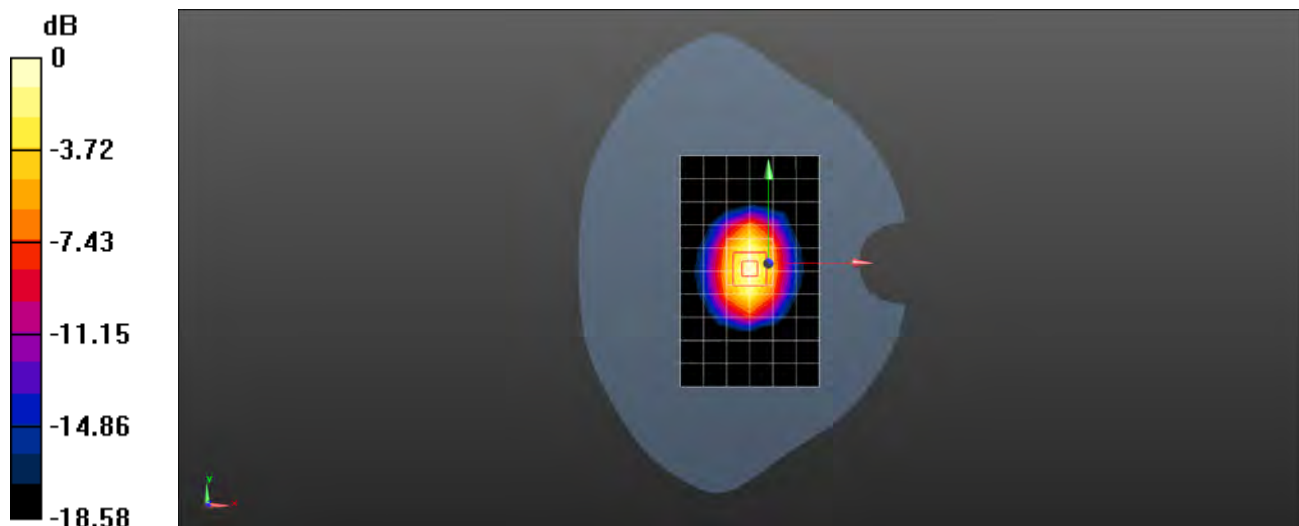

0 dB = 11.8 W/kg = 10.72 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 1900 MHz Body

DUT: D1900V2; Type: D1900V2; Serial: 5d028

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL1900; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.514$ S/m; $\epsilon_r = 53.84$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(8.09, 8.09, 8.09); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=250mW/Area Scan (7x11x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 11.6 W/kg


Body/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 60.09 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 10.3 W/kg; SAR(10 g) = 5.45 W/kg

Maximum value of SAR (measured) = 14.5 W/kg

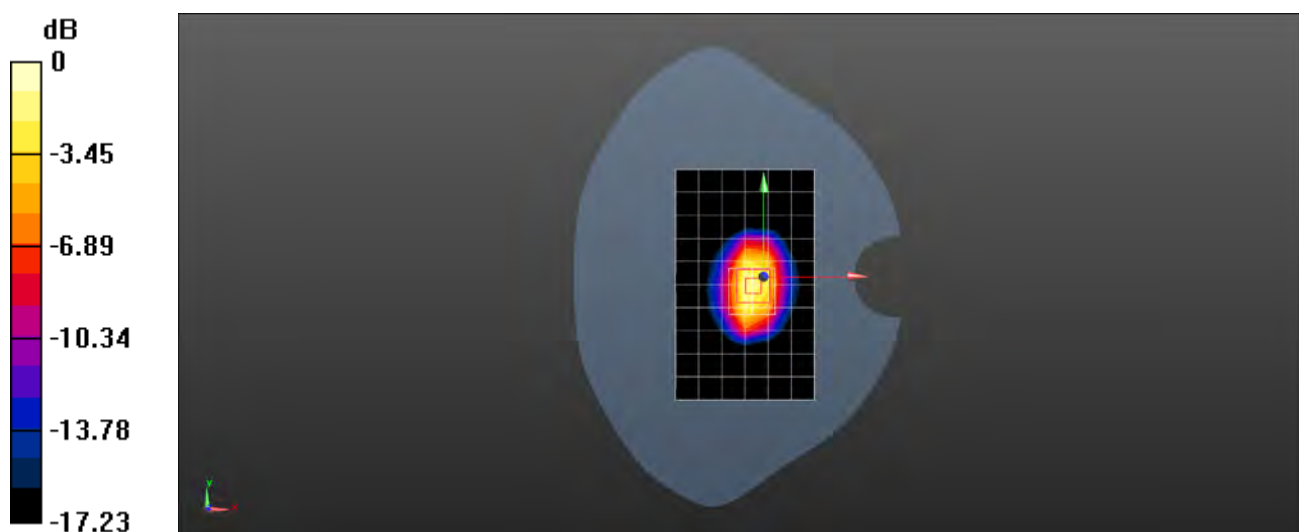

0 dB = 14.5 W/kg = 11.61 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 2450MHz Head

DUT: D2450V2; Type: D2450V2; Serial: 733

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.803$ S/m; $\epsilon_r = 40.177$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.01, 7.01, 7.01); Calibrated: 2018-02-08;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1267; Calibrated: 2017-11-28
- Phantom: SAM2; Type: SAM; Serial: 1913
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=250mW/Area Scan (9x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 13.7 W/kg


Body/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid:
 $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 86.57 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 27.6 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.08 W/kg

Maximum value of SAR (measured) = 15.0 W/kg

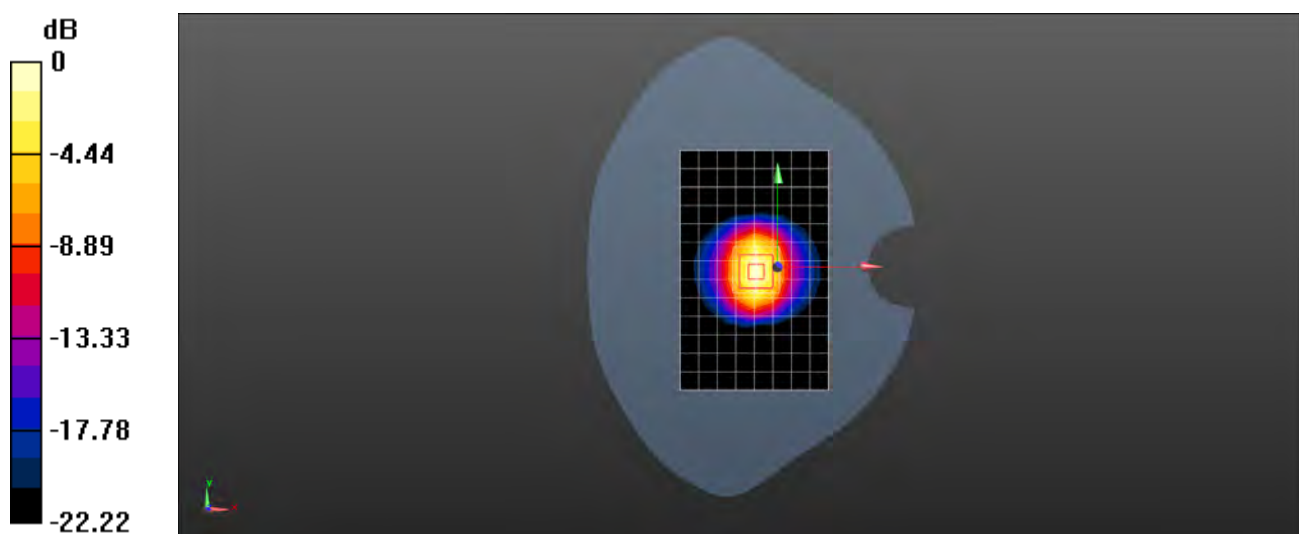

0 dB = 15.0 W/kg = 11.76 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 2450MHz Body

DUT: D2450V2; Type: D2450V2; Serial: 733

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL2450; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.889$ S/m; $\epsilon_r = 51.49$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.15, 7.15, 7.15); Calibrated: 2018-02-08;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1267; Calibrated: 2017-11-28
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=250mW/Area Scan (10x14x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 12.9 W/kg


Body/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 79.74 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 24.2 W/kg

SAR(1 g) = 12.1 W/kg; SAR(10 g) = 5.69 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

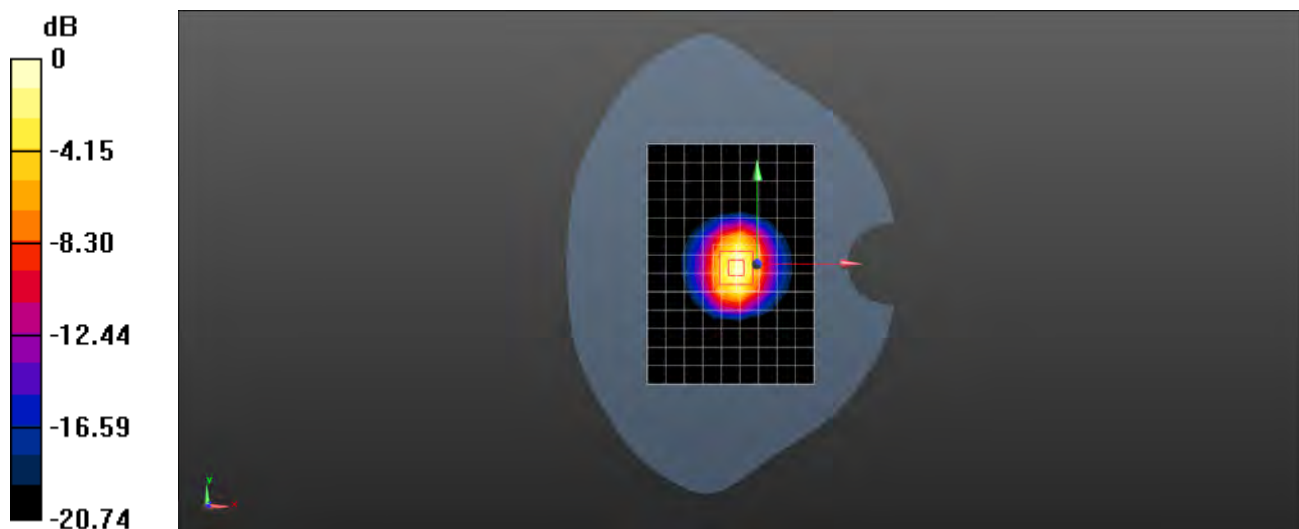

0 dB = 14.0 W/kg = 11.46 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 2600MHz Head

DUT: Dipole D2600V2; Type: D2600V2; Serial: 1125

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2600$ MHz; $\sigma = 1.968$ S/m; $\epsilon_r = 39.86$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(7.01, 7.01, 7.01); Calibrated: 2018-02-08;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1267; Calibrated: 2017-11-28
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=250mW/Area Scan (10x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 14.3 W/kg


Body/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 88.53 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 31.4 W/kg

SAR(1 g) = 14 W/kg; SAR(10 g) = 6.15 W/kg

Maximum value of SAR (measured) = 16.0 W/kg

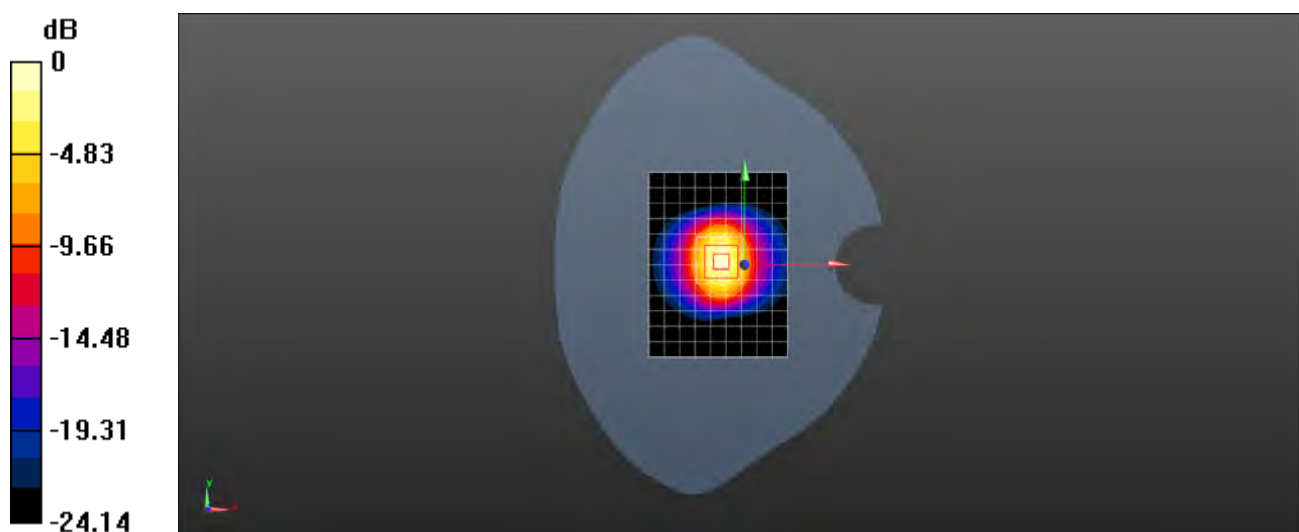

0 dB = 16.0 W/kg = 12.04 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 2600MHz Body

DUT: D2600V2; Type: D2600V2; Serial: 1125

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: MSL2600; Medium parameters used: $f = 2600$ MHz; $\sigma = 2.072$ S/m; $\epsilon_r = 51.268$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(6.96, 6.96, 6.96); Calibrated: 2018-02-08;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1267; Calibrated: 2017-11-28
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=250mW/Area Scan (10x11x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 16.7 W/kg


Body/d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 76.35 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 26.4 W/kg

SAR(1 g) = 12.8 W/kg; SAR(10 g) = 5.77 W/kg

Maximum value of SAR (measured) = 19.7 W/kg

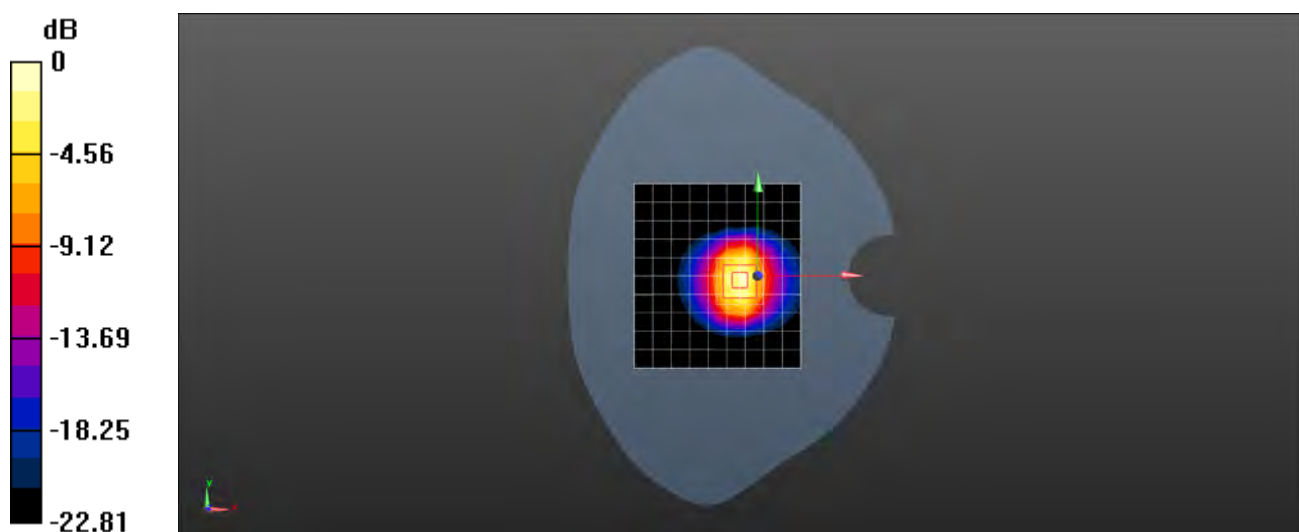

0 dB = 19.7 W/kg = 12.94 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 5.25GHz Head

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1165

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5250$ MHz; $\sigma = 4.721$ S/m; $\epsilon_r = 36.011$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.68, 5.68, 5.68); Calibrated: 2018-01-11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=100mW, f=5250 MHz/Area Scan (10x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 12.2 W/kg


Body/d=10mm, Pin=100mW, f=5250 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 66.58 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 7.1 W/kg; SAR(10 g) = 2.02 W/kg

Maximum value of SAR (measured) = 16.7 W/kg

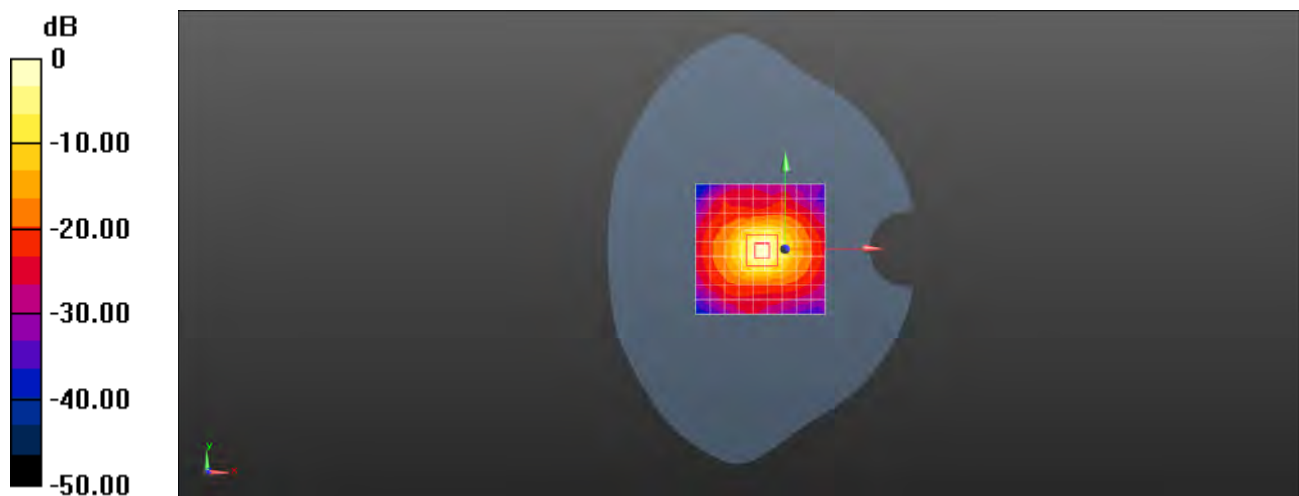

0 dB = 16.7 W/kg = 12.23 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 5.25GHz Body

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1165

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium: MSL5G; Medium parameters used: $f = 5250$ MHz; $\sigma = 5.426$ S/m; $\epsilon_r = 48.122$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.22, 5.22, 5.22); Calibrated: 2018-01-11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 2; Type: SAM V4.0; Serial: 1640
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=100mW, f=5250 MHz/Area Scan (10x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 18.0 W/kg


Body/d=10mm, Pin=100mW, f=5250 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 56.22 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 32.4 W/kg

SAR(1 g) = 7.38 W/kg; SAR(10 g) = 2.02 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

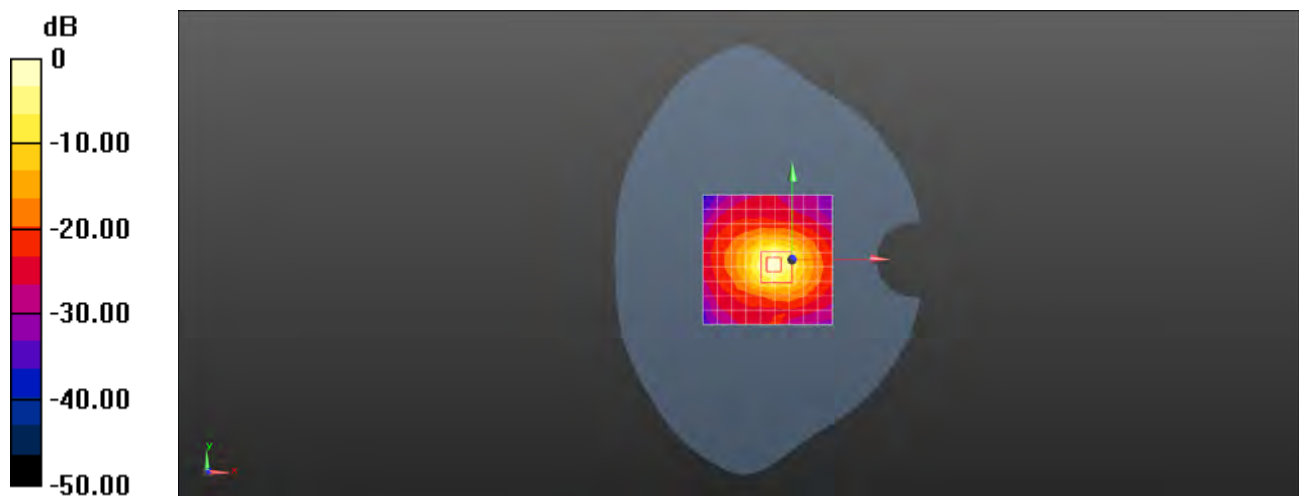

0 dB = 18.9 W/kg = 12.76 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 5.6GHz Head

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1165

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5600$ MHz; $\sigma = 5.107$ S/m; $\epsilon_r = 35.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.05, 5.05, 5.05); Calibrated: 2018-01-11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (10x10x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 16.4 W/kg

Body/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded),


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 63.24 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 34.7 W/kg

SAR(1 g) = 7.67 W/kg; SAR(10 g) = 2.16 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

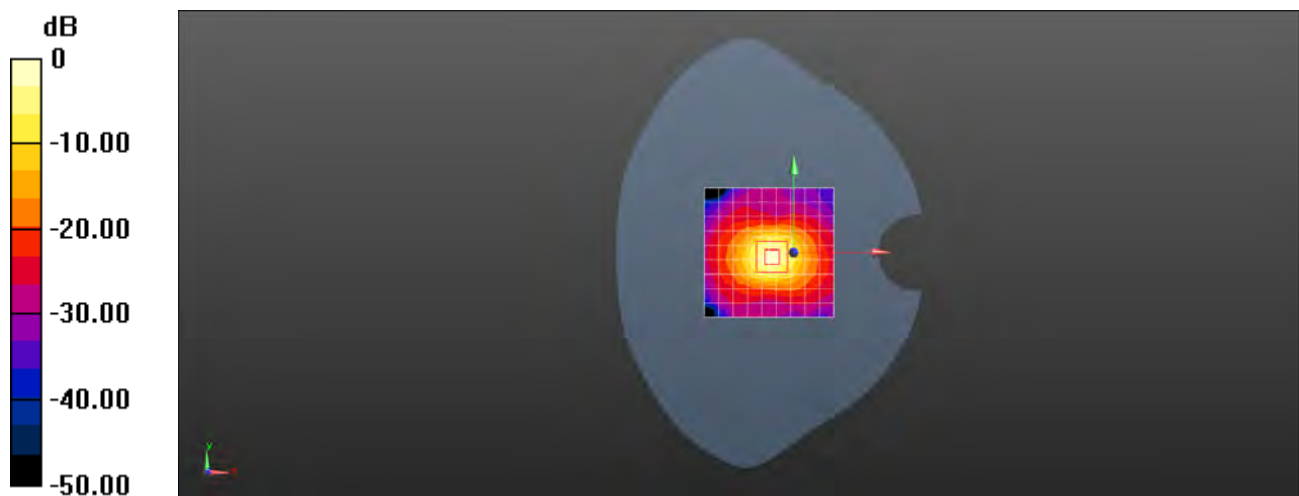

0 dB = 19.2 W/kg = 12.83 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 5.6GHz Body

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1165

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium: MSL5G; Medium parameters used: $f = 5600$ MHz; $\sigma = 5.85$ S/m; $\epsilon_r = 47.19$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(4.59, 4.59, 4.59); Calibrated: 2018-01-11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 2; Type: SAM V4.0; Serial: 1640
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=100mW, f=5600 MHz/Area Scan (10x10x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 20.2 W/kg

Body/d=10mm, Pin=100mW, f=5600 MHz/Zoom Scan (4x4x1.4mm, graded),

dist=1.4mm (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 62.96 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 40.4 W/kg

SAR(1 g) = 8.51 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 22.5 W/kg



0 dB = 22.5 W/kg = 13.52 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 5.75GHz Head

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1165

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: HSL5G; Medium parameters used: $f = 5750$ MHz; $\sigma = 5.279$ S/m; $\epsilon_r = 34.695$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(5.05, 5.05, 5.05); Calibrated: 2018-01-11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=100mW, f=5750 MHz/Area Scan (10x10x1): Measurement grid:

$dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 19.2 W/kg

Body/d=10mm, Pin=100mW, f=5750 MHz/Zoom Scan (4x4x1.4mm, graded),


dist=1.4mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 64.31 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 38.6 W/kg

SAR(1 g) = 8.38 W/kg; SAR(10 g) = 2.39 W/kg

Maximum value of SAR (measured) = 20.6 W/kg

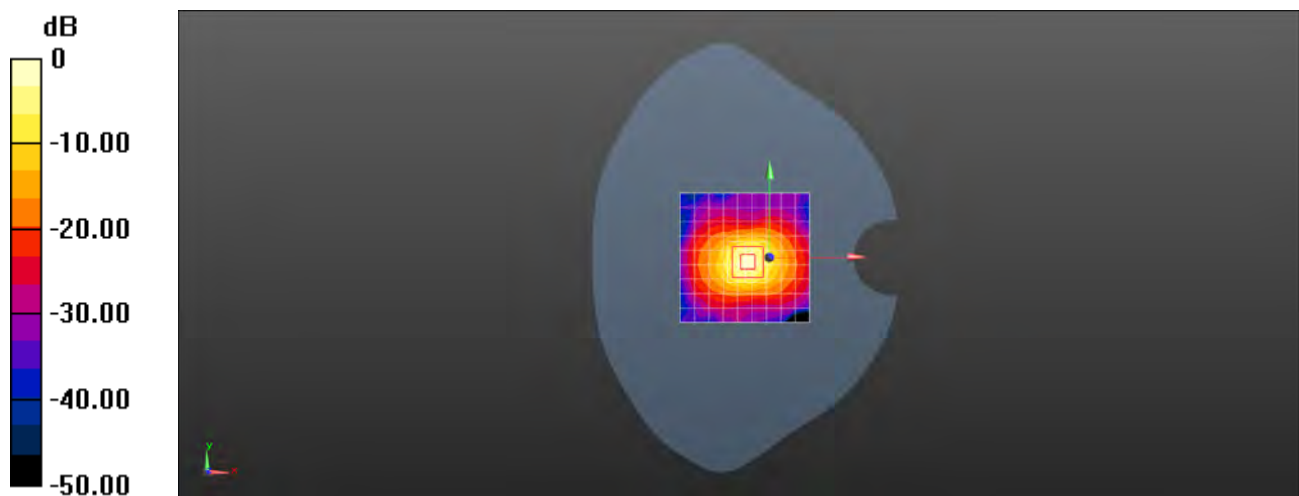

0 dB = 20.6 W/kg = 13.14 dBW/kg

Test Laboratory: SGS-SAR Lab

System Performance Check 5.75GHz Body

DUT: D5GHzV2; Type: D5GHzV2; Serial: 1165

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium: MSL5G; Medium parameters used: $f = 5750$ MHz; $\sigma = 6.017$ S/m; $\epsilon_r = 46.85$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(4.59, 4.59, 4.59); Calibrated: 2018-01-11;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = -2.0, 23.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 2; Type: SAM V4.0; Serial: 1640
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Body/d=10mm, Pin=100mW, f=5750 MHz/Area Scan (10x10x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 16.8 W/kg


Body/d=10mm, Pin=100mW, f=5750 MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 60.28 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 38.0 W/kg

SAR(1 g) = 8.1 W/kg; SAR(10 g) = 2.21 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

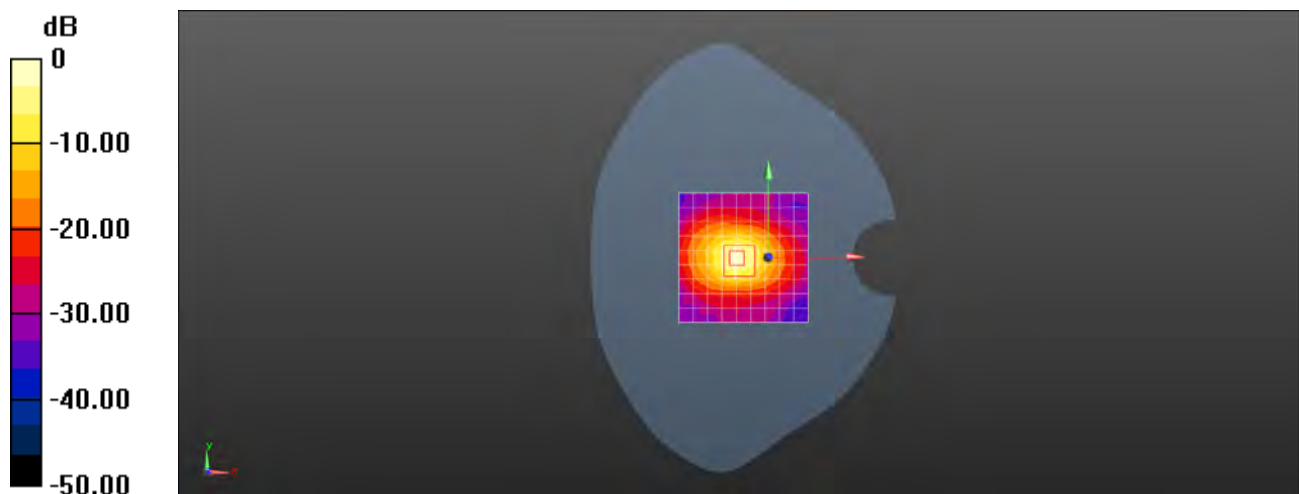

0 dB = 20.7 W/kg = 13.16 dBW/kg



Appendix B

Detailed Test Results

| |
|-------------------------------|
| 1. GSM |
| GSM850 for Head & Body |
| GSM1900 for Head & Body |
| 2. WCDMA |
| WCDMA Band II for Head & Body |
| WCDMA Band V for Head & Body |
| 3. LTE |
| LTE Band 2 for Head & Body |
| LTE Band 5 for Head & Body |
| LTE Band 7 for Head & Body |
| LTE Band 41 for Head & Body |
| 4. WIFI |
| WIFI 2.4G for Head & Body |
| WIFI 5G for Head & Body |

Test Laboratory: SGS-SAR Lab

SONY I4332 GSM850 GSM 190CH Right cheek

DUT: I4332; Type: mobile phone; Serial: HQ689S0532

Communication System: UID 0, GSM Only Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium: HSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 42.599$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3962; ConvF(9.96, 9.96, 9.96); Calibrated: 2018-01-11;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1428; Calibrated: 2018-01-17
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Head/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.256 W/kg


Configuration/Head/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.458 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.289 W/kg

SAR(1 g) = 0.231 W/kg; SAR(10 g) = 0.178 W/kg

Maximum value of SAR (measured) = 0.260 W/kg

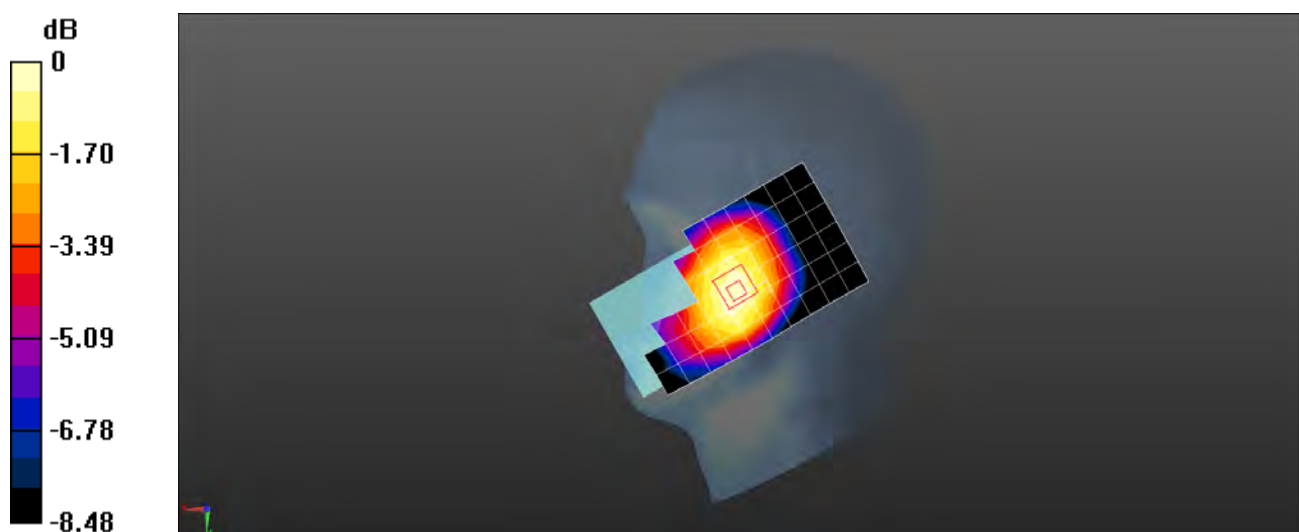

0 dB = 0.260 W/kg = -5.85 dBW/kg

Test Laboratory: SGS-SAR Lab

SONY I4332 GSM850 GSM 128CH Back side 15mm

DUT: I4332; Type: mobile phone; Serial: HQ689S0532

Communication System: UID 0, GSM Only Communication System (0); Frequency: 824.2 MHz; Duty Cycle: 1:8.30042

Medium: MSL835; Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.976$ S/m; $\epsilon_r = 54.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.84, 8.84, 8.84); Calibrated: 2018-02-08;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1267; Calibrated: 2017-11-28
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.337 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 17.06 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.226 W/kg

Maximum value of SAR (measured) = 0.338 W/kg

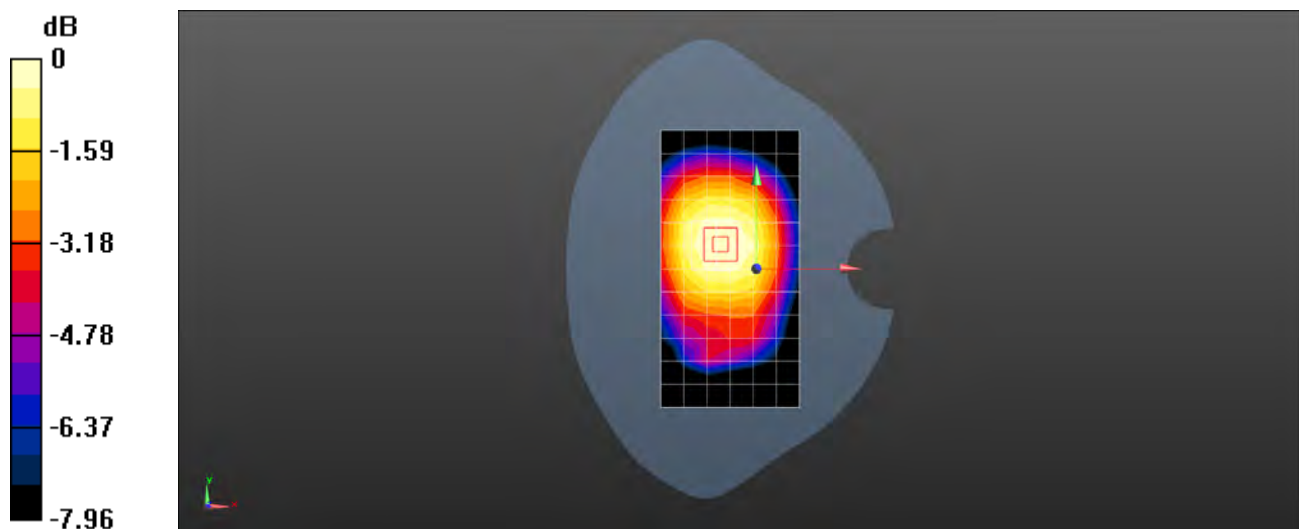

0 dB = 0.338 W/kg = -4.71 dBW/kg

Test Laboratory: SGS-SAR Lab

SONY I4332 GSM850 GPRS 4TS 190CH Right side 10mm

DUT: I4332; Type: mobile phone; Serial: HQ689S0532

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.0797

Medium: MSL835; Medium parameters used: $f = 837$ MHz; $\sigma = 0.99$ S/m; $\epsilon_r = 54.318$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3789; ConvF(8.84, 8.84, 8.84); Calibrated: 2018-02-08;
- Sensor-Surface: 2mm (Mechanical Surface Detection), $z = -2.0, 31.0$
- Electronics: DAE4 Sn1267; Calibrated: 2017-11-28
- Phantom: SAM 1; Type: SAM V4.0; Serial: TP-1283
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (5x13x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 0.670 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 23.56 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.832 W/kg

SAR(1 g) = 0.578 W/kg; SAR(10 g) = 0.393 W/kg

Maximum value of SAR (measured) = 0.717 W/kg

