



FCC RADIO TEST REPORT

FCC ID : PY7-13086M
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII
a/b/g/n/ac, GPS and NFC
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Standard : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Nov. 05, 2019 and testing was started from Dec. 10, 2019 and completed on Dec. 27, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report	3
Summary of Test Result	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	6
1.4 Testing Location	7
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System.....	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels	10
3 Conducted Test Result	11
3.1 Measuring Instruments	11
3.2 Conducted Output Power and ERP/EIRP	12
3.3 Peak-to-Average Ratio	13
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement	14
3.5 Conducted Band Edge	15
3.6 Conducted Spurious Emission	16
3.7 Frequency Stability	17
4 Radiated Test Items.....	18
4.1 Measuring Instruments	18
4.2 Test Setup.....	18
4.3 Test Result of Radiated Test.....	18
4.4 Field Strength of Spurious Radiation Measurement	19
5 List of Measuring Equipment	20
6 Uncertainty of Evaluation	22
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG9O1519-04A	01	Initial issue of report	Jan. 20, 2020

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power (GSM850) (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (GSM1900)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (GSM850) (WCDMA Band V) (GSM1900) (WCDMA Band IV)	Pass	Under limit 29.51 dB at 7400.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Yvonne Cheng



1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type	Inverted-F Type Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	0.201	BH95004HJB	Conducted Measurement
	0.334	BH95009JJG	Radiated Spurious Emission
	0.148	BH95002VJB	ERP/EIRP Test

Accessory List	
AC Adapter	Model Name : UCH20
	S/N: 3016W49308827
Earphone	Model Name.: MH410c
	S/N : N/A
USB Cable	Model Name.: UCB20
	S/N : N/A

Note:

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GPRS class 8	GMSK	0.5546	0.0227 ppm	247KGXW
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.1309	0.0084 ppm	251KG7W
Part 22	826.4 ~846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.0652	0.0155 ppm	4M15F9W
Part 24	1850.2 ~1909.8	GSM1900 GPRS class 8	GMSK	0.1514	0.0117 ppm	245KGXW
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.1361	0.0436 ppm	246KG7W
Part 27	1712.4 ~ 1752.6	WCDMA Band IV RMC 12.2Kbps	BPSK	0.0929	0.0225 ppm	4M13F9W

1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Louis Chung
Temperature	21.9~23.6 °C
Relative Humidity	51.0~55.9 %

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH12-HY
Test Engineer	jack Cheng, Lance Chiang, and Chuan Chu
Temperature	24.3~26.2 °C
Relative Humidity	54.2~55.1 %

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for GSM1900

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM850	■ GPRS Class 8 Link	■ GPRS Class 8 Link
	■ EDGE Class 8 Link	■ EDGE Class 8 Link
GSM1900	■ GPRS Class 8 Link	■ GPRS Class 8 Link
	■ EDGE Class 8 Link	■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

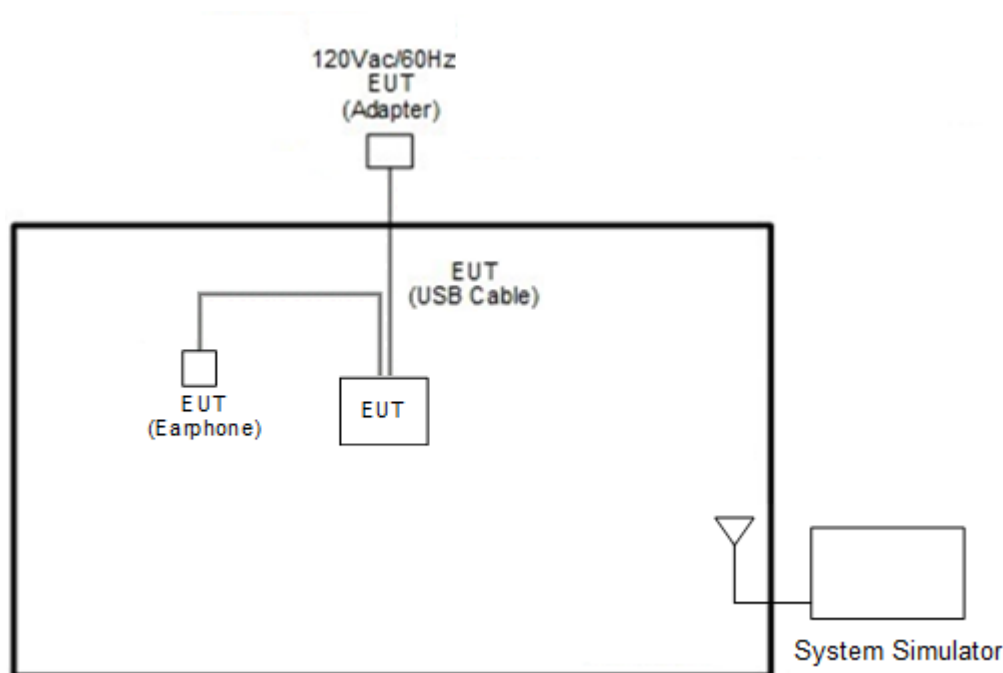

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power

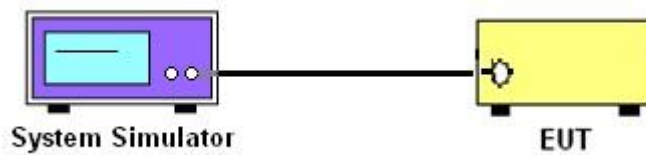

3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

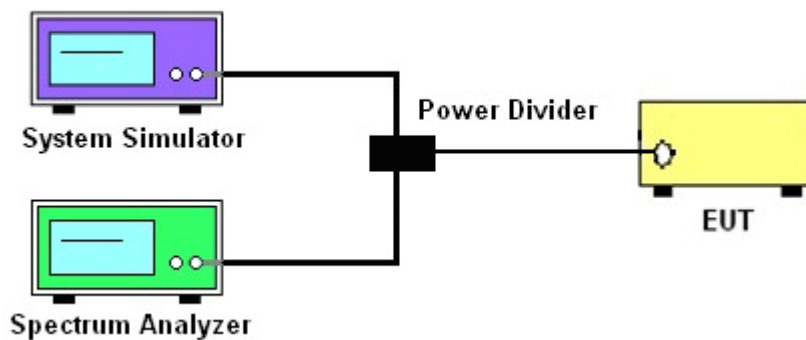

3.1.4 Frequency Stability

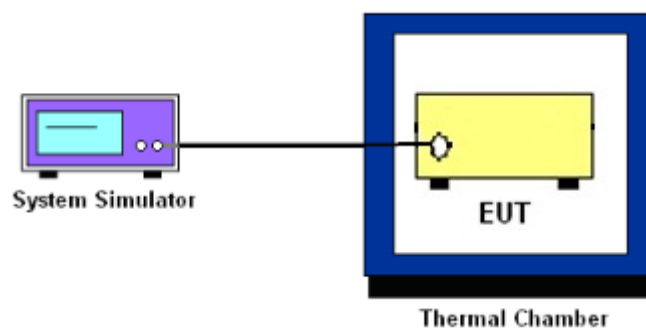

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

For radiated test from 30MHz to 1GHz

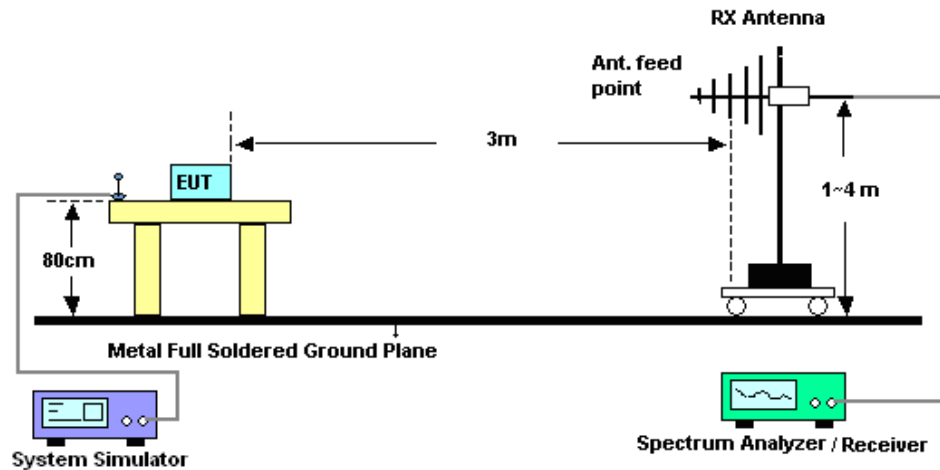

For radiated test above 1GHz

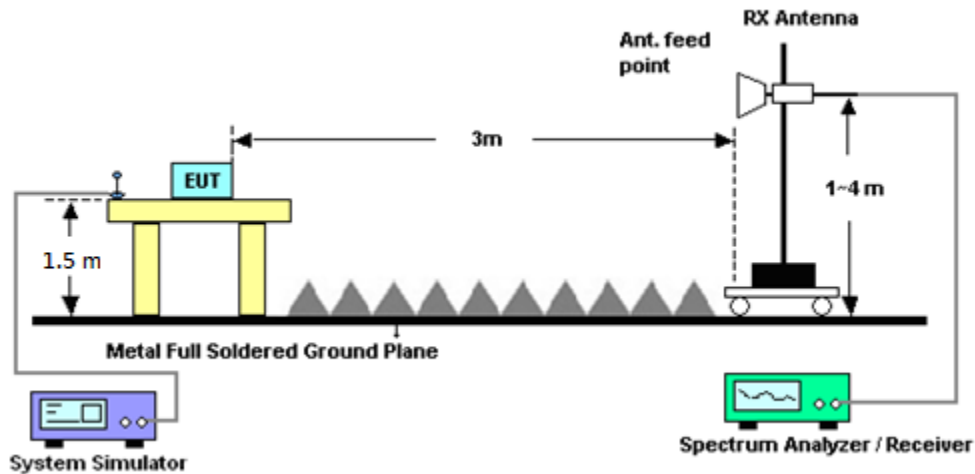

4.3 Test Result of Radiated Test

Please refer to Appendix B.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
 $ERP \text{ (dBm)} = EIRP - 2.15$
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
12. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 23, 2019	Dec. 10, 2019	Aug. 22, 2020	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 04, 2019	Dec. 10, 2019	Sep. 03, 2020	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 26, 2019	Dec. 10, 2019	Nov. 25, 2020	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 09, 2019	Dec. 10, 2019	Oct. 08, 2020	Conducted (TH03-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 06, 2019	Dec. 10, 2019	Mar. 05, 2020	Conducted (TH03-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 07, 2019	Dec. 26, 2019~ Dec. 27, 2019	Jan. 06, 2020	Radiation (03CH12-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	41912 & 05	30MHz~1GHz	Feb. 12, 2019	Dec. 26, 2019~ Dec. 27, 2019	Feb 11, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1328	1GHz ~ 18GHz	Nov. 14, 2019	Dec. 26, 2019~ Dec. 27, 2019	Nov. 13, 2020	Radiation (03CH12-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1522	1GHz ~ 18GHz	Sep. 19, 2019	Dec. 26, 2019~ Dec. 27, 2019	Sep. 18, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz ~ 40GHz	Dec. 10, 2019	Dec. 26, 2019~ Dec. 27, 2019	Dec. 09, 2020	Radiation (03CH12-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170251	18GHz- 40GHz	Nov. 26, 2019	Dec. 26, 2019~ Dec. 27, 2019	Nov. 25, 2020	Radiation (03CH12-HY)
Preamplifier	COM-POWER	PA-103	161075	10MHz~1GHz	Mar. 25, 2019	Dec. 26, 2019~ Dec. 27, 2019	Mar. 24, 2020	Radiation (03CH12-HY)
Preamplifier	Jet-Power	JPA00101800-30-10P	1601180002	1GHz~18GHz	Aug. 01, 2019	Dec. 26, 2019~ Dec. 27, 2019	Jul. 01, 2020	Radiation (03CH12-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Dec. 26, 2019~ Dec. 27, 2019	Dec. 12, 2020	Radiation (03CH12-HY)
Preamplifier	Agilent	8449B	3008A02375	1GHz~26.5GHz	May 27, 2019	Dec. 26, 2019~ Dec. 27, 2019	May 26, 2020	Radiation (03CH12-HY)
EMI Test Receiver	Agilent	N9038A(MXE)	MY53290045	20MHz~8.4GHz	Jan. 19, 2019	Dec. 26, 2019~ Dec. 27, 2019	Jan. 18, 2020	Radiation (03CH12-HY)
Spectrum Analyzer	Keysight	N9010A	MY55370526	10Hz~44GHz	Mar. 19, 2019	Dec. 26, 2019~ Dec. 27, 2019	Mar. 18, 2020	Radiation (03CH12-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Aug. 27, 2019	Dec. 26, 2019~ Dec. 27, 2019	Aug. 26, 2020	Radiation (03CH12-HY)
Hygrometer	TECPEL	DTM-303B	TP161243	N/A	May 11, 2019	Dec. 26, 2019~ Dec. 27, 2019	May 10, 2020	Radiation (03CH12-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Notch Filter	Wainwright	WRCG1710/1755-1690/1775-45/7SS	SN2	AWS Band	Nov. 05, 2019	Dec. 26, 2019~Dec. 27, 2019	Nov. 04, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WLKS1200-12SS	SN2	1.2GHz Low Pass	Mar. 22, 2019	Dec. 26, 2019~Dec. 27, 2019	Mar. 21, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-1080-1200-1500-60ST	SN1	1.2G High Pass	Mar. 19, 2019	Dec. 26, 2019~Dec. 27, 2019	Mar. 18, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	3G High Pass	Jul. 15, 2019	Dec. 26, 2019~Dec. 27, 2019	Jul. 14, 2020	Radiation (03CH12-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN2	3G High Pass	Jul. 15, 2019	Dec. 26, 2019~Dec. 27, 2019	Jul. 14, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126E	0058/126E	30M-18G	Mar. 13, 2019	Dec. 26, 2019~Dec. 27, 2019	Mar. 12, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Feb. 26, 2019	Dec. 26, 2019~Dec. 27, 2019	Feb. 25, 2020	Radiation (03CH12-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Feb. 26, 2019	Dec. 26, 2019~Dec. 27, 2019	Feb. 25, 2020	Radiation (03CH12-HY)
Controller	EMEC	EM1000	N/A	Control Turn table & Ant Mast	N/A	Dec. 26, 2019~Dec. 27, 2019	N/A	Radiation (03CH12-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1m~4m	N/A	Dec. 26, 2019~Dec. 27, 2019	N/A	Radiation (03CH12-HY)
Turn Table	EMEC	TT2000	N/A	0~360 Degree	N/A	Dec. 26, 2019~Dec. 27, 2019	N/A	Radiation (03CH12-HY)
Software	Audix	E3 6.2009-8-24	RK-000989	N/A	N/A	Dec. 26, 2019~Dec. 27, 2019	N/A	Radiation (03CH12-HY)

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.24
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.62
--	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	4.06
--	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	32.86	32.91	32.93	24.63	24.68	24.64
GPRS class 8	32.94	32.93	32.98	24.74	24.79	24.76
GPRS class 10	29.55	29.45	29.42	23.76	23.68	23.78
GPRS class 11	28.22	28.31	28.29	21.67	21.55	21.75
GPRS class 12	27.22	26.94	27.06	20.79	20.74	20.85
EGPRS class 8	26.71	26.66	26.64	24.27	24.22	24.33
EGPRS class 10	25.54	25.44	25.52	23.19	23.07	23.22
EGPRS class 11	23.82	23.73	23.72	21.34	21.32	21.40
EGPRS class 12	22.33	22.21	22.25	20.09	20.05	20.06

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band IV		
Channel	4132	4182	4233	1312	1413	1513
Frequency	826.4	836.4	846.6	1712.4	1732.6	1752.6
RMC 12.2K	23.61	23.64	23.68	21.38	21.52	21.60
HSDPA Subtest-1	22.64	22.72	22.78	20.33	20.54	20.63
HSDPA Subtest-2	22.70	22.78	22.78	20.32	20.53	20.62
HSDPA Subtest-3	22.18	22.23	22.32	19.85	20.08	20.15
HSDPA Subtest-4	22.16	22.23	22.32	19.84	20.07	20.14
HSUPA Subtest-1	22.70	22.75	22.76	20.32	20.54	20.63
HSUPA Subtest-2	20.62	20.72	20.77	18.31	18.51	18.62
HSUPA Subtest-3	21.70	21.72	21.78	19.33	19.50	19.65
HSUPA Subtest-4	20.67	20.71	20.79	18.33	18.53	18.61
HSUPA Subtest-5	22.60	22.70	22.80	20.30	20.50	20.60








A2. GSM







Peak-to-Average Ratio

Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.80	3.64	PASS
Middle CH	0.76	3.56	
Highest CH	0.76	3.56	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.44	3.4	PASS
Middle CH	0.44	3.4	
Highest CH	0.44	3.36	

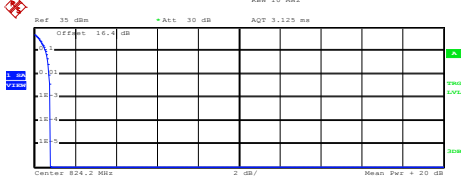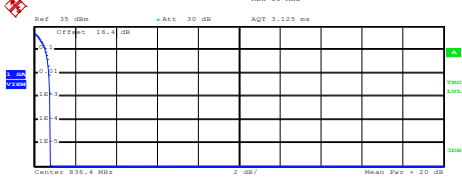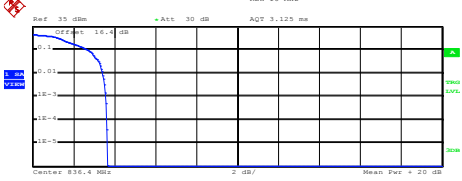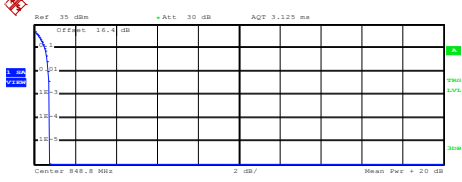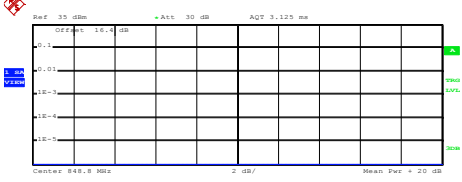GSM850 (GPRS class 8)	GSM850 (EDGE class 8)
Lowest Channel	Lowest Channel
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 824.2 MHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 32.91 dBm Peak 33.70 dBm Crest 0.79 dB 10 % 0.56 dB 1 % 0.72 dB .1 % 0.80 dB .01 % 0.80 dB Date: 10.DEC.2019 11:32:40	 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 824.2 MHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 26.98 dBm Peak 30.74 dBm Crest 3.75 dB 10 % 2.60 dB 1 % 3.44 dB .1 % 3.64 dB .01 % 3.72 dB Date: 10.DEC.2019 11:16:19
Middle Channel	Middle Channel
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 835.4 MHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 33.00 dBm Peak 33.77 dBm Crest 0.77 dB 10 % 0.56 dB 1 % 0.72 dB .1 % 0.76 dB .01 % 0.80 dB Date: 10.DEC.2019 11:33:01	 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 835.4 MHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 27.03 dBm Peak 30.67 dBm Crest 3.64 dB 10 % 2.72 dB 1 % 3.44 dB .1 % 3.56 dB .01 % 3.64 dB Date: 10.DEC.2019 11:16:40
Highest Channel	Highest Channel
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 848.8 MHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 33.22 dBm Peak 33.98 dBm Crest 0.76 dB 10 % 0.52 dB 1 % 0.68 dB .1 % 0.76 dB .01 % 0.76 dB Date: 10.DEC.2019 11:33:18	 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 848.8 MHz 2 dB/ Mean Pwr: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 27.03 dBm Peak 30.67 dBm Crest 3.64 dB 10 % 2.72 dB 1 % 3.44 dB .1 % 3.56 dB .01 % 3.64 dB Date: 10.DEC.2019 11:16:52

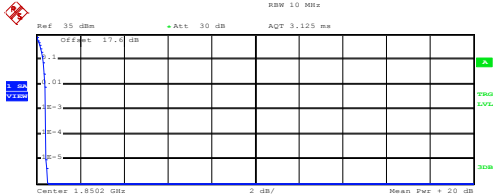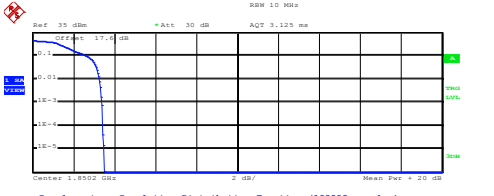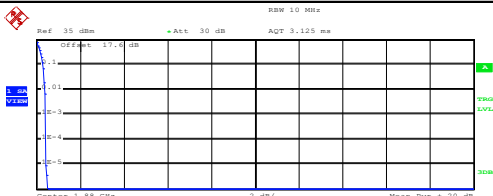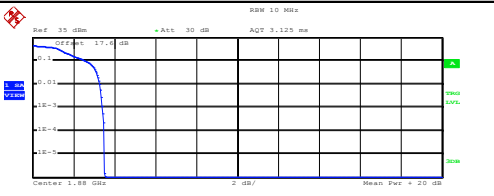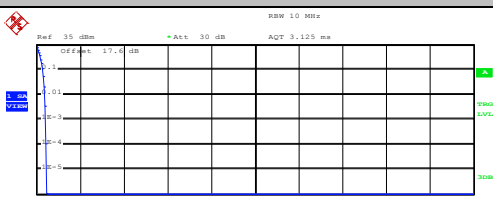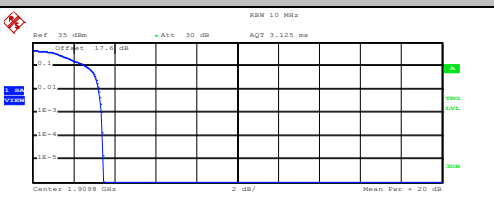



GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.8502 GHz 2 dB/ Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 24.23 dBm Peak: 24.74 dBm Crest: 0.51 dB 10 %: 0.32 dB 1 %: 0.40 dB .1 %: 0.44 dB .01 %: 0.44 dB Date: 10.DEC.2019 10:09:35		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.8502 GHz 2 dB/ Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 24.28 dBm Peak: 27.77 dBm Crest: 3.49 dB 10 %: 2.64 dB 1 %: 3.28 dB .1 %: 3.40 dB .01 %: 3.44 dB Date: 10.DEC.2019 10:42:56	
Middle Channel		Middle Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.85 GHz 2 dB/ Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 24.09 dBm Peak: 24.60 dBm Crest: 0.51 dB 10 %: 0.32 dB 1 %: 0.40 dB .1 %: 0.44 dB .01 %: 0.44 dB Date: 10.DEC.2019 10:09:53		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.85 GHz 2 dB/ Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 24.26 dBm Peak: 27.77 dBm Crest: 3.51 dB 10 %: 2.64 dB 1 %: 3.28 dB .1 %: 3.40 dB .01 %: 3.52 dB Date: 10.DEC.2019 10:43:11	
Highest Channel		Highest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.9098 GHz 2 dB/ Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 24.12 dBm Peak: 24.60 dBm Crest: 0.48 dB 10 %: 0.28 dB 1 %: 0.40 dB .1 %: 0.44 dB .01 %: 0.44 dB Date: 10.DEC.2019 10:10:10		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.9098 GHz 2 dB/ Mean Per: +20 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean: 24.37 dBm Peak: 27.84 dBm Crest: 3.47 dB 10 %: 2.60 dB 1 %: 3.24 dB .1 %: 3.36 dB .01 %: 3.40 dB Date: 10.DEC.2019 10:43:23	

**26dB Bandwidth**

Mode	GSM850	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.314	0.291
Middle CH	0.303	0.297
Highest CH	0.306	0.307

Mode	GSM1900	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.296	0.308
Middle CH	0.317	0.311
Highest CH	0.303	0.296

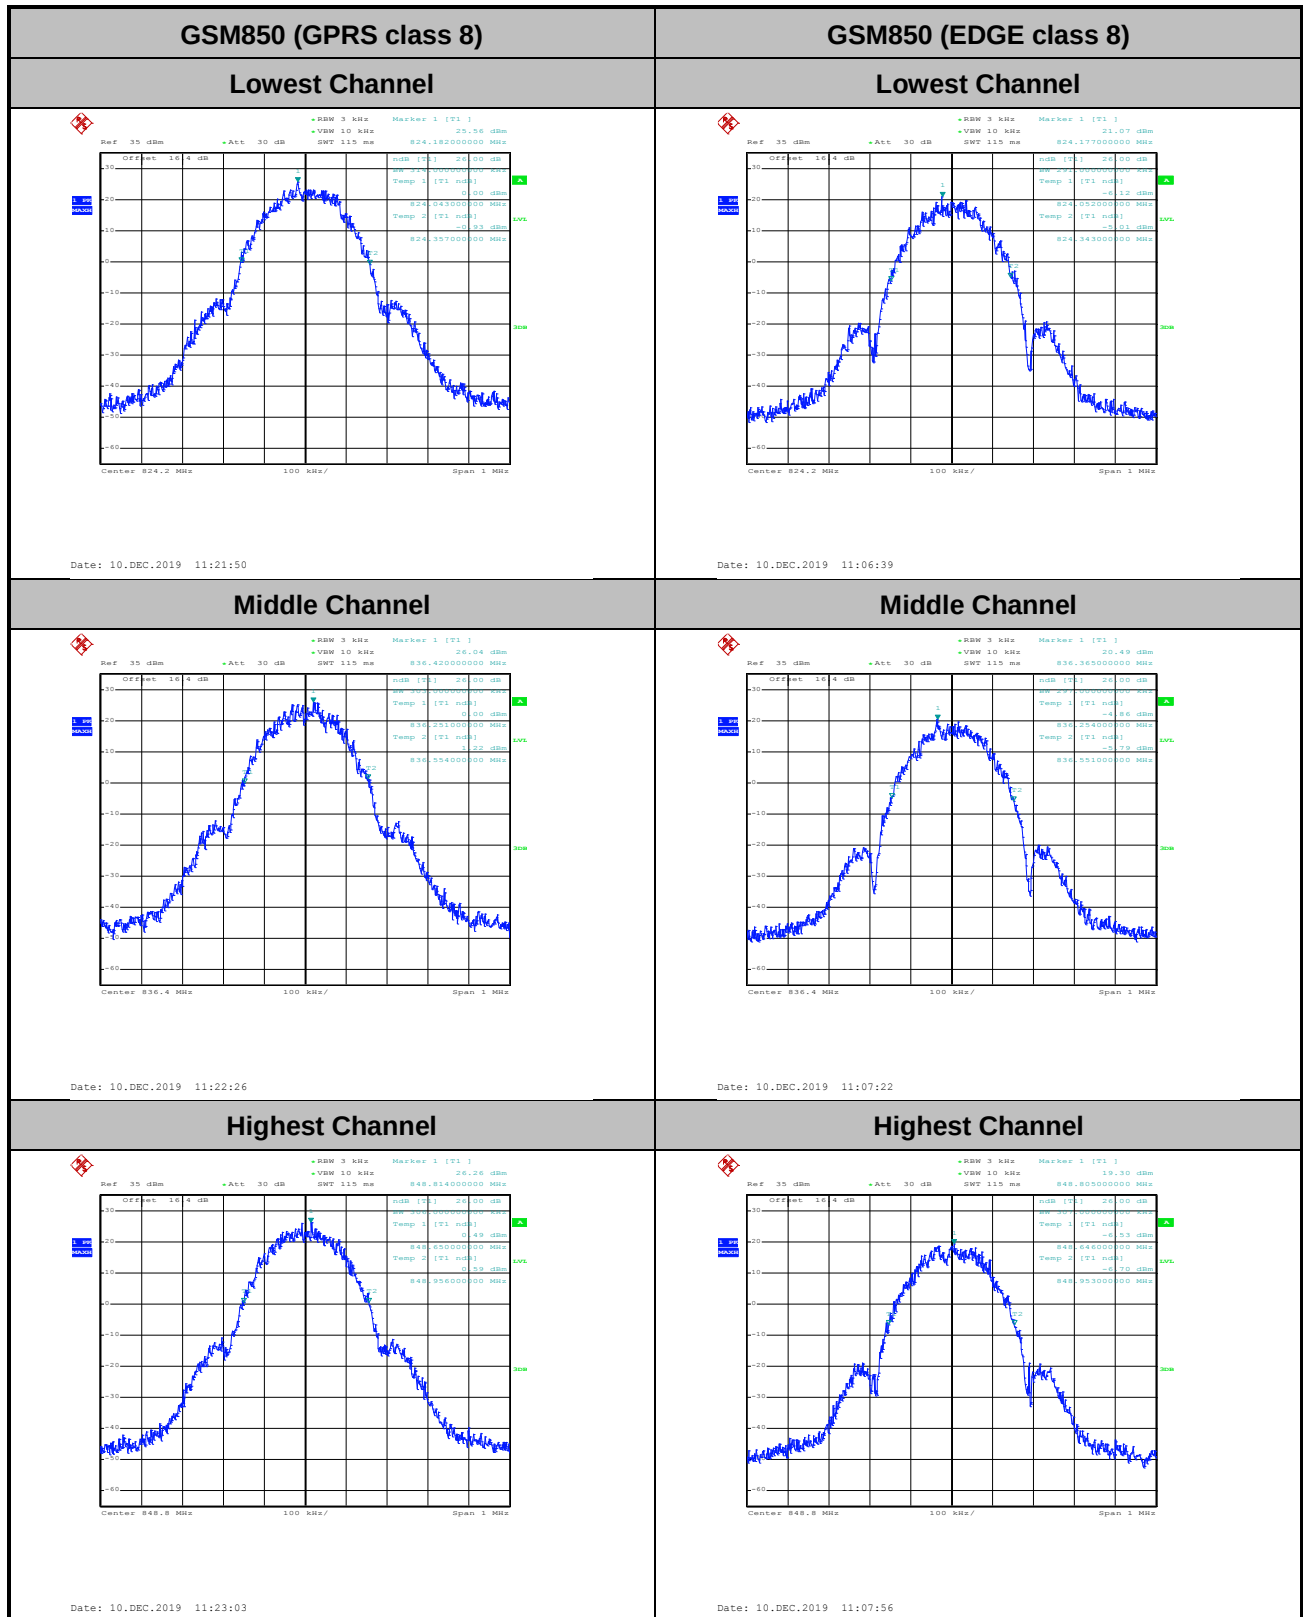


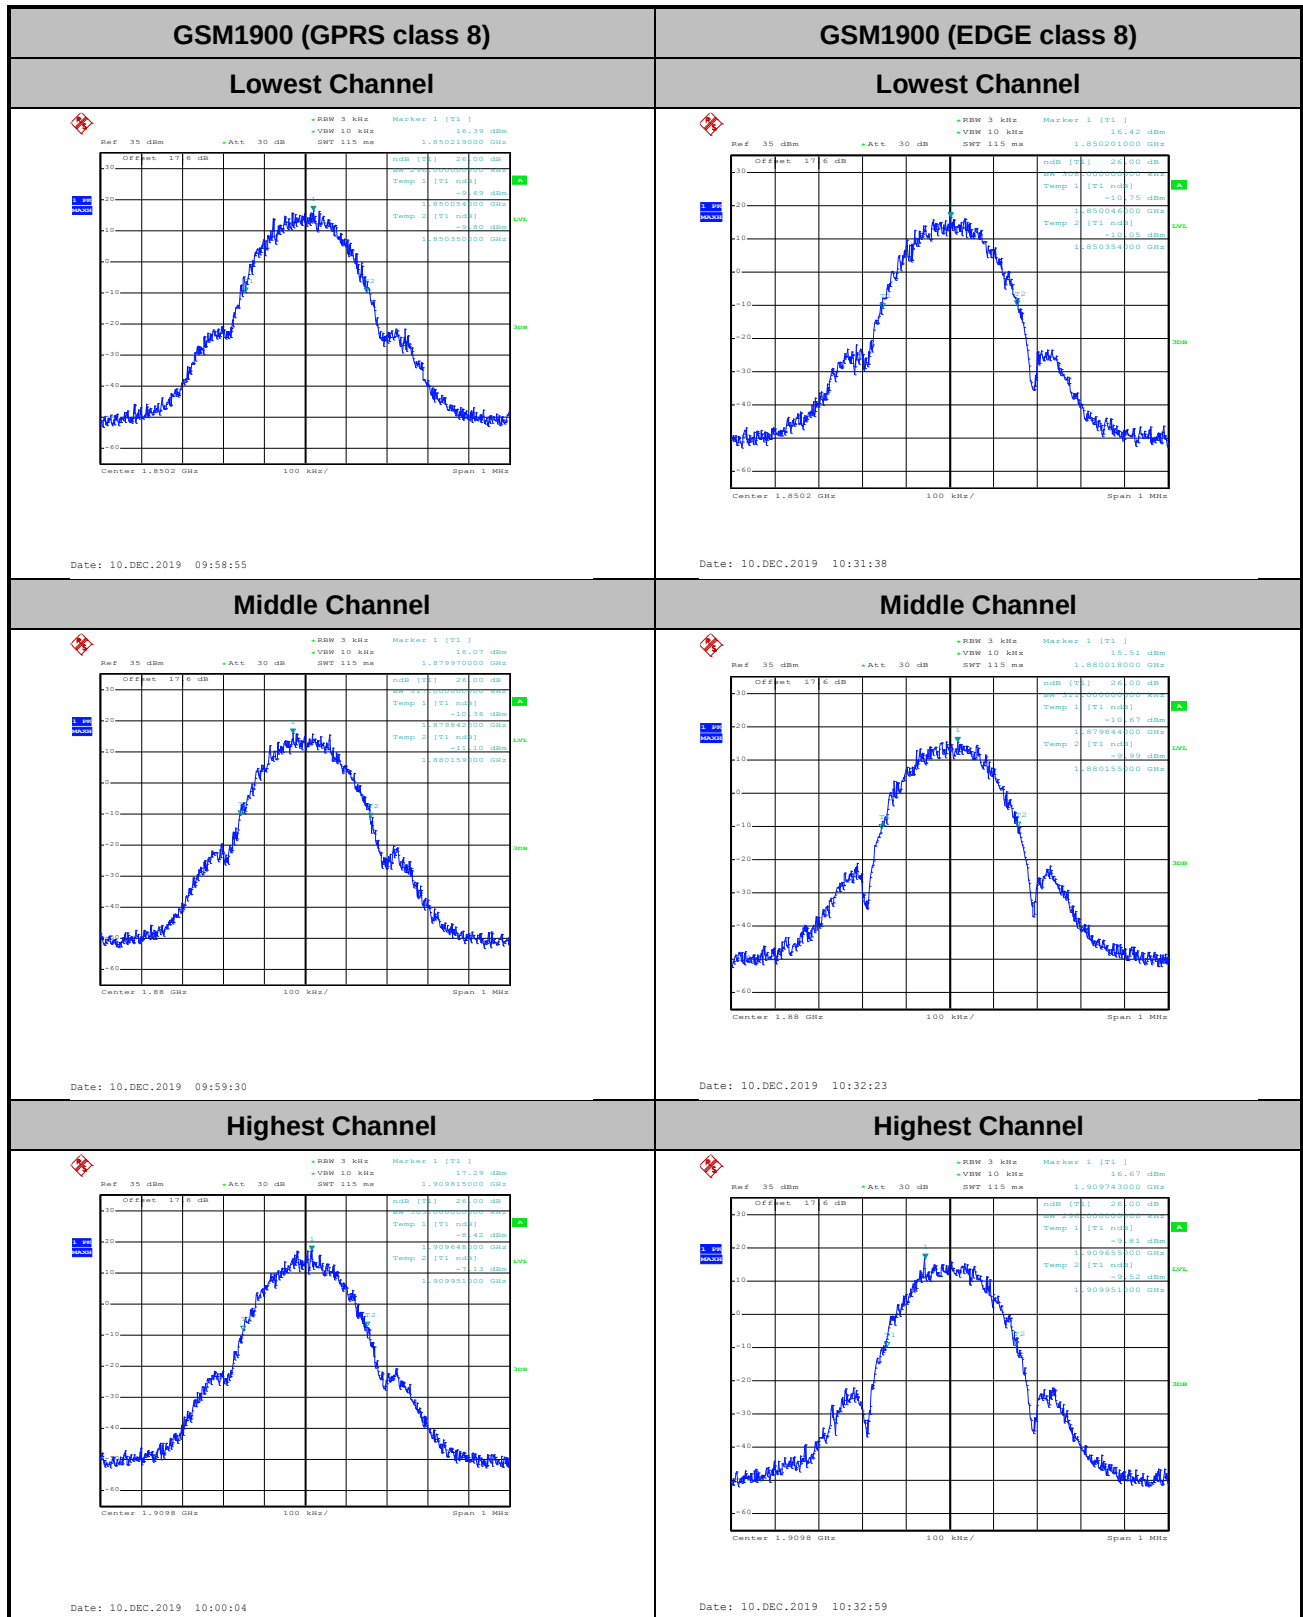


**Occupied Bandwidth**

Mode	GSM850	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.247	0.251
Middle CH	0.246	0.244
Highest CH	0.247	0.247


Mode	GSM1900	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.245	0.246
Middle CH	0.242	0.240
Highest CH	0.242	0.244

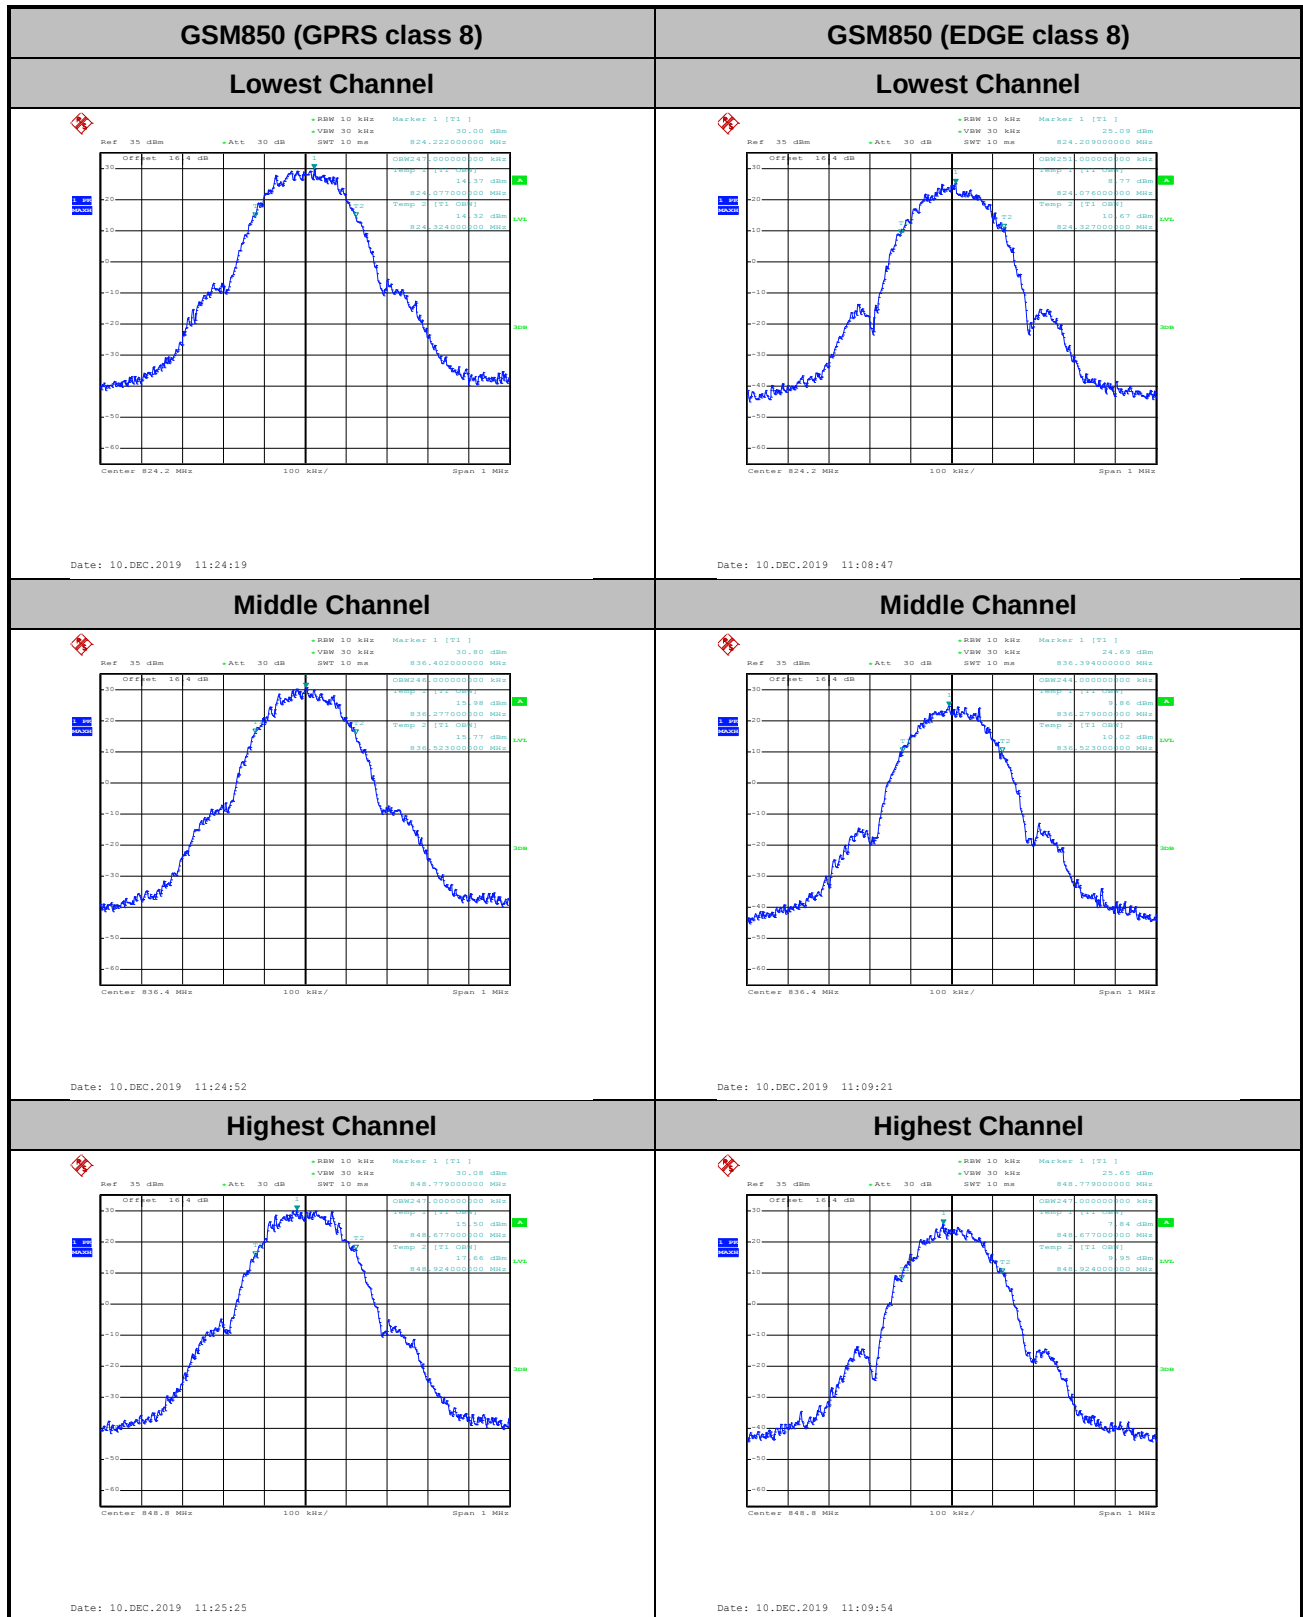

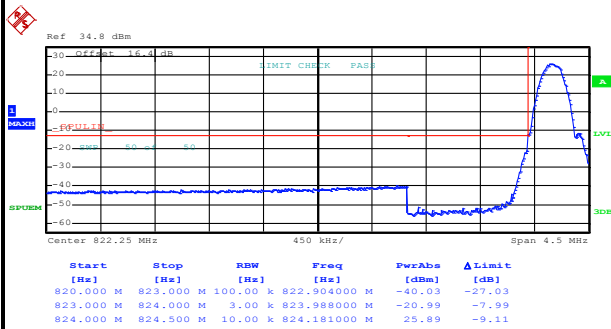


**Conducted Band Edge****GSM850 (GPRS class 8)****Lowest Band Edge**


Date: 10.DEC.2019 11:27:00

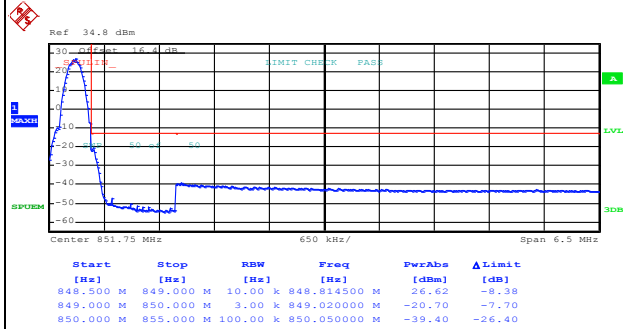Highest Band Edge

Date: 10.DEC.2019 11:28:33

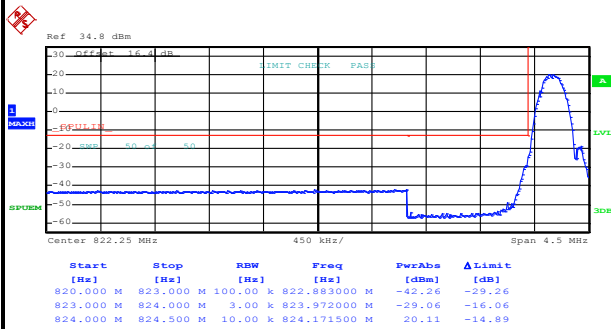GSM850 (EDGE class 8)**Lowest Band Edge**

Date: 10.DEC.2019 11:11:30

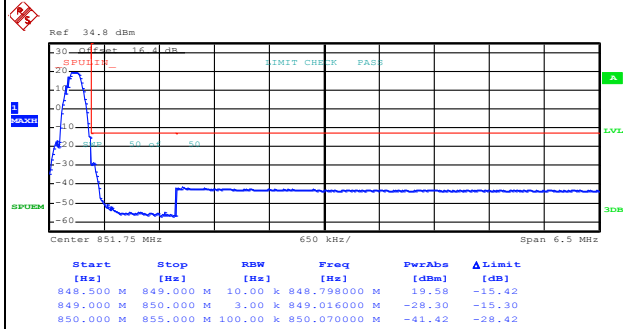
Highest Band Edge

Date: 10.DEC.2019 11:13:04




GSM1900 (GPRS class 8)

Lowest Band Edge

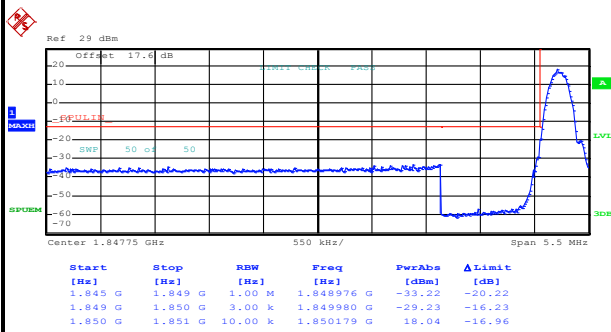

Date: 10.DEC.2019 10:06:59


Highest Band Edge

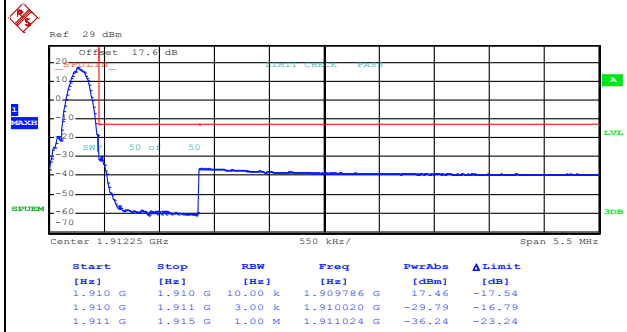

Date: 10.DEC.2019 10:08:33


GSM1900 (EDGE class 8)

Lowest Band Edge

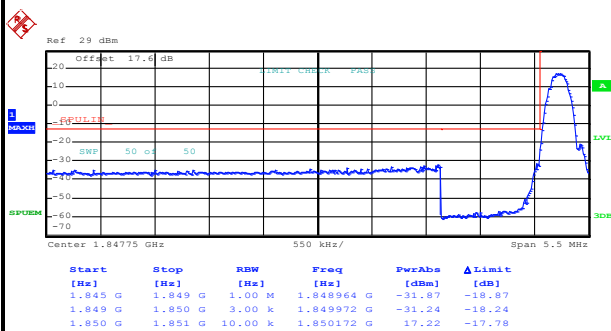







Date: 10.DEC.2019 10:36:30

Highest Band Edge

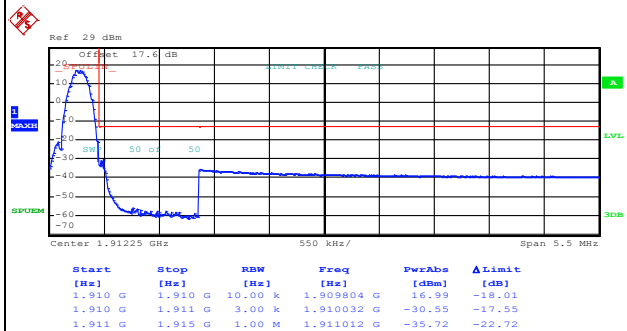

Date: 10.DEC.2019 10:39:12


**Conducted Spurious Emission**

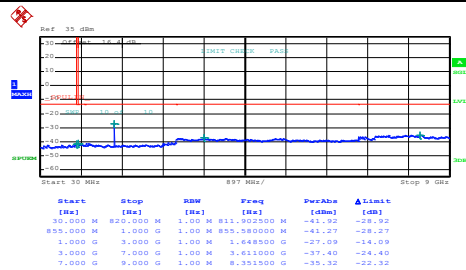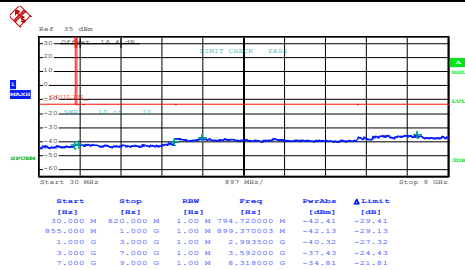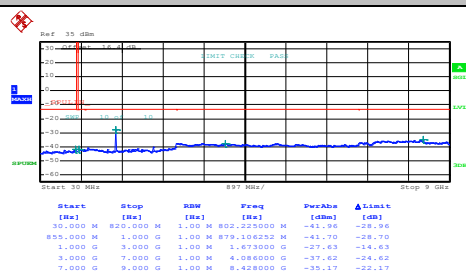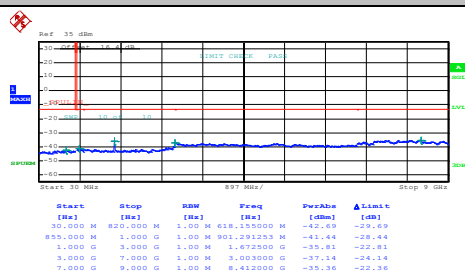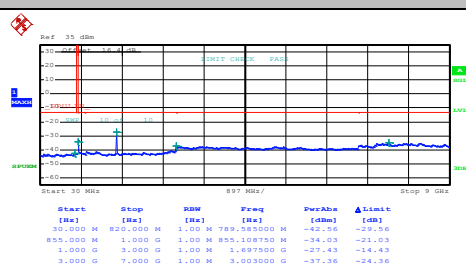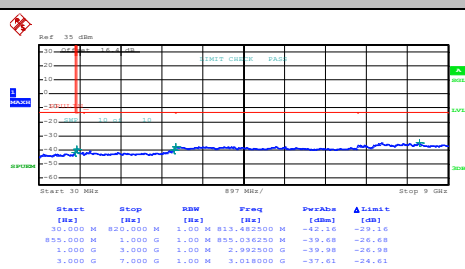GSM850 (GPRS class 8)		GSM850 (EDGE class 8)																																																																																					
Lowest Channel		Lowest Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,00 M</td><td>811,902500 M</td><td>-41.92</td><td>-28.92</td></tr><tr><td>850,000 M</td><td>1,000 G</td><td>1,00 M</td><td>855.580000 M</td><td>-41.27</td><td>-28.27</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>1.648000 G</td><td>-27.09</td><td>-24.09</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.611000 G</td><td>-37.40</td><td>-24.40</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>8.351500 G</td><td>-35.32</td><td>-22.32</td></tr></table> Date: 10.DEC.2019 11:30:27		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,00 M	811,902500 M	-41.92	-28.92	850,000 M	1,000 G	1,00 M	855.580000 M	-41.27	-28.27	1,000 G	3,000 G	1,00 M	1.648000 G	-27.09	-24.09	3,000 G	7,000 G	1,00 M	3.611000 G	-37.40	-24.40	7,000 G	9,000 G	1,00 M	8.351500 G	-35.32	-22.32	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,00 M</td><td>794.720000 M</td><td>-42.41</td><td>-29.41</td></tr><tr><td>850,000 M</td><td>1,000 G</td><td>1,00 M</td><td>899.370003 M</td><td>-42.13</td><td>-29.13</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>2.993500 G</td><td>-40.32</td><td>-27.32</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.592000 G</td><td>-37.43</td><td>-24.43</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>8.318000 G</td><td>-34.81</td><td>-21.81</td></tr></table> Date: 10.DEC.2019 11:14:01		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,00 M	794.720000 M	-42.41	-29.41	850,000 M	1,000 G	1,00 M	899.370003 M	-42.13	-29.13	1,000 G	3,000 G	1,00 M	2.993500 G	-40.32	-27.32	3,000 G	7,000 G	1,00 M	3.592000 G	-37.43	-24.43	7,000 G	9,000 G	1,00 M	8.318000 G	-34.81	-21.81
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30,000 M	820,000 M	1,00 M	811,902500 M	-41.92	-28.92																																																																																		
850,000 M	1,000 G	1,00 M	855.580000 M	-41.27	-28.27																																																																																		
1,000 G	3,000 G	1,00 M	1.648000 G	-27.09	-24.09																																																																																		
3,000 G	7,000 G	1,00 M	3.611000 G	-37.40	-24.40																																																																																		
7,000 G	9,000 G	1,00 M	8.351500 G	-35.32	-22.32																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30,000 M	820,000 M	1,00 M	794.720000 M	-42.41	-29.41																																																																																		
850,000 M	1,000 G	1,00 M	899.370003 M	-42.13	-29.13																																																																																		
1,000 G	3,000 G	1,00 M	2.993500 G	-40.32	-27.32																																																																																		
3,000 G	7,000 G	1,00 M	3.592000 G	-37.43	-24.43																																																																																		
7,000 G	9,000 G	1,00 M	8.318000 G	-34.81	-21.81																																																																																		
Middle Channel		Middle Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,00 M</td><td>802,225000 M</td><td>-41.96</td><td>-28.96</td></tr><tr><td>850,000 M</td><td>1,000 G</td><td>1,00 M</td><td>879.108202 M</td><td>-41.70</td><td>-28.70</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>1.673000 G</td><td>-27.63</td><td>-24.63</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>4.086000 G</td><td>-37.62</td><td>-24.62</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>8.428000 G</td><td>-35.17</td><td>-22.17</td></tr></table> Date: 10.DEC.2019 11:31:20		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,00 M	802,225000 M	-41.96	-28.96	850,000 M	1,000 G	1,00 M	879.108202 M	-41.70	-28.70	1,000 G	3,000 G	1,00 M	1.673000 G	-27.63	-24.63	3,000 G	7,000 G	1,00 M	4.086000 G	-37.62	-24.62	7,000 G	9,000 G	1,00 M	8.428000 G	-35.17	-22.17	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,00 M</td><td>618.155000 M</td><td>-42.69</td><td>-29.69</td></tr><tr><td>850,000 M</td><td>1,000 G</td><td>1,00 M</td><td>901.291203 M</td><td>-41.44</td><td>-28.44</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>1.672500 G</td><td>-35.81</td><td>-22.81</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.003000 G</td><td>-37.14</td><td>-24.14</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>8.412000 G</td><td>-35.36</td><td>-22.36</td></tr></table> Date: 10.DEC.2019 11:14:52		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,00 M	618.155000 M	-42.69	-29.69	850,000 M	1,000 G	1,00 M	901.291203 M	-41.44	-28.44	1,000 G	3,000 G	1,00 M	1.672500 G	-35.81	-22.81	3,000 G	7,000 G	1,00 M	3.003000 G	-37.14	-24.14	7,000 G	9,000 G	1,00 M	8.412000 G	-35.36	-22.36
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30,000 M	820,000 M	1,00 M	802,225000 M	-41.96	-28.96																																																																																		
850,000 M	1,000 G	1,00 M	879.108202 M	-41.70	-28.70																																																																																		
1,000 G	3,000 G	1,00 M	1.673000 G	-27.63	-24.63																																																																																		
3,000 G	7,000 G	1,00 M	4.086000 G	-37.62	-24.62																																																																																		
7,000 G	9,000 G	1,00 M	8.428000 G	-35.17	-22.17																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30,000 M	820,000 M	1,00 M	618.155000 M	-42.69	-29.69																																																																																		
850,000 M	1,000 G	1,00 M	901.291203 M	-41.44	-28.44																																																																																		
1,000 G	3,000 G	1,00 M	1.672500 G	-35.81	-22.81																																																																																		
3,000 G	7,000 G	1,00 M	3.003000 G	-37.14	-24.14																																																																																		
7,000 G	9,000 G	1,00 M	8.412000 G	-35.36	-22.36																																																																																		
Highest Channel		Highest Channel																																																																																					
<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,00 M</td><td>789.583500 M</td><td>-42.56</td><td>-29.56</td></tr><tr><td>850,000 M</td><td>1,000 G</td><td>1,00 M</td><td>855.108750 M</td><td>-34.03</td><td>-21.03</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>1.697500 G</td><td>-27.43</td><td>-24.43</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.003000 G</td><td>-37.36</td><td>-24.36</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>7.675000 G</td><td>-35.14</td><td>-22.14</td></tr></table> Date: 10.DEC.2019 11:32:10		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,00 M	789.583500 M	-42.56	-29.56	850,000 M	1,000 G	1,00 M	855.108750 M	-34.03	-21.03	1,000 G	3,000 G	1,00 M	1.697500 G	-27.43	-24.43	3,000 G	7,000 G	1,00 M	3.003000 G	-37.36	-24.36	7,000 G	9,000 G	1,00 M	7.675000 G	-35.14	-22.14	<table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PerAbn</th><th>ΔLimit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30,000 M</td><td>820,000 M</td><td>1,00 M</td><td>813.482500 M</td><td>-42.16</td><td>-29.16</td></tr><tr><td>850,000 M</td><td>1,000 G</td><td>1,00 M</td><td>855.036250 M</td><td>-39.68</td><td>-26.68</td></tr><tr><td>1,000 G</td><td>3,000 G</td><td>1,00 M</td><td>2.992500 G</td><td>-39.98</td><td>-26.98</td></tr><tr><td>3,000 G</td><td>7,000 G</td><td>1,00 M</td><td>3.018000 G</td><td>-37.61</td><td>-24.61</td></tr><tr><td>7,000 G</td><td>9,000 G</td><td>1,00 M</td><td>8.367500 G</td><td>-34.88</td><td>-21.88</td></tr></table> Date: 10.DEC.2019 11:15:42		Start	Stop	RBW	Freq	PerAbn	ΔLimit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30,000 M	820,000 M	1,00 M	813.482500 M	-42.16	-29.16	850,000 M	1,000 G	1,00 M	855.036250 M	-39.68	-26.68	1,000 G	3,000 G	1,00 M	2.992500 G	-39.98	-26.98	3,000 G	7,000 G	1,00 M	3.018000 G	-37.61	-24.61	7,000 G	9,000 G	1,00 M	8.367500 G	-34.88	-21.88
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30,000 M	820,000 M	1,00 M	789.583500 M	-42.56	-29.56																																																																																		
850,000 M	1,000 G	1,00 M	855.108750 M	-34.03	-21.03																																																																																		
1,000 G	3,000 G	1,00 M	1.697500 G	-27.43	-24.43																																																																																		
3,000 G	7,000 G	1,00 M	3.003000 G	-37.36	-24.36																																																																																		
7,000 G	9,000 G	1,00 M	7.675000 G	-35.14	-22.14																																																																																		
Start	Stop	RBW	Freq	PerAbn	ΔLimit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30,000 M	820,000 M	1,00 M	813.482500 M	-42.16	-29.16																																																																																		
850,000 M	1,000 G	1,00 M	855.036250 M	-39.68	-26.68																																																																																		
1,000 G	3,000 G	1,00 M	2.992500 G	-39.98	-26.98																																																																																		
3,000 G	7,000 G	1,00 M	3.018000 G	-37.61	-24.61																																																																																		
7,000 G	9,000 G	1,00 M	8.367500 G	-34.88	-21.88																																																																																		



GSM1900 (GPRS class 8)


Lowest Channel

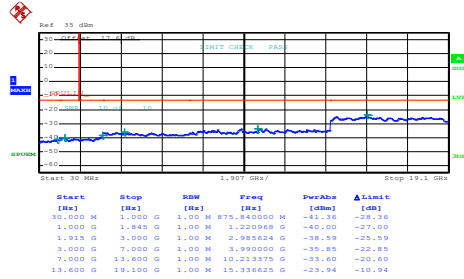

Date: 10.DEC.2019 10:01:00


GSM1900 (EDGE class 8)

Lowest Channel

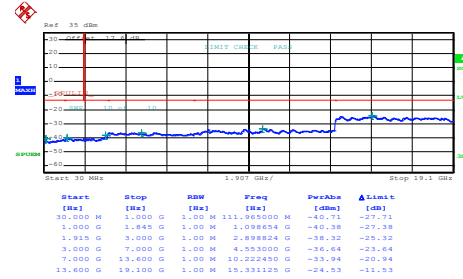


Date: 10.DEC.2019 10:40:15

Middle Channel

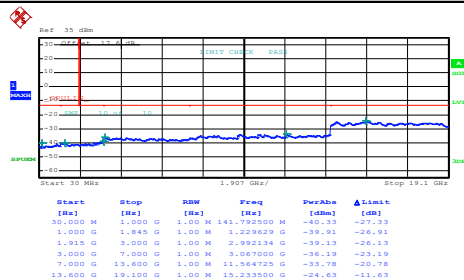


Date: 10.DEC.2019 10:01:52

Middle Channel

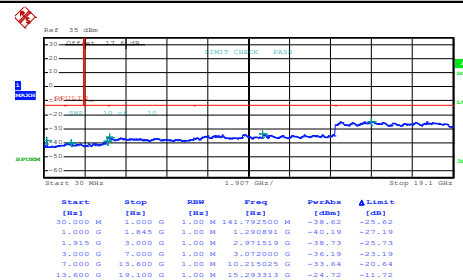


Date: 10.DEC.2019 10:41:07

Highest Channel

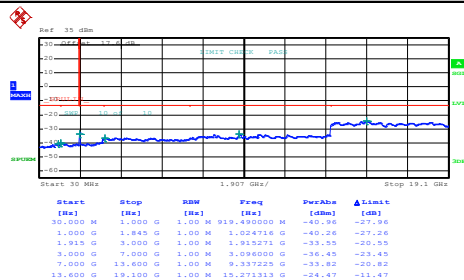

Date: 10.DEC.2019 10:02:45

Highest Channel

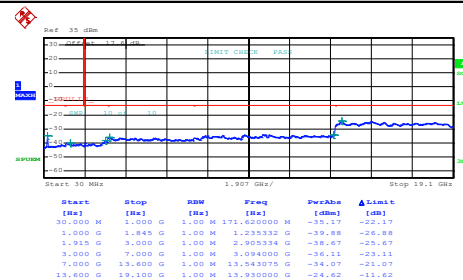

Date: 10.DEC.2019 10:41:58

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0012	0.0048	PASS
40	Normal Voltage	0.0000	0.0048	
30	Normal Voltage	0.0012	0.0024	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0084	0.0084	
0	Normal Voltage	0.0084	0.0000	
-10	Normal Voltage	0.0132	0.0024	
-20	Normal Voltage	0.0060	0.0036	
-30	Normal Voltage	0.0227	0.0000	
20	Maximum Voltage	0.0012	0.0072	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0024	0.0012	

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Result
50	Normal Voltage	0.0053	0.0016	PASS
40	Normal Voltage	0.0021	0.0011	
30	Normal Voltage	0.0043	0.0005	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0064	0.0090	
0	Normal Voltage	0.0069	0.0016	
-10	Normal Voltage	0.0053	0.0011	
-20	Normal Voltage	0.0101	0.0021	
-30	Normal Voltage	0.0117	0.0436	
20	Maximum Voltage	0.0005	0.0048	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0021	0.0016	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.65V. ; Maximum Voltage =4.25V
2. The frequency fundamental emissions stay within the authorized frequency block.



A3. WCDMA

Peak-to-Average Ratio

Mode	WCDMA Band V	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.08	3.24	PASS
Middle CH	3.16	3.12	
Highest CH	3.28	3.24	



WCDMA Band V (RMC 12.2Kbps)	WCDMA Band IV (RMC 12.2Kbps)
Lowest Channel	Lowest Channel
Ref: 30 dBm, Att: 30 dB, AQT: 3.125 ms, RSW: 10 MHz, Center: 826.4 MHz, Mean: 23.41 dBm, Peak: 26.79 dBm, Crest: 3.39 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.41 dBm Peak 26.79 dBm Crest 3.39 dB 10 % 1.72 dB 1 % 2.64 dB .1 % 3.08 dB .01 % 3.28 dB Date: 10.DEC.2019 11:58:33	Ref: 30 dBm, Att: 30 dB, AQT: 3.125 ms, RSW: 10 MHz, Center: 1.7124 GHz, Mean: 20.50 dBm, Peak: 24.18 dBm, Crest: 3.69 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 20.50 dBm Peak 24.18 dBm Crest 3.69 dB 10 % 1.76 dB 1 % 2.76 dB .1 % 3.24 dB .01 % 3.48 dB Date: 10.DEC.2019 13:42:43
Middle Channel	Middle Channel
Ref: 30 dBm, Att: 30 dB, AQT: 3.125 ms, RSW: 10 MHz, Center: 836.4 MHz, Mean: 23.36 dBm, Peak: 26.87 dBm, Crest: 3.51 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.36 dBm Peak 26.87 dBm Crest 3.51 dB 10 % 1.72 dB 1 % 2.68 dB .1 % 3.16 dB .01 % 3.40 dB Date: 10.DEC.2019 11:58:45	Ref: 30 dBm, Att: 30 dB, AQT: 3.125 ms, RSW: 10 MHz, Center: 1.7326 GHz, Mean: 20.80 dBm, Peak: 24.33 dBm, Crest: 3.53 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 20.80 dBm Peak 24.33 dBm Crest 3.53 dB 10 % 1.76 dB 1 % 2.64 dB .1 % 3.12 dB .01 % 3.36 dB Date: 10.DEC.2019 13:42:56
Highest Channel	Highest Channel
Ref: 30 dBm, Att: 30 dB, AQT: 3.125 ms, RSW: 10 MHz, Center: 846.6 MHz, Mean: 23.54 dBm, Peak: 27.22 dBm, Crest: 3.68 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 23.54 dBm Peak 27.22 dBm Crest 3.68 dB 10 % 1.80 dB 1 % 2.76 dB .1 % 3.28 dB .01 % 3.48 dB Date: 10.DEC.2019 11:58:54	Ref: 30 dBm, Att: 30 dB, AQT: 3.125 ms, RSW: 10 MHz, Center: 1.7526 GHz, Mean: 20.91 dBm, Peak: 24.47 dBm, Crest: 3.56 dB Complementary Cumulative Distribution Function (100000 samples) Trace 1 Mean 20.91 dBm Peak 24.47 dBm Crest 3.56 dB 10 % 1.76 dB 1 % 2.72 dB .1 % 3.24 dB .01 % 3.48 dB Date: 10.DEC.2019 13:43:07


**26dB Bandwidth**

Mode	WCDMA Band V 26dB BW(MHz)	WCDMA Band IV 26dB BW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.70	4.70
Middle CH	4.71	4.71
Highest CH	4.71	4.69



WCDMA Band V (RMC 12.2Kbps)


Lowest Channel

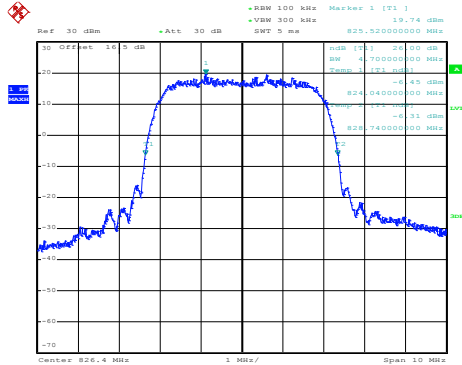

Date: 10.DEC.2019 11:56:57


WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

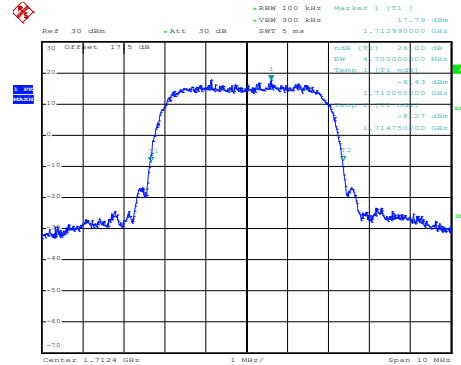


Date: 10.DEC.2019 13:37:19

Middle Channel

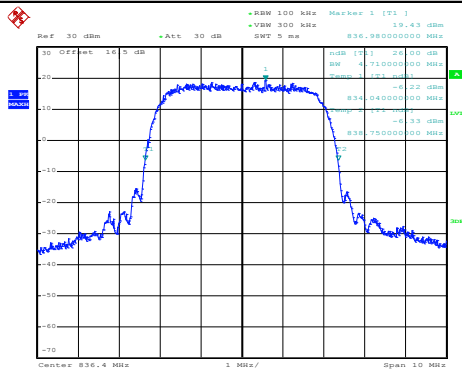


Date: 10.DEC.2019 11:57:34

Middle Channel

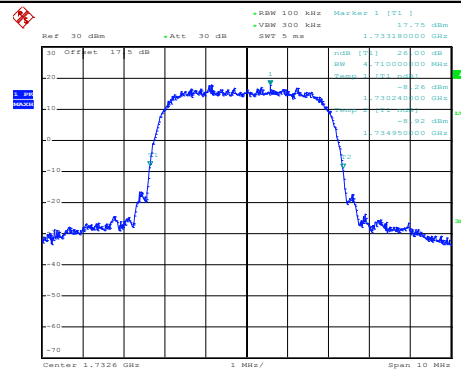


Date: 10.DEC.2019 13:38:00

Highest Channel

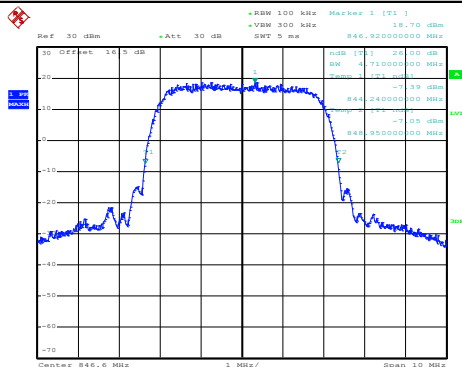

Date: 10.DEC.2019 11:58:10


Highest Channel

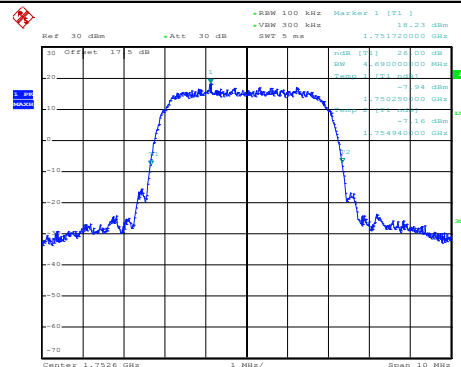


Date: 10.DEC.2019 13:38:46


**Occupied Bandwidth**

Mode	WCDMA Band V 99% OBW(MHz)	WCDMA Band IV 99% OBW(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.14	4.13
Middle CH	4.15	4.13
Highest CH	4.13	4.13

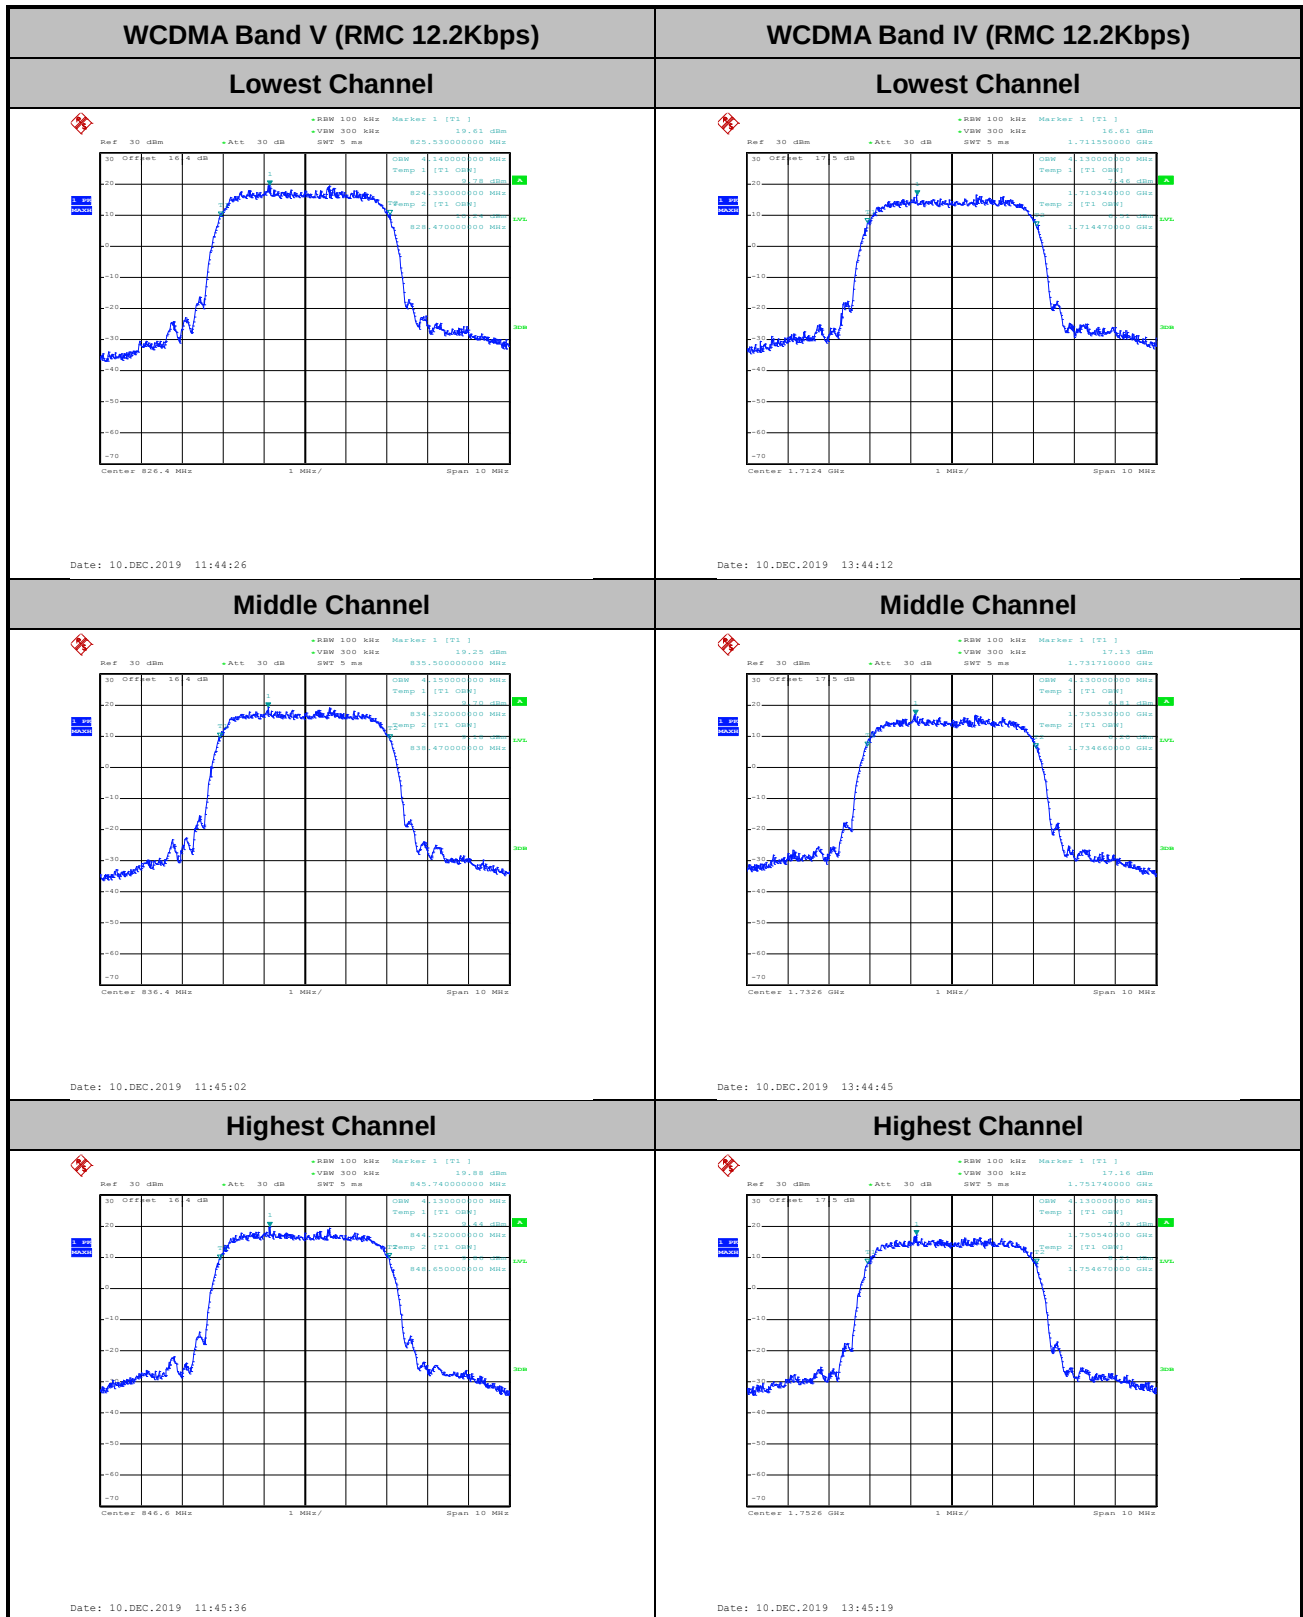


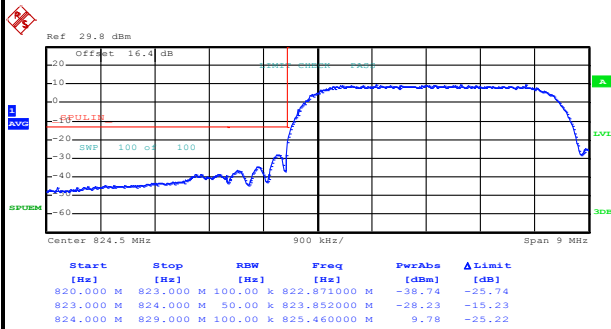**Conducted Band Edge****WCDMA Band V (RMC 12.2Kbps)****Lowest Band Edge**


Date: 10.DEC.2019 11:48:27

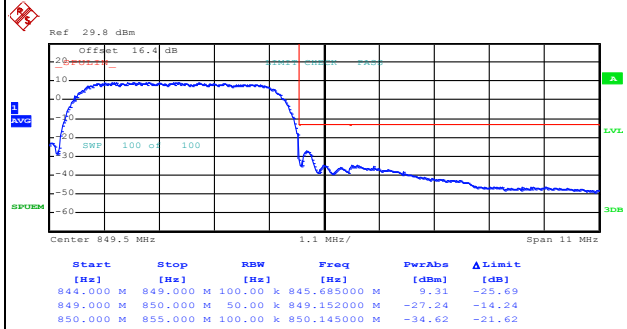Highest Band Edge


Date: 10.DEC.2019 11:51:17

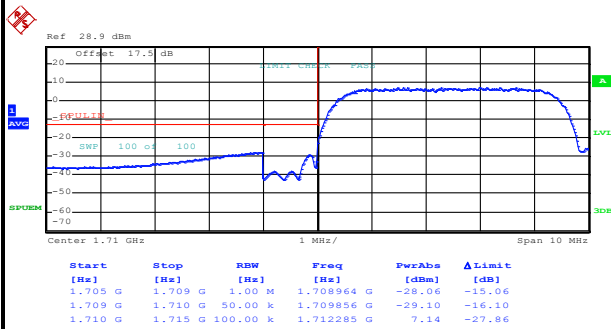WCDMA Band IV (RMC 12.2Kbps)**Lowest Band Edge**


Date: 10.DEC.2019 13:48:09

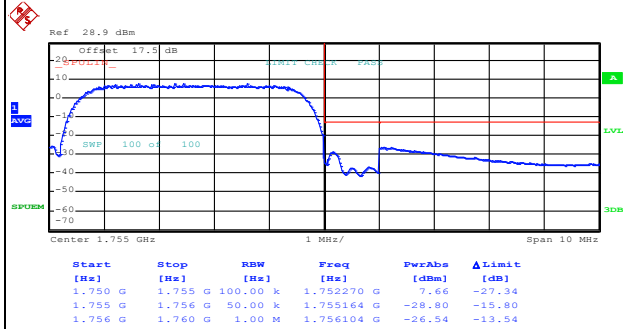Highest Band Edge


Date: 10.DEC.2019 13:50:59

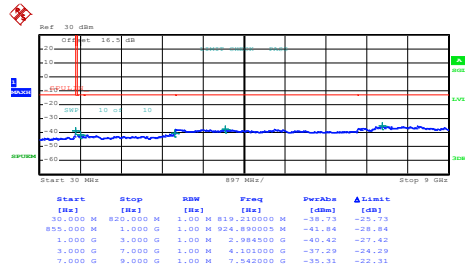**Conducted Spurious Emission****WCDMA Band V (RMC 12.2Kbps)****Lowest Channel**


Date: 10.DEC.2019 11:59:52

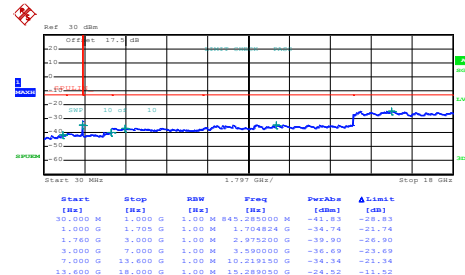WCDMA Band IV (RMC 12.2Kbps)**Lowest Channel**


Date: 10.DEC.2019 13:40:12

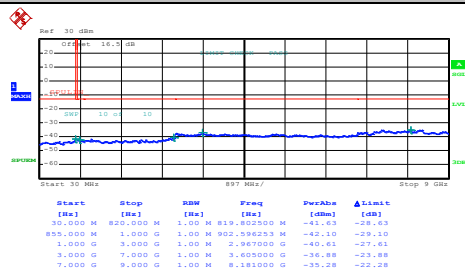Middle Channel


Date: 10.DEC.2019 12:00:40

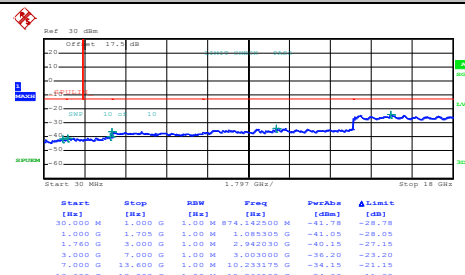Middle Channel

Date: 10.DEC.2019 13:41:03

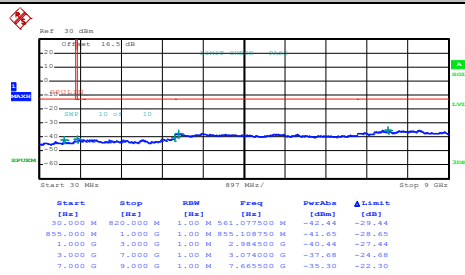Highest Channel

Date: 10.DEC.2019 12:01:34

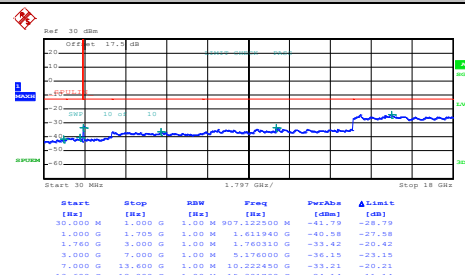Highest Channel

Date: 10.DEC.2019 13:41:55

**Frequency Stability**

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0155	PASS
40	Normal Voltage	0.0000	
30	Normal Voltage	0.0000	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0000	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0012	
-30	Normal Voltage	0.0012	
20	Maximum Voltage	0.0143	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0000	



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0075	PASS
40	Normal Voltage	0.0035	
30	Normal Voltage	0.0023	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0196	
0	Normal Voltage	0.0219	
-10	Normal Voltage	0.0225	
-20	Normal Voltage	0.0185	
-30	Normal Voltage	0.0167	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0006	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.25 V
2. The frequency fundamental emissions stay within the authorized frequency block.

**Appendix B. Test Results of ERP/EIRP and Radiated Test****ERP/EIRP**

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850	32.94	1.9679	27.40	0.5495
Middle	GPRS class 8	32.93	1.9634	27.39	0.5483
Highest	GT - LC = -3.39 dB	32.98	1.9861	27.44	0.5546
Lowest	GSM850	26.71	0.4688	21.17	0.1309
Middle	EDGE class 8	26.66	0.4634	21.12	0.1294
Highest	GT - LC = -3.39 dB	26.64	0.4613	21.10	0.1288
Lowest	WCDMA Band V	23.61	0.2296	18.07	0.0641
Middle	RMC 12.2Kbps	23.64	0.2312	18.10	0.0646
Highest	GT - LC = -3.39 dB	23.68	0.2333	18.14	0.0652
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900	24.74	0.2979	21.75	0.1496
Middle	GPRS class 8	24.79	0.3013	21.80	0.1514
Highest	GT - LC = -2.99 dB	24.76	0.2992	21.77	0.1503
Lowest	GSM1900	24.27	0.2673	21.28	0.1343
Middle	EDGE class 8	24.22	0.2642	21.23	0.1327
Highest	GT - LC = -2.99 dB	24.33	0.2710	21.34	0.1361
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV	21.38	0.1374	19.46	0.0883
Middle	RMC 12.2Kbps	21.52	0.1419	19.60	0.0912
Highest	GT - LC = -1.92 dB	21.60	0.1445	19.68	0.0929
Limit	EIRP < 1W	Result		PASS	

**Radiated Spurious Emission****GPRS850**

GPRS 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-51.71	-13	-38.71	-61.8	-57.30	0.92	8.66	H
	2472	-48.15	-13	-35.15	-62.46	-55.52	1.14	10.66	H
	3304	-55.13	-13	-42.13	-70.78	-63.68	1.32	12.03	H
									H
									H
									H
	1648	-55.42	-13	-42.42	-64.98	-61.01	0.92	8.66	V
	2472	-50.61	-13	-37.61	-65.07	-57.98	1.14	10.66	V
	3304	-54.71	-13	-41.71	-70.83	-63.26	1.32	12.03	V
									V
									V
									V
Middle	1672	-52.41	-13	-39.41	-62.57	-58.09	0.93	8.75	H
	2512	-56.27	-13	-43.27	-70.56	-63.68	1.15	10.71	H
	3344	-55.66	-13	-42.66	-71.21	-64.30	1.33	12.13	H
									H
									H
									H
	1672	-55.61	-13	-42.61	-65.14	-61.29	0.93	8.75	V
	2512	-55.11	-13	-42.11	-69.59	-62.52	1.15	10.71	V
	3344	-55.07	-13	-42.07	-71.07	-63.71	1.33	12.13	V
									V
									V
									V



Highest	1696	-49.31	-13	-36.31	-59.55	-55.07	0.94	8.84	H
	2544	-52.82	-13	-39.82	-67.08	-60.26	1.16	10.75	H
	3386	-54.98	-13	-41.98	-70.42	-63.72	1.34	12.23	H
									H
									H
									H
	1696	-55.54	-13	-42.54	-65.07	-61.30	0.94	8.84	V
	2544	-53.52	-13	-40.52	-67.89	-60.96	1.16	10.75	V
	3386	-54.97	-13	-41.97	-70.85	-63.71	1.34	12.23	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE 850**

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-60.58	-13	-47.58	-70.7	-66.20	0.92	8.69	H
	2480	-56.45	-13	-43.45	-70.76	-63.83	1.15	10.67	H
	3304	-55.53	-13	-42.53	-71.18	-64.08	1.32	12.03	H
									H
									H
									H
	1656	-61.17	-13	-48.17	-70.72	-66.79	0.92	8.69	V
	2480	-56.48	-13	-43.48	-70.96	-63.86	1.15	10.67	V
	3304	-55.38	-13	-42.38	-71.5	-63.93	1.32	12.03	V
									V
									V
									V
Middle	1672	-59.94	-13	-46.94	-70.1	-65.62	0.93	8.75	H
	2512	-56.90	-13	-43.90	-71.19	-64.31	1.15	10.71	H
	3344	-55.74	-13	-42.74	-71.29	-64.38	1.33	12.13	H
									H
									H
									H
	1672	-61.43	-13	-48.43	-70.96	-67.11	0.93	8.75	V
	2512	-56.59	-13	-43.59	-71.07	-64.00	1.15	10.71	V
	3344	-54.93	-13	-41.93	-70.93	-63.57	1.33	12.13	V
									V
									V
									V



Highest	1696	-57.68	-13	-44.68	-67.92	-63.44	0.94	8.84	H
	2539	-56.89	-13	-43.89	-71.16	-64.33	1.16	10.75	H
	3384	-55.80	-13	-42.80	-71.25	-64.53	1.34	12.22	H
									H
									H
									H
	1696	-61.41	-13	-48.41	-70.94	-67.17	0.94	8.84	V
	2539	-56.78	-13	-43.78	-71.18	-64.22	1.16	10.75	V
	3384	-55.31	-13	-42.31	-71.2	-64.04	1.34	12.22	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 850**

WCDMA 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1652	-59.92	-13	-46.92	-70.02	-65.53	0.92	8.68	H
	2478	-56.39	-13	-43.39	-70.71	-63.76	1.15	10.67	H
	3304	-55.04	-13	-42.04	-70.69	-63.59	1.32	12.03	H
									H
									H
									H
	1652	-61.06	-13	-48.06	-70.62	-66.67	0.92	8.68	V
	2478	-56.22	-13	-43.22	-70.71	-63.59	1.15	10.67	V
	3304	-54.81	-13	-41.81	-70.93	-63.36	1.32	12.03	V
									V
									V
									V
Middle	1672	-60.76	-13	-47.76	-70.92	-66.44	0.93	8.75	H
	2508	-56.88	-13	-43.88	-71.18	-64.29	1.15	10.71	H
	3344	-55.44	-13	-42.44	-70.99	-64.08	1.33	12.13	H
									H
									H
									H
	1672	-61.27	-13	-48.27	-70.8	-66.95	0.93	8.75	V
	2508	-56.69	-13	-43.69	-71.19	-64.10	1.15	10.71	V
	3344	-55.31	-13	-42.31	-71.31	-63.95	1.33	12.13	V
									V
									V
									V



Highest	1692	-60.73	-13	-47.73	-70.95	-66.47	0.94	8.83	H
	2538	-56.60	-13	-43.60	-70.87	-64.04	1.16	10.75	H
	3384	-55.83	-13	-42.83	-71.28	-64.56	1.34	12.22	H
									H
									H
									H
	1692	-61.47	-13	-48.47	-70.99	-67.21	0.94	8.83	V
	2538	-56.73	-13	-43.73	-71.13	-64.17	1.16	10.75	V
	3384	-55.10	-13	-42.10	-70.99	-63.83	1.34	12.22	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1700**

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3424	-51.73	-13	-38.73	-68.08	-62.70	1.35	12.32	H
	5136	-49.39	-13	-36.39	-71.11	-60.54	1.65	12.79	H
	6848	-44.90	-13	-31.90	-70.43	-55.27	1.74	12.11	H
									H
									H
									H
	3424	-52.11	-13	-39.11	-68.88	-63.08	1.35	12.32	V
	5136	-49.77	-13	-36.77	-71.24	-60.92	1.65	12.79	V
	6848	-45.55	-13	-32.55	-70.68	-55.92	1.74	12.11	V
									V
									V
									V
Middle	3464	-51.82	-13	-38.82	-68.56	-62.88	1.35	12.41	H
	5196	-49.72	-13	-36.72	-71.49	-60.93	1.66	12.87	H
	6928	-44.16	-13	-31.16	-70.08	-54.43	1.73	12.00	H
									H
									H
									H
	3464	-50.87	-13	-37.87	-68	-61.93	1.35	12.41	V
	5196	-49.60	-13	-36.60	-71.2	-60.81	1.66	12.87	V
	6928	-44.82	-13	-31.82	-70.29	-55.09	1.73	12.00	V
									V
									V
									V



Highest	3504	-51.62	-13	-38.62	-68.72	-62.76	1.36	12.50	H
	5256	-49.08	-13	-36.08	-71.06	-60.36	1.68	12.96	H
	7008	-43.81	-13	-30.81	-70.12	-53.97	1.72	11.89	H
									H
									H
									H
	3504	-51.24	-13	-38.24	-68.69	-62.38	1.36	12.50	V
	5256	-49.29	-13	-36.29	-71.03	-60.57	1.68	12.96	V
	7008	-44.37	-13	-31.37	-70.19	-54.53	1.72	11.89	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**GPRS 1900**

GPRS 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-52.38	-13	-39.38	-70.59	-63.59	1.41	12.62	H
	5550	-47.87	-13	-34.87	-70.93	-59.43	1.74	13.30	H
	7400	-42.51	-13	-29.51	-69.59	-51.83	1.94	11.26	H
									H
									H
									H
	3700	-52.53	-13	-39.53	-70.88	-63.74	1.41	12.62	V
	5550	-48.38	-13	-35.38	-70.96	-59.94	1.74	13.30	V
	7400	-42.95	-13	-29.95	-69.87	-52.27	1.94	11.26	V
									V
									V
									V
Middle	3760	-52.14	-13	-39.14	-70.56	-63.37	1.43	12.66	H
	5640	-47.95	-13	-34.95	-71.05	-59.52	1.73	13.30	H
	7520	-44.23	-13	-31.23	-70.74	-53.34	1.99	11.10	H
									H
									H
									H
	3760	-51.95	-13	-38.95	-70.59	-63.18	1.43	12.66	V
	5640	-47.93	-13	-34.93	-70.62	-59.50	1.73	13.30	V
	7520	-44.88	-13	-31.88	-71.35	-53.99	1.99	11.10	V
									V
									V
									V



Highest	3820	-52.12	-13	-39.12	-70.73	-63.37	1.44	12.69	H
	5730	-47.26	-13	-34.26	-70.79	-58.83	1.73	13.30	H
	7640	-45.26	-13	-32.26	-71.31	-54.38	2.01	11.13	H
									H
									H
									H
	3820	-51.83	-13	-38.83	-70.67	-63.08	1.44	12.69	V
	5730	-47.89	-13	-34.89	-70.78	-59.46	1.73	13.30	V
	7640	-45.67	-13	-32.67	-71.62	-54.79	2.01	11.13	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE1900**

EDGE 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-52.67	-13	-39.67	-70.88	-63.88	1.41	12.62	H
	5550	-47.63	-13	-34.63	-70.69	-59.19	1.74	13.30	H
	7400	-42.75	-13	-29.75	-69.83	-52.07	1.94	11.26	H
									H
									H
									H
	3700	-52.52	-13	-39.52	-70.87	-63.73	1.41	12.62	V
	5550	-47.82	-13	-34.82	-70.4	-59.38	1.74	13.30	V
	7400	-42.92	-13	-29.92	-69.84	-52.24	1.94	11.26	V
									V
									V
									V
Middle	3760	-52.17	-13	-39.17	-70.59	-63.40	1.43	12.66	H
	5640	-47.93	-13	-34.93	-71.03	-59.50	1.73	13.30	H
	7520	-45.12	-13	-32.12	-71.63	-54.23	1.99	11.10	H
									H
									H
									H
	3760	-52.23	-13	-39.23	70.87	-63.46	1.43	12.66	V
	5640	-48.10	-13	-35.10	-70.79	-59.67	1.73	13.30	V
	7520	-44.74	-13	-31.74	-71.21	-53.85	1.99	11.10	V
									V
									V
									V



Highest	3820	-52.31	-13	-39.31	-70.92	-63.56	1.44	12.69	H
	5730	-47.71	-13	-34.71	71.24	-59.28	1.73	13.30	H
	7640	-45.82	-13	-32.82	-71.87	-54.94	2.01	11.13	H
									H
									H
									H
	3820	-52.15	-13	-39.15	-70.99	-63.40	1.44	12.69	V
	5730	-48.19	-13	-35.19	-71.08	-59.76	1.73	13.30	V
	7640	-45.84	-13	-32.84	-71.79	-54.96	2.01	11.13	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.