



9.4.2. 99% BANDWIDTH



LIMITS



None; for reporting purposes only.



RESULTS



Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
CH1	2412	17.89	17.82
CH2	2417	17.77	17.74
CH6	2437	17.74	17.77
CH11	2462	16.41	17.77
CH12	2467	16.48	17.80
CH13	2472	16.49	17.72

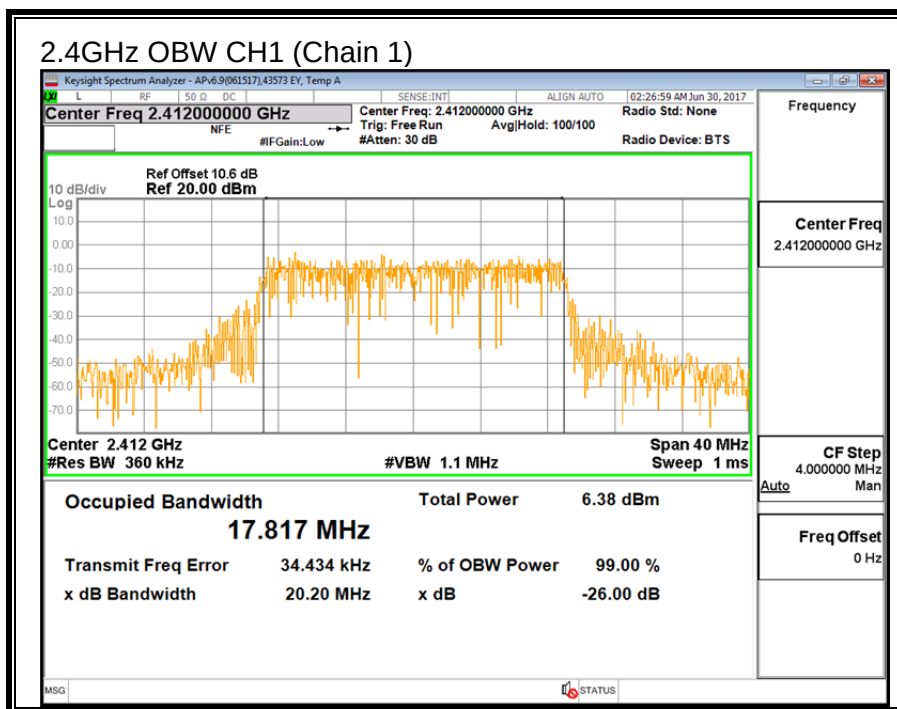
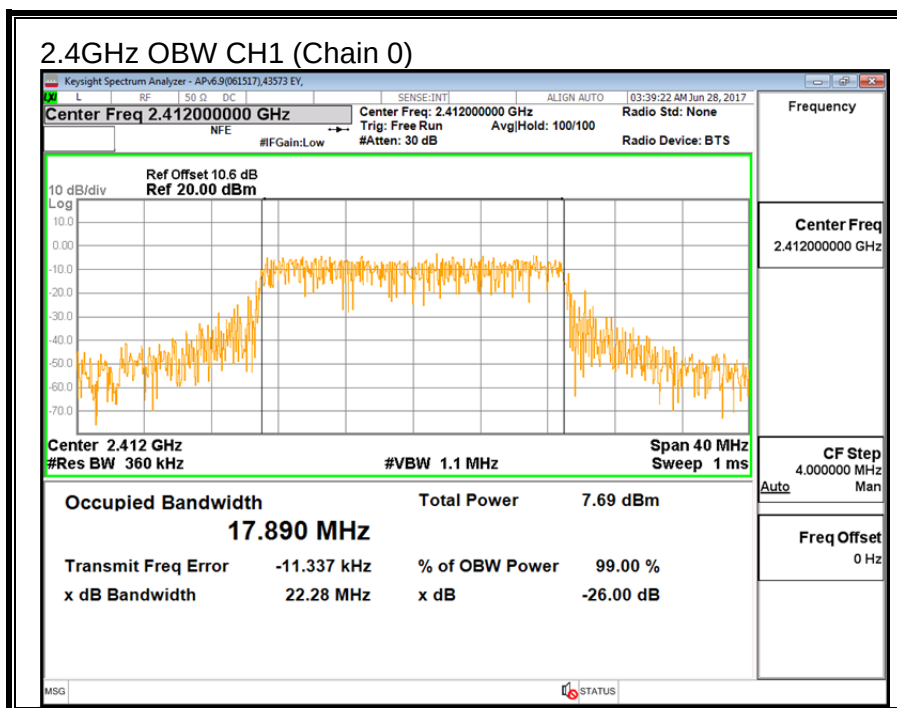


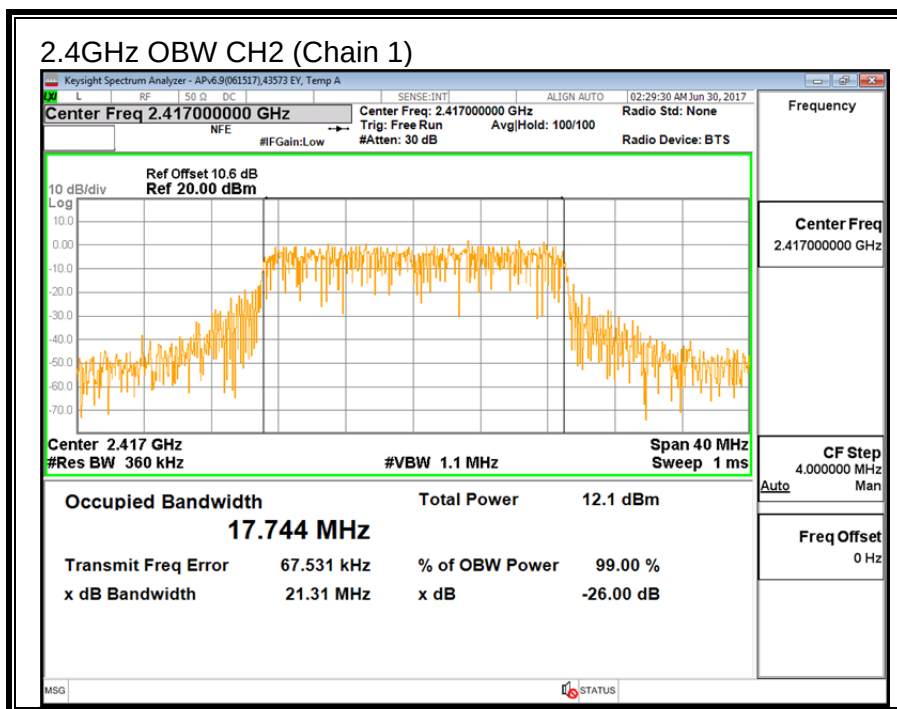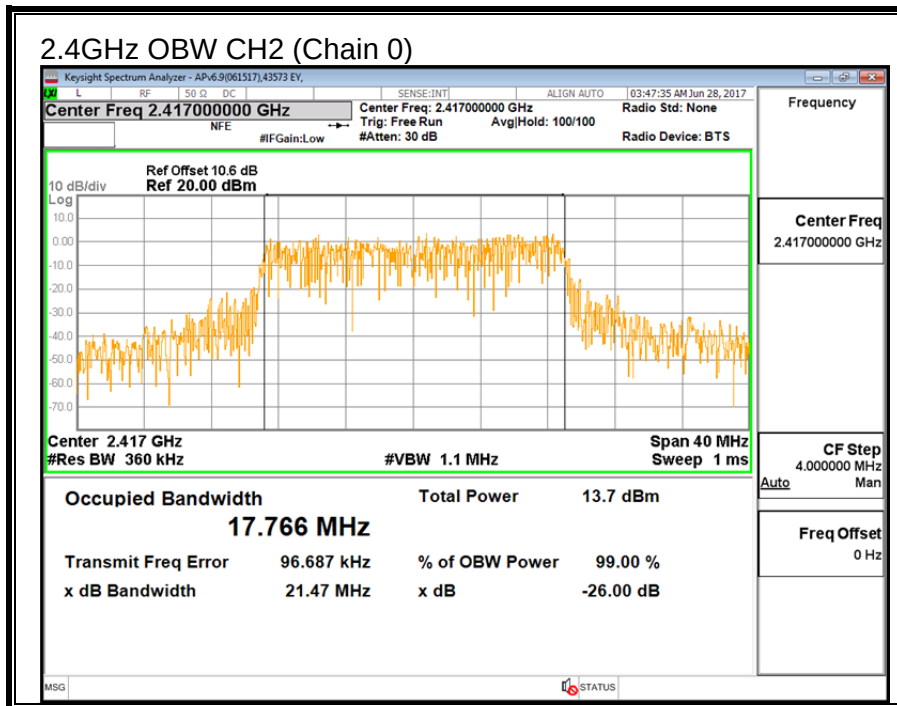

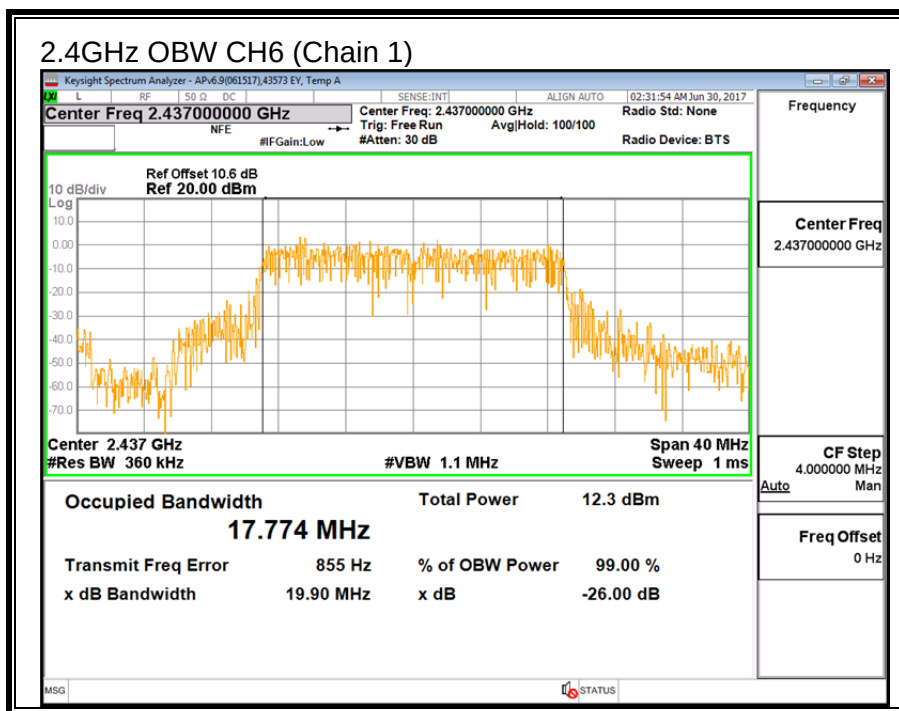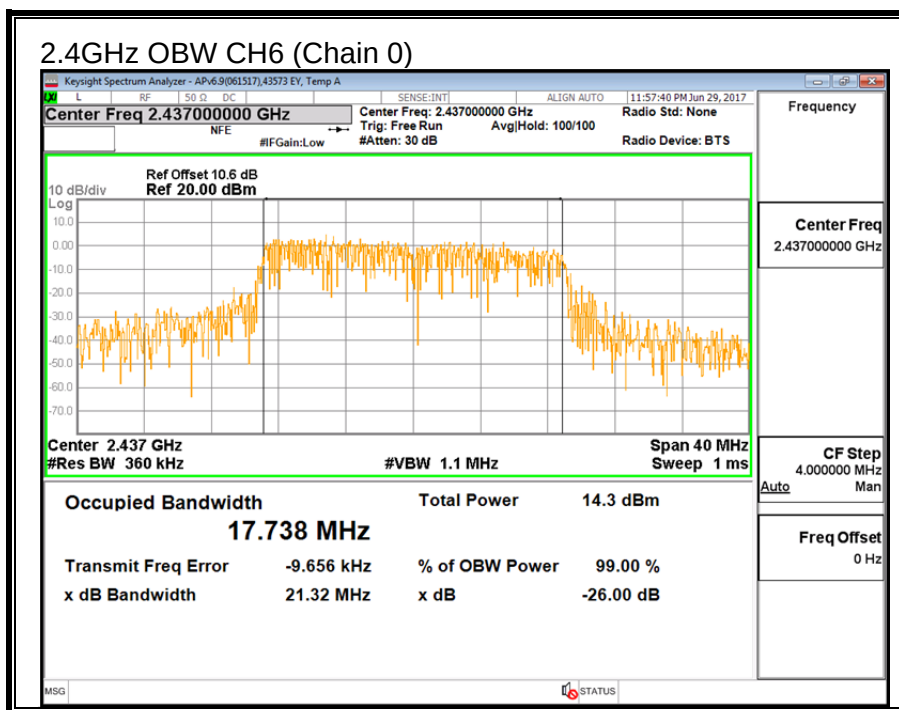

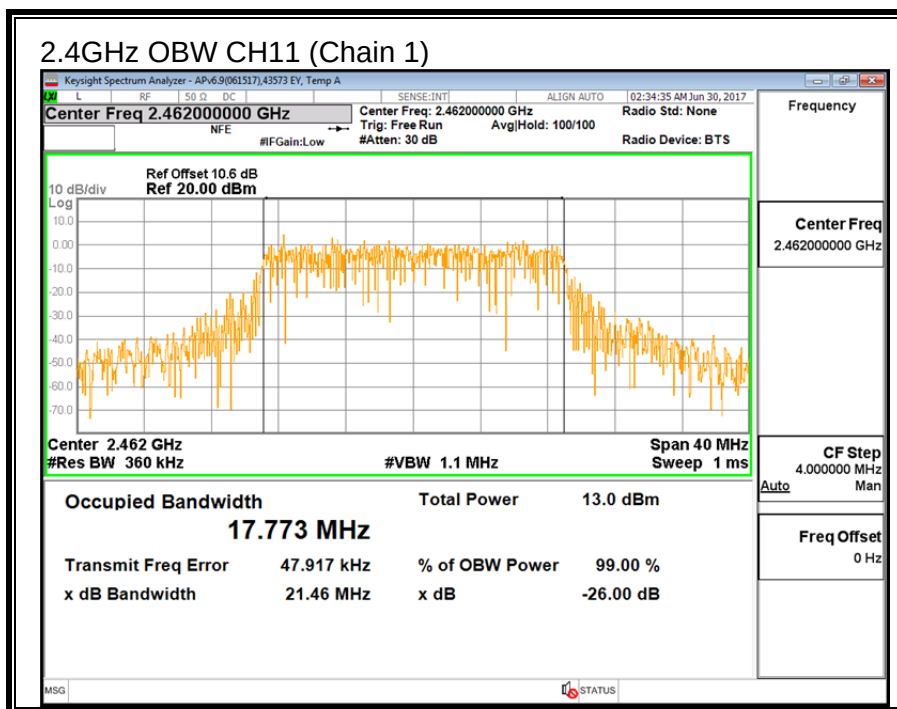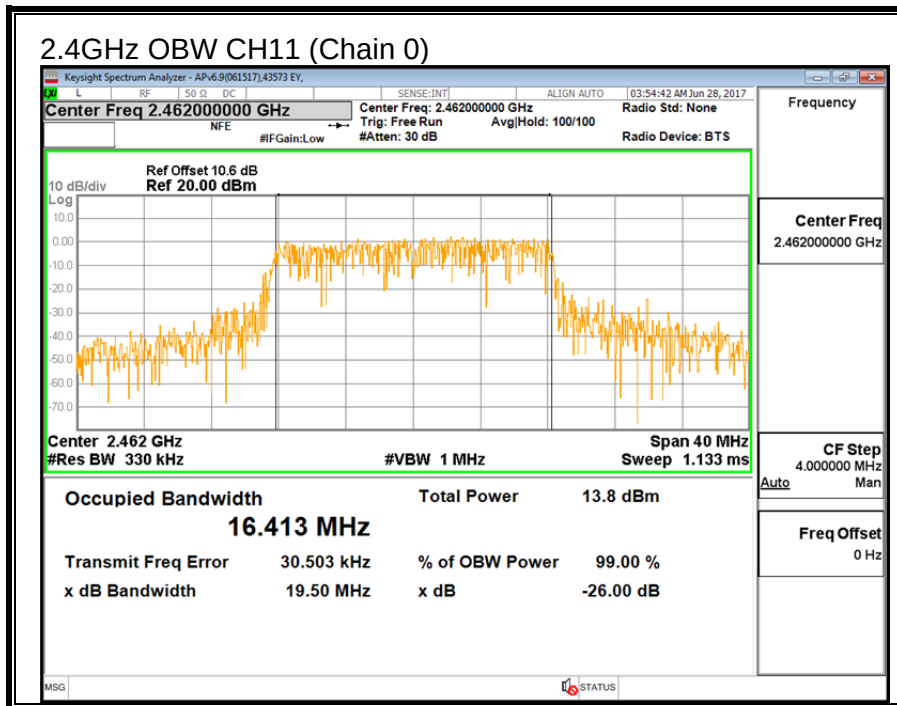

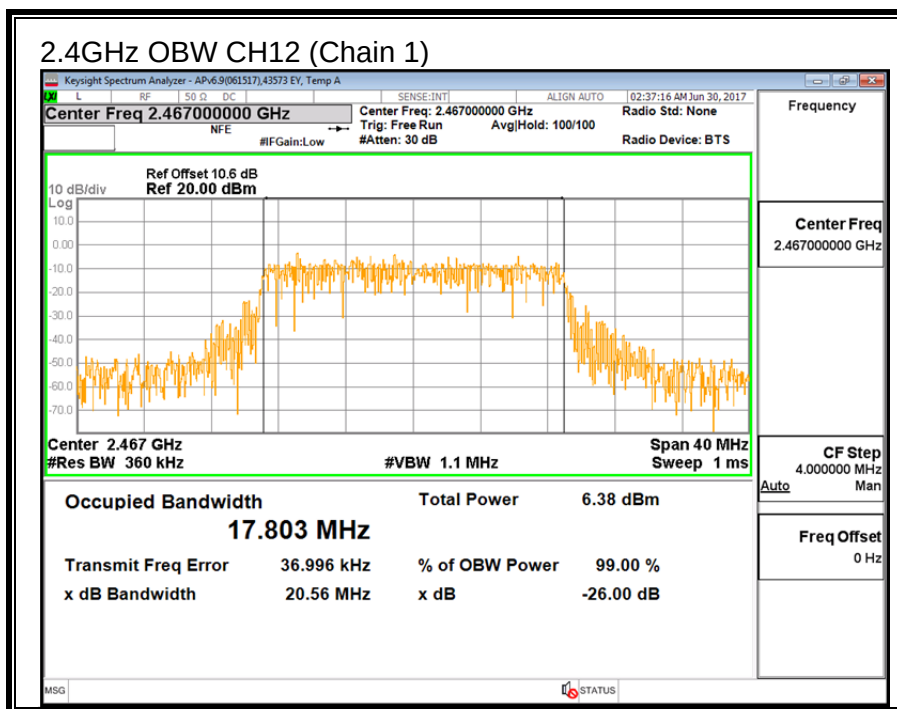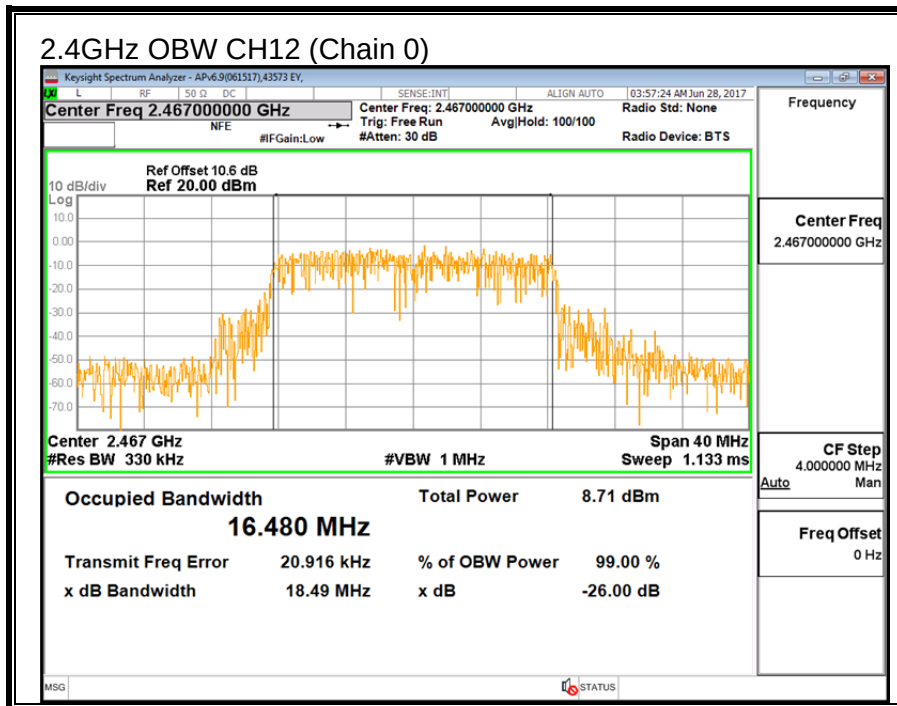

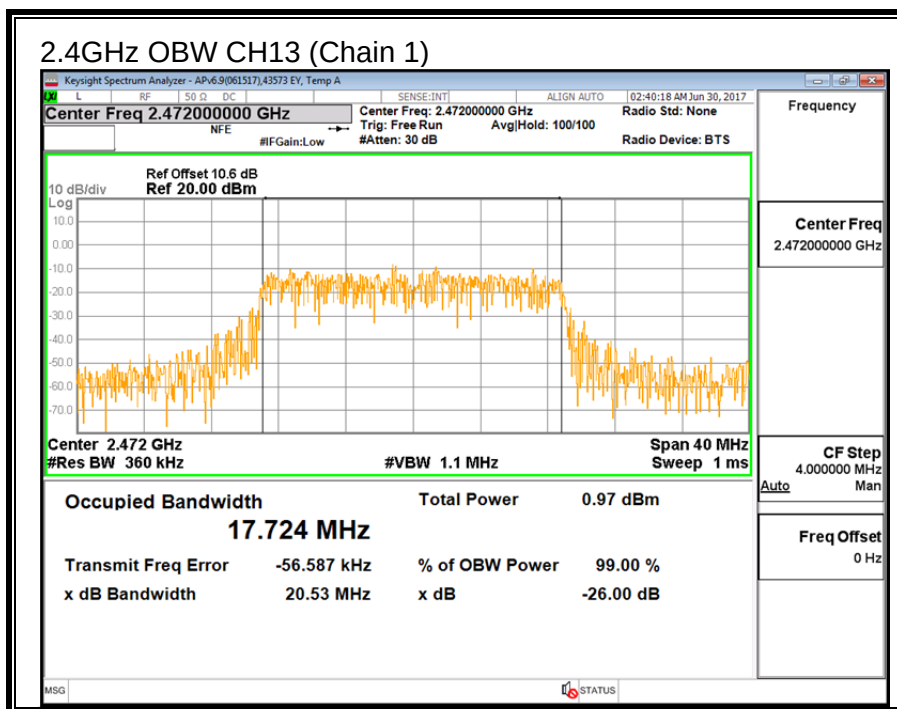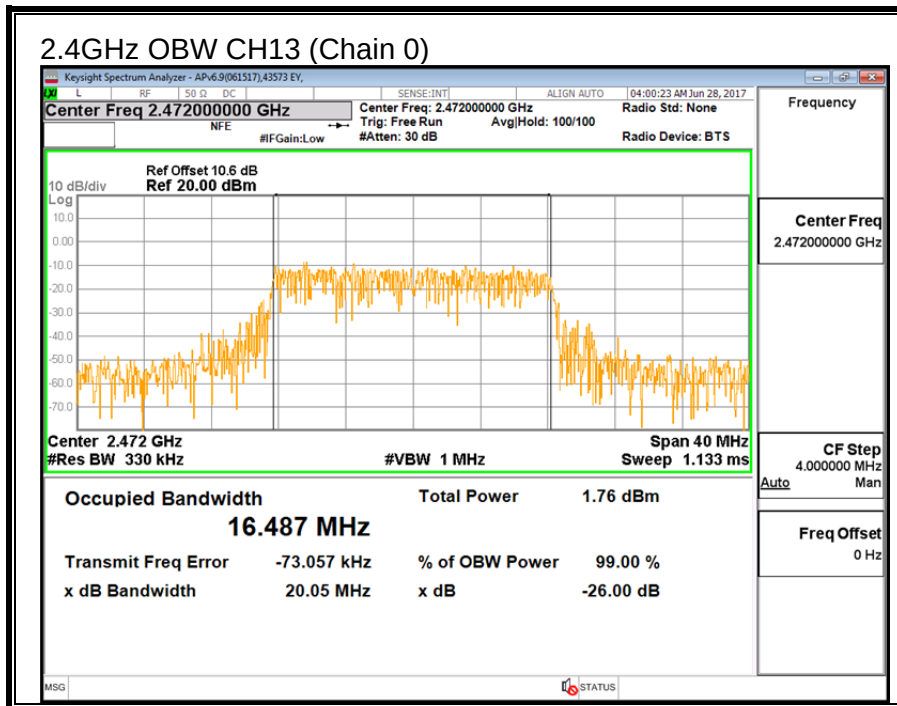

9.4.3. OUTPUT POWER

LIMITS

FCC §15.247 (b) (3)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

KDB 558074 D01 v04Section 9.2.3.2

DIRECTIONAL ANTENNA GAIN

The TX chains are uncorrelated and the antenna gain is unequal among the chains. The directional gain is:

Chain 0 Antenna Gain (dBi)	Chain 1 Antenna Gain (dBi)	Uncorrelated Chains Directional Gain (dBi)
-2.80	-7.00	-4.41

RESULTS

ID:	29435	Date:	06/026/2017
------------	-------	--------------	-------------

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
CH1	2412	-4.41	30.00	30	36	30.00
CH2	2417	-4.41	30.00	30	36	30.00
CH3	2422	-4.41	30.00	30	36	30.00
CH6	2437	-4.41	30.00	30	36	30.00
CH10	2457	-4.41	30.00	30	36	30.00
CH11	2462	-4.41	30.00	30	36	30.00
CH12	2467	-4.41	30.00	30	36	30.00
CH13	2472	-4.41	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Chain 0 Meas Power (dBm)	Chain 1 Meas Power (dBm)	Total Corr'd Power (dBm)	Power Limit (dBm)	Margin (dB)
CH1	2412	8.09	6.95	10.57	30.00	-19.43
CH2	2417	14.03	12.21	16.22	30.00	-13.78
CH3	2422	14.04	12.45	16.33	30.00	-13.67
CH6	2437	14.36	12.73	16.63	30.00	-13.37
CH10	2457	13.10	13.84	16.50	30.00	-13.50
CH11	2462	13.18	13.91	16.57	30.00	-13.43
CH12	2467	7.82	7.76	10.80	30.00	-19.20
CH13	2472	1.79	2.25	5.04	30.00	-24.96

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

9.4.4. POWER SPECTRAL DENSITY



LIMITS



FCC §15.247 (e)



For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.



RESULTS



Duty Cycle CF (dB)		0.21	Included in Calculations of Corr'd PSD			
PSD Results						
Channel	Frequency	Chain 0 Meas	Chain 1 Meas	Total Corr'd PSD	Limit	Margin
	(MHz)	(dBm/3kHz)	(dBm/3kHz)	(dBm/3kHz)	(dBm/3kHz)	(dB)
CH1	2412	-17.46	-18.47	-14.72	8.0	-22.7
CH2	2417	-10.28	-12.89	-8.17	8.0	-16.2
CH6	2437	-9.38	-12.58	-7.47	8.0	-15.5
CH11	2462	-10.32	-12.18	-7.93	8.0	-15.9
CH12	2467	-15.79	-18.07	-13.56	8.0	-21.6
CH13	2472	-22.69	-24.37	-20.23	8.0	-28.2

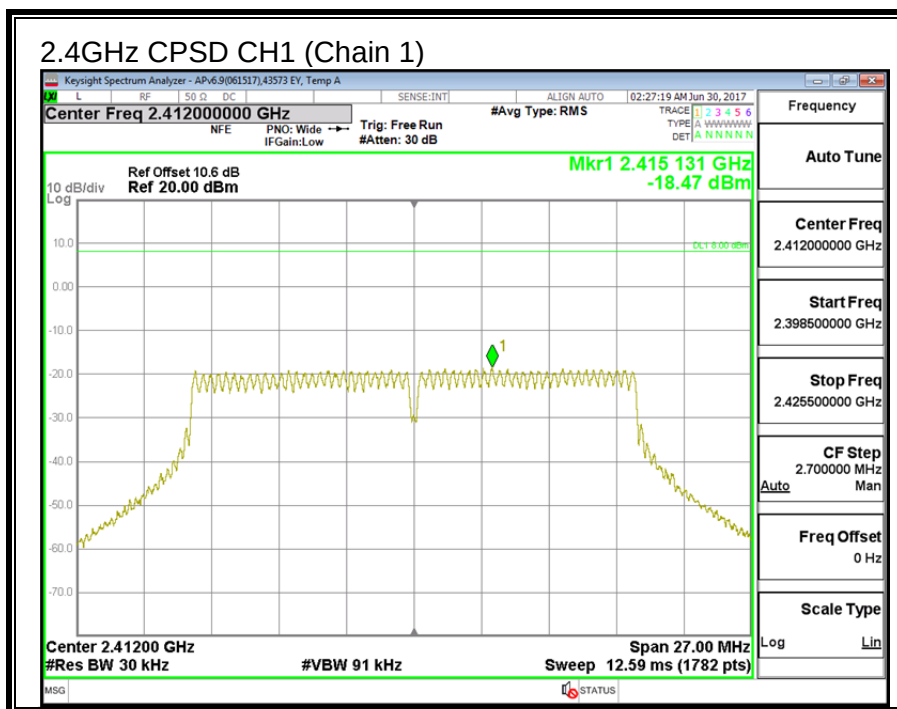
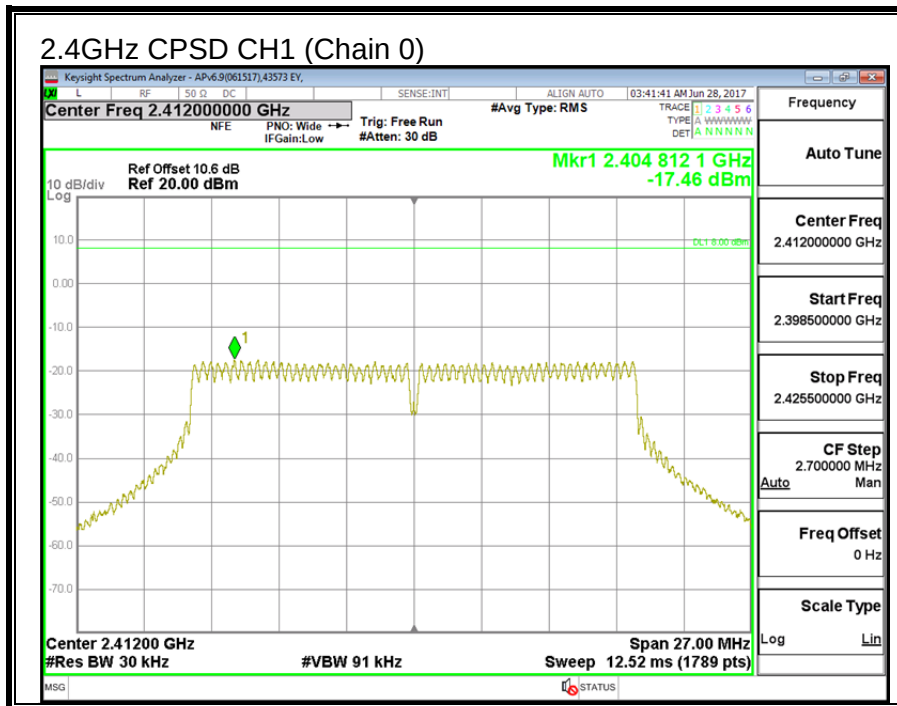


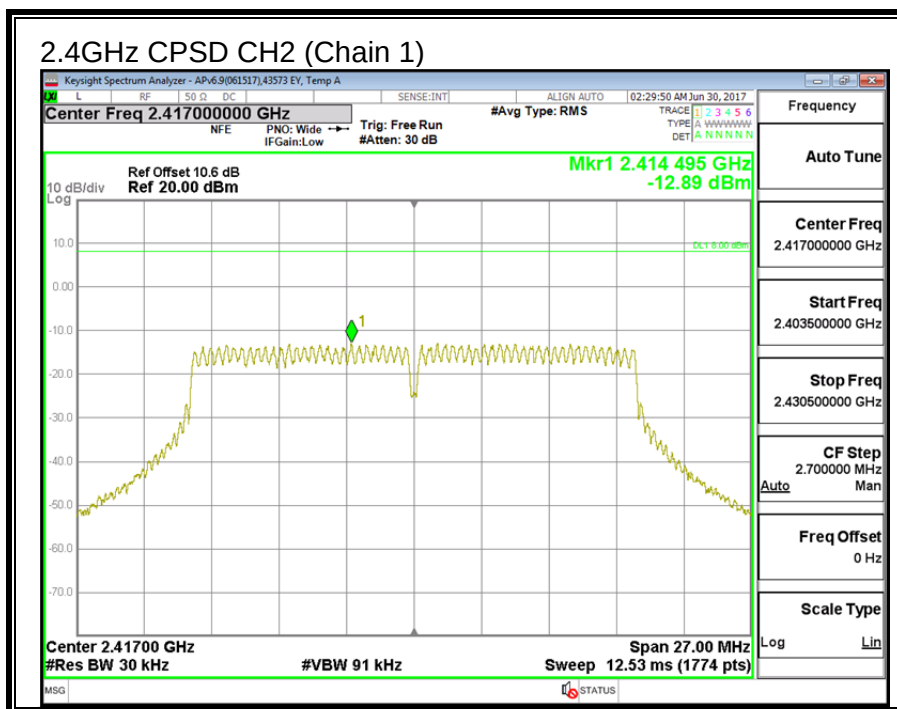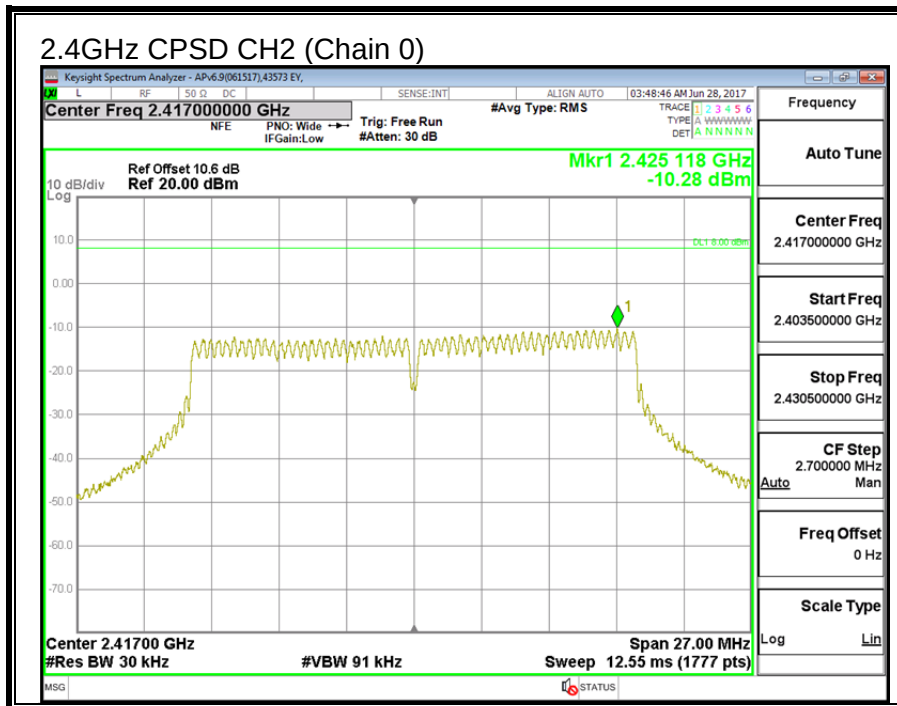

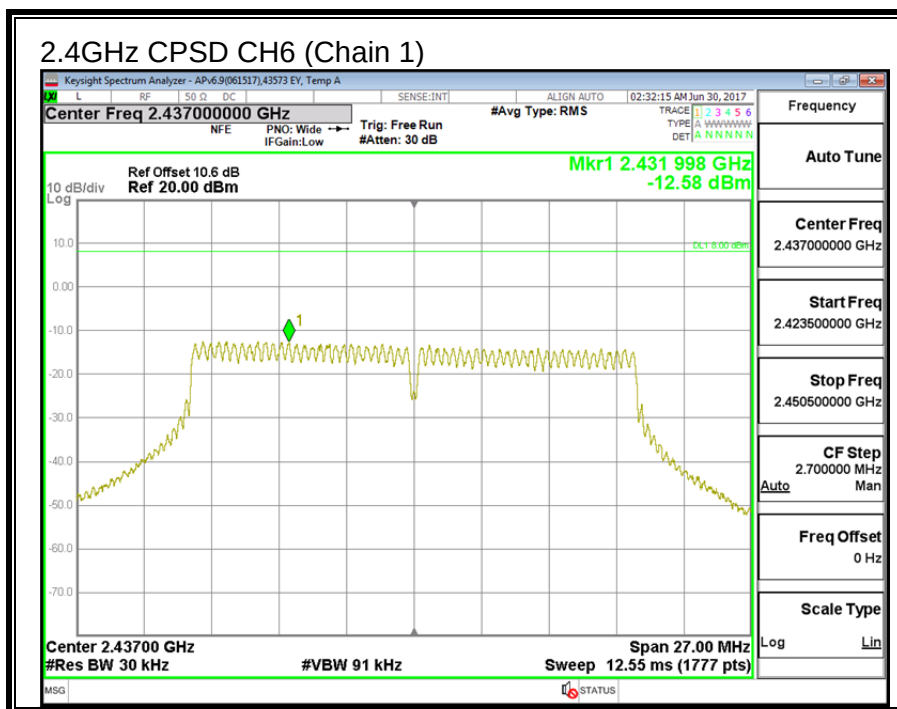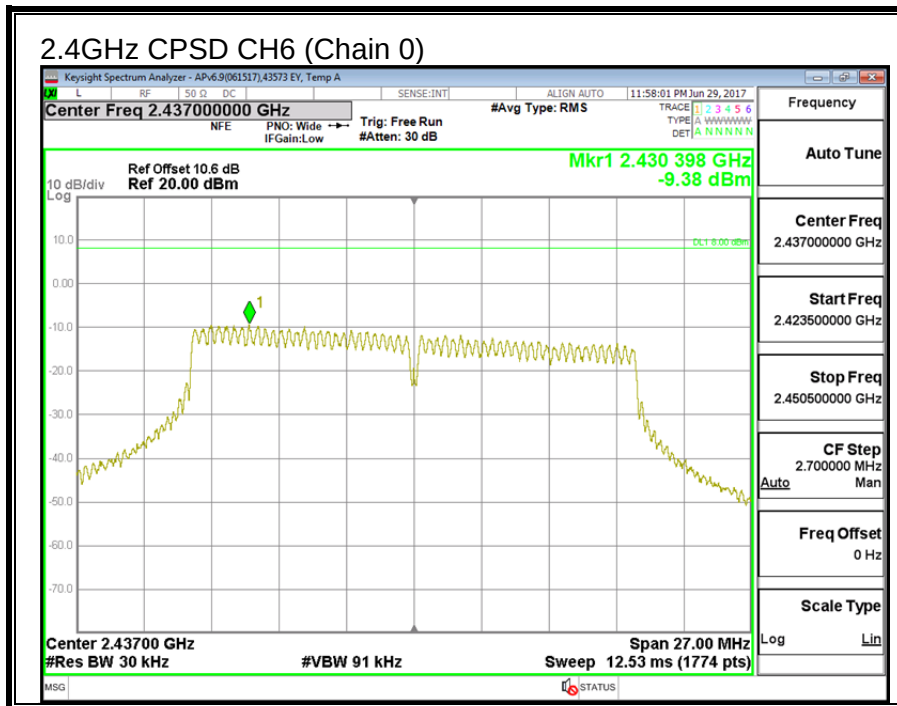

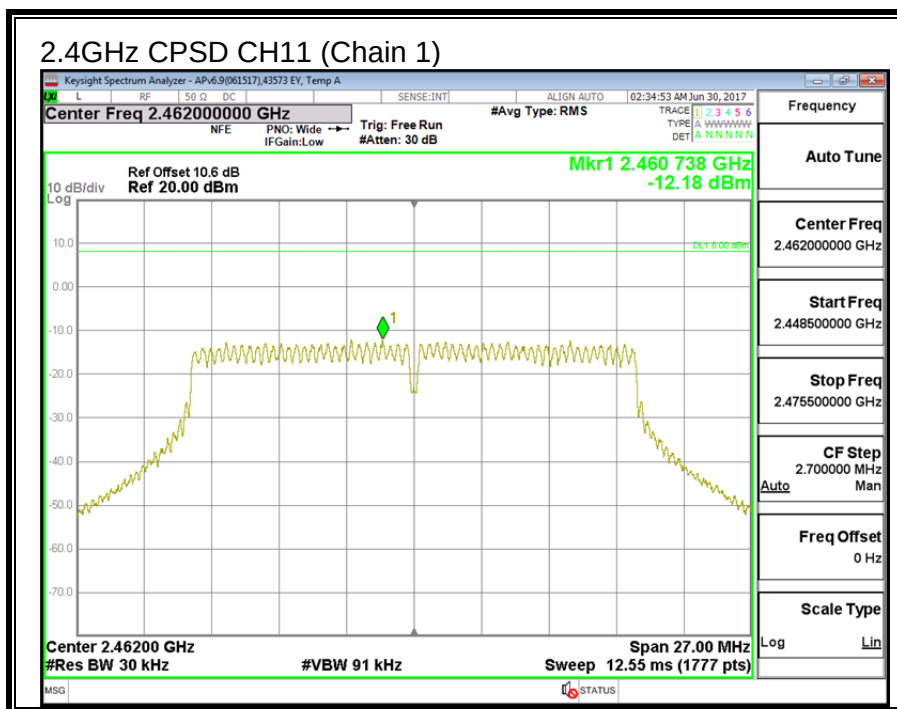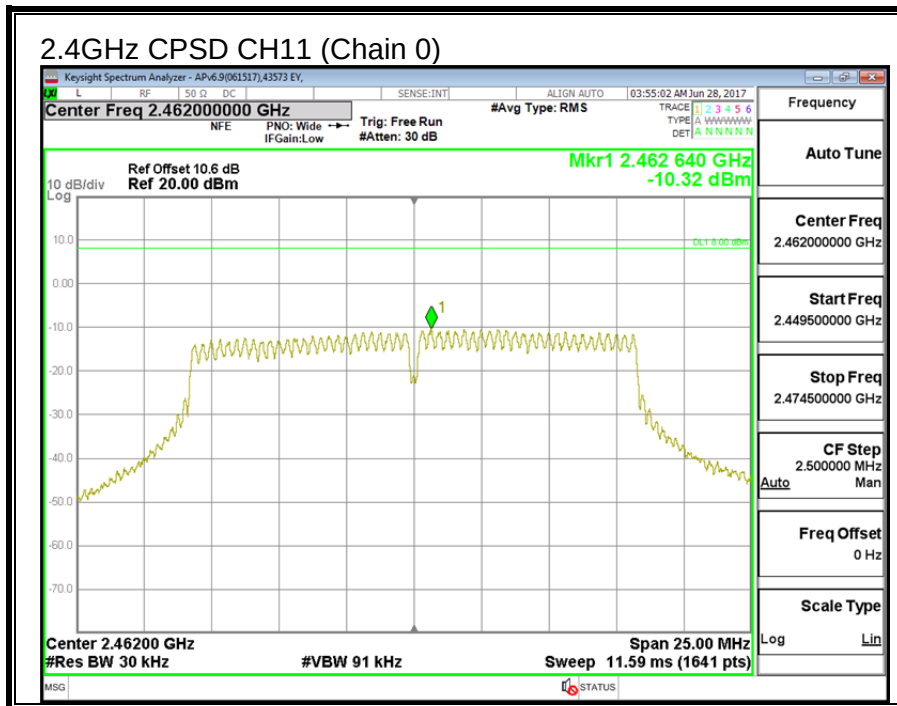

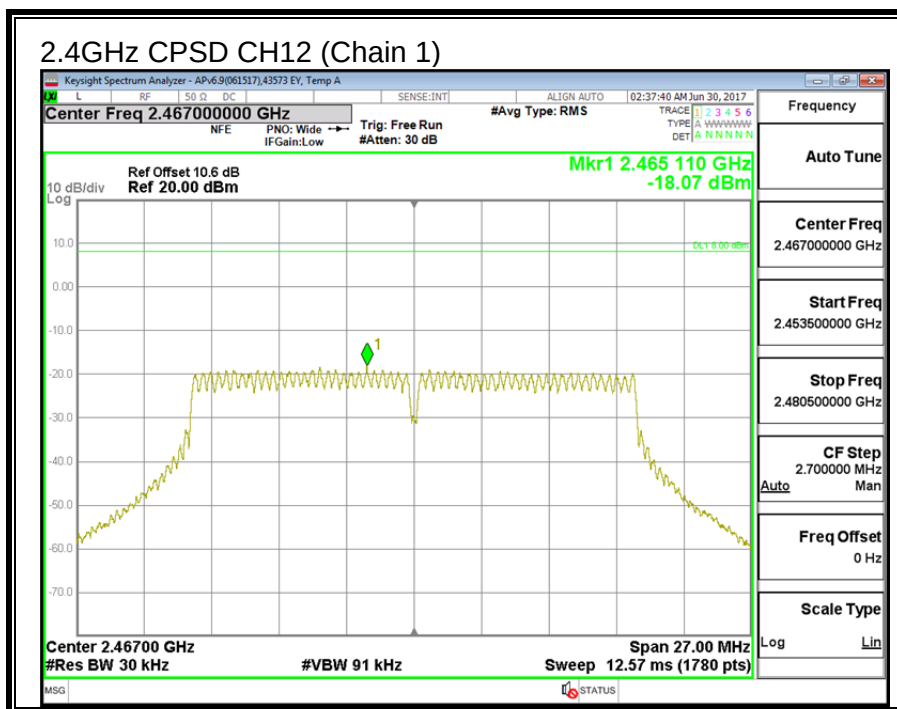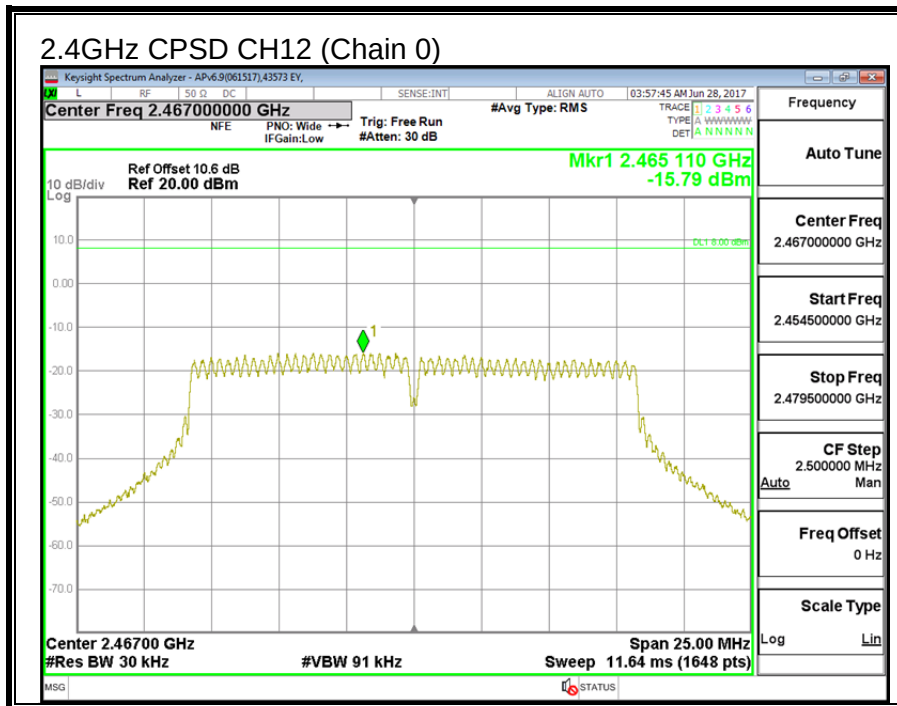

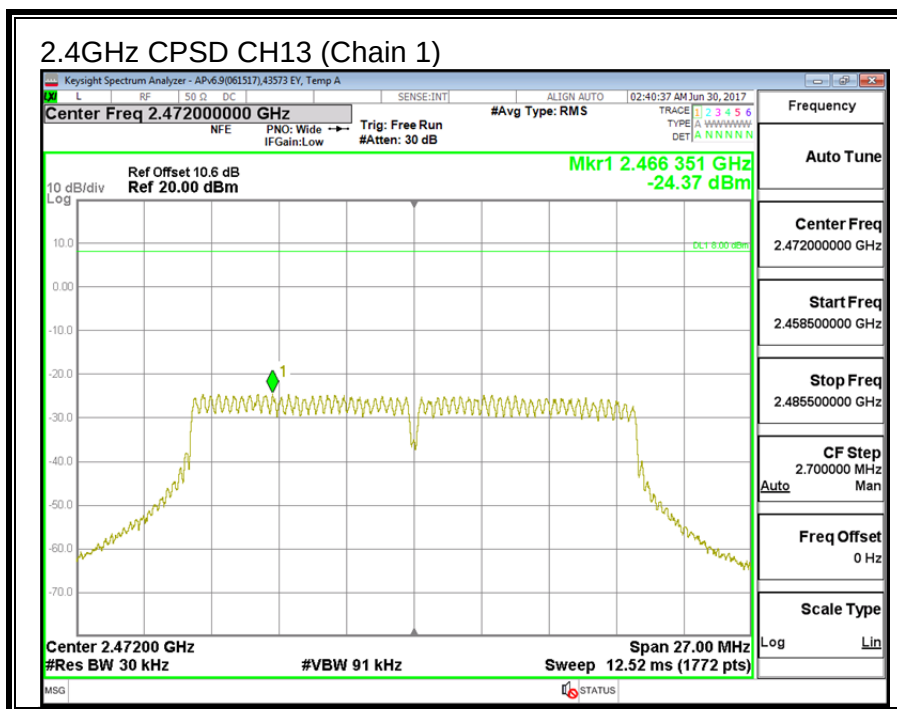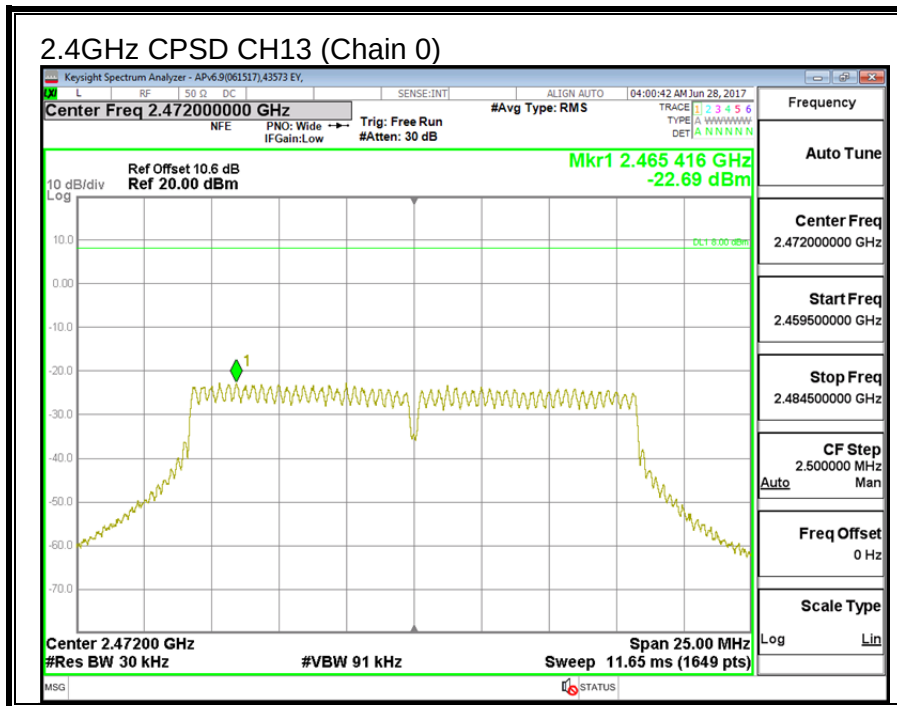

9.4.5. CONDUCTED BANEDGE AND SPURIOUS EMISSIONS

