

HAC_E_Dipole_835**DUT: HAC-Dipole 835 MHz**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2017/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1399; Calibrated: 2016/11/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid:

$dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 122.6 V/m; Power Drift = 0.05 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 113.8 V/m

Average value of Total=(113.8+108.8) / 2 = 111.3 V/m

PMF scaled E-field



Grid 1 M4 110.4 V/m	Grid 2 M4 113.8 V/m	Grid 3 M4 112.6 V/m
Grid 4 M4 62.42 V/m	Grid 5 M4 63.83 V/m	Grid 6 M4 62.92 V/m
Grid 7 M4 106.9 V/m	Grid 8 M4 108.8 V/m	Grid 9 M4 107.1 V/m

Cursor:

Total = 113.8 V/m

E Category: M4

Location: -1, -75.5, 9.7 mm

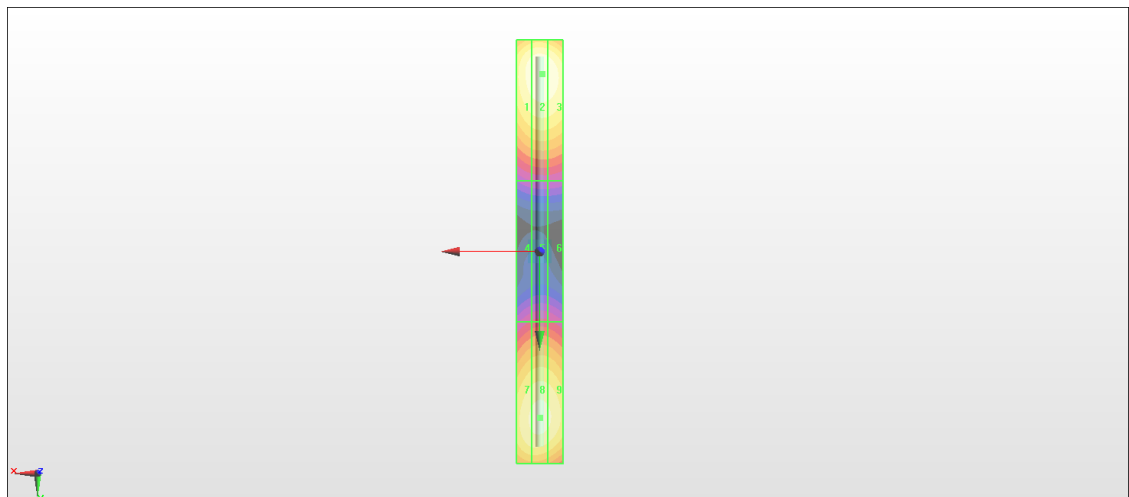

0 dB = 113.8 V/m = 41.12 dBV/m

HAC_E_Dipole_1880**DUT: HAC Dipole 1880 MHz**

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Ambient Temperature : 23.4 °C

DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2017/1/19;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1399; Calibrated: 2016/11/17
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7373)

E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid:

$dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 134.1 V/m; Power Drift = -0.01 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 88.77 V/m

Average value of Total=(87.94+88.77) / 2 = 88.355 V/m

PMF scaled E-field



Grid 1 M3 86.85 V/m	Grid 2 M3 87.94 V/m	Grid 3 M3 86.36 V/m
Grid 4 M3 69.97 V/m	Grid 5 M3 70.97 V/m	Grid 6 M3 70.11 V/m
Grid 7 M3 87.44 V/m	Grid 8 M3 88.77 V/m	Grid 9 M3 86.79 V/m

Cursor:

Total = 88.77 V/m

E Category: M3

Location: 0, 30.5, 9.7 mm

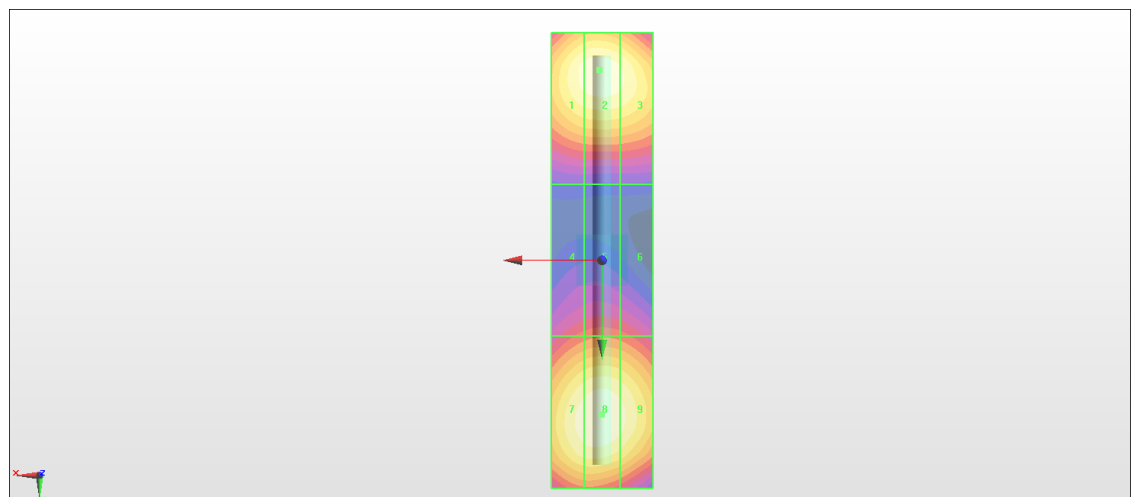

0 dB = 88.77 V/m = 38.97 dBV/m