



FCC RADIO TEST REPORT

FCC ID : PY7-23855M
Equipment : GSM/WCDMA/LTE Phone with BT, DTS/UNII
a/b/g/n/ac/ax, GPS, and NFC
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Jul. 01, 2020 and testing was started from Aug. 12, 2020 and completed on Aug. 19, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	6
1.4 Testing Location	6
1.5 Applicable Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	9
2.5 Frequency List of Low/Middle/High Channels	10
3 Conducted Test Result	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power and ERP/EIRP	12
3.3 Peak-to-Average Ratio	13
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	14
3.5 Conducted Band Edge	15
3.6 Conducted Spurious Emission	16
3.7 Frequency Stability	17
4 Radiated Test Items	18
4.1 Measuring Instruments.....	18
4.2 Test Setup	18
4.3 Test Result of Radiated Test.....	19
4.4 Field Strength of Spurious Radiation Measurement	20
5 List of Measuring Equipment.....	21
6 Uncertainty of Evaluation	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	



History of this test report

Report No.	Version	Description	Issued Date
FG042245-02A	01	Initial issue of report	Aug. 24, 2020

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power (GSM850)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (GSM1900) (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth (GSM850) (GSM1900)(WCDMA Band II) (WCDMA Band IV)	Pass	-
3.5	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement (GSM850) (GSM1900)(WCDMA Band II) (WCDMA Band IV)	Pass	-
3.6	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission (GSM850) (GSM1900)(WCDMA Band II) (WCDMA Band IV)	Pass	-
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (GSM850) (GSM1900)(WCDMA Band II) (WCDMA Band IV)	Pass	Under limit 20.21 dB at 9400.000 MHz

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Wii Chang

Report Producer: Yimin Ho

1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac/ax, FM Receiver, NFC, and GNSS.

Product Specification subjective to this standard	
Antenna Type	Loop Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	1.130	QV71000U3Z	Conducted Measurement
		QV7100C93Z	Radiated Spurious Emission
		QV71007J3Z	ERP/EIRP Test
		QV71001S3Z	

Accessory List	
AC Adapter	Model Name : UCH32
	S/N: 6218W30200215
Earphone	Model Name.: STH40D
	S/N : N/A
USB Cable	Model Name.: UCB24
	S/N : N/A

Note:

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GPRS class 8	GMSK	0.2075	0.0167 ppm	248KGXW
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.0582	0.0084 ppm	250KG7W
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.0417	0.0048 ppm	4M15F9W
Part 24	1850.2 ~1909.8	GSM1900 GPRS class 8	GMSK	0.2559	0.0122 ppm	243KGXW
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.1585	0.0149 ppm	248KG7W
Part 27	1712.4 ~ 1752.6	WCDMA Band IV RMC 12.2Kbps	BPSK	0.0378	0.0058 ppm	4M16F9W

1.4 Testing Location

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH03-HY
Test Engineer	Oscar Chi
Temperature	21~24 °C
Relative Humidity	51~55 %

Test Site	SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. 03CH15-HY
Test Engineer	Leo Lee, Mancy Chou and Bigshow Wang
Temperature	19.2~22.1 °C
Relative Humidity	60.2~72.5 %

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007



1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X Plane with Accessory for AWS Band, Y Plane with Accessory for Cellular Band and Z Plane with Accessory for PCS Band) were recorded in this report.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
GSM850	■ GPRS Class 8 Link	■ GPRS Class 8 Link
	■ EDGE Class 8 Link	■ EDGE Class 8 Link
GSM1900	■ GPRS Class 8 Link	■ GPRS Class 8 Link
	■ EDGE Class 8 Link	■ EDGE Class 8 Link
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

2.2 Connection Diagram of Test System

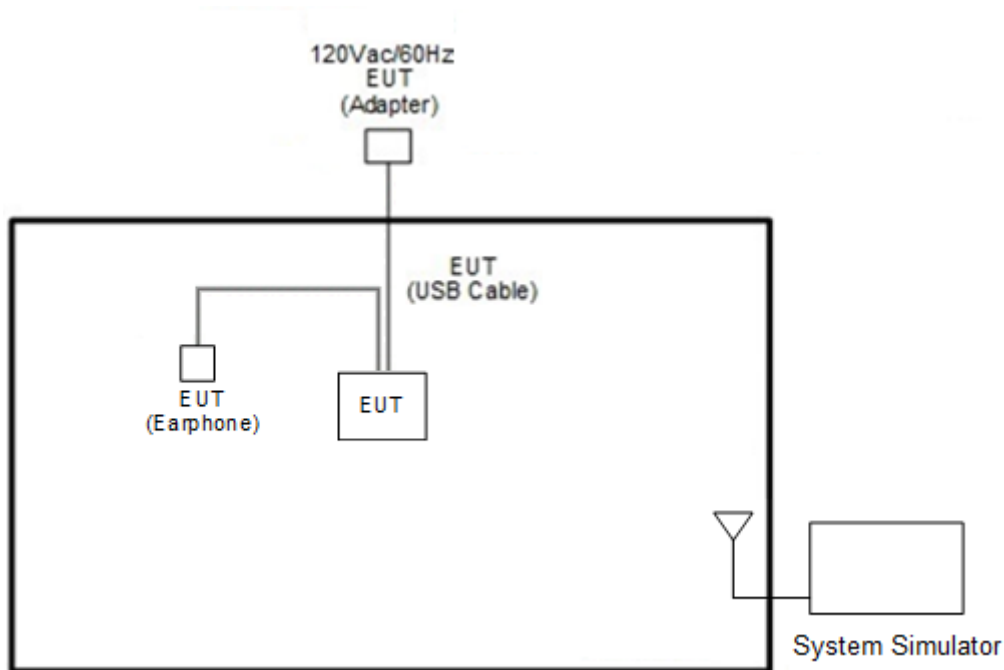

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6

3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

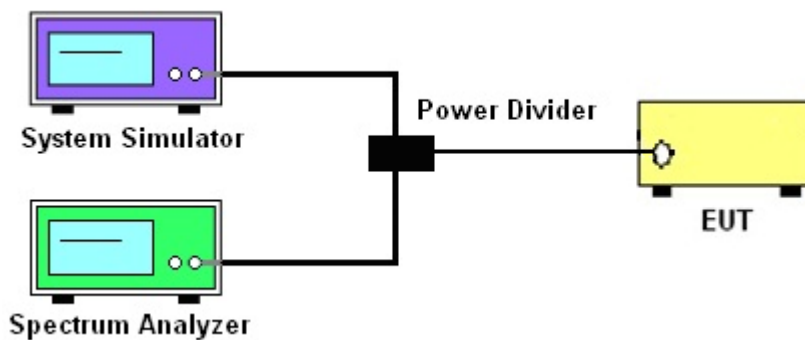

3.1.4 Frequency Stability



3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C steps up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


For radiated emissions below 30MHz

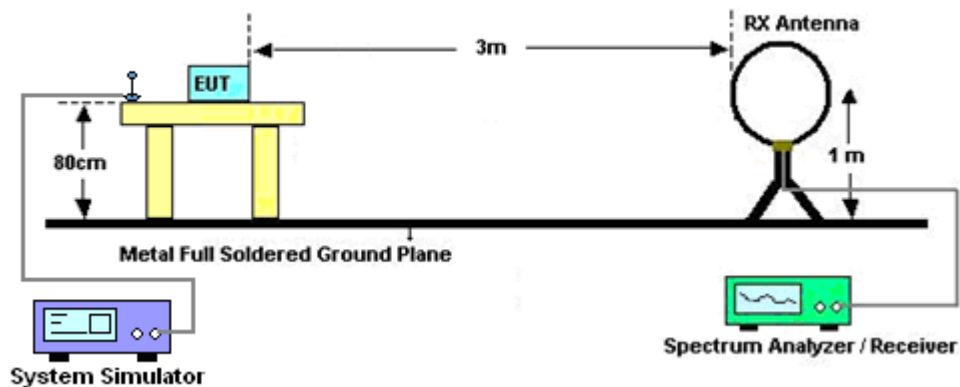


For radiated test from 30MHz to 1GHz

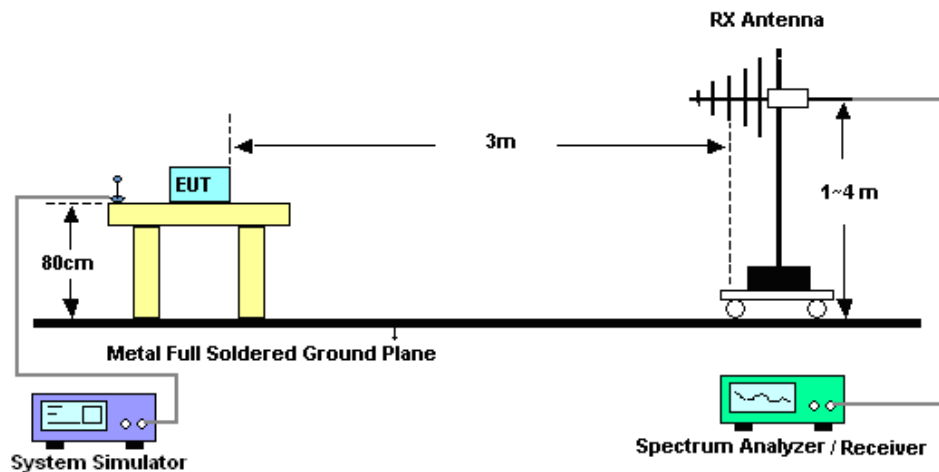

For radiated test from 1GHz to 18GHz

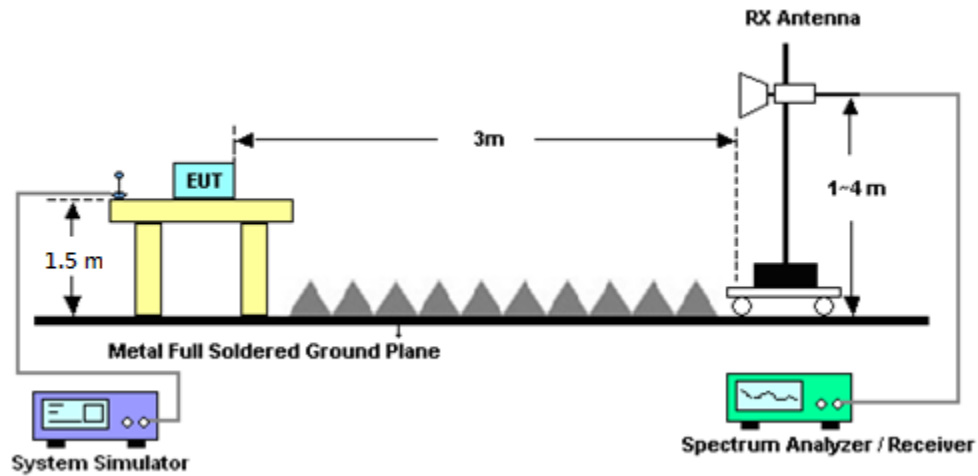

For radiated emissions above 18GHz

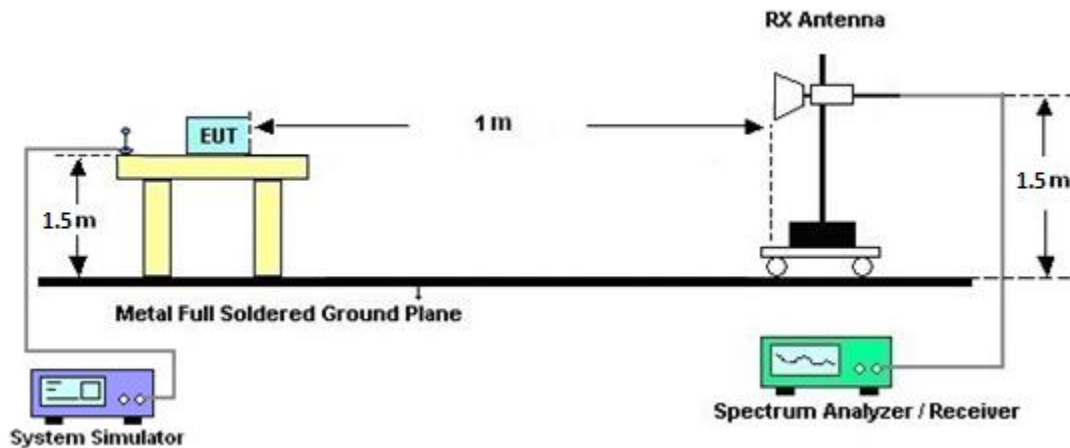

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Jan. 09, 2020	Aug. 12, 2020~ Aug. 18, 2020	Jan. 08, 2021	Radiation (03CH15-HY)
Bilog Antenna	TESEQ	CBL6111D&00 800N1D01N-0 6	41912&05	30MHz to 1GHz	Feb. 09, 2020	Aug. 12, 2020~ Aug. 18, 2020	Feb. 08, 2021	Radiation (03CH15-HY)
Amplifier	SONOMA	310N	363440	9kHz~1GHz	Dec. 27, 2019	Aug. 12, 2020~ Aug. 18, 2020	Dec. 26, 2020	Radiation (03CH15-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1620	1-18GHz	Oct. 28, 2019	Aug. 12, 2020~ Aug. 18, 2020	Oct. 27, 2020	Radiation (03CH15-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917058 4	18GHz- 40GHz	Dec. 10, 2019	Aug. 12, 2020~ Aug. 18, 2020	Dec. 09, 2020	Radiation (03CH15-HY)
Preamplifier	Jet-Power	JPA0118-55-3 03	1710001800 055006	1GHz~18GHz	May 07, 2020	Aug. 12, 2020~ Aug. 18, 2020	May 06, 2021	Radiation (03CH15-HY)
Preamplifier	Keysight	83017A	MY53270195	1GHz~26.5GHz	Aug. 23, 2019	Aug. 12, 2020~ Aug. 18, 2020	Aug. 22, 2020	Radiation (03CH15-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz ~ 40GHz	Dec. 13, 2019	Aug. 12, 2020~ Aug. 18, 2020	Dec. 12, 2020	Radiation (03CH15-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY54130085	20MHz~8.4GHz	Nov. 01, 2019	Aug. 12, 2020~ Aug. 18, 2020	Oct. 31, 2020	Radiation (03CH15-HY)
Spectrum Analyzer	Agilent	E4446A	MY50180136	3Hz~44GHz	May 04, 2020	Aug. 12, 2020~ Aug. 18, 2020	May 03, 2021	Radiation (03CH15-HY)
Signal Generator	Rohde & Schwarz	SMB100A	101107	100kHz~40GHz	Aug. 27, 2019	Aug. 12, 2020~ Aug. 18, 2020	Aug. 26, 2020	Radiation (03CH12-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Aug. 12, 2020~ Aug. 18, 2020	N/A	Radiation (03CH15-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Aug. 12, 2020~ Aug. 18, 2020	N/A	Radiation (03CH15-HY)
Software	Audix	E3 6.2009-8-24 (k5)	RK-000451	N/A	N/A	Aug. 12, 2020~ Aug. 18, 2020	N/A	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY36980/4	30M-18G	Apr. 14, 2020	Aug. 12, 2020~ Aug. 18, 2020	Apr. 13, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9838/4PE	30M-18G	Apr. 14, 2020	Aug. 12, 2020~ Aug. 18, 2020	Apr. 13, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY37710/4	30M-18G	Apr. 17, 2020	Aug. 12, 2020~ Aug. 18, 2020	Apr. 16, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30MHz-40GHz	Feb. 25, 2020	Aug. 12, 2020~ Aug. 18, 2020	Feb. 24, 2021	Radiation (03CH15-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30MHz-40GHz	Feb. 25, 2020	Aug. 12, 2020~ Aug. 18, 2020	Feb. 24, 2021	Radiation (03CH15-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WLK4-1000-1530-8000-40SS	SN4	1.53G Low Pass	Jul. 03, 2020	Aug. 12, 2020~ Aug. 18, 2020	Jul. 02, 2021	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-1080-1200-15000-60ST	SN5	1.2GHz High Pass Filter	Jul. 01, 2020	Aug. 12, 2020~ Aug. 18, 2020	Jun. 30, 2021	Radiation (03CH15-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN4	3GHz High Pass Filter	Sep. 17, 2019	Aug. 12, 2020~ Aug. 18, 2020	Sep. 16, 2020	Radiation (03CH15-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN6	6.75GHz High Pass Filter	Jul. 03, 2020	Aug. 12, 2020~ Aug. 18, 2020	Jul. 02, 2021	Radiation (03CH15-HY)
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 26, 2020	Aug. 18, 2020~ Aug. 19, 2020	Mar. 25, 2021	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 04, 2019	Aug. 18, 2020~ Aug. 19, 2020	Sep. 03, 2020	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30℃ ~70℃	Nov. 26, 2019	Aug. 18, 2020~ Aug. 19, 2020	Nov. 25, 2020	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 09, 2019	Aug. 18, 2020~ Aug. 19, 2020	Oct. 08, 2020	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 23, 2019	Aug. 18, 2020~ Aug. 19, 2020	Aug. 22, 2020	Conducted (TH03-HY)
Power Divider	Warison	WCOU-0.4-26.5S-20	#A	N/A	Nov. 06, 2019	Aug. 18, 2020~ Aug. 19, 2020	Nov. 05, 2020	Conducted (TH03-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.06
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.63
--	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.16
--	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	32.09	32.14	32.00	27.39	27.79	27.61
GPRS class 8	32.13	32.22	32.07	27.45	27.88	27.66
GPRS class 10	30.23	30.16	29.84	24.50	24.85	24.69
GPRS class 11	28.15	28.08	27.80	22.62	22.74	22.60
GPRS class 12	27.05	26.50	26.20	21.62	21.73	21.56
EGPRS class 8	26.70	26.68	26.62	25.76	25.80	25.61
EGPRS class 10	24.93	25.09	25.13	24.03	24.06	23.99
EGPRS class 11	22.88	23.21	23.16	22.01	22.14	21.94
EGPRS class 12	22.05	22.14	22.04	20.74	20.99	20.85

Conducted Power (*Unit: dBm)			
Band	WCDMA Band II		
Channel	9262	9400	9538
Frequency	1852.4	1880	1907.6
RMC 12.2K	19.97	19.99	20.00
HSDPA Subtest-1	18.97	18.99	19.00
HSDPA Subtest-2	18.96	18.99	19.01
HSDPA Subtest-3	18.44	18.51	18.51
HSDPA Subtest-4	18.46	18.49	18.51
HSUPA Subtest-1	18.95	18.99	19.03
HSUPA Subtest-2	16.95	17.01	17.06
HSUPA Subtest-3	17.96	18.01	18.01
HSUPA Subtest-4	16.92	17.01	17.04
HSUPA Subtest-5	18.90	19.00	19.00

Conducted Power (*Unit: dBm)			
Band	WCDMA Band IV		
Channel	1312	1413	1513
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	19.93	19.96	19.97
HSDPA Subtest-1	18.92	18.95	19.02
HSDPA Subtest-2	18.94	18.99	18.72
HSDPA Subtest-3	18.43	18.46	18.55
HSDPA Subtest-4	18.46	18.50	18.54
HSUPA Subtest-1	18.96	18.95	18.99
HSUPA Subtest-2	16.93	16.92	16.97
HSUPA Subtest-3	17.91	17.92	17.98
HSUPA Subtest-4	16.97	16.97	17.02
HSUPA Subtest-5	18.90	19.00	19.00









A2. GSM

Peak-to-Average Ratio







Mode	GSM850		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.28	3.08	PASS
Middle CH	0.28	3.16	
Highest CH	0.28	2.96	

Mode	GSM1900		Limit: 13dB
Mod.	GPRS class 8	EDGE class 8	Result
Lowest CH	0.32	3.32	PASS
Middle CH	0.28	3.40	
Highest CH	0.32	3.36	

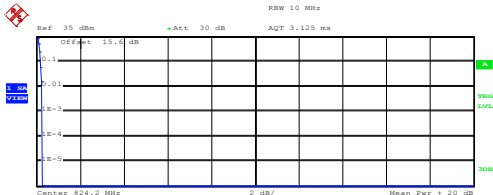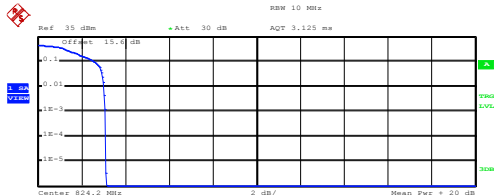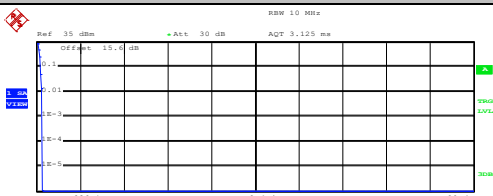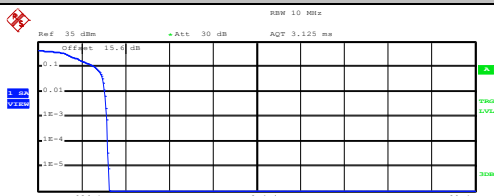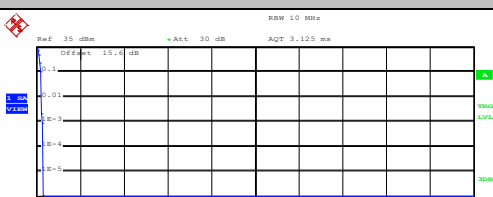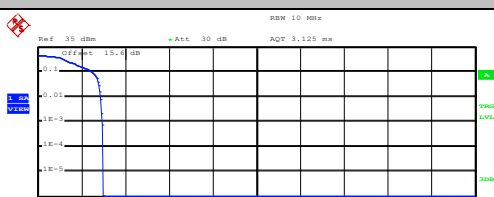

GSM850 (GPRS class 8)		GSM850 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 824.2 MHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 31.82 dBm Peak: 32.08 dBm Crest: 0.25 dB 10 %: 0.20 dB 1 %: 0.24 dB .1 %: 0.28 dB .01 %: 0.28 dB Date: 18.AUG.2020 15:53:52		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 824.2 MHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 25.86 dBm Peak: 28.97 dBm Crest: 3.11 dB 10 %: 2.60 dB 1 %: 3.00 dB .1 %: 3.08 dB .01 %: 3.12 dB Date: 18.AUG.2020 16:38:21	
Middle Channel		Middle Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 836.4 MHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 32.02 dBm Peak: 32.29 dBm Crest: 0.27 dB 10 %: 0.20 dB 1 %: 0.24 dB .1 %: 0.28 dB .01 %: 0.28 dB Date: 18.AUG.2020 15:54:18		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 836.4 MHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 26.01 dBm Peak: 29.26 dBm Crest: 3.25 dB 10 %: 2.60 dB 1 %: 3.04 dB .1 %: 3.16 dB .01 %: 3.20 dB Date: 18.AUG.2020 16:38:50	
Highest Channel		Highest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 848.8 MHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 32.19 dBm Peak: 32.50 dBm Crest: 0.31 dB 10 %: 0.20 dB 1 %: 0.24 dB .1 %: 0.28 dB .01 %: 0.32 dB Date: 18.AUG.2020 15:54:43		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 848.8 MHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 26.06 dBm Peak: 29.05 dBm Crest: 2.99 dB 10 %: 2.48 dB 1 %: 2.88 dB .1 %: 2.96 dB .01 %: 3.00 dB Date: 18.AUG.2020 16:39:15	

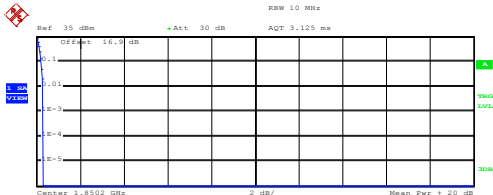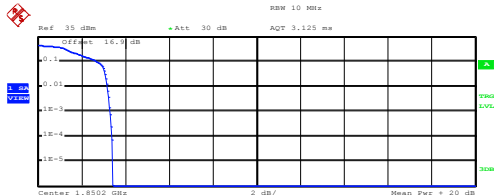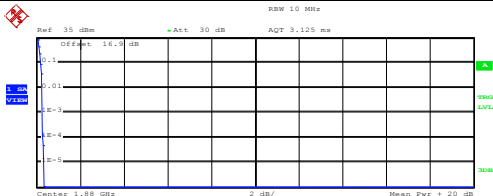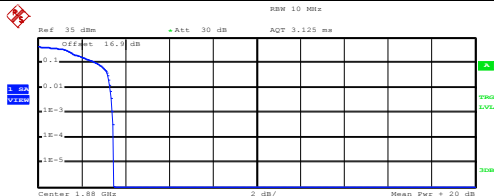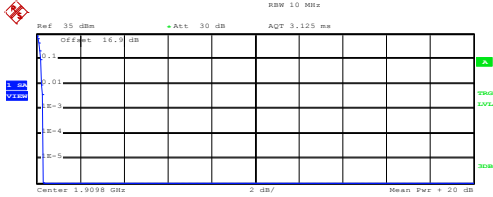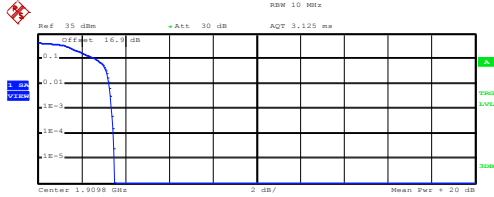



GSM1900 (GPRS class 8)		GSM1900 (EDGE class 8)	
Lowest Channel		Lowest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.8500 GHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 30.00 dBm Peak: 30.32 dBm Crest: 0.32 dB 10 %: 0.20 dB 1 %: 0.32 dB .1 %: 0.32 dB .01 %: 0.32 dB Date: 18.AUG.2020 17:17:45		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.8500 GHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 25.71 dBm Peak: 29.12 dBm Crest: 3.41 dB 10 %: 2.72 dB 1 %: 3.16 dB .1 %: 3.32 dB .01 %: 3.40 dB Date: 18.AUG.2020 19:47:57	
Middle Channel		Middle Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.85 GHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 30.54 dBm Peak: 30.88 dBm Crest: 0.34 dB 10 %: 0.20 dB 1 %: 0.28 dB .1 %: 0.28 dB .01 %: 0.28 dB Date: 18.AUG.2020 17:18:06		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.85 GHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 25.36 dBm Peak: 28.83 dBm Crest: 3.47 dB 10 %: 2.72 dB 1 %: 3.32 dB .1 %: 3.40 dB .01 %: 3.48 dB Date: 18.AUG.2020 19:48:20	
Highest Channel		Highest Channel	
 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.8538 GHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 30.29 dBm Peak: 30.60 dBm Crest: 0.31 dB 10 %: 0.20 dB 1 %: 0.24 dB .1 %: 0.32 dB .01 %: 0.32 dB Date: 18.AUG.2020 17:18:51		 Ref: 35 dBm Att: 30 dB AGT: 3.125 ms Center: 1.8538 GHz 2 dB/ Mean: Pwr + 20 dB Trace 1 Mean: 25.42 dBm Peak: 28.90 dBm Crest: 3.48 dB 10 %: 2.68 dB 1 %: 3.24 dB .1 %: 3.36 dB .01 %: 3.44 dB Date: 18.AUG.2020 19:48:59	

**26dB Bandwidth**

Mode	GSM850: 26dB BW (MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.315	0.309
Middle CH	0.308	0.303
Highest CH	0.316	0.309

Mode	GSM1900: 26dB BW (MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.310	0.303
Middle CH	0.310	0.298
Highest CH	0.306	0.300

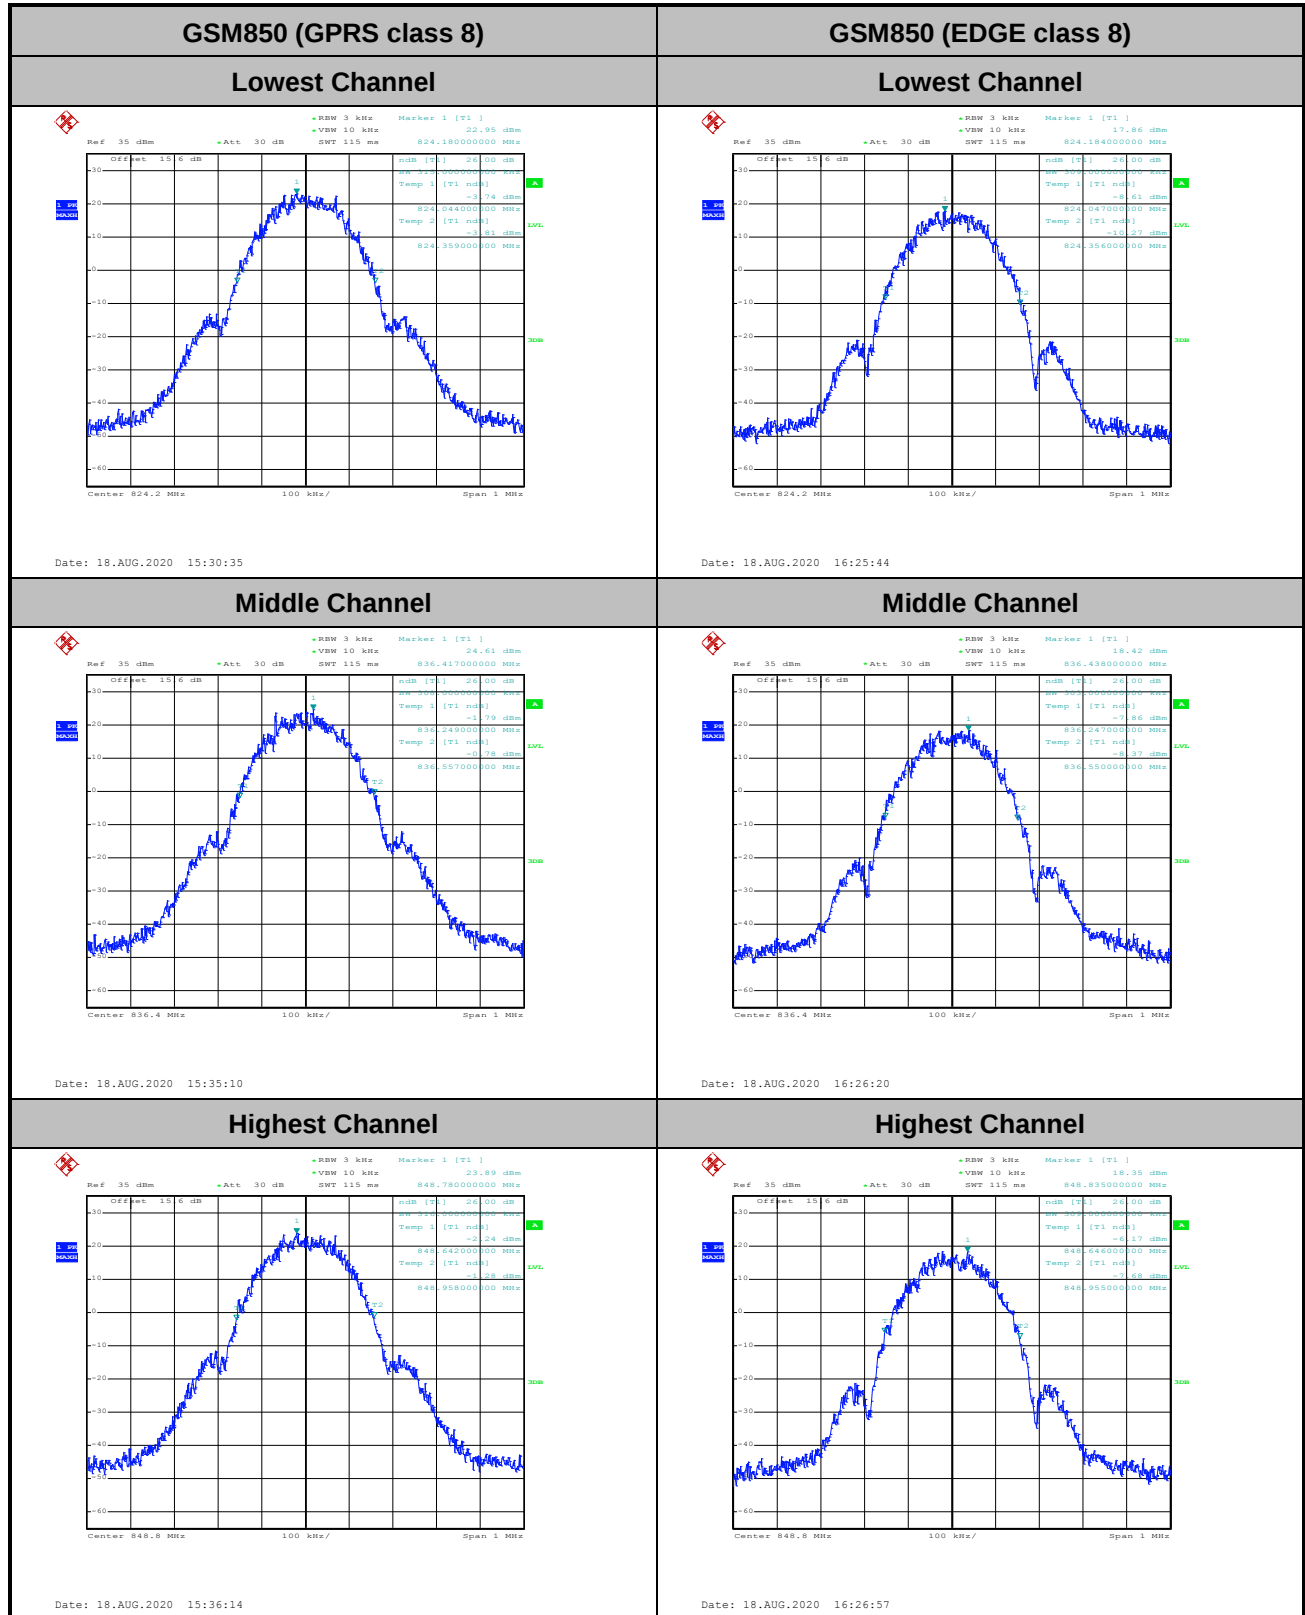


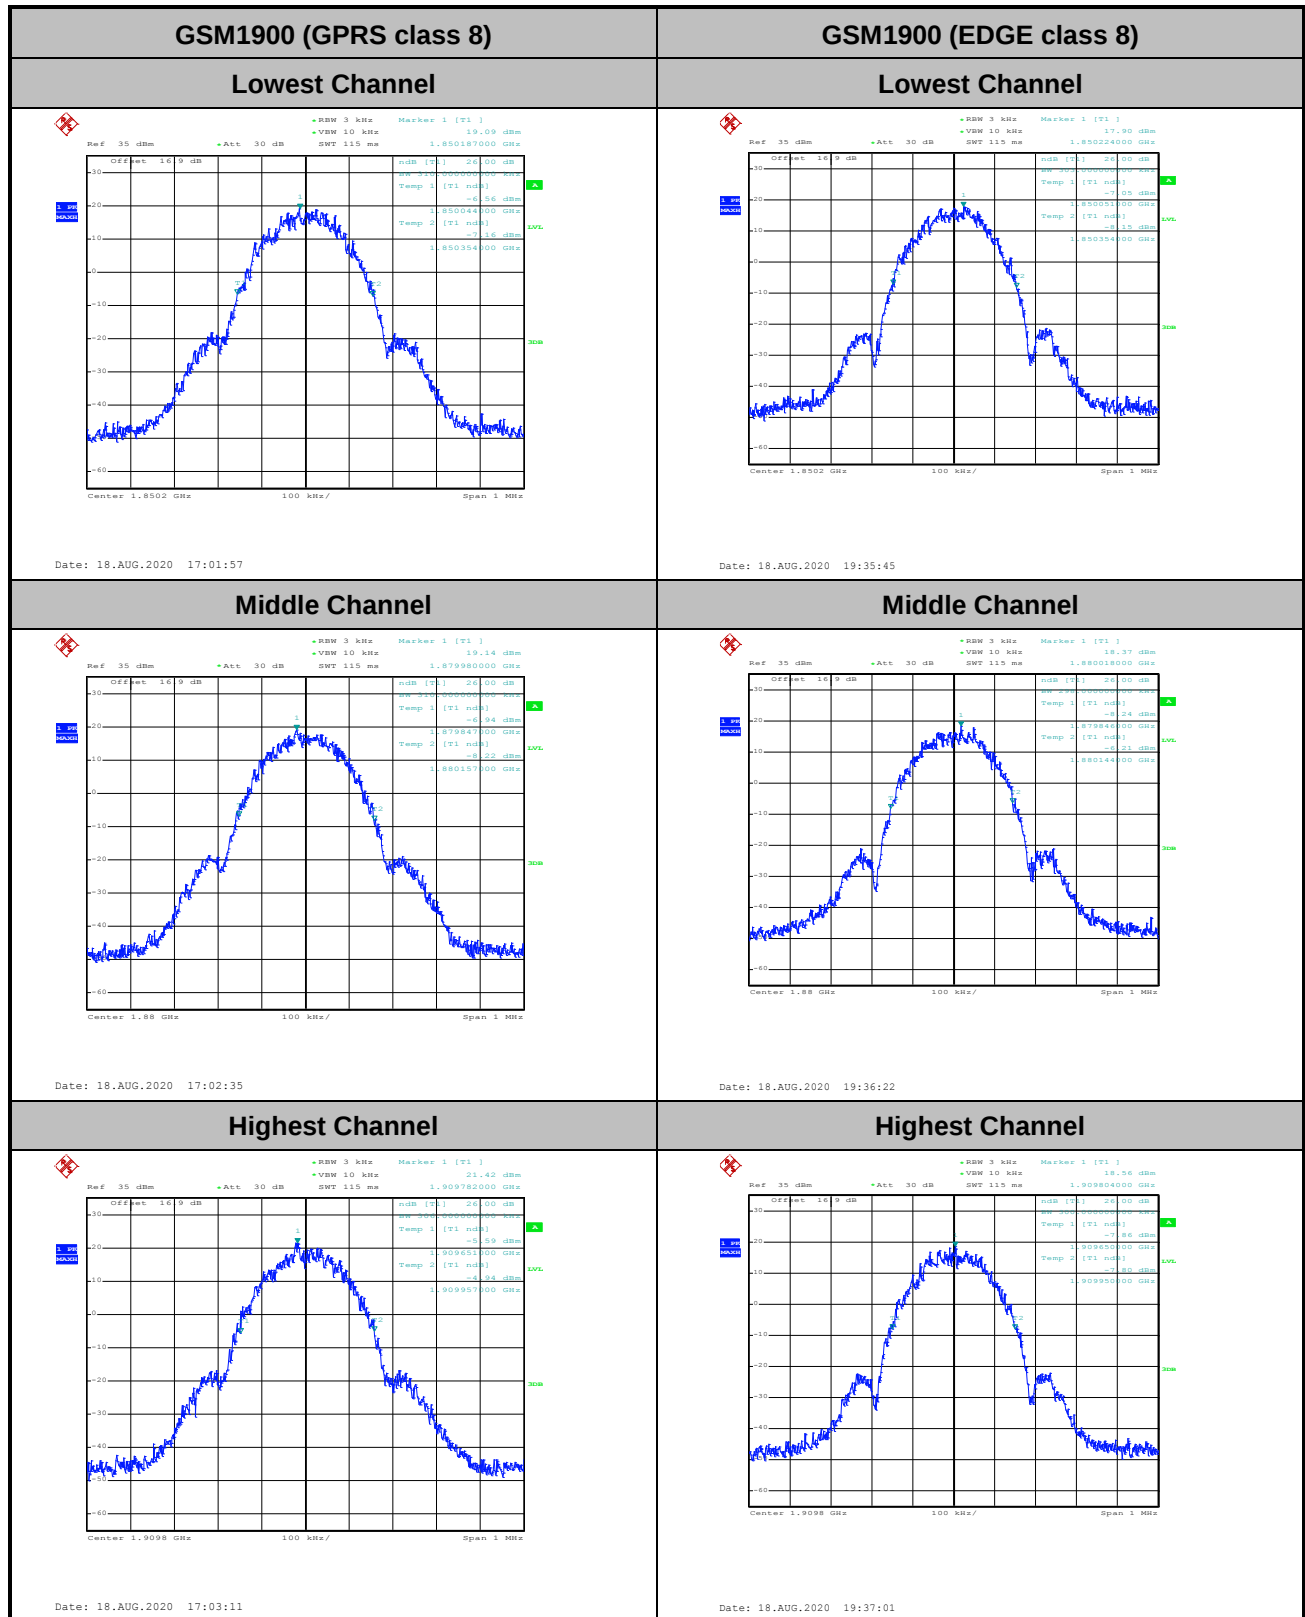



**Occupied Bandwidth**

Mode	GSM850: 99% BW (MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.243	0.245
Middle CH	0.248	0.250
Highest CH	0.244	0.247


Mode	GSM1900: 99% BW (MHz)	
Mod.	GPRS class 8	EDGE class 8
Lowest CH	0.243	0.248
Middle CH	0.239	0.242
Highest CH	0.242	0.246

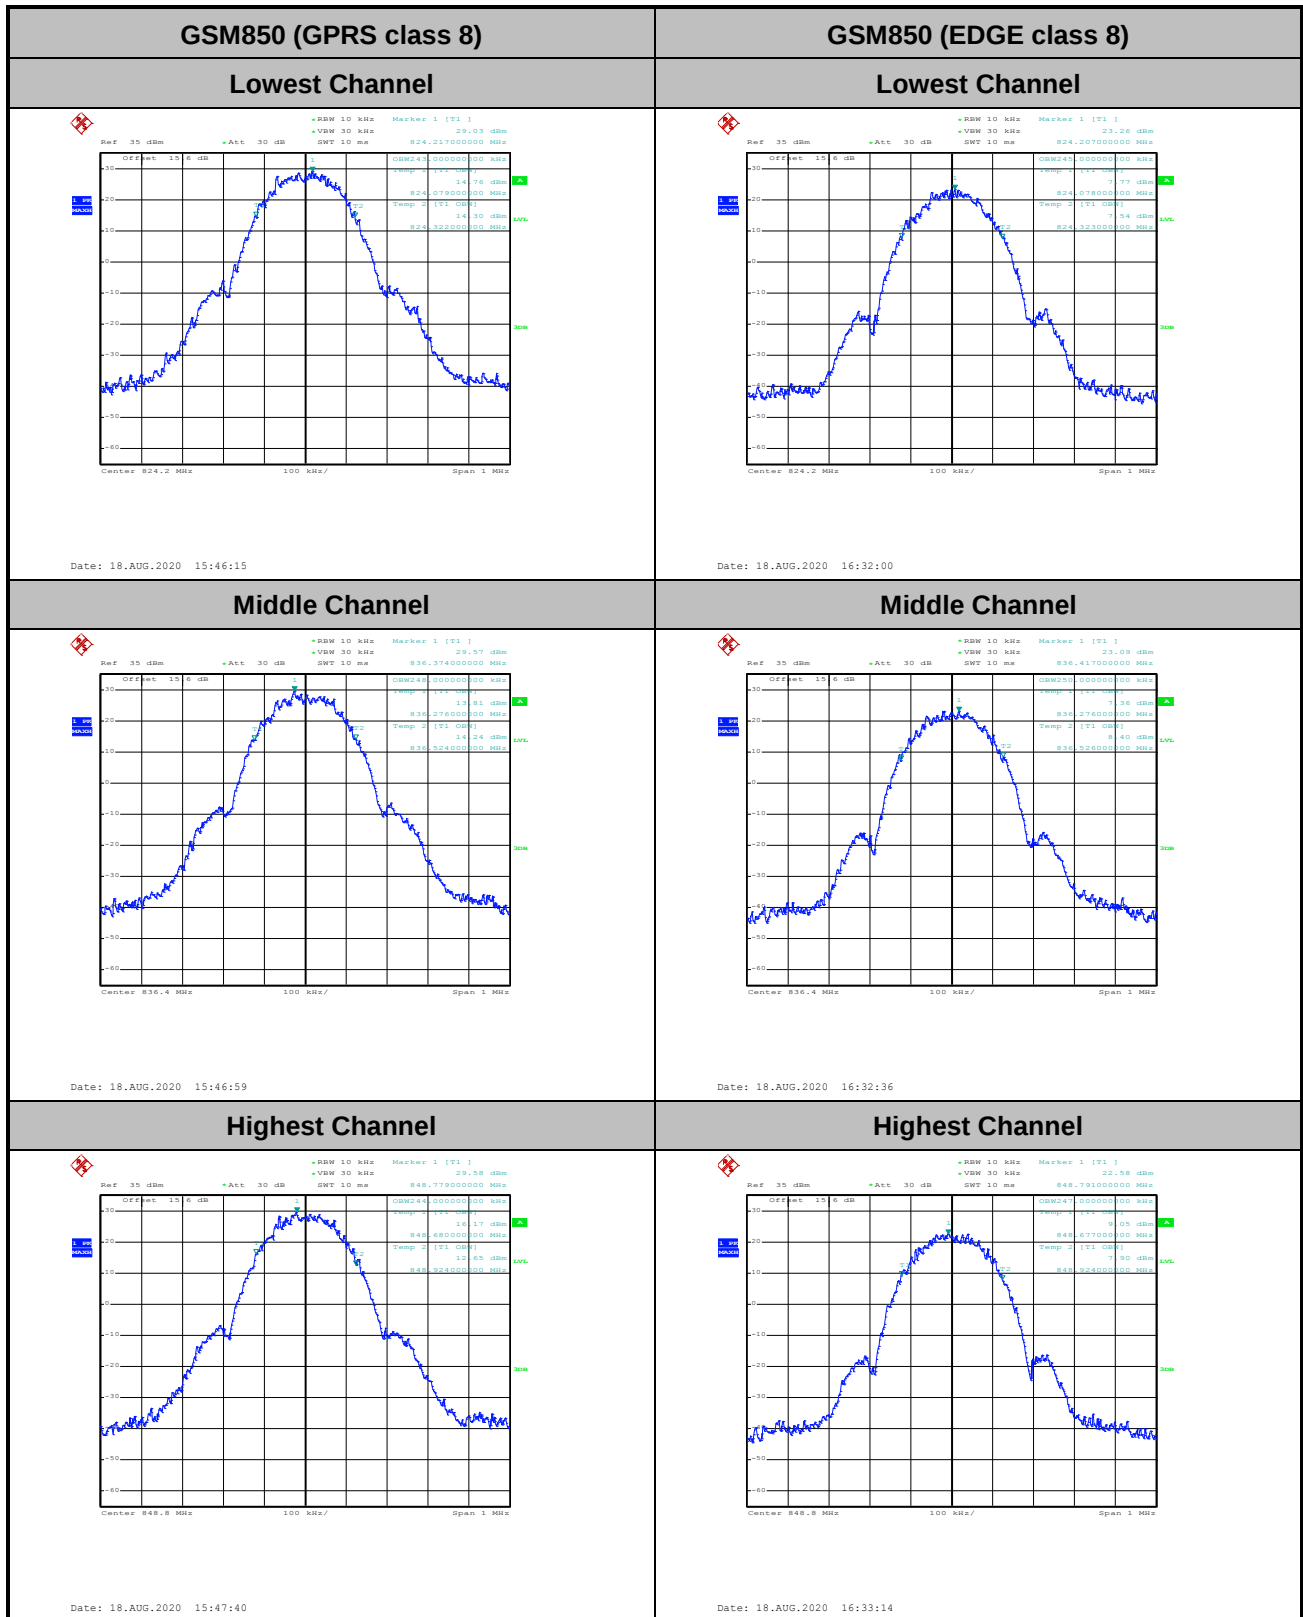

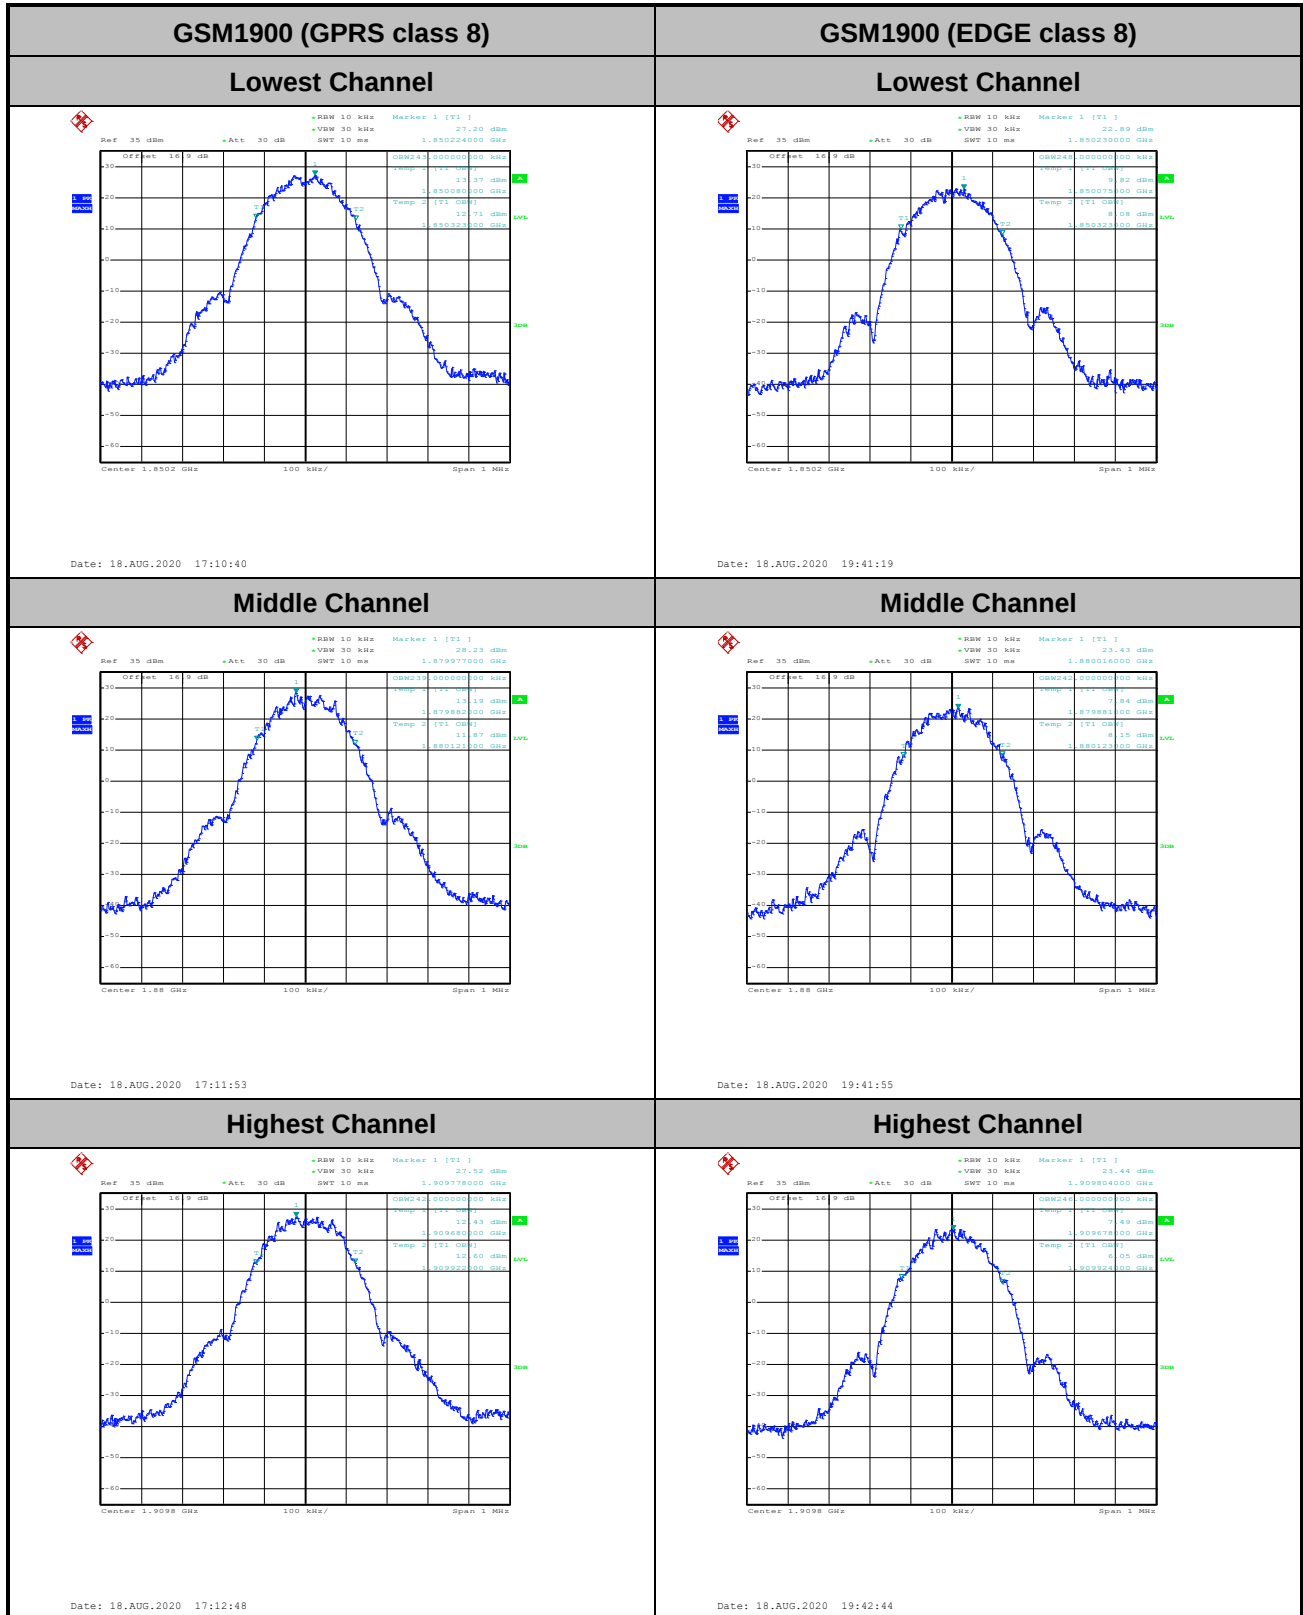

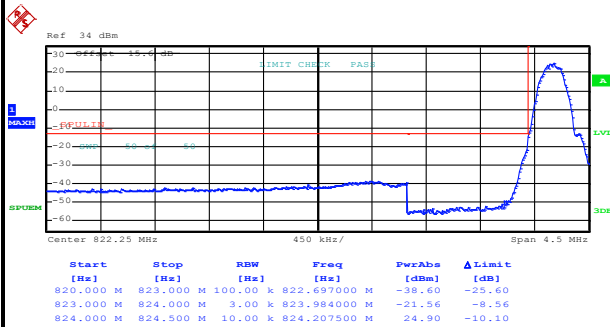**Conducted Band Edge****GSM850 (GPRS class 8)****Lowest Band Edge**

Date: 18.AUG.2020 15:49:26

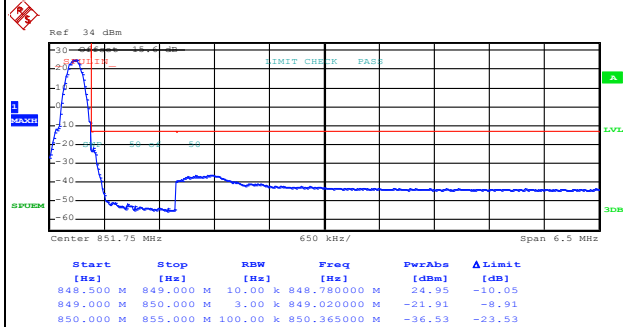
Highest Band Edge

Date: 18.AUG.2020 15:51:24




GSM850 (EDGE class 8)

Lowest Band Edge

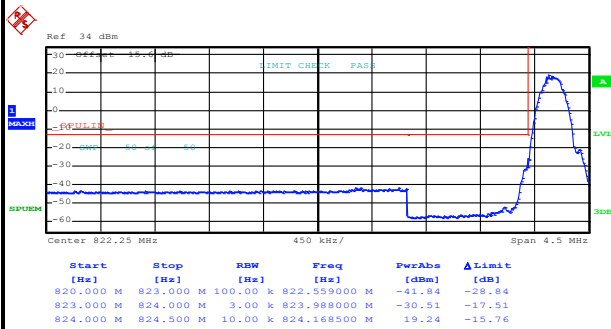

Date: 18.AUG.2020 16:35:28

Highest Band Edge

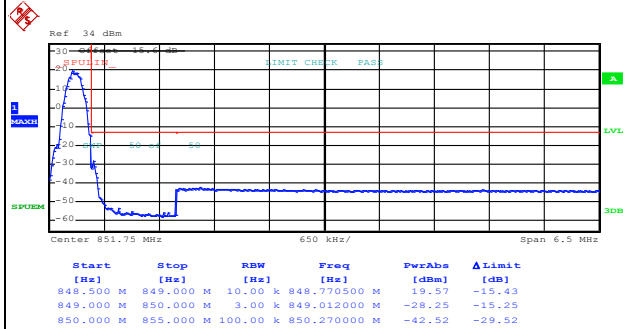


Date: 18.AUG.2020 16:37:23




GSM1900 (GPRS class 8)

Lowest Band Edge

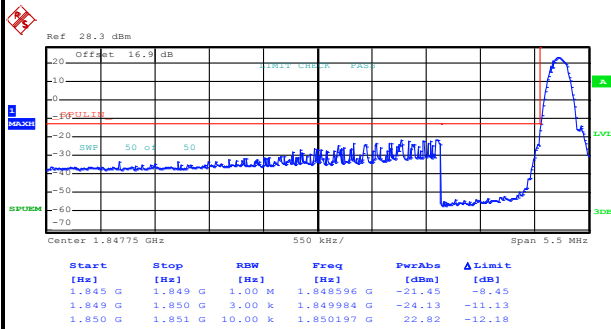

Date: 18.AUG.2020 17:15:07

Highest Band Edge

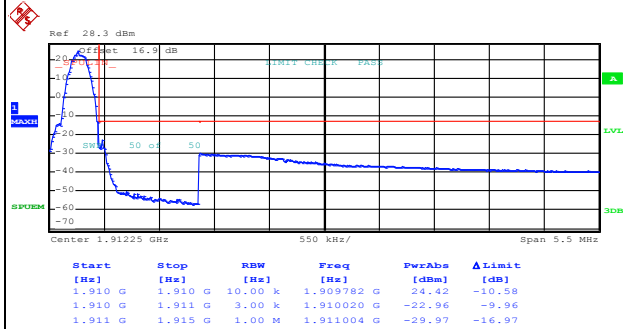


Date: 18.AUG.2020 17:16:48




GSM1900 (EDGE class 8)

Lowest Band Edge

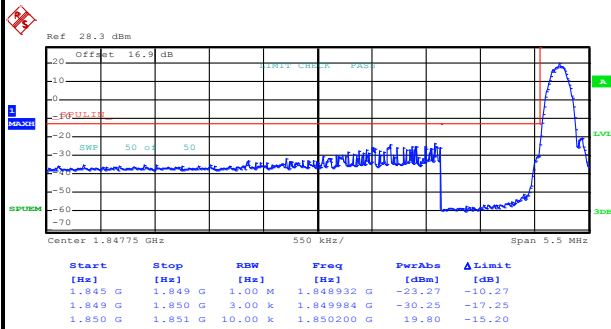







Date: 18.AUG.2020 19:44:28

Highest Band Edge

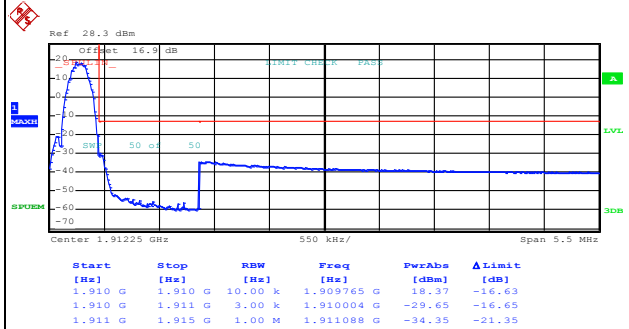


Date: 18.AUG.2020 19:47:02

**Conducted Spurious Emission**

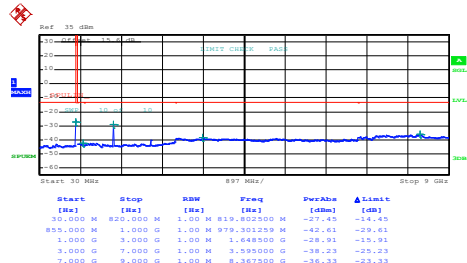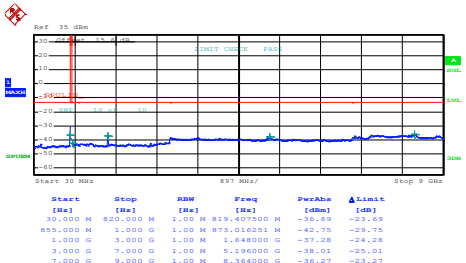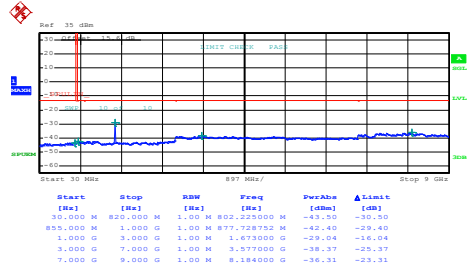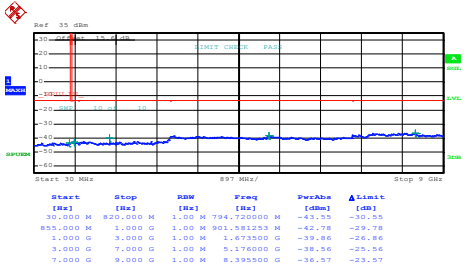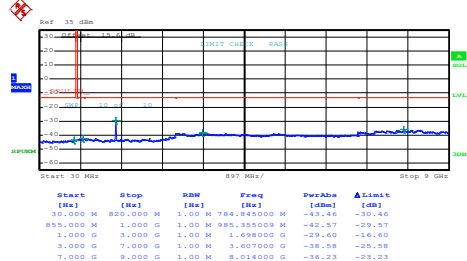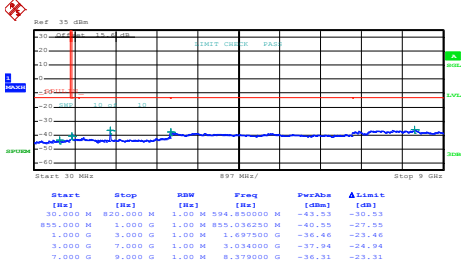GSM850 (GPRS class 8)		GSM850 (EDGE class 8)																																																																																					
Lowest Channel		Lowest Channel																																																																																					
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>Limit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>819.802500 M</td><td>-27.45</td><td>-14.45</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>979.301259 M</td><td>-42.61</td><td>-29.61</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.648000 G</td><td>-28.91</td><td>-15.91</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.595000 G</td><td>-38.23</td><td>-25.23</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.367500 G</td><td>-36.33</td><td>-23.33</td></tr></table> Date: 18.AUG.2020 15:40:10		Start	Stop	RBW	Freq	PwrAve	Limit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	819.802500 M	-27.45	-14.45	855.000 M	1.000 G	1.00 M	979.301259 M	-42.61	-29.61	1.000 G	3.000 G	1.00 M	1.648000 G	-28.91	-15.91	3.000 G	7.000 G	1.00 M	3.595000 G	-38.23	-25.23	7.000 G	9.000 G	1.00 M	8.367500 G	-36.33	-23.33	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>Limit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>819.407500 M</td><td>-36.69</td><td>-23.69</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>873.016251 M</td><td>-42.75</td><td>-29.75</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.648000 G</td><td>-37.28</td><td>-24.28</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>5.196000 G</td><td>-38.01</td><td>-25.01</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.364000 G</td><td>-36.27</td><td>-23.27</td></tr></table> Date: 18.AUG.2020 16:28:11		Start	Stop	RBW	Freq	PwrAve	Limit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	819.407500 M	-36.69	-23.69	855.000 M	1.000 G	1.00 M	873.016251 M	-42.75	-29.75	1.000 G	3.000 G	1.00 M	1.648000 G	-37.28	-24.28	3.000 G	7.000 G	1.00 M	5.196000 G	-38.01	-25.01	7.000 G	9.000 G	1.00 M	8.364000 G	-36.27	-23.27
Start	Stop	RBW	Freq	PwrAve	Limit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	819.802500 M	-27.45	-14.45																																																																																		
855.000 M	1.000 G	1.00 M	979.301259 M	-42.61	-29.61																																																																																		
1.000 G	3.000 G	1.00 M	1.648000 G	-28.91	-15.91																																																																																		
3.000 G	7.000 G	1.00 M	3.595000 G	-38.23	-25.23																																																																																		
7.000 G	9.000 G	1.00 M	8.367500 G	-36.33	-23.33																																																																																		
Start	Stop	RBW	Freq	PwrAve	Limit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	819.407500 M	-36.69	-23.69																																																																																		
855.000 M	1.000 G	1.00 M	873.016251 M	-42.75	-29.75																																																																																		
1.000 G	3.000 G	1.00 M	1.648000 G	-37.28	-24.28																																																																																		
3.000 G	7.000 G	1.00 M	5.196000 G	-38.01	-25.01																																																																																		
7.000 G	9.000 G	1.00 M	8.364000 G	-36.27	-23.27																																																																																		
Middle Channel		Middle Channel																																																																																					
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>Limit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>802.225000 M</td><td>-43.50</td><td>-30.50</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>877.728752 M</td><td>-42.40</td><td>-29.40</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.673000 G</td><td>-29.04</td><td>-16.04</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.597000 G</td><td>-38.97</td><td>-25.97</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.184000 G</td><td>-36.31</td><td>-23.31</td></tr></table> Date: 18.AUG.2020 15:41:20		Start	Stop	RBW	Freq	PwrAve	Limit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	802.225000 M	-43.50	-30.50	855.000 M	1.000 G	1.00 M	877.728752 M	-42.40	-29.40	1.000 G	3.000 G	1.00 M	1.673000 G	-29.04	-16.04	3.000 G	7.000 G	1.00 M	3.597000 G	-38.97	-25.97	7.000 G	9.000 G	1.00 M	8.184000 G	-36.31	-23.31	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>Limit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>794.720000 M</td><td>-43.55</td><td>-30.55</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>901.561253 M</td><td>-42.78</td><td>-29.78</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.673500 G</td><td>-39.86</td><td>-26.86</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.597000 G</td><td>-38.96</td><td>-25.96</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.355500 G</td><td>-36.57</td><td>-23.57</td></tr></table> Date: 18.AUG.2020 16:29:40		Start	Stop	RBW	Freq	PwrAve	Limit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	794.720000 M	-43.55	-30.55	855.000 M	1.000 G	1.00 M	901.561253 M	-42.78	-29.78	1.000 G	3.000 G	1.00 M	1.673500 G	-39.86	-26.86	3.000 G	7.000 G	1.00 M	3.597000 G	-38.96	-25.96	7.000 G	9.000 G	1.00 M	8.355500 G	-36.57	-23.57
Start	Stop	RBW	Freq	PwrAve	Limit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	802.225000 M	-43.50	-30.50																																																																																		
855.000 M	1.000 G	1.00 M	877.728752 M	-42.40	-29.40																																																																																		
1.000 G	3.000 G	1.00 M	1.673000 G	-29.04	-16.04																																																																																		
3.000 G	7.000 G	1.00 M	3.597000 G	-38.97	-25.97																																																																																		
7.000 G	9.000 G	1.00 M	8.184000 G	-36.31	-23.31																																																																																		
Start	Stop	RBW	Freq	PwrAve	Limit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	794.720000 M	-43.55	-30.55																																																																																		
855.000 M	1.000 G	1.00 M	901.561253 M	-42.78	-29.78																																																																																		
1.000 G	3.000 G	1.00 M	1.673500 G	-39.86	-26.86																																																																																		
3.000 G	7.000 G	1.00 M	3.597000 G	-38.96	-25.96																																																																																		
7.000 G	9.000 G	1.00 M	8.355500 G	-36.57	-23.57																																																																																		
Highest Channel		Highest Channel																																																																																					
 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>Limit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>784.845000 M</td><td>-43.46</td><td>-30.46</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>985.355009 M</td><td>-42.57</td><td>-29.57</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.698000 G</td><td>-29.60</td><td>-16.60</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.607000 G</td><td>-38.58</td><td>-25.58</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.054000 G</td><td>-36.23</td><td>-23.23</td></tr></table> Date: 18.AUG.2020 15:44:01		Start	Stop	RBW	Freq	PwrAve	Limit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	784.845000 M	-43.46	-30.46	855.000 M	1.000 G	1.00 M	985.355009 M	-42.57	-29.57	1.000 G	3.000 G	1.00 M	1.698000 G	-29.60	-16.60	3.000 G	7.000 G	1.00 M	3.607000 G	-38.58	-25.58	7.000 G	9.000 G	1.00 M	8.054000 G	-36.23	-23.23	 <table><tr><th>Start</th><th>Stop</th><th>RBW</th><th>Freq</th><th>PwrAve</th><th>Limit</th></tr><tr><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[Hz]</th><th>[dBm]</th><th>[dB]</th></tr><tr><td>30.000 M</td><td>820.000 M</td><td>1.00 M</td><td>594.850000 M</td><td>-43.53</td><td>-30.53</td></tr><tr><td>855.000 M</td><td>1.000 G</td><td>1.00 M</td><td>855.036250 M</td><td>-40.55</td><td>-27.55</td></tr><tr><td>1.000 G</td><td>3.000 G</td><td>1.00 M</td><td>1.697500 G</td><td>-36.46</td><td>-23.46</td></tr><tr><td>3.000 G</td><td>7.000 G</td><td>1.00 M</td><td>3.034000 G</td><td>-37.94</td><td>-24.94</td></tr><tr><td>7.000 G</td><td>9.000 G</td><td>1.00 M</td><td>8.379000 G</td><td>-36.31</td><td>-23.31</td></tr></table> Date: 18.AUG.2020 16:30:34		Start	Stop	RBW	Freq	PwrAve	Limit	[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]	30.000 M	820.000 M	1.00 M	594.850000 M	-43.53	-30.53	855.000 M	1.000 G	1.00 M	855.036250 M	-40.55	-27.55	1.000 G	3.000 G	1.00 M	1.697500 G	-36.46	-23.46	3.000 G	7.000 G	1.00 M	3.034000 G	-37.94	-24.94	7.000 G	9.000 G	1.00 M	8.379000 G	-36.31	-23.31
Start	Stop	RBW	Freq	PwrAve	Limit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	784.845000 M	-43.46	-30.46																																																																																		
855.000 M	1.000 G	1.00 M	985.355009 M	-42.57	-29.57																																																																																		
1.000 G	3.000 G	1.00 M	1.698000 G	-29.60	-16.60																																																																																		
3.000 G	7.000 G	1.00 M	3.607000 G	-38.58	-25.58																																																																																		
7.000 G	9.000 G	1.00 M	8.054000 G	-36.23	-23.23																																																																																		
Start	Stop	RBW	Freq	PwrAve	Limit																																																																																		
[Hz]	[Hz]	[Hz]	[Hz]	[dBm]	[dB]																																																																																		
30.000 M	820.000 M	1.00 M	594.850000 M	-43.53	-30.53																																																																																		
855.000 M	1.000 G	1.00 M	855.036250 M	-40.55	-27.55																																																																																		
1.000 G	3.000 G	1.00 M	1.697500 G	-36.46	-23.46																																																																																		
3.000 G	7.000 G	1.00 M	3.034000 G	-37.94	-24.94																																																																																		
7.000 G	9.000 G	1.00 M	8.379000 G	-36.31	-23.31																																																																																		

GSM1900 (GPRS class 8)


Lowest Channel

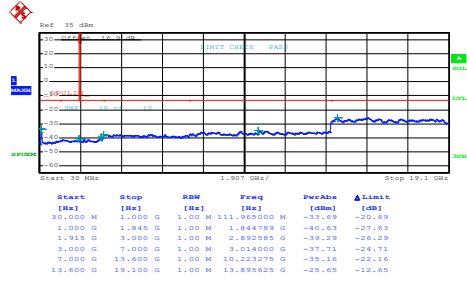

Date: 18.AUG.2020 17:07:29


GSM1900 (EDGE class 8)

Lowest Channel

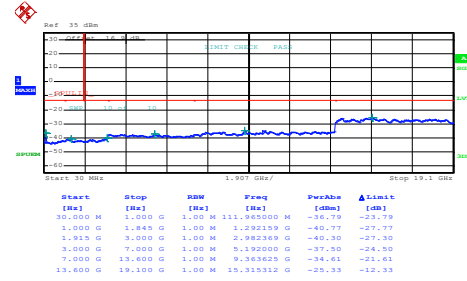


Date: 18.AUG.2020 19:38:31

Middle Channel

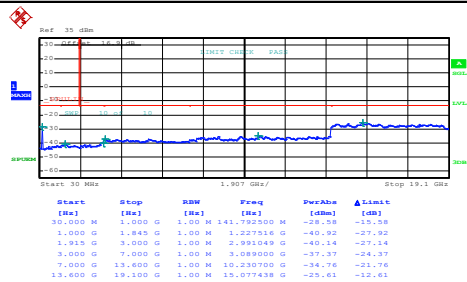


Date: 18.AUG.2020 17:08:33

Middle Channel

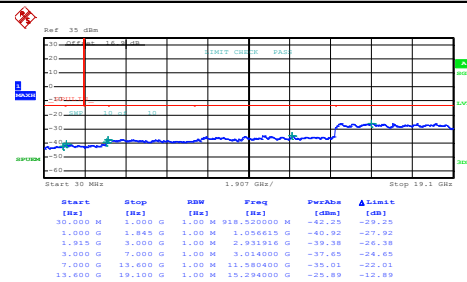


Date: 18.AUG.2020 19:39:27

Highest Channel

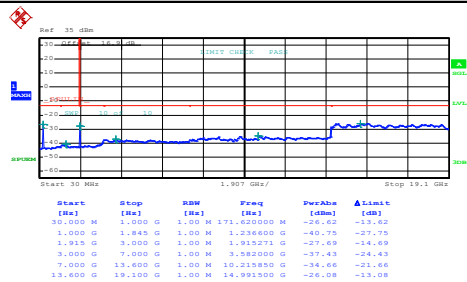

Date: 18.AUG.2020 17:09:29

Highest Channel

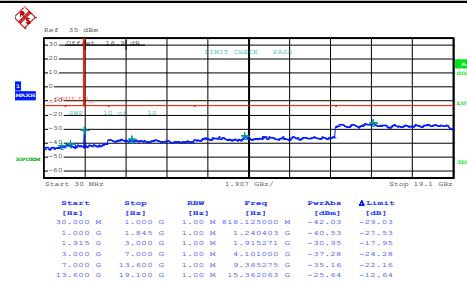

Date: 18.AUG.2020 19:40:21

**Frequency Stability**

Test Conditions	Middle Channel	GSM850 (GPRS class 8)	GSM850 (EDGE class 8)	Limit
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		2.5ppm
		Deviation (ppm)		Result
50	Normal Voltage	0.0012	0.0084	PASS
40	Normal Voltage	0.0012	0.0084	
30	Normal Voltage	0.0000	0.0072	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0000	0.0024	
0	Normal Voltage	0.0012	0.0012	
-10	Normal Voltage	0.0036	0.0024	
-20	Normal Voltage	0.0084	0.0024	
-30	Normal Voltage	0.0108	0.0036	
20	Maximum Voltage	0.0167	0.0012	
20	Normal Voltage	0.0000	0.0000	
20	Battery End Point	0.0012	0.0024	

Test Conditions	Middle Channel	GSM1900 (GPRS class 8)	GSM1900 (EDGE class 8)	Limit
Temperature (°C)	Voltage (Volt)	Deviation (ppm)		Note 2.
		Deviation (ppm)		Result
50	Normal Voltage	0.0069	0.0037	PASS
40	Normal Voltage	0.0048	0.0027	
30	Normal Voltage	0.0037	0.0011	
20(Ref.)	Normal Voltage	0.0000	0.0000	
10	Normal Voltage	0.0016	0.0032	
0	Normal Voltage	0.0069	0.0096	
-10	Normal Voltage	0.0101	0.0106	
-20	Normal Voltage	0.0112	0.0128	
-30	Normal Voltage	0.0122	0.0149	
20	Maximum Voltage	0.0096	0.0011	
20	Normal Voltage	0.0000	0.0005	
20	Battery End Point	0.0074	0.0043	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.25 V
2. The frequency fundamental emissions stay within the authorized frequency block..



A3. WCDMA


Peak-to-Average Ratio

Mode	WCDMA Band II	WCDMA Band IV	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.00	2.92	PASS
Middle CH	3.04	2.92	
Highest CH	3.08	3.00	




WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

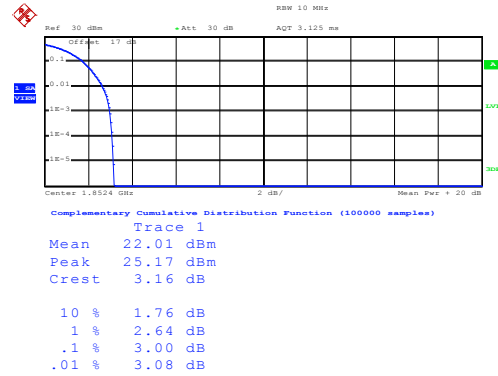


Date: 18.AUG.2020 17:57:37

Middle Channel

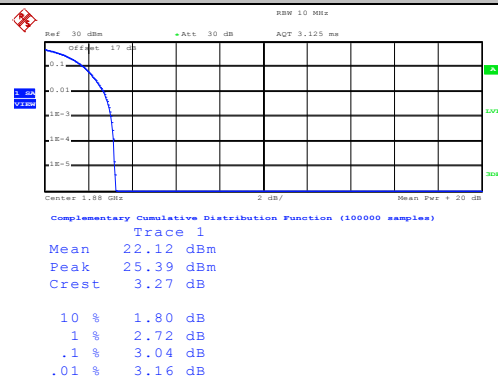

Date: 18.AUG.2020 17:57:57

Highest Channel

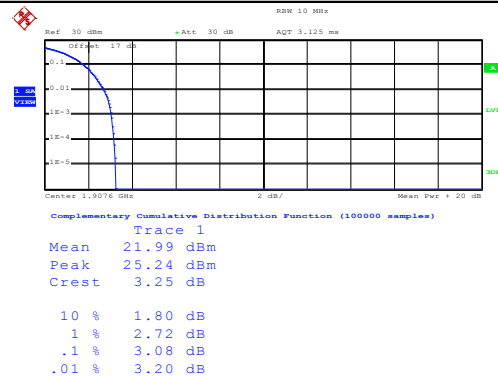


Date: 18.AUG.2020 17:58:18




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

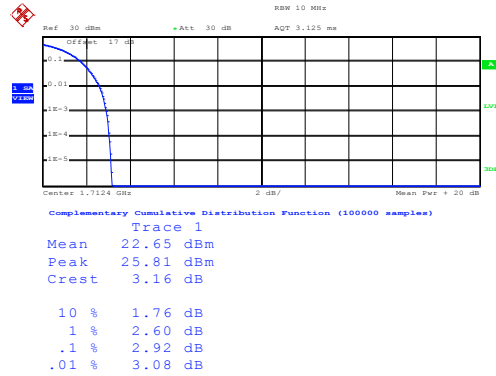


Date: 18.AUG.2020 18:22:10

Middle Channel

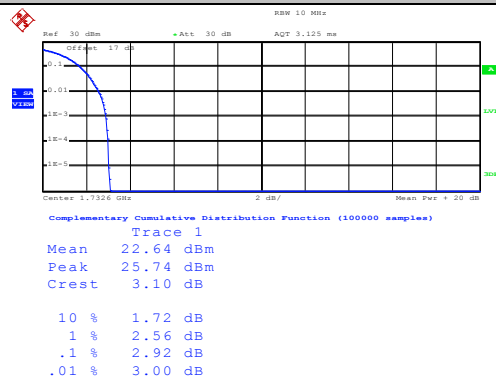

Date: 18.AUG.2020 18:22:31

Highest Channel

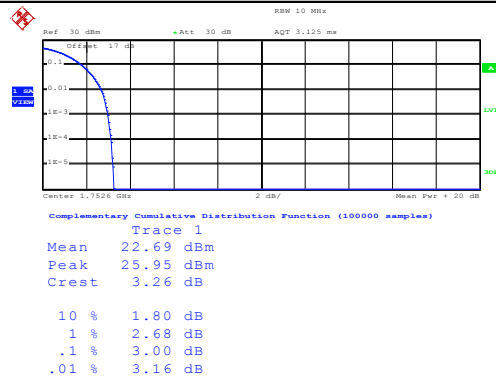

Date: 18.AUG.2020 18:22:49


**26dB Bandwidth**

Mode	WCDMA Band II: 26dB BW (MHz)	WCDMA Band IV: 26dB BW (MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.70	4.72
Middle CH	4.71	4.71
Highest CH	4.72	4.71




WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

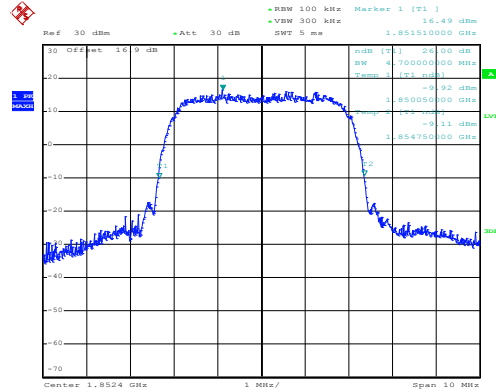


Date: 18.AUG.2020 17:31:14

Middle Channel

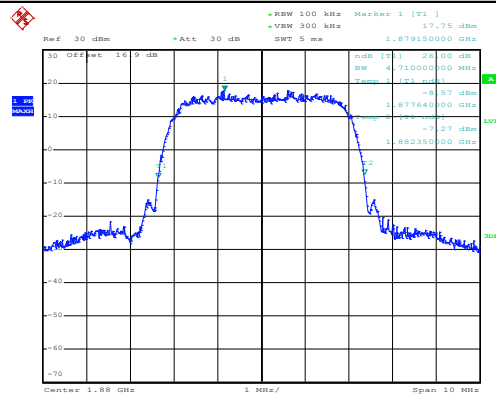

Date: 18.AUG.2020 17:38:59

Highest Channel

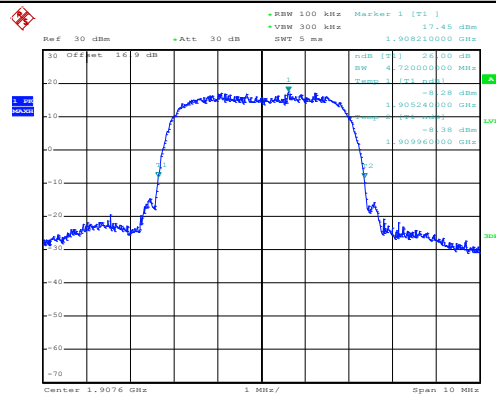


Date: 18.AUG.2020 17:41:24




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

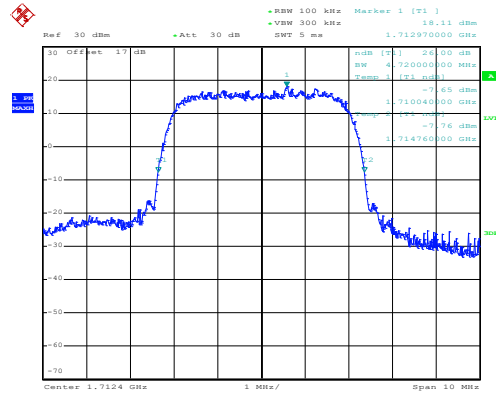


Date: 18.AUG.2020 18:06:11

Middle Channel

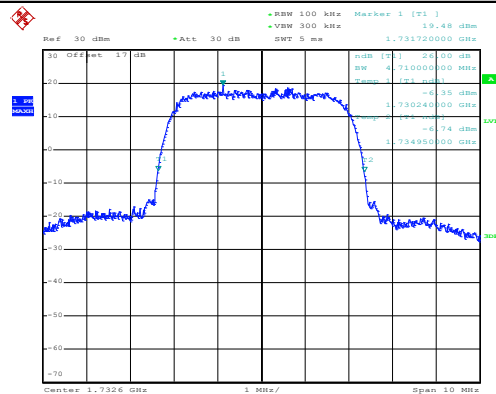

Date: 18.AUG.2020 18:08:21

Highest Channel

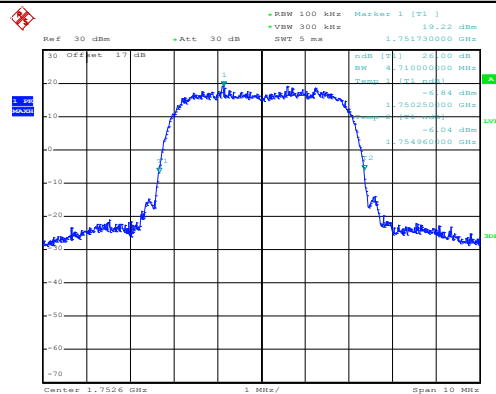

Date: 18.AUG.2020 18:09:01


**Occupied Bandwidth**

Mode	WCDMA Band II: 99% BW (MHz)	WCDMA Band IV: 99% BW (MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.15	4.15
Middle CH	4.13	4.14
Highest CH	4.15	4.16




WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

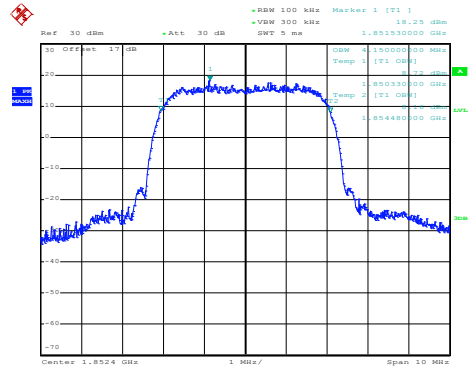


Date: 18.AUG.2020 17:49:17

Middle Channel

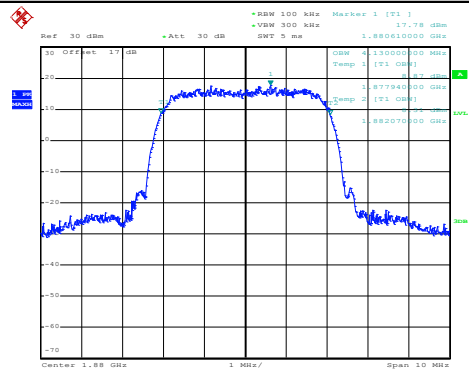

Date: 18.AUG.2020 17:49:59

Highest Channel

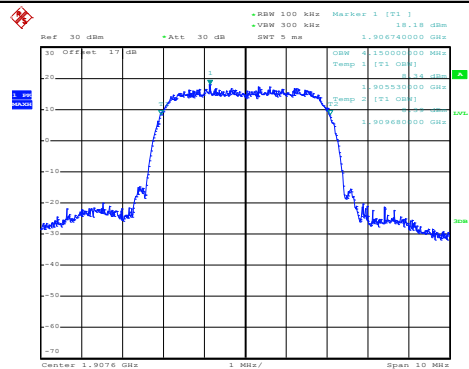


Date: 18.AUG.2020 17:50:39




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

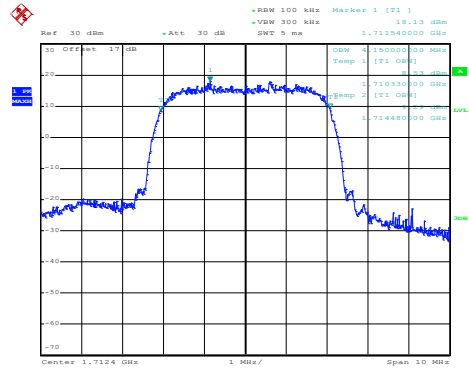


Date: 18.AUG.2020 18:13:09

Middle Channel

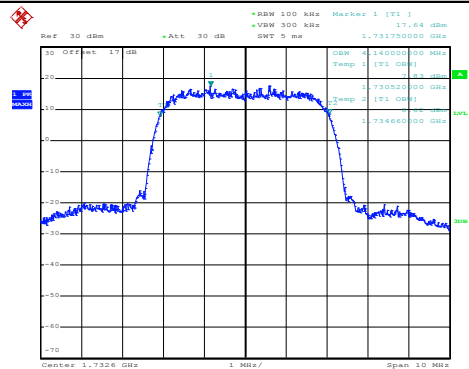

Date: 18.AUG.2020 18:14:05

Highest Channel

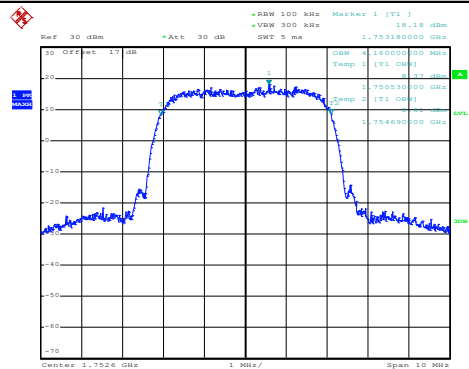


Date: 18.AUG.2020 18:15:02



Conducted Band Edge


WCDMA Band II (RMC 12.2Kbps)

Lowest Band Edge

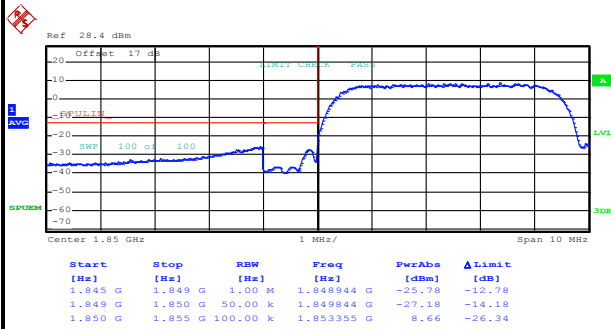

Date: 18.AUG.2020 17:53:50

Highest Band Edge

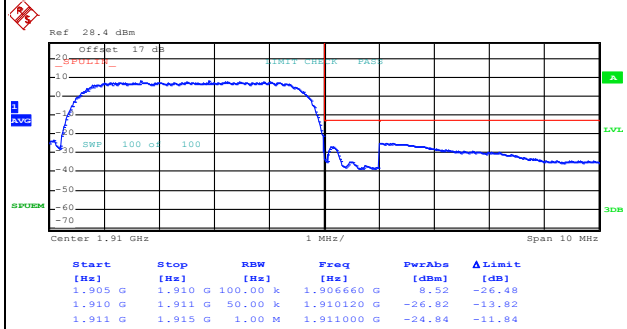


Date: 18.AUG.2020 17:56:46




WCDMA Band IV (RMC 12.2Kbps)

Lowest Band Edge

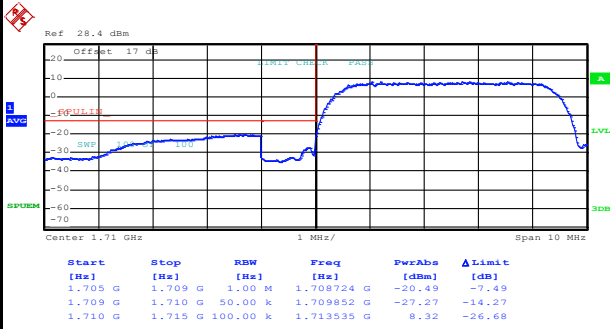

Date: 18.AUG.2020 18:18:08

Highest Band Edge

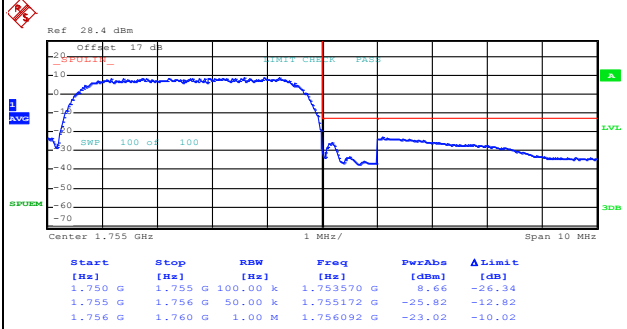


Date: 18.AUG.2020 18:21:02



Conducted Spurious Emission


WCDMA Band II (RMC 12.2Kbps)

Lowest Channel

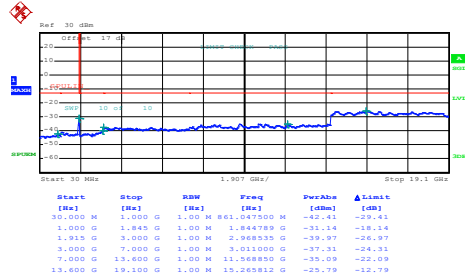


Date: 18.AUG.2020 17:46:18

Middle Channel

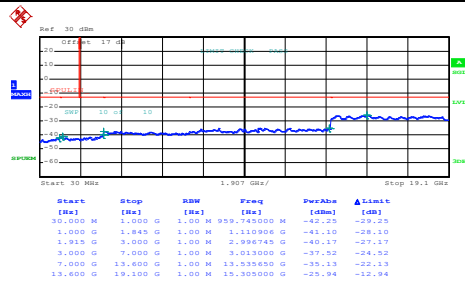

Date: 18.AUG.2020 17:47:23

Highest Channel

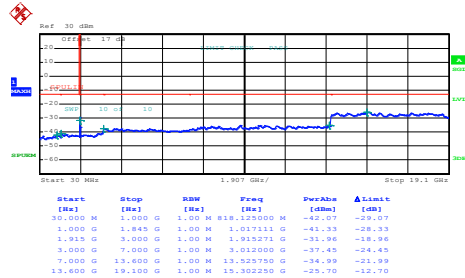


Date: 18.AUG.2020 17:48:25




WCDMA Band IV (RMC 12.2Kbps)

Lowest Channel

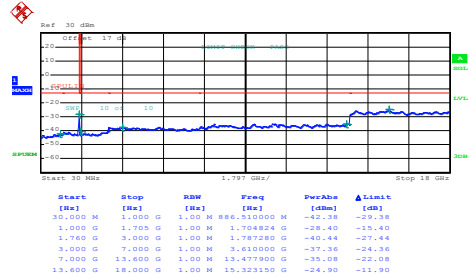


Date: 18.AUG.2020 18:10:16

Middle Channel

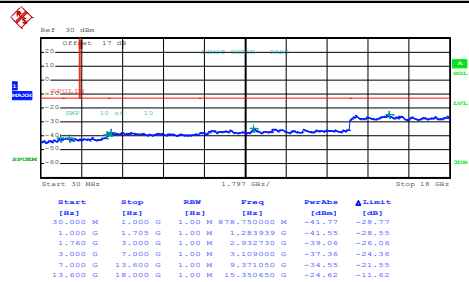

Date: 18.AUG.2020 18:11:17

Highest Channel

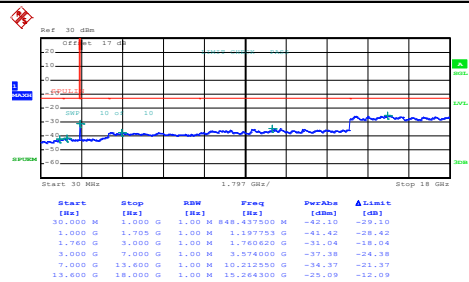

Date: 18.AUG.2020 18:12:19

Frequency Stability

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Note 2. Result
50	Normal Voltage	0.0016	PASS
40	Normal Voltage	0.0016	
30	Normal Voltage	0.0016	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0011	
0	Normal Voltage	0.0011	
-10	Normal Voltage	0.0027	
-20	Normal Voltage	0.0043	
-30	Normal Voltage	0.0048	
20	Maximum Voltage	0.0021	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0011	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.25 V
2. The frequency fundamental emissions stay within the authorized frequency block.



Test Conditions	Middle Channel	WCDMA Band IV (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0052	PASS
40	Normal Voltage	0.0040	
30	Normal Voltage	0.0017	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0023	
0	Normal Voltage	0.0012	
-10	Normal Voltage	0.0023	
-20	Normal Voltage	0.0012	
-30	Normal Voltage	0.0006	
20	Maximum Voltage	0.0058	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0029	

Note:

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.65 V. ; Maximum Voltage =4.25 V
2. The frequency fundamental emissions stay within the authorized frequency block.

**Appendix B. Test Results of ERP/EIRP and Radiated Test****ERP/EIRP**

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850	32.13	1.6331	23.08	0.2032
Middle	GPRS class 8	32.22	1.6672	23.17	0.2075
Highest	(GT - LC = -6.9 dB)	32.07	1.6106	23.02	0.2004
Lowest	GSM850	26.70	0.4677	17.65	0.0582
Middle	EDGE class 8	26.68	0.4656	17.63	0.0579
Highest	(GT - LC = -6.9 dB)	26.62	0.4592	17.57	0.0571
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900	27.45	0.5559	23.65	0.2317
Middle	GPRS class 8	27.88	0.6138	24.08	0.2559
Highest	(GT - LC = -3.8 dB)	27.66	0.5834	23.86	0.2432
Lowest	GSM1900	25.76	0.3767	21.96	0.1570
Middle	EDGE class 8	25.80	0.3802	22.00	0.1585
Highest	(GT - LC = -3.8 dB)	25.61	0.3639	21.81	0.1517
Lowest	WCDMA Band II	19.97	0.0993	16.17	0.0414
Middle	RMC 12.2Kbps	19.99	0.0998	16.19	0.0416
Highest	(GT - LC = -3.8 dB)	20.00	0.1000	16.20	0.0417
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV	19.93	0.0984	15.73	0.0374
Middle	RMC 12.2Kbps	19.96	0.0991	15.76	0.0377
Highest	(GT - LC = -4.2 dB)	19.97	0.0993	15.77	0.0378
Limit	EIRP < 1W	Result		PASS	

**Radiated Spurious Emission****GPRS850**

GPRS 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-54.13	-13	-41.13	-64.89	-59.98	0.69	8.69	H
	2473	-48.14	-13	-35.14	-63.8	-55.81	0.95	10.76	H
	3297	-48.17	-13	-35.17	-66.05	-56.67	1.20	11.85	H
									H
									H
									H
	1648	-54.47	-13	-41.47	-65.11	-60.32	0.69	8.69	V
	2473	-49.30	-13	-36.30	-64.96	-56.97	0.95	10.76	V
	3297	-48.60	-13	-35.60	-66.33	-57.10	1.20	11.85	V
									V
									V
									V
Middle	1673	-53.66	-13	-40.66	-64.53	-59.60	0.71	8.79	H
	2509	-46.36	-13	-33.36	-62.01	-54.06	0.95	10.81	H
	3345	-48.33	-13	-35.33	-66.08	-56.93	1.21	11.96	H
									H
									H
									H
	1673	-53.76	-13	-40.76	-64.54	-59.70	0.71	8.79	V
	2509	-49.37	-13	-36.37	-65.04	-57.07	0.95	10.81	V
	3345	-47.44	-13	-34.44	-64.89	-56.04	1.21	11.96	V
									V
									V
									V



Highest	1697	-53.59	-13	-40.59	-64.58	-59.61	0.72	8.89	H
	2546	-50.14	-13	-37.14	-65.85	-57.86	0.97	10.84	H
	3392	-49.10	-13	-36.10	-66.71	-57.79	1.22	12.06	H
									H
									H
									H
									H
	1696	-53.71	-13	-40.71	-64.62	-59.72	0.72	8.88	V
	2546	-49.39	-13	-36.39	-65.43	-57.11	0.97	10.84	V
	3395	-50.00	-13	-37.00	-67.15	-58.69	1.22	12.07	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE 850**

EDGE 850									
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-54.16	-13	-41.16	-64.92	-60.01	0.69	8.69	H
	2472	-50.55	-13	-37.55	-66.21	-58.21	0.95	10.76	H
	3296	-48.60	-13	-35.60	-66.49	-57.10	1.20	11.85	H
									H
									H
									H
									H
	1648	-53.67	-13	-40.67	64.31	-59.52	0.69	8.69	V
	2472	-50.67	-13	-37.67	-66.33	-58.33	0.95	10.76	V
	3296	-48.20	-13	-35.20	-65.93	-56.70	1.20	11.85	V
									V
									V
									V
									V
Middle	1672	-54.35	-13	-41.35	-65.21	-60.28	0.71	8.79	H
	2509	-49.44	-13	-36.44	-65.09	-57.14	0.95	10.81	H
	3345	-47.52	-13	-34.52	-65.27	-56.12	1.21	11.96	H
									H
									H
									H
									H
	1672	-53.97	-13	-40.97	-64.74	-59.90	0.71	8.79	V
	2509	-49.42	-13	-36.42	-65.09	-57.12	0.95	10.81	V
	3345	-48.05	-13	-35.05	-65.5	-56.65	1.21	11.96	V
									V
									V
									V
									V



Highest	1697	-53.59	-13	-40.59	-64.58	-59.61	0.72	8.89	H
	2546	-50.14	-13	-37.14	-65.85	-57.86	0.97	10.84	H
	3392	-49.10	-13	-36.10	-66.71	-57.79	1.22	12.06	H
									H
									H
									H
									H
	1696	-53.71	-13	-40.71	-64.62	-59.72	0.72	8.88	V
	2546	-49.39	-13	-36.39	-65.43	-57.11	0.97	10.84	V
	3395	-50.00	-13	-37.00	-67.15	-58.69	1.22	12.07	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**GSM 1900**

GSM 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-46.17	-13	-33.17	-66.43	-57.20	1.43	12.46	H
	5548	-41.90	-13	-28.90	-65.59	-53.18	2.01	13.29	H
	7403	-38.76	-13	-25.76	-66.49	-47.95	2.21	11.40	H
	9251	-34.34	-13	-21.34	-65.63	-43.16	2.38	11.20	H
									H
									H
									H
	3700	-46.42	-13	-33.42	-66.37	-57.45	1.43	12.46	V
	5548	-42.51	-13	-29.51	-66.4	-53.79	2.01	13.29	V
	7403	-38.78	-13	-25.78	-66.05	-47.97	2.21	11.40	V
	9251	-35.26	-13	-22.26	-65.75	-44.08	2.38	11.20	V
									V
									V
									V
Middle	3760	-45.03	-13	-32.03	-65.41	-56.06	1.48	12.51	H
	5640	-43.06	-13	-30.06	-66.75	-54.33	2.00	13.27	H
	7520	-38.36	-13	-25.36	-65.97	-47.47	2.18	11.30	H
	9400	-33.21	-13	-20.21	-65.04	-42.25	2.34	11.38	H
									H
									H
									H
	3760	-46.05	-13	-33.05	-66.18	-57.08	1.48	12.51	V
	5640	-42.92	-13	-29.92	-66.9	-54.19	2.00	13.27	V
	7520	-38.56	-13	-25.56	-66.33	-47.67	2.18	11.30	V
	9400	-35.22	-13	-22.22	-65.98	-44.26	2.34	11.38	V
									V
									V
									V
									V



Highest	3819	-46.05	-13	-33.05	-66.53	-57.07	1.53	12.56	H
	5730	-43.48	-13	-30.48	-67.27	-54.74	1.99	13.25	H
	7641	-38.95	-13	-25.95	-66.01	-47.95	2.27	11.27	H
	9545	-34.51	-13	-21.51	-66.72	-43.66	2.32	11.47	H
									H
									H
									H
	3819	-46.55	-13	-33.55	-66.86	-57.57	1.53	12.56	V
	5730	-42.38	-13	-29.38	-66.43	-53.64	1.99	13.25	V
	7641	-38.55	-13	-25.55	-65.82	-47.55	2.27	11.27	V
	9545	-36.49	-13	-23.49	-67.32	-45.64	2.32	11.47	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**EDGE 1900**

EDGE 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3700	-45.80	-13	-32.80	-66.06	-56.83	1.43	12.46	H
	5500	-43.44	-13	-30.44	-67.17	-54.73	2.01	13.30	H
	7400	-38.99	-13	-25.99	-66.72	-48.18	2.21	11.40	H
									H
									H
									H
									H
	3700	-46.79	-13	-33.79	-66.74	-57.82	1.43	12.46	V
	5500	-43.27	-13	-30.27	-67.08	-54.56	2.01	13.30	V
	7400	-39.36	-13	-26.36	-66.61	-48.55	2.21	11.40	V
									V
									V
									V
									V
Middle	3760	-46.06	-13	-33.06	-66.44	-57.09	1.48	12.51	H
	5640	-43.59	-13	-30.59	-67.28	-54.86	2.00	13.27	H
	7522	-38.76	-13	-25.76	-66.36	-47.87	2.19	11.30	H
									H
									H
									H
									H
	3763	-46.31	-13	-33.31	-66.45	-57.34	1.48	12.51	V
	5640	-42.80	-13	-29.80	-66.78	-54.07	2.00	13.27	V
	7520	-39.25	-13	-26.25	-67.02	-48.36	2.18	11.30	V
									V
									V
									V
									V



Highest	3819	-45.81	-13	-32.81	-66.29	-56.83	1.53	12.56	H
	5729	-43.75	-13	-30.75	-67.54	-55.01	1.99	13.25	H
	7639	-39.46	-13	-26.46	-66.52	-48.46	2.27	11.27	H
									H
									H
									H
									H
	3819	-46.66	-13	-33.66	-66.97	-57.68	1.53	12.56	V
	5729	-43.33	-13	-30.33	-67.37	-54.59	1.99	13.25	V
	7639	-39.11	-13	-26.11	-66.38	-48.11	2.27	11.27	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1900**

WCDMA 1900									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3704	-45.76	-13	-32.76	-66.03	-56.79	1.43	12.46	H
	5557	-43.94	-13	-30.94	-67.63	-55.22	2.01	13.29	H
	7409	-39.17	-13	-26.17	-66.91	-48.35	2.21	11.39	H
									H
									H
									H
									H
	3704	-45.98	-13	-32.98	-65.94	-57.01	1.43	12.46	V
	5557	-44.18	-13	-31.18	-68.08	-55.46	2.01	13.29	V
	7409	-39.66	-13	-26.66	-66.98	-48.84	2.21	11.39	V
									V
									V
									V
									V
Middle	3760	-45.49	-13	-32.49	-65.88	-56.52	1.48	12.51	H
	5640	-42.94	-13	-29.94	-66.63	-54.21	2.00	13.27	H
	7520	-39.32	-13	-26.32	-66.93	-48.43	2.18	11.30	H
									H
									H
									H
									H
	3760	-45.98	-13	-32.98	-66.11	-57.01	1.48	12.51	V
	5640	-43.07	-13	-30.07	-67.05	-54.34	2.00	13.27	V
	7520	-38.42	-13	-25.42	-66.17	-47.53	2.18	11.30	V
									V
									V
									V
									V



Highest	3812	-46.50	-13	-33.50	-66.97	-57.53	1.52	12.55	H
	5722	-43.70	-13	-30.70	-67.48	-54.96	1.99	13.26	H
	7630	-39.38	-13	-26.38	-66.43	-48.39	2.26	11.27	H
									H
									H
									H
									H
	3812	-45.80	-13	-32.80	-66.1	-56.83	1.52	12.55	V
	5722	-42.54	-13	-29.54	-66.58	-53.80	1.99	13.26	V
	7630	-39.42	-13	-26.42	-66.69	-48.43	2.26	11.27	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**WCDMA 1700**

WCDMA 1700									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3427	-47.28	-13	-34.28	-66.02	-58.19	1.23	12.14	H
	5137	-43.67	-13	-30.67	-67.31	-54.57	1.97	12.86	H
	6849	-41.99	-13	-28.99	-66.98	-50.96	2.34	11.32	H
									H
									H
									H
									H
	3427	-48.33	-13	-35.33	-66.69	-59.24	1.23	12.14	V
	5137	-43.90	-13	-30.90	-67.28	-54.80	1.97	12.86	V
	6849	-41.92	-13	-28.92	-66.8	-50.89	2.34	11.32	V
									V
									V
									V
									V
Middle	3462	-48.33	-13	-35.33	-67.44	-59.31	1.24	12.22	H
	5197	-43.35	-13	-30.35	-67.19	-54.31	1.97	12.94	H
	6930	-39.91	-13	-26.91	-65.63	-49.13	2.36	11.58	H
									H
									H
									H
									H
	3465	-48.69	-13	-35.69	-67.57	-59.67	1.24	12.22	V
	5197	-44.35	-13	-31.35	-67.75	-55.31	1.97	12.94	V
	6927	-39.90	-13	-26.90	-65.7	-49.11	2.36	11.57	V
									V
									V
									V
									V



Highest	3504	-47.21	-13	-34.21	-66.74	-58.26	1.25	12.30	H
	5257	-43.83	-13	-30.83	-67.63	-54.86	1.98	13.01	H
	7010	-40.11	-13	-27.11	-66.51	-49.53	2.37	11.79	H
									H
									H
									H
									H
	3504	-46.90	-13	-33.90	-66.27	-57.95	1.25	12.30	V
	5257	-43.85	-13	-30.85	-67.35	-54.88	1.98	13.01	V
	7010	-40.06	-13	-27.06	-66.76	-49.48	2.37	11.79	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

————THE END————