



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

FOR

GSM/WCDMA/LTE Phone with BT, BLE, DTS/UNII a/b/g/n/ac & NFC

FCC ID: PY7-29752M

REPORT NUMBER: 16J23633A-E7V4

ISSUE DATE: 2016-08-18

**Prepared for
SONY MOBILE COMMUNICATIONS, INC.
1-8-15 KONAN, MINATO-KU
TOKYO, 108-0075, JAPAN**

**Prepared by
UL LLC
12 LABORATORY DR.
RESEARCH TRIANGLE PARK, NC 27709 USA
TEL: (919) 549-1400**



NVLAP Lab code: 200246-0

Revision History

<u>Ver.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	2016-08-12	Initial Issue	Brian Kiewra
V2	2016-08-17	Added Frequency Stability data for startup, 2min, 5min, and 10min.	Brian Kiewra
V3	2016-08-18	Revised Radiated Fundamental and spurious emissions data.	Jeff Moser
V4	2016-08-18	Revised Section 5.3 and Tx Spurious Emission 30 to 1000GHz test data	C.S.OOI

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>7</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>7</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
5.6. <i>MODIFICATIONS</i>	<i>8</i>
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
6. TEST AND MEASUREMENT EQUIPMENT	11
7. OCCUPIED BANDWIDTH	15
LIMITS.....	15
8. RADIATED EMISSION TEST RESULTS.....	16
8.1. <i>LIMITS AND PROCEDURE.....</i>	<i>16</i>
8.1.1. <i>FUNDAMENTAL AND SPURIOUS EMISSIONS (0.009 – 30 MHz).....</i>	<i>18</i>
8.1.2. <i>TX SPURIOUS EMISSION 30 TO 1000 MHz</i>	<i>20</i>
9. AC MAINS LINE CONDUCTED EMISSIONS.....	21
10. FREQUENCY STABILITY.....	26
11. SETUP PHOTOS	29
END OF REPORT	34

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
1-8-15 KONAN, MINATO-KU
TOKYO, 108-0075, JAPAN

EUT DESCRIPTION: GSM/WCDMA/LTE Phone with BT, BLE, DTS/UNII a/b/g/n/ac & NFC

SERIAL NUMBER: CB512ASGNX

DATE TESTED: 2016-07-26 to 2016-08-16

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released
For UL LLC By:



Jeff Moser
EMC Program Manager
UL – Consumer Technology Division

Prepared By:



Brian T. Kiewra
WiSE Engineer
UL – Consumer Technology Division

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA and 2800 Suite B, Perimeter Park Drive, Morrisville, NC 27560.

12 Laboratory Dr., RTP, NC 27709
<input type="checkbox"/> Chamber A
<input type="checkbox"/> Chamber C

2800 Suite B Perimeter Park Dr., Morrisville, NC 27560
<input type="checkbox"/> Chamber NORTH
<input checked="" type="checkbox"/> Chamber SOUTH

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <http://www.nist.gov/nvlap/>

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Morrisville

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Fremont

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.84 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, BLE, DTS/UNII a/b/g/n/ac & NFC

5.2. MAXIMUM OUTPUT POWER

The testing was performed at 3 meter. The transmitter maximum E-field at 30 meter distance is 17.1 dBuV/m which is converted from the 3 meter data.

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes loop antenna.

5.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was 39.0.X.1.30

The test utility software used during testing was Tera Term ver 4.89 (SVN# 6182).

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, Z, it was determined that X-Axis orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X-Axis orientation.

5.6. MODIFICATIONS

No modifications were made during testing.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Desktop	Lenovo	ThinkCentre	MG00ADEN	NA
Laptop	Lenovo	T450	RTP0116PC0A2UQT	NA
Headphones	Sony	MH410x	12271A100010396	NA
PowerSupply	Sony	1300-7146.1B	5816W02400051	NA


I/O CABLES

I/O Cable List					
Cable No	Port	# of Identical ports	Connector Type	Cable Length (m)	Remarks
2	DC Mains	1	AC	>1m	NA
3	Audio	1	3.5mm	>1m	Headphone

TEST SETUP

The EUT is setup as a standalone device. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

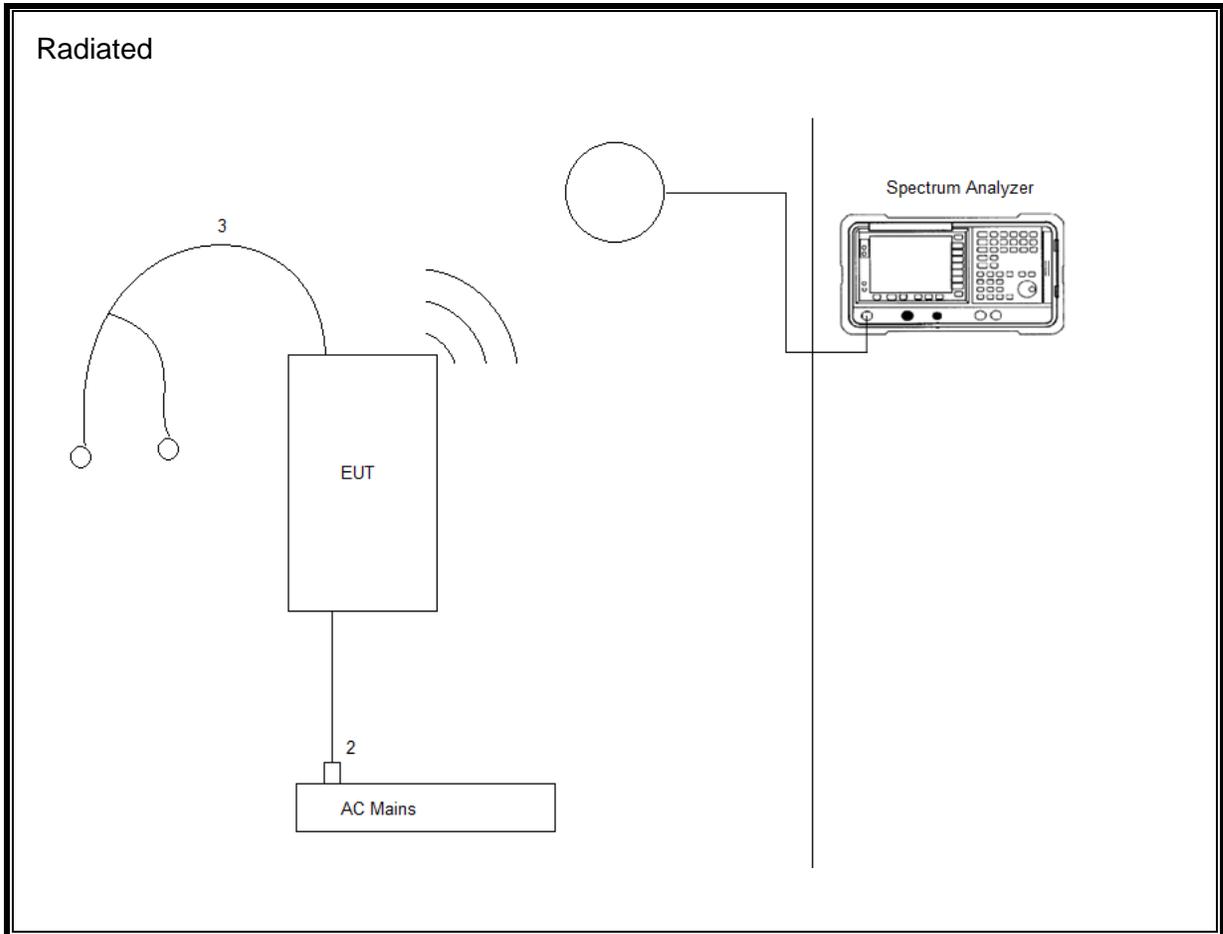

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville - South Chamber)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	0.009-30MHz	(Loop Ant.)			
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2015-12-08	2016-12-31
	30-1000 MHz				
AT0074	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2016-06-07	2017-06-30
	Gain-Loss Chains				
S-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2015-10-07	2016-10-31
S-SAC02	Gain-loss string: 30-1000MHz	Various	Various	2016-06-26	2017-06-30
	Receiver & Software				
SA0025	Spectrum Analyzer	Agilent	N9030A	2016-03-17	2017-03-31
SA0026 (18-40GHz RSE)	Spectrum Analyzer	Agilent	N9030A	2016-02-24	2017-02-28
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	Additional Equipment used				
HI0078	Temp/Humid/Pressure Meter	Springfield Precision	PreciseTemp	2016-06-13	2017-06-13

Test Equipment Used – Frequency Stability and Occupied Bandwidth Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Conducted Room 2					
SA0020	Spectrum Analyzer	Agilent Technologies	E4446A	2016-03-22	2017-03-31
1100502	Temp/Humid Chamber	Cincinnati Sub-Zero	ZPH-8-3.5-SCT/AC	2016-06-06	2017-06-06
HI0080	Temp/Humid/Pressure Meter	Springfield	PreciseTemp	2015-07-01	2016-08-31
76021	DC Regulated Power Supply	CircuitSpecialists.Com	CSI3005X5	N/A	N/A
Additional Equipment used					
SA0026	Spectrum Analyzer	Keysight Technologies	N9030A	2016-02-24	2017-02-28
7405	E and B – Field Probes	EMCO	7405	N/A	N/A

Test Equipment Used - Line-Conducted Emissions – Voltage (Morrisville – Conducted 1)

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
CBL077	Coax cable, RG223, N-male to BNC-male, 20-ft.	Pasternack	PE3476-240	2016-06-15	2017-06-30
HI0078	Temp/Humid/Pressure Meter	Springfield Precision	PreciseTemp	2016-06-13	2017-06-13
LISN003	LISN, 50-ohm/50-uH, 2-conductor, 25A	Fischer Custom Com.	FCC-LISN-50-25-2-01-550V	2015-08-24	2016-08-31
LISN008	LISN, 50-ohm/50-uH, 2-conductor, 25A (For support gear only.)	Solar Electronics	8012-50-R-24-BNC	2015-09-03	2016-09-30
MM0167	Multi-meter	Agilent	U1232A	2015-08-17	2016-08-31
PRE0101521 (75141)	EMI Test Receiver 9kHz-7GHz	Rohde & Schwarz	ESCI 7	2015-08-26	2016-08-31
TL001	Transient Limiter, 0.009-30MHz	Com-Power	LIT-930A	2016-06-09	2017-06-30
PS214	AC Power Source	Elgar	CW2501M (s/n 1523A02396)	NA	NA
PS215	AC Power Source	Elgar	CW2501M (s/n 1523A02397)	NA	NA
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	Miscellaneous (if needed)				
ATA220	ISN for Unshielded Balanced Pairs	Teseq, Inc.	ISN T8	2015-08-24	2016-08-31
TN0129	ISN for Shielded Balanced Pairs	Teseq, Inc.	ISN ST08	2015-08-24	2016-08-31
TN0145	ISN for Cat-6 Unshielded Balanced Pairs	Teseq, Inc.	ISN T8-Cat6	2015-08-25	2016-08-31
CDECABLE001	ANSI C63.4 1m extension cable.	UL	Per Annex B of ANSI C63.4	2016-06-04	2017-06-30

Test Equipment Used - Line-Conducted Emissions – Voltage (Fremont)

Test Equipment List					
Description	Manufacturer	Model	T No.	Cal Date	Cal Due
EMI Test Receiver 9Khz-7GHz	R&S	ESC17	100935	9/10/2015	09/10/16
LISN for Conducted Emissions	Fischer	50/250-25-2	161124	9/16/2015	09/16/16
Power Cable, Line Conducted Emissions	UL	PG1	N/A	7/28/2016	07/28/17

Test Software List			
Description	Manufacturer	Model	Version
Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015


7. OCCUPIED BANDWIDTH

LIMITS

For reporting purposes only. Tested per ANSI C63.10 (6.9.3)

RESULTS

Channel	Frequency (KHz)	20dB Bandwidth (KHz)
Low	13.56	25.14

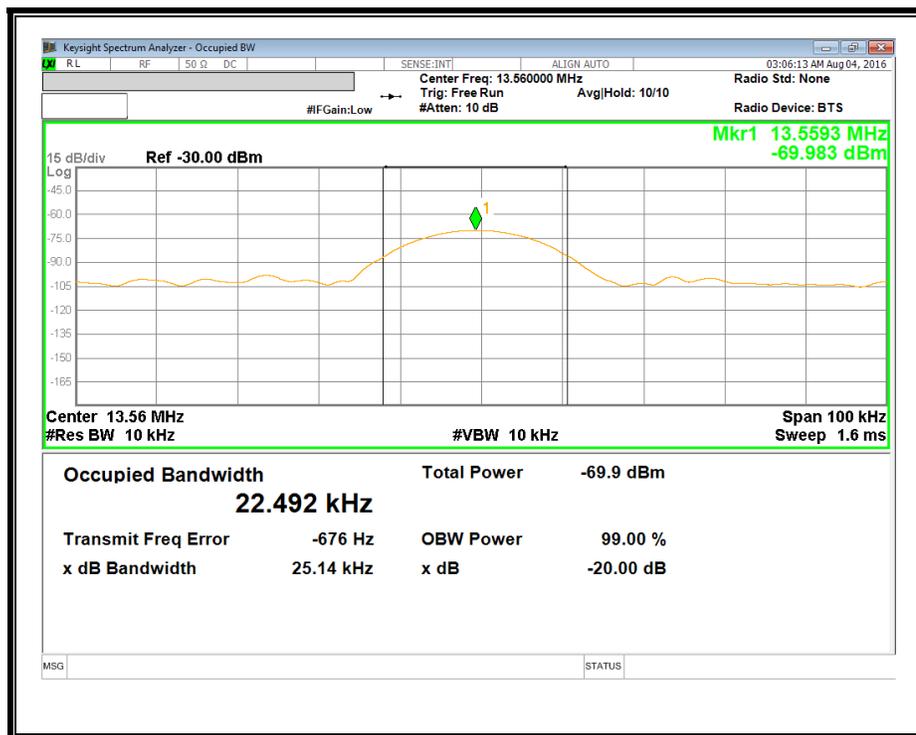

TEST INFORMATION

Date 8/04/16
 Project No: 11349470
 Tester: Mark Learner

8. RADIATED EMISSION TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMIT

§15.225, 15.209

(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/ meter at 30 meters.

(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.

(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.

(d) The field strength of any emissions appearing outside of the 13.110– 14.010 MHz and shall not exceed the general radiated emission limits in § 15.209 as follows:

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

Formula for converting the filed strength from uV/m to dBuV/m is:

$$\text{Limit (dBuV/m)} = 20 \log \text{limit (uV/m)}$$

In addition:

§15.209 (d) The emission limits shown the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

§15.209 (d) The provisions in §§ 15.225, measuring emissions at distances other than the distances specified in the above table, determining the frequency range over which radiated emissions are to be measured, and limiting peak emissions apply to all devices operated under this part.

TEST PROCEDURE

ANSI C63.10-2013

The EUT is an intentional radiator that incorporates a digital device. The highest fundamental frequency generated or used in the device is 13.56 MHz. The frequency range was investigated from 0.15 MHz to the 10th harmonic of the highest fundamental frequency, or 1000 MHz, whichever is greater (1000MHz)

RESULTS

No non-compliance noted:

KDB 937606 OATS and Chamber Correlation Justification

Device is a Smart Phone.

Base on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field.


OATs and chamber correlation testing had been performed and chamber measured test result is the worst case test result.

8.1.1. FUNDAMENTAL AND SPURIOUS EMISSIONS (0.009 – 30 MHz)

Fundamental

Freq (MHz)	Meter Reading (dBuV)	Detector Type	AF (dB/m)	Gain/Loss (dB)	Test Distance (m)	DCF (dB)	Corrected Reading (dBuV/m)	QP Limit @ 30m (dBuV/m)	Margin (dB)	Loop Orientation	Notes
13.559	42.0	Pk	10.7	0.6	3.0	-40.0	13.3	84.0	-70.7	Face On	Fundamental @ 30m
13.348	15.6	Pk	10.8	0.6	3.0	-40.0	-13.0	40.5	-53.5	Face On	13.110-13.410MHz Band @ 30m
13.506	20.4	Pk	10.7	0.6	3.0	-40.0	-8.3	50.5	-58.8	Face On	13.410-13.553MHz Band @ 30m
13.612	20.7	Pk	10.7	0.6	3.0	-40.0	-8.0	50.5	-58.4	Face On	13.567-13.710MHz Band @ 30m
13.771	17.6	Pk	10.7	0.6	3.0	-40.0	-11.1	40.5	-51.6	Face On	13.710-14.010MHz Band @ 30m
13.559	45.8	Pk	10.7	0.6	3.0	-40.0	17.1	84.0	-66.9	Face Off	Fundamental @ 30m
13.355	16.5	Pk	10.8	0.6	3.0	-40.0	-12.2	40.5	-52.7	Face Off	13.110-13.410MHz Band @ 30m
13.483	22.8	Pk	10.8	0.6	3.0	-40.0	-5.8	50.5	-56.2	Face Off	13.410-13.553MHz Band @ 30m
13.613	23.2	Pk	10.7	0.6	3.0	-40.0	-5.5	50.5	-56.0	Face Off	13.567-13.710MHz Band @ 30m
13.722	16.8	Pk	10.7	0.6	3.0	-40.0	-11.9	40.5	-52.4	Face Off	13.710-14.010MHz Band @ 30m
Note:	Emissions at the break points met the lowest applicable limit with -42 dB margin or more										


Spurious Emissions (0.15 – 30MHz)

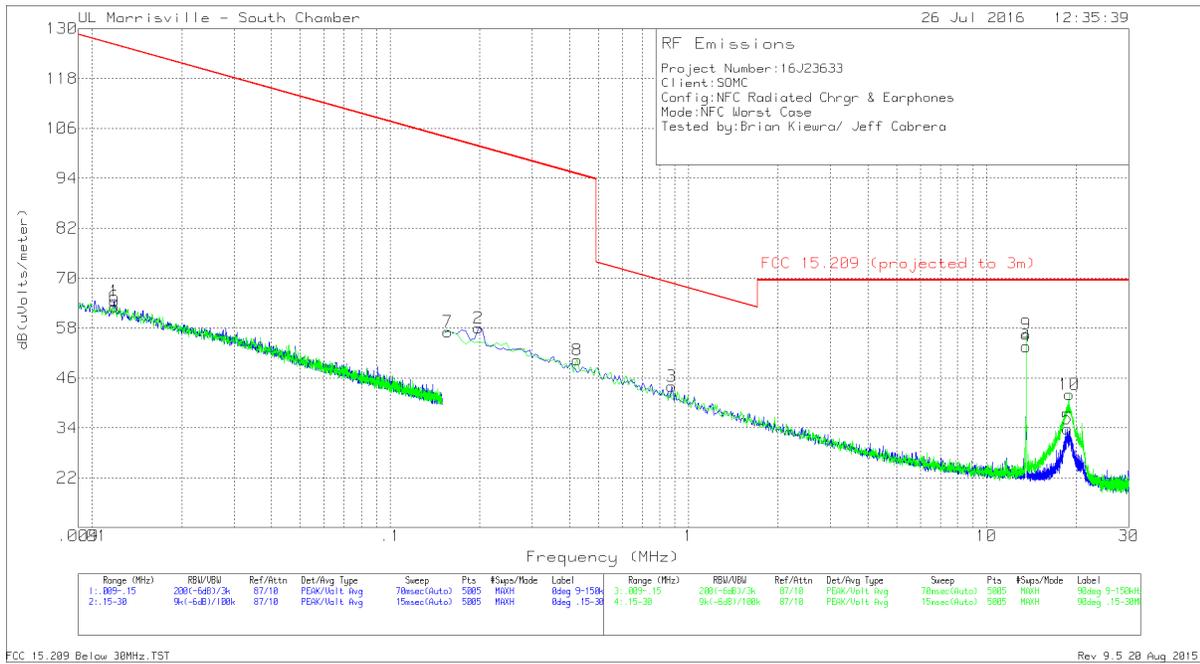

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0079 AF (dB/m)	Cbl (dB)	Corrected Reading dB(uVolts/meter)	FCC 15.209 (projected to 3m)	Margin (dB)	Azimuth (Degs)
8	.42439	38.35	Pk	11.9	.1	50.35	95.05	-44.7	0-360
3	.87773	31.98	Pk	11.9	.1	43.98	68.74	-24.76	0-360
5	18.64747	23	Pk	10.1	.7	33.8	69.54	-35.74	0-360
10	18.93975	31.36	Pk	10	.7	42.06	69.54	-27.48	0-360

Pk - Peak detector

8.1.2. TX SPURIOUS EMISSION 30 TO 1000 MHz

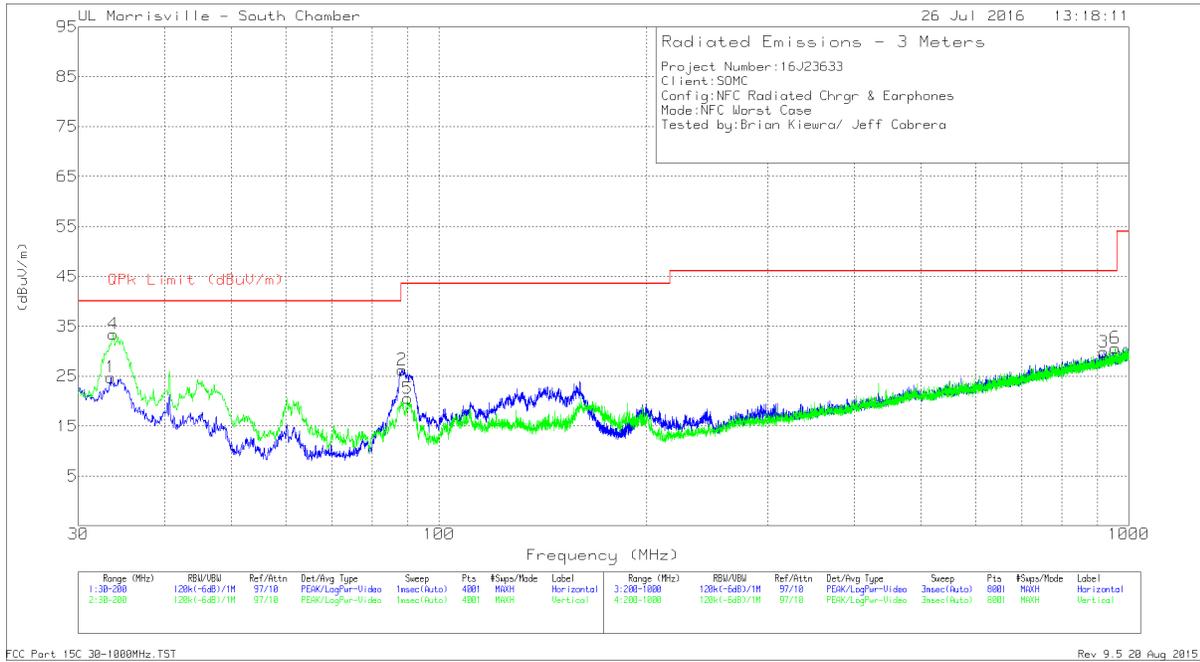

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0074 AF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPk Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	33.4425	33.17	Pk	23.4	-31.8	24.77	40	-15.23	0-360	299	H
4	33.7773	34.86	Qp	23.2	-31.7	26.36	40	-13.64	300	105	V
2	88.3525	45.77	Pk	11.6	-31.1	26.27	43.52	-17.25	0-360	199	H
5	90.095	39.96	Pk	11.7	-31.1	20.56	43.52	-22.96	0-360	102	V
3	920.4	29.68	Pk	27	-26.8	29.88	46.02	-16.14	0-360	199	H
6	955.9	29.55	Pk	27.5	-26.4	30.65	46.02	-15.37	0-360	102	V

Pk - Peak detector
 Qp - Quasi-Peak detector

9. AC MAINS LINE CONDUCTED EMISSIONS

LIMITS

§15.207

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:
1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.


TEST PROCEDURE

ANSI C63.10

RESULTS

No non-compliance noted.

EUT WITH ANTENNA -LINE 1 RESULTS

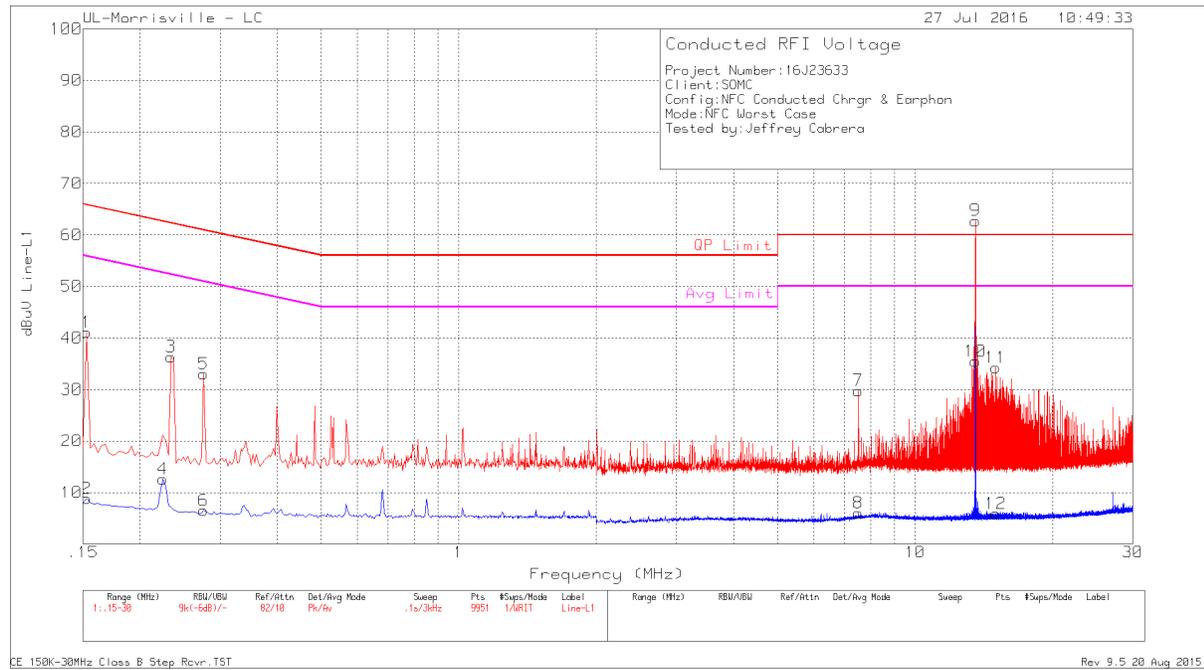


Range 1: Line-L1 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF [dB]	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
1	.153	30.88	Pk	.2	10	41.08	65.84	-24.76	-	-
2	.153	-1.36	Av	.2	10	8.84	-	-	55.84	-47
3	.234	26.27	Pk	.1	10	36.37	62.31	-25.94	-	-
4	.225	2.51	Av	.1	10	12.61	-	-	52.63	-40.02
5	.276	22.91	Pk	.1	10	33.01	60.94	-27.93	-	-
6	.276	-3.6	Av	.1	10	6.5	-	-	50.94	-44.44
7	7.515	19.47	Pk	.1	10.2	29.77	60	-30.23	-	-
8	7.503	-4.3	Av	.1	10.2	6	-	-	50	-44
9	13.563	52.27	Pk	.1	10.4	62.77	60	2.77	-	-
10	13.563	24.95	Av	.1	10.4	35.45	-	-	50	-14.55
11	15.015	23.63	Pk	.2	10.4	34.23	60	-25.77	-	-
12	15.015	-4.71	Av	.2	10.4	5.89	-	-	50	-44.11

Pk - Peak detector

Av - Average detection

Note: Markers 9 and 10 are the 13.56MHz NFC Fundamental

EUT WITH ANTENNA-LINE 2 RESULTS

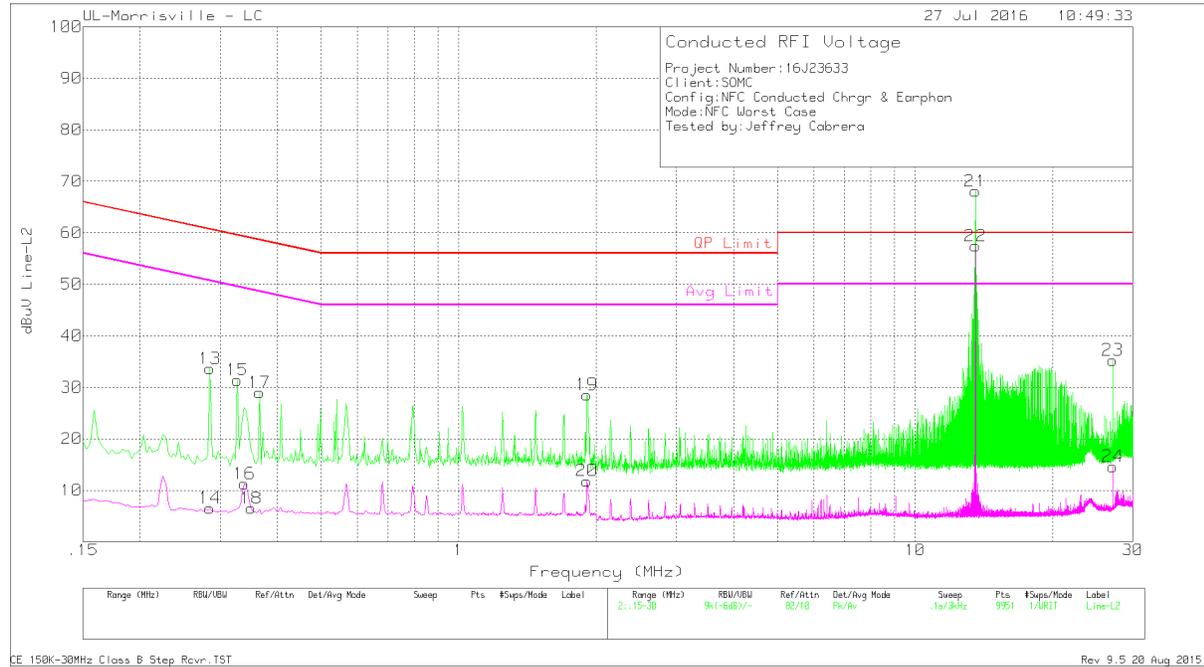


Range 2: Line-L2 .15 - 30MHz										
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN VCF [dB]	Cbl/Limiter (dB)	Corrected Reading dBuV	QP Limit	Margin (dB)	Avg Limit	Margin (dB)
13	.285	23.51	Pk	.1	10	33.61	60.67	-27.06	-	-
14	.285	-3.56	Av	.1	10	6.54	-	-	50.67	-44.13
15	.327	21.3	Pk	.1	10	31.4	59.53	-28.13	-	-
16	.339	1.15	Av	.1	10	11.25	-	-	49.23	-37.98
17	.366	18.89	Pk	.1	10	28.99	58.59	-29.6	-	-
18	.351	-3.58	Av	.1	10	6.52	-	-	48.94	-42.42
19	1.911	18.43	Pk	0	10.1	28.53	56	-27.47	-	-
20	1.911	1.72	Av	0	10.1	11.82	-	-	46	-34.18
21	13.563	57.59	Pk	.1	10.4	68.09	60	8.09	-	-
22	13.563	46.95	Av	.1	10.4	57.45	-	-	50	7.45
23	27.12	24.24	Pk	.3	10.7	35.24	60	-24.76	-	-
24	27.12	3.61	Av	.3	10.7	14.61	-	-	50	-35.39

Pk - Peak detector

Av - Average detection


Note: Markers 21 and 22 are the 13.56MHz NFC Fundamental

EUT WITH ANTENNA PORT TERMINATED -LINE 1 RESULTS

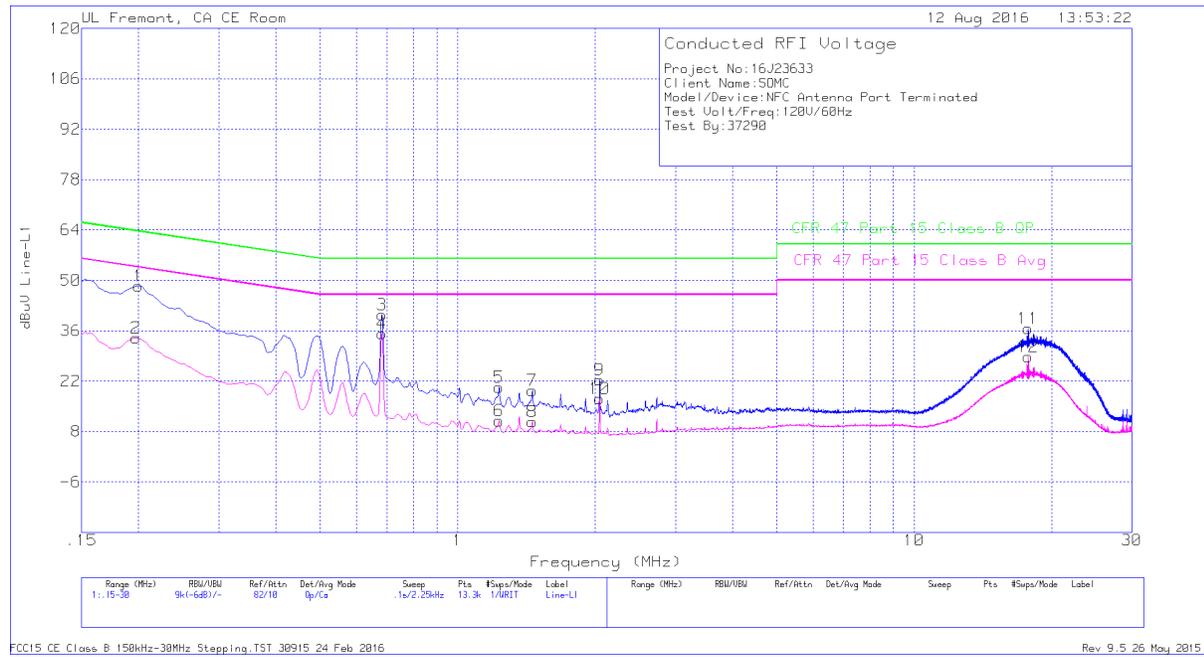

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L1	LC Cables 1&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
1	.1995	38.36	Qp	0	0	10.1	48.46	63.63	-15.17	-	-
2	.19725	23.97	Ca	0	0	10.1	34.07	-	-	53.73	-19.66
3	.68325	30.31	Qp	0	0	10.1	40.41	56	-15.59	-	-
4	.68325	25.08	Ca	0	0	10.1	35.18	-	-	46	-10.82
5	1.23225	10	Qp	0	.1	10.1	20.2	56	-35.8	-	-
6	1.23225	.78	Ca	0	.1	10.1	10.98	-	-	46	-35.02
7	1.45725	9.16	Qp	0	.1	10.1	19.36	56	-36.64	-	-
8	1.45725	.45	Ca	0	.1	10.1	10.65	-	-	46	-35.35
9	2.04675	12.13	Qp	0	.1	10.1	22.33	56	-33.67	-	-
10	2.04675	7	Ca	0	.1	10.1	17.2	-	-	46	-28.8
11	17.75175	26.12	Qp	0	.2	10.3	36.62	60	-23.38	-	-
12	17.75175	18.37	Ca	0	.2	10.3	28.87	-	-	50	-21.13

EUT WITH ANTENNA PORT TERMINATED -LINE 2 RESULTS

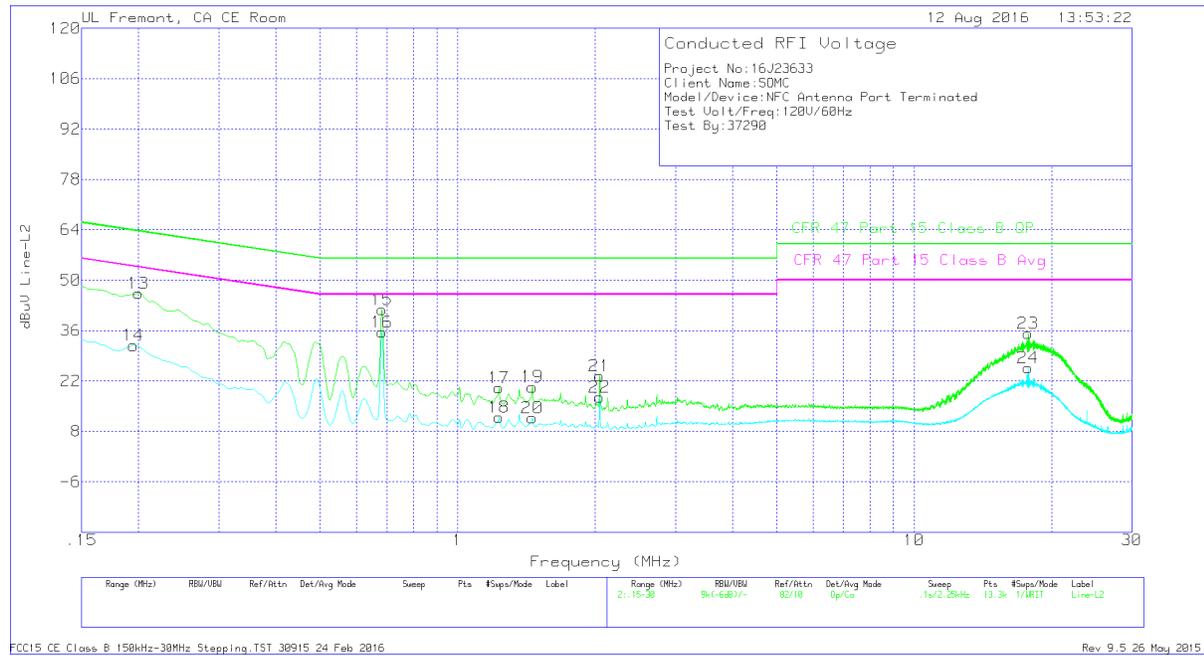

Range 1: Line-L1 .15 - 30MHz											
Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	LISN L2	LC Cables 2&3	Limiter (dB)	Corrected Reading dBuV	CFR 47 Part 15 Class B QP	QP Margin (dB)	CFR 47 Part 15 Class B Avg	Av(CISPR) Margin (dB)
13	.1995	36.25	Qp	0	0	10.1	46.35	63.63	-17.28	-	-
14	.195	21.74	Ca	0	0	10.1	31.84	-	-	53.82	-21.98
15	.68325	31.71	Qp	0	0	10.1	41.81	56	-14.19	-	-
16	.68325	25.54	Ca	0	0	10.1	35.64	-	-	46	-10.36
17	1.23225	9.95	Qp	0	.1	10.1	20.15	56	-35.85	-	-
18	1.23225	1.66	Ca	0	.1	10.1	11.86	-	-	46	-34.14
19	1.45725	10.16	Qp	0	.1	10.1	20.36	56	-35.64	-	-
20	1.45725	1.63	Ca	0	.1	10.1	11.83	-	-	46	-34.17
21	2.04675	13.24	Qp	0	.1	10.1	23.44	56	-32.56	-	-
22	2.04675	7.35	Ca	0	.1	10.1	17.55	-	-	46	-28.45
23	17.75175	24.74	Qp	0	.2	10.3	35.24	60	-24.76	-	-
24	17.75175	15.22	Ca	0	.2	10.3	25.72	-	-	50	-24.28

10. FREQUENCY STABILITY

LIMIT

§15.225 (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency, over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST PROCEDURE

ANSI C63.10

RESULTS

No non-compliance noted.

Startup

Reference Frequency: EUT Channel 13.56 MHz @ 20°C				
Limit: ± 100 ppm = 1.356 kHz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
			Delta (ppm)	Limit (ppm)
5.00	50	13.5592455	57.012	± 100
5.00	40	13.5592630	55.722	± 100
5.00	30	13.5592747	54.858	± 100
5.00	20	13.5600186	0.000	± 100
5.00	10	13.5593715	47.721	± 100
5.00	0	13.5593799	47.102	± 100
5.00	-10	13.5593899	46.368	± 100
5.00	-20	13.5593555	48.899	± 100
4.25	20	13.5593026	52.807	± 100
5.75	20	13.5593015	52.881	± 100

2 minutes

Reference Frequency: EUT Channel 13.56 MHz @ 20°C				
Limit: ± 100 ppm = 1.356 kHz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
			Delta (ppm)	Limit (ppm)
5.00	50	13.5592486	5.653	± 100
5.00	40	13.5592646	4.476	± 100
5.00	30	13.5592850	2.972	± 100
5.00	20	13.5593252	0.000	± 100
5.00	10	13.5593349	-0.710	± 100
5.00	0	13.5603853	-78.178	± 100
5.00	-10	13.5593875	-4.593	± 100
5.00	-20	13.5593814	-4.144	± 100
4.25	20	13.5593225	0.199	± 100
5.75	20	13.5593190	0.463	± 100

5 minutes

Reference Frequency: EUT Channel 13.56 MHz @ 20°C				
Limit: ± 100 ppm = 1.356 kHz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
			Delta (ppm)	Limit (ppm)
5.00	50	13.5592506	5.983	± 100
5.00	40	13.5592624	5.108	± 100
5.00	30	13.5592885	3.186	± 100
5.00	20	13.5593317	0.000	± 100
5.00	10	13.5593213	0.767	± 100
5.00	0	13.5593868	-4.063	± 100
5.00	-10	13.5593867	-4.060	± 100
5.00	-20	13.5593742	-3.136	± 100
4.25	20	13.5593322	-0.037	± 100
5.75	20	13.5593325	-0.060	± 100

10 minutes

Reference Frequency: EUT Channel 13.56 MHz @ 20°C				
Limit: ± 100 ppm = 1.356 kHz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
			Delta (ppm)	Limit (ppm)
5.00	50	13.5592453	4.544	± 100
5.00	40	13.5592646	3.116	± 100
5.00	30	13.5592726	2.529	± 100
5.00	20	13.5593069	0.000	± 100
5.00	10	13.5593516	-3.297	± 100
5.00	0	13.5593873	-5.928	± 100
5.00	-10	13.5593862	-5.849	± 100
5.00	-20	13.5593687	-4.556	± 100
4.25	20	13.5593080	-0.081	± 100
5.75	20	13.5593103	-0.255	± 100

TEST INFORMATION

Date 8/15/16-8/16/16
Project No: 11349470
Tester: Mark Learner