



# FCC RADIO TEST REPORT

**FCC ID** : PY7-48130K  
**Equipment** : GSM/WCDMA/LTE Phone with BT, DTS/UNII  
a/b/g/n/ac, GPS and NFC  
**Brand Name** : Sony  
**Applicant** : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa, Shinagawa-ku,  
Tokyo, 140-0002, Japan  
**Manufacturer** : Sony Mobile Communications Inc.  
4-12-3 Higashi-Shinagawa, Shinagawa-ku,  
Tokyo, 140-0002, Japan  
**Standard** : 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on Nov. 01, 2018 and testing was started from Apr. 09, 2019 and completed on Apr. 23, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Jones Tsai

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Modification of EUT .....	5
1.3 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator .....	6
1.4 Testing Location .....	7
1.5 Applicable Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System .....	9
2.3 Support Unit used in test configuration .....	9
2.4 Measurement Results Explanation Example .....	9
2.5 Frequency List of Low/Middle/High Channels.....	10
<b>3 Conducted Test Result .....</b>	<b>11</b>
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power and ERP/EIRP .....	12
<b>4 Radiated Test Items .....</b>	<b>13</b>
4.1 Measuring Instruments.....	13
4.2 Test Setup .....	13
4.3 Test Result of Radiated Test.....	13
4.4 Field Strength of Spurious Radiation Measurement .....	14
<b>5 List of Measuring Equipment.....</b>	<b>15</b>
<b>6 Uncertainty of Evaluation.....</b>	<b>17</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of ERP/EIRP and Radiated Test</b>	





### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(2)	Effective Radiated Power		
	§24.232 (c)	Equivalent Isotropic Radiated Power		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power		
-	§24.232 (d)	Peak-to-Average Ratio	Pass	-
-	§2.1049 §22.917 (b) §24.238 (b) §27.53 (g)	Occupied Bandwidth	Pass	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Band Edge Measurement	Pass	-
-	§2.1051 §22.917 (a) §24.238 (a) §27.53 (g)	Conducted Emission	Pass	-
-	§2.1055 §22.355	Frequency Stability Temperature & Voltage	Pass	-
	§2.1055 §24.235 §27.54			-
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation	Pass	Under limit 31.50 dB at 3344.000 MHz

**Remark:**

1. This is a variant report. All the test cases were performed on original report which can be referred to Sporton Report Number FG8O2417-03A.
2. The spot-check data performed in this report are chosen from the worst case of the original FCC ID report and the spot-check data summary is included in the another spot check data report.

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Wii Chang**

**Report Producer: Natasha Hsieh**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, NFC, and GNSS.

Standards-related Product Specification	
Antenna Type	Monopole / Loop Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	2.37	BH97007BFR	Conducted Measurement
		QV71005D1S QV71005J1S	ERP/EIRP Test Radiated Spurious Emission

Accessory List	
AC Adapter	Model No. : UCH32
	S/N: 6218W30200140
Earphone	Model No.: MH750
	S/N : N/A
USB Cable	Model No.: UCB24
	S/N : N/A
2 in 1 USB Audio Cable	Model No.: EC270
	S/N : N/A

**Note:**

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
3. For other wireless features of this EUT, test report will be issued separately.

## 1.2 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.3 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	Frequency Range (MHz)	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22	824.2 ~848.8	GSM850 GPRS class 8	GMSK	0.4150	-	-
Part 22	824.2 ~848.8	GSM850 EDGE class 8	8PSK	0.1483	-	-
Part 22	826.4 ~846.6	WCDMA Band V RMC 12.2Kbps	BPSK	0.0798	-	-
Part 24	1850.2 ~1909.8	GSM1900 GPRS class 8	GMSK	0.2018	-	-
Part 24	1850.2 ~1909.8	GSM1900 EDGE class 8	8PSK	0.1416	-	-
Part 24	1852.4 ~ 1907.6	WCDMA Band II RMC 12.2Kbps	BPSK	0.0274	-	-
Part 27	1712.4 ~ 1752.6	WCDMA Band IV RMC 12.2Kbps	BPSK	0.0910	-	-



### 1.4 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH03-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	03CH10-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW0007

### 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

Radiated emissions were investigated as following frequency range:


1. 30 MHz to 9000 MHz for GSM850 and WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV.
3. 30 MHz to 19100 MHz for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes	
Band	Radiated TCs
GSM 850	■ GPRS Class 8 Link ■ EDGE Class 8 Link
GSM 1900	■ GPRS Class 8 Link ■ EDGE Class 8 Link
WCDMA Band V	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link

## 2.2 Connection Diagram of Test System

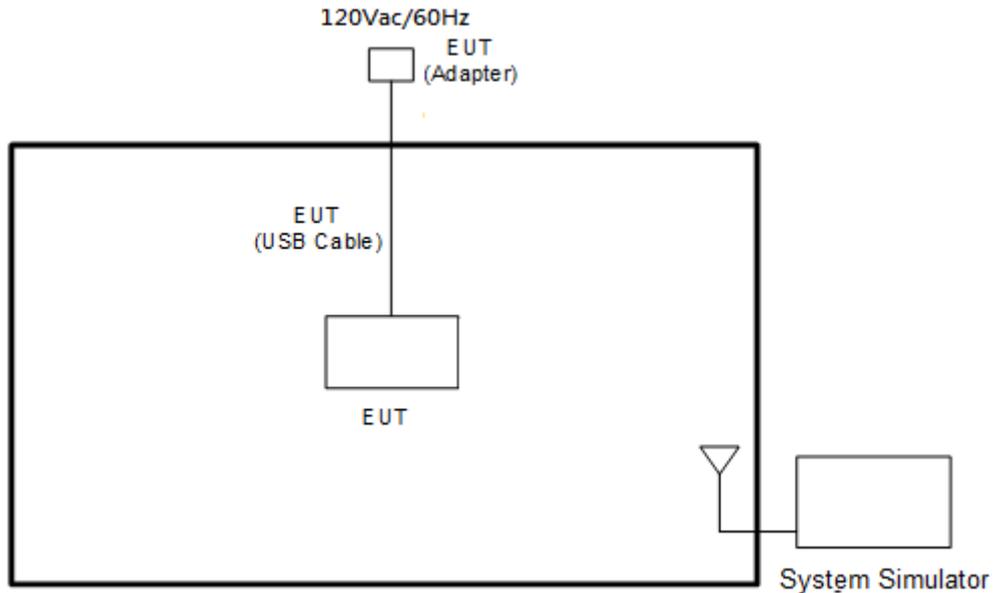

## 2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	8820C	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



## 2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
GSM850	Channel	128	189	251
	Frequency	824.2	836.4	848.8
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
GSM1900	Channel	512	661	810
	Frequency	1850.2	1880.0	1909.8
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


### 3 Conducted Test Result

#### 3.1 Measuring Instruments

See list of measuring instruments of this test report.

##### 3.1.1 Test Setup

##### 3.1.2 Conducted Output Power

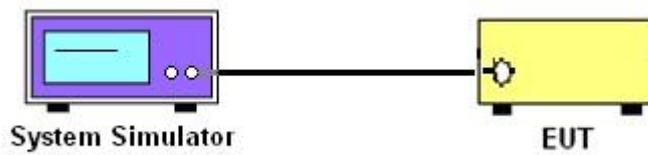

##### 3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



## 3.2 Conducted Output Power and ERP/EIRP

### 3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

For radiated test from 30MHz to 1GHz

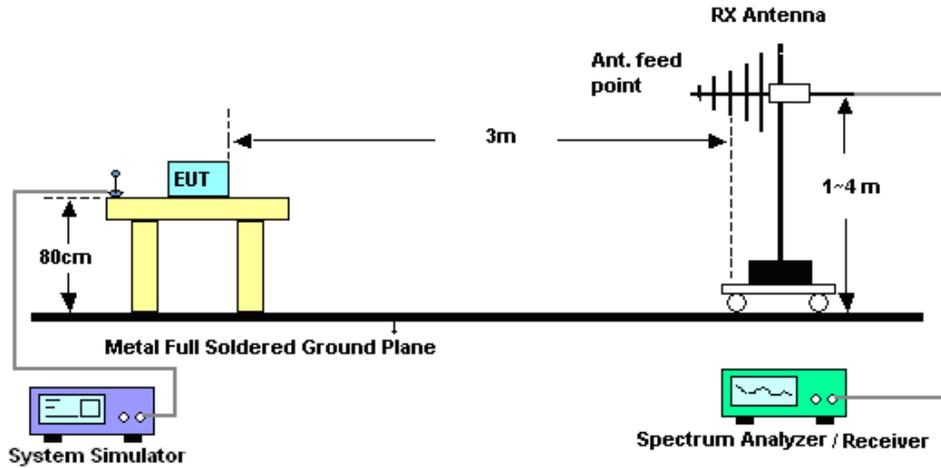

For radiated test above 1GHz

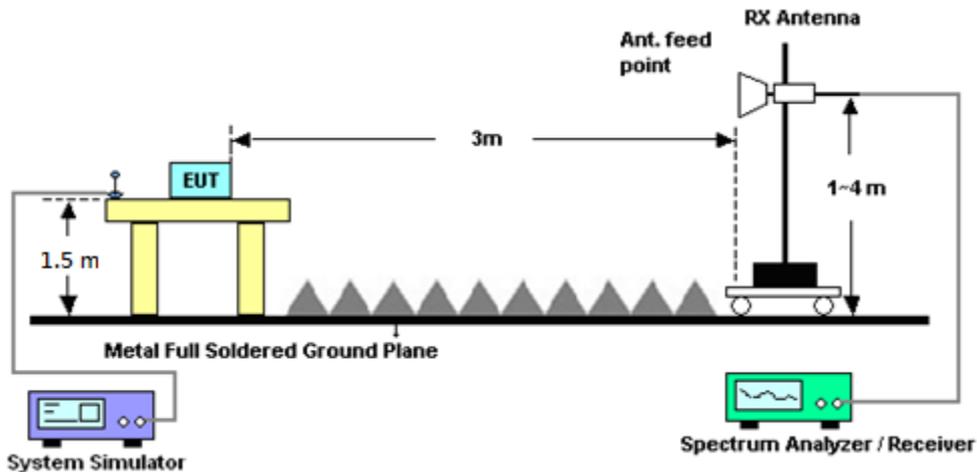

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## 4.4 Field Strength of Spurious Radiation Measurement

### 4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP (dBm) = S.G. Power - Tx Cable Loss + Tx Antenna Gain$
11.  $ERP (dBm) = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 06, 2019	Apr. 17, 2019~ Apr. 20, 2019	Mar. 05, 2020	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Jun. 29, 2018	Apr. 17, 2019~ Apr. 20, 2019	Jun. 28, 2019	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SU-641	92013721	-30°C ~70°C	Dec. 06, 2017	Apr. 17, 2019~ Apr. 20, 2019	Dec. 05, 2019	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL883644	Voltage:0~20V;C urrent:0~5A	Dec. 06, 2017	Apr. 17, 2019~ Apr. 20, 2019	Dec. 05, 2019	Conducted (TH03-HY)
Base Station (Measure)	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 10, 2018	Apr. 17, 2019~ Apr. 20, 2019	Aug. 09, 2019	Conducted (TH03-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Oct. 23, 2018	Apr. 09, 2019~ Apr. 23, 2019	Oct. 22, 2019	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D&0080 0N1D01N-06	35413&02	30MHz~1GHz	Feb. 12, 2019	Apr. 09, 2019~ Apr. 23, 2019	Feb. 11, 2020	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Oct. 02, 2018	Apr. 09, 2019~ Apr. 23, 2019	Oct. 01, 2019	Radiation (03CH10-HY)
Horn Antenna	ESCO	3117	00211469	1GHz~18GHz	Aug. 06, 2018	Apr. 09, 2019~ Apr. 23, 2019	Aug. 05, 2019	Radiation (03CH10-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	May 15, 2017	Apr. 09, 2019~ Apr. 23, 2019	May 14, 2019	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY5327007 8	1GHz~26.5GHz	Oct. 28, 2018	Apr. 09, 2019~ Apr. 23, 2019	Oct. 27, 2019	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY5420048 5	10Hz ~ 44GHz	Nov. 02, 2018	Apr. 09, 2019~ Apr. 23, 2019	Nov. 01, 2019	Radiation (03CH10-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Apr. 09, 2019~ Apr. 23, 2019	N/A	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-4500 -B	N/A	1~4m	N/A	Apr. 09, 2019~ Apr. 23, 2019	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0~360 Degree	N/A	Apr. 09, 2019~ Apr. 23, 2019	N/A	Radiation (03CH10-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Apr. 09, 2019~ Apr. 23, 2019	N/A	Radiation (03CH10-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	May 22, 2018	Apr. 09, 2019~ Apr. 23, 2019	May 21, 2019	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91705 76	18GHz ~ 40GHz	May 08, 2018	Apr. 09, 2019~ Apr. 23, 2019	May 07, 2019	Radiation (03CH10-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA91702 51	18GHz ~ 40GHz	Nov. 20, 2018	Apr. 09, 2019~ Apr. 23, 2019	Nov. 19, 2019	Radiation (03CH10-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4PE, MY11693/4PE, MY2855/2	30M-1G	Nov. 08, 2018	Apr. 09, 2019~ Apr. 23, 2019	Nov. 07, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104 / 102	MY11692/4PE, MY11693/4PE, MY2855/2	1G-18G	Nov. 08, 2018	Apr. 09, 2019~ Apr. 23, 2019	Nov. 07, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	505134/2	30M~40GHz	Oct. 16, 2018	Apr. 09, 2019~ Apr. 23, 2019	Oct. 15, 2019	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	800740/2	30M~40GHz	Oct. 16, 2018	Apr. 09, 2019~ Apr. 23, 2019	Oct. 15, 2019	Radiation (03CH10-HY)
Notch Filter	Wainwright	WTRCT5-824-849-20-70-60SSK	SN1	824-849	May 22, 2019	Apr. 09, 2019~ Apr. 23, 2019	May 21, 2019	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCT10-1920-1980-20-40-40SSK	SN1	1920-1980	May 22, 2018	Apr. 09, 2019~ Apr. 23, 2019	May 21, 2019	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCG1710/1755-1690/1755-45/7SS	SN2	AWS Band	Nov. 06, 2018	Apr. 09, 2019~ Apr. 23, 2019	Nov. 05, 2019	Radiation (03CH10-HY)
Filter	Wainwright	WLKS1200-8SS	SN3	1.2G Low Pass	Nov. 02, 2018	Apr. 09, 2019~ Apr. 23, 2019	Nov. 01, 2019	Radiation (03CH10-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Nov. 02, 2018	Apr. 09, 2019~ Apr. 23, 2019	Nov. 01, 2019	Radiation (03CH10-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Nov. 02, 2018	Apr. 09, 2019~ Apr. 23, 2019	Nov. 01, 2019	Radiation (03CH10-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.17
---	------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.48
---	------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.00
---	------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band	GSM850			GSM1900		
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880	1909.8
GSM	31.22	31.21	31.20	27.20	27.63	27.45
GPRS class 8	<b>31.23</b>	31.22	31.18	27.21	<b>27.65</b>	27.48
GPRS class 10	29.36	29.21	28.87	25.34	25.58	25.56
GPRS class 11	27.41	26.93	27.03	23.27	23.59	23.53
GPRS class 12	26.26	26.08	26.05	22.27	22.58	22.53
EGPRS class 8	26.69	26.73	<b>26.76</b>	25.70	<b>26.11</b>	26.01
EGPRS class 10	25.22	25.25	25.24	24.27	24.26	24.32
EGPRS class 11	23.32	23.33	23.34	22.17	22.22	22.20
EGPRS class 12	22.42	22.37	22.20	21.16	21.24	21.23

Conducted Power (*Unit: dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
RMC 12.2K	23.91	24.00	<b>24.07</b>	18.78	<b>18.97</b>	18.84
HSDPA Subtest-1	22.87	22.89	23.00	17.67	17.81	17.73
HSDPA Subtest-2	22.86	22.88	22.95	17.65	17.76	17.68
HSDPA Subtest-3	22.34	22.38	22.44	17.15	17.35	17.18
HSDPA Subtest-4	22.36	22.38	22.42	17.15	17.36	17.18
HSUPA Subtest-1	22.77	22.90	22.99	17.69	17.82	17.74
HSUPA Subtest-2	20.75	20.87	20.89	15.64	15.86	15.72
HSUPA Subtest-3	21.76	21.89	21.97	16.71	16.80	16.77
HSUPA Subtest-4	20.88	20.97	21.03	15.68	15.85	15.78
HSUPA Subtest-5	23.00	23.02	23.10	17.70	17.90	17.80



<b>Conducted Power (*Unit: dBm)</b>			
<b>Band</b>	<b>WCDMA Band IV</b>		
<b>Channel</b>	<b>1312</b>	<b>1413</b>	<b>1513</b>
<b>Frequency</b>	<b>1712.4</b>	<b>1732.6</b>	<b>1752.6</b>
<b>RMC 12.2K</b>	19.32	<b>19.49</b>	19.40
<b>HSDPA Subtest-1</b>	18.13	18.37	18.26
<b>HSDPA Subtest-2</b>	18.16	18.39	18.27
<b>HSDPA Subtest-3</b>	17.70	17.88	17.77
<b>HSDPA Subtest-4</b>	17.67	17.86	17.76
<b>HSUPA Subtest-1</b>	18.19	18.34	18.26
<b>HSUPA Subtest-2</b>	16.13	16.36	16.24
<b>HSUPA Subtest-3</b>	17.21	17.41	17.32
<b>HSUPA Subtest-4</b>	16.22	16.40	16.30
<b>HSUPA Subtest-5</b>	18.30	18.40	18.33



## Appendix B. Test Results of ERP/EIRP and Radiated Test

### ERP/EIRP

Channel	Mode	Conducted		ERP	
		Power (dBm)	Power (Watts)	ERP(dBm)	ERP(W)
Lowest	GSM850 GPRS class 8 (GT - LC = -2.9 dB)	31.23	1.3274	26.18	0.4150
Middle		31.22	1.3243	26.17	0.4140
Highest		31.18	1.3122	26.13	0.4102
Lowest	GSM850 EDGE class 8 (GT - LC = -2.9 dB)	26.69	0.4667	21.64	0.1459
Middle		26.73	0.4710	21.68	0.1472
Highest		26.76	0.4742	21.71	0.1483
Lowest	WCDMA Band V RMC 12.2Kbps (GT - LC = -2.9 dB)	23.91	0.2460	18.86	0.0769
Middle		24.00	0.2512	18.95	0.0785
Highest		24.07	0.2553	19.02	0.0798
Limit	ERP < 7W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	GSM1900 GPRS class 8 (GT - LC = -4.6 dB)	27.21	0.5260	22.61	0.1824
Middle		27.65	0.5821	23.05	0.2018
Highest		27.48	0.5598	22.88	0.1941
Lowest	GSM1900 EDGE class 8 (GT - LC = -4.6 dB)	25.70	0.3715	21.10	0.1288
Middle		26.11	0.4083	21.51	0.1416
Highest		26.01	0.3990	21.41	0.1384
Lowest	WCDMA Band II RMC 12.2Kbps (GT - LC = -4.6 dB)	18.78	0.0755	14.18	0.0262
Middle		18.97	0.0789	14.37	0.0274
Highest		18.84	0.0766	14.24	0.0265
Limit	EIRP < 2W	Result		PASS	

Channel	Mode	Conducted		EIRP	
		Power (dBm)	Power (Watts)	EIRP(dBm)	EIRP(W)
Lowest	WCDMA Band IV RMC 12.2Kbps (GT - LC = 0.1 dB)	19.32	0.0855	19.42	0.0875
Middle		19.49	0.0889	19.59	0.0910
Highest		19.40	0.0871	19.50	0.0891
Limit	EIRP < 1W	Result		PASS	



Radiated Spurious Emission

GPRS 850

GPRS 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-46.81	-13	-33.81	-68.63	-65.63	0.82	8.79	H
	2508	-45.46	-13	-32.46	-72.07	-66.05	1.05	10.81	H
	3344	-44.50	-13	-31.50	-72.88	-66.21	1.10	11.96	H
									H
									H
									H
									H
	1672	-46.50	-13	-33.50	-68.15	-65.30	0.82	8.79	V
	2508	-58.67	-13	-45.67	-72.37	-66.28	1.05	10.81	V
	3344	-57.89	-13	-44.89	-73.76	-66.59	1.10	11.96	V
									V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EDGE 850**

EDGE 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-58.56	-13	-45.56	-67.38	-64.38	0.82	8.79	H
	2508	-58.87	-13	-45.87	-72.5	-66.48	1.05	10.81	H
	3344	-57.55	-13	-44.55	-72.93	-66.26	1.10	11.96	H
									H
									H
									H
									H
	1672	-59.97	-13	-46.97	-68.64	-65.79	0.82	8.79	V
	2508	-58.98	-13	-45.98	-72.7	-66.59	1.05	10.81	V
	3344	-57.27	-13	-44.27	-73.15	-65.98	1.10	11.96	V
									V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA850**

WCDMA850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1656	-63.25	-13	-50.25	-72.72	-69.00	0.82	8.72	H
	2480	-58.92	-13	-45.92	-72.49	-66.50	1.04	10.77	H
	3304	-58.04	-13	-45.04	-73.63	-66.66	1.10	11.87	H
									H
									H
									H
									H
	1656	-64.18	-13	-51.18	-72.79	-69.93	0.82	8.72	V
	2480	-58.92	-13	-45.92	-72.64	-66.50	1.04	10.77	V
	3304	-57.95	-13	-44.95	-73.93	-66.57	1.10	11.87	V
									V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**GPRS 1900**

GPRS 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-57.85	-13	-44.85	-75.48	-69.09	1.27	12.51	H
	5640	-54.91	-13	-41.91	-76.66	-66.33	1.85	13.27	H
	7520	-49.95	-13	-36.95	-76.61	-58.57	2.50	11.11	H
									H
									H
									H
									H
	3760	-57.44	-13	-44.44	-75.67	-68.68	1.27	12.51	V
	5640	-54.45	-13	-41.45	-76.86	-65.87	1.85	13.27	V
	7520	-49.61	-13	-36.61	-76.07	-58.23	2.50	11.11	V
									V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**EDGE 1900**

EDGE 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-57.83	-13	-44.83	-75.46	-69.07	1.27	12.51	H
	5640	-55.00	-13	-42.00	-76.75	-66.42	1.85	13.27	H
	7520	-49.86	-13	-36.86	-76.52	-58.48	2.50	11.11	H
									H
									H
									H
									H
	3760	-57.10	-13	-44.10	-75.33	-68.34	1.27	12.51	V
	5640	-54.28	-13	-41.28	-76.92	-65.70	1.85	13.27	V
	7520	-50.08	-13	-37.08	-76.54	-58.70	2.50	11.11	V
									V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA 1900**

WCDMA 1900									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3760	-58.02	-13	-45.02	-75.65	-69.26	1.27	12.51	H
	5640	-55.09	-13	-42.09	-76.84	-66.51	1.85	13.27	H
	7520	-49.90	-13	-36.90	-76.56	-58.52	2.50	11.11	H
									H
									H
									H
									H
	3760	-57.24	-13	-44.24	-75.47	-68.48	1.27	12.51	V
	5640	-54.53	-13	-41.53	-76.94	-65.95	1.85	13.27	V
	7520	-49.99	-13	-36.99	-76.45	-58.61	2.50	11.11	V
									V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**WCDMA 1700**

WCDMA 1700									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	3505.2	-56.34	-13	-43.34	-73.64	-67.54	1.10	12.30	H
	5257.8	-55.83	-13	-42.83	-76.95	-67.23	1.60	13.01	H
	7010.4	-51.71	-13	-38.71	-76.12	-61.25	2.24	11.79	H
									H
									H
									H
									H
	3505.2	-56.02	-13	-43.02	-73.5	-67.22	1.10	12.30	V
	5257.8	-55.02	-13	-42.02	-76.85	-66.42	1.60	13.01	V
	7010.4	-50.66	-13	-37.66	-75.82	-60.20	2.24	11.79	V
									V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.