

Appendix B

GSM850
GSM1900
WCDMA Band II
WCDMA Band IV
WCDMA Band V
LTE Band 2
LTE Band 12
LTE Band 13
LTE Band 25
LTE Band 26
LTE Band 66
LTE Band 41
NR n5
NR n41
NR n66
NR n77
WIFI 2.4G
WIFI 5G
BT
NFC

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, GSM 850, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 190 (836.600 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	GSM 850	GSM, 10090-DAC	836.600, 190	0.894	40.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL835	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-06, 10:48	2025-02-06, 10:53
psSAR1g [W/Kg]	0.173	0.187
psSAR10g [W/Kg]	0.119	0.147
Power Drift [dB]	-0.00	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.1
Dist 3dB Peak [mm]		16.0

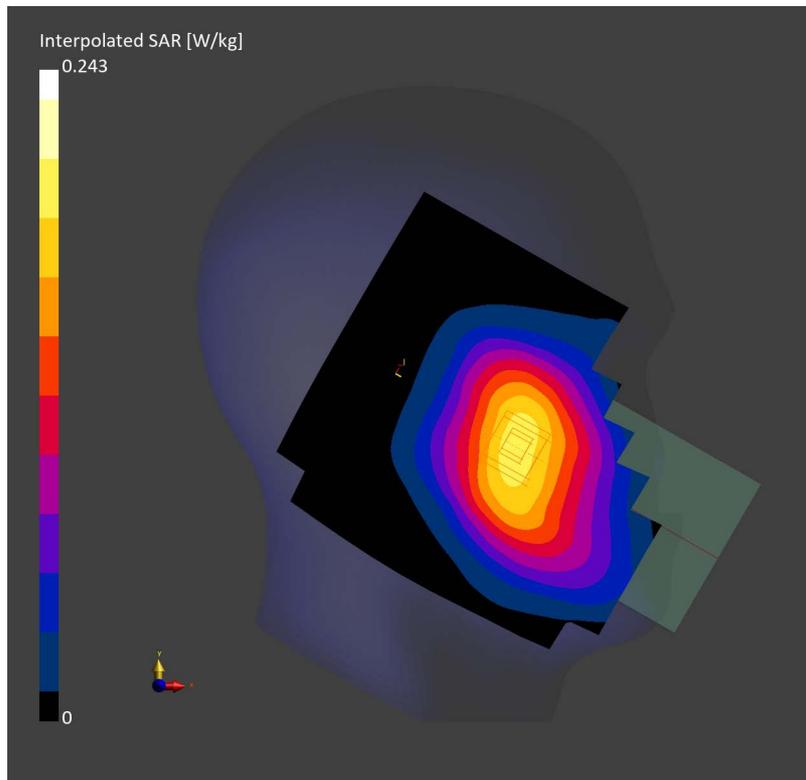

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, GSM 850, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 190 (836.600 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	GSM 850	GSM, 10090-DAC	836.600, 190	0.894	40.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL835	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-06, 13:55	2025-02-06, 13:58
psSAR1g [W/Kg]	0.363	0.371
psSAR10g [W/Kg]	0.239	0.223
Power Drift [dB]	-0.09	-0.19
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		54.7
Dist 3dB Peak [mm]		15.1

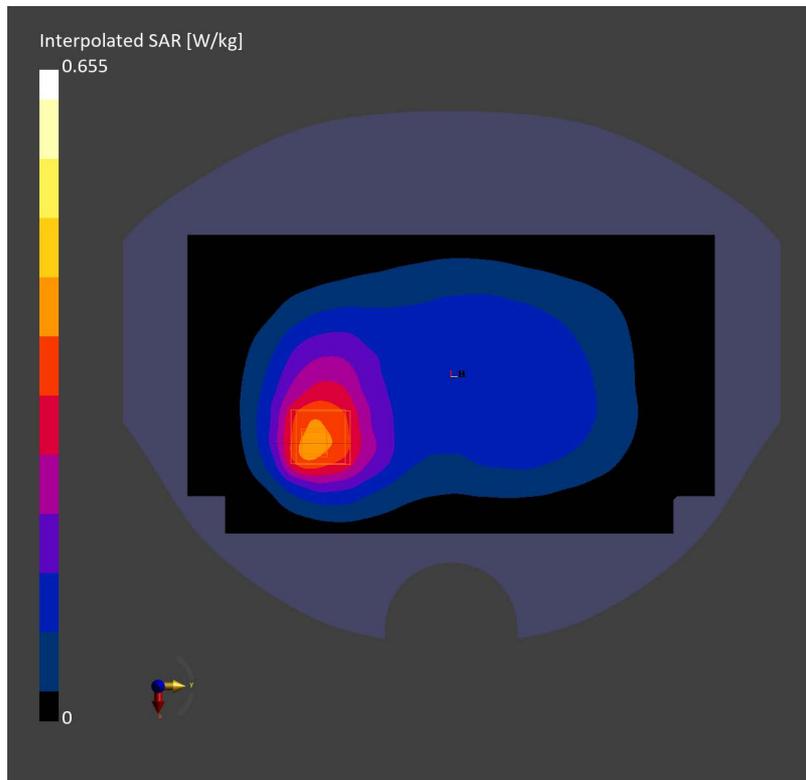

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 661 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	PCS 1900	GSM, 10090-DAC	1880.000, 661	1.41	40.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 150.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-06, 11:48	2025-02-06, 11:54
psSAR1g [W/Kg]	0.125	0.129
psSAR10g [W/Kg]	0.072	0.079
Power Drift [dB]	-0.13	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		64.6
Dist 3dB Peak [mm]		13.2

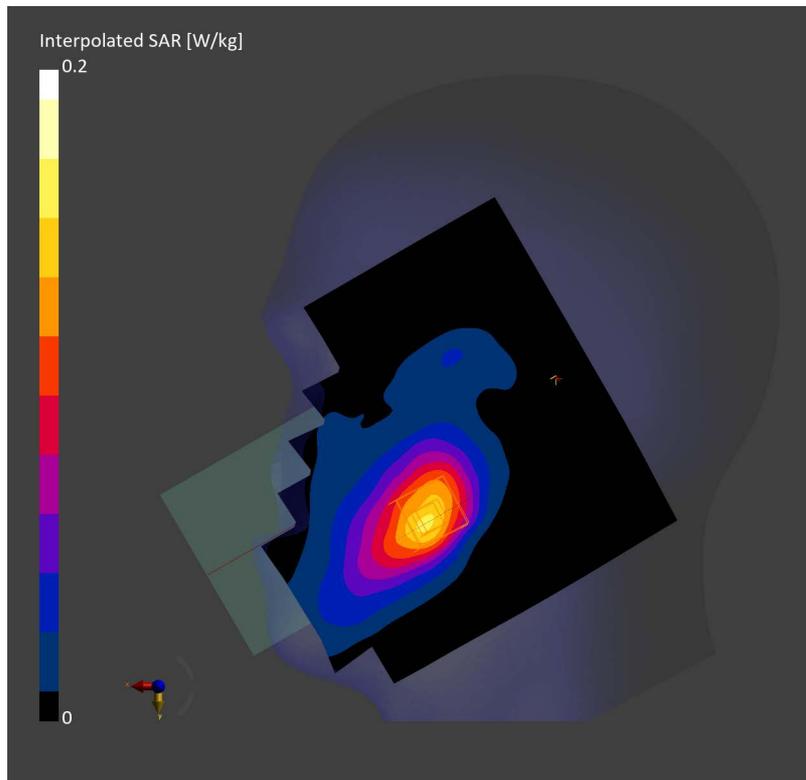

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 661 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	PCS 1900	GSM, 10090-DAC	1880.000, 661	1.41	40.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-06, 12:14	2025-02-06, 12:19
psSAR1g [W/Kg]	0.352	0.361
psSAR10g [W/Kg]	0.206	0.203
Power Drift [dB]	-0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.0
Dist 3dB Peak [mm]		12.2

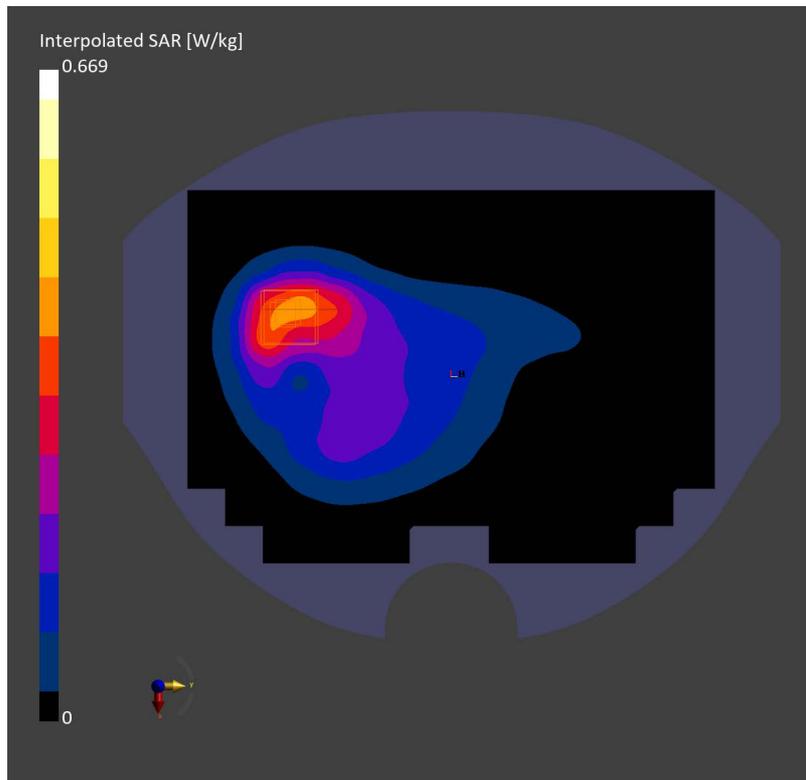

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, PCS 1900, GPRS-FDD (TDMA, GMSK, TN 0-4), Channel 661 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	PCS 1900	GSM, 10090-DAC	1880.000, 661	1.41	40.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-06, 12:30	2025-02-06, 12:33
psSAR1g [W/Kg]	0.369	0.386
psSAR10g [W/Kg]	0.194	0.207
Power Drift [dB]	-0.02	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.4
Dist 3dB Peak [mm]		11.2

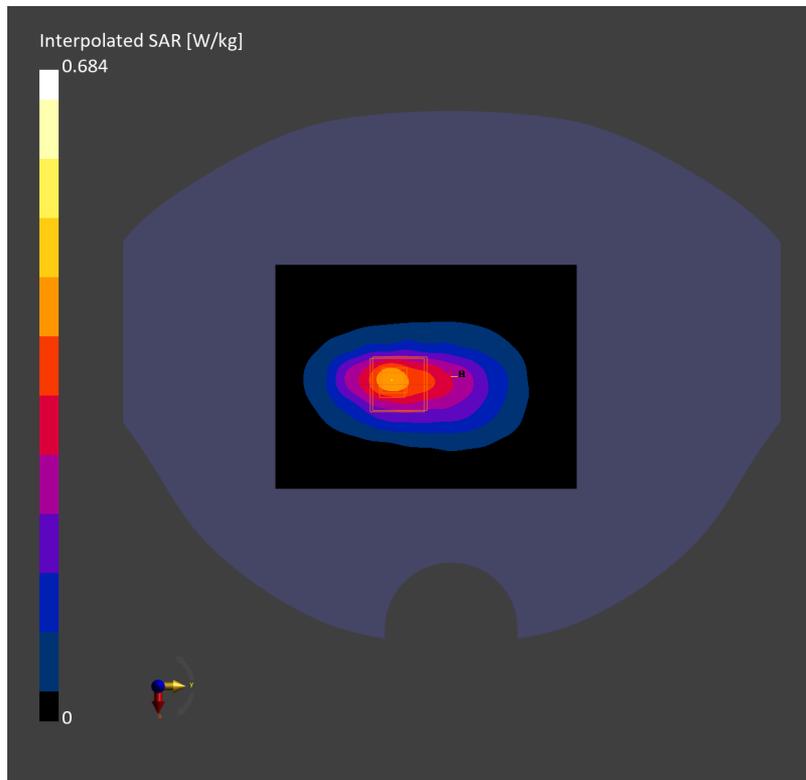

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 2, UMTS-FDD, Channel 9400 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 2	WCDMA, 10457-AAB	1880.000, 9400	1.39	39.3

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 16:32	2025-02-13, 16:37
psSAR1g [W/Kg]	0.047	0.047
psSAR10g [W/Kg]	0.027	0.029
Power Drift [dB]	0.01	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.7
Dist 3dB Peak [mm]		10.7

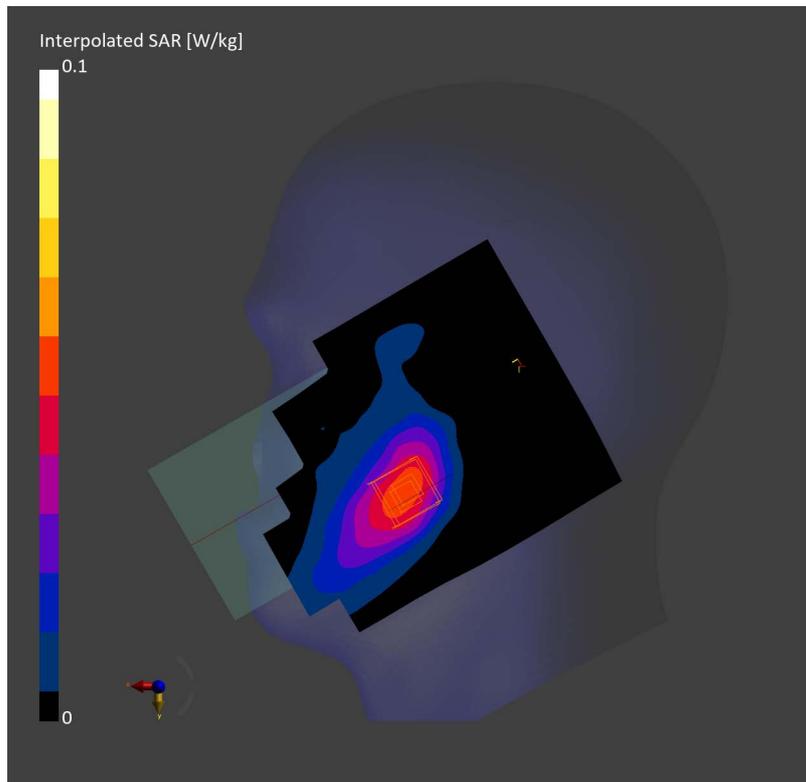

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 2, UMTS-FDD, Channel 9400 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 2	WCDMA, 10457-AAB	1880.000, 9400	1.39	39.3

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 14:32	2025-02-13, 14:36
psSAR1g [W/Kg]	0.178	0.175
psSAR10g [W/Kg]	0.100	0.098
Power Drift [dB]	-0.02	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.6
Dist 3dB Peak [mm]		12.8

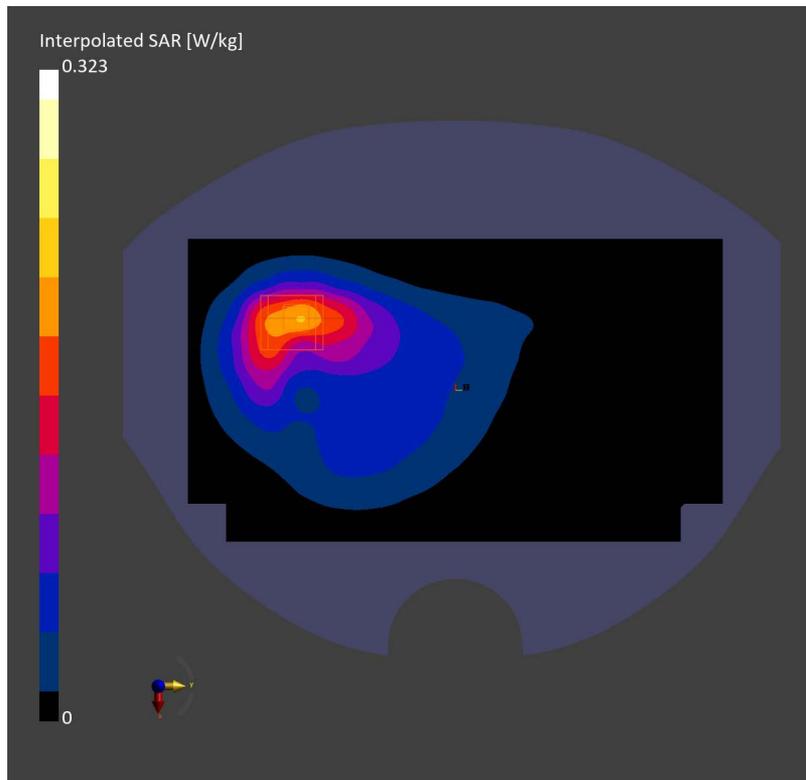

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band 2, UMTS-FDD, Channel 9400 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 2	WCDMA, 10457-AAB	1880.000, 9400	1.39	39.3

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 15:18	2025-02-13, 15:21
psSAR1g [W/Kg]	0.173	0.199
psSAR10g [W/Kg]	0.096	0.105
Power Drift [dB]	0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.4
Dist 3dB Peak [mm]		11.2

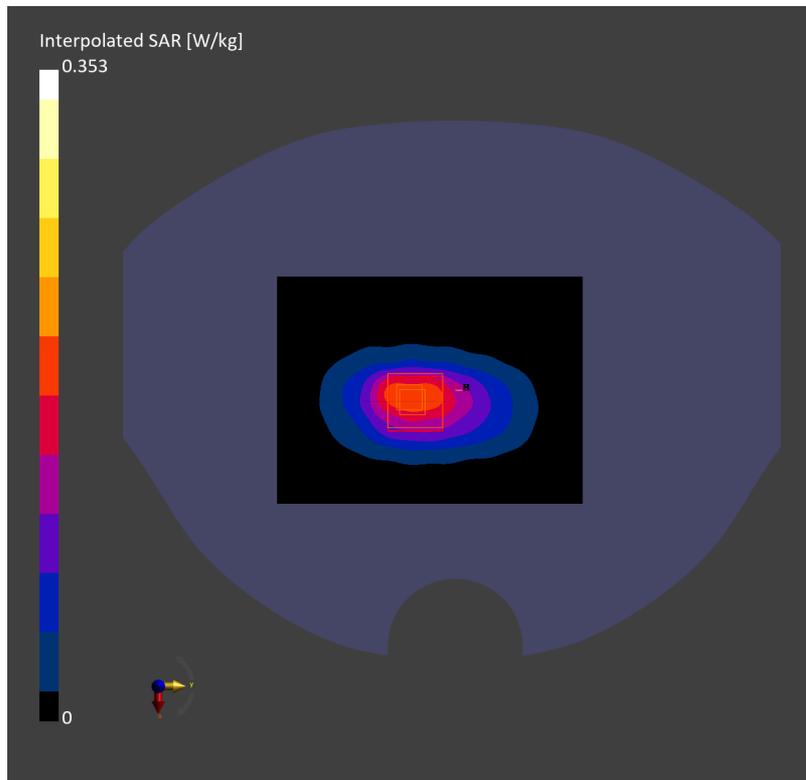

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 4, UMTS-FDD, Channel 1412 (1732.400 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 4	WCDMA, 10457-AAB	1732.400, 1412	1.35	40.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 16:47	2025-02-13, 16:53
psSAR1g [W/Kg]	0.061	0.064
psSAR10g [W/Kg]	0.036	0.040
Power Drift [dB]	-0.05	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		67.6
Dist 3dB Peak [mm]		11.5

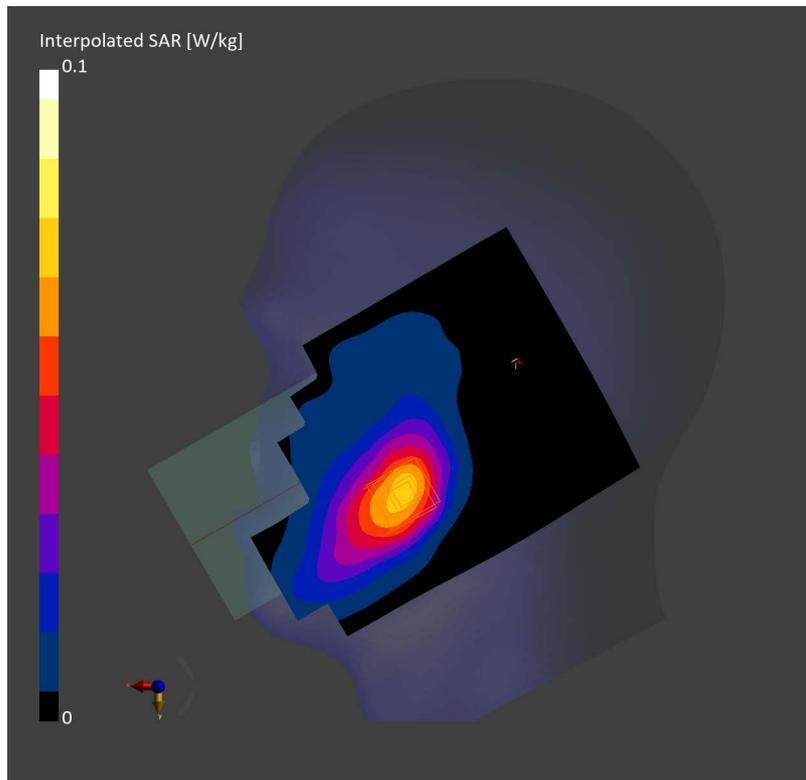

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, FRONT, Band 4, UMTS-FDD, Channel 1412 (1732.400 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	Band 4	WCDMA, 10457-AAB	1732.400, 1412	1.35	40.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 14:52	2025-02-13, 14:55
psSAR1g [W/Kg]	0.229	0.257
psSAR10g [W/Kg]	0.135	0.144
Power Drift [dB]	0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.9
Dist 3dB Peak [mm]		10.8

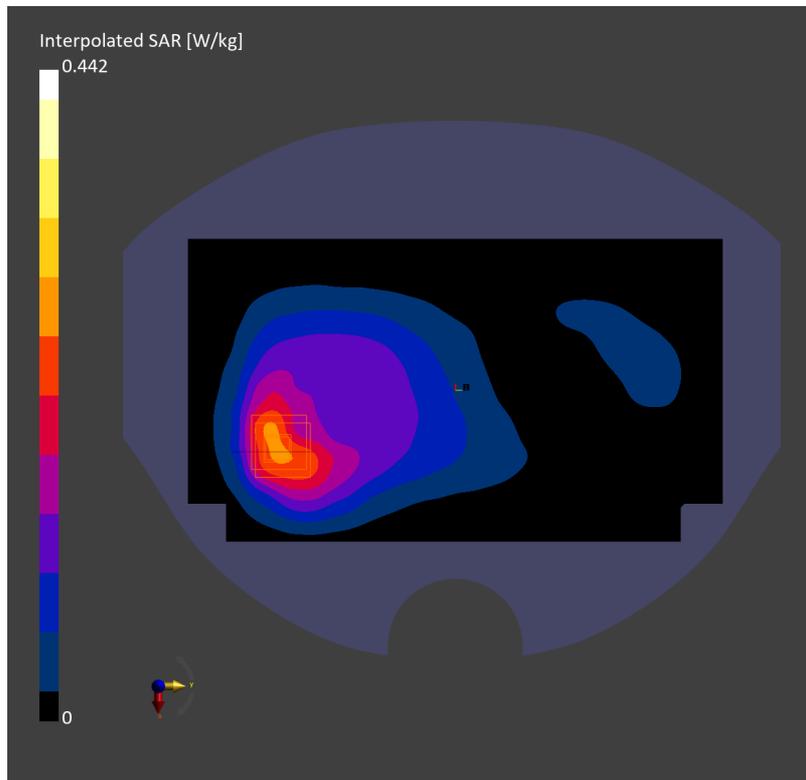

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band 4, UMTS-FDD, Channel 1412 (1732.400 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 4	WCDMA, 10457-AAB	1732.400, 1412	1.35	40.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 150.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	8.5 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 15:05	2025-02-13, 15:08
psSAR1g [W/Kg]	0.273	0.286
psSAR10g [W/Kg]	0.147	0.151
Power Drift [dB]	0.01	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.7
Dist 3dB Peak [mm]		10.8

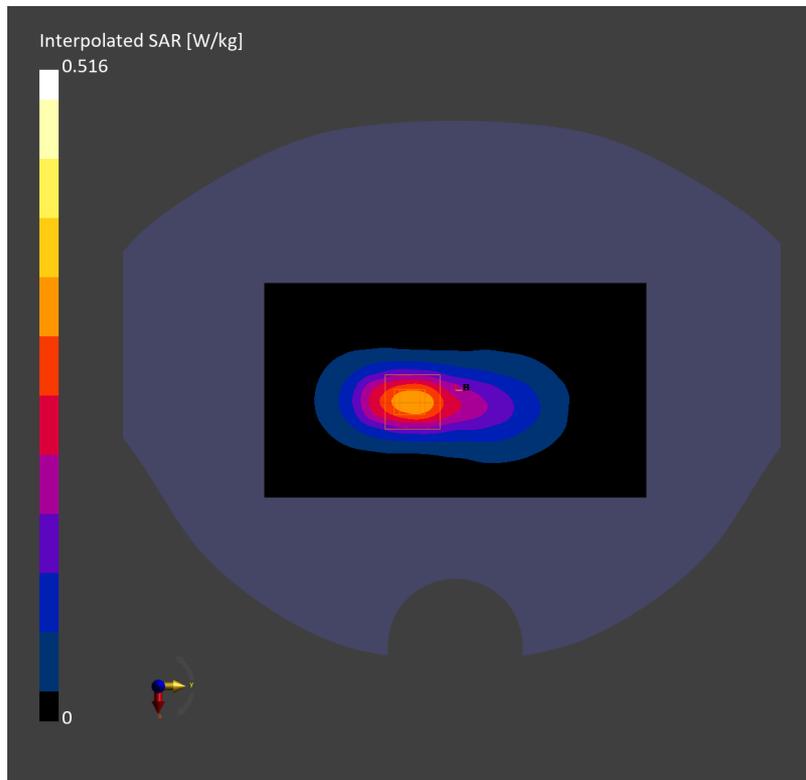

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 5, UMTS-FDD (WCDMA), Channel 4182 (836.400 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 5	WCDMA, 10011-CAC	836.400, 4182	0.894	40.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL835	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-05, 19:49	2025-02-05, 19:54
psSAR1g [W/Kg]	0.035	0.036
psSAR10g [W/Kg]	0.024	0.028
Power Drift [dB]	0.00	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.9
Dist 3dB Peak [mm]		16.0

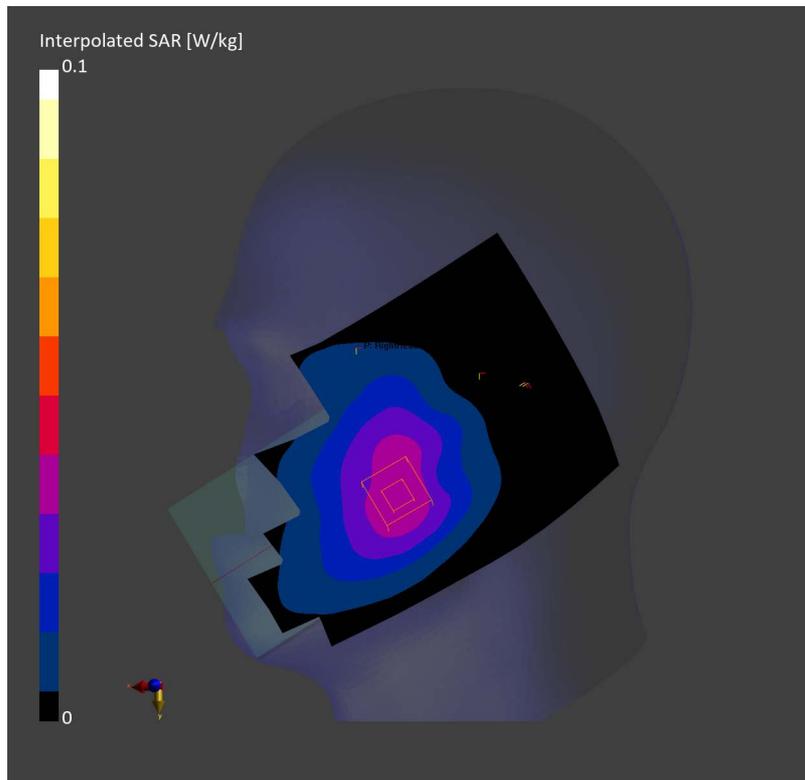

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 5, UMTS-FDD (WCDMA), Channel 4182 (836.400 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 5	WCDMA, 10011-CAC	836.400, 4182	0.894	40.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL835	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-05, 19:01	2025-02-05, 19:04
psSAR1g [W/Kg]	0.101	0.106
psSAR10g [W/Kg]	0.066	0.063
Power Drift [dB]	0.00	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.5
Dist 3dB Peak [mm]		14.8

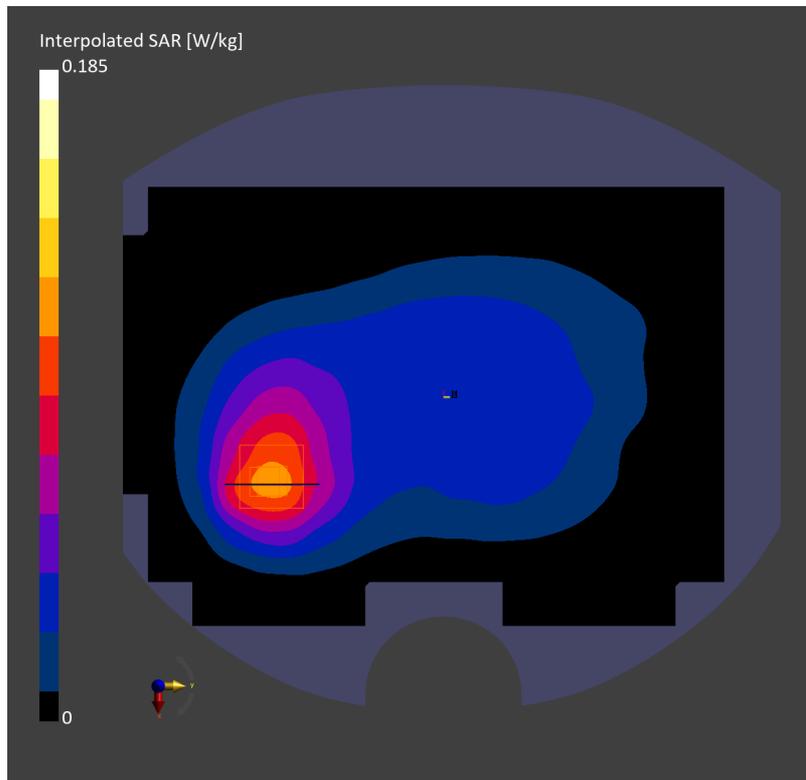

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 2, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 18900 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 2	LTE-FDD, 10169-CAF	1880.000, 18900	1.41	40.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-06, 20:34	2025-02-06, 20:38
psSAR1g [W/Kg]	0.351	0.361
psSAR10g [W/Kg]	0.169	0.162
Power Drift [dB]	0.17	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		46.4
Dist 3dB Peak [mm]		8.8

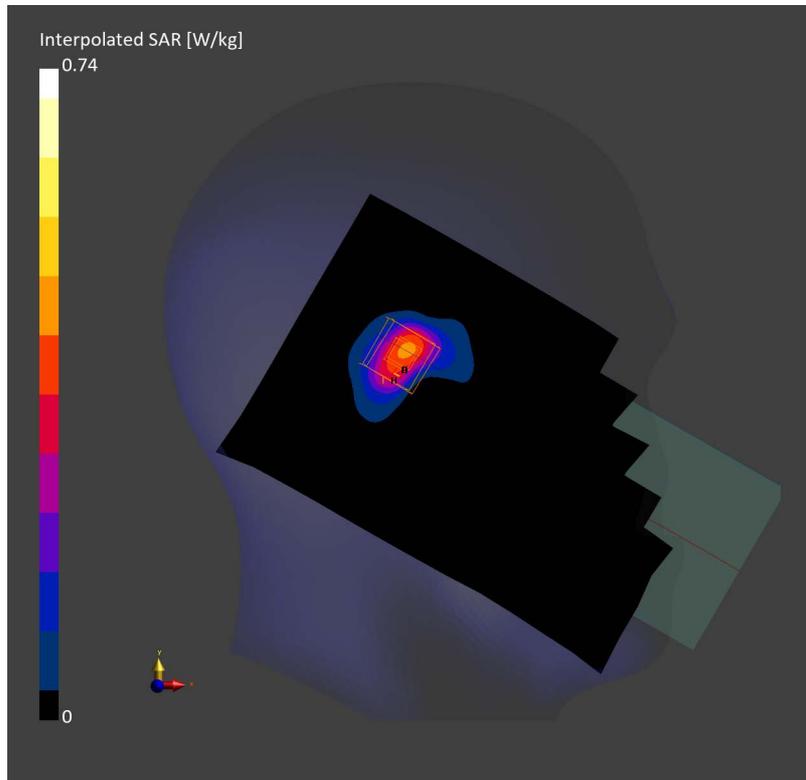

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 2, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 18900 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 2	LTE-FDD, 10169-CAF	1880.000, 18900	1.41	40.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-06, 20:56	2025-02-06, 21:00
psSAR1g [W/Kg]	0.127	0.138
psSAR10g [W/Kg]	0.067	0.073
Power Drift [dB]	0.11	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.9
Dist 3dB Peak [mm]		10.2

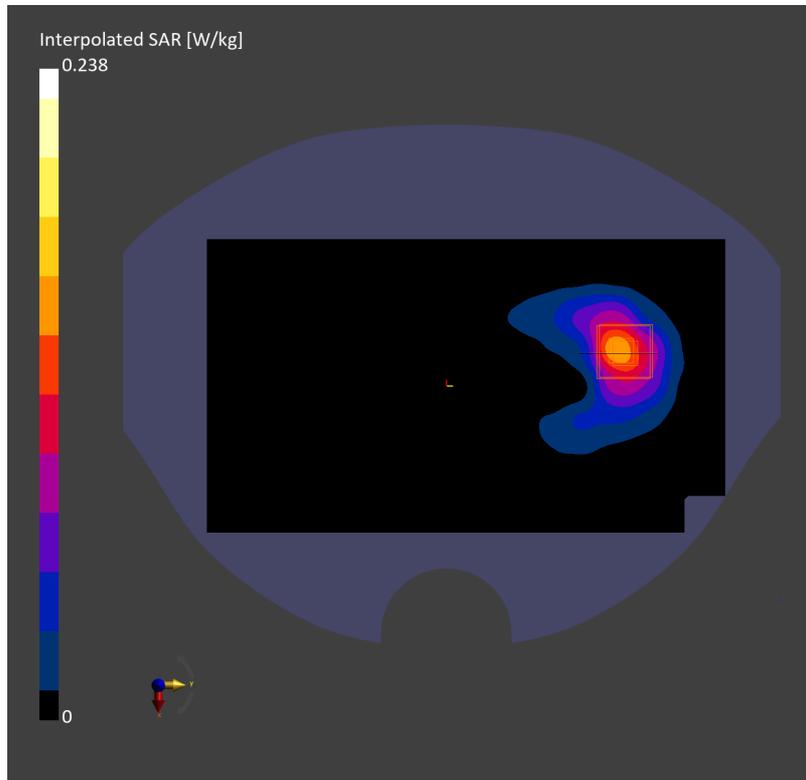

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE TOP, Band 2, LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 18900 (1880.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE TOP, 10.00	Band 2	LTE-FDD, 10169-CAF	1880.000, 18900	1.41	40.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1900	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 90.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	8.5 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-06, 21:10	2025-02-06, 21:13
psSAR1g [W/Kg]	0.162	0.170
psSAR10g [W/Kg]	0.082	0.085
Power Drift [dB]	-0.04	-0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		54.7
Dist 3dB Peak [mm]		9.4

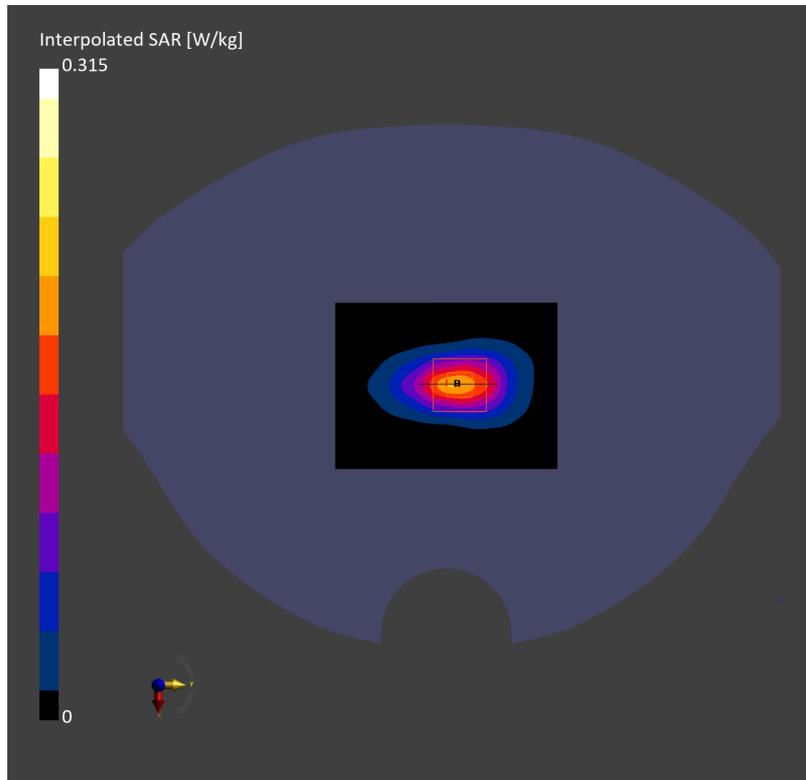

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 23095 (707.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 12	LTE-FDD, 10175-CAH	707.500, 23095	0.880	42.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22, 17:44	2025-01-22, 17:49
psSAR1g [W/Kg]	0.140	0.149
psSAR10g [W/Kg]	0.098	0.117
Power Drift [dB]	0.06	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		75.0
Dist 3dB Peak [mm]		16.0

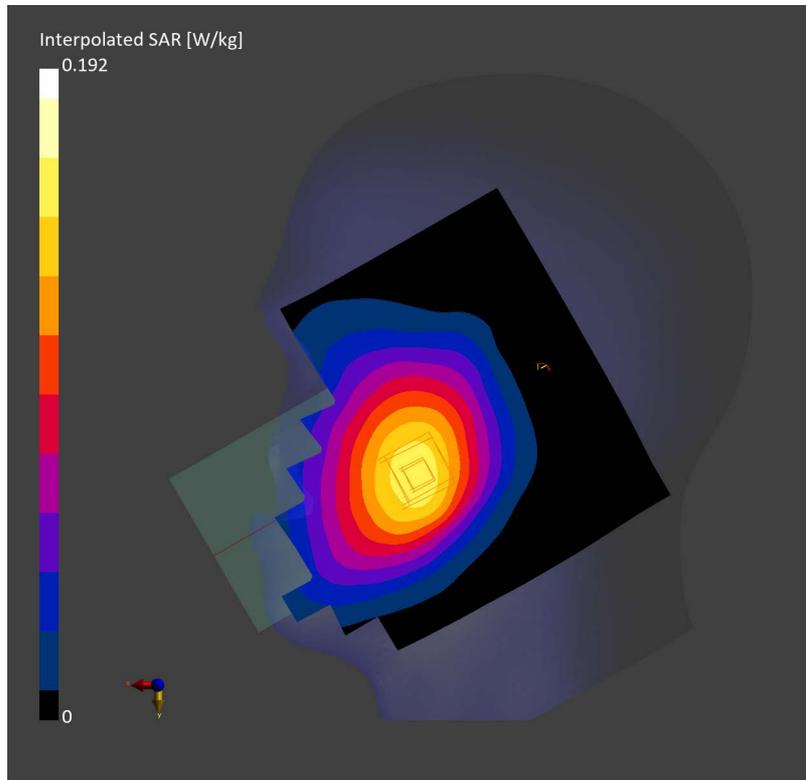

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 12, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 23095 (707.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 12	LTE-FDD, 10175-CAH	707.500, 23095	0.890	42.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22, 21:49	2025-01-22, 21:56
psSAR1g [W/Kg]	0.309	0.330
psSAR10g [W/Kg]	0.211	0.203
Power Drift [dB]	-0.04	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.5
Dist 3dB Peak [mm]		17.1

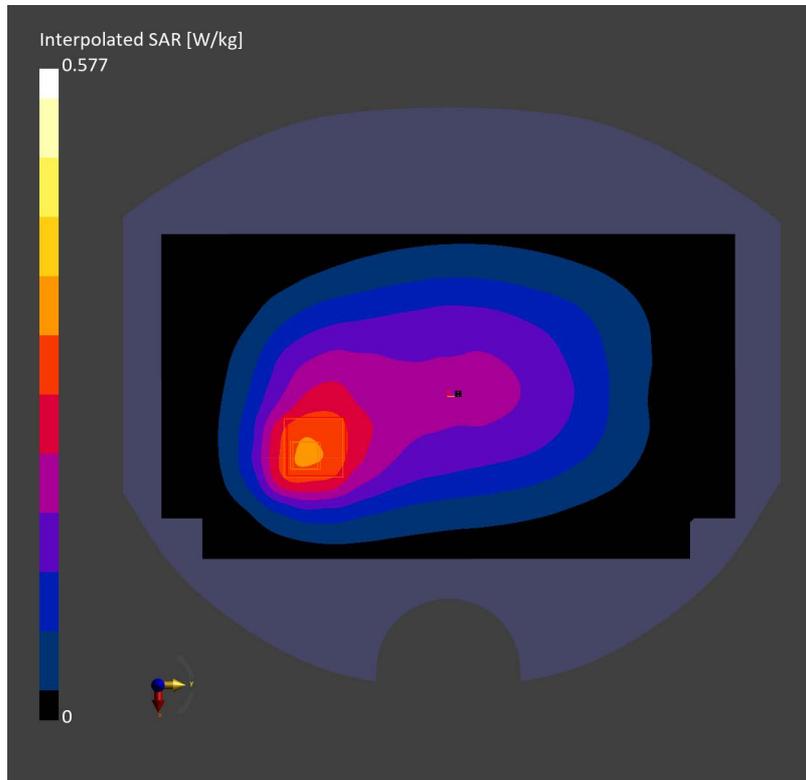

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 13, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Low AntennaCfg:SISO, Channel 23230 (782.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 13	LTE-FDD, 10175-CAH	782.000, 23230	0.905	42.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 150.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22, 19:25	2025-01-22, 19:30
psSAR1g [W/Kg]	0.173	0.185
psSAR10g [W/Kg]	0.121	0.143
Power Drift [dB]	0.13	0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		76.2
Dist 3dB Peak [mm]		22.4

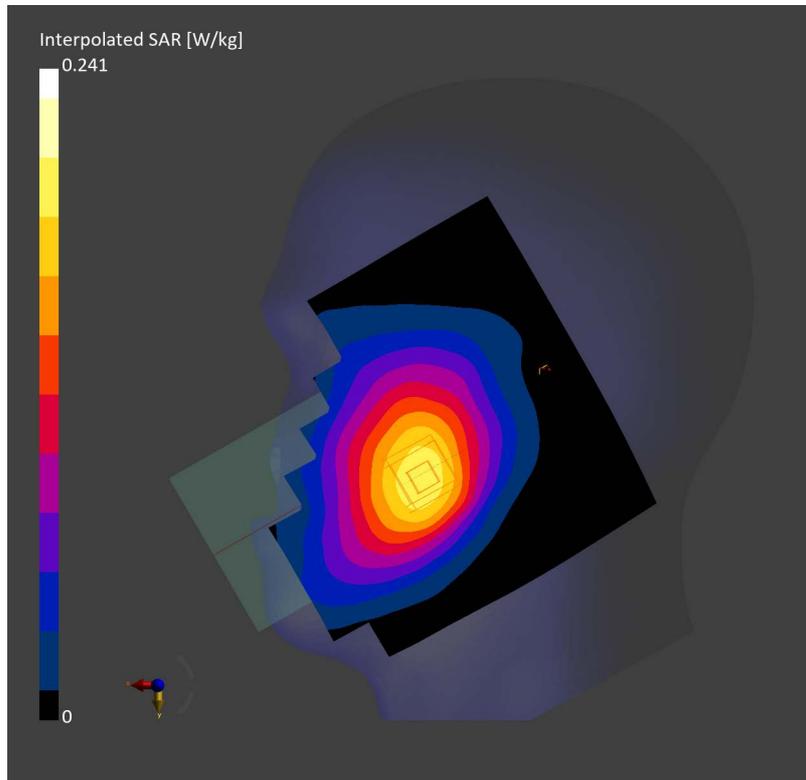

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 13, LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Low AntennaCfg:SISO, Channel 23230 (782.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 13	LTE-FDD, 10175-CAH	782.000, 23230	0.896	41.8

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22, 22:08	2025-01-22, 22:15
psSAR1g [W/Kg]	0.330	0.357
psSAR10g [W/Kg]	0.223	0.217
Power Drift [dB]	0.05	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.1
Dist 3dB Peak [mm]		15.9

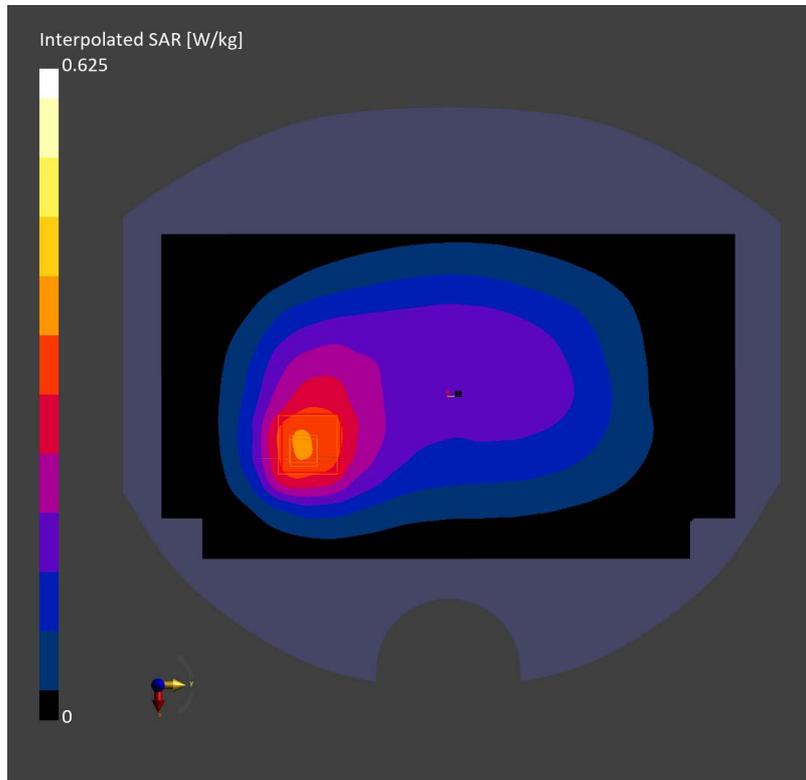

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 25, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Low AntennaCfg:SISO, Channel 26365 (1882.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 25	LTE-FDD, 10297-AAE	1882.500, 26365	1.42	40.3

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL1900	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21, 09:44	2025-01-21, 09:50
psSAR1g [W/Kg]	0.116	0.124
psSAR10g [W/Kg]	0.068	0.078
Power Drift [dB]	-0.01	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		67.7
Dist 3dB Peak [mm]		11.3

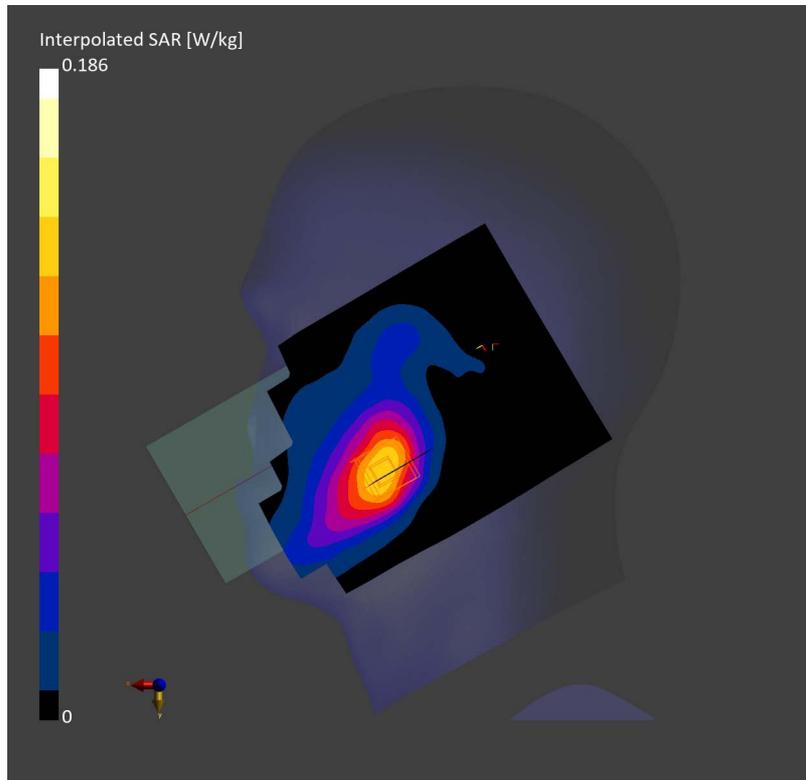

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 25, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Low AntennaCfg:SISO,

Channel 26365 (1882.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 25	LTE-FDD, 10297-AAE	1882.500, 26365	1.42	40.3

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL1900	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21, 11:46	2025-01-21, 11:49
psSAR1g [W/Kg]	0.350	0.346
psSAR10g [W/Kg]	0.198	0.196
Power Drift [dB]	0.00	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.6
Dist 3dB Peak [mm]		12.9

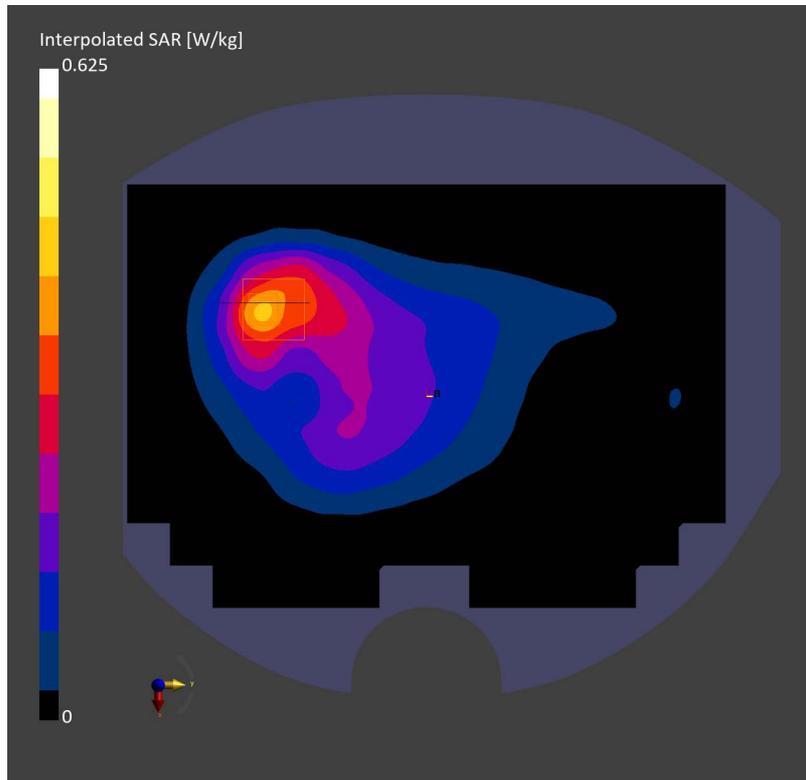

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band 25, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Low AntennaCfg:SISO, Channel 26365 (1882.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 25	LTE-FDD, 10297-AAE	1882.500, 26365	1.42	40.3

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL1900	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-21, 13:02	2025-01-21, 13:06
psSAR1g [W/Kg]	0.365	0.378
psSAR10g [W/Kg]	0.190	0.201
Power Drift [dB]	0.00	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.8
Dist 3dB Peak [mm]		11.2

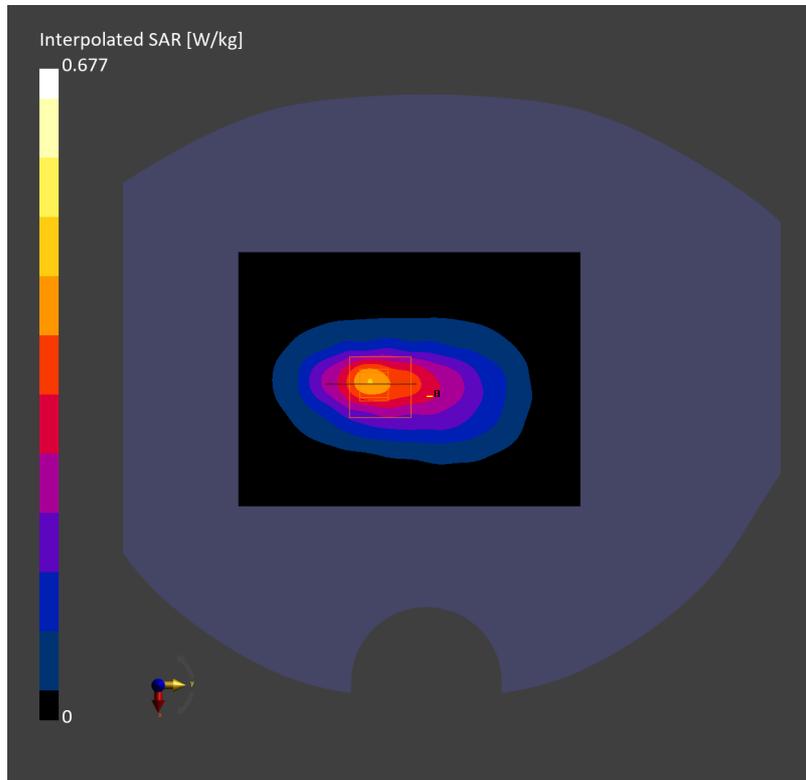

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 26, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:High AntennaCfg:SISO, Channel 26865 (831.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 26	LTE-FDD, 10181-CAF	831.500, 26865	0.892	42.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL835	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-25, 16:01	2025-01-25, 16:07
psSAR1g [W/Kg]	0.145	0.154
psSAR10g [W/Kg]	0.099	0.117
Power Drift [dB]	-0.03	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		76.9
Dist 3dB Peak [mm]		16.0

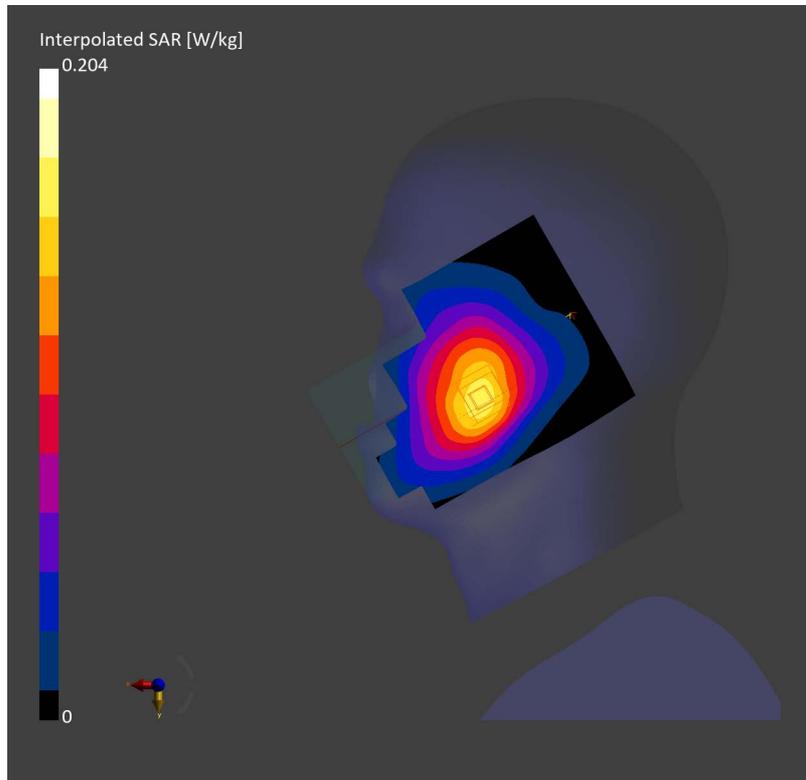

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 26, LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:High AntennaCfg:SISO, Channel 26865 (831.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 26	LTE-FDD, 10181-CAF	831.500, 26865	0.892	42.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL835	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 180.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-25, 15:44	2025-01-25, 15:47
psSAR1g [W/Kg]	0.354	0.377
psSAR10g [W/Kg]	0.237	0.228
Power Drift [dB]	0.02	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		52.3
Dist 3dB Peak [mm]		16.0

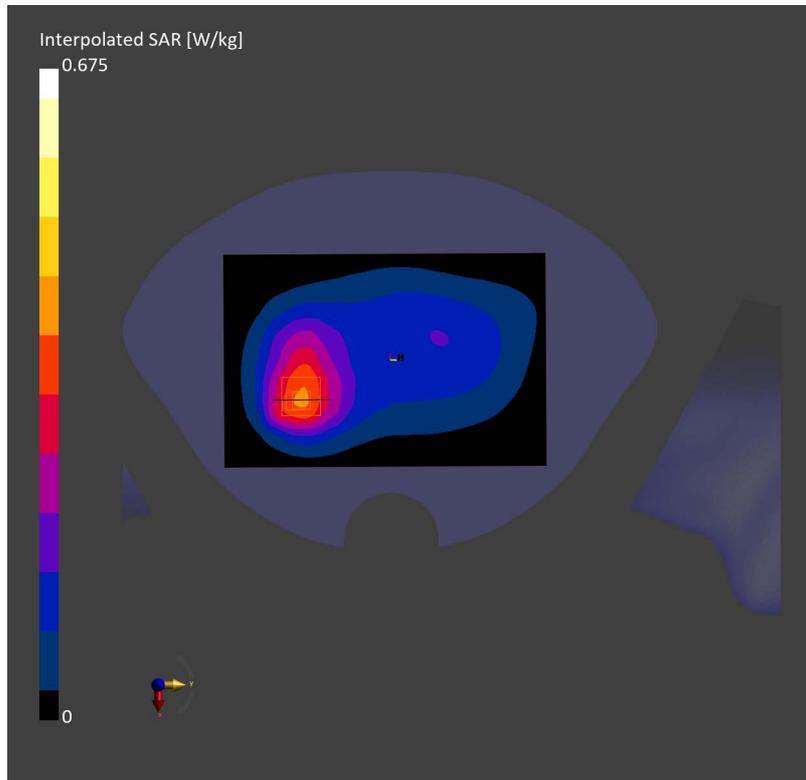

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 66, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 132322 (1745.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 66	LTE-FDD, 10297-AAE	1745.000, 132322	1.36	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL1750	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 11:09	2025-01-23, 11:14
psSAR1g [W/Kg]	0.024	0.023
psSAR10g [W/Kg]	0.014	0.014
Power Drift [dB]	0.03	-0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		65.9
Dist 3dB Peak [mm]		13.7

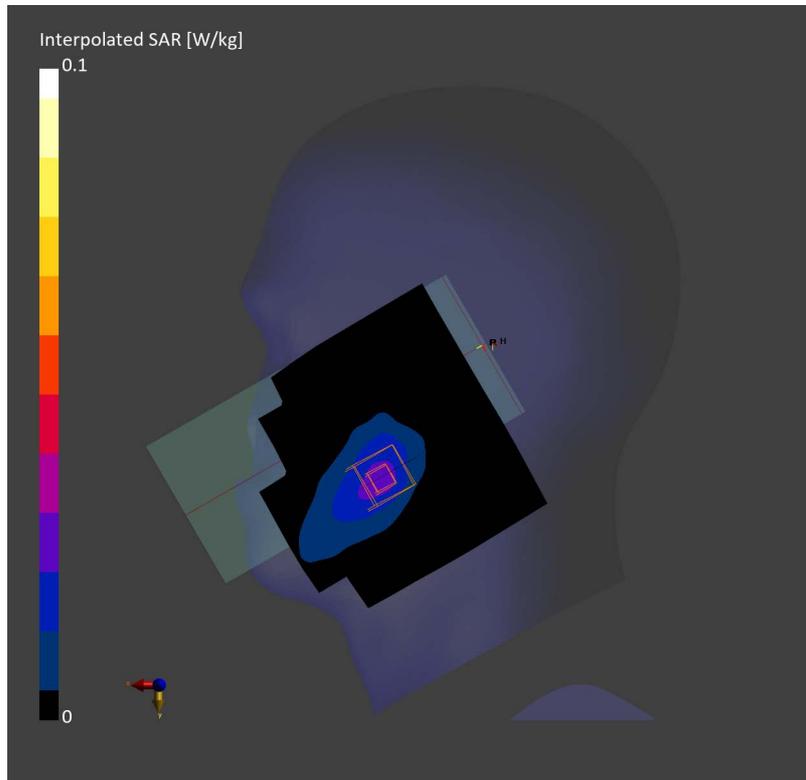

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 66, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 132322 (1745.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 66	LTE-FDD, 10297-AAE	1745.000, 132322	1.36	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL1750	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 00:04	2025-01-23, 00:08
psSAR1g [W/Kg]	0.096	0.097
psSAR10g [W/Kg]	0.053	0.054
Power Drift [dB]	0.16	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.0
Dist 3dB Peak [mm]		12.8

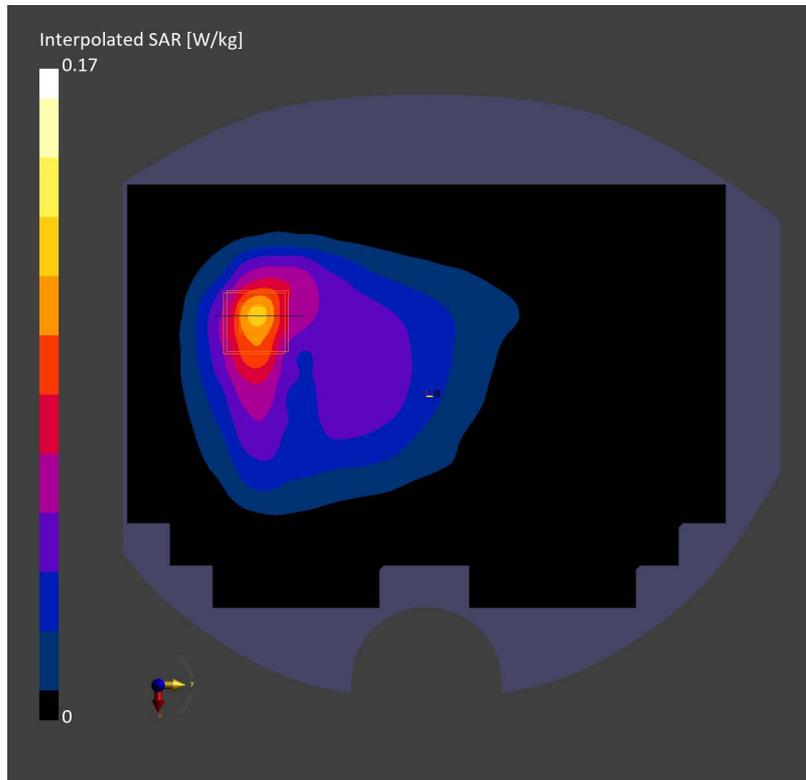

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band 66, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 132322 (1745.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 66	LTE-FDD, 10297-AAE	1745.000, 132322	1.36	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL1750	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	8.5 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 01:23	2025-01-23, 01:26
psSAR1g [W/Kg]	0.123	0.120
psSAR10g [W/Kg]	0.066	0.063
Power Drift [dB]	0.00	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		54.6
Dist 3dB Peak [mm]		10.2

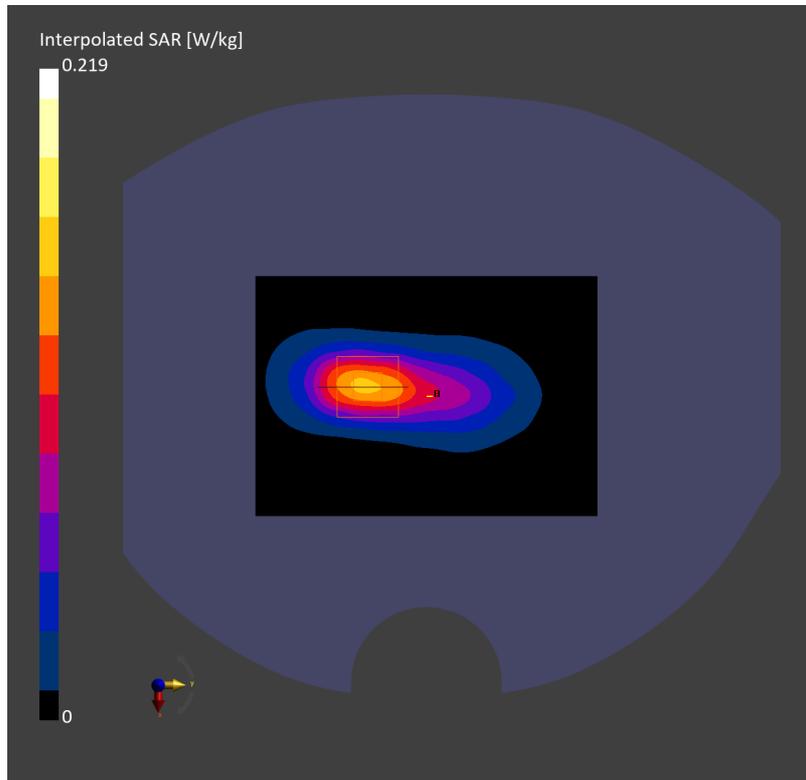

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 66, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 132322 (1745.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band 66	LTE-FDD, 10297-AAE	1745.000, 132322	1.35	38.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-10, 14:03	2025-02-10, 14:07
psSAR1g [W/Kg]	0.186	0.191
psSAR10g [W/Kg]	0.104	0.094
Power Drift [dB]	0.01	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.9
Dist 3dB Peak [mm]		8.2

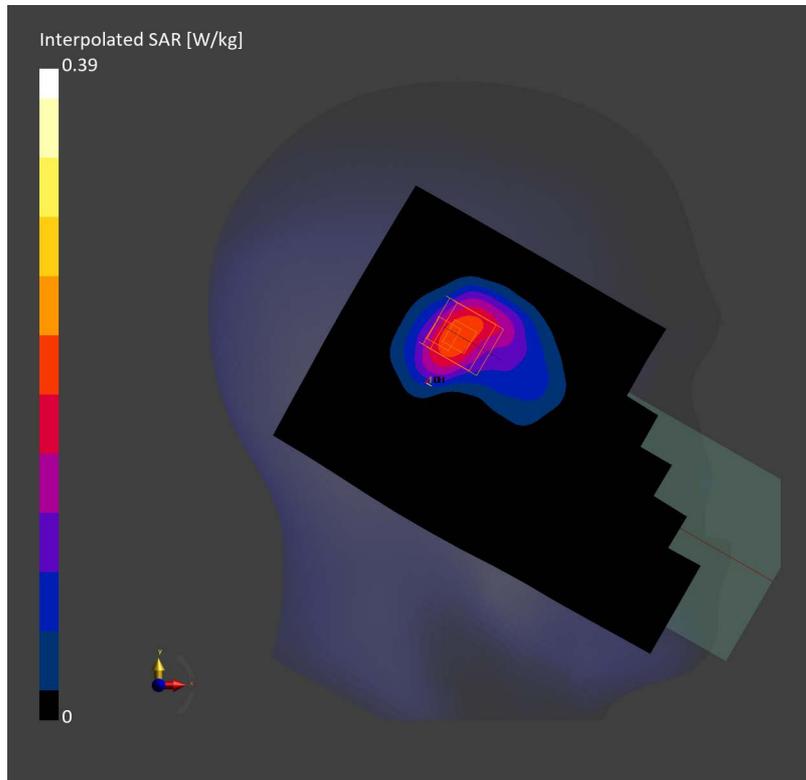

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 66, LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 132322 (1745.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 66	LTE-FDD, 10297-AAE	1745.000, 132322	1.35	38.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-10, 15:23	2025-02-10, 15:26
psSAR1g [W/Kg]	0.058	0.067
psSAR10g [W/Kg]	0.030	0.034
Power Drift [dB]	-0.03	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.7
Dist 3dB Peak [mm]		8.1

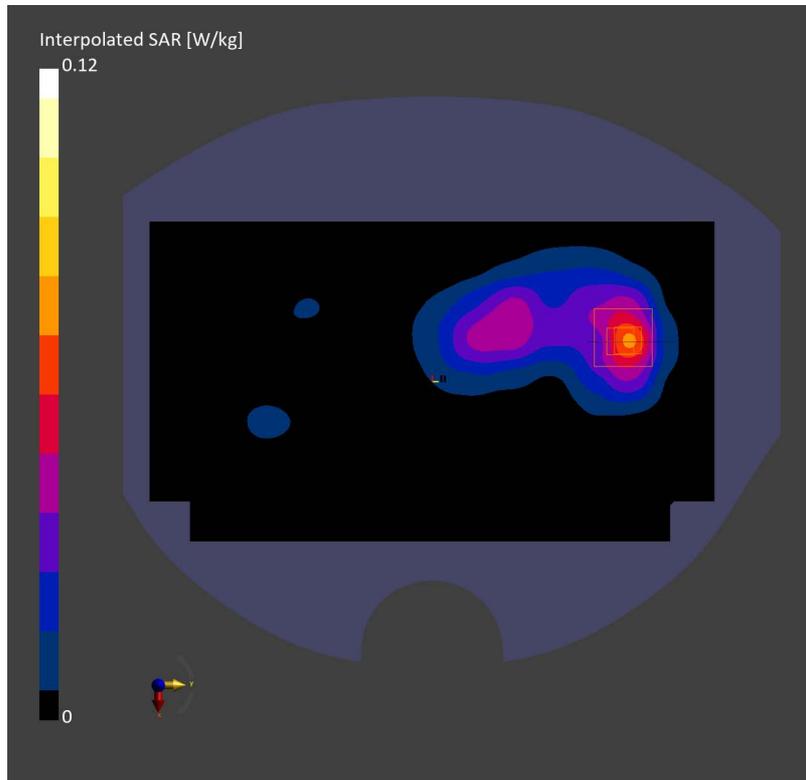

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band 41, LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 39750 (2506.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band 41	LTE-TDD, 10151-CAH	2506.000, 39750	1.83	39.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 02:42	2025-01-23, 02:50
psSAR1g [W/Kg]	0.008	0.005
psSAR10g [W/Kg]	0.003	0.003
Power Drift [dB]	0.15	0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.5
Dist 3dB Peak [mm]		5.4

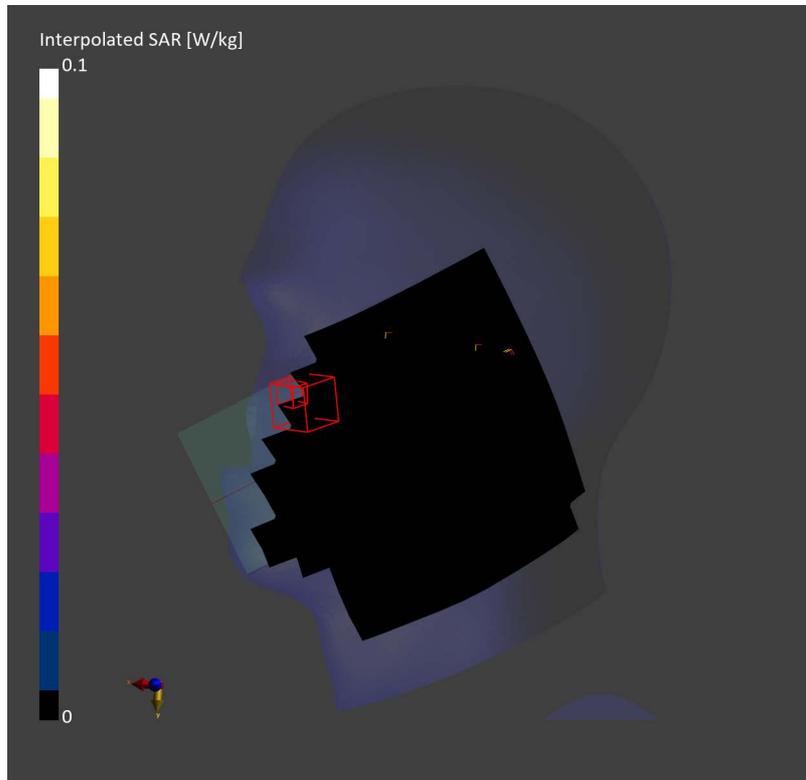

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band 41, LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 39750 (2506.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band 41	LTE-TDD, 10172-CAH	2506.000, 39750	1.83	39.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 00:19	2025-01-23, 00:24
psSAR1g [W/Kg]	0.111	0.110
psSAR10g [W/Kg]	0.061	0.058
Power Drift [dB]	-0.00	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.9
Dist 3dB Peak [mm]		9.5

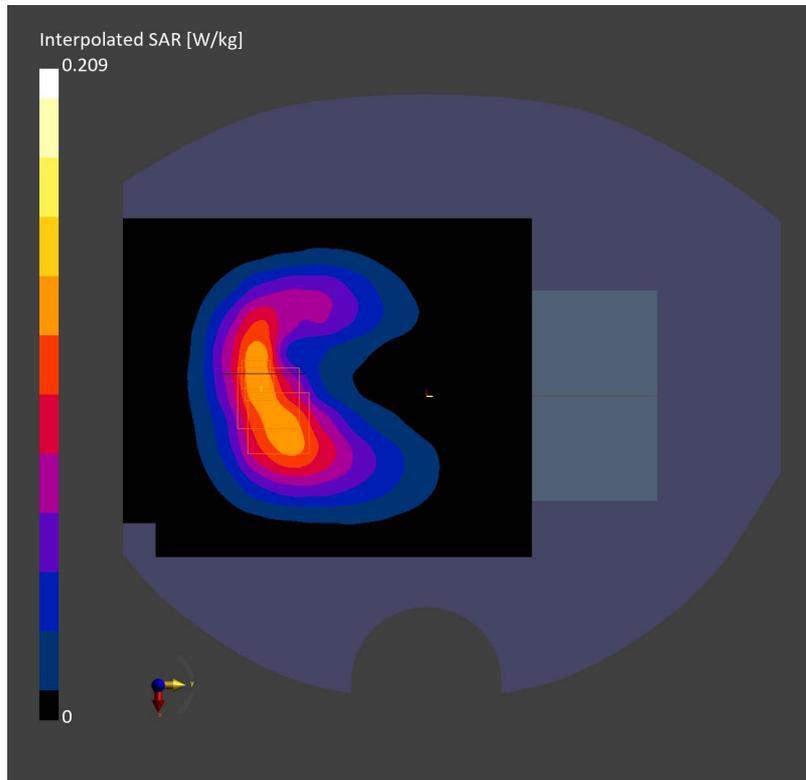

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band 41, LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK) RBPosition:Mid AntennaCfg:SISO, Channel 39750 (2506.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band 41	LTE-TDD, 10151-CAH	2506.000, 39750	1.83	39.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 01:40	2025-01-23, 01:45
psSAR1g [W/Kg]	0.130	0.164
psSAR10g [W/Kg]	0.069	0.085
Power Drift [dB]	-0.00	0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.8
Dist 3dB Peak [mm]		12.0

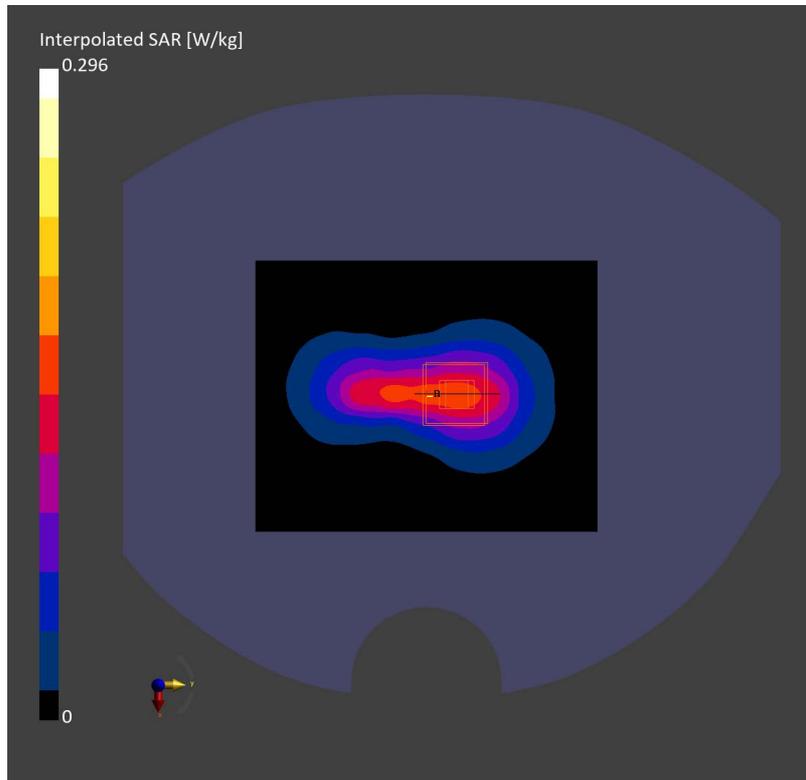

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n5, 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz) RBPosition:50RB25, Channel 167300 (836.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n5	5G NR FR1 FDD, 10939-AAC	836.500, 167300	0.899	41.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL835	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 150.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22, 09:44	2025-01-22, 09:49
psSAR1g [W/Kg]	0.031	0.031
psSAR10g [W/Kg]	0.021	0.023
Power Drift [dB]	0.01	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		74.4
Dist 3dB Peak [mm]		22.0

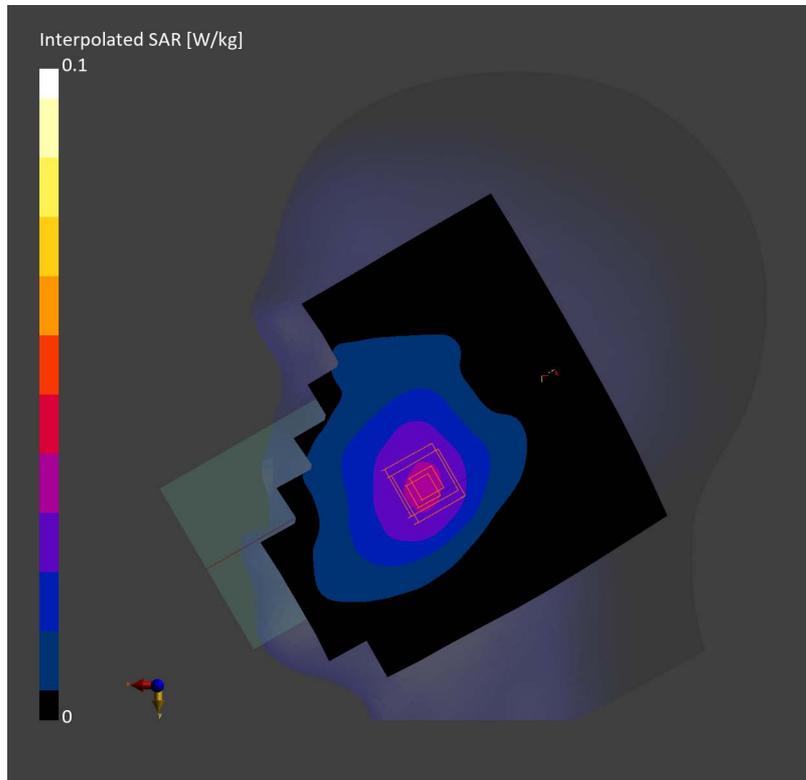

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n5, 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz) RBPosition:50RB25, Channel 167300 (836.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n5	5G NR FR1 FDD, 10939-AAC	836.500, 167300	0.899	41.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL835	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	150.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22, 10:49	2025-01-22, 10:52
psSAR1g [W/Kg]	0.082	0.082
psSAR10g [W/Kg]	0.053	0.049
Power Drift [dB]	0.00	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.4
Dist 3dB Peak [mm]		13.6

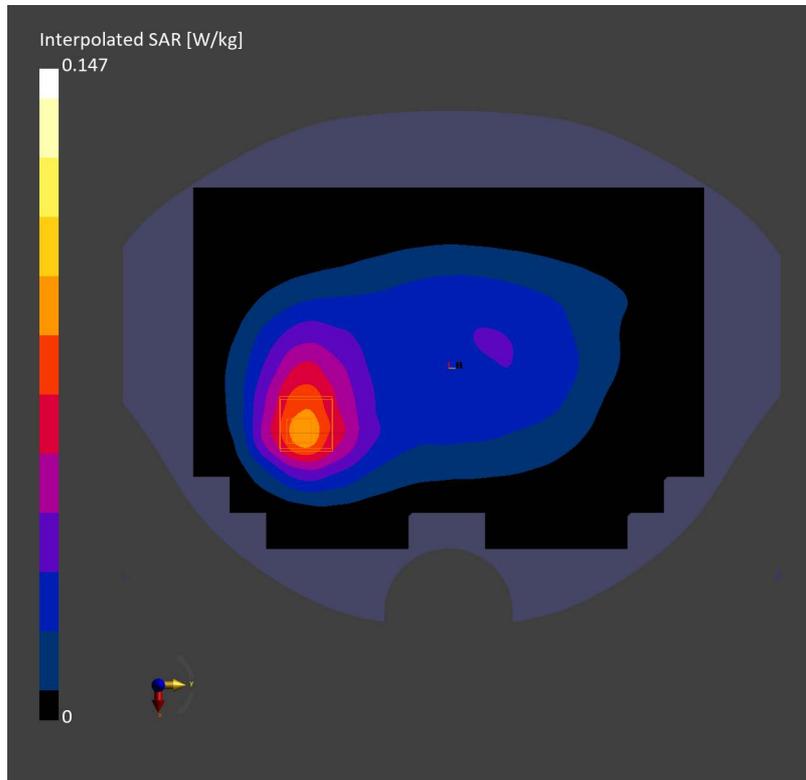

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n41, 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 518598 (2592.990 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n41	5G NR FR1 TDD, 10917-AAD	2592.990, 518598	1.93	38.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-22, 12:30	2025-01-22, 12:39
psSAR1g [W/Kg]	0.034	0.025
psSAR10g [W/Kg]	0.017	0.011
Power Drift [dB]	-0.05	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.9
Dist 3dB Peak [mm]		8.6

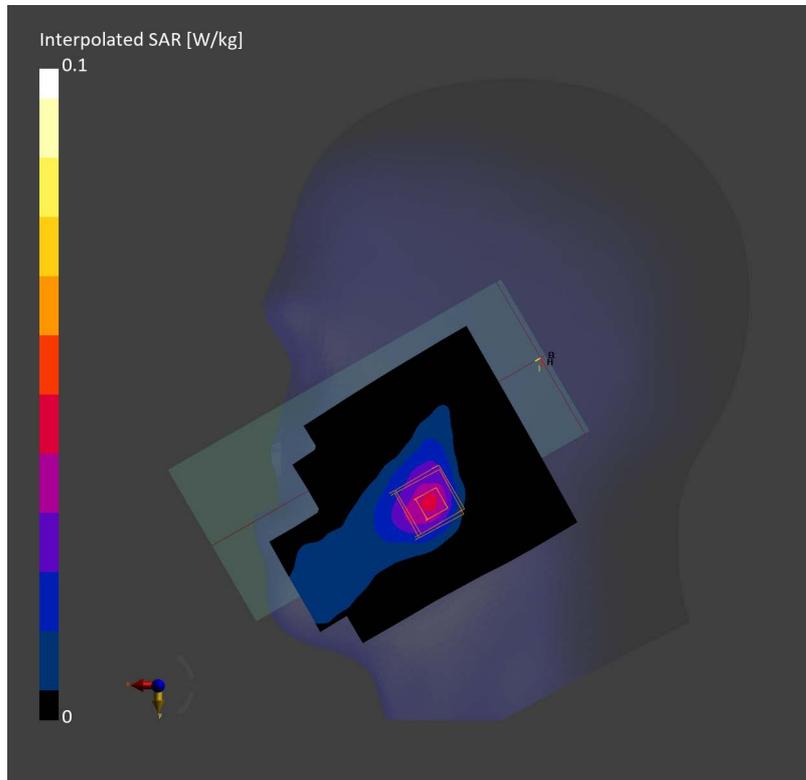

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, FRONT, Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 518598 (2592.990 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	Band n41	5G NR FR1 TDD, 10866-AAF	2592.990, 518598	1.93	38.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	144.0 x 216.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 04:27	2025-01-23, 04:33
psSAR1g [W/Kg]	0.173	0.173
psSAR10g [W/Kg]	0.090	0.090
Power Drift [dB]	-0.06	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.3
Dist 3dB Peak [mm]		12.1

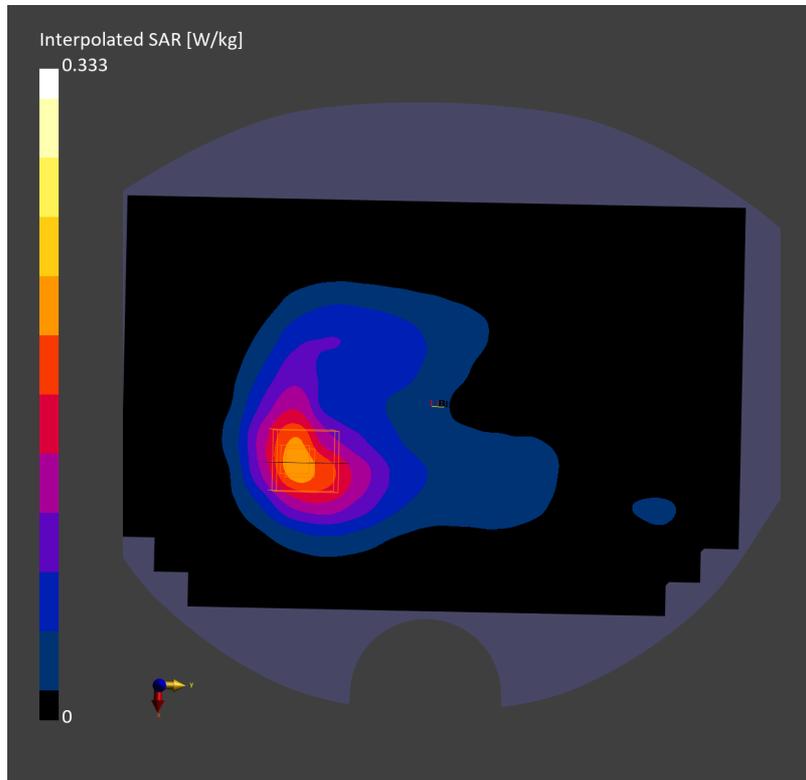

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 518598 (2592.990 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band n41	5G NR FR1 TDD, 10866-AAF	2592.990, 518598	1.93	38.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 05:04	2025-01-23, 05:10
psSAR1g [W/Kg]	0.201	0.198
psSAR10g [W/Kg]	0.101	0.099
Power Drift [dB]	-0.03	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		52.1
Dist 3dB Peak [mm]		10.5

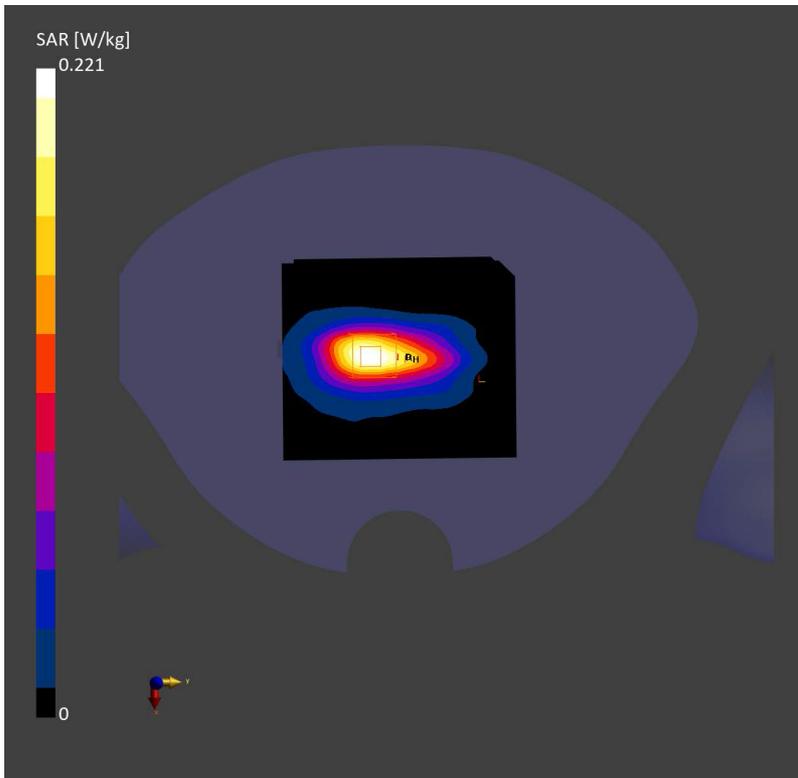

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 513900 (2569.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band n41	5G NR FR1 TDD, 10866-AAF	2569.500, 513900	1.92	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-09, 17:10	2025-02-09, 17:16
psSAR1g [W/Kg]	0.388	0.432
psSAR10g [W/Kg]	0.188	0.196
Power Drift [dB]	-0.09	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.7
Dist 3dB Peak [mm]		8.5

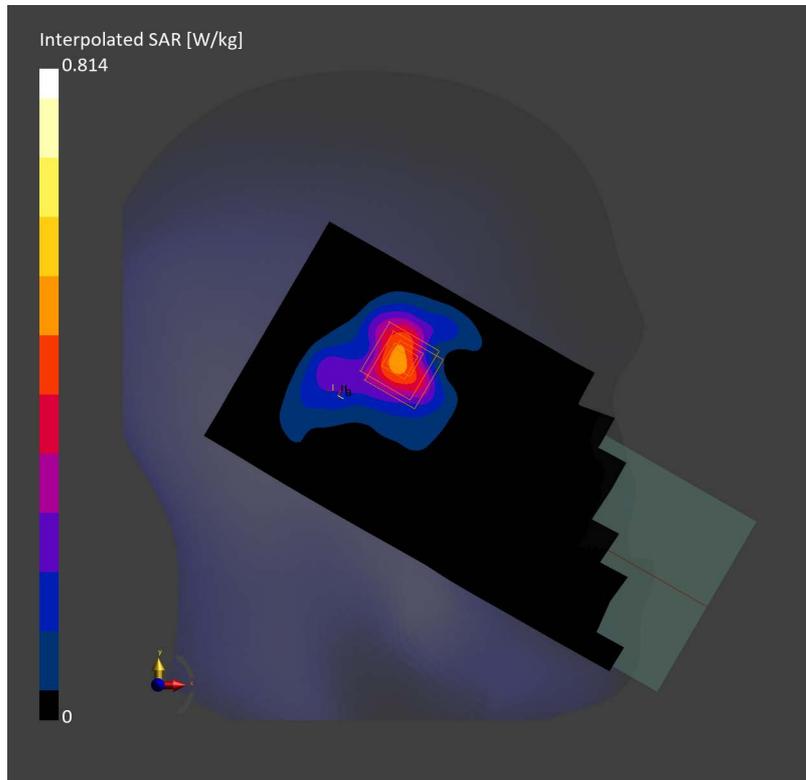

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel

513900 (2569.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n41	5G NR FR1 TDD, 10866-AAF	2569.500, 513900	1.92	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-09, 18:24	2025-02-09, 18:30
psSAR1g [W/Kg]	0.086	0.086
psSAR10g [W/Kg]	0.041	0.040
Power Drift [dB]	-0.02	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.4
Dist 3dB Peak [mm]		9.5

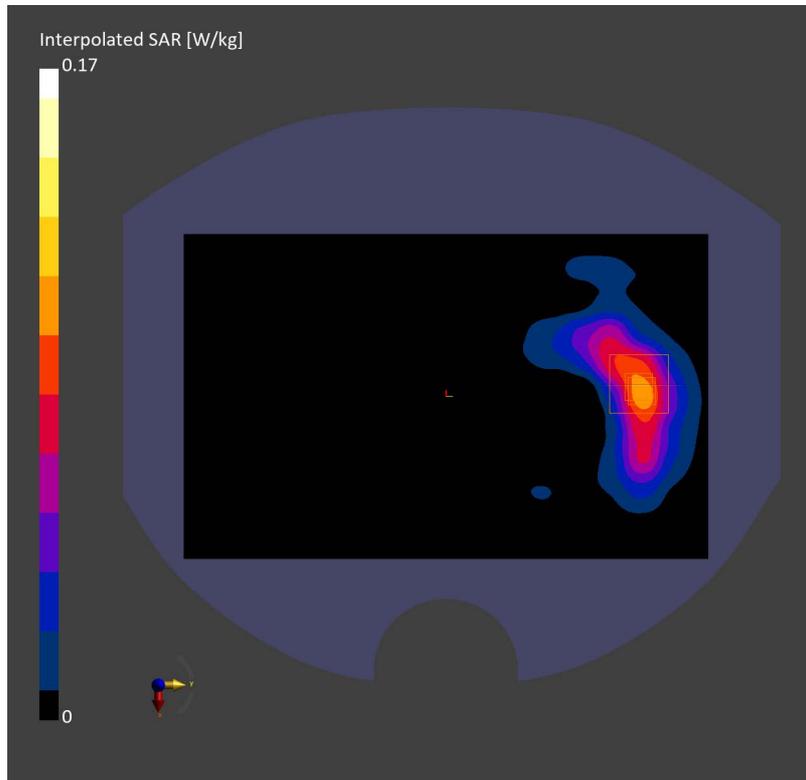

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 513900 (2569.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n41	5G NR FR1 TDD, 10866-AAF	2569.500, 513900	1.92	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-09, 21:12	2025-02-09, 21:38
psSAR1g [W/Kg]	0.046	0.053
psSAR10g [W/Kg]	0.021	0.021
Power Drift [dB]	-0.02	0.11
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		45.5
Dist 3dB Peak [mm]		5.1

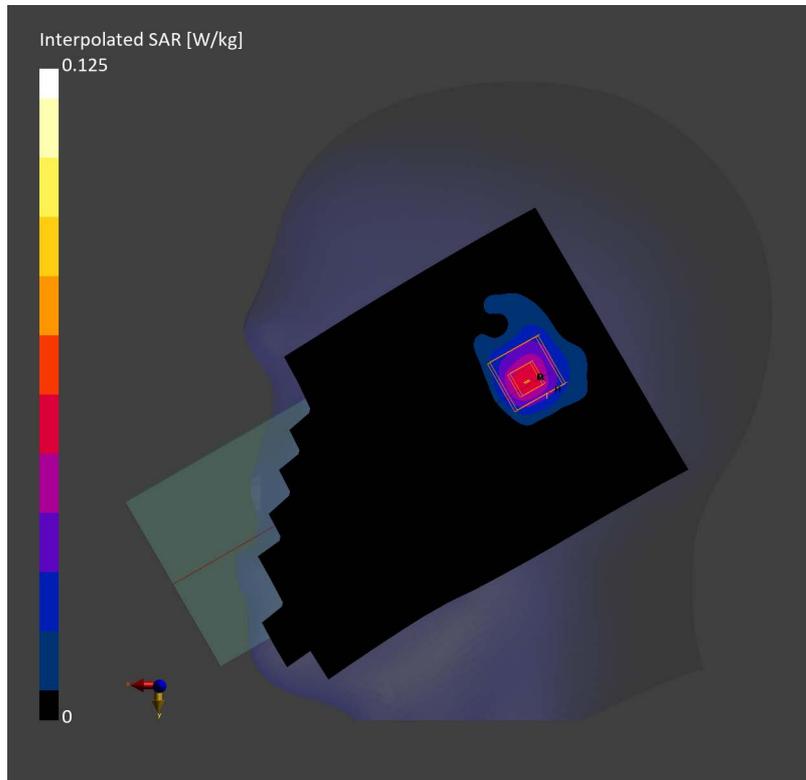

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel

513900 (2569.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n41	5G NR FR1 TDD, 10866-AAF	2569.500, 513900	1.92	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-09, 19:35	2025-02-09, 19:40
psSAR1g [W/Kg]	0.054	0.058
psSAR10g [W/Kg]	0.027	0.026
Power Drift [dB]	0.09	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		52.0
Dist 3dB Peak [mm]		7.7

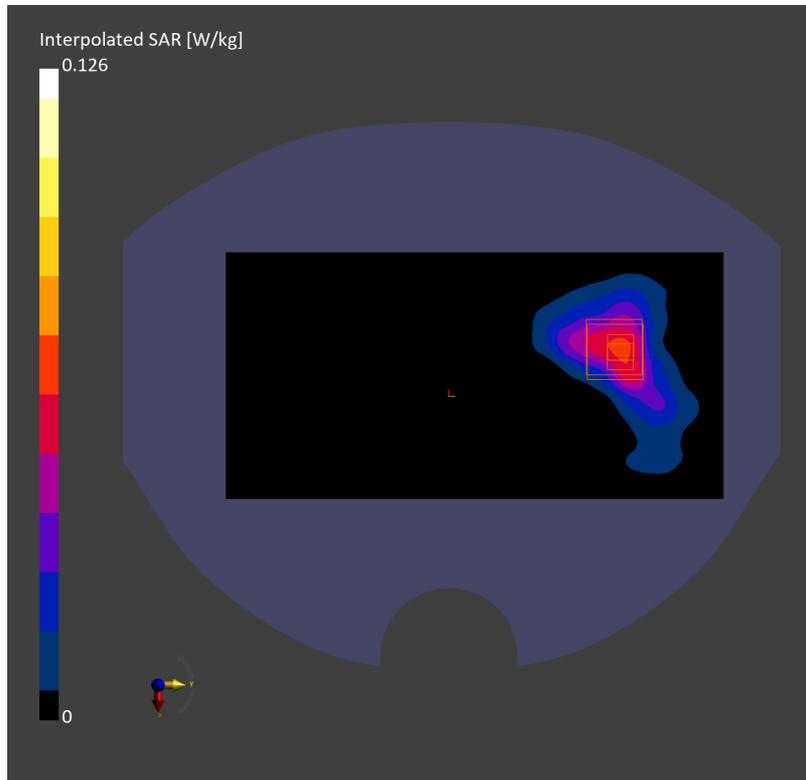

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 513900 (2569.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n41	5G NR FR1 TDD, 10866-AAF	2569.500, 513900	1.92	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-09, 08:21	2025-02-09, 08:27
psSAR1g [W/Kg]	0.312	0.329
psSAR10g [W/Kg]	0.153	0.148
Power Drift [dB]	0.01	0.13
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		36.4
Dist 3dB Peak [mm]		7.1

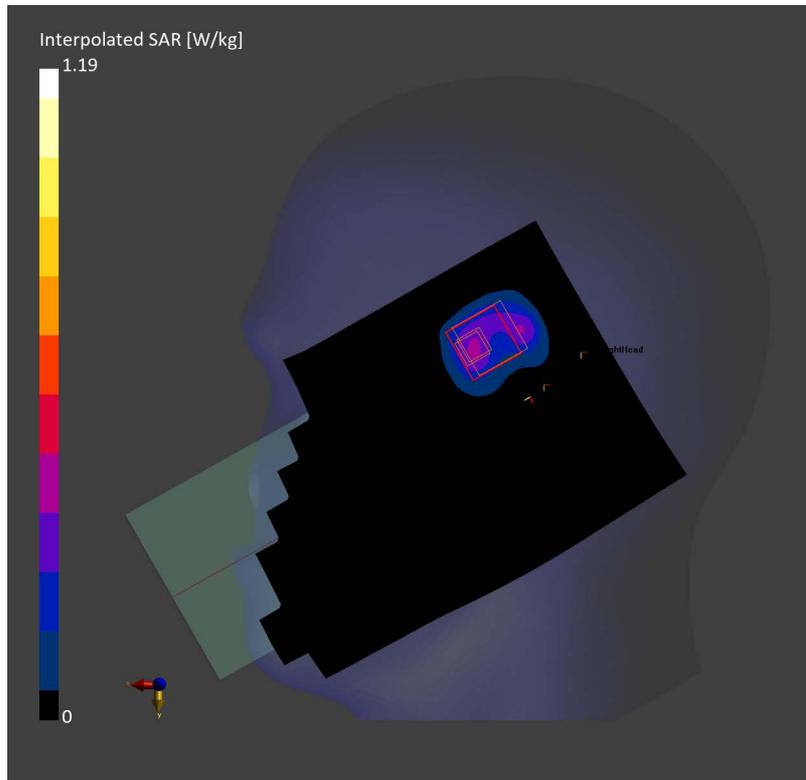

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n41, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel

51 3900 (2569.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n41	5G NR FR1 TDD, 10866-AAF	2569.500, 513900	1.92	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2600	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-09, 12:17	2025-02-09, 12:22
psSAR1g [W/Kg]	0.045	0.051
psSAR10g [W/Kg]	0.021	0.021
Power Drift [dB]	0.05	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.9
Dist 3dB Peak [mm]		7.0

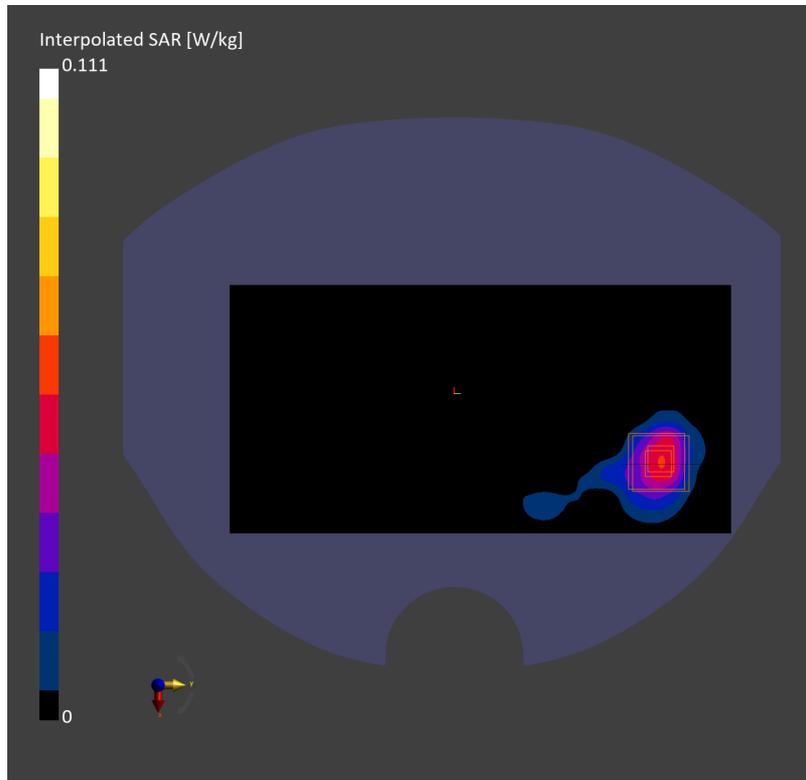

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n41, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 513900 (2569.500 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, Head Simulating Liquid	CHEEK, 0.00	Band n41	5G NR FR1 TDD, 10803-AAF	2569.500, 513900	1.99	39.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2600	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-05, 10:16	2025-03-05, 10:23
psSAR1g [W/Kg]	0.556	0.593
psSAR10g [W/Kg]	0.268	0.273
Power Drift [dB]	0.04	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.8
Dist 3dB Peak [mm]		7.8

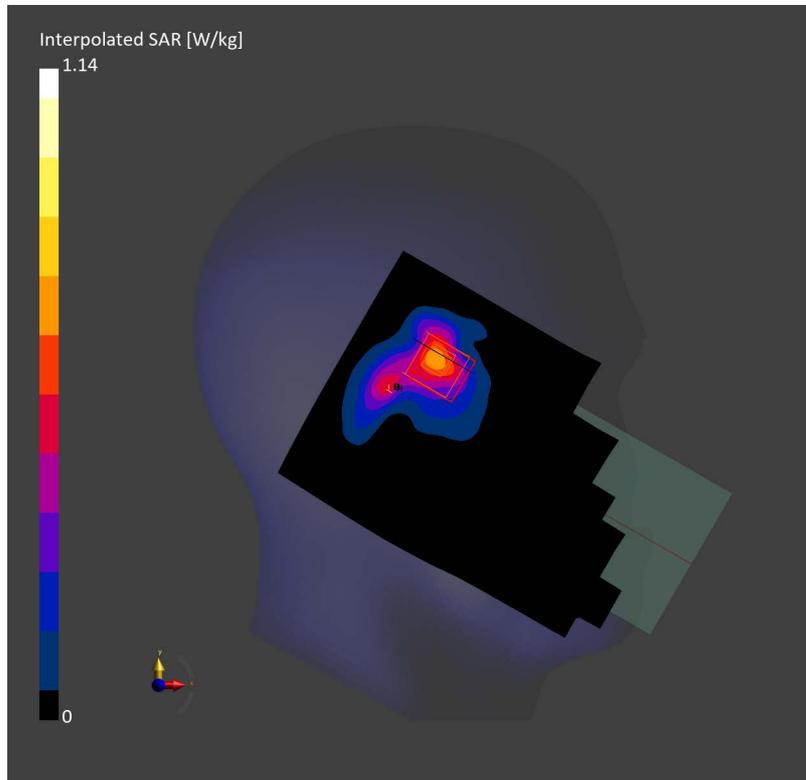

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, FRONT, Band n41, 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 509202 (2546.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	FRONT, 10.00	Band n41	5G NR FR1 TDD, 10917-AAD	2546.010, 509202	1.96	40.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2600	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 1.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-04, 19:27	2025-03-04, 19:35
psSAR1g [W/Kg]	0.173	0.172
psSAR10g [W/Kg]	0.092	0.090
Power Drift [dB]	-0.02	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		81.1
Dist 3dB Peak [mm]		12.6

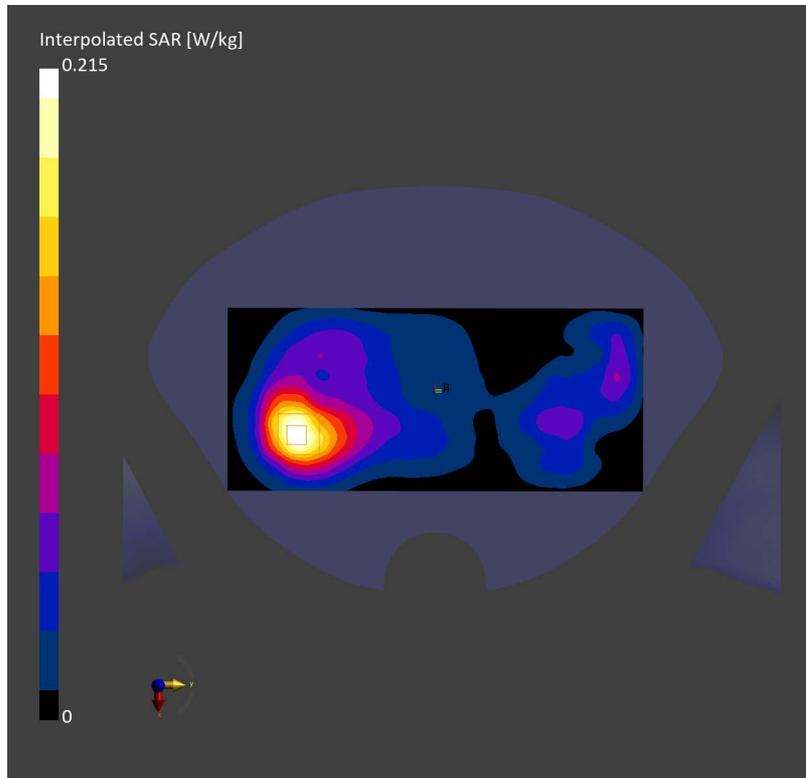

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band n41, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 509202 (2546.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE BOTTOM, 10.00	Band n41	5G NR FR1 TDD, 10803-AAF	2546.010, 509202	1.96	40.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2600	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 100.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.5 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-04, 18:06	2025-03-04, 18:11
psSAR1g [W/Kg]	0.196	0.196
psSAR10g [W/Kg]	0.094	0.096
Power Drift [dB]	0.02	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.5
Dist 3dB Peak [mm]		11.0

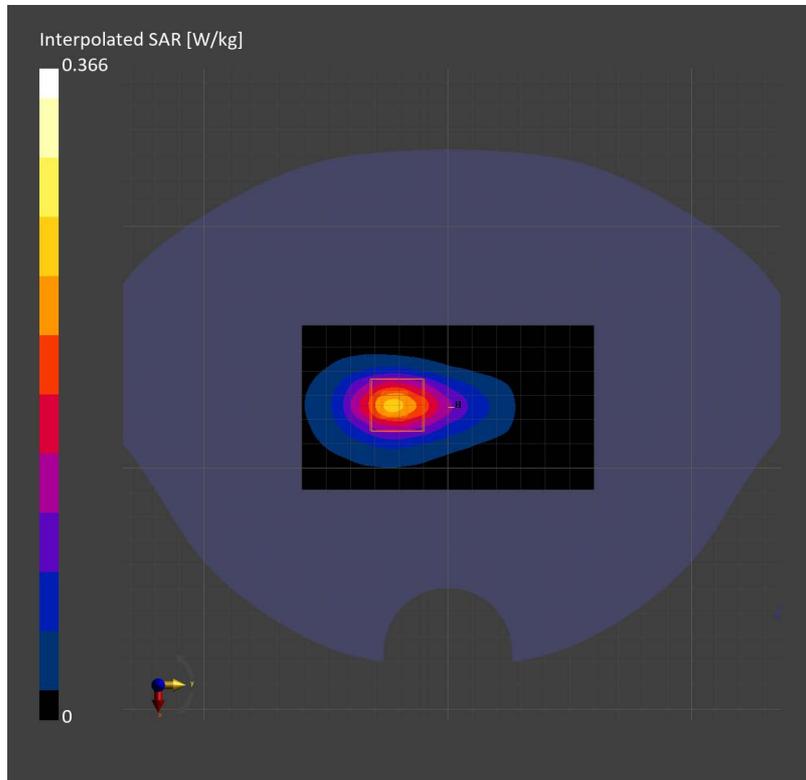

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n41, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 509202 (2546.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, Head Simulating Liquid	CHEEK, 0.00	Band n41	5G NR FR1 TDD, 10803-AAF	2546.010, 509202	1.96	40.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2600	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-05, 12:20	2025-03-05, 12:26
psSAR1g [W/Kg]	0.389	0.499
psSAR10g [W/Kg]	0.186	0.199
Power Drift [dB]	-0.00	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.2
Dist 3dB Peak [mm]		5.7

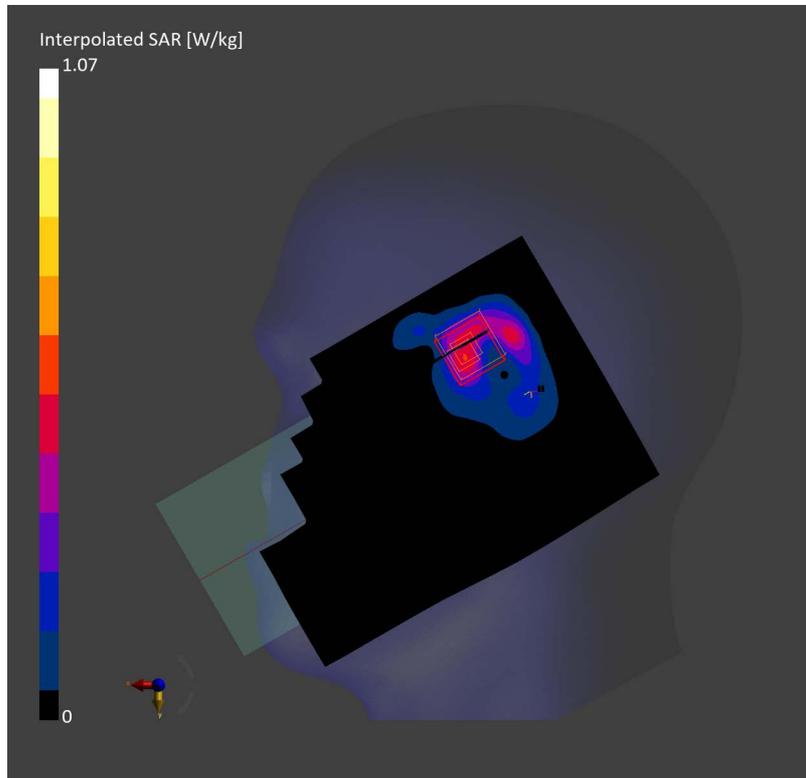

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n41, 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 509202 (2546.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	BACK, 10.00	Band n41	5G NR FR1 TDD, 10917-AAD	2546.010, 509202	1.96	40.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2600	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 200.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-05, 14:52	2025-03-05, 14:58
psSAR1g [W/Kg]	0.086	0.091
psSAR10g [W/Kg]	0.040	0.042
Power Drift [dB]	-0.04	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.3
Dist 3dB Peak [mm]		9.3

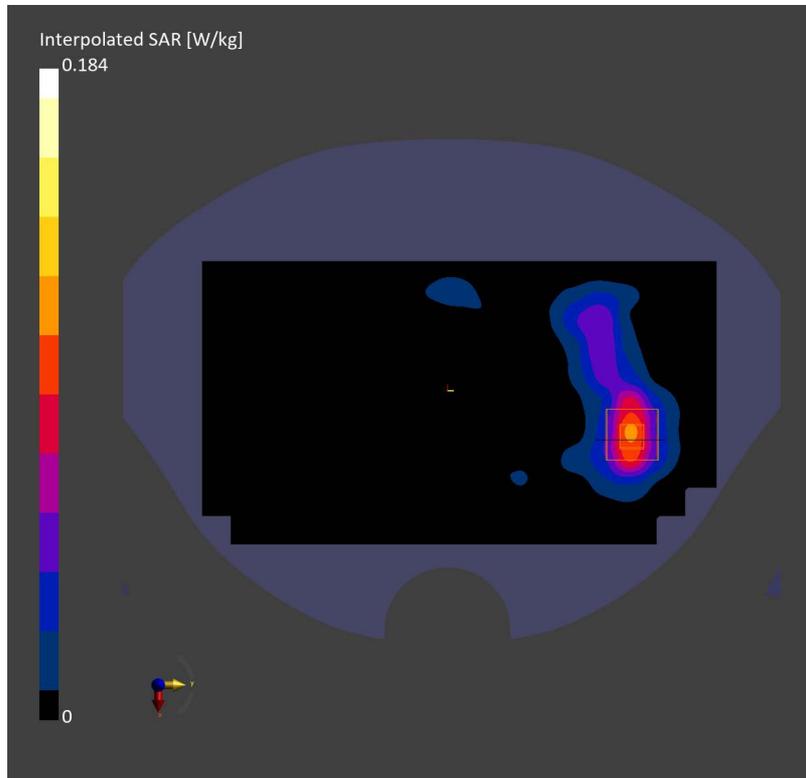

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n66, 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz) RBPosition:1RB1:SISO, Channel 349000 (1745.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n66	5G NR FR1 FDD, 10934-AAC	1745.000, 349000	1.36	39.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-04-14, 20:20	2025-04-14, 20:27
psSAR1g [W/Kg]	0.027	0.024
psSAR10g [W/Kg]	0.016	0.015
Power Drift [dB]	-0.01	-0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		62.8
Dist 3dB Peak [mm]		13.7

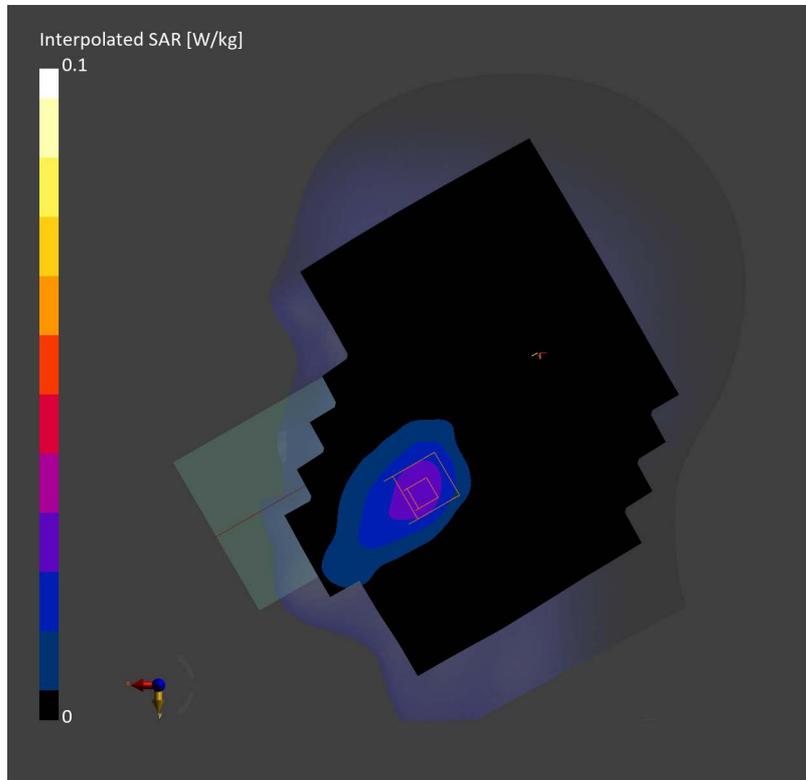

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, FRONT, Band n66, 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz) RBPosition:108RB54:SISO, Channel 349000 (1745.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	Band n66	5G NR FR1 FDD, 10942-AAC	1745.000, 349000	1.36	39.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 210.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-04-15, 03:34	2025-04-15, 03:41
psSAR1g [W/Kg]	0.093	0.096
psSAR10g [W/Kg]	0.052	0.053
Power Drift [dB]	0.04	0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.3
Dist 3dB Peak [mm]		11.4

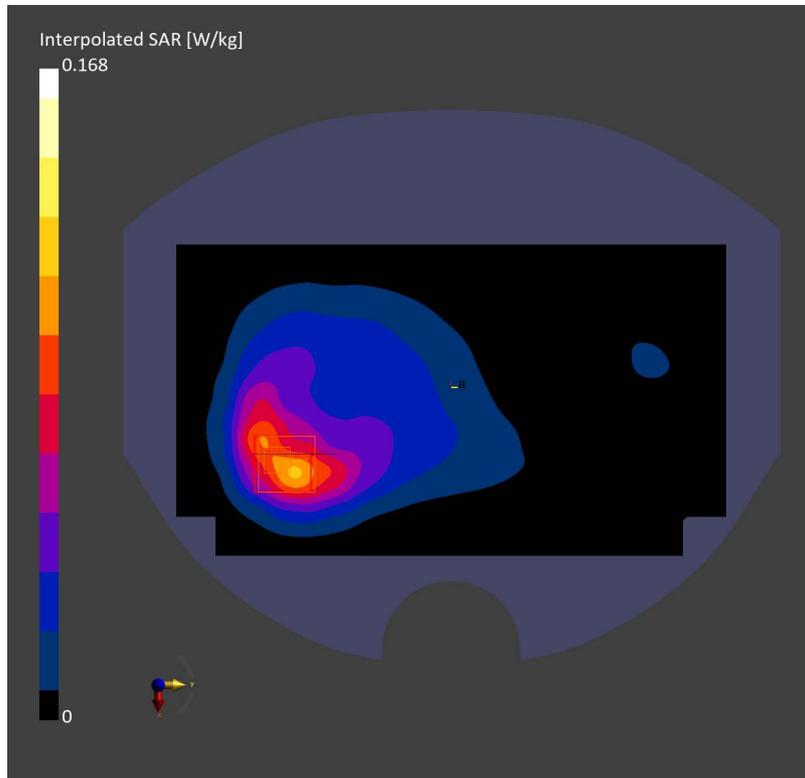

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band n66, 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz) RBPosition:1RB1:SISO, Channel 349000 (1745.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band n66	5G NR FR1 FDD, 10934-AAC	1745.000, 349000	1.36	39.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL1750	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-04-14, 22:38	2025-04-14, 22:43
psSAR1g [W/Kg]	0.110	0.117
psSAR10g [W/Kg]	0.059	0.062
Power Drift [dB]	-0.02	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.1
Dist 3dB Peak [mm]		11.2

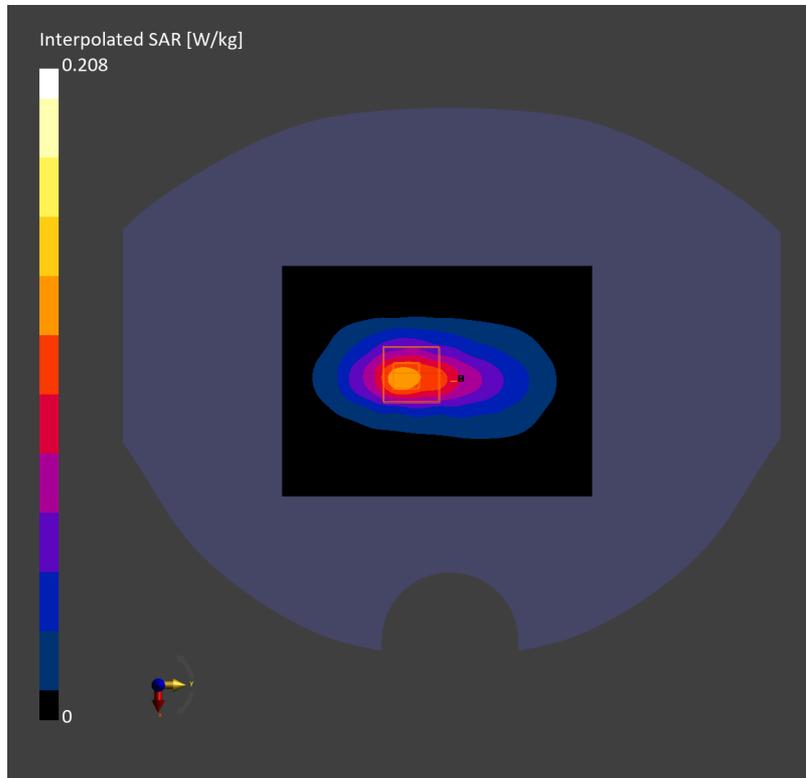

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10866-AAF	3500.010, 633334	2.88	38.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-24, 11:15	2025-01-24, 11:22
psSAR1g [W/Kg]	0.008	0.009
psSAR10g [W/Kg]	0.004	0.004
Power Drift [dB]	-0.01	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		77.1
Dist 3dB Peak [mm]		9.6

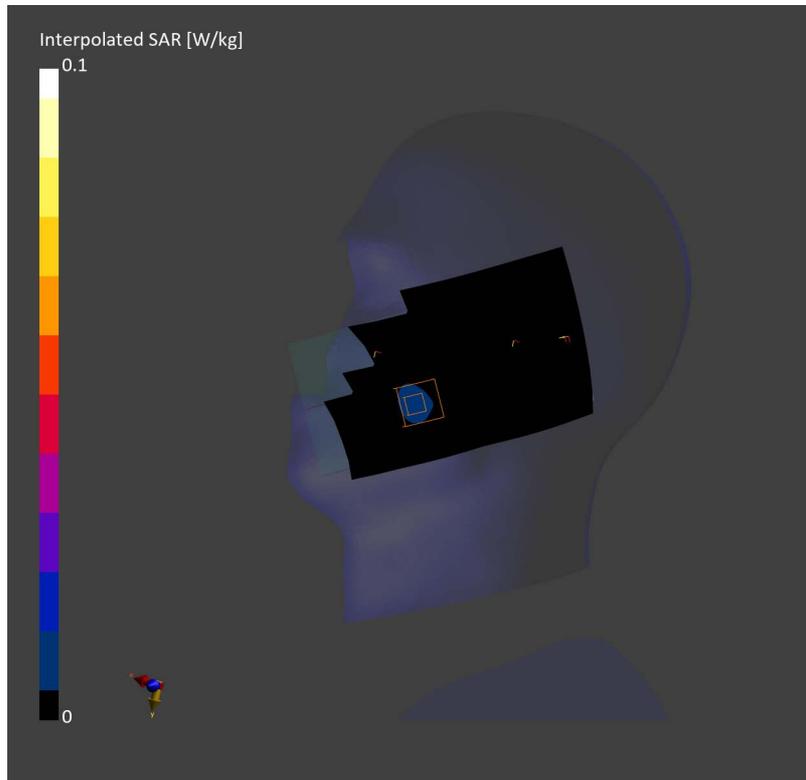

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, FRONT, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	FRONT, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3500.010, 633334	2.88	38.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	144.0 x 216.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	Unknown method	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 23:16	2025-01-23, 23:24
psSAR1g [W/Kg]	0.108	0.113
psSAR10g [W/Kg]	0.049	0.048
Power Drift [dB]	0.08	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.2
Dist 3dB Peak [mm]		9.9

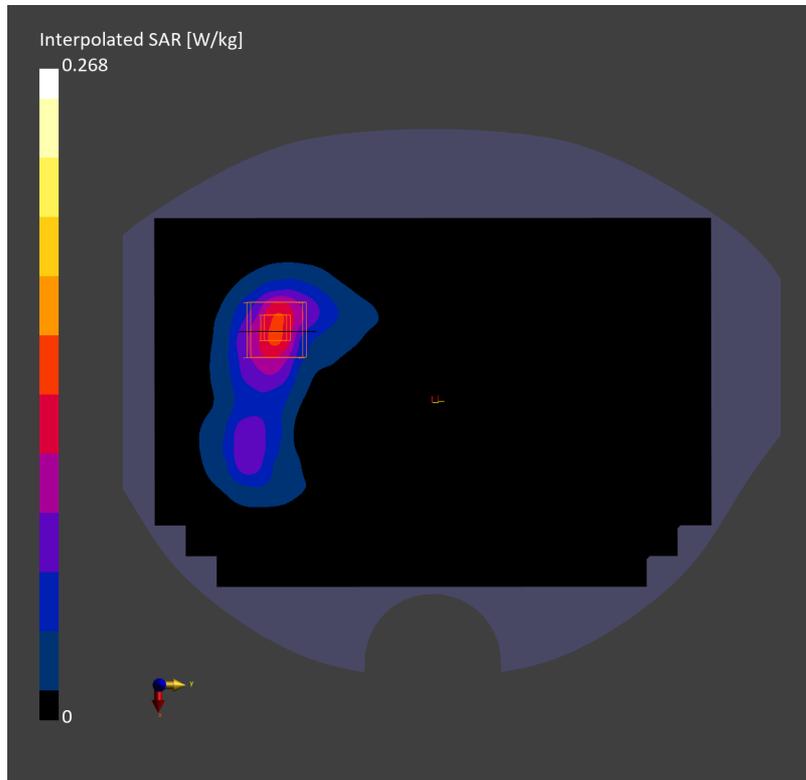

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3500.010, 633334	2.88	38.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-23, 22:48	2025-01-23, 22:53
psSAR1g [W/Kg]	0.210	0.218
psSAR10g [W/Kg]	0.088	0.092
Power Drift [dB]	0.02	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		59.5
Dist 3dB Peak [mm]		9.3

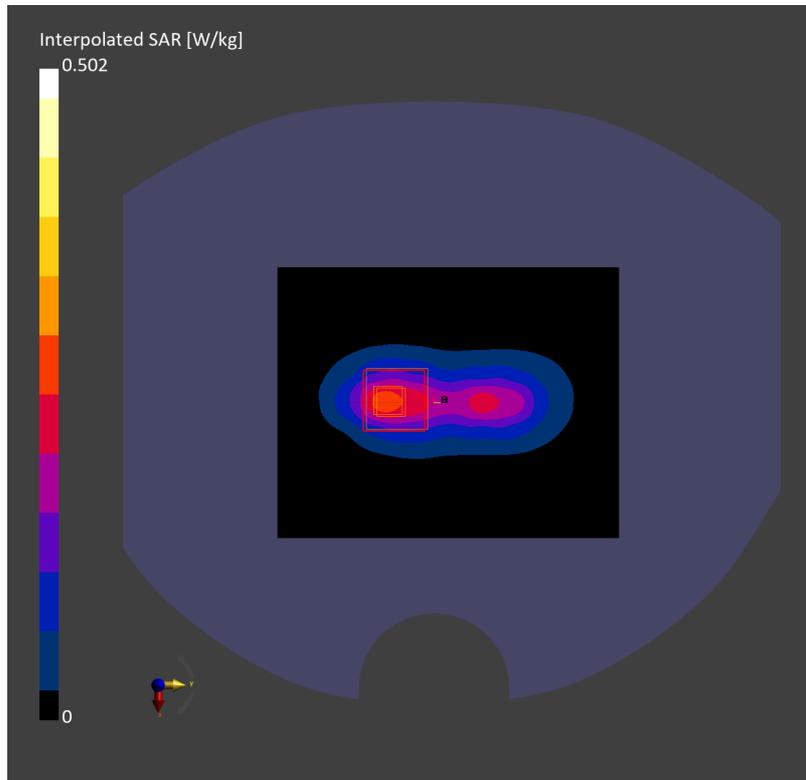

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10866-AAF	3500.010, 633334	2.90	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 10:12	2025-02-08, 10:18
psSAR1g [W/Kg]	0.130	0.126
psSAR10g [W/Kg]	0.056	0.048
Power Drift [dB]	0.15	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.1
Dist 3dB Peak [mm]		6.8

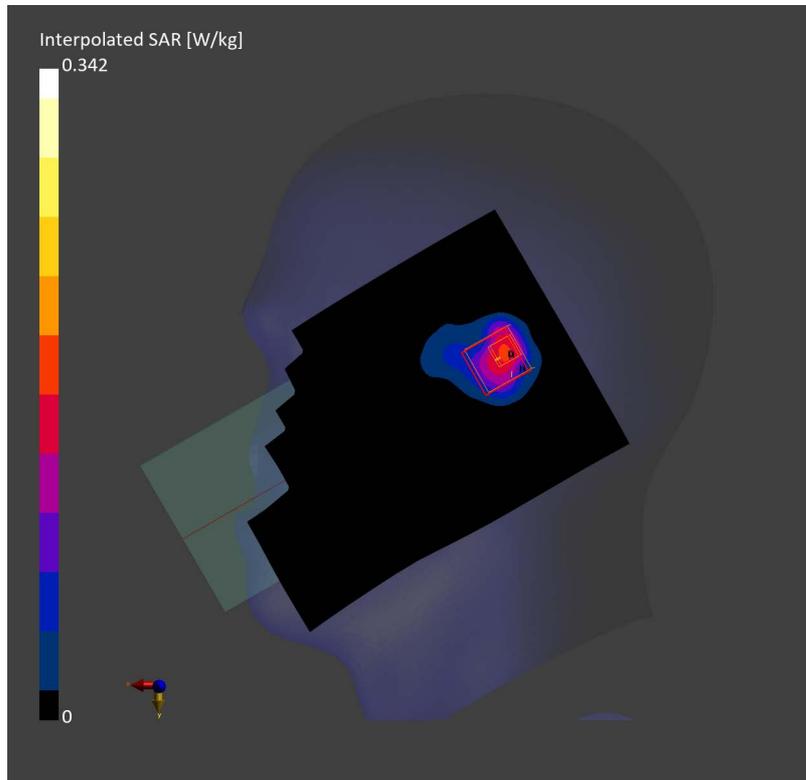

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3500.010, 633334	2.90	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 11:52	2025-02-08, 11:58
psSAR1g [W/Kg]	0.026	0.034
psSAR10g [W/Kg]	0.011	0.011
Power Drift [dB]	0.15	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		58.6
Dist 3dB Peak [mm]		9.5

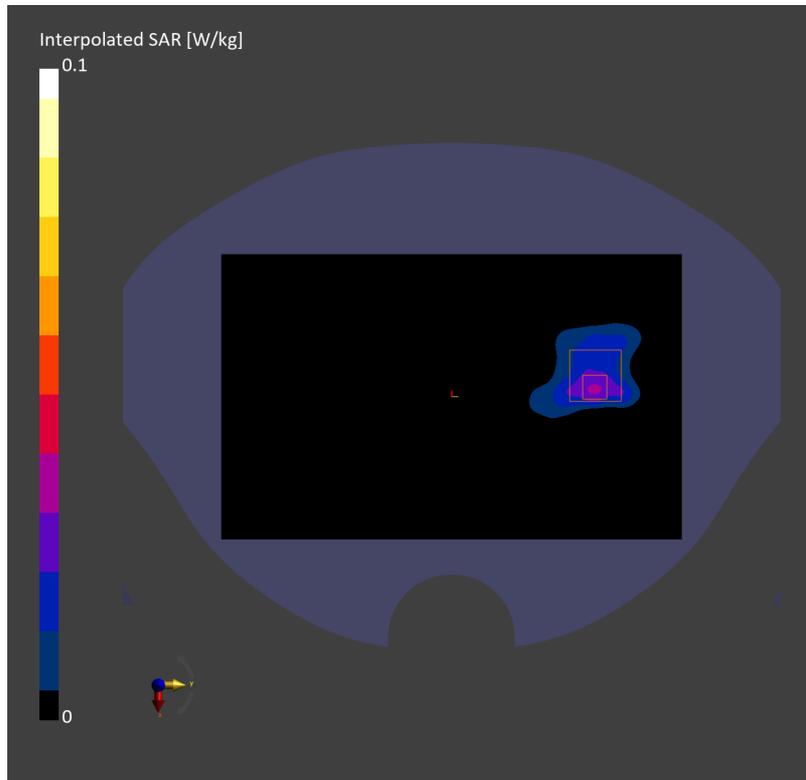

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10917-AAD	3500.010, 633334	2.90	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 14:08	2025-02-08, 14:17
psSAR1g [W/Kg]	0.043	0.060
psSAR10g [W/Kg]	0.019	0.009
Power Drift [dB]	-0.04	0.17
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.5
Dist 3dB Peak [mm]		5.1

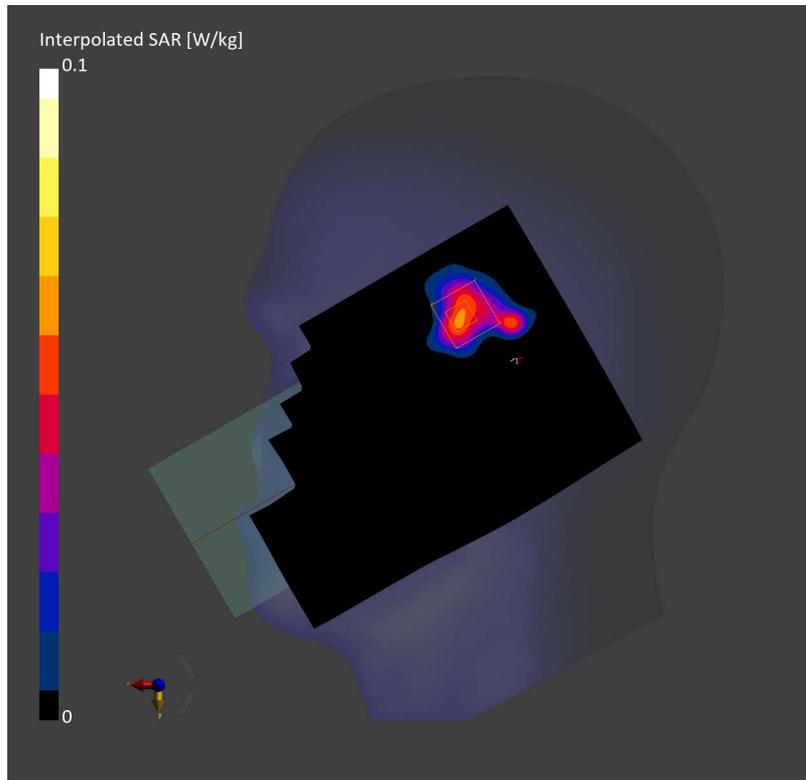

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3500.010, 633334	2.90	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 13:07	2025-02-08, 13:12
psSAR1g [W/Kg]	0.015	0.008
psSAR10g [W/Kg]	0.006	0.001
Power Drift [dB]	0.13	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		59.2
Dist 3dB Peak [mm]		5.7

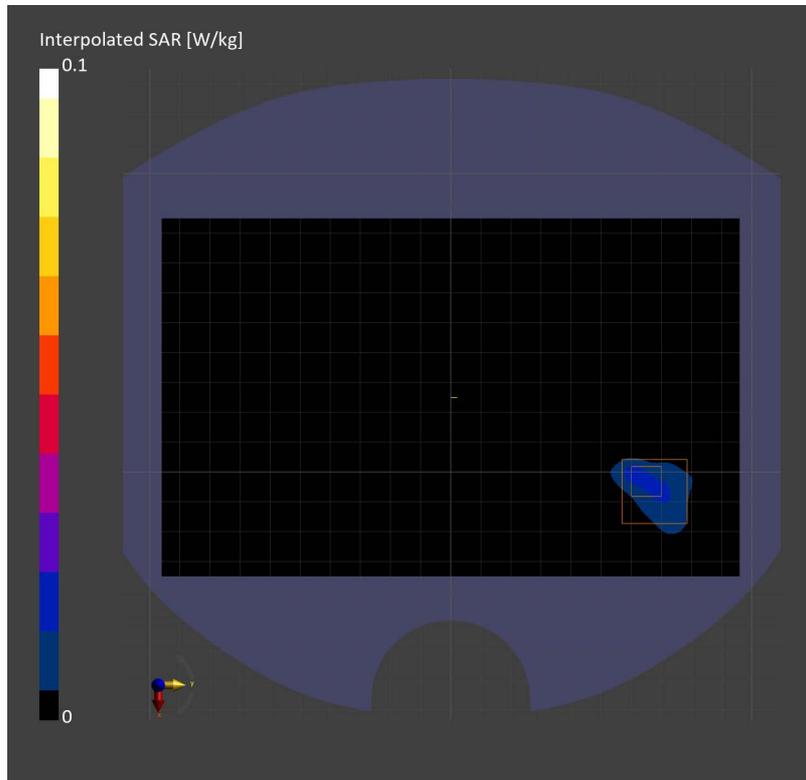

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10866-AAF	3500.010, 633334	2.90	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 15:55	2025-02-08, 16:01
psSAR1g [W/Kg]	0.044	0.046
psSAR10g [W/Kg]	0.014	0.011
Power Drift [dB]	0.16	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		55.7
Dist 3dB Peak [mm]		5.2

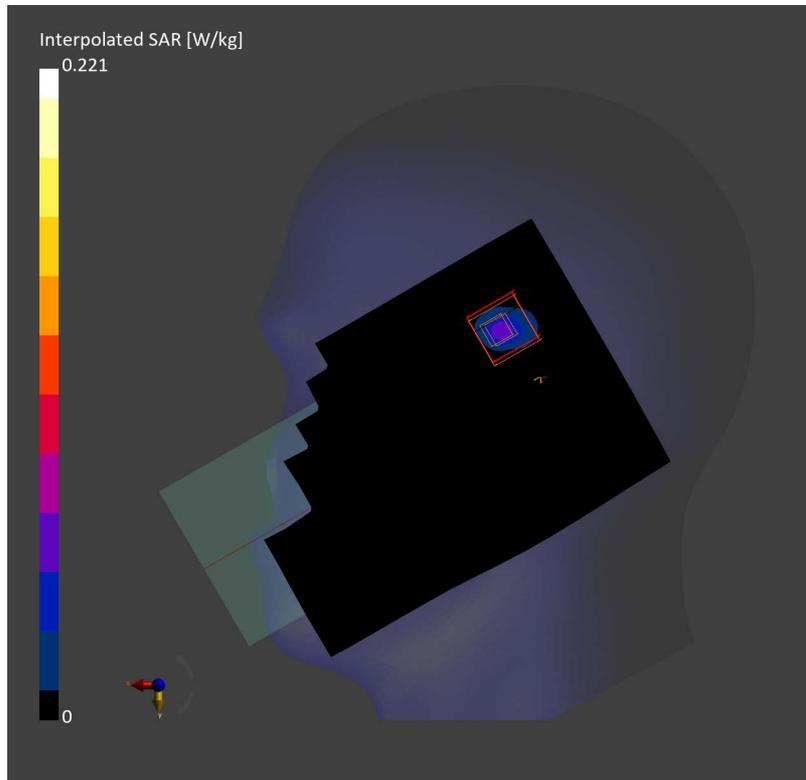

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3500.010, 633334	2.90	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 15:20	2025-02-08, 15:25
psSAR1g [W/Kg]	0.081	0.092
psSAR10g [W/Kg]	0.032	0.031
Power Drift [dB]	0.04	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.0
Dist 3dB Peak [mm]		7.3

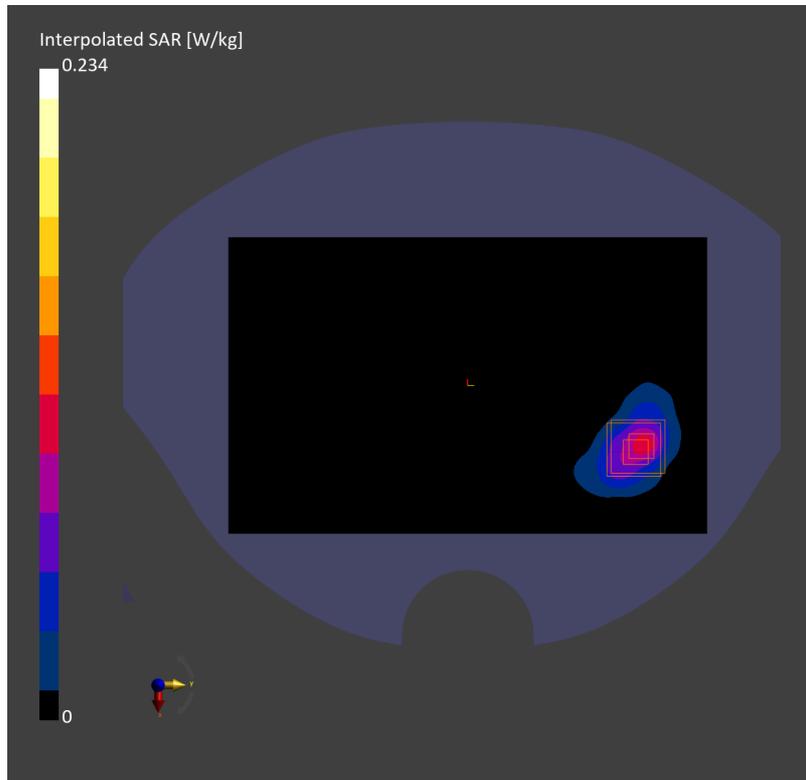

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10803-AAF	3500.010, 633334	2.92	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-04, 17:15	2025-03-04, 17:21
psSAR1g [W/Kg]	0.232	0.262
psSAR10g [W/Kg]	0.102	0.107
Power Drift [dB]	0.13	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.6
Dist 3dB Peak [mm]		5.7

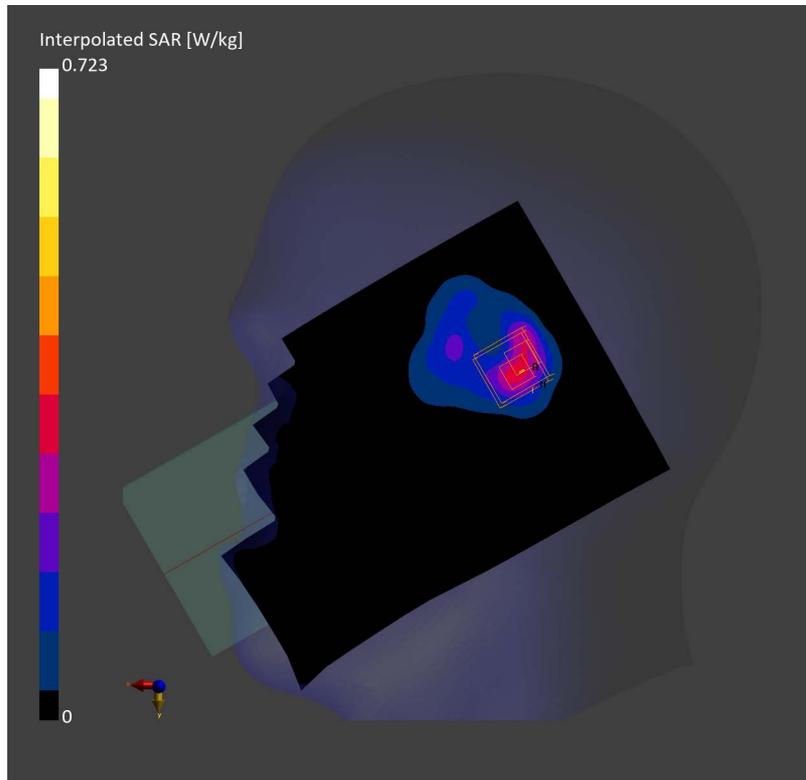

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1 RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10803-AAF	3500.010, 633334	2.92	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-04, 16:13	2025-03-04, 16:18
psSAR1g [W/Kg]	0.110	0.112
psSAR10g [W/Kg]	0.052	0.053
Power Drift [dB]	-0.08	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		61.2
Dist 3dB Peak [mm]		11.7

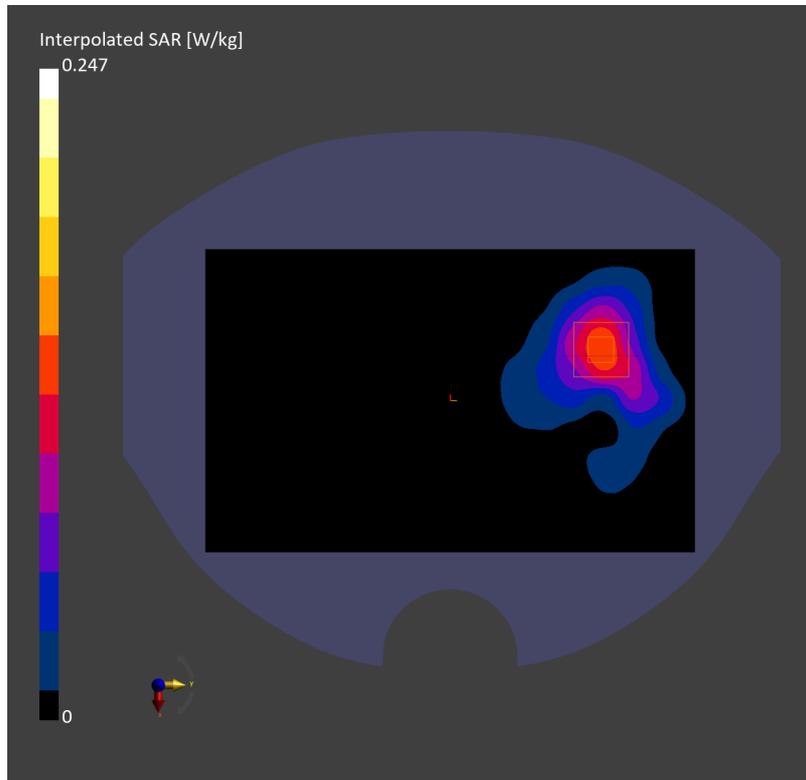

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10803-AAF	3500.010, 633334	2.92	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-05, 11:50	2025-03-05, 11:56
psSAR1g [W/Kg]	0.119	0.154
psSAR10g [W/Kg]	0.045	0.049
Power Drift [dB]	0.18	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.5
Dist 3dB Peak [mm]		5.2

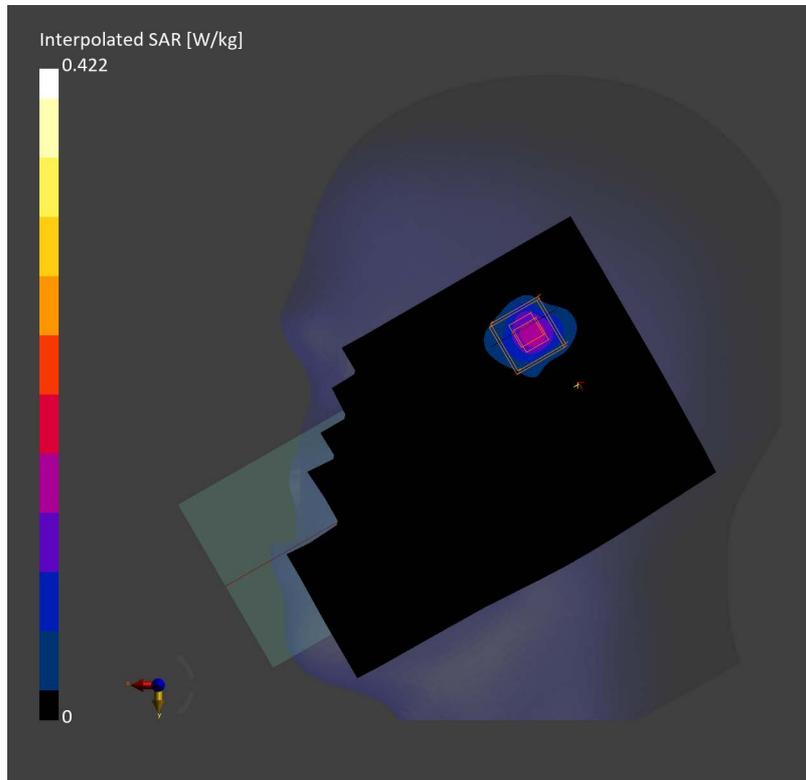

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1 RB1, Channel 633334 (3500.010 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10803-AAF	3500.010, 633334	2.92	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 216.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 4.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-05, 09:40	2025-03-05, 09:46
psSAR1g [W/Kg]	0.289	0.339
psSAR10g [W/Kg]	0.121	0.129
Power Drift [dB]	-0.01	0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		47.9
Dist 3dB Peak [mm]		7.7

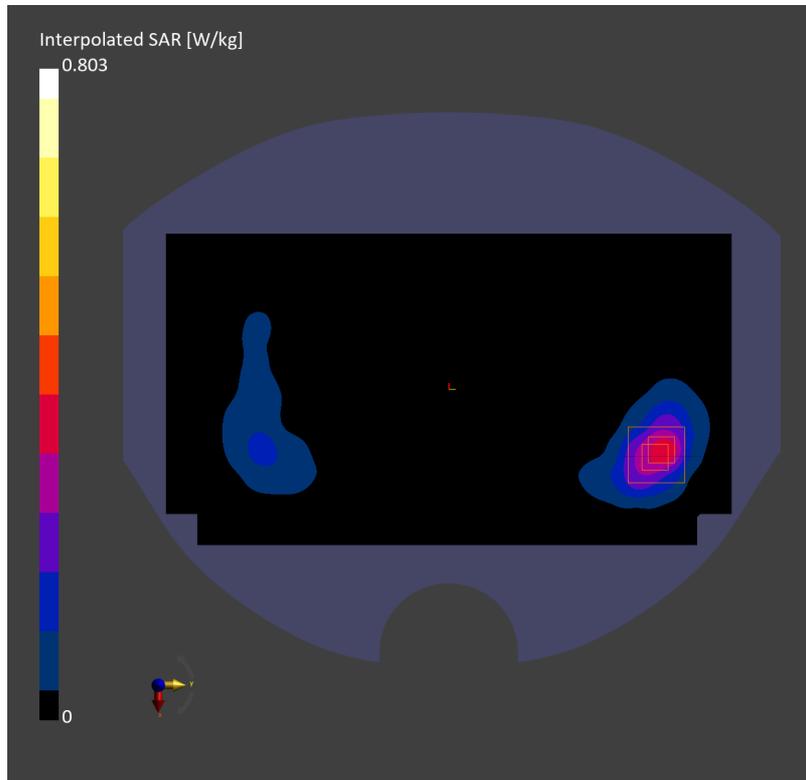

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 654800 (3822.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10866-AAF	3822.000, 654800	3.21	37.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-24, 20:31	2025-01-24, 20:42
psSAR1g [W/Kg]	0.029	0.015
psSAR10g [W/Kg]	0.011	0.002
Power Drift [dB]	-0.14	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		31.3
Dist 3dB Peak [mm]		7.1

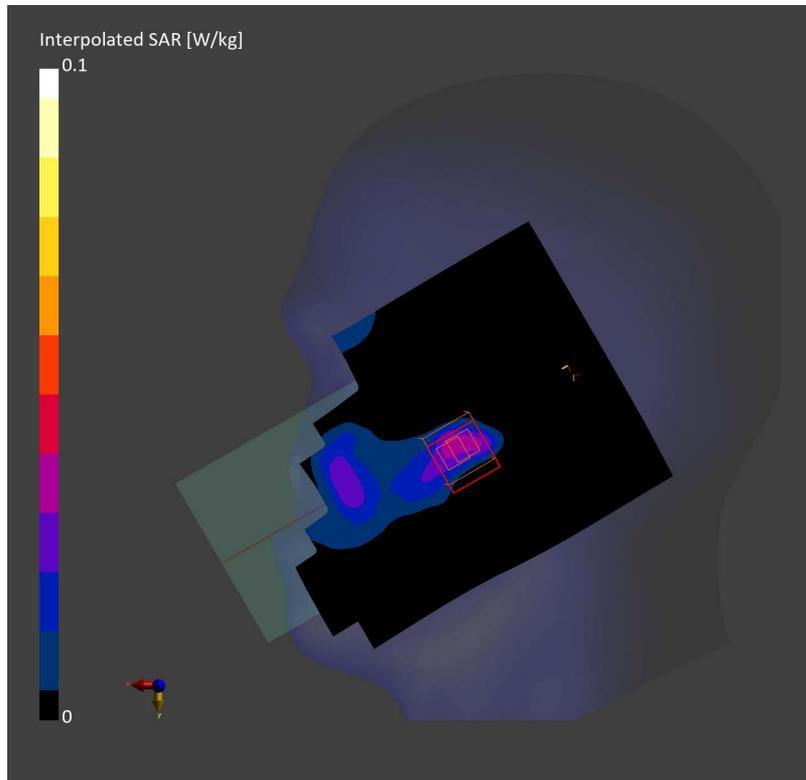

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 654800 (3822.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3822.000, 654800	3.21	37.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-24, 15:53	2025-01-24, 16:00
psSAR1g [W/Kg]	0.120	0.128
psSAR10g [W/Kg]	0.055	0.053
Power Drift [dB]	0.10	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.3
Dist 3dB Peak [mm]		9.0

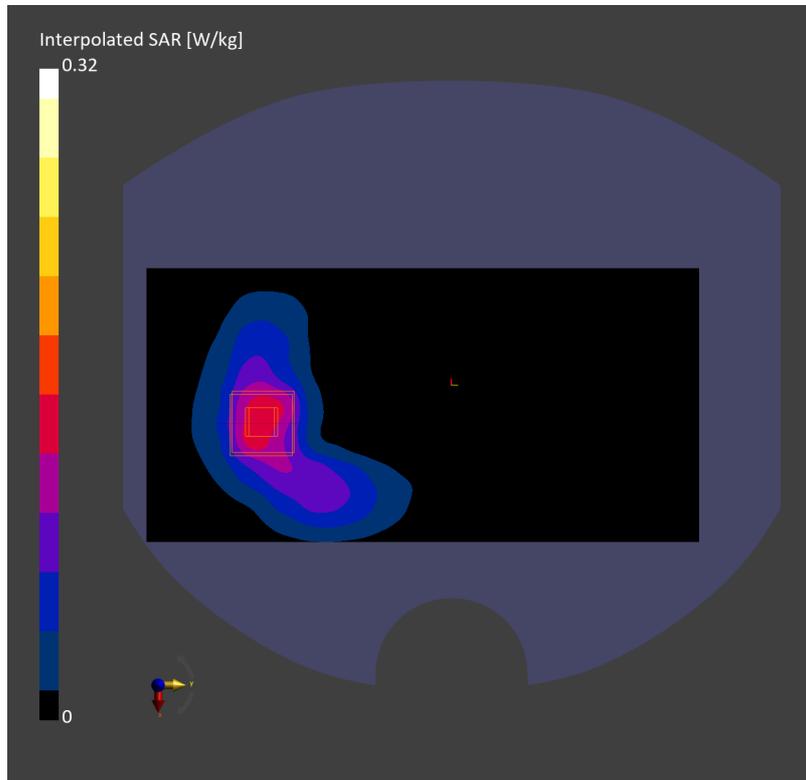

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0,

Channel 654800 (3822.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3822.000, 654800	3.21	37.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3500	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	48.0 x 120.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-24, 14:04	2025-01-24, 14:09
psSAR1g [W/Kg]	0.230	0.243
psSAR10g [W/Kg]	0.098	0.102
Power Drift [dB]	-0.12	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.7
Dist 3dB Peak [mm]		9.9

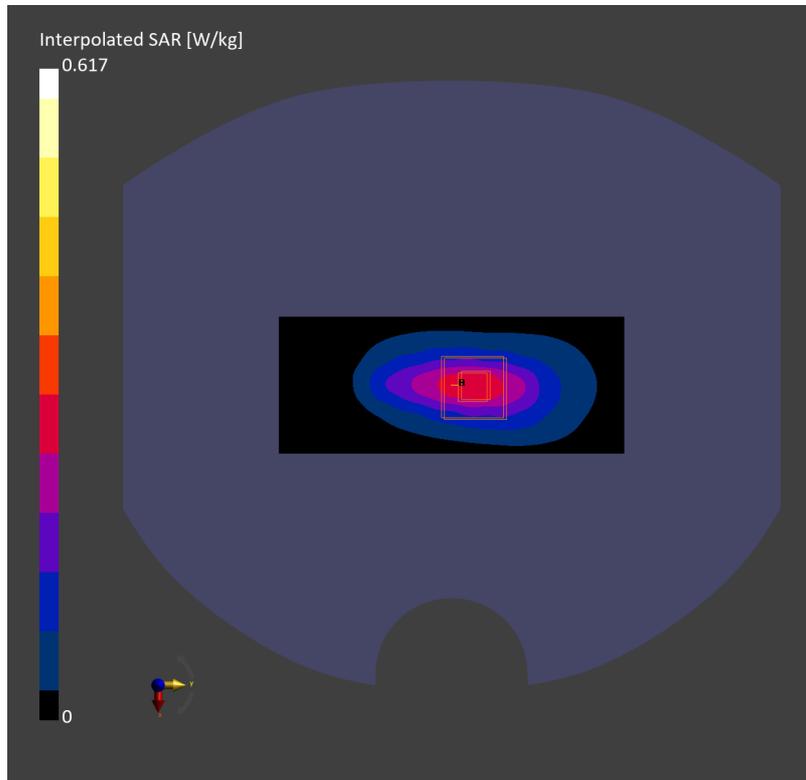

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 650000 (3750.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10917-AAD	3750.000, 650000	3.14	37.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3700	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-09, 11:32	2025-02-09, 11:38
psSAR1g [W/Kg]	0.161	0.182
psSAR10g [W/Kg]	0.064	0.064
Power Drift [dB]	0.11	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		52.7
Dist 3dB Peak [mm]		6.8

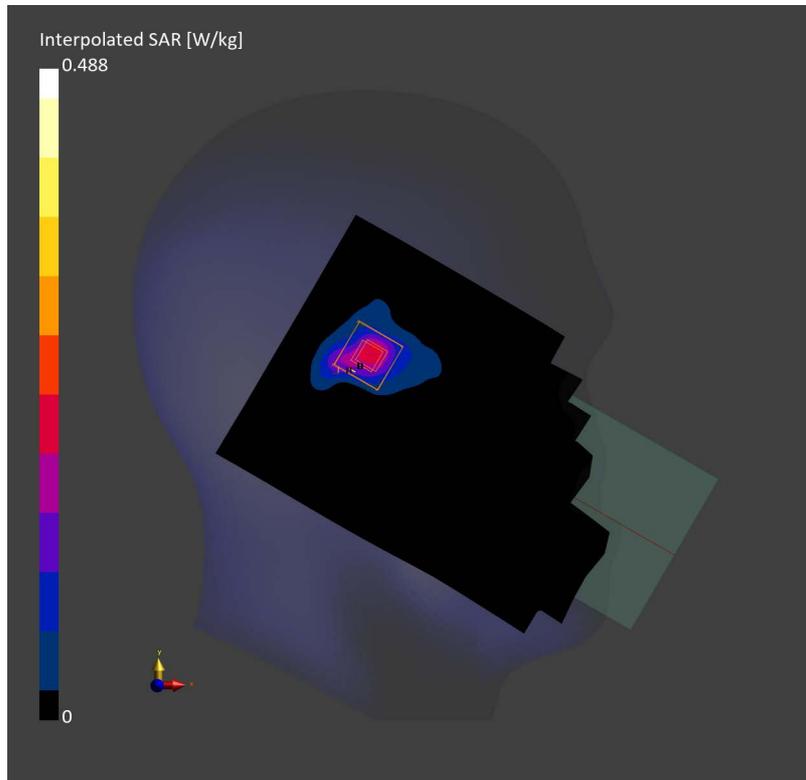

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz) RBPosition:135RB0, Channel 650000 (3750.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10917-AAD	3750.000, 650000	3.14	37.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3700	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-09, 10:47	2025-02-09, 10:52
psSAR1g [W/Kg]	0.063	0.065
psSAR10g [W/Kg]	0.028	0.028
Power Drift [dB]	-0.15	0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.3
Dist 3dB Peak [mm]		9.0

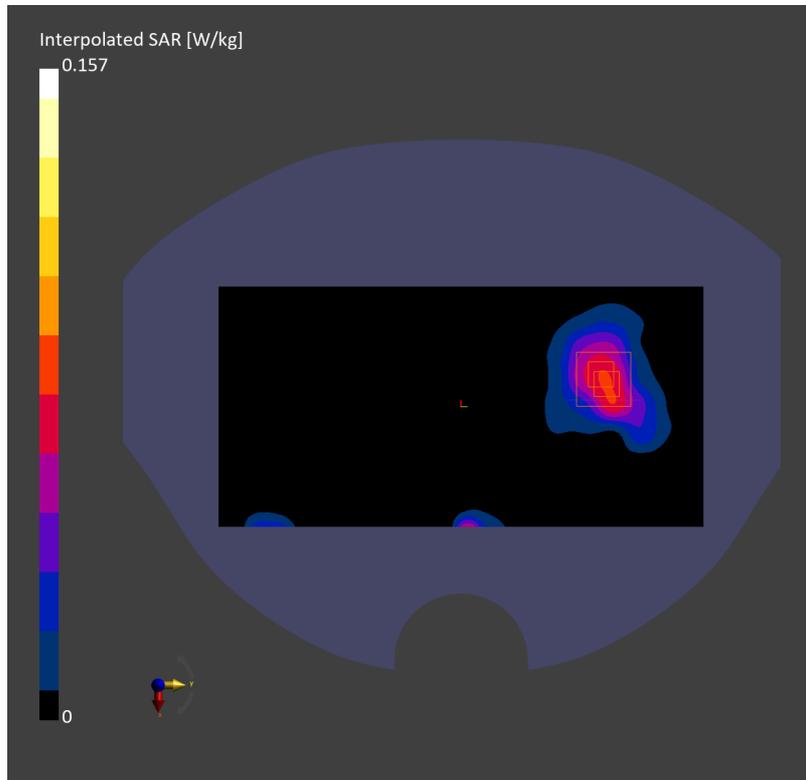

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 650000 (3750.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10866-AAF	3750.000, 650000	3.14	37.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3700	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 20:22	2025-02-08, 20:28
psSAR1g [W/Kg]	0.085	0.131
psSAR10g [W/Kg]	0.036	0.039
Power Drift [dB]	-0.05	0.10
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		58.3
Dist 3dB Peak [mm]		5.7

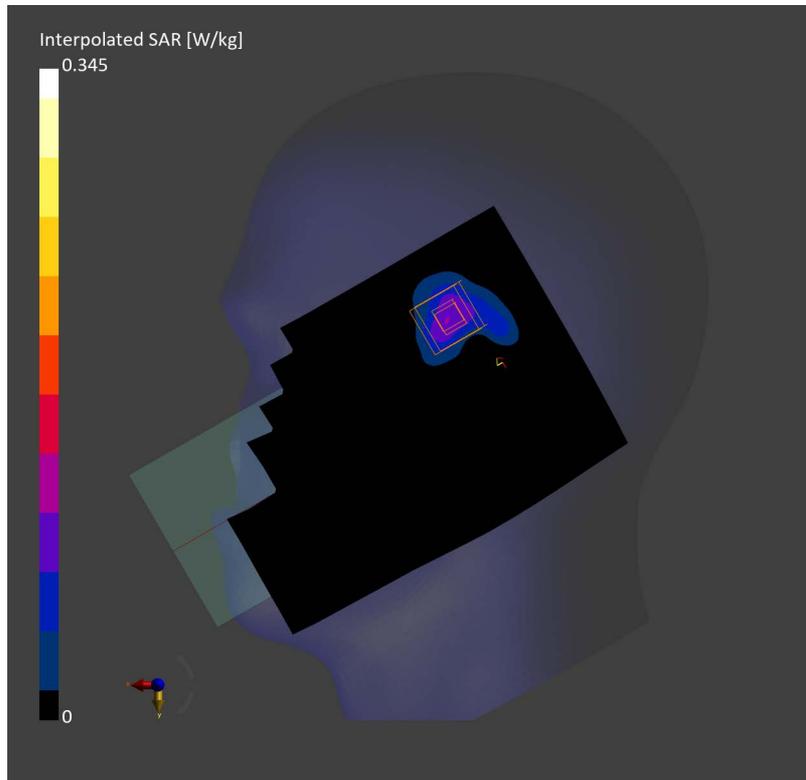

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 650000 (3750.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3750.000, 650000	3.14	37.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3700	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 19:49	2025-02-08, 19:54
psSAR1g [W/Kg]	0.019	0.016
psSAR10g [W/Kg]	0.008	0.004
Power Drift [dB]	-0.02	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		57.2
Dist 3dB Peak [mm]		7.1

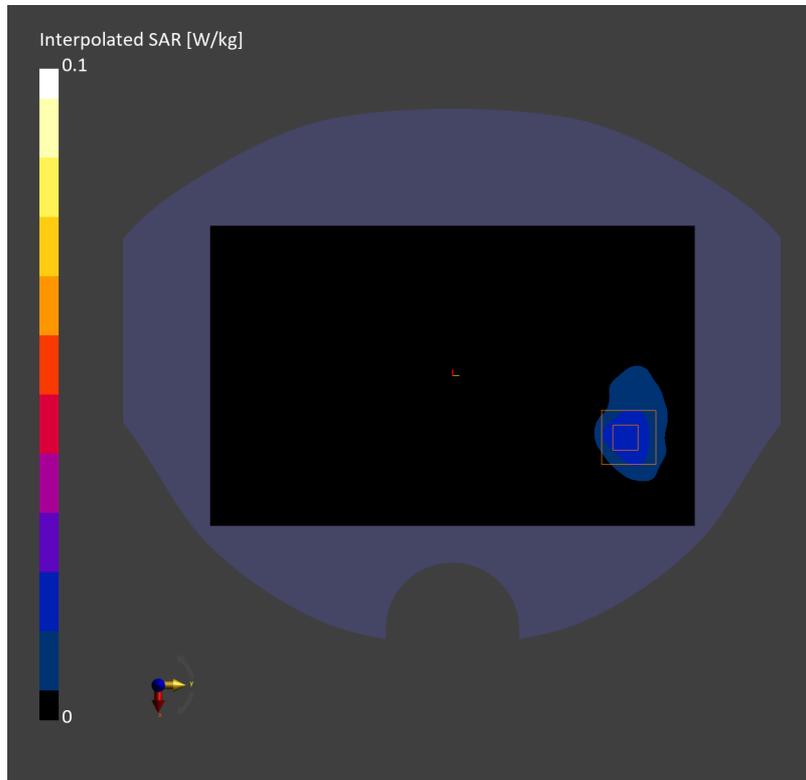

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 654800 (3822.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10866-AAF	3822.000, 654800	3.23	37.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3900	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 17:30	2025-02-08, 17:36
psSAR1g [W/Kg]	0.066	0.068
psSAR10g [W/Kg]	0.023	0.018
Power Drift [dB]	0.09	0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.3
Dist 3dB Peak [mm]		5.8

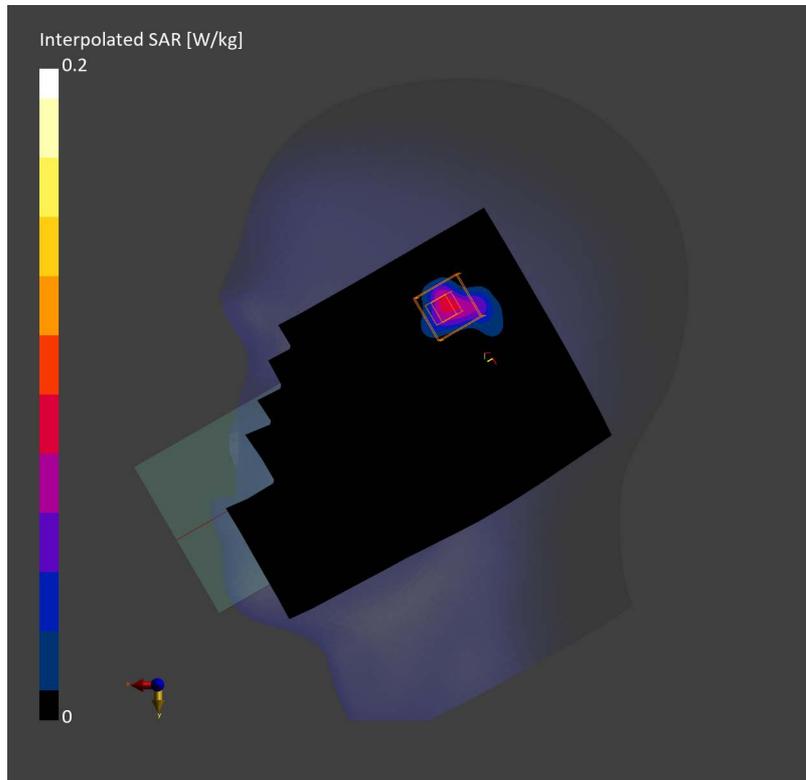

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 654800 (3822.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10866-AAF	3822.000, 654800	3.23	37.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3900	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-08, 17:00	2025-02-08, 17:05
psSAR1g [W/Kg]	0.060	0.065
psSAR10g [W/Kg]	0.022	0.021
Power Drift [dB]	0.07	-0.14
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		58.4
Dist 3dB Peak [mm]		6.8

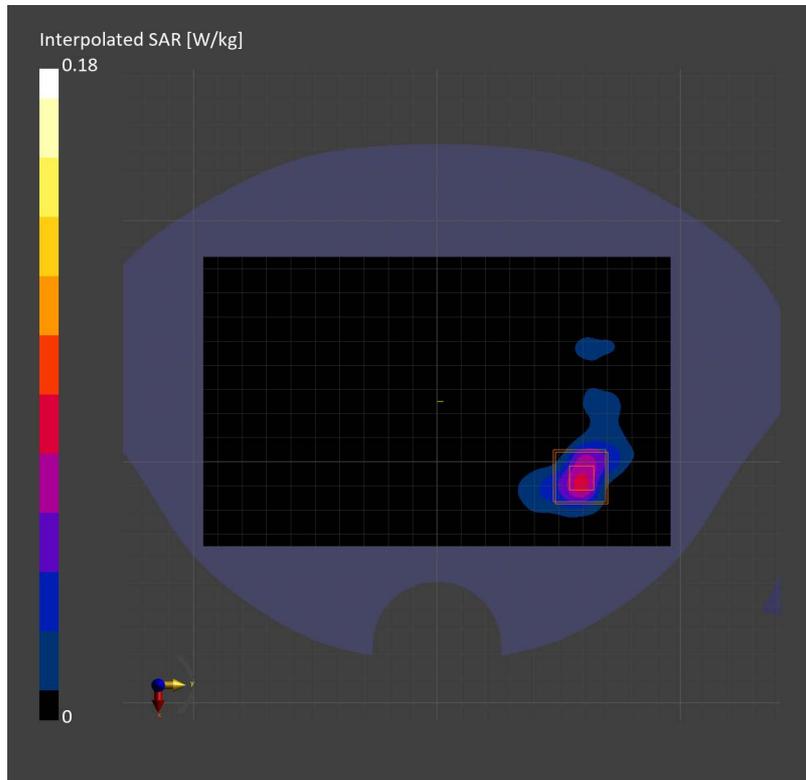

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 650000 (3750.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
LeftHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10803-AAF	3750.000, 650000	3.05	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3700	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-05, 19:46	2025-03-05, 19:52
psSAR1g [W/Kg]	0.416	0.416
psSAR10g [W/Kg]	0.174	0.170
Power Drift [dB]	0.11	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.1
Dist 3dB Peak [mm]		8.1

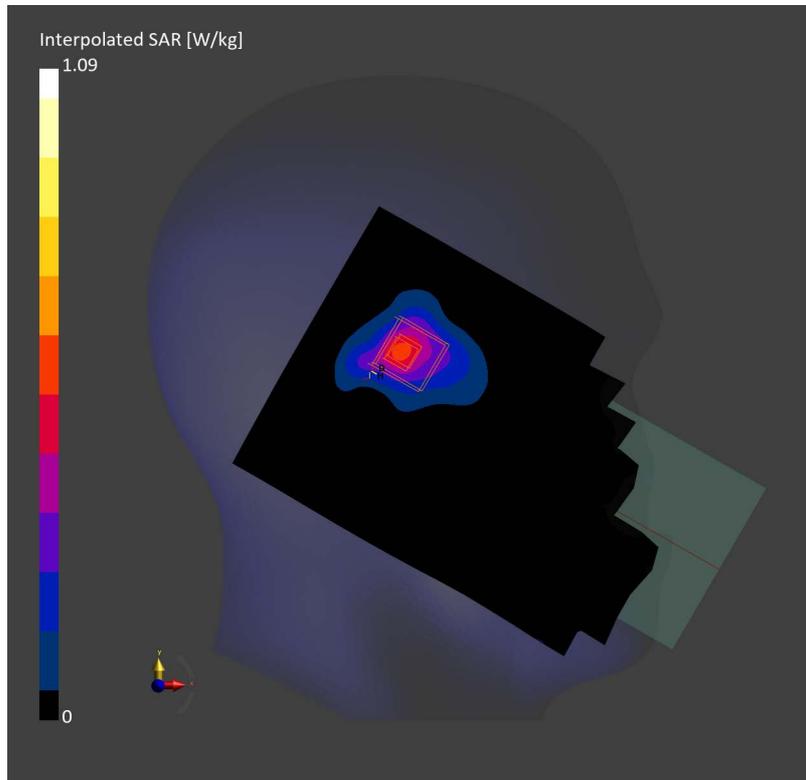

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1 RB1, Channel 650000 (3750.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10803-AAF	3750.000, 650000	3.05	38.6

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3700	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-05, 17:27	2025-03-05, 17:32
psSAR1g [W/Kg]	0.168	0.173
psSAR10g [W/Kg]	0.075	0.076
Power Drift [dB]	0.05	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		59.1
Dist 3dB Peak [mm]		9.5

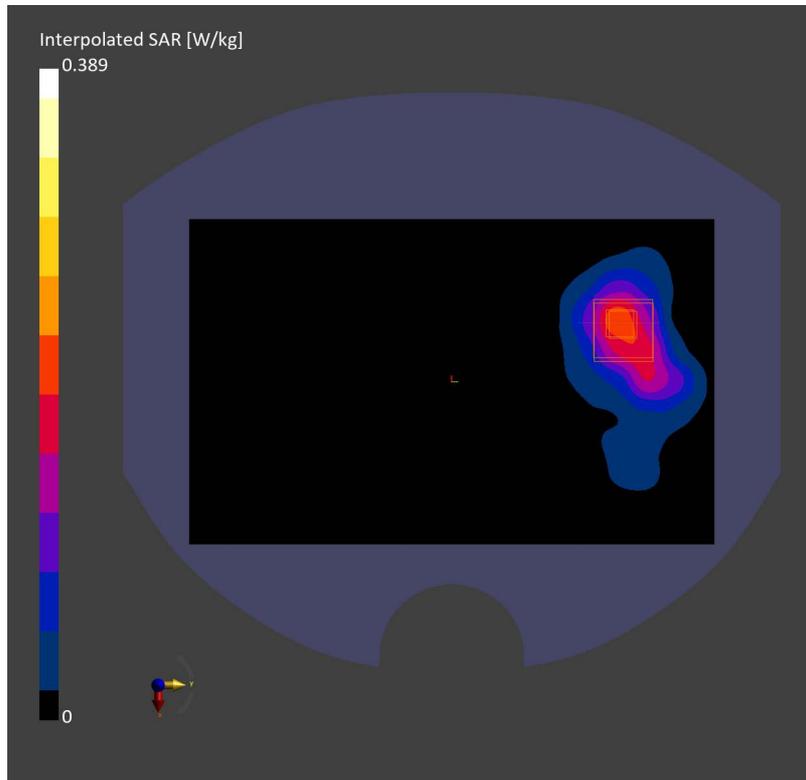

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 654800 (3822.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	Band n77	5G NR FR1 TDD, 10803-AAF	3822.000, 654800	3.17	38.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3900	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 192.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	All points	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-06, 10:42	2025-03-06, 10:48
psSAR1g [W/Kg]	0.206	0.235
psSAR10g [W/Kg]	0.073	0.075
Power Drift [dB]	-0.01	0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.8
Dist 3dB Peak [mm]		5.4

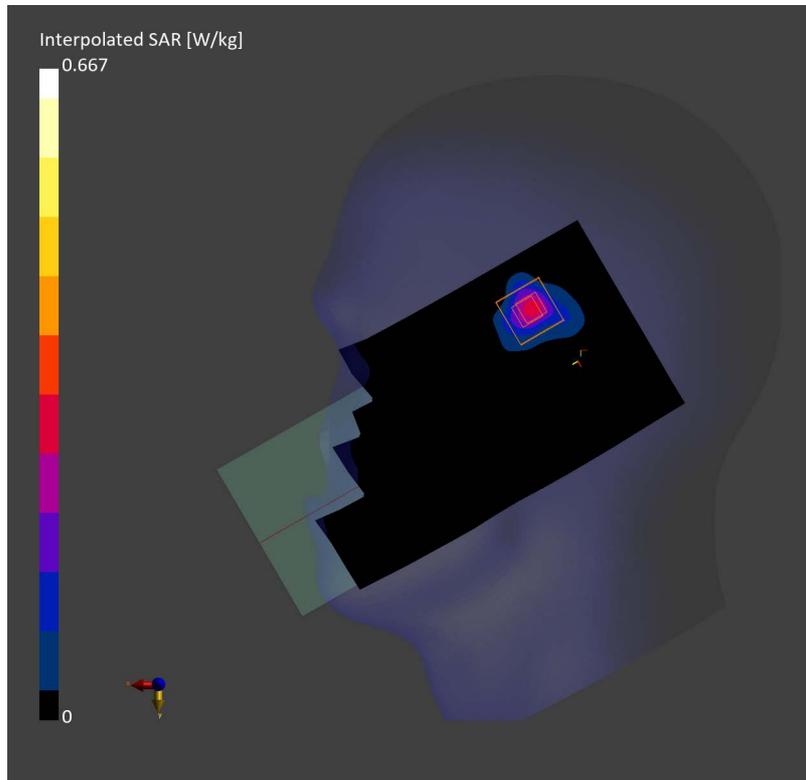

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1 RB1, Channel 654800 (3822.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	Band n77	5G NR FR1 TDD, 10803-AAF	3822.000, 654800	3.17	38.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3900	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 216.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-06, 09:37	2025-03-06, 09:42
psSAR1g [W/Kg]	0.204	0.244
psSAR10g [W/Kg]	0.083	0.087
Power Drift [dB]	0.05	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		56.0
Dist 3dB Peak [mm]		7.7

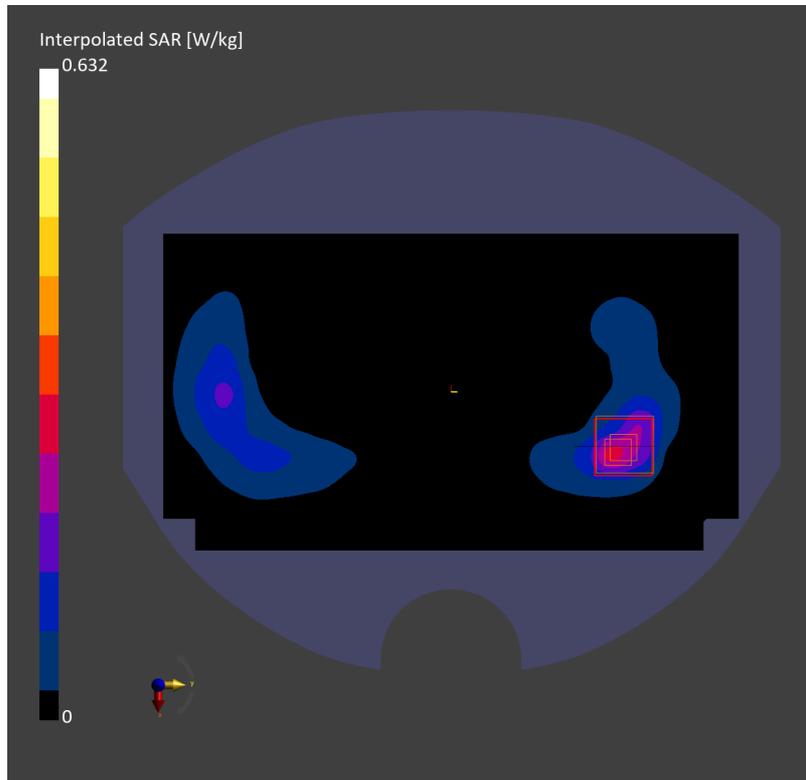

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE BOTTOM, Band n77, 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz) RBPosition:1RB1, Channel 654800 (3822.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE BOTTOM, 10.00	Band n77	5G NR FR1 TDD, 10803-AAF	3822.000, 654800	3.17	38.2

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL3900	EX3DV4 - SN3624, 2025-01-15	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 120.0	30.0 x 30.0 x 24.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 3.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-03-06, 10:02	2025-03-06, 10:07
psSAR1g [W/Kg]	0.259	0.266
psSAR10g [W/Kg]	0.109	0.114
Power Drift [dB]	-0.00	0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		53.7
Dist 3dB Peak [mm]		10.0

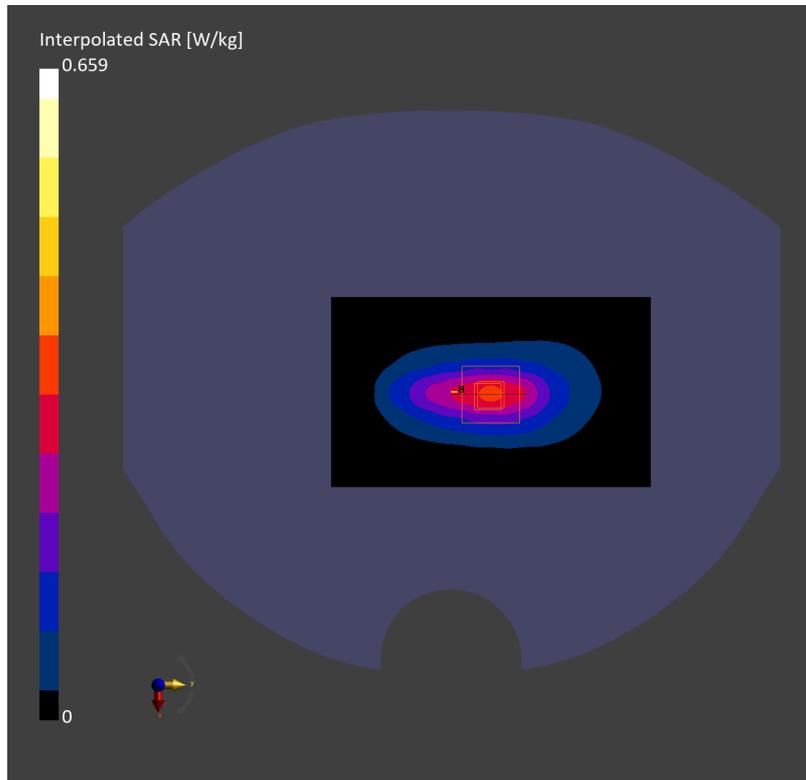

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 11 (2462.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	WLAN 2.4GHz	WLAN, 10012-CAB	2462.000, 11	1.77	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-15, 22:39	2025-01-15, 22:46
psSAR1g [W/Kg]	0.318	0.407
psSAR10g [W/Kg]	0.144	0.147
Power Drift [dB]	-0.03	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		37.6
Dist 3dB Peak [mm]		5.1

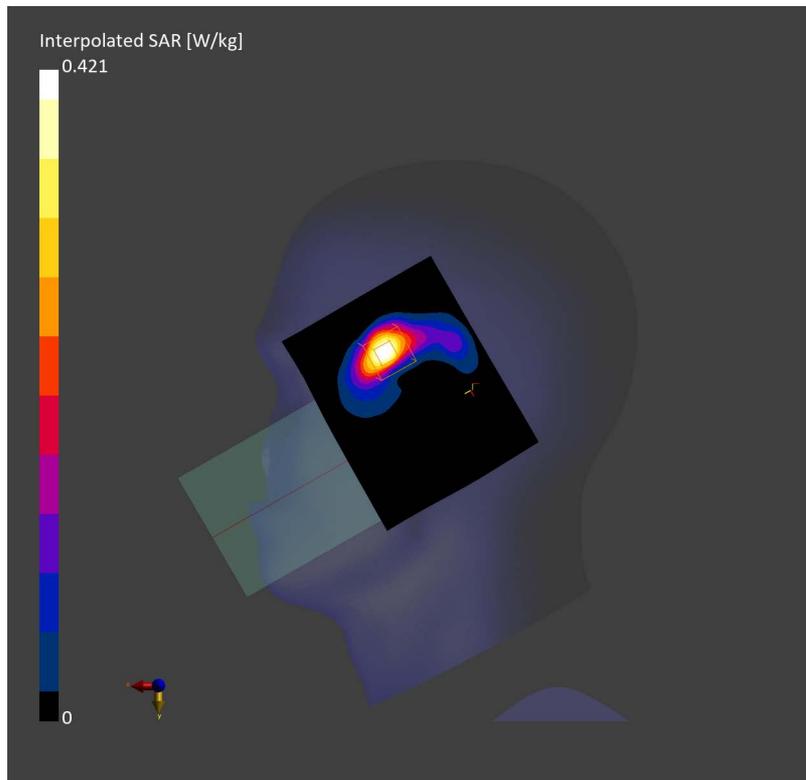

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 11 (2462.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 2.4GHz	WLAN, 10012-CAB	2462.000, 11	1.77	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-15, 23:34	2025-01-15, 23:39
psSAR1g [W/Kg]	0.126	0.142
psSAR10g [W/Kg]	0.063	0.064
Power Drift [dB]	0.03	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.8
Dist 3dB Peak [mm]		8.0

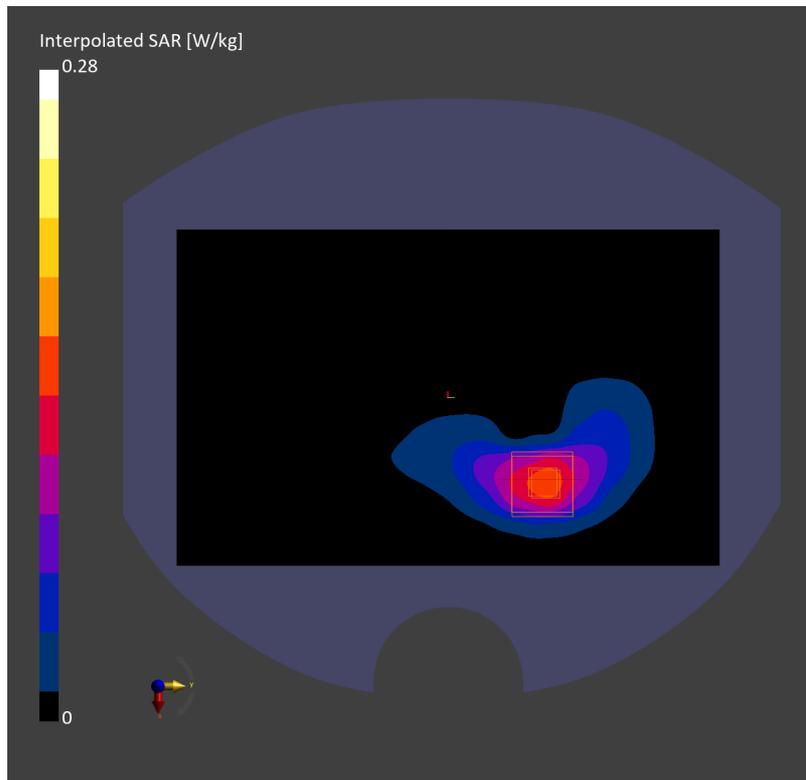

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE LEFT, WLAN 2.4GHz, IEEE 802.11 b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 11 (2462.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 10.00	WLAN 2.4GHz	WLAN, 10012-CAB	2462.000, 11	1.77	39.4

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-15, 21:51	2025-01-15, 22:00
psSAR1g [W/Kg]	0.216	0.225
psSAR10g [W/Kg]	0.098	0.103
Power Drift [dB]	-0.18	0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.4
Dist 3dB Peak [mm]		8.6

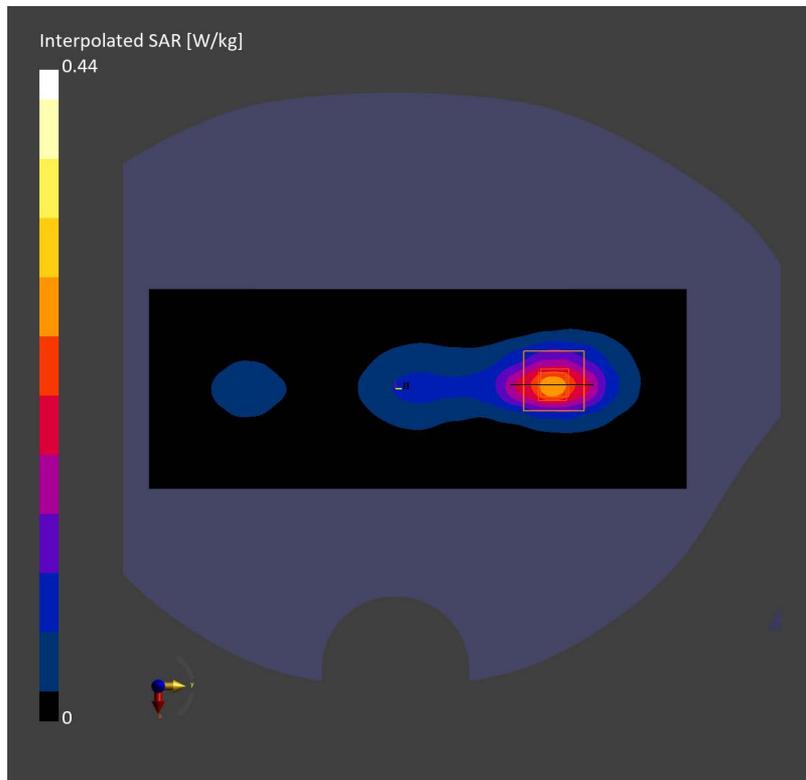

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 6 (2437.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, Head Simulating Liquid	CHEEK, 0.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	7.27	1.74	39.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450 , 2025-02-07	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 00:03	2025-01-16, 00:43
psSAR1g [W/Kg]	0.003	0.004
psSAR10g [W/Kg]	0.001	0.001
Power Drift [dB]	0.16	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		33.7
Dist 3dB Peak [mm]		5.2

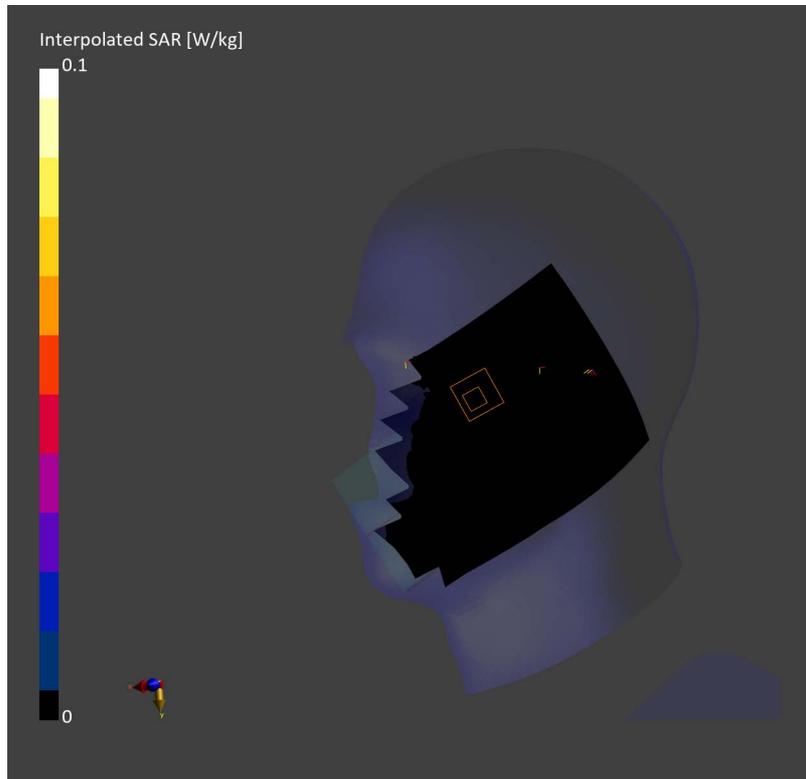

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 6 (2437.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	1.74	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 01:40	2025-01-16, 01:46
psSAR1g [W/Kg]	0.160	0.161
psSAR10g [W/Kg]	0.076	0.077
Power Drift [dB]	0.02	0.07
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		52.0
Dist 3dB Peak [mm]		10.3

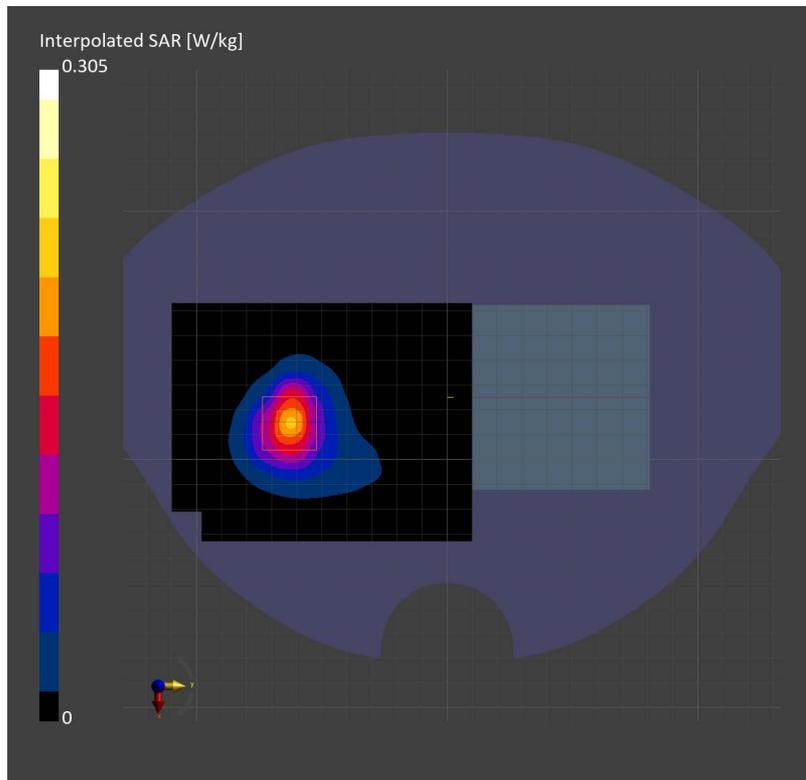

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 6 (2437.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, Head Simulating Liquid	CHEEK, 0.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	7.27	1.74	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 168.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 04:12	2025-01-16, 04:18
psSAR1g [W/Kg]	0.370	0.455
psSAR10g [W/Kg]	0.169	0.167
Power Drift [dB]	-0.02	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		38.1
Dist 3dB Peak [mm]		5.1

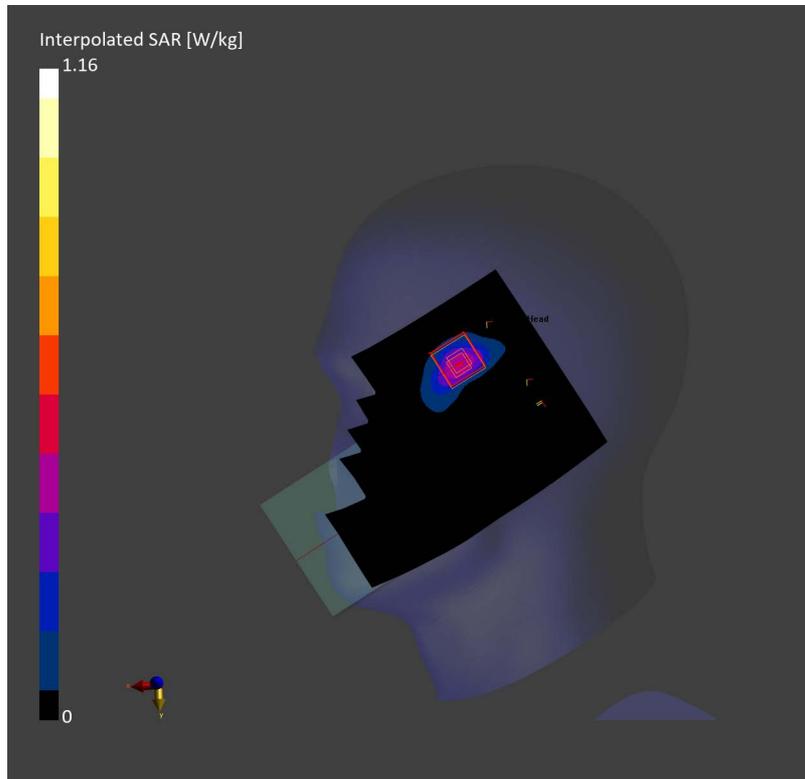

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 6 (2437.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	1.74	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 216.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 18:48	2025-01-16, 18:54
psSAR1g [W/Kg]	0.160	0.179
psSAR10g [W/Kg]	0.081	0.083
Power Drift [dB]	0.13	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.3
Dist 3dB Peak [mm]		9.3

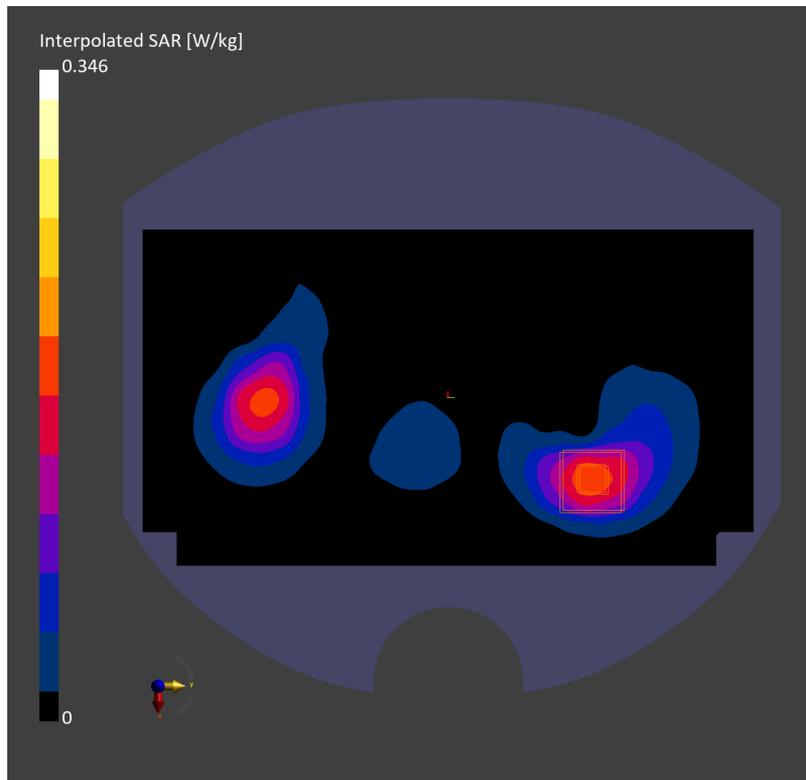

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE LEFT, WLAN 2.4GHz, IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps), Channel 6 (2437.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	EDGE LEFT, 10.00	WLAN 2.4GHz	WLAN, 10012-CAB	2437.000, 6	1.74	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 216.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	8.5 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	N/A
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 07:54	2025-01-16, 08:03
psSAR1g [W/Kg]	0.242	0.248
psSAR10g [W/Kg]	0.115	0.116
Power Drift [dB]	-0.02	-0.00
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.4
Dist 3dB Peak [mm]		9.1

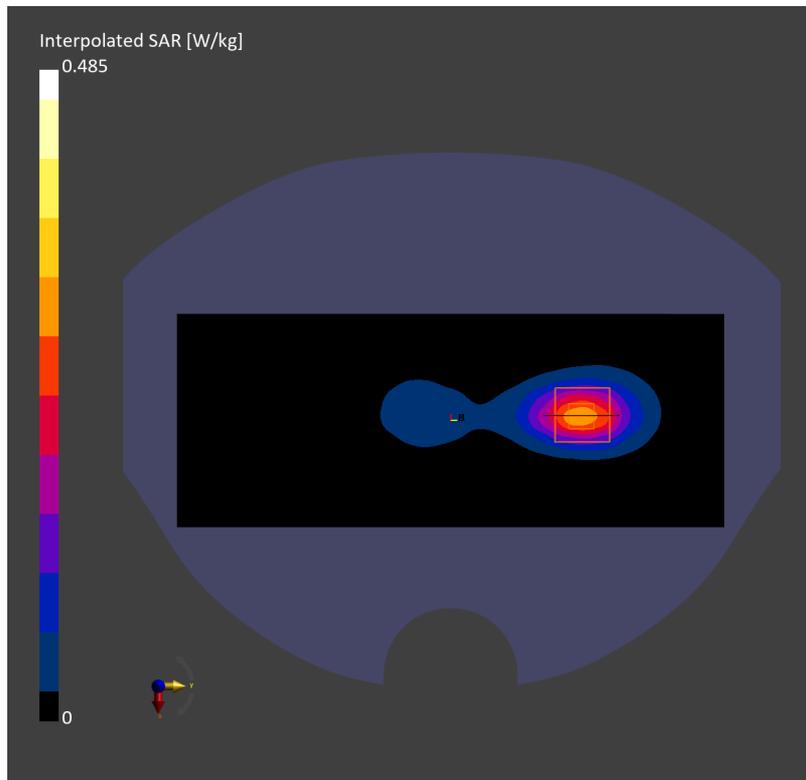

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 138 (5690.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	U-NII-2C Standalone	WLAN, 10544-AAD	5690.000, 138	5.30	36.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 20:19	2025-02-13, 20:26
psSAR1g [W/Kg]	0.402	0.445
psSAR10g [W/Kg]	0.121	0.106
Power Drift [dB]	0.10	0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		50.3
Dist 3dB Peak [mm]		5.4

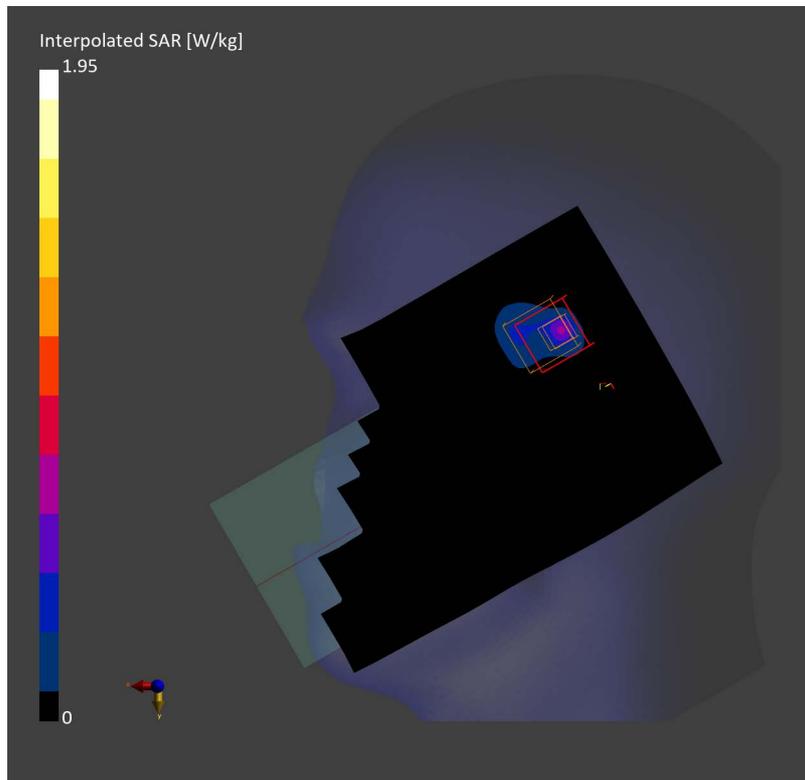

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 155 (5775.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10544-AAD	5775.000, 155	5.46	34.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-19, 17:56	2025-01-19, 18:03
psSAR1g [W/Kg]	0.295	0.301
psSAR10g [W/Kg]	0.115	0.111
Power Drift [dB]	0.04	-0.08
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		52.7
Dist 3dB Peak [mm]		11.2

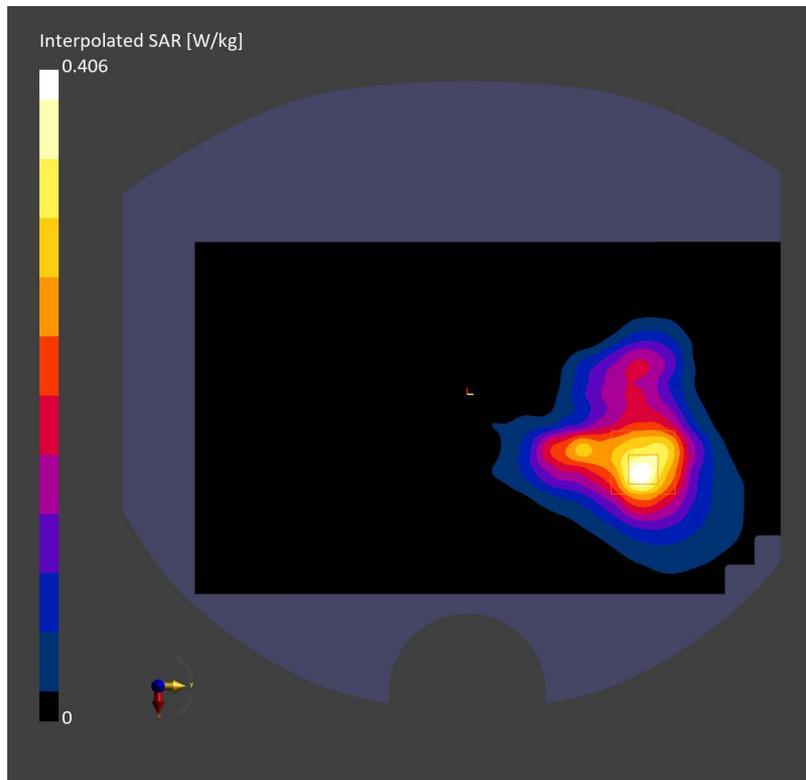

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 138 (5690.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	U-NII-2C Standalone	WLAN, 10544-AAD	5690.000, 138	5.30	36.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 12:35	2025-02-13, 12:42
psSAR1g [W/Kg]	5.77	6.22
psSAR10g [W/Kg]	1.36	1.35
Power Drift [dB]	0.05	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		43.7
Dist 3dB Peak [mm]		5.2

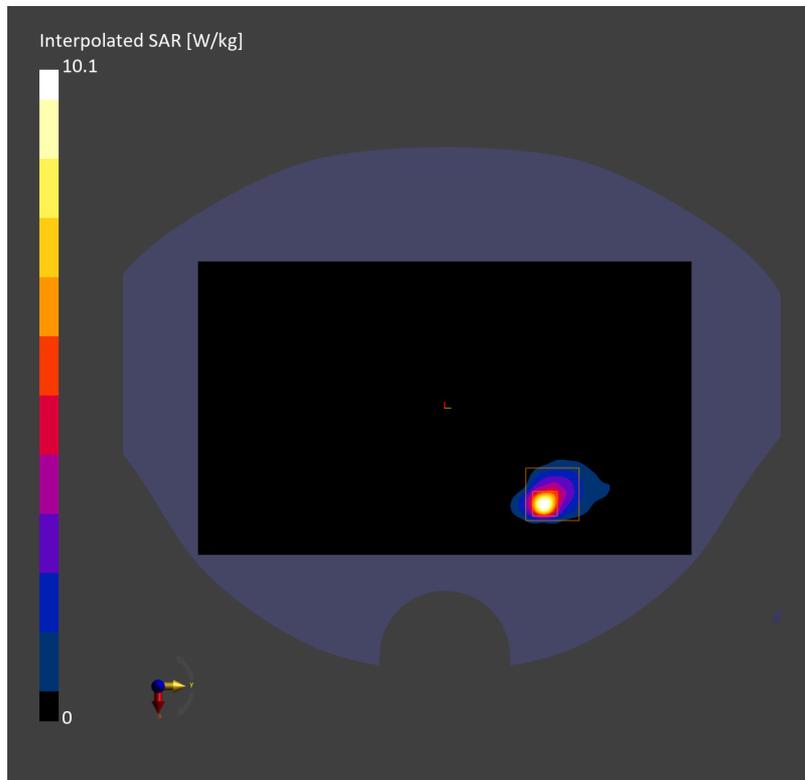

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, U-NII-1, U-NII-2A, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 58 (5290.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	U-NII-1, U-NII-2A	WLAN, 10554-AAE	5290.000, 58	4.75	37.0

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 140.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-11, 17:04	2025-02-11, 17:14
psSAR1g [W/Kg]	0.01	0.011
psSAR10g [W/Kg]	0.001	0.002
Power Drift [dB]	-0.06	-0.09
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		60.9
Dist 3dB Peak [mm]		8.5

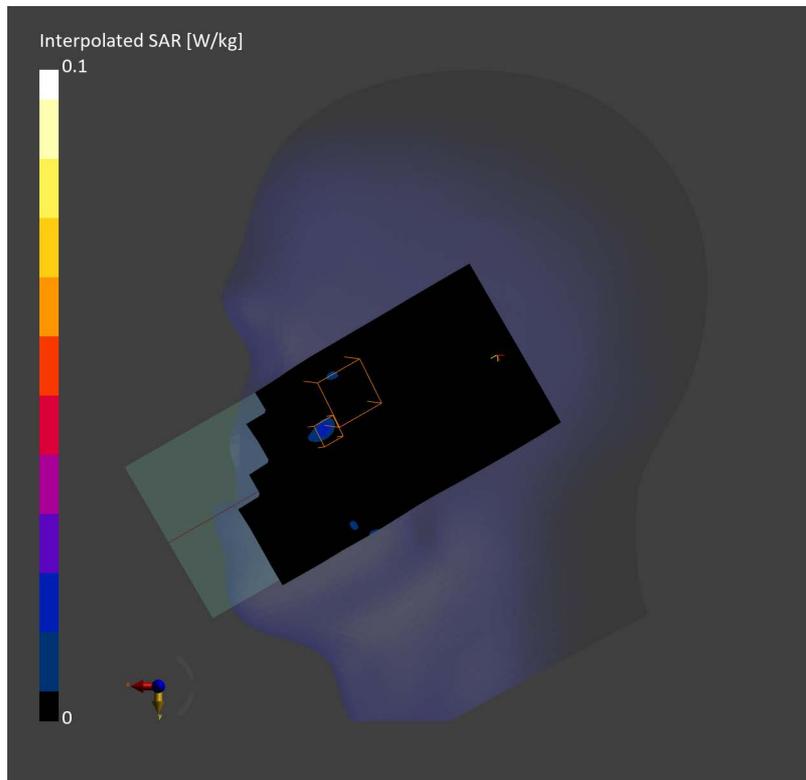

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 155 (5775.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10544-AAD	5775.000, 155	5.43	35.7

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-11, 13:59	2025-02-11, 14:06
psSAR1g [W/Kg]	0.189	0.206
psSAR10g [W/Kg]	0.067	0.067
Power Drift [dB]	-0.01	0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.4
Dist 3dB Peak [mm]		9.0

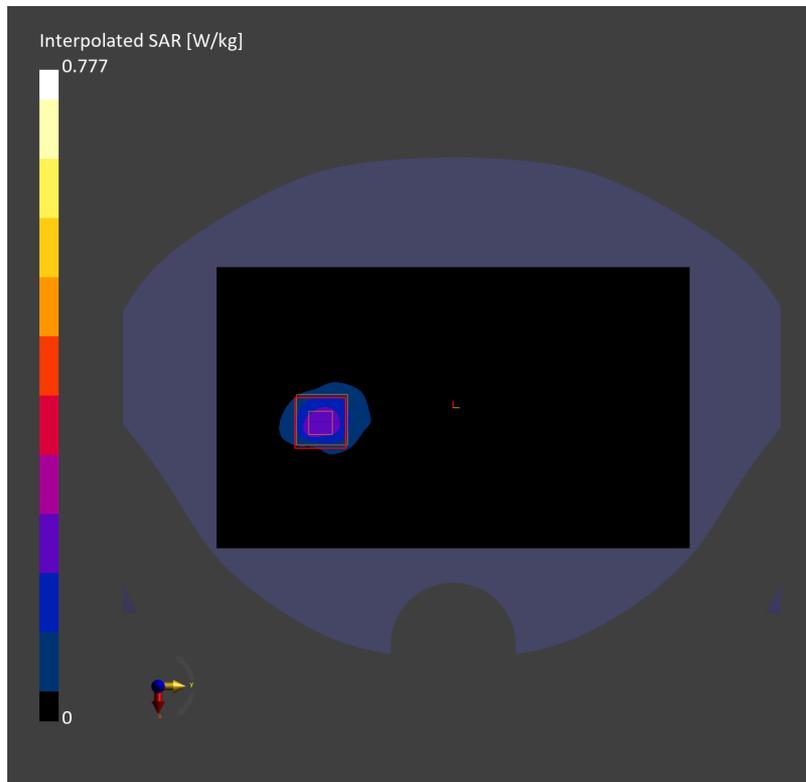

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 138 (5690.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	U-NII-2C Standalone	WLAN, 10544-AAD	5690.000, 138	5.30	36.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 180.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 10:03	2025-02-13, 10:10
psSAR1g [W/Kg]	2.03	2.11
psSAR10g [W/Kg]	0.610	0.545
Power Drift [dB]	-0.04	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		45.4
Dist 3dB Peak [mm]		4.7

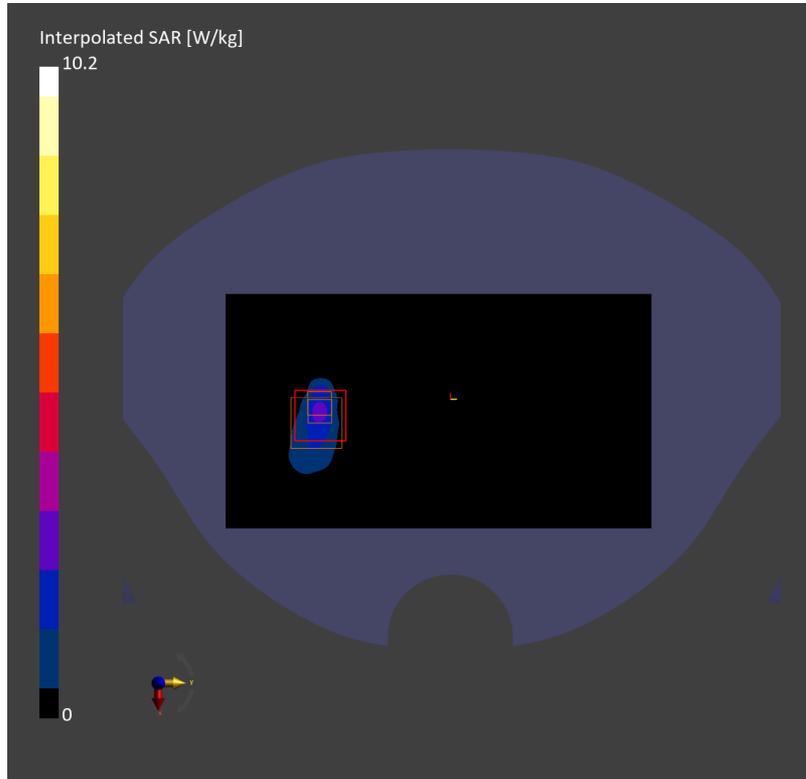

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 138 (5690.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	U-NII-2C Standalone	WLAN, 10544-AAD	5690.000, 138	5.30	36.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 160.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 22:01	2025-02-13, 22:10
psSAR1g [W/Kg]	0.606	0.473
psSAR10g [W/Kg]	0.202	0.167
Power Drift [dB]	0.00	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.8
Dist 3dB Peak [mm]		5.4

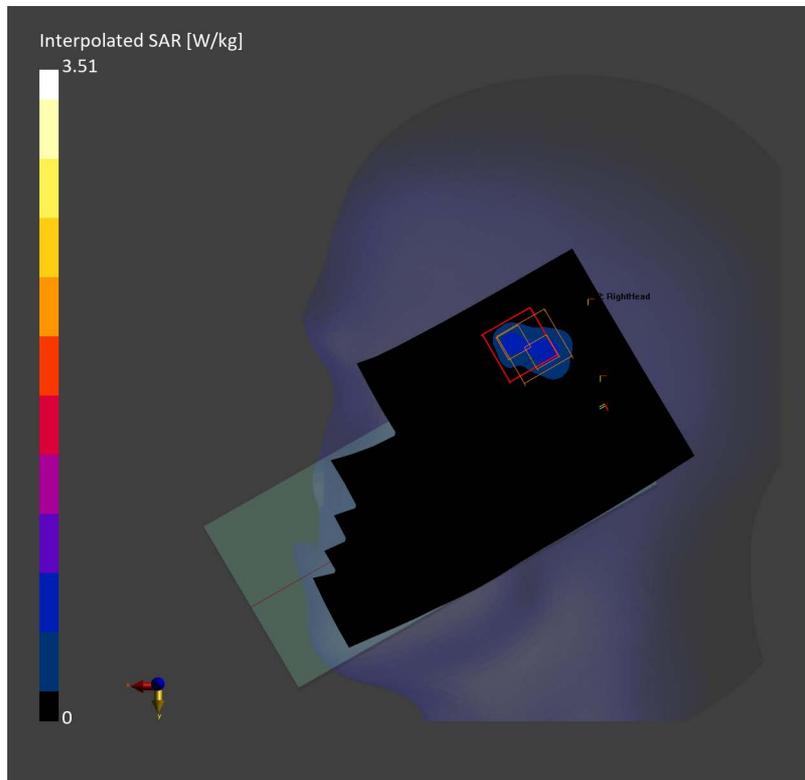

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, WLAN 5GHz, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 155 (5775.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	WLAN 5GHz	WLAN, 10544-AAD	5775.000, 155	5.46	34.9

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	140.0 x 200.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-19, 16:12	2025-01-19, 16:19
psSAR1g [W/Kg]	0.300	0.323
psSAR10g [W/Kg]	0.122	0.122
Power Drift [dB]	-0.05	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.3
Dist 3dB Peak [mm]		11.9

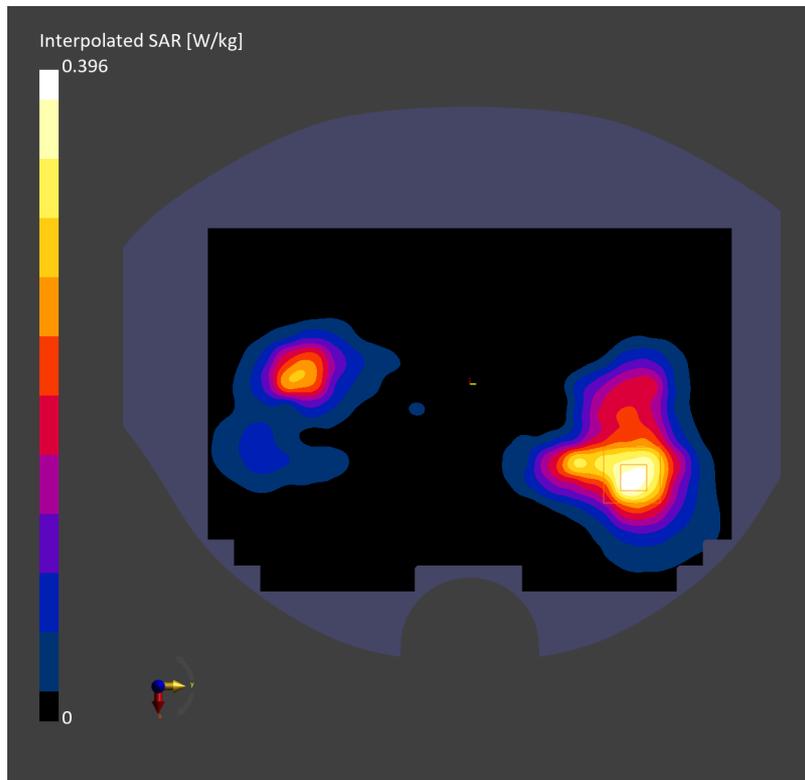

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, U-NII-2C Standalone, IEEE 802.11ac WiFi (80MHz, MCS0), Channel 138 (5690.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	U-NII-2C Standalone	WLAN, 10544-AAD	5690.000, 138	5.30	36.1

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL5GHz	EX3DV4 - SN7758, 2024-09-12	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	100.0 x 180.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 2.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-02-13, 21:11	2025-02-13, 21:18
psSAR1g [W/Kg]	3.92	6.12
psSAR10g [W/Kg]	1.12	1.37
Power Drift [dB]	-0.07	-0.06
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		48.9
Dist 3dB Peak [mm]		4.1

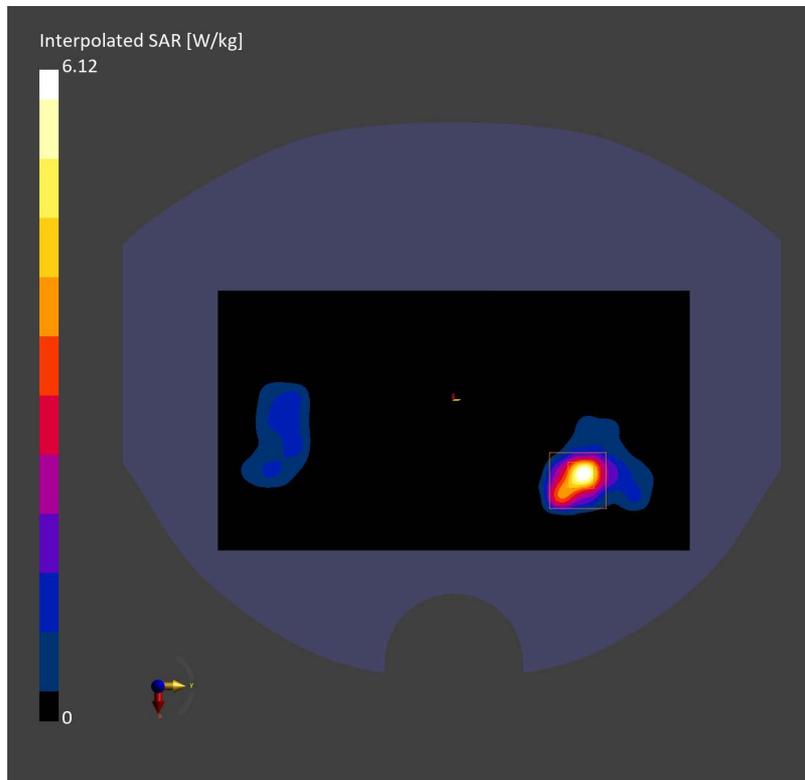

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
RightHead, Head Simulating Liquid	CHEEK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10035-CAA	2441.000, 39	7.27	1.75	39.5

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450, 2025-01-16	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 12:28	2025-01-16, 12:34
psSAR1g [W/Kg]	0.311	0.356
psSAR10g [W/Kg]	0.136	0.130
Power Drift [dB]	0.16	0.04
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		38.5
Dist 3dB Peak [mm]		5.1

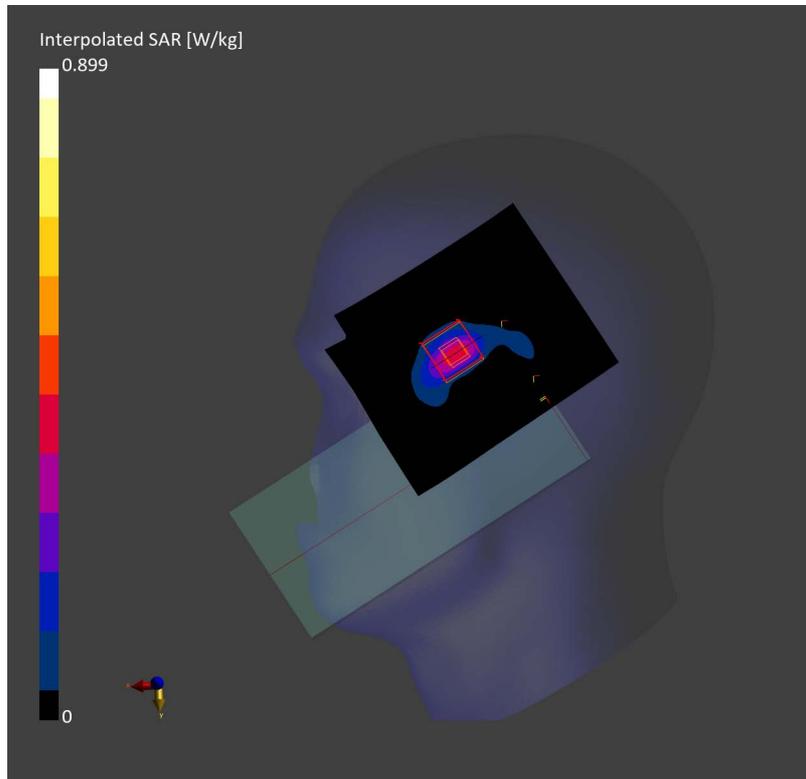

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, ISM 2.4 GHz Band, Bluetooth (PI/4-DQPSK), Channel 39 (2441.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	ISM 2.4 GHz Band	Bluetooth, 10035-CAA	2441.000, 39	1.75	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2173	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 17:50	2025-01-16, 17:55
psSAR1g [W/Kg]	0.089	0.096
psSAR10g [W/Kg]	0.044	0.044
Power Drift [dB]	-0.19	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		36.3
Dist 3dB Peak [mm]		5.4

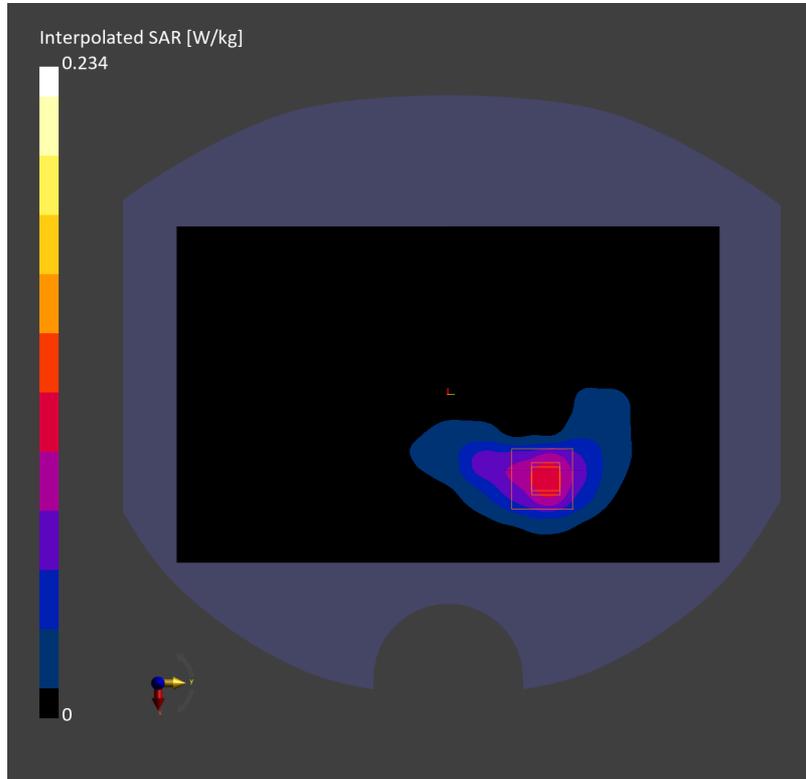

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, EDGE LEFT, ISM 2.4 GHz Band, Bluetooth (PI/4-DQPSK), Channel 39 (2441.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, Head Simulating Liquid	EDGE LEFT, 10.00	ISM 2.4 GHz Band	Bluetooth, 10035-CAA	2441.000, 39	1.75	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 192.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	All points	All points
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 19:22	2025-01-16, 19:58
psSAR1g [W/Kg]	0.164	0.168
psSAR10g [W/Kg]	0.074	0.078
Power Drift [dB]	-0.14	-0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		51.5
Dist 3dB Peak [mm]		9.0

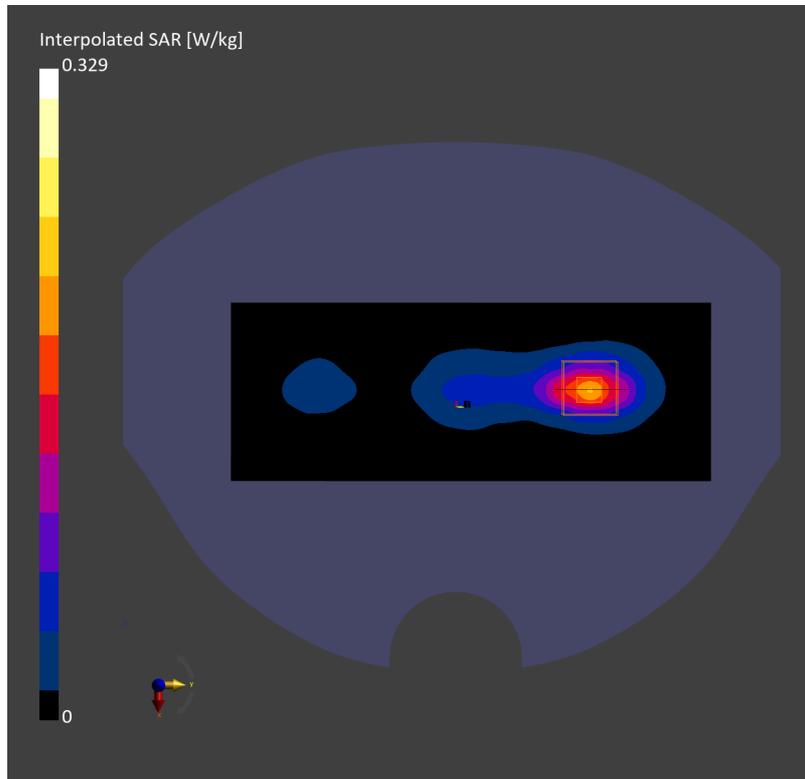

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, CHEEK, ISM 2.4 GHz Band, Bluetooth (8-DPSK), Channel 39 (2441.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
RightHead, HSL	CHEEK, 0.00	ISM 2.4 GHz Band	Bluetooth, 10038-CAA	2441.000, 39	1.75	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 144.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 05:18	2025-01-16, 05:24
psSAR1g [W/Kg]	0.016	0.018
psSAR10g [W/Kg]	0.007	0.007
Power Drift [dB]	0.16	0.02
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		49.6
Dist 3dB Peak [mm]		5.5

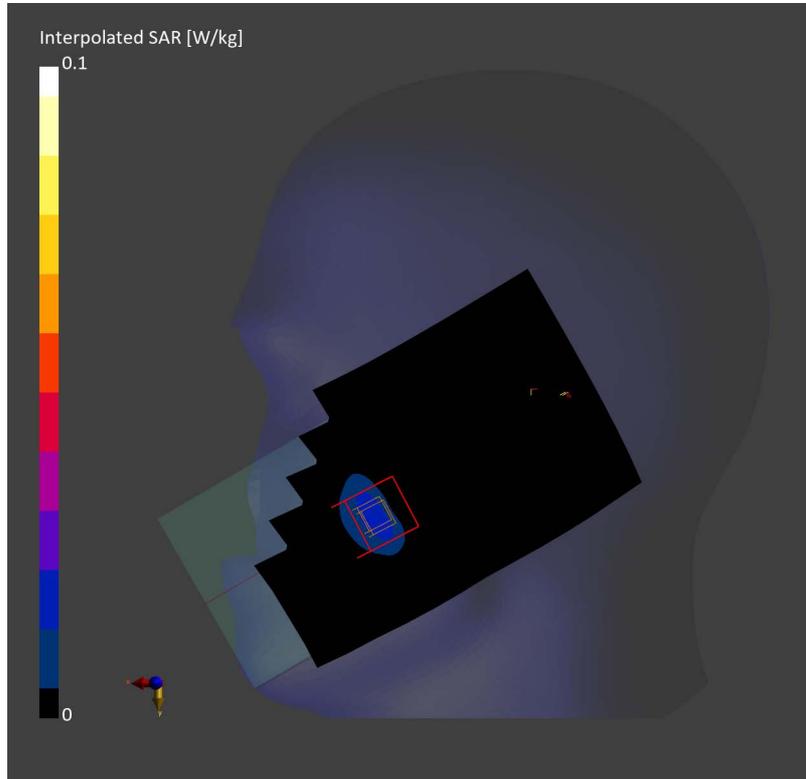

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, ISM 2.4 GHz Band, Bluetooth (8-DPSK), Channel 39 (2441.000 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 10.00	ISM 2.4 GHz Band	Bluetooth, 10038-CAA	2441.000, 39	1.75	39.5

Hardware Setup


Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V8.0 (30deg probe tilt) - 2168	HSL2450	EX3DV4 - SN7812, 2024-06-25	DAE4ip Sn1846, 2024-12-10

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-16, 08:48	2025-01-16, 08:53
psSAR1g [W/Kg]	0.104	0.113
psSAR10g [W/Kg]	0.053	0.054
Power Drift [dB]	0.06	-0.05
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		52.3
Dist 3dB Peak [mm]		10.2

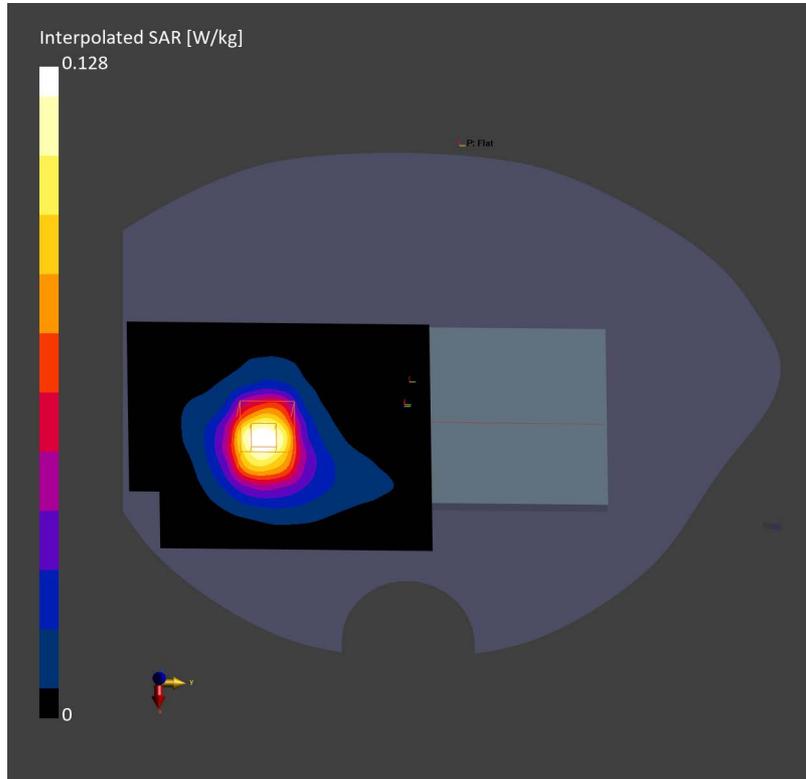

Test Laboratory: TOWE Lab

Measurement Report for PY7-50337X, BACK, Custom Band, CW, Channel 13600 (13.600 MHz)

Device Under Test Properties

Model
PY7-50337X

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	TSL Conductivity [S/m]	TSL Permittivity
Flat, HSL	BACK, 0.00	Custom Band	CW, 0--	13.600, 13600	0.823	55.9

Hardware Setup

Phantom	TSL	Probe, Calibration Date	DAE, Calibration Date
ELI V8.0 (20deg probe tilt) - 2227	HSL3-6GHz	EX3DV4 - SN7858, 2024-01-09	DAE4ip Sn1847, 2024-12-31

Scans Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 168.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.5
MAIA	N/A	N/A
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2025-01-02, 17:40	2025-01-02, 17:45
psSAR1g [W/Kg]	0.093	0.111
psSAR10g [W/Kg]	0.051	0.036
Power Drift [dB]	0.01	-0.03
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		33.5
Dist 3dB Peak [mm]		10.0

