

MEASUREMENT REPORT

FCC PART 15.407 / ISSED RSS-247 UNII OFDMA

Applicant Name:

Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa
Shinagawa-ku
Tokyo, 140-0002, Japan

Date of Testing:

7/29 - 9/18/2020

Test Site/Location:

PCTEST Lab. Columbia, MD, USA

Test Report Serial No.:

1M2007070106-06-R2.PY7

FCC ID:

PY7-57441Y

APPLICANT:

Sony Mobile Communications Inc.

Application Type:

Certification

EUT Type:

Portable Handset

Frequency Range:

5180 – 5825MHz

Modulation Type:

OFDMA

FCC Classification:

Unlicensed National Information Infrastructure (UNII)

FCC Rule Part(s):

Part 15 Subpart E (15.407)


Test Procedure(s):

ANSI C63.10-2013, KDB 789033 D02 v02r01,
KDB 662911 D01 v02r01

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013 and KDB 789033 D02 v02r01. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2007070106-06-R2.FCC Report SNs) supersedes and replaces the previously issued test report on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.



Randy Ortanez
President




FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 1 of 246


T A B L E O F C O N T E N T S

1.0	INTRODUCTION	4
1.1	Scope.....	4
1.2	PCTEST Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration.....	7
2.4	EMI Suppression Device(s)/Modifications.....	7
3.0	DESCRIPTION OF TESTS	8
3.1	Evaluation Procedure	8
3.2	Radiated Emissions.....	8
3.3	Environmental Conditions.....	8
4.0	ANTENNA REQUIREMENTS	9
5.0	MEASUREMENT UNCERTAINTY	10
6.0	TEST EQUIPMENT CALIBRATION DATA.....	11
7.0	TEST RESULTS	12
7.1	Summary.....	12
7.2	26dB Bandwidth Measurement – 802.11ax OFDMA.....	13
7.3	6dB Bandwidth Measurement – 802.11ax OFDMA.....	62
7.4	UNII Output Power Measurement – 802.11ax OFDMA.....	79
7.5	Maximum Power Spectral Density – 802.11ax OFDMA.....	99
7.6	Radiated Spurious Emission Measurements – Above 1GHz	167
7.6.1	SISO Antenna-1 Radiated Spurious Emission Measurements	170
7.6.2	SISO Antenna-2 Radiated Spurious Emission Measurements	188
7.6.3	MIMO Radiated Spurious Emission Measurements	206
7.6.4	SISO Antenna-1 Radiated Band Edge Measurements (20MHz BW).....	224
7.6.5	SISO Antenna-1 Radiated Band Edge Measurements (40MHz BW).....	226
7.6.6	SISO Antenna-1 Radiated Band Edge Measurements (80MHz BW).....	228
7.6.7	SISO Antenna-2 Radiated Band Edge Measurements (20MHz BW).....	230
7.6.8	SISO Antenna-2 Radiated Band Edge Measurements (40MHz BW).....	232
7.6.9	SISO Antenna-2 Radiated Band Edge Measurements (80MHz BW).....	234
7.6.10	MIMO Radiated Band Edge Measurements (20MHz BW).....	236
7.6.11	MIMO Radiated Band Edge Measurements (40MHz BW).....	238
7.6.12	MIMO Radiated Band Edge Measurements (80MHz BW).....	240
7.7	Radiated Spurious Emissions Measurements – Below 1GHz	242
8.0	CONCLUSION.....	246

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 2 of 246



MEASUREMENT REPORT



UNII Band	Channel Bandwidth (MHz)	Tx Frequency (MHz)	ANT1		ANT2		MIMO	
			Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)	Max. Power (mW)	Max. Power (dBm)
1	20	5180 - 5240	7.925	8.99	7.925	8.99	15.850	12.00
2A		5260 - 5320	7.925	8.99	7.925	8.99	15.723	11.97
2C		5500 - 5720	7.925	8.99	7.925	8.99	15.850	12.00
3		5745 - 5825	7.925	8.99	7.925	8.99	15.832	12.00
1	40	5190 - 5230	7.925	8.99	7.925	8.99	15.850	12.00
2A		5270 - 5310	7.925	8.99	7.925	8.99	15.597	11.93
2C		5510 - 5710	7.925	8.99	7.925	8.99	15.850	12.00
3		5755 - 5795	7.925	8.99	7.925	8.99	15.850	12.00
1	80	5210	7.925	8.99	7.925	8.99	15.759	11.98
2A		5290	7.925	8.99	7.925	8.99	15.579	11.93
2C		5530 - 5690	7.925	8.99	7.925	8.99	15.850	12.00
3		5775	7.925	8.99	7.925	8.99	15.850	12.00

EUT Overview

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)		SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset			Page 3 of 246

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.

1.2 PCTEST Test Location

These measurement tests were conducted at the PCTEST facility located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at PCTEST located in Columbia, MD 21046, U.S.A.

- PCTEST is an ISO 17025-2005 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISSED Standards (RSS).
- PCTEST facility is a registered (2451B) test laboratory with the site description on file with ISSED.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 4 of 246

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **SONY Portable Handset FCC ID: PY7-57441Y**. The test data contained in this report pertains only to the emissions due to the EUT's UNII transmitter.

Test Device Serial No.: 81175, 81118, 81134, 80979, 80953

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900, WCDMA/HSPA, Multi-band LTE, 5G NR (n5, n66, n2, n260, n261), 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII, Bluetooth (1x, EDR, LE), NFC

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
:	:	:	:	:	:	:	:
42	5210	56	5280	120	5600	157	5785
:	:	:	:	:	:	:	:
48	5240	64	5320	144	5720	165	5825

Table 2-1. 802.11ax (20MHz) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
:	:	:	:	:	:	:	:
46	5230	62	5310	118	5590	159	5795
				:	:		
				142	5710		

Table 2-2. 802.11ax (40MHz BW) Frequency / Channel Operations

Band 1		Band 2A		Band 2C		Band 3	
Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)	Ch.	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
				:	:		
				138	5690		

Table 2-3. 802.11ax (80MHz BW) Frequency / Channel Operations

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 5 of 246

Notes:

- 5GHz NII operation is possible in 20MHz, and 40MHz, and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = peak per the guidance of Section B)2)b) of ANSI C63.10-2013 and KDB 789033 D02 v02r01. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Mode	Antenna	Bandwidth	Tone	Duty Cycle	
		[MHz]			
802.11ax NII RU	1	20	26T	99.7	
			52T	99.7	
			106T	99.7	
			242T	99.5	
802.11ax NII RU	2		26T	99.4	
			52T	99.7	
			106T	99.2	
			242T	98.3	
802.11ax NII RU	1	40	26T	99.5	
			52T	99.5	
			106T	99.7	
			242T	99.7	
802.11ax NII RU	2		484T	99.5	
			26T	99.4	
			52T	99.0	
			106T	98.0	
		242T	98.2		
		484T	96.8		
		80	1	26T	99.7
				52T	99.7
106T	99.6				
242T	99.6				
2	484T		99.6		
	996T		99.5		
	26T		99.4		
	52T		99.3		
802.11ax NII RU	2	106T	99.2		
		242T	98.3		
		484T	96.8		
		996T	94.1		

Table 2-4. Measured Duty Cycles

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 6 of 246

2. The device employs MIMO technology. Below are the possible configurations.

WiFi Configurations		SISO		SDM		MIMO	
		ANT1	ANT2	ANT1	ANT2	ANT1	ANT2
5GHz	11ax (20MHz)	✓	✓	✓	✓	✓	✓
	11ax (40MHz)	✓	✓	✓	✓	✓	✓
	11ax (80MHz)	✓	✓	✓	✓	✓	✓

Table 2-5. Frequency / Channel Operations

✓ = Support ; ✗ = NOT Support

SISO = Single Input Single Output

SDM = Spatial Diversity Multiplexing – MIMO function

2.3 Antenna Description

Following antenna was used for the testing.

Frequency [GHz]	Antenna1 Gain (dBi)	Antenna2 Gain (dBi)
5.20	-2.82	-2.76
5.30	-2.82	-2.76
5.50	-0.25	-6.45
5.80	-1.88	-5.80

Table 2-6. Antenna Peak Gain

2.4 Test Configuration

The EUT was tested per the guidance of KDB 789033 D02 v02r01. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 7 of 246

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) and the guidance provided in KDB 789033 D02 v02r01 were used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33 depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01.

3.3 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 8 of 246

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antennas of the EUT are **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 9 of 246

5.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Bench Top Measurements	1.13
Line Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 10 of 246

6.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	WL25-1	Conducted Cable Set (25GHz)	7/2/2020	Annual	7/2/2021	WL25-1
-	WL25-2	Conducted Cable Set (25GHz)	7/9/2020	Annual	7/9/2021	WL25-2
Anritsu	ML2495A	Power Meter	12/17/2019	Annual	12/17/2020	941001
Anritsu	ML2496A	Power Meter	11/6/2019	Annual	11/6/2020	1405003
Anritsu	MA2411B	Pulse Power Sensor	10/15/2019	Annual	10/15/2020	1339026
Com-Power	AL-130	9kHz - 30MHz Loop Antenna	10/10/2019	Biennial	10/10/2021	121034
Emco	3115	Horn Antenna (1-18GHz)	6/18/2020	Biennial	6/18/2022	9704-5182
Emco	3116	Horn Antenna (18 - 40GHz)	8/7/2018	Triennial	8/7/2021	9203-2178
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	2/14/2019	Biennial	2/14/2021	125518
ETS-Lindgren	3816/2NM	LISN	7/9/2020	Biennial	7/9/2022	114451
ETS-Lindgren	3115	Double Ridged Guide Horn 750MHz - 18GHz	3/12/2020	Biennial	3/12/2022	150693
Keysight Technologies	N9020A	MXA Signal Analyzer	8/14/2020	Annual	8/14/2021	US46470561
Keysight Technologies	N9038A	MXE EMI Receiver	8/11/2020	Annual	8/11/2021	MY51210133
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	8/17/2020	Annual	8/17/2021	MY52350166
Pasternack	NMLC-2	Line Conducted Emissions Cable (NM)	1/9/2020	Annual	1/9/2021	NMLC-2
Rohde & Schwarz	TS-PR26	18-26.5 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100040
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	7/15/2020	Annual	7/15/2021	100342
Rohde & Schwarz	TS-PR40	26.5-40 GHz Pre-Amplifier	11/1/2019	Annual	11/1/2020	100037
Rohde & Schwarz	ESU40	EMI Test Receiver (40GHz)	9/23/2019	Annual	9/23/2020	100348
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/10/2020	Annual	2/10/2021	102134
Rohde & Schwarz	SFUNIT-Rx	Shielded Filter Unit	2/21/2020	Annual	2/21/2021	102133
Sunol	DRH-118	Horn Antenna (1-18GHz)	10/3/2019	Biennial	10/3/2021	A050307
Sunol Science	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107

Table 6-1. Annual Test Equipment Calibration Schedule

Note:

For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 11 of 246

7.0 TEST RESULTS

7.1 Summary

Company Name: Sony Mobile Communications Inc.
FCC ID: PY7-57441Y
FCC Classification: Unlicensed National Information Infrastructure (UNII)

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
N/A	RSS-Gen [6.7]	26dB Bandwidth	N/A	CONDUCTED	PASS	Section 7.2
15.407(e)	RSS-Gen [6.7]	6dB Bandwidth	>500kHz(5725-5850MHz)		PASS	Section 7.3
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Conducted Output Power	Maximum conducted powers must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.4
15.407 (a.1.iv), (a.2), (a.3)	RSS-247 [6.2]	Maximum Power Spectral Density	Maximum power spectral density must meet the limits detailed in 15.407 (a) (RSS-247 [6.2])		PASS	Section 7.5
15.407(h)	RSS-247 [6.3]	Dynamic Frequency Selection	See DFS Test Report		PASS	See DFS Test Report
15.407(b.1), (2), (3), (4)	RSS-247 [6.2]	Undesirable Emissions	Undesirable emissions must meet the limits detailed in 15.407(b) (RSS-247 [6.2])	RADIATED	PASS	Section 7.6
15.205, 15.407(b.1), (4), (5), (6)	RSS-Gen [8.9]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209 (RSS-Gen [8.9])		PASS	Section 7.6, 7.7

Table 7-1. Summary of Test Results

Notes:

- 1) All channels, modes, and modulations/data rates were investigated among all UNII bands. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables and attenuators.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "UNII Automation," Version 4.7.
- 5) For radiated band edge, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is PCTEST "Chamber Automation," Version 1.3.1.
- 6) 802.11ax OFDMA testing was performed for all signal tone configurations as specified by the 802.11ax standard. Worst case results are determined and reported per the guidance provided at the October 2018 TCB Workshop.
- 7) Only one RU index could be selected at a time so no contiguous or non-contiguous RU's were considered for testing.

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 12 of 246

7.2 26dB Bandwidth Measurement – 802.11ax OFDMA

RSS-Gen [6.2]

Test Overview and Limit

The bandwidth at 26dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26dB bandwidth.

The 26dB bandwidth is used to determine the conducted power limits.

Test Procedure Used

ANSI C63.10-2013 – Section 12.4

KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = max hold

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

The 26dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 13 of 246

SISO Antenna-1 26 dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	18.37
	5200	40	ax (20MHz)	26T	MCS0	19.50
	5240	48	ax (20MHz)	26T	MCS0	18.31
	5190	38	ax (40MHz)	26T	MCS0	39.71
	5230	46	ax (40MHz)	26T	MCS0	40.16
	5210	42	ax (80MHz)	26T	MCS0	81.84
Band 2A	5260	52	ax (20MHz)	26T	MCS0	18.30
	5280	56	ax (20MHz)	26T	MCS0	18.39
	5320	64	ax (20MHz)	26T	MCS0	18.38
	5270	54	ax (40MHz)	26T	MCS0	38.05
	5310	62	ax (40MHz)	26T	MCS0	39.91
	5290	58	ax (80MHz)	26T	MCS0	81.61
Band 2C	5500	100	ax (20MHz)	26T	MCS0	19.81
	5600	120	ax (20MHz)	26T	MCS0	19.87
	5720	144	ax (20MHz)	26T	MCS0	18.27
	5510	102	ax (40MHz)	26T	MCS0	27.65
	5590	118	ax (40MHz)	26T	MCS0	39.96
	5710	142	ax (40MHz)	26T	MCS0	39.69
	5530	106	ax (80MHz)	26T	MCS0	81.41
	5610	122	ax (80MHz)	26T	MCS0	81.52
	5690	138	ax (80MHz)	26T	MCS0	81.51

Table 7-2. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 14 of 246

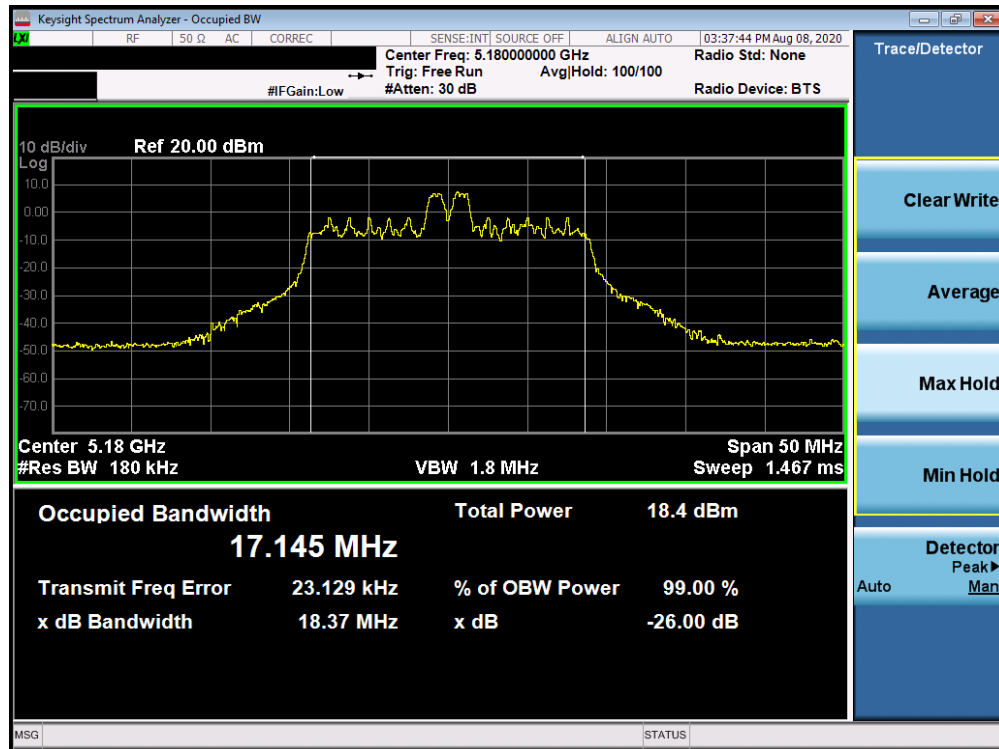


Plot 7-1. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

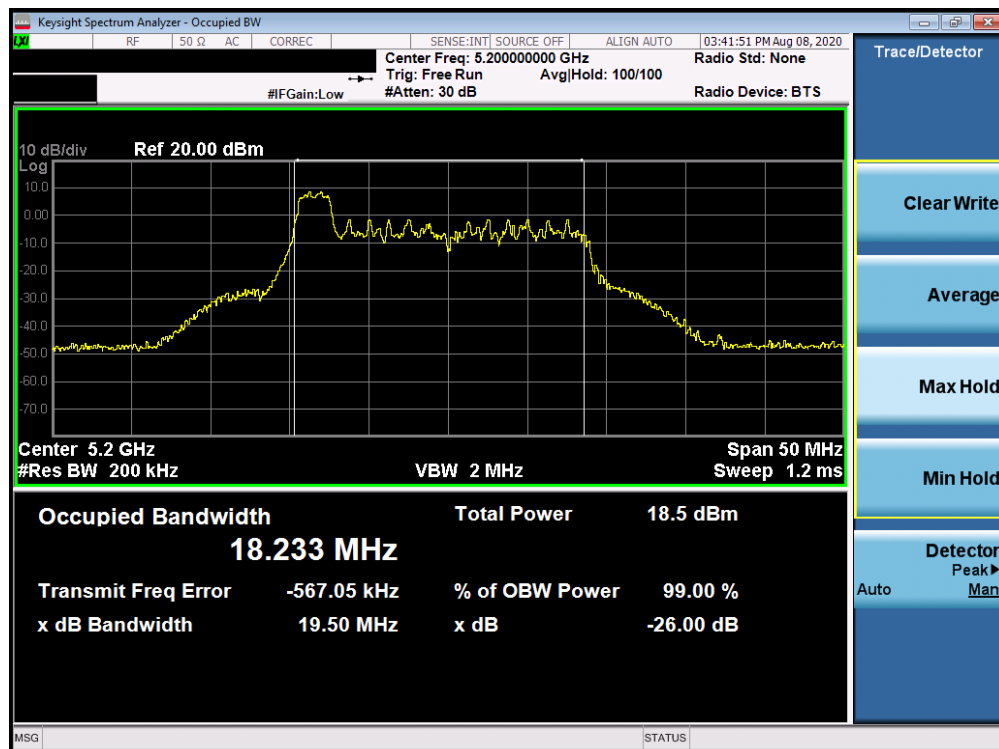


Plot 7-2. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 15 of 246

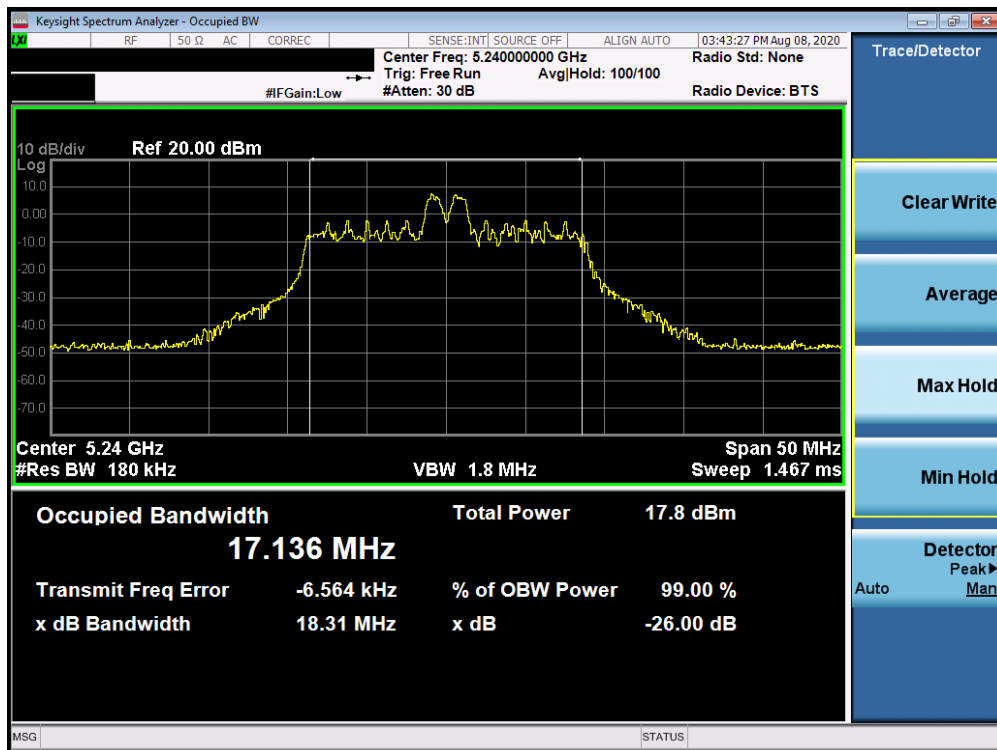


Plot 7-3. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

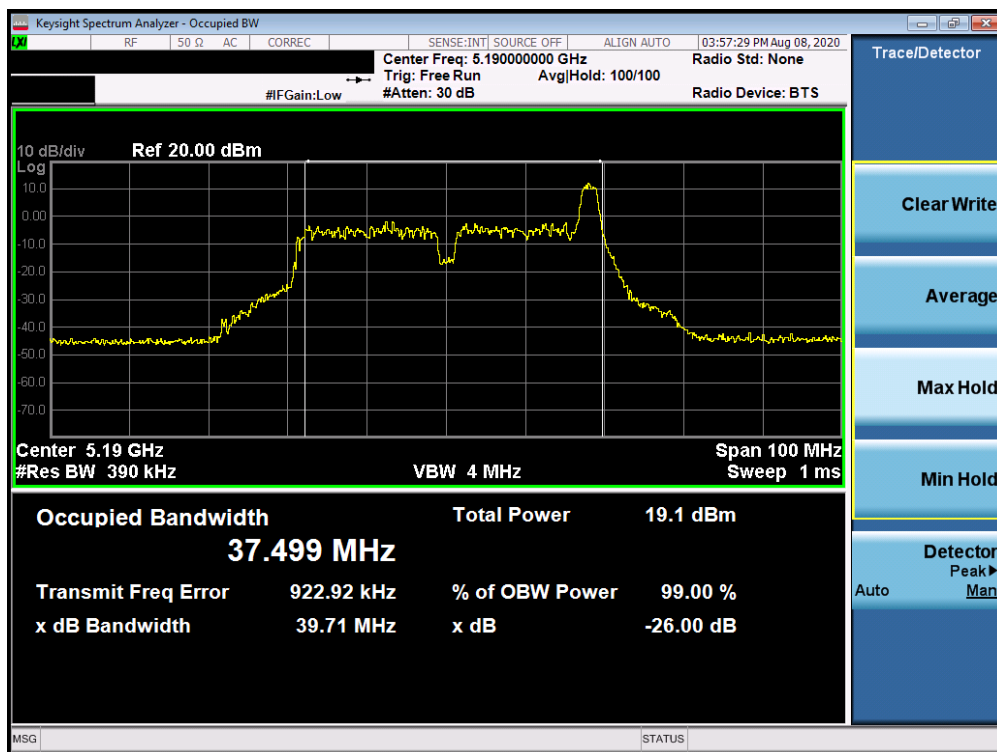


Plot 7-4. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 16 of 246

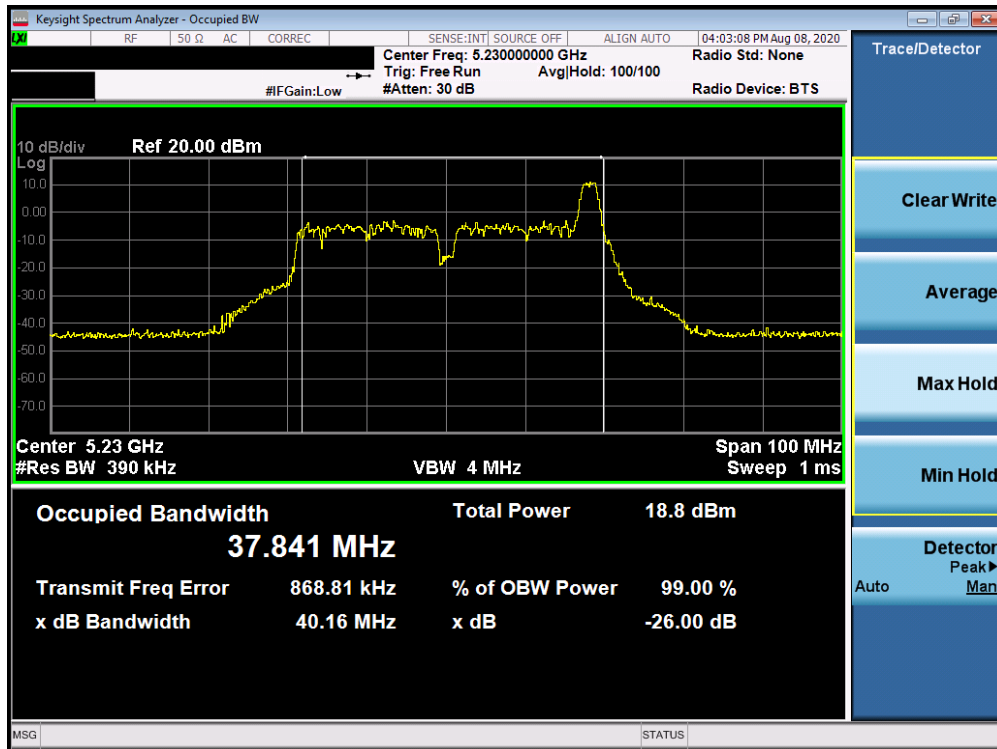


Plot 7-5. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

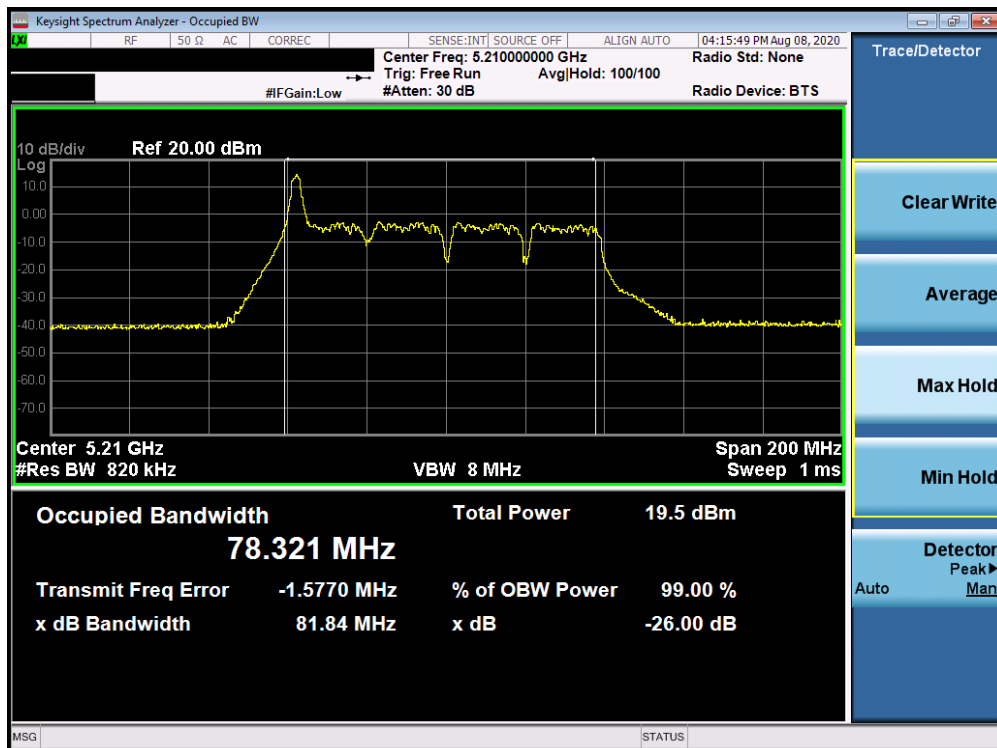


Plot 7-6. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 17 of 246

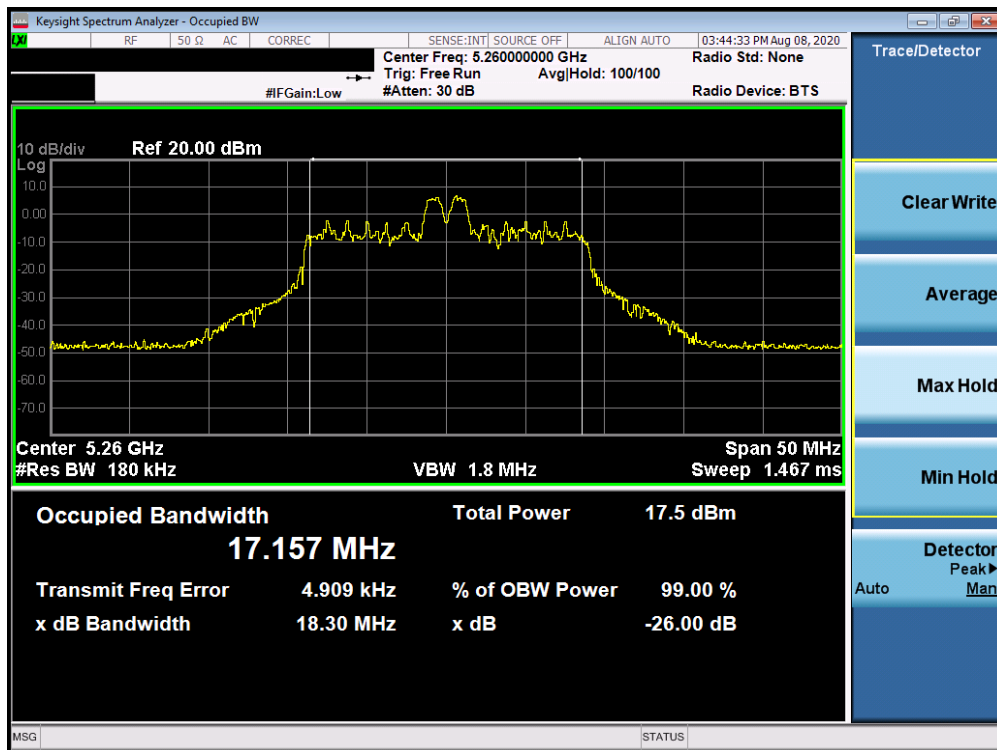


Plot 7-7. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

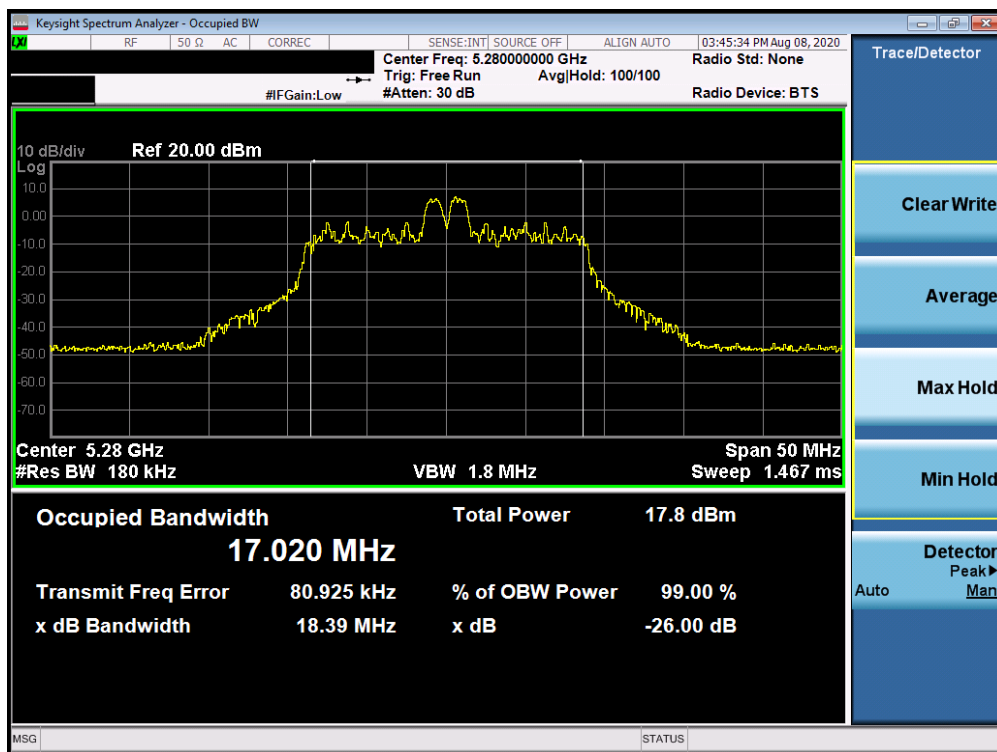


Plot 7-8. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 18 of 246

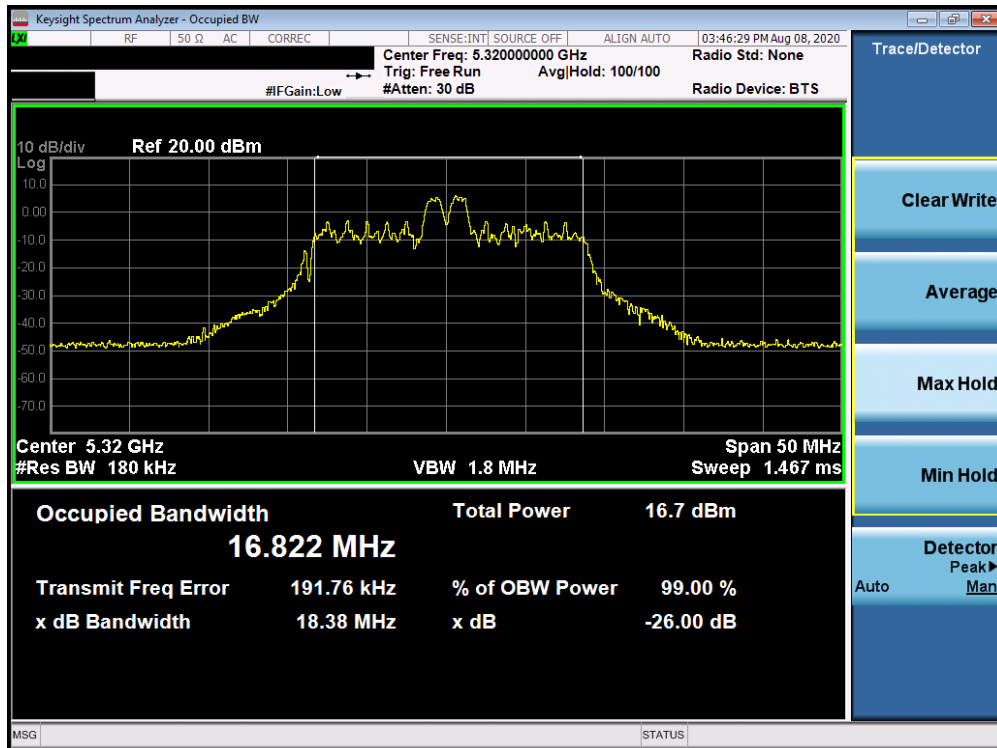


Plot 7-9. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

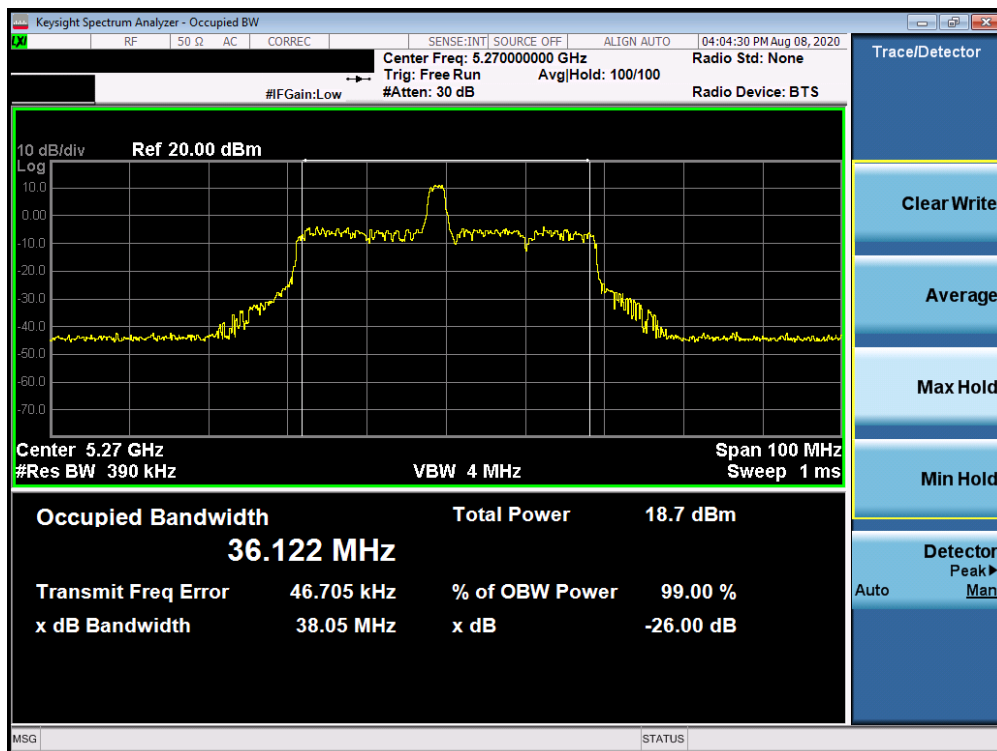


Plot 7-10. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 19 of 246

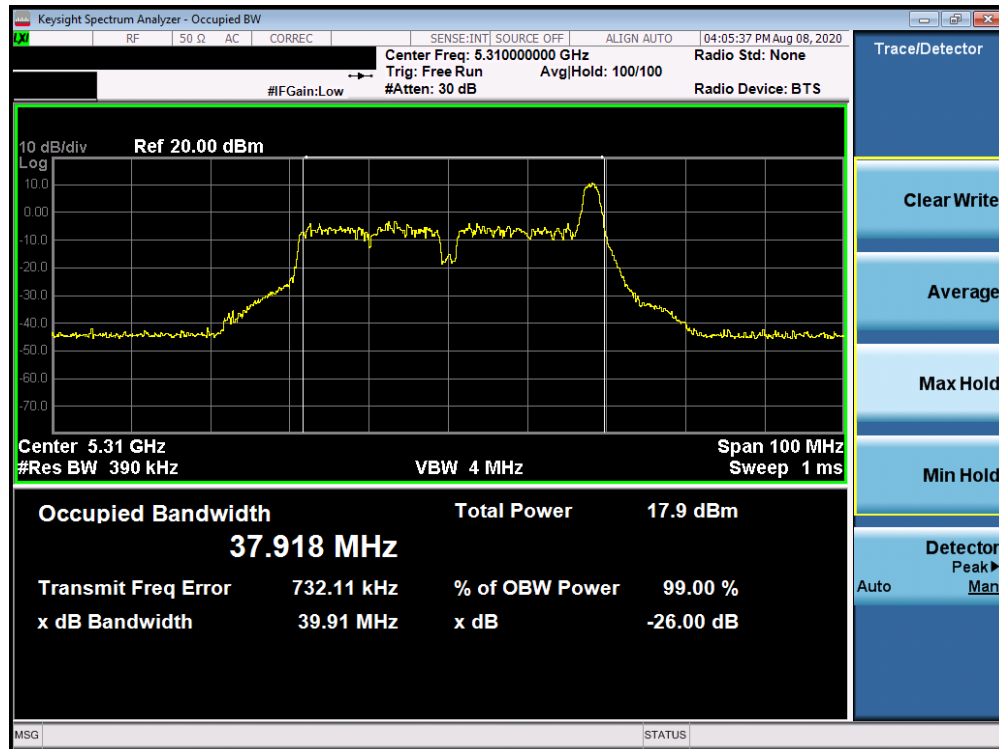


Plot 7-11. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

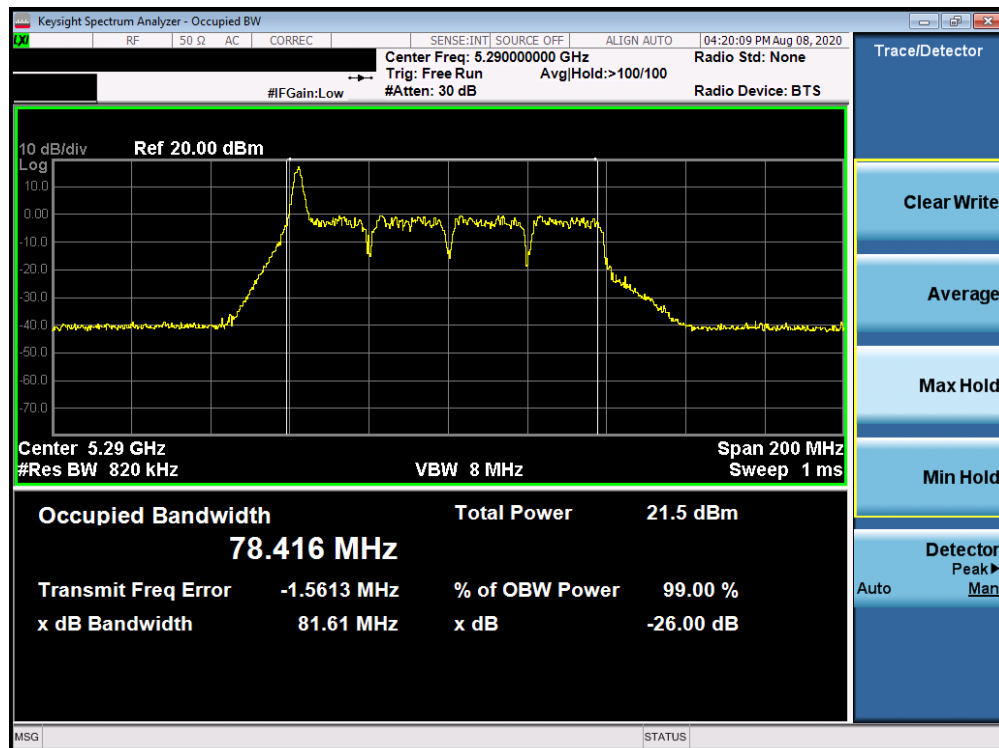


Plot 7-12. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 20 of 246

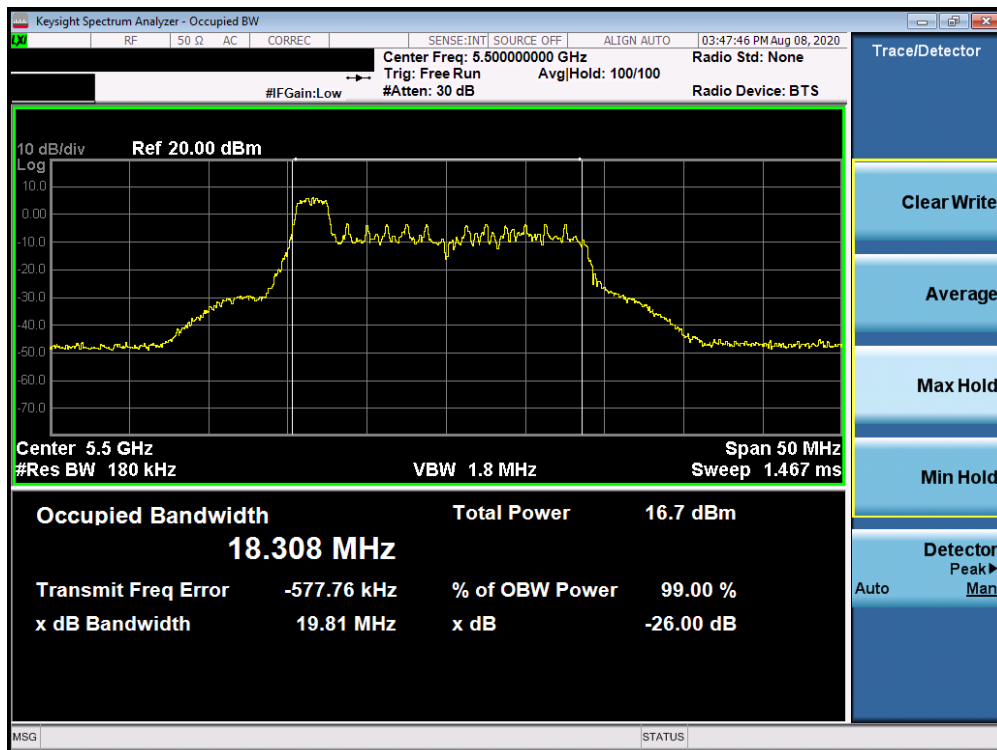


Plot 7-13. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

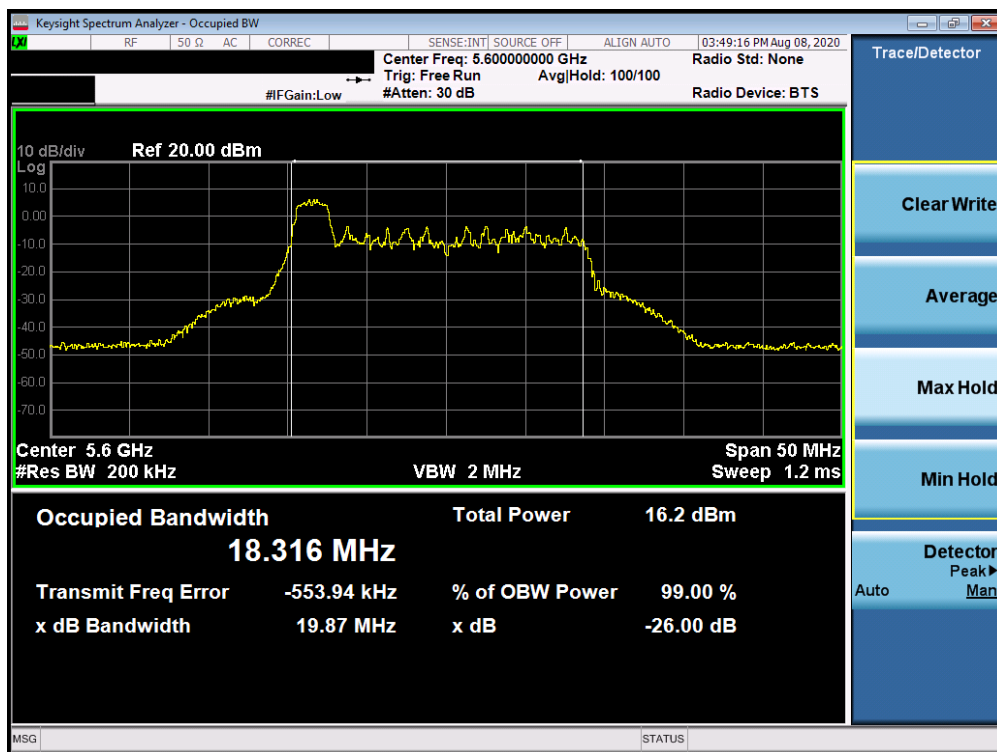


Plot 7-14. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 21 of 246

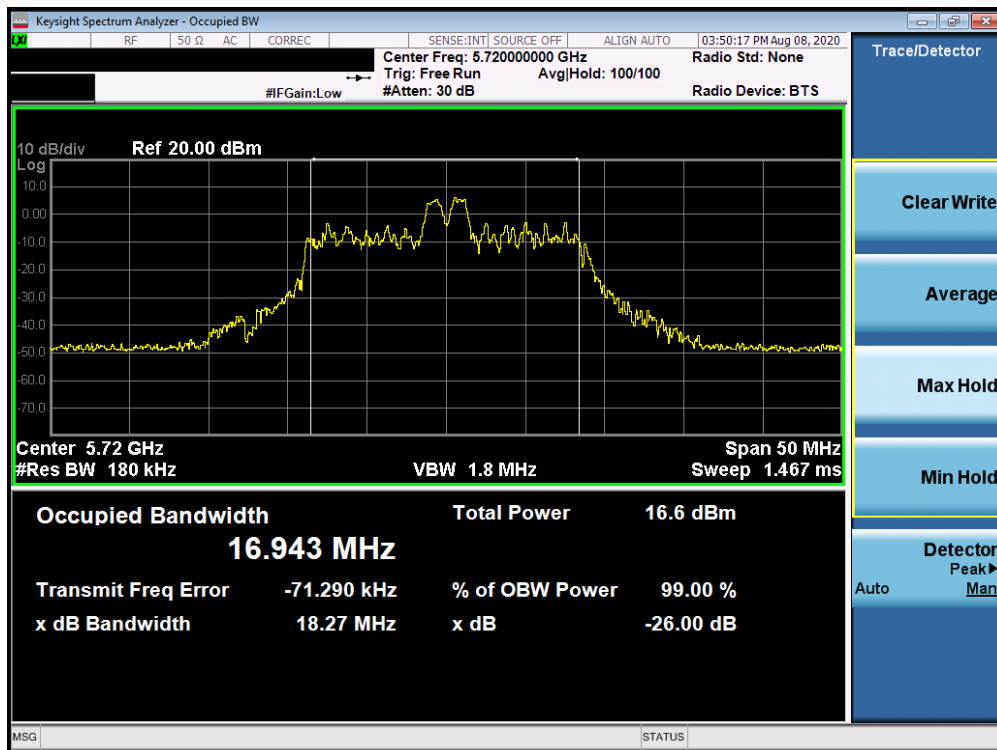


Plot 7-15. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

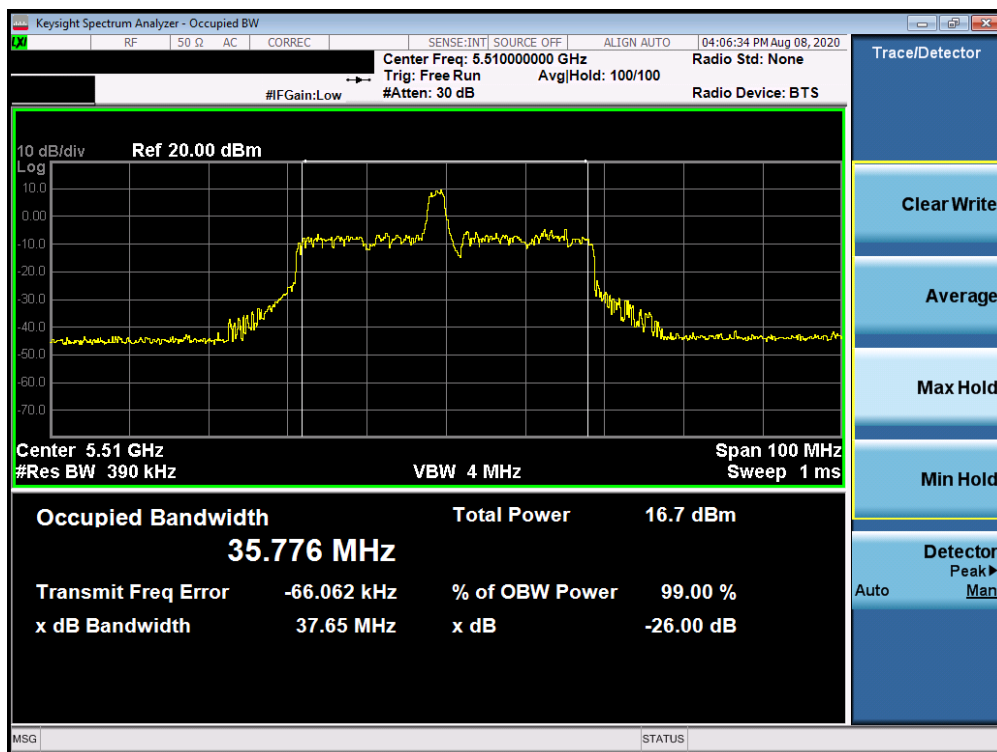


Plot 7-16. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 22 of 246

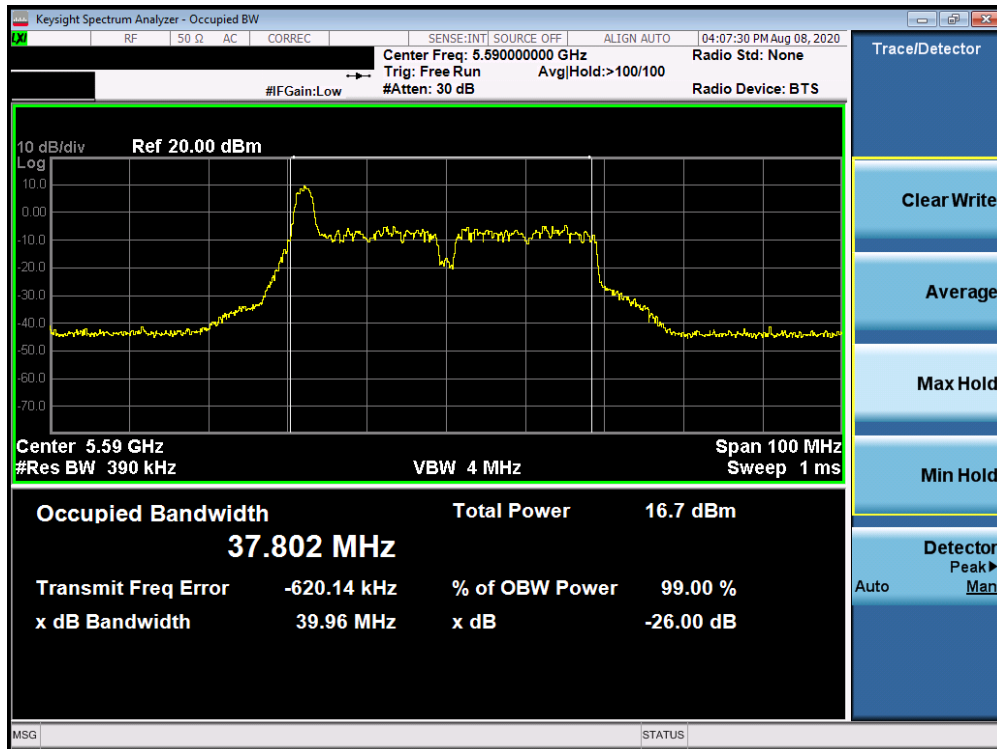


Plot 7-17. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

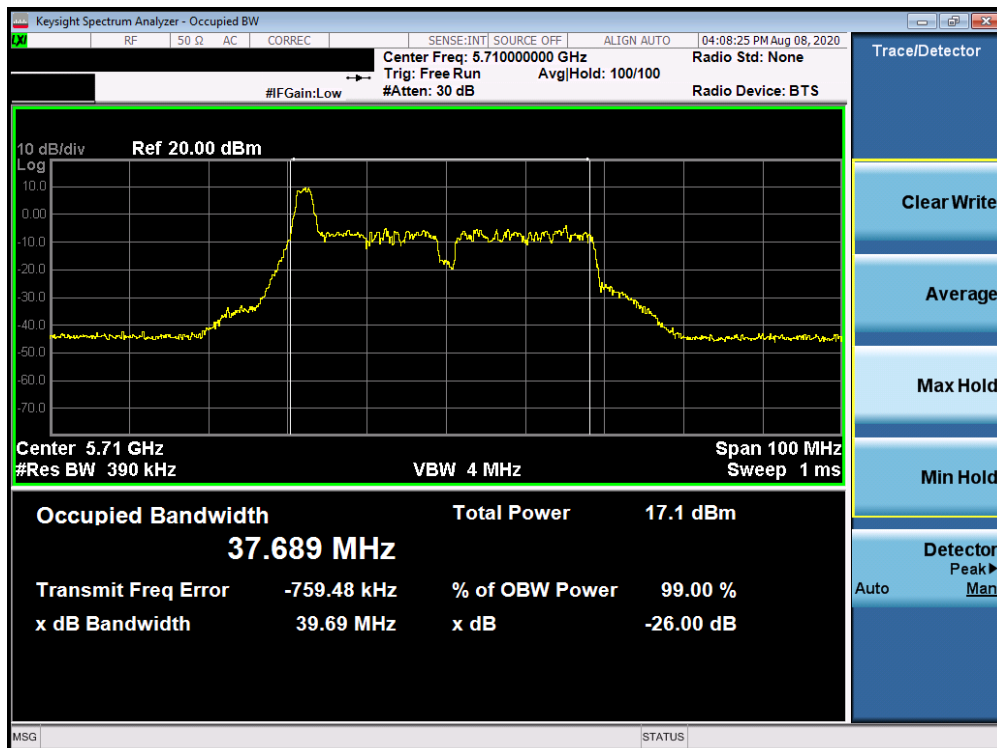


Plot 7-18. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 23 of 246

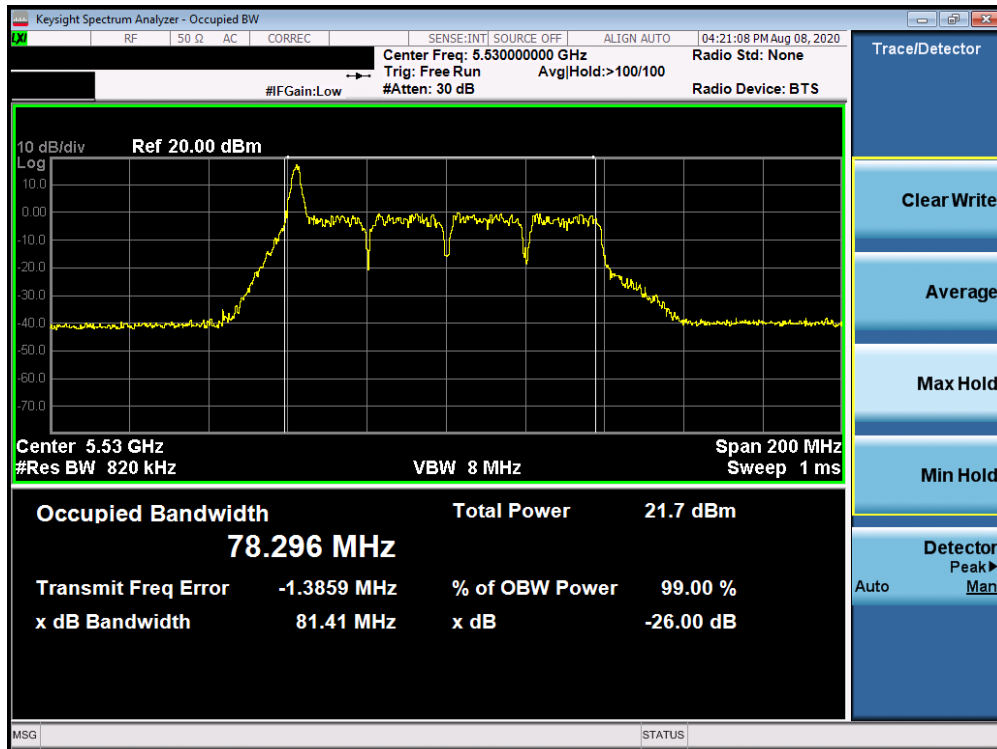


Plot 7-19. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

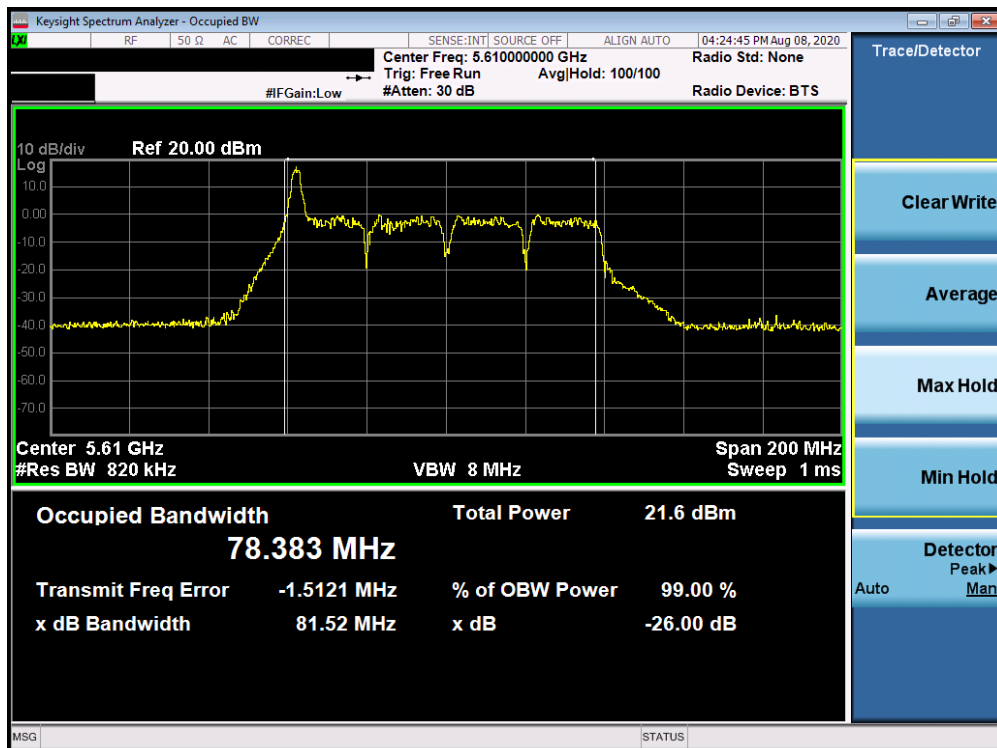

Plot 7-20. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 24 of 246

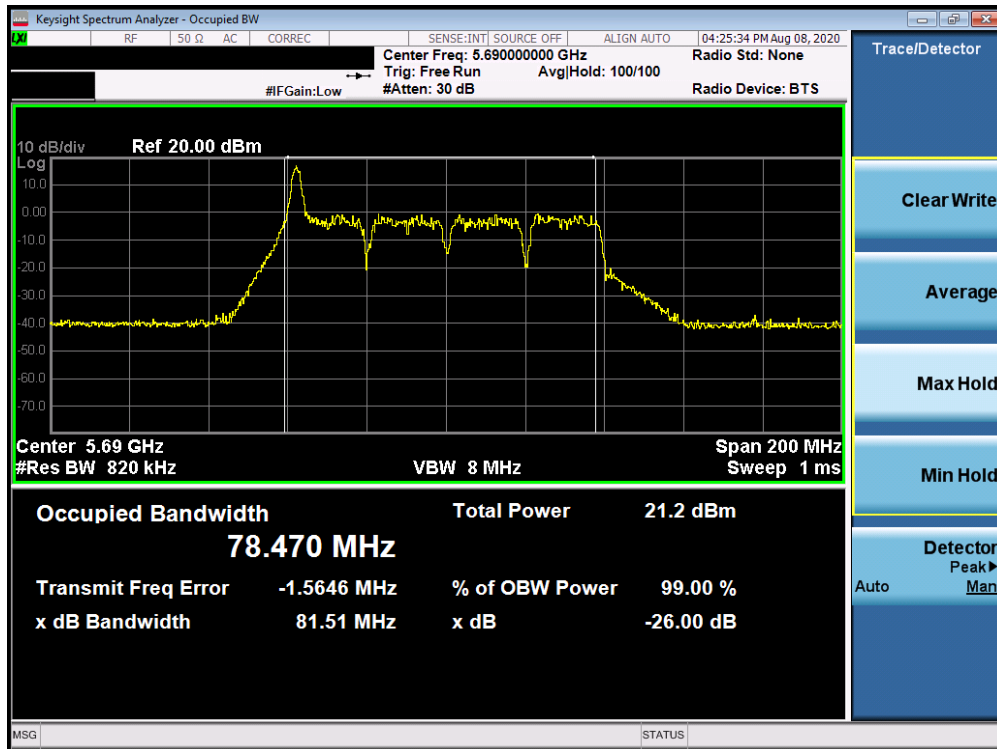

Plot 7-21. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 25 of 246

SISO Antenna-1 26 dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	242T	MCS0	21.63
	5200	40	ax (20MHz)	242T	MCS0	21.65
	5240	48	ax (20MHz)	242T	MCS0	22.41
	5190	38	ax (40MHz)	484T	MCS0	42.72
	5230	46	ax (40MHz)	484T	MCS0	43.39
	5210	42	ax (80MHz)	996T	MCS0	87.26
Band 2A	5260	52	ax (20MHz)	242T	MCS0	22.39
	5280	56	ax (20MHz)	242T	MCS0	22.19
	5320	64	ax (20MHz)	242T	MCS0	22.29
	5270	54	ax (40MHz)	484T	MCS0	42.52
	5310	62	ax (40MHz)	484T	MCS0	41.83
	5290	58	ax (80MHz)	996T	MCS0	85.21
Band 2C	5500	100	ax (20MHz)	242T	MCS0	22.01
	5600	120	ax (20MHz)	242T	MCS0	21.83
	5720	144	ax (20MHz)	242T	MCS0	21.81
	5510	102	ax (40MHz)	484T	MCS0	44.30
	5590	118	ax (40MHz)	484T	MCS0	42.94
	5710	142	ax (40MHz)	484T	MCS0	41.96
	5530	106	ax (80MHz)	996T	MCS0	86.25
	5610	122	ax (80MHz)	996T	MCS0	85.87
	5690	138	ax (80MHz)	996T	MCS0	84.73

Table 7-3. Conducted Bandwidth Measurements SISO ANT1 (Full Tones)

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 26 of 246

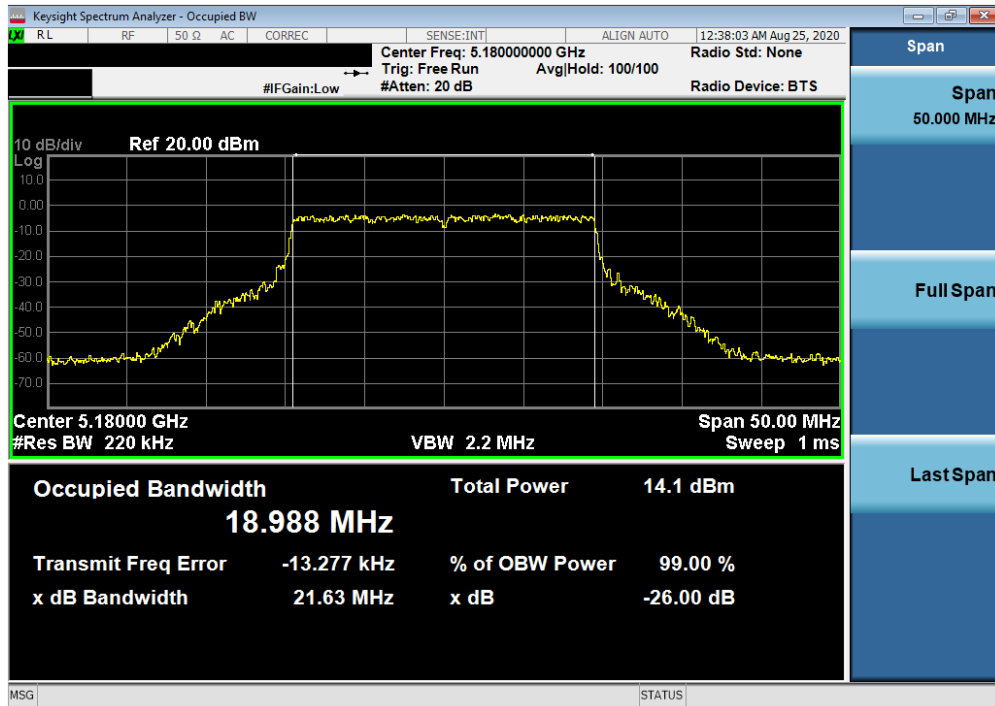


Plot 7-22. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 36)

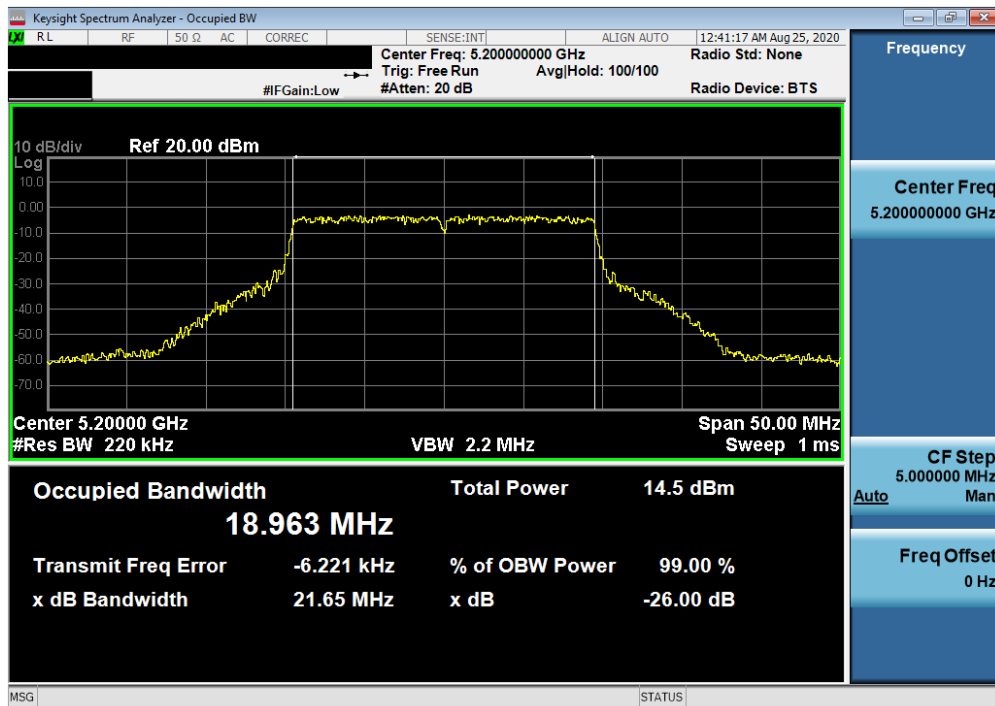


Plot 7-23. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 27 of 246

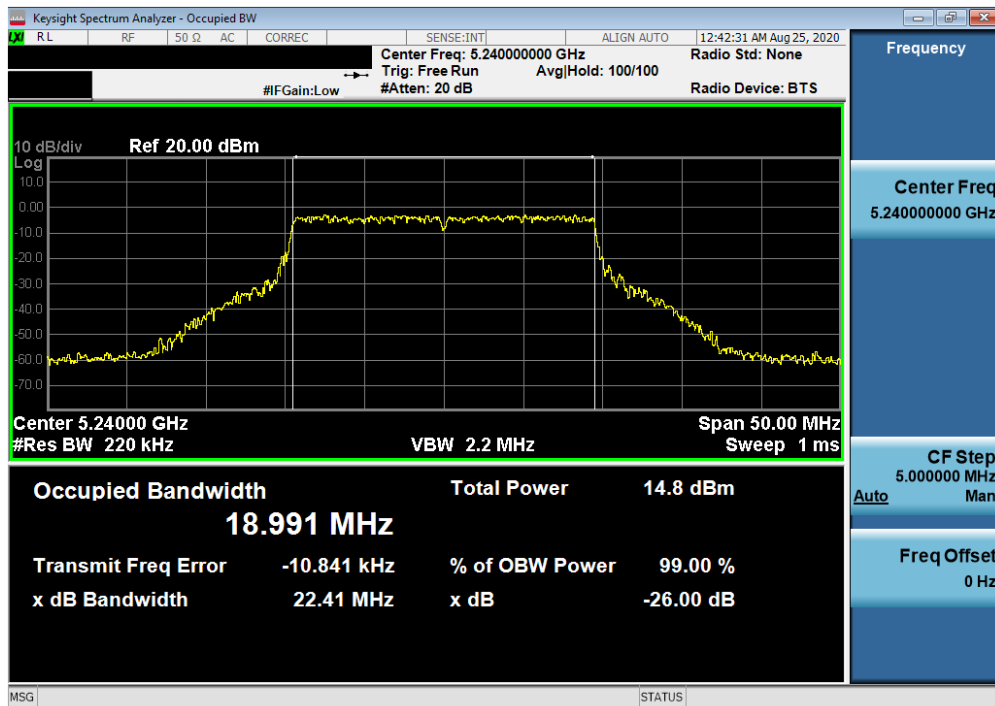


Plot 7-24. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 48)

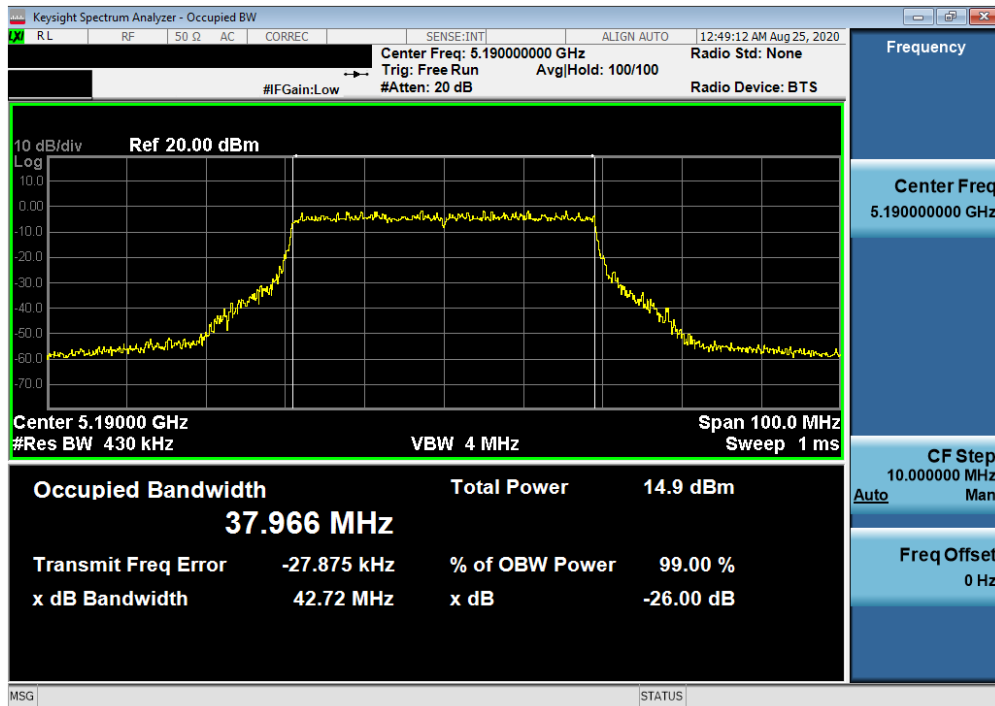


Plot 7-25. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 28 of 246

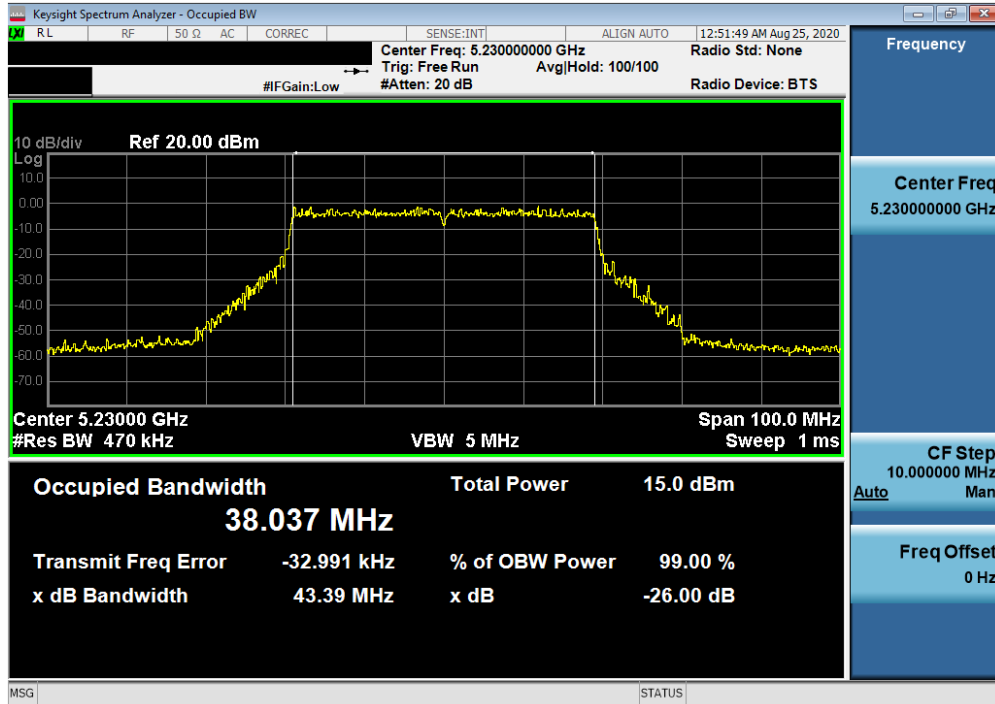


Plot 7-26. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 46)

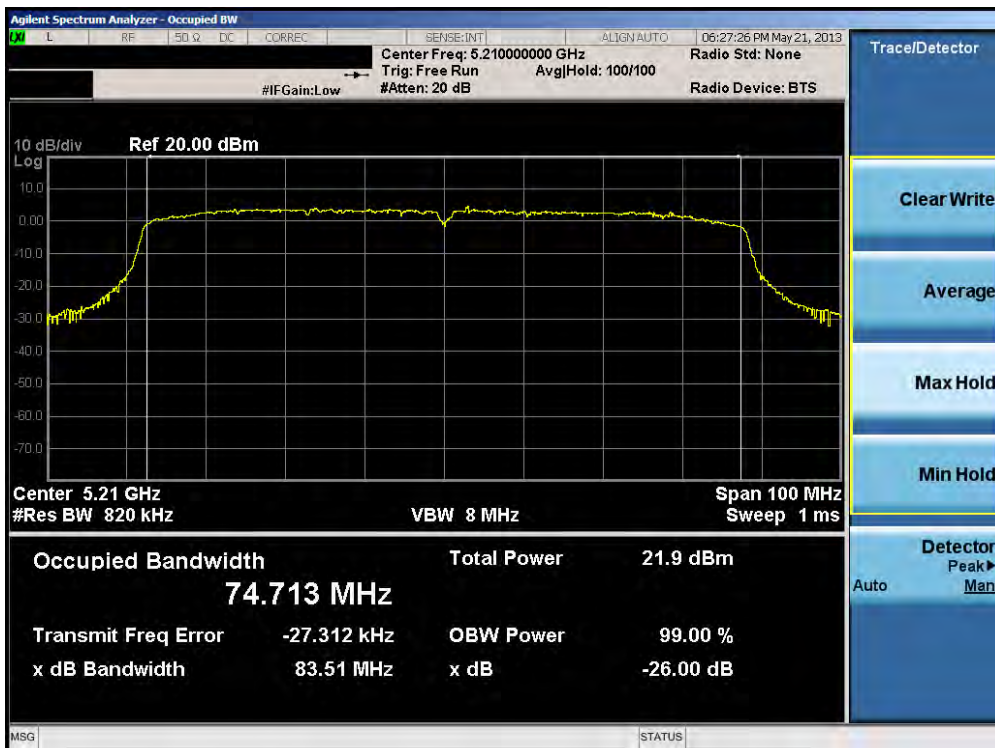


Plot 7-27. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 29 of 246

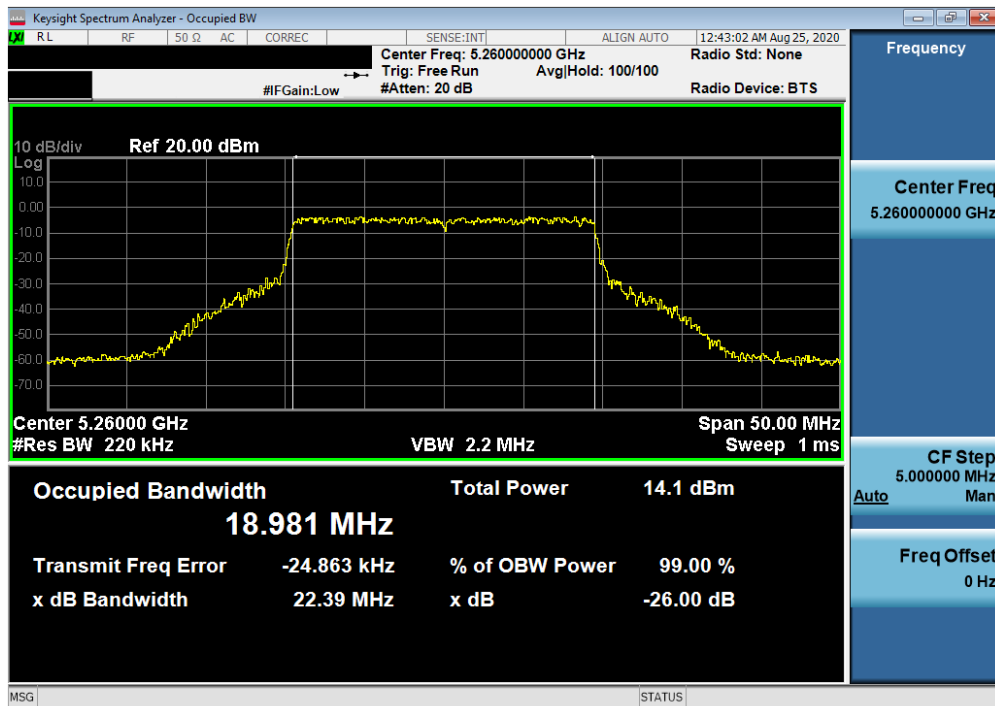


Plot 7-28. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 52)

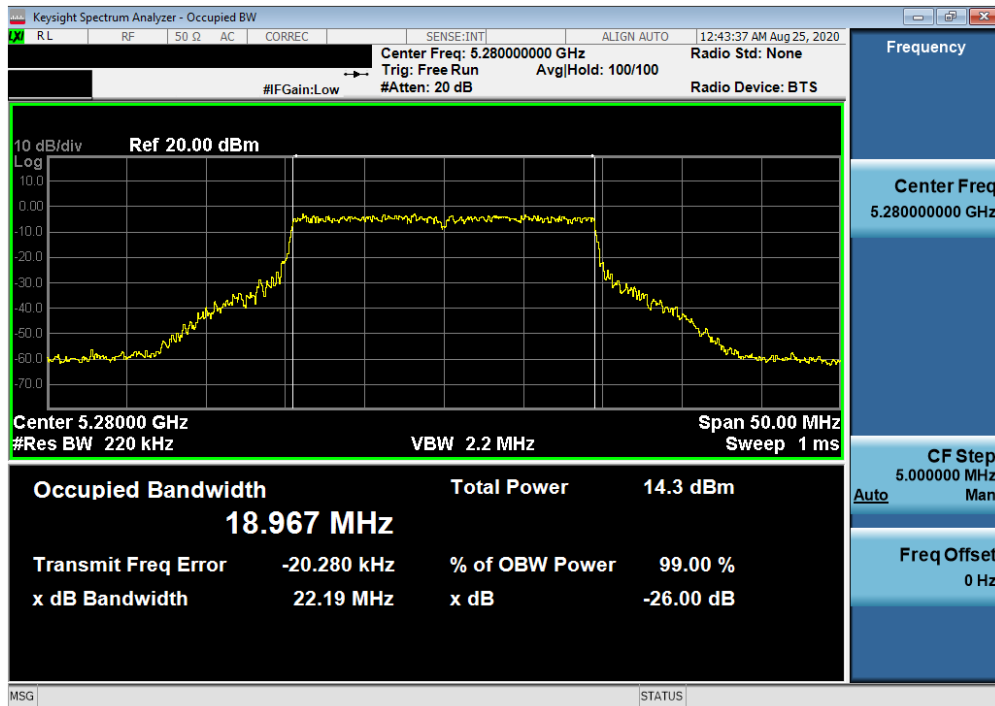


Plot 7-29. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 30 of 246

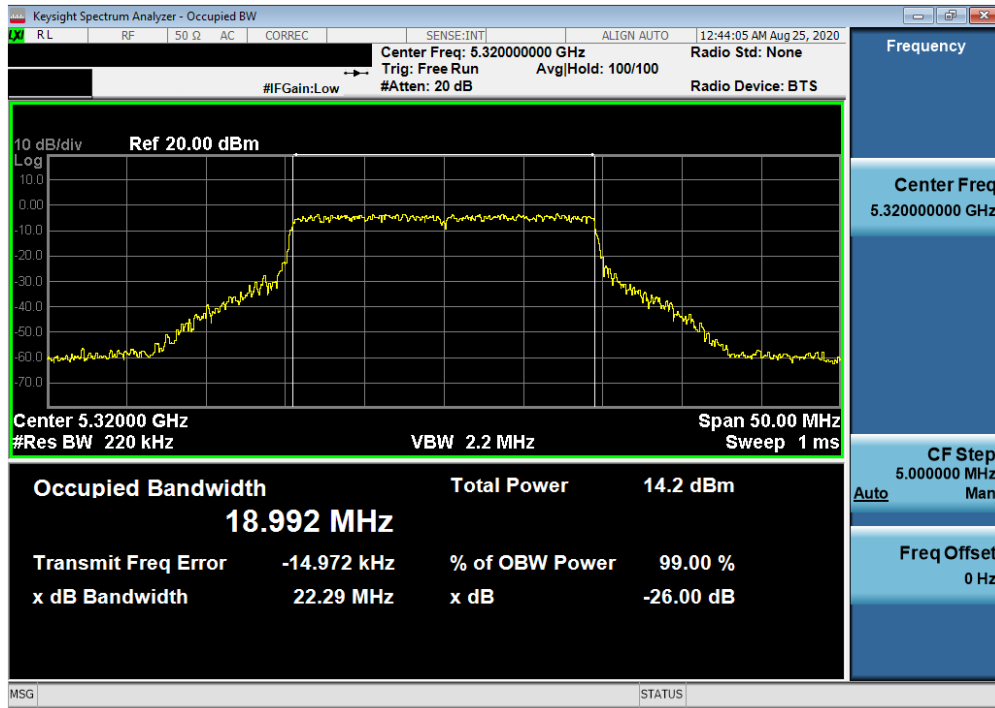


Plot 7-30. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 64)

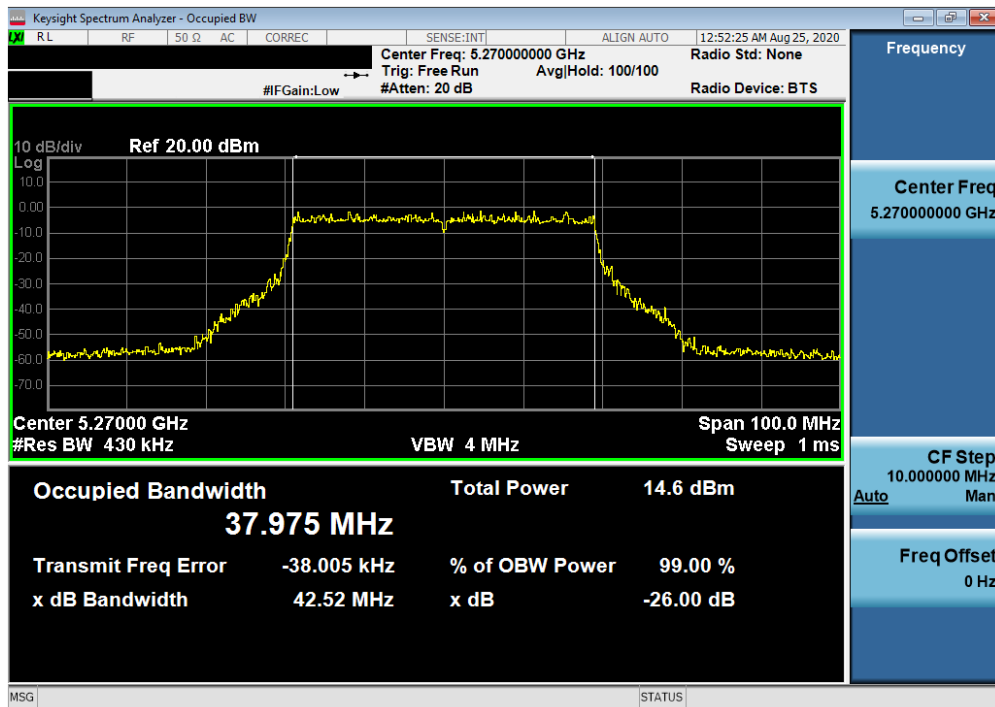


Plot 7-31. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 31 of 246

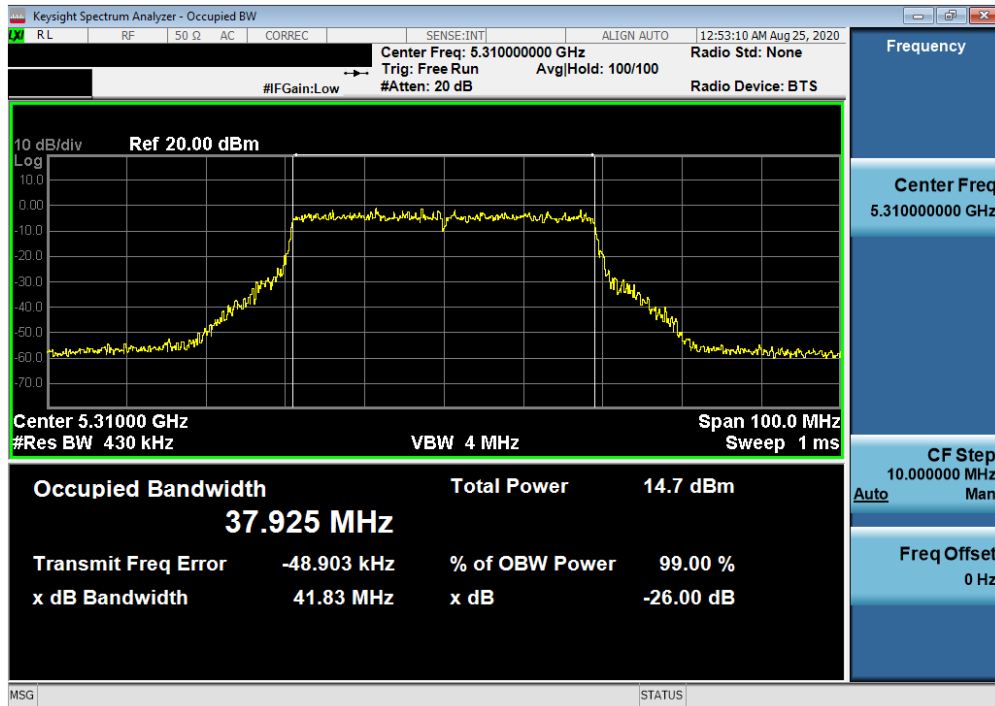


Plot 7-32. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 62)

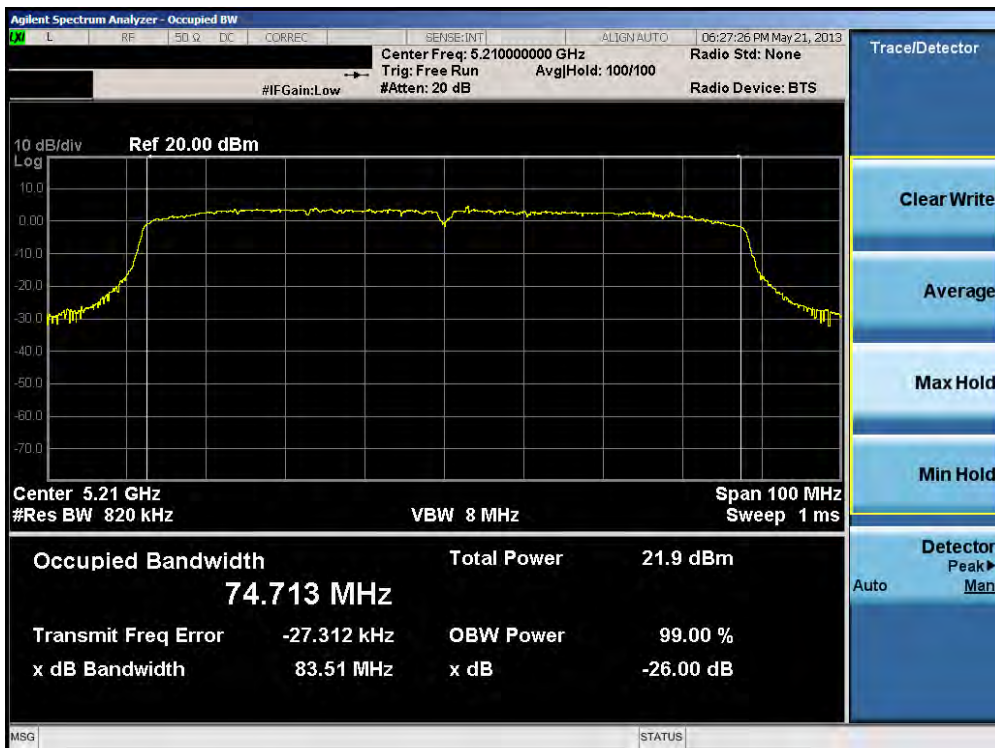


Plot 7-33. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 32 of 246

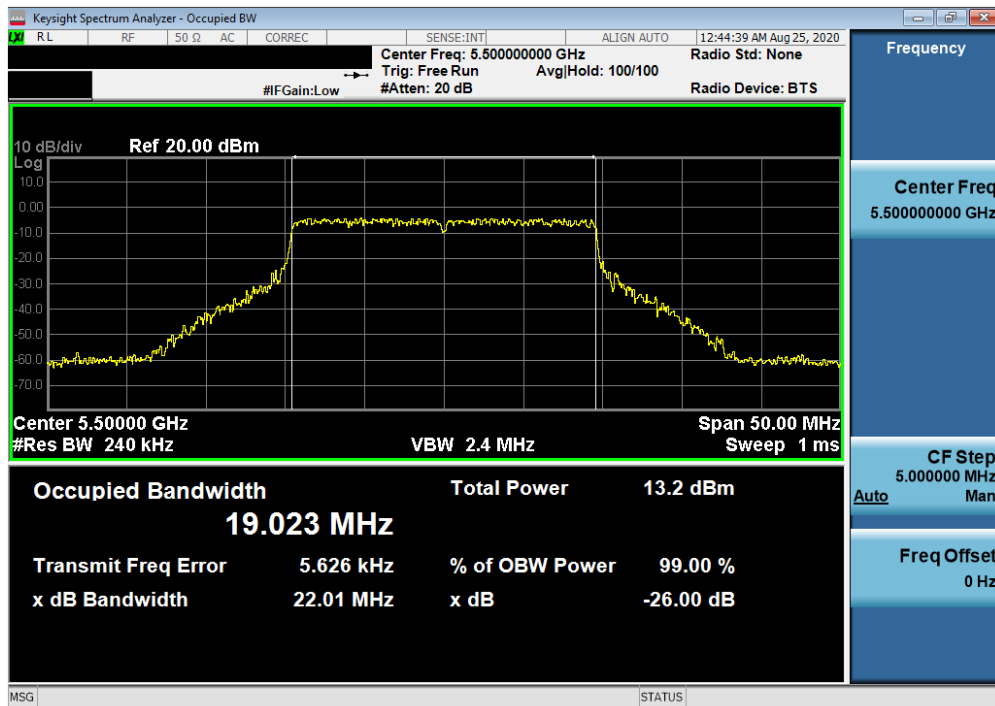


Plot 7-34. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 100)

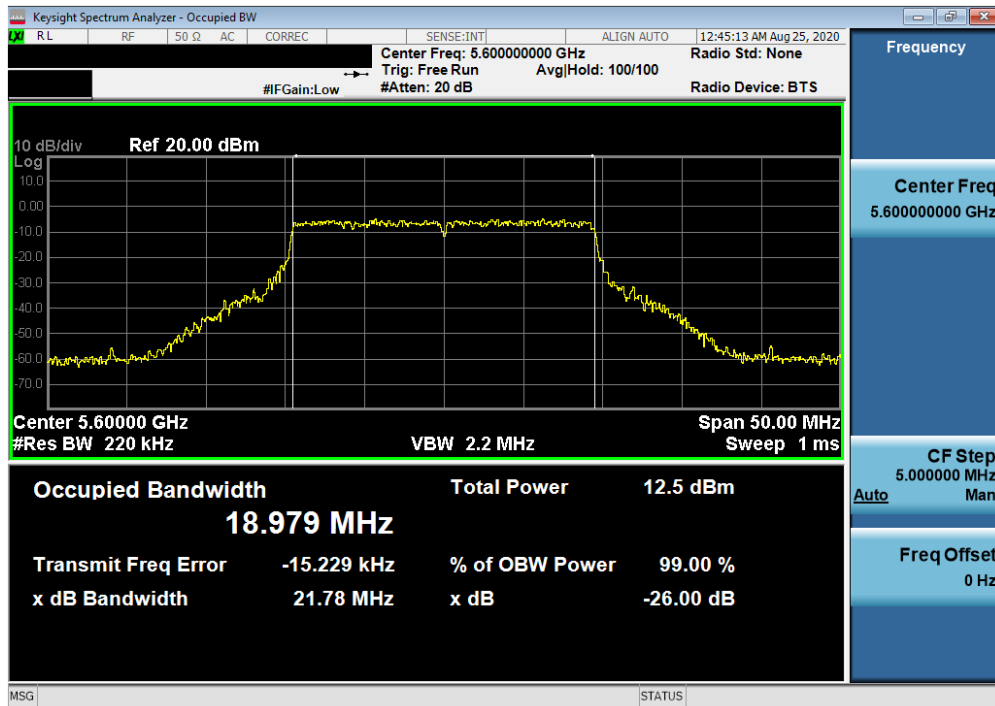


Plot 7-35. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 33 of 246

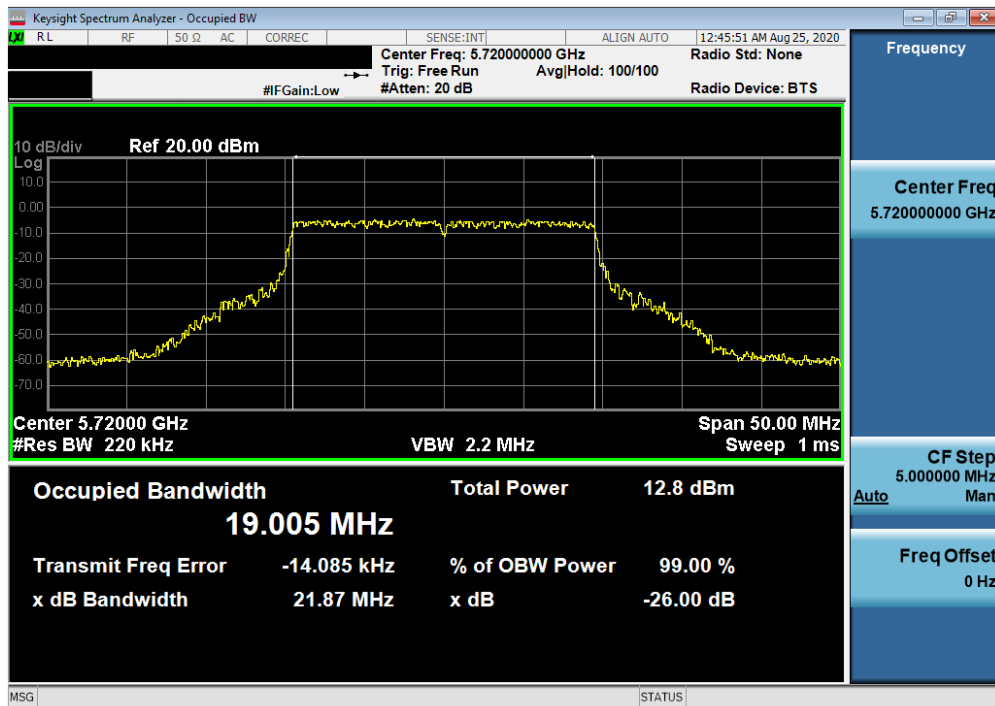


Plot 7-36. 26dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 144)

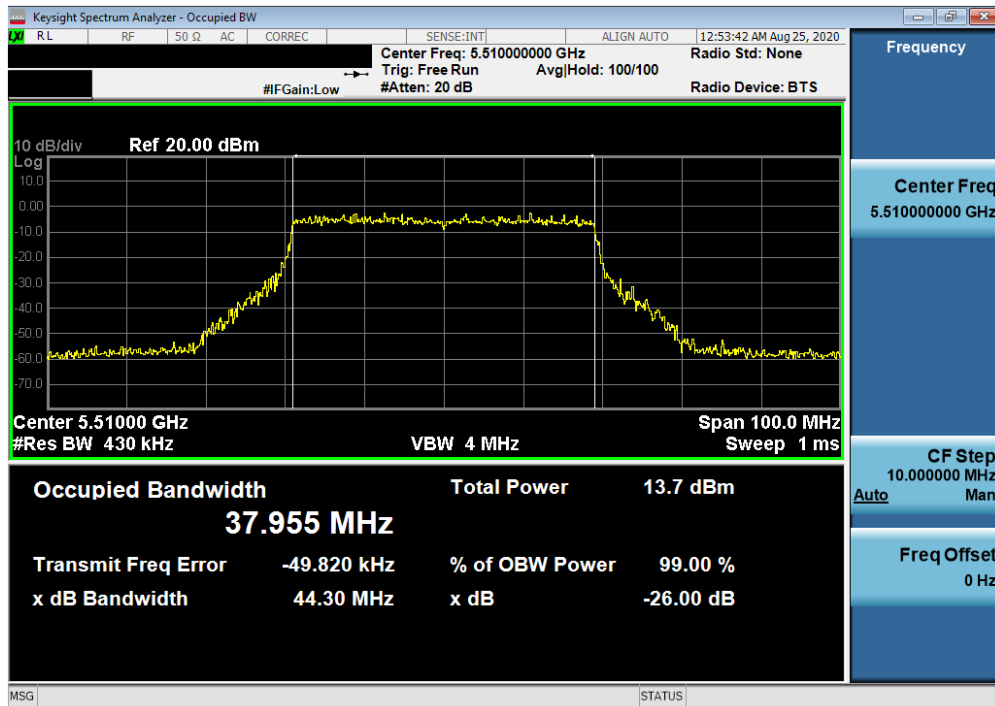


Plot 7-37. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 102)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 34 of 246

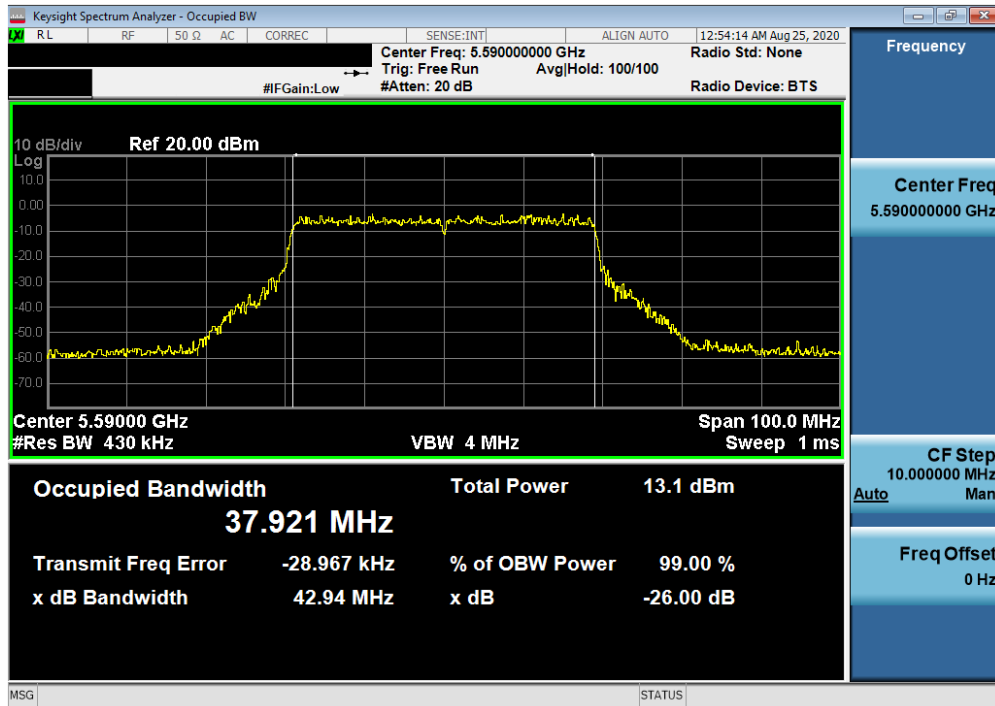


Plot 7-38. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 118)

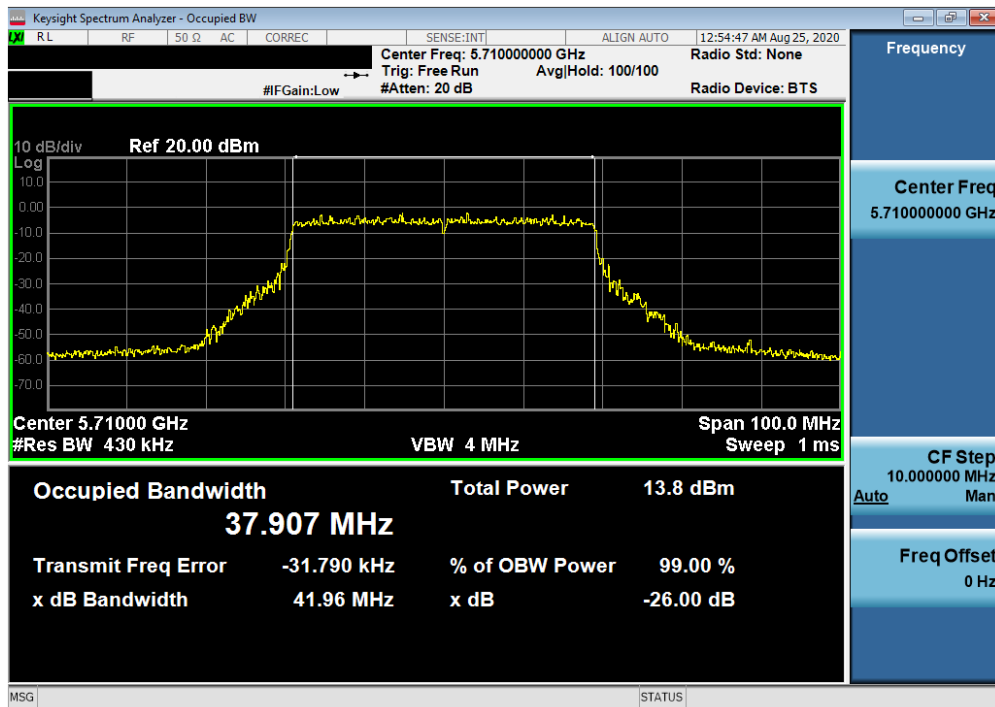


Plot 7-39. 26dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 142)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 35 of 246

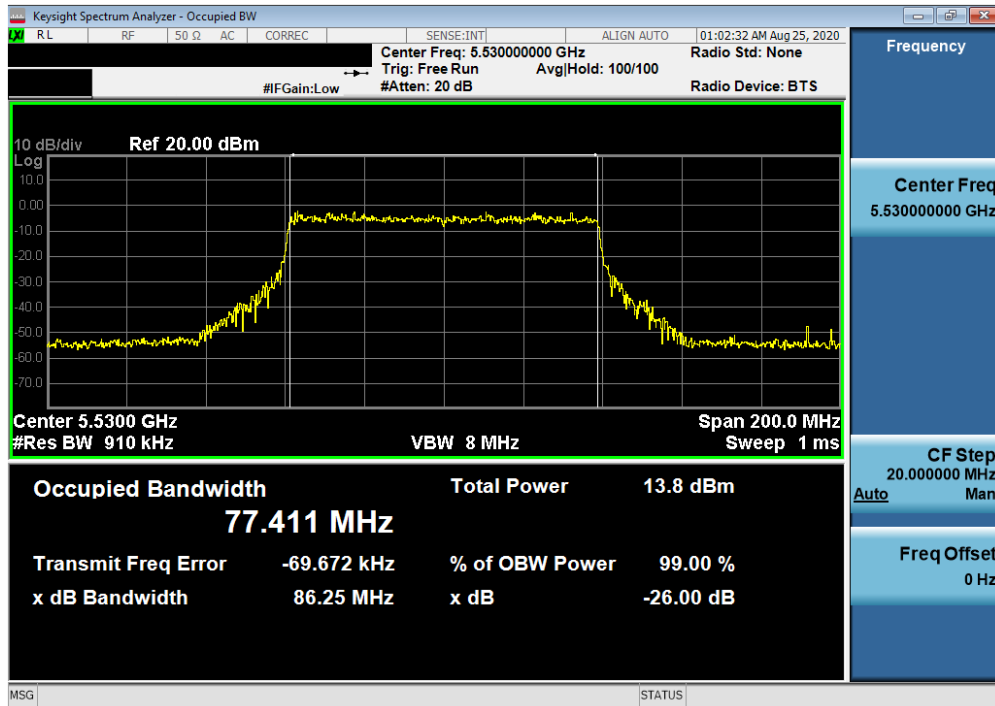


Plot 7-40. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 106)

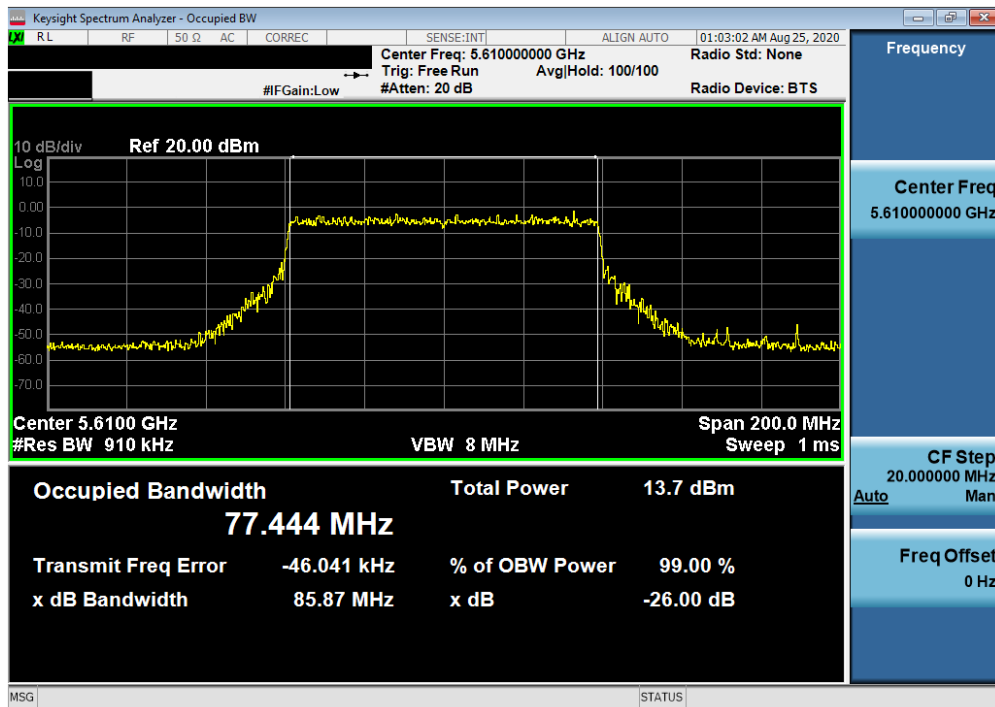

Plot 7-41. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 36 of 246

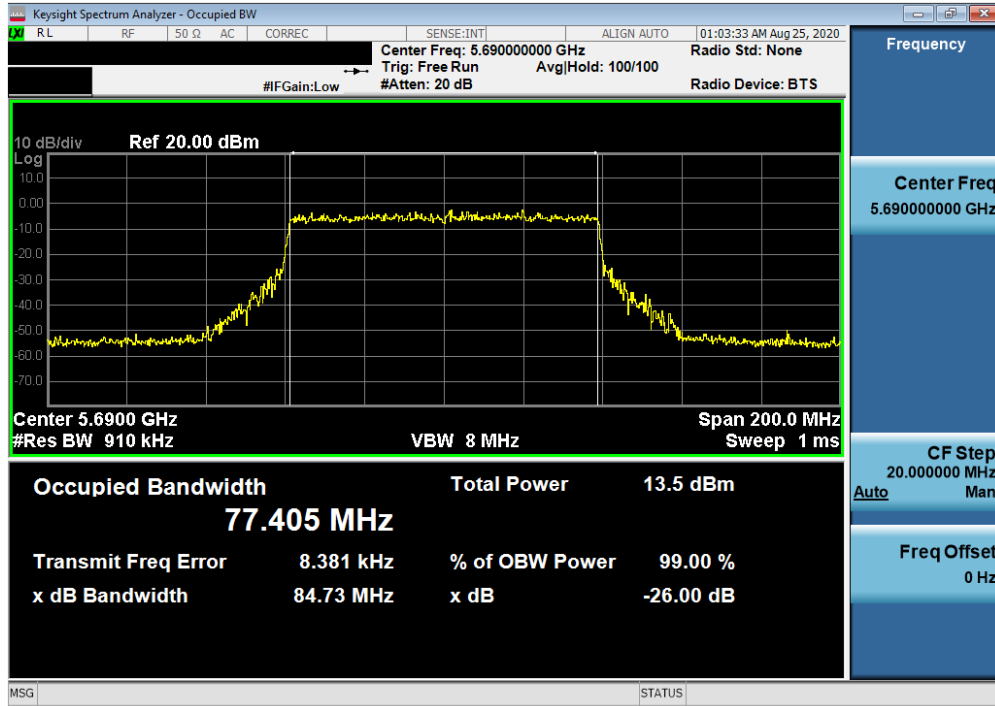

Plot 7-42. 26dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 138)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 37 of 246

SISO Antenna-2 26dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	26T	MCS0	18.47
	5200	40	ax (20MHz)	26T	MCS0	18.46
	5240	48	ax (20MHz)	26T	MCS0	18.34
	5190	38	ax (40MHz)	26T	MCS0	39.82
	5230	46	ax (40MHz)	26T	MCS0	40.22
	5210	42	ax (80MHz)	26T	MCS0	80.75
Band 2A	5260	52	ax (20MHz)	26T	MCS0	18.51
	5280	56	ax (20MHz)	26T	MCS0	18.44
	5320	64	ax (20MHz)	26T	MCS0	18.36
	5270	54	ax (40MHz)	26T	MCS0	38.14
	5310	62	ax (40MHz)	26T	MCS0	38.01
	5290	58	ax (80MHz)	26T	MCS0	81.53
Band 2C	5500	100	ax (20MHz)	26T	MCS0	19.79
	5600	120	ax (20MHz)	26T	MCS0	19.79
	5720	144	ax (20MHz)	26T	MCS0	19.54
	5510	102	ax (40MHz)	26T	MCS0	39.83
	5590	118	ax (40MHz)	26T	MCS0	38.08
	5710	142	ax (40MHz)	26T	MCS0	38.11
	5530	106	ax (80MHz)	26T	MCS0	80.93
	5610	122	ax (80MHz)	26T	MCS0	78.19
	5690	138	ax (80MHz)	26T	MCS0	81.25

Table 7-4. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 38 of 246

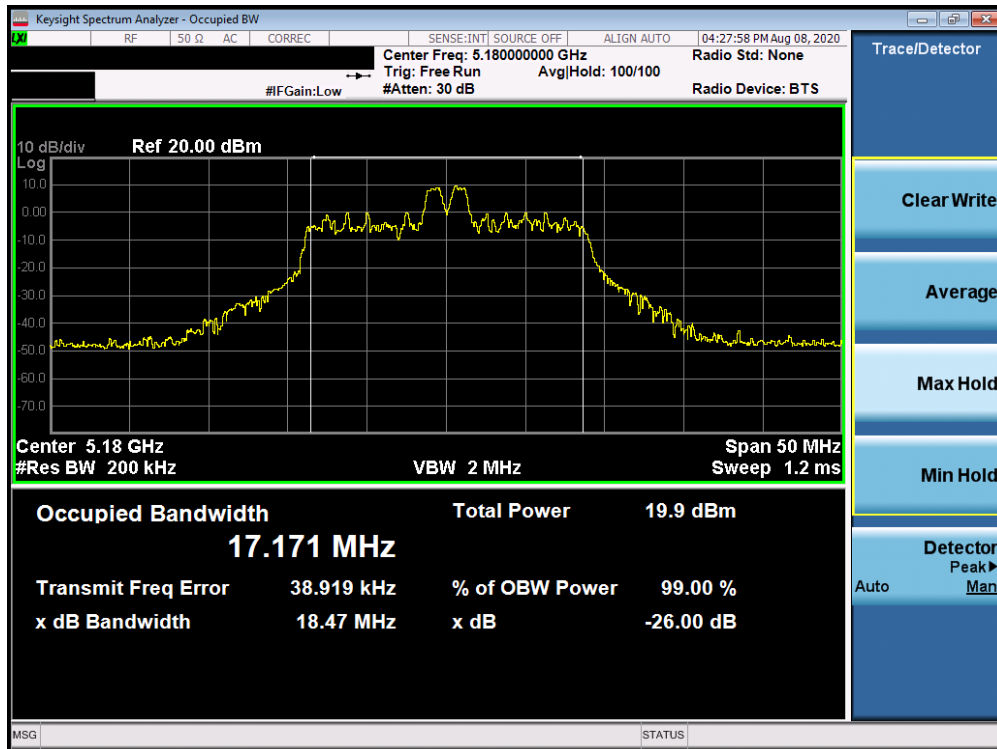


Plot 7-43. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 36)

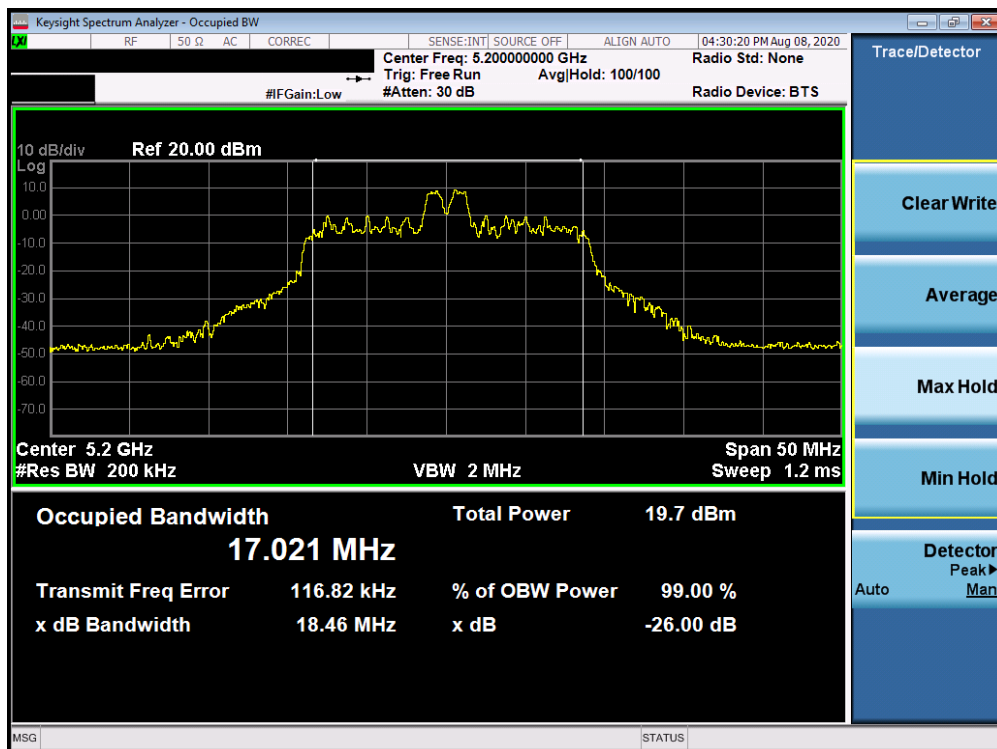


Plot 7-44. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 40)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 39 of 246

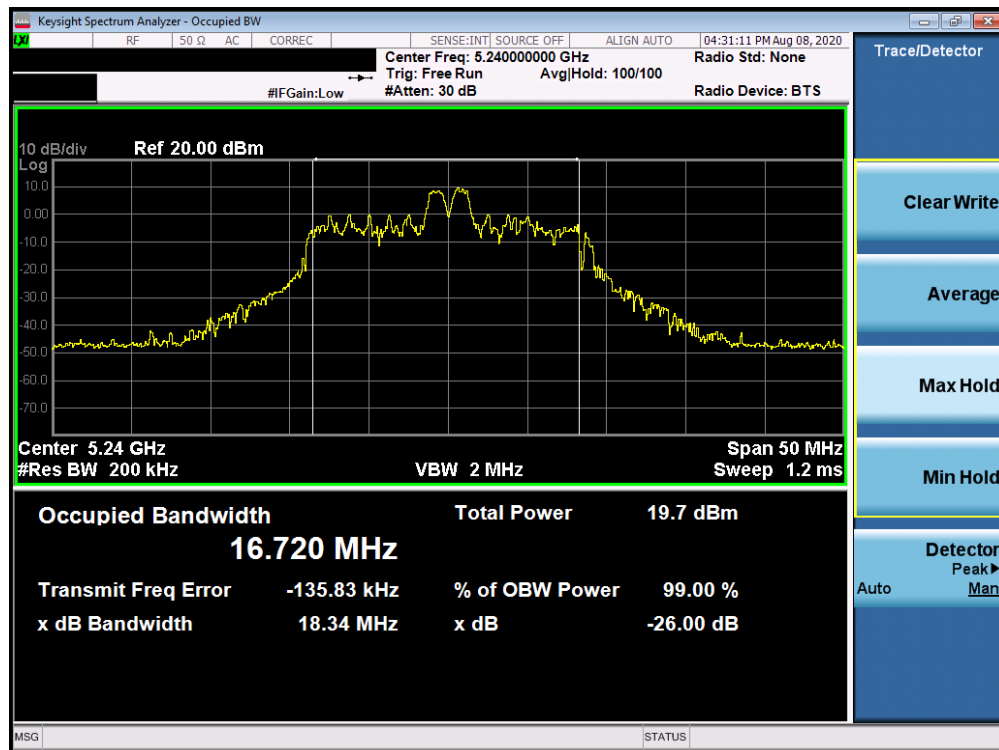


Plot 7-45. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 48)

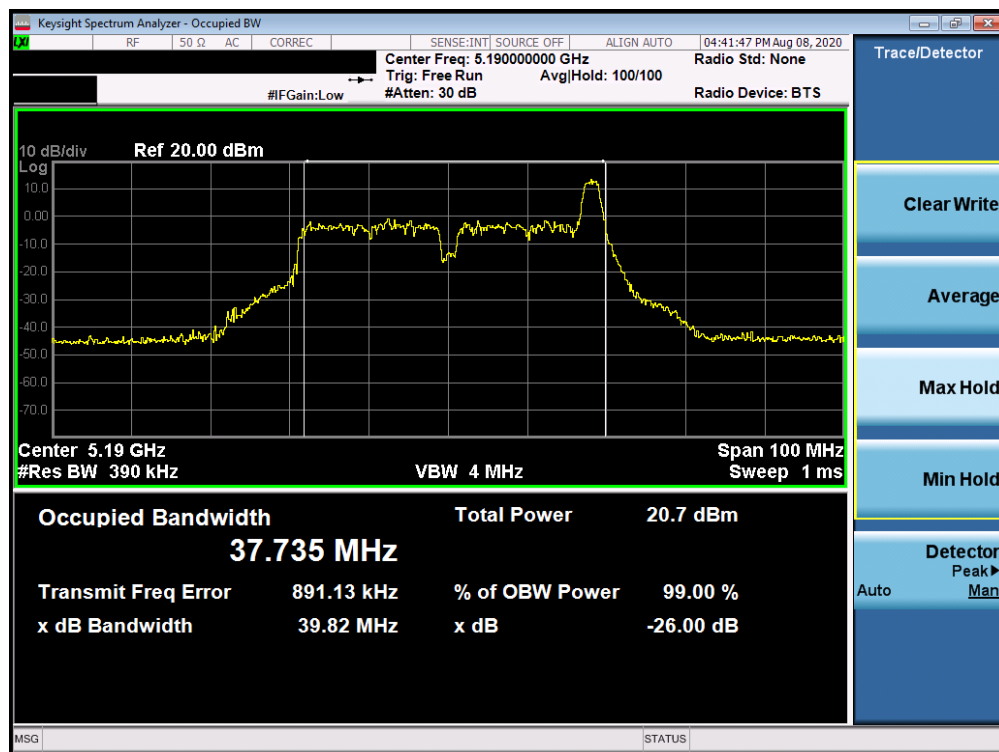


Plot 7-46. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 38)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 40 of 246

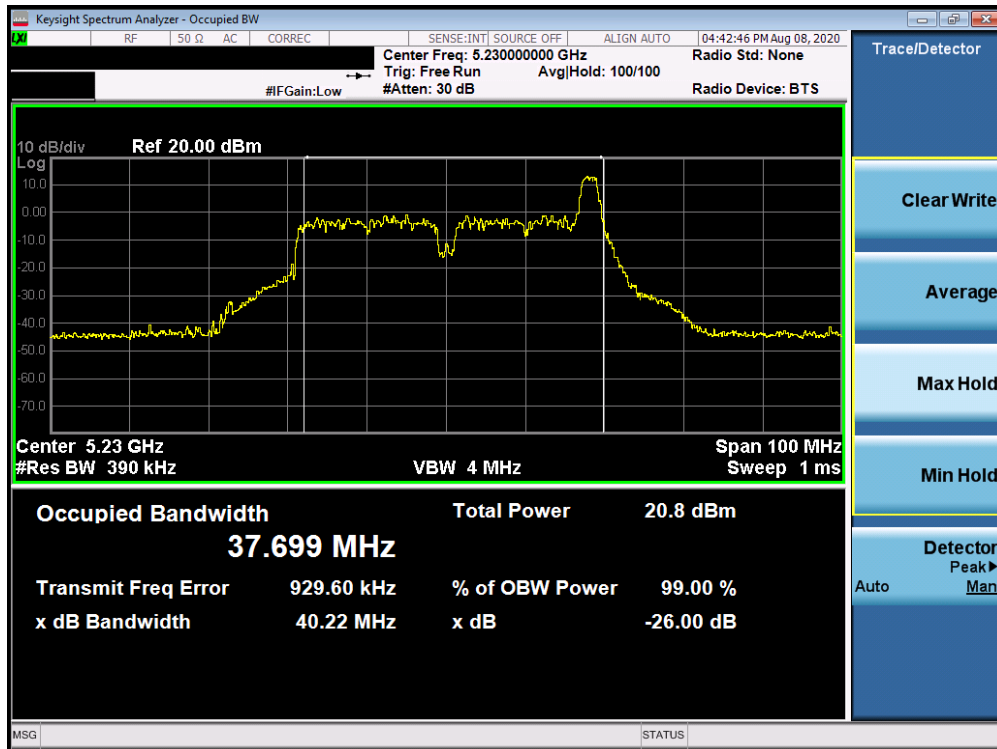


Plot 7-47. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 46)

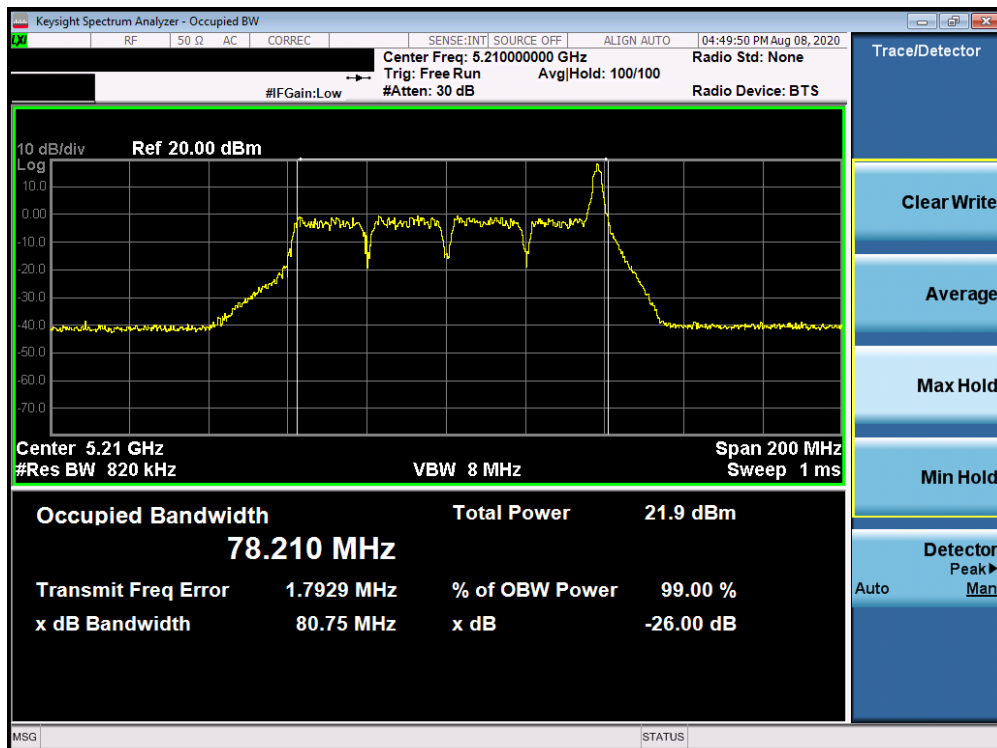


Plot 7-48. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 1) – Ch. 42)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 41 of 246

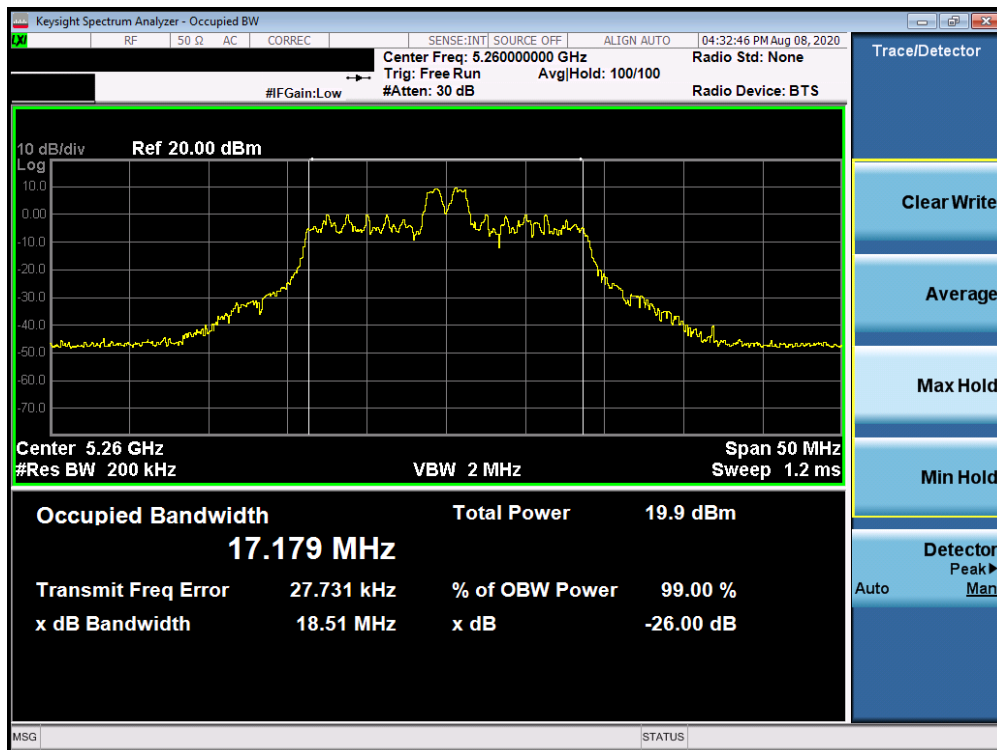


Plot 7-49. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 52)

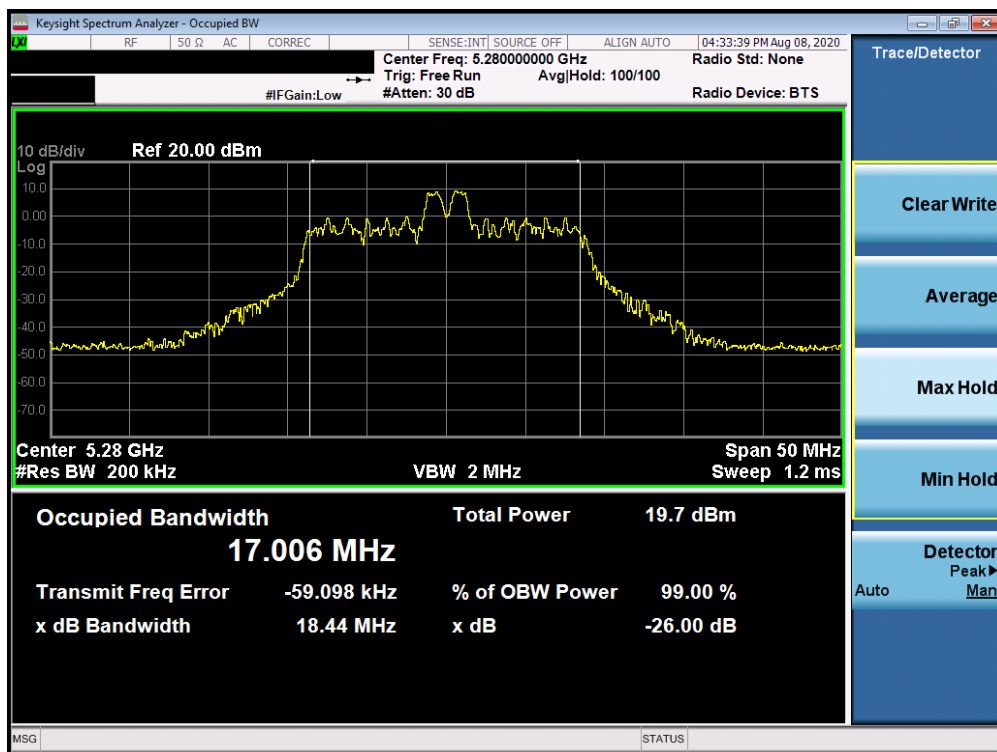


Plot 7-50. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 56)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 42 of 246

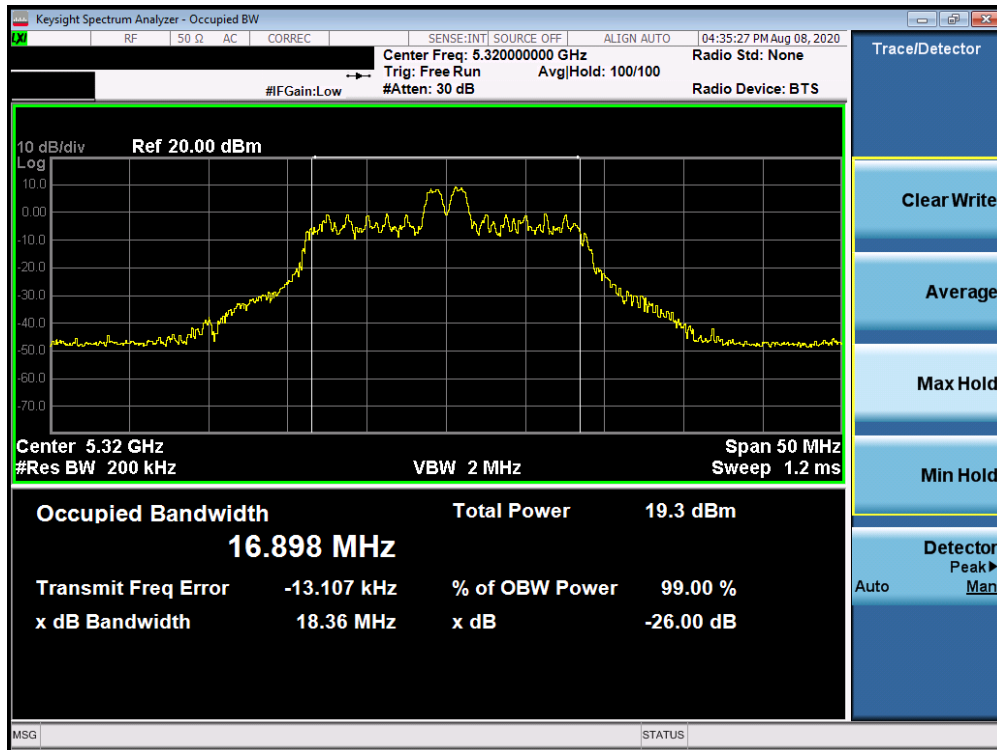


Plot 7-51. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 64)

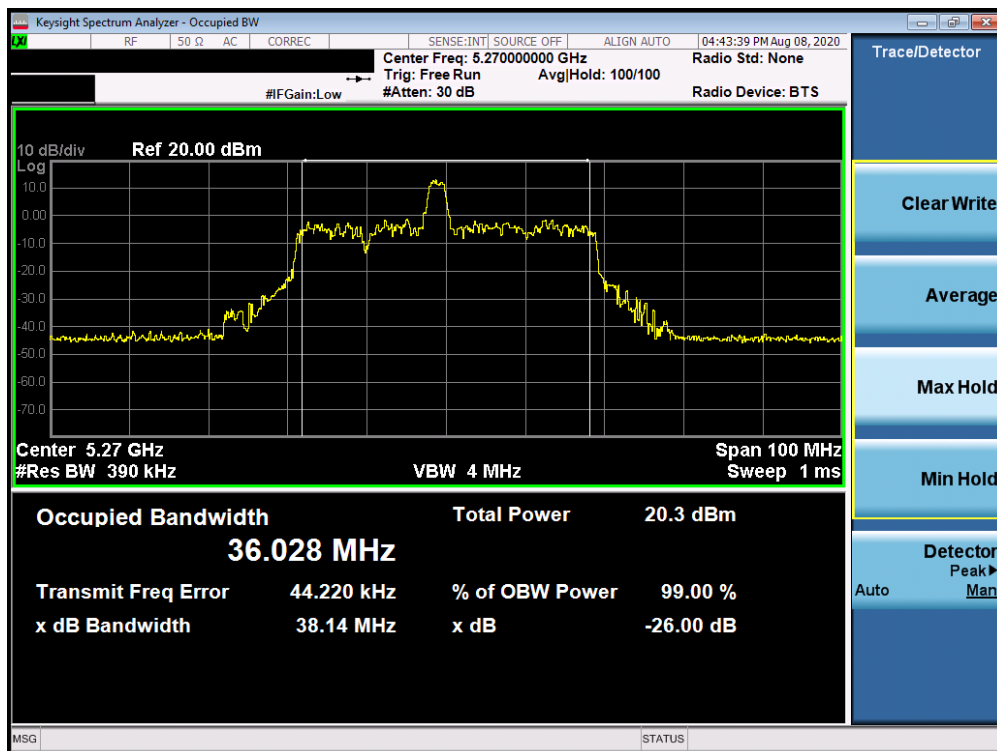


Plot 7-52. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 54)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 43 of 246

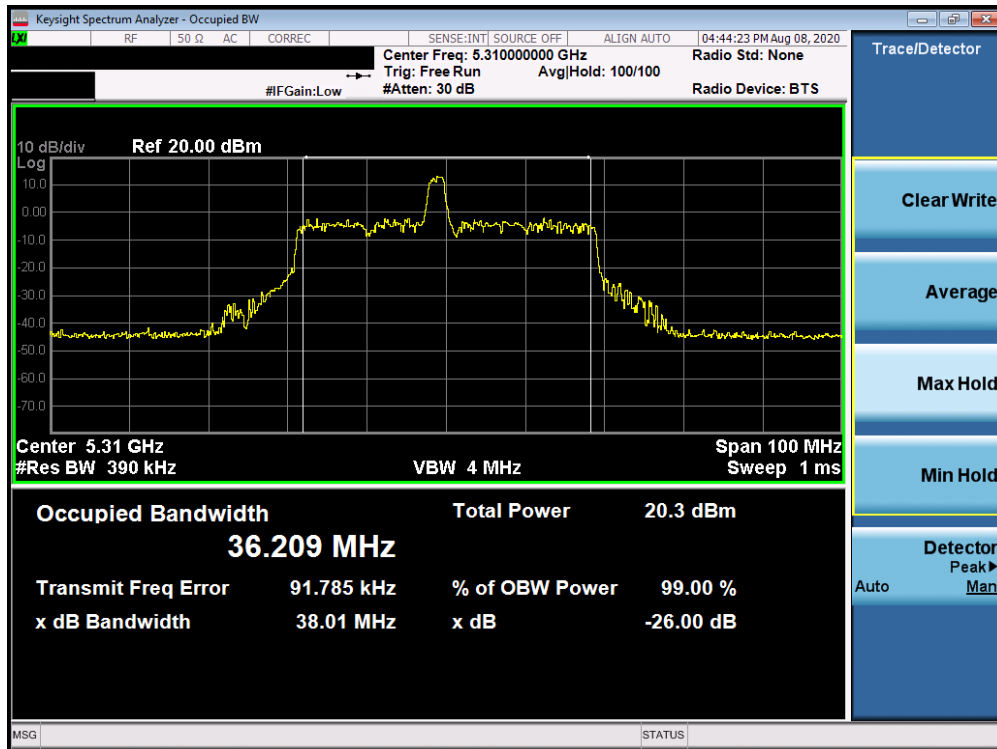


Plot 7-53. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 62)

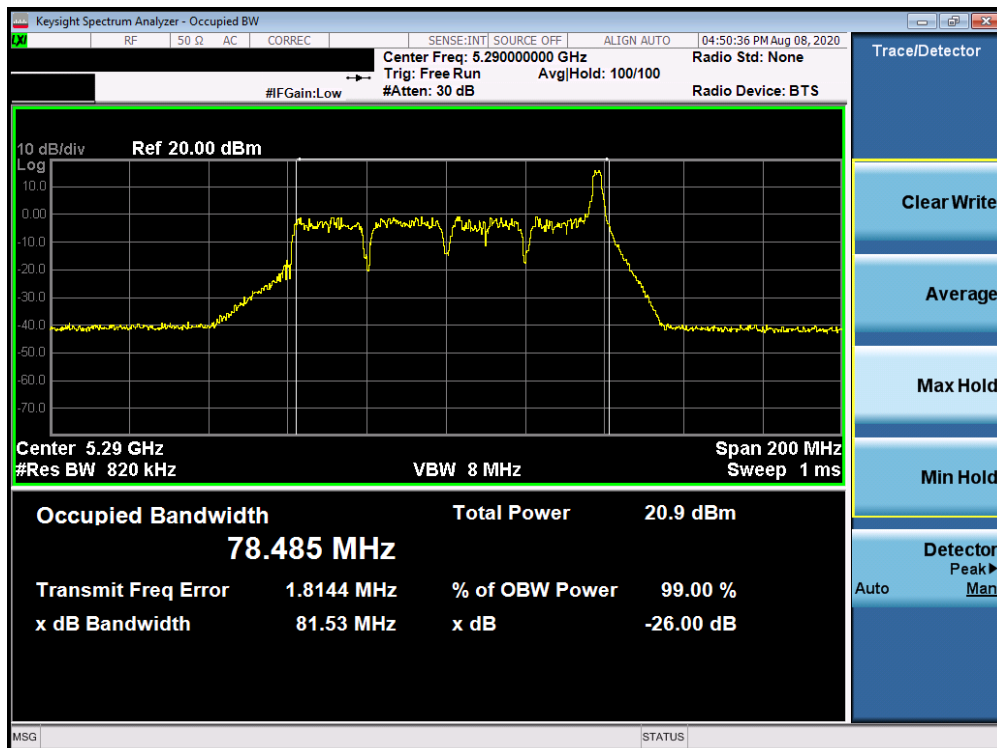


Plot 7-54. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2A) – Ch. 58)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 44 of 246

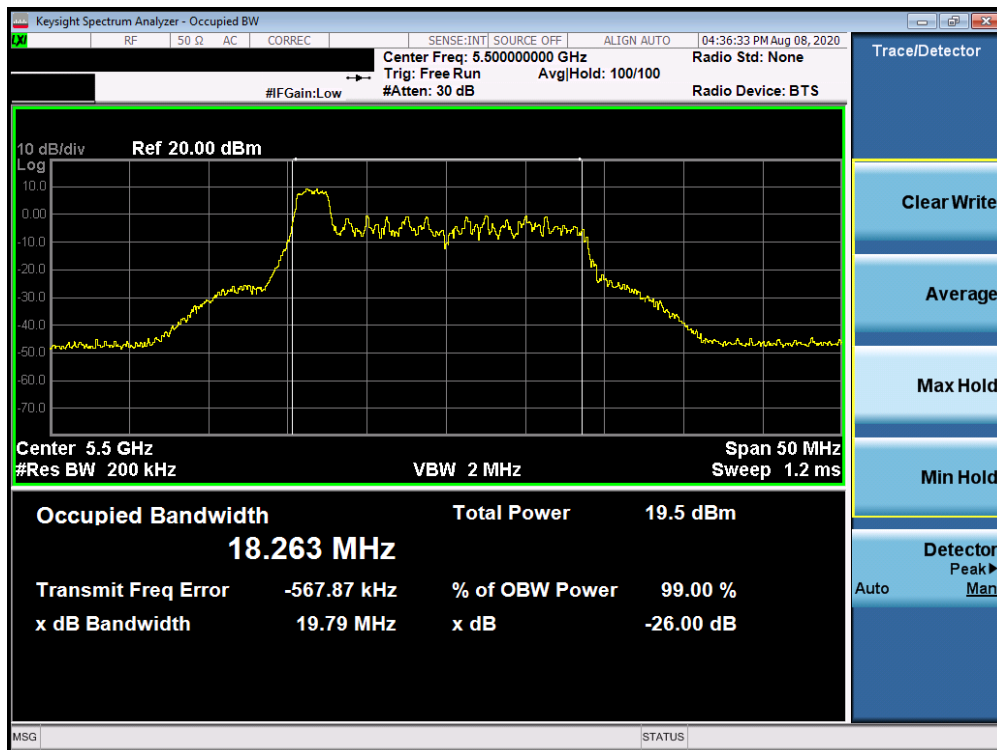


Plot 7-55. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 100)

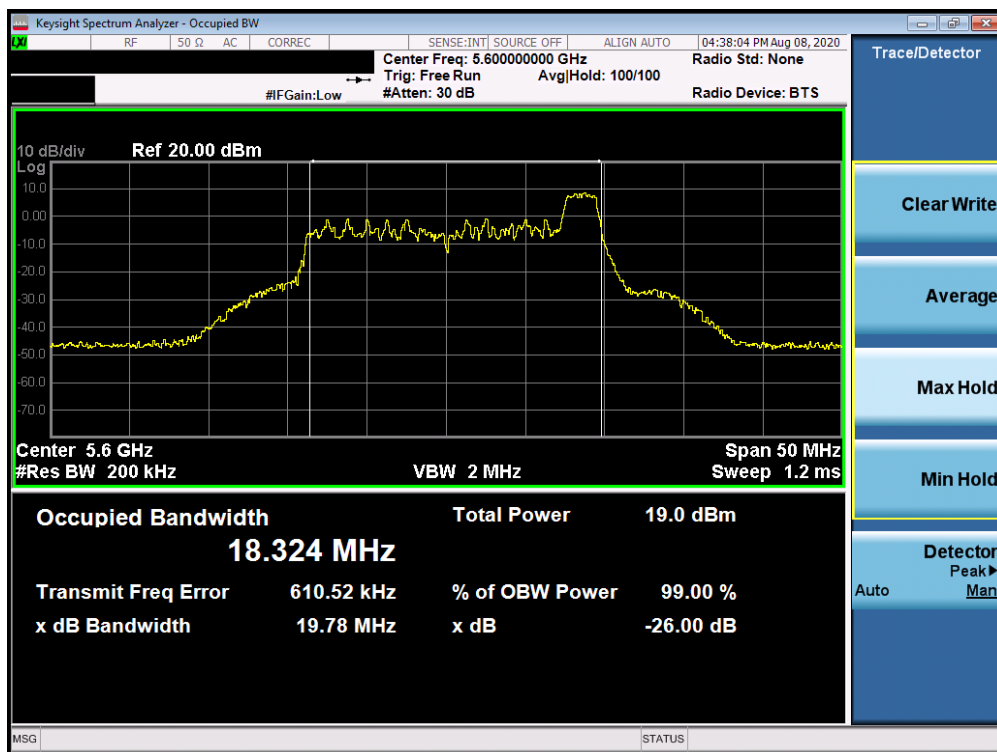


Plot 7-56. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 120)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 45 of 246

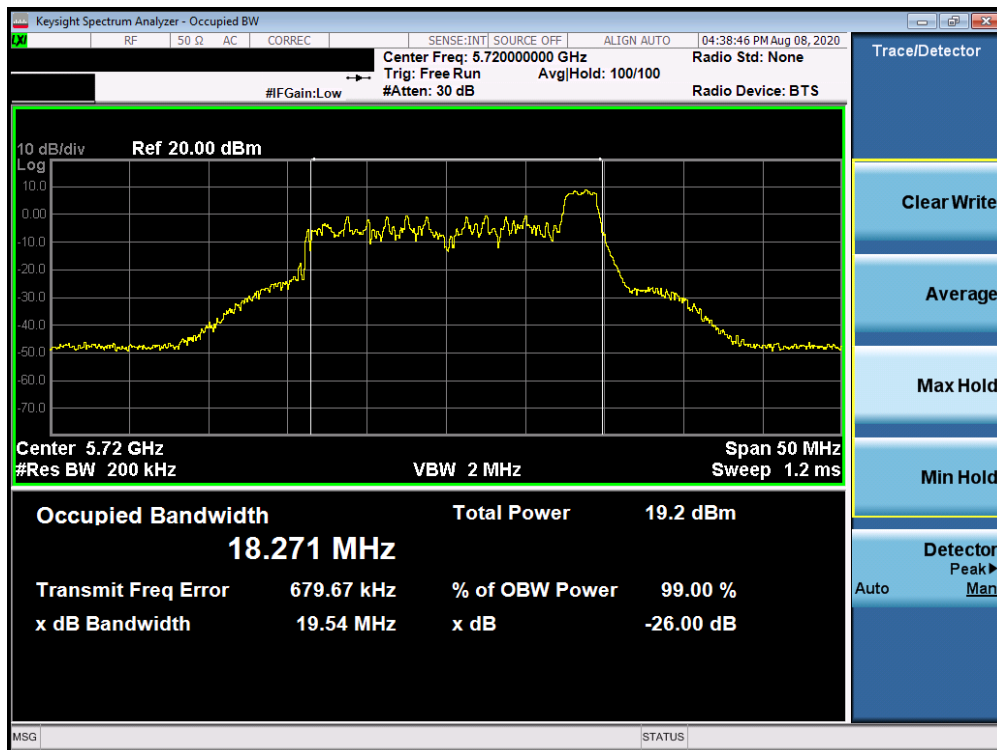


Plot 7-57. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 144)

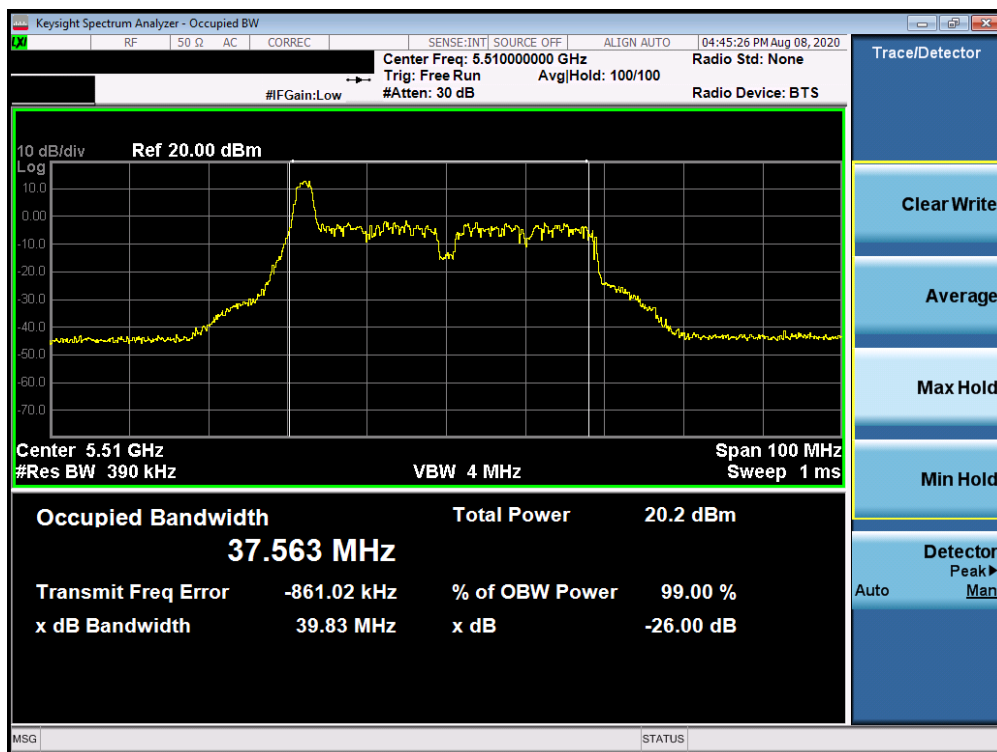


Plot 7-58. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 102)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 46 of 246

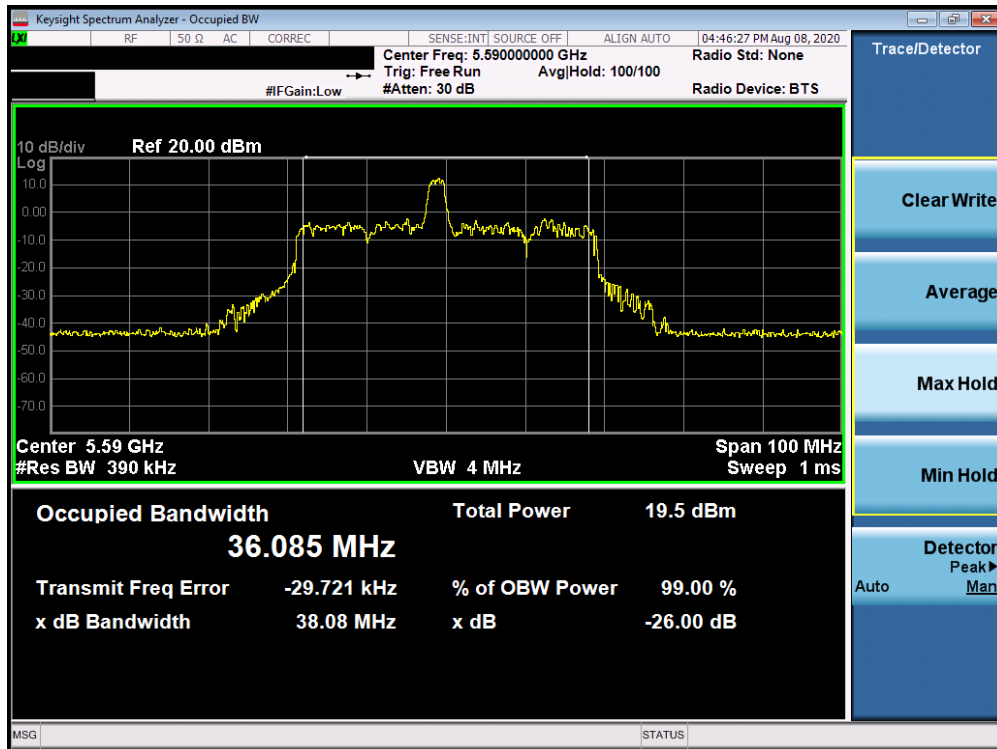


Plot 7-59. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 118)

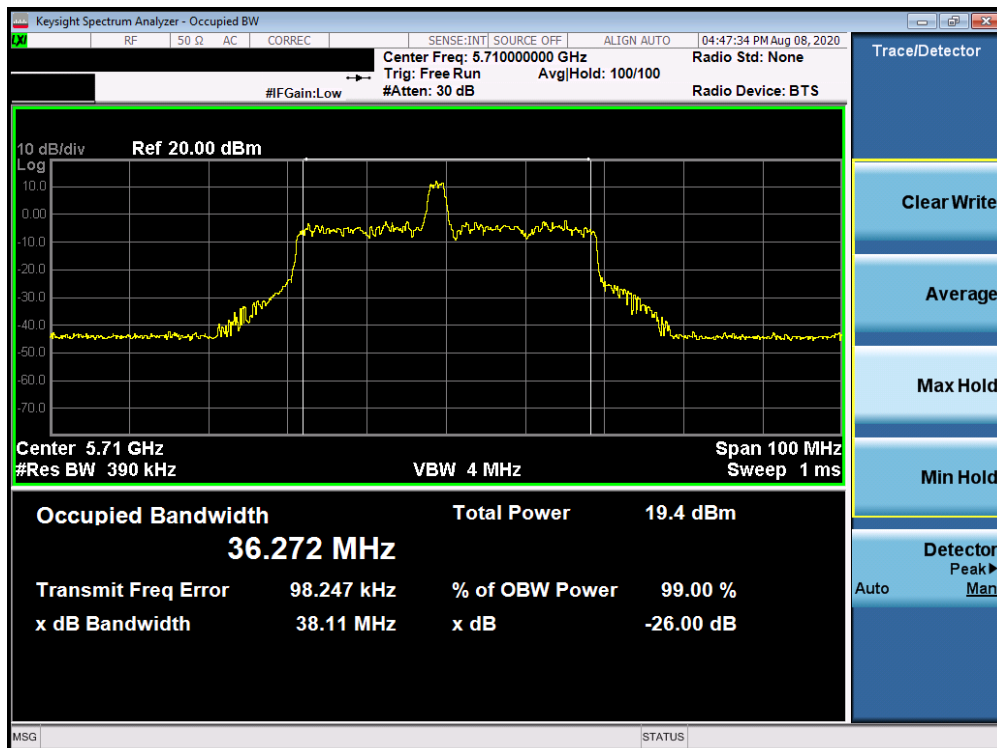


Plot 7-60. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 142)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 47 of 246

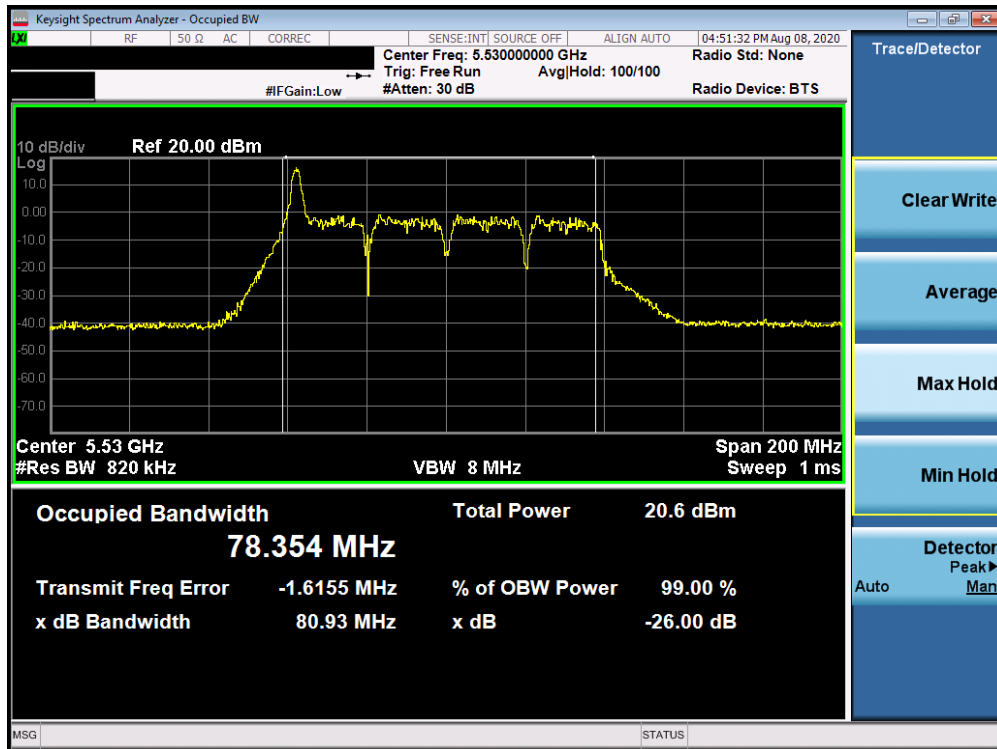


Plot 7-61. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 106)

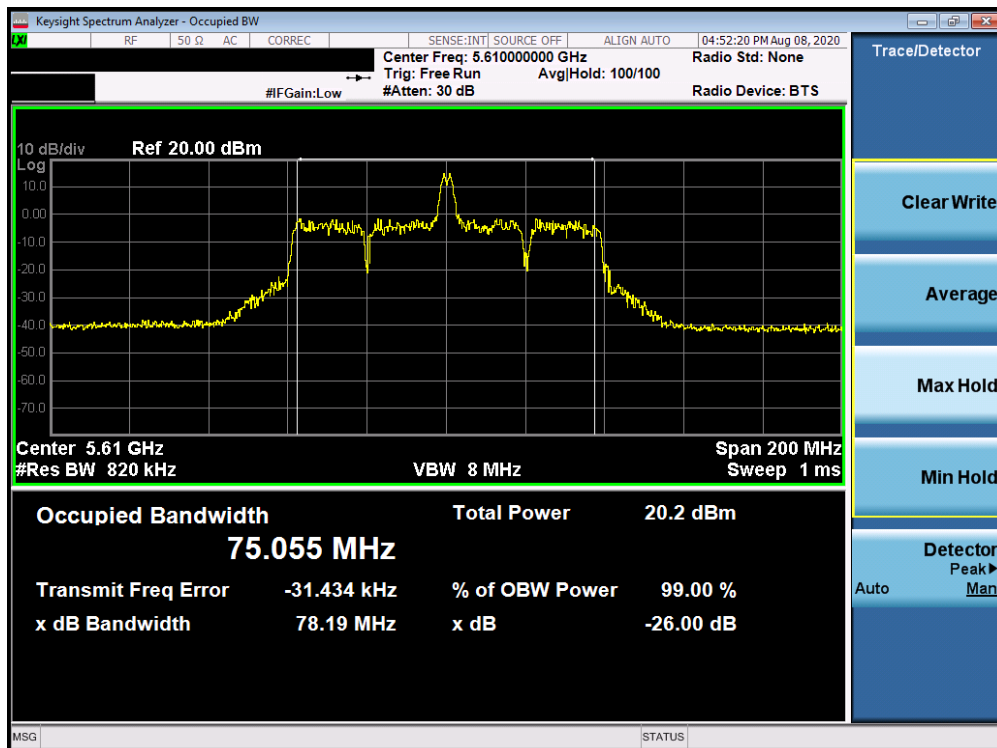

Plot 7-62. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 122)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 48 of 246

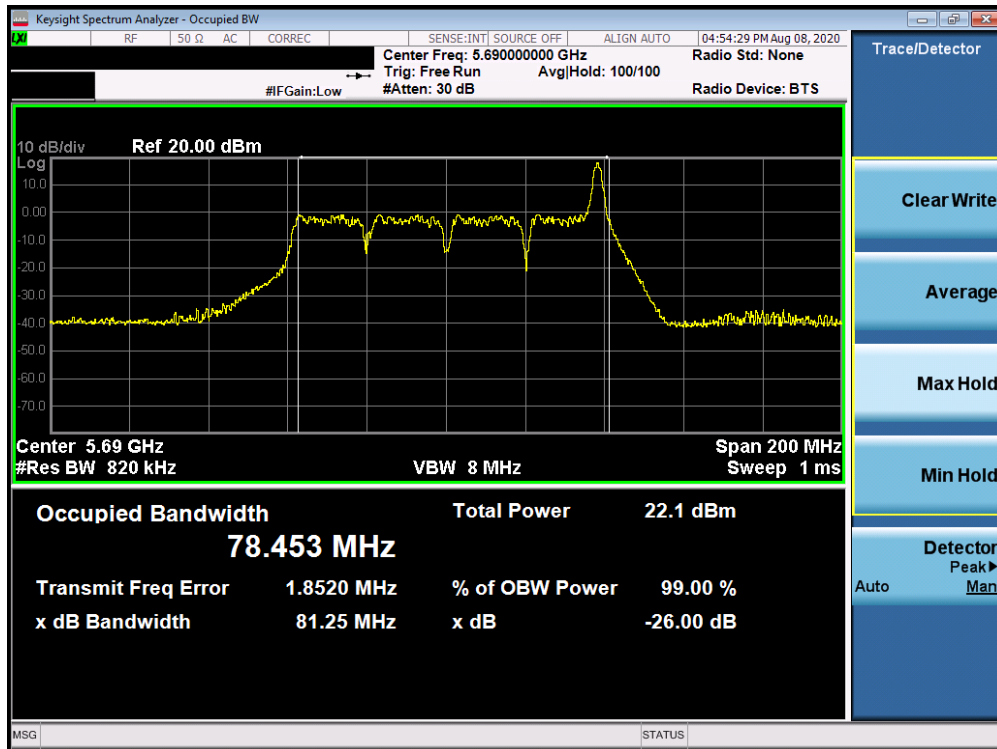

Plot 7-63. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 2C) – Ch. 138)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 49 of 246

SISO Antenna-2 26dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 26dB Bandwidth [MHz]
Band 1	5180	36	ax (20MHz)	242T	MCS0	22.47
	5200	40	ax (20MHz)	242T	MCS0	22.11
	5240	48	ax (20MHz)	242T	MCS0	22.26
	5190	38	ax (40MHz)	484T	MCS0	43.61
	5230	46	ax (40MHz)	484T	MCS0	41.90
	5210	42	ax (80MHz)	996T	MCS0	84.78
Band 2A	5260	52	ax (20MHz)	242T	MCS0	22.86
	5280	56	ax (20MHz)	242T	MCS0	22.54
	5320	64	ax (20MHz)	242T	MCS0	22.01
	5270	54	ax (40MHz)	484T	MCS0	42.97
	5310	62	ax (40MHz)	484T	MCS0	43.17
	5290	58	ax (80MHz)	996T	MCS0	84.29
Band 2C	5500	100	ax (20MHz)	242T	MCS0	21.00
	5600	120	ax (20MHz)	242T	MCS0	21.74
	5720	144	ax (20MHz)	242T	MCS0	21.85
	5510	102	ax (40MHz)	484T	MCS0	43.44
	5590	118	ax (40MHz)	484T	MCS0	43.30
	5710	142	ax (40MHz)	484T	MCS0	41.36
	5530	106	ax (80MHz)	996T	MCS0	85.02
	5610	122	ax (80MHz)	996T	MCS0	84.54
	5690	138	ax (80MHz)	996T	MCS0	85.10

Table 7-5. Conducted Bandwidth Measurements SISO ANT2 (Full Tones)

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 50 of 246

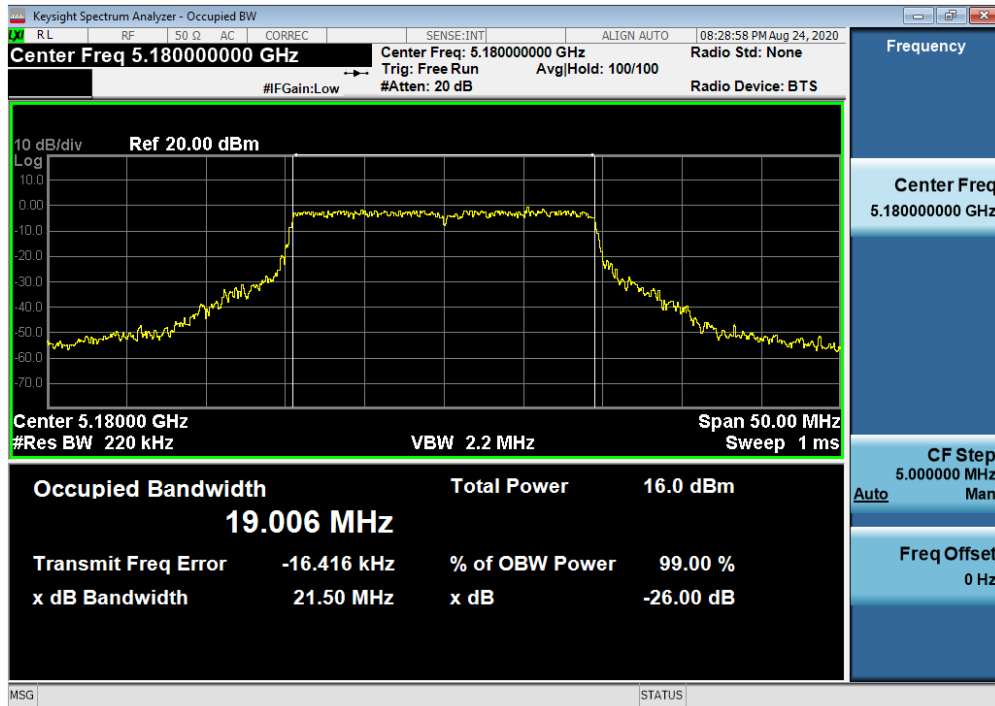


Plot 7-64. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 36)

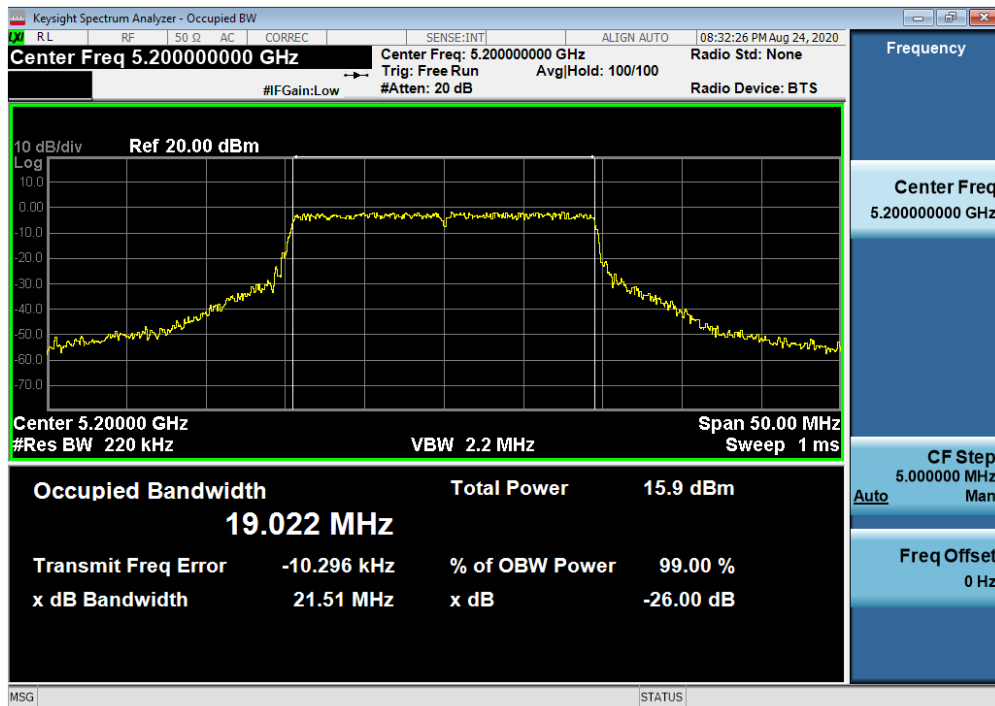


Plot 7-65. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 40)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 51 of 246

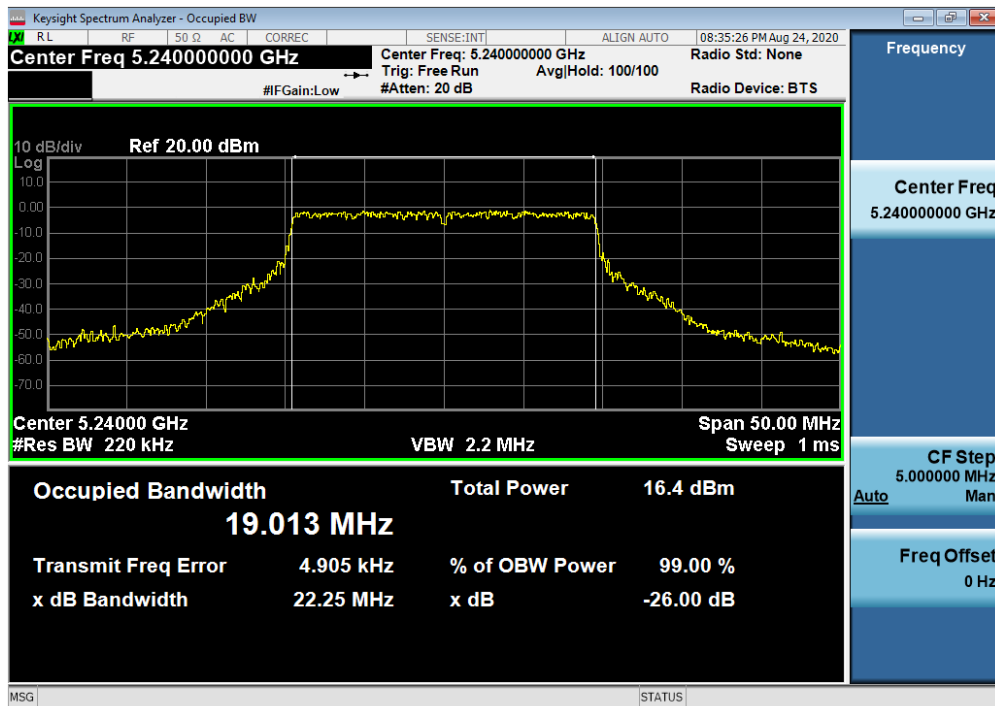


Plot 7-66. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 1) – Ch. 48)

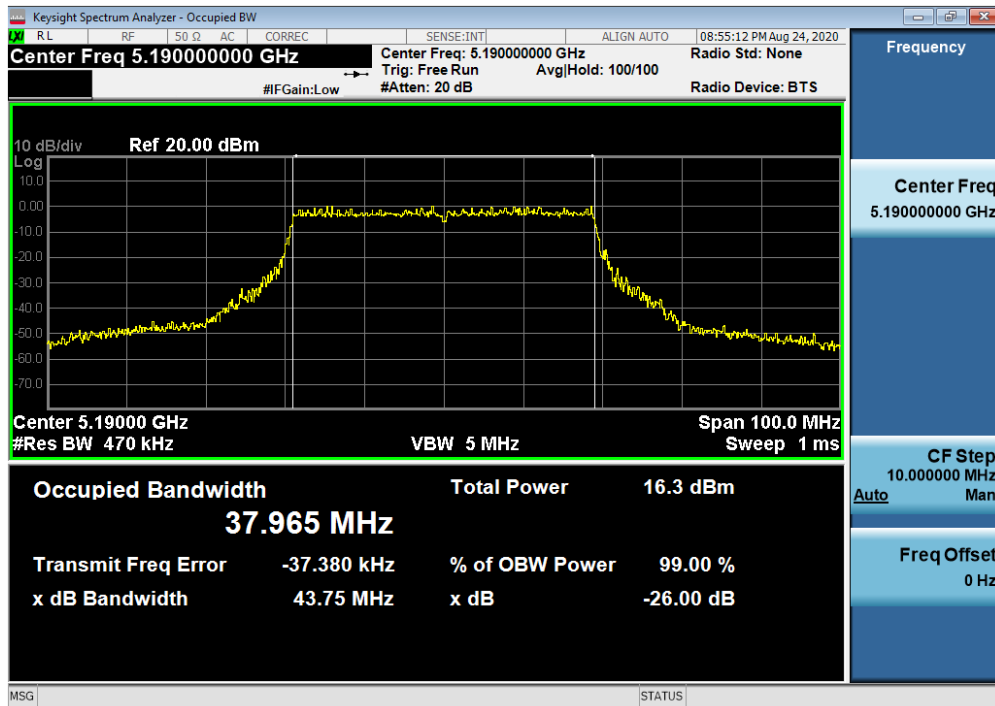


Plot 7-67. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 38)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 52 of 246

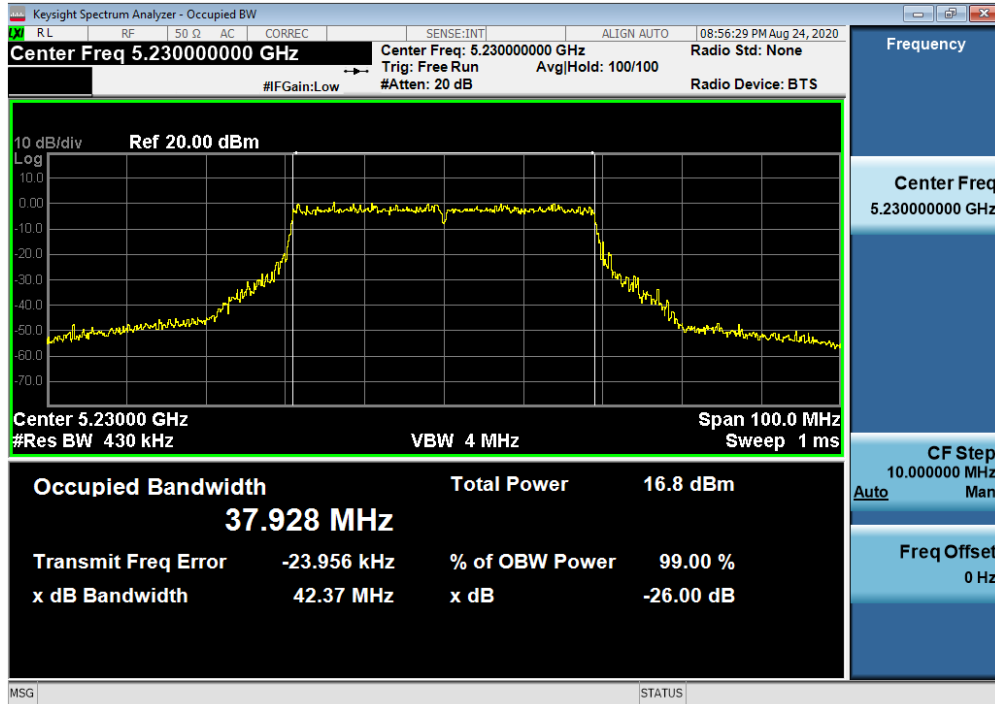


Plot 7-68. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 1) – Ch. 46)

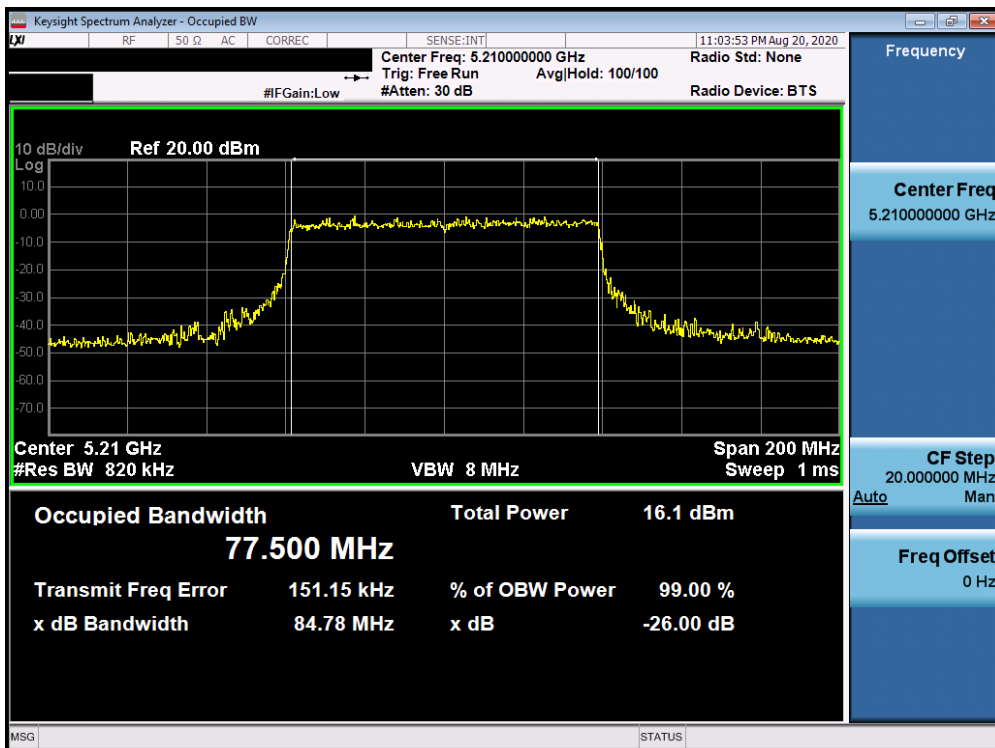


Plot 7-69. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 1) – Ch. 42)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 53 of 246

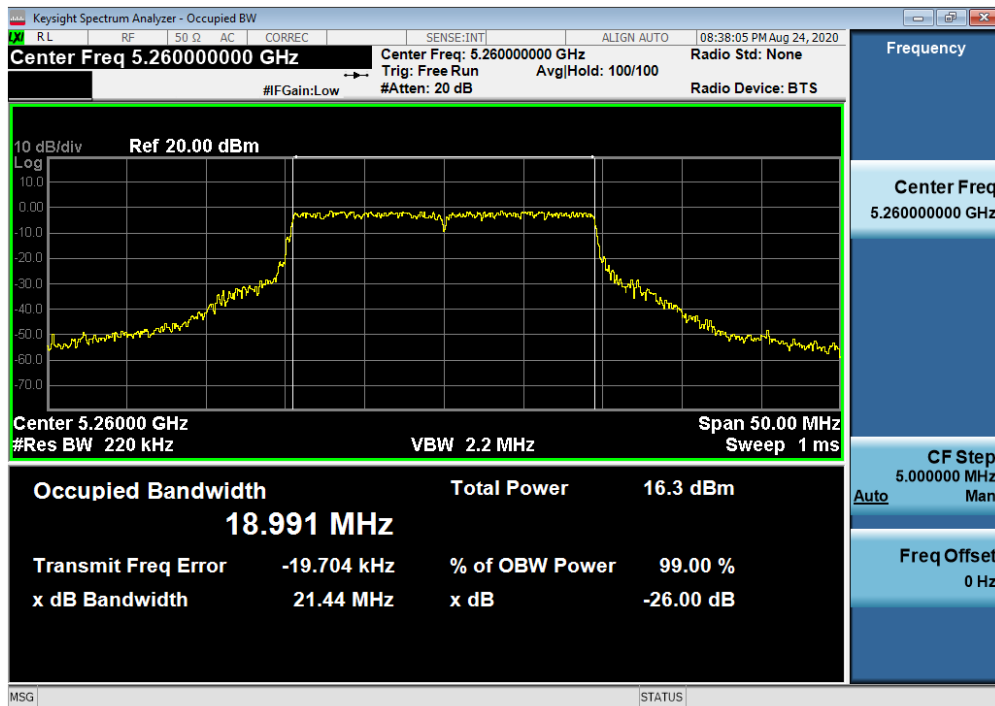


Plot 7-70. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 52)

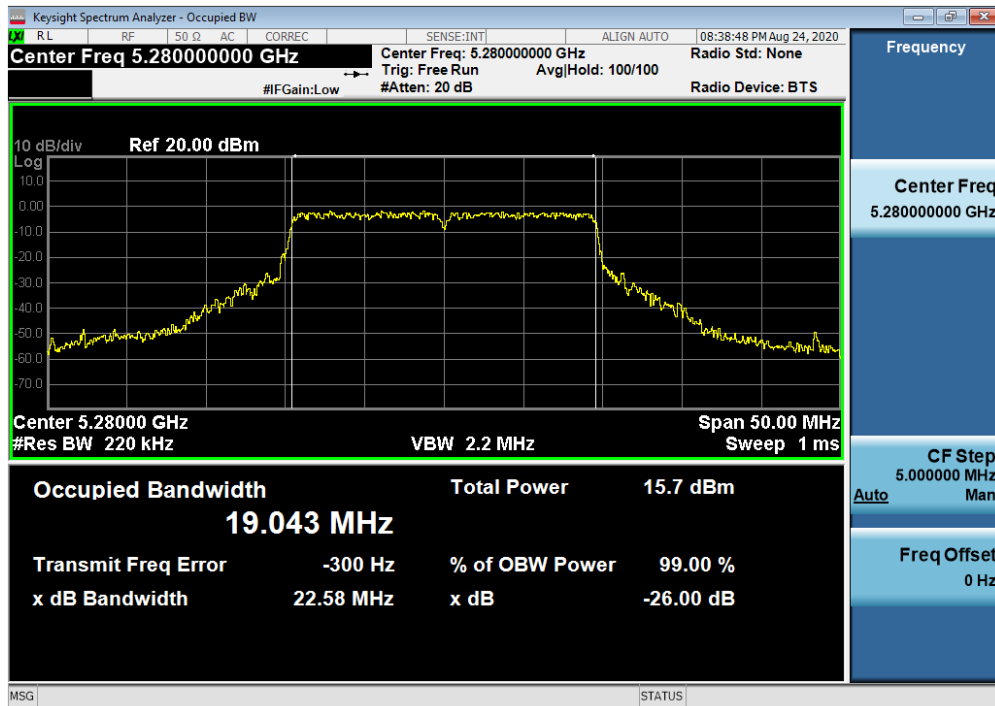


Plot 7-71. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 56)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 54 of 246

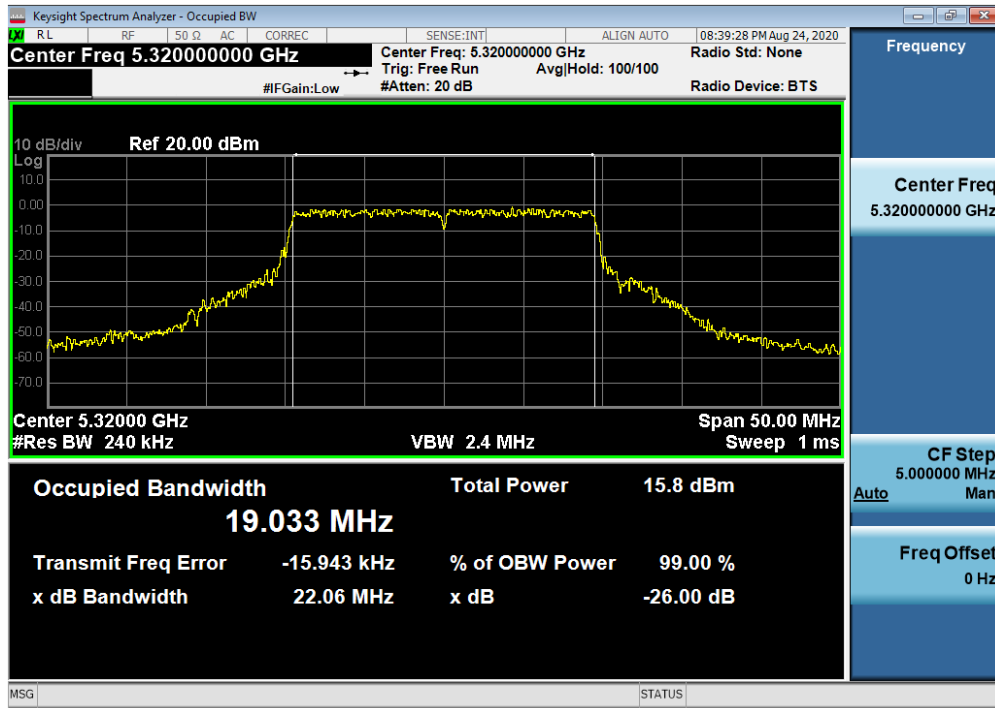


Plot 7-72. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2A) – Ch. 64)

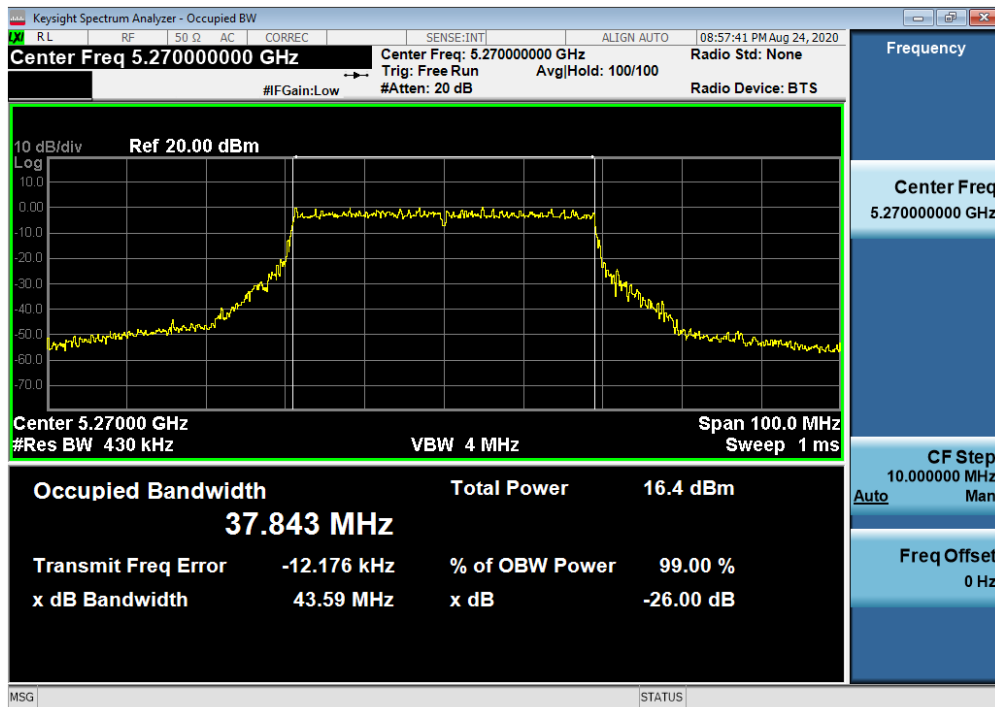


Plot 7-73. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 54)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 55 of 246

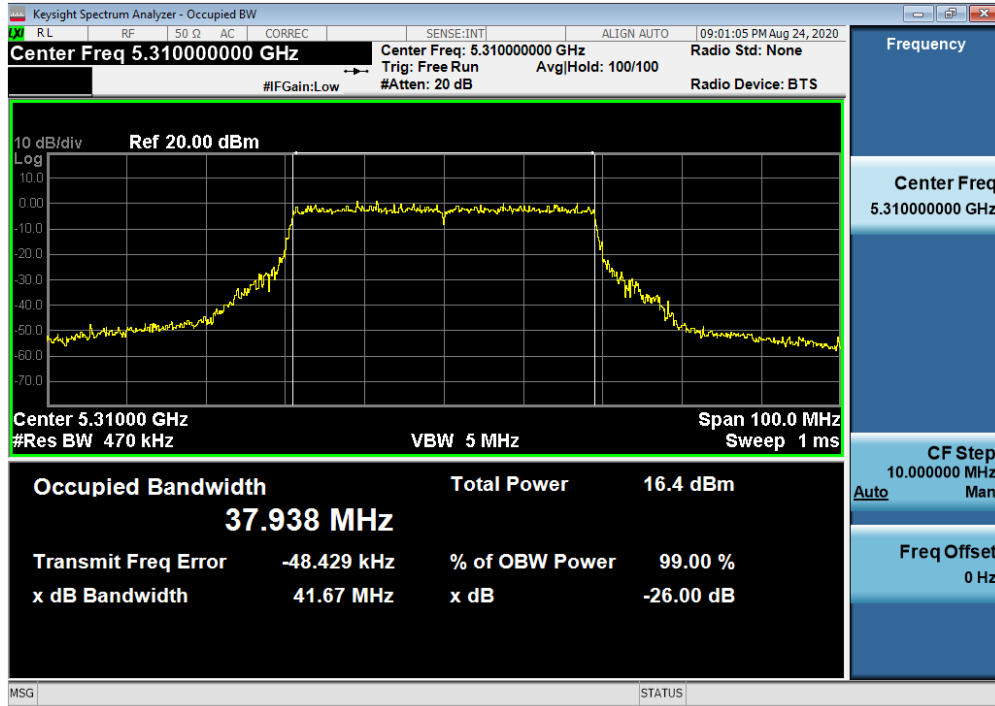


Plot 7-74. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2A) – Ch. 62)

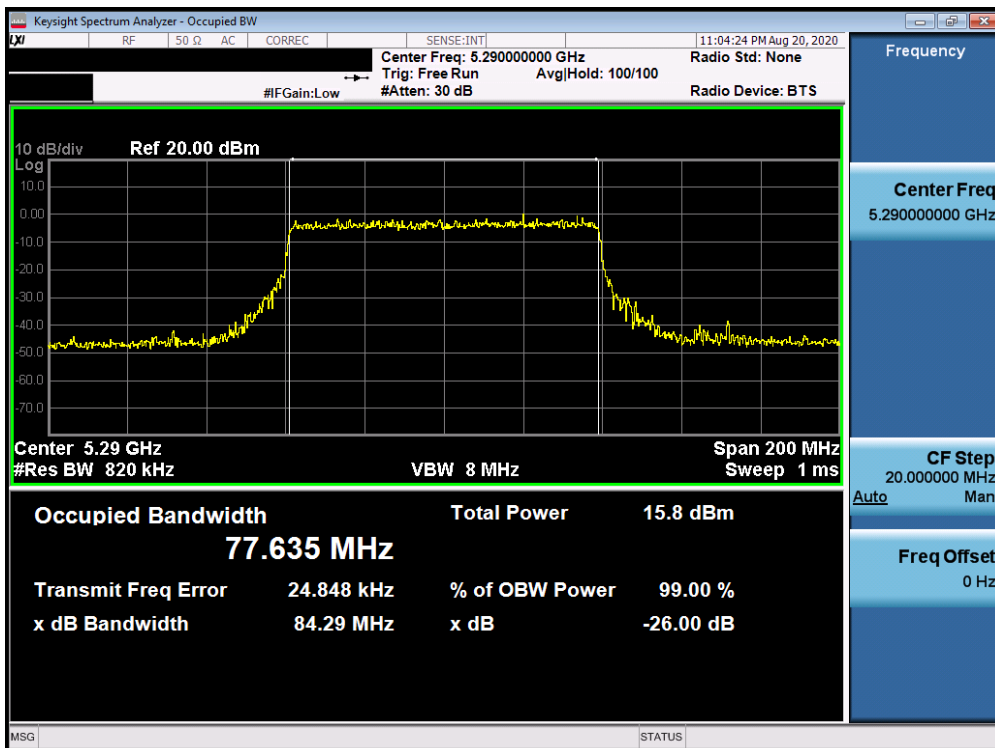


Plot 7-75. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2A) – Ch. 58)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2-PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 56 of 246

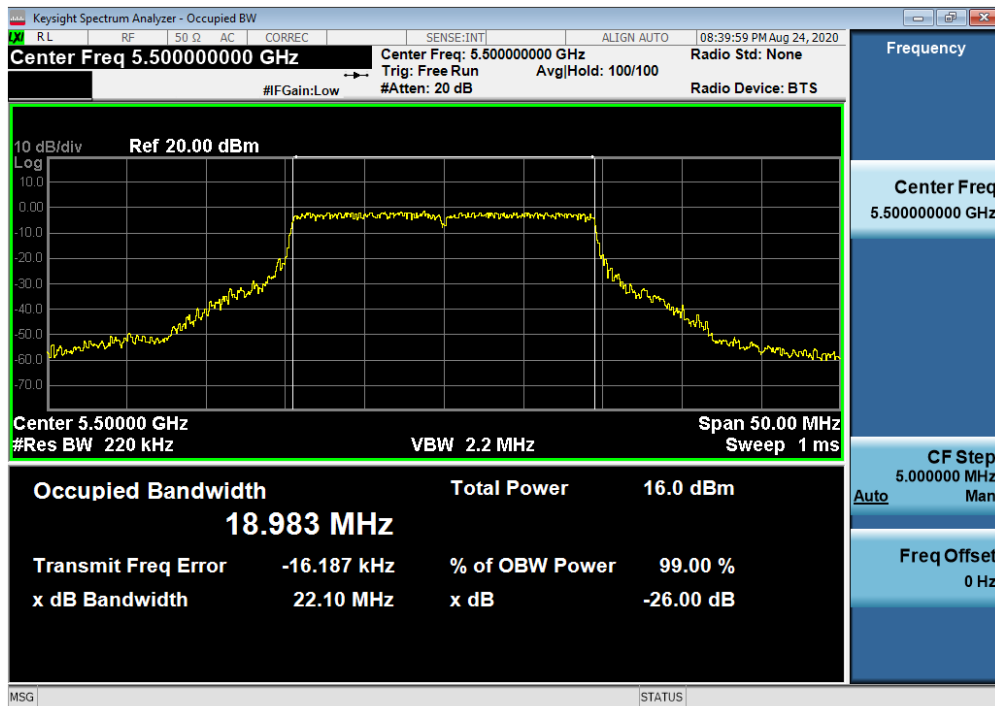


Plot 7-76. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 100)

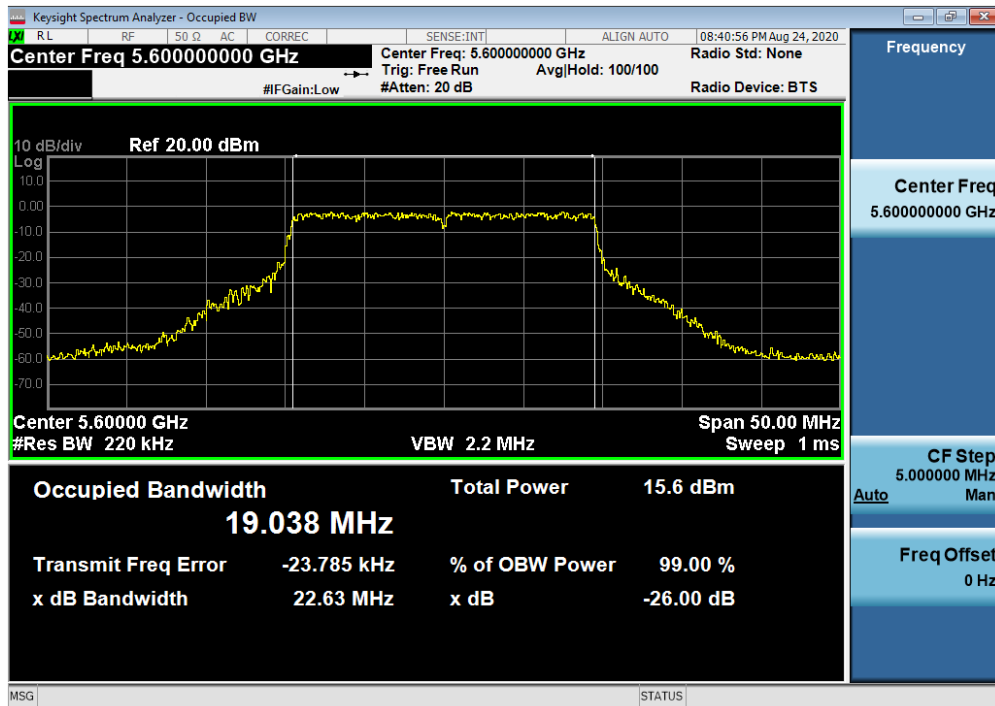


Plot 7-77. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 120)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 57 of 246

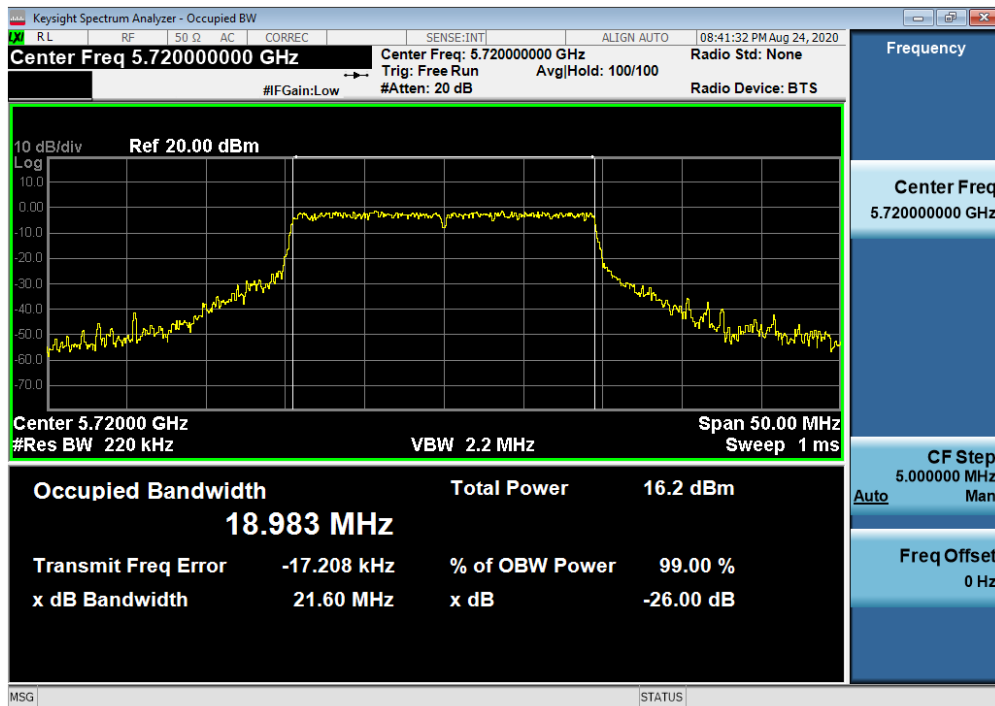


Plot 7-78. 26dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 2C) – Ch. 144)

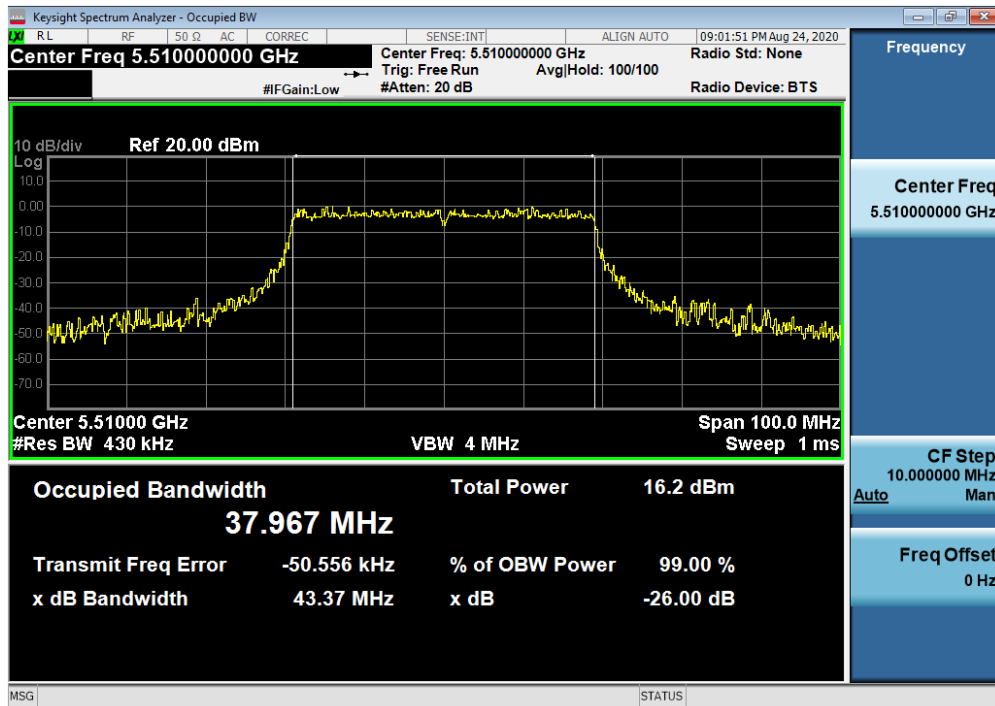


Plot 7-79. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 102)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 58 of 246

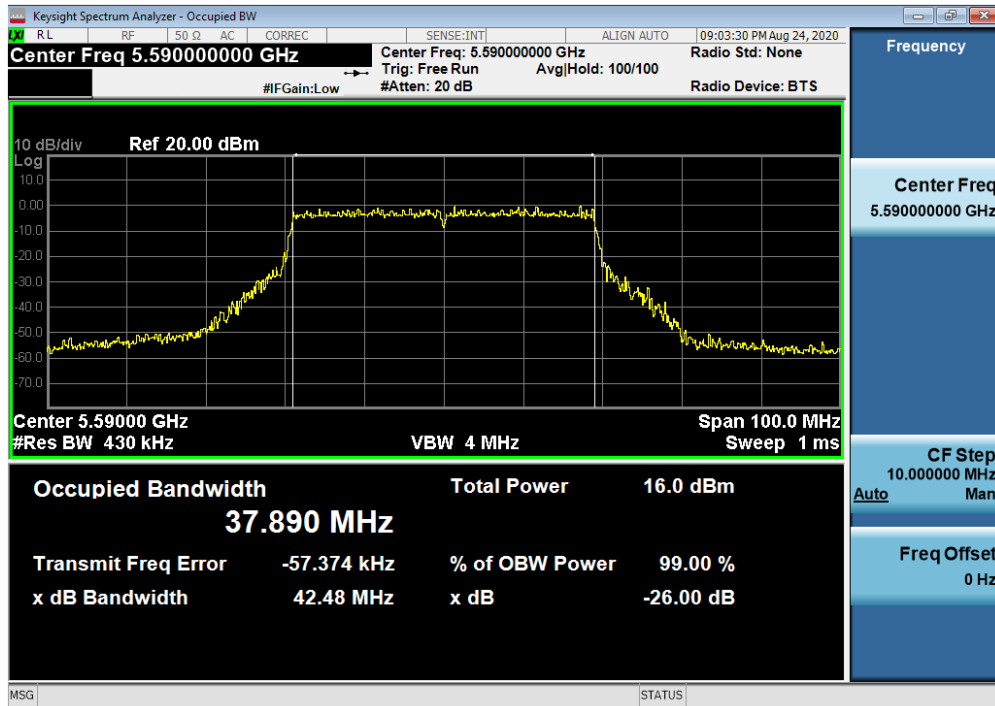


Plot 7-80. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 118)

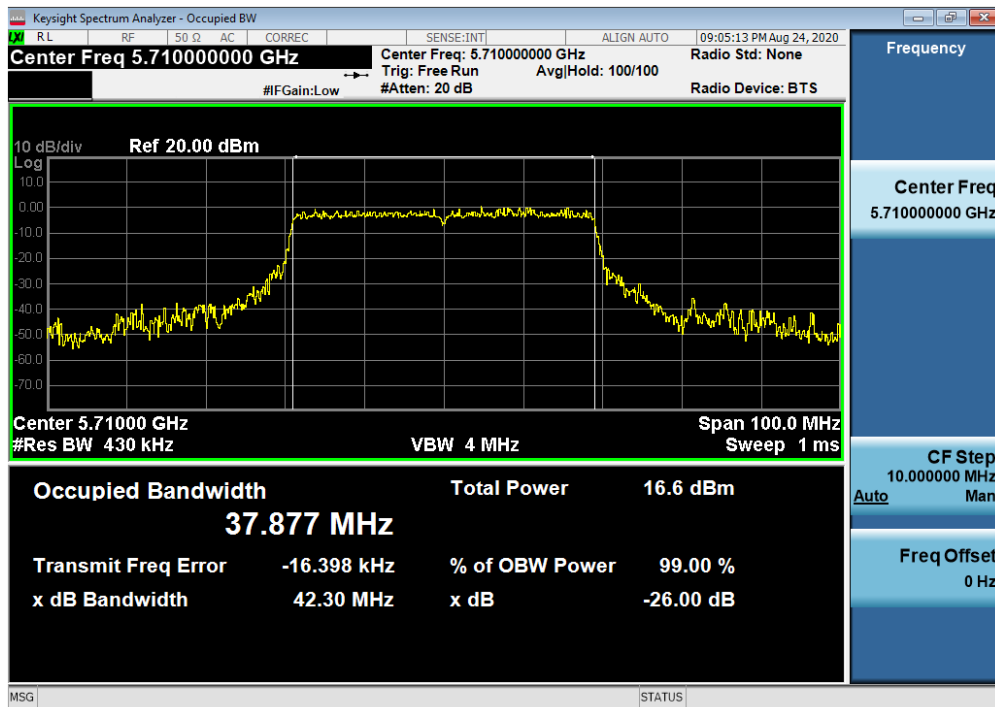


Plot 7-81. 26dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 484 Tones (UNII Band 2C) – Ch. 142)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 59 of 246

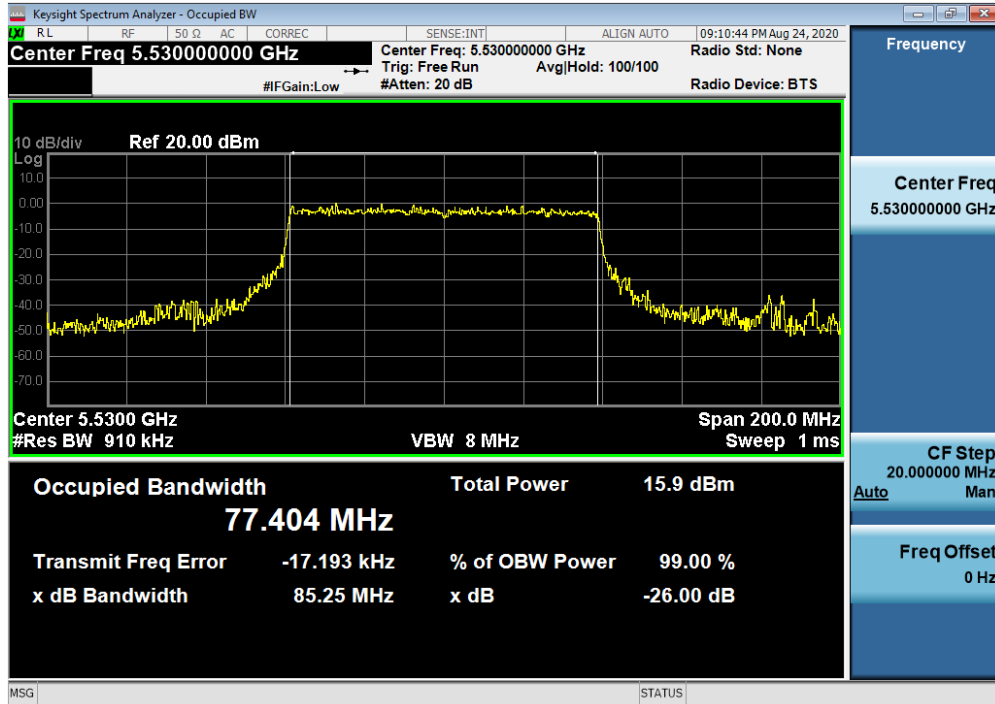


Plot 7-82. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 106)

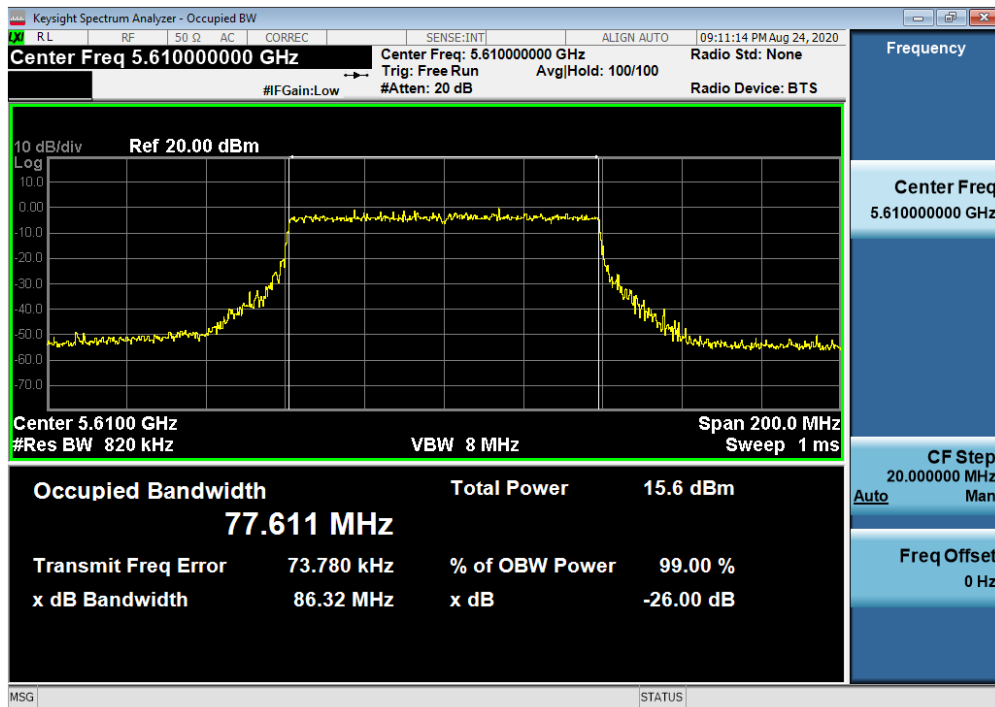

Plot 7-83. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 122)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 60 of 246

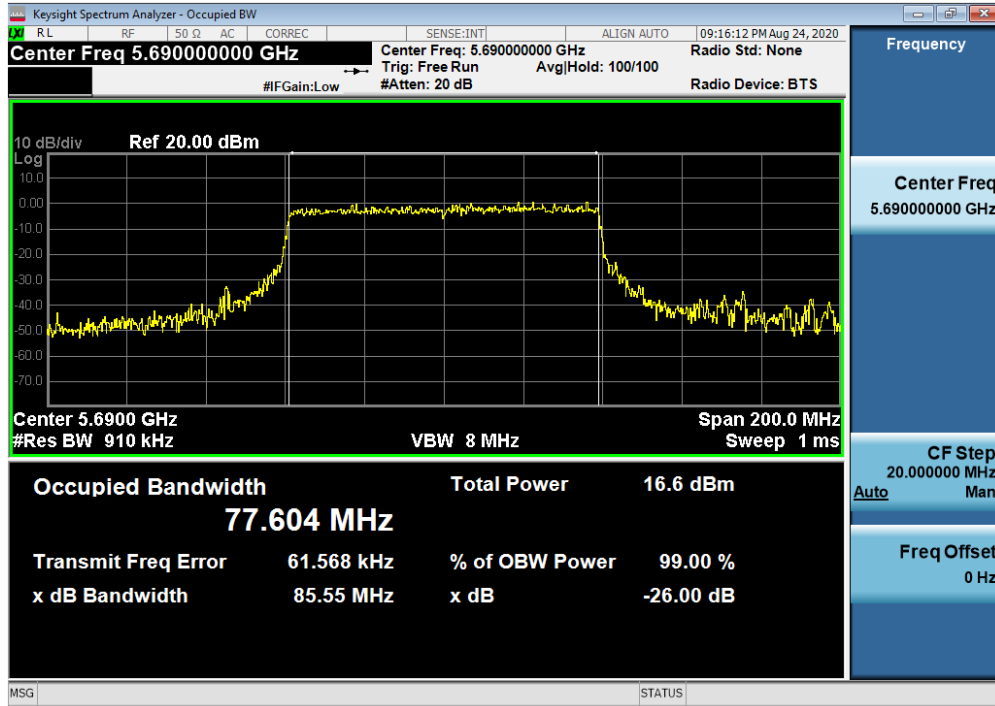

Plot 7-84. 26dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 996 Tones (UNII Band 2C) – Ch. 138)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 61 of 246

7.3 6dB Bandwidth Measurement – 802.11ax OFDMA §15.407 (e); RSS-Gen [6.7]

Test Overview and Limit

The bandwidth at 6dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum duty cycle, at its maximum power control level, as defined in ANSI C63.10-2013 and KDB 789033 D02 v02r01, and at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 6dB bandwidth.

In the 5.725 – 5.850GHz band, the 6dB bandwidth must be ≥ 500 kHz.

Test Procedure Used

ANSI C63.10-2013 – Section 6.9.2
KDB 789033 D02 v02r01 – Section C

Test Settings

1. The signal analyzers' automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.



Figure 7-2. Test Instrument & Measurement Setup

Test Notes

The 6dB Bandwidth measurement for each channel was measured with the RU index showing the highest conducted power.


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 62 of 246

SISO Antenna-1 6 dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	26T	MCS0	2.68
	5785	157	ax (20MHz)	26T	MCS0	2.12
	5825	165	ax (20MHz)	26T	MCS0	2.12
	5755	151	ax (40MHz)	26T	MCS0	2.13
	5775	155	ax (40MHz)	26T	MCS0	#VALUE!
	5785	157	ax (40MHz)	26T	MCS0	#VALUE!
	5795	159	ax (40MHz)	26T	MCS0	2.15
	5805	161	ax (40MHz)	26T	MCS0	#VALUE!
	5815	163	ax (40MHz)	26T	MCS0	#VALUE!
	5775	155	ax (80MHz)	26T	MCS0	2.28

Table 7-6. Conducted Bandwidth Measurements SISO ANT1 (26 Tones)

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 63 of 246

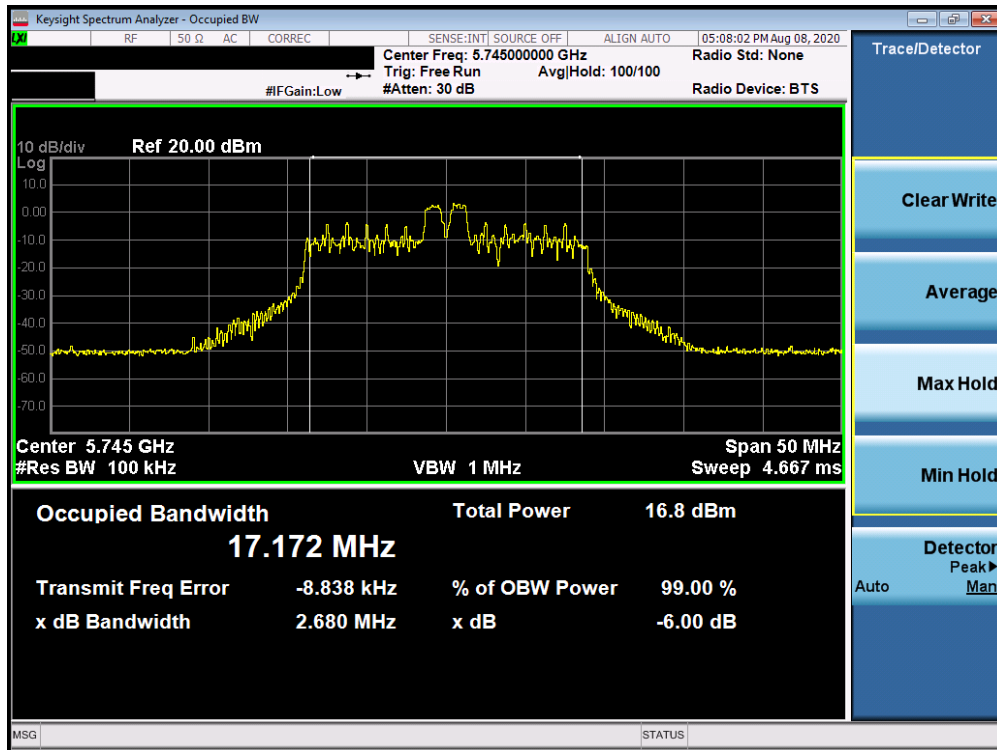


Plot 7-85. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

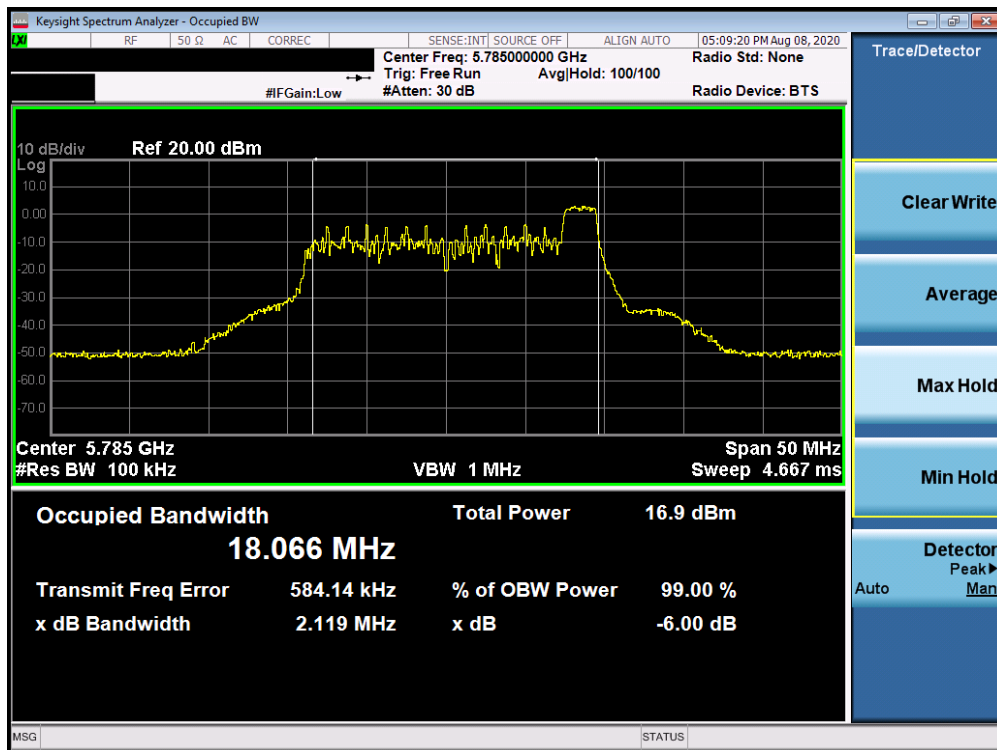


Plot 7-86. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 64 of 246

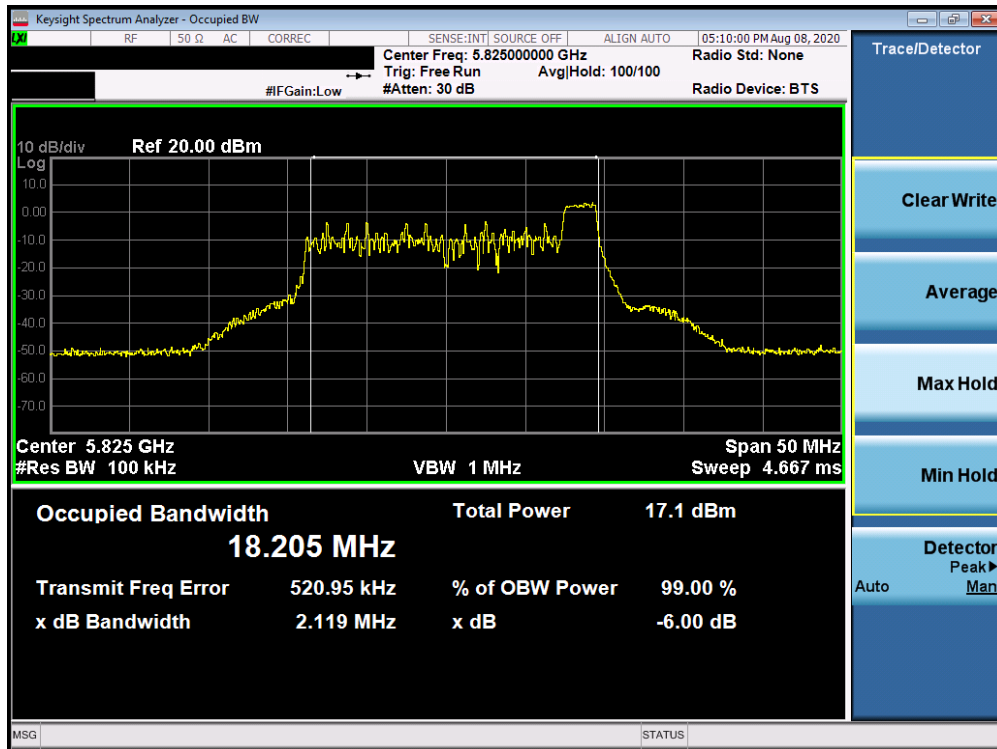


Plot 7-87. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

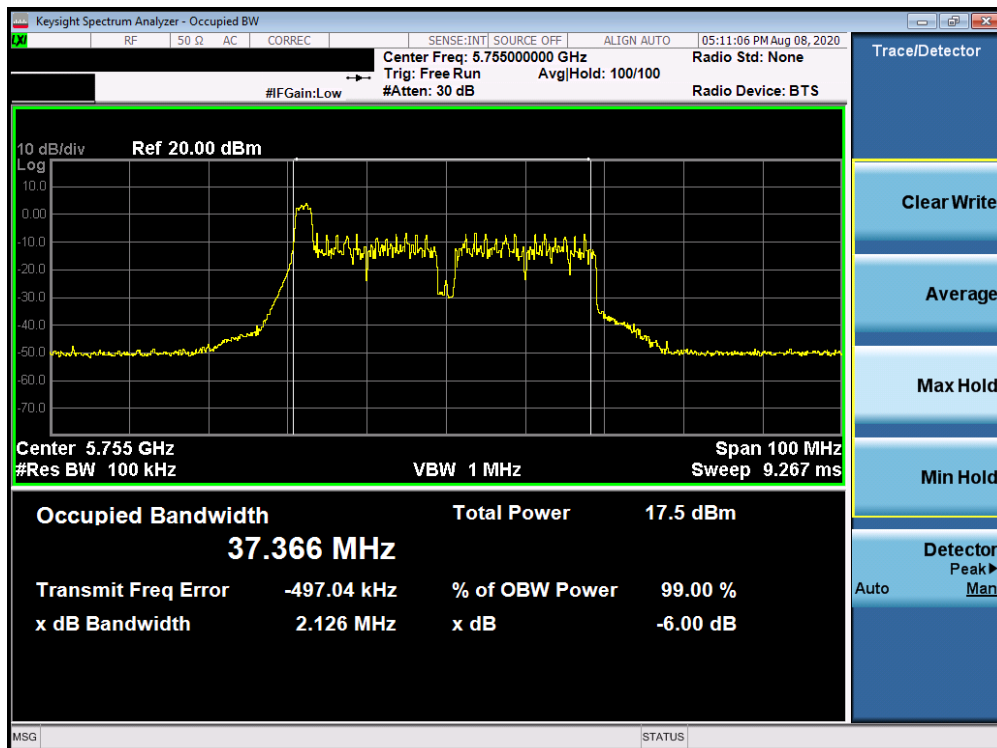


Plot 7-88. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 65 of 246

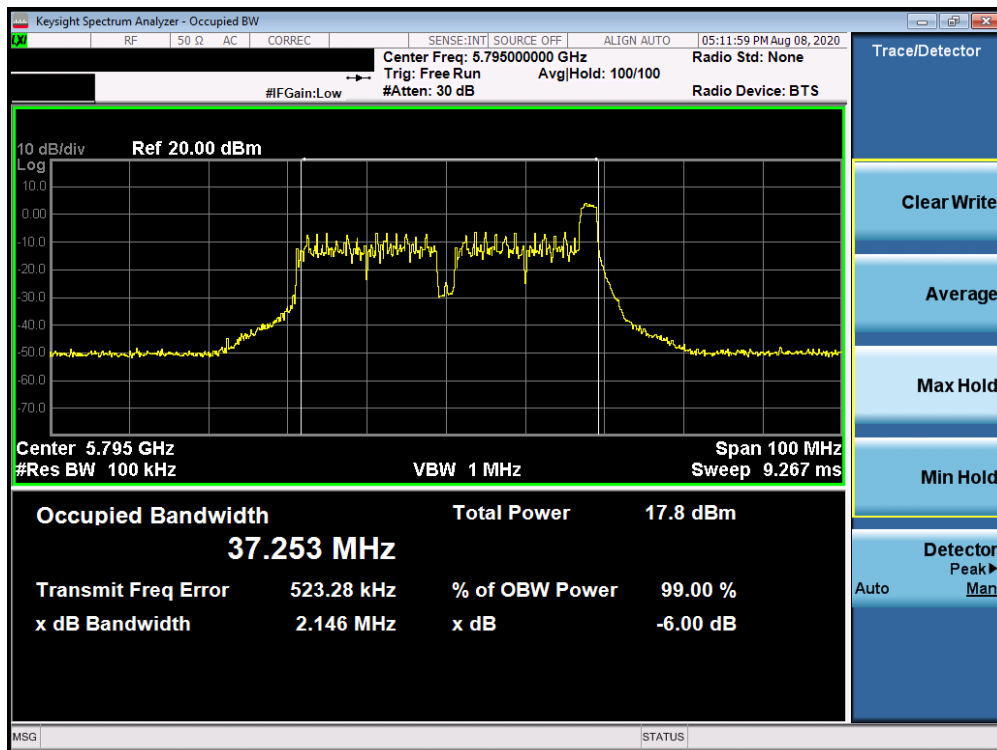

Plot 7-89. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

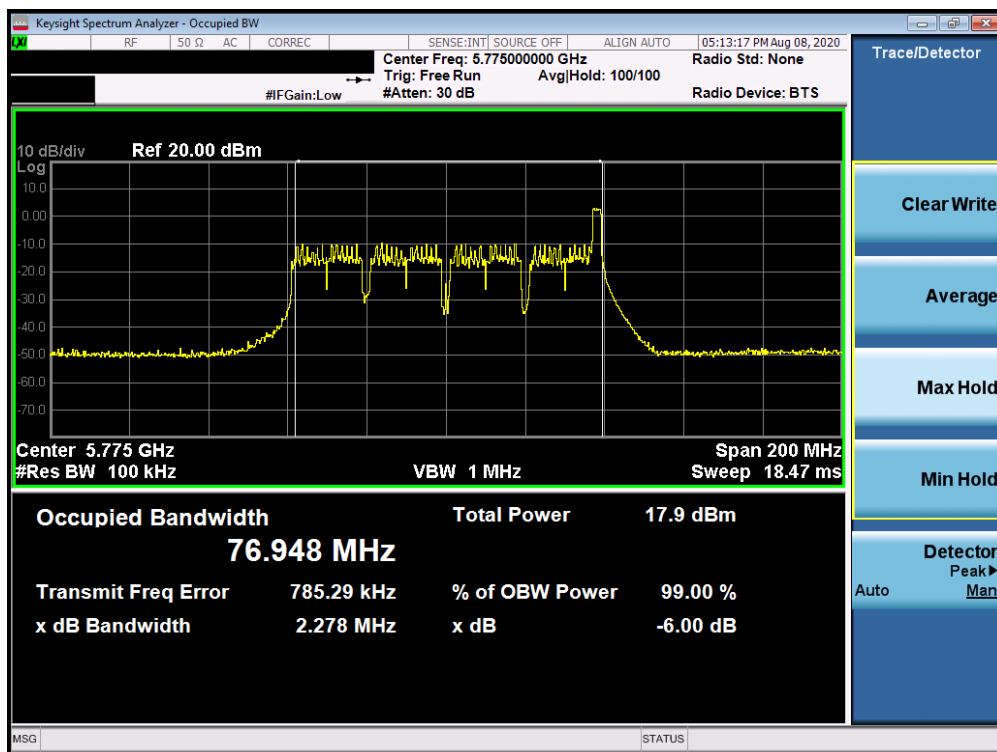

Plot 7-90. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 66 of 246

SISO Antenna-1 6 dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	242T	MCS0	19.11
	5785	157	ax (20MHz)	242T	MCS0	19.16
	5825	165	ax (20MHz)	242T	MCS0	19.03
	5755	151	ax (40MHz)	484T	MCS0	37.97
	5795	159	ax (40MHz)	484T	MCS0	38.08
	5775	155	ax (80MHz)	996T	MCS0	78.16

Table 7-7. Conducted Bandwidth Measurements SISO ANT1 (Full Tones)

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 67 of 246

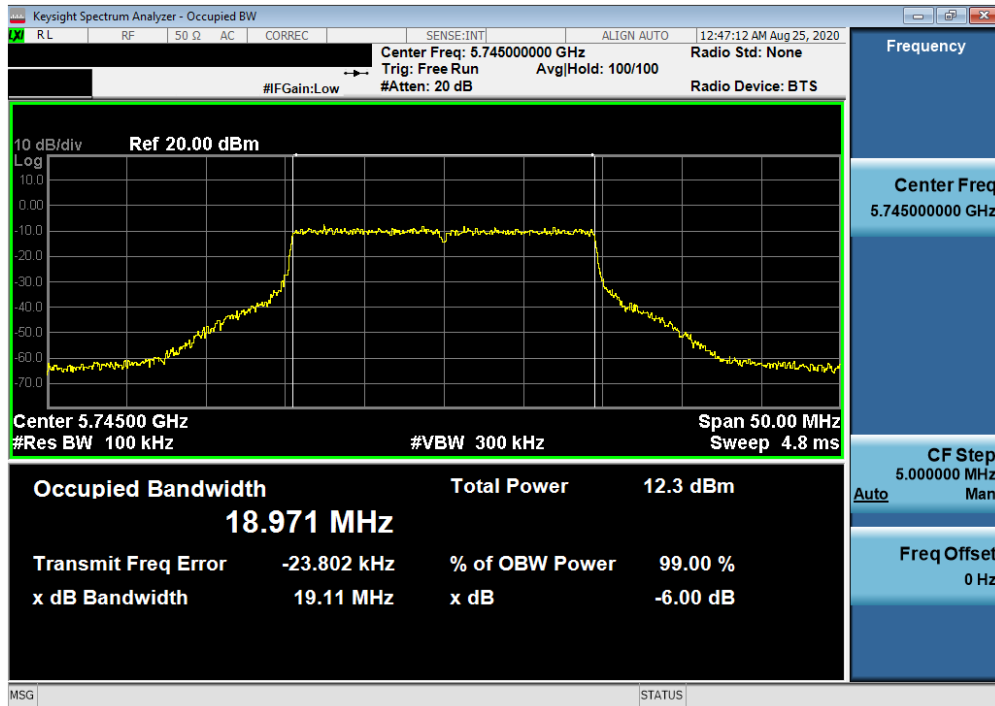


Plot 7-91. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 149)

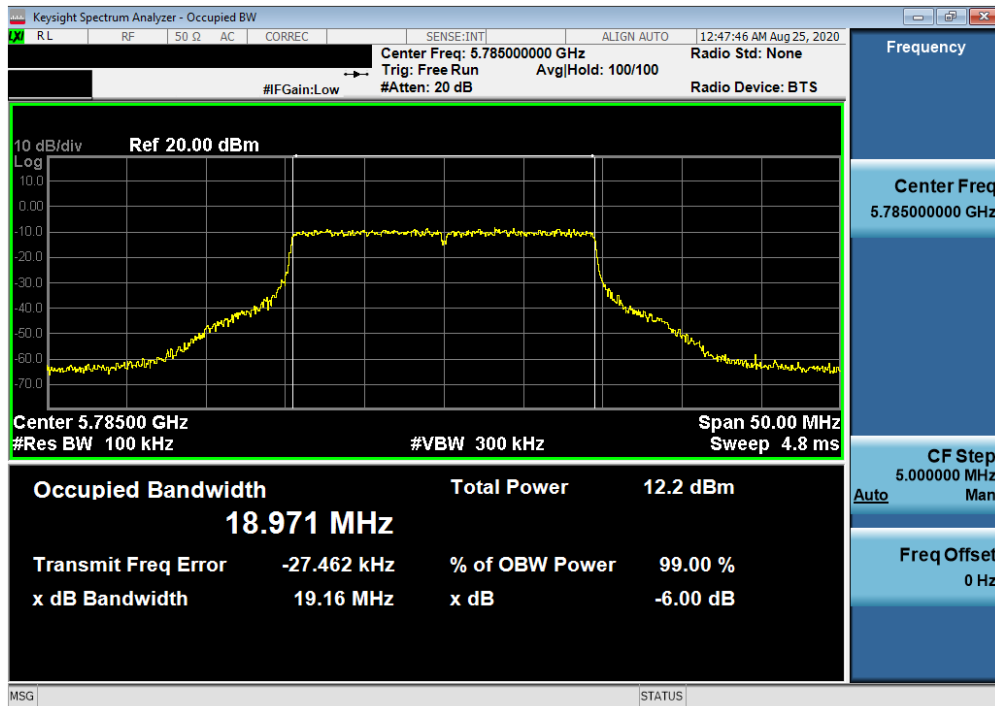


Plot 7-92. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 68 of 246

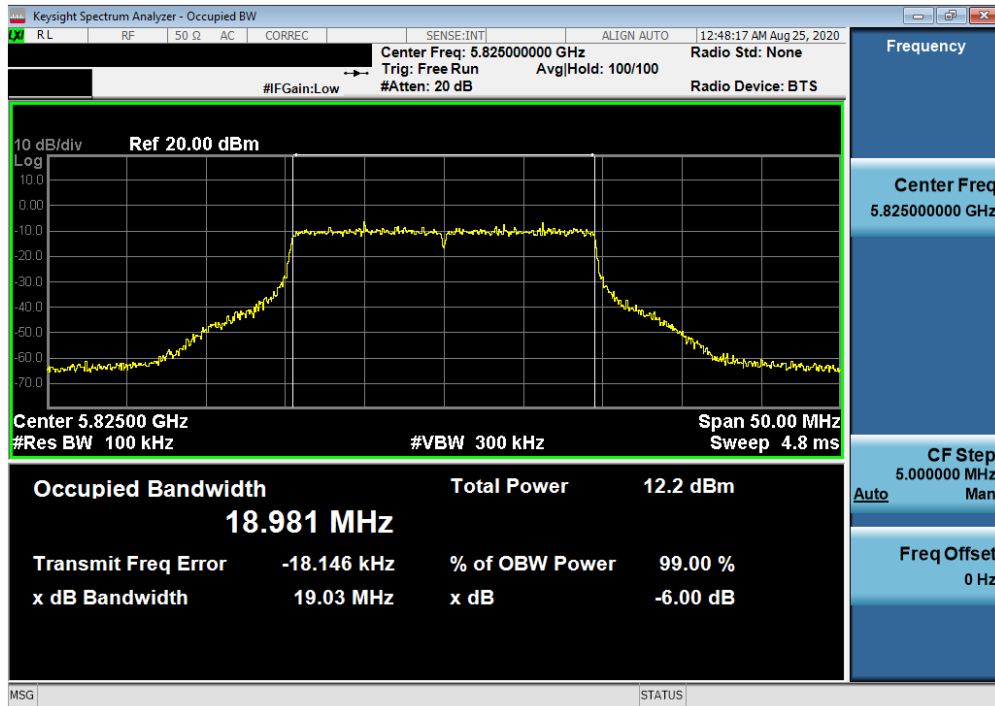


Plot 7-93. 6dB Bandwidth Plot SISO ANT1 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 165)

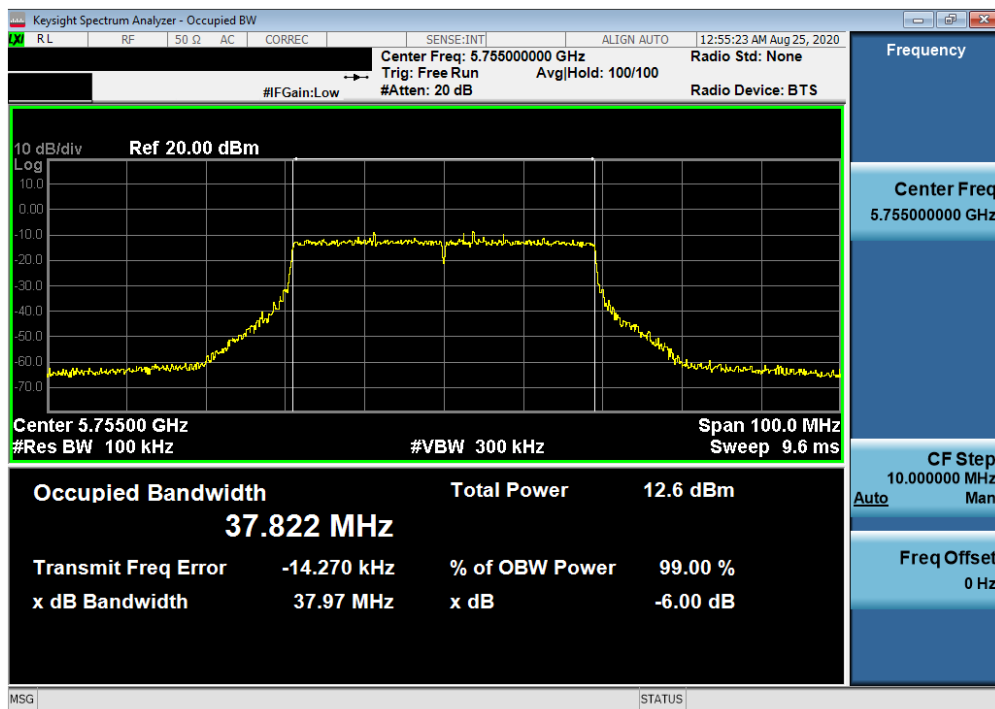


Plot 7-94. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 151)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 69 of 246

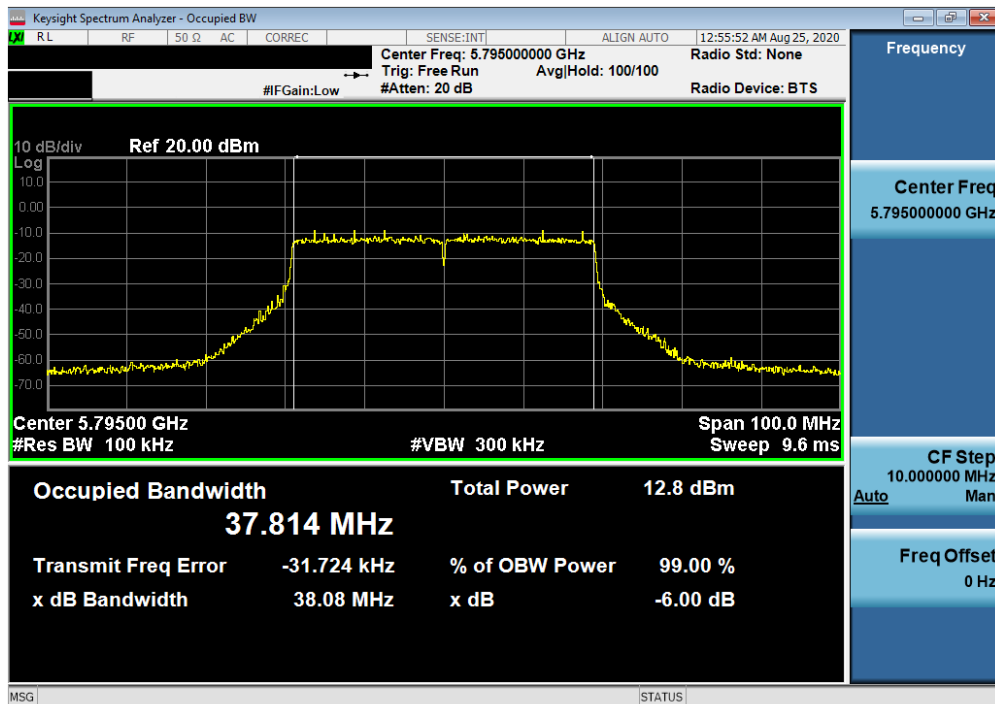

Plot 7-95. 6dB Bandwidth Plot SISO ANT1 (40MHz BW 802.11ax – 484 Tones (UNII Band 3) – Ch. 159)

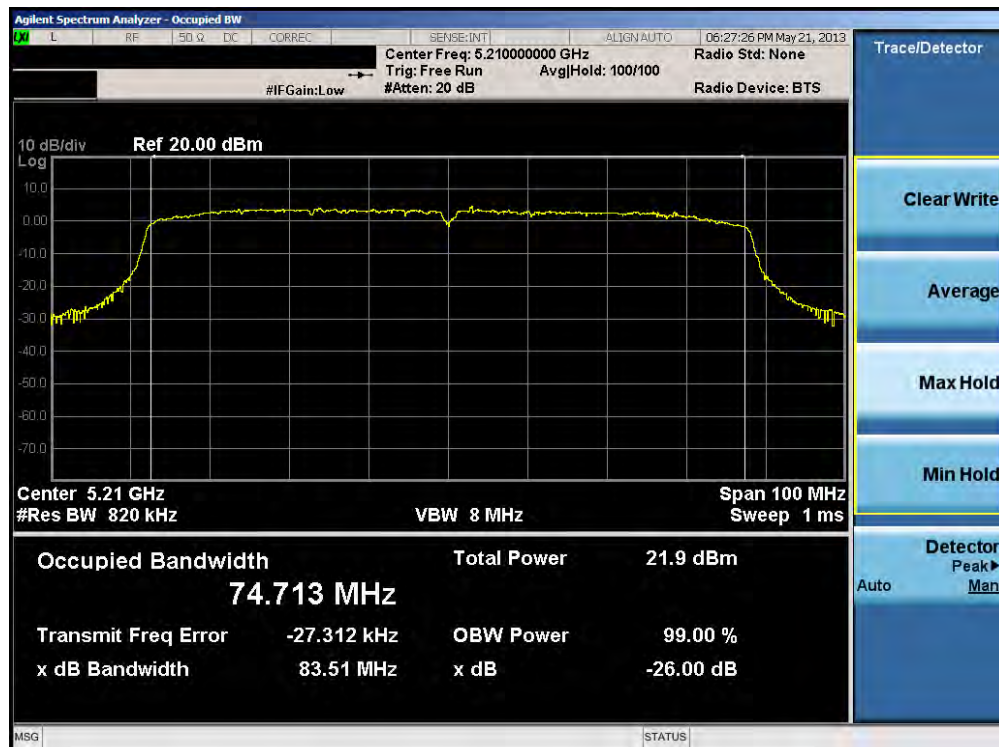

Plot 7-96. 6dB Bandwidth Plot SISO ANT1 (80MHz BW 802.11ax – 996 Tones (UNII Band 3) – Ch. 155)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 70 of 246

SISO Antenna-2 6dB Bandwidth Measurements (26 Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	26T	MCS0	2.15
	5785	157	ax (20MHz)	26T	MCS0	2.71
	5825	165	ax (20MHz)	26T	MCS0	2.72
	5755	151	ax (40MHz)	26T	MCS0	2.12
	5775	155	ax (40MHz)	26T	MCS0	
	5785	157	ax (40MHz)	26T	MCS0	#NUM!
	5795	159	ax (40MHz)	26T	MCS0	2.15
	5805	161	ax (40MHz)	26T	MCS0	#NUM!
	5815	163	ax (40MHz)	26T	MCS0	#NUM!
	5775	155	ax (80MHz)	26T	MCS0	2.24

Table 7-8. Conducted Bandwidth Measurements SISO ANT2 (26 Tones)

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 71 of 246

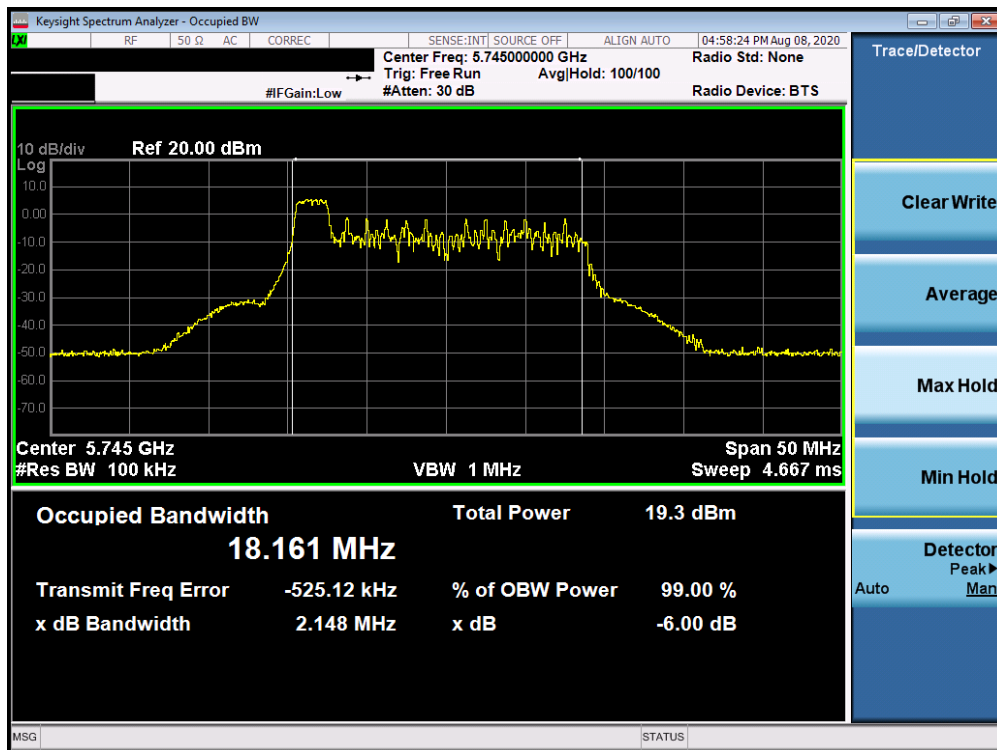


Plot 7-97. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 149)

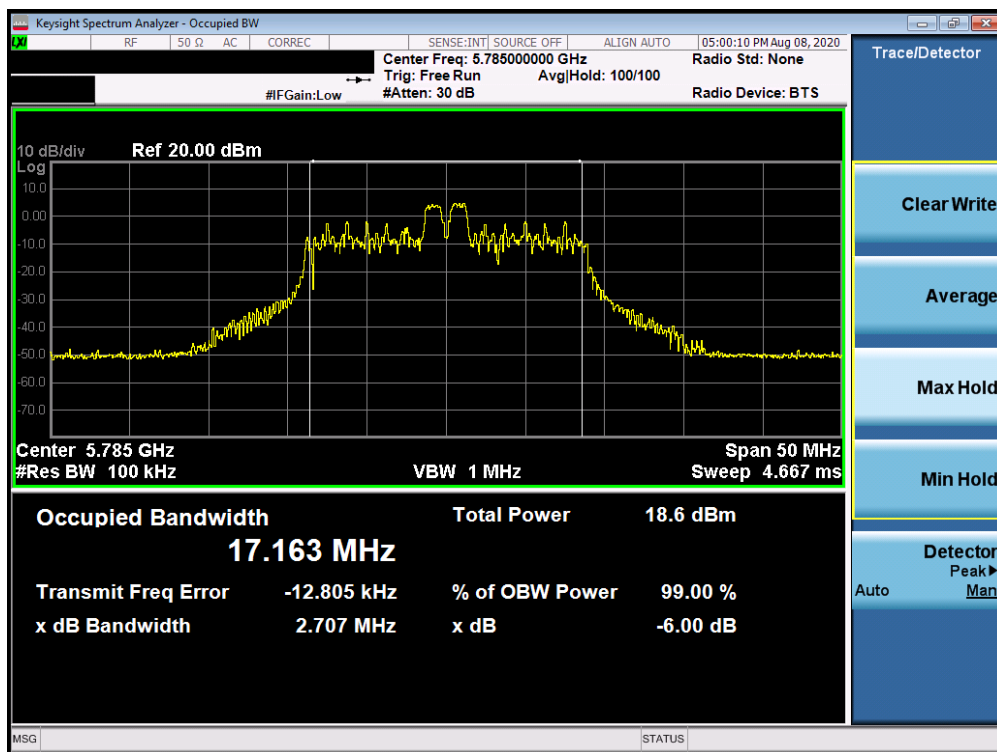


Plot 7-98. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 157)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 72 of 246

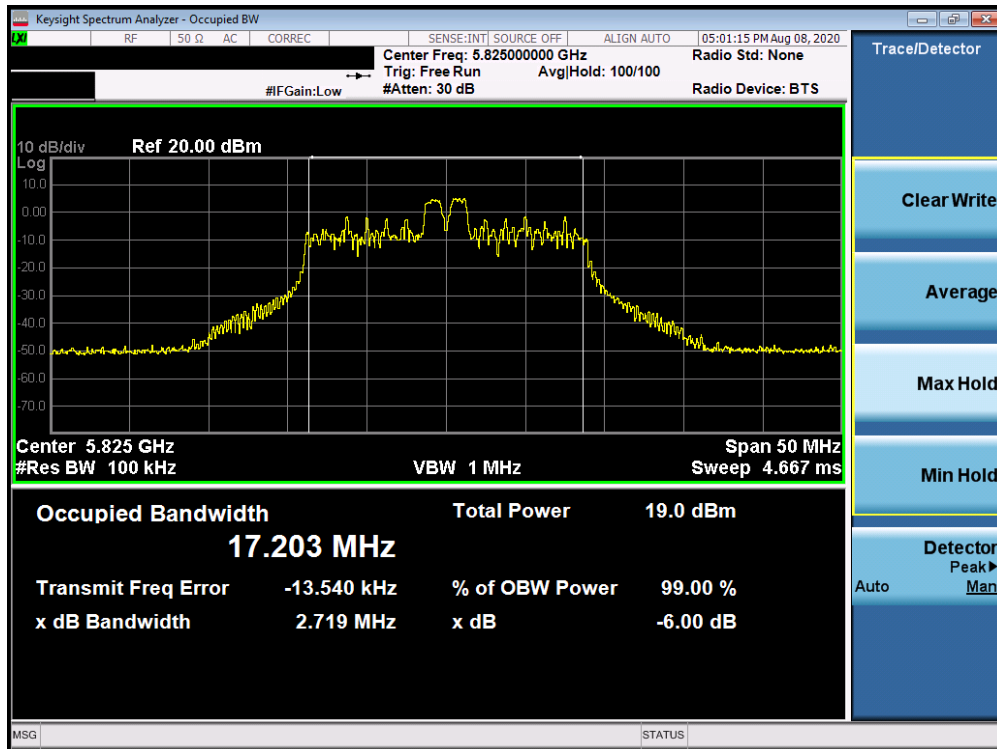


Plot 7-99. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 165)

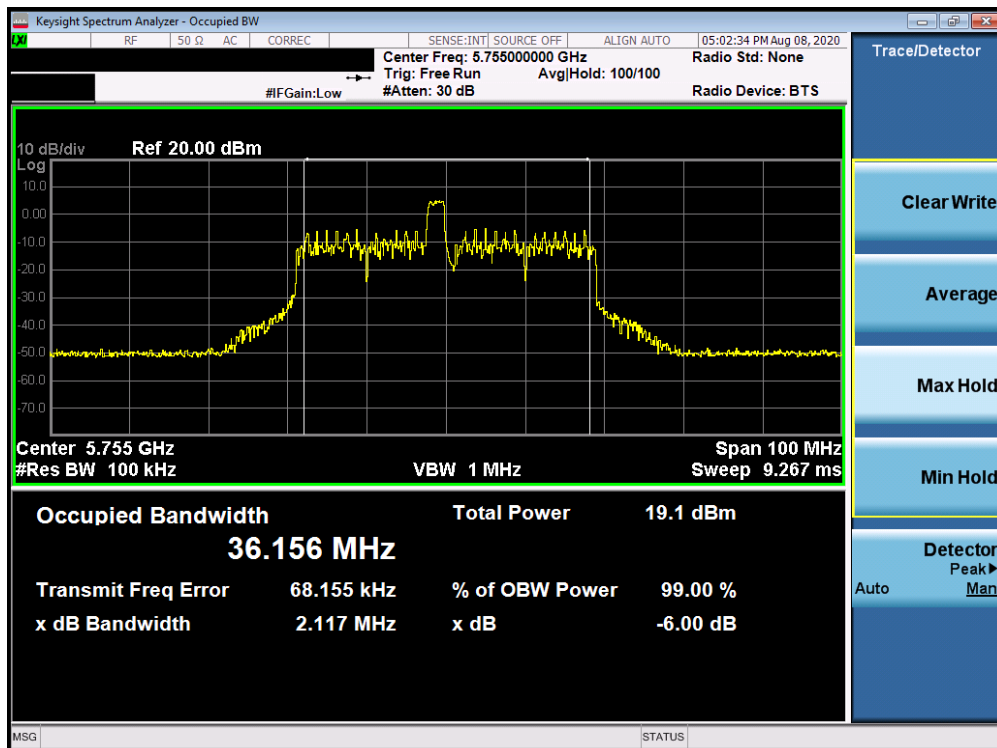


Plot 7-100. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 151)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 73 of 246

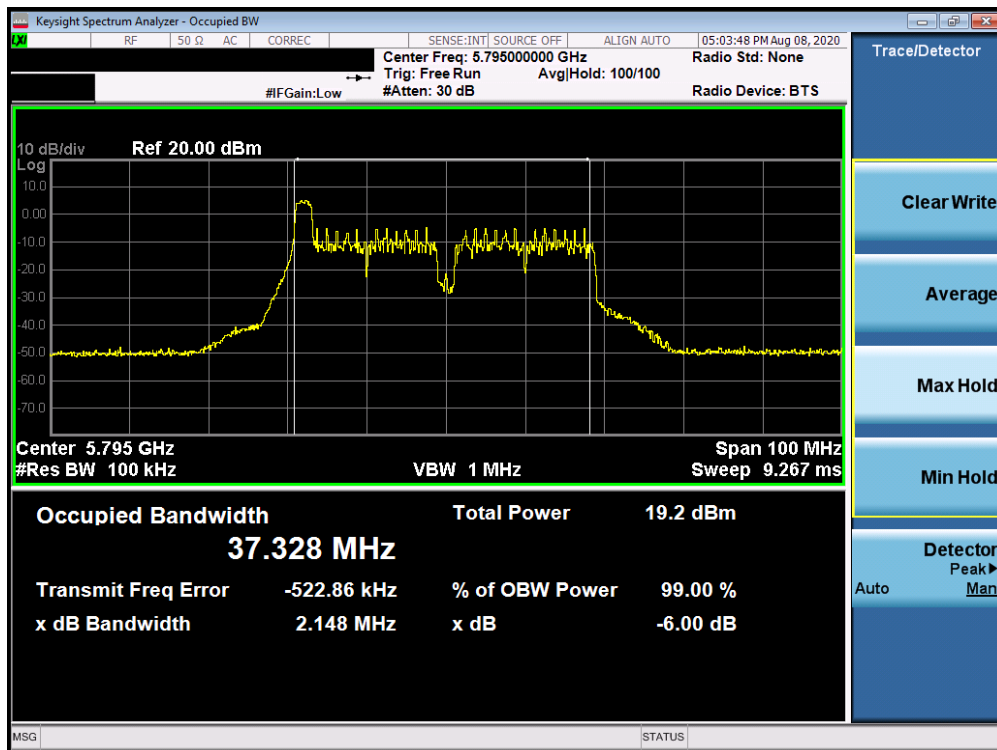

Plot 7-101. 6dB Bandwidth Plot SISO ANT2 (40MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 159)

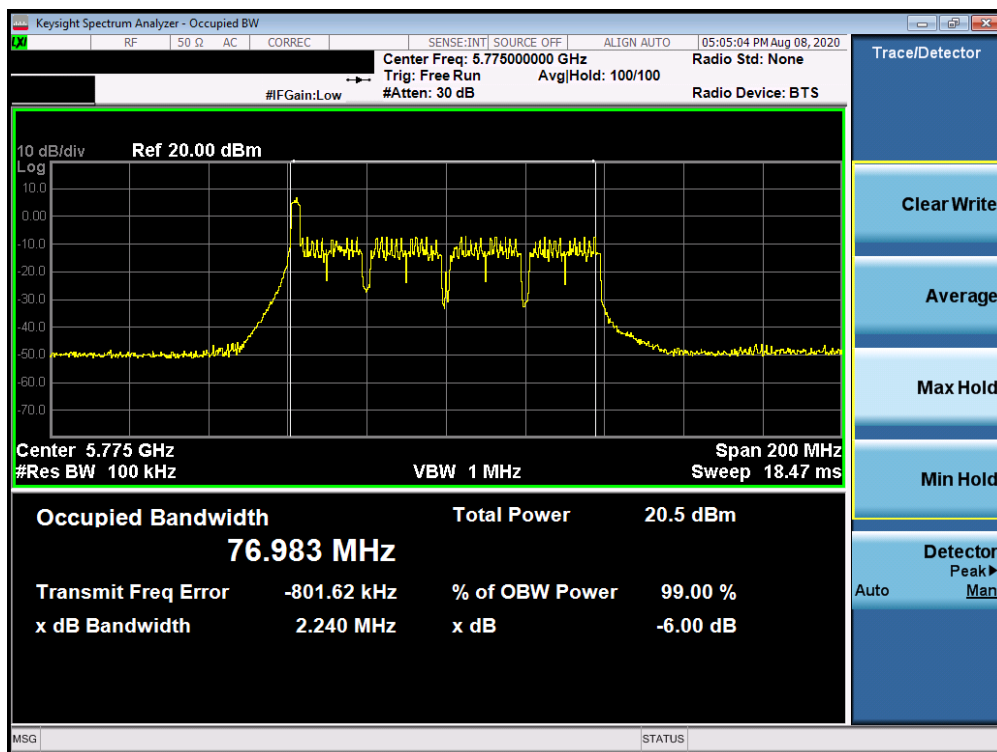

Plot 7-102. 6dB Bandwidth Plot SISO ANT2 (80MHz BW 802.11ax – 26 Tones (UNII Band 3) – Ch. 155)


FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 74 of 246

SISO Antenna-2 6dB Bandwidth Measurements (Full Tones)


	Frequency [MHz]	Channel No.	802.11 Mode	Tones	Data Rate [Mbps]	Measured 6dB Bandwidth [MHz]
Band 3	5745	149	ax (20MHz)	242T	MCS0	19.04
	5785	157	ax (20MHz)	242T	MCS0	19.05
	5825	165	ax (20MHz)	242T	MCS0	19.11
	5755	151	ax (40MHz)	484T	MCS0	38.09
	5795	159	ax (40MHz)	484T	MCS0	38.20
	5775	155	ax (80MHz)	996T	MCS0	78.17

Table 7-9. Conducted Bandwidth Measurements SISO ANT2 (Full Tones)

FCC ID: PY7-57441Y		MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 75 of 246

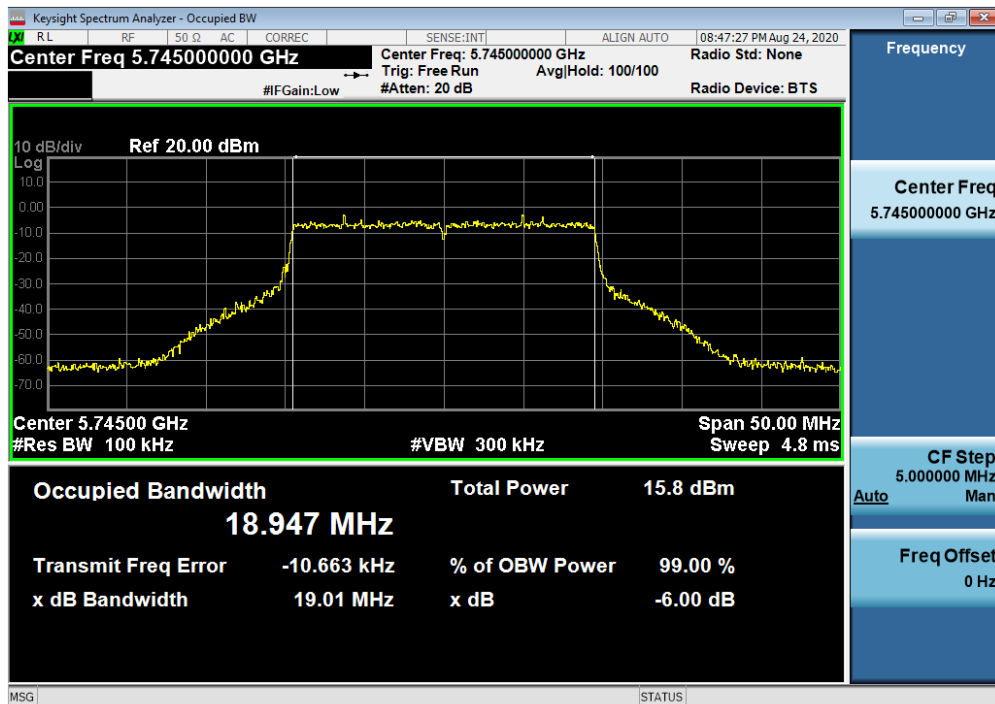

Plot 7-103. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 149)

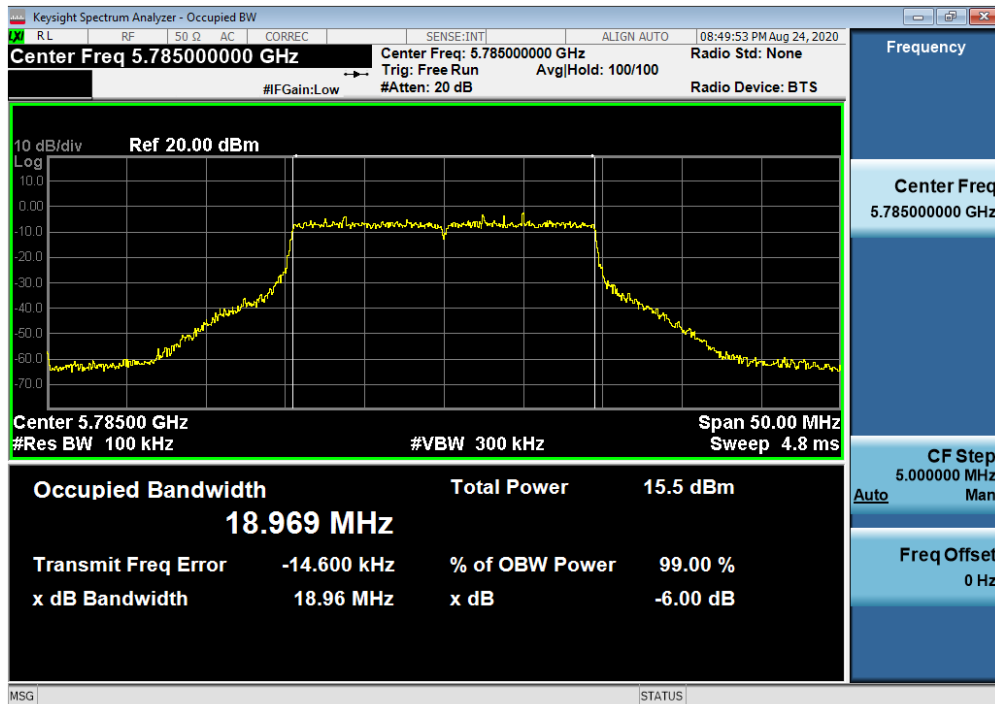

Plot 7-104. 6dB Bandwidth Plot SISO ANT2 (20MHz BW 802.11ax – 242 Tones (UNII Band 3) – Ch. 157)

FCC ID: PY7-57441Y	PCTEST Proud to be part of element	MEASUREMENT REPORT (CERTIFICATION)	SONY	Approved by: Quality Manager
Test Report S/N: 1M2007070106-06-R2.PY7	Test Dates: 7/29 - 9/18/2020	EUT Type: Portable Handset		Page 76 of 246