

FCC RADIO TEST REPORT

FCC ID : PY7-57442Y
Equipment : GSM/WCDMA/LTE Phone+Bluetooth,
DTS/UNII a/b/g/n/ac and NFC
Brand Name : Sony
Applicant : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Manufacturer : Sony Mobile Communications Inc.
4-12-3 Higashi-Shinagawa, Shinagawa-ku,
Tokyo, 140-0002, Japan
Standard : 47 CFR Part 2, 22(H), 24(E), 27

The product was received on Aug. 30, 2018 and testing was started from Sep. 28, 2018 and completed on Nov. 24, 2018. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Jones Tsai

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report	3
Summary of Test Result	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Emission Designator	6
1.4 Testing Location	7
1.5 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test.....	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels.....	11
3 Conducted Test Items	13
3.1 Measuring Instruments	13
3.2 Conducted Output Power and ERP/EIRP.....	14
3.3 Peak-to-Average Ratio	15
3.4 Occupied Bandwidth.....	16
3.5 Conducted Band Edge.....	17
3.6 Conducted Spurious Emission	19
3.7 Frequency Stability	20
4 Radiated Test Items.....	21
4.1 Measuring Instruments	21
4.2 Radiated Spurious Emission.....	22
5 List of Measuring Equipment.....	23
6 Uncertainty of Evaluation.....	25
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of ERP/EIRP and Radiated Test	
Appendix C. Verification and Validation of Using Mobile Country Code	



History of this test report

Report No.	Version	Description	Issued Date
FG882920-01B	01	Initial issue of report	Dec. 07, 2018

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
	§22.913 (a)(2)	Effective Radiated Power (Band 5)	Pass	
	§24.232 (c) §27.50 (h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7) (Band 41)		
3.3	§24.232 (d)	Peak-to-Average Ratio	Pass	-
3.4	§2.1049	Occupied Bandwidth	Reporting only	-
3.5	§2.1051 §22.917 (a) §24.238 (a)	Conducted Band Edge Measurement (Band 2) (Band 5)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Band Edge Measurement (Band 7) (Band 41)		
3.6	§2.1051 §22.917 (a) §24.238 (a)	Conducted Spurious Emission (Band 2) (Band 5)	Pass	-
	§2.1051 §27.53 (m)(4)	Conducted Spurious Emission (Band 7) (Band 41)		
3.7	§2.1055 §22.355 §24.235 §27.54	Frequency Stability Temperature & Voltage	Pass	-
4.2	§2.1053 §22.917 (a) §24.238 (a)	Radiated Spurious Emission (Band 2) (Band 5)	Pass	Under limit 3.16 dB at 10368.000 MHz
	§2.1053 §27.53 (m)(4)	Radiated Spurious Emission (Band 7) (Band 41)		

Reviewed by: Wii Chang

Report Producer: Natasha Hsieh

1 General Description

1.1 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII a/b/g/n/ac, FM Receiver, NFC, and GNSS.

Standards-related Product Specification	
Antenna Type	Main 1 Antenna : PIFA Antenna Main 2 Antenna : PIFA Antenna

EUT Information List			
HW Version	SW Version	S/N	Performed Test Item
A	1.129	CQ30015WUL	Conducted Measurement
		CQ3001BNHG	Radiated Spurious Emission ERP/EIRP Test

Accessory List	
AC Adapter	Model Name: UCH32
	S/N: 6218W30200038
Earphone	Model Name: MH410c
	S/N: N/A
USB Cable	Model Name: UCB24
	S/N: N/A

Note:

1. Above EUT list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test, and the serial number of each type of accessories is listed in each section of this report. .
3. For other wireless features of this EUT, test report will be issued separately.

1.2 Modification of EUT

No modifications are made to the EUT during all test items.



1.3 Emission Designator

LTE Band 2		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1850.7 ~ 1909.3	1M10G7D	-	0.1816	1M09W7D	-	0.1581	1M10W7D	-	0.1242
3	1851.5 ~ 1908.5	2M73G7D	-	0.1807	2M73W7D	-	0.1589	2M75W7D	-	0.1242
5	1852.5 ~ 1907.5	4M52G7D	-	0.1824	4M50W7D	-	0.1589	4M50W7D	-	0.1242
10	1855.0 ~ 1905.0	9M07G7D	0.0079	0.1854	9M03W7D	-	0.1629	9M01W7D	-	0.1268
15	1857.5 ~ 1902.5	13M4G7D	-	0.1832	13M5W7D	-	0.1596	13M5W7D	-	0.1253
20	1860.0 ~ 1900.0	18M5G7D	-	0.1901	18M5W7D	-	0.1614	18M4W7D	-	0.1262
LTE Band 5		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	824.7 ~ 848.3	1M09G7D	-	0.0705	1M10W7D	-	0.0600	1M10W7D	-	0.0471
3	825.5 ~ 847.5	2M74G7D	-	0.0703	2M75W7D	-	0.0604	2M74W7D	-	0.0475
5	826.5 ~ 846.5	4M52G7D	-	0.0701	4M51W7D	-	0.0605	4M51W7D	-	0.0475
10	829.0 ~ 844.0	9M11G7D	0.0148	0.0706	9M05W7D	-	0.0612	9M07W7D	-	0.0483
LTE Band 7		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2502.5 ~ 2567.5	4M52G7D	-	0.2851	4M52W7D	-	0.2360	4M52W7D	-	0.1879
10	2505.0 ~ 2565.0	9M01G7D	0.0050	0.2871	9M01W7D	-	0.2371	9M07W7D	-	0.1871
15	2507.5 ~ 2562.5	13M4G7D	-	0.2864	13M5W7D	-	0.2366	13M5W7D	-	0.1879
20	2510.0 ~ 2560.0	18M5G7D	-	0.2877	18M5W7D	-	0.2371	18M5W7D	-	0.1879
LTE Band 41		QPSK			16QAM			64QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
5	2557.5~2652.5	4M51G7D	-	0.2767	4M51W7D	-	0.2265	4M53W7D	-	0.1694
10	2560.0~2650.0	9M05G7D	0.0044	0.2858	9M09W7D	-	0.2333	9M07W7D	-	0.1758
15	2562.5~2647.5	13M5G7D	-	0.2773	13M5W7D	-	0.2360	13M5W7D	-	0.1782
20	2565.0~2645.0	18M6G7D	-	0.2831	18M6W7D	-	0.2366	18M4W7D	-	0.1782

1.4 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1190 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH05-HY; 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ 47 CFR Part 2, 22(H), 24(E), 27
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.


For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane for Band 7, Y plane for Band 5 and Band 41, Z plane for Band 2) were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	2						v	v	v	v	v		v	v	v	v
	5				v	-	-	v	v	v	v		v	v	v	v
	7	-	-				v	v	v	v	v		v	v	v	v
	41	-	-				v	v	v	v	v		v	v	v	v
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v	-	-	v	v	v			v	v	v	v
	7	-	-	v	v	v	v	v	v	v			v	v	v	v
	41	-	-	v	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v	v		v	v		v
	5	v	v	v	v	-	-	v	v	v	v		v	v		v
	7	-	-	v	v	v	v	v	v	v	v		v	v		v
	41	-	-	v	v	v	v	v	v	v	v		v	v		v
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v	-	-	v	v	v	v			v	v	v
	7	-	-	v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Frequency Stability	2				v			v					v		v	
	5				v	-	-	v					v		v	
	7	-	-		v			v					v		v	
	41	-	-		v			v					v		v	



Test Items	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
E.R.P / E.I.R.P	2	v	v	v	v	v	v	v	v	v	v			v	v	v
	5	v	v	v	v	-	-	v	v	v	v			v	v	v
	7	-	-	v	v	v	v	v	v	v	v			v	v	v
	41	-	-	v	v	v	v	v	v	v	v			v	v	v
Radiated Spurious Emission	2	Worst Case												v	v	v
	5	Worst Case												v	v	v
	7	-	-	v	v	v	v	v			v			v	v	v
	41	-	-	v	v	v	v	v			v			v	v	v
Remark	1. The mark "v " means that this configuration is chosen for testing 2. The mark "- " means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

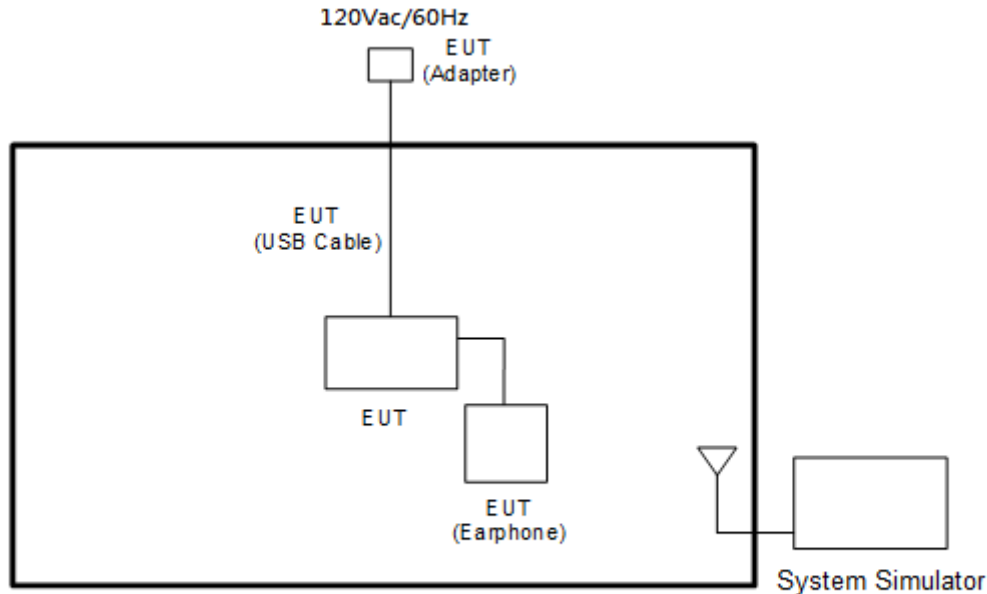

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

$$= 4.2 + 10 = 14.2 \text{ (dB)}$$

2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3



LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5

LTE Band 41 2555MHz ~ 2655MHz Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	40340	40740	41140
	Frequency	2565.0	2605.0	2645.0
15	Channel	40315	40740	41165
	Frequency	2562.5	2605.0	2647.5
10	Channel	40290	40740	41190
	Frequency	2560.0	2605.0	2650.0
5	Channel	40265	40740	41215
	Frequency	2557.5	2605.0	2652.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power



3.1.3 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

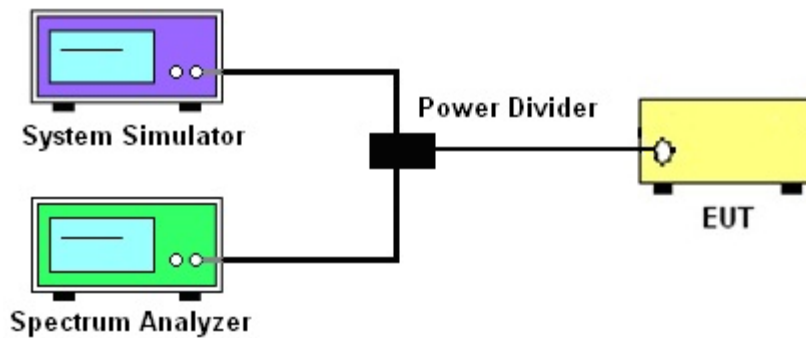

3.1.4 Frequency Stability

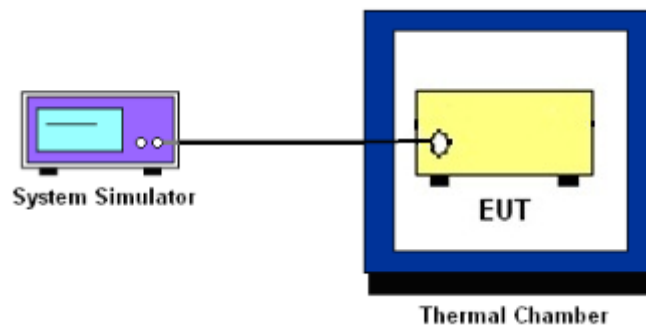

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for LTE Band 5.

The EIRP of mobile transmitters must not exceed 2 Watts for LTE Band 2 and Band 7 and Band 41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.7.1

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio.

3.4 Occupied Bandwidth

3.4.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 4.2

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.5 Conducted Band Edge

3.5.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



3.5.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
5. Set spectrum analyzer with RMS detector.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. Checked that all the results comply with the emission limit line.
The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
8. For LTE Band 7, 41, the other 40 dB, and 55 dB have additionally applied same calculation above.

3.6 Conducted Spurious Emission

3.6.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7, 41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.0.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
10. For Band 7, 41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

3.7 Frequency Stability

3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

24.235 & 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.1.1 Test Setup

For radiated test from 30MHz to 1GHz

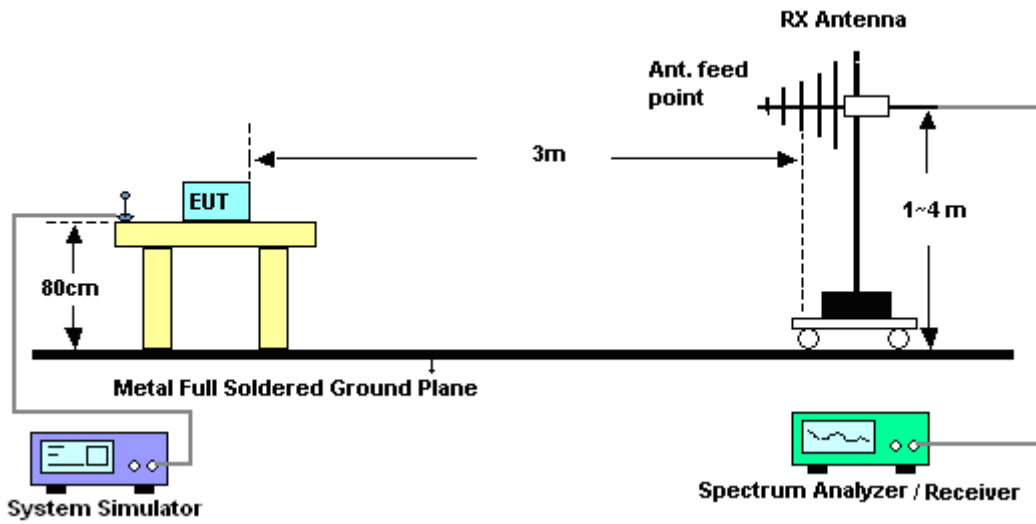

For radiated test above 1GHz

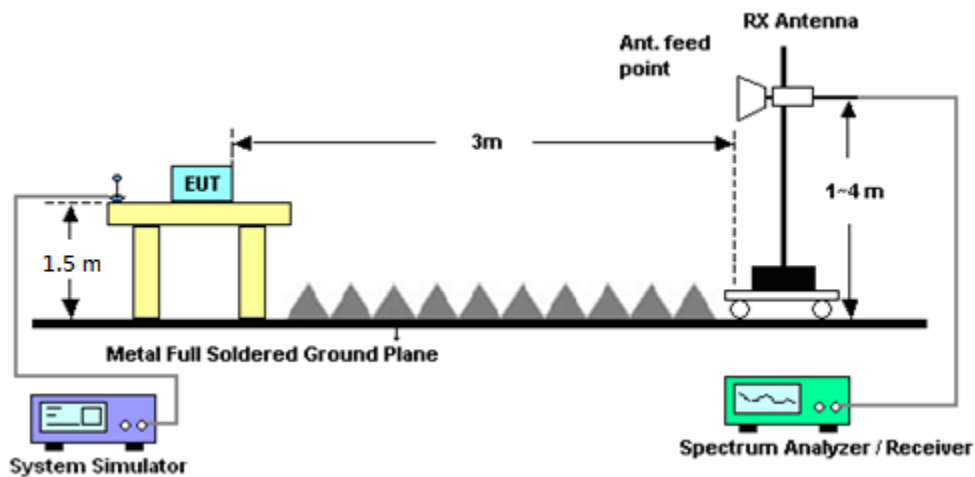

4.1.2 Test Result of Radiated Test

Please refer to Appendix B.

4.2 Radiated Spurious Emission

4.2.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA-603-E. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7, 41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.2.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

11. For Band 7, 41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

ERP (dBm) = EIRP - 2.15



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LTE Base Station	Anritsu	MT8820C	6201107509	GSM/GPRS /WCDMA/LTE	Mar. 02, 2018	Sep. 28, 2018~ Nov. 24, 2018	Mar. 01, 2020	Conducted (TH05-HY)
Spectrum Analyzer	Rohde & Schwarz	FSV40	101408	10Hz~40GHz	Jul. 30, 2018	Sep. 28, 2018~ Nov. 24, 2018	Jul. 29, 2019	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃~90℃	Aug. 29, 2018	Sep. 28, 2018~ Nov. 24, 2018	Aug. 28, 2019	Conducted (TH05-HY)
Programmable Power Supply	GW Instek	PSS-2005	GEO821763	N/A	Dec. 07, 2017	Sep. 28, 2018~ Nov. 24, 2018	Dec. 06, 2018	Conducted (TH05-HY)
Coupler	Warison	1-18GHz 20 dB 25WSM A Directional Coupler	#B	1G~18GHz	Dec. 04, 2017	Sep. 28, 2018~ Nov. 24, 2018	Dec. 03, 2018	Conducted (TH05-HY)
Hygrometer	TECPEL	HTC-1	2	N/A	Mar. 06, 2018	Sep. 28, 2018~ Nov. 24, 2018	Mar. 05, 2019	Conducted (TH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Nov. 23, 2017	Oct. 05, 2018~ Oct. 08, 2018	Nov. 22, 2018	Radiation (03CH07-HY)
Bilog Antenna	TESEQ	CBL 6111D&0080 0N1D01N-06	35419&03	30MHz to 1GHz	Dec. 18, 2017	Oct. 05, 2018~ Oct. 08, 2018	Dec. 17, 2018	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00211469	1GHz~18GHz	Aug. 06, 2018	Oct. 05, 2018~ Oct. 08, 2018	Aug. 05, 2019	Radiation (03CH07-HY)
Horn Antenna	ESCO	3117	00143261	1GHz~18GHz	Dec. 27, 2017	Oct. 05, 2018~ Oct. 08, 2018	Dec. 26, 2018	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91705 76	18GHz ~ 40GHz	May 08, 2018	Oct. 05, 2018~ Oct. 08, 2018	May 07, 2019	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA91702 51	18GHz- 40GHz	Nov. 10, 2017	Oct. 05, 2018~ Oct. 08, 2018	Nov. 09, 2018	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz-1GHz	May 21, 2018	Oct. 05, 2018~ Oct. 08, 2018	May 20, 2019	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-001 01800-30-10 P	1590075	1GHz ~ 18GHz	Apr. 25, 2018	Oct. 05, 2018~ Oct. 08, 2018	Apr. 24, 2019	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~ 26.5GHz	Oct. 30, 2017	Oct. 05, 2018~ Oct. 08, 2018	Oct. 29, 2018	Radiation (03CH07-HY)
Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz, VSWR : 2.5:1 max	Jul. 16, 2018	Oct. 05, 2018~ Oct. 08, 2018	Jul. 15, 2019	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9010A	MY5347011 8	10Hz~44GHz	Apr. 17, 2018	Oct. 05, 2018~ Oct. 08, 2018	Apr. 16, 2019	Radiation (03CH07-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	HTC-2	1	N/A	May 12, 2018	Oct. 05, 2018~ Oct. 08, 2018	May 11, 2019	Radiation (03CH07-HY)
Notch Filter	Wainwright	WRCT1850/ 1910-40/8SS	SN21	1900	Nov. 08, 2017	Oct. 05, 2018~ Oct. 08, 2018	Nov. 07, 2018	Radiation (03CH07-HY)
Notch Filter	Wainwright	WTRCT5-82 4-849-20-70- 60SSK	SN1	824-849	Mar. 22, 2018	Oct. 05, 2018~ Oct. 08, 2018	Mar. 21, 2019	Radiation (03CH07-HY)
Notch Filter	Wainwright	WTRCD10-1 710-1785-20 -40-40SSK	SN1	1710-1785	May 22, 2018	Oct. 05, 2018~ Oct. 08, 2018	May 21, 2019	Radiation (03CH07-HY)
Filter	Wainwright	WLJ4-1000- 1530-6000-4 0ST	SN3	1.53 GHz Lowpass	Mar. 21, 2018	Oct. 05, 2018~ Oct. 08, 2018	Mar. 20, 2019	Radiation (03CH07-HY)
Filter	Microwave	H1G013G1	SN477215	1.0G High Pass	Dec. 07, 2017	Oct. 05, 2018~ Oct. 08, 2018	Dec. 06, 2018	Radiation (03CH07-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Nov. 21, 2017	Oct. 05, 2018~ Oct. 08, 2018	Nov. 20, 2018	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24971/4, MY28655/4	9KHz~30MHz	Jan. 02, 2018	Oct. 05, 2018~ Oct. 08, 2018	Jan. 01, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	30MHz~1GHz	Feb. 27, 2018	Oct. 05, 2018~ Oct. 08, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4, MY24971/4, MY15682/4	1GHz~18GHz	Feb. 27, 2018	Oct. 05, 2018~ Oct. 08, 2018	Feb. 26, 2019	Radiation (03CH07-HY)
Controller	ChainTek	Chaintek 3000	N/A	Control Turn table	N/A	Oct. 05, 2018~ Oct. 08, 2018	N/A	Radiation (03CH07-HY)
Controller	Max-Full	MF7802	MF7802083 68	Control Ant Mast	N/A	Oct. 05, 2018~ Oct. 08, 2018	N/A	Radiation (03CH07-HY)
Antenna Mast	Max-Full	MFA520BS	N/A	1m~4m	N/A	Oct. 05, 2018~ Oct. 08, 2018	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Oct. 05, 2018~ Oct. 08, 2018	N/A	Radiation (03CH07-HY)
Signal Generator	Anritsu	MG3694C	163401	0.1Hz~40GHz	Jan. 15, 2018	Oct. 05, 2018~ Oct. 08, 2018	Jan. 14, 2019	Radiation (03CH07-HY)
Software	Audix	E3 6.2009-8-24	RK-001042	N/A	N/A	Oct. 05, 2018~ Oct. 08, 2018	N/A	Radiation (03CH07-HY)



6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.70
--	------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.50
--	------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	5.20
--	------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.54	22.59	22.41
20	1	49		22.37	22.44	22.29
20	1	99		22.38	22.42	22.26
20	50	0		21.45	21.44	21.31
20	50	24		21.44	21.43	21.28
20	50	50		21.44	21.38	21.22
20	100	0		21.36	21.47	21.27
20	1	0	16-QAM	21.86	21.88	21.73
20	1	49		21.80	21.85	21.74
20	1	99		21.83	21.82	21.61
20	50	0		20.55	20.55	20.42
20	50	24		20.52	20.54	20.41
20	50	50		20.58	20.51	20.33
20	100	0		20.60	20.53	20.38
20	1	0	64-QAM	20.74	20.81	20.64
20	1	49		20.74	20.76	20.62
20	1	99		20.74	20.78	20.55
20	50	0		19.55	19.58	19.42
20	50	24		19.55	19.56	19.49
20	50	50		19.56	19.49	19.44
20	100	0		19.60	19.51	19.44
15	1	0	QPSK	22.30	22.43	22.31
15	1	37		22.30	22.40	22.34
15	1	74		22.18	22.28	22.26
15	36	0		21.35	21.42	21.29
15	36	20		21.31	21.41	21.32
15	36	39		21.27	21.35	21.33
15	75	0		21.31	21.41	21.30
15	1	0	16-QAM	21.69	21.83	21.71
15	1	37		21.70	21.79	21.82
15	1	74		21.57	21.71	21.57
15	36	0		20.43	20.56	20.49
15	36	20		20.46	20.56	20.45
15	36	39		20.42	20.51	20.52
15	75	0		20.41	20.55	20.41
15	1	0	64-QAM	20.62	20.78	20.65
15	1	37		20.59	20.73	20.72
15	1	74		20.54	20.64	20.56
15	36	0		19.47	19.58	19.51
15	36	20		19.48	19.61	19.52
15	36	39		19.42	19.54	19.54
15	75	0		19.41	19.54	19.46



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.40	22.48	22.27
10	1	25		22.27	22.40	22.36
10	1	49		22.28	22.38	22.28
10	25	0		21.33	21.40	21.25
10	25	12		21.33	21.42	21.36
10	25	25		21.26	21.35	21.30
10	50	0		21.29	21.37	21.23
10	1	0	16-QAM	21.79	21.92	21.68
10	1	25		21.70	21.83	21.76
10	1	49		21.68	21.79	21.60
10	25	0		20.42	20.54	20.42
10	25	12		20.40	20.53	20.52
10	25	25		20.38	20.47	20.42
10	50	0		20.44	20.52	20.38
10	1	0	64-QAM	20.69	20.83	20.65
10	1	25		20.60	20.72	20.70
10	1	49		20.62	20.74	20.56
10	25	0		19.44	19.55	19.44
10	25	12		19.44	19.55	19.55
10	25	25		19.39	19.49	19.45
10	50	0		19.42	19.54	19.39
5	1	0	QPSK	22.31	22.37	22.31
5	1	12		22.29	22.41	22.31
5	1	24		22.25	22.34	22.25
5	12	0		21.32	21.41	21.32
5	12	7		21.36	21.43	21.37
5	12	13		21.27	21.36	21.32
5	25	0		21.29	21.36	21.31
5	1	0	16-QAM	21.63	21.78	21.69
5	1	12		21.65	21.81	21.67
5	1	24		21.61	21.73	21.54
5	12	0		20.45	20.57	20.50
5	12	7		20.44	20.56	20.52
5	12	13		20.44	20.49	20.44
5	25	0		20.42	20.49	20.44
5	1	0	64-QAM	20.57	20.73	20.65
5	1	12		20.60	20.74	20.63
5	1	24		20.51	20.67	20.53
5	12	0		19.49	19.60	19.58
5	12	7		19.50	19.60	19.58
5	12	13		19.45	19.58	19.50
5	25	0		19.40	19.50	19.49



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	22.28	22.35	22.31
3	1	8		22.29	22.37	22.33
3	1	14		22.25	22.35	22.29
3	8	0		21.28	21.38	21.31
3	8	4		21.33	21.44	21.36
3	8	7		21.30	21.37	21.32
3	15	0		21.29	21.35	21.33
3	1	0	16-QAM	21.58	21.73	21.65
3	1	8		21.63	21.81	21.64
3	1	14		21.56	21.55	21.55
3	8	0		20.45	20.56	20.33
3	8	4		20.51	20.59	20.52
3	8	7		20.45	20.40	20.46
3	15	0		20.41	20.48	20.47
3	1	0	64-QAM	20.56	20.71	20.61
3	1	8		20.59	20.74	20.61
3	1	14		20.53	20.67	20.59
3	8	0		19.48	19.39	19.55
3	8	4		19.50	19.63	19.56
3	8	7		19.46	19.57	19.53
3	15	0		19.26	19.50	19.47
1.4	1	0	QPSK	22.23	22.31	22.24
1.4	1	3		22.28	22.39	22.33
1.4	1	5		22.20	22.31	22.23
1.4	3	0		22.28	22.34	22.29
1.4	3	1		22.32	22.39	22.32
1.4	3	3		22.26	22.34	22.29
1.4	6	0		21.25	21.32	21.28
1.4	1	0	16-QAM	21.56	21.73	21.58
1.4	1	3		21.64	21.79	21.63
1.4	1	5		21.52	21.68	21.54
1.4	3	0		21.41	21.49	21.37
1.4	3	1		21.44	21.54	21.39
1.4	3	3		21.36	21.49	21.34
1.4	6	0		20.42	20.54	20.46
1.4	1	0	64-QAM	20.54	20.68	20.57
1.4	1	3		20.60	20.74	20.60
1.4	1	5		20.49	20.66	20.50
1.4	3	0		20.51	20.65	20.53
1.4	3	1		20.56	20.72	20.57
1.4	3	3		20.52	20.64	20.52
1.4	6	0		19.39	19.46	19.40



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.81	23.86	23.67
10	1	25		23.74	23.84	23.64
10	1	49		23.80	23.81	23.60
10	25	0		22.88	22.90	22.73
10	25	12		22.81	22.88	22.71
10	25	25		22.87	22.86	22.70
10	50	0		22.87	22.98	22.71
10	1	0	16-QAM	23.20	23.20	22.98
10	1	25		23.19	23.16	22.87
10	1	49		23.24	23.09	22.72
10	25	0		22.02	22.00	21.79
10	25	12		22.13	21.99	21.75
10	25	25		22.06	21.97	21.71
10	50	0		22.09	21.97	21.76
10	1	0	64-QAM	22.16	22.16	21.93
10	1	25		22.15	22.16	21.84
10	1	49		22.21	22.05	21.75
10	25	0		21.02	21.03	20.77
10	25	12		21.12	21.02	20.80
10	25	25		21.07	20.95	20.73
10	50	0		21.10	20.99	20.76
5	1	0	QPSK	23.83	23.82	23.61
5	1	12		23.81	23.80	23.60
5	1	24		23.79	23.76	23.57
5	12	0		22.90	22.86	22.66
5	12	7		22.91	22.88	22.64
5	12	13		22.87	22.83	22.59
5	25	0		22.88	22.86	22.63
5	1	0	16-QAM	23.15	23.15	22.82
5	1	12		23.19	23.14	22.77
5	1	24		23.13	23.09	22.69
5	12	0		22.02	21.98	21.67
5	12	7		22.03	21.99	21.71
5	12	13		22.00	21.94	21.64
5	25	0		21.97	21.95	21.67
5	1	0	64-QAM	22.14	22.11	21.79
5	1	12		22.13	22.10	21.74
5	1	24		22.10	22.05	21.68
5	12	0		21.09	21.03	20.77
5	12	7		21.11	21.04	20.75
5	12	13		21.06	20.98	20.73
5	25	0		21.00	20.96	20.67



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.84	23.82	23.60
3	1	8		23.82	23.78	23.55
3	1	14		23.81	23.78	23.55
3	8	0		22.86	22.84	22.59
3	8	4		22.90	22.88	22.65
3	8	7		22.88	22.81	22.58
3	15	0		22.89	22.85	22.65
3	1	0	16-QAM	23.14	23.13	22.76
3	1	8		23.18	23.13	22.73
3	1	14		23.14	23.08	22.72
3	8	0		22.01	21.98	21.66
3	8	4		22.06	22.02	21.70
3	8	7		22.04	21.97	21.64
3	15	0		22.03	21.95	21.67
3	1	0	64-QAM	22.13	22.08	21.72
3	1	8		22.14	22.09	21.69
3	1	14		22.14	21.97	21.67
3	8	0		21.06	21.00	20.71
3	8	4		21.06	21.04	20.71
3	8	7		21.04	21.00	20.65
3	15	0		21.02	20.96	20.68
1.4	1	0	QPSK	23.75	23.71	23.50
1.4	1	3		23.85	23.78	23.57
1.4	1	5		23.76	23.70	23.51
1.4	3	0		23.80	23.79	23.51
1.4	3	1		23.76	23.83	23.59
1.4	3	3		23.82	23.77	23.52
1.4	6	0		22.84	22.78	22.54
1.4	1	0	16-QAM	23.06	23.05	22.64
1.4	1	3		23.15	23.11	22.68
1.4	1	5		23.08	23.03	22.61
1.4	3	0		22.87	22.84	22.48
1.4	3	1		22.91	22.87	22.54
1.4	3	3		22.88	22.82	22.46
1.4	6	0		21.99	21.92	21.62
1.4	1	0	64-QAM	22.06	22.01	21.65
1.4	1	3		22.10	22.06	21.68
1.4	1	5		22.03	21.99	21.61
1.4	3	0		22.06	22.00	21.66
1.4	3	1		22.09	22.06	21.67
1.4	3	3		22.03	22.00	21.62
1.4	6	0		20.94	20.87	20.59



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	24.10	24.33	24.23
20	1	49		24.04	24.19	24.21
20	1	99		24.05	24.12	24.14
20	50	0		23.16	23.32	23.31
20	50	24		23.10	23.24	23.29
20	50	50		23.14	23.29	23.24
20	100	0		23.21	23.28	23.27
20	1	0	16-QAM	23.21	23.33	23.38
20	1	49		23.30	23.41	23.42
20	1	99		23.47	23.48	23.49
20	50	0		22.21	22.32	22.36
20	50	24		22.27	22.38	22.41
20	50	50		22.40	22.41	22.44
20	100	0		22.35	22.35	22.42
20	1	0	64-QAM	22.14	22.31	22.33
20	1	49		22.26	22.33	22.38
20	1	99		22.43	22.48	22.43
20	50	0		21.22	21.33	21.36
20	50	24		21.27	21.39	21.43
20	50	50		21.41	21.43	21.45
20	100	0		21.38	21.41	21.43
15	1	0	QPSK	24.26	24.20	24.24
15	1	37		24.23	24.22	24.24
15	1	74		24.18	24.31	24.20
15	36	0		23.32	23.32	23.32
15	36	20		23.36	23.34	23.36
15	36	39		23.37	23.35	23.37
15	75	0		23.28	23.31	23.35
15	1	0	16-QAM	23.43	23.38	23.43
15	1	37		23.40	23.43	23.41
15	1	74		23.47	23.48	23.45
15	36	0		22.23	22.19	22.22
15	36	20		22.29	22.25	22.25
15	36	39		22.29	22.24	22.26
15	75	0		22.25	22.23	22.23
15	1	0	64-QAM	22.35	22.34	22.34
15	1	37		22.36	22.33	22.34
15	1	74		22.47	22.48	22.43
15	36	0		21.24	21.20	21.24
15	36	20		21.32	21.26	21.27
15	36	39		21.31	21.28	21.28
15	75	0		21.23	21.20	21.23



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	24.24	24.21	24.21
10	1	25		24.26	24.27	24.27
10	1	49		24.32	24.14	24.32
10	25	0		23.28	23.27	23.27
10	25	12		23.30	23.29	23.30
10	25	25		23.32	23.32	23.33
10	50	0		23.31	23.30	23.31
10	1	0	16-QAM	23.45	23.40	23.43
10	1	25		23.46	23.47	23.45
10	1	49		23.49	23.48	23.49
10	25	0		22.39	22.38	22.39
10	25	12		22.45	22.43	22.41
10	25	25		22.44	22.43	22.44
10	50	0		22.42	22.40	22.40
10	1	0	64-QAM	22.33	22.33	22.33
10	1	25		22.38	22.38	22.37
10	1	49		22.46	22.44	22.42
10	25	0		21.41	21.39	21.42
10	25	12		21.46	21.42	21.45
10	25	25		21.47	21.45	21.44
10	50	0		21.43	21.41	21.43
5	1	0	QPSK	24.25	24.23	24.25
5	1	12		24.25	24.20	24.25
5	1	24		24.28	24.28	24.29
5	12	0		23.28	23.27	23.28
5	12	7		23.35	23.33	23.34
5	12	13		23.35	23.32	23.30
5	25	0		23.30	23.27	23.28
5	1	0	16-QAM	23.43	23.43	23.40
5	1	12		23.46	23.45	23.41
5	1	24		23.47	23.47	23.44
5	12	0		22.43	22.39	22.40
5	12	7		22.47	22.43	22.41
5	12	13		22.49	22.45	22.41
5	25	0		22.41	22.38	22.38
5	1	0	64-QAM	22.45	22.43	22.42
5	1	12		22.47	22.47	22.43
5	1	24		22.48	22.46	22.45
5	12	0		21.45	21.43	21.44
5	12	7		21.43	21.48	21.47
5	12	13		21.50	21.47	21.48
5	25	0		21.41	21.40	21.38



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	24.26	24.22	24.16
20	1	49		24.15	23.99	24.08
20	1	99		24.25	24.03	24.09
20	50	0		23.25	23.32	23.18
20	50	24		23.21	23.24	23.17
20	50	50		23.21	23.14	23.12
20	100	0		23.18	23.14	23.07
20	1	0	16-QAM	23.36	23.48	23.31
20	1	49		23.27	23.48	23.29
20	1	99		23.40	23.27	23.30
20	50	0		22.25	22.03	22.26
20	50	24		22.25	22.30	22.26
20	50	50		22.21	22.25	22.30
20	100	0		22.30	22.15	22.28
20	1	0	64-QAM	22.13	22.25	22.14
20	1	49		22.02	21.81	22.06
20	1	99		22.09	22.20	22.05
20	50	0		21.27	21.29	21.32
20	50	24		21.29	21.31	21.35
20	50	50		21.24	21.30	21.30
20	100	0		21.27	21.30	21.31
15	1	0	QPSK	24.12	24.14	24.14
15	1	37		24.07	24.15	24.11
15	1	74		24.14	24.08	24.17
15	36	0		23.09	23.09	23.16
15	36	20		23.14	23.19	23.17
15	36	39		23.17	23.08	23.12
15	75	0		23.17	23.12	23.12
15	1	0	16-QAM	23.34	23.47	23.39
15	1	37		23.22	23.09	23.30
15	1	74		23.24	23.24	23.29
15	36	0		22.24	22.46	22.31
15	36	20		22.25	22.10	22.26
15	36	39		22.24	22.38	22.26
15	75	0		22.23	22.48	22.30
15	1	0	64-QAM	22.05	21.89	22.13
15	1	37		21.93	21.84	22.03
15	1	74		22.01	22.25	22.13
15	36	0		21.26	21.13	21.31
15	36	20		21.25	21.35	21.30
15	36	39		21.29	21.45	21.30
15	75	0		21.25	21.44	21.26



LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	24.09	24.30	24.04
10	1	25		24.10	23.97	23.93
10	1	49		24.17	24.03	24.02
10	25	0		23.11	23.20	23.03
10	25	12		23.13	23.00	23.07
10	25	25		23.14	23.23	23.02
10	50	0		23.15	23.18	23.05
10	1	0	16-QAM	23.28	23.25	23.28
10	1	25		23.26	23.18	23.24
10	1	49		23.26	23.42	23.16
10	25	0		22.21	22.06	22.26
10	25	12		22.26	22.43	22.29
10	25	25		22.25	22.10	22.23
10	50	0		22.25	22.12	22.22
10	1	0	64-QAM	22.01	22.19	22.04
10	1	25		22.00	22.13	22.01
10	1	49		22.00	21.88	21.98
10	25	0		21.26	21.20	21.28
10	25	12		21.30	21.47	21.31
10	25	25		21.28	21.26	21.35
10	50	0		21.21	21.02	21.23
5	1	0	QPSK	24.07	24.16	23.96
5	1	12		24.08	23.96	24.03
5	1	24		24.07	24.04	23.92
5	12	0		23.11	22.91	23.05
5	12	7		23.08	23.26	23.03
5	12	13		23.10	23.15	23.01
5	25	0		23.09	22.89	23.03
5	1	0	16-QAM	23.29	23.09	23.18
5	1	12		23.29	23.23	23.17
5	1	24		23.24	23.08	23.18
5	12	0		22.11	22.09	22.19
5	12	7		22.21	22.08	22.20
5	12	13		22.20	22.12	22.24
5	25	0		22.21	22.43	22.19
5	1	0	64-QAM	22.02	21.83	22.02
5	1	12		22.01	21.97	22.03
5	1	24		21.99	22.00	21.90
5	12	0		21.22	21.06	21.21
5	12	7		21.24	21.12	21.26
5	12	13		21.27	21.07	21.26
5	25	0		21.28	21.46	21.27



LTE Band 2


Peak-to-Average Ratio

Mode	LTE Band 2 / 20MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	3.13	4.32	4.41	5.62	PASS
Middle CH	3.3	4.23	4.52	5.57	
Highest CH	3.13	4.29	4.52	5.57	
Mode	LTE Band 2 / 20MHz				
Mod.	64QAM				Limit: 13dB
RB Size	1RB	Full RB			Result
Lowest CH	5.30	6.17	-	-	PASS
Middle CH	5.71	6.14	-	-	
Highest CH	5.45	6.29	-	-	




LTE Band 2 / 20MHz / QPSK


Lowest Channel / 1RB

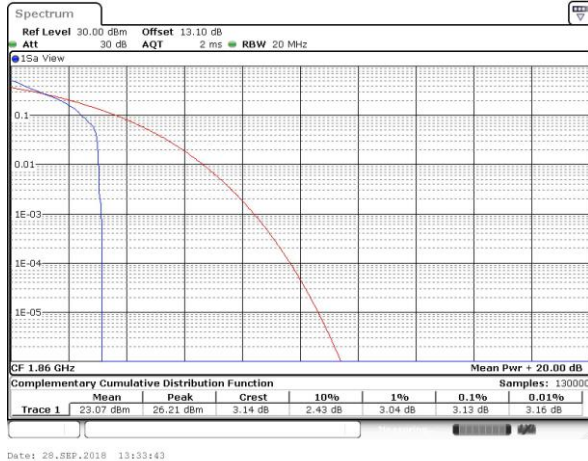


Lowest Channel / Full RB

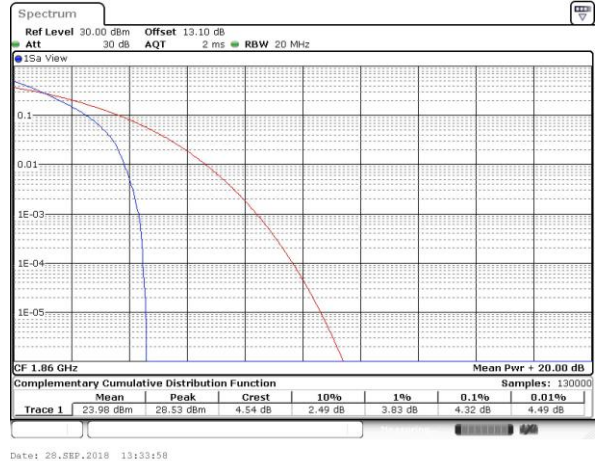


Middle Channel / 1RB

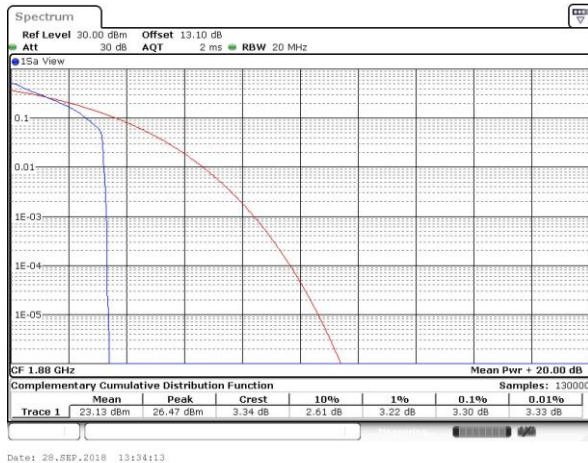


Middle Channel / Full RB

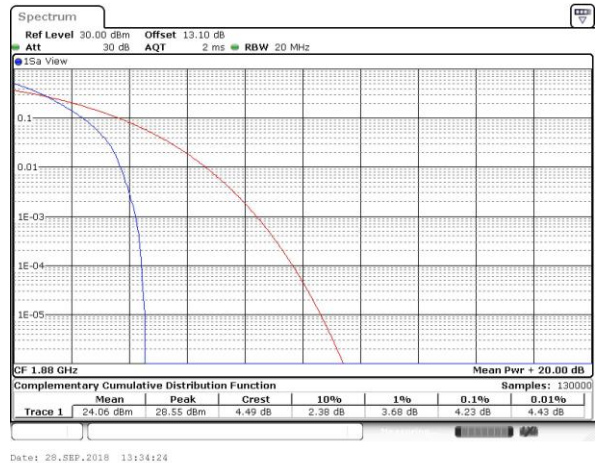

Highest Channel / 1RB

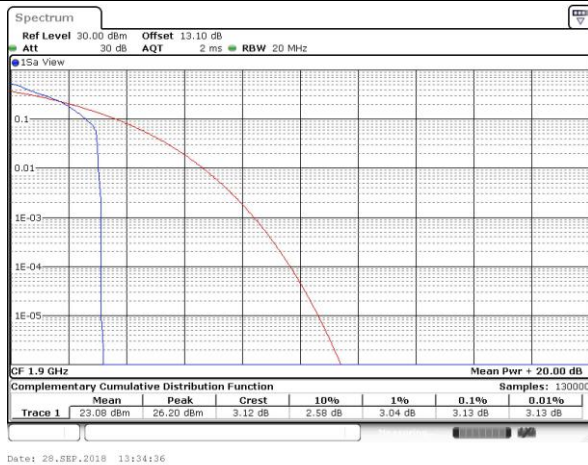


Highest Channel / Full RB

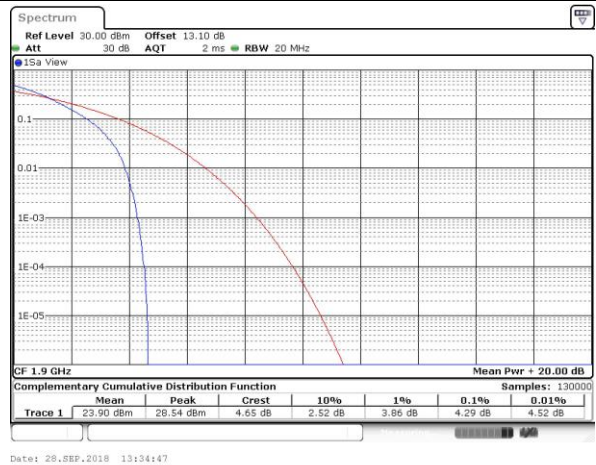




LTE Band 2 / 20MHz / 16QAM


Lowest Channel / 1RB

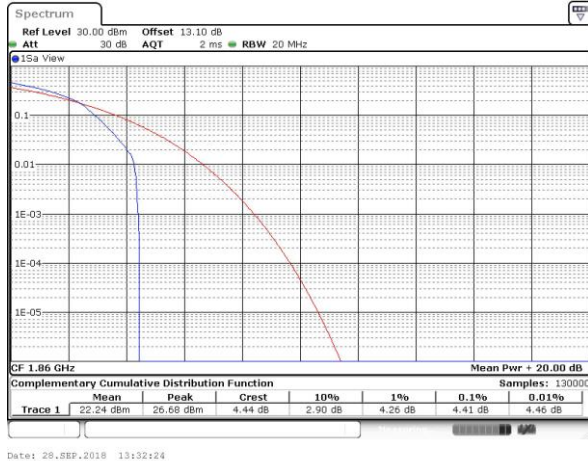


Lowest Channel / Full RB

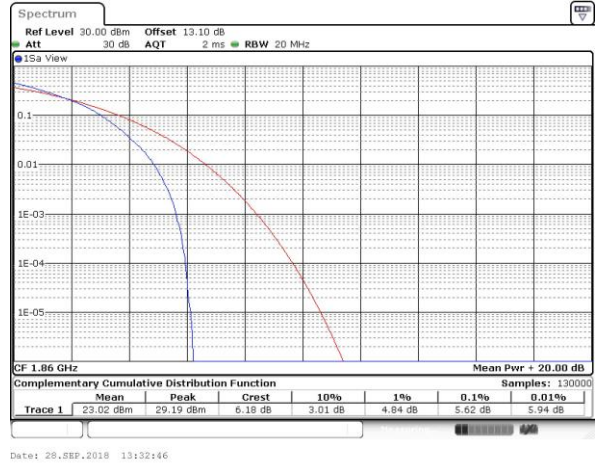


Middle Channel / 1RB

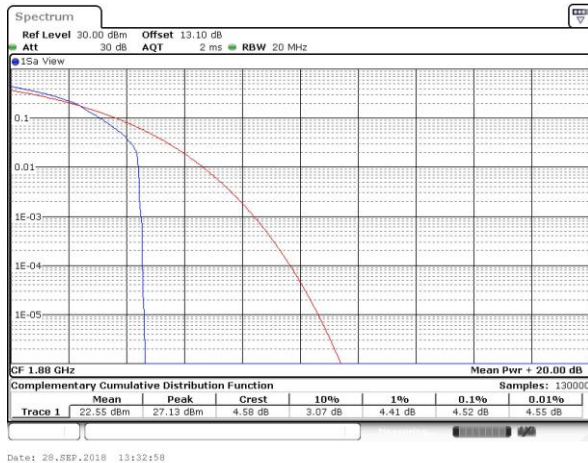


Middle Channel / Full RB

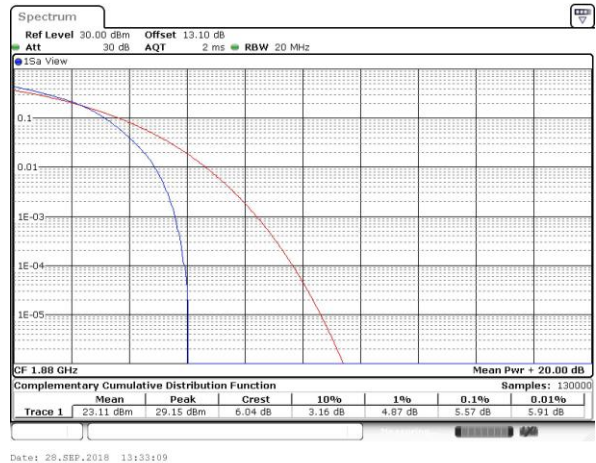

Highest Channel / 1RB

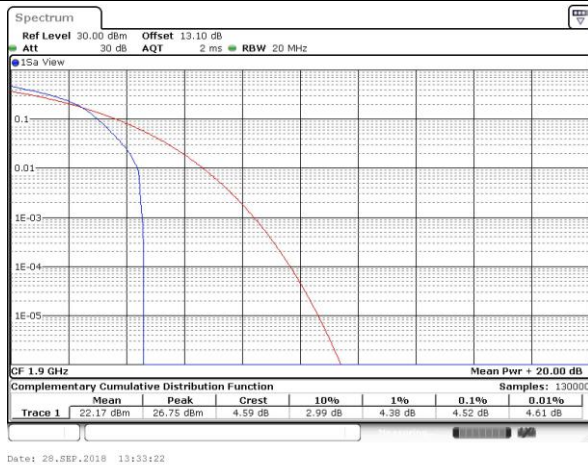


Highest Channel / Full RB

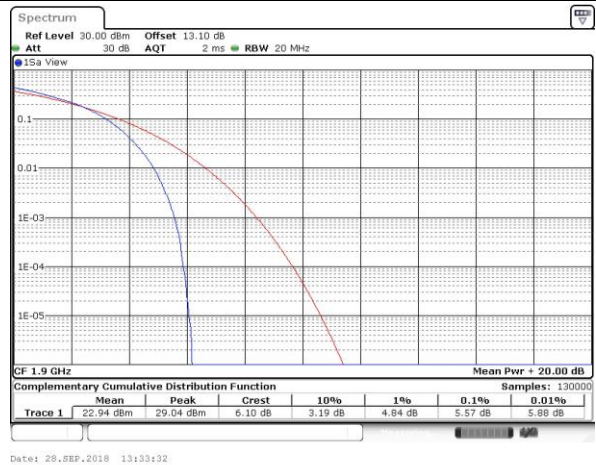




LTE Band 2 / 20MHz / 64QAM


Lowest Channel / 1RB

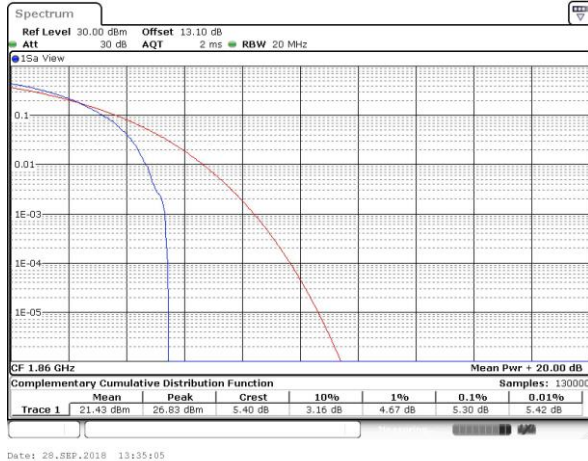


Lowest Channel / Full RB

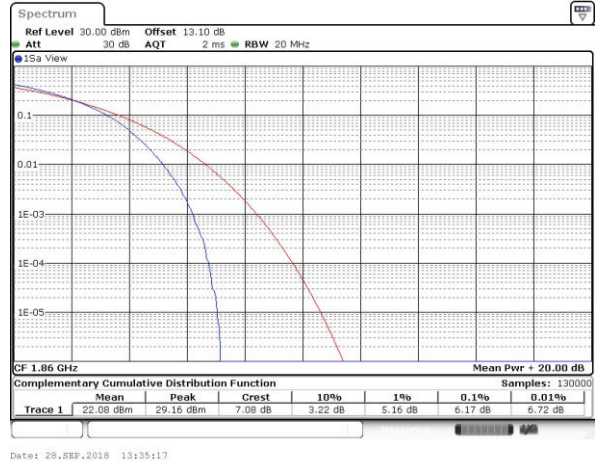


Middle Channel / 1RB

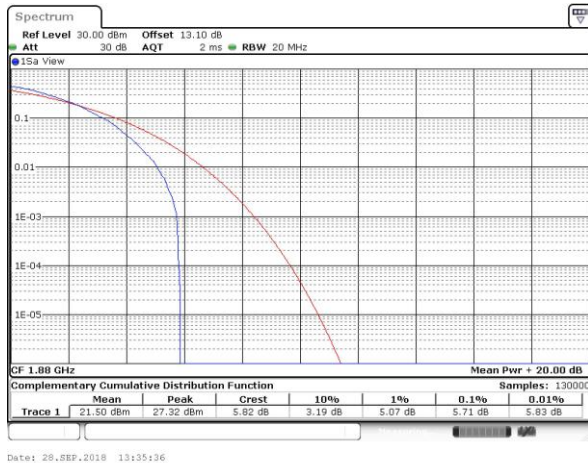


Middle Channel / Full RB

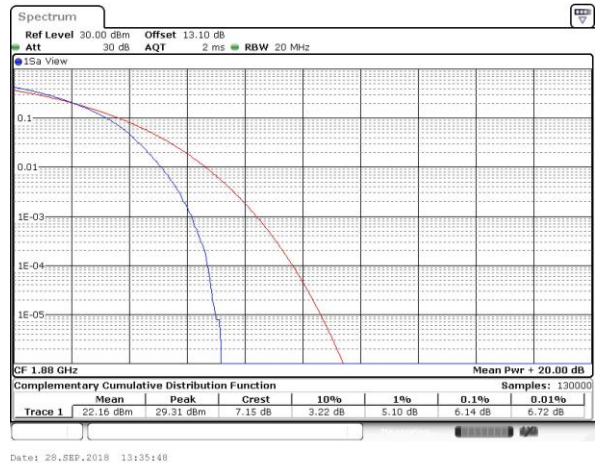

Highest Channel / 1RB

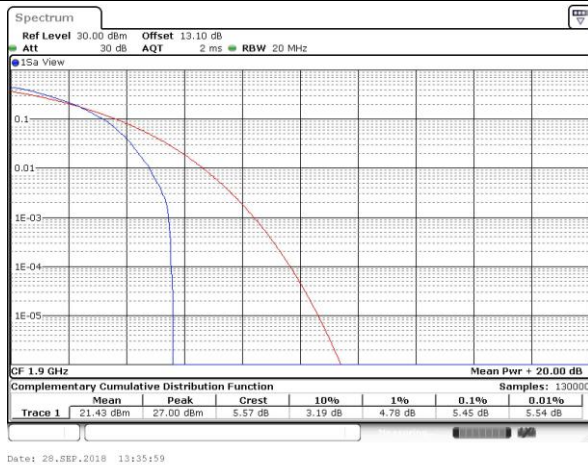

Highest Channel / Full RB

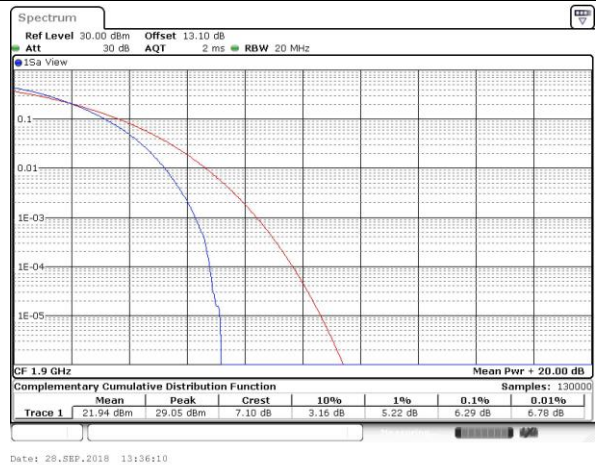


**26dB Bandwidth**

Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.23	1.23	3.05	3.03	4.94	4.96	9.77	9.83	14.39	14.51	20.26	20.22
Middle CH	1.23	1.24	3.03	3.02	4.92	4.87	9.77	9.81	14.39	14.18	20.10	20.34
Highest CH	1.24	1.23	3.09	3.06	4.91	4.96	9.69	9.61	14.42	14.42	20.26	20.10
Mode	LTE Band 2 : 26dB BW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.23	-	3.05	-	4.93	-	9.83	-	14.18	-	20.10	-
Middle CH	1.22	-	3.05	-	4.90	-	9.81	-	14.45	-	20.06	-
Highest CH	1.23	-	3.00	-	4.91	-	9.71	-	14.48	-	20.18	-




LTE Band 2


Lowest Channel / 1.4MHz / QPSK

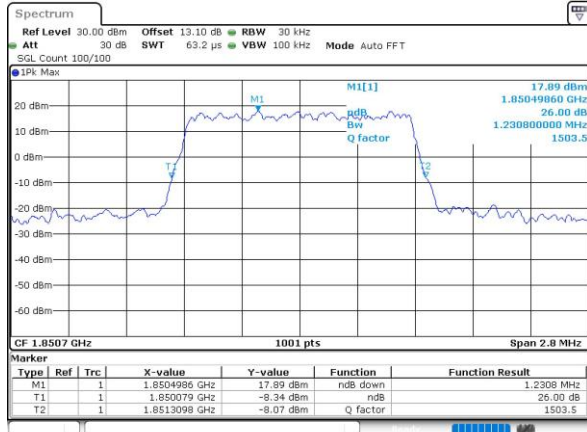


Lowest Channel / 1.4MHz / 16QAM

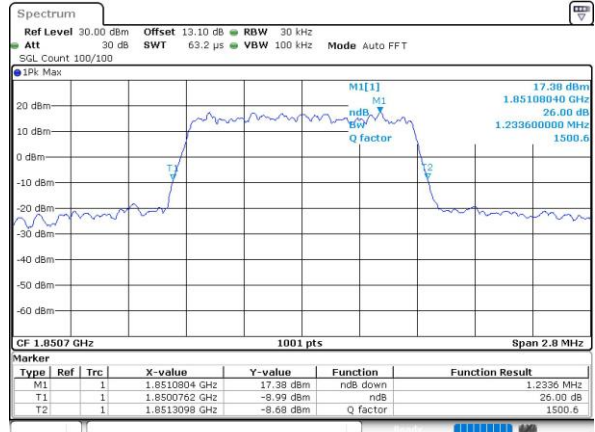


Middle Channel / 1.4MHz / QPSK

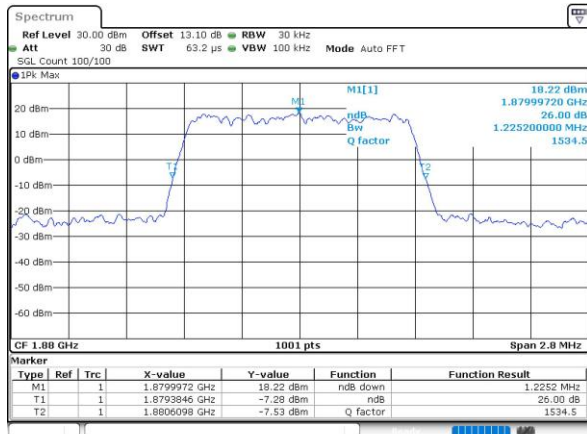

Middle Channel / 1.4MHz / 16QAM

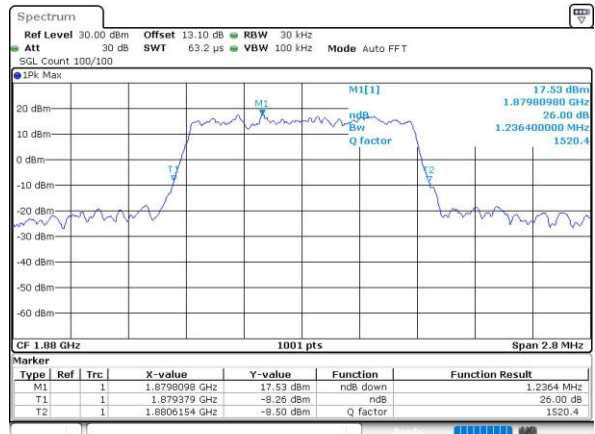

Highest Channel / 1.4MHz / QPSK

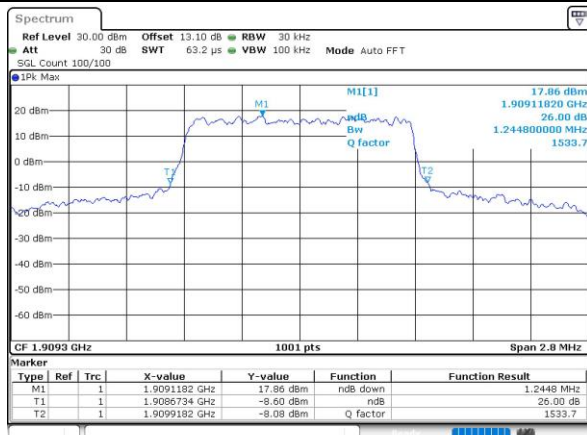


Highest Channel / 1.4MHz / 16QAM






LTE Band 2


Lowest Channel / 3MHz / QPSK

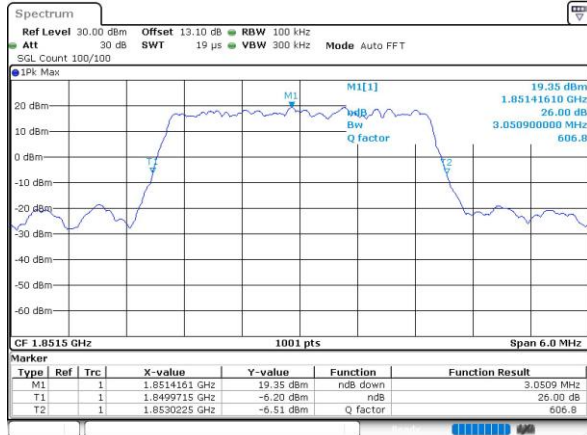


Lowest Channel / 3MHz / 16QAM

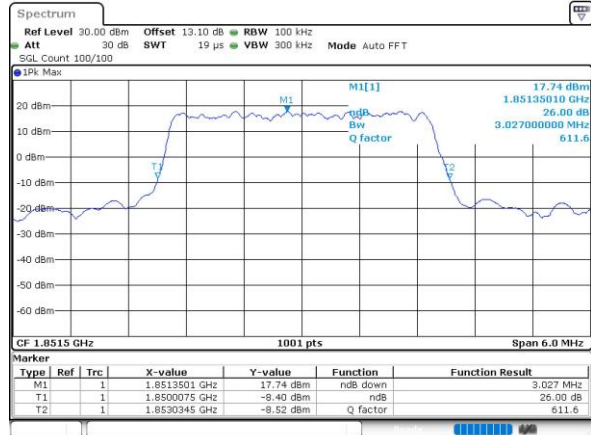


Middle Channel / 3MHz / QPSK

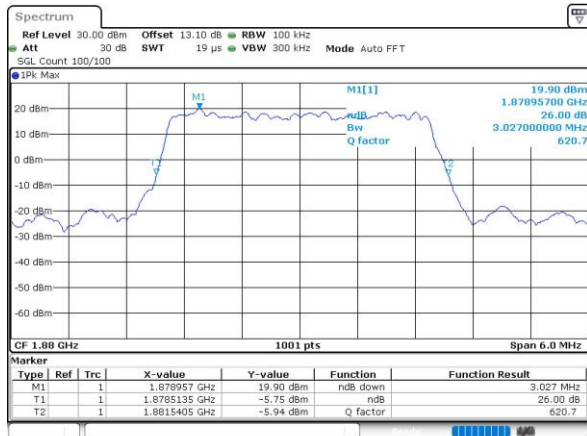


Middle Channel / 3MHz / 16QAM

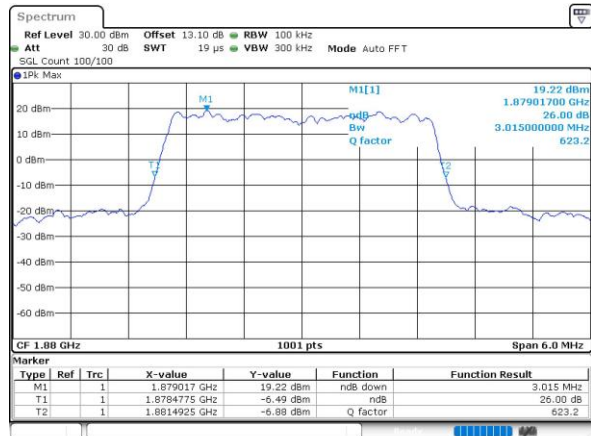

Highest Channel / 3MHz / QPSK

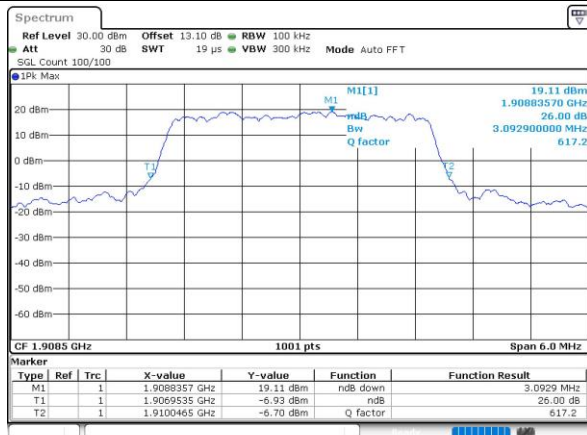


Highest Channel / 3MHz / 16QAM

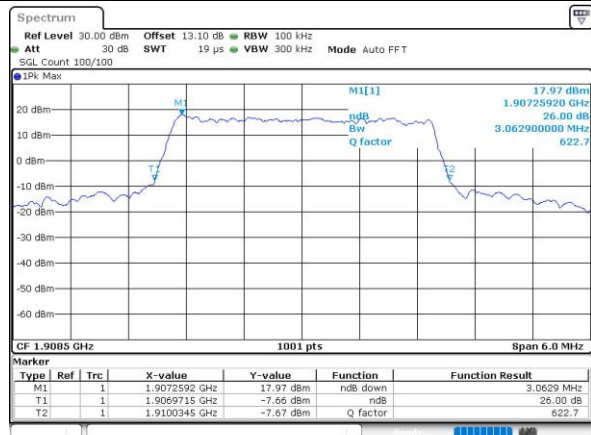




LTE Band 2

Lowest Channel / 5MHz / QPSK

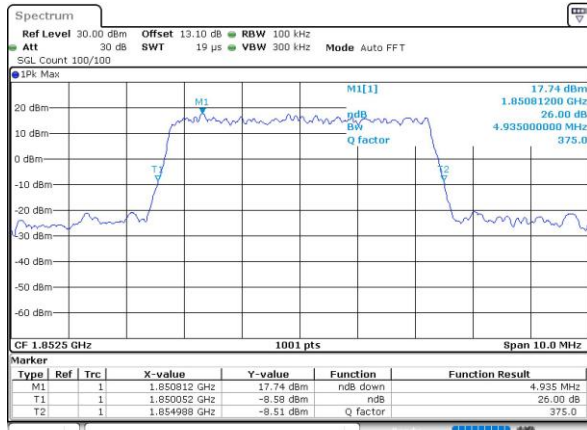

Date: 28_SEP.2018 10:11:08

Lowest Channel / 5MHz / 16QAM

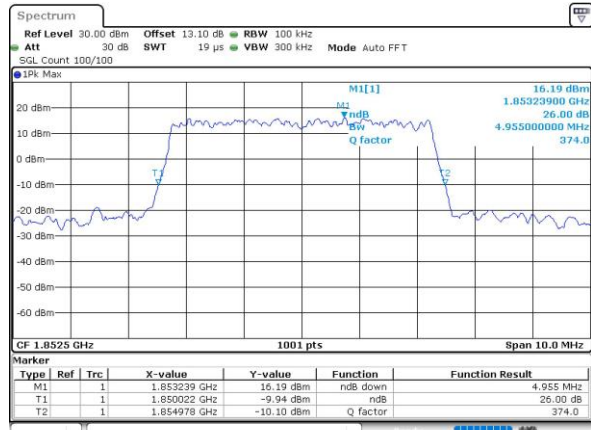

Date: 28_SEP.2018 10:11:20

Middle Channel / 5MHz / QPSK




Date: 28_SEP.2018 10:16:52

Middle Channel / 5MHz / 16QAM




Date: 28_SEP.2018 10:17:03

Highest Channel / 5MHz / QPSK

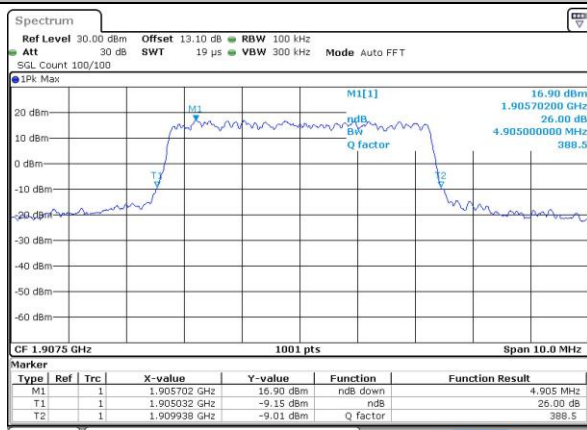

Date: 28_SEP.2018 10:19:17

Highest Channel / 5MHz / 16QAM

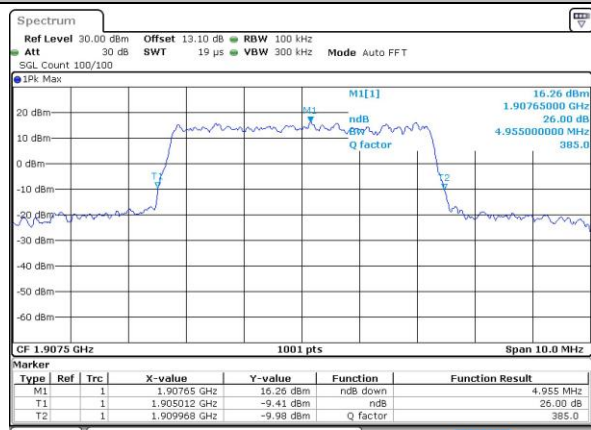


Date: 28_SEP.2018 10:19:29




LTE Band 2

Lowest Channel / 10MHz / QPSK

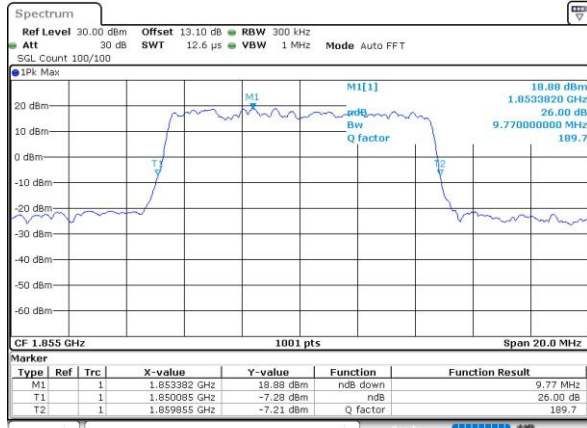


Date: 28_SEP.2018 10:25:01

Lowest Channel / 10MHz / 16QAM

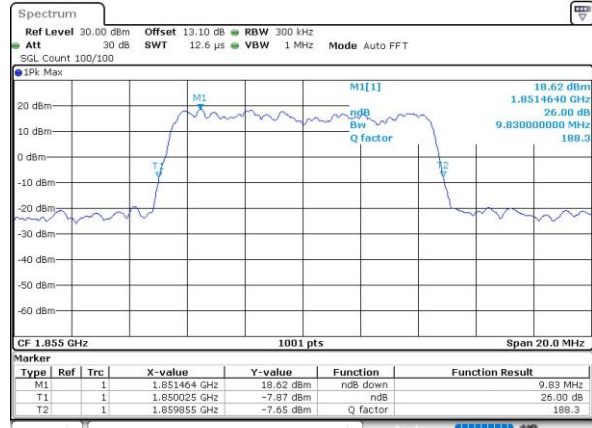


Date: 28_SEP.2018 10:25:12

Middle Channel / 10MHz / QPSK

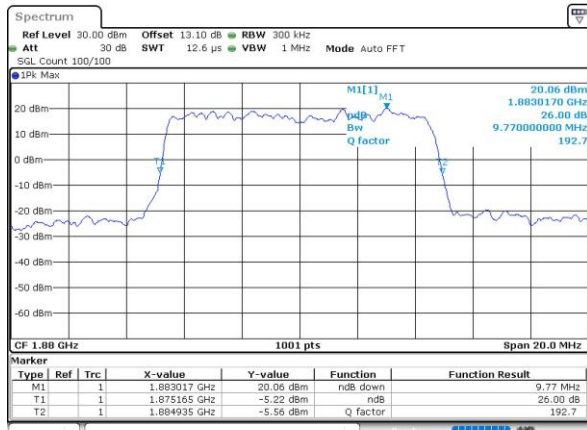


Date: 28_SEP.2018 10:30:44

Middle Channel / 10MHz / 16QAM

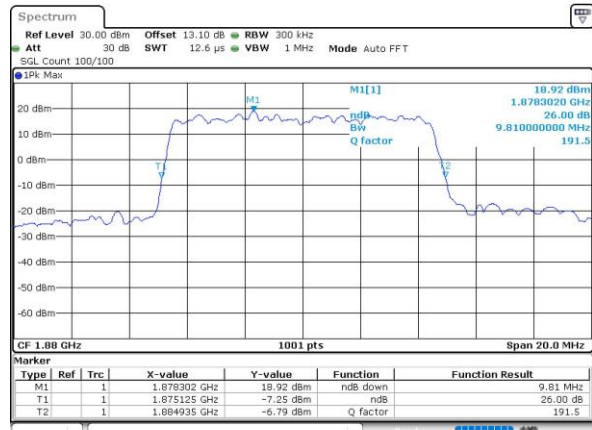


Date: 28_SEP.2018 10:30:55

Highest Channel / 10MHz / QPSK

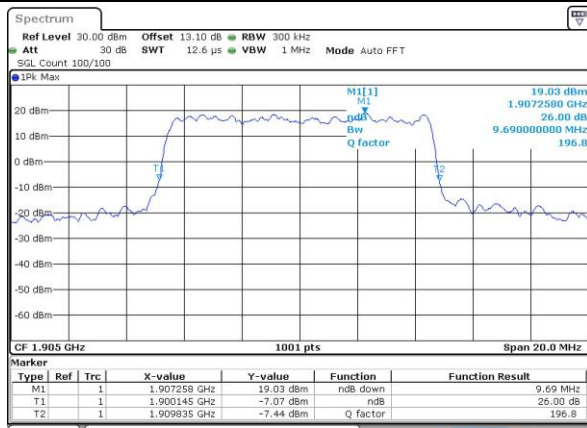

Date: 28_SEP.2018 10:33:10

Highest Channel / 10MHz / 16QAM

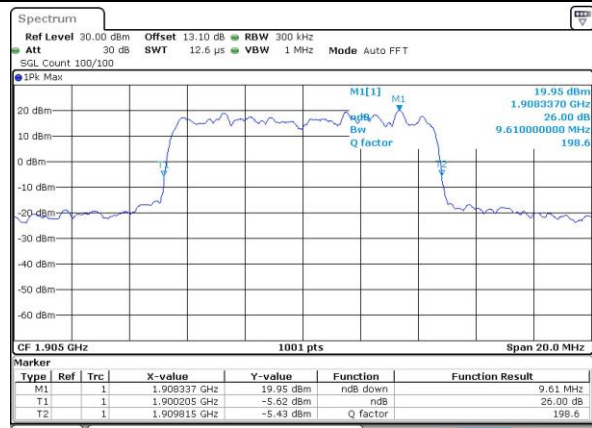


Date: 28_SEP.2018 10:33:21




LTE Band 2

Lowest Channel / 15MHz / QPSK

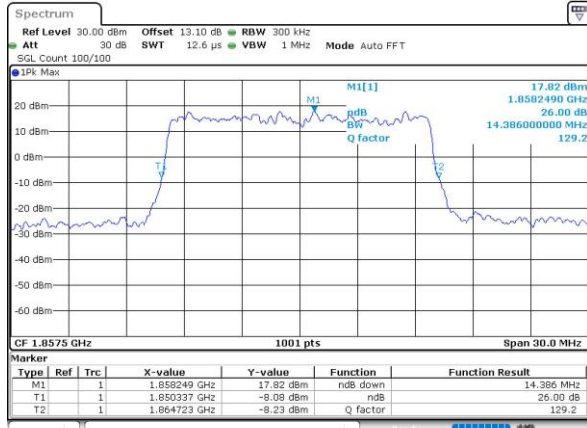


Date: 28_SEP.2018 10:38:53

Lowest Channel / 15MHz / 16QAM

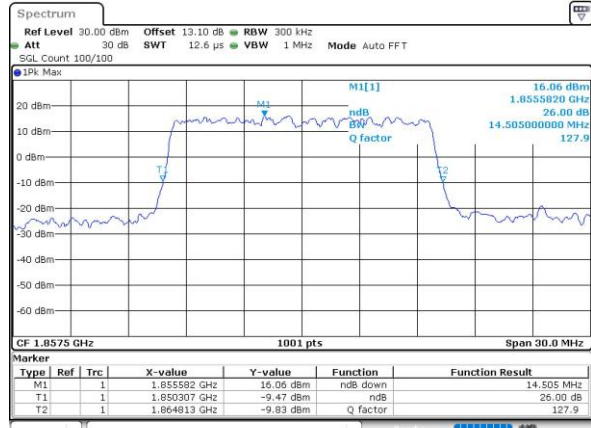


Date: 28_SEP.2018 10:39:05

Middle Channel / 15MHz / QPSK

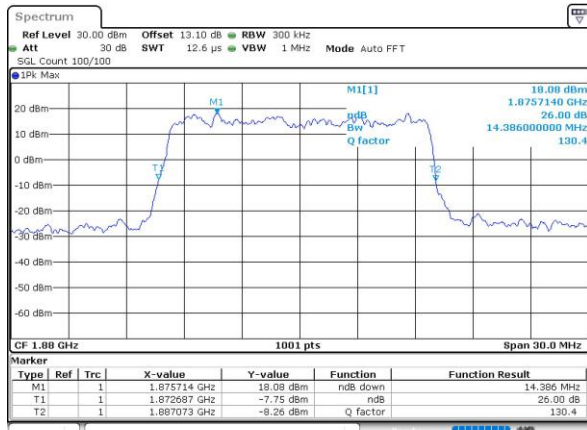


Date: 28_SEP.2018 10:44:36

Middle Channel / 15MHz / 16QAM

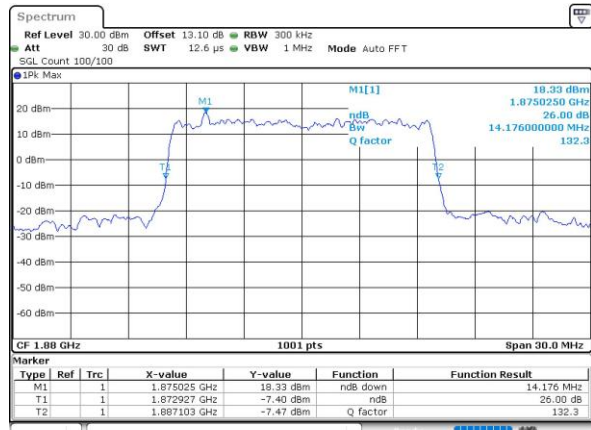


Date: 28_SEP.2018 10:44:48

Highest Channel / 15MHz / QPSK

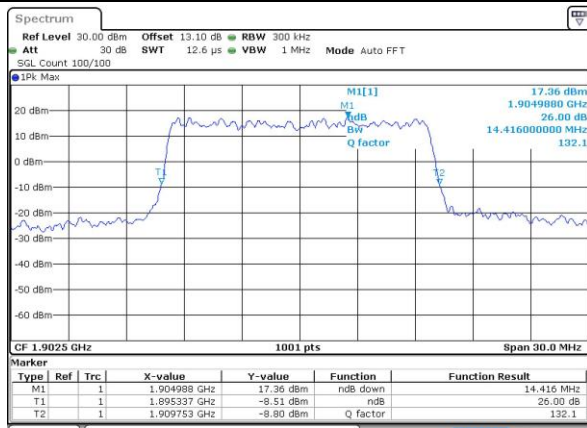

Date: 28_SEP.2018 10:47:02

Highest Channel / 15MHz / 16QAM

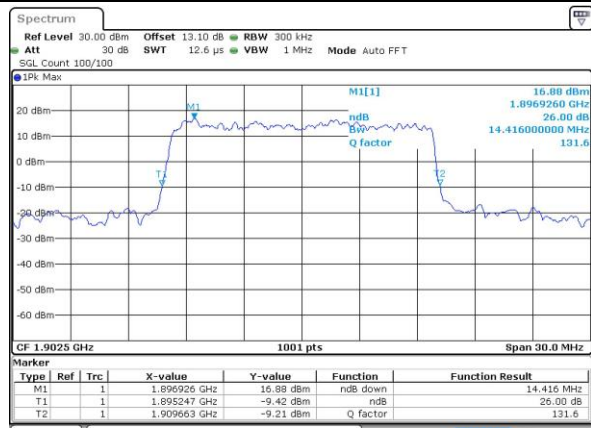


Date: 28_SEP.2018 10:47:13




LTE Band 2


Lowest Channel / 20MHz / QPSK

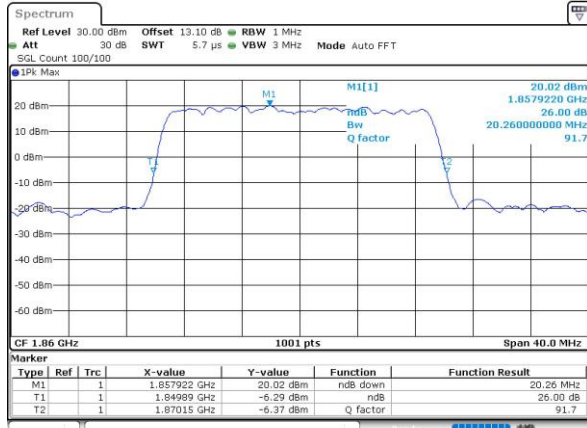


Lowest Channel / 20MHz / 16QAM

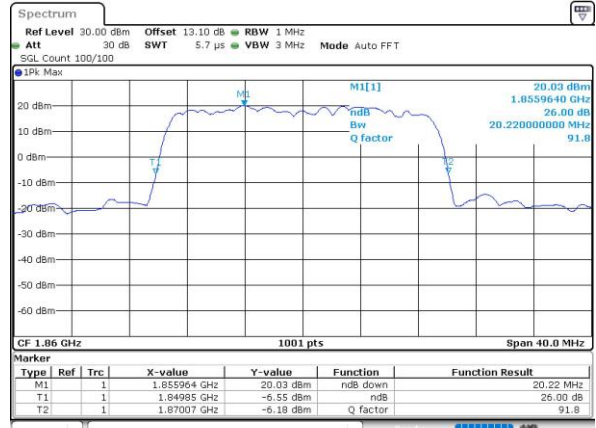


Middle Channel / 20MHz / QPSK

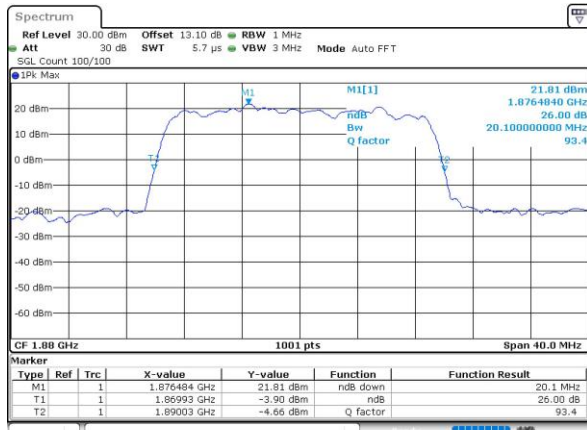


Middle Channel / 20MHz / 16QAM

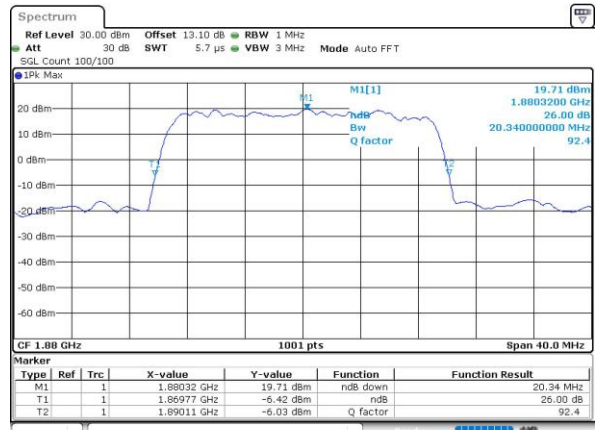

Highest Channel / 20MHz / QPSK

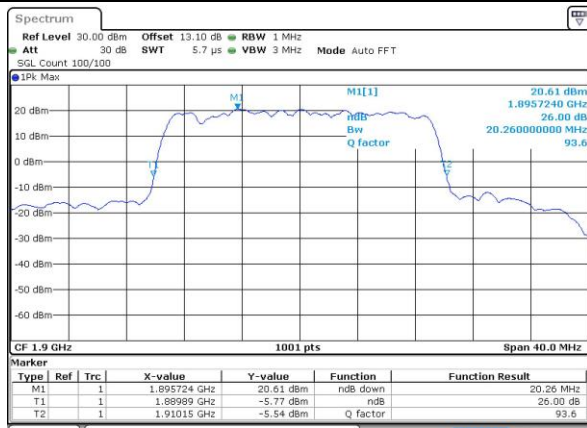


Highest Channel / 20MHz / 16QAM

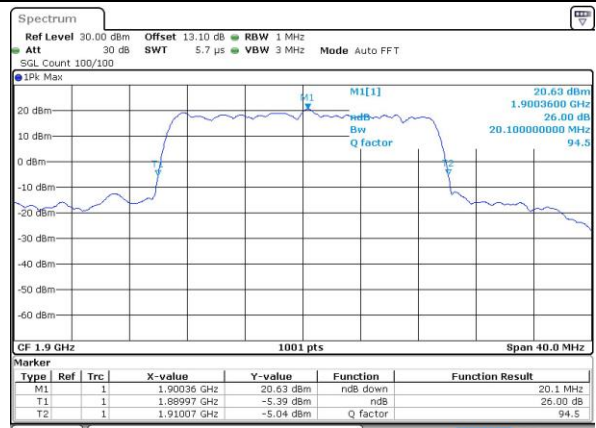




LTE Band 2

Lowest Channel / 1.4MHz / 64QAM

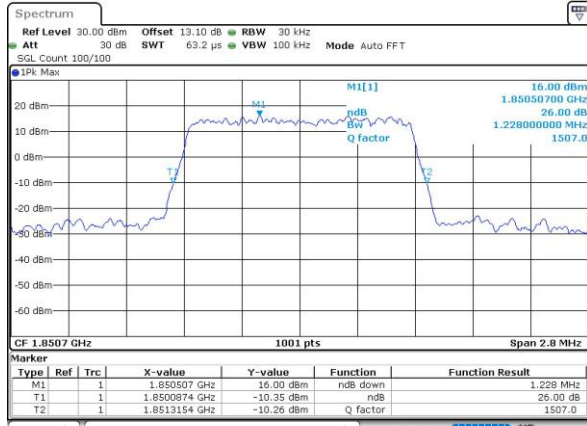


Date: 28.SEP.2018 11:41:36

Lowest Channel / 3MHz / 64QAM

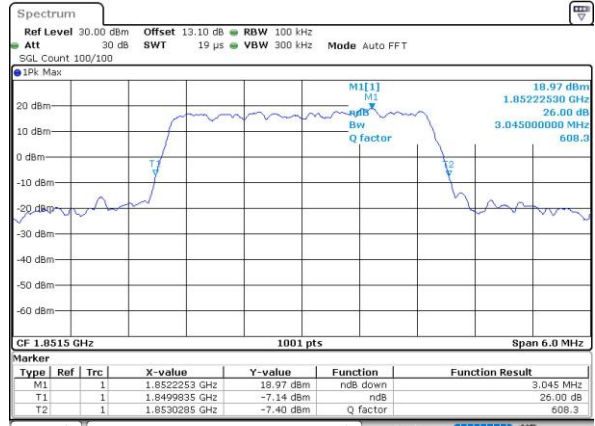


Date: 28.SEP.2018 11:06:26

Middle Channel / 1.4MHz / 64QAM

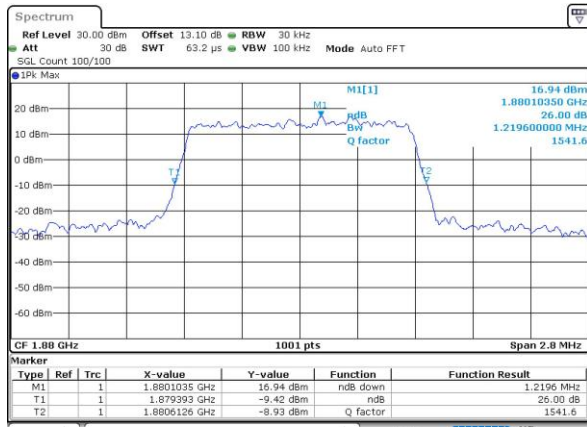


Date: 28.SEP.2018 11:44:53

Middle Channel / 3MHz / 64QAM

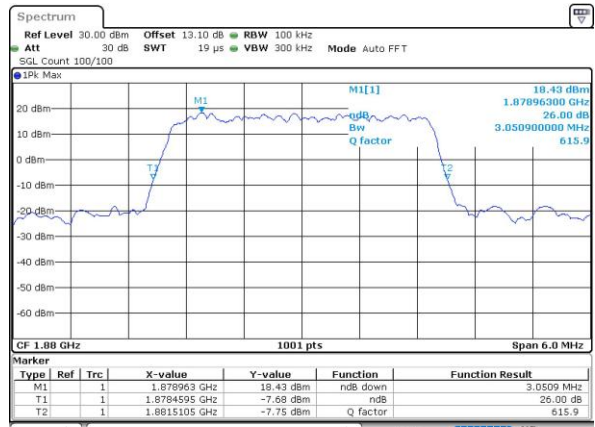


Date: 28.SEP.2018 11:09:18

Highest Channel / 1.4MHz / 64QAM

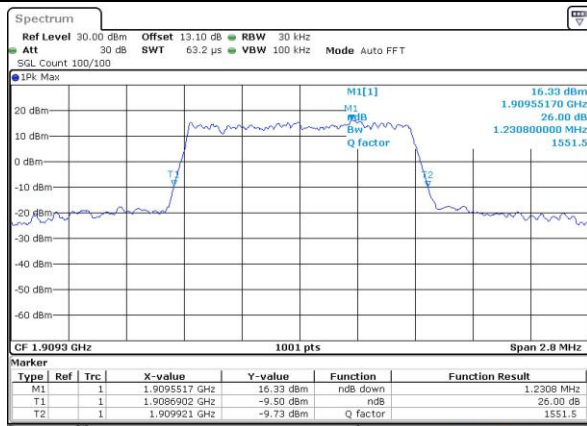

Date: 28.SEP.2018 11:46:05

Highest Channel / 3MHz / 64QAM

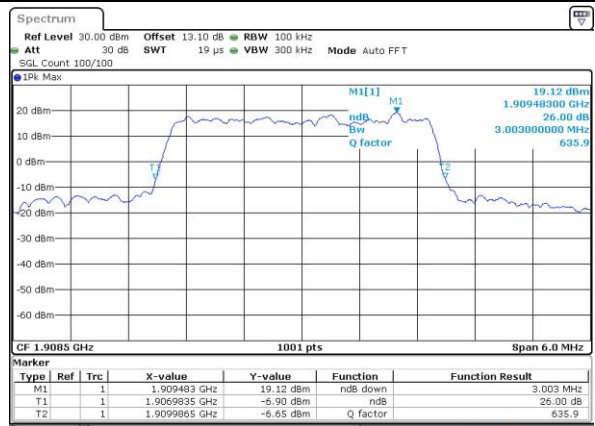


Date: 28.SEP.2018 11:10:31




LTE Band 2

Lowest Channel / 5MHz / 64QAM

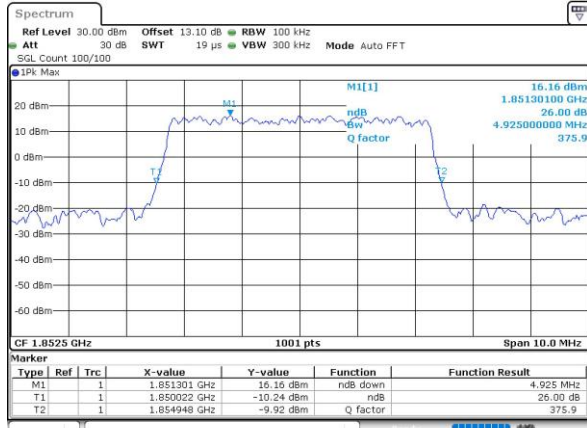


Date: 28.SEP.2018 11:13:23

Lowest Channel / 10MHz / 64QAM

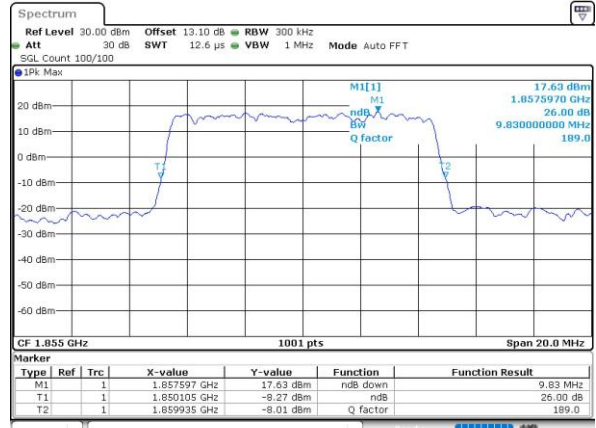


Date: 28.SEP.2018 11:20:19

Middle Channel / 5MHz / 64QAM

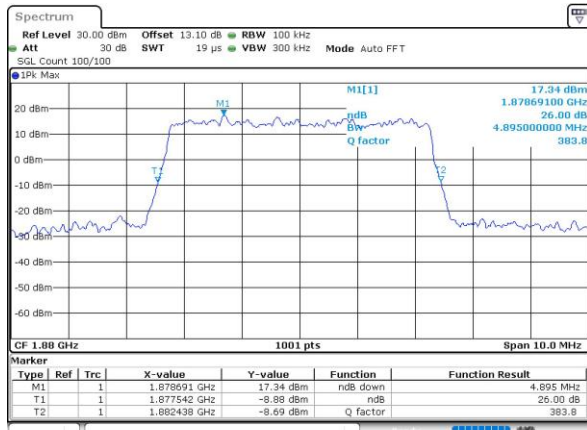


Date: 28.SEP.2018 11:16:14

Middle Channel / 10MHz / 64QAM

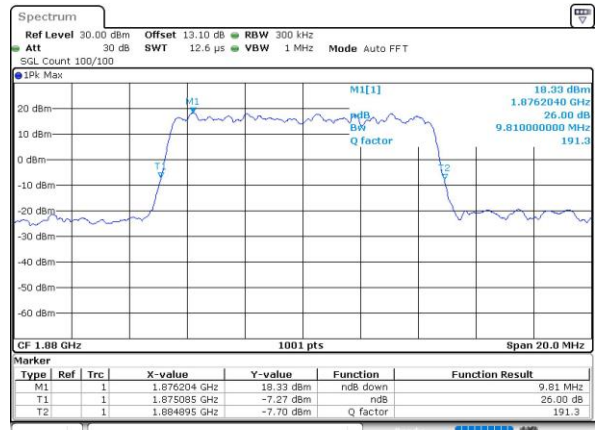


Date: 28.SEP.2018 11:23:10

Highest Channel / 5MHz / 64QAM

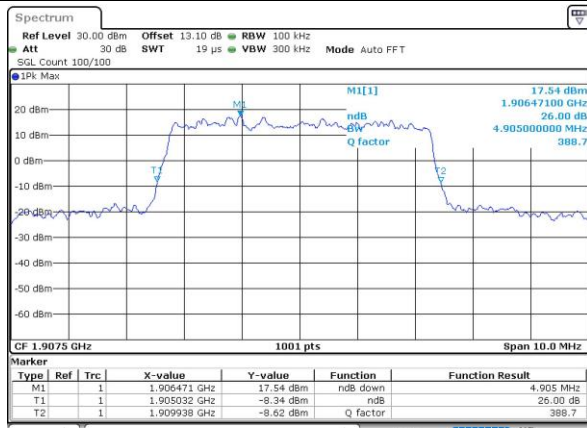

Date: 28.SEP.2018 11:17:27

Highest Channel / 10MHz / 64QAM

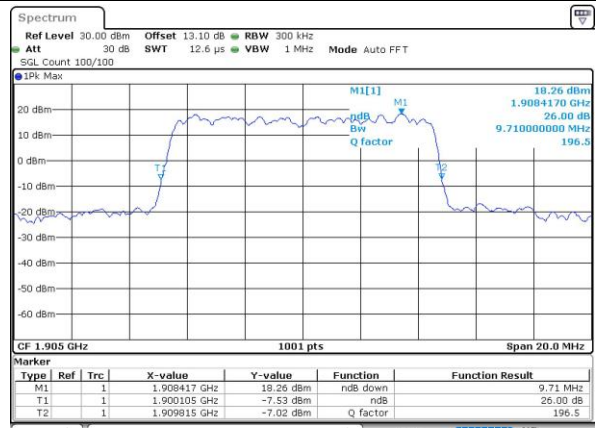


Date: 28.SEP.2018 11:24:23




LTE Band 2

Lowest Channel / 15MHz / 64QAM

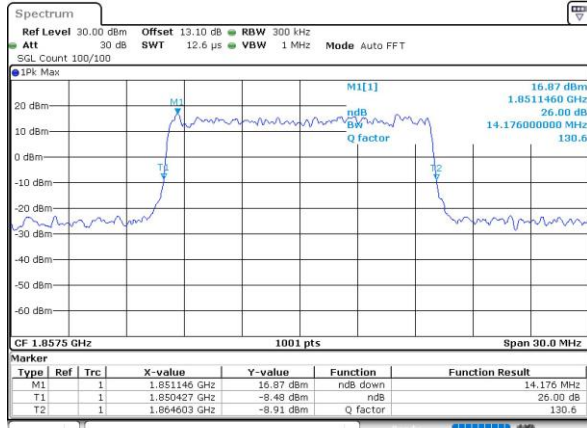


Date: 28.SEP.2018 11:27:15

Lowest Channel / 20MHz / 64QAM

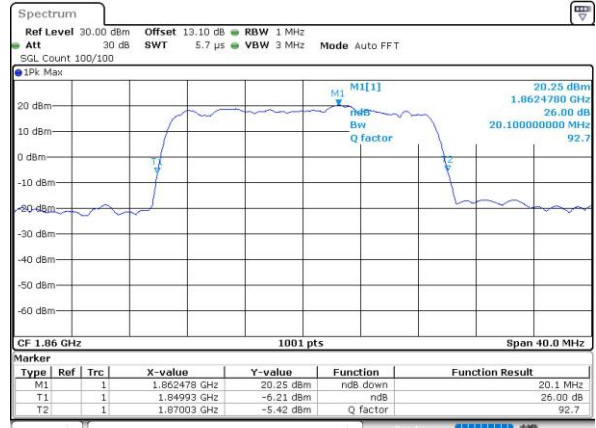


Date: 28.SEP.2018 11:34:11

Middle Channel / 15MHz / 64QAM

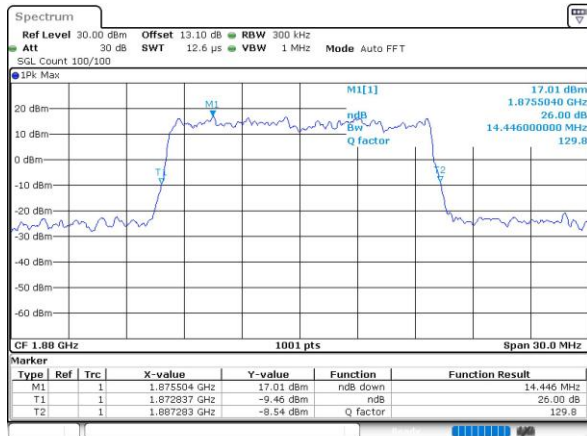


Date: 28.SEP.2018 11:38:07

Middle Channel / 20MHz / 64QAM

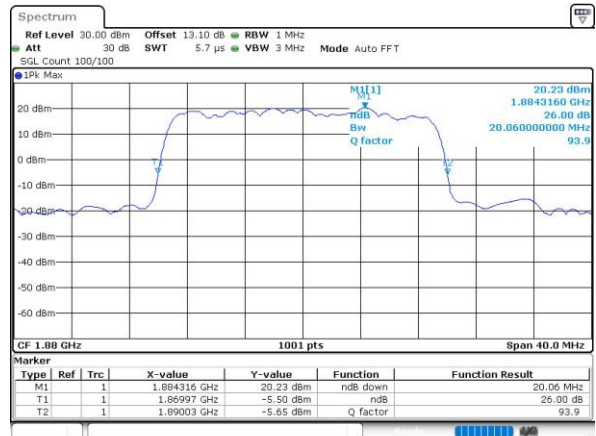


Date: 28.SEP.2018 11:37:03

Highest Channel / 15MHz / 64QAM

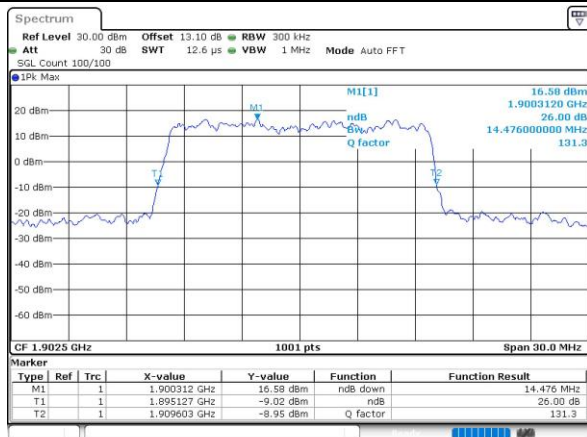

Date: 28.SEP.2018 11:31:20

Highest Channel / 20MHz / 64QAM

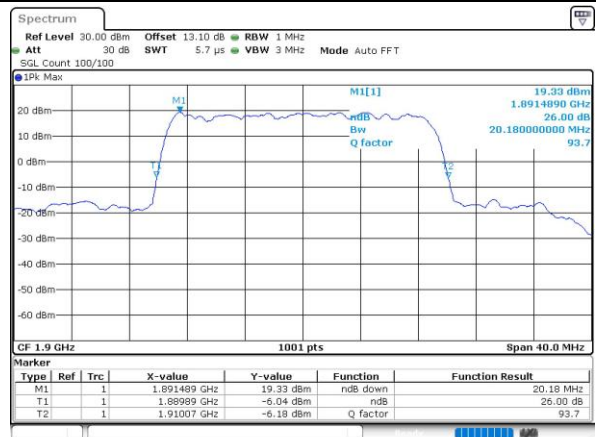

Date: 28.SEP.2018 11:38:15


**Occupied Bandwidth**

Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	1.09	1.09	2.73	2.73	4.52	4.5	9.07	9.03	13.43	13.43	18.46	18.46
Middle CH	1.08	1.08	2.72	2.72	4.48	4.49	9.03	9.03	13.37	13.46	18.26	18.22
Highest CH	1.1	1.09	2.72	2.7	4.47	4.49	9.01	8.99	13.43	13.46	18.3	18.42
Mode	LTE Band 2 : 99%OBW(MHz)											
BW	1.4MHz		3MHz		5MHz		10MHz		15MHz		20MHz	
Mod.	64QAM		64QAM		64QAM		64QAM		64QAM		64QAM	
Lowest CH	1.09	-	2.71	-	4.50	-	9.01	-	13.46	-	18.34	-
Middle CH	1.10	-	2.75	-	4.49	-	9.01	-	13.43	-	18.26	-
Highest CH	1.09	-	2.73	-	4.48	-	9.01	-	13.43	-	18.42	-




LTE Band 2


Lowest Channel / 1.4MHz / QPSK

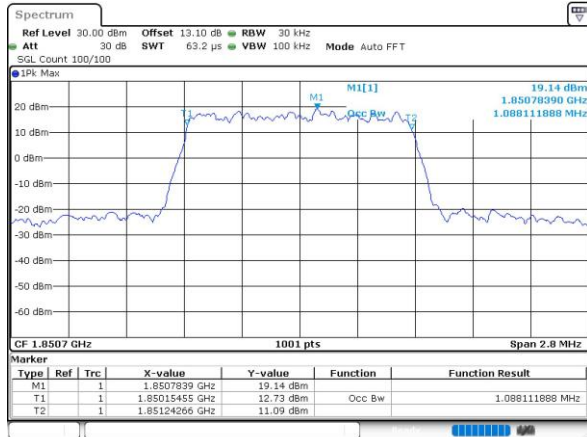


Lowest Channel / 1.4MHz / 16QAM

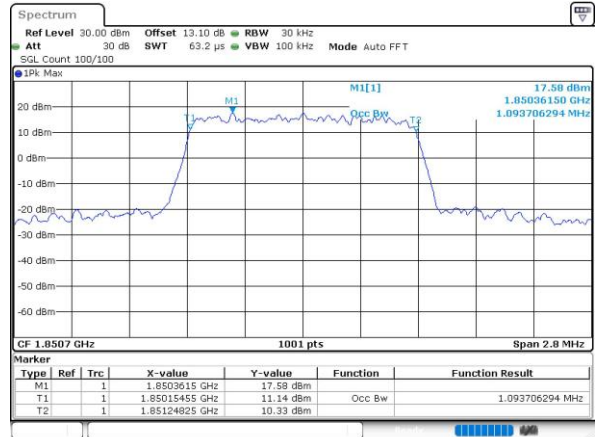


Middle Channel / 1.4MHz / QPSK

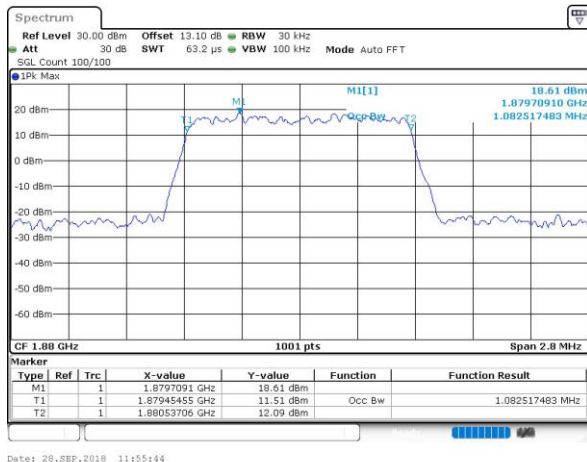


Middle Channel / 1.4MHz / 16QAM

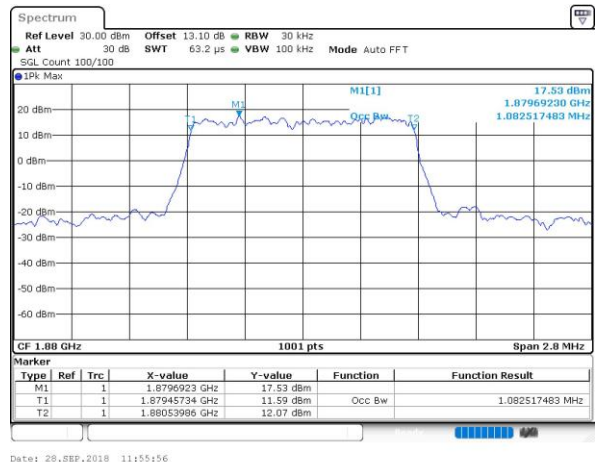

Highest Channel / 1.4MHz / QPSK

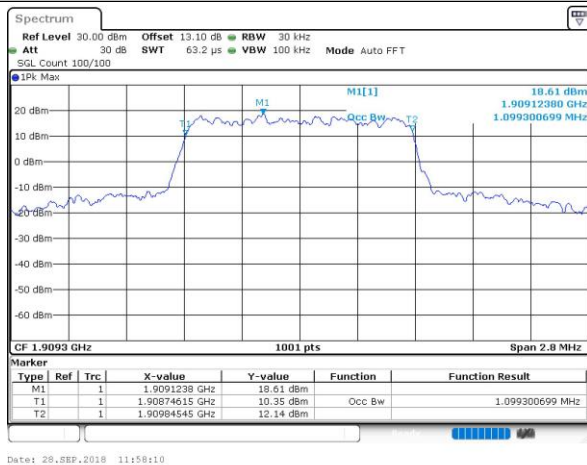


Highest Channel / 1.4MHz / 16QAM

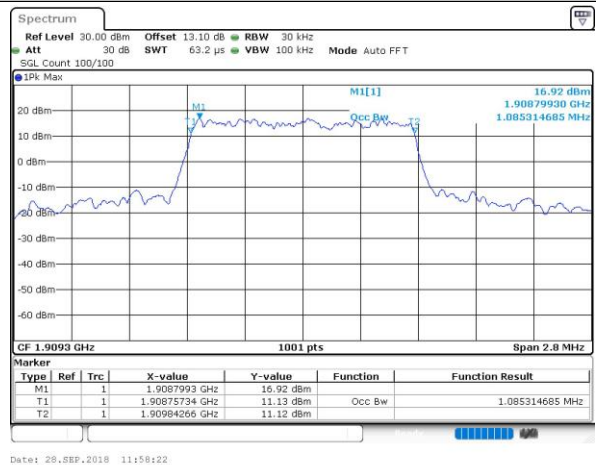




LTE Band 2


Lowest Channel / 3MHz / QPSK

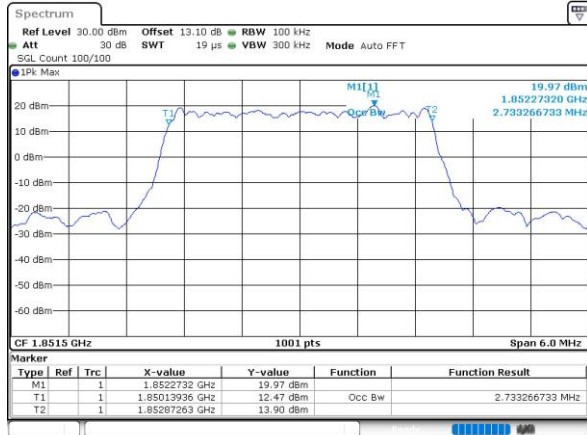


Lowest Channel / 3MHz / 16QAM

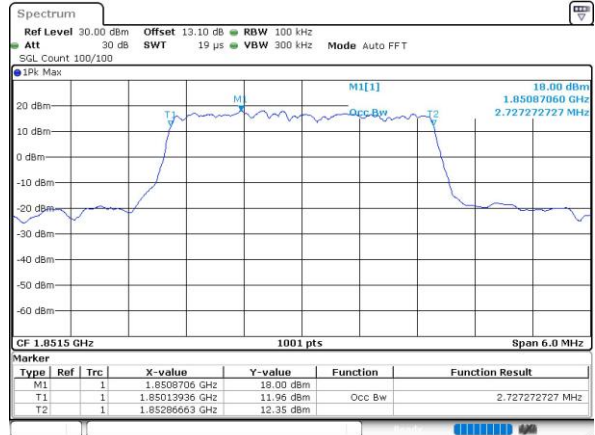


Middle Channel / 3MHz / QPSK

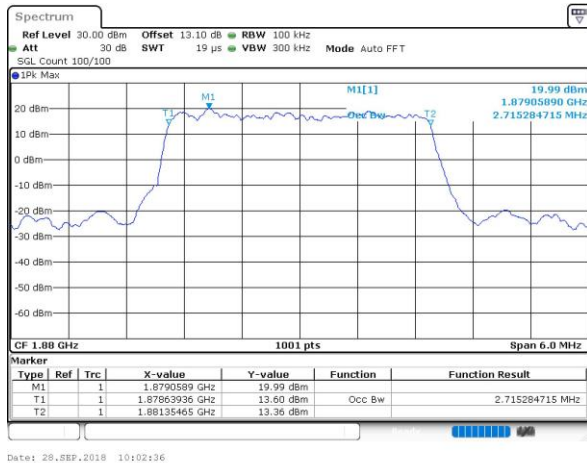

Middle Channel / 3MHz / 16QAM

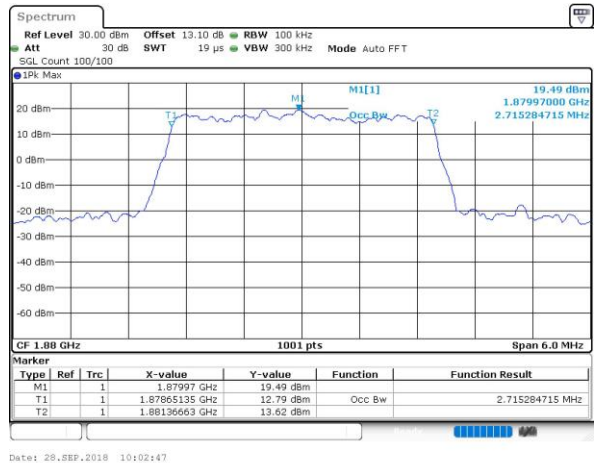

Highest Channel / 3MHz / QPSK

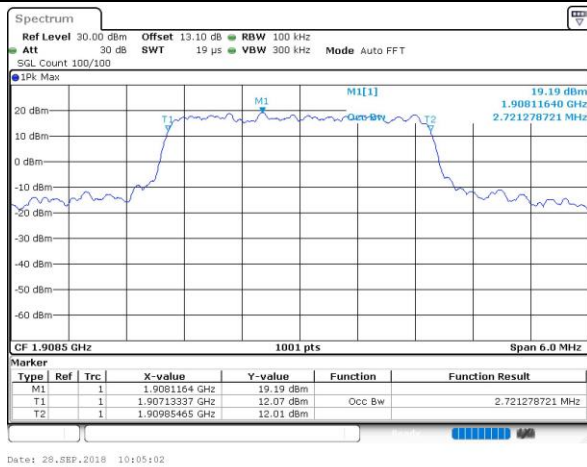

Highest Channel / 3MHz / 16QAM

