



CERTIFICATION TEST REPORT

Report Number. : 12132879-E1V3

Applicant : SONY MOBILE COMMUNICATIONS, INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

FCC ID : PY7-70663E

EUT Description : GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC

Test Standard(s) : FCC CFR47 PART 22H, 24E, and 27

Date Of Issue:
APRIL 02, 2018

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	3/21/2018	Initial Review	Dan Corona
V2	3/23/2018	Updated Section 5.2, 7, 8.1.4, 8.2, 8.2.4, 8.2.8, 8.2.11, 8.3, 8.3.4, 8.3.5, 8.3.6, 8.3.7, 8.3.8, 8.3.9, 8.3.10, Added Section 8.4.7, 8.5.2, 9.1 & 9.1.8	Kiya Kedida
V3	4/2/2018	Updated Section 5.2, 8.4, 7.2 (page 24) and updated LTE Band 17 statement: add channel BW	Kiya Kedida

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	7
4.1. MEASURING INSTRUMENT CALIBRATION	7
4.2. SAMPLE CALCULATION	7
4.3. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. MAXIMUM OUTPUT POWER	9
5.3. MAXIMUM ANTENNA GAIN	13
5.4. WORST-CASE CONFIGURATION AND MODE	14
5.5. DESCRIPTION OF TEST SETUP	15
6. TEST AND MEASUREMENT EQUIPMENT	17
7. RF OUTPUT POWER VERIFICATION	18
7.1. GSM	19
7.2. WCDMA	21
7.3. LTE	25
7.5. LTE Band 4	27
7.6. LTE Band 5	30
7.7. LTE Band 7	32
7.8. LTE Band 12	34
7.9. LTE Band 13	36
7.10. LTE BAND 17	37
7.11. LTE Band 41	38
8. CONDUCTED TEST RESULTS	40
8.1. OCCUPIED BANDWIDTH	40
8.1.1. GSM	44
8.1.2. WCDMA	45
8.1.3. LTE BAND 4	46
8.1.4. LTE BAND 5	48

8.1.5.	LTE BAND 7	50
8.1.6.	LTE BAND 12.....	52
8.1.7.	LTE BAND 13.....	54
8.1.9.	LTE BAND 41.....	56
8.2.	BAND EDGE AND EMISSION MASK	58
8.2.1.	GSM 850MHz.....	60
8.2.2.	GSM 1900MHz.....	61
8.2.3.	WCDMA BAND 5	62
8.2.4.	LTE BAND 4 BANDEDGE	63
8.2.5.	LTE BAND 5 BANDEDGE	71
8.2.6.	LTE BAND 7 ADJACENT CHANNEL POWER.....	77
8.2.7.	LTE BAND 12 BANDEDGE	83
8.2.8.	LTE BAND 13 BANDEDGE	89
8.2.10.	LTE BAND 17 BANDEDGE	92
8.2.11.	LTE BAND 41 ADJACENT CHANNEL POWER	93
8.3.	OUT OF BAND EMISSIONS	99
8.3.1.	GSM GSM850	100
8.3.2.	GSM GSM1900	102
8.3.3.	WCDMA BAND5	104
8.3.4.	LTE BAND 4.....	106
8.3.7.	LTE BAND 12.....	120
8.3.8.	LTE BAND 13.....	124
8.3.9.	LTE BAND 17.....	126
8.3.10.	LTE BAND 41	127
8.4.	FREQUENCY STABILITY	131
8.4.1.	GSM 1900	133
8.4.2.	LTE BAND 4.....	133
8.4.3.	LTE BAND 5.....	134
8.4.4.	LTE BAND 7	134
8.4.5.	LTE BAND 12.....	135
8.4.6.	LTE BAND 13.....	135
8.4.7.	LTE BAND 41.....	136
8.6.	PEAK TO AVERAGE RATIO	137
8.6.1.	GSM.....	138
8.6.2.	WCDMA	139

8.6.3.	LTE BAND 4.....	140
8.6.4.	LTE BAND 5.....	142
8.6.5.	LTE BAND 7.....	144
8.6.6.	LTE BAND 12.....	146
8.6.7.	LTE BAND 13.....	148
8.6.9.	LTE BAND 17.....	149
8.6.10.	LTE BAND 41	150
9.	RADIATED TEST RESULTS	152
9.1.	FIELD STRENGTH OF SPURIOUS RADIATION	152
9.1.1.	GSM.....	153
10.	SETUP PHOTOS.....	167

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SONY MOBILE COMMUNICATIONS, INC. 4-12-3 HIGASHI-SHINAGAWA, SHINAGAWA -KU, TOKYO, 140-0002, JAPAN
FCC ID	PY7-70663E
EUT Description	GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC
Serial Number	BH9000HXBC, BH9000ADBC, BH9000JBBB, BH9000M4BG
Date Tested	FEBRUARY 21, 2018 to MARCH 23, 2018
Applicable Standards	FCC CFR47 PART 22H, 24E, 27
Test Results	COMPLIES

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released For
UL Verification Services Inc. By:

Reviewed By:



Dan Corona
Operations Leader
UL Verification Services Inc.



Kiya Kedida
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, ANSI/TIA-603-E-2016, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, FCC KDB 971168 D01 v03.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A (ISED:2324B-1)	☐ Chamber D (ISED:22541-1)
☐ Chamber B (ISED:2324B-2)	☐ Chamber E (ISED:22541-2)
☐ Chamber C (ISED:2324B-3)	☐ Chamber F (ISED:22541-3)
	☐ Chamber G (ISED:22541-4)
	☐ Chamber H (ISED:22541-5)

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \\ &\text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC.

5.2. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015/ TIA-603-E Clause 2.2.17

KDB 971168 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

GSM MODES

Part 22 850MHz

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	ERP		Limit (dBm)	Margin (dB)
				dBm	mW		
824- 849	GPRS	32.00	-1.08	28.77	753.4	38.5	-9.7
	EGPRS	27.20	-1.08	23.97	249.5	38.5	-14.5

Part 24 1900MHz

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1850-1910	GPRS	29.30	-1.91	27.39	548.3	33.0	-5.6
	EGPRS	25.60	-1.91	23.69	233.9	33.0	-9.3

WCDMA MODE

Part 22 Band 5

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	ERP		Limit (dBm)	Margin (dB)
				dBm	mW		
824- 849	REL 99	24.40	-1.08	21.17	130.9	38.5	-17.3
	HSDPA	23.40	-1.08	20.17	104.0	38.5	-18.3

LTE BAND 4

Part 27						
EIRP Limit (dBm)		30.00				
Antenna Gain (dBi)		-1.17				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
1.4	1710-1755	QPSK	23.1	21.93	156.0	-8.1
		16QAM	22.9	21.73	148.9	-8.3
		64QAM	22.4	21.23	132.7	-8.8
3.0		QPSK	23.2	22.03	159.6	-8.0
		16QAM	23.0	21.83	152.4	-8.2
		64QAM	22.6	21.43	139.0	-8.6
5.0		QPSK	23.3	22.13	163.3	-7.9
		16QAM	23.1	21.93	156.0	-8.1
		64QAM	22.6	21.43	139.0	-8.6
10.0		QPSK	23.1	21.93	156.0	-8.1
		16QAM	23.0	21.83	152.4	-8.2
		64QAM	22.4	21.23	132.7	-8.8
15.0		QPSK	23.2	22.03	159.6	-8.0
		16QAM	23.1	21.93	156.0	-8.1
		64QAM	22.8	21.63	145.5	-8.4
20.0		QPSK	23.1	21.93	156.0	-8.1
		16QAM	23.3	22.13	163.3	-7.9
		64QAM	22.9	21.73	148.9	-8.3

LTE BAND 5

Part 22						
ERP Limit (dBm)			38.45			
Antenna Gain (dBi)			-1.08			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	824-849	QPSK	24.6	21.37	137.1	-17.1
		16QAM	23.9	20.67	116.7	-17.8
		64QAM	22.4	19.17	82.6	-19.3
3.0		QPSK	24.7	21.47	140.3	-17.0
		16QAM	24.0	20.77	119.4	-17.7
		64QAM	22.5	19.27	84.5	-19.2
5.0		QPSK	24.7	21.47	140.3	-17.0
		16QAM	24.0	20.77	119.4	-17.7
		64QAM	22.7	19.47	88.5	-19.0
10.0		QPSK	24.6	21.37	137.1	-17.1
		16QAM	24.0	20.77	119.4	-17.7
		64QAM	22.5	19.27	84.5	-19.2

LTE BAND 7

Part 27						
EIRP Limit (dBm)		33.00				
Antenna Gain (dBi)		-6.43				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
5.0	2500-2570	QPSK	20.6	14.17	26.1	-18.8
		16QAM	20.5	14.07	25.5	-18.9
		64QAM	20.4	13.97	24.9	-19.0
10.0		QPSK	20.6	14.17	26.1	-18.8
		16QAM	20.4	13.97	24.9	-19.0
		64QAM	20.4	13.97	24.9	-19.0
15.0		QPSK	20.6	14.17	26.1	-18.8
		16QAM	20.6	14.17	26.1	-18.8
		64QAM	20.6	14.17	26.1	-18.8
20.0		QPSK	20.6	14.17	26.1	-18.8
		16QAM	20.7	14.27	26.7	-18.7
		64QAM	20.7	14.27	26.7	-18.7

LTE BAND 12

Part 27						
ERP Limit (dBm)		34.77				
Antenna Gain (dBi)		-3.36				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	699-716	QPSK	24.4	18.89	77.4	-15.9
		16QAM	23.5	17.99	63.0	-16.8
		64QAM	22.5	16.99	50.0	-17.8
3.0		QPSK	24.5	18.99	79.3	-15.8
		16QAM	23.9	18.39	69.0	-16.4
		64QAM	22.5	16.99	50.0	-17.8
5.0		QPSK	24.5	18.99	79.3	-15.8
		16QAM	24.0	18.49	70.6	-16.3
		64QAM	22.5	16.99	50.0	-17.8
10.0		QPSK	24.4	18.89	77.4	-15.9
		16QAM	23.8	18.29	67.5	-16.5
		64QAM	22.2	16.69	46.7	-18.1

LTE BAND 13

Part 27						
ERP Limit (dBm)		34.77				
Antenna Gain (dBi)		-1.18				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
5.0	777-787	QPSK	24.7	21.37	137.1	-13.4
		16QAM	23.7	20.37	108.9	-14.4
		64QAM	22.4	19.07	80.7	-15.7
10.0		QPSK	24.3	20.97	125.0	-13.8
		16QAM	23.3	19.97	99.3	-14.8
		64QAM	22.4	19.07	80.7	-15.7

LTE BAND 17

LTE Band 17 (704-716MHz, 5/10MHz bandwidth) is covered by LTE Band 12 because it is a subset of LTE band 12 and they have the same output power and channel bandwidth.

LTE BAND 41

Part 27						
EIRP Limit (dBm)		33.00				
Antenna Gain (dBi)		-5.61				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
5.0	2496-2690	QPSK	21.6	15.99	39.7	-17.0
		16QAM	21.1	15.49	35.4	-17.5
		64QAM	21.5	15.89	38.8	-17.1
10.0		QPSK	21.6	15.99	39.7	-17.0
		16QAM	21.2	15.59	36.2	-17.4
		64QAM	21.3	15.69	37.1	-17.3
15.0		QPSK	21.6	15.99	39.7	-17.0
		16QAM	21.2	15.59	36.2	-17.4
		64QAM	21.3	15.69	37.1	-17.3
20.0		QPSK	21.6	15.99	39.7	-17.0
		16QAM	21.3	15.69	37.1	-17.3
		64QAM	21.6	15.99	39.7	-17.0

5.3. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands	Antenna Gain (dBi)
GSM850, 824-849MHz	-1.08
GSM1900, 1850-1910MHz	-1.91
WCDMA Band 5, 824-849 MHz	-1.08
LTE BAND 4, 1710 - 1755 MHz	-1.17
LTE BAND 5, 824 - 849 MHz	-1.08
LTE BAND 7, 2500 - 2570 MHz	-6.43
LTE BAND 12, 699 - 716 MHz	-3.36
LTE BAND 13, 777 - 787 MHz	-1.18
LTE Band 17, 704 – 716 MHz	-3.36
LTE BAND 41, 2496 - 2690 MHz	-5.61

5.4. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE Bands of:

Band 4, Band 5, Band 7, Band 12, Band 13, Band 17, and Band 41.

LTE Band 17 (704-716MHz, 5/10MHz bandwidth) is covered by LTE Band 12 because it is a subset of LTE band 12 and they have the same output power and channel bandwidth.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK and 16QAM results were worst case. All testing was performed using QPSK and 16QAM modulations to represent the worst case. All testing was performed using QPSK, and 16QAM modulations to represent the worst case.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y, & Z, and it was determined that X-Axis with AC/DC Adapter and headset was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X-Axis with AC/DC Adapter and headset orientation.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC adapter	SONY	UCH12	VB17W46601037
Audio & Charging Cable	SONY	1312-8675.1B	YYWWSSPCXXXXXC
DC Power Supply	Ametek	XT 15-4	T463
Earphone	SONY	MH410c	N/A

I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	USB/Headphone Jack	1	USB Type-C/Audio	Un-shielded	.2m	Audio & Charging Cable
4	RF In/out	1	Communication Test Set	Un-shielded	2m	No


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

CONDUCTED SETUP

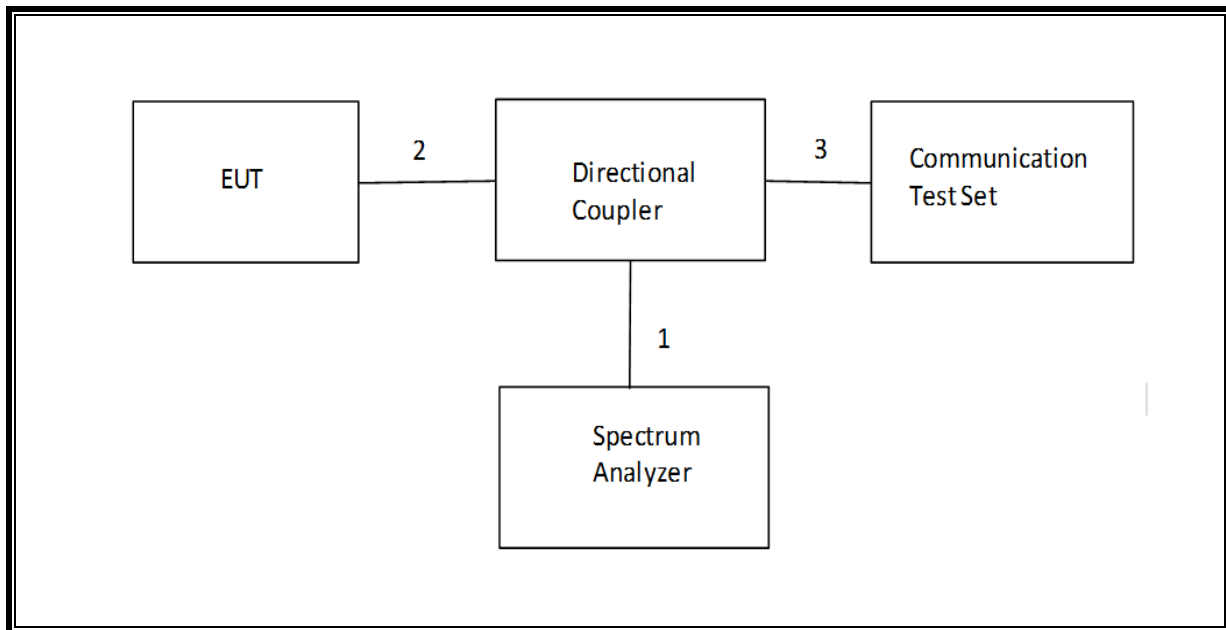

RADIATED SETUP

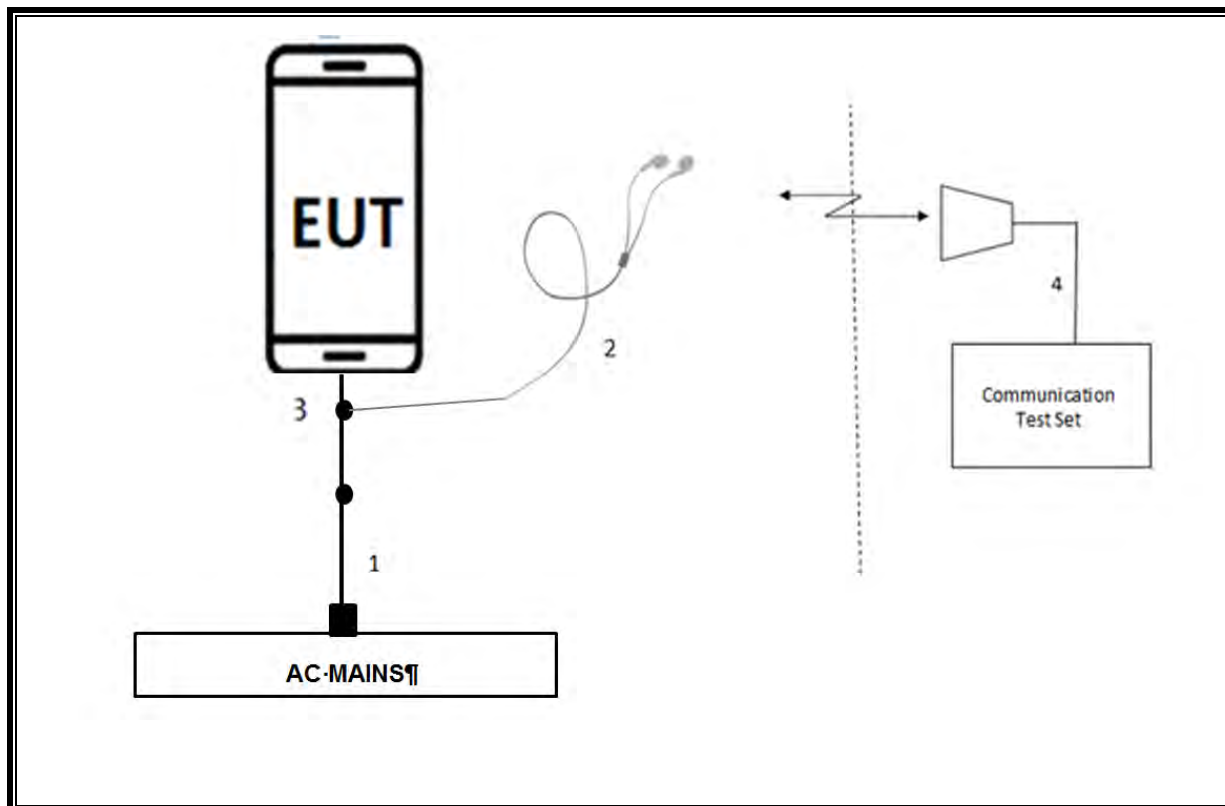

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	6/9/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T1165	06/24/18
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1466	04/11/18
Spectrum Analyzer, PSA 3Hz to 44GHz	Keysight	E4446A	T123	12/14/18
Directional Coupler	Mini-Circuits	ZUDC10-183+	T1136	06/18/18
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	07/05/18
Highpass Filter, 1 GHz	Micro-Tronics	HPM18129	T889	02/21/19
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1241	07/19/18
Wideband Communication Test Set, Call Box	R&S	CMW500	T959	connection purpose only
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T971	connection purpose only
Chamber, Environmental	Thermotron	SE-600-10-10	80	2/22/2019
DC power supply, 8 V @ 3 A or 15 V @ 2 A	Agilent / HP	E3610A	None	CNR
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 1.7, November 2015	
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017	

NOTES:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

7. RF OUTPUT POWER VERIFICATION

The below tables contain the highest of all configurations average conducted output powers as follows:

RESULT

7.1.1. GSM 850MHz

ID:	35515	Date:	2/13/18
------------	-------	--------------	---------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Average (dBm)	
			1 slot	2 slots
850.0	128	824.2	31.7	29.9
	190	836.6	31.8	29.9
	251	848.8	32.0	29.8

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Average (dBm)	
			1 slot	2 slots
850.0	128	824.2	27.0	25.6
	190	836.6	27.1	25.6
	251	848.8	27.2	25.7

7.1.2. GSM 1900MHz

ID:	35515	Date:	2/13/18
------------	-------	--------------	---------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Average (dBm)	
			1 slot	2 slots
1900.0	512	1850.2	29.2	27.2
	661	1880.0	29.3	27.3
	810	1909.8	29.1	27.1

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Average (dBm)	
			1 slot	2 slots
1900.0	512	1850.2	25.6	24.3
	661	1880.0	25.6	24.3
	810	1909.8	25.5	24.2

7.2. WCDMA

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

REL 99 Setup Procedures used to establish the test signals

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA Setup Procedures used to establish the test signals

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA (HSDPA & HSUPA) Setup Procedures used to establish the test signals

The following 5 Sub-tests were completed according to Release 6 procedures in table C, 11.1.3 of 3GPP TS34.121-1v13. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
HSDPA Specific Settings	MPR (dB)	0	2	1	2	0
	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
HSUPA Specific Settings	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
	E-DPDCCH	6	8	8	5	0
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	12
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	67
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

HSPA+

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

RESULT

7.2.1. WCDMA BAND 5

ID:	35515	Date:	2/13/18
------------	-------	--------------	---------

Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 5 (850MHz)	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.3
			4183	836.6	N/A	24.3
			4233	846.6	N/A	24.4
	HSDPA	Subtest 1	4132	826.4	0	23.3
			4183	836.6	0	23.3
			4233	846.6	0	23.4
		Subtest 2	4132	826.4	0	23.3
			4183	836.6	0	23.3
			4233	846.6	0	23.4
		Subtest 3	4132	826.4	0.5	22.8
			4183	836.6	0.5	22.8
			4233	846.6	0.5	22.9
		Subtest 4	4132	826.4	0.5	22.8
			4183	836.6	0.5	22.8
			4233	846.6	0.5	22.9
	HSPA (HSDPA & HSUPA)	Subtest 1	4132	826.4	0	23.3
			4183	836.6	0	23.3
			4233	846.6	0	23.4
		Subtest 2	4132	826.4	2	21.3
			4183	836.6	2	21.3
			4233	846.6	2	21.4
		Subtest 3	4132	826.4	1	22.3
			4183	836.6	1	22.3
			4233	846.6	1	22.4
		Subtest 4	4132	826.4	2	21.3
			4183	836.6	2	21.3
			4233	846.6	2	21.4
		Subtest 5	4132	826.4	0	23.3
			4183	836.6	0	23.3
			4233	846.6	0	23.4

7.3. LTE

CONDUCTED OUTPUT POWER MEASUREMENT PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
...					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

MODES TESTED

- LTE 4
- LTE 5
- LTE 7
- LTE 12
- LTE 13
- LTE 41

RESULTS

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

7.5. LTE Band 4

ID:	40814	Date:	2/21/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 4 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				19957	20175	20393
				1710.7 MHz	1732.5 MHz	1754.3 MHz
1.4	QPSK	1	0	23.0	22.8	22.6
		1	2	23.1	22.9	22.6
		1	5	23.0	22.9	22.6
		3	0	23.0	22.9	22.5
		3	1	23.1	22.9	22.6
		3	2	23.1	23.0	22.6
	16QAM	6	0	23.1	22.8	22.6
		1	0	22.7	22.8	22.3
		1	2	22.7	22.9	22.3
		1	5	22.7	22.8	22.3
		3	0	22.9	22.7	22.3
		3	1	22.9	22.7	22.3
	64QAM	3	2	22.9	22.7	22.3
		6	0	22.3	21.9	21.8
		1	0	22.4	22.0	22.1
		1	2	22.4	22.1	22.2
		1	5	22.4	22.0	22.1
		3	0	22.2	22.1	22.1
		3	1	22.3	22.2	22.1
		3	2	22.3	22.1	22.1
		6	0	21.3	21.2	20.7

OUTPUT POWER FOR LTE BAND 4 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				19965	20175	20385
				1711.5 MHz	1732.5 MHz	1753.5 MHz
3.0	QPSK	1	0	23.1	23.0	22.5
		1	7	23.2	23.0	22.7
		1	14	23.1	22.9	22.6
		8	0	23.2	22.9	22.5
		8	4	23.2	23.0	22.6
		8	7	23.2	23.0	22.6
	16QAM	15	0	23.2	22.9	22.5
		1	0	22.8	22.9	22.1
		1	7	22.8	23.0	22.2
		1	14	22.8	22.9	22.1
		8	0	22.3	22.1	21.7
		8	4	22.3	22.1	21.7
	64QAM	8	7	22.3	22.1	21.7
		15	0	22.2	22.1	21.7
		1	0	22.5	22.2	22.0
		1	7	22.6	22.3	22.2
		1	14	22.5	22.2	22.1
		8	0	21.3	21.1	20.8
		8	4	21.3	21.2	20.8
		8	7	21.3	21.2	20.8
		15	0	21.4	21.2	20.7

OUTPUT POWER FOR LTE BAND 4 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				19975	20175	20375
				1712.5 MHz	1732.5 MHz	1752.5 MHz
5.0	QPSK	1	0	23.3	23.0	22.8
		1	12	23.2	22.9	22.6
		1	24	23.2	22.9	22.7
		12	0	23.2	23.0	22.6
		12	6	23.2	23.0	22.6
		12	11	23.2	23.0	22.6
		25	0	23.2	23.0	22.6
	16QAM	1	0	22.9	23.1	22.5
		1	12	22.8	23.0	22.3
		1	24	22.9	23.0	22.4
		12	0	22.3	22.2	21.8
		12	6	22.3	22.2	21.7
		12	11	22.3	22.2	21.7
		25	0	22.2	22.1	21.7
	64QAM	1	0	22.6	22.5	21.8
		1	12	22.6	22.4	21.7
		1	24	22.6	22.4	21.8
		12	0	21.4	21.1	20.8
		12	6	21.4	21.1	20.8
		12	11	21.4	21.1	20.8
		25	0	21.4	21.1	20.8

OUTPUT POWER FOR LTE BAND 4 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20000	20175	20350
				1715.0 MHz	1732.5 MHz	1750.0 MHz
10.0	QPSK	1	0	22.9	23.1	23.0
		1	24	22.8	22.9	22.8
		1	49	22.8	23.0	22.8
		25	0	22.9	23.1	23.0
		25	12	22.9	23.0	22.8
		25	24	23.0	23.0	22.8
		50	0	23.0	23.0	22.8
	16QAM	1	0	22.6	23.0	22.5
		1	24	22.5	22.9	22.4
		1	49	22.5	23.0	22.3
		25	0	22.1	22.2	22.1
		25	12	22.1	22.1	21.9
		25	24	22.1	22.1	21.8
		50	0	22.1	22.1	21.9
	64QAM	1	0	22.3	22.3	22.4
		1	24	22.2	22.2	22.3
		1	49	22.3	22.4	22.3
		25	0	21.2	21.3	21.2
		25	12	21.2	21.3	21.1
		25	24	21.2	21.2	21.0
		50	0	21.2	21.2	21.0

OUTPUT POWER FOR LTE BAND 4 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20025	20175	20325
				1717.5 MHz	1732.5 MHz	1747.5 MHz
15.0	QPSK	1	0	23.2	23.2	23.1
		1	37	23.1	23.0	22.9
		1	74	23.0	23.0	22.8
		36	0	23.0	23.1	22.9
		36	16	23.1	23.0	22.9
		36	35	23.0	23.0	22.8
		75	0	23.1	23.0	22.8
	16QAM	1	0	23.1	23.1	22.6
		1	37	23.0	22.9	22.4
		1	74	23.0	23.0	22.3
		36	0	22.1	22.2	22.0
		36	16	22.2	22.1	22.0
		36	35	22.1	22.1	21.9
		75	0	22.2	22.1	22.0
	64QAM	1	0	22.8	22.4	22.5
		1	37	22.8	22.2	22.4
		1	74	22.8	22.3	22.4
		36	0	21.2	21.3	21.1
		36	16	21.3	21.3	21.2
		36	35	21.2	21.2	21.0
		75	0	21.3	21.2	21.0

OUTPUT POWER FOR LTE BAND 4 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20050	20175	20300
				1720.0 MHz	1732.5 MHz	1745.0 MHz
20.0	QPSK	1	0	23.1	23.1	23.1
		1	49	22.9	22.9	22.9
		1	99	22.8	22.9	22.8
		50	0	23.0	23.1	23.1
		50	24	22.9	23.0	23.0
		50	49	22.8	23.0	23.0
		100	0	22.8	23.0	23.0
	16QAM	1	0	23.3	23.2	23.1
		1	49	23.0	22.9	22.9
		1	99	22.9	23.0	22.8
		50	0	22.1	22.2	22.2
		50	24	22.0	22.1	22.1
		50	49	21.9	22.1	22.0
		100	0	22.0	22.1	22.1
	64QAM	1	0	22.6	22.9	22.4
		1	49	22.4	22.7	22.3
		1	99	22.4	22.9	22.3
		50	0	21.2	21.3	21.2
		50	24	21.1	21.3	21.2
		50	49	21.1	21.2	21.2
		100	0	21.1	21.2	21.2

7.6. LTE Band 5

ID:	38515	Date:	2/20/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 5 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20407	20525	20643
				824.7 MHz	836.5 MHz	848.3 MHz
1.4	QPSK	1	0	24.2	24.6	24.4
		1	2	24.2	24.6	24.4
		1	5	24.1	24.5	24.4
		3	0	24.1	24.5	24.4
		3	1	24.2	24.6	24.5
		3	2	24.2	24.6	24.5
	16QAM	6	0	23.1	23.5	23.4
		1	0	23.3	23.7	23.8
		1	2	23.3	23.7	23.8
		1	5	23.3	23.6	23.7
		3	0	23.3	23.8	23.6
		3	1	23.3	23.9	23.7
	64QAM	3	2	23.3	23.9	23.7
		6	0	22.4	22.8	22.4
		1	0	22.0	22.4	22.3
		1	2	22.1	22.4	22.4
		1	5	22.0	22.3	22.3
		3	0	21.8	22.4	22.3
		3	1	21.9	22.4	22.3
		3	2	21.9	22.4	22.3
		6	0	21.5	22.0	21.5

OUTPUT POWER FOR LTE BAND 5 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20415	20525	20635
				825.5 MHz	836.5 MHz	847.5 MHz
3.0	QPSK	1	0	24.1	24.7	24.3
		1	7	24.2	24.7	24.4
		1	14	24.1	24.6	24.3
		8	0	23.2	23.6	23.3
		8	4	23.2	23.6	23.4
		8	7	23.2	23.6	23.4
	16QAM	15	0	23.2	23.6	23.4
		1	0	23.3	24.0	23.3
		1	7	23.3	24.0	23.4
		1	14	23.2	24.0	23.2
		8	0	22.3	22.7	22.5
		8	4	22.4	22.8	22.6
	64QAM	8	7	22.3	22.8	22.5
		15	0	22.3	22.7	22.5
		1	0	22.1	22.4	22.4
		1	7	22.1	22.5	22.4
		1	14	22.0	22.4	22.2
		8	0	21.4	21.9	21.6
		8	4	21.4	21.9	21.7
		8	7	21.4	21.9	21.6
		15	0	21.5	21.9	21.6

OUTPUT POWER FOR LTE BAND 5 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20425	20525	20625
				826.5 MHz	836.5 MHz	846.5 MHz
5.0	QPSK	1	0	24.3	24.7	24.5
		1	12	24.2	24.6	24.4
		1	24	24.2	24.7	24.4
		12	0	23.2	23.7	23.4
		12	6	23.2	23.7	23.4
		12	11	23.2	23.6	23.4
		25	0	23.2	23.7	23.4
	16QAM	1	0	23.4	24.0	23.7
		1	12	23.3	24.0	23.6
		1	24	23.3	24.0	23.5
		12	0	22.4	22.9	22.6
		12	6	22.4	22.9	22.6
		12	11	22.3	22.9	22.5
		25	0	22.3	22.8	22.5
	64QAM	1	0	22.2	22.6	22.1
		1	12	22.1	22.6	22.0
		1	24	22.1	22.7	21.9
		12	0	21.5	21.8	21.7
		12	6	21.5	21.8	21.7
		12	11	21.5	21.8	21.6
		25	0	21.5	21.8	21.6

OUTPUT POWER FOR LTE BAND 5 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20450	20525	20600
				829.0 MHz	836.5 MHz	844.0 MHz
10.0	QPSK	1	0	24.4	24.6	24.5
		1	24	24.2	24.6	24.4
		1	49	24.1	24.6	24.3
		25	0	23.4	23.7	23.6
		25	12	23.4	23.7	23.6
		25	24	23.3	23.6	23.5
		50	0	23.4	23.6	23.6
	16QAM	1	0	23.4	24.0	23.7
		1	24	23.3	24.0	23.6
		1	49	23.1	24.0	23.5
		25	0	22.5	22.8	22.8
		25	12	22.5	22.8	22.8
		25	24	22.4	22.7	22.7
		50	0	22.4	22.7	22.7
	64QAM	1	0	22.4	22.4	22.4
		1	24	22.3	22.4	22.4
		1	49	22.2	22.5	22.4
		25	0	21.7	22.0	21.9
		25	12	21.6	22.0	21.9
		25	24	21.5	21.9	21.9
		50	0	21.6	21.9	21.8

7.7. LTE Band 7

ID:	40814	Date:	2/22/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 7 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20775	21100	21425
				2502.5 MHz	2535.0 MHz	2567.5 MHz
5.0	QPSK	1	0	20.5	20.4	20.6
		1	12	20.5	20.5	20.6
		1	24	20.4	20.4	20.5
		12	0	20.5	20.5	20.5
		12	6	20.5	20.5	20.5
		12	11	20.4	20.5	20.5
	16QAM	25	0	20.4	20.5	20.5
		1	0	20.1	20.5	20.2
		1	12	20.1	20.5	20.2
		1	24	20.0	20.5	20.1
		12	0	20.1	20.2	20.1
		12	6	20.1	20.2	20.1
	64QAM	12	11	20.0	20.2	20.1
		25	0	20.0	20.2	20.1
		1	0	20.3	20.4	20.0
		1	12	20.3	20.4	20.0
		1	24	20.3	20.4	20.0
		12	0	20.2	20.1	20.2
		12	6	20.2	20.2	20.2
		12	11	20.2	20.1	20.2
		25	0	20.1	20.1	20.1

OUTPUT POWER FOR LTE BAND 7 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20800	21100	21400
				2505.0 MHz	2535.0 MHz	2565.0 MHz
10.0	QPSK	1	0	20.5	20.5	20.5
		1	24	20.4	20.5	20.5
		1	49	20.5	20.4	20.4
		25	0	20.5	20.6	20.6
		25	12	20.6	20.6	20.6
		25	24	20.5	20.5	20.5
	16QAM	50	0	20.5	20.5	20.5
		1	0	20.4	20.0	20.0
		1	24	20.3	20.0	20.0
		1	49	20.4	19.9	19.9
		25	0	20.1	20.2	20.2
		25	12	20.2	20.1	20.1
	64QAM	25	24	20.1	20.1	20.1
		50	0	20.1	20.1	20.1
		1	0	20.3	20.2	20.4
		1	24	20.2	20.3	20.4
		1	49	20.3	20.3	20.4
		25	0	20.2	20.3	20.3
		25	12	20.3	20.3	20.3
		25	24	20.2	20.2	20.2
		50	0	20.2	20.2	20.2

OUTPUT POWER FOR LTE BAND 7 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20825	21100	21375
				2507.5 MHz	2535.0 MHz	2562.5 MHz
15.0	QPSK	1	0	20.6	20.5	20.6
		1	37	20.5	20.5	20.5
		1	74	20.3	20.4	20.3
		36	0	20.6	20.6	20.6
		36	16	20.6	20.6	20.5
		36	35	20.5	20.5	20.5
		75	0	20.5	20.6	20.5
	16QAM	1	0	20.6	20.4	20.2
		1	37	20.4	20.4	20.0
		1	74	20.2	20.3	19.8
		36	0	20.2	20.2	20.2
		36	16	20.1	20.2	20.2
		36	35	20.0	20.1	20.1
		75	0	20.1	20.2	20.2
	64QAM	1	0	20.6	20.2	20.6
		1	37	20.6	20.3	20.4
		1	74	20.5	20.2	20.4
		36	0	20.2	20.3	20.3
		36	16	20.2	20.3	20.2
		36	35	20.1	20.2	20.2
		75	0	20.2	20.2	20.2

OUTPUT POWER FOR LTE BAND 7 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				20850	21100	21350
				2510.0 MHz	2535.0 MHz	2560.0 MHz
20.0	QPSK	1	0	20.4	20.5	20.6
		1	49	20.3	20.5	20.5
		1	99	20.1	20.4	20.4
		50	0	20.4	20.5	20.6
		50	24	20.4	20.6	20.6
		50	49	20.3	20.5	20.5
		100	0	20.3	20.6	20.5
	16QAM	1	0	20.4	20.5	20.7
		1	49	20.2	20.4	20.6
		1	99	20.0	20.4	20.4
		50	0	20.0	20.2	20.2
		50	24	19.9	20.2	20.2
		50	49	19.8	20.1	20.1
		100	0	19.9	20.1	20.1
	64QAM	1	0	20.2	20.6	20.5
		1	49	20.1	20.6	20.4
		1	99	19.9	20.7	20.4
		50	0	20.1	20.1	20.2
		50	24	20.0	20.3	20.2
		50	49	19.9	20.2	20.2
		100	0	19.9	20.2	20.1

7.8. LTE Band 12

ID:	38515	Date:	2/22/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 12 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23017	23095	23173
				699.7 MHz	707.5 MHz	715.3 MHz
1.4	QPSK	1	0	24.0	24.4	24.2
		1	2	23.9	24.4	24.3
		1	5	24.0	24.3	24.2
		3	0	23.9	24.3	24.2
		3	1	23.9	24.4	24.2
		3	2	24.0	24.4	24.2
	16QAM	6	0	22.9	23.3	23.2
		1	0	23.4	23.5	23.3
		1	2	23.4	23.5	23.3
		1	5	23.4	23.5	23.2
		3	0	23.2	23.4	23.4
		3	1	23.2	23.5	23.5
	64QAM	3	2	23.2	23.5	23.5
		6	0	22.0	22.5	22.5
		1	0	22.4	22.3	22.1
		1	2	22.5	22.4	22.1
		1	5	22.3	22.3	22.1
		3	0	22.5	22.2	21.9
		3	1	22.5	22.3	21.9
		3	2	22.5	22.3	21.9
		6	0	21.7	21.4	21.5

OUTPUT POWER FOR LTE BAND 12 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23025	23095	23165
				700.5 MHz	707.5 MHz	714.5 MHz
3.0	QPSK	1	0	24.0	24.4	24.3
		1	7	24.2	24.5	24.4
		1	14	24.3	24.5	24.3
		8	0	23.1	23.4	23.4
		8	4	23.1	23.4	23.4
		8	7	23.2	23.4	23.3
	16QAM	15	0	23.2	23.4	23.3
		1	0	23.2	23.8	23.3
		1	7	23.4	23.9	23.3
		1	14	23.5	23.9	23.2
		8	0	22.3	22.6	22.5
		8	4	22.3	22.6	22.5
	64QAM	8	7	22.4	22.6	22.5
		15	0	22.2	22.5	22.5
		1	0	22.4	22.3	22.3
		1	7	22.5	22.3	22.3
		1	14	22.5	22.3	22.3
		8	0	21.5	21.6	21.6
		8	4	21.6	21.6	21.6
		8	7	21.6	21.6	21.6
		15	0	21.6	21.5	21.5

OUTPUT POWER FOR LTE BAND 12 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23035	23095	23155
				701.5 MHz	707.5 MHz	713.5 MHz
5.0	QPSK	1	0	24.1	24.2	24.5
		1	12	24.4	24.4	24.4
		1	24	24.5	24.5	24.4
		12	0	23.1	23.5	23.4
		12	6	23.4	23.5	23.4
		12	11	23.5	23.4	23.4
		25	0	23.3	23.5	23.4
	16QAM	1	0	23.2	23.8	23.6
		1	12	23.6	23.9	23.5
		1	24	23.6	24.0	23.5
		12	0	22.3	22.7	22.5
		12	6	22.5	22.7	22.6
		12	11	22.6	22.6	22.5
		25	0	22.4	22.6	22.5
	64QAM	1	0	22.5	22.1	22.0
		1	12	22.5	22.0	22.3
		1	24	22.5	22.1	22.1
		12	0	21.4	21.7	21.7
		12	6	21.6	21.7	21.7
		12	11	21.7	21.6	21.6
		25	0	21.6	21.6	21.6

OUTPUT POWER FOR LTE BAND 12 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23060	23095	23130
				704.0 MHz	707.5 MHz	711.0 MHz
10.0	QPSK	1	0	24.4	24.4	23.8
		1	24	24.4	24.4	24.4
		1	49	24.3	24.3	24.5
		25	0	23.5	23.5	23.2
		25	12	23.5	23.5	23.4
		25	24	23.4	23.4	23.5
		50	0	23.4	23.4	23.3
	16QAM	1	0	23.4	23.8	23.0
		1	24	23.4	23.8	23.6
		1	49	23.2	23.7	23.5
		25	0	22.5	22.6	22.5
		25	12	22.5	22.6	22.6
		25	24	22.4	22.5	22.6
		50	0	22.5	22.5	22.4
	64QAM	1	0	22.4	22.2	22.3
		1	24	22.4	22.2	22.8
		1	49	22.2	22.1	22.7
		25	0	21.7	21.7	21.6
		25	12	21.6	21.7	21.8
		25	24	21.6	21.7	21.8
		50	0	21.6	21.7	21.5

7.9. LTE Band 13

ID:	40814	Date:	2/22/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 13 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				23207	23230	23255
				779.5 MHz	782.0 MHz	784.5 MHz
5.0	QPSK	1	0	24.7	24.7	24.2
		1	12	24.6	24.6	24.4
		1	24	24.6	24.6	24.2
		12	0	23.5	23.5	23.5
		12	6	23.6	23.6	23.5
		12	11	23.6	23.6	23.5
		25	0	23.6	23.6	23.5
	16QAM	1	0	23.7	23.7	23.1
		1	12	23.6	23.6	23.3
		1	24	23.7	23.7	23.1
		12	0	22.7	22.7	22.6
		12	6	22.7	22.7	22.6
		12	11	22.6	22.6	22.5
		25	0	22.6	22.6	22.6
	64QAM	1	0	22.1	22.1	22.3
		1	12	22.0	22.0	22.4
		1	24	22.1	22.1	22.3
		12	0	21.7	21.7	21.6
		12	6	21.8	21.7	21.6
		12	11	21.7	21.7	21.6
		25	0	21.7	21.7	21.6

OUTPUT POWER FOR LTE BAND 13 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				N/A	23230	N/A
				N/A	782.0 MHz	N/A
10.0	QPSK	1	0		24.2	
		1	24		24.3	
		1	49		24.2	
		25	0		23.5	
		25	12		23.5	
		25	24		23.4	
		50	0		23.5	
	16QAM	1	0		23.1	
		1	24		23.3	
		1	49		23.2	
		25	0		22.6	
		25	12		22.6	
		25	24		22.6	
		50	0		22.6	
	64QAM	1	0		22.4	
		1	24		22.4	
		1	49		22.4	
		25	0		21.7	
		25	12		21.8	
		25	24		21.7	
		50	0		21.7	

7.10. LTE BAND 17

LTE Band 17 (704-716MHz, 5/10MHz bandwidth) is covered by LTE Band 12 because it is a subset of LTE band 12 and they have the same output power and channel bandwidth.

7.11. LTE Band 41

ID:	38515	Date:	2/22/18
------------	-------	--------------	---------

OUTPUT POWER FOR LTE BAND 41 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				39675	40620	41565
				2498.5 MHz	2593.0 MHz	2687.5 MHz
5.0	QPSK	1	0	21.4	21.5	21.2
		1	12	21.3	21.5	21.1
		1	24	21.3	21.5	21.0
		12	0	21.4	21.5	21.3
		12	6	21.4	21.6	21.3
		12	11	21.4	21.5	21.2
	16QAM	25	0	21.4	21.5	21.3
		1	0	21.0	21.1	20.7
		1	12	20.9	21.0	20.7
		1	24	20.9	21.0	20.6
		12	0	21.0	21.1	20.8
		12	6	21.0	21.1	20.8
	64QAM	12	11	21.0	21.0	20.8
		25	0	20.9	21.1	20.8
		1	0	21.1	21.5	20.8
		1	12	21.1	21.5	20.7
		1	24	21.1	21.5	20.7
		12	0	21.0	21.3	21.1
		12	6	21.0	21.3	21.1
		12	11	20.9	21.3	21.0
		25	0	20.9	21.2	21.1

OUTPUT POWER FOR LTE BAND 41 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				39700	40620	41540
				2501.0 MHz	2593.0 MHz	2685.0 MHz
10.0	QPSK	1	0	21.3	21.5	21.4
		1	24	21.4	21.5	21.2
		1	49	21.3	21.4	21.1
		25	0	21.5	21.6	21.3
		25	12	21.4	21.5	21.3
		25	24	21.3	21.5	21.2
	16QAM	50	0	21.4	21.5	21.2
		1	0	20.9	21.0	21.0
		1	24	20.8	21.0	20.9
		1	49	20.8	20.9	20.8
		25	0	21.0	21.2	20.9
		25	12	21.0	21.1	20.9
	64QAM	25	24	20.9	21.0	20.8
		50	0	21.0	21.1	20.9
		1	0	21.2	20.7	21.2
		1	24	21.2	20.8	21.1
		1	49	21.2	20.8	21.1
		25	0	21.0	21.3	21.0
		25	12	21.1	21.3	21.0
		25	24	21.0	21.2	21.0
		50	0	21.0	21.2	21.0

OUTPUT POWER FOR LTE BAND 41 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				39725	40620	41515
				2503.5 MHz	2593.0 MHz	2682.5 MHz
15.0	QPSK	1	0	21.4	21.5	21.4
		1	37	21.3	21.4	21.2
		1	74	21.2	21.4	21.0
		36	0	21.5	21.6	21.3
		36	16	21.4	21.5	21.3
		36	35	21.3	21.4	21.2
		75	0	21.4	21.5	21.2
	16QAM	1	0	21.0	21.1	21.0
		1	37	20.8	21.0	20.8
		1	74	20.8	21.0	20.6
		36	0	21.0	21.2	20.9
		36	16	21.0	21.1	20.9
		36	35	20.9	21.0	20.8
		75	0	20.9	21.1	20.9
	64QAM	1	0	21.3	20.7	21.0
		1	37	21.2	20.7	20.8
		1	74	21.2	20.8	20.8
		36	0	21.2	21.3	21.1
		36	16	21.1	21.3	21.0
		36	35	21.1	21.3	21.0
		75	0	21.1	21.2	21.1

OUTPUT POWER FOR LTE BAND 41 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Conducted Average (dBm)		
				39750	40620	41490
				2506.0 MHz	2593.0 MHz	2680.0 MHz
20.0	QPSK	1	0	21.5	21.6	21.6
		1	49	21.4	21.5	21.2
		1	99	21.3	21.4	21.0
		50	0	21.5	21.6	21.4
		50	24	21.4	21.6	21.3
		50	49	21.3	21.4	21.2
		100	0	21.4	21.5	21.3
	16QAM	1	0	21.0	21.2	21.3
		1	49	20.7	21.0	20.9
		1	99	20.7	20.9	20.7
		50	0	21.1	21.2	21.0
		50	24	21.0	21.1	20.9
		50	49	20.9	21.0	20.8
		100	0	21.0	21.1	20.9
	64QAM	1	0	21.0	21.6	21.4
		1	49	20.9	21.5	21.1
		1	99	20.9	21.5	21.0
		50	0	21.2	21.3	21.2
		50	24	21.1	21.3	21.1
		50	49	21.0	21.2	21.1
		100	0	21.1	21.2	21.1

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

MODES TESTED

- GSM
- WCDMA
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 41

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested.

GSM

Band	Modulation	Channel	f(MHz)	99% BW (KHz)	-26dB BW (KHz)
850MHz	GPRS	190	836.6	246.2	308.1
	EGPRS			245.9	317.9
1900MHz	GPRS	661	1880.0	240.2	310.5
	EGPRS			243.3	310.9

WCDMA

Band	Modulation	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BAND 5	REL 99	4408	836.6	4.1	4.69
	HSDPA			4.12	4.68

LTE 4

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 4	1.4 MHz, QPSK	6/0	1732.5	1.09	1.22
	1.4 MHz, 16QAM			1.09	1.23
	3 MHz, QPSK	15/0		2.68	2.98
	3 MHz, 16QAM			2.69	2.99
	5 MHz, QPSK	25/0		4.48	4.93
	5 MHz, 16QAM			4.5	4.93
	10 MHz, QPSK	50/0		8.96	9.72
	10 MHz, 16QAM			8.93	9.73
	15 MHz, QPSK	75/0		13.44	14.49
	15 MHz, 16QAM			13.45	14.56
	20 MHz, QPSK	100/0		17.86	19.08
	20 MHz, 16QAM			17.87	19.2

LTE 5

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 5	1.4 MHz, QPSK	6/0	836.5	1.08	1.22
	1.4 MHz, 16QAM			1.09	1.23
	3 MHz, QPSK	15/0		2.69	2.92
	3 MHz, 16QAM			2.68	2.98
	5 MHz, QPSK	25/0		4.49	4.87
	5 MHz, 16QAM			4.49	4.93
	10 MHz, QPSK	50/0		8.98	9.63
	10 MHz, 16QAM			8.97	9.7

LTE 7

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 7	5 MHz, QPSK	25/0	2535.0	4.5	5.64
	5 MHz, 16QAM			4.49	5.59
	10 MHz, QPSK	50/0		8.98	9.61
	10 MHz, 16QAM			8.93	9.67
	15 MHz, QPSK	75/0		13.36	15.61
	15 MHz, 16QAM			13.34	14.91
	20 MHz, QPSK	100/0		17.74	18.91
	20 MHz, 16QAM			17.78	19.13

LTE 12

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 12	1.4 MHz, QPSK	6/0	707.5	1.09	1.23
	1.4 MHz, 16QAM			1.09	1.22
	3 MHz, QPSK	15/0		2.68	2.96
	3 MHz, 16QAM			2.68	2.96
	5 MHz, QPSK	25/0		4.49	4.99
	5 MHz, 16QAM			4.51	4.95
	10 MHz, QPSK	50/0		8.97	9.78
	10 MHz, 16QAM			8.96	9.62

LTE 13

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 13	5 MHz, QPSK	25/0	782.0	4.5	4.92
	5 MHz, 16QAM			4.5	4.95
	10 MHz, QPSK	50/0		8.94	9.64
	10 MHz, 16QAM			8.94	9.68


LTE BAND 17

LTE Band 17 (Frequency range: 704-716 MHz, 5/10MHz bandwidth) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.


LTE41

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 41	5 MHz, QPSK	25/0	2593.0	4.5	5.14
	5 MHz, 16QAM			4.48	4.84
	10 MHz, QPSK	50/0		8.93	9.66
	10 MHz, 16QAM			8.96	9.69
	15 MHz, QPSK	75/0		13.43	14.44
	15 MHz, 16QAM			13.44	14.57
	20 MHz, QPSK	100/0		17.94	19.13
	20 MHz, 16QAM			17.92	19.21


8.1.1. GSM

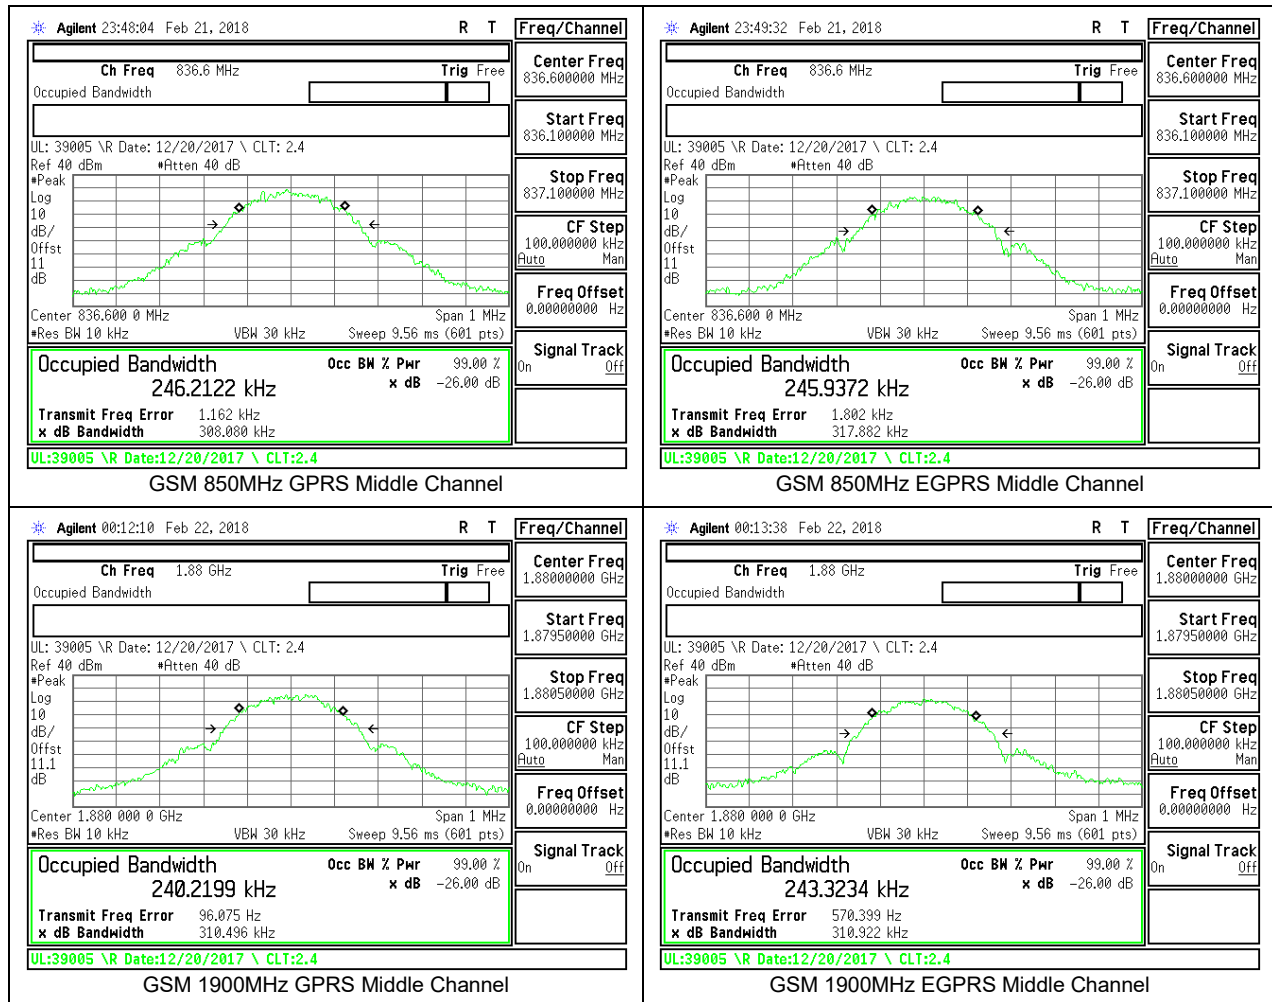


8.1.2. WCDMA

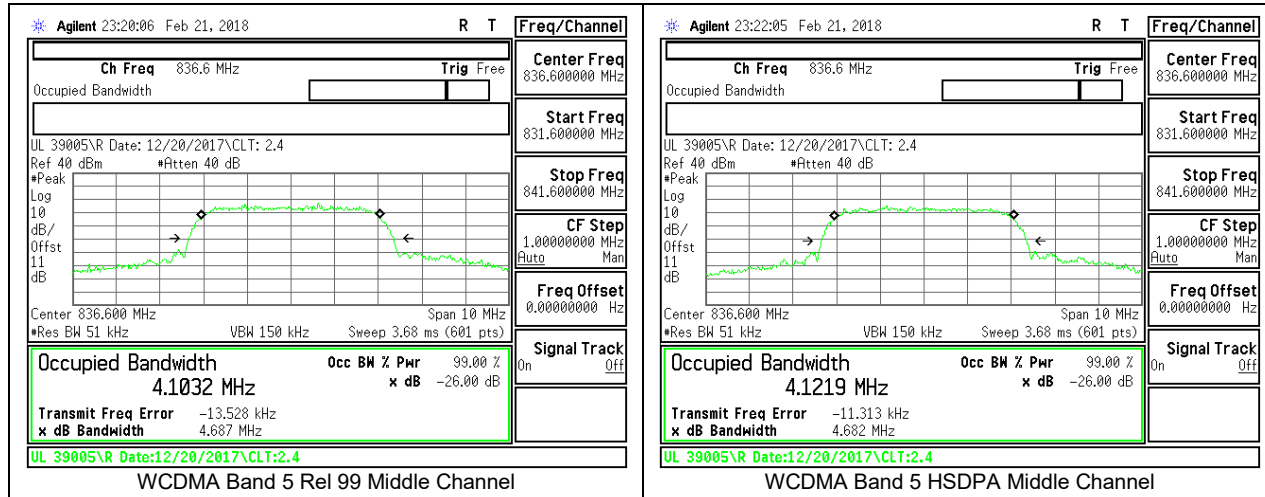



8.1.3. LTE BAND 4

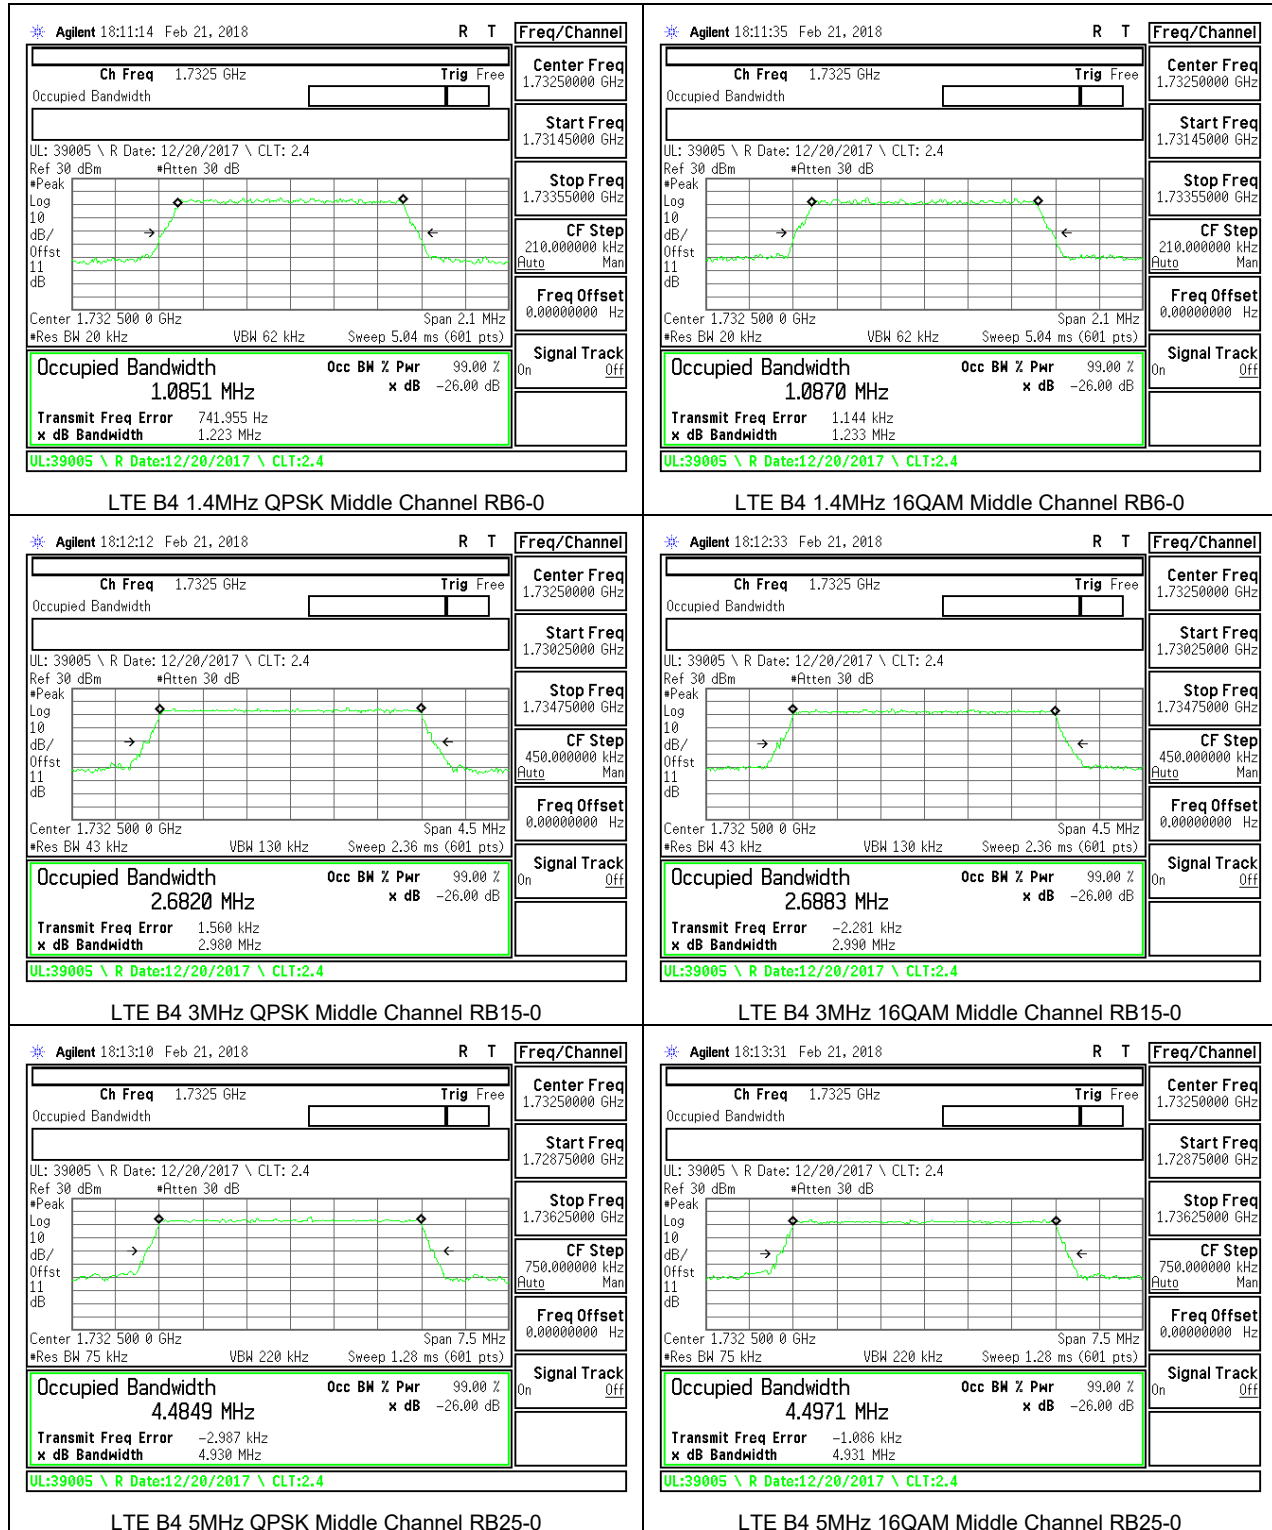

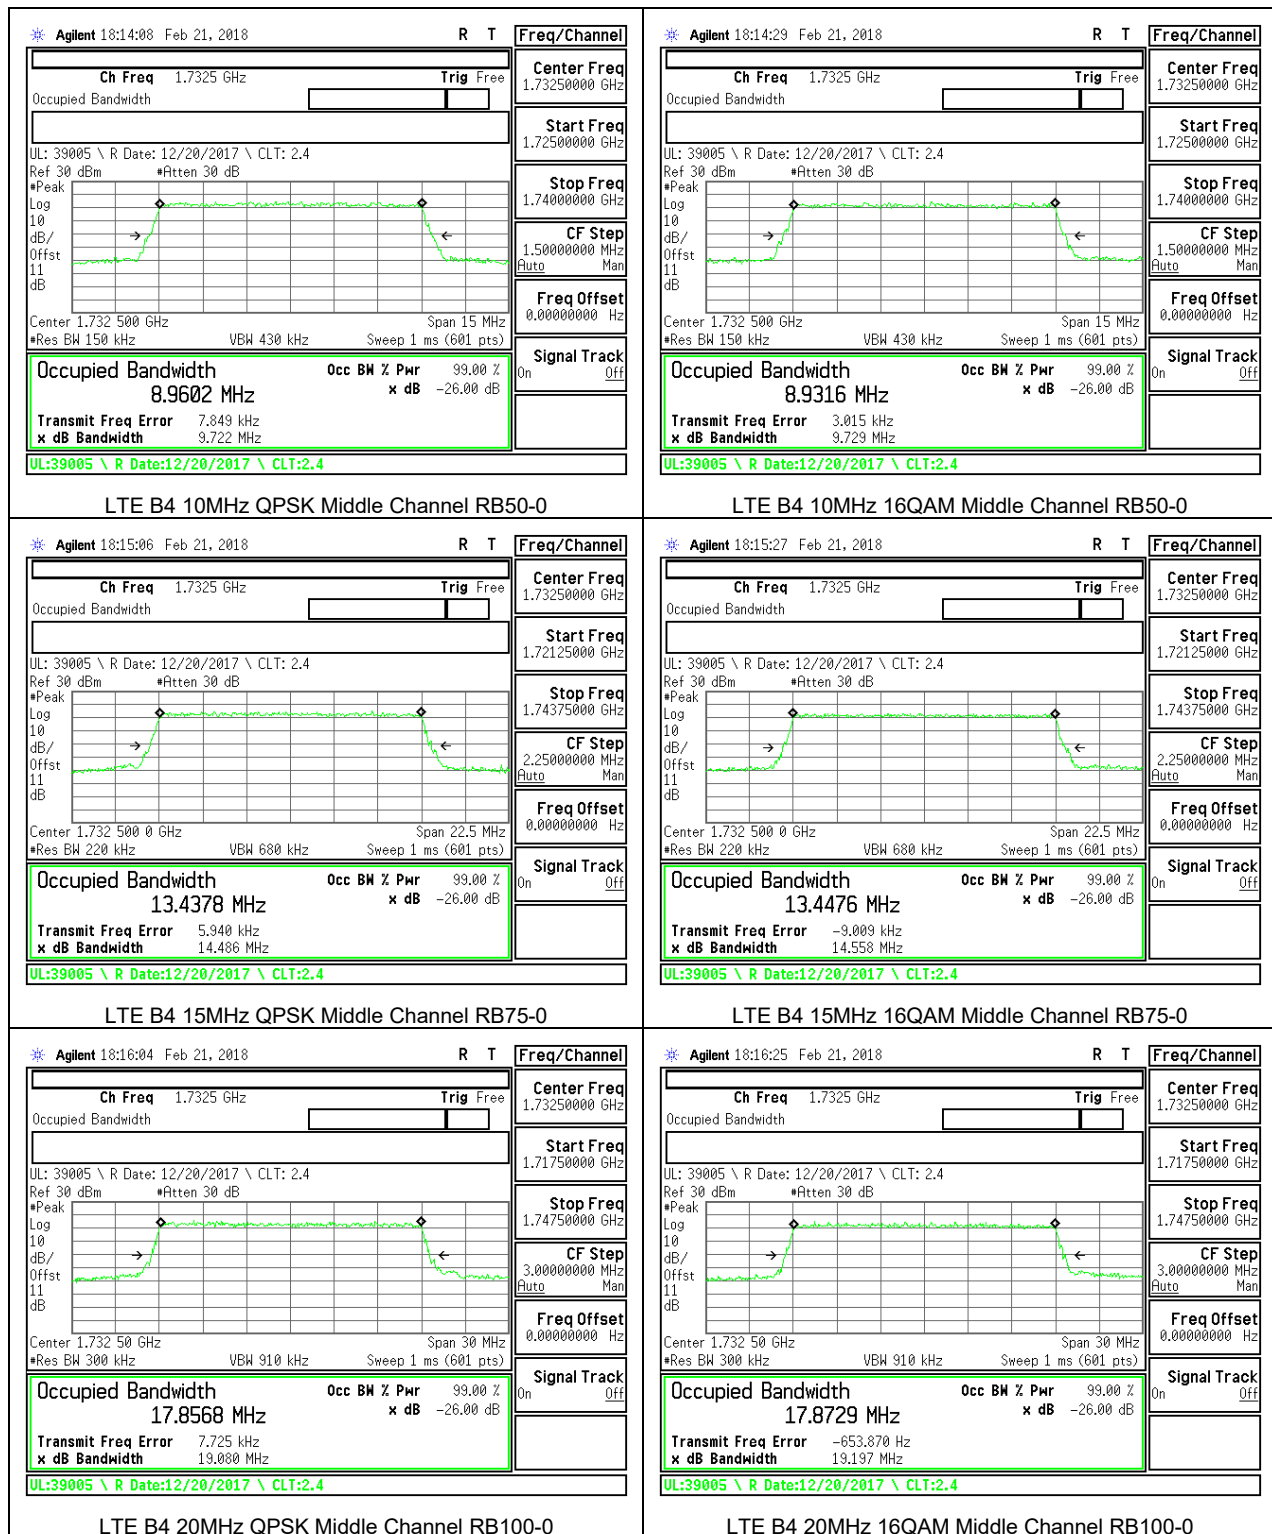



8.1.4. LTE BAND 5

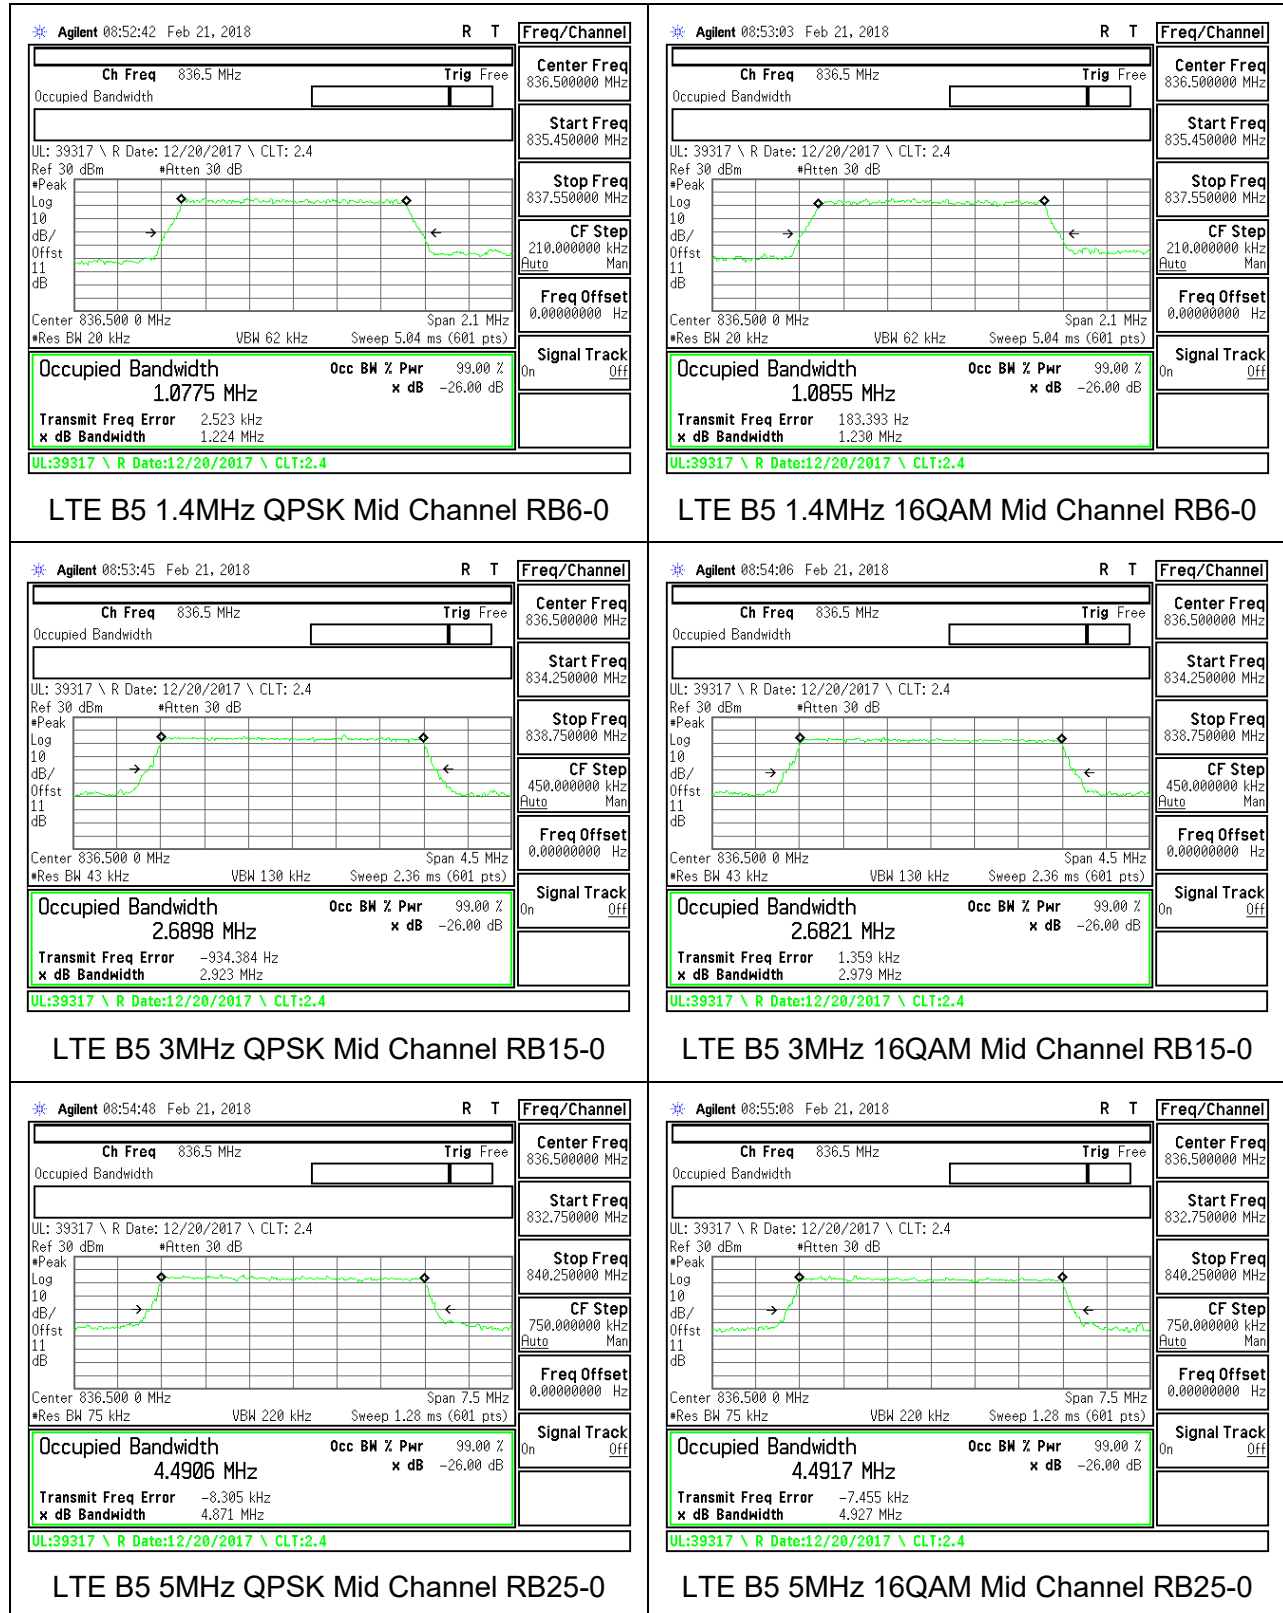

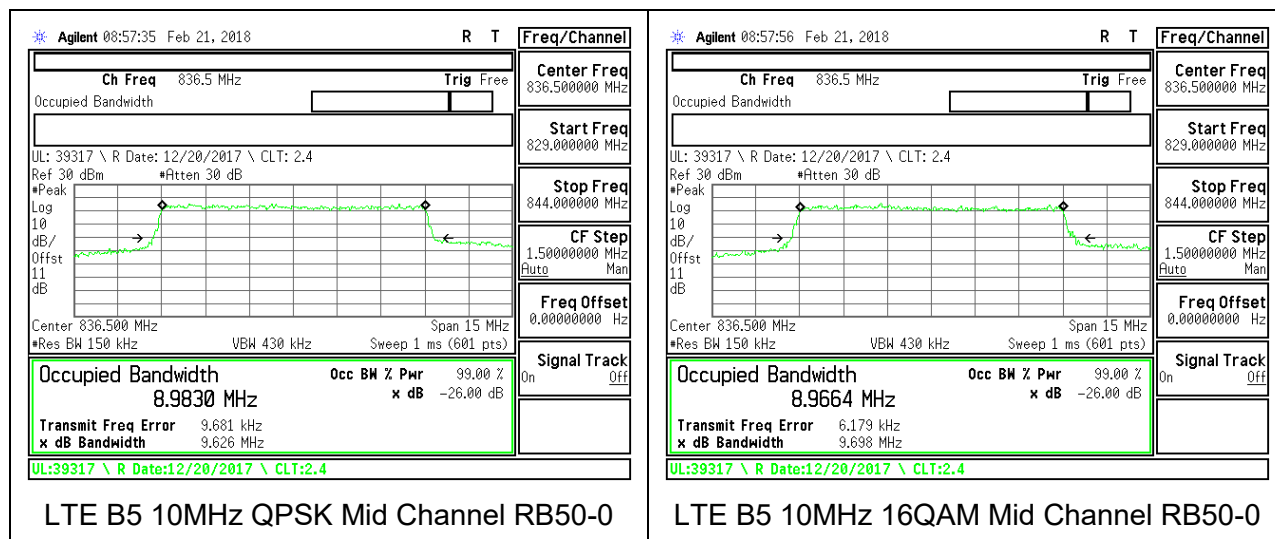



8.1.5. LTE BAND 7

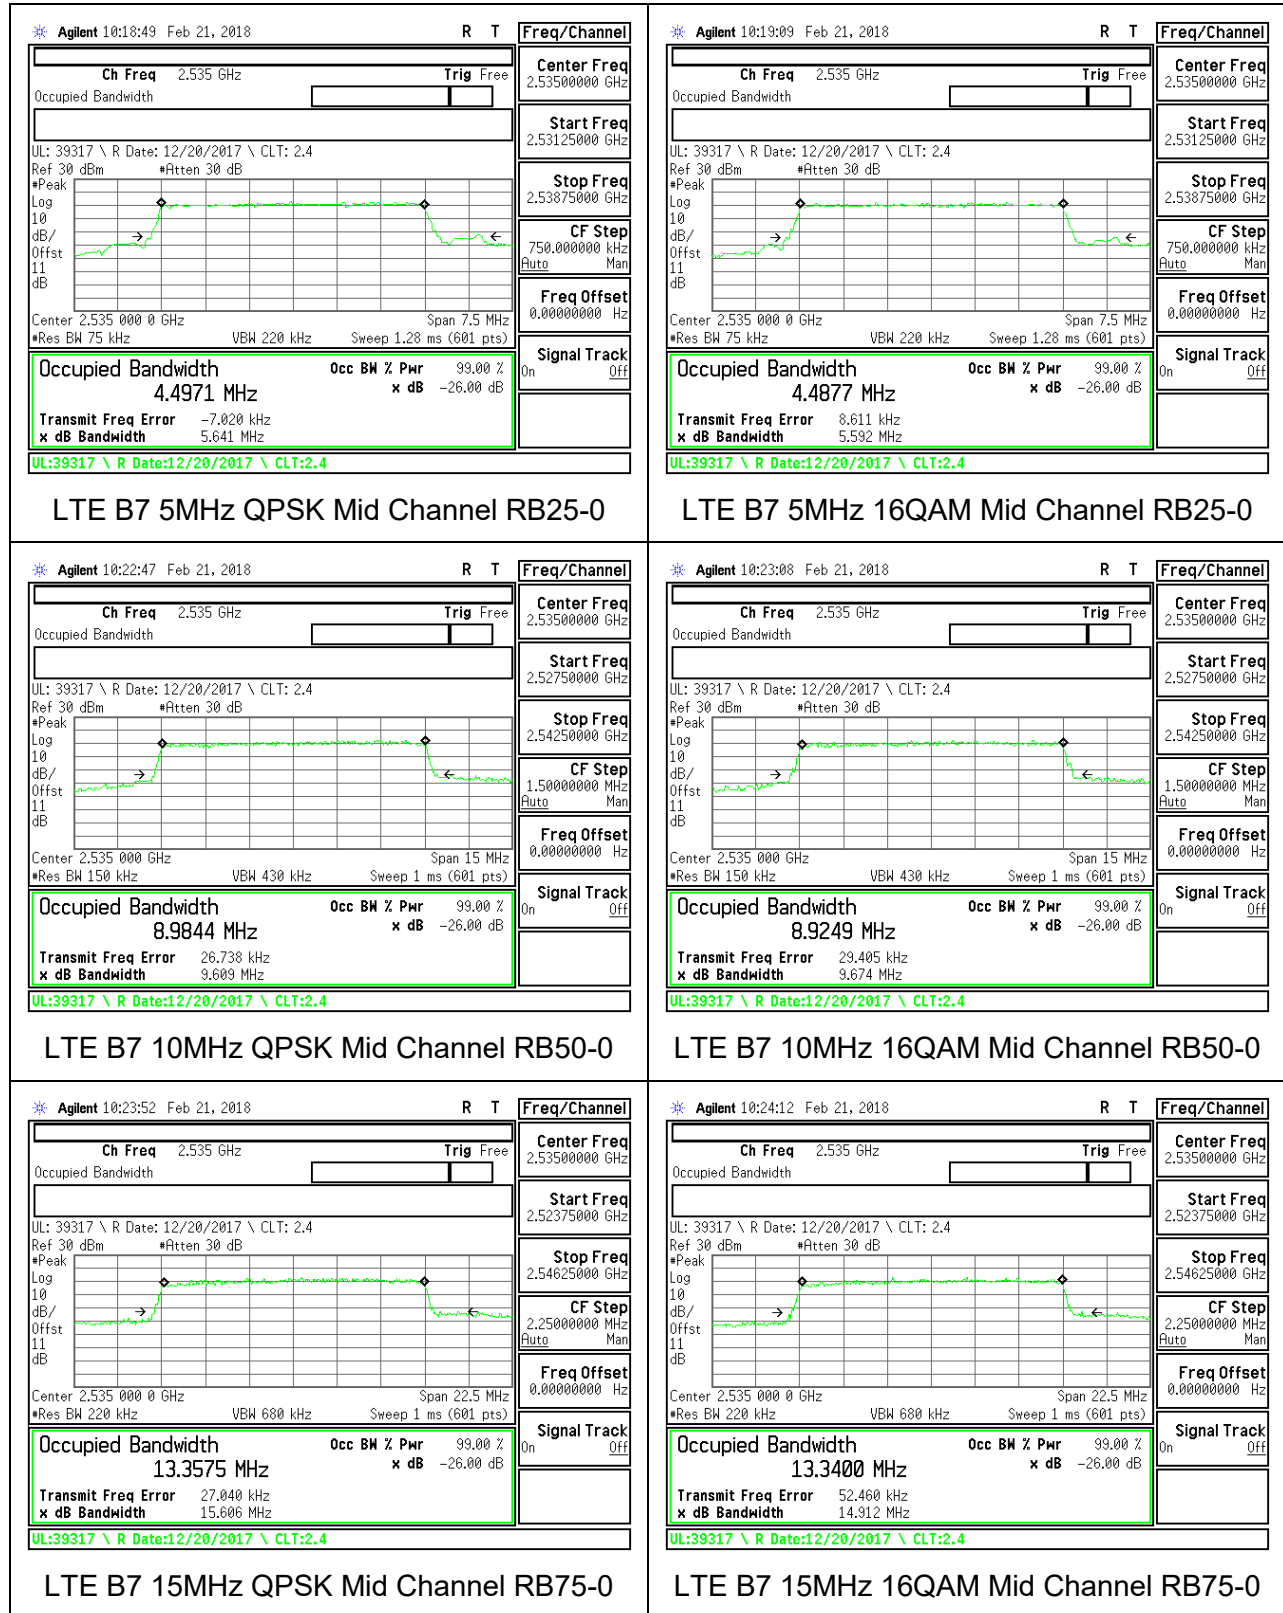

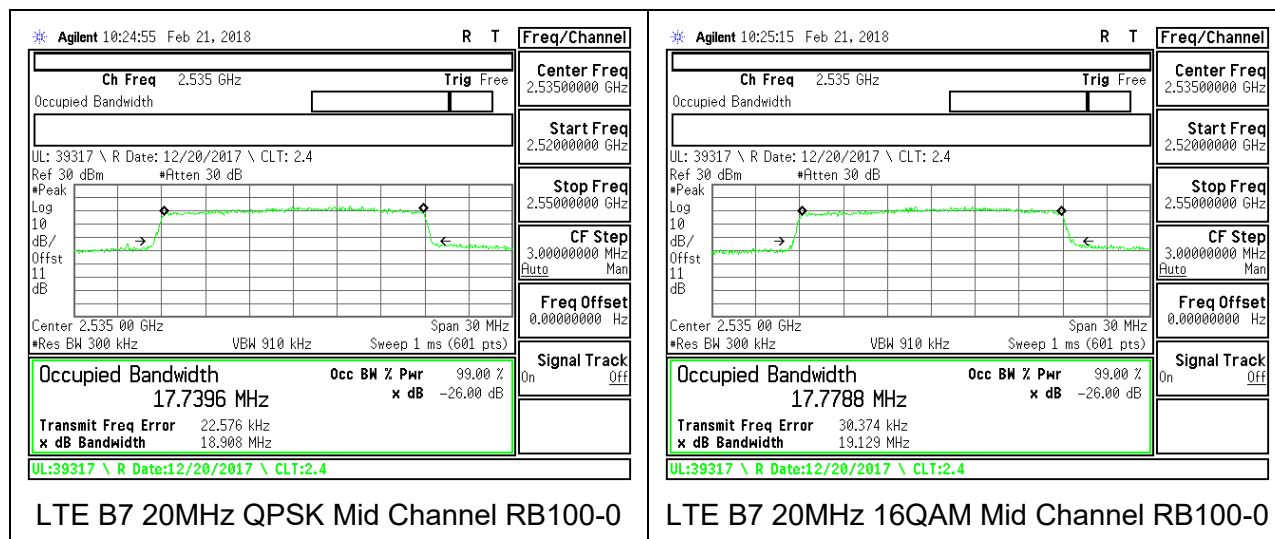


8.1.6. LTE BAND 12

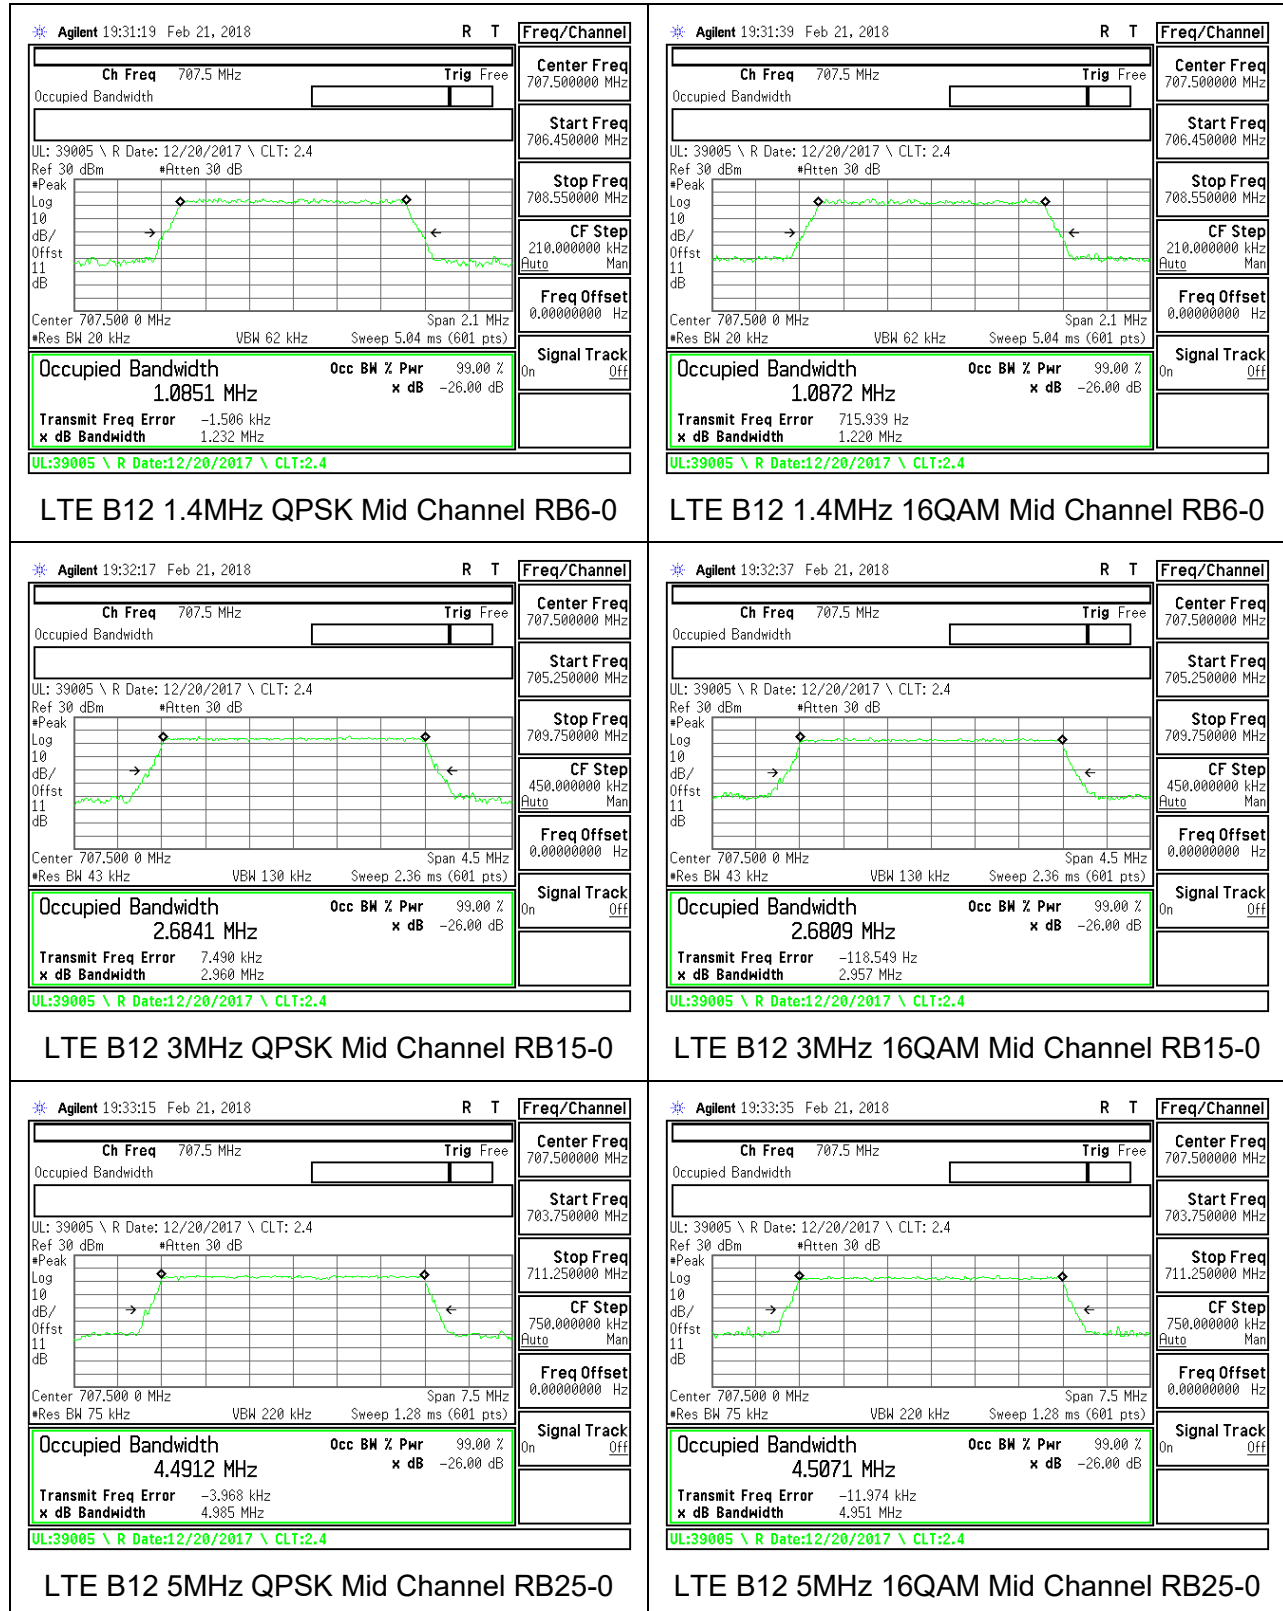

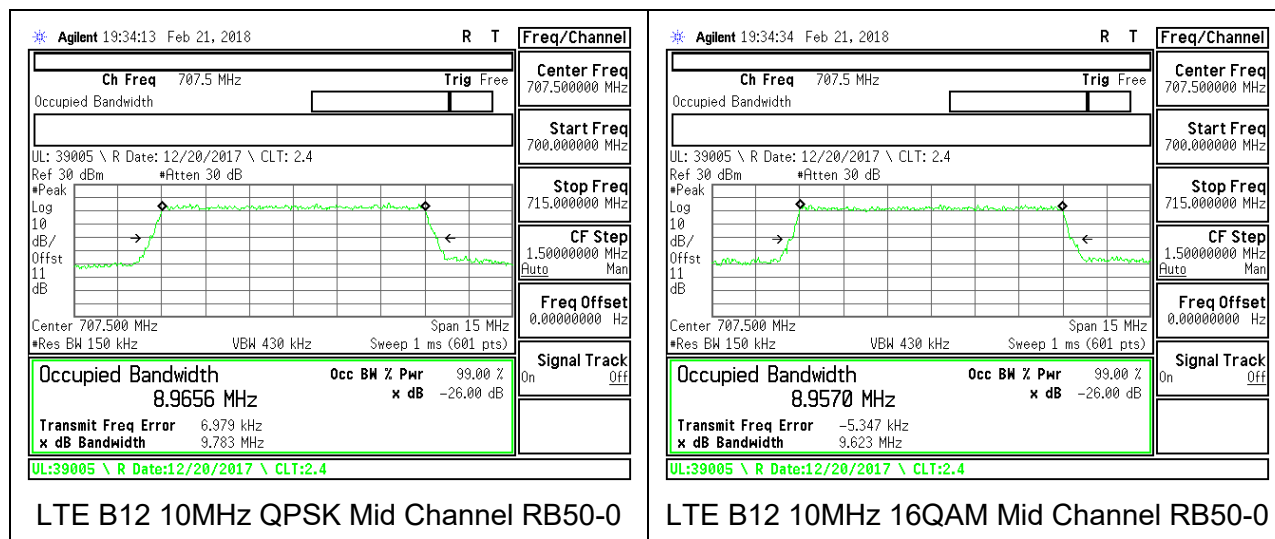


8.1.7. LTE BAND 13

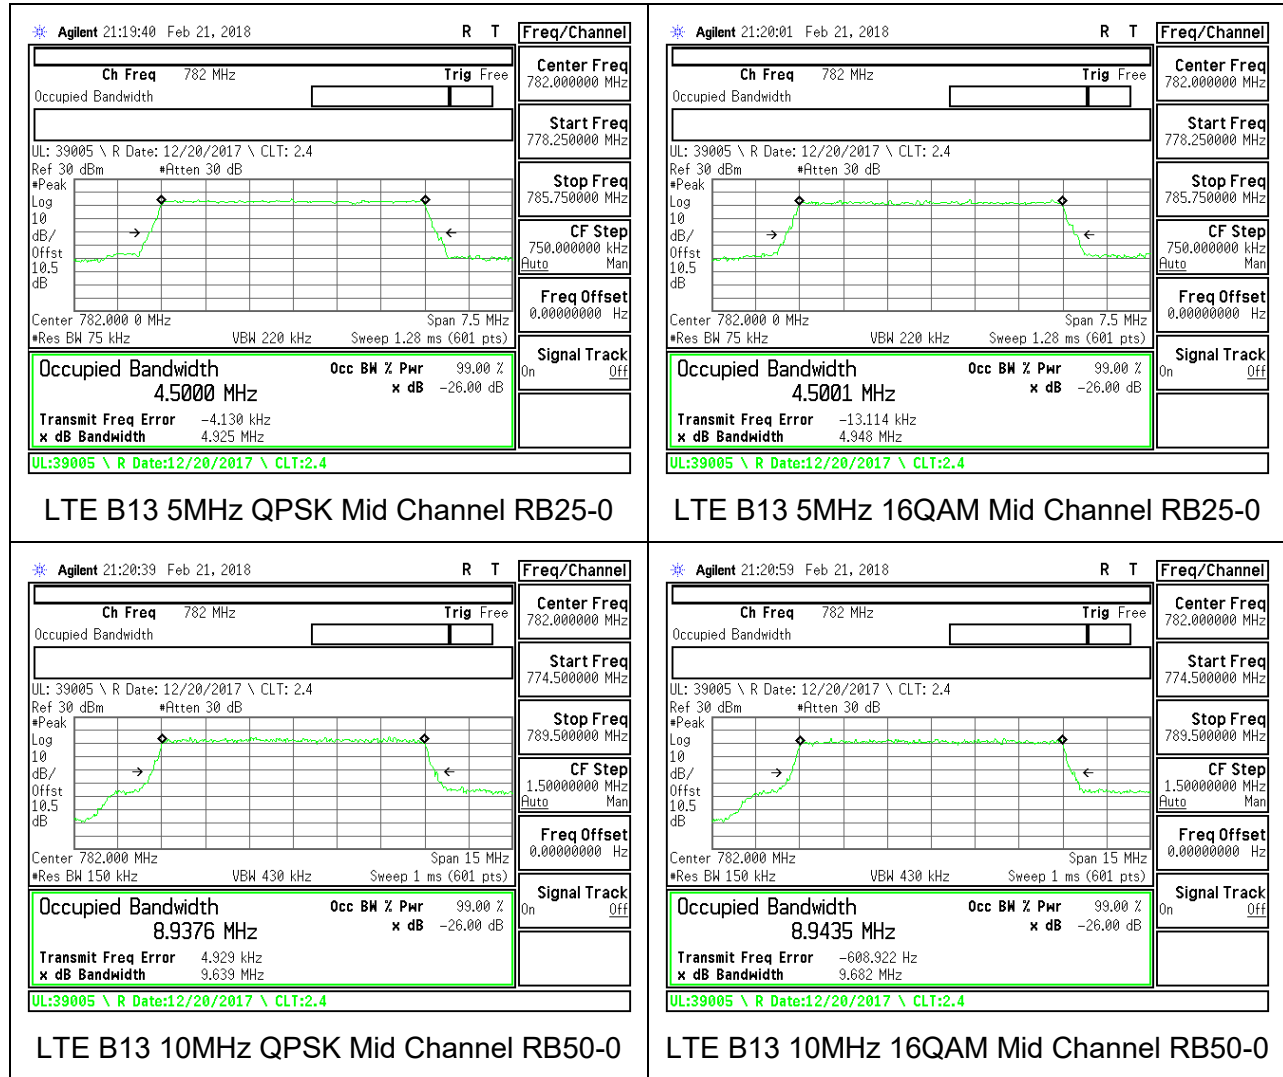


8.1.8. LTE BAND 17

LTE Band 17 (704-716MHz, 5/10MHz bandwidth) is covered by LTE Band 12 because it is a subset of LTE band 12 and they have the same output power and channel bandwidth.

8.1.9. LTE BAND 41

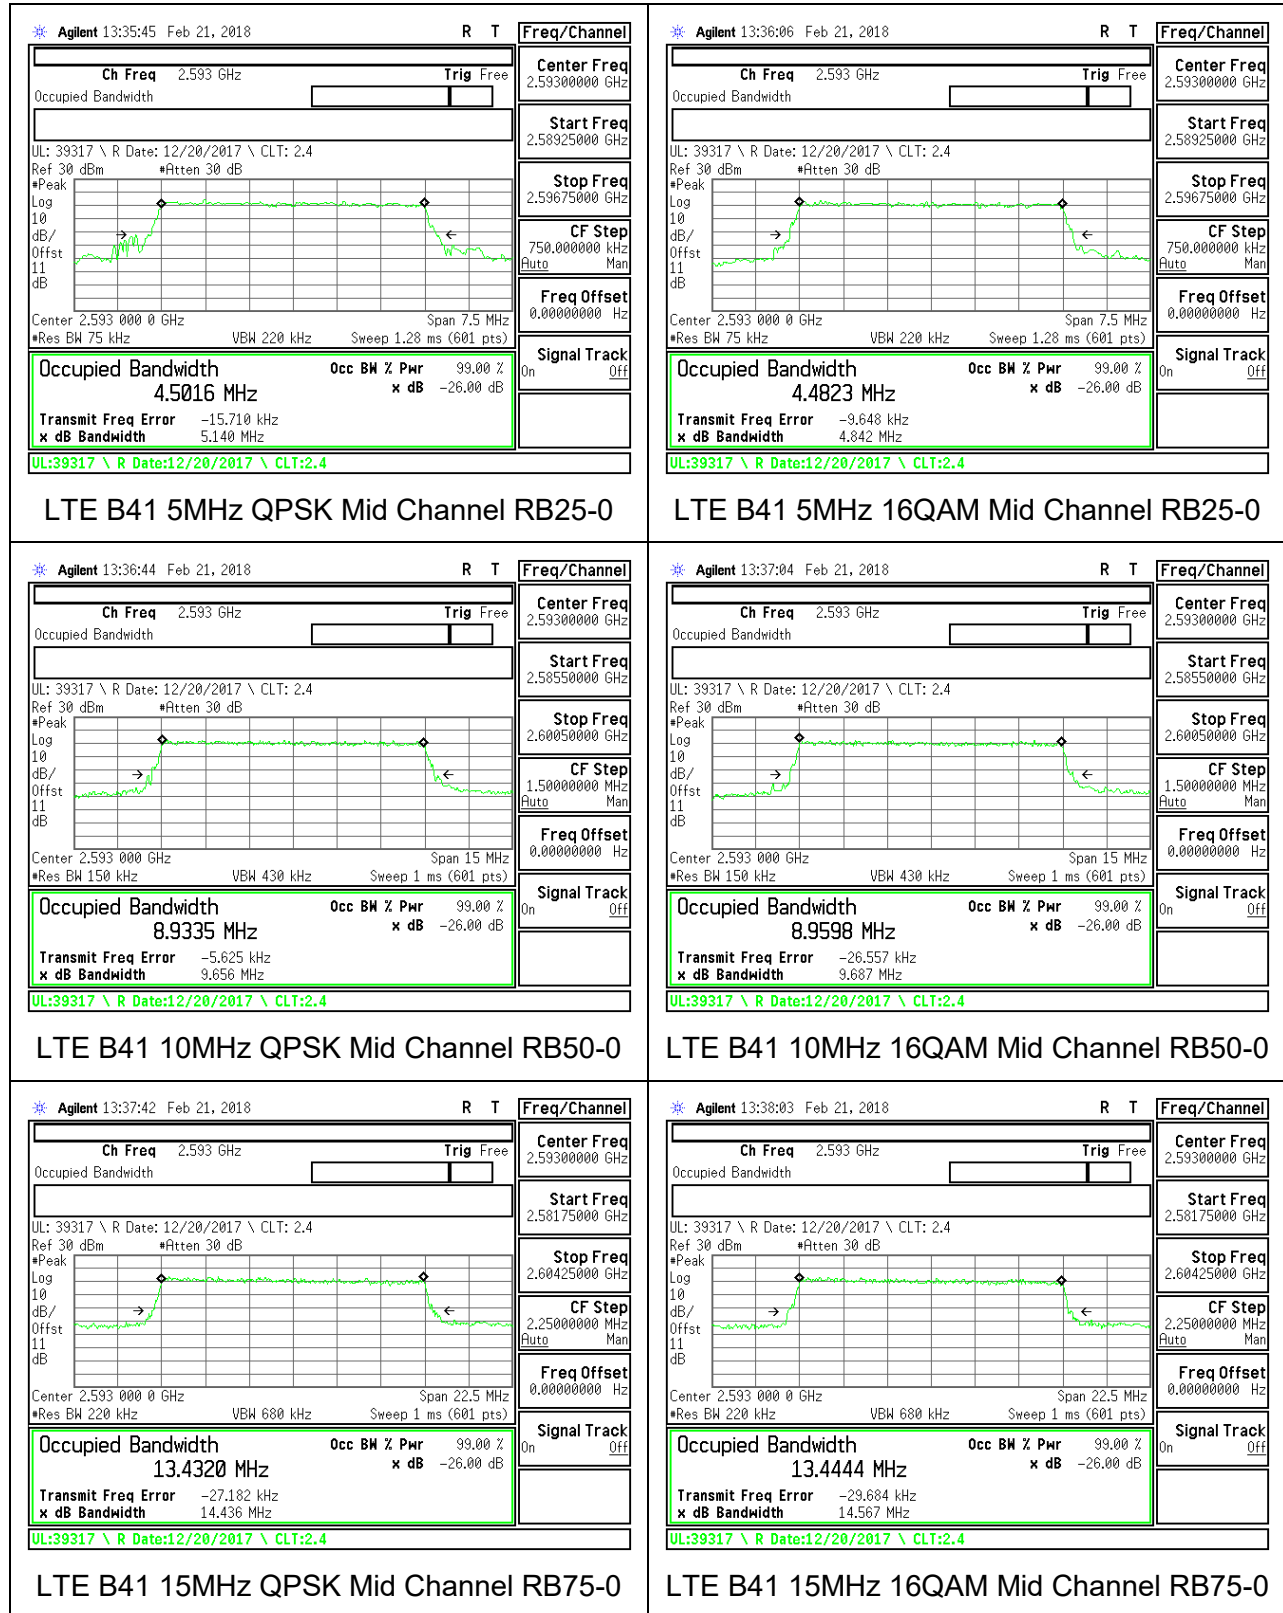

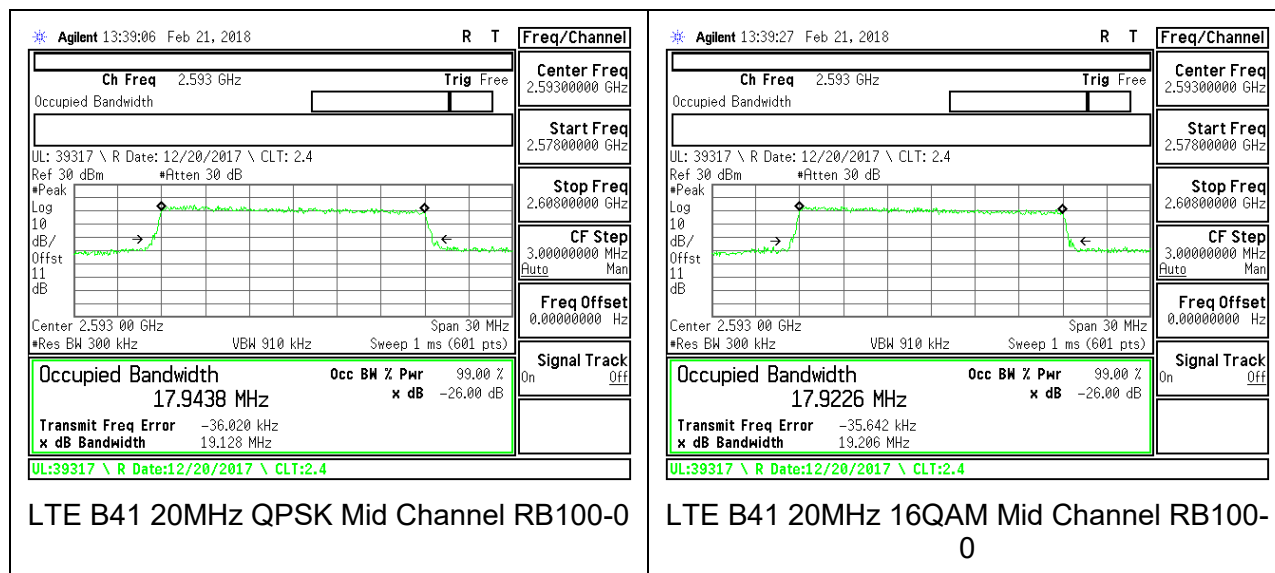

8.2. BAND EDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53

LIMITS

FCC: §22.917, §24.238, §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (Band 13)

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40dBm/MHz).

FCC: §27.53 (Band 12, 17)

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC: §27.53 (Band 7, 41)

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:


- Set the spectrum analyzer span to include the block edge frequency.
- Set a marker to point the corresponding band edge frequency in each test case.
- Set display line at -13 dBm
- Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED


- GSM
- WCDMA
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 41

RESULTS


8.2.1. GSM 850MHz

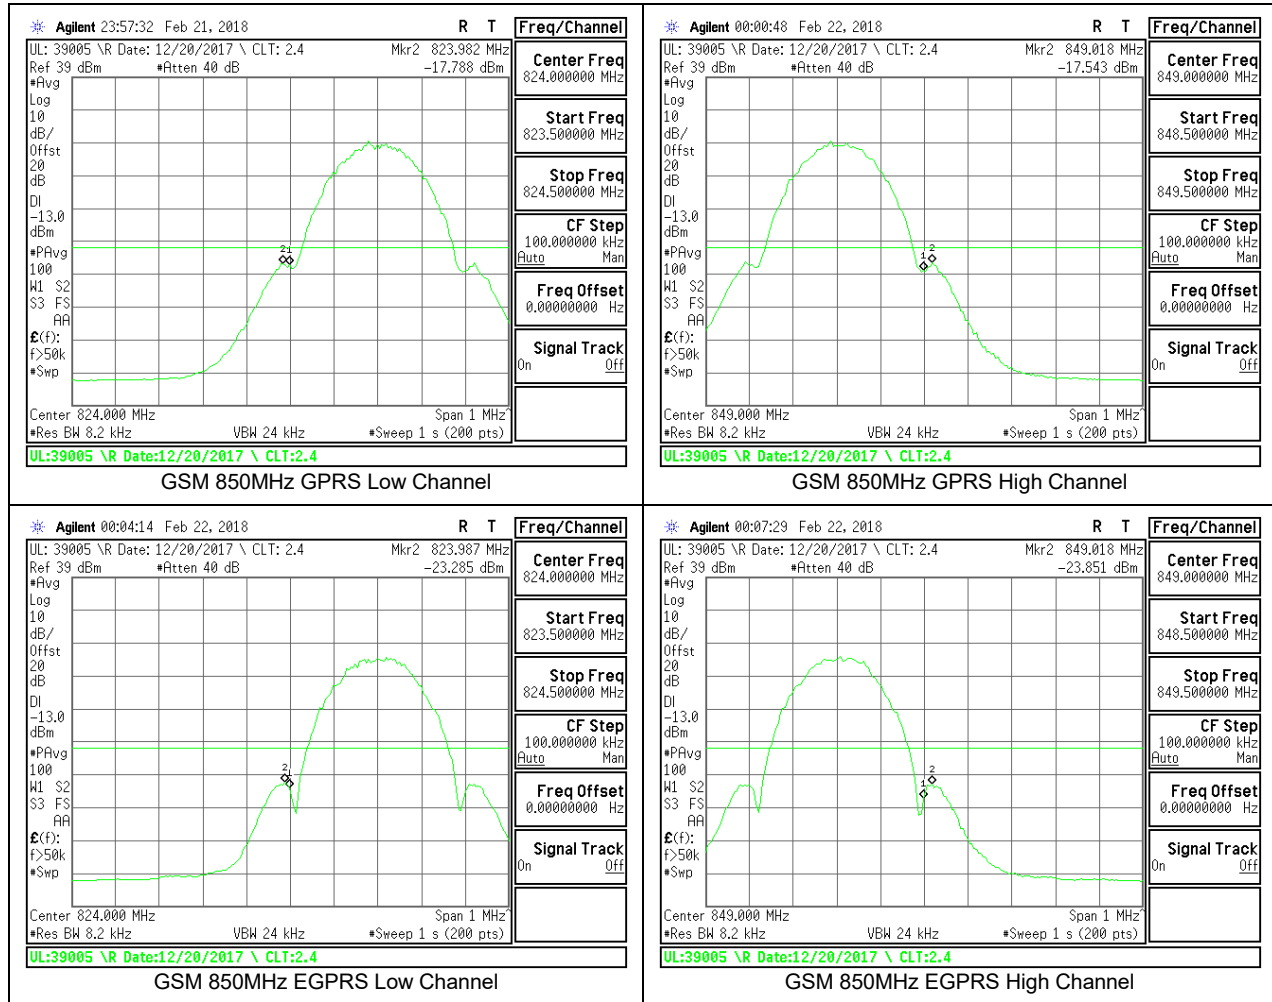


8.2.2. GSM 1900MHz

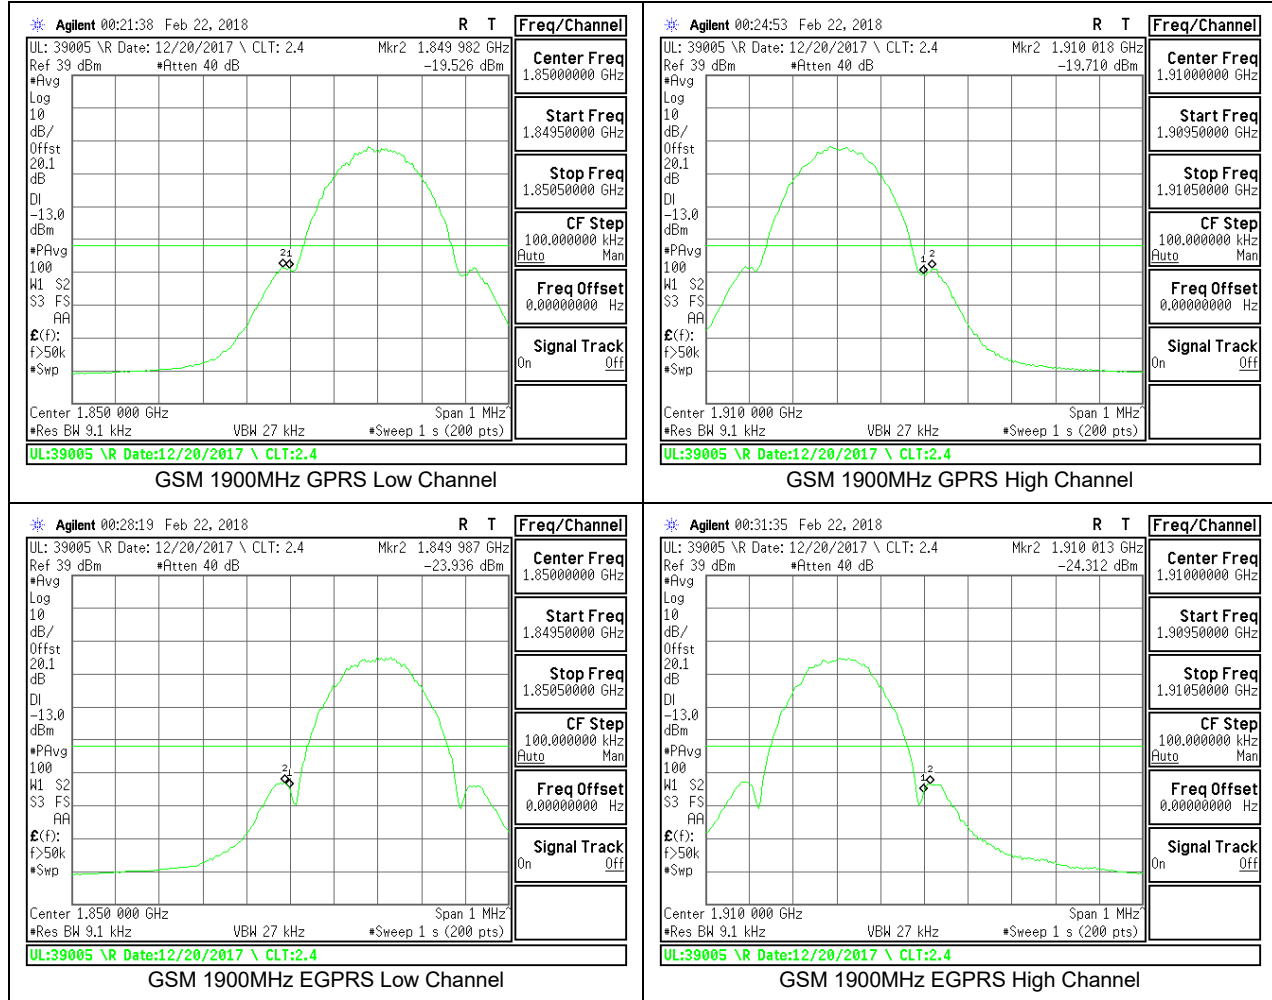



8.2.3. WCDMA BAND 5

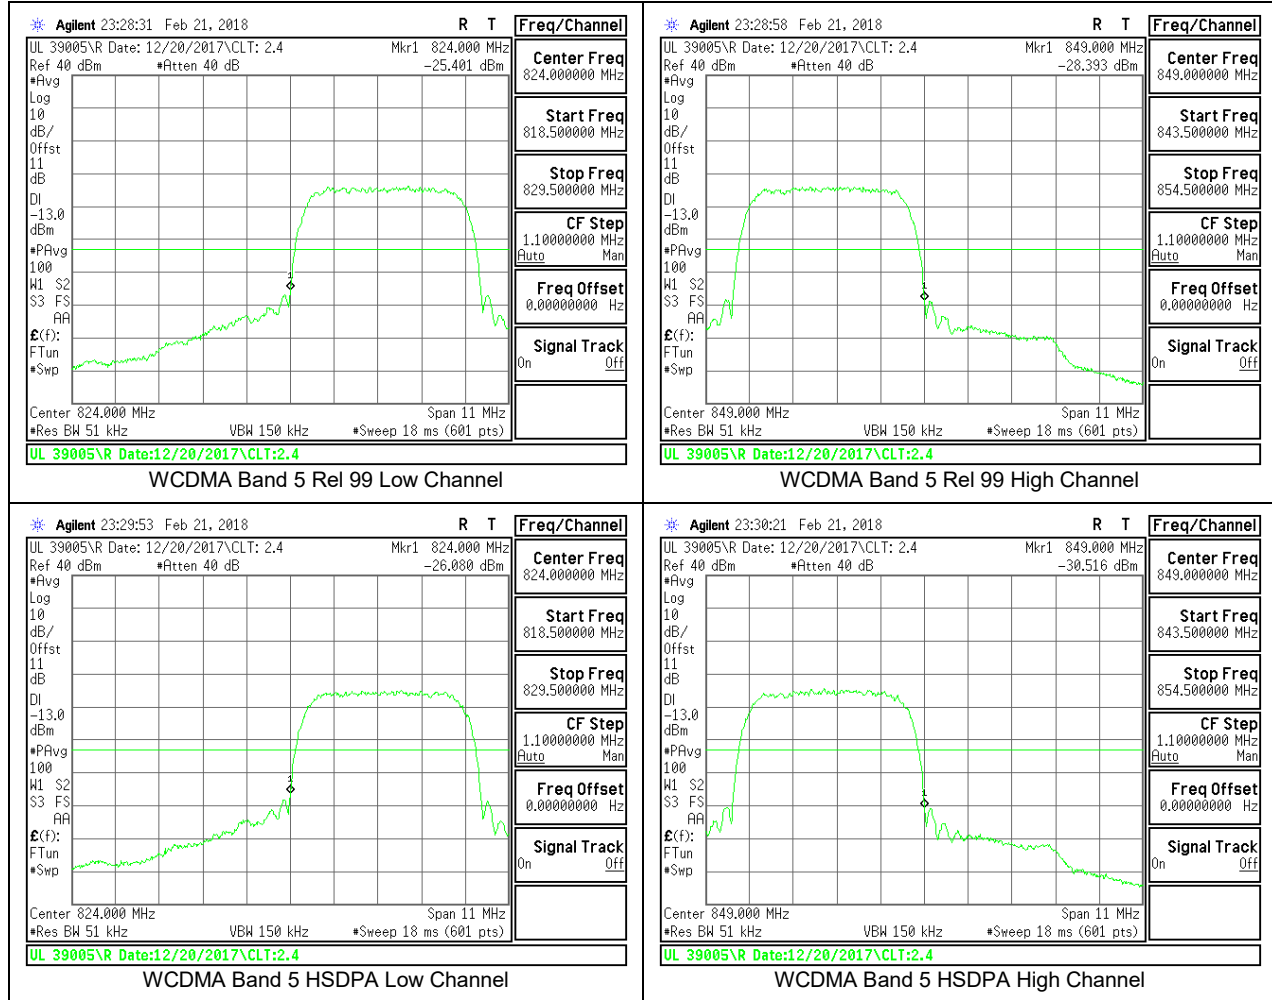



8.2.4. LTE BAND 4 BANDEDGE

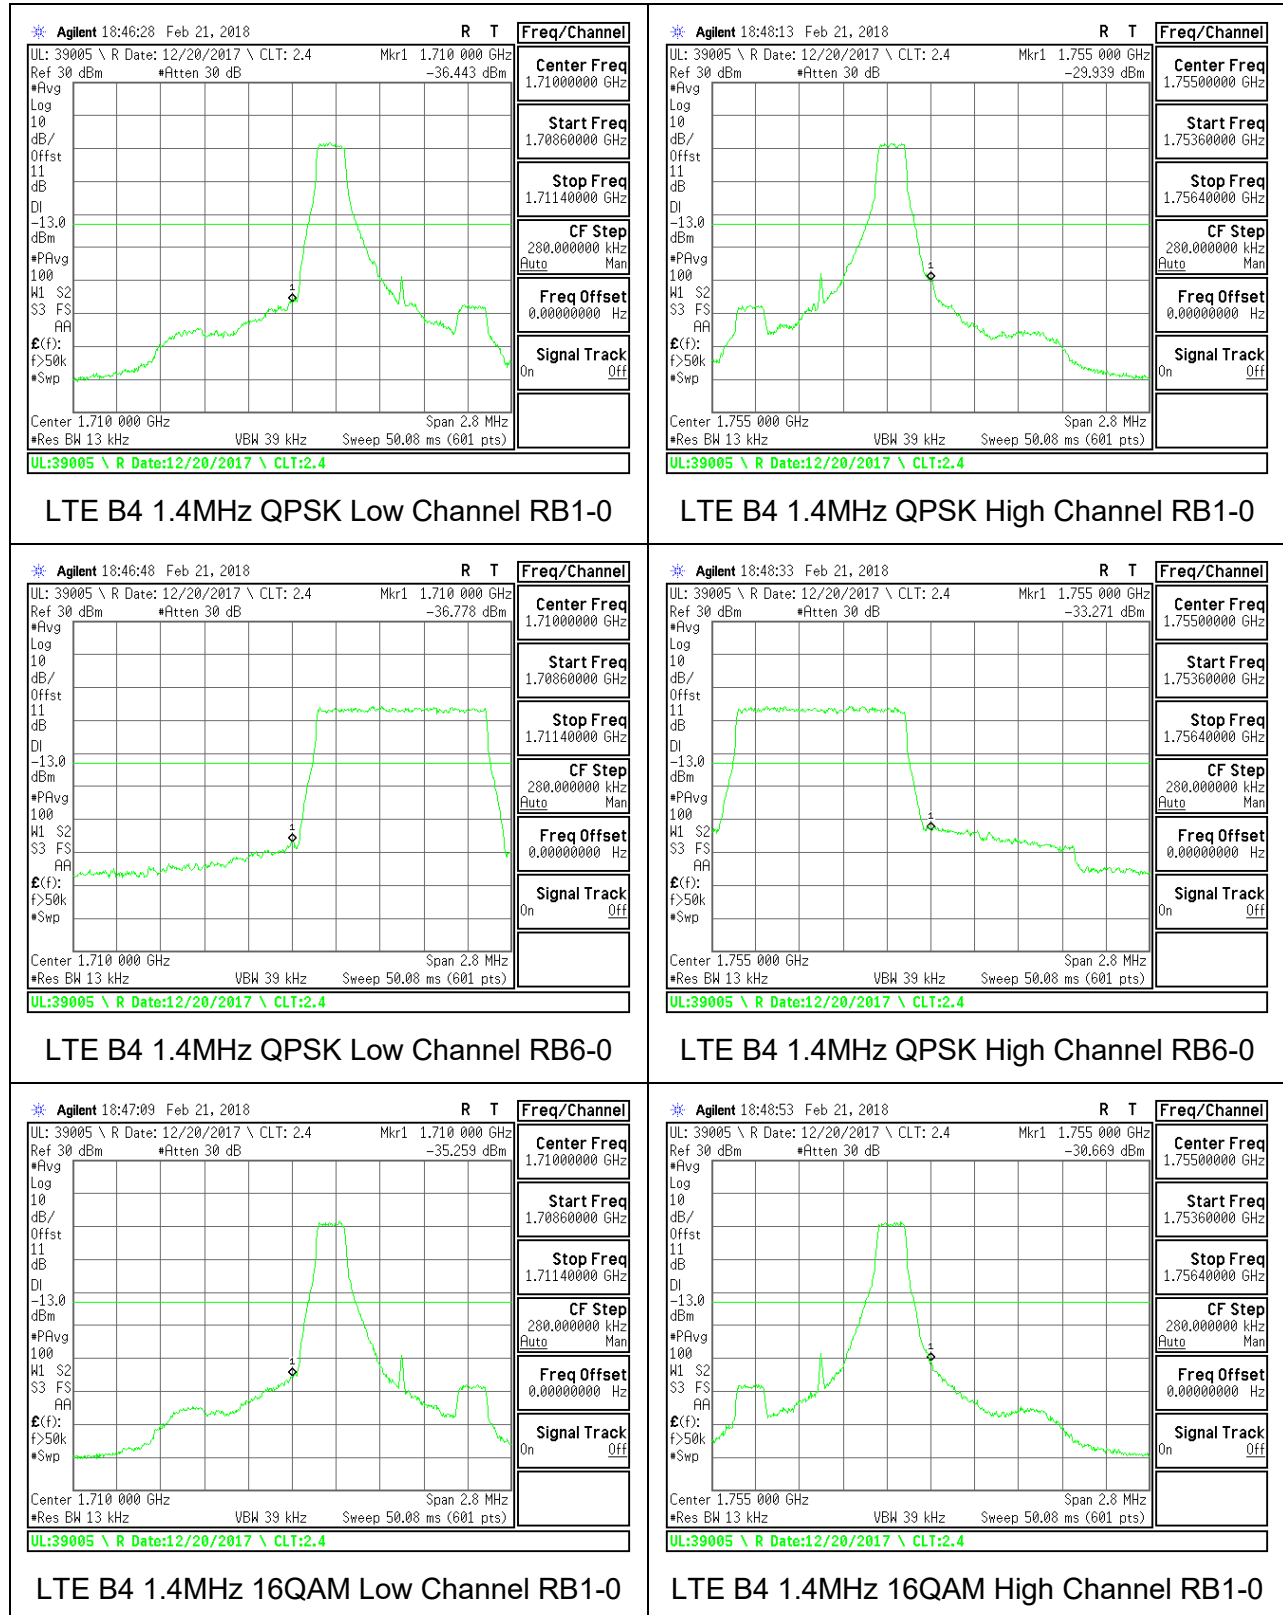


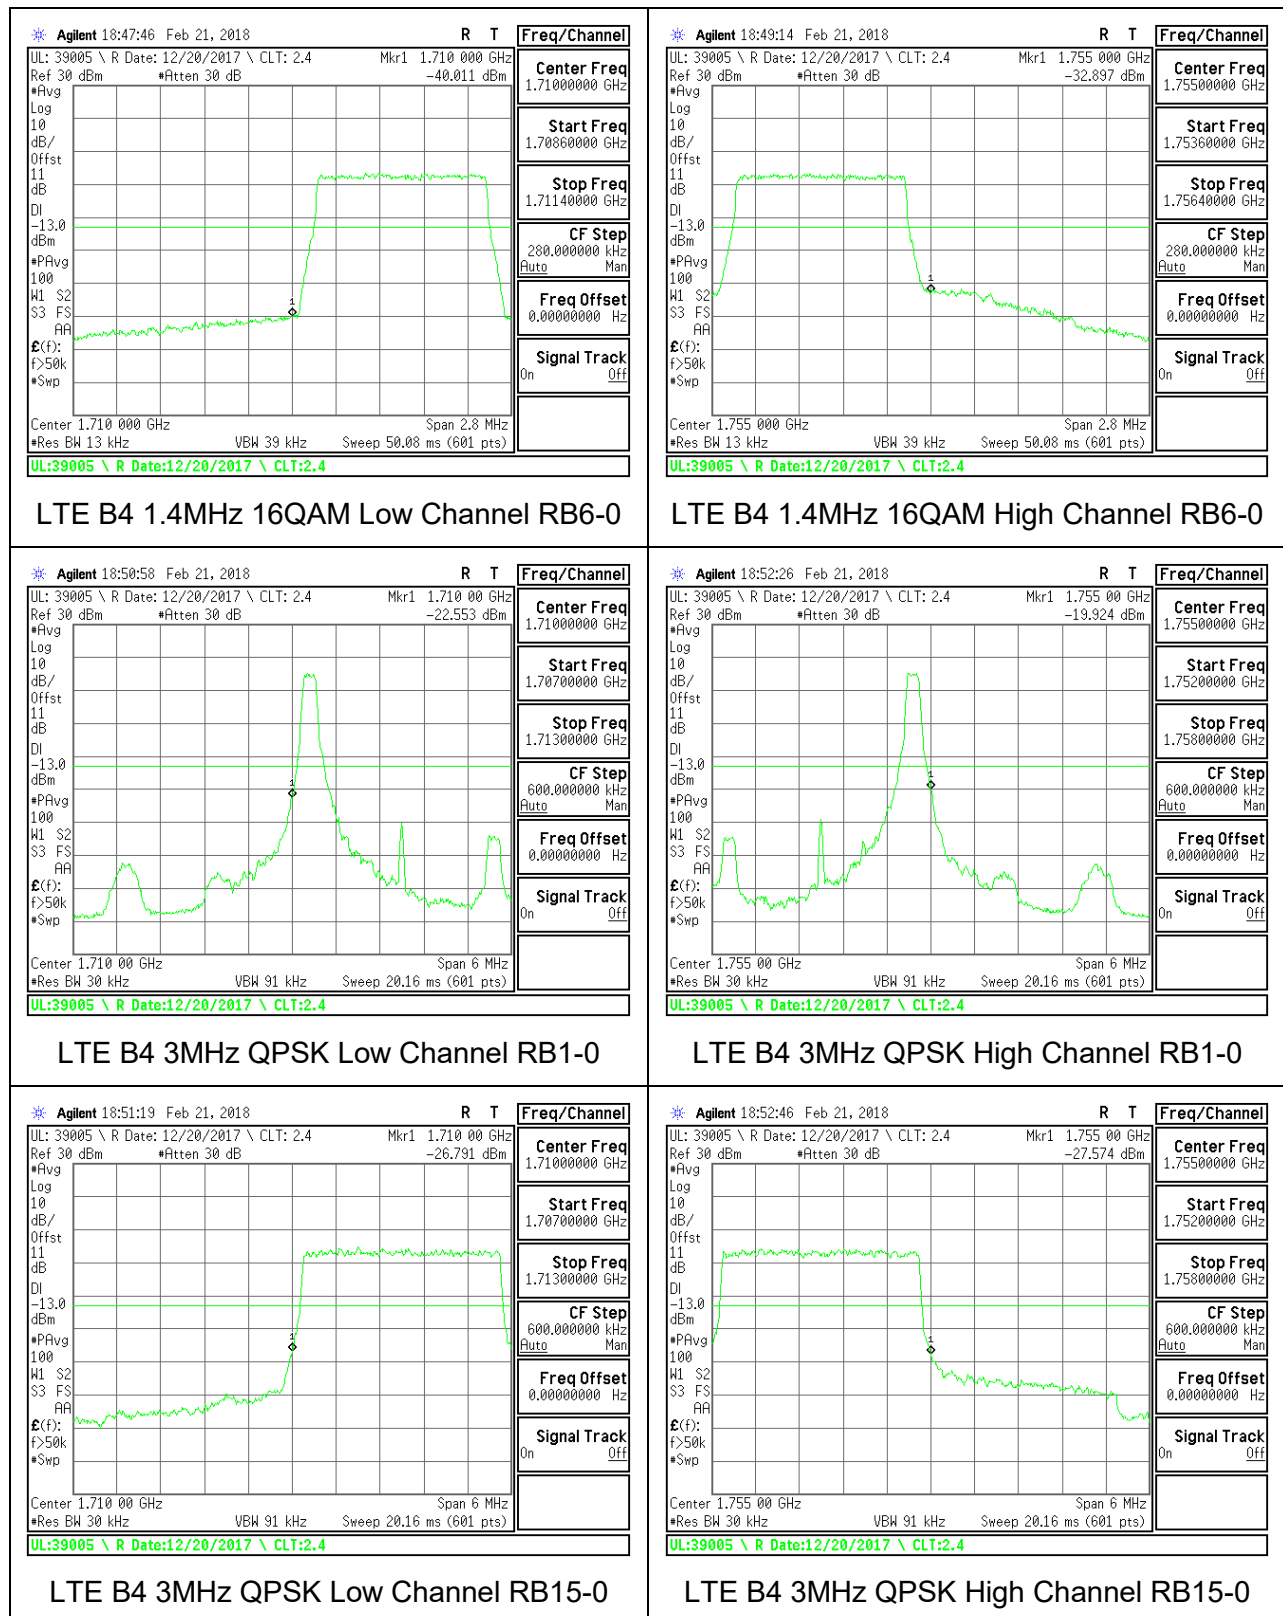


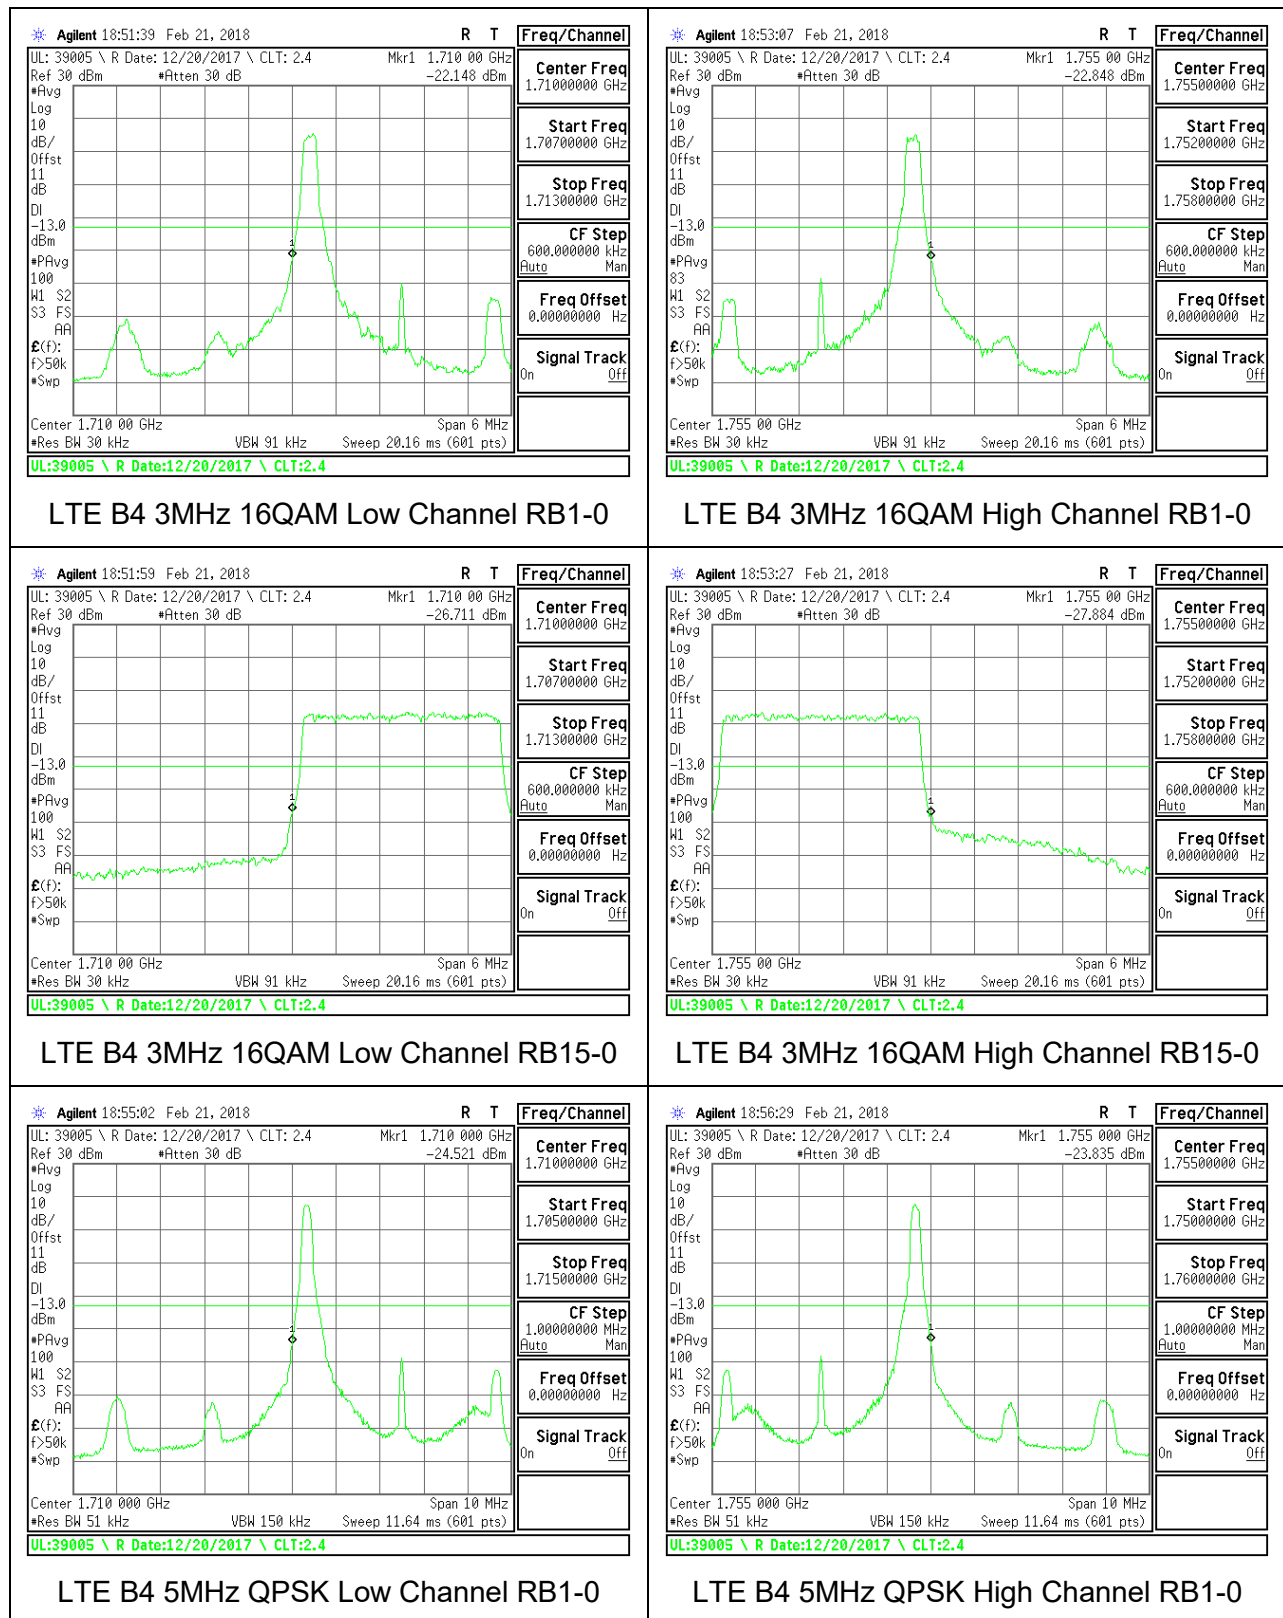

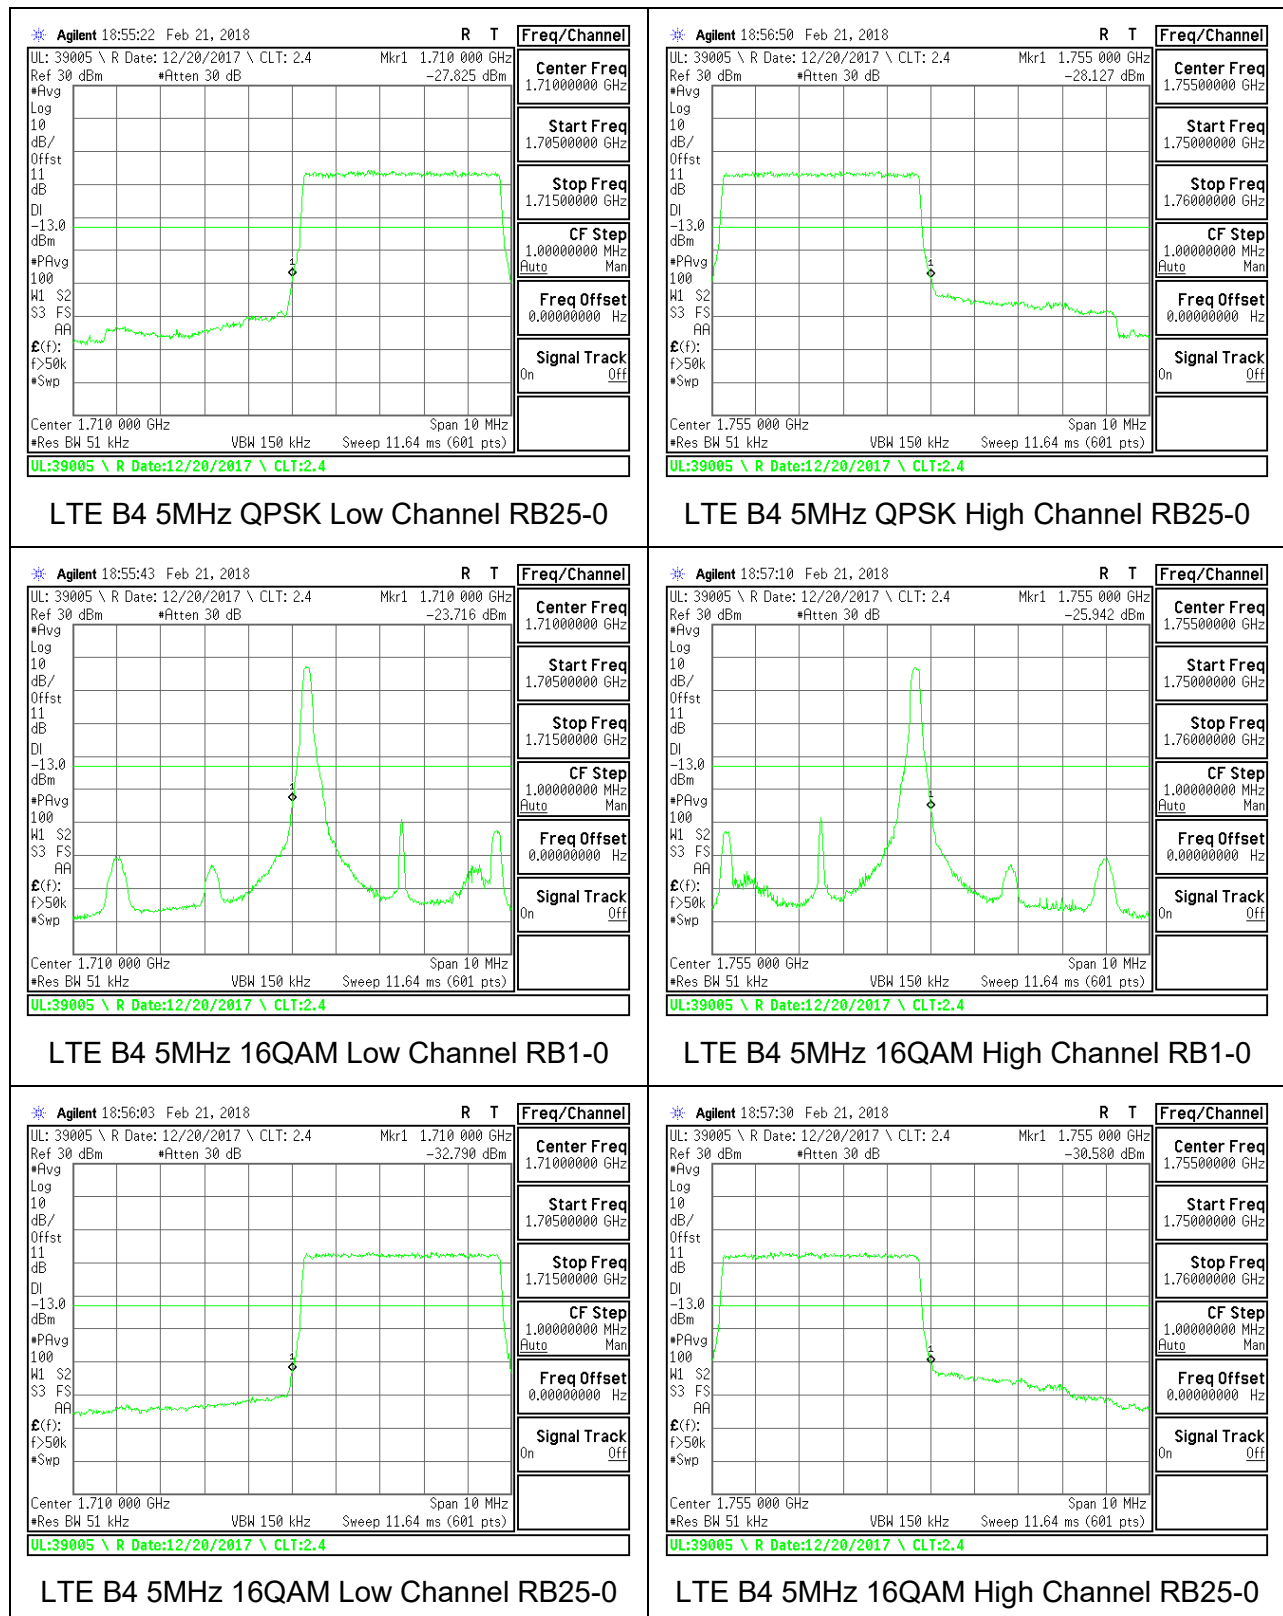


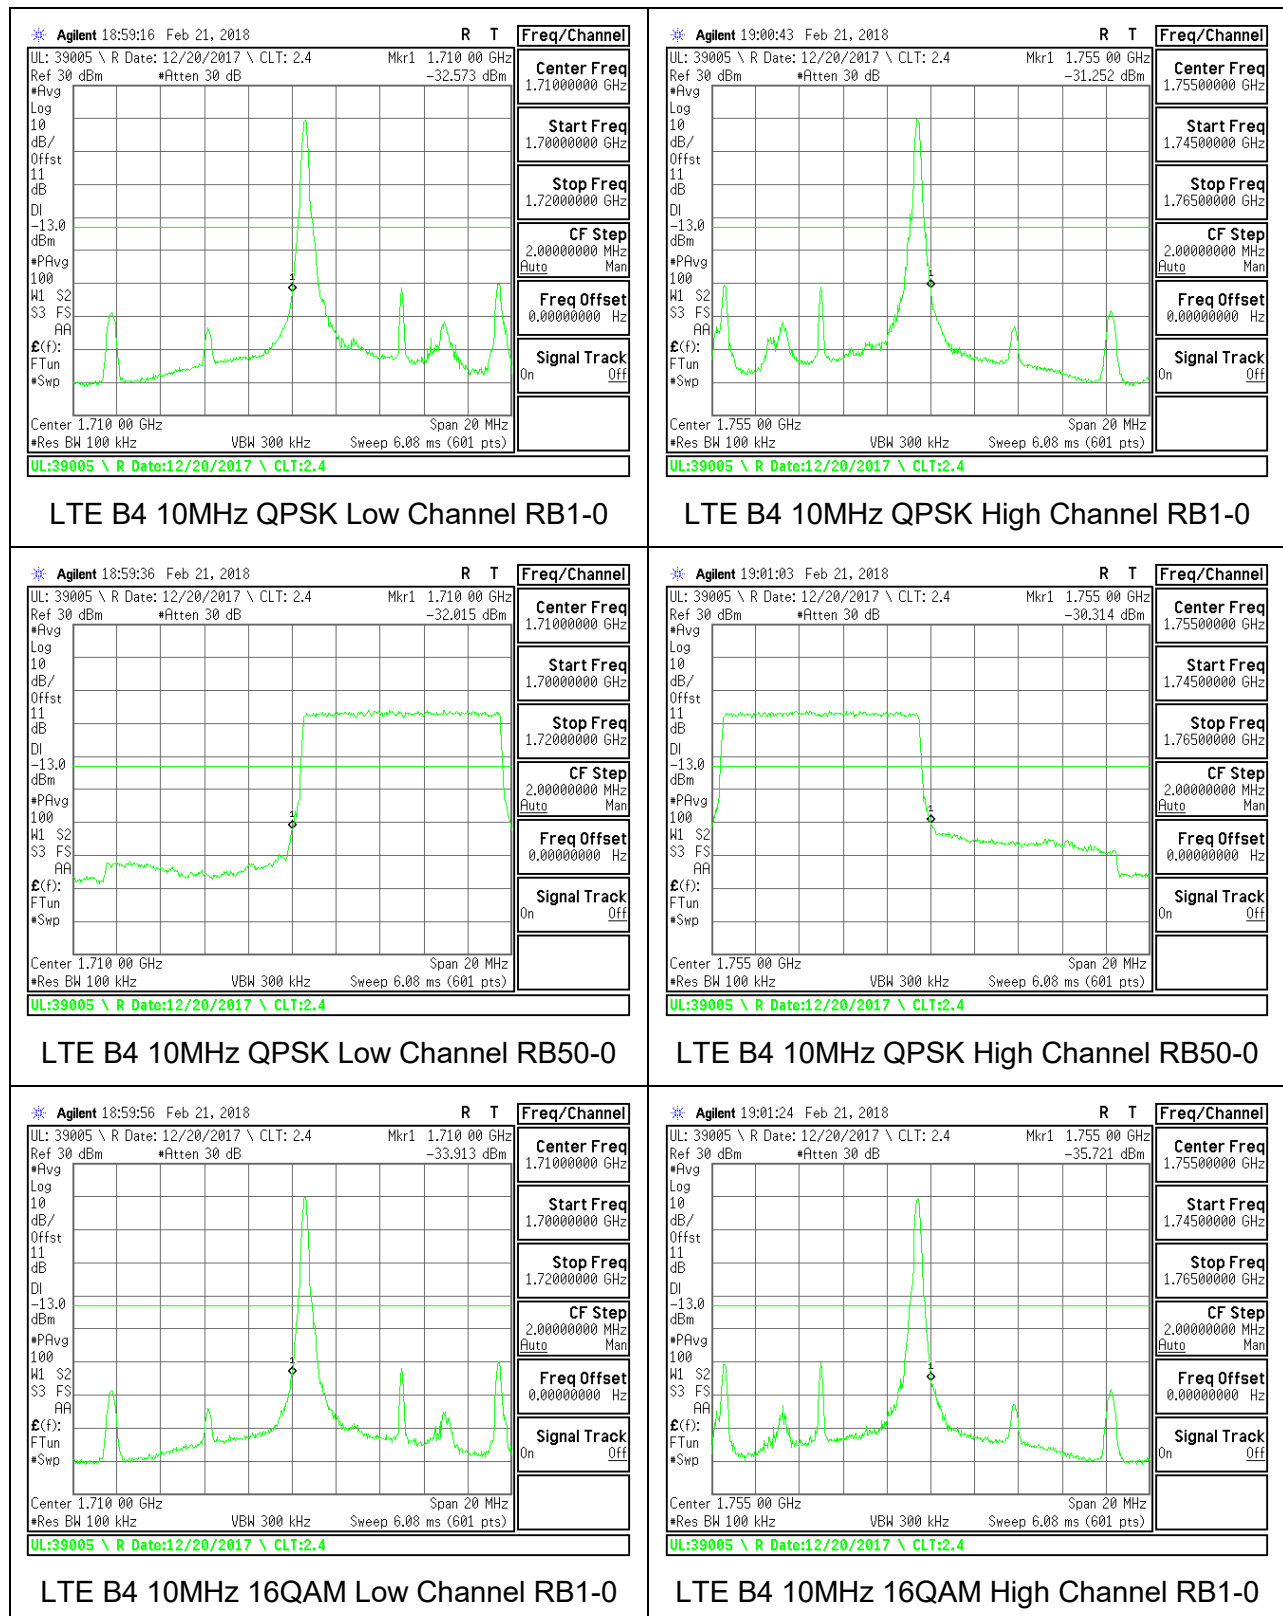

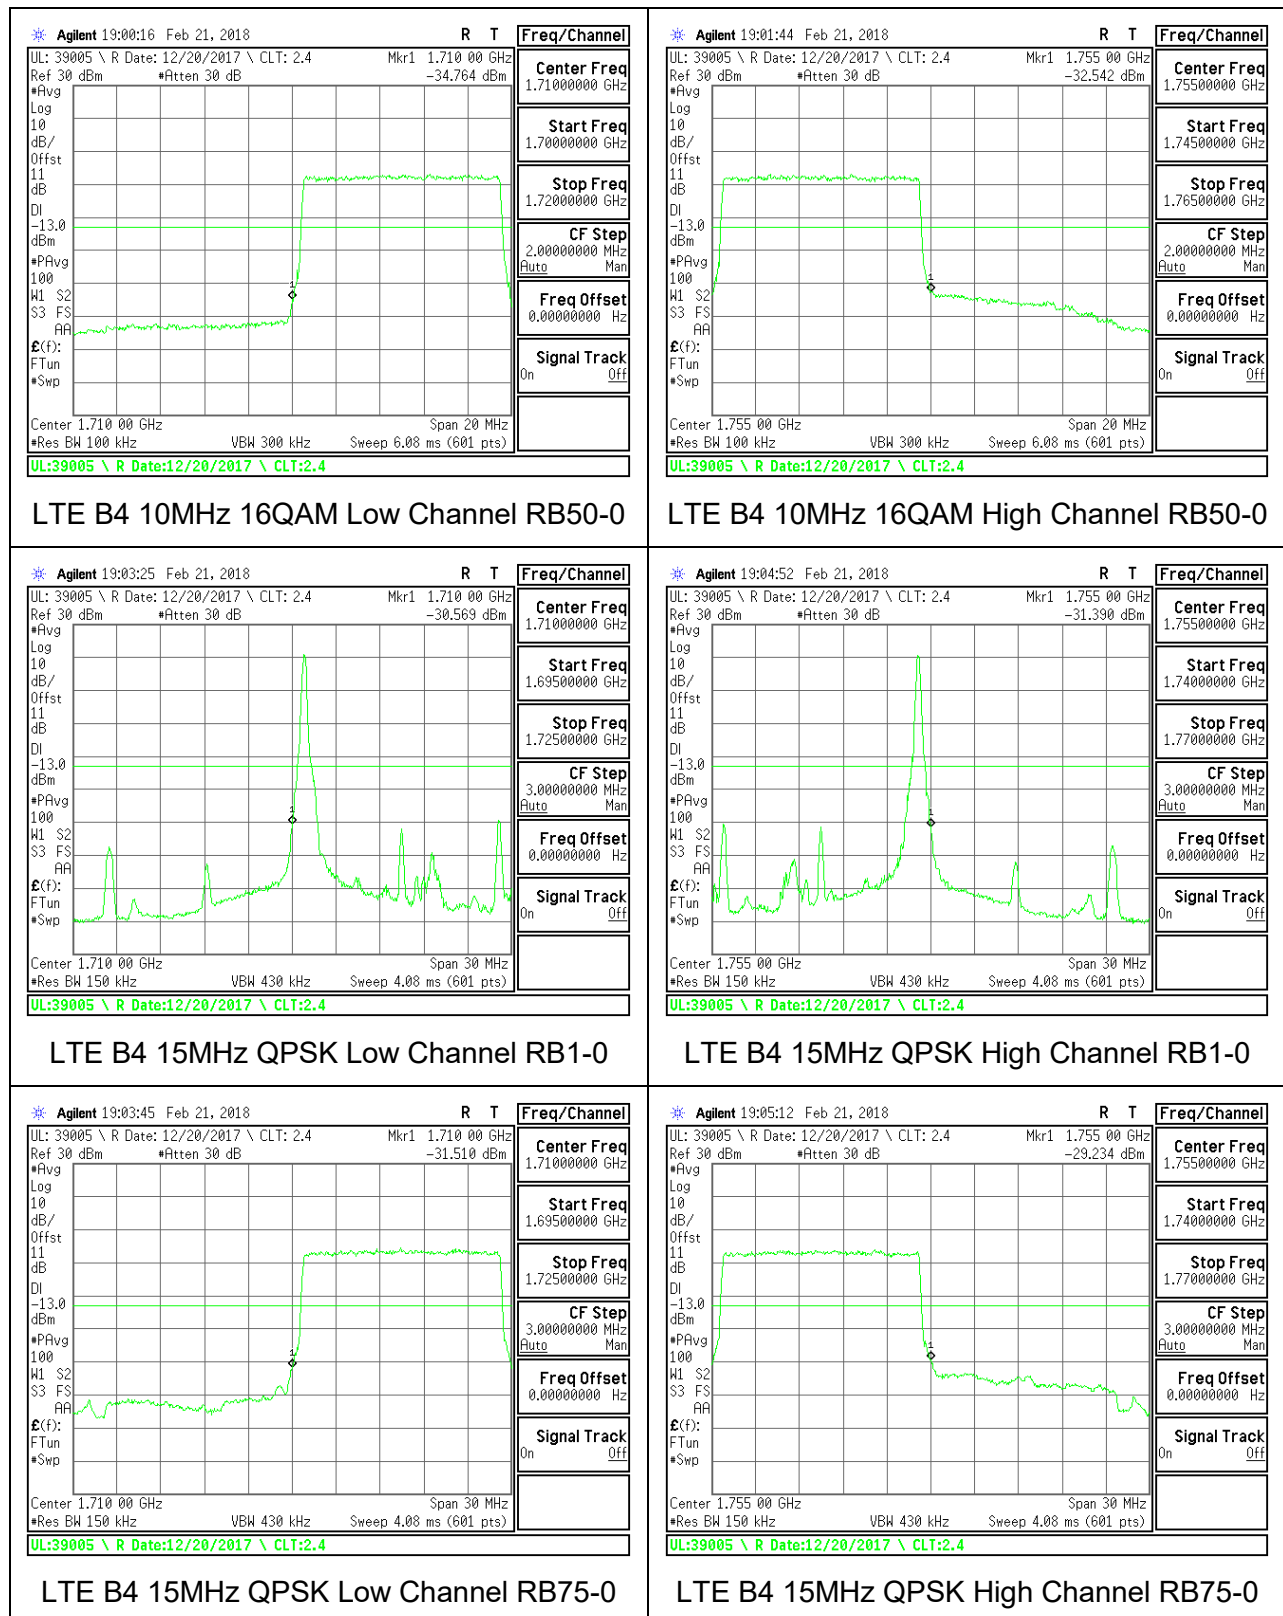


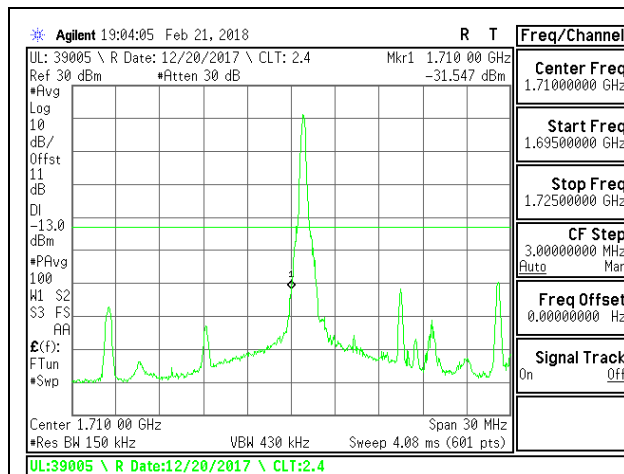


LTE B4 15MHz 16QAM Low Channel RB1-0

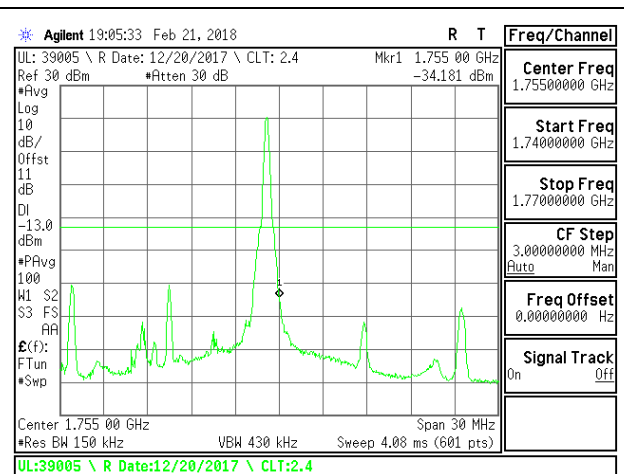


LTE B4 15MHz 16QAM High Channel RB1-0

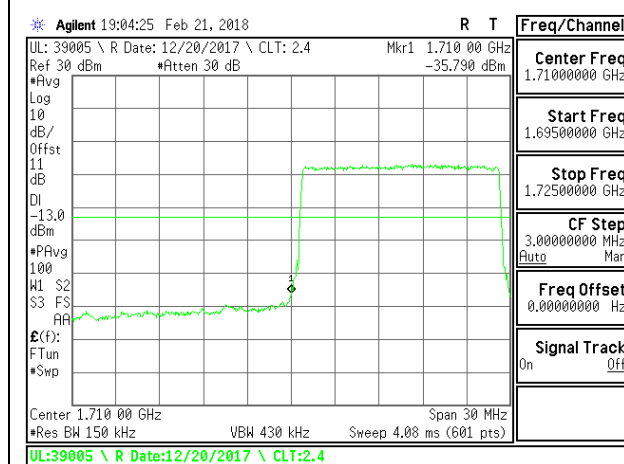


LTE B4 15MHz 16QAM Low Channel RB75-0

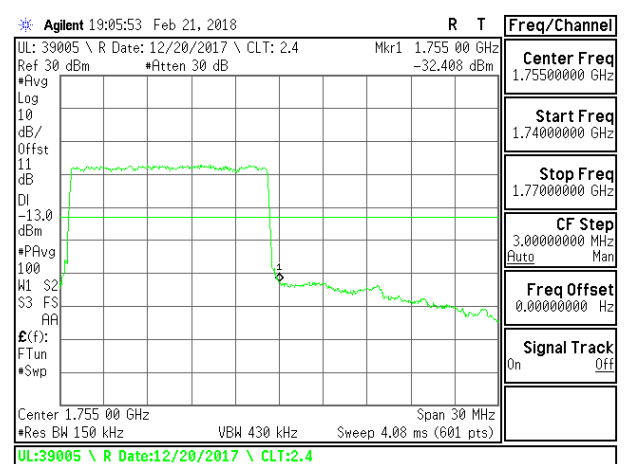


LTE B4 15MHz 16QAM High Channel RB75-0

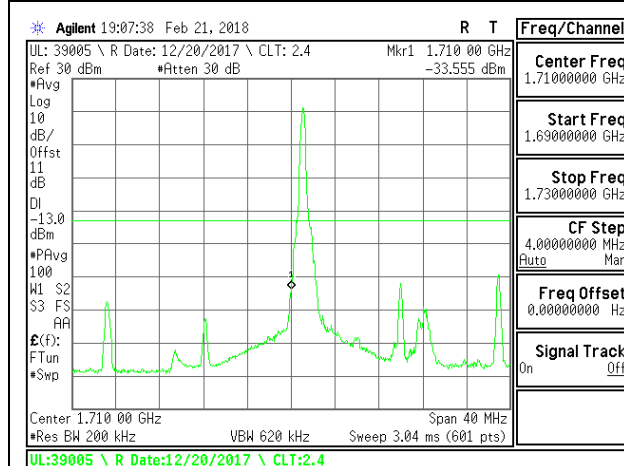


LTE B4 20MHz QPSK Low Channel RB1-0

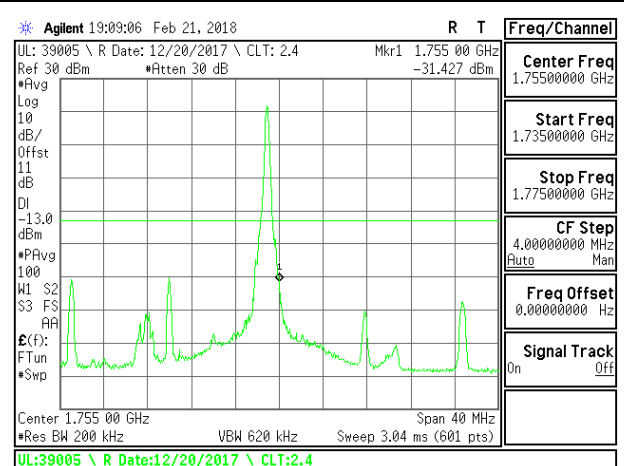


LTE B4 20MHz QPSK High Channel RB1-0

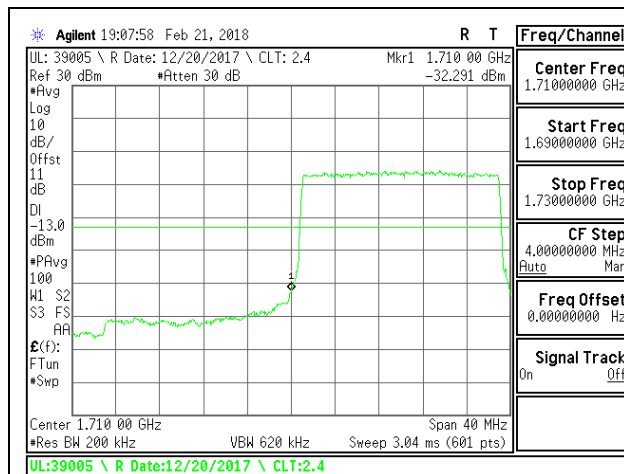


LTE B4 20MHz QPSK Low Channel RB100-0

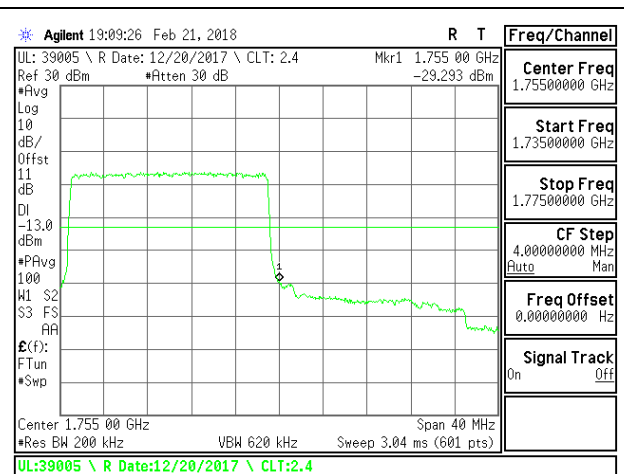


LTE B4 20MHz QPSK High Channel RB100-0

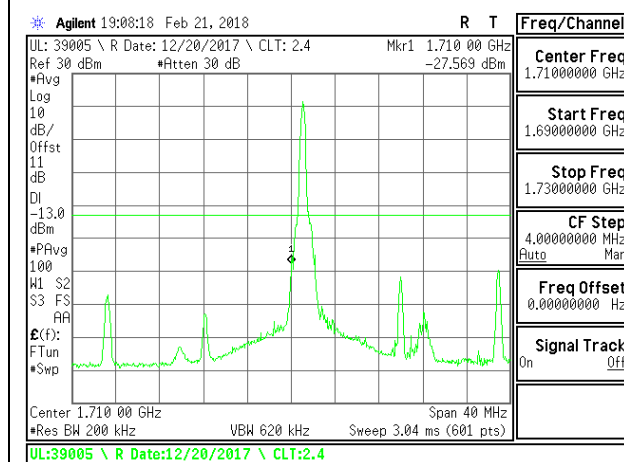


LTE B4 20MHz 16QAM Low Channel RB1-0

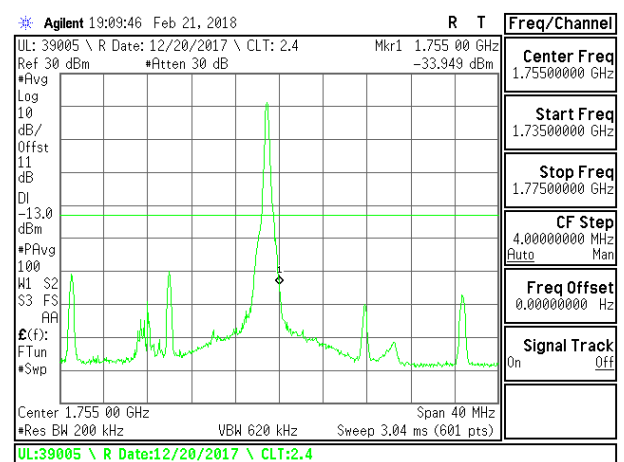

LTE B4 20MHz 16QAM High Channel RB1-0

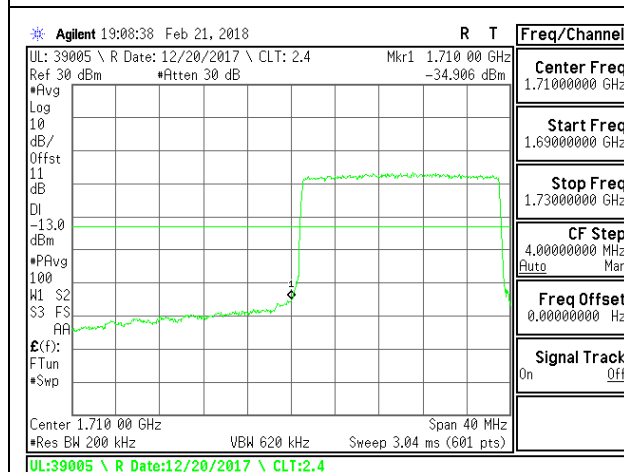



LTE B4 20MHz 16QAM Low Channel RB100-0

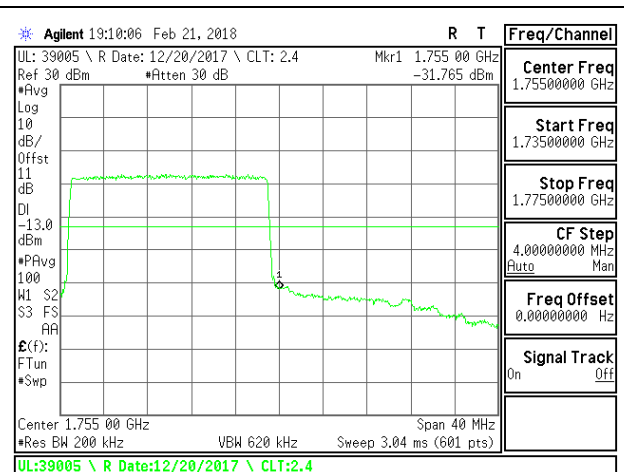


LTE B4 20MHz 16QAM High Channel RB100-0


8.2.5. LTE BAND 5 BANDEDGE

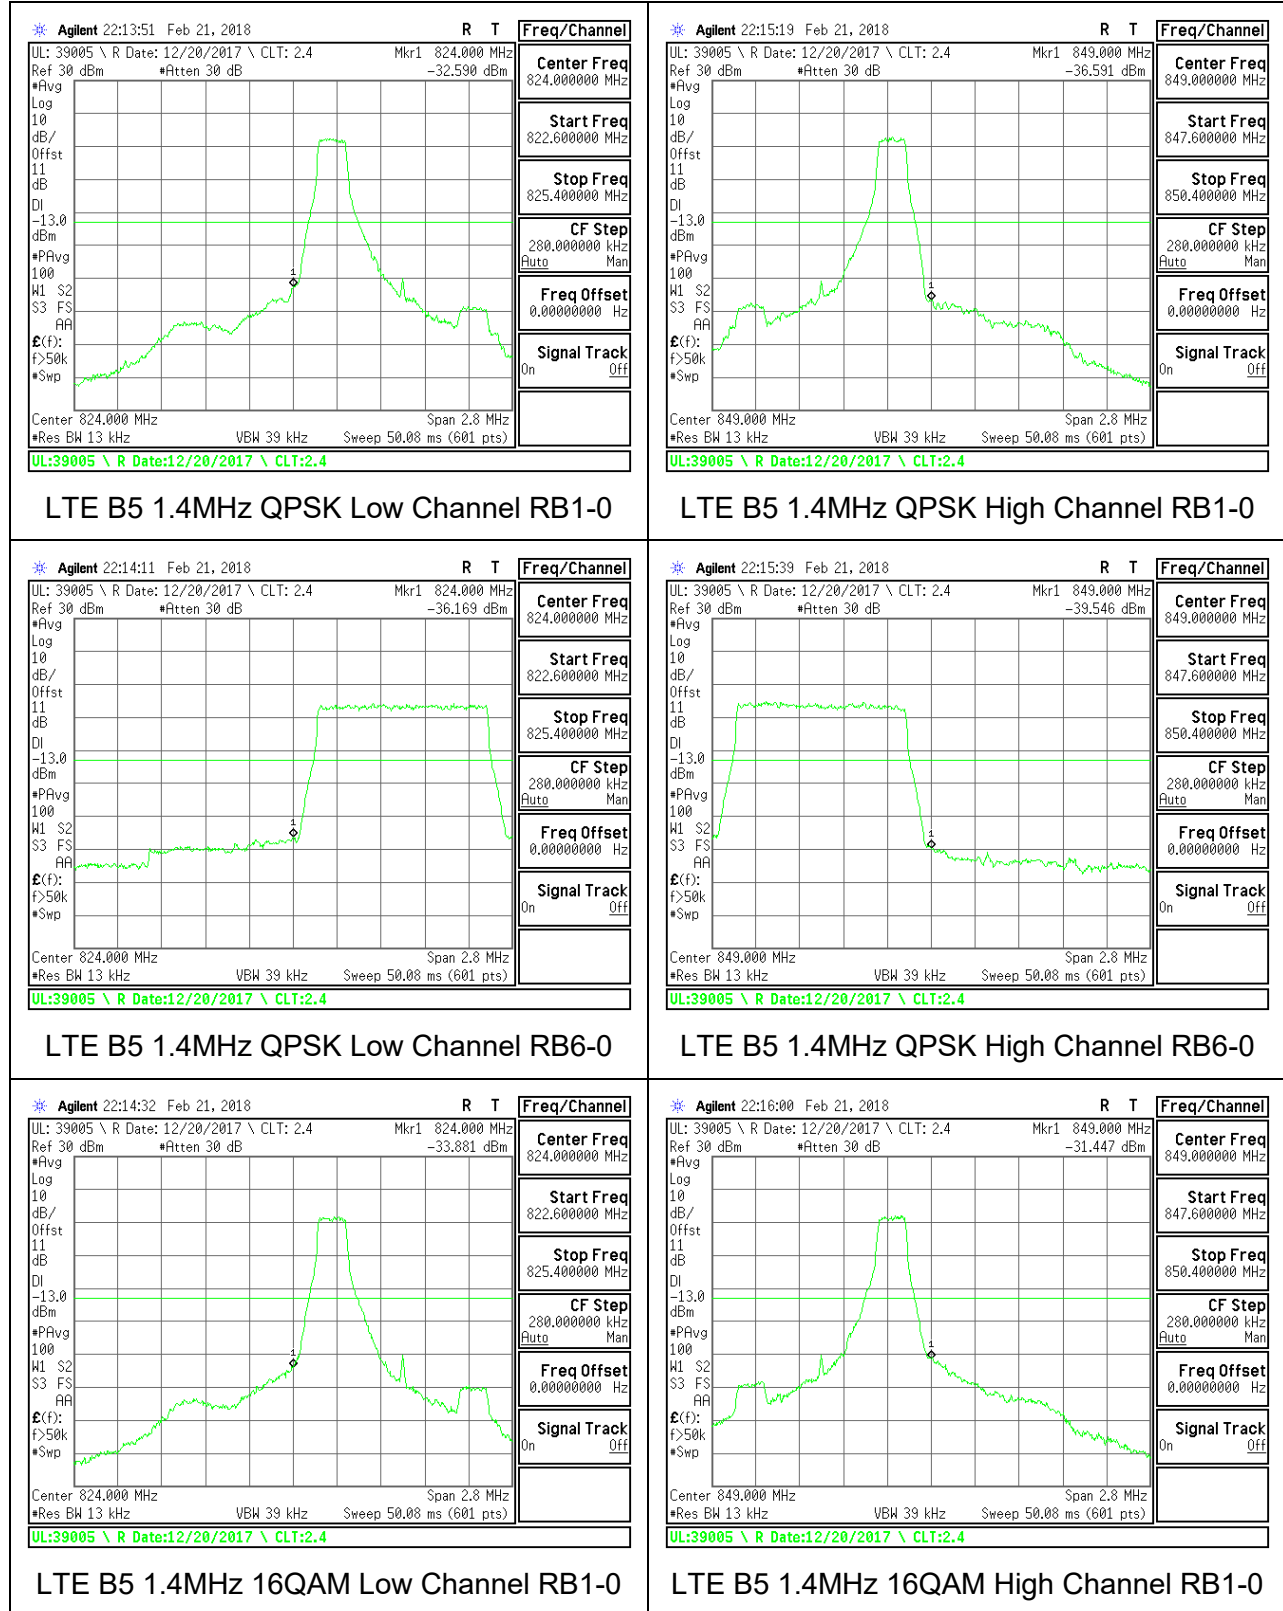

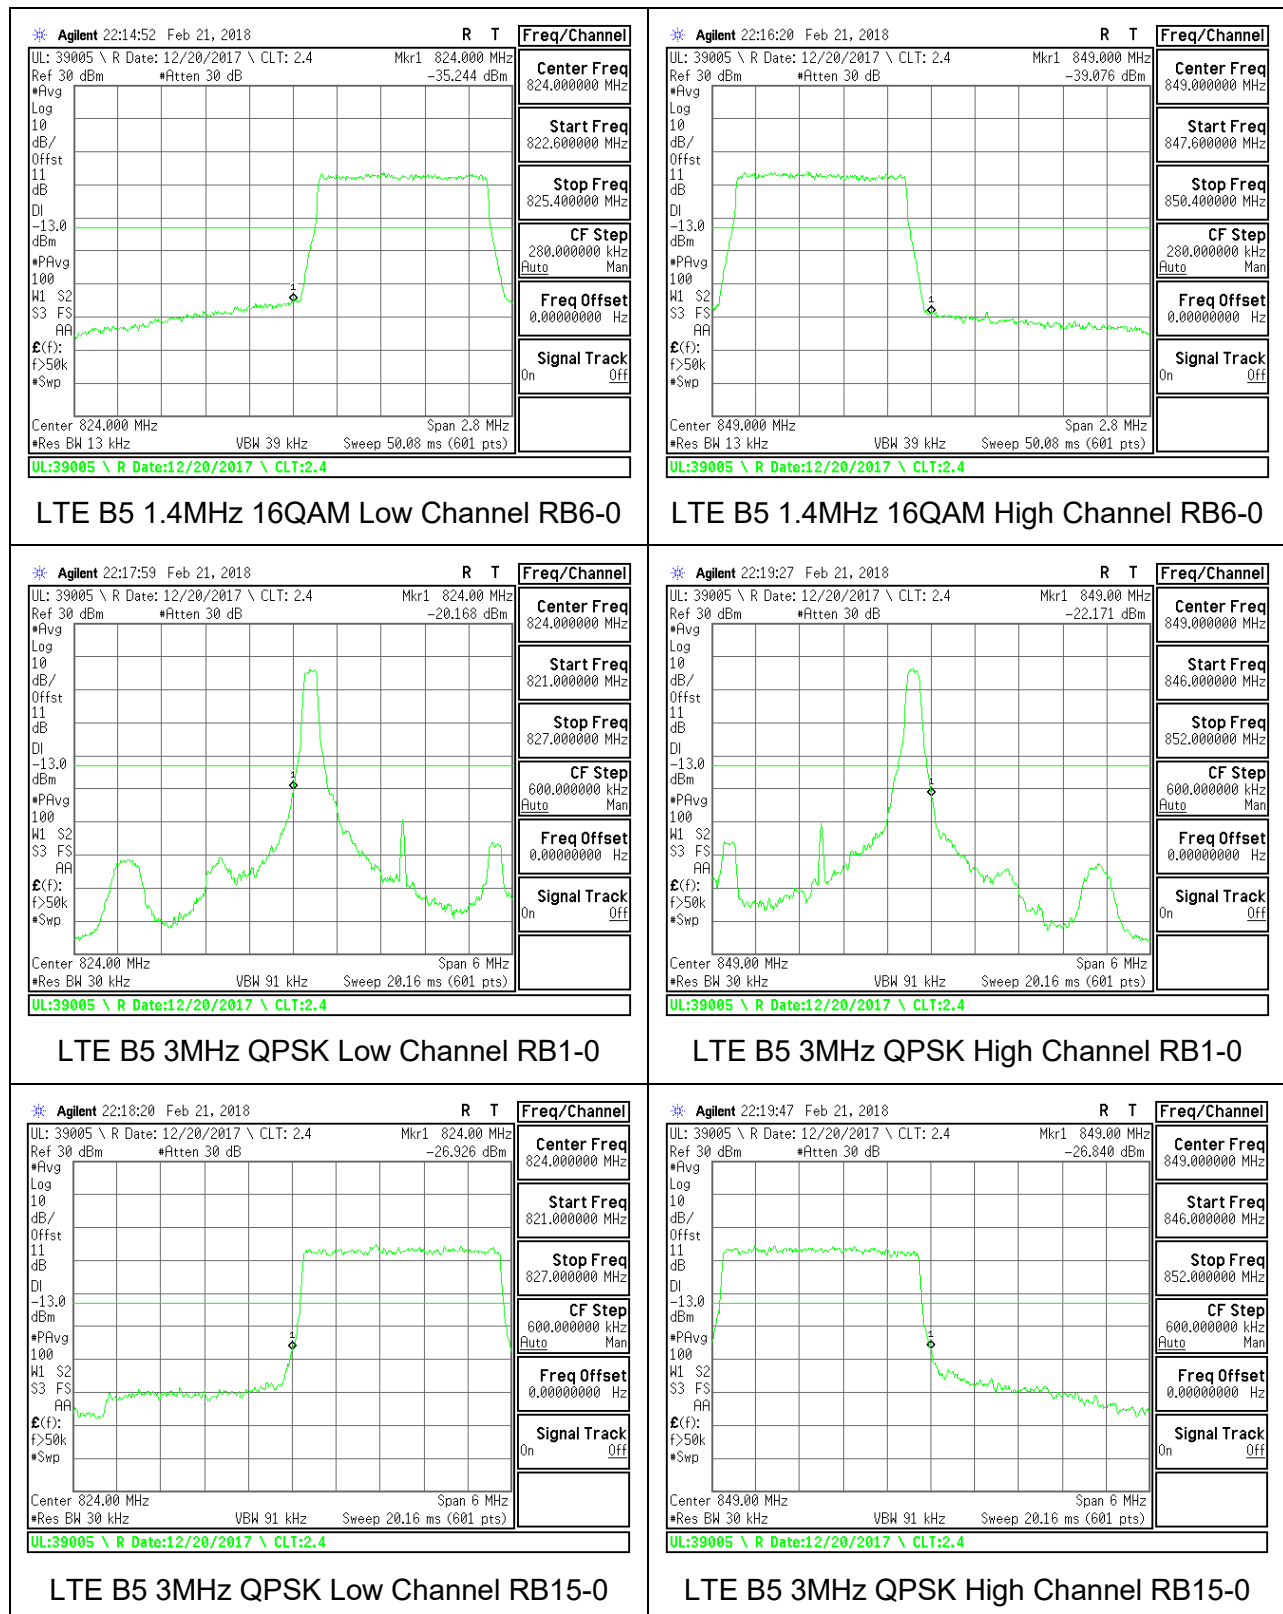


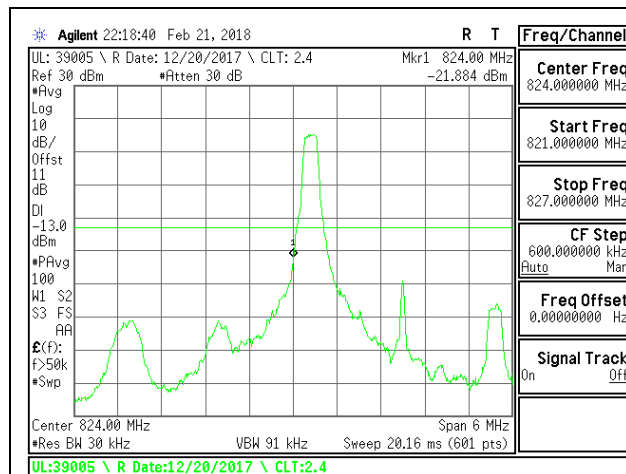


LTE B5 3MHz 16QAM Low Channel RB1-0

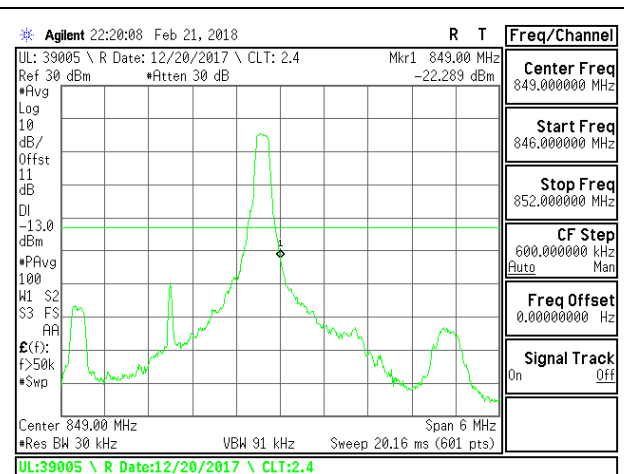


LTE B5 3MHz 16QAM High Channel RB1-0

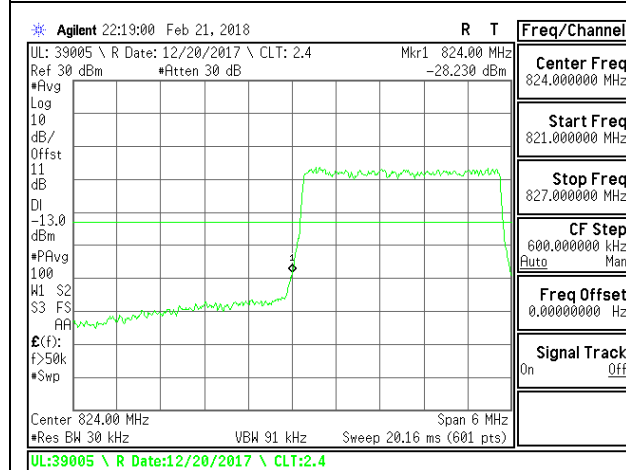


LTE B5 3MHz 16QAM Low Channel RB15-0

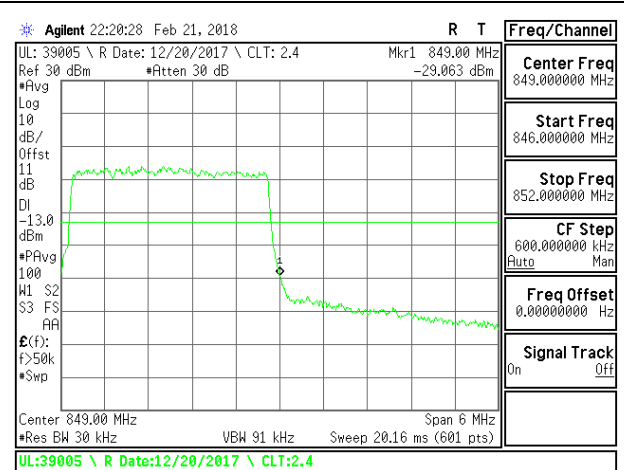


LTE B5 3MHz 16QAM High Channel RB15-0

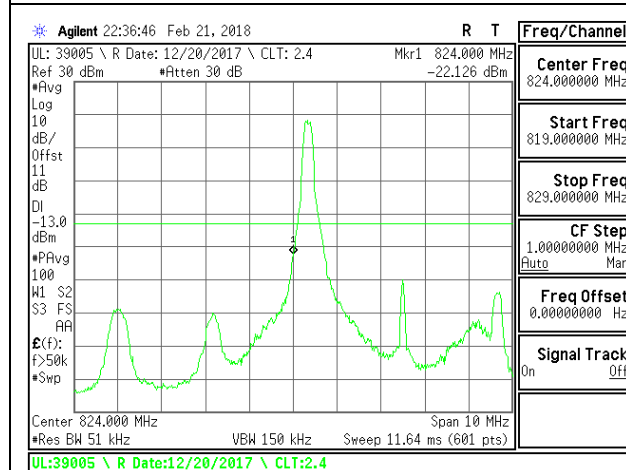


LTE B5 5MHz QPSK Low Channel RB1-0

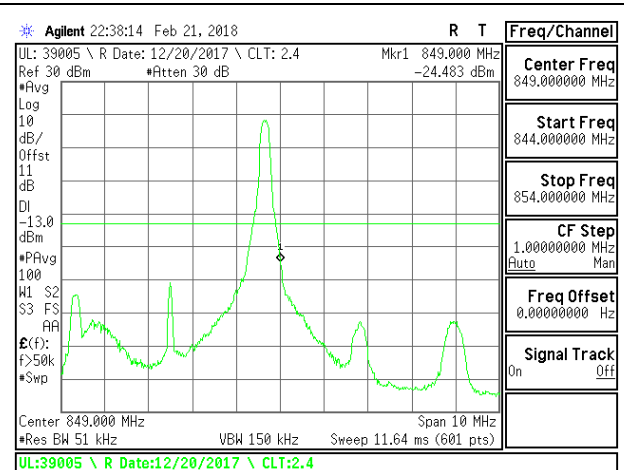


LTE B5 5MHz QPSK High Channel RB1-0

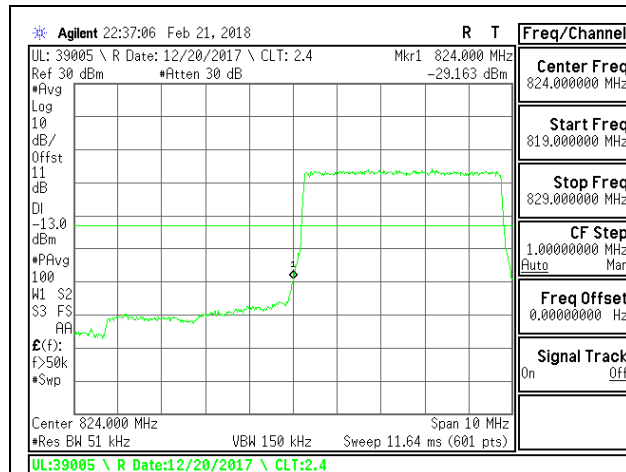


LTE B5 5MHz QPSK Low Channel RB25-0

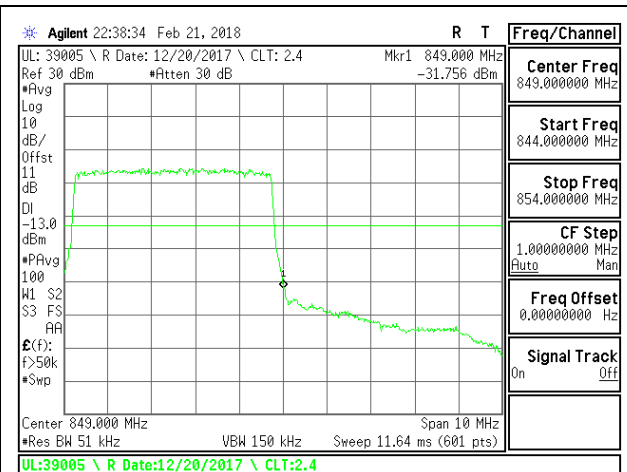


LTE B5 5MHz QPSK High Channel RB25-0

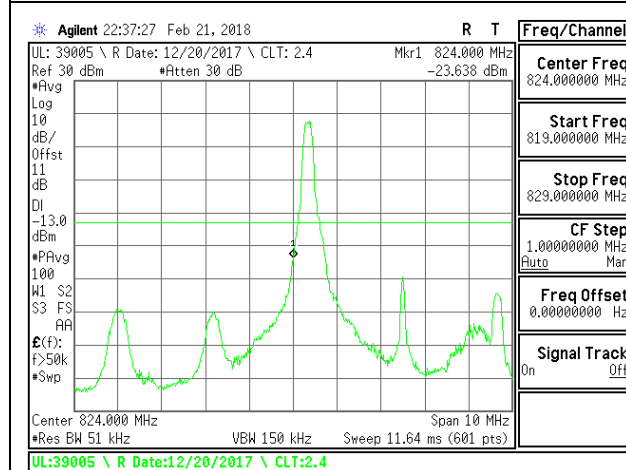


LTE B5 5MHz 16QAM Low Channel RB1-0

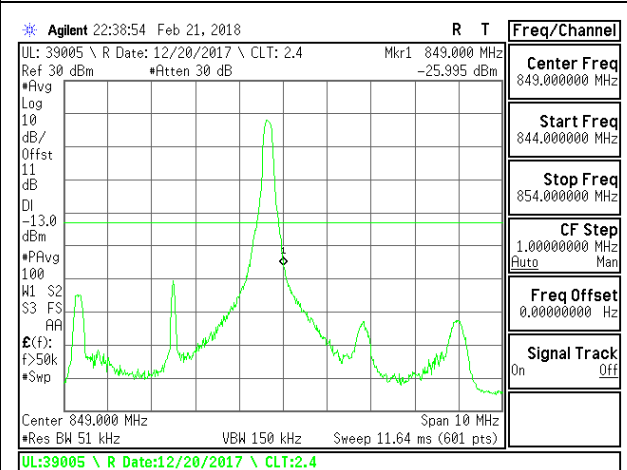


LTE B5 5MHz 16QAM High Channel RB1-0

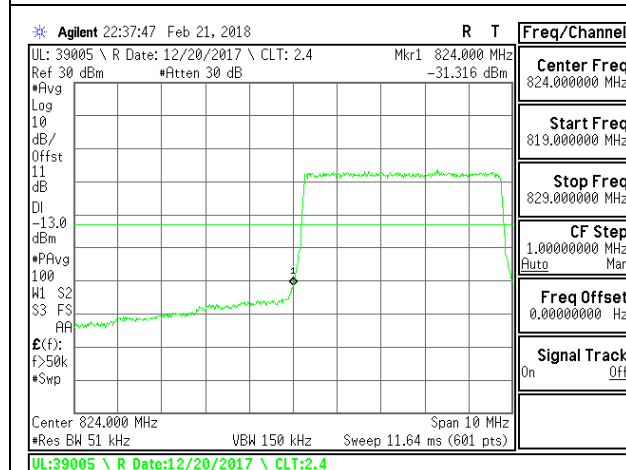


LTE B5 5MHz 16QAM Low Channel RB25-0

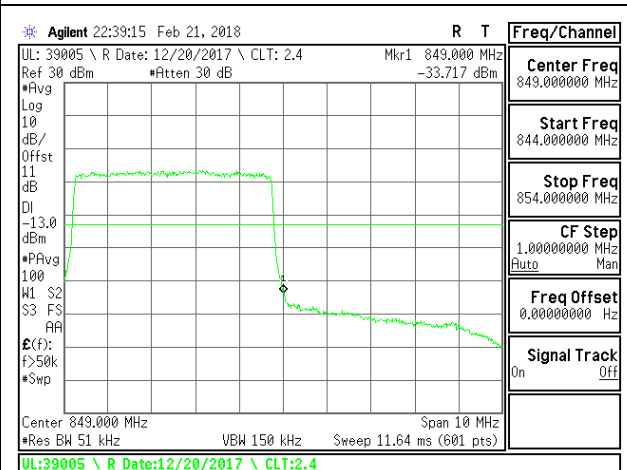


LTE B5 5MHz 16QAM High Channel RB25-0

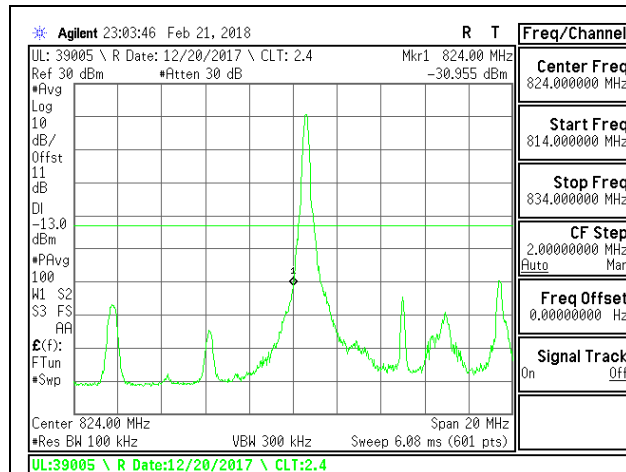


LTE B5 10MHz QPSK Low Channel RB1-0

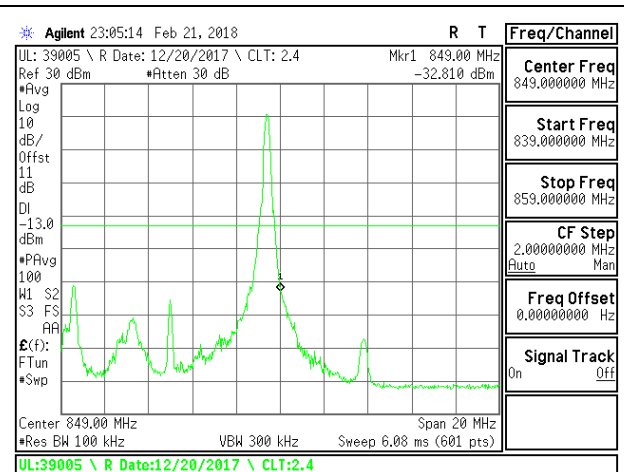


LTE B5 10MHz QPSK High Channel RB1-0

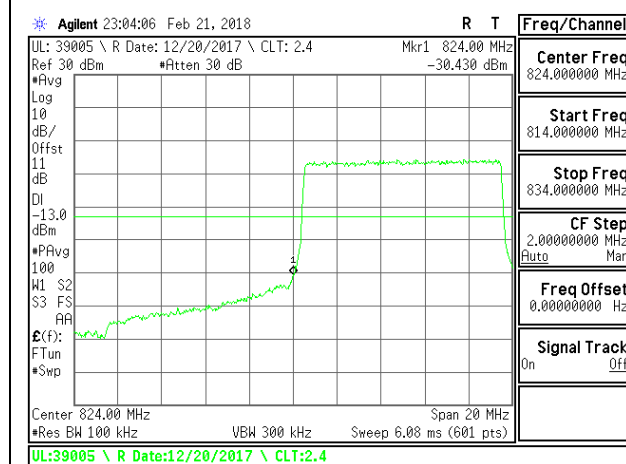


LTE B5 10MHz QPSK Low Channel RB50-0

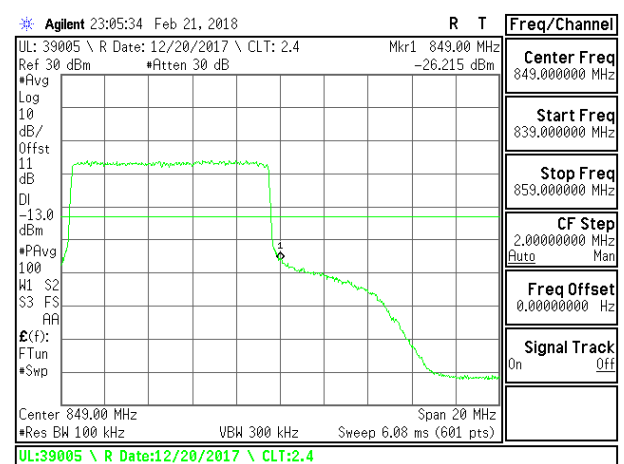


LTE B5 10MHz QPSK High Channel RB50-0

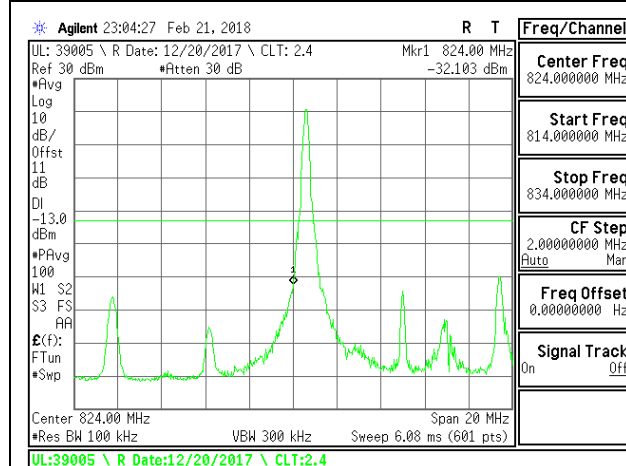


LTE B5 10MHz 16QAM Low Channel RB1-0

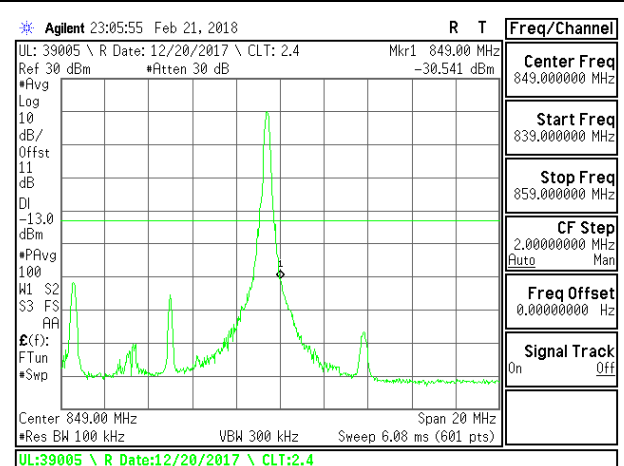



LTE B5 10MHz 16QAM High Channel RB1-0

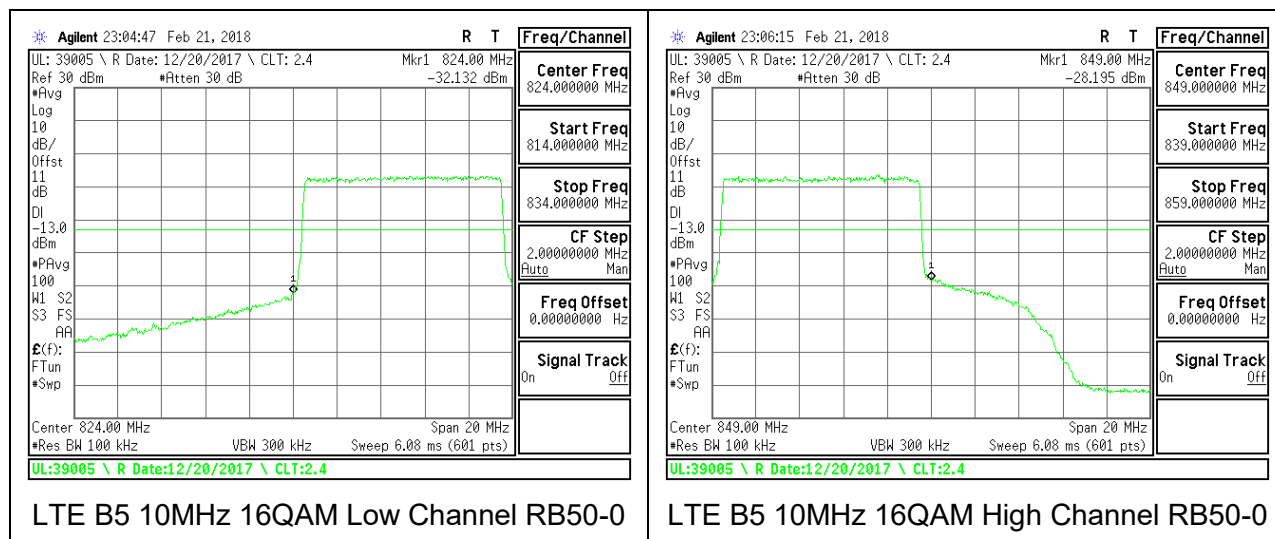



8.2.6. LTE BAND 7 ADJACENT CHANNEL POWER

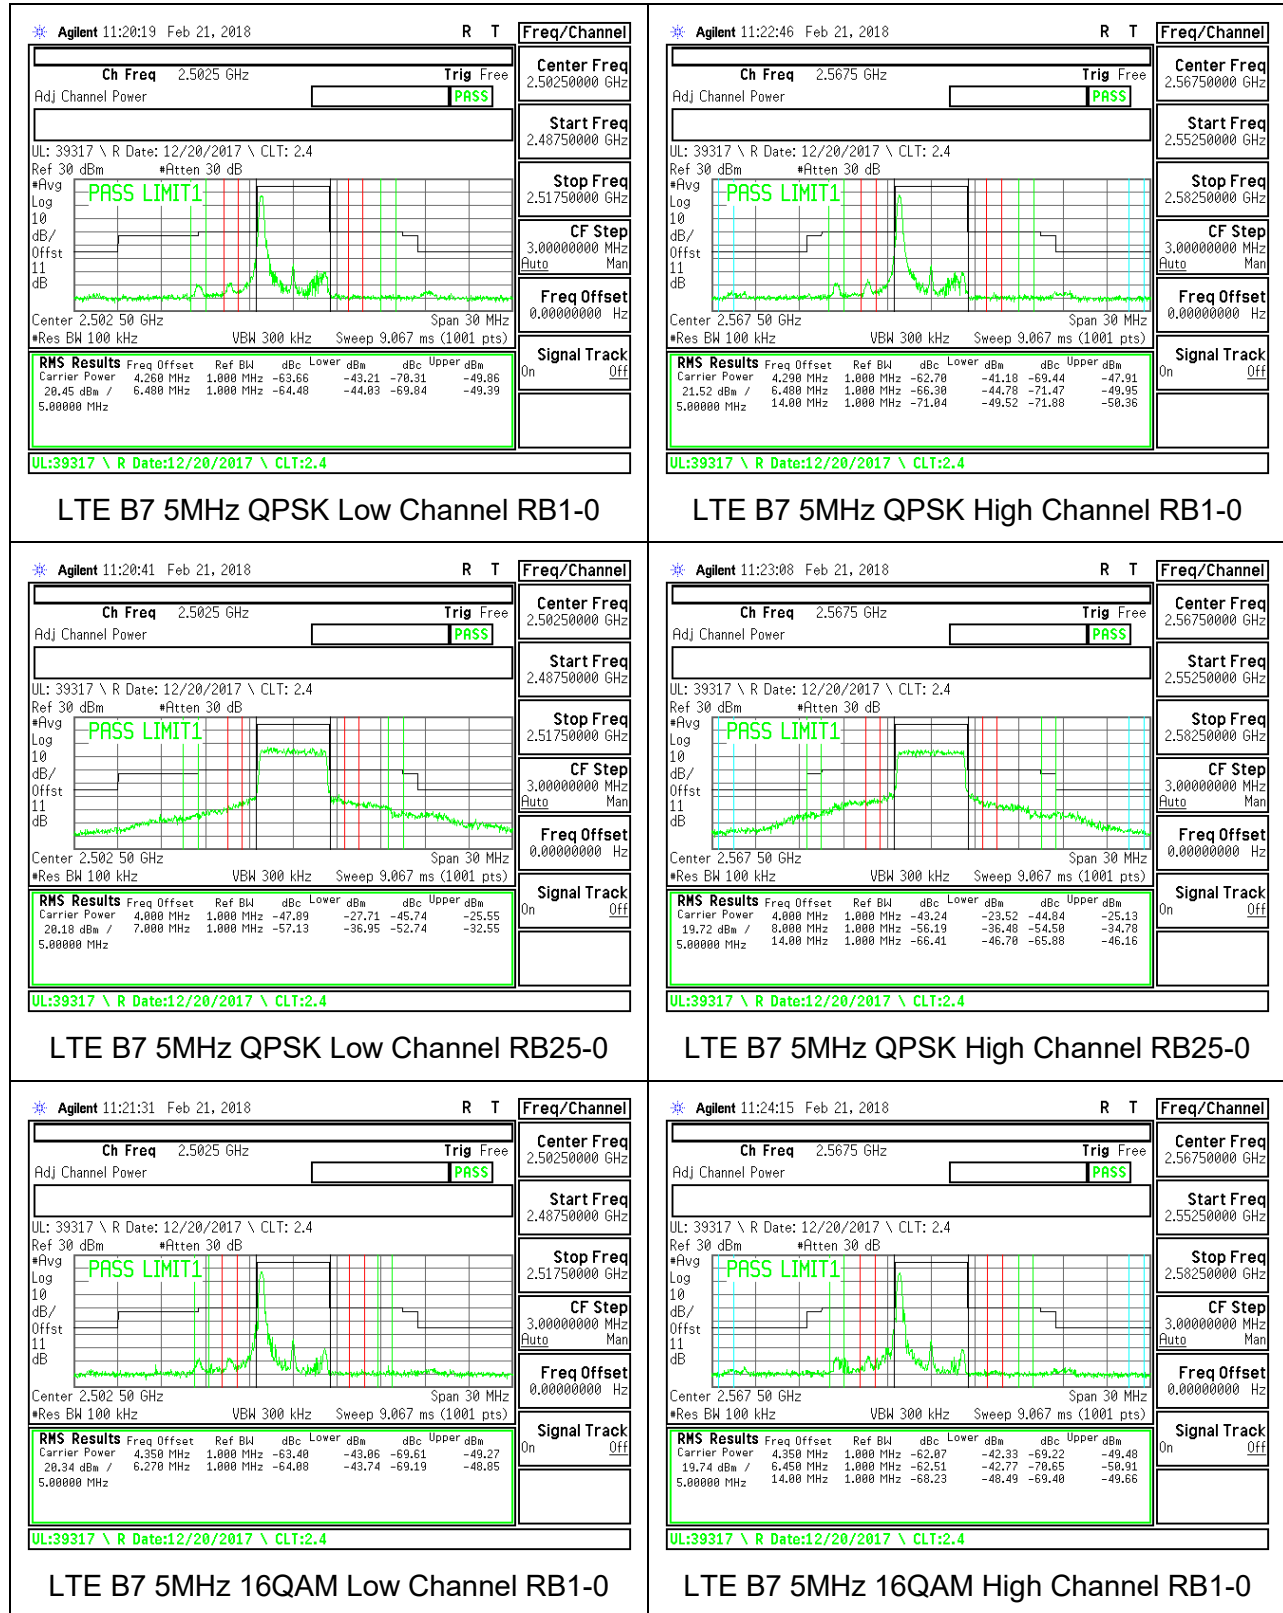


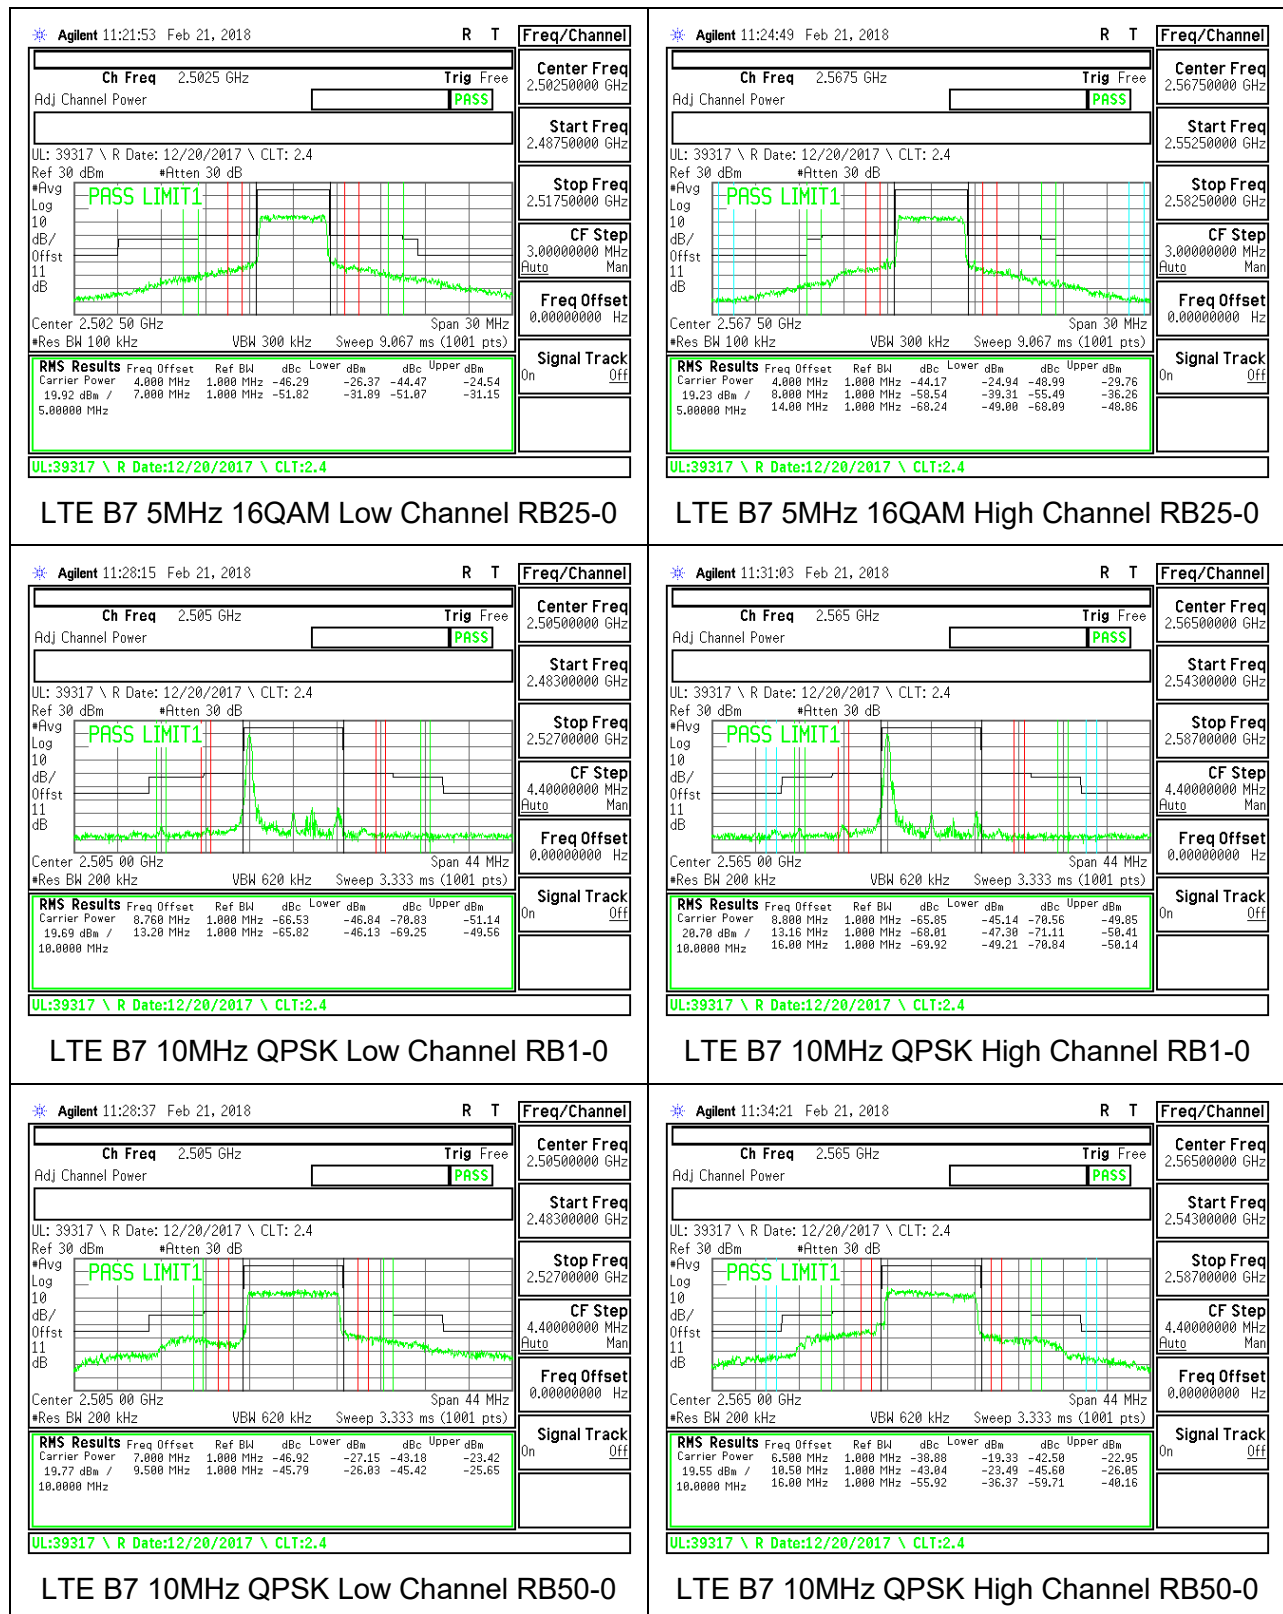

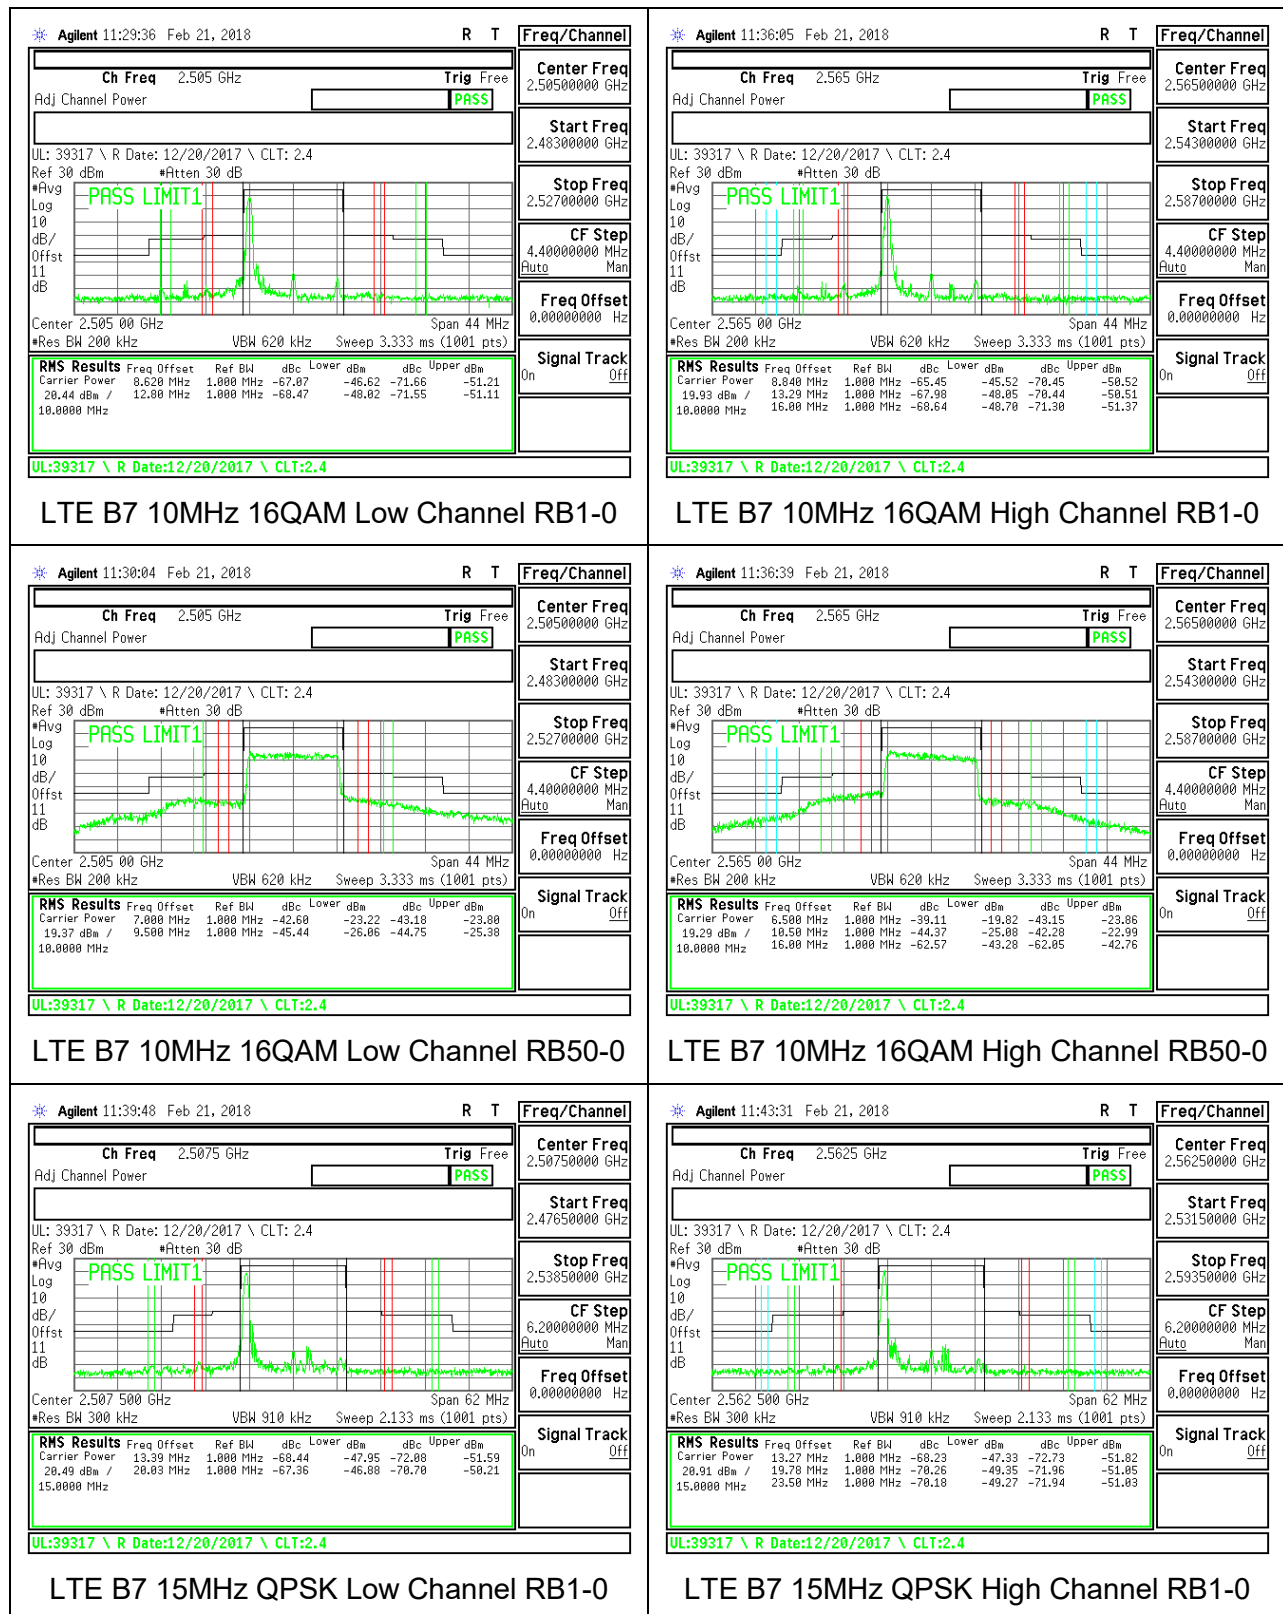


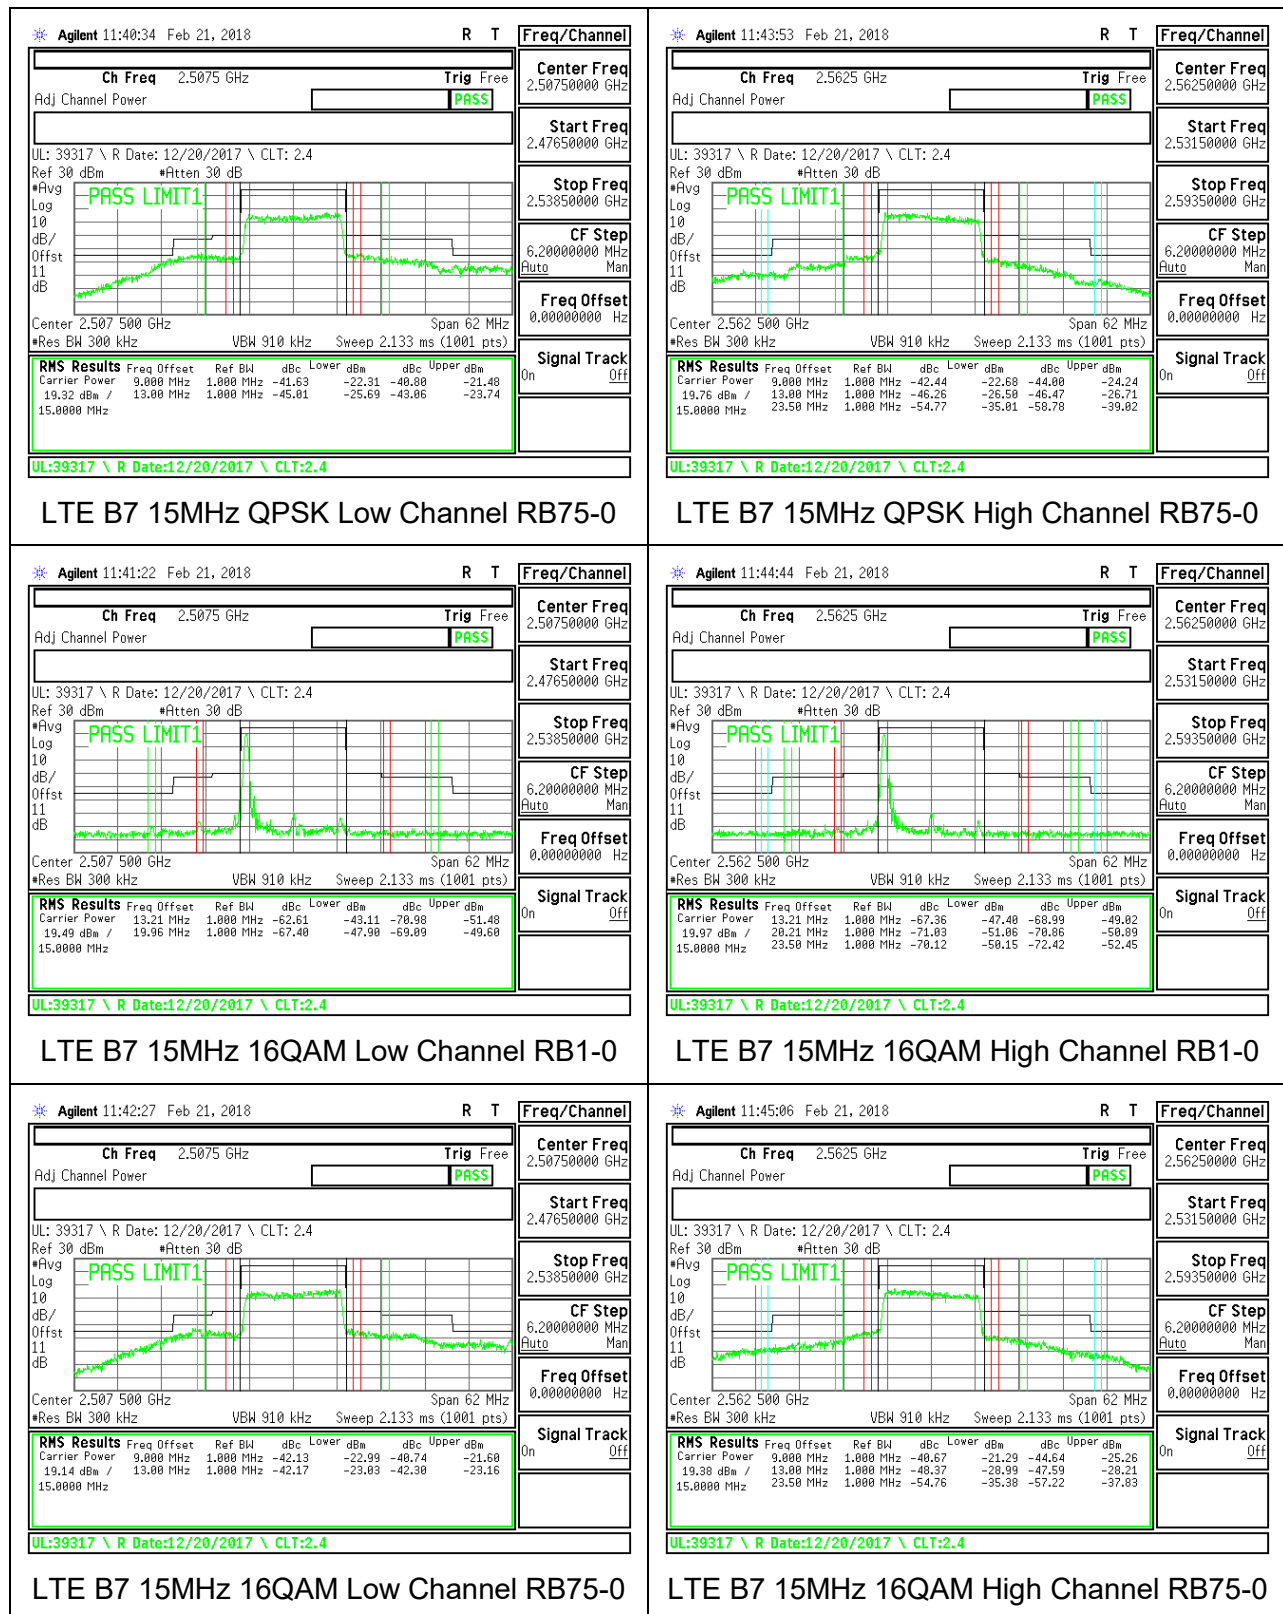


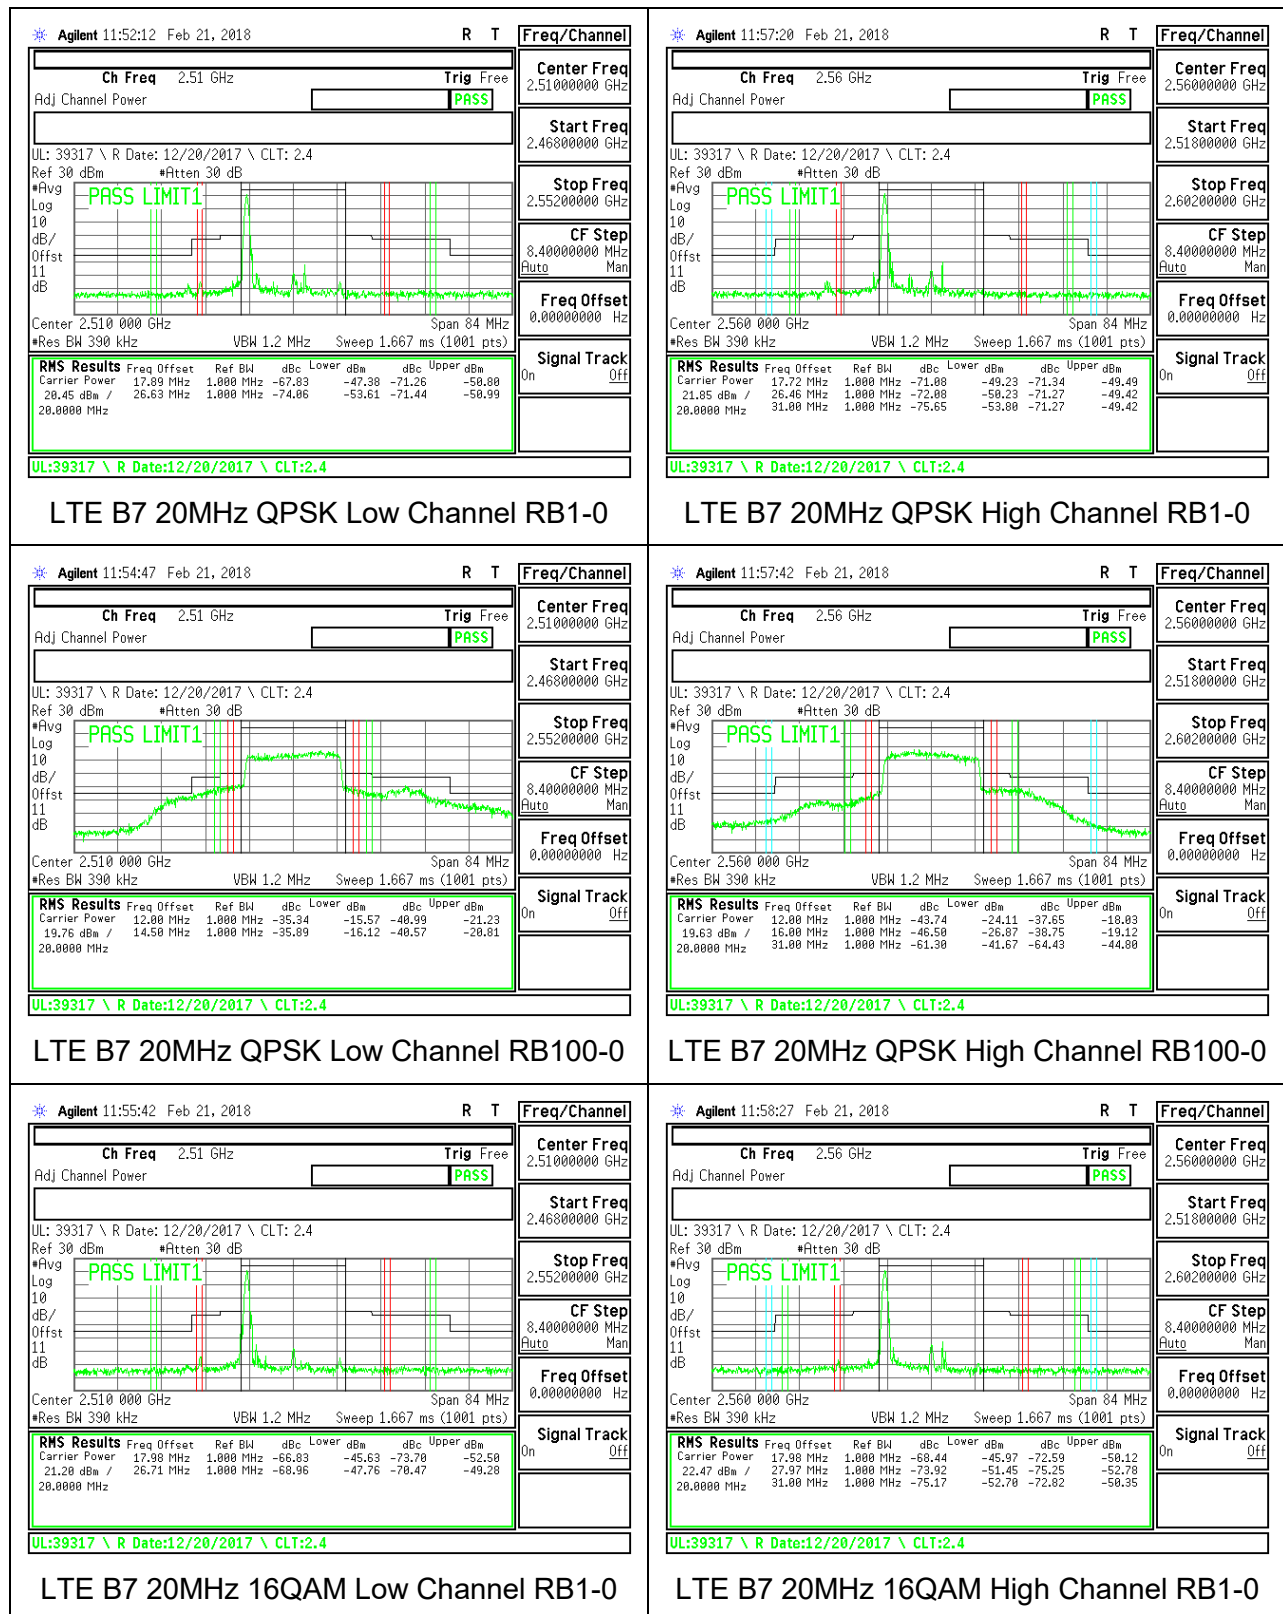


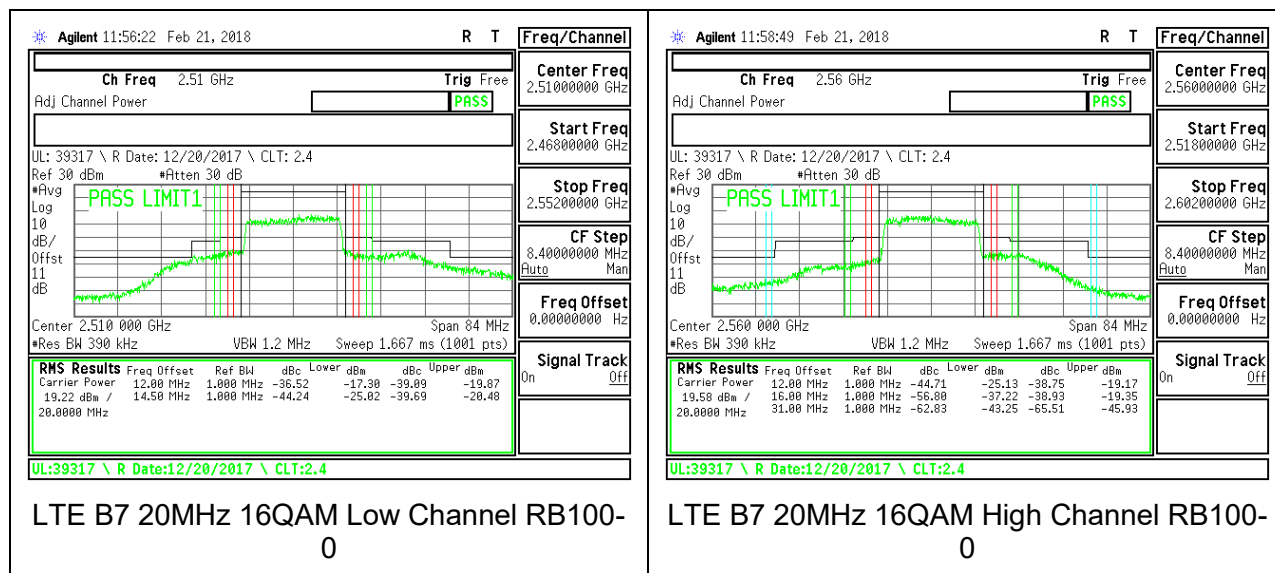


8.2.7. LTE BAND 12 BANDEDGE

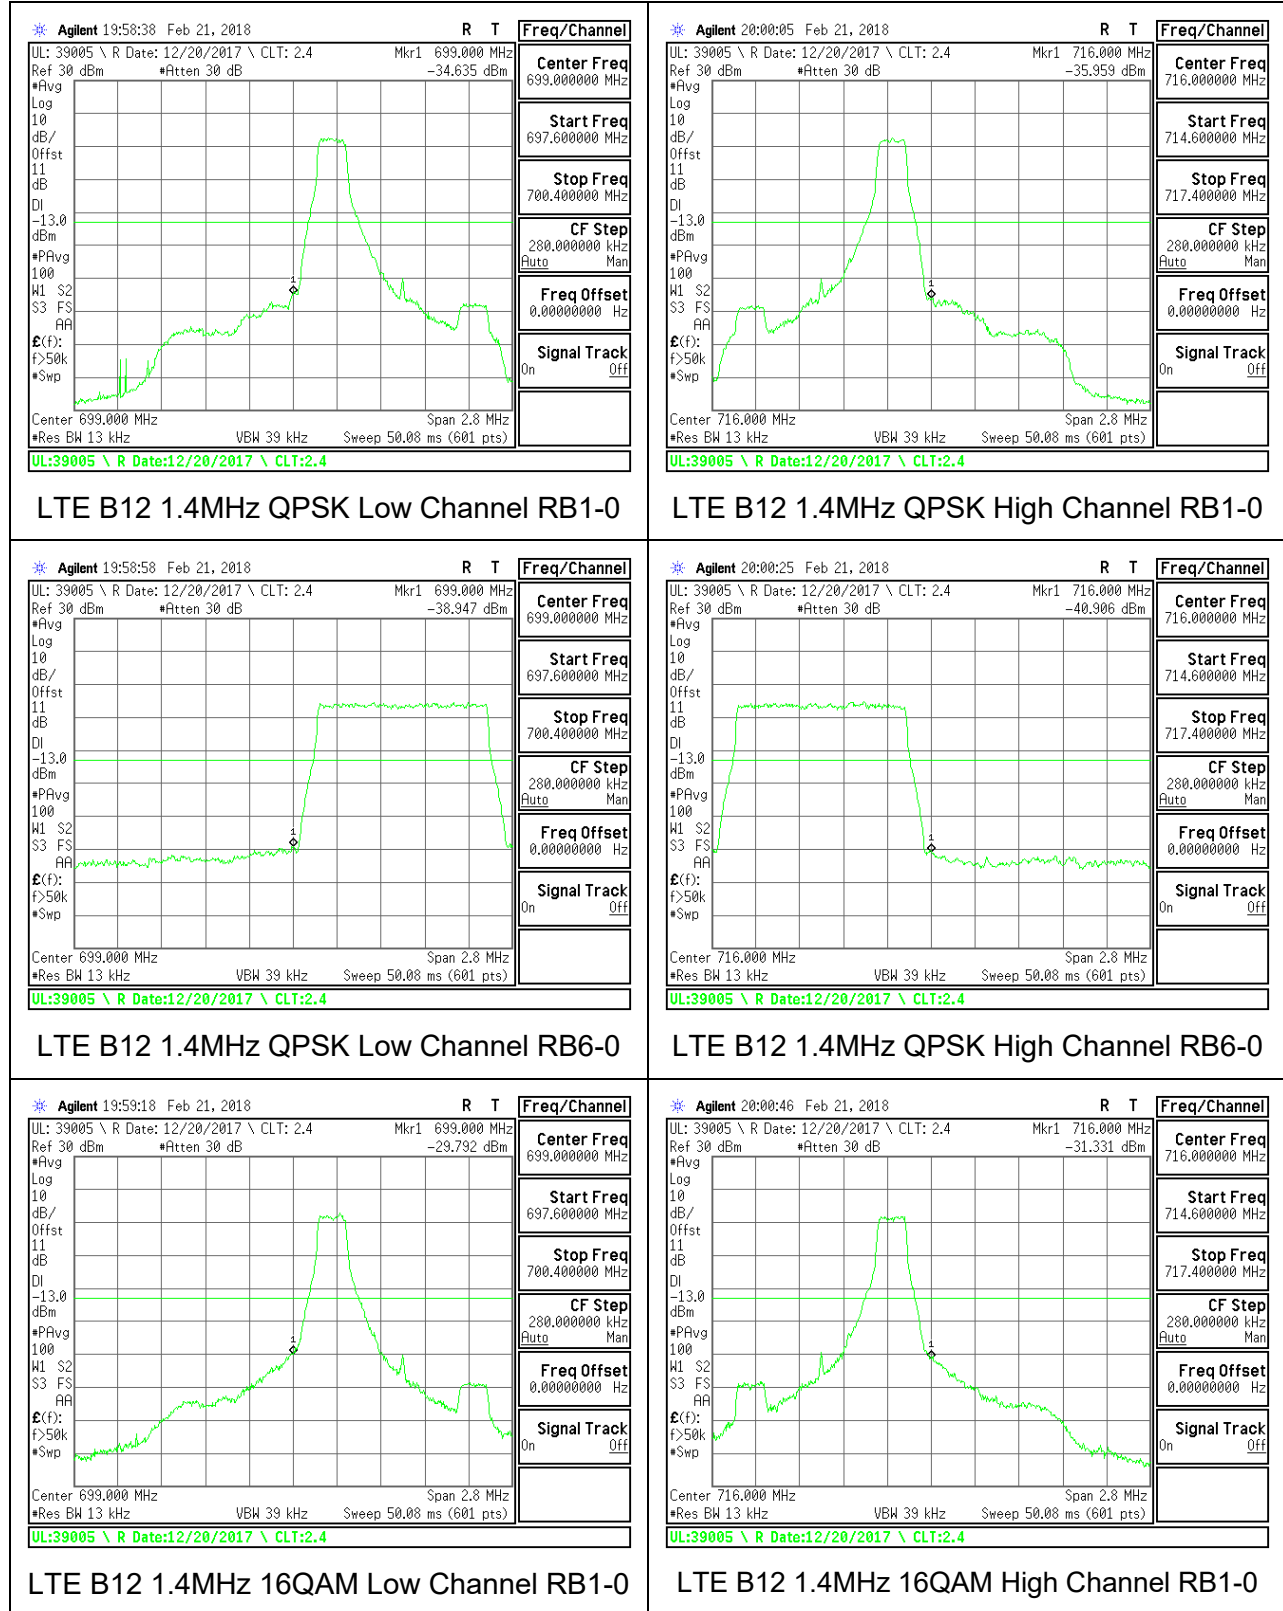

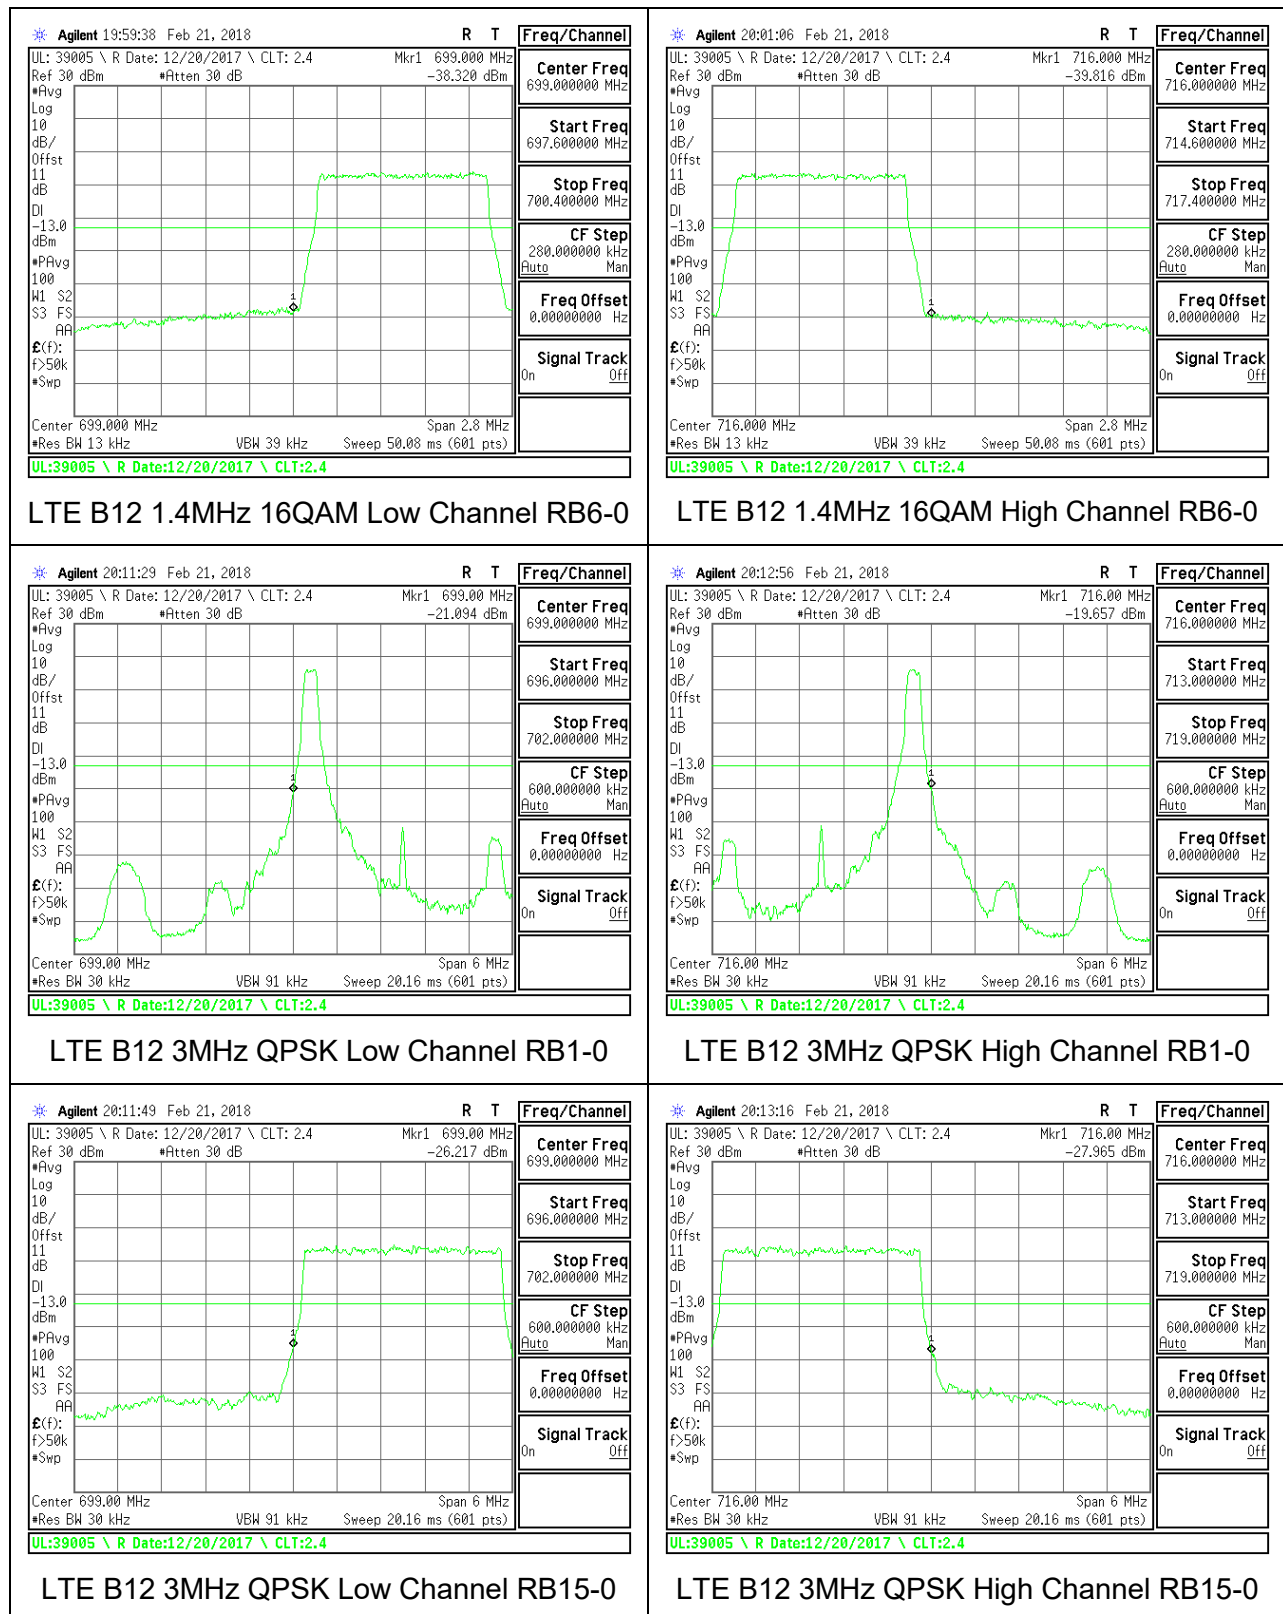


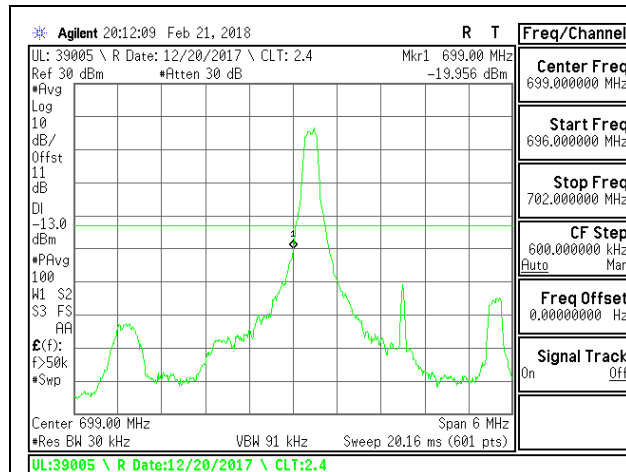


LTE B12 3MHz 16QAM Low Channel RB1-0

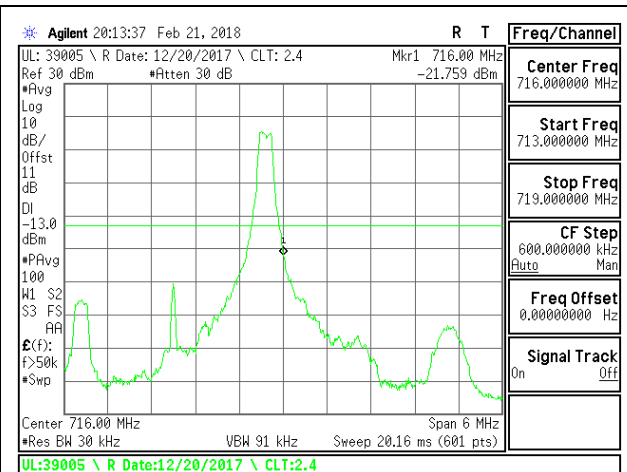


LTE B12 3MHz 16QAM High Channel RB1-0

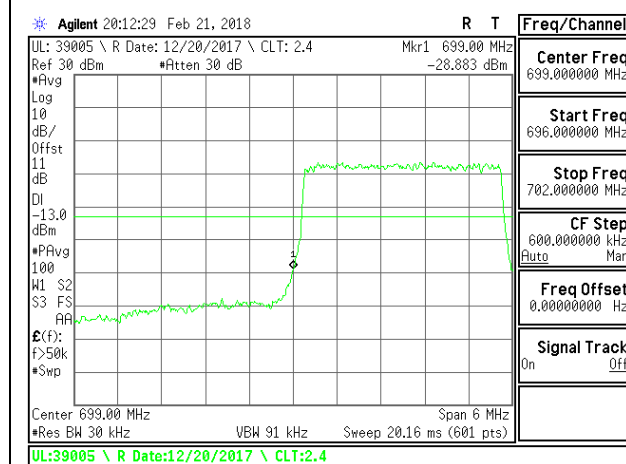


LTE B12 3MHz 16QAM Low Channel RB15-0

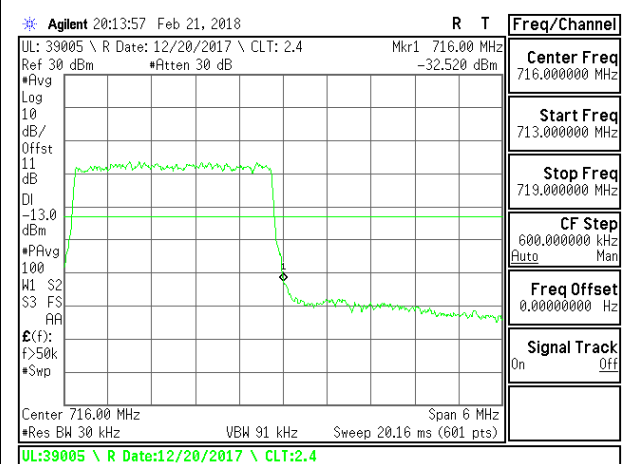


LTE B12 3MHz 16QAM High Channel RB15-0

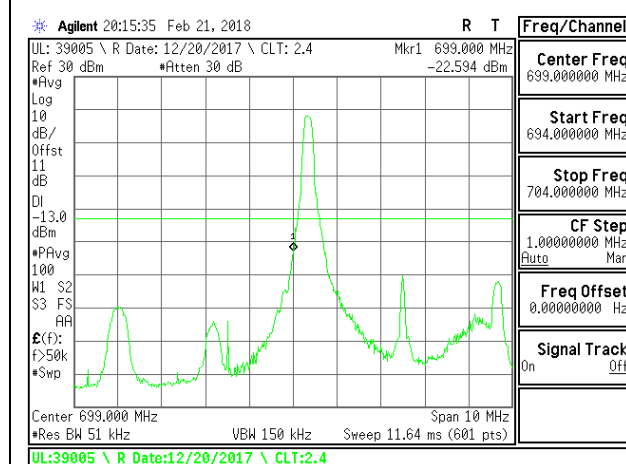


LTE B12 5MHz QPSK Low Channel RB1-0

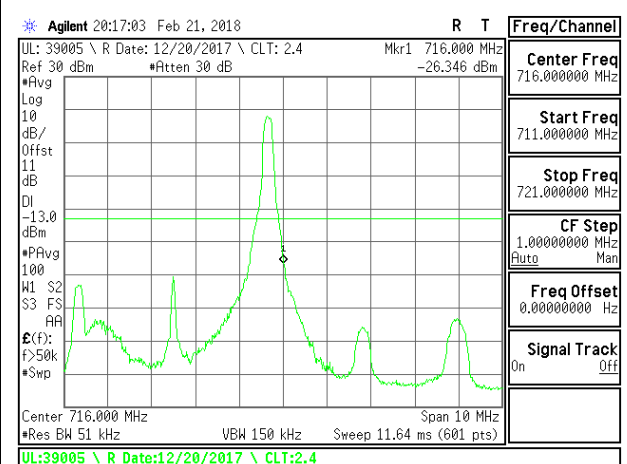


LTE B12 5MHz QPSK High Channel RB1-0

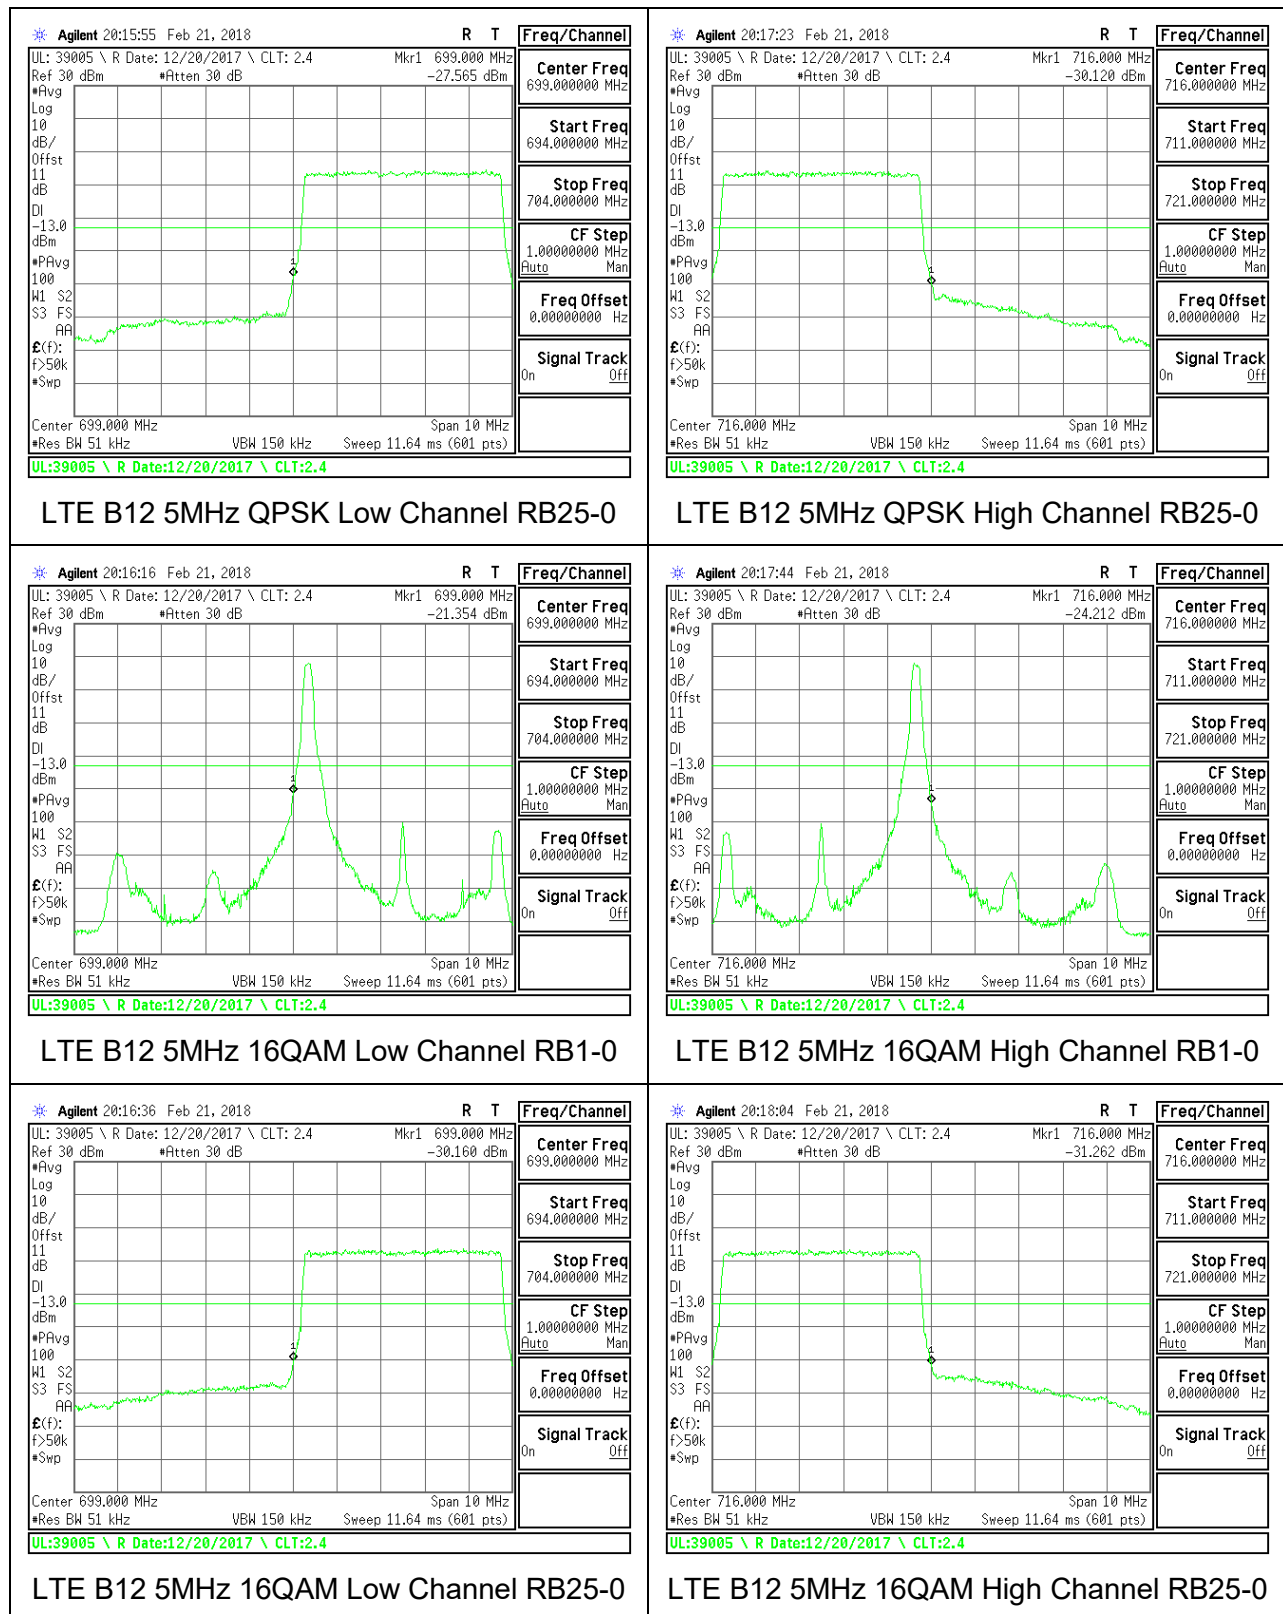


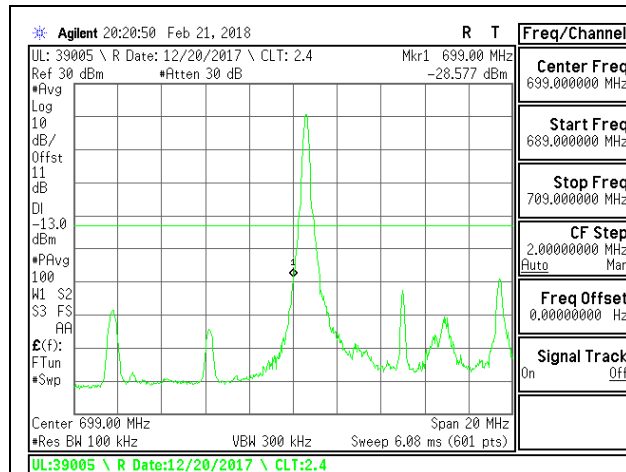


LTE B12 10MHz QPSK Low Channel RB1-0

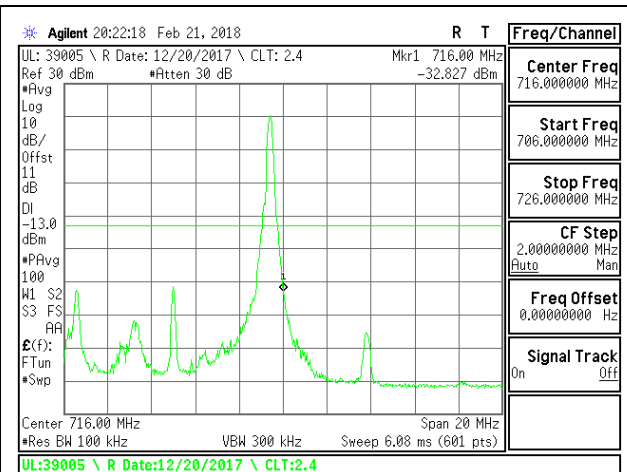


LTE B12 10MHz QPSK High Channel RB1-0

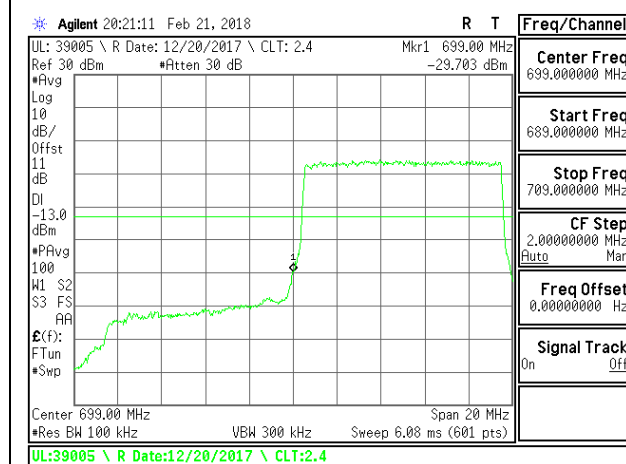


LTE B12 10MHz QPSK Low Channel RB50-0

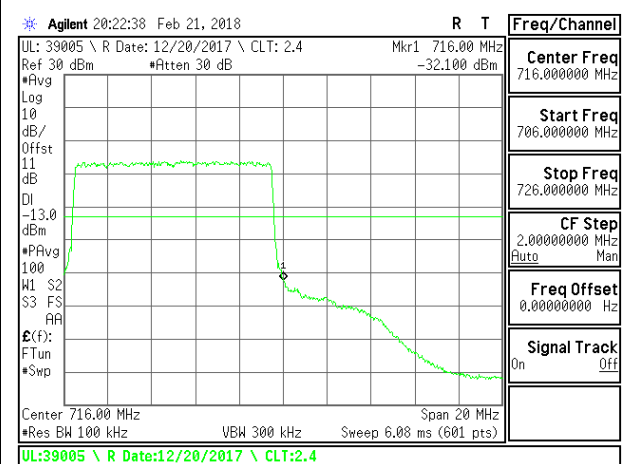


LTE B12 10MHz QPSK High Channel RB50-0

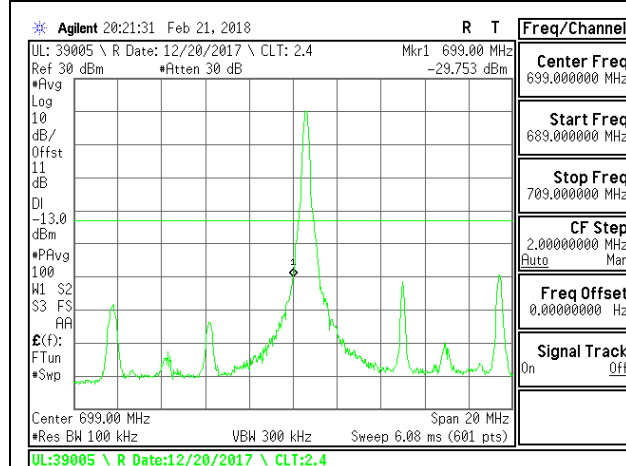


LTE B12 10MHz 16QAM Low Channel RB1-0

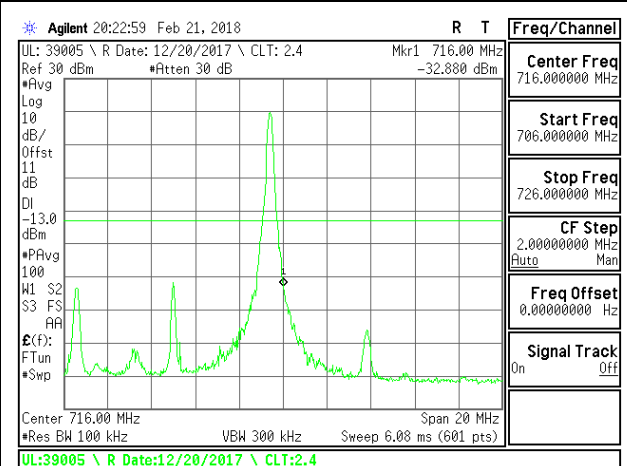



LTE B12 10MHz 16QAM High Channel RB1-0

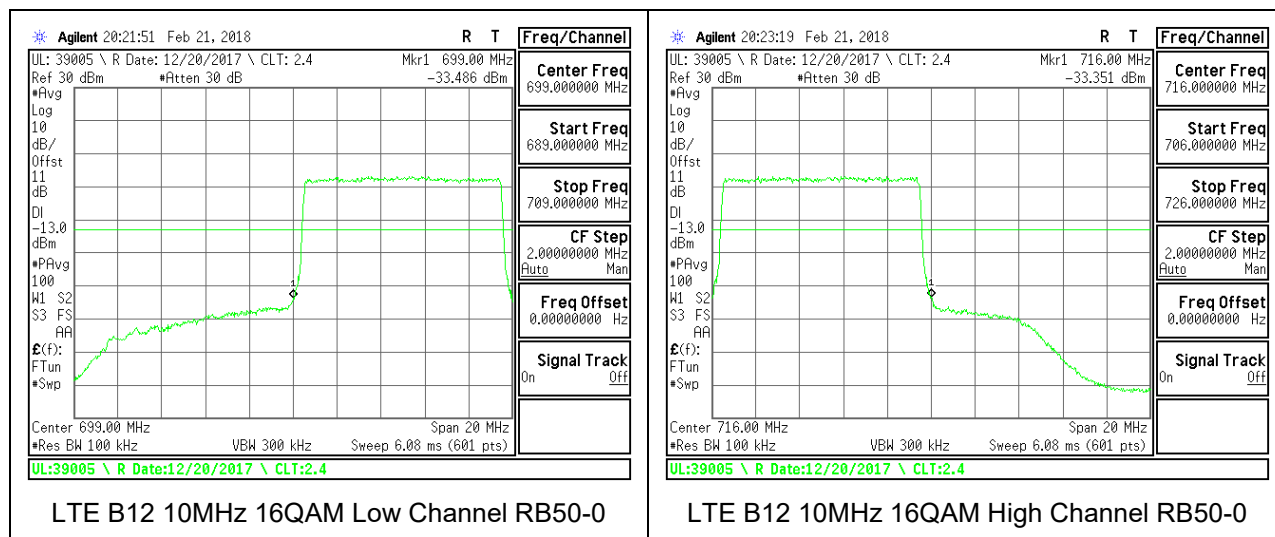

8.2.8. LTE BAND 13 BANDEDGE

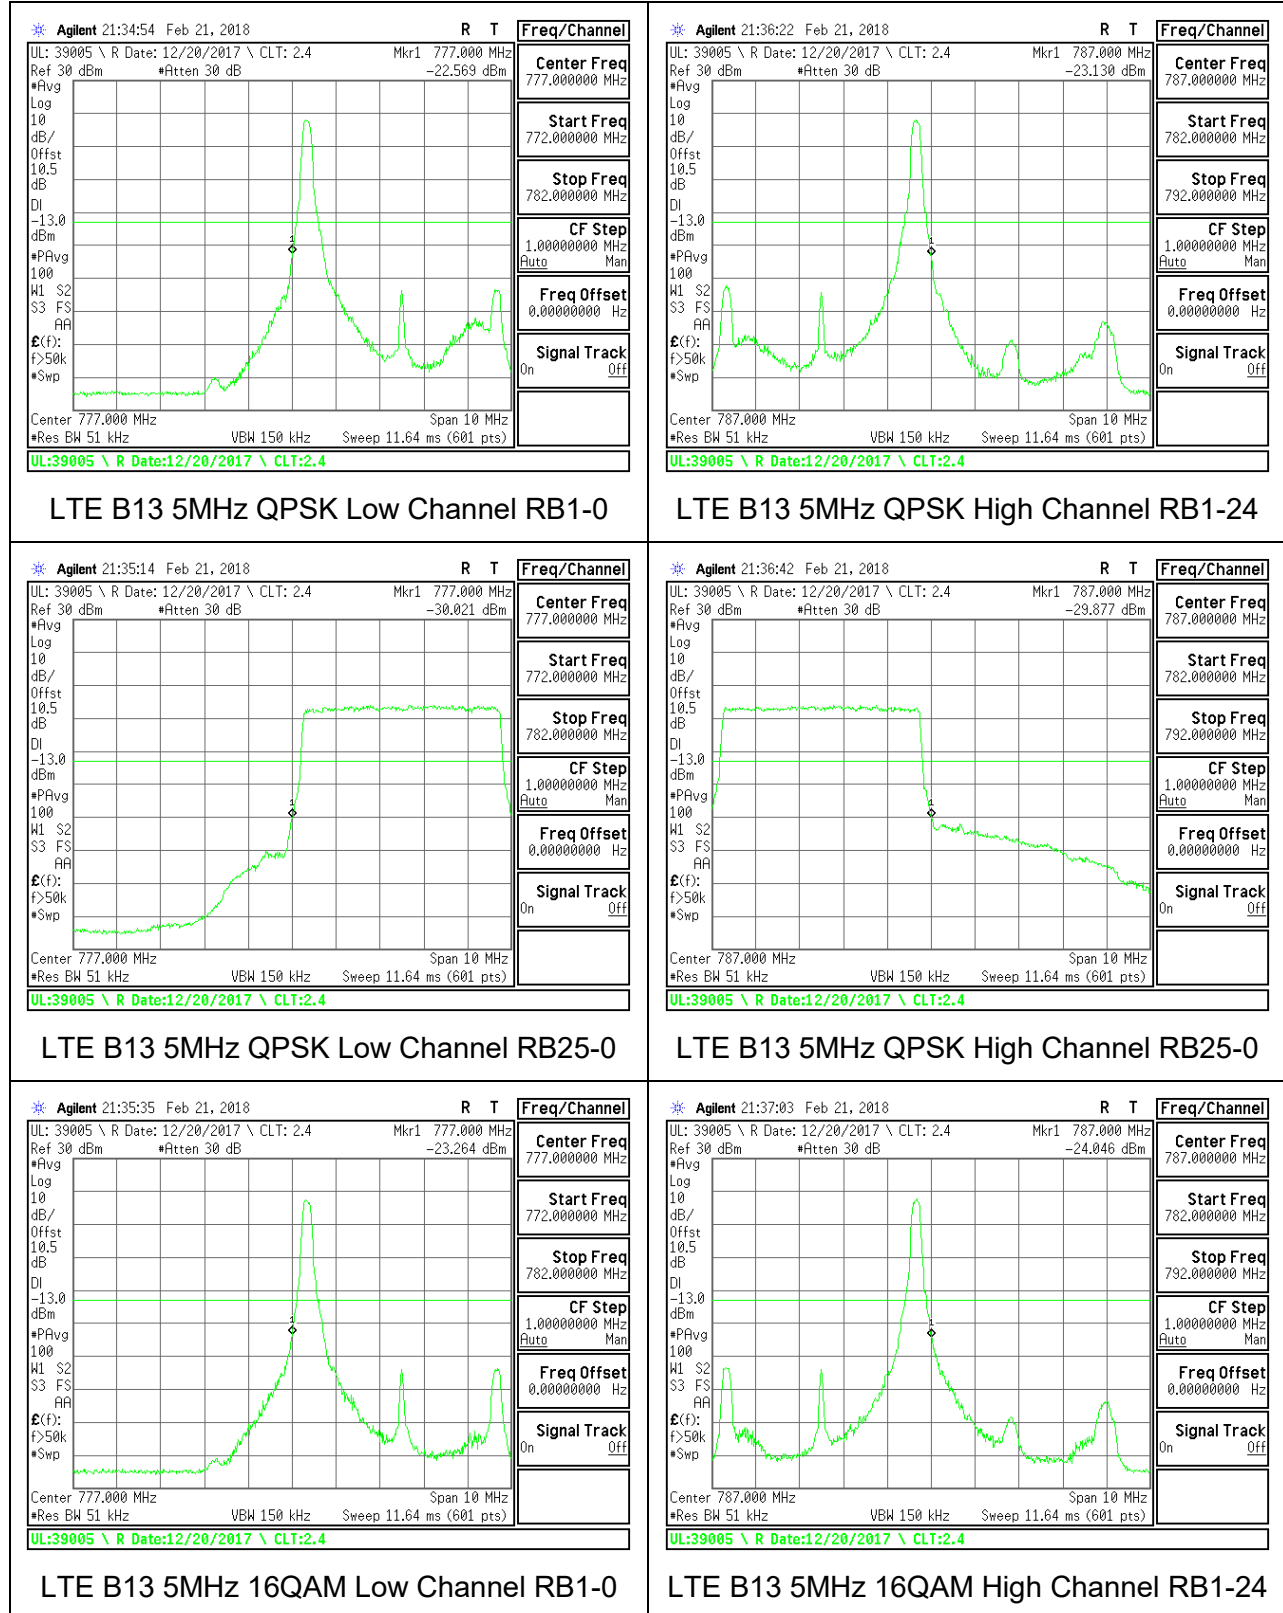

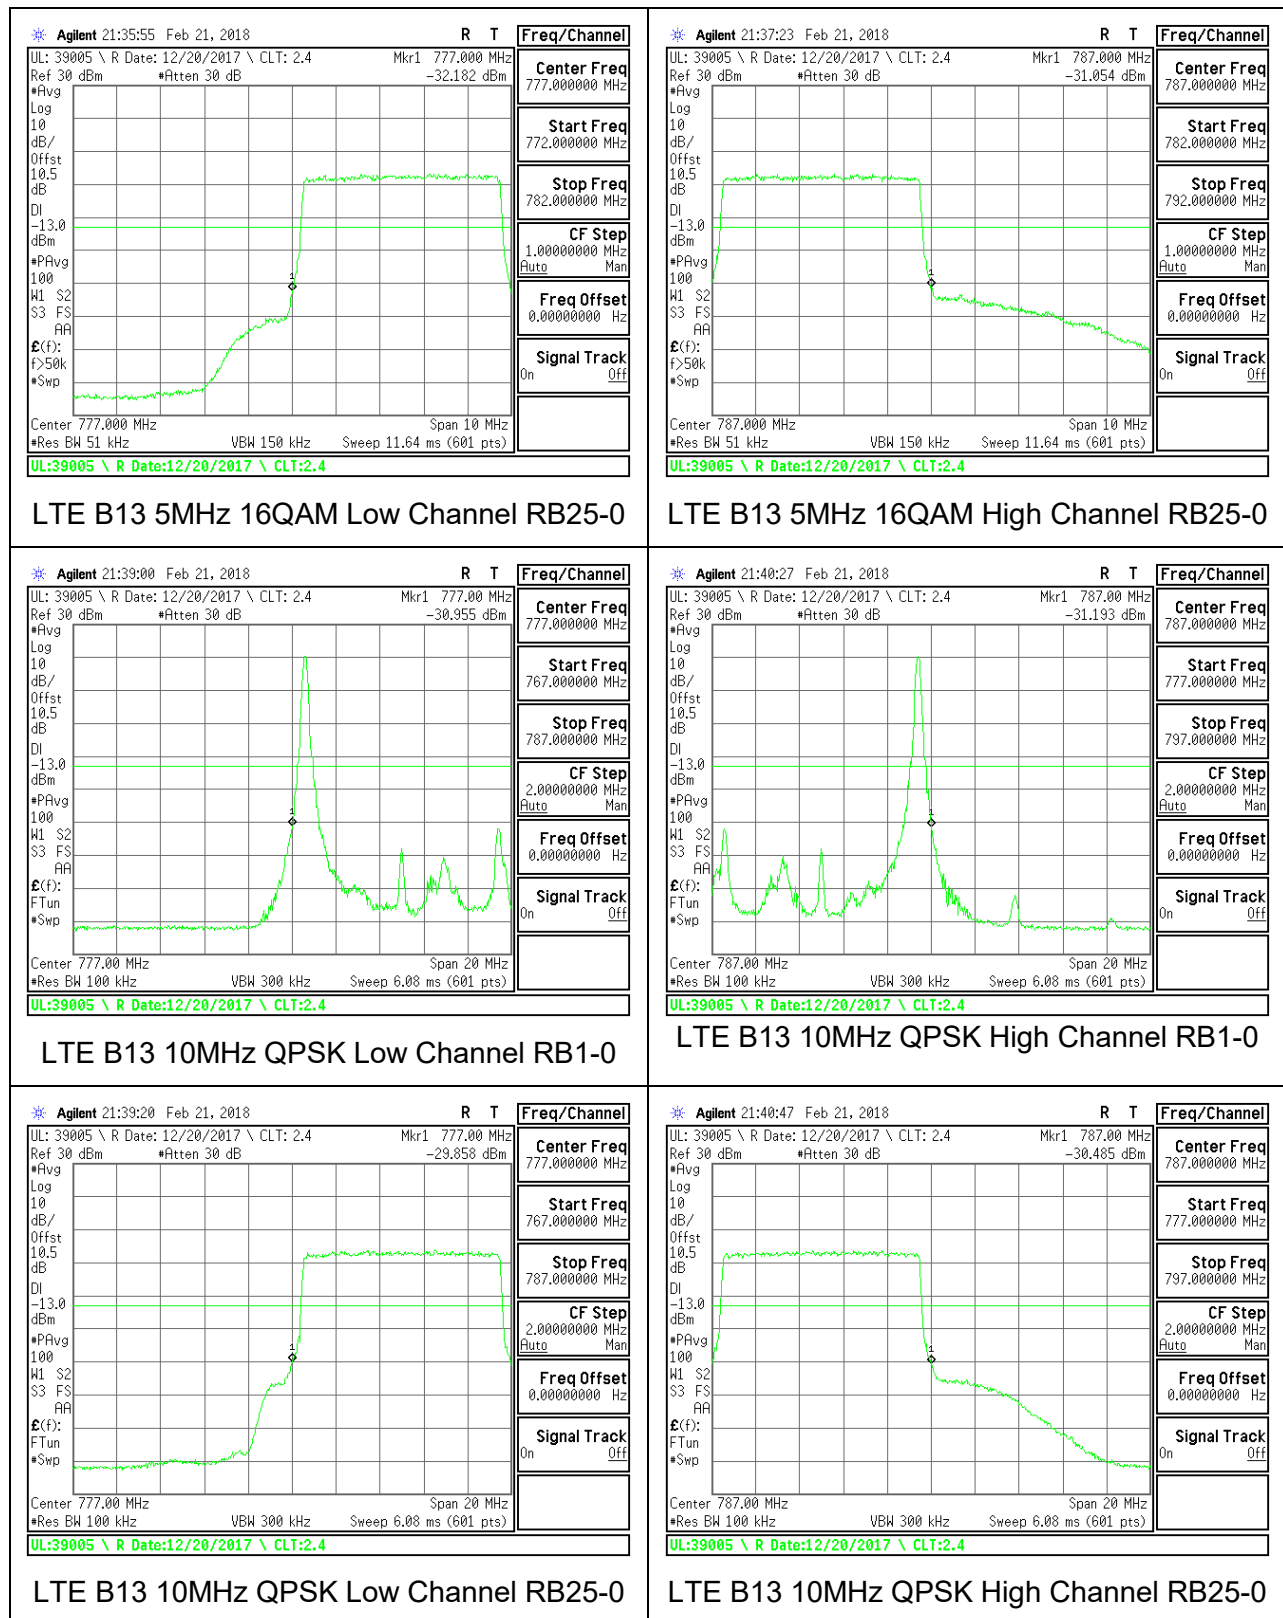


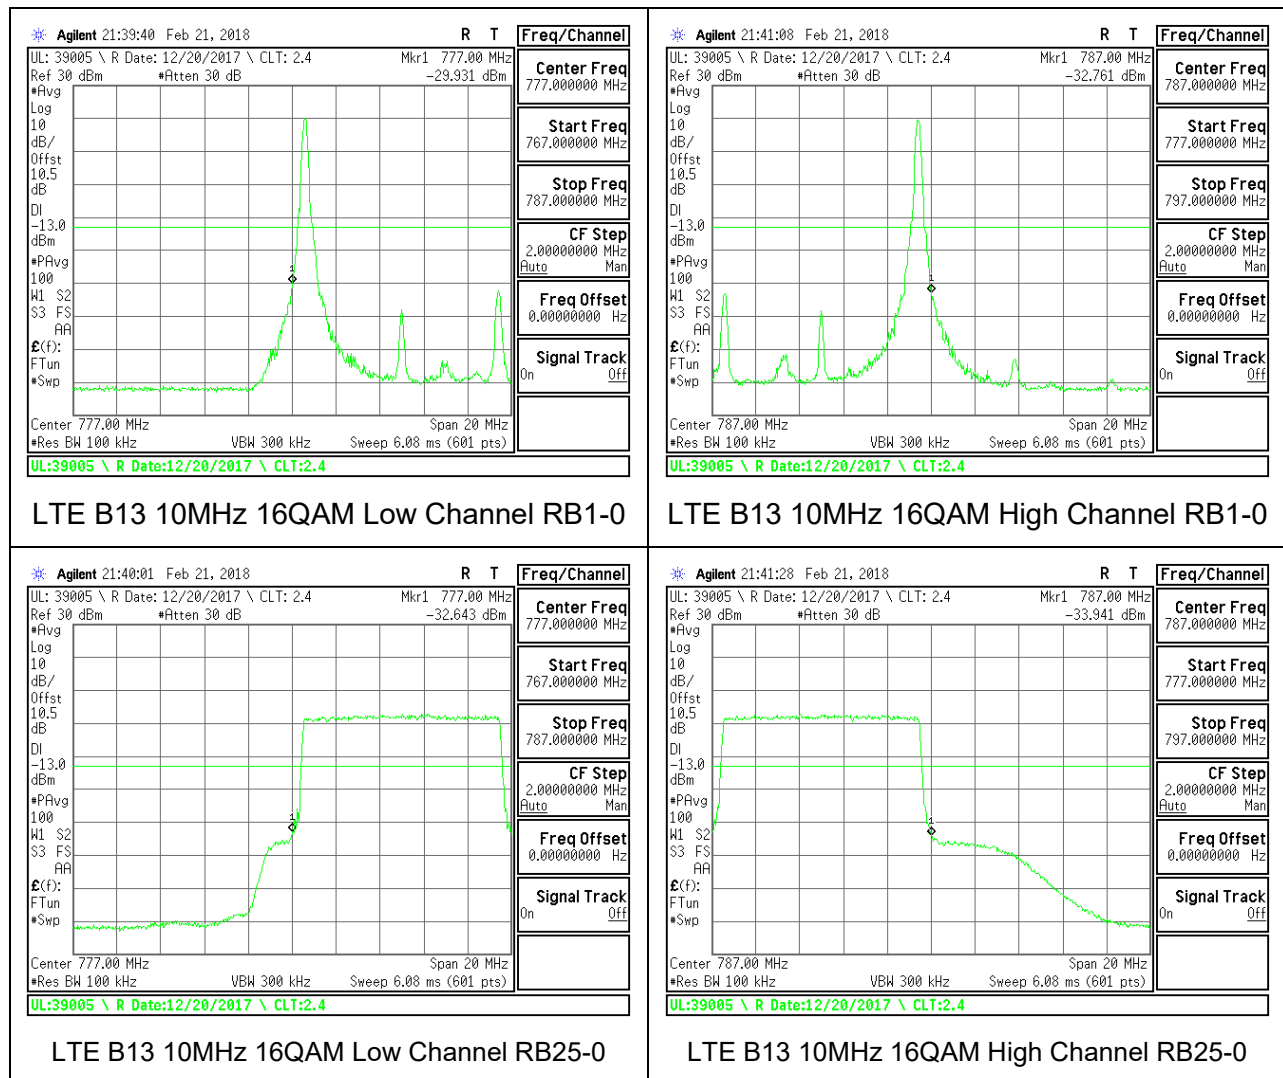



8.2.10. LTE BAND 17 BANDEDGE

LTE Band 17 (704-716MHz, 5/10MHz bandwidth) is covered by LTE Band 12 because it is a subset of LTE band 12 and they have the same output power and channel bandwidth.


8.2.11. LTE BAND 41 ADJACENT CHANNEL POWER

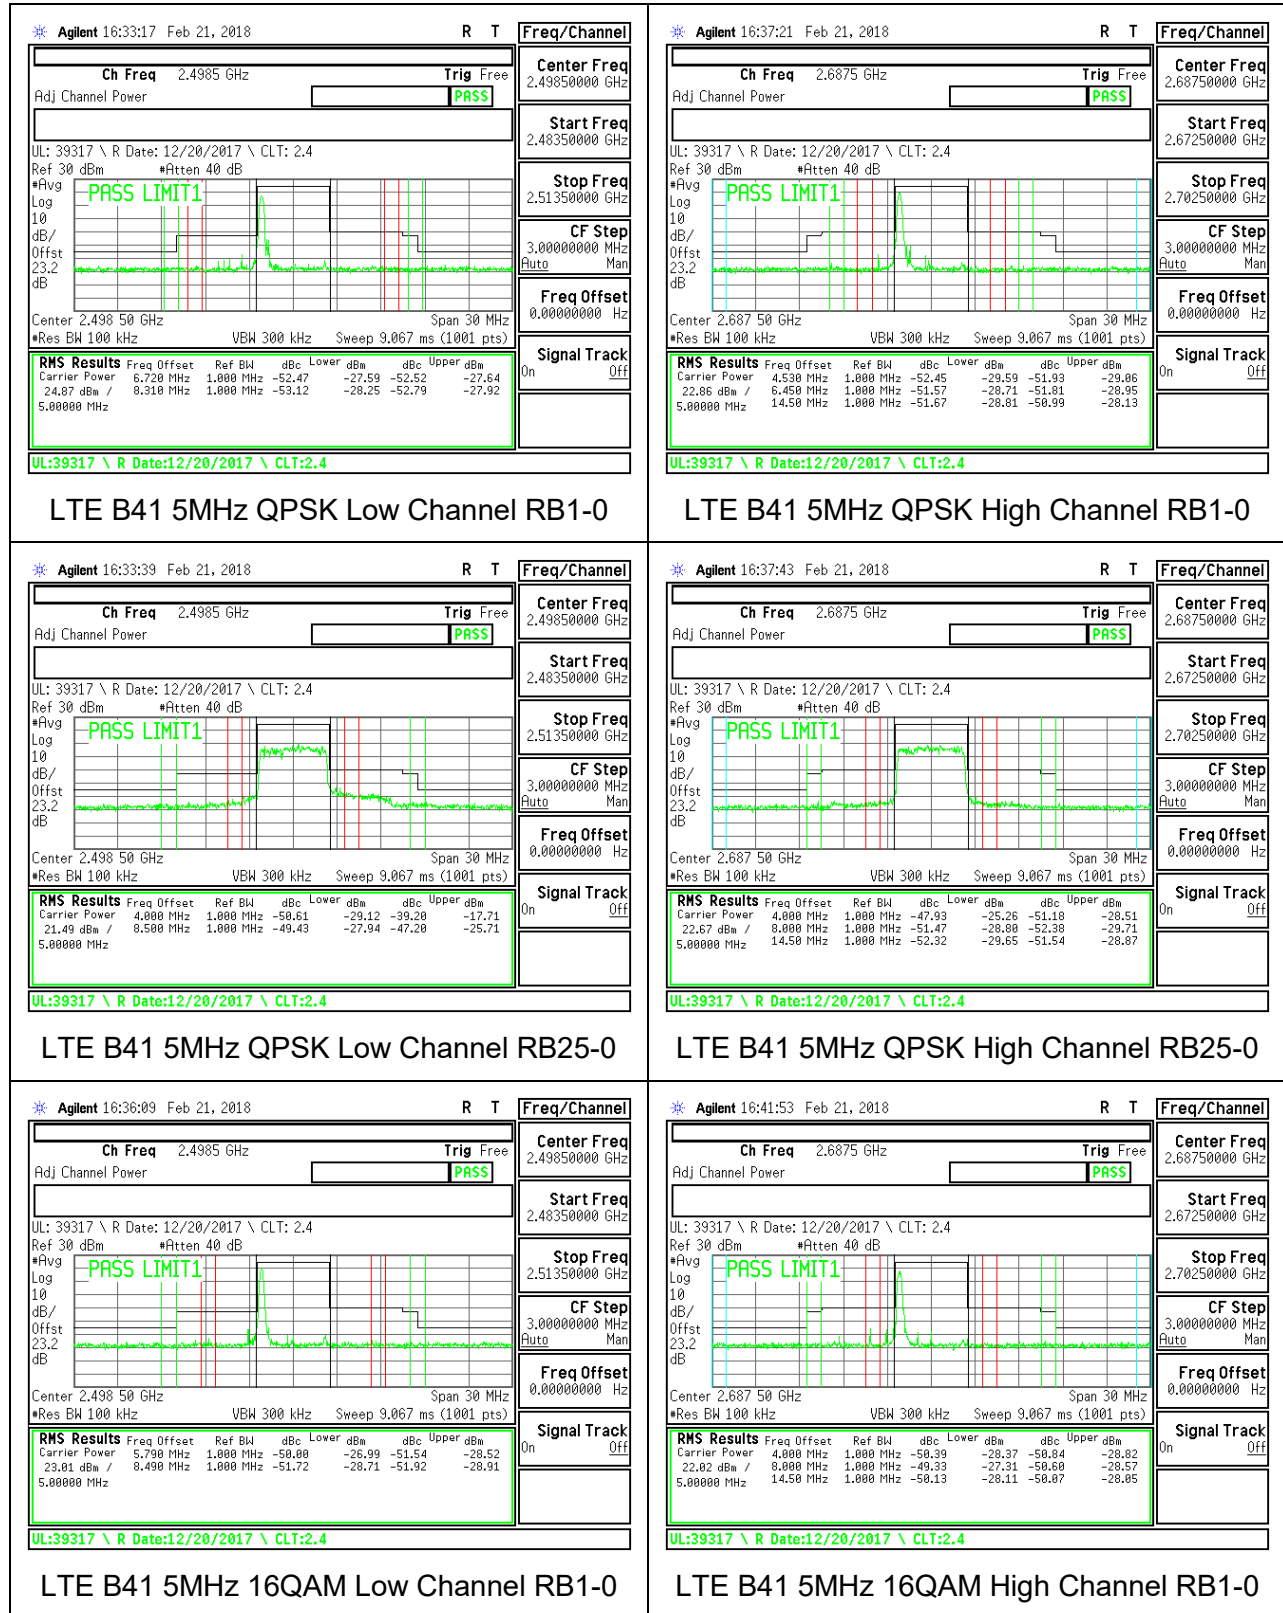

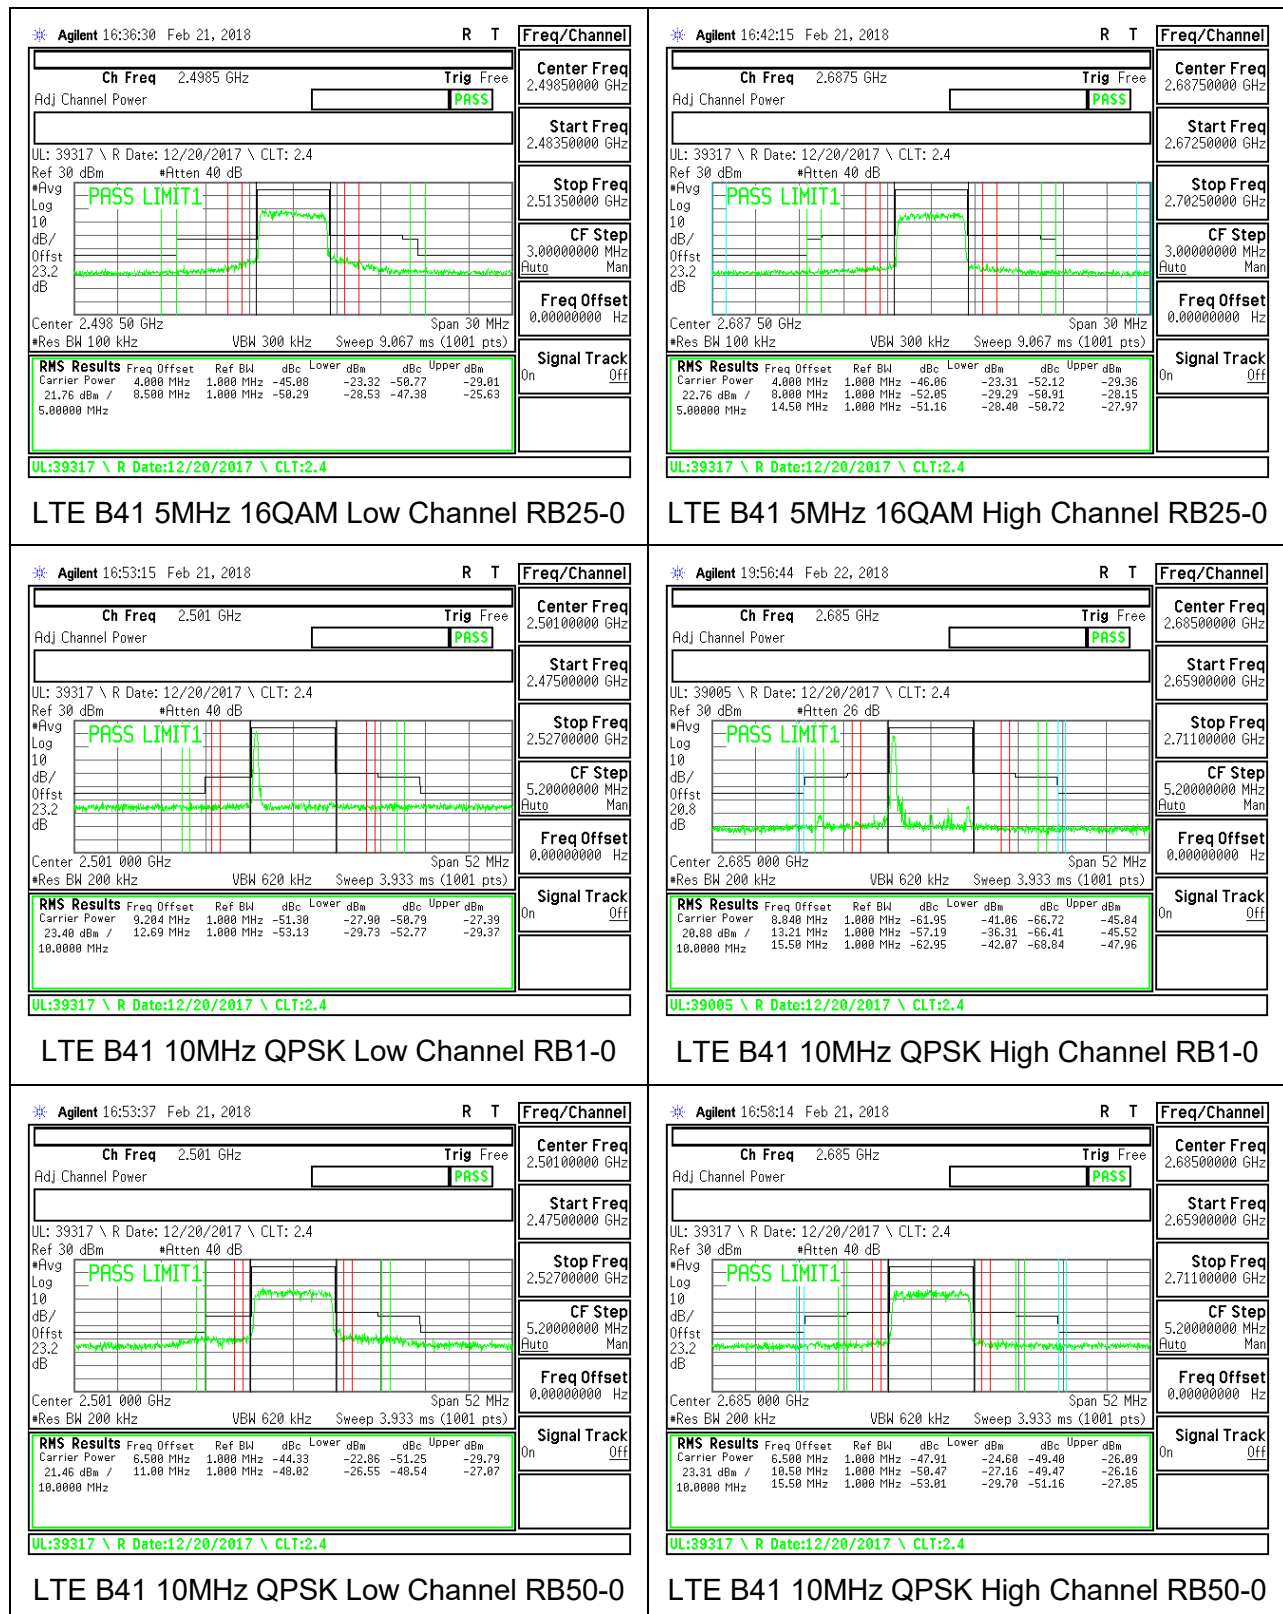


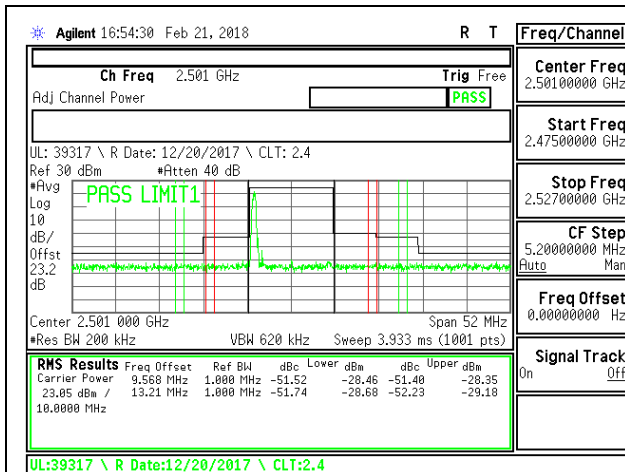


LTE B41 10MHz 16QAM Low Channel RB1-0

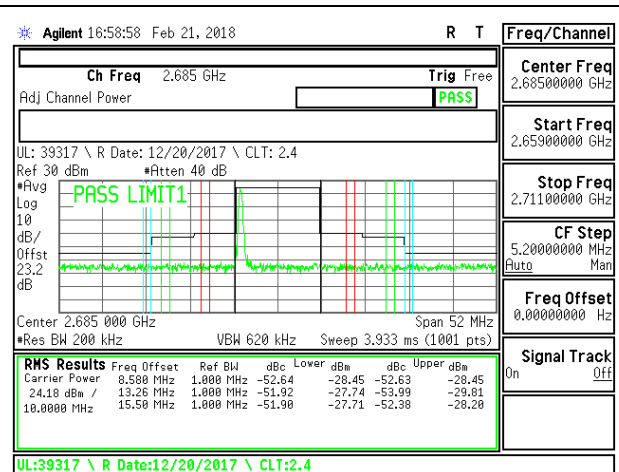


LTE B41 10MHz 16QAM High Channel RB1-0

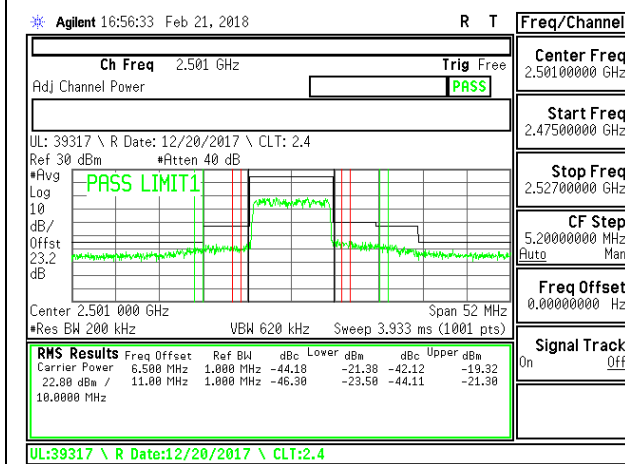


LTE B41 10MHz 16QAM Low Channel RB50-0

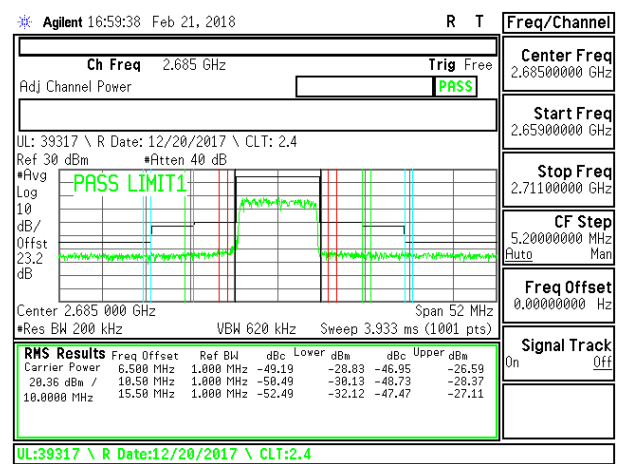


LTE B41 10MHz 16QAM High Channel RB50-0

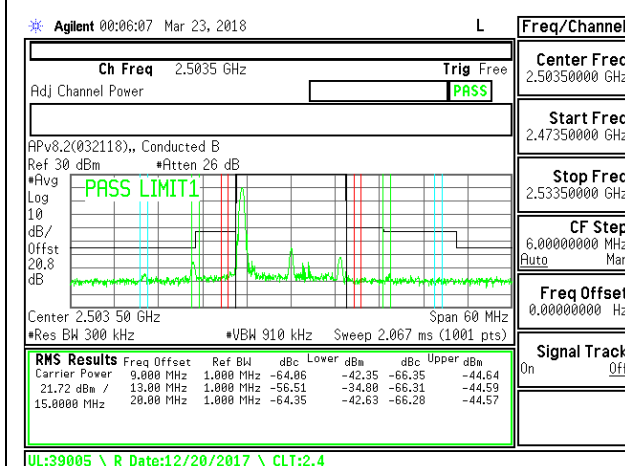


LTE B41 15MHz QPSK Low Channel RB1-0

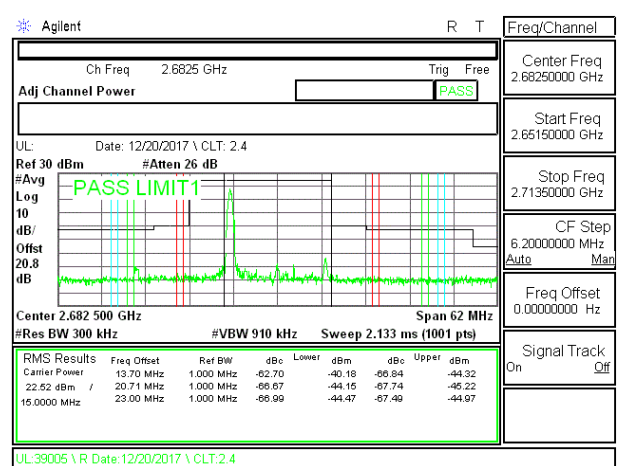


LTE B41 15MHz QPSK High Channel RB1-0

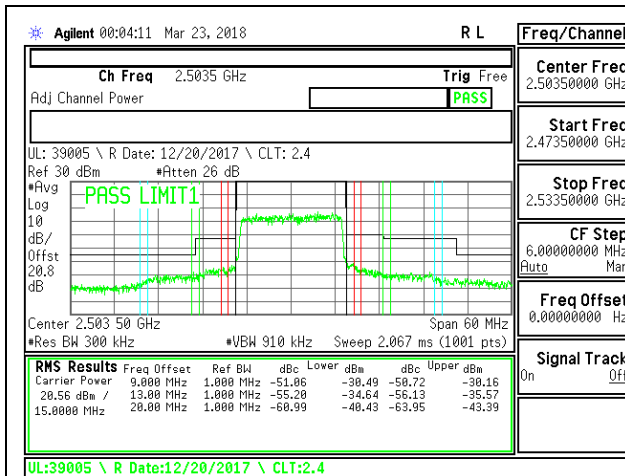


LTE B41 15MHz QPSK Low Channel RB75-0

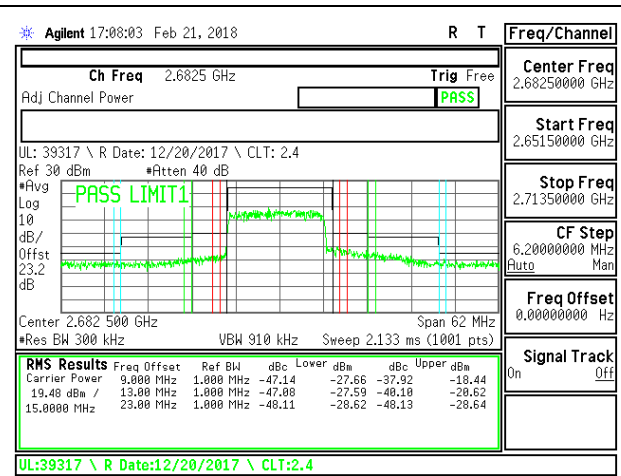


LTE B41 15MHz QPSK High Channel RB75-0

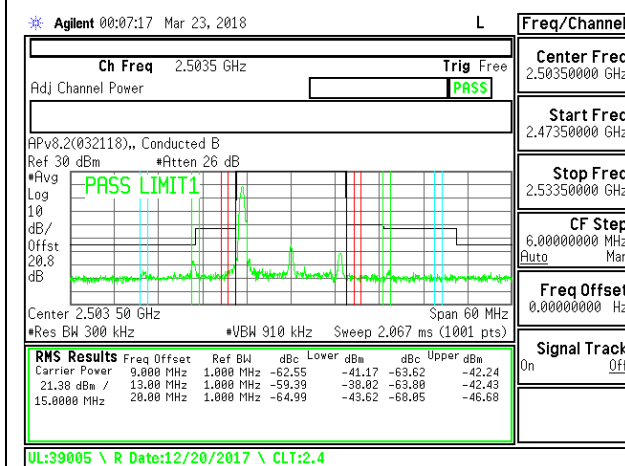


LTE B41 15MHz 16QAM Low Channel RB1-0

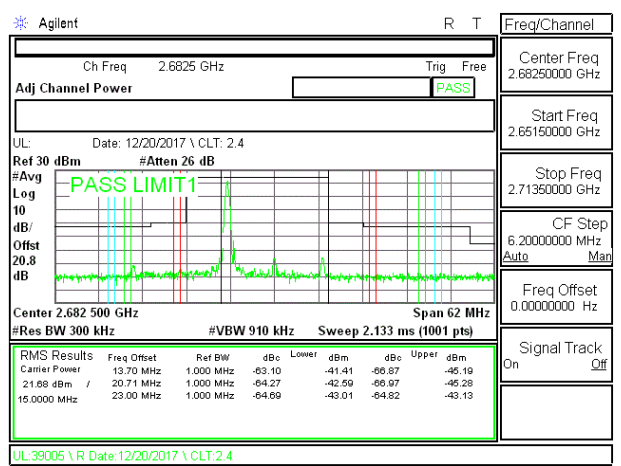


LTE B41 15MHz 16QAM High Channel RB1-0

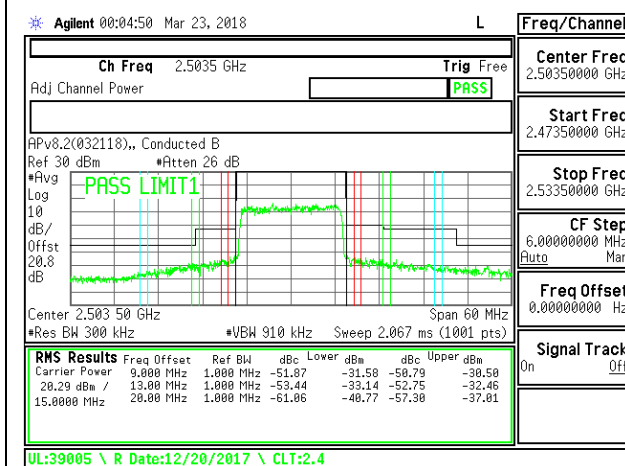


LTE B41 15MHz 16QAM Low Channel RB75-0

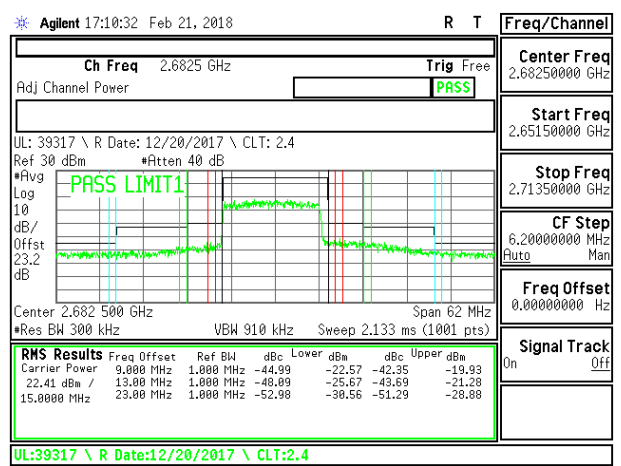

LTE B41 15MHz 16QAM High Channel RB75-0

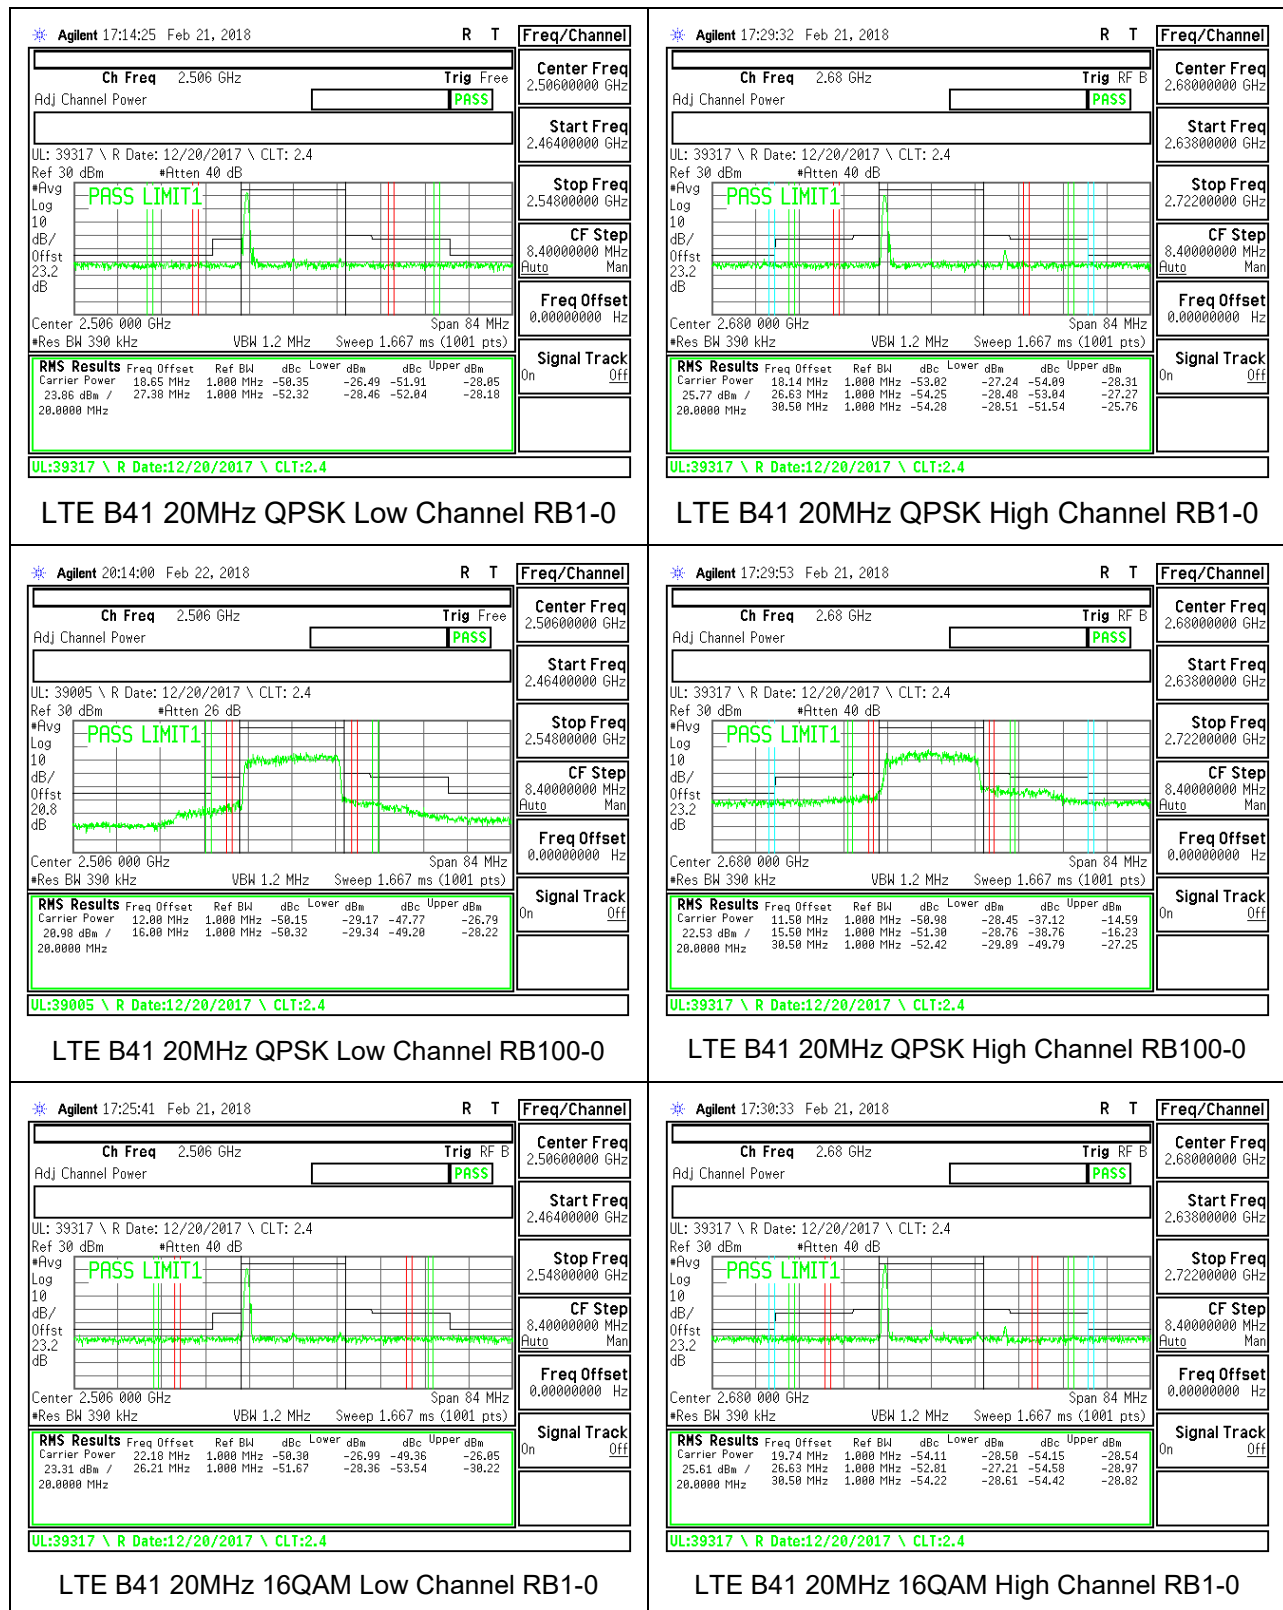

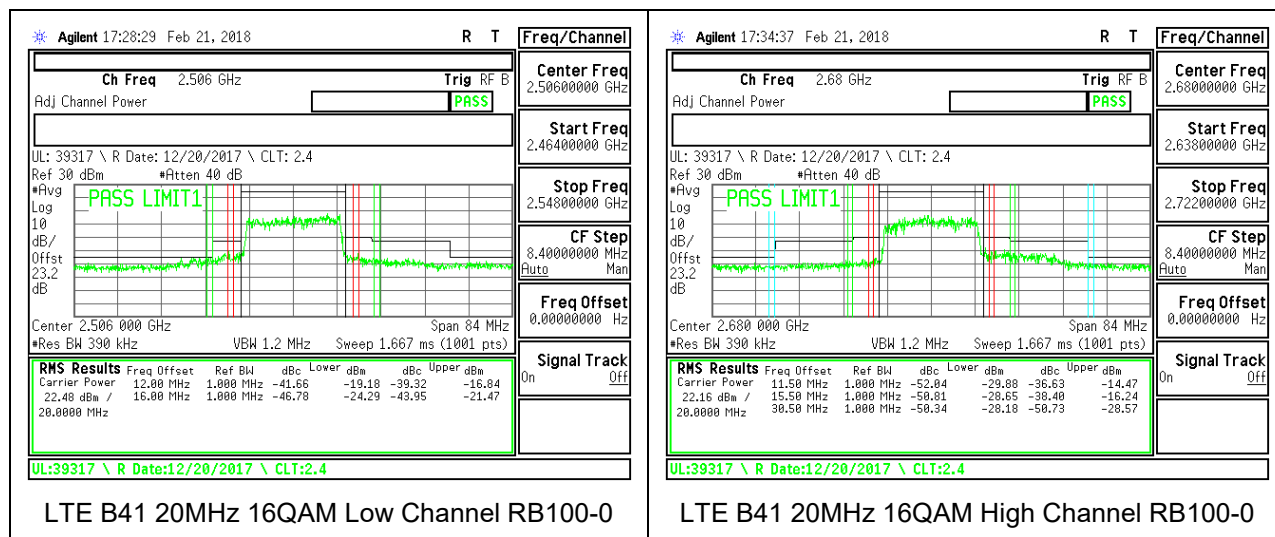

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53

LIMITS

FCC: §22.917, §24.238, §27.53 (c), (g), (h)

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

FCC: §27.53 (m) (Band 7, 41)

The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.

For each out of band emissions measurement:

- Set display line at -13 dBm
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz. (NOTE: Worst case set RBW/VBW to 1MHz/3MHz)



MODES TESTED

- GSM 850, 1900
- WCDMA Band 5
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 41



RESULTS

8.3.1. GSM GSM850

GPRS

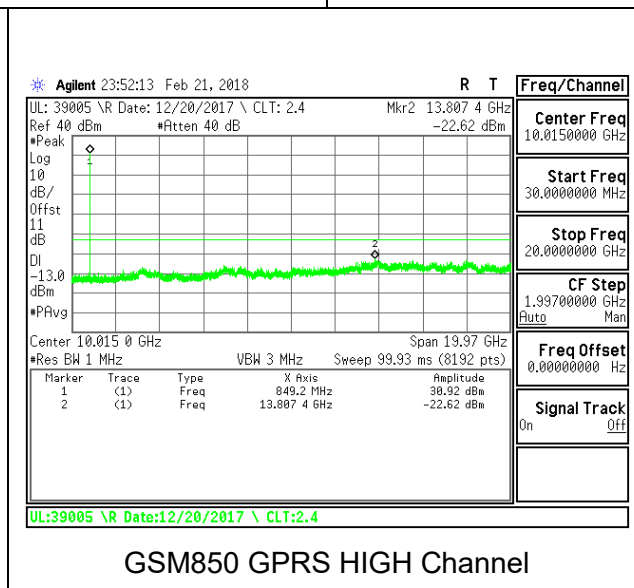
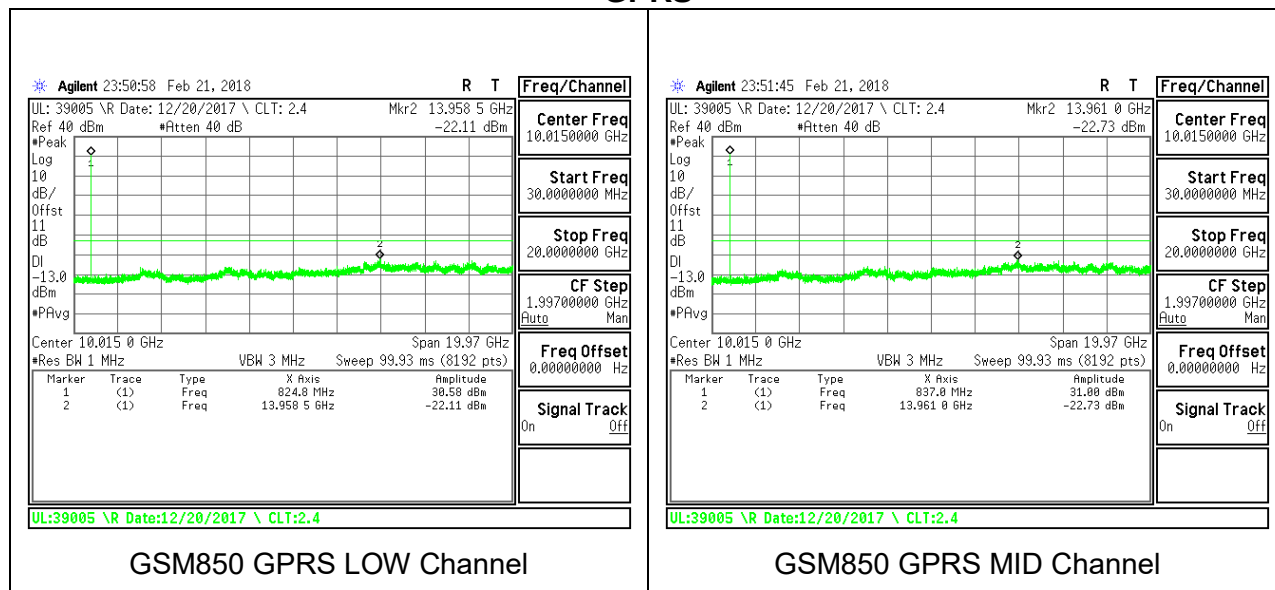


EGPRS

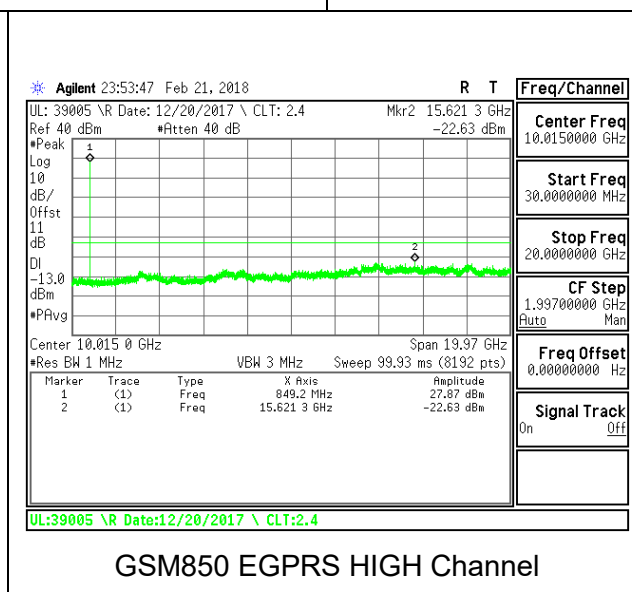
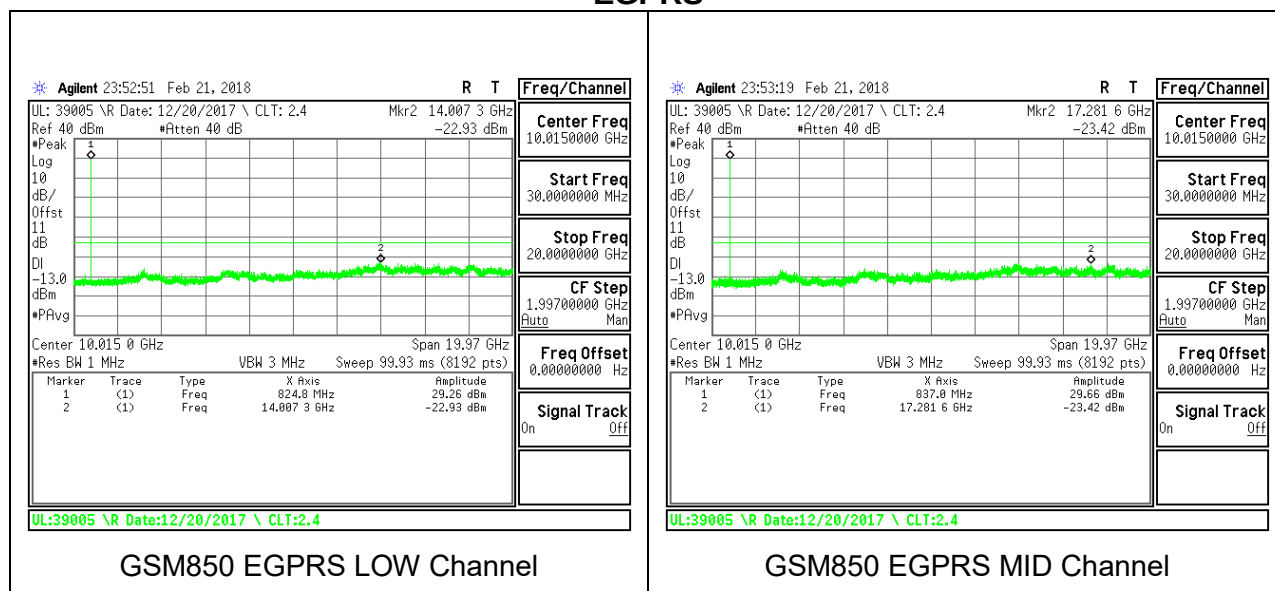


8.3.2. GSM GSM1900

GPRS

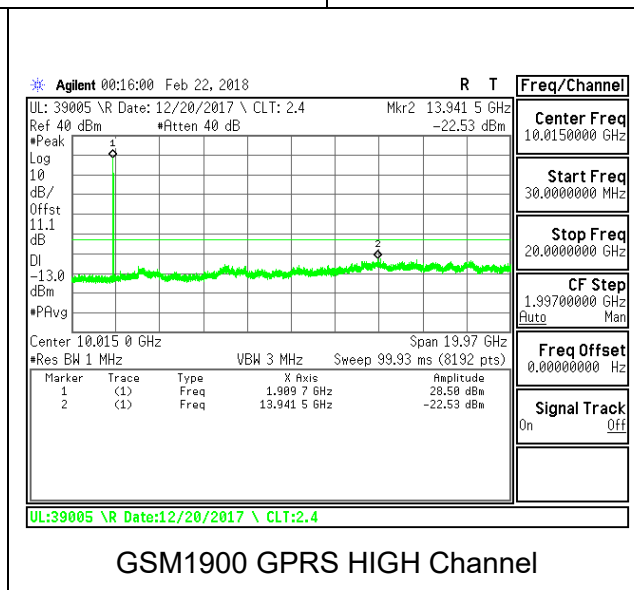
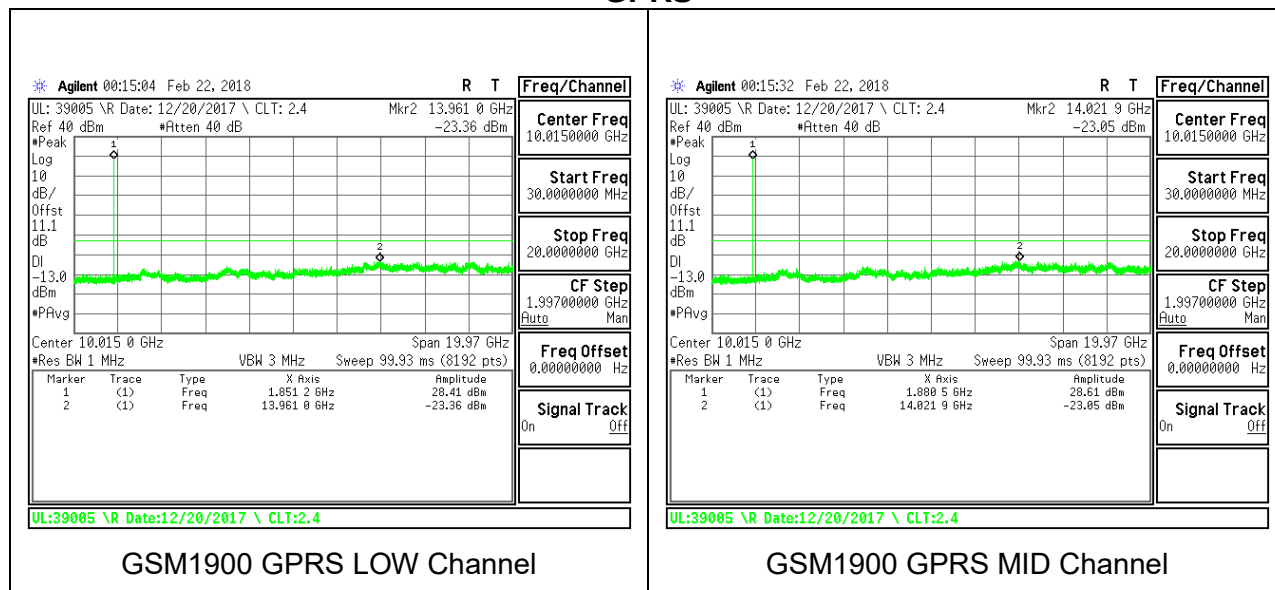


EGPRS

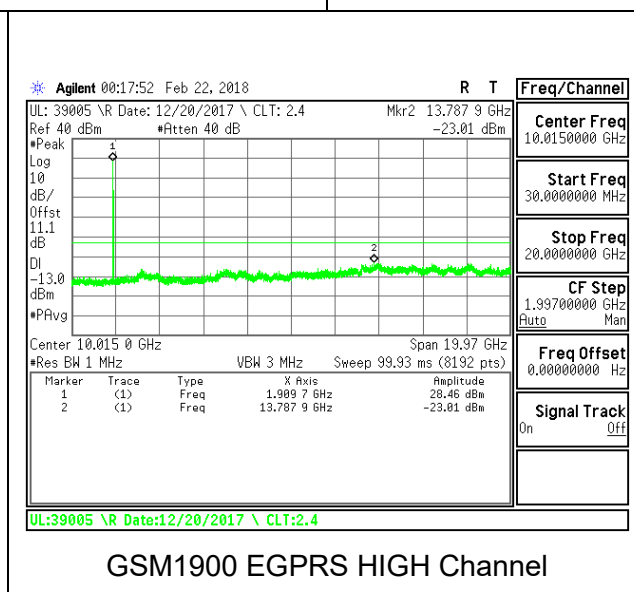
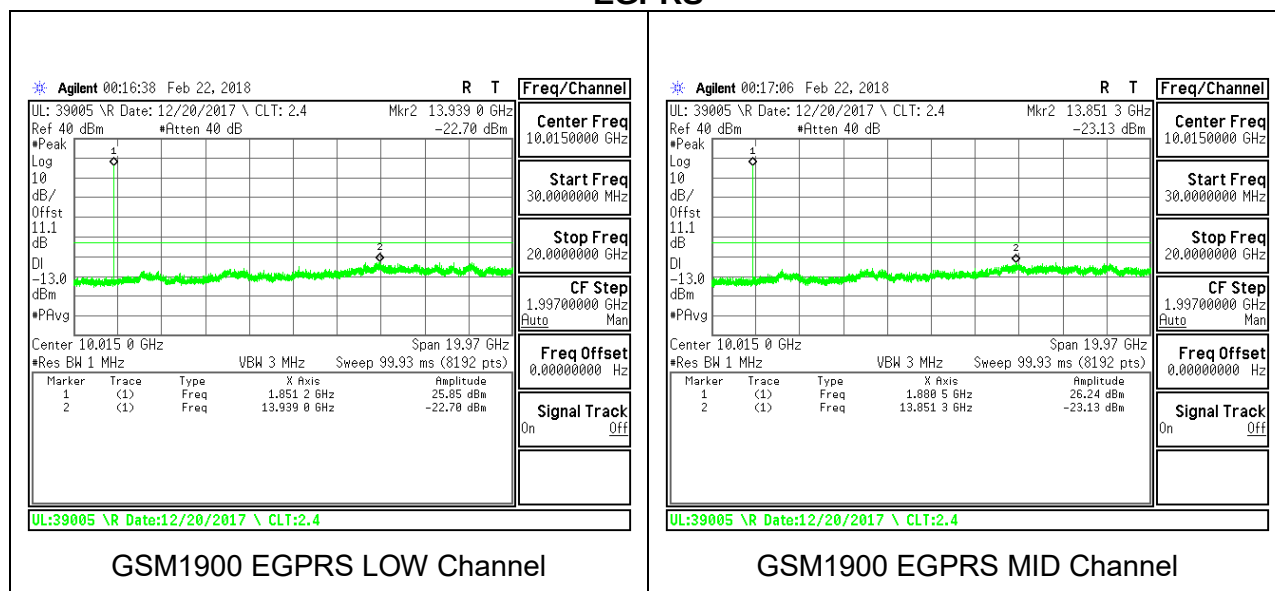


8.3.3. WCDMA BAND5


Rel99

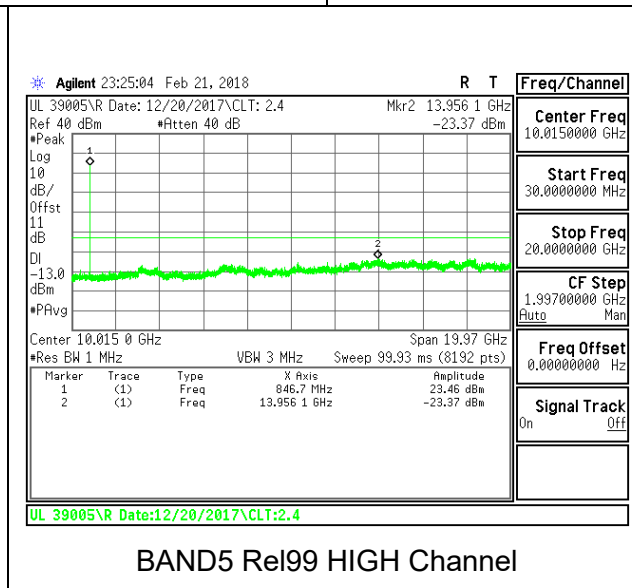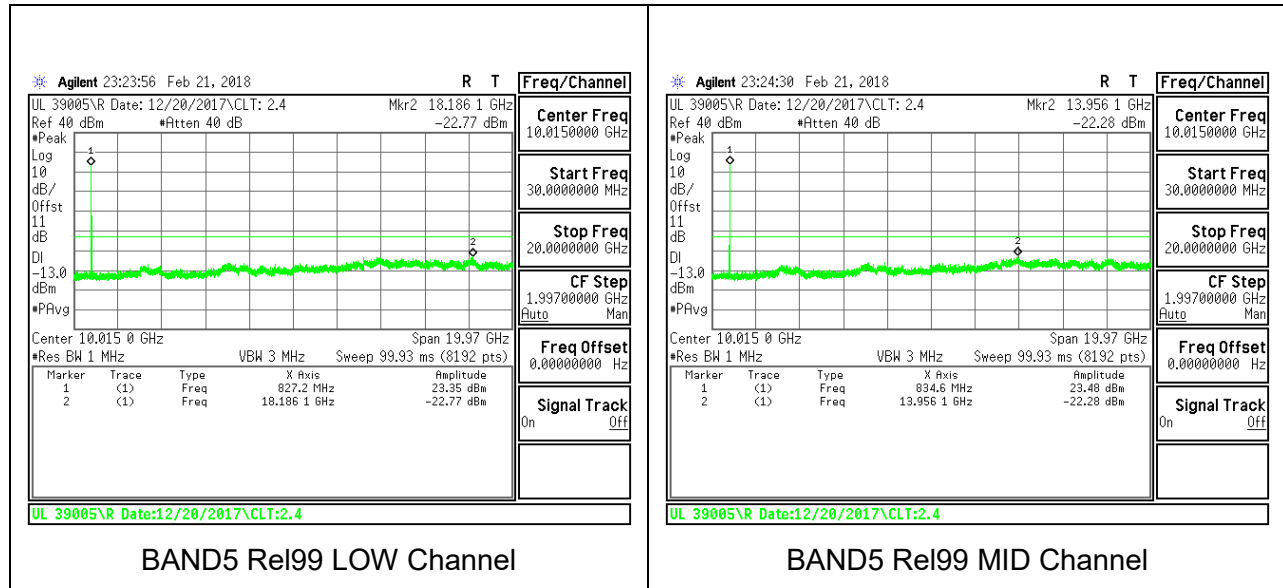


HSDPA

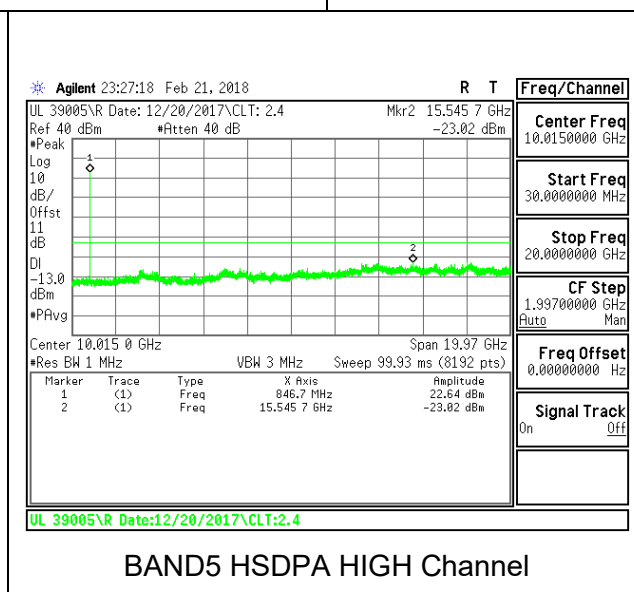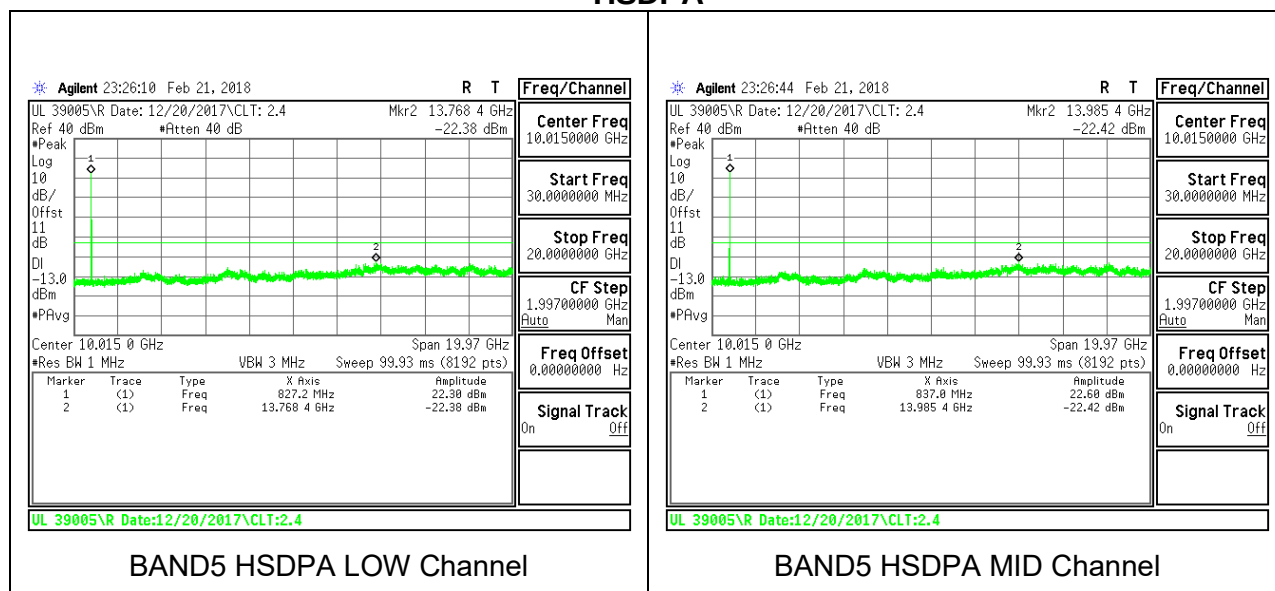


8.3.4. LTE BAND 4

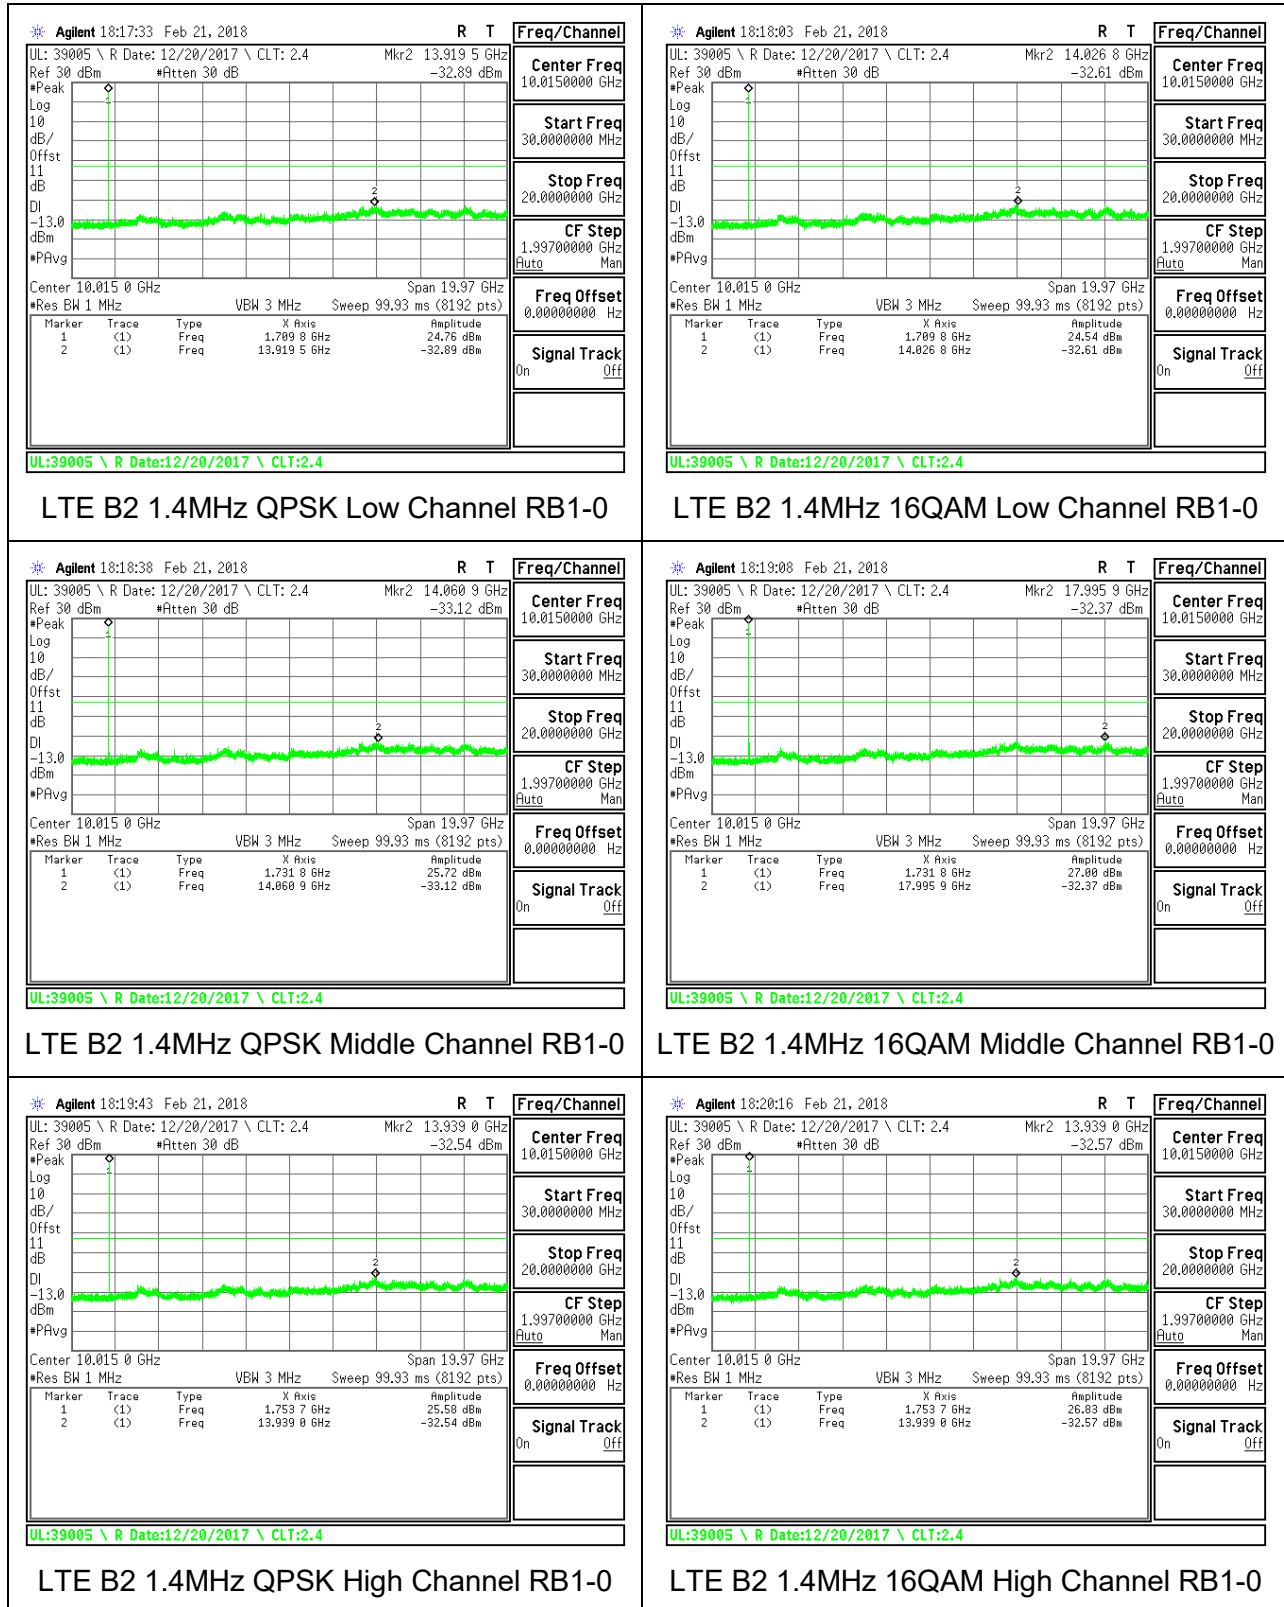


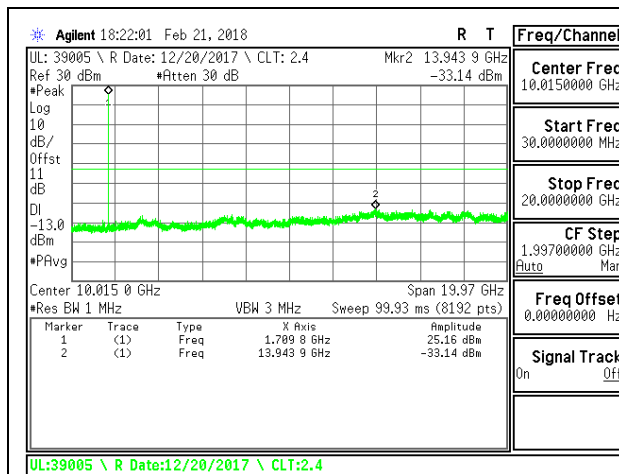


LTE B2 3MHz QPSK Low Channel RB1-0

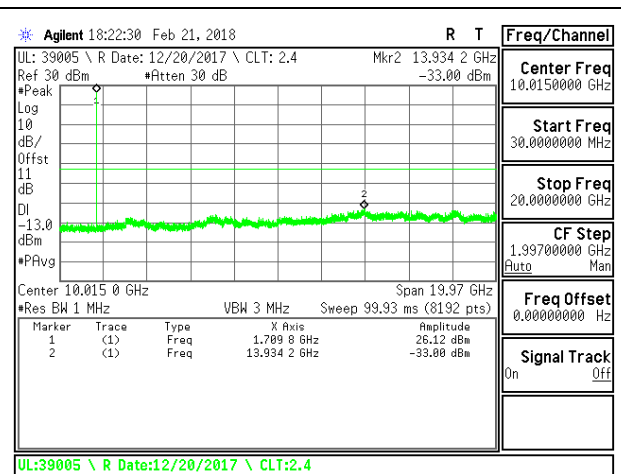


LTE B2 3MHz 16QAM Low Channel RB1-0

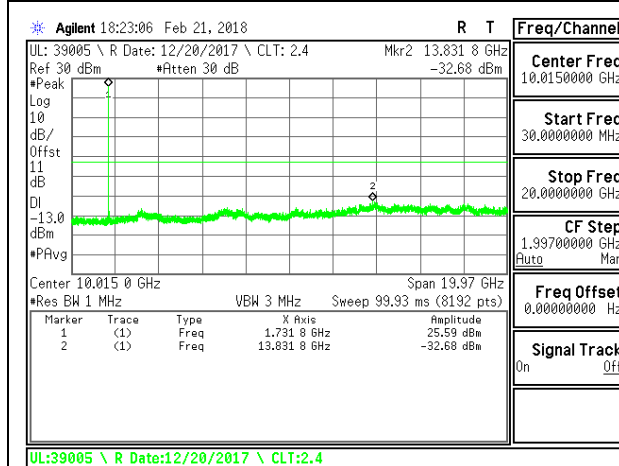


LTE B2 3MHz QPSK Middle Channel RB1-0

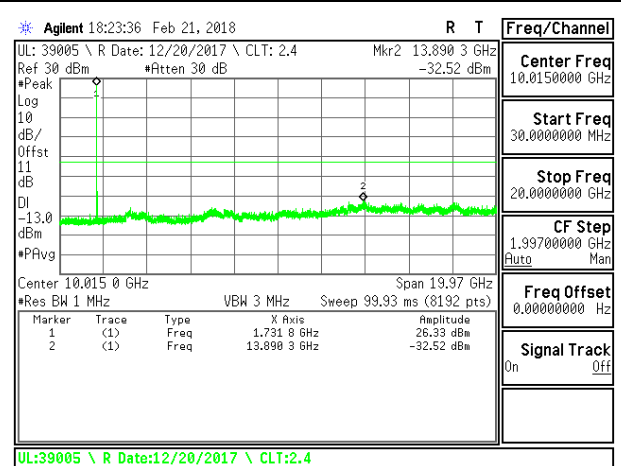


LTE B2 3MHz 16QAM Middle Channel RB1-0

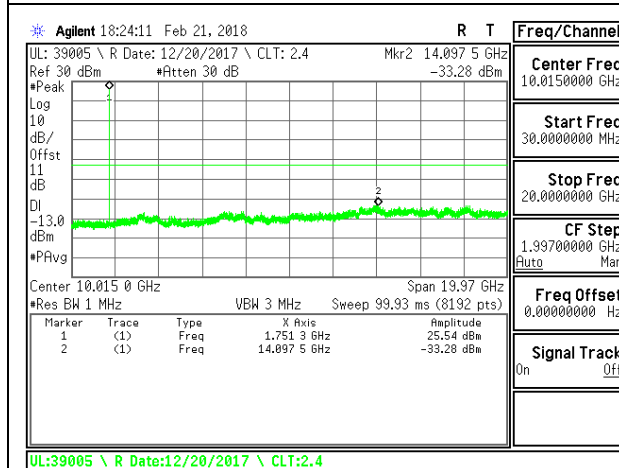


LTE B2 3MHz QPSK High Channel RB1-0

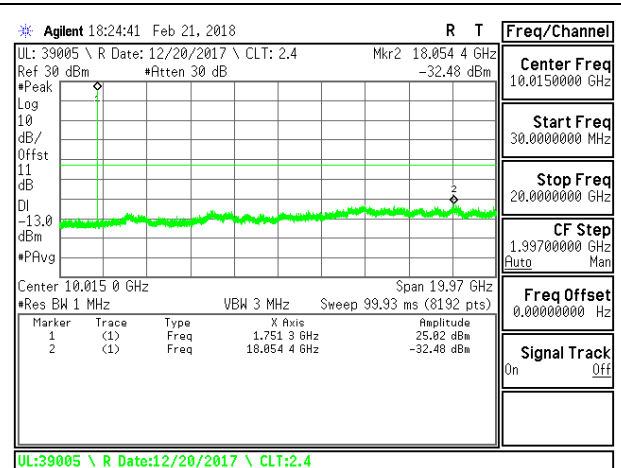


LTE B2 3MHz 16QAM High Channel RB1-0

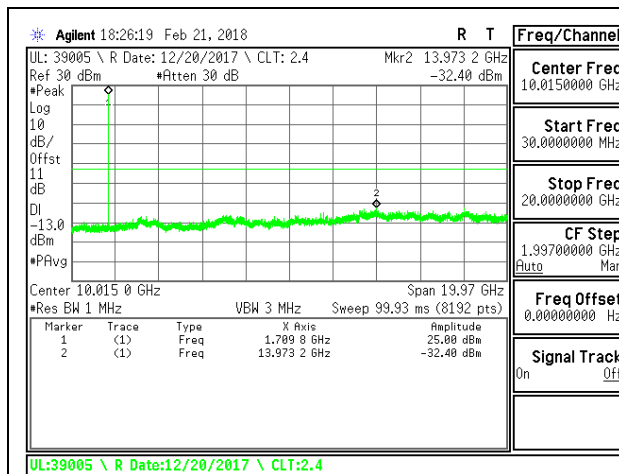


LTE B2 5MHz QPSK Low Channel RB1-0

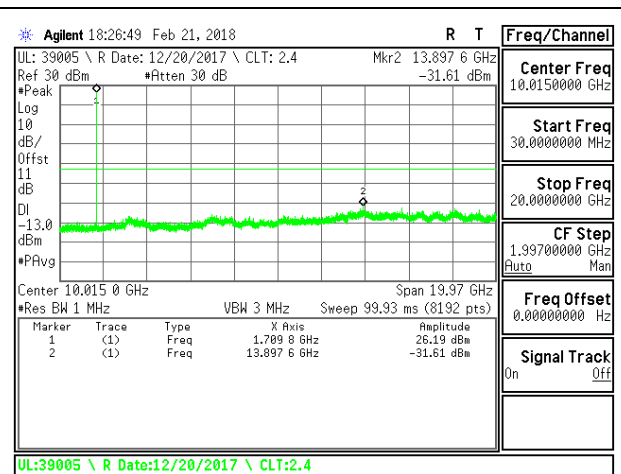


LTE B2 5MHz 16QAM Low Channel RB1-0

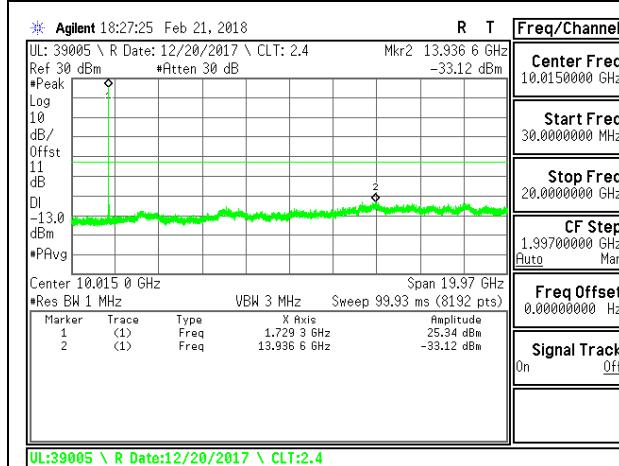


LTE B2 5MHz QPSK Middle Channel RB1-0

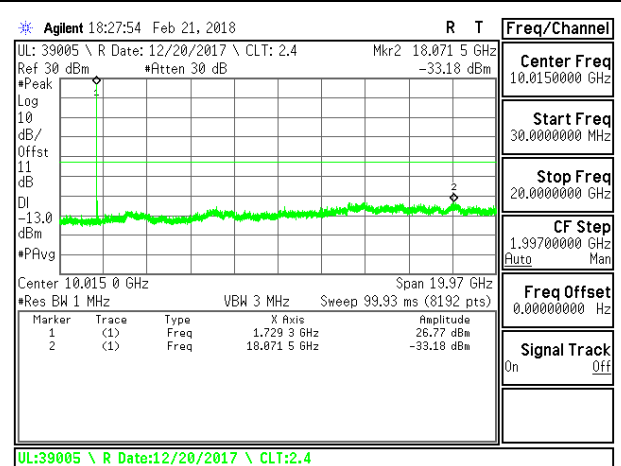


LTE B2 5MHz 16QAM Middle Channel RB1-0

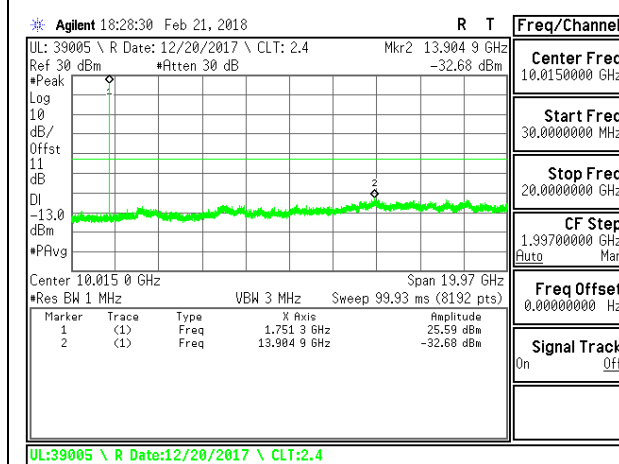


LTE B2 5MHz QPSK High Channel RB1-0

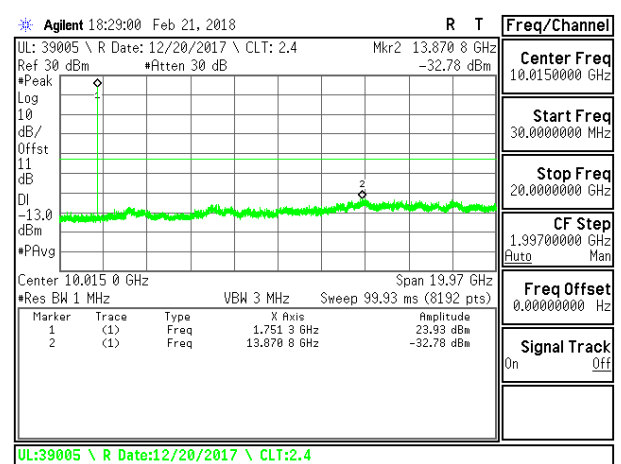


LTE B2 5MHz 16QAM High Channel RB1-0

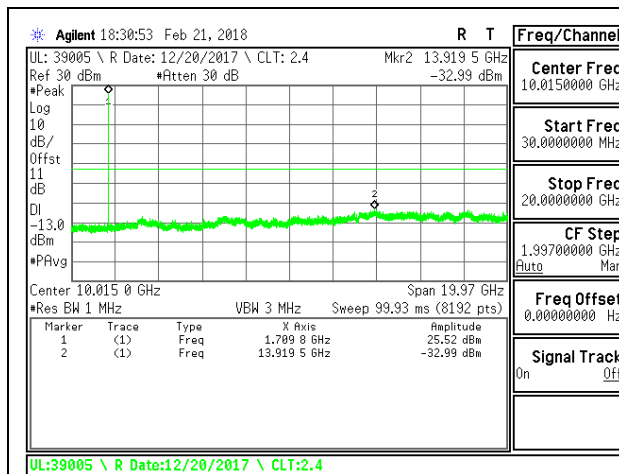


LTE B2 10MHz QPSK Low Channel RB1-0

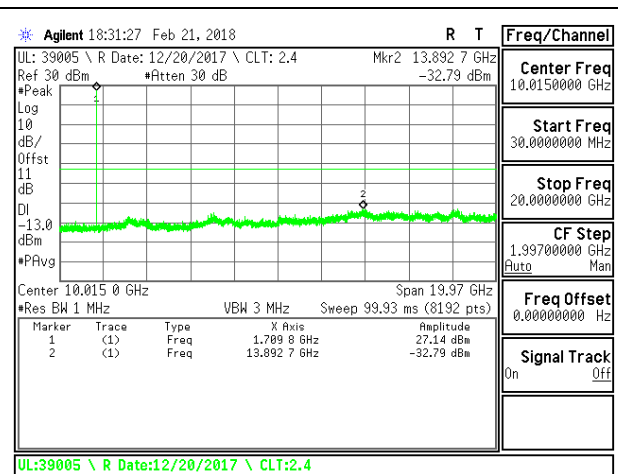


LTE B2 10MHz 16QAM Low Channel RB1-0

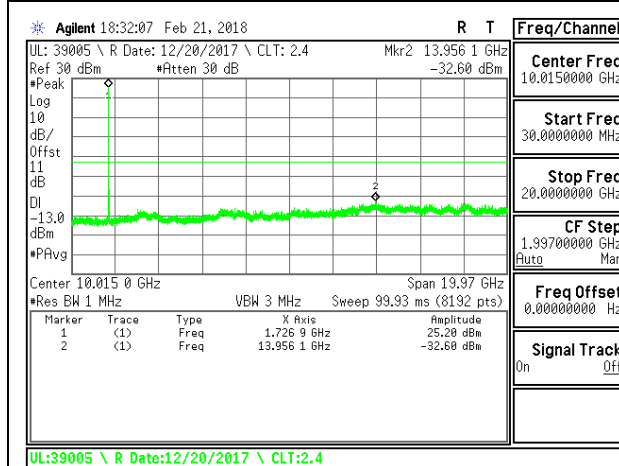


LTE B2 10MHz QPSK Middle Channel RB1-0

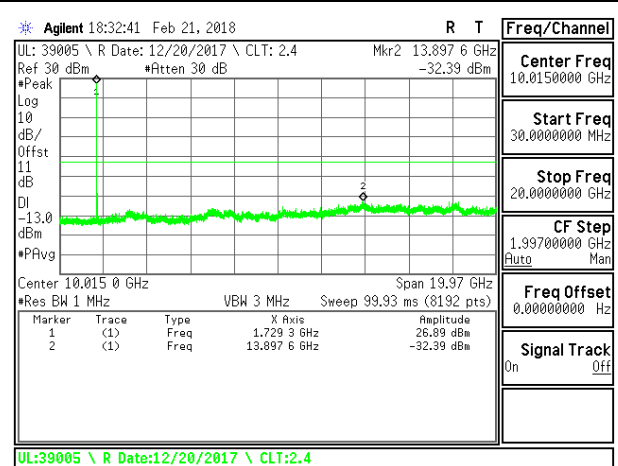

LTE B2 10MHz 16QAM Middle Channel RB1-0

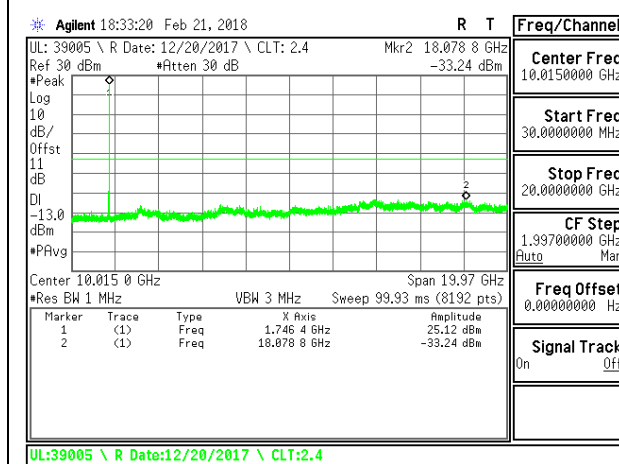

LTE B2 10MHz QPSK High Channel RB1-0

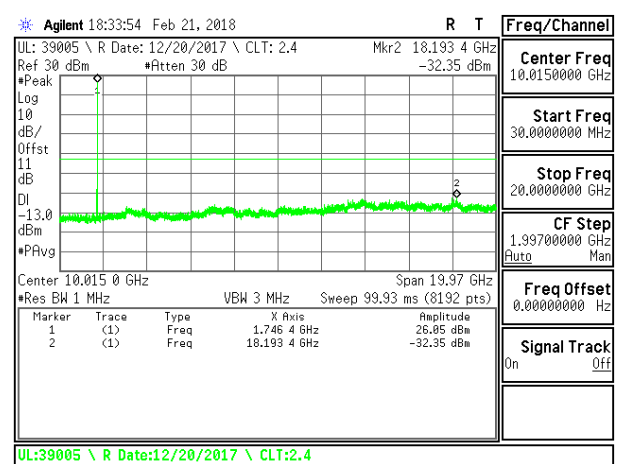

LTE B2 10MHz 16QAM High Channel RB1-0

