



CERTIFICATION TEST REPORT

Report Number. : 12097277-E1V2

Applicant : SONY MOBILE COMMUNICATIONS INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU,TOKYO, 140-0002, JAPAN

FCC ID : PY7-72474U

EUT Description : GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC

Test Standard(s) : FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART F, H, L, and M
FCC CFR47 PART 90 SUBPART S

Date Of Issue:
JANUARY 29, 2018

Prepared by:
UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



Revision History

Rev.	Issue Date	Revisions	Revised By
V1	1/24/2018	Initial Review	Dan Corona
V2	1/29/2018	Updated Section 2	Kiya Kedida

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	7
2. TEST METHODOLOGY	8
3. FACILITIES AND ACCREDITATION	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. SAMPLE CALCULATION.....	8
4.3. MEASUREMENT UNCERTAINTY	9
5. EQUIPMENT UNDER TEST	10
5.1. DESCRIPTION OF EUT.....	10
5.2. MAXIMUM OUTPUT POWER.....	10
5.3. MAXIMUM ANTENNA GAIN	17
5.4. WORST-CASE CONFIGURATION AND MODE	18
5.5. DESCRIPTION OF TEST SETUP.....	19
6. TEST AND MEASUREMENT EQUIPMENT	21
7. RF OUTPUT POWER VERIFICATION	22
7.1. GSM	22
7.1.1. GSM 850MHz.....	23
7.1.2. GSM 1900MHz.....	23
7.2. WCDMA	24
7.2.1. WCDMA BAND 5	28
7.2.2. WCDMA BAND 2	29
7.2.3. WCDMA BAND 4	30
7.3. LTE.....	31
7.3.1. LTE BAND 2.....	33
7.3.2. LTE BAND 4.....	36
7.3.3. LTE BAND 5.....	39
7.3.4. LTE BAND 7.....	41
7.3.5. LTE BAND 12.....	43
7.3.6. LTE BAND 13.....	45
7.3.7. LTE BAND 17.....	46
7.3.8. LTE BAND 26.....	47

7.3.9.	LTE BAND 41.....	50
7.3.10.	LTE BAND 66.....	52
8.	CONDUCTED TEST RESULTS.....	55
8.1.	OCCUPIED BANDWIDTH.....	55
8.1.1.	GSM	60
8.1.2.	WCDMA	61
8.1.3.	LTE BAND 2.....	62
8.1.4.	LTE BAND 5.....	64
8.1.5.	LTE BAND 7.....	66
8.1.6.	LTE BAND 12.....	68
8.1.7.	LTE BAND 13.....	70
8.1.8.	LTE BAND 26 (FCC PART 90S)	71
8.1.9.	LTE BAND 26 (FCC PART 22)	73
8.1.10.	LTE BAND 41	75
8.1.11.	LTE BAND 66	77
8.2.	BAND EDGE AND EMISSION MASK.....	79
8.2.1.	WCDMA BAND 2	84
8.2.1.	WCDMA BAND 4	85
8.2.2.	WCDMA BAND 5	86
8.2.3.	LTE BAND 2 BANDEDGE	87
8.2.5.	LTE BAND 5 BANDEDGE	95
8.2.6.	LTE BAND 7 ADJACENT CHANNEL POWER.....	101
8.2.8.	LTE BAND 12 BANDEDGE	107
8.2.9.	LTE BAND 13 BANDEDGE	113
8.2.11.	LTE BAND 26 EMISSION MASK (FCC PART 90S)	115
8.2.12.	LTE BAND 26 BANDEDGE (FCC PART 22)	118
8.2.13.	LTE BAND 41 ADJACENT CHANNEL POWER	125
8.2.15.	LTE BAND 66 BANDEDGE.....	131
8.3.	OUT OF BAND EMISSIONS.....	139
8.3.1.	GSM 850MHz.....	140
8.3.2.	GSM 1900MHz.....	141
8.3.3.	WCDMA BAND 2	142
8.3.4.	WCDMA BAND 4	143
8.3.5.	WCDMA BAND 5	144

8.3.6.	LTE BAND 2.....	145
8.3.8.	LTE BAND 5.....	151
8.3.9.	LTE BAND 7.....	155
8.3.10.	LTE BAND 12.....	159
8.3.11.	LTE BAND 13.....	163
8.3.13.	LTE BAND 26.....	165
8.3.14.	LTE BAND 41.....	170
8.3.15.	LTE BAND 66.....	174
8.4.	FREQUENCY STABILITY.....	180
8.4.1.	LTE BAND 2.....	182
8.4.2.	LTE BAND 7.....	182
8.4.3.	LTE BAND 13.....	183
8.4.4.	LTE BAND 26.....	183
8.4.5.	LTE BAND 66.....	184
8.5.	PEAK-TO-AVERAGE POWER RATIO	185
8.5.1.	GSM	186
8.5.2.	WCDMA	187
8.5.3.	LTE BAND 2.....	188
8.5.4.	LTE BAND 4.....	189
8.5.5.	LTE BAND 5.....	190
8.5.6.	LTE BAND 7.....	192
8.5.7.	LTE BAND 12.....	194
8.5.8.	LTE BAND 13.....	196
8.5.9.	LTE BAND 17.....	196
8.5.10.	LTE BAND 26.....	197
8.5.11.	LTE BAND 41.....	199
8.5.12.	LTE BAND 66.....	201
9.	RADIATED TEST RESULTS.....	203
9.1.	FIELD STRENGTH OF SPURIOUS RADIATION	203
9.1.1.	GSM	204
9.1.2.	WCDMA	205
9.1.3.	LTE BAND 2.....	206
9.1.4.	LTE BAND 4.....	207
9.1.5.	LTE BAND 5.....	208

9.1.6.	LTE BAND 7.....	210
9.1.7.	LTE BAND 12.....	212
9.1.8.	LTE BAND 13.....	214
9.1.9.	LTE BAND 17.....	214
9.1.10.	LTE BAND 26.....	215
9.1.11.	LTE BAND 41.....	217
9.1.12.	LTE BAND 66.....	219
10.	SETUP PHOTOS.....	221

1. ATTESTATION OF TEST RESULTS

Applicant Name and Address	SONY MOBILE COMMUNICATIONS, INC. 4-12-3 HIGASHI-SHINAGAWA, SHINAGAWA –KU, TOKYO, 140-0002, JAPAN
FCC ID	PY7-72474U
EUT Description	GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC
Serial Number	BH90001EAY,BH900049AY,BH90002MAY,BH90009AAY,BH90001RAY,BH90003DAY,BH90003FAY
Date Tested	DECEMBER 15, 2017 - JANUARY 05, 2018
Applicable Standards	FCC CFR 47 PART 22H, 24E, 27F,H,L,M and 90S
Test Results	COMPLIES

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released For
UL Verification Services Inc By:



Dan Corona
Operations Leader
UL Verification Services Inc.

Prepared By:



Kiya Kedida
Project Engineer
UL Verification Services Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.26:2015, TIA-603-E, FCC CFR 47 Part 2, Part 22, Part 24, Part 27, Part and 90, FCC KDB 971168 D01 v03.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
☒ Chamber A (IC:2324B-1)	☐ Chamber D (IC:22541-1)
☐ Chamber B (IC:2324B-2)	☐ Chamber E (IC:22541-2)
☐ Chamber C (IC:2324B-3)	☐ Chamber F (IC:22541-3)
	☐ Chamber G (IC:22541-4)
	☐ Chamber H (IC:22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \\ &\text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Radiated Disturbance, 26000 to 40000 MHz	5.24 dB
Occupied Channel Bandwidth	±0.39 %
Temperature	±0.9 °C
Supply voltages	±0.45 %
Time	±0.02 %

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE PHONE WITH BT, DTS/UNII A/B/G/N/AC & NFC

5.2. MAXIMUM OUTPUT POWER

ERP/EIRP LIMIT

FCC: §2.1046, §22.913, §24.232, §27.50, §90.635

EIRP/ERP TEST PROCEDURE

ANSI C63.26:2015/ TIA-603-E Clause 2.2.17

KDB 971168 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The transmitter has a maximum average conducted and ERP / EIRP output powers as follows:

GSM MODES

Part 22 850MHz

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	ERP		Limit (dBm)	Margin (dB)
				dBm	mW		
824- 849	GPRS	32.90	-7.10	23.65	231.7	38.5	-14.8
	EGPRS	27.20	-7.10	17.95	62.4	38.5	-20.5

Part 24 1900MHz

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1850-1910	GPRS	29.50	-2.70	26.80	478.6	33.0	-6.2
	EGPRS	26.10	-2.70	23.40	218.8	33.0	-9.6

WCDMA MODE

Part 22 Band 5

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	ERP		Limit (dBm)	Margin (dB)
				dBm	mW		
824- 849	REL 99	24.90	-7.10	15.65	36.7	38.5	-22.8
	HSDPA	24.20	-7.10	14.95	31.3	38.5	-23.5

Part 24 Band 2

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1850-1910	REL 99	22.70	-2.70	20.00	100.0	33.0	-13.0
	HSDPA	21.70	-2.70	19.00	79.4	33.0	-14.0

Part 27 Band 4

Frequency range (MHz)	Modulation	Conducted (Average) (dBm)	Antenna Gain (dBi)	EIRP		Limit (dBm)	Margin (dB)
				dBm	mW		
1710-1755	REL 99	21.70	-2.80	18.90	77.6	30.0	-11.1
	HSDPA	20.70	-2.80	17.90	61.7	30.0	-12.1

LTE BAND 2

Part 24						
EIRP Limit (dBm)		33.00				
Antenna Gain (dBi)		-2.70				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
1.4	1850-1910	QPSK	22.8	20.1	102.3	-12.9
		16QAM	22.6	19.9	97.7	-13.1
		64QAM	22.7	20.0	100.0	-13.0
3.0		QPSK	22.9	20.2	104.7	-12.8
		16QAM	22.6	19.9	97.7	-13.1
		64QAM	22.6	19.9	97.7	-13.1
5.0		QPSK	22.9	20.2	104.7	-12.8
		16QAM	22.7	20.0	100.0	-13.0
		64QAM	22.7	20.0	100.0	-13.0
10.0		QPSK	22.9	20.2	104.7	-12.8
		16QAM	22.8	20.1	102.3	-12.9
		64QAM	22.8	20.1	102.3	-12.9
15.0		QPSK	22.7	20.0	100.0	-13.0
		16QAM	22.6	19.9	97.7	-13.1
		64QAM	22.6	19.9	97.7	-13.1
20.0		QPSK	22.9	20.2	104.7	-12.8
		16QAM	22.8	20.1	102.3	-12.9
		64QAM	22.8	20.1	102.3	-12.9

LTE BAND 4

Part 27						
EIRP Limit (dBm)		30.00				
Antenna Gain (dBi)		-2.80				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
1.4	1710-1755	QPSK	21.6	18.8	75.9	-11.2
		16QAM	21.5	18.7	74.1	-11.3
		64QAM	21.4	18.6	72.4	-11.4
3.0		QPSK	21.7	18.9	77.6	-11.1
		16QAM	21.6	18.8	75.9	-11.2
		64QAM	21.5	18.7	74.1	-11.3
5.0		QPSK	21.7	18.9	77.6	-11.1
		16QAM	21.3	18.5	70.8	-11.5
		64QAM	21.5	18.7	74.1	-11.3
10.0		QPSK	21.8	19.0	79.4	-11.0
		16QAM	21.7	18.9	77.6	-11.1
		64QAM	21.5	18.7	74.1	-11.3
15.0		QPSK	21.8	19.0	79.4	-11.0
		16QAM	21.7	18.9	77.6	-11.1
		64QAM	21.5	18.7	74.1	-11.3
20.0		QPSK	21.9	19.1	81.3	-10.9
		16QAM	21.8	19.0	79.4	-11.0
		64QAM	21.7	18.9	77.6	-11.1

LTE BAND 5

Part 22						
ERP Limit (dBm)			38.45			
Antenna Gain (dBi)			-7.10			
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	824-849	QPSK	24.8	15.55	35.9	-22.9
		16QAM	24.0	14.75	29.9	-23.7
		64QAM	23.0	13.75	23.7	-24.7
3.0		QPSK	24.8	15.55	35.9	-22.9
		16QAM	24.0	14.75	29.9	-23.7
		64QAM	22.7	13.45	22.1	-25.0
5.0		QPSK	25.0	15.73	37.4	-22.7
		16QAM	24.4	15.15	32.7	-23.3
		64QAM	22.7	13.45	22.1	-25.0
10.0		QPSK	24.8	15.55	35.9	-22.9
		16QAM	23.8	14.55	28.5	-23.9
		64QAM	22.5	13.25	21.1	-25.2

LTE BAND 7

Part 27						
EIRP Limit (dBm)		33.00				
Antenna Gain (dBi)		-1.50				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
5.0	2500-2570	QPSK	19.5	18.0	63.1	-15.0
		16QAM	19.2	17.7	58.9	-15.3
		64QAM	19.1	17.6	57.5	-15.4
10.0		QPSK	19.5	18.0	63.1	-15.0
		16QAM	19.4	17.9	61.7	-15.1
		64QAM	19.3	17.8	60.3	-15.2
15.0		QPSK	19.6	18.1	64.6	-14.9
		16QAM	19.4	17.9	61.7	-15.1
		64QAM	19.4	17.9	61.7	-15.1
20.0		QPSK	19.7	18.2	66.1	-14.8
		16QAM	19.6	18.1	64.6	-14.9
		64QAM	19.4	17.9	61.7	-15.1

LTE BAND 12

Part 27						
ERP Limit (dBm)		34.77				
Antenna Gain (dBi)		-12.50				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	699-716	QPSK	24.9	10.25	10.6	-24.5
		16QAM	24.0	9.35	8.6	-25.4
		64QAM	23.0	8.35	6.8	-26.4
3.0		QPSK	24.9	10.25	10.6	-24.5
		16QAM	24.0	9.35	8.6	-25.4
		64QAM	22.6	7.95	6.2	-26.8
5.0		QPSK	24.9	10.25	10.6	-24.5
		16QAM	24.0	9.35	8.6	-25.4
		64QAM	22.6	7.95	6.2	-26.8
10.0		QPSK	24.8	10.15	10.4	-24.6
		16QAM	23.7	9.05	8.0	-25.7
		64QAM	22.5	7.85	6.1	-26.9

LTE BAND 13

Part 27						
ERP Limit (dBm)		34.77				
Antenna Gain (dBi)		-5.90				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
5.0	777-787	QPSK	24.9	16.85	48.4	-17.9
		16QAM	23.9	15.85	38.5	-18.9
		64QAM	22.6	14.55	28.5	-20.2
10.0		QPSK	24.8	16.75	47.3	-18.0
		16QAM	23.8	15.75	37.6	-19.0
		64QAM	22.6	14.55	28.5	-20.2

LTE BAND 17

Part 27						
ERP Limit (dBm)		34.77				
Antenna Gain (dBi)		-12.50				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
5.0	704-716	QPSK	24.9	10.25	10.6	-24.5
		16QAM	24.0	9.35	8.6	-25.4
		64QAM	22.6	7.95	6.2	-26.8
10.0		QPSK	24.8	10.15	10.4	-24.6
		16QAM	23.7	9.05	8.0	-25.7
		64QAM	22.5	7.85	6.1	-26.9

LTE BAND 26 (FCC Part 90S)

ERP Limit (dBm)		50.00				
Antenna Gain (dBi)		-6.40				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	814-824	QPSK	24.8	16.25	42.2	-33.8
		16QAM	24.1	15.55	35.9	-34.5
		64QAM	23.0	14.45	27.9	-35.6
3.0		QPSK	24.7	16.15	41.2	-33.9
		16QAM	24.1	15.55	35.9	-34.5
		64QAM	22.6	14.05	25.4	-36.0
5.0		QPSK	24.8	16.25	42.2	-33.8
		16QAM	24.3	15.75	37.6	-34.3
		64QAM	22.6	14.05	25.4	-36.0
10.0		QPSK	24.7	16.15	41.2	-33.9
		16QAM	24.0	15.45	35.1	-34.6
		64QAM	22.6	14.05	25.4	-36.0

LTE BAND 26 (FCC Part 22)

ERP Limit (dBm)		38.45				
Antenna Gain (dBi)		-6.40				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	ERP Average		Margin (dB)
				dBm	mW	
1.4	824-849	QPSK	24.8	16.25	42.2	-22.2
		16QAM	24.1	15.55	35.9	-22.9
		64QAM	23.0	14.45	27.9	-24.0
3.0		QPSK	24.7	16.15	41.2	-22.3
		16QAM	24.1	15.55	35.9	-22.9
		64QAM	22.6	14.05	25.4	-24.4
5.0		QPSK	24.8	16.25	42.2	-22.2
		16QAM	24.3	15.75	37.6	-22.7
		64QAM	22.6	14.05	25.4	-24.4
10.0		QPSK	24.7	16.15	41.2	-22.3
		16QAM	24.0	15.45	35.1	-23.0
		64QAM	22.6	14.05	25.4	-24.4
15.0		QPSK	24.8	16.25	42.2	-22.2
		16QAM	24.1	15.55	35.9	-22.9
		64QAM	22.6	14.05	25.4	-24.4

LTE BAND 41

Part 27						
EIRP Limit (dBm)		33.00				
Antenna Gain (dBi)		-1.50				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
5.0	2496-2690	QPSK	21.5	20.0	100.0	-13.0
		16QAM	21.1	19.6	91.2	-13.4
		64QAM	21.2	19.7	93.3	-13.3
10.0		QPSK	21.5	20.0	100.0	-13.0
		16QAM	21.1	19.6	91.2	-13.4
		64QAM	21.2	19.7	93.3	-13.3
15.0		QPSK	21.5	20.0	100.0	-13.0
		16QAM	21.1	19.6	91.2	-13.4
		64QAM	21.2	19.7	93.3	-13.3
20.0		QPSK	21.6	20.1	102.3	-12.9
		16QAM	21.1	19.6	91.2	-13.4
		64QAM	21.5	20.0	100.0	-13.0

LTE BAND 66

Part 27						
EIRP Limit (dBm)		30.00				
Antenna Gain (dBi)		-2.80				
Bandwidth (MHz)	Frequency Range (MHz)	Modulation	Conducted Average (dBm)	EIRP Average		Margin (dB)
				dBm	mW	
1.4	1710-1755	QPSK	21.7	18.9	77.6	-11.1
		16QAM	21.5	18.7	74.1	-11.3
		64QAM	21.5	18.7	74.1	-11.3
3.0		QPSK	21.8	19.0	79.4	-11.0
		16QAM	21.7	18.9	77.6	-11.1
		64QAM	21.5	18.7	74.1	-11.3
5.0		QPSK	21.8	19.0	79.4	-11.0
		16QAM	21.7	18.9	77.6	-11.1
		64QAM	21.5	18.7	74.1	-11.3
10.0		QPSK	21.9	19.1	81.3	-10.9
		16QAM	21.8	19.0	79.4	-11.0
		64QAM	21.4	18.6	72.4	-11.4
15.0		QPSK	21.9	19.1	81.3	-10.9
		16QAM	21.8	19.0	79.4	-11.0
		64QAM	21.5	18.7	74.1	-11.3
20.0		QPSK	22.0	19.2	83.2	-10.8
		16QAM	21.9	19.1	81.3	-10.9
		64QAM	21.6	18.8	75.9	-11.2

5.3. MAXIMUM ANTENNA GAIN

Please see table below:

LTE Bands	Antenna Gain (dBi)
GSM850, 824-849MHz	-7.10
GSM1900, 1850-1910MHz	-2.70
WCDMA Band 2, 1850-1910 MHz	-2.70
WCDMA Band 4, 1710-1755 MHz	-2.80
WCDMA Band 5, 824-849 MHz	-7.10
LTE Band 2, 1850 – 1910 MHz	-2.70
LTE Band 4, 1710 – 1755 MHz	-2.80
LTE Band 5, 824 – 849 MHz	-7.10
LTE Band 7, 2500 – 2570 MHz	-1.50
LTE Band 12, 699 – 716 MHz	-12.50
LTE Band 13, 777 – 787 MHz	-5.90
LTE Band 17, 704 – 716 MHz	-12.50
LTE Band 26, 814 – 824 MHz	-6.40
LTE Band 41, 2496 – 2690 MHz	-1.50
LTE Band 66, 1710 – 1780 MHz	-2.80

5.4. WORST-CASE CONFIGURATION AND MODE

The EUT supports LTE Bands of:

Band 2, Band 4, Band 5, Band 7, Band 12, Band 13, Band 17, Band 26, Band 41, and Band 66.

LTE Band 4 (1710-1755MHz, 5/10/15/20MHz bandwidth) is covered by LTE Band 66 because it is a subset of LTE band 66 and they have same output power.

LTE Band 17 (704-716MHz, 5/10MHz bandwidth) is covered by LTE Band 12 because it is a subset of LTE band 12 and they have the same output power.

The worst-case scenario for all measurements is based on the average conducted output power measurement investigation results. Output power measurements were measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK and 16QAM results were worst case. All testing was performed using QPSK and 16QAM modulations to represent the worst case.

5.5. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List			
Description	Manufacturer	Model	Serial Number
AC adapter	SONY	UCH12	VB17W46601037
Audio & Charging Cable	SONY	1312-8675.1B	YYWWSSPCXXXXXC
DC Power Supply	Ametek	XT 15-4	T463
Earphone	SONY	MH410c	N/A

I/O CABLES (RF Conducted Test)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RF Radiated Test)

I/O Cable List						
Cable No	Port	# of identic	Connector Type	Cable Type	Cable Length	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	USB/Headphone Jack	1	USB Type-C/Audio	Un-shielded	.2m	Audio & Charging Cable
4	RF In/out	1	Communication Test Set	Un-shielded	2m	No


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

CONDUCTED SETUP

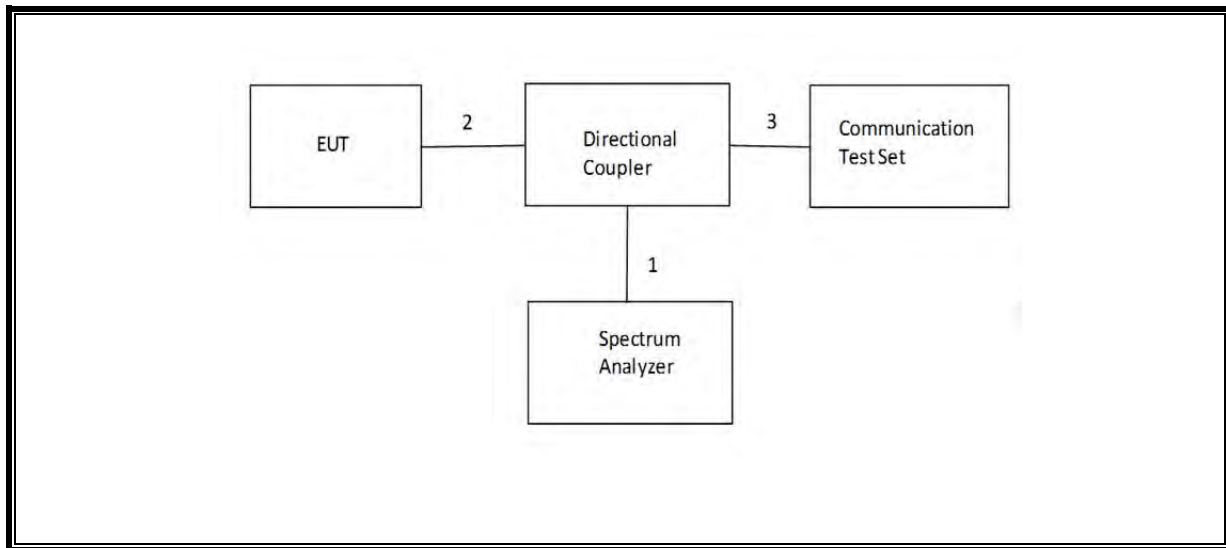

RADIATED SETUP

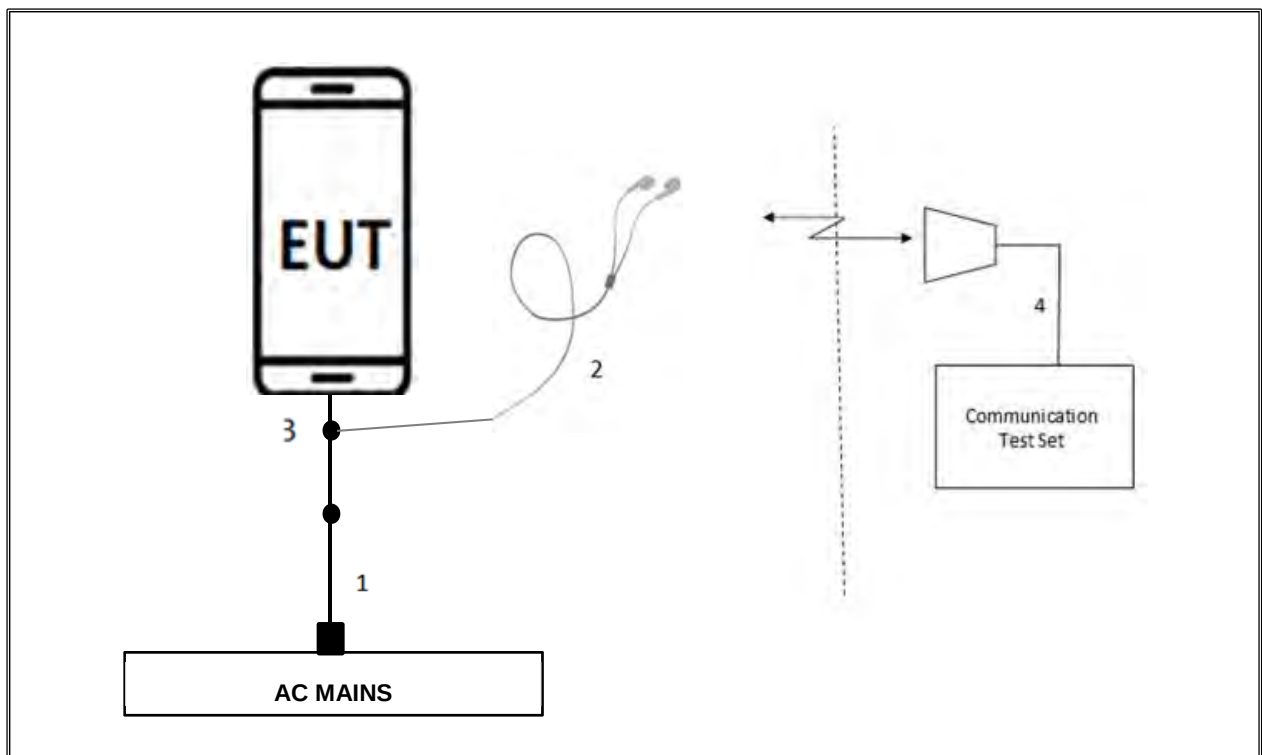

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn 1-18GHz	ETS Lindgren	3117	T862	6/9/2018
Amplifier, 1 to 18GHz	Miteq	AFS42-00101800-25-S-42	T1573	11/25/2018
Spectrum Analyzer, PXA 3Hz to 44GHz	Keysight	N9030A	T1466	4/11/2018
Directional Coupler	Mini-Circuits	ZUDC10-183+	T1136	6/18/2018
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	7/05/2018
Highpass Filter, 1 GHz	Micro-Tronics	HPM18129	T889	2/21/2018
Highpass Filter, 3 GHz	Micro-Tronics	HPM17543	T486	11/251/2018
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1241	7/19/2018
Wideband Communication Test Set, Call Box	R&S	CMW500	T959	connection purpose only
Wideband Communication Test Set, Call Box	R&S GmbH & Co. KG	CMW500	T971	connection purpose only
Chamber, Environmental	Thermotron	SE-600-10-10	80	2/18/2018
DC power supply, 8 V @ 3 A or 15 V @ 2 A	Agilent / HP	E3610A	None	CNR
UL AUTOMATION SOFTWARE				
CLT Software	UL	UL RF	Ver 1.7, November 2015	
Power Measurement Software	UL	UL RF	Ver 2.2, June 2017	

NOTES:

- Equipment listed above that calibrated during the testing period was set for test after the calibration.
- Equipment listed above that has a calibration due date during the testing period, the testing is completed before equipment expiration date.

RESULT

7.1.1. GSM 850MHz

ID:	40814	Date:	12/21/17
------------	-------	--------------	----------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Average (dBm)	
			1 slot	2 slots
850.0	128	824.2	32.8	30.9
	190	836.6	32.9	30.9
	251	848.8	32.9	30.8

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Average (dBm)	
			1 slot	2 slots
850.0	128	824.2	27.2	25.8
	190	836.6	27.2	25.6
	251	848.8	27.0	25.5

7.1.2. GSM 1900MHz

ID:	40814	Date:	12/21/17
------------	-------	--------------	----------

GPRS (GMSK) - Coding Scheme: CS1

Band	Ch No.	Freq. (MHz)	Average (dBm)	
			1 slot	2 slots
1900.0	512	1850.2	29.4	27.4
	661	1880.0	29.4	27.3
	810	1909.8	29.5	27.5

EGPRS (8PSK) - Coding Scheme: MCS5

Band	Ch No.	Freq. (MHz)	Average (dBm)	
			1 slot	2 slots
1900.0	512	1850.2	26.0	24.8
	661	1880.0	25.9	24.7
	810	1909.8	26.1	24.8

7.2. WCDMA

TEST PROCEDURE

The transmitter output was connected to the input terminal of Directional Coupler via calibrated coaxial cable. The output coupling terminal of the Directional Coupler was directly connected to a spectrum analyzer while the output through terminal connected to the communication test set via calibrated coaxial cable.

The output power was measured with the spectrum analyzer at the low, middle and high channel in each band.

- Set the spectrum analyzer span wide enough or greater than the modulated signal BW.
- Set a spectrum analyzer at peak detection mode with VBW $\geq$ RBW $\geq$ 26dB BW, typically 5MHz.
- Set a marker to point the corresponding peak value.

REL 99

The following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS34.121-1 specification. The DUT supports power Class 3, which has a nominal maximum output power of 24 dBm (+1.7/-3.7).

Mode	Subtest	Rel99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA REL 5

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
W-CDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	11/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSPA REL 6 (HSDPA & HSUPA)

The following 5 Sub-tests were completed according to Release 6 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	HSPA				
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2 kbps RMC				
	HSDPA FRC	H-Set 1				
	HSUPA Test	HSPA				
	Power Control Algorithm	Algorithm 2				Algorithm 1
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	β_{ed}	1309/225	94/75	47/15	56/75	47/15
	CM (dB)	1	3	2	3	1
	MPR (dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				0
	DNAK	8				0
	DCQI	8				0
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
	$A_{hs} = \beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	E-DPDCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E-TFCIs	5	5	2	5	1
	Reference E-TFCI	11	11	11	11	67
	Reference E-TFCI PO	4	4	4	4	18
	Reference E-TFCI	67	67	92	67	67
	Reference E-TFCI PO	18	18	18	18	18
	Reference E-TFCI	71	71	71	71	71
	Reference E-TFCI PO	23	23	23	23	23
	Reference E-TFCI	75	75	75	75	75
	Reference E-TFCI PO	26	26	26	26	26
	Reference E-TFCI	81	81	81	81	81
	Reference E-TFCI PO	27	27	27	27	27
	Maximum Channelization Codes	2xSF2				SF4

DUAL CARRIER HSDPA (DC-HSDPA (REL 8, CAT 24)

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

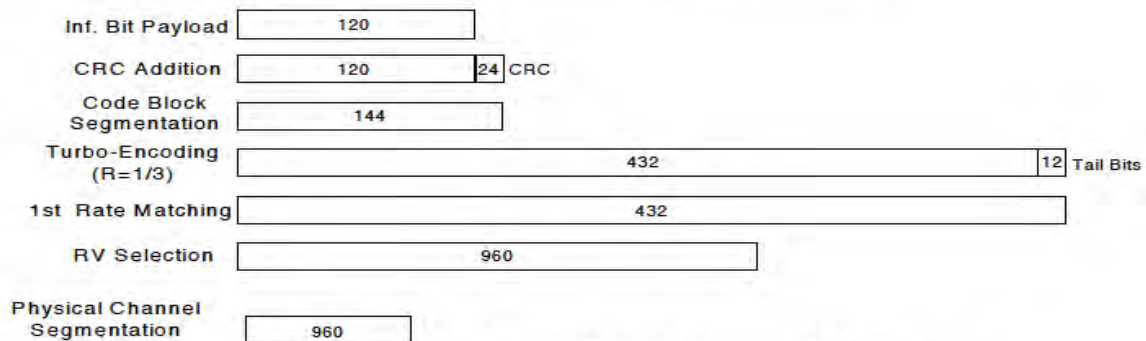


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 8 procedures in section 5.2 of 3GPP TS34.121. A summary of subtest settings are illustrated below:

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set 1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	11/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
HSDPA Specific Settings	MPR (dB)	0	0	0.5	0.5
	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack Repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	Ahs = β_{hs}/β_c	30/15			

HSPA+ REL 7

The following 1 Sub-test was completed according to Release 7 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and β_d = 0 by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

RESULT

7.2.1. WCDMA BAND 5

ID:	37433	Date:	12/21/17			
Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 5 (850MHz)	Rel 99	RMC, 12.2 kbps	4132	826.4	N/A	24.9
			4183	836.6	N/A	24.9
			4233	846.6	N/A	24.9
	HSDPA	Subtest 1	4132	826.4	0	24.2
			4183	836.6	0	24.2
			4233	846.6	0	24.0
		Subtest 2	4132	826.4	0	23.1
			4183	836.6	0	23.2
			4233	846.6	0	23.0
		Subtest 3	4132	826.4	0.5	22.0
			4183	836.6	0.5	22.1
			4233	846.6	0.5	22.0
		Subtest 4	4132	826.4	0.5	23.7
			4183	836.6	0.5	23.7
			4233	846.6	0.5	23.7
	HSPA (HSDPA & HSUPA)	Subtest 1	4132	826.4	0	24.2
			4183	836.6	0	24.2
			4233	846.6	0	24.0
		Subtest 2	4132	826.4	2	22.2
			4183	836.6	2	22.2
			4233	846.6	2	22.0
		Subtest 3	4132	826.4	1	23.2
			4183	836.6	1	23.2
			4233	846.6	1	23.1
		Subtest 4	4132	826.4	2	22.2
			4183	836.6	2	22.2
			4233	846.6	2	22.0
		Subtest 5	4132	826.4	0	24.2
			4183	836.6	0	24.2
			4233	846.6	0	24.0
	DC-HSDPA	Subtest 1	4132	826.4	0	24.2
			4183	836.6	0	24.2
			4233	846.6	0	24.1
		Subtest 2	4132	826.4	0	24.2
			4183	836.6	0	24.2
			4233	846.6	0	24.2
		Subtest 3	4132	826.4	0.5	23.7
			4183	836.6	0.5	23.7
			4233	846.6	0.5	23.5
		Subtest 4	4132	826.4	0.5	23.7
			4183	836.6	0.5	23.7
			4233	846.6	0.5	23.5

7.2.2. WCDMA BAND 2

ID:	37433	Date:	12/21/17			
Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 2 (1900MHz)	Rel 99	RMC, 12.2 kbps	9262	1852.4	N/A	22.7
			9400	1880.0	N/A	22.7
			9538	1907.6	N/A	22.7
	HSDPA	Subtest 1	9262	1852.4	0	21.7
			9400	1880.0	0	21.7
			9538	1907.6	0	21.7
		Subtest 2	9262	1852.4	0	20.6
			9400	1880.0	0	20.9
			9538	1907.6	0	20.8
		Subtest 3	9262	1852.4	0.5	21.1
			9400	1880.0	0.5	21.0
			9538	1907.6	0.5	21.1
		Subtest 4	9262	1852.4	0.5	21.1
			9400	1880.0	0.5	21.0
			9538	1907.6	0.5	21.0
	HSPA (HSDPA & HSUPA)	Subtest 1	9262	1852.4	0	21.8
			9400	1880.0	0	21.7
			9538	1907.6	0	21.7
		Subtest 2	9262	1852.4	2	19.9
			9400	1880.0	2	19.8
			9538	1907.6	2	19.9
		Subtest 3	9262	1852.4	1	20.8
			9400	1880.0	1	20.7
			9538	1907.6	1	20.9
		Subtest 4	9262	1852.4	2	19.8
			9400	1880.0	2	19.8
			9538	1907.6	2	19.9
		Subtest 5	9262	1852.4	0	21.8
			9400	1880.0	0	21.7
			9538	1907.6	0	21.7
	DC-HSDPA	Subtest 1	9262	1852.4	0	21.8
			9400	1880.0	0	21.8
			9538	1907.6	0	21.7
		Subtest 2	9262	1852.4	0	21.8
			9400	1880.0	0	21.8
			9538	1907.6	0	21.7
		Subtest 3	9262	1852.4	0.5	21.2
			9400	1880.0	0.5	21.1
			9538	1907.6	0.5	21.4
		Subtest 4	9262	1852.4	0.5	21.2
			9400	1880.0	0.5	21.3
			9538	1907.6	0.5	21.2

7.2.3. WCDMA BAND 4

ID:	37433	Date:	12/21/17			
Band	Mode		UL Ch No.	Freq. (MHz)	MPR (dB)	Average (dBm)
W-CDMA Band 4 (1700MHz)	Rel 99	RMC, 12.2 kbps	1312	1712.4	N/A	21.7
			1413	1732.6	N/A	21.7
			1513	1752.6	N/A	21.7
	HSDPA	Subtest 1	1312	1712.4	0	20.7
			1413	1732.6	0	20.7
			1513	1752.6	0	20.7
		Subtest 2	1312	1712.4	0	19.6
			1413	1732.6	0	19.6
			1513	1752.6	0	19.8
		Subtest 3	1312	1712.4	0.5	18.7
			1413	1732.6	0.5	18.5
			1513	1752.6	0.5	18.3
		Subtest 4	1312	1712.4	0.5	20.5
			1413	1732.6	0.5	20.5
			1513	1752.6	0.5	20.5
	HSPA (HSDPA & HSUPA)	Subtest 1	1312	1712.4	0	20.6
			1413	1732.6	0	20.9
			1513	1752.6	0	20.9
		Subtest 2	1312	1712.4	2	18.7
			1413	1732.6	2	18.8
			1513	1752.6	2	18.9
		Subtest 3	1312	1712.4	1	19.9
			1413	1732.6	1	19.8
			1513	1752.6	1	19.8
		Subtest 4	1312	1712.4	2	18.7
			1413	1732.6	2	18.8
			1513	1752.6	2	18.9
		Subtest 5	1312	1712.4	0	20.7
			1413	1732.6	0	20.9
			1513	1752.6	0	20.9
	DC-HSDPA	Subtest 1	1312	1712.4	0	20.8
			1413	1732.6	0	20.8
			1513	1752.6	0	20.9
		Subtest 2	1312	1712.4	0	20.7
			1413	1732.6	0	20.9
			1513	1752.6	0	20.8
		Subtest 3	1312	1712.4	0.5	20.4
			1413	1732.6	0.5	20.3
			1513	1752.6	0.5	20.2
		Subtest 4	1312	1712.4	0.5	20.3
			1413	1732.6	0.5	20.3
			1513	1752.6	0.5	20.3

7.3. LTE

CONDUCTED OUTPUT POWER MEASUREMENT PROCEDURE

All LTE bands conducted average power is obtained from the CMW500 telecommunication test set.

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".3

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

MODES TESTED

- LTE Band 2
- LTE Band 4
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 17
- LTE Band 26
- LTE Band 41
- LTE Band 66

RESULTS

EUT includes different power levels for head use configuration and body use configuration and the below tables contain the highest of all configurations average conducted output powers as follows:

7.3.1. LTE BAND 2

ID:	38515	Date:	1/4/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 2 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18607	18900	19193
				1850.7 MHz	1880.0 MHz	1909.3 MHz
1.4	QPSK	1	0	22.6	22.5	22.7
		1	2	22.7	22.5	22.8
		1	5	22.6	22.4	22.7
		3	0	22.6	22.5	22.7
		3	1	22.7	22.5	22.7
		3	2	22.7	22.5	22.7
	16QAM	6	0	22.6	22.5	22.7
		1	0	22.6	22.1	22.4
		1	2	22.6	22.2	22.5
		1	5	22.5	22.1	22.4
		3	0	22.4	22.3	22.4
		3	1	22.5	22.3	22.4
	64QAM	3	2	22.5	22.3	22.4
		6	0	22.1	22.3	22.4
		1	0	22.4	22.3	22.4
		1	2	22.7	22.6	22.4
		1	5	22.6	22.5	22.2
		3	0	22.6	22.5	22.3
		3	1	22.6	22.5	22.4
		3	2	22.6	22.6	22.4
		6	0	21.7	21.6	22.0

OUTPUT POWER FOR LTE BAND 2 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18615	18900	19185
				1851.5 MHz	1880.0 MHz	1908.5 MHz
3.0	QPSK	1	0	22.6	22.6	22.8
		1	7	22.7	22.7	22.9
		1	14	22.6	22.6	22.8
		8	0	22.6	22.6	22.8
		8	4	22.6	22.6	22.8
		8	7	22.6	22.6	22.8
	16QAM	15	0	22.6	22.6	22.8
		1	0	22.5	22.6	22.3
		1	7	22.6	22.6	22.4
		1	14	22.5	22.5	22.2
		8	0	22.2	22.3	22.5
		8	4	22.2	22.3	22.5
	64QAM	8	7	22.2	22.3	22.5
		15	0	22.2	22.2	22.4
		1	0	22.3	22.3	22.3
		1	7	22.5	22.6	22.6
		1	14	22.4	22.5	22.6
		8	0	21.7	21.7	21.9
		8	4	21.7	21.8	22.0
		8	7	21.7	21.8	21.9
		15	0	21.7	21.7	21.9

OUTPUT POWER FOR LTE BAND 2 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18625	18900	19175
				1852.5 MHz	1880.0 MHz	1907.5 MHz
5.0	QPSK	1	0	22.9	22.6	22.8
		1	12	22.6	22.6	22.7
		1	24	22.6	22.6	22.7
		12	0	22.6	22.6	22.7
		12	6	22.6	22.6	22.8
		12	11	22.6	22.6	22.8
		25	0	22.6	22.6	22.8
	16QAM	1	0	22.7	22.7	22.5
		1	12	22.7	22.7	22.5
		1	24	22.7	22.7	22.5
		12	0	22.3	22.4	22.5
		12	6	22.3	22.3	22.5
		12	11	22.3	22.4	22.5
		25	0	22.2	22.3	22.4
	64QAM	1	0	22.2	22.2	22.7
		1	12	22.1	22.2	22.2
		1	24	22.1	22.2	22.2
		12	0	21.7	21.8	21.9
		12	6	21.7	21.8	21.9
		12	11	21.7	21.8	21.9
		25	0	21.7	21.7	21.9

OUTPUT POWER FOR LTE BAND 2 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18650	18900	19150
				1855.0 MHz	1880.0 MHz	1905.0 MHz
10.0	QPSK	1	0	22.9	22.9	22.8
		1	24	22.6	22.6	22.8
		1	49	22.8	22.8	22.8
		25	0	22.6	22.6	22.9
		25	12	22.7	22.7	22.9
		25	24	22.6	22.6	22.9
		50	0	22.6	22.7	22.9
	16QAM	1	0	22.8	22.8	22.3
		1	24	22.5	22.6	22.3
		1	49	22.7	22.8	22.3
		25	0	22.3	22.3	22.5
		25	12	22.3	22.3	22.5
		25	24	22.2	22.3	22.4
		50	0	22.2	22.3	22.4
	64QAM	1	0	22.7	22.8	22.7
		1	24	22.5	22.5	22.7
		1	49	22.7	22.7	22.7
		25	0	21.4	21.4	21.6
		25	12	21.4	21.4	21.6
		25	24	21.4	21.4	21.6
		50	0	21.4	21.4	21.6

OUTPUT POWER FOR LTE BAND 2 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18675	18900	19125
				1857.5 MHz	1880.0 MHz	1902.5 MHz
15.0	QPSK	1	0	22.7	22.7	21.5
		1	37	22.6	22.6	21.4
		1	74	22.6	22.6	21.4
		36	0	22.7	22.7	21.5
		36	16	22.6	22.7	21.5
		36	35	22.6	22.6	21.4
		75	0	22.6	22.7	21.5
	16QAM	1	0	22.6	22.3	21.1
		1	37	22.5	22.1	21.0
		1	74	22.5	22.1	21.0
		36	0	22.4	22.3	21.1
		36	16	22.3	22.3	21.1
		36	35	22.2	22.2	21.0
		75	0	22.2	22.3	21.1
	64QAM	1	0	22.6	22.6	21.5
		1	37	22.5	22.6	21.4
		1	74	22.5	22.6	21.4
		36	0	21.4	21.4	21.6
		36	16	21.4	21.4	21.6
		36	35	21.3	21.4	21.5
		75	0	21.4	21.4	21.6

OUTPUT POWER FOR LTE BAND 2 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				18700	18900	19100
				1860.0 MHz	1880.0 MHz	1900.0 MHz
20.0	QPSK	1	0	22.9	22.6	22.5
		1	49	22.3	22.3	22.3
		1	99	22.5	22.5	22.4
		50	0	22.7	22.7	22.9
		50	24	22.6	22.7	22.8
		50	49	22.7	22.6	22.7
		100	0	22.8	22.7	22.8
	16QAM	1	0	22.8	22.7	22.8
		1	49	22.5	22.7	22.6
		1	99	22.8	22.8	22.6
		50	0	22.3	22.4	22.4
		50	24	22.2	22.3	22.4
		50	49	22.3	22.3	22.3
		100	0	22.4	22.3	22.4
	64QAM	1	0	22.8	22.8	22.7
		1	49	22.8	22.6	22.5
		1	99	22.8	22.7	22.6
		50	0	21.4	21.5	21.6
		50	24	21.3	21.4	21.6
		50	49	21.4	21.4	21.6
		100	0	21.4	21.4	21.6

7.3.2. LTE BAND 4

ID:	38515	Date:	1/4/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 4 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				19957	20175	20393
				1710.7 MHz	1732.5 MHz	1754.3 MHz
1.4	QPSK	1	0	21.5	21.6	21.5
		1	2	21.5	21.6	21.6
		1	5	21.5	21.6	21.5
		3	0	21.5	21.6	21.4
		3	1	21.4	21.6	21.4
		3	2	21.5	21.6	21.4
	16QAM	6	0	21.4	21.5	21.4
		1	0	21.1	21.5	21.1
		1	2	21.4	21.5	21.1
		1	5	21.2	21.5	21.0
		3	0	21.2	21.5	21.1
		3	1	21.4	21.4	21.1
	64QAM	3	2	21.4	21.4	21.1
		6	0	21.3	21.1	21.0
		1	0	21.1	21.2	21.4
		1	2	21.1	21.3	21.4
		1	5	21.1	21.1	21.4
		3	0	20.9	21.2	21.3
		3	1	20.9	21.3	21.3
		3	2	20.9	21.3	21.3
		6	0	20.9	21.2	21.2

OUTPUT POWER FOR LTE BAND 4 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				19965	20175	20385
				1711.5 MHz	1732.5 MHz	1753.5 MHz
3.0	QPSK	1	0	21.6	21.6	21.6
		1	7	21.6	21.7	21.6
		1	14	21.5	21.6	21.5
		8	0	21.5	21.6	21.4
		8	4	21.6	21.7	21.4
		8	7	21.5	21.7	21.5
	16QAM	15	0	21.5	21.6	21.4
		1	0	21.5	21.5	21.1
		1	7	21.2	21.6	21.1
		1	14	21.2	21.5	21.0
		8	0	21.3	21.4	21.1
		8	4	21.4	21.4	21.1
	64QAM	8	7	21.3	21.4	21.1
		15	0	21.3	21.1	21.2
		1	0	21.1	21.2	21.4
		1	7	21.2	21.3	21.5
		1	14	21.1	21.1	21.4
		8	0	20.9	21.2	21.3
		8	4	21.0	21.3	21.4
		8	7	21.0	21.3	21.4
		15	0	21.0	21.4	21.0

OUTPUT POWER FOR LTE BAND 4 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				19975	20175	20375
				1712.5 MHz	1732.5 MHz	1752.5 MHz
5.0	QPSK	1	0	21.7	21.6	21.6
		1	12	21.6	21.6	21.6
		1	24	21.6	21.6	21.6
		12	0	21.4	21.4	21.4
		12	6	21.4	21.4	21.4
		12	11	21.5	21.5	21.5
		25	0	21.4	21.4	21.4
	16QAM	1	0	21.3	21.3	21.3
		1	12	21.1	21.1	21.1
		1	24	21.0	21.0	21.0
		12	0	21.1	21.1	21.1
		12	6	21.1	21.1	21.1
		12	11	21.1	21.1	21.1
		25	0	21.2	21.2	21.2
	64QAM	1	0	21.4	21.4	21.4
		1	12	21.5	21.5	21.5
		1	24	21.4	21.4	21.4
		12	0	21.3	21.3	21.3
		12	6	21.4	21.4	21.4
		12	11	21.4	21.4	21.4
		25	0	21.0	21.0	21.0

OUTPUT POWER FOR LTE BAND 4 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20000	20175	20350
				1715.0 MHz	1732.5 MHz	1750.0 MHz
10.0	QPSK	1	0	21.8	21.6	21.7
		1	24	21.7	21.6	21.6
		1	49	21.7	21.5	21.5
		25	0	21.6	21.4	21.4
		25	12	21.5	21.4	21.4
		25	24	21.5	21.3	21.3
		50	0	21.6	21.6	21.7
	16QAM	1	0	21.6	21.1	21.3
		1	24	21.7	21.0	21.3
		1	49	21.6	21.0	21.1
		25	0	21.5	21.3	21.4
		25	12	21.4	21.3	21.4
		25	24	21.4	21.3	21.3
		50	0	21.4	21.3	21.3
	64QAM	1	0	21.4	21.5	21.4
		1	24	21.3	21.2	21.4
		1	49	21.3	21.2	21.4
		25	0	21.3	21.2	21.2
		25	12	21.3	21.2	21.2
		25	24	21.3	21.2	21.2
		50	0	21.2	21.2	21.2

OUTPUT POWER FOR LTE BAND 4 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20025	20175	20325
				1717.5 MHz	1732.5 MHz	1747.5 MHz
15.0	QPSK	1	0	21.8	21.8	21.4
		1	37	21.4	21.3	21.3
		1	74	21.4	21.4	21.2
		36	0	21.5	21.5	21.4
		36	16	21.5	21.5	21.3
		36	35	21.4	21.4	21.2
		75	0	21.5	21.5	21.2
	16QAM	1	0	21.7	21.7	21.7
		1	37	21.7	21.7	21.6
		1	74	21.7	21.7	21.4
		36	0	21.5	21.5	21.4
		36	16	21.4	21.4	21.2
		36	35	21.4	21.4	21.2
		75	0	21.4	21.4	21.3
	64QAM	1	0	21.5	21.5	21.3
		1	37	21.4	21.4	21.3
		1	74	21.5	21.5	21.3
		36	0	21.2	21.2	21.2
		36	16	21.2	21.2	21.2
		36	35	21.2	21.2	21.2
		75	0	21.3	21.3	21.2

OUTPUT POWER FOR LTE BAND 4 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20050	20175	20300
				1720.0 MHz	1732.5 MHz	1745.0 MHz
20.0	QPSK	1	0	21.9	21.6	21.6
		1	49	21.5	21.3	21.4
		1	99	21.3	21.3	21.4
		50	0	21.6	21.5	21.3
		50	24	21.5	21.5	21.3
		50	49	21.5	21.4	21.3
		100	0	21.6	21.4	21.2
	16QAM	1	0	21.8	21.8	21.7
		1	49	21.7	21.8	21.5
		1	99	21.7	21.4	21.4
		50	0	21.5	21.5	21.4
		50	24	21.4	21.4	21.1
		50	49	21.5	21.3	21.2
		100	0	21.5	21.4	21.3
	64QAM	1	0	21.2	21.7	21.4
		1	49	21.0	21.5	21.4
		1	99	21.1	21.5	21.4
		50	0	21.3	21.3	21.3
		50	24	21.2	21.3	21.2
		50	49	21.3	21.3	21.0
		100	0	21.3	21.3	21.1

7.3.3. LTE BAND 5

ID:	38515	Date:	1/4/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 5 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20407 824.7 MHz	20525 836.5 MHz	20643 848.3 MHz
1.4	QPSK	1	0	24.7	24.8	24.6
		1	2	24.7	24.8	24.6
		1	5	24.6	24.8	24.5
		3	0	24.7	24.7	24.6
		3	1	24.7	24.8	24.7
		3	2	24.7	24.7	24.6
		6	0	23.6	23.7	23.7
	16QAM	1	0	24.0	23.9	23.7
		1	2	24.0	23.9	23.7
		1	5	24.0	23.9	23.6
		3	0	23.9	23.9	23.8
		3	1	24.0	23.9	23.9
		3	2	24.0	23.9	23.9
		6	0	22.7	22.9	22.9
	64QAM	1	0	22.0	22.4	22.0
		1	2	22.1	22.5	22.1
		1	5	22.0	22.3	22.0
		3	0	22.8	23.0	22.6
		3	1	22.9	23.0	22.7
		3	2	22.9	23.0	22.7
		6	0	22.0	21.8	21.8

OUTPUT POWER FOR LTE BAND 5 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20415 825.5 MHz	20525 836.5 MHz	20635 847.5 MHz
3.0	QPSK	1	0	24.6	24.8	24.8
		1	7	24.7	24.8	24.7
		1	14	24.6	24.8	24.5
		8	0	23.6	23.8	23.7
		8	4	23.6	23.8	23.8
		8	7	23.6	23.8	23.8
		15	0	23.6	23.8	23.8
	16QAM	1	0	24.0	23.8	23.9
		1	7	24.0	23.8	23.8
		1	14	24.0	23.7	23.6
		8	0	22.8	23.0	22.8
		8	4	22.8	23.0	22.9
		8	7	22.8	23.0	22.9
		15	0	22.7	22.9	22.8
	64QAM	1	0	22.5	22.4	22.7
		1	7	22.5	22.5	22.6
		1	14	22.5	22.4	22.5
		8	0	21.7	21.9	21.8
		8	4	21.8	21.9	21.9
		8	7	21.8	22.0	21.9
		15	0	21.8	21.9	21.8

OUTPUT POWER FOR LTE BAND 5 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20425	20525	20625
				826.5 MHz	836.5 MHz	846.5 MHz
5.0	QPSK	1	0	24.8	24.9	25.0
		1	12	24.7	24.8	24.8
		1	24	24.7	24.7	24.7
		12	0	23.7	23.9	23.9
		12	6	23.7	23.9	23.8
		12	11	23.7	23.8	23.8
		25	0	23.7	23.9	23.8
	16QAM	1	0	24.0	24.4	24.0
		1	12	23.9	24.4	23.9
		1	24	23.8	24.3	23.8
		12	0	22.9	23.0	23.0
		12	6	22.9	23.0	23.0
		12	11	22.8	23.0	22.9
		25	0	22.8	23.0	22.9
	64QAM	1	0	22.6	22.7	22.4
		1	12	22.5	22.6	22.2
		1	24	22.5	22.6	22.2
		12	0	21.9	21.9	22.0
		12	6	21.9	21.9	21.9
		12	11	21.9	21.8	21.9
		25	0	21.8	21.9	21.8

OUTPUT POWER FOR LTE BAND 5 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20450	20525	20600
				829.0 MHz	836.5 MHz	844.0 MHz
10.0	QPSK	1	0		24.8	
		1	24		24.7	
		1	49		24.5	
		25	0		23.9	
		25	12		23.9	
		25	24		23.8	
		50	0		23.9	
	16QAM	1	0		23.8	
		1	24		23.8	
		1	49		23.5	
		25	0		23.0	
		25	12		23.0	
		25	24		22.9	
		50	0		22.9	
	64QAM	1	0		22.5	
		1	24		22.5	
		1	49		22.4	
		25	0		22.0	
		25	12		22.0	
		25	24		22.0	
		50	0		22.0	

7.3.4. LTE BAND 7

ID:	40814	Date:	2/1/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 7 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20775	21100	21425
				2502.5 MHz	2535.0 MHz	2567.5 MHz
5.0	QPSK	1	0	19.1	19.5	19.5
		1	12	19.1	19.5	19.5
		1	24	19.1	19.4	19.4
		12	0	19.2	19.4	19.4
		12	6	19.2	19.4	19.4
		12	11	19.2	19.4	19.4
		25	0	19.2	19.4	19.4
	16QAM	1	0	19.2	19.2	19.2
		1	12	19.2	19.1	19.2
		1	24	19.2	19.1	19.2
		12	0	18.9	19.1	19.1
		12	6	18.9	19.1	19.1
		12	11	18.8	19.1	19.1
		25	0	18.8	19.0	19.0
	64QAM	1	0	19.0	18.8	18.9
		1	12	19.0	18.8	18.9
		1	24	18.9	18.9	18.9
		12	0	19.0	19.0	19.0
		12	6	19.1	19.0	19.1
		12	11	19.0	19.0	19.0
		25	0	19.0	18.9	19.0

OUTPUT POWER FOR LTE BAND 7 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20800	21100	21400
				2505.0 MHz	2535.0 MHz	2565.0 MHz
10.0	QPSK	1	0	19.5	19.4	19.4
		1	24	19.3	19.4	19.3
		1	49	19.4	19.3	19.2
		25	0	19.4	19.4	19.3
		25	12	19.4	19.4	19.3
		25	24	19.4	19.4	19.2
		50	0	19.4	19.4	19.3
	16QAM	1	0	19.3	19.4	19.3
		1	24	19.2	19.3	19.2
		1	49	19.2	19.3	19.1
		25	0	19.0	19.1	18.9
		25	12	19.1	19.1	19.0
		25	24	19.0	19.0	18.9
		50	0	19.0	19.1	18.9
	64QAM	1	0	19.1	19.3	19.1
		1	24	19.2	19.2	19.1
		1	49	19.2	19.2	19.1
		25	0	19.0	19.0	18.9
		25	12	19.1	19.0	18.9
		25	24	19.0	19.0	18.9
		50	0	19.0	19.0	18.9

OUTPUT POWER FOR LTE BAND 7 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20825	21100	21375
				2507.5 MHz	2535.0 MHz	2562.5 MHz
15.0	QPSK	1	0	19.5	19.6	19.3
		1	37	19.4	19.4	19.2
		1	74	19.4	19.3	19.1
		36	0	19.5	19.5	19.3
		36	16	19.5	19.4	19.3
		36	35	19.4	19.4	19.2
		75	0	19.4	19.4	19.3
	16QAM	1	0	19.3	19.4	18.9
		1	37	19.4	19.3	18.7
		1	74	19.3	19.3	18.6
		36	0	19.1	19.1	18.9
		36	16	19.1	19.1	18.9
		36	35	19.0	19.0	18.9
		75	0	19.1	19.1	18.9
	64QAM	1	0	19.4	19.4	19.4
		1	37	19.3	19.2	19.1
		1	74	19.2	19.2	19.1
		36	0	19.1	19.1	19.0
		36	16	19.1	19.1	18.9
		36	35	19.0	19.0	18.9
		75	0	19.0	19.0	19.0

OUTPUT POWER FOR LTE BAND 7 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				20850	21100	21350
				2510.0 MHz	2535.0 MHz	2560.0 MHz
20.0	QPSK	1	0	19.3	19.7	19.4
		1	49	19.2	19.4	19.2
		1	99	19.3	19.3	19.1
		50	0	19.4	19.5	19.4
		50	24	19.3	19.5	19.4
		50	49	19.4	19.4	19.3
		100	0	19.3	19.4	19.3
	16QAM	1	0	19.4	19.6	19.6
		1	49	19.3	19.4	19.4
		1	99	19.2	19.5	19.3
		50	0	19.0	19.2	19.1
		50	24	18.9	19.1	19.0
		50	49	18.9	19.0	18.9
		100	0	18.9	19.1	19.0
	64QAM	1	0	19.3	19.4	19.4
		1	49	19.2	19.3	19.2
		1	99	19.1	19.3	19.1
		50	0	19.1	19.1	19.1
		50	24	19.0	19.1	19.0
		50	49	19.0	19.1	18.9
		100	0	18.9	19.0	18.9

7.3.5. LTE BAND 12

ID:	38515	Date:	1/4/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 12 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23017 699.7 MHz	23095 707.5 MHz	23173 715.3 MHz
1.4	QPSK	1	0	24.5	24.8	24.6
		1	2	24.6	24.9	24.6
		1	5	24.4	24.8	24.5
		3	0	24.5	24.7	24.6
		3	1	24.5	24.7	24.6
		3	2	24.6	24.7	24.6
	16QAM	6	0	23.5	23.7	23.6
		1	0	23.9	23.8	23.6
		1	2	24.0	23.9	23.7
		1	5	23.8	23.9	23.6
		3	0	23.8	23.8	23.8
		3	1	23.8	23.8	23.9
		3	2	23.8	23.8	23.9
		6	0	22.6	22.9	22.9
	64QAM	1	0	22.4	22.4	22.5
		1	2	22.5	22.5	22.6
		1	5	22.5	22.3	22.5
		3	0	22.7	22.9	22.9
		3	1	22.7	23.0	23.0
		3	2	22.8	22.9	23.0
		6	0	21.4	21.6	21.1

OUTPUT POWER FOR LTE BAND 12 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23025 700.5 MHz	23095 707.5 MHz	23165 714.5 MHz
3.0	QPSK	1	0	24.6	24.8	24.8
		1	7	24.8	24.9	24.8
		1	14	24.7	24.8	24.6
		8	0	23.6	23.8	23.7
		8	4	23.7	23.8	23.7
		8	7	23.8	23.8	23.7
		15	0	23.7	23.8	23.7
	16QAM	1	0	24.0	23.7	23.8
		1	7	24.0	23.8	23.8
		1	14	24.0	23.7	23.7
		8	0	22.8	23.0	22.9
		8	4	22.9	23.0	22.9
		8	7	22.9	23.0	22.9
		15	0	22.8	22.9	22.8
	64QAM	1	0	22.5	22.4	22.5
		1	7	22.5	22.5	22.6
		1	14	22.4	22.4	22.5
		8	0	21.8	21.9	21.8
		8	4	21.8	21.9	21.8
		8	7	21.8	21.9	21.8
		15	0	21.8	21.9	21.8

OUTPUT POWER FOR LTE BAND 12 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23035	23095	23155
				701.5 MHz	707.5 MHz	713.5 MHz
5.0	QPSK	1	0	24.6	24.8	24.8
		1	12	24.7	24.9	24.8
		1	24	24.6	24.9	24.7
		12	0	23.7	23.8	23.8
		12	6	23.8	23.9	23.8
		12	11	23.7	23.8	23.8
		25	0	23.7	23.8	23.8
	16QAM	1	0	24.0	23.9	24.0
		1	12	24.0	24.0	23.9
		1	24	24.0	24.0	23.8
		12	0	22.9	23.0	22.9
		12	6	23.0	23.0	22.9
		12	11	22.9	23.0	22.9
		25	0	22.9	22.9	22.8
	64QAM	1	0	22.6	22.3	22.5
		1	12	22.5	22.2	22.5
		1	24	22.5	22.2	22.4
		12	0	21.7	21.9	21.8
		12	6	21.8	21.9	21.9
		12	11	21.7	21.9	21.8
		25	0	21.8	21.8	21.8

OUTPUT POWER FOR LTE BAND 12 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23060	23095	23130
				704.0 MHz	707.5 MHz	711.0 MHz
10.0	QPSK	1	0		24.7	
		1	24		24.8	
		1	49		24.8	
		25	0		23.8	
		25	12		23.9	
		25	24		23.8	
		50	0		23.8	
	16QAM	1	0		23.7	
		1	24		23.7	
		1	49		23.7	
		25	0		22.6	
		25	12		22.6	
		25	24		22.5	
		50	0		22.9	
	64QAM	1	0		22.5	
		1	24		22.4	
		1	49		22.5	
		25	0		22.0	
		25	12		22.0	
		25	24		21.9	
		50	0		21.5	

7.3.6. LTE BAND 13

ID:	38515	Date:	1/4/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 13 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23207	23230	23255
				779.5 MHz	782.0 MHz	784.5 MHz
5.0	QPSK	1	0		24.8	
		1	12		24.9	
		1	24		24.8	
		12	0		23.9	
		12	6		23.8	
		12	11		23.8	
		25	0		23.8	
	16QAM	1	0		23.9	
		1	12		23.9	
		1	24		23.9	
		12	0		23.0	
		12	6		23.0	
		12	11		23.0	
		25	0		22.9	
	64QAM	1	0		22.5	
		1	12		22.6	
		1	24		22.6	
		12	0		22.0	
		12	6		22.0	
		12	11		22.0	
		25	0		22.0	

OUTPUT POWER FOR LTE BAND 13 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				N/A	23230	N/A
				N/A	782.0 MHz	N/A
10.0	QPSK	1	0		24.5	
		1	24		24.8	
		1	49		24.3	
		25	0		23.9	
		25	12		23.9	
		25	24		23.8	
		50	0		23.9	
	16QAM	1	0		23.5	
		1	24		23.8	
		1	49		23.3	
		25	0		23.0	
		25	12		23.0	
		25	24		22.9	
		50	0		22.9	
	64QAM	1	0		22.6	
		1	24		22.6	
		1	49		22.5	
		25	0		22.0	
		25	12		22.0	
		25	24		21.9	
		50	0		21.4	

7.3.7. LTE BAND 17

ID:	38515	Date:	1/4/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 17 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23755	23790	23825
				706.5 MHz	710.0 MHz	713.5 MHz
5.0	QPSK	1	0	24.6	24.8	24.8
		1	12	24.7	24.9	24.8
		1	24	24.6	24.9	24.7
		12	0	23.7	23.8	23.8
		12	6	23.8	23.9	23.8
		12	11	23.7	23.8	23.8
		25	0	23.7	23.8	23.8
	16QAM	1	0	24.0	23.9	24.0
		1	12	24.0	24.0	23.9
		1	24	24.0	24.0	23.8
		12	0	22.9	23.0	22.9
		12	6	23.0	23.0	22.9
		12	11	22.9	23.0	22.9
		25	0	22.9	22.9	22.8
	64QAM	1	0	22.6	22.3	22.5
		1	12	22.5	22.2	22.5
		1	24	22.5	22.2	22.4
		12	0	21.7	21.9	21.8
		12	6	21.8	21.9	21.9
		12	11	21.7	21.9	21.8
		25	0	21.8	21.8	21.8

OUTPUT POWER FOR LTE BAND 17 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				23780	23790	23800
				709.0 MHz	710.0 MHz	711.0 MHz
10.0	QPSK	1	0		24.7	
		1	24		24.8	
		1	49		24.8	
		25	0		23.8	
		25	12		23.9	
		25	24		23.8	
		50	0		23.8	
	16QAM	1	0		23.7	
		1	24		23.7	
		1	49		23.7	
		25	0		22.6	
		25	12		22.6	
		25	24		22.5	
		50	0		22.9	
	64QAM	1	0		22.5	
		1	24		22.4	
		1	49		22.5	
		25	0		22.0	
		25	12		22.0	
		25	24		21.9	
		50	0		21.5	

7.3.8. LTE BAND 26

ID:	37433	Date:	1/8/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 26 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26697	26740	26783
				814.7 MHz	819.0 MHz	823.3 MHz
1.4	QPSK	1	0	24.5	24.7	24.7
		1	2	24.6	24.8	24.7
		1	5	24.5	24.7	24.7
		3	0	24.5	24.7	24.6
		3	1	24.6	24.7	24.7
		3	2	24.5	24.7	24.6
		6	0	23.6	23.7	23.7
	16QAM	1	0	23.6	24.1	23.8
		1	2	23.7	24.1	23.8
		1	5	23.6	24.1	23.7
		3	0	23.7	23.9	23.7
		3	1	23.8	24.0	23.7
		3	2	23.8	24.0	23.8
		6	0	22.8	22.7	22.8
	64QAM	1	0	22.5	22.4	22.2
		1	2	22.6	22.5	22.3
		1	5	22.5	22.4	22.2
		3	0	22.9	22.6	22.8
		3	1	23.0	22.7	22.8
		3	2	23.0	22.7	22.8
		6	0	21.6	21.8	21.9

OUTPUT POWER FOR LTE BAND 26 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26705	26740	26775
				815.5 MHz	819.0 MHz	822.5 MHz
3.0	QPSK	1	0	24.5	24.6	24.6
		1	7	24.6	24.7	24.6
		1	14	24.6	24.6	24.6
		8	0	23.5	23.6	23.6
		8	4	23.7	23.7	23.6
		8	7	23.6	23.7	23.6
		15	0	23.6	23.6	23.6
	16QAM	1	0	23.6	24.0	23.6
		1	7	23.7	24.1	23.6
		1	14	23.7	24.0	23.4
		8	0	22.6	22.8	22.7
		8	4	22.8	22.8	22.8
		8	7	22.8	22.8	22.8
		15	0	22.7	22.7	22.7
	64QAM	1	0	22.3	22.5	22.4
		1	7	22.3	22.6	22.4
		1	14	22.3	22.5	22.3
		8	0	21.7	21.9	21.7
		8	4	21.9	21.9	21.7
		8	7	21.9	21.9	21.7
		15	0	21.8	21.8	21.8

OUTPUT POWER FOR LTE BAND 26 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26715	26740	26765
				816.5 MHz	819.0 MHz	821.5 MHz
5.0	QPSK	1	0	24.6	24.6	24.8
		1	12	24.7	24.6	24.7
		1	24	24.7	24.7	24.7
		12	0	23.4	23.4	23.3
		12	6	23.5	23.4	23.3
		12	11	23.4	23.4	23.3
		25	0	23.8	23.7	23.7
	16QAM	1	0	23.8	24.2	24.0
		1	12	23.8	24.2	23.8
		1	24	23.9	24.3	23.7
		12	0	22.8	22.9	22.8
		12	6	22.9	22.9	22.8
		12	11	22.8	22.8	22.7
		25	0	22.8	22.8	22.7
	64QAM	1	0	22.5	22.2	22.5
		1	12	22.6	22.2	22.4
		1	24	22.6	22.3	22.4
		12	0	21.3	21.4	21.3
		12	6	21.4	21.4	21.3
		12	11	21.4	21.3	21.3
		25	0	21.9	21.8	21.8

OUTPUT POWER FOR LTE BAND 26 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26840	26915	26990
				829.0 MHz	836.5 MHz	844.0 MHz
10.0	QPSK	1	0	24.6	24.7	24.7
		1	24	24.6	24.7	24.5
		1	49	24.7	24.7	24.4
		25	0	23.8	23.8	23.6
		25	12	23.7	23.7	23.6
		25	24	23.7	23.6	23.5
		50	0	23.4	23.4	23.3
	16QAM	1	0	23.7	24.0	23.6
		1	24	23.7	24.0	23.5
		1	49	23.7	24.0	23.3
		25	0	22.9	22.8	22.7
		25	12	22.8	22.8	22.7
		25	24	22.9	22.7	22.6
		50	0	22.3	22.4	22.2
	64QAM	1	0	22.3	22.6	22.4
		1	24	22.4	22.5	22.3
		1	49	22.4	22.6	22.2
		25	0	21.9	21.9	21.8
		25	12	21.9	21.8	21.8
		25	24	21.9	21.8	21.7
		50	0	21.3	21.3	21.2

OUTPUT POWER FOR LTE BAND 26 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				26865 831.5 MHz	26915 836.5 MHz	26965 841.5 MHz
15.0	QPSK	1	0		24.7	
		1	37		24.8	
		1	74		24.6	
		36	0		23.7	
		36	16		23.7	
		36	35		23.6	
		75	0		23.7	
	16QAM	1	0		24.1	
		1	37		24.1	
		1	74		24.0	
		36	0		22.9	
		36	16		22.9	
		36	35		22.8	
		75	0		22.3	
	64QAM	1	0		22.5	
		1	37		22.6	
		1	74		22.5	
		36	0		21.4	
		36	16		21.4	
		36	35		21.4	
		75	0		21.4	

7.3.9. LTE BAND 41

ID:	40814	Date:	1/2/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 41 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				39675	40620	41565
				2498.5 MHz	2593.0 MHz	2687.5 MHz
5.0	QPSK	1	0	21.5	21.4	21.3
		1	12	21.3	21.4	21.2
		1	24	21.3	21.4	21.2
		12	0	21.5	21.5	21.3
		12	6	21.5	21.5	21.3
		12	11	21.4	21.4	21.2
		25	0	21.4	21.4	21.3
	16QAM	1	0	20.9	21.1	20.8
		1	12	20.9	21.0	20.8
		1	24	20.8	21.0	20.7
		12	0	21.1	21.1	20.8
		12	6	21.1	21.1	20.8
		12	11	21.1	21.1	20.8
		25	0	21.1	21.0	20.9
	64QAM	1	0	20.5	21.2	21.2
		1	12	20.5	21.1	21.2
		1	24	20.5	21.1	21.2
		12	0	20.8	21.0	20.9
		12	6	20.9	21.0	21.0
		12	11	20.9	21.0	20.9
		25	0	21.0	21.0	20.8

OUTPUT POWER FOR LTE BAND 41 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				39700	40620	41540
				2501.0 MHz	2593.0 MHz	2685.0 MHz
10.0	QPSK	1	0	21.3	21.3	21.4
		1	24	21.2	21.4	21.2
		1	49	21.2	21.4	21.1
		25	0	21.3	21.5	21.4
		25	12	21.4	21.5	21.3
		25	24	21.4	21.4	21.1
		50	0	21.4	21.5	21.2
	16QAM	1	0	20.9	20.8	21.1
		1	24	20.7	20.9	20.9
		1	49	20.8	20.9	20.8
		25	0	20.9	21.1	20.9
		25	12	21.0	21.0	20.9
		25	24	20.9	21.0	20.7
		50	0	21.0	21.1	20.8
	64QAM	1	0	21.2	20.6	21.0
		1	24	21.0	20.6	20.9
		1	49	21.1	20.6	20.7
		25	0	20.9	21.1	20.8
		25	12	21.0	21.1	20.8
		25	24	20.9	21.1	20.6
		50	0	20.9	21.1	20.8

OUTPUT POWER FOR LTE BAND 41 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				39700	40620	41540
				2503.5 MHz	2593.0 MHz	2682.5MHz
15.0	QPSK	1	0	21.2	21.4	21.3
		1	37	21.2	21.4	21.3
		1	74	21.2	21.3	21.0
		36	0	21.3	21.5	21.2
		36	16	21.4	21.5	21.2
		36	35	21.3	21.4	21.1
		75	0	21.4	21.5	21.2
	16QAM	1	0	20.8	21.0	21.0
		1	37	20.7	20.9	20.8
		1	74	20.8	20.8	20.7
		36	0	20.9	21.1	20.9
		36	16	21.0	21.1	20.8
		36	35	20.9	21.0	20.7
		75	0	21.0	21.1	20.8
	64QAM	1	0	21.1	20.6	20.8
		1	37	21.0	20.6	20.6
		1	74	21.1	20.5	20.5
		36	0	21.0	21.2	20.8
		36	16	21.1	21.1	20.8
		36	35	21.0	21.1	20.7
		75	0	21.0	21.1	20.8

OUTPUT POWER FOR LTE BAND 41 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				39750	40620	41490
				2506 MHz	2593.0 MHz	2680MHz
20.0	QPSK	1	0	21.4	21.5	21.4
		1	49	21.2	21.4	21.3
		1	99	21.2	21.3	21.0
		50	0	21.4	21.6	21.3
		50	24	21.4	21.5	21.2
		50	49	21.3	21.5	21.1
		100	0	21.4	21.5	21.2
	16QAM	1	0	20.7	21.0	21.1
		1	49	20.7	20.9	20.9
		1	99	20.7	20.9	20.7
		50	0	21.0	21.1	20.9
		50	24	21.0	21.1	20.8
		50	49	20.9	21.0	20.8
		100	0	21.0	21.1	20.8
	64QAM	1	0	20.9	21.5	21.0
		1	49	20.7	21.4	20.9
		1	99	20.8	21.3	20.7
		50	0	21.0	21.2	20.9
		50	24	21.0	21.1	20.8
		50	49	20.9	21.1	20.8
		100	0	21.0	21.1	20.8

7.3.10. LTE BAND 66

ID:	37433	Date:	1/8/18
-----	-------	-------	--------

OUTPUT POWER FOR LTE BAND 66 (1.4 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				131997	132322	132647
				1710.7 MHz	1745 MHz	1779.3 MHz
1.4	QPSK	1	0	21.5	21.7	21.5
		1	3	21.5	21.6	21.6
		1	5	21.5	21.6	21.5
		3	0	21.5	21.6	21.4
		3	1	21.6	21.6	21.4
		3	3	21.6	21.6	21.4
	16QAM	6	0	21.5	21.5	21.4
		1	0	21.1	21.5	21.1
		1	3	21.2	21.5	21.1
		1	5	21.2	21.5	21.0
		3	0	21.3	21.4	21.1
		3	1	21.4	21.4	21.1
	64QAM	3	3	21.4	21.4	21.1
		6	0	21.3	21.1	21.2
		1	0	21.1	21.2	21.4
		1	3	21.2	21.3	21.5
		1	5	21.1	21.1	21.4
		3	0	20.9	21.2	21.3
		3	1	20.9	21.3	21.4
		3	3	21.0	21.3	21.4
		6	0	21.0	21.4	21.0

OUTPUT POWER FOR LTE BAND 66 (3.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				132022	132322	132622
				1711.5 MHz	1745 MHz	1778.5 MHz
3.0	QPSK	1	0	21.7	21.6	21.5
		1	8	21.8	21.7	21.6
		1	14	21.6	21.6	21.5
		8	0	21.6	21.6	21.5
		8	4	21.6	21.7	21.5
		8	7	21.6	21.7	21.5
	16QAM	15	0	21.6	21.7	21.5
		1	0	21.6	21.2	21.2
		1	8	21.7	21.2	21.2
		1	14	21.6	21.0	21.1
		8	0	21.3	21.4	21.2
		8	4	21.3	21.4	21.2
	64QAM	8	7	21.3	21.4	21.2
		15	0	21.3	21.3	21.1
		1	0	21.2	21.3	21.3
		1	8	21.3	21.4	21.5
		1	14	21.2	21.3	21.3
		8	0	21.0	21.2	21.1
		8	4	21.0	21.2	21.2
		8	7	21.0	21.2	21.2
		15	0	21.1	21.2	21.1

OUTPUT POWER FOR LTE BAND 66 (5.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				131997	132322	132647
				1712.5 MHz	1745 MHz	1777.5 MHz
5.0	QPSK	1	0	21.7	21.8	21.7
		1	12	21.6	21.7	21.6
		1	24	21.6	21.7	21.5
		12	0	21.3	21.4	21.2
		12	6	21.4	21.4	21.3
		12	11	21.3	21.3	21.2
		25	0	21.7	21.7	21.6
	16QAM	1	0	21.7	21.5	21.3
		1	12	21.7	21.4	21.2
		1	24	21.7	21.4	21.3
		12	0	21.4	21.4	21.2
		12	6	21.4	21.4	21.3
		12	11	21.4	21.4	21.2
		25	0	21.3	21.3	21.1
	64QAM	1	0	21.3	21.5	21.0
		1	12	21.2	21.5	21.0
		1	24	21.3	21.5	21.0
		12	0	21.1	21.1	21.1
		12	6	21.1	21.2	21.1
		12	11	21.1	21.1	21.1
		25	0	21.1	21.2	21.1

OUTPUT POWER FOR LTE BAND 66 (10.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				132022	132322	132622
				1715 MHz	1745 MHz	1775 MHz
10.0	QPSK	1	0	21.9	21.7	21.6
		1	24	21.7	21.7	21.5
		1	49	21.7	21.6	21.5
		25	0	21.6	21.5	21.4
		25	12	21.5	21.5	21.4
		25	24	21.5	21.4	21.3
		50	0	21.8	21.7	21.7
	16QAM	1	0	21.8	21.2	21.3
		1	24	21.7	21.1	21.2
		1	49	21.6	21.1	21.1
		25	0	21.5	21.4	21.4
		25	12	21.4	21.4	21.3
		25	24	21.4	21.3	21.3
		50	0	21.4	21.3	21.3
	64QAM	1	0	21.4	21.2	21.4
		1	24	21.3	21.3	21.3
		1	49	21.3	21.3	21.3
		25	0	21.3	21.3	21.2
		25	12	21.3	21.3	21.2
		25	24	21.3	21.3	21.2
		50	0	21.2	21.3	21.1

OUTPUT POWER FOR LTE BAND 66 (15.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				132047	132322	132597
				1717.5 MHz	1745 MHz	1772.5 MHz
15.0	QPSK	1	0	21.9	21.5	21.5
		1	37	21.4	21.4	21.3
		1	74	21.4	21.3	21.2
		36	0	21.5	21.5	21.4
		36	16	21.4	21.4	21.3
		36	35	21.4	21.4	21.2
		75	0	21.5	21.4	21.3
	16QAM	1	0	21.7	21.3	21.8
		1	37	21.7	21.2	21.6
		1	74	21.6	21.2	21.4
		36	0	21.5	21.4	21.3
		36	16	21.4	21.3	21.2
		36	35	21.4	21.3	21.2
		75	0	21.4	21.3	21.3
	64QAM	1	0	21.5	21.0	21.2
		1	37	21.4	21.0	21.1
		1	74	21.4	21.0	21.1
		36	0	21.2	21.3	21.2
		36	16	21.2	21.3	21.2
		36	35	21.2	21.3	21.2
		75	0	21.2	21.3	21.2

OUTPUT POWER FOR LTE BAND 66 (20.0 MHz)

Bandwidth (MHz)	Modulation	RB Allocation	RB Offset	Power		
				Conducted Average (dBm)		
				132072	132322	132572
				1720 MHz	1745 MHz	1770 MHz
20.0	QPSK	1	0	22.0	21.6	21.6
		1	49	21.4	21.3	21.3
		1	99	21.3	21.3	21.1
		50	0	21.6	21.5	21.4
		50	24	21.5	21.5	21.3
		50	49	21.5	21.4	21.3
		100	0	21.6	21.4	21.4
	16QAM	1	0	21.9	21.9	21.8
		1	49	21.7	21.8	21.5
		1	99	21.7	21.7	21.4
		50	0	21.5	21.5	21.3
		50	24	21.4	21.4	21.3
		50	49	21.5	21.3	21.2
		100	0	21.5	21.4	21.3
	64QAM	1	0	21.2	21.6	21.3
		1	49	21.0	21.5	21.1
		1	99	21.1	21.5	21.1
		50	0	21.3	21.3	21.3
		50	24	21.2	21.3	21.3
		50	49	21.3	21.3	21.2
		100	0	21.3	21.3	21.2

8. CONDUCTED TEST RESULTS

8.1. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only.

TEST PROCEDURE

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the middle channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

MODES TESTED

- GSM 850
- GSM 1900
- WCDM Band 2
- WCDM Band 4
- WCDM Band 5
- LTE Band 2
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 26
- LTE Band 41
- LTE Band 66

RESULTS

There is no limit required and power is the same for low, middle and high channel; therefore, only middle channel was tested.

GSM

Band	Modulation	Channel	f(MHz)	99% BW (KHz)	-26dB BW (KHz)
850MHz	GPRS	190	836.6	247.577	314.337
	EGPRS			242.557	309.833
1900MHz	GPRS	661	1880.0	250.114	321.614
	EGPRS			245.904	316.954

WCDMA

Band	Modulation	Channel	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
BAND 5	REL 99	4408	836.6	4.117	4.708
	HSDPA			4.109	4.684
BAND 2	REL 99	9800	1880.0	4.144	4.689
	HSDPA			4.133	4.682
BAND 4	REL 99	1638	1732.6	4.144	4.664
	HSDPA			4.125	4.680

LTE BAND 2

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 2	1.4 MHz, QPSK	6/0	1880.0	1.086	1.228
	1.4 MHz,16QAM			1.086	1.232
	3 MHz, QPSK	15/0		2.677	2.958
	3 MHz, 16QAM			2.683	2.947
	5 MHz, QPSK	25/0		4.484	4.903
	5 MHz, 16QAM			4.492	4.890
	10 MHz, QPSK	50/0		8.935	9.774
	10 MHz, 16QAM			8.970	9.719
	15 MHz, QPSK	75/0		13.390	14.379
	15 MHz, 16QAM			13.377	14.502
	20 MHz, QPSK	100/0		17.860	19.200
	20 MHz, 16QAM			17.864	19.262

LTE BAND 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

LTE BAND 5

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 5	1.4 MHz, QPSK	6/0	836.5	1.087	1.228
	1.4 MHz,16QAM			1.093	1.243
	3 MHz, QPSK	15/0		2.689	2.962
	3 MHz, 16QAM			2.688	2.962
	5 MHz, QPSK	25/0		4.490	4.914
	5 MHz, 16QAM			4.500	4.901
	10 MHz, QPSK	50/0		8.946	9.776
	10 MHz, 16QAM			8.940	9.567

LTE BAND 7

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 7	5 MHz, QPSK	25/0	2535.0	4.486	4.956
	5 MHz, 16QAM			4.485	4.940
	10 MHz, QPSK	50/0		8.960	9.671
	10 MHz, 16QAM			8.960	9.751
	15 MHz, QPSK	75/0		13.401	14.486
	15 MHz, 16QAM			13.413	14.361
	20 MHz, QPSK	100/0		17.854	19.267
	20 MHz, 16QAM			17.820	19.189

LTE BAND 12

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 12	1.4 MHz, QPSK	6/0	707.5	1.084	1.228
	1.4 MHz,16QAM			1.086	1.239
	3 MHz, QPSK	15/0		2.688	2.947
	3 MHz, 16QAM			2.688	2.949
	5 MHz, QPSK	25/0		4.503	4.925
	5 MHz, 16QAM			4.492	4.921
	10 MHz, QPSK	50/0		8.975	9.658
	10 MHz, 16QAM			8.927	9.690

LTE BAND 13

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 13	5 MHz, QPSK	25/0	782.0	4.523	4.928
	5 MHz, 16QAM			4.508	4.959
	10 MHz, QPSK	50/0		8.950	9.783
	10 MHz, 16QAM			8.931	9.771

LTE BAND 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth (5 & 10 MHz).

LTE BAND 26

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
	1.4 MHz, QPSK	6/0	831.5	1.085	1.229
	1.4 MHz,16QAM			1.086	1.225
	3 MHz, QPSK	15/0		2.683	3.003
	3 MHz, 16QAM			2.684	2.978
	5 MHz, QPSK	25/0		4.494	4.894
	5 MHz, 16QAM			4.505	4.947
	10 MHz, QPSK	50/0		8.942	9.851
	10 MHz, 16QAM			8.959	9.684
	15 MHz, QPSK	75/0		13.398	14.303
	15 MHz, 16OAM			13.399	14.411


LTE BAND 41

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 41	5 MHz, QPSK	25/0	2593.0	4.506	4.967
	5 MHz, 16QAM			4.475	4.872
	10 MHz, QPSK	50/0		8.959	9.589
	10 MHz, 16QAM			8.959	9.579
	15 MHz, QPSK	75/0		13.408	14.309
	15 MHz, 16QAM			13.400	14.361
	20 MHz, QPSK	100/0		17.868	19.069
	20 MHz, 16QAM			17.855	19.187


LTE BAND 66

Band	Mode	RB Allocation/RB Offset	f(MHz)	99% BW (MHz)	-26dB BW (MHz)
LTE BAND 66	1.4 MHz, QPSK	6/0	1745.0	1.083	1.217
	1.4 MHz,16QAM			1.084	1.221
	3 MHz, QPSK	15/0		2.681	2.956
	3 MHz, 16QAM			2.685	2.964
	5 MHz, QPSK	25/0		4.496	4.897
	5 MHz, 16QAM			4.491	4.880
	10 MHz, QPSK	50/0		8.961	9.657
	10 MHz, 16QAM			8.950	9.582
	15 MHz, QPSK	75/0		13.448	14.425
	15 MHz, 16QAM			13.400	14.495
	20 MHz, QPSK	100/0		17.824	19.151
	20 MHz, 16QAM			17.828	19.130


8.1.1. GSM

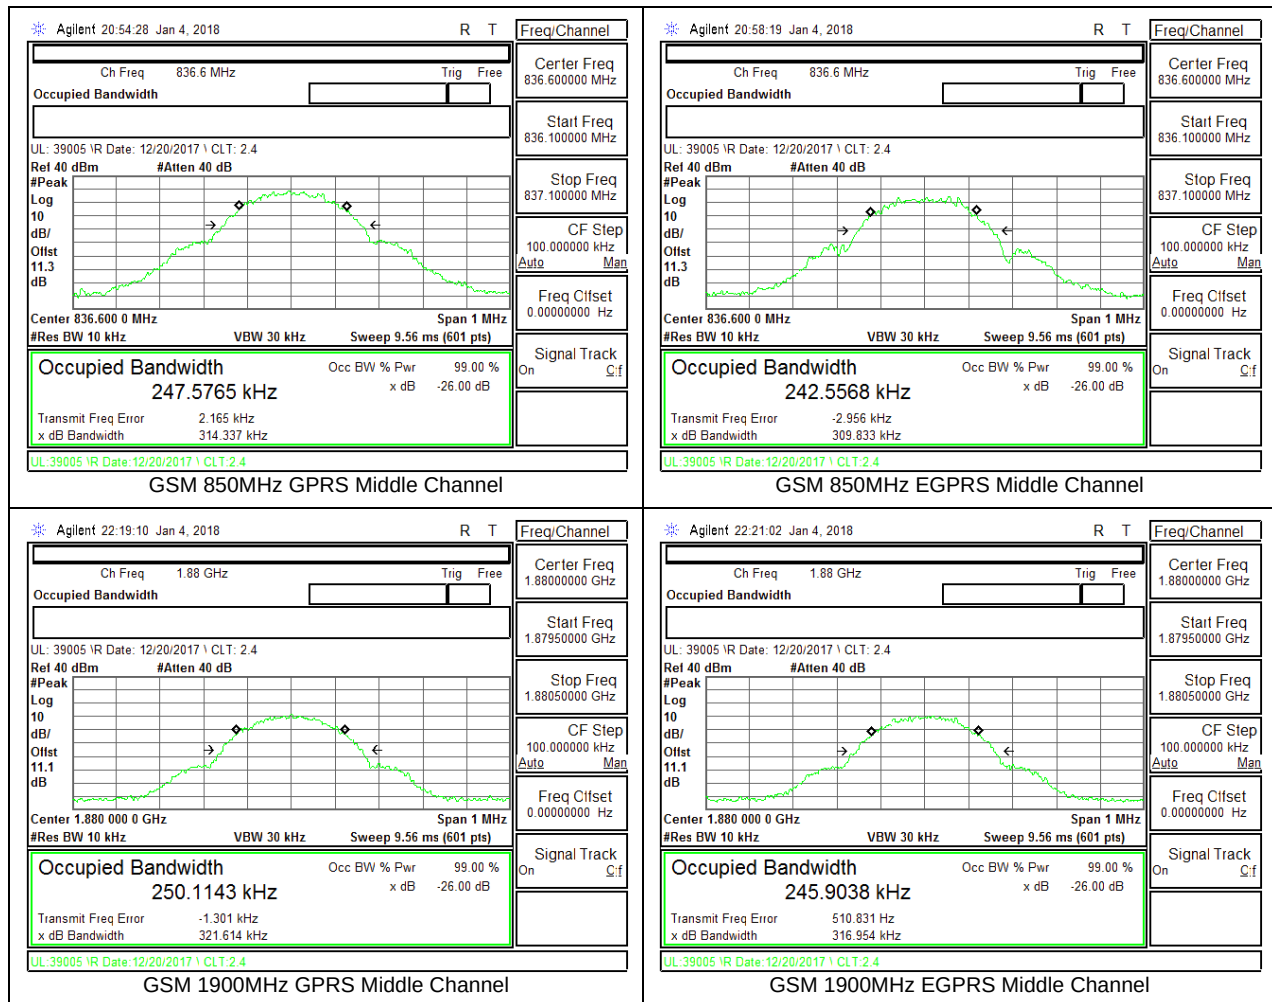


8.1.2. WCDMA

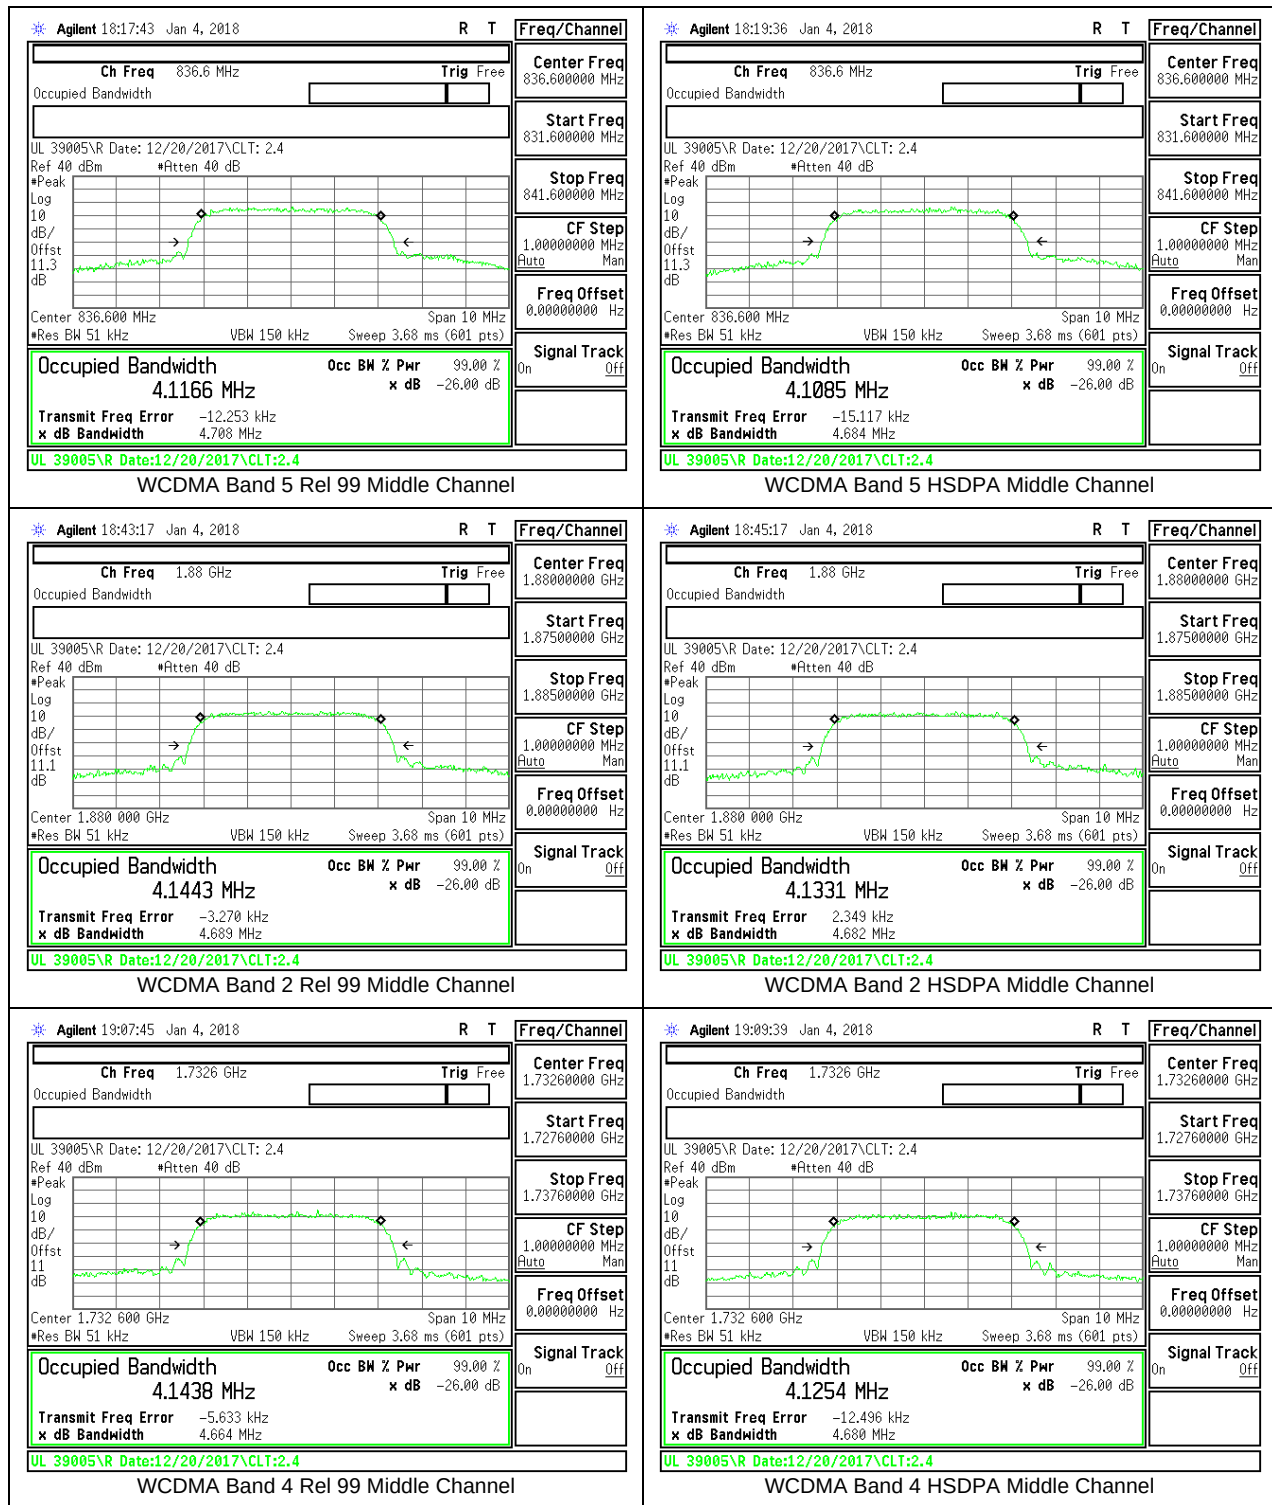



8.1.3. LTE BAND 2

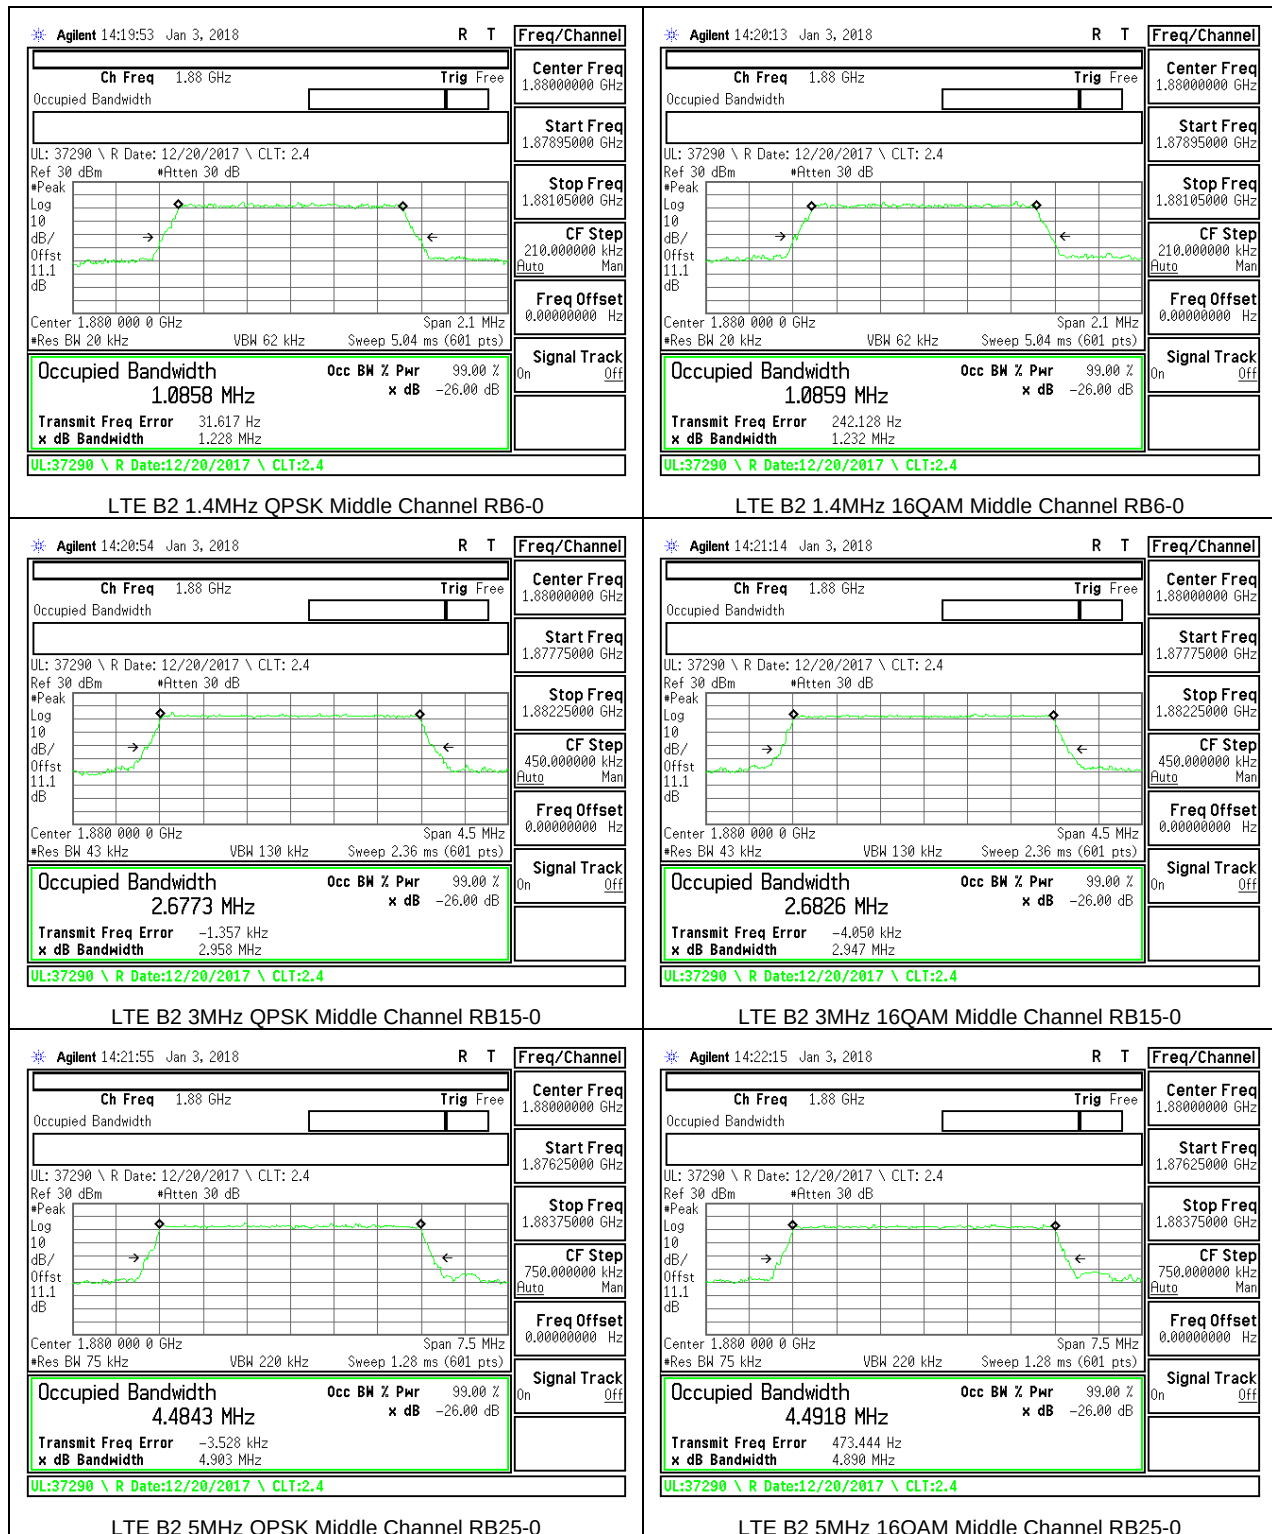

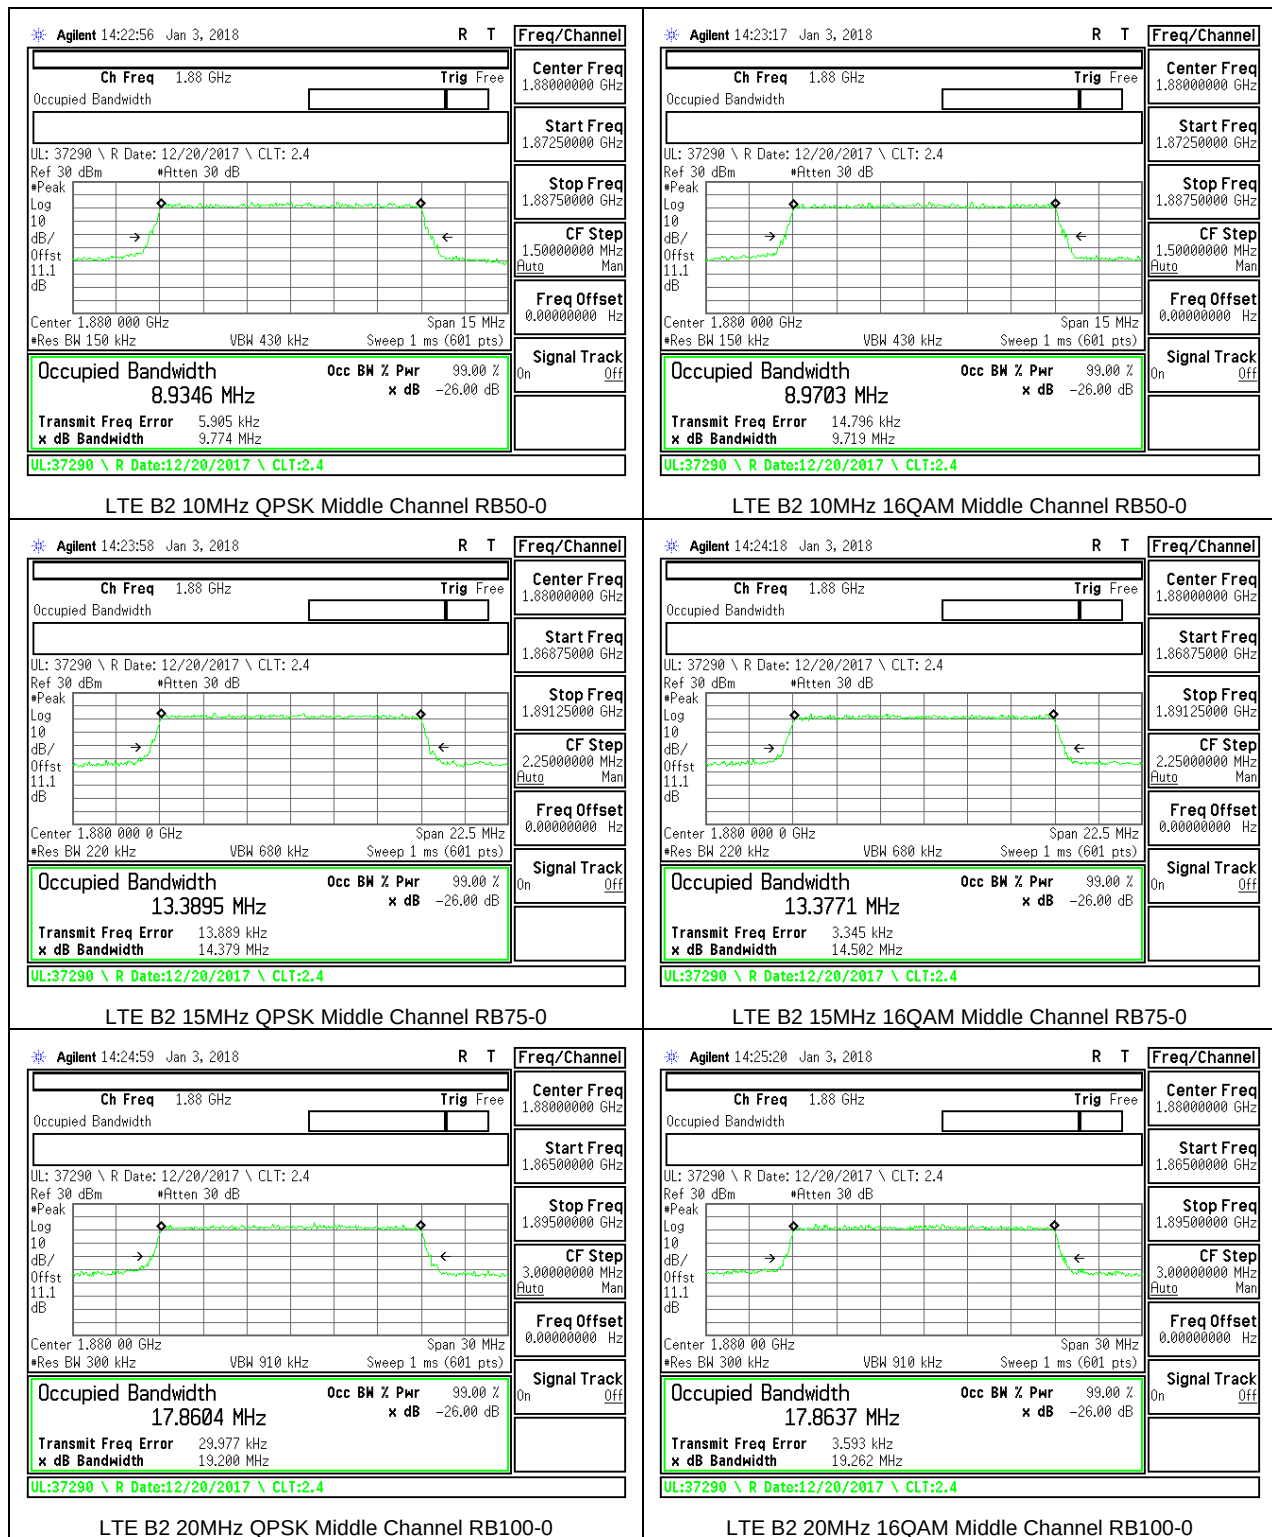



8.1.4. LTE BAND 5

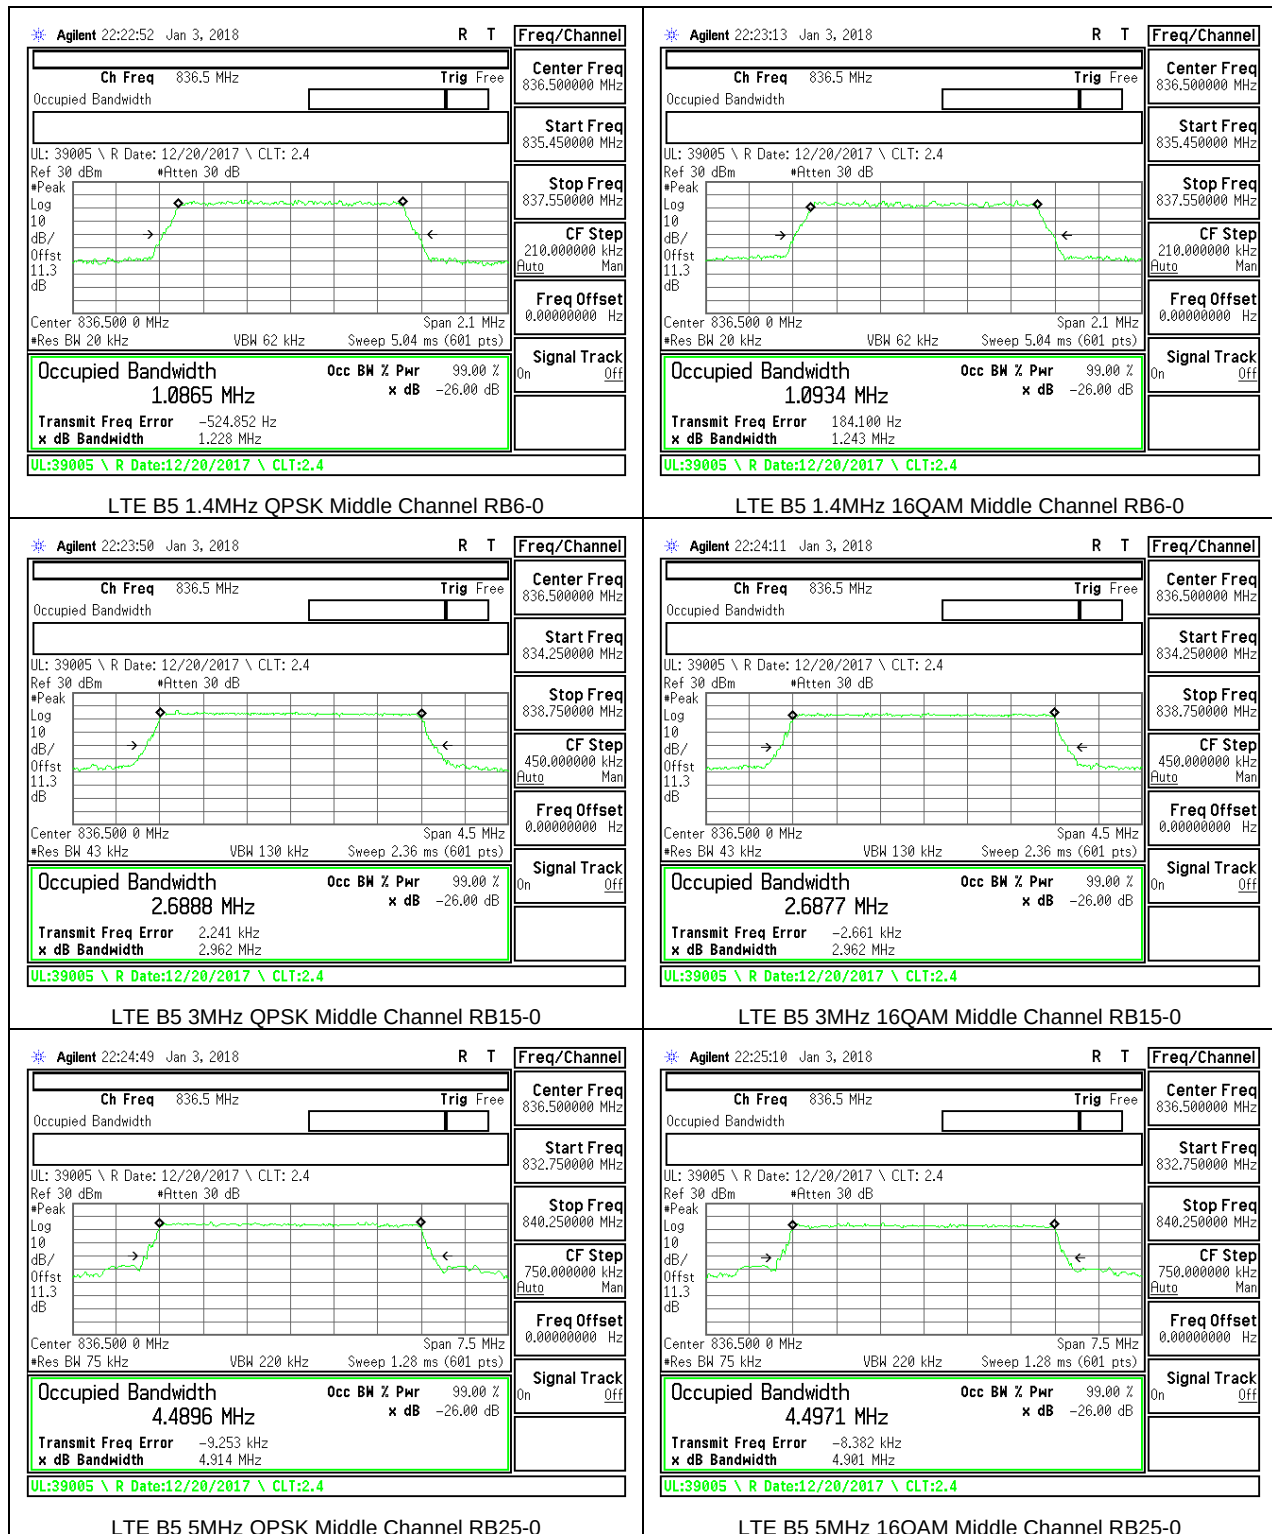

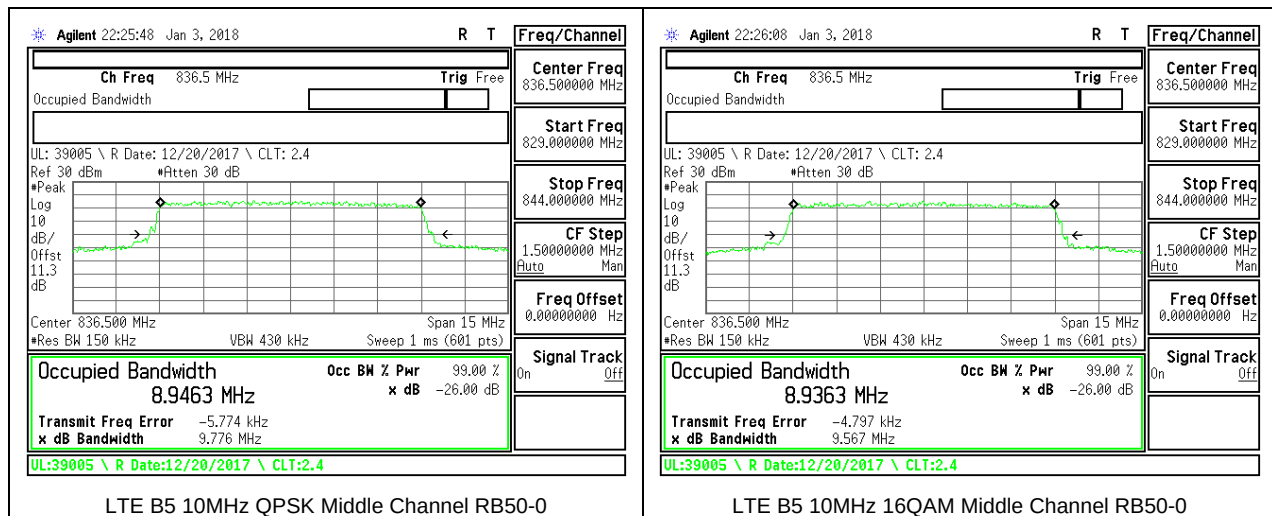



8.1.5. LTE BAND 7

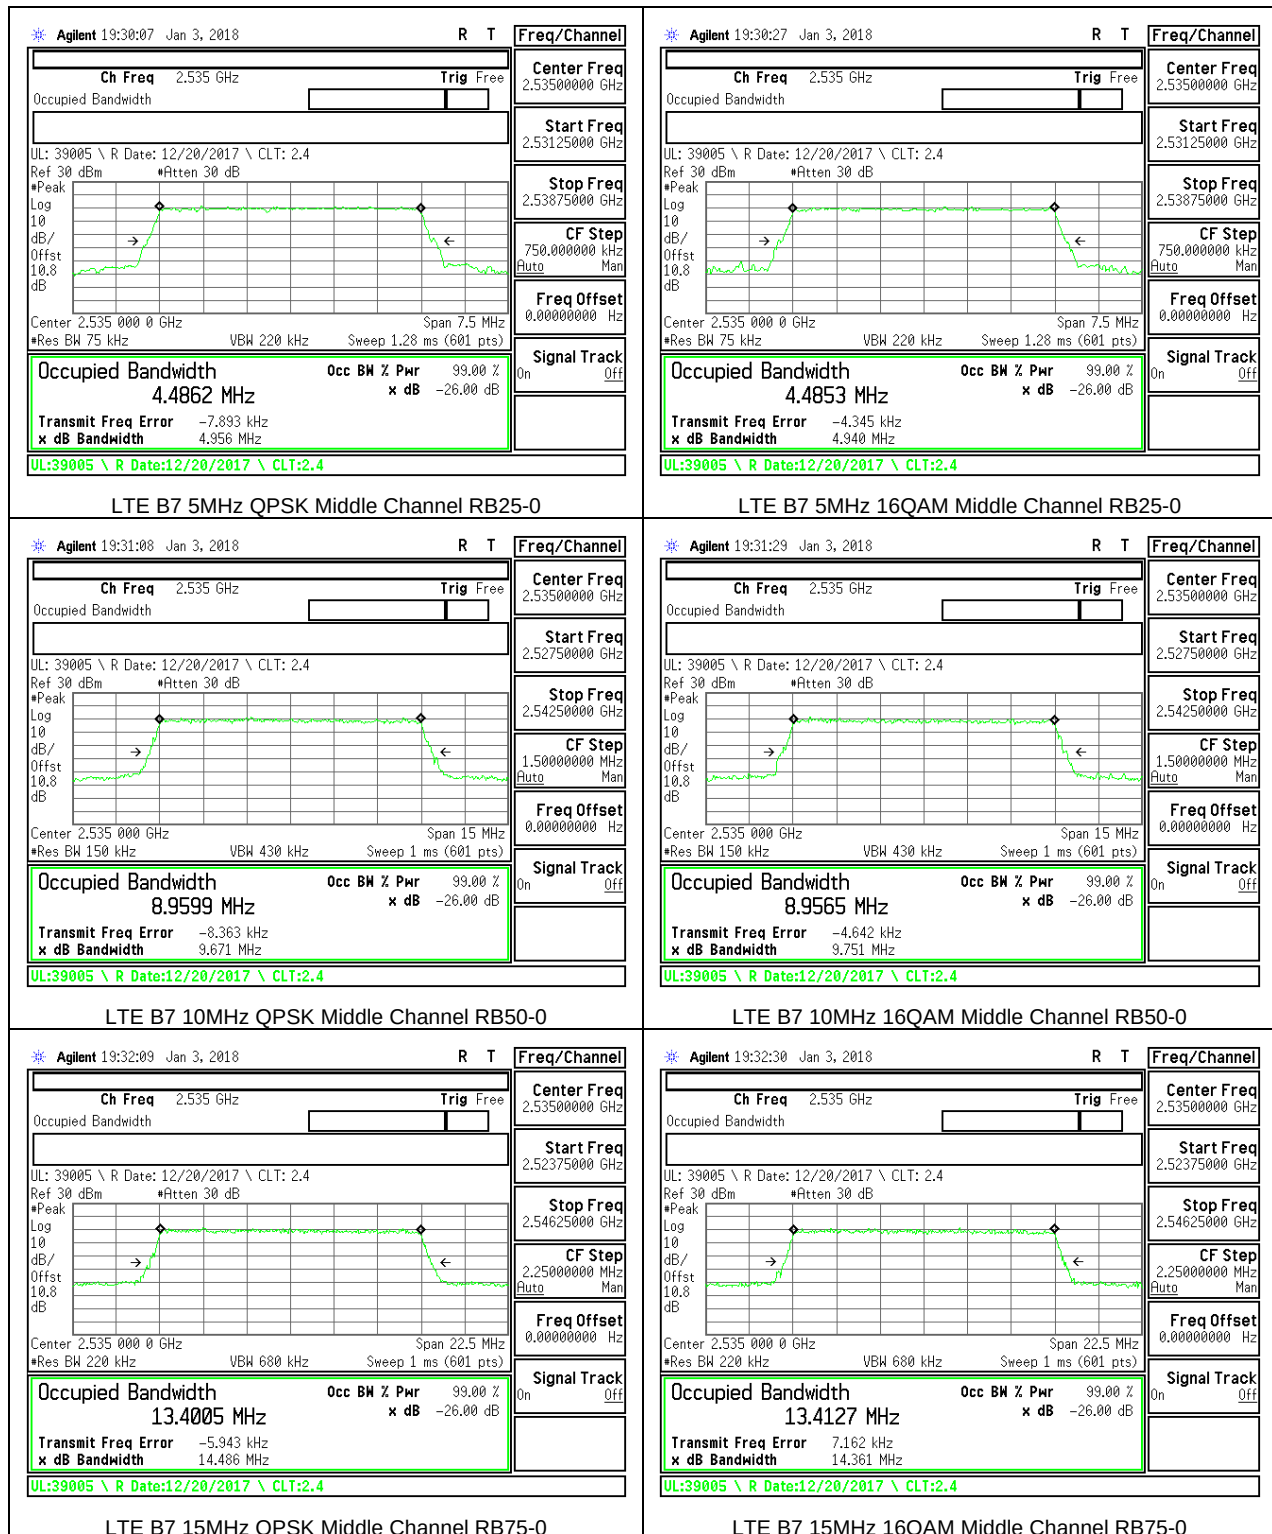

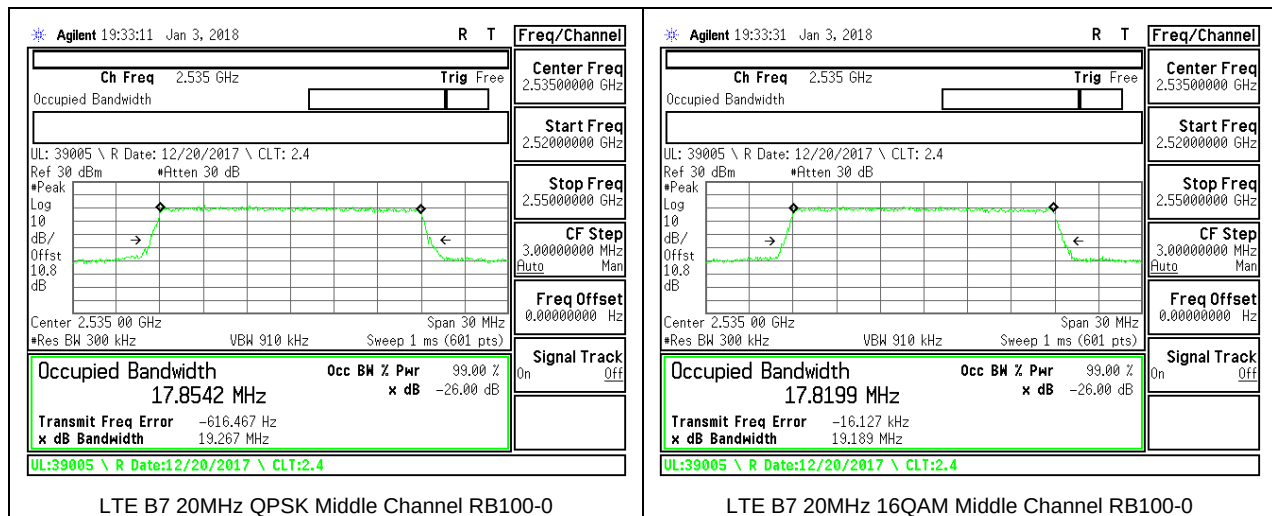


8.1.6. LTE BAND 12

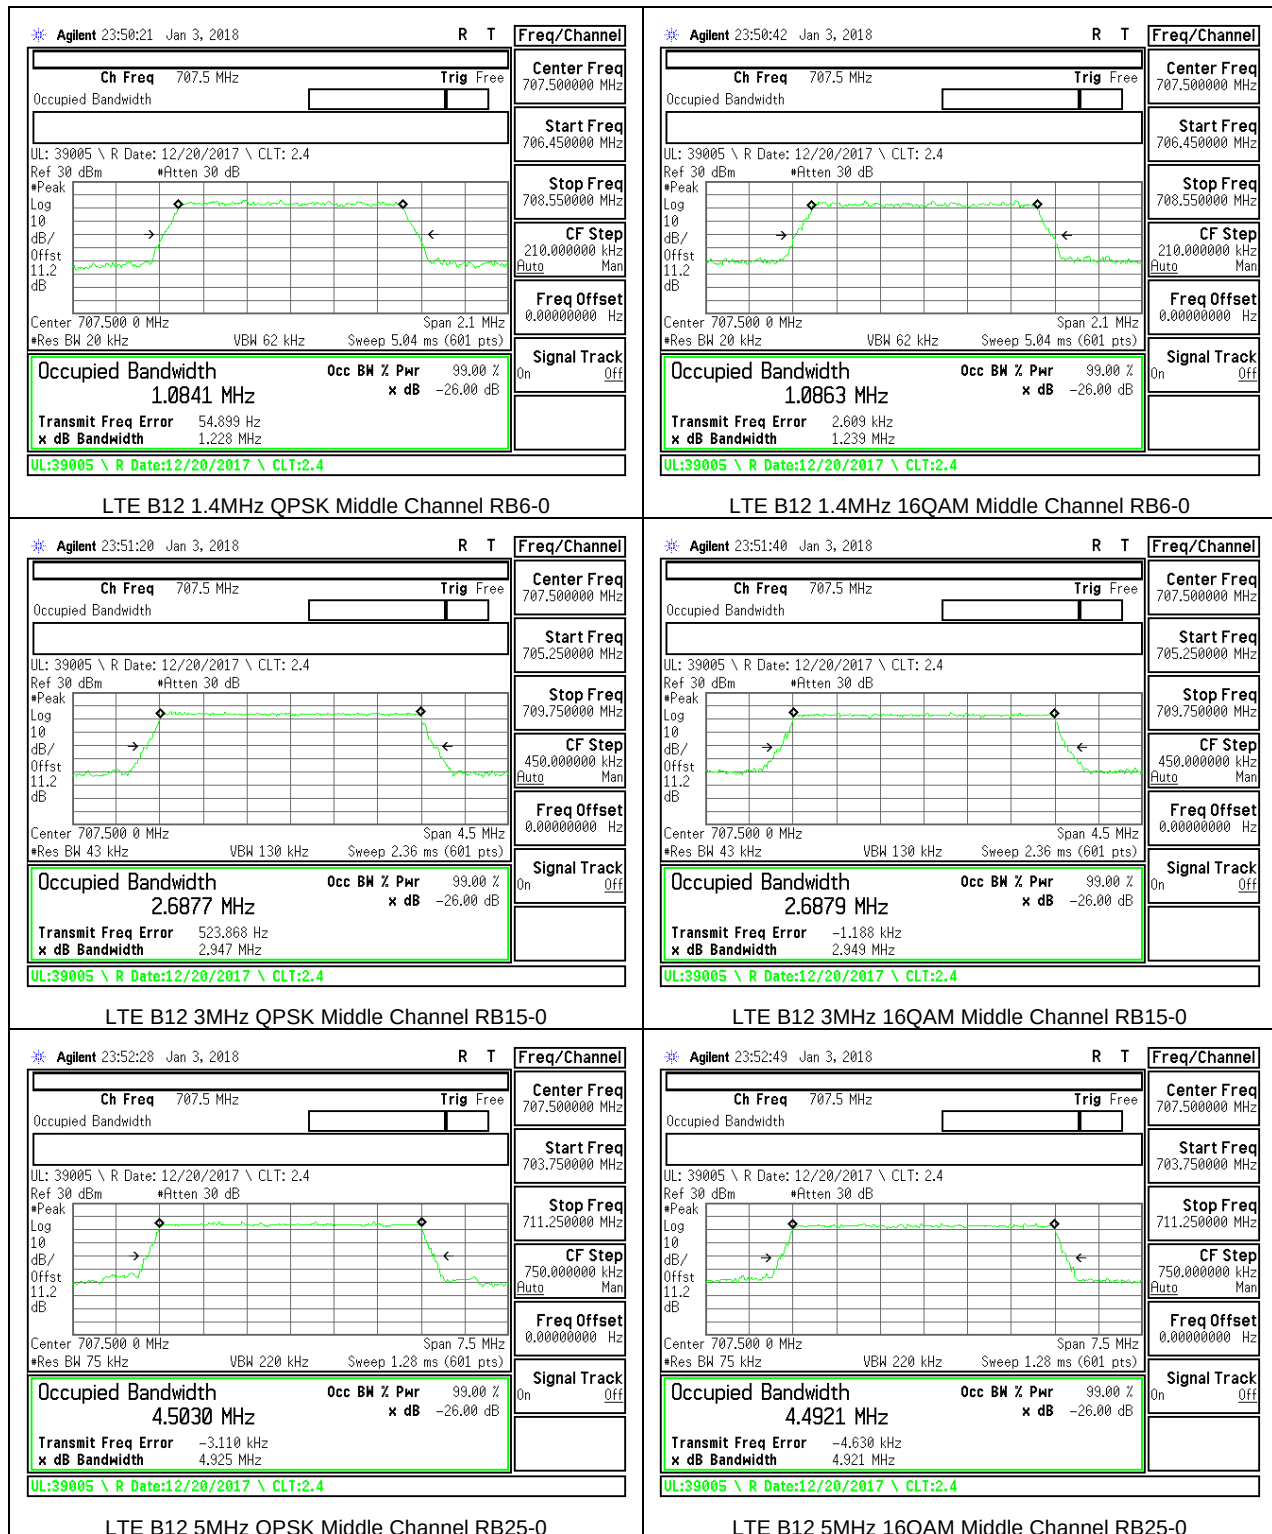


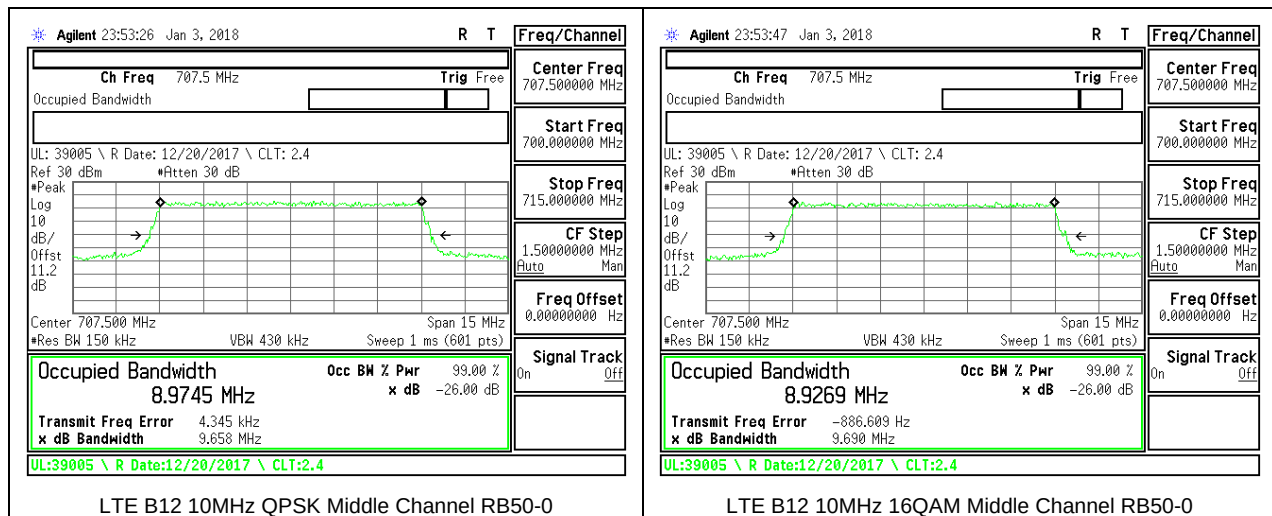


8.1.7. LTE BAND 13

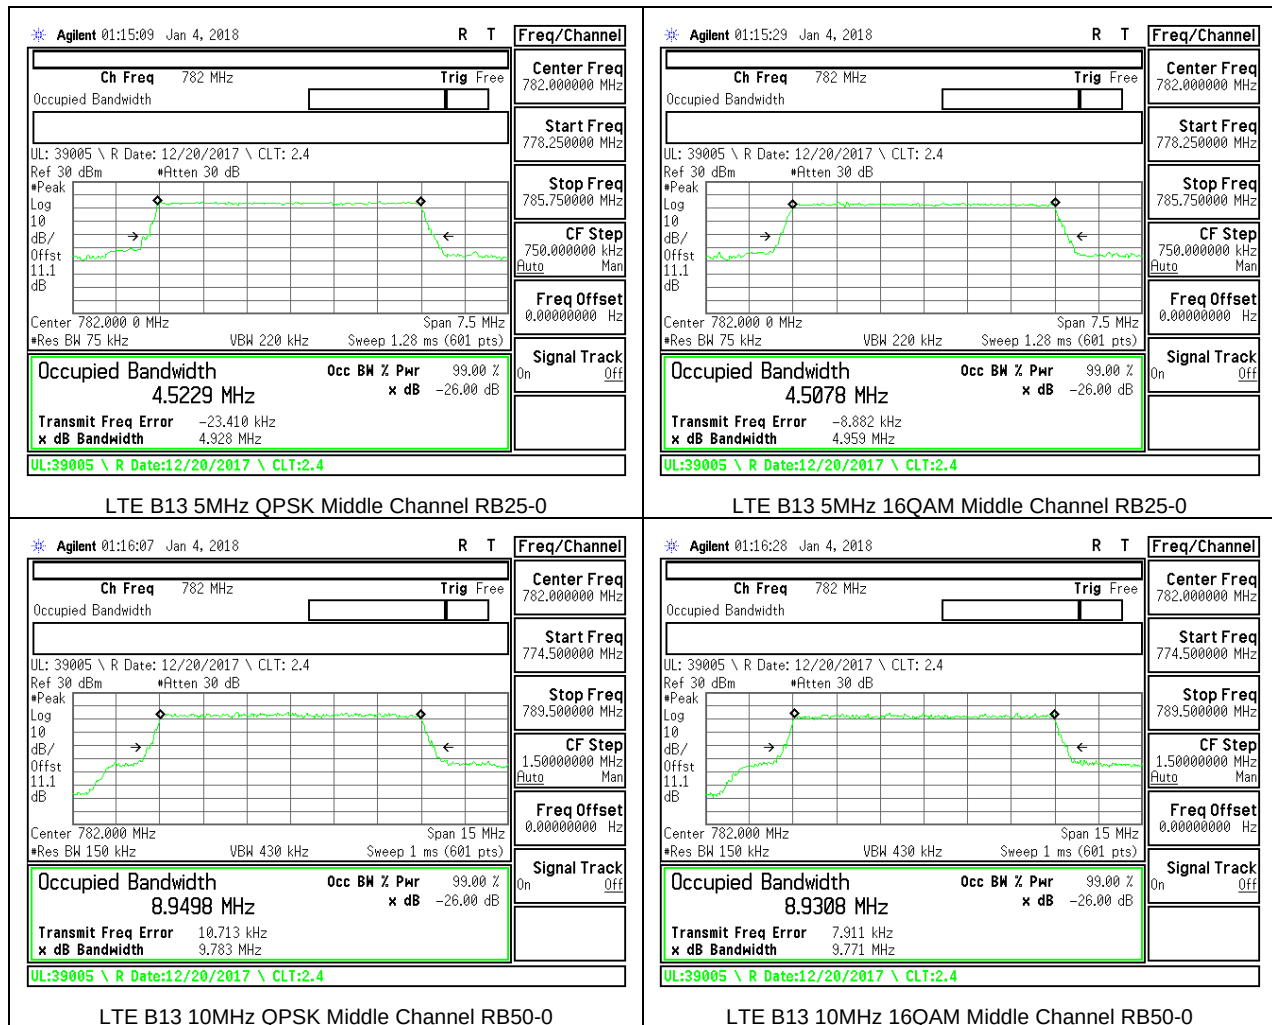


8.1.8. LTE BAND 26 (FCC PART 90S)

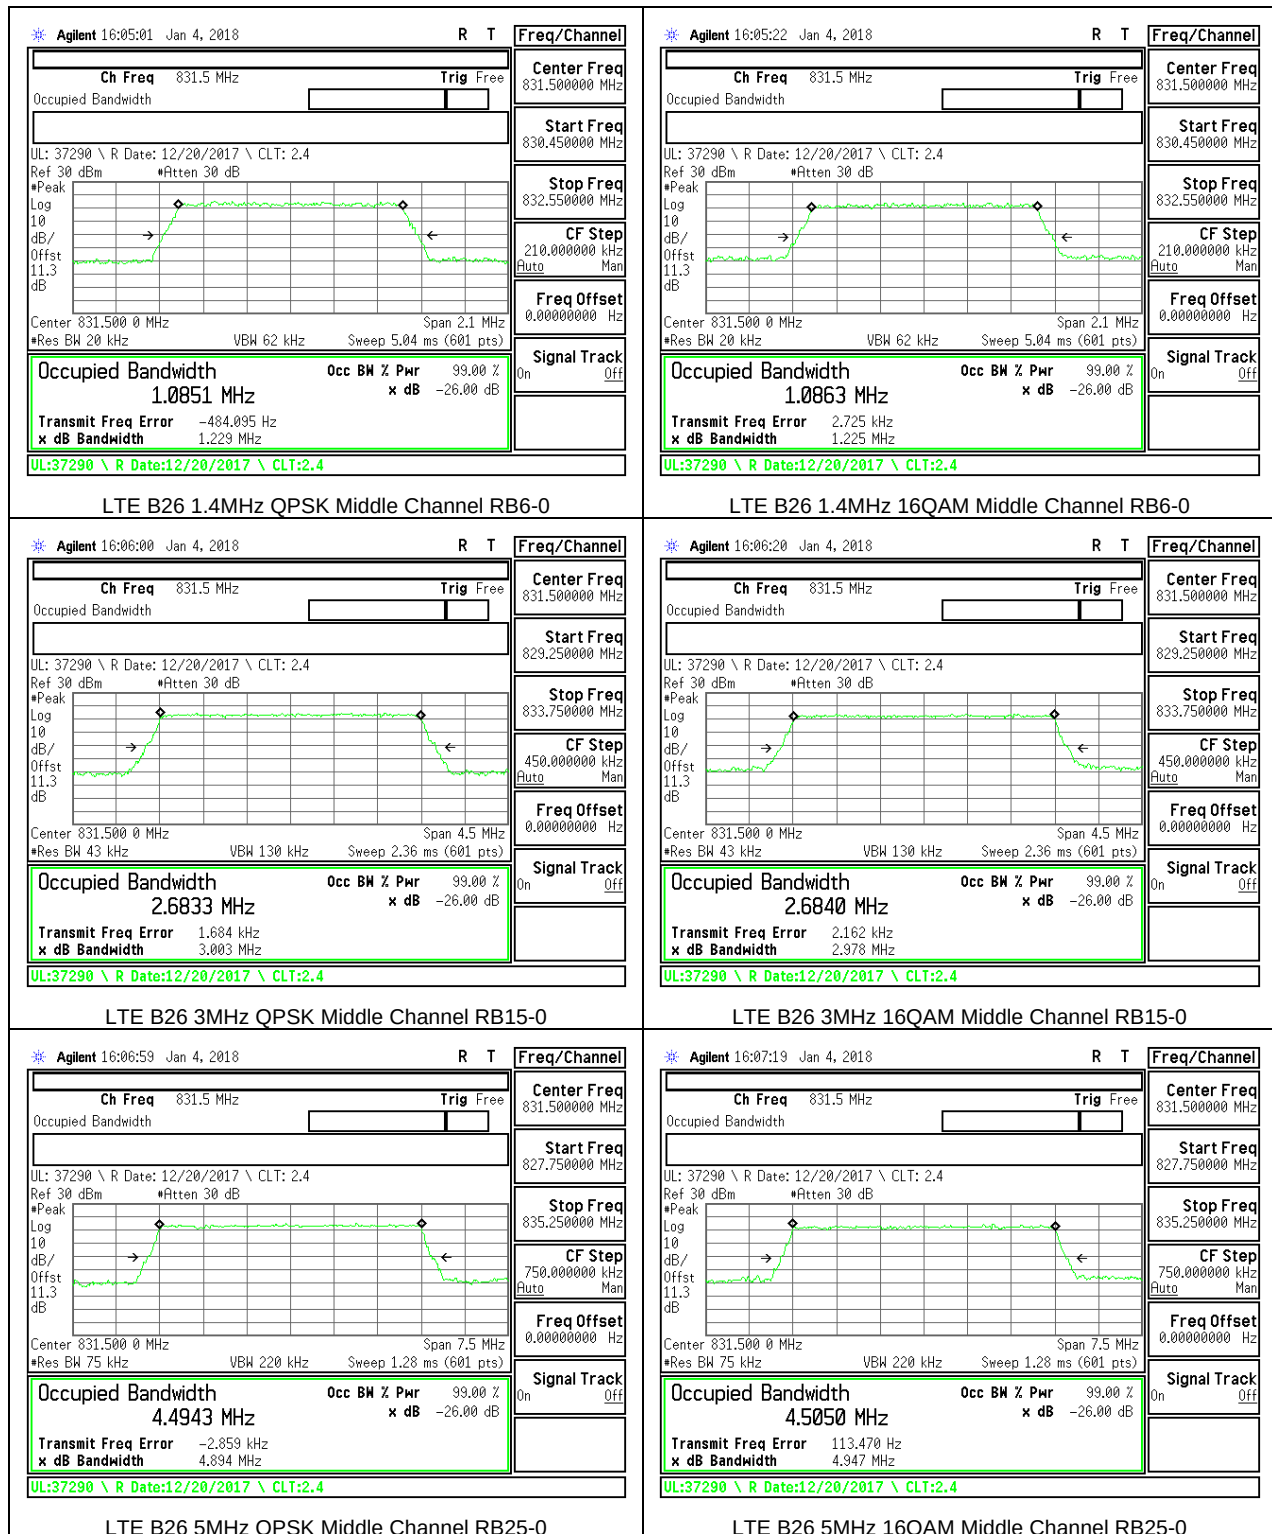

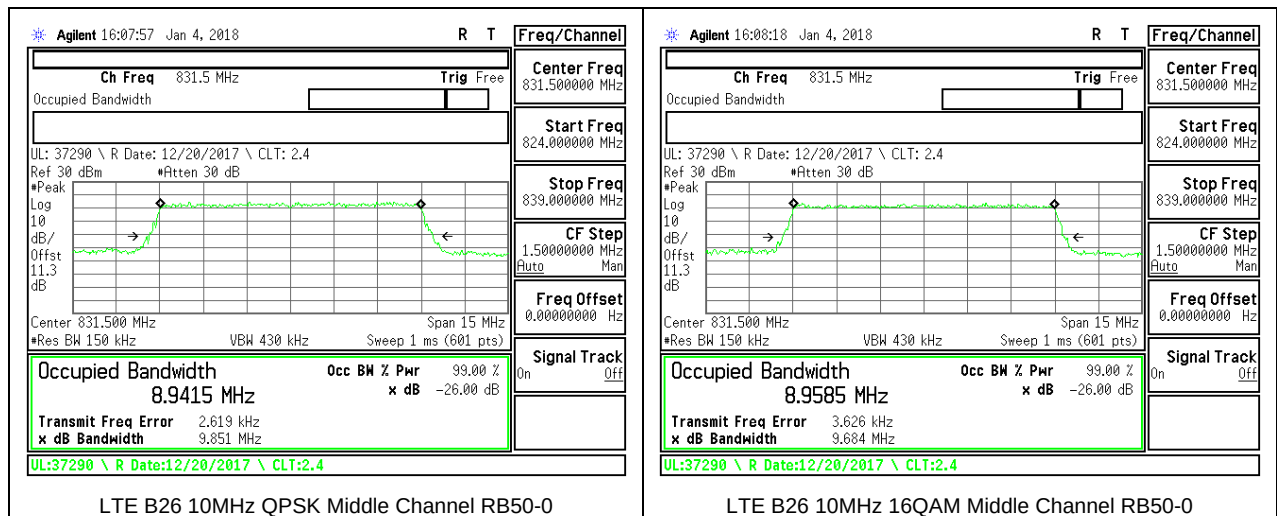



8.1.9. LTE BAND 26 (FCC PART 22)

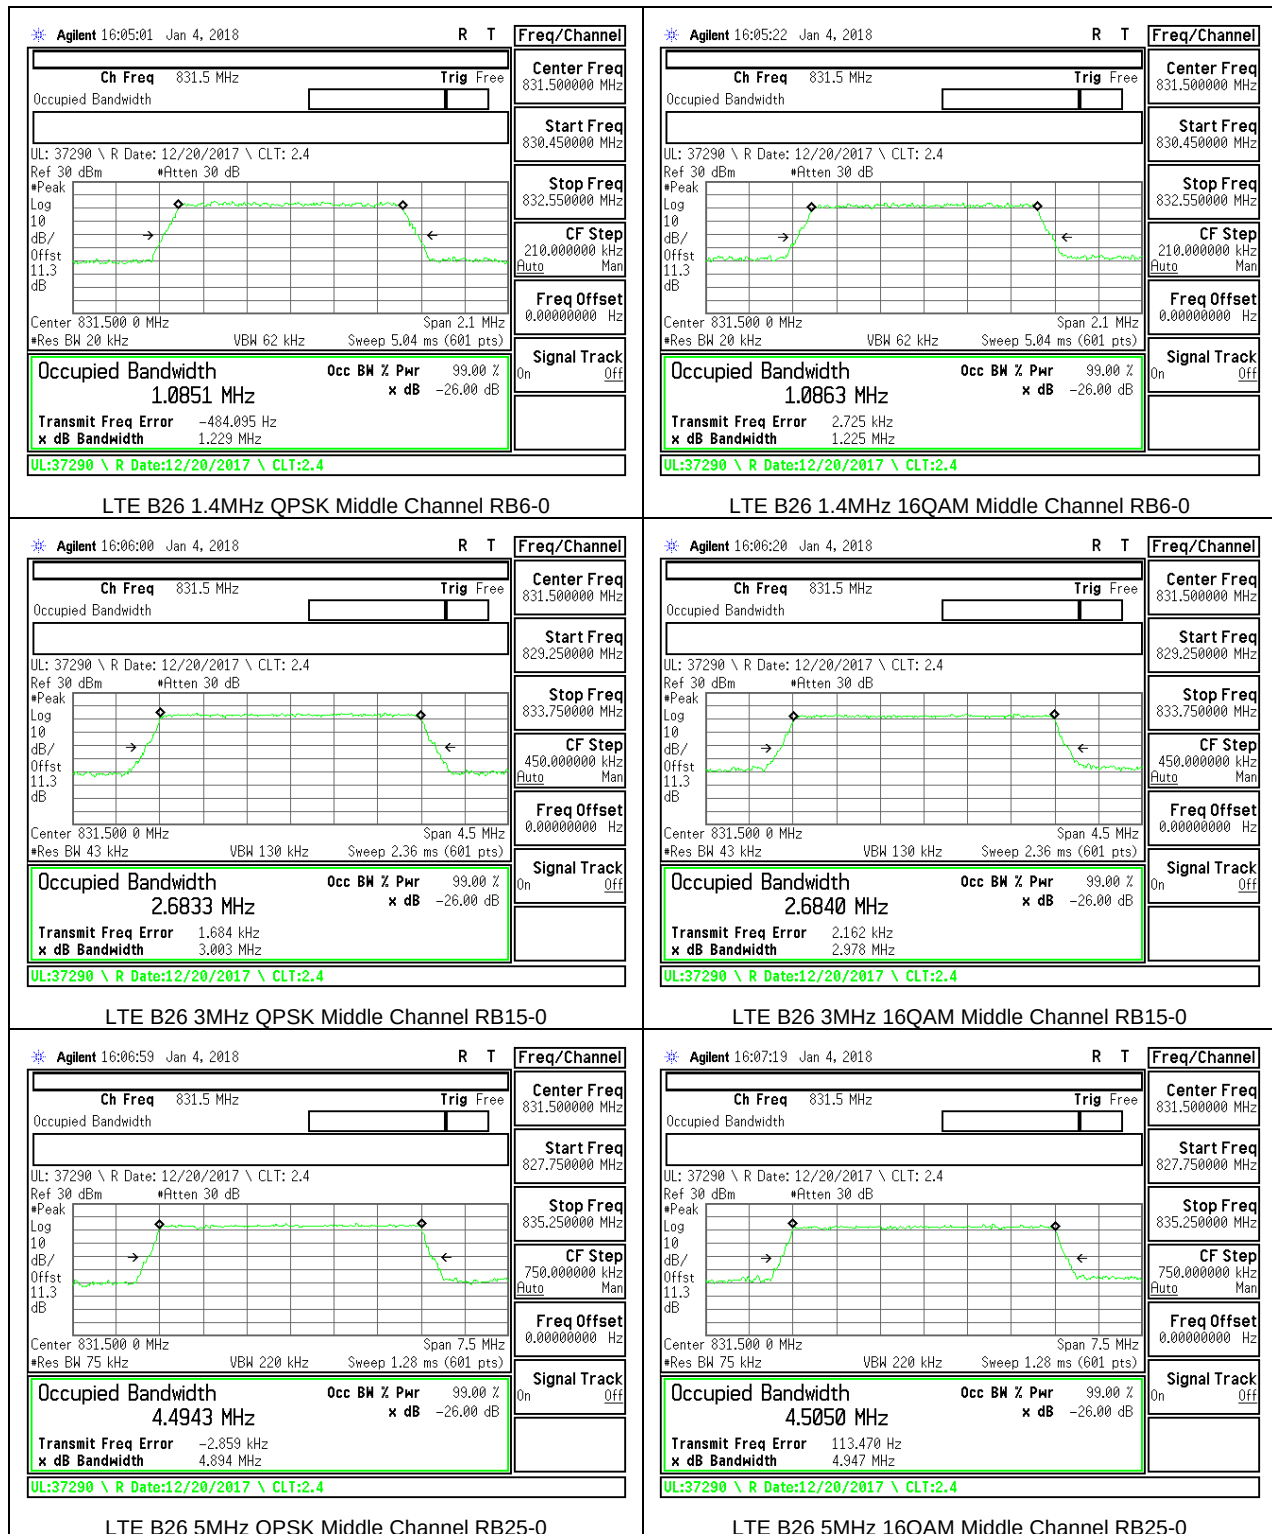





8.1.10. LTE BAND 41

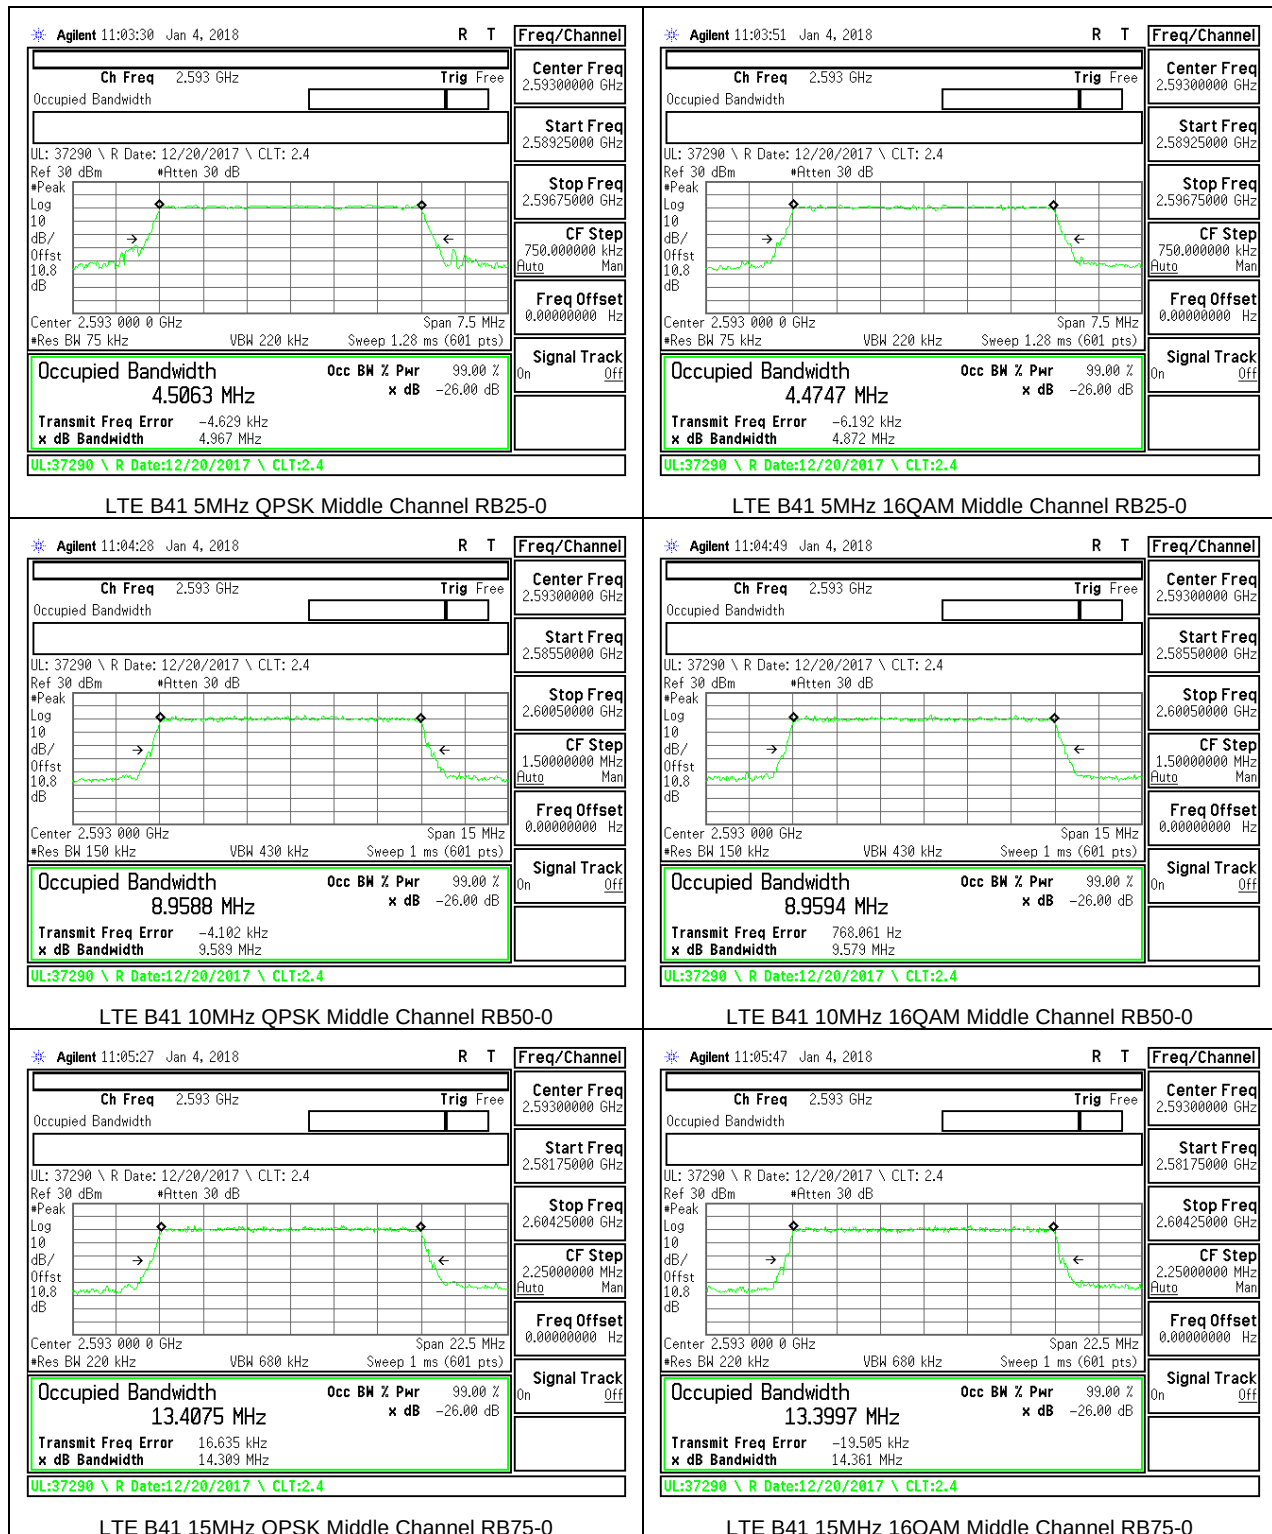

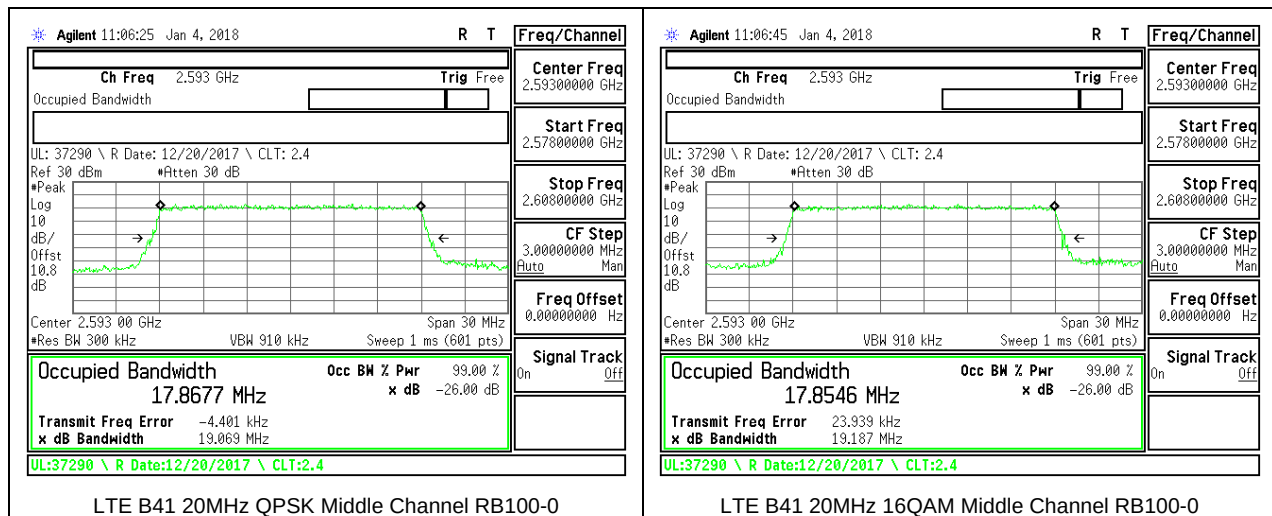

8.1.11. LTE BAND 66

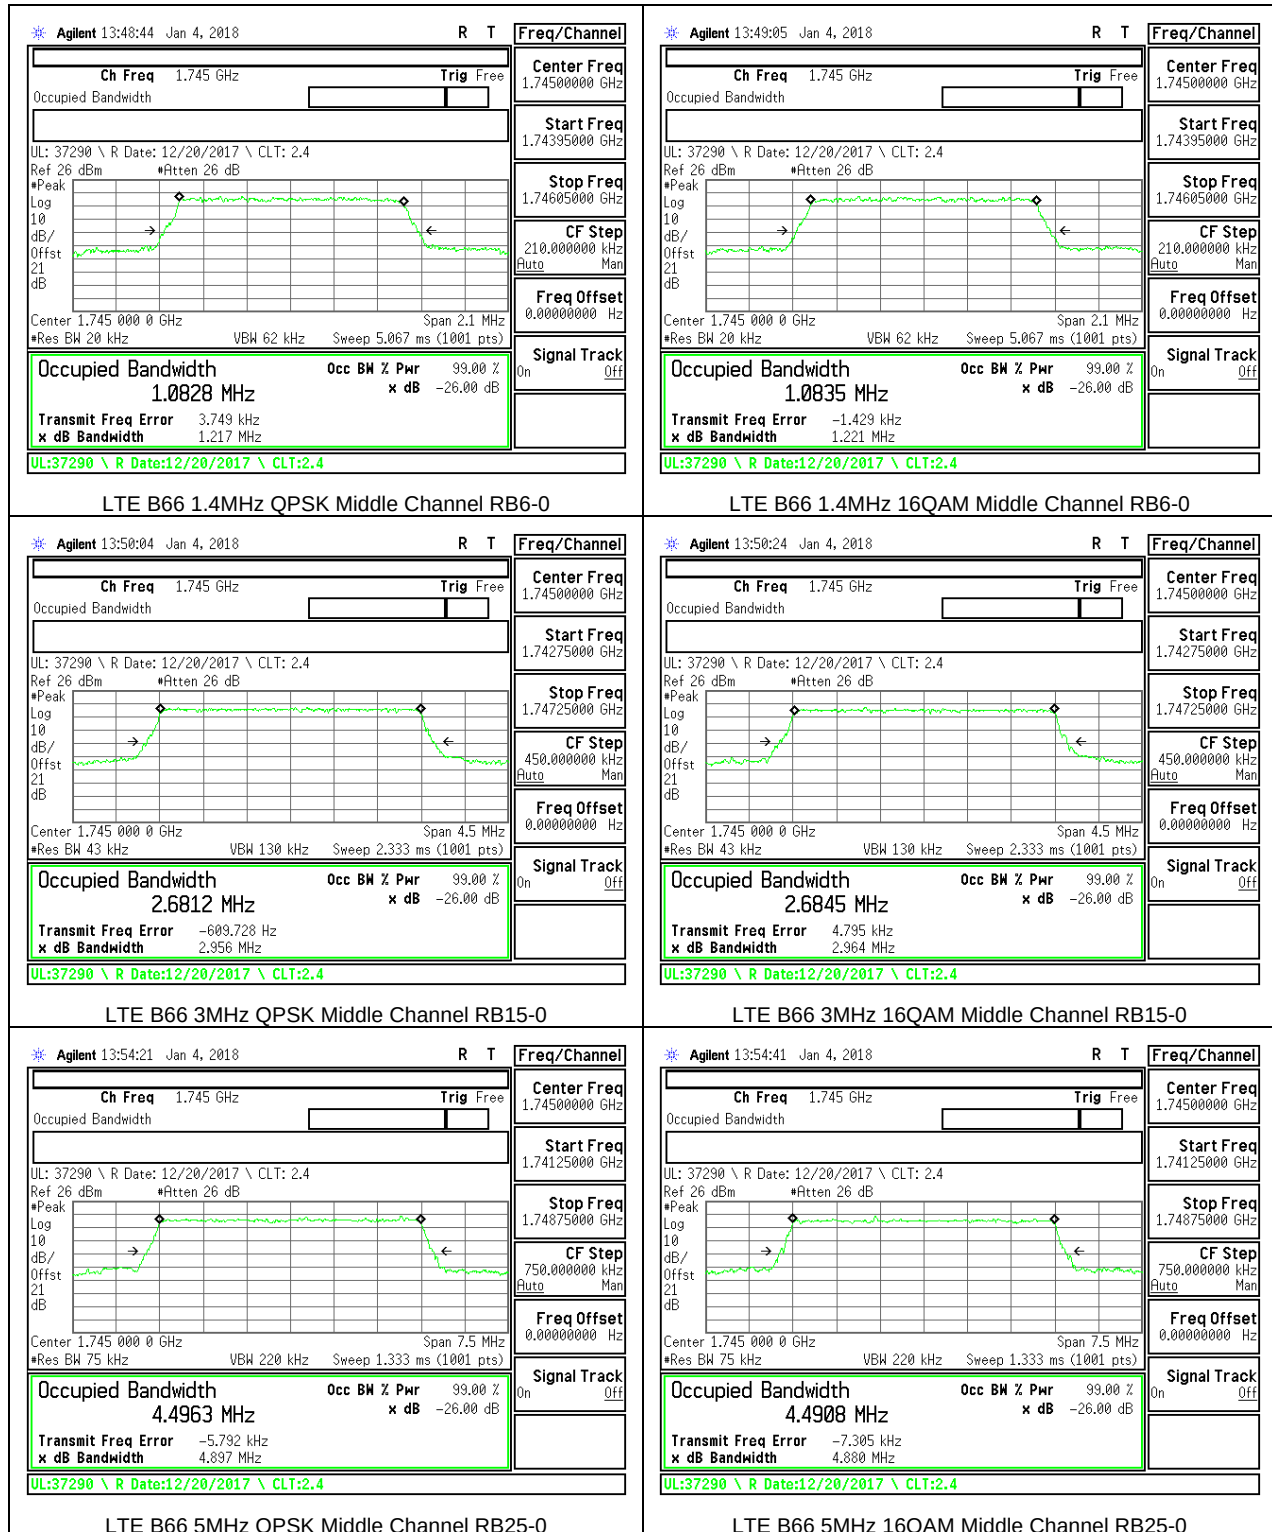

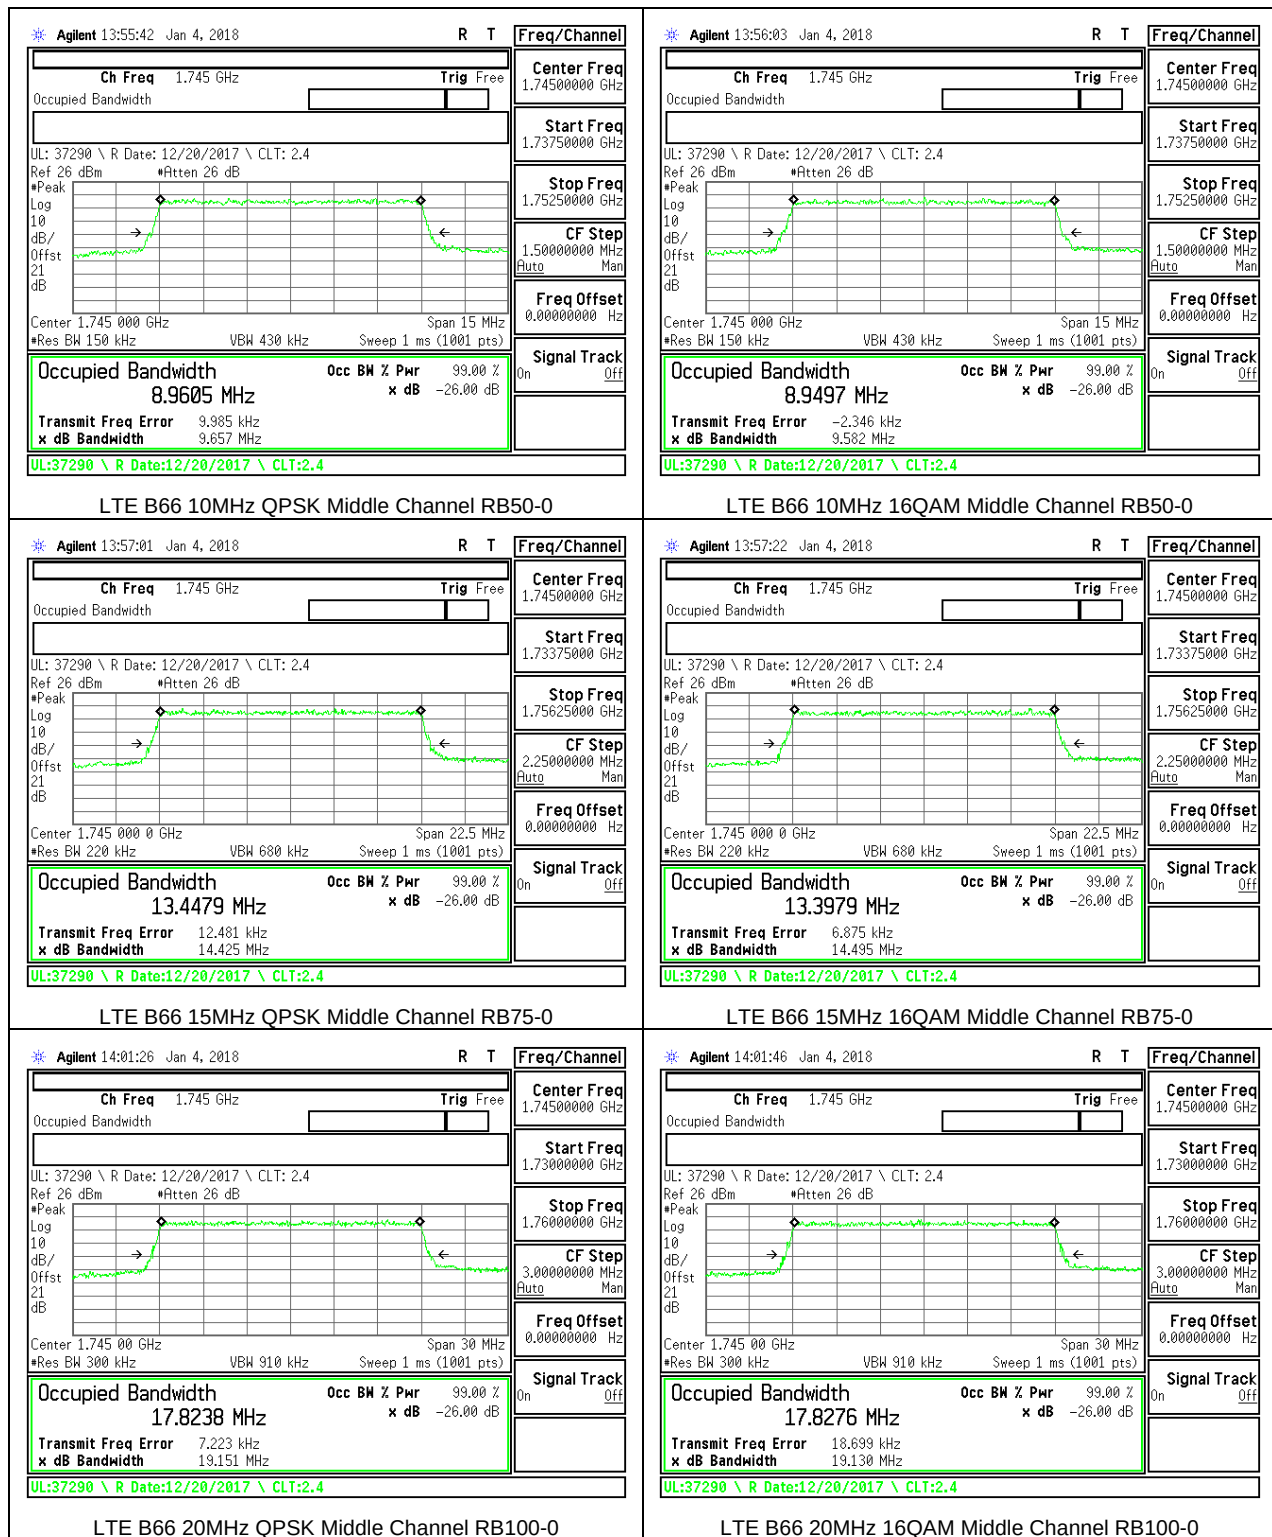

8.2. BAND EDGE AND EMISSION MASK

RULE PART(S)

FCC: §2.1051, §22.917, §24.238, §27.53, §90.691

LIMITS

FCC: §22.917, §24.238, §27.53(h)

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §90.691 Emission mask requirements for EA-based systems.

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.

FCC: §27.53 (Band 30)

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

FCC: §27.53 (Band 13)

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

FCC: §27.53 (Band 12, 17)

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC: §27.53 (Band 7, 41)

(m)(4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

TEST PROCEDURE

The transmitter output was connected to a CMW500 Test Set and configured to operate at maximum power. The band edge emissions were measured at the required operating frequencies in each band on the Spectrum Analyzer.

For each band edge measurement:


1. Set the spectrum analyzer span to include the block edge frequency.
2. Set a marker to point the corresponding band edge frequency in each test case.
3. Set display line at -13 dBm
4. Set resolution bandwidth to at least 1% of emission bandwidth.

MODES TESTED


- GSM 850
- GSM 1900
- WCDM Band 2
- WCDM Band 4
- WCDM Band 5
- LTE Band 2
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 26
- LTE Band 41
- LTE Band 66

RESULTS


8.2.1. GSM 850MHz

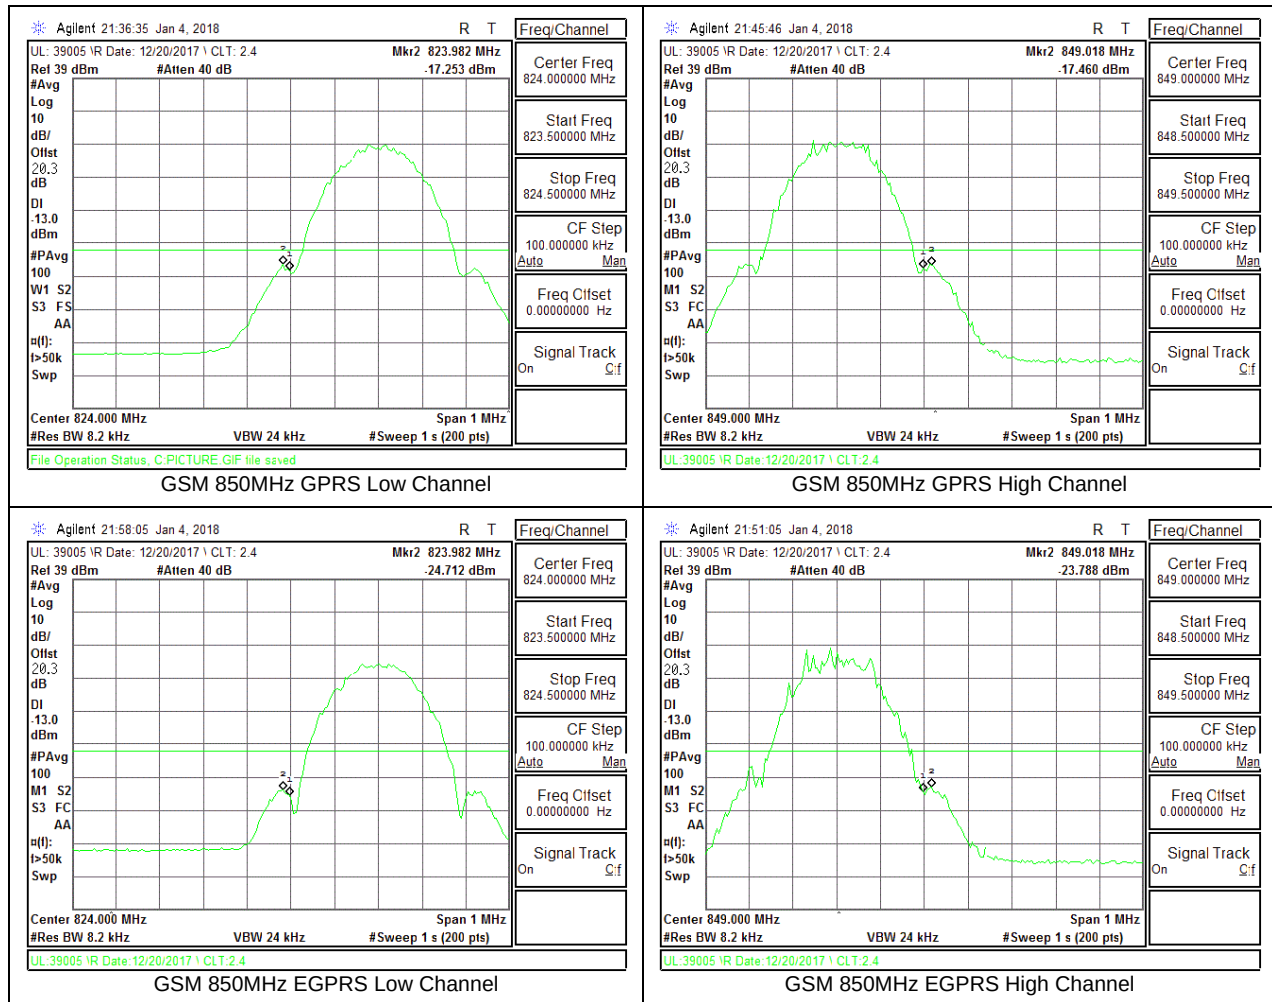


8.2.2. GSM 1900MHz

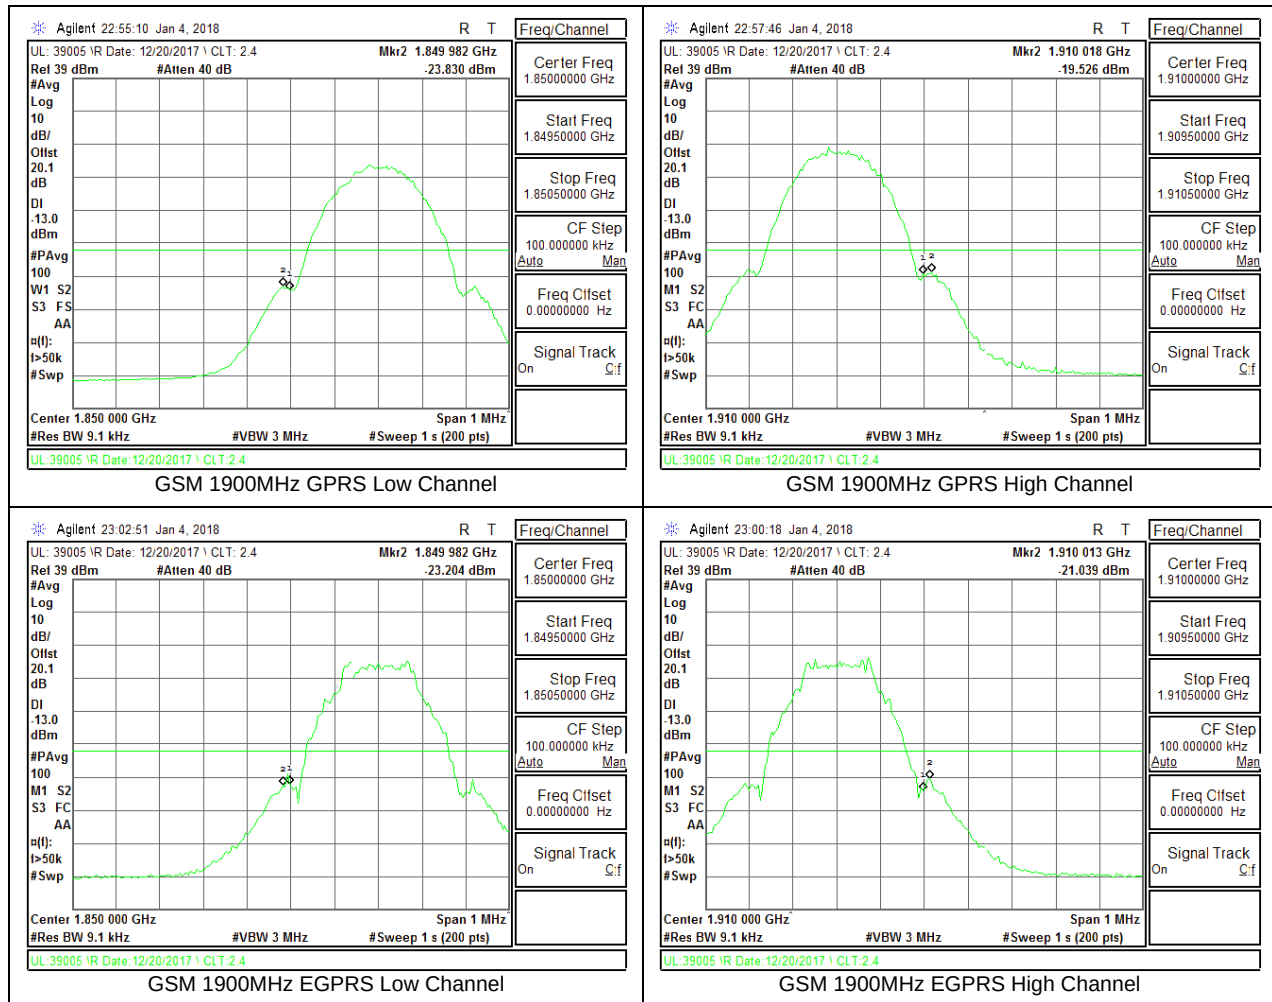


8.2.1. WCDMA BAND 2

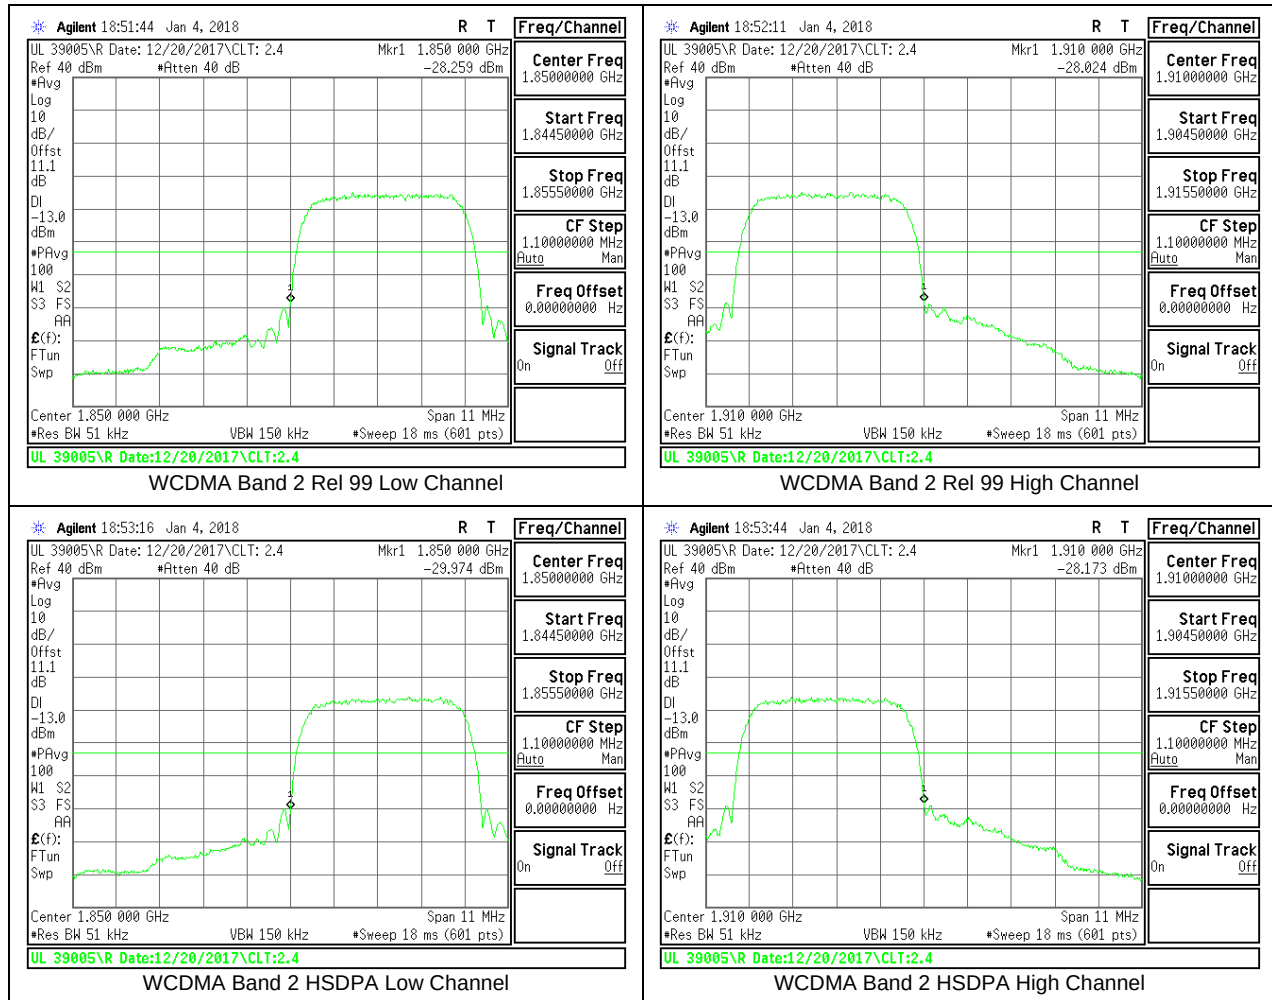


8.2.1. WCDMA BAND 4

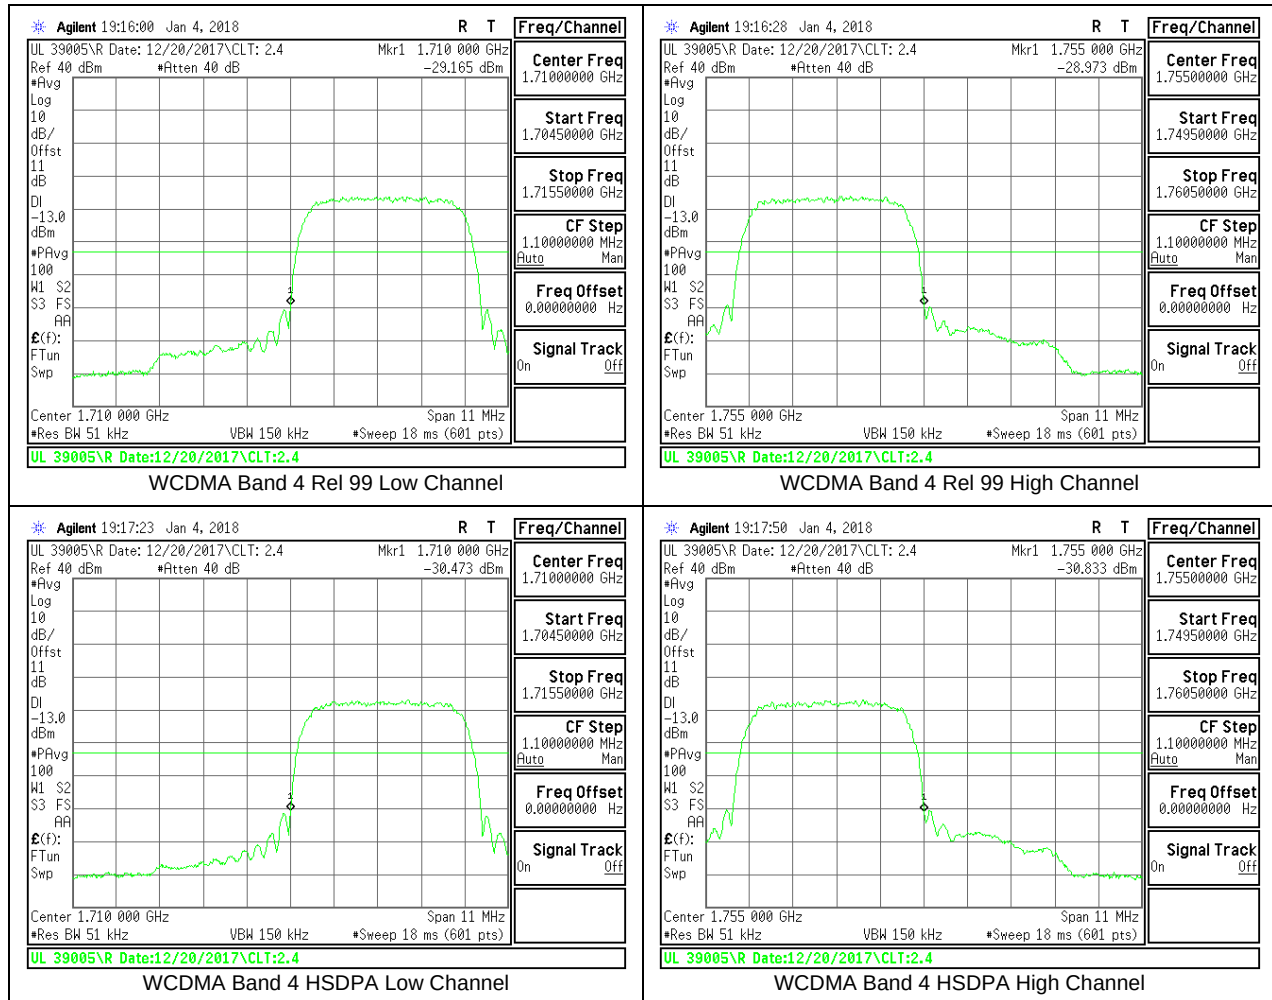



8.2.2. WCDMA BAND 5

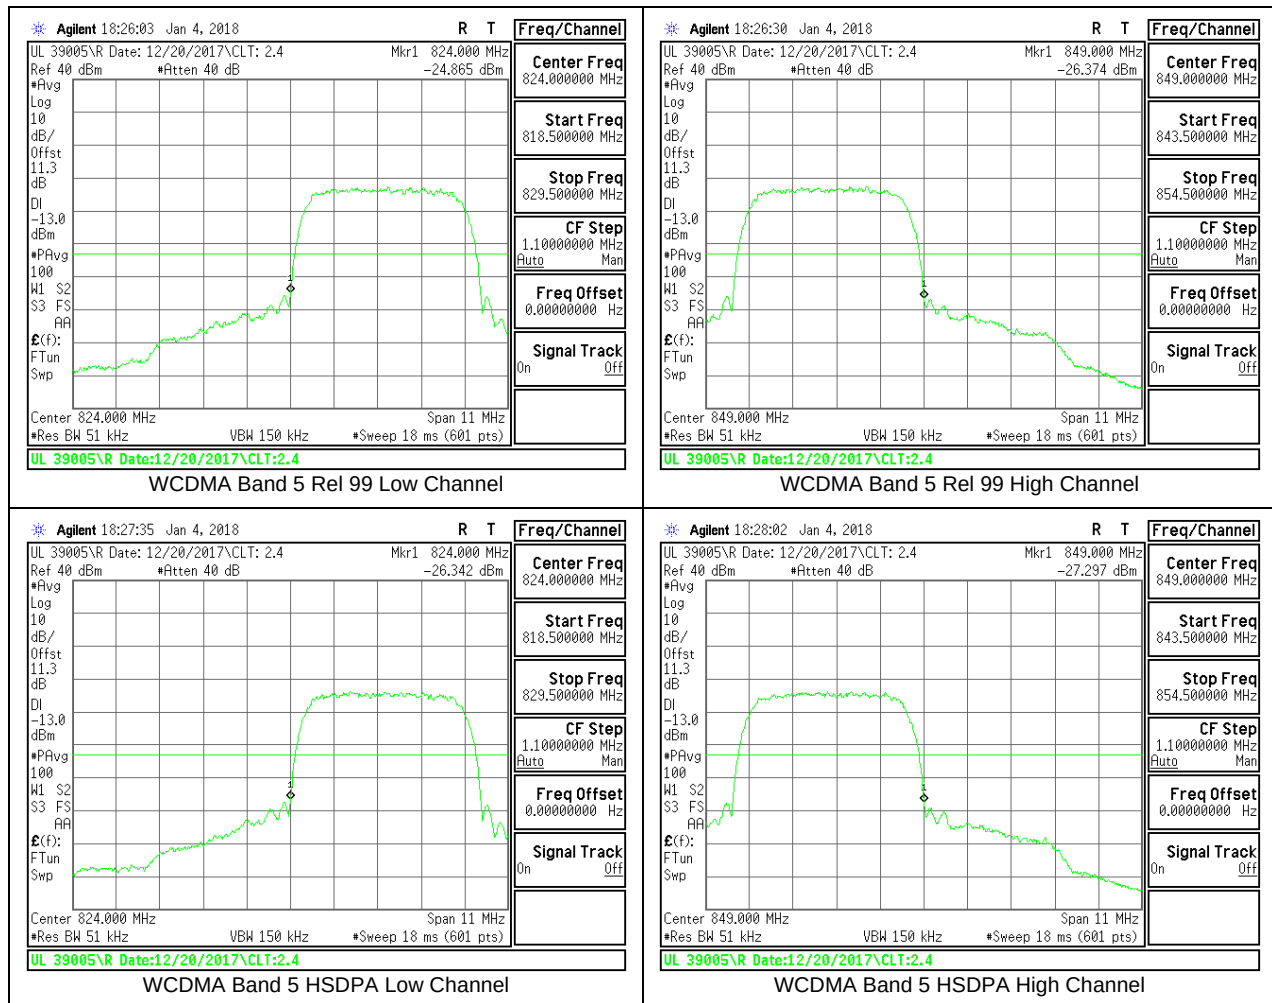



8.2.3. LTE BAND 2 BANDEDGE

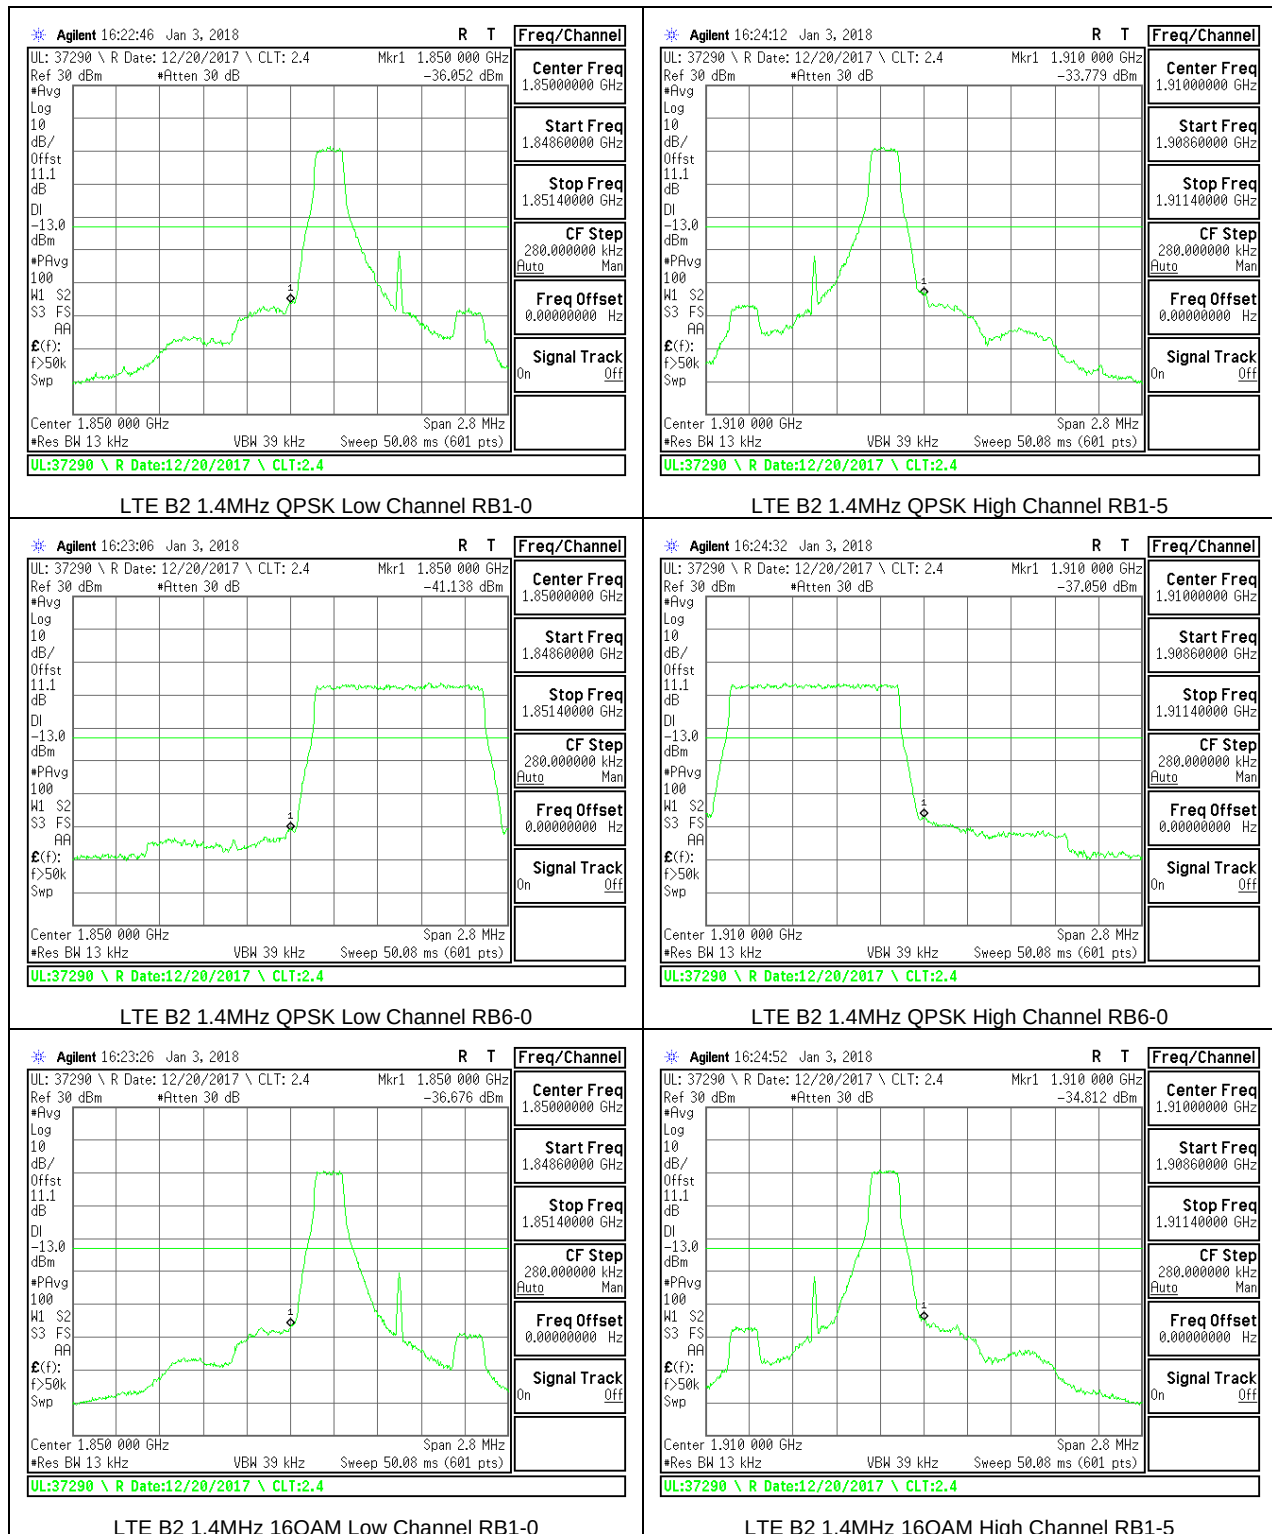


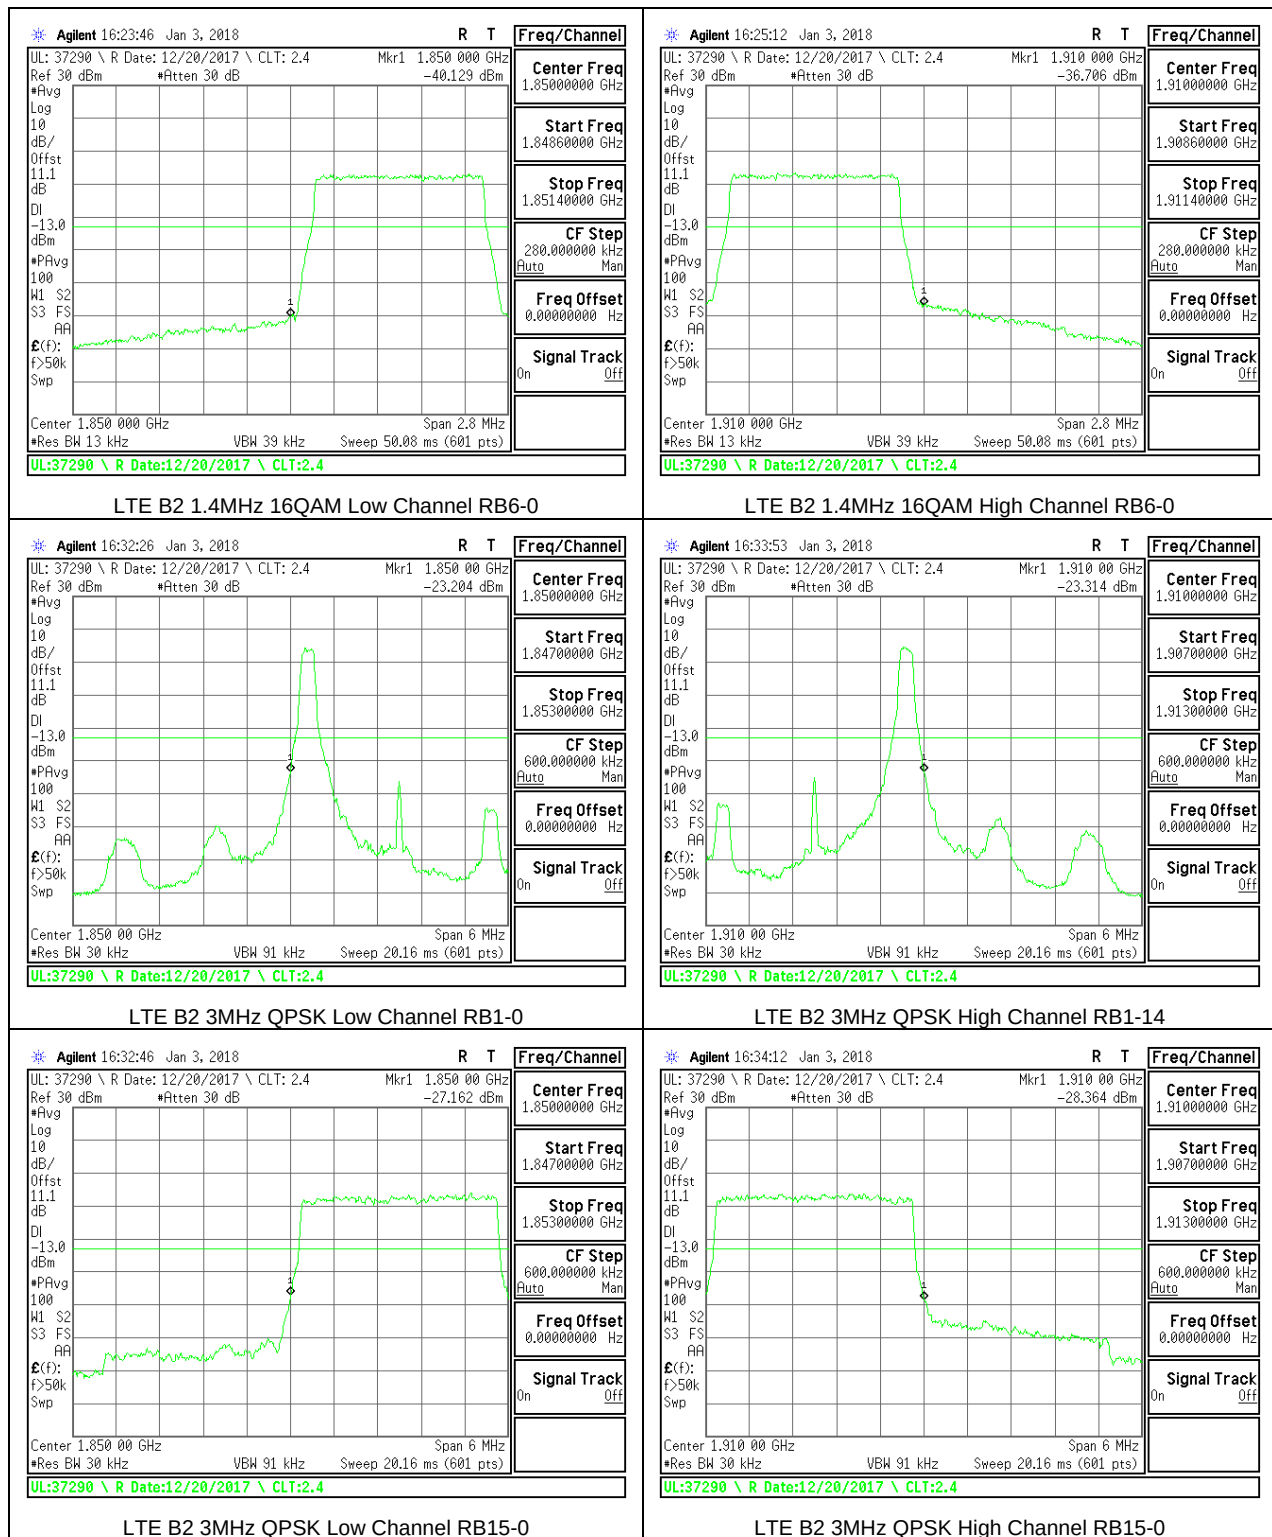


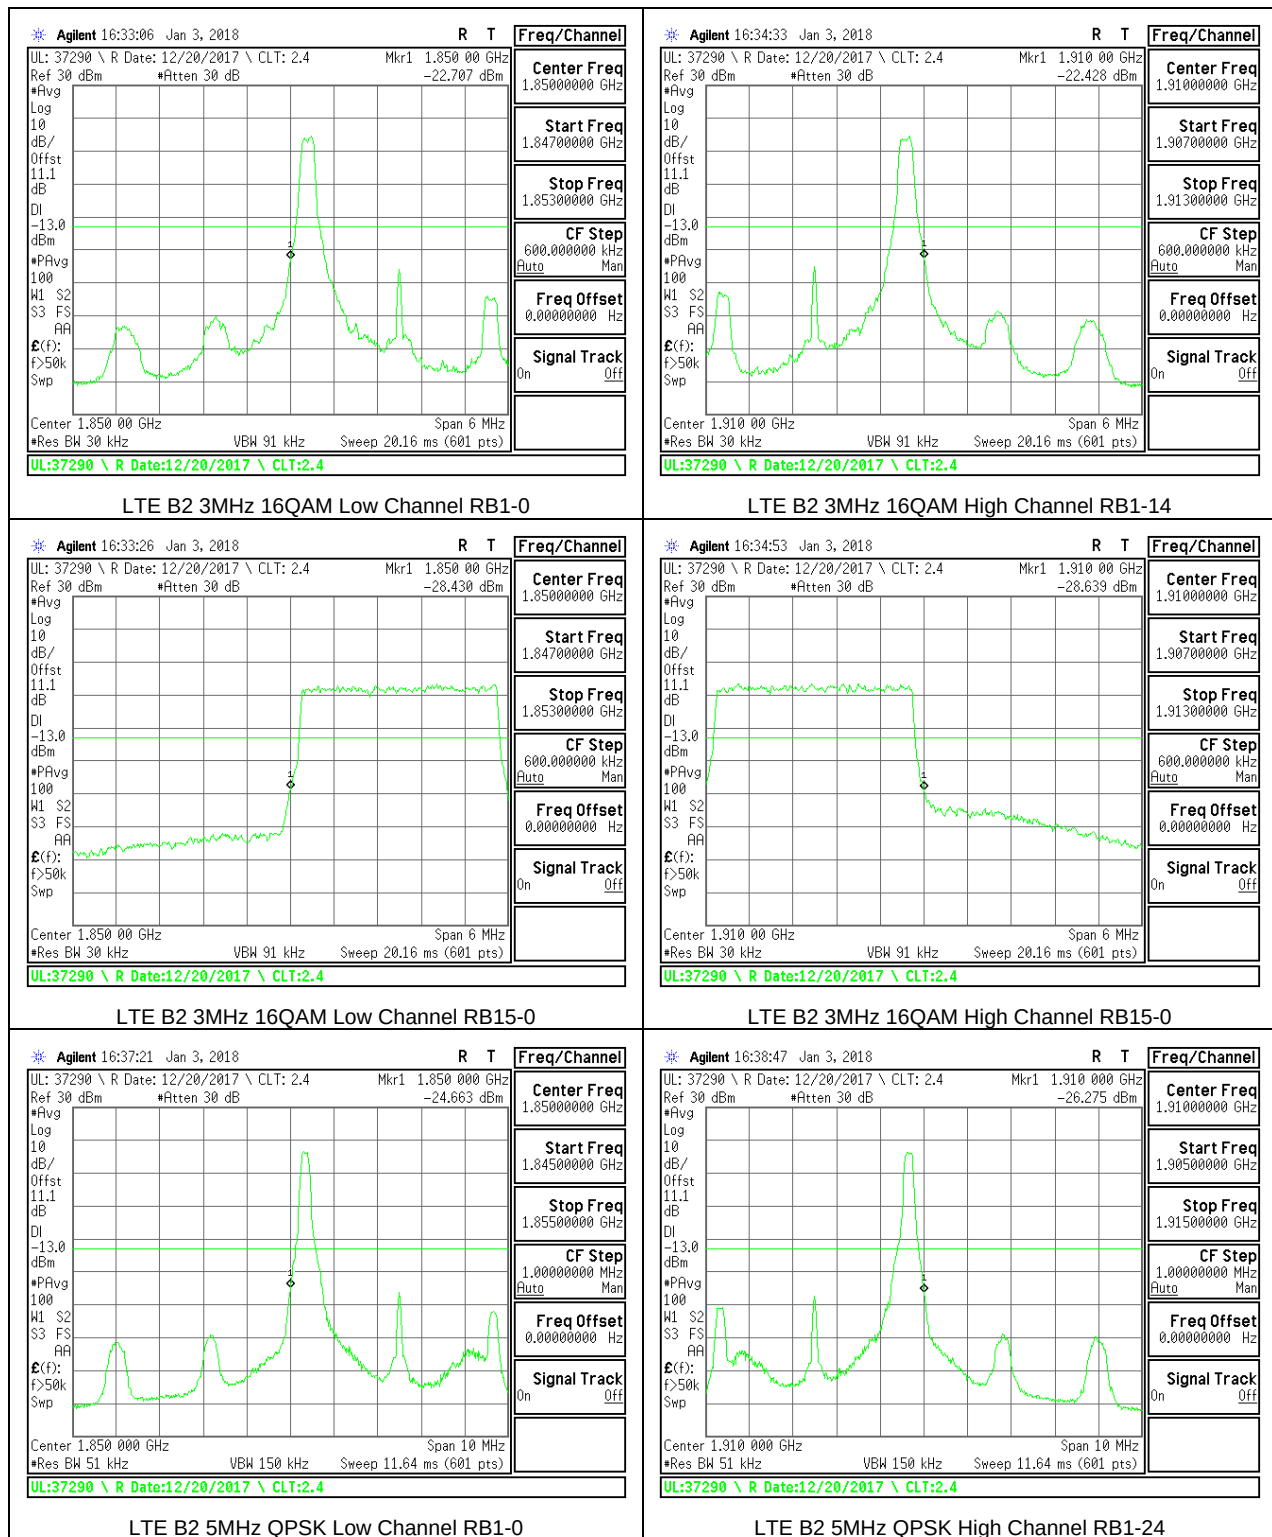


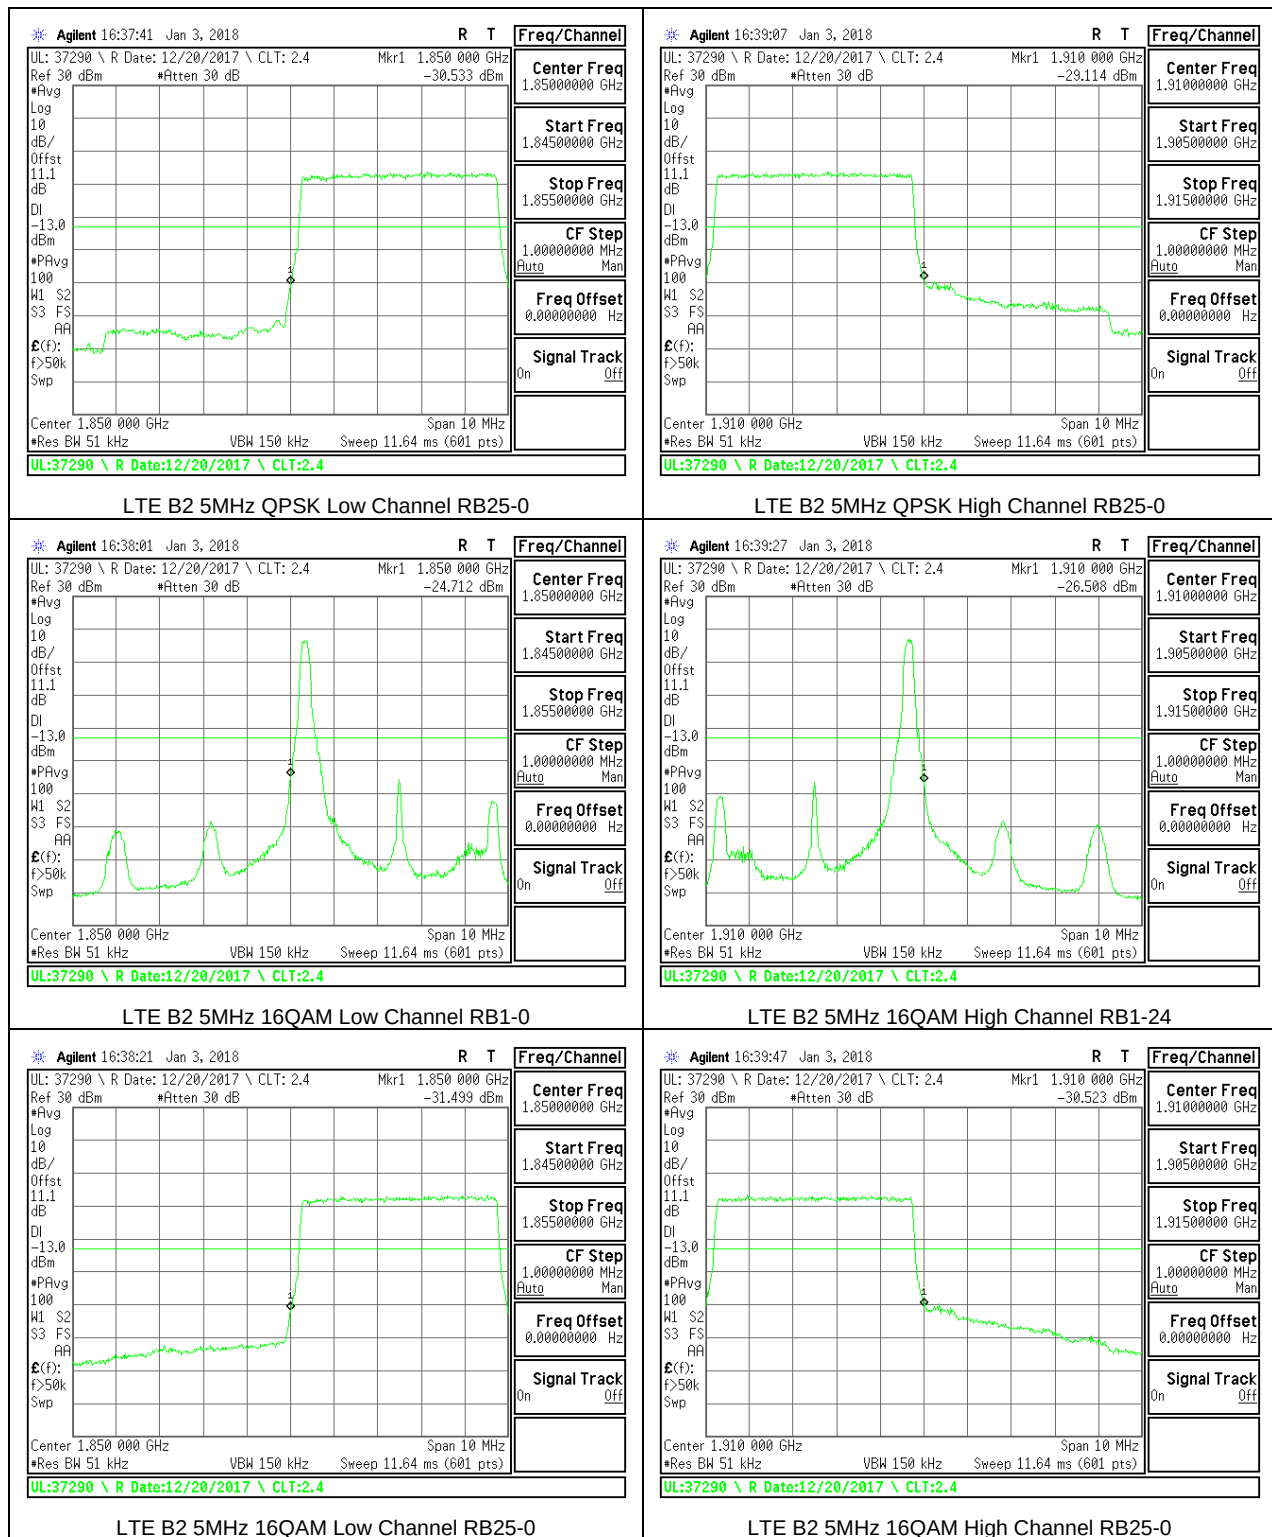

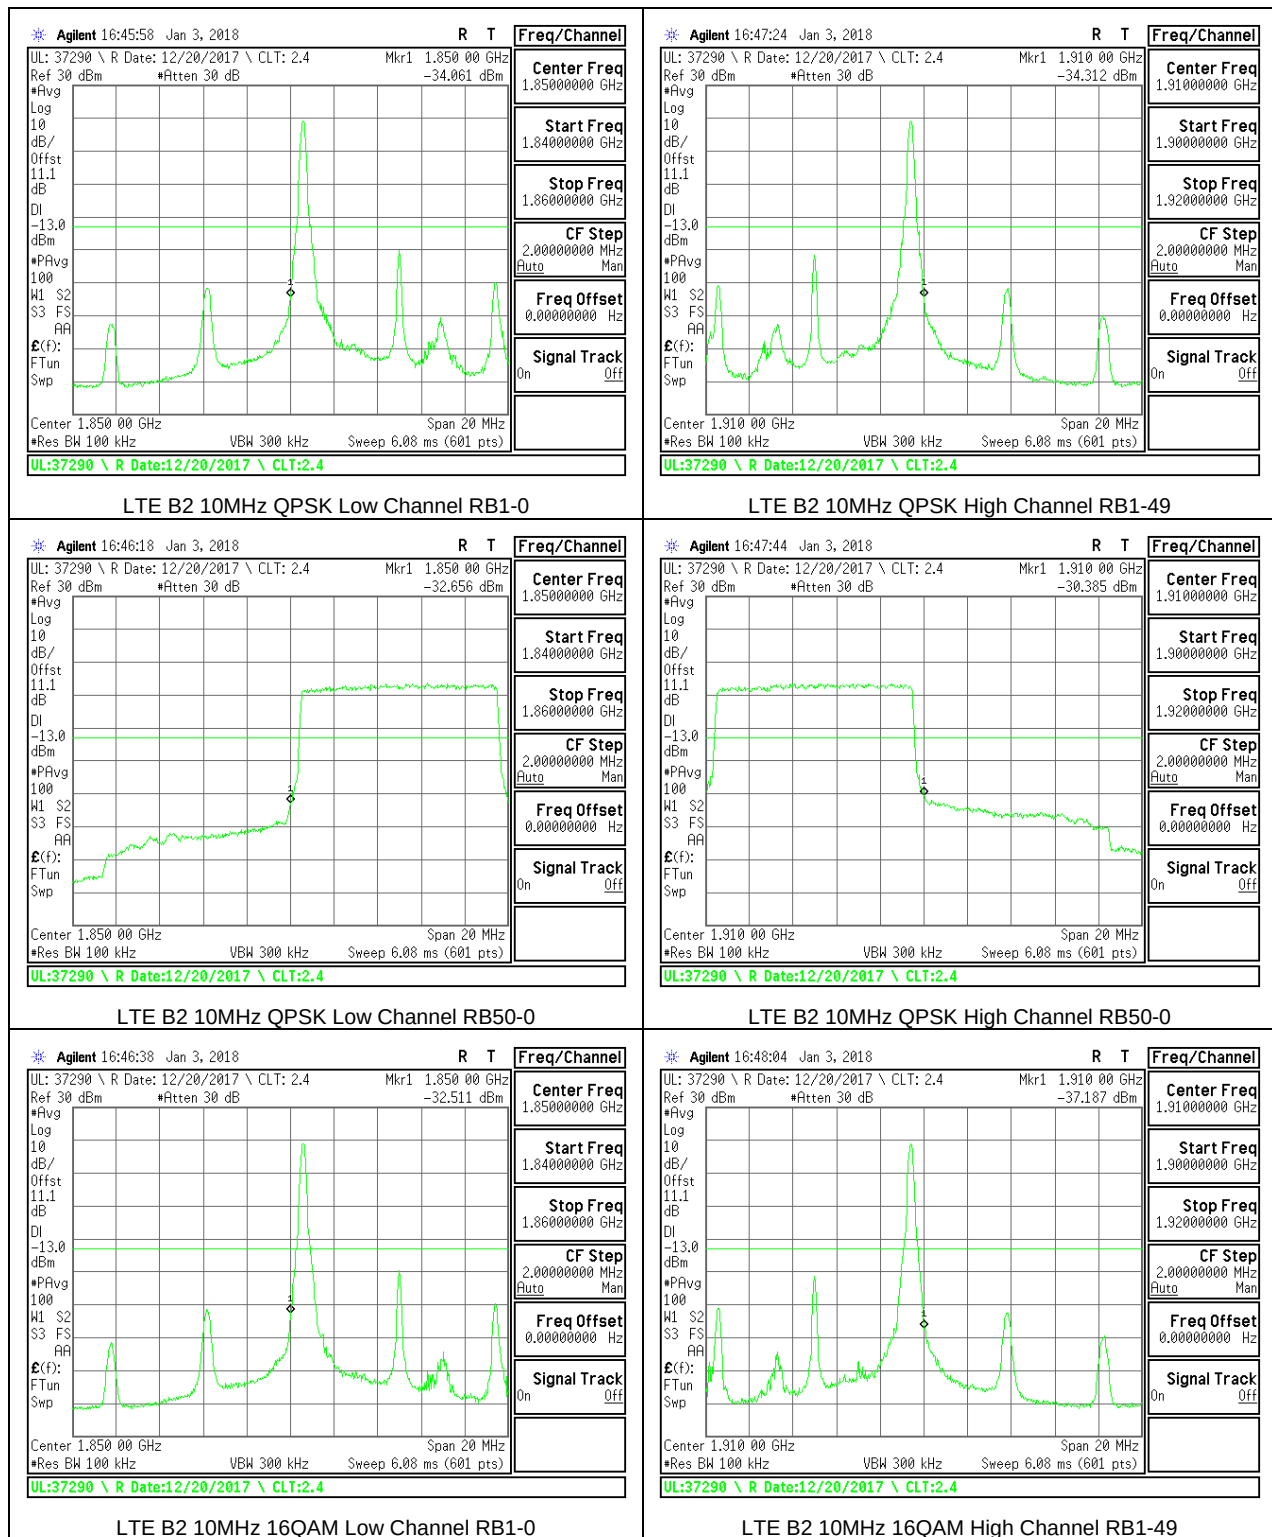

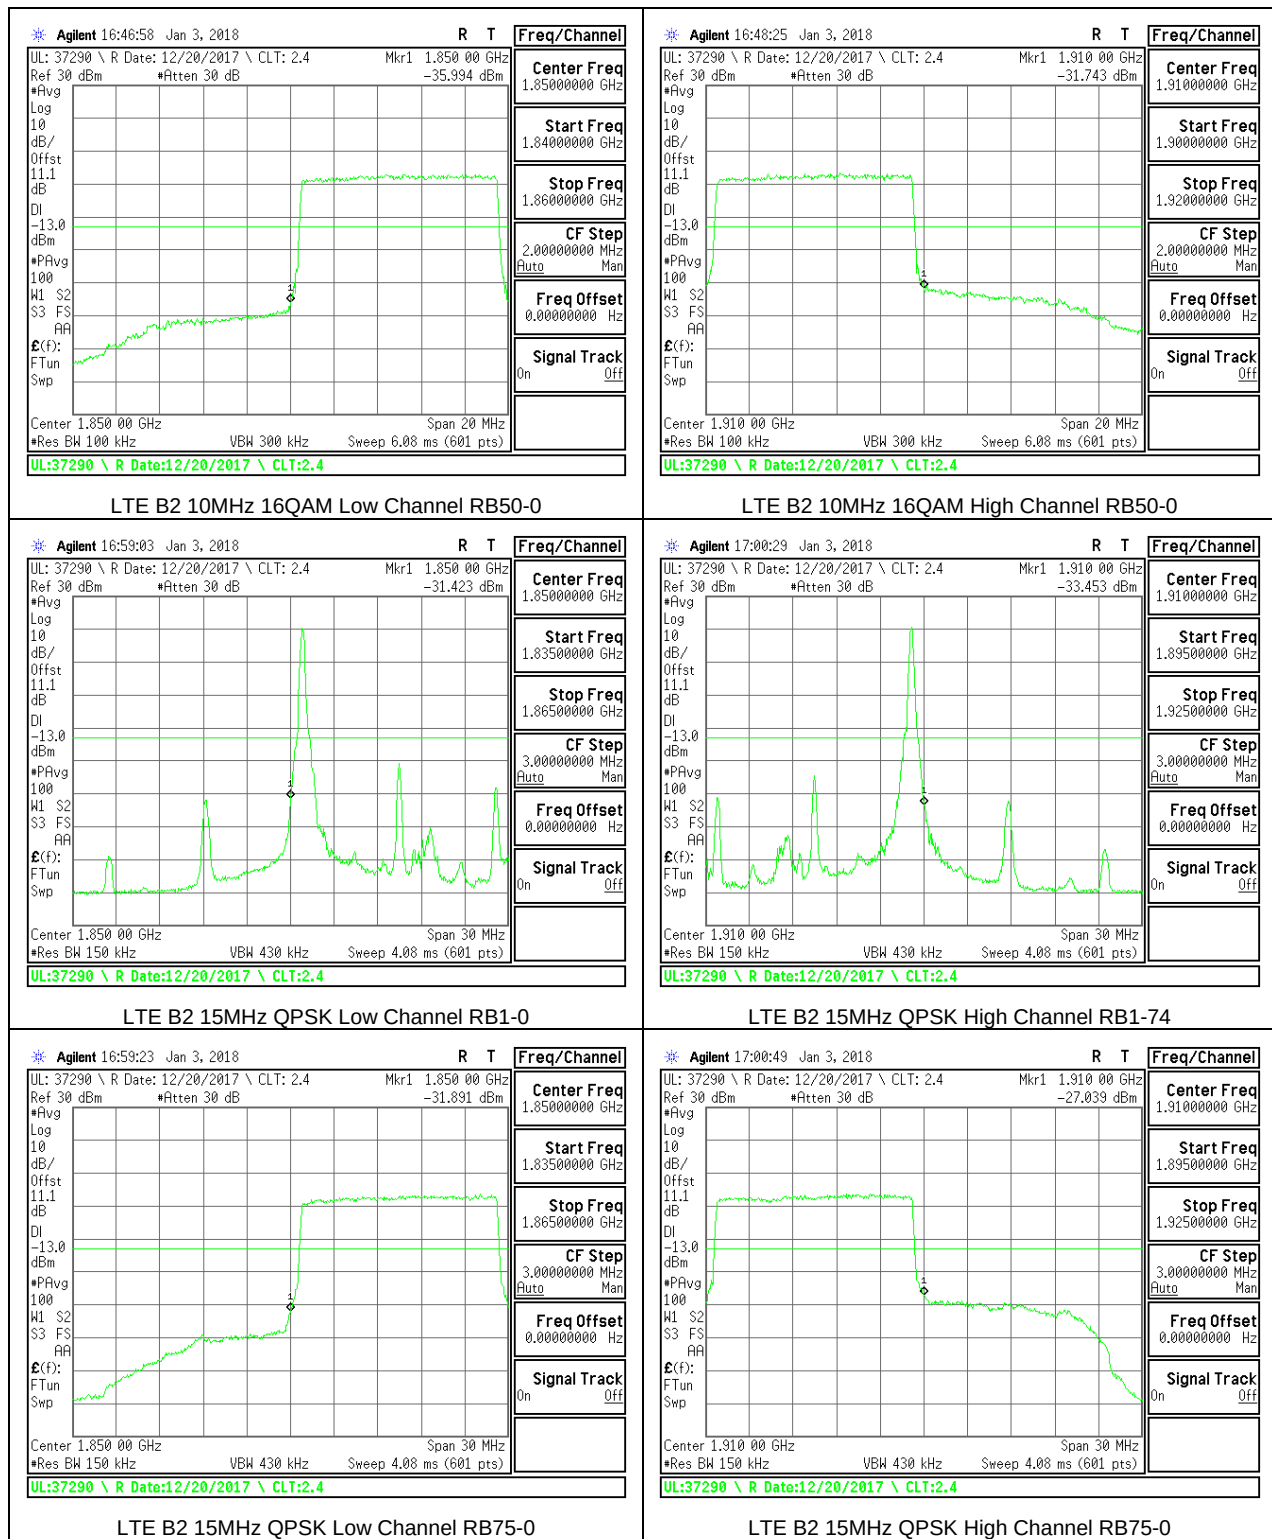

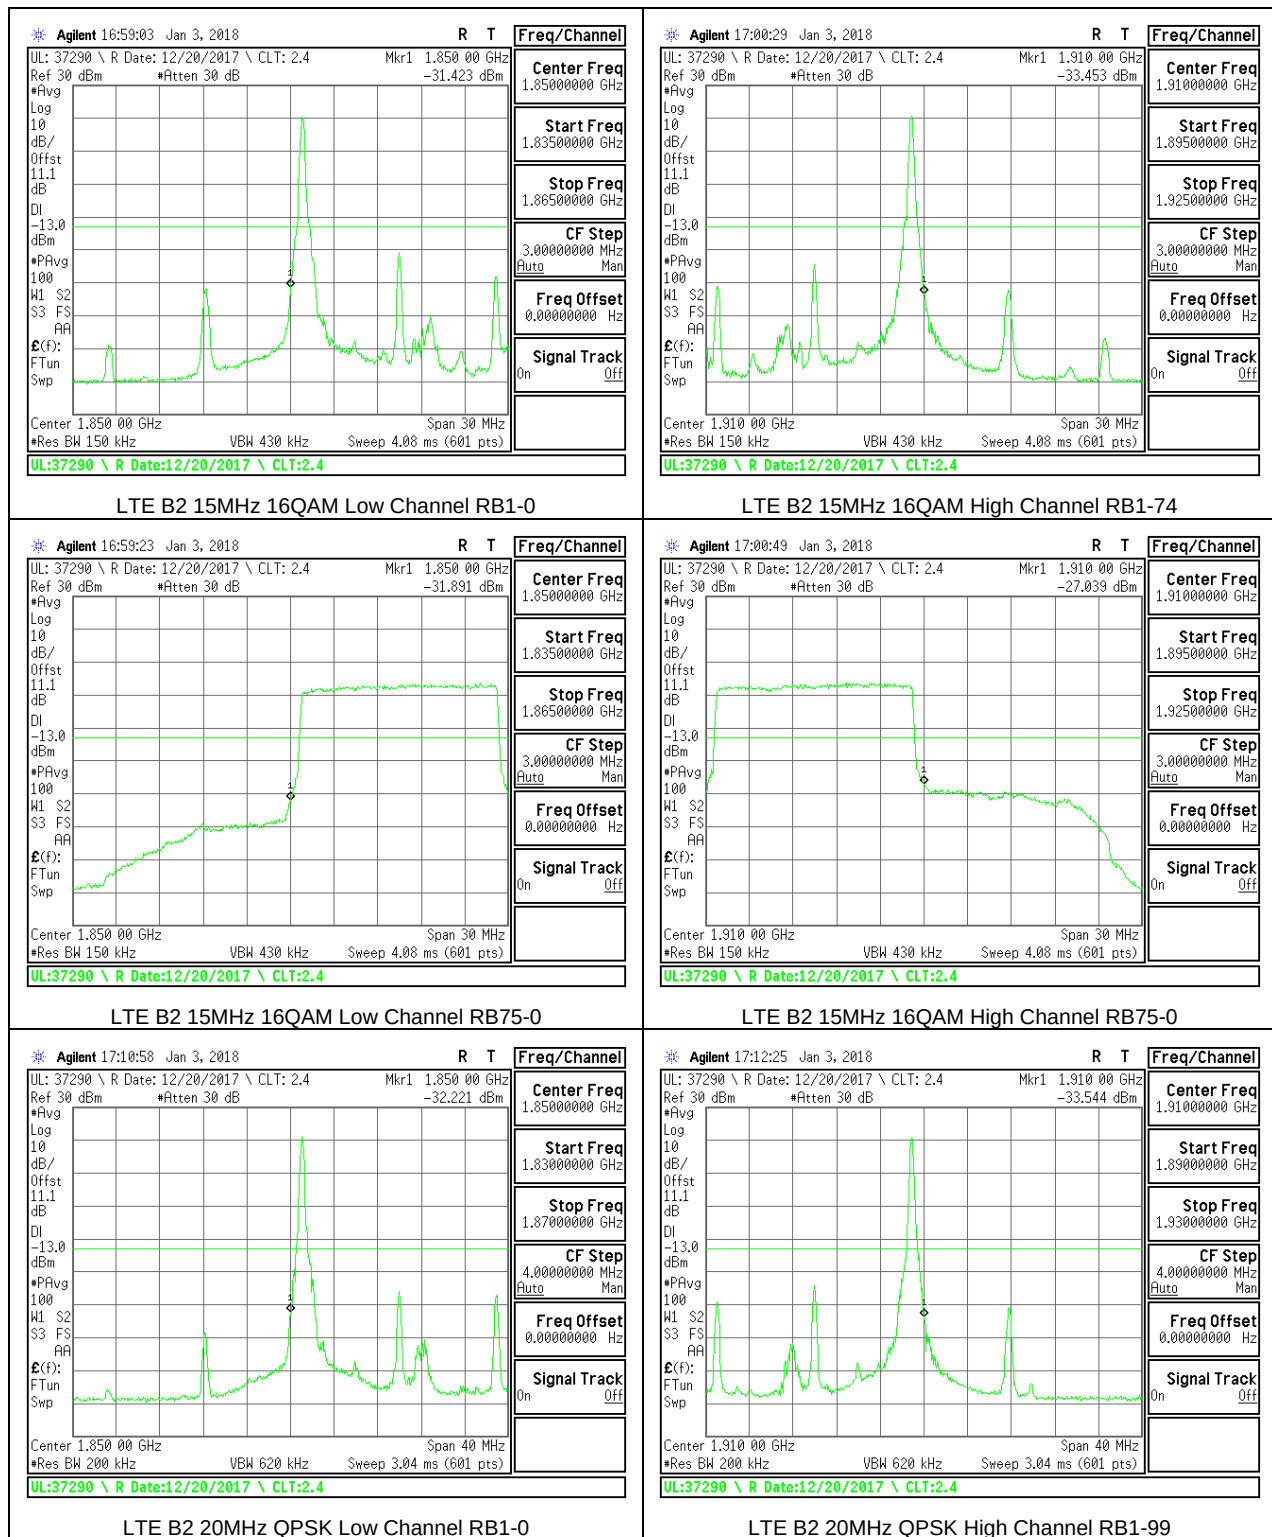


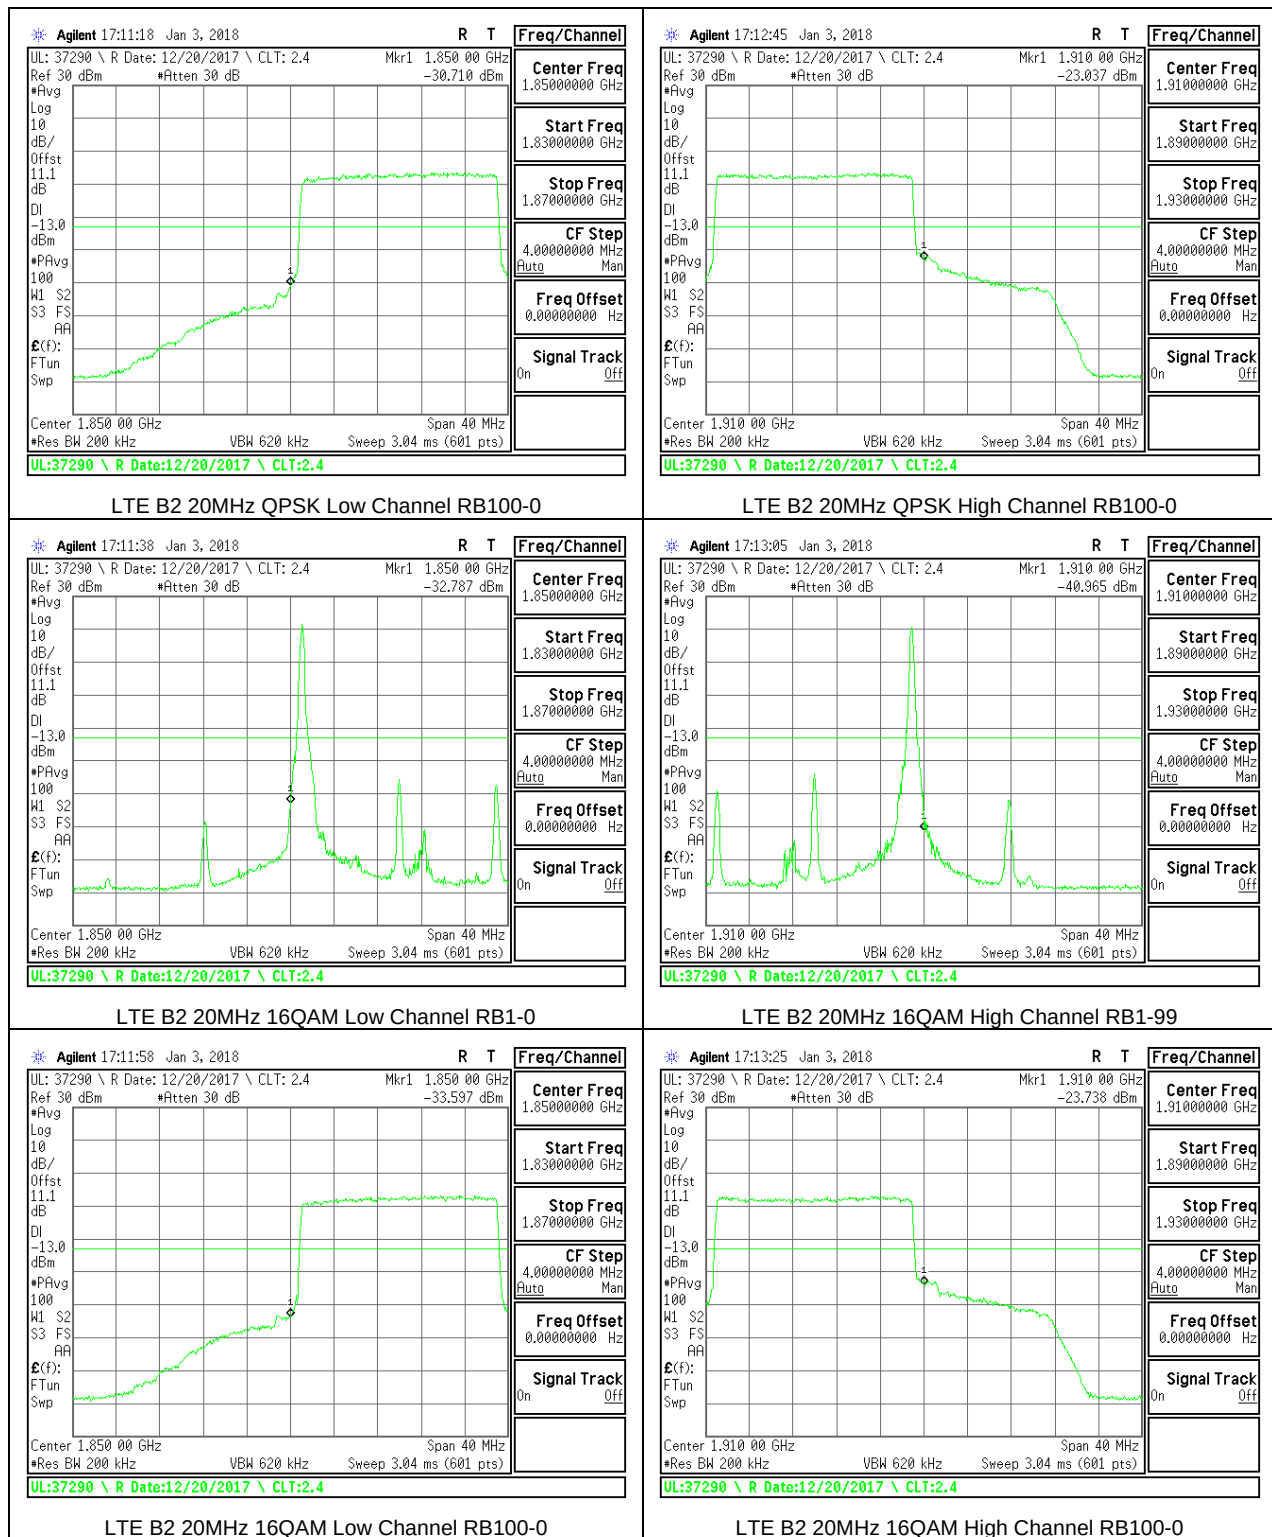



8.2.4. LTE BAND 4 BANDEDGE


LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.


8.2.5. LTE BAND 5 BANDEDGE

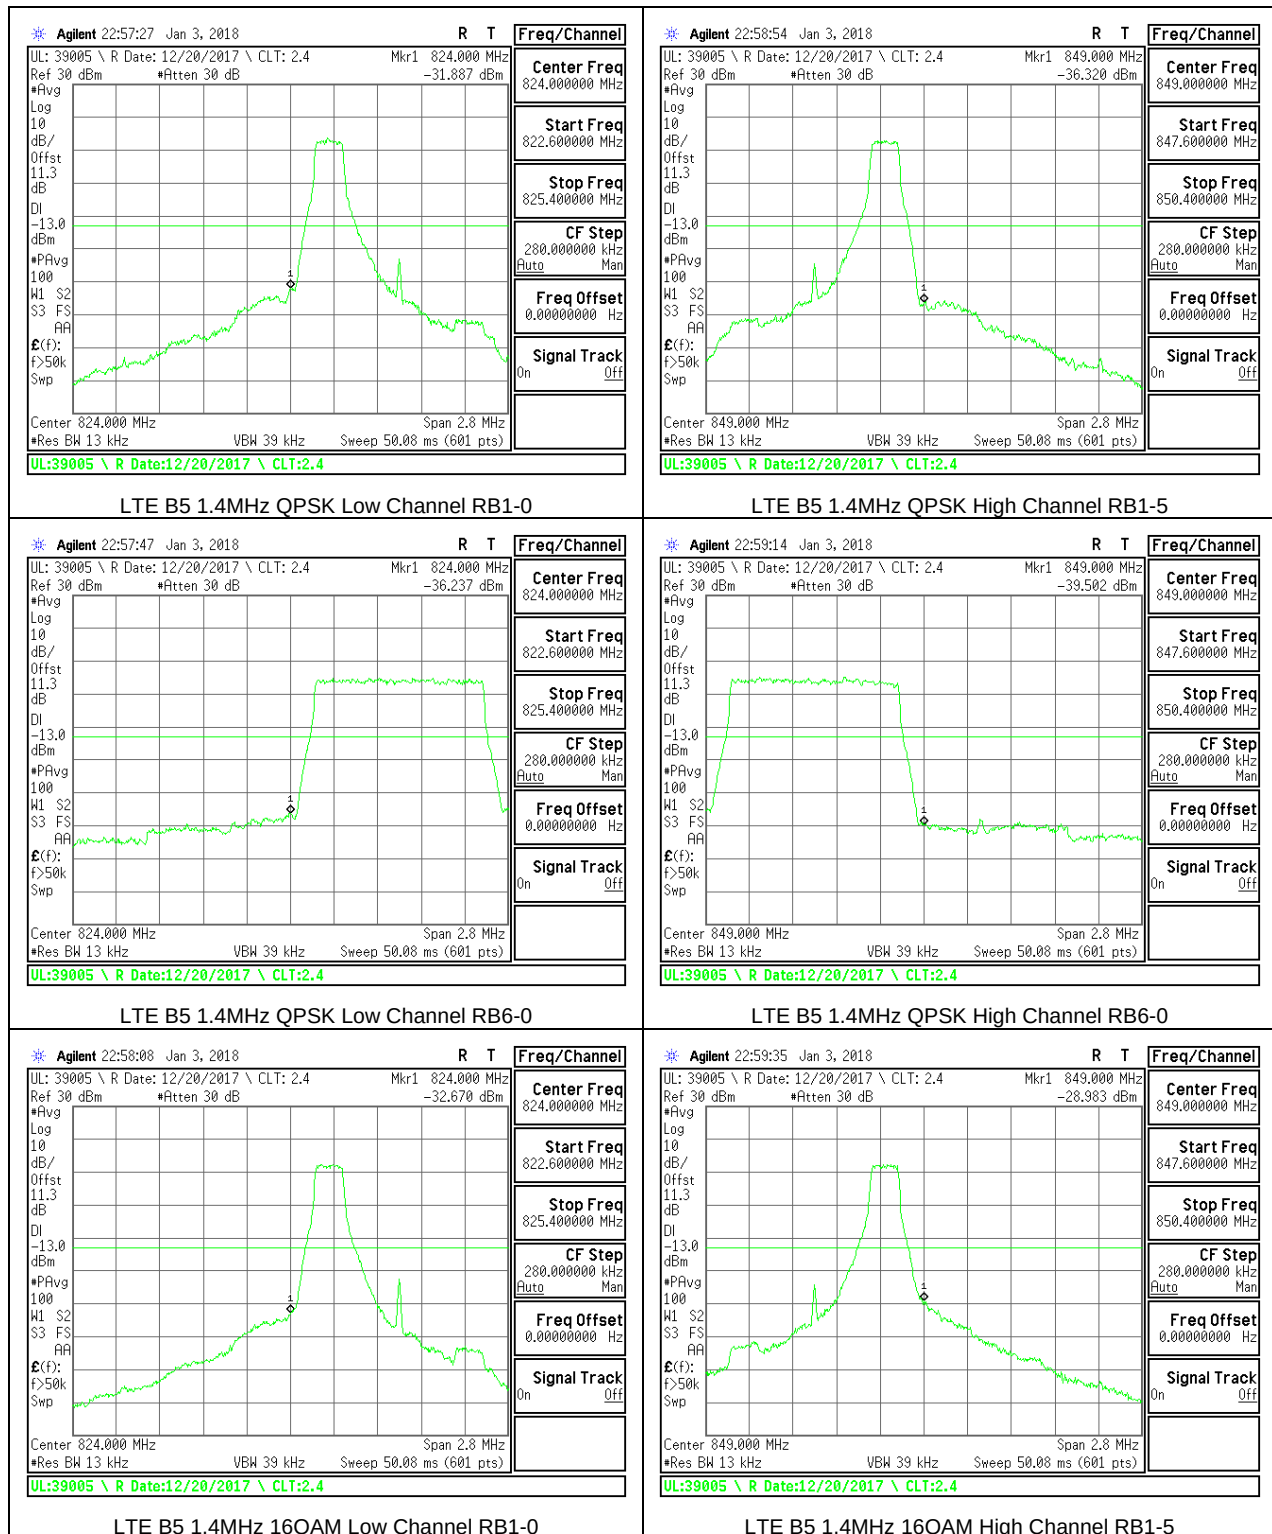


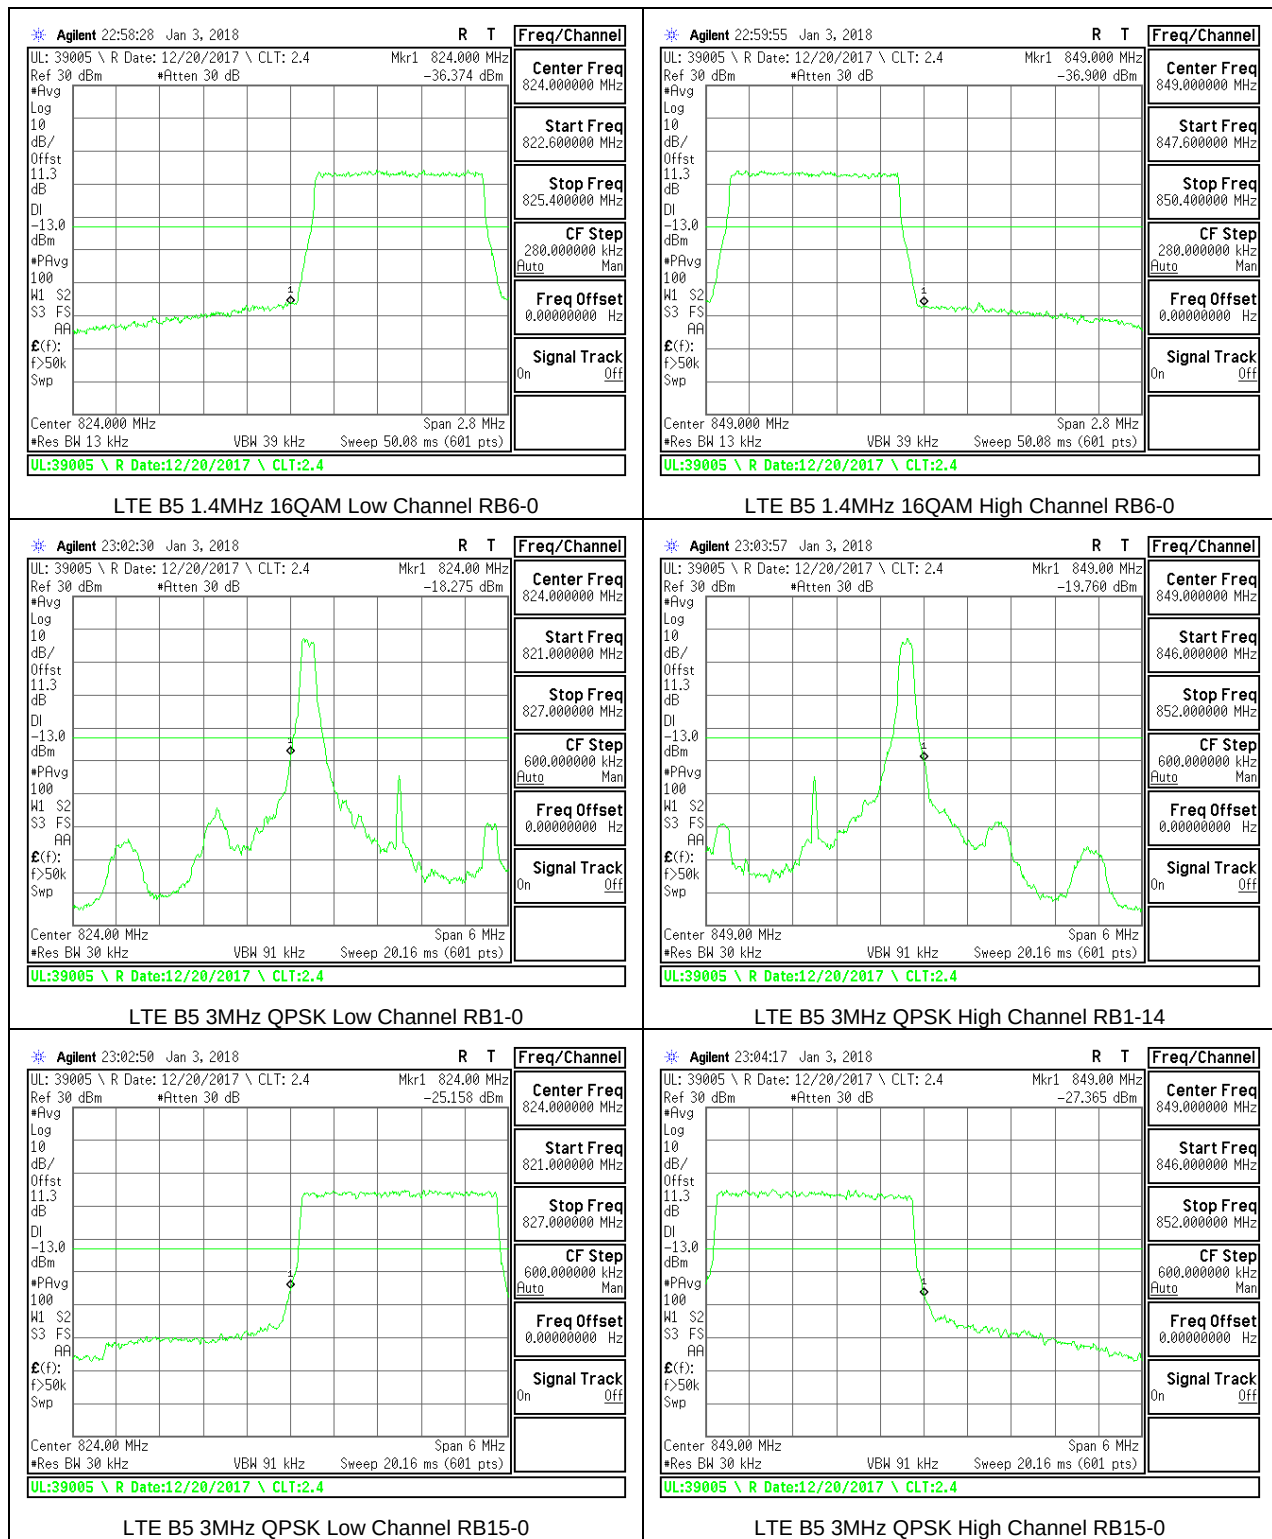

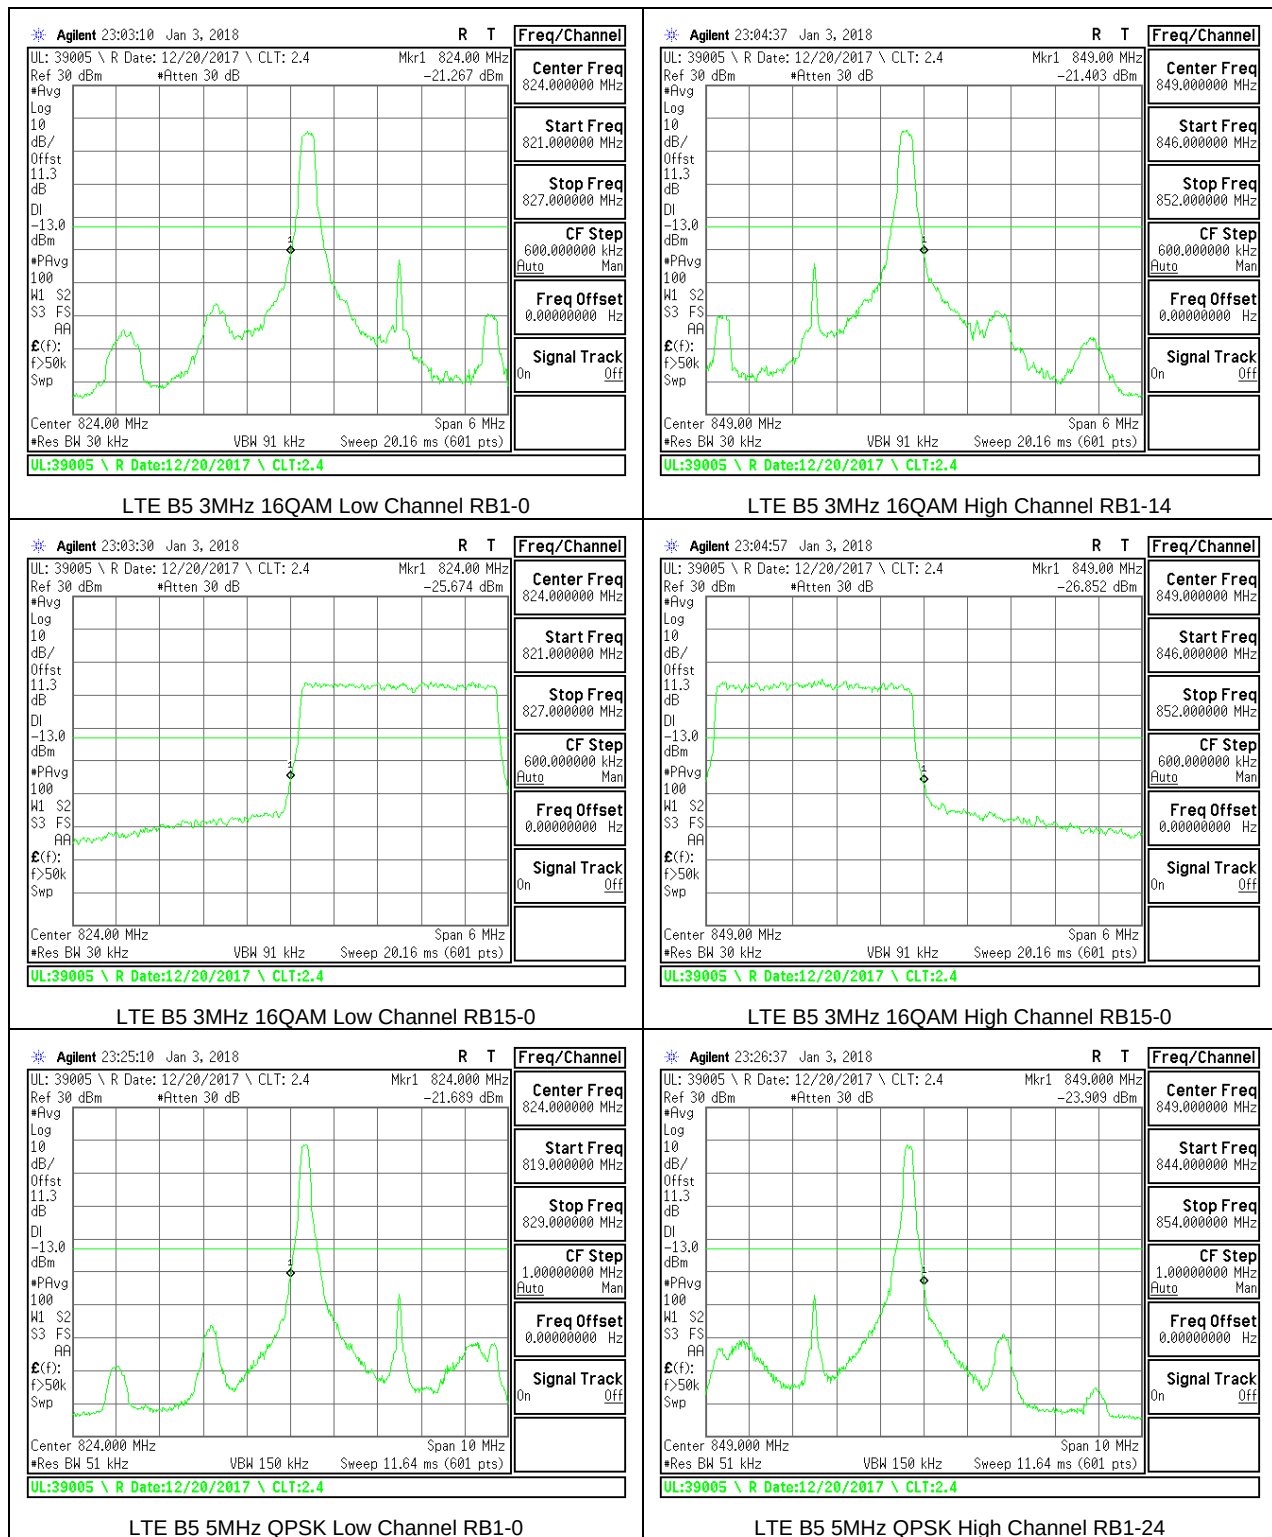


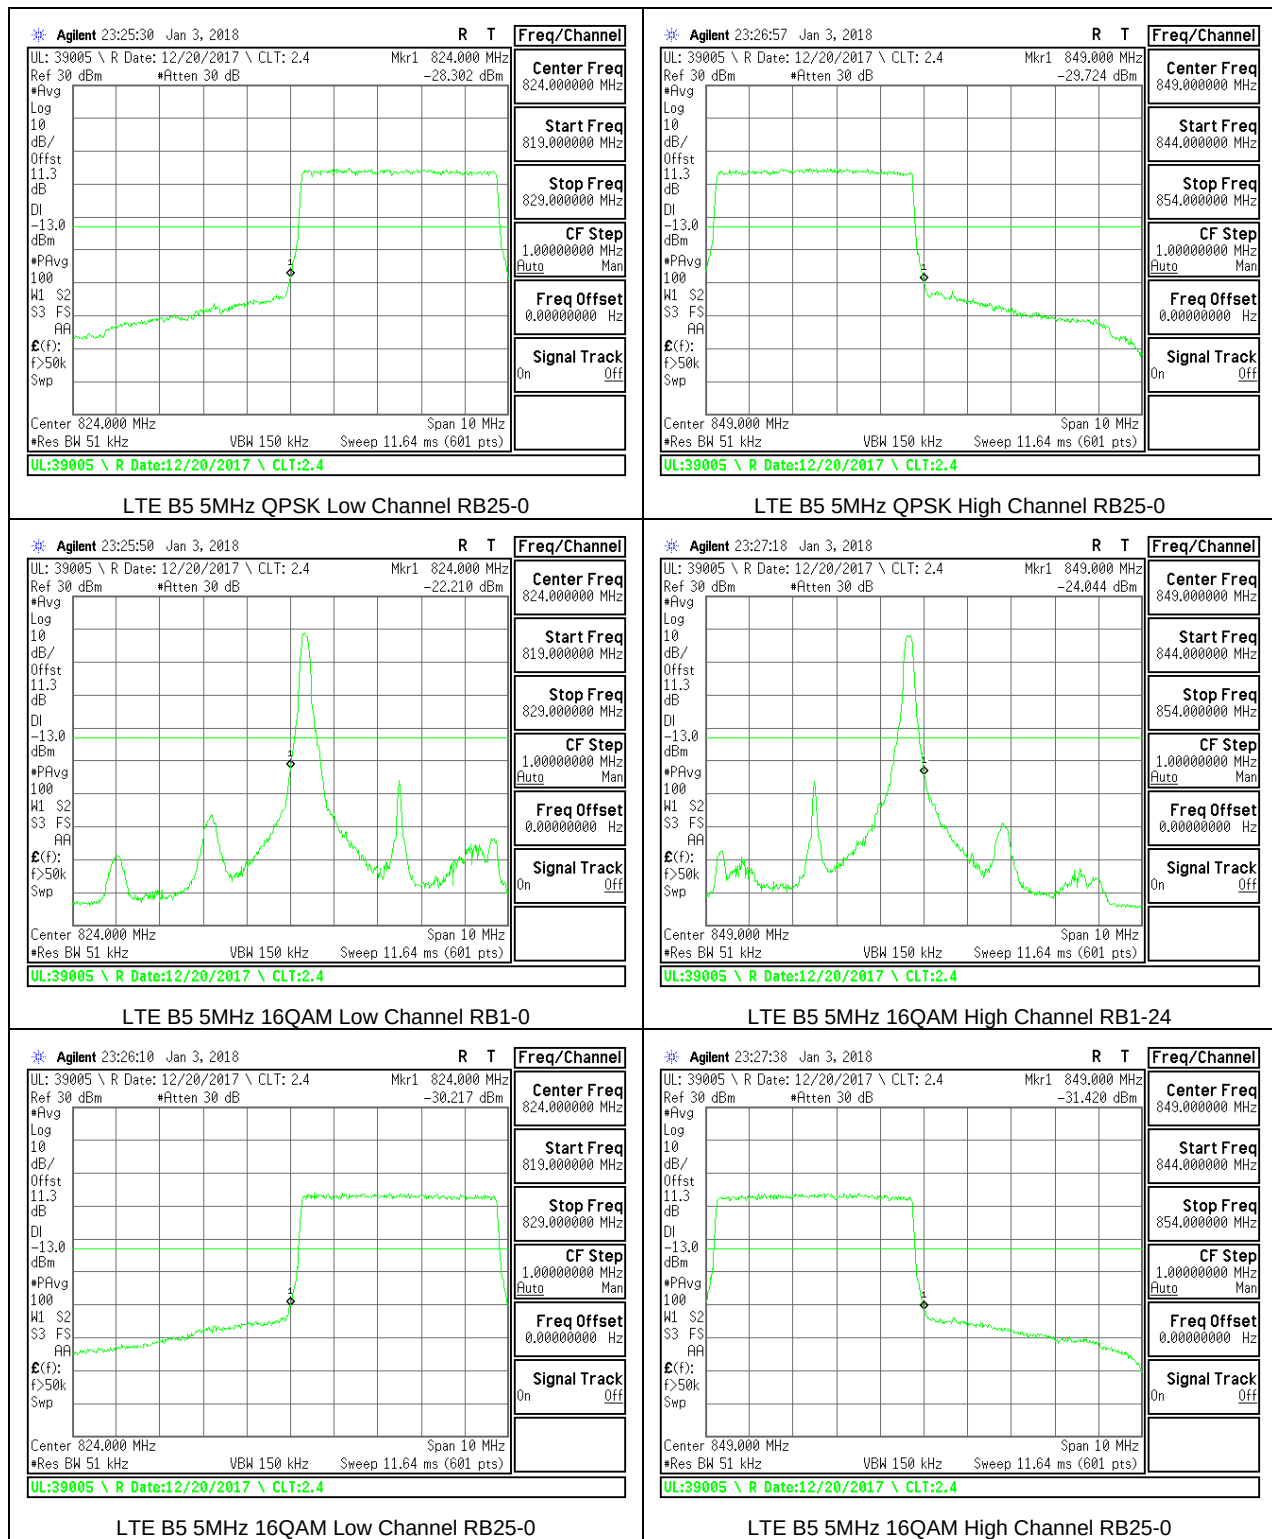


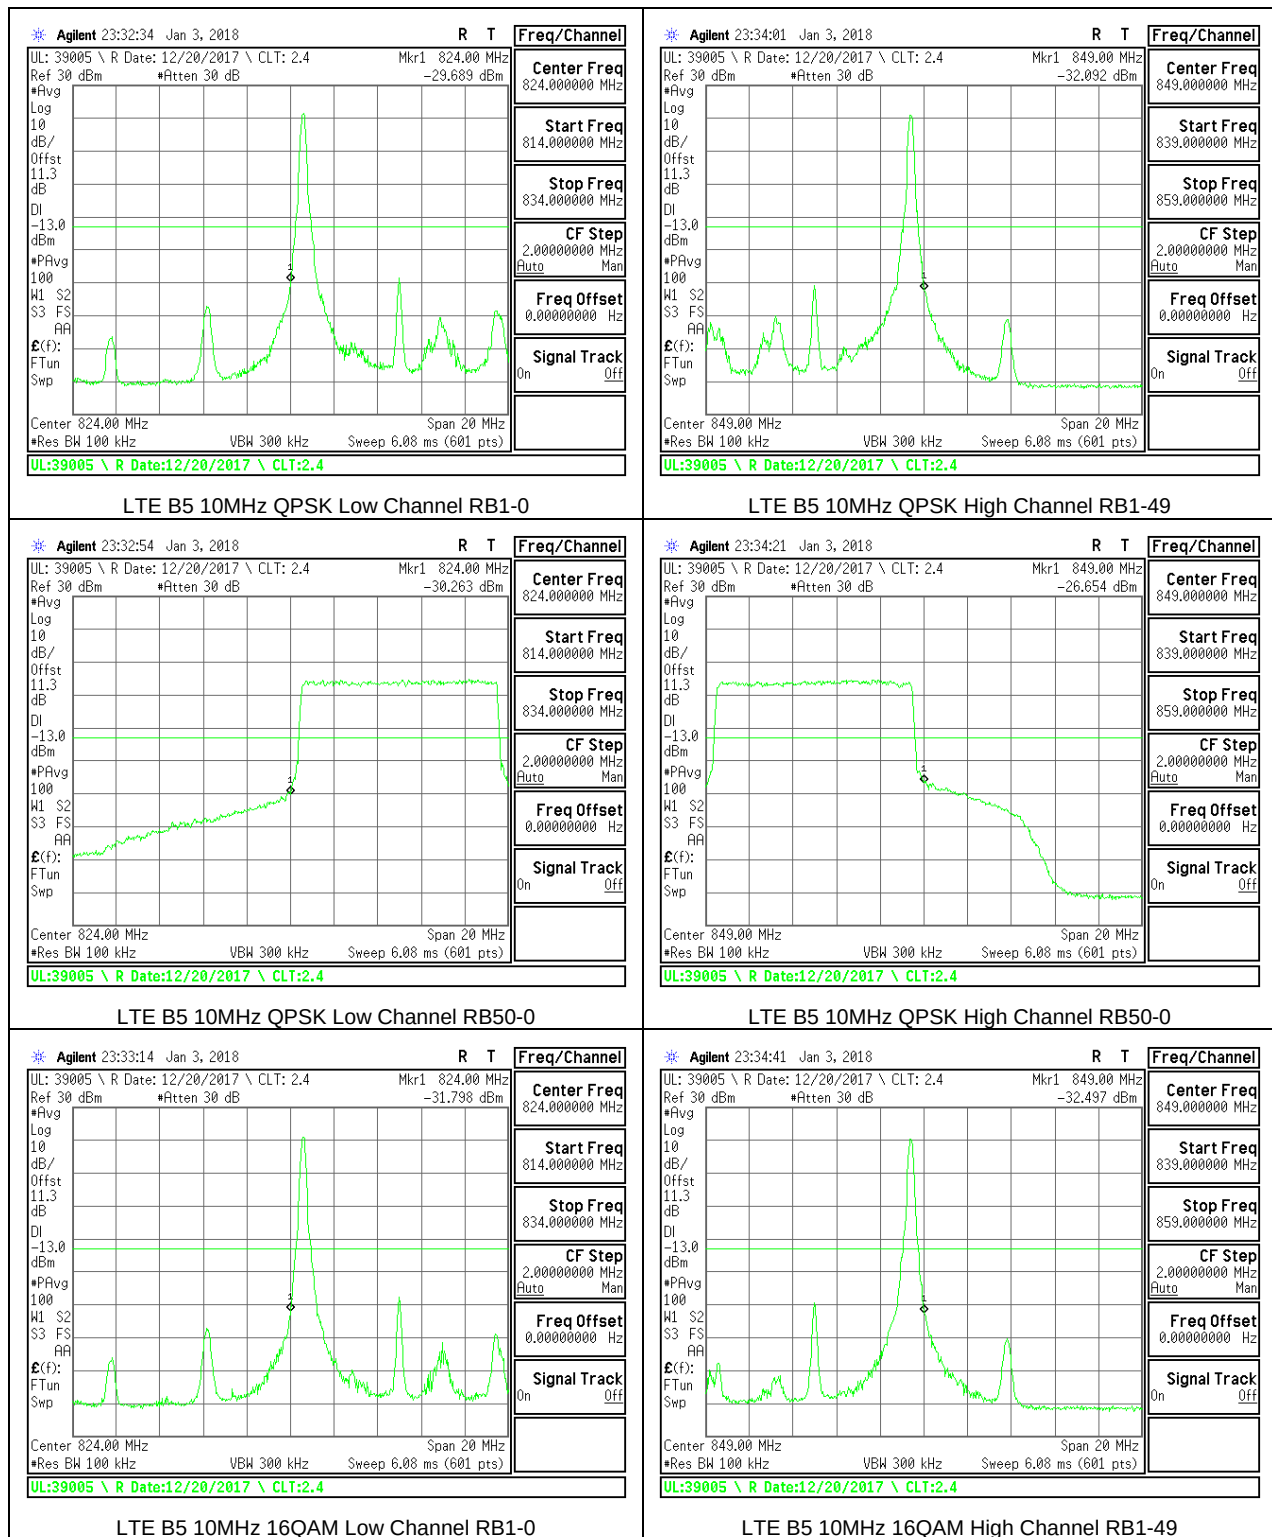


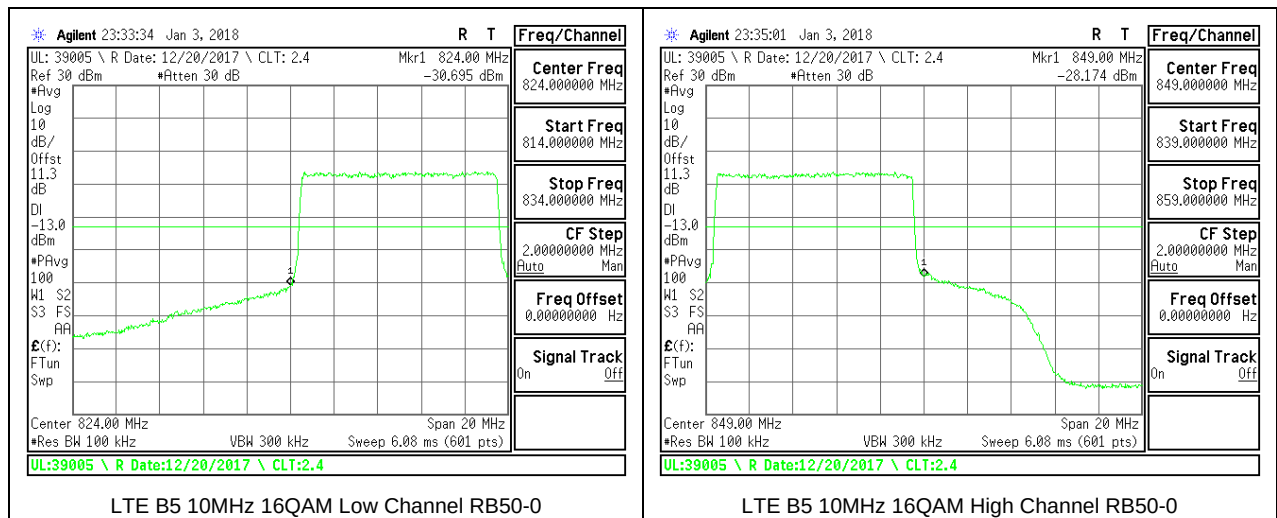



8.2.6. LTE BAND 7 ADJACENT CHANNEL POWER

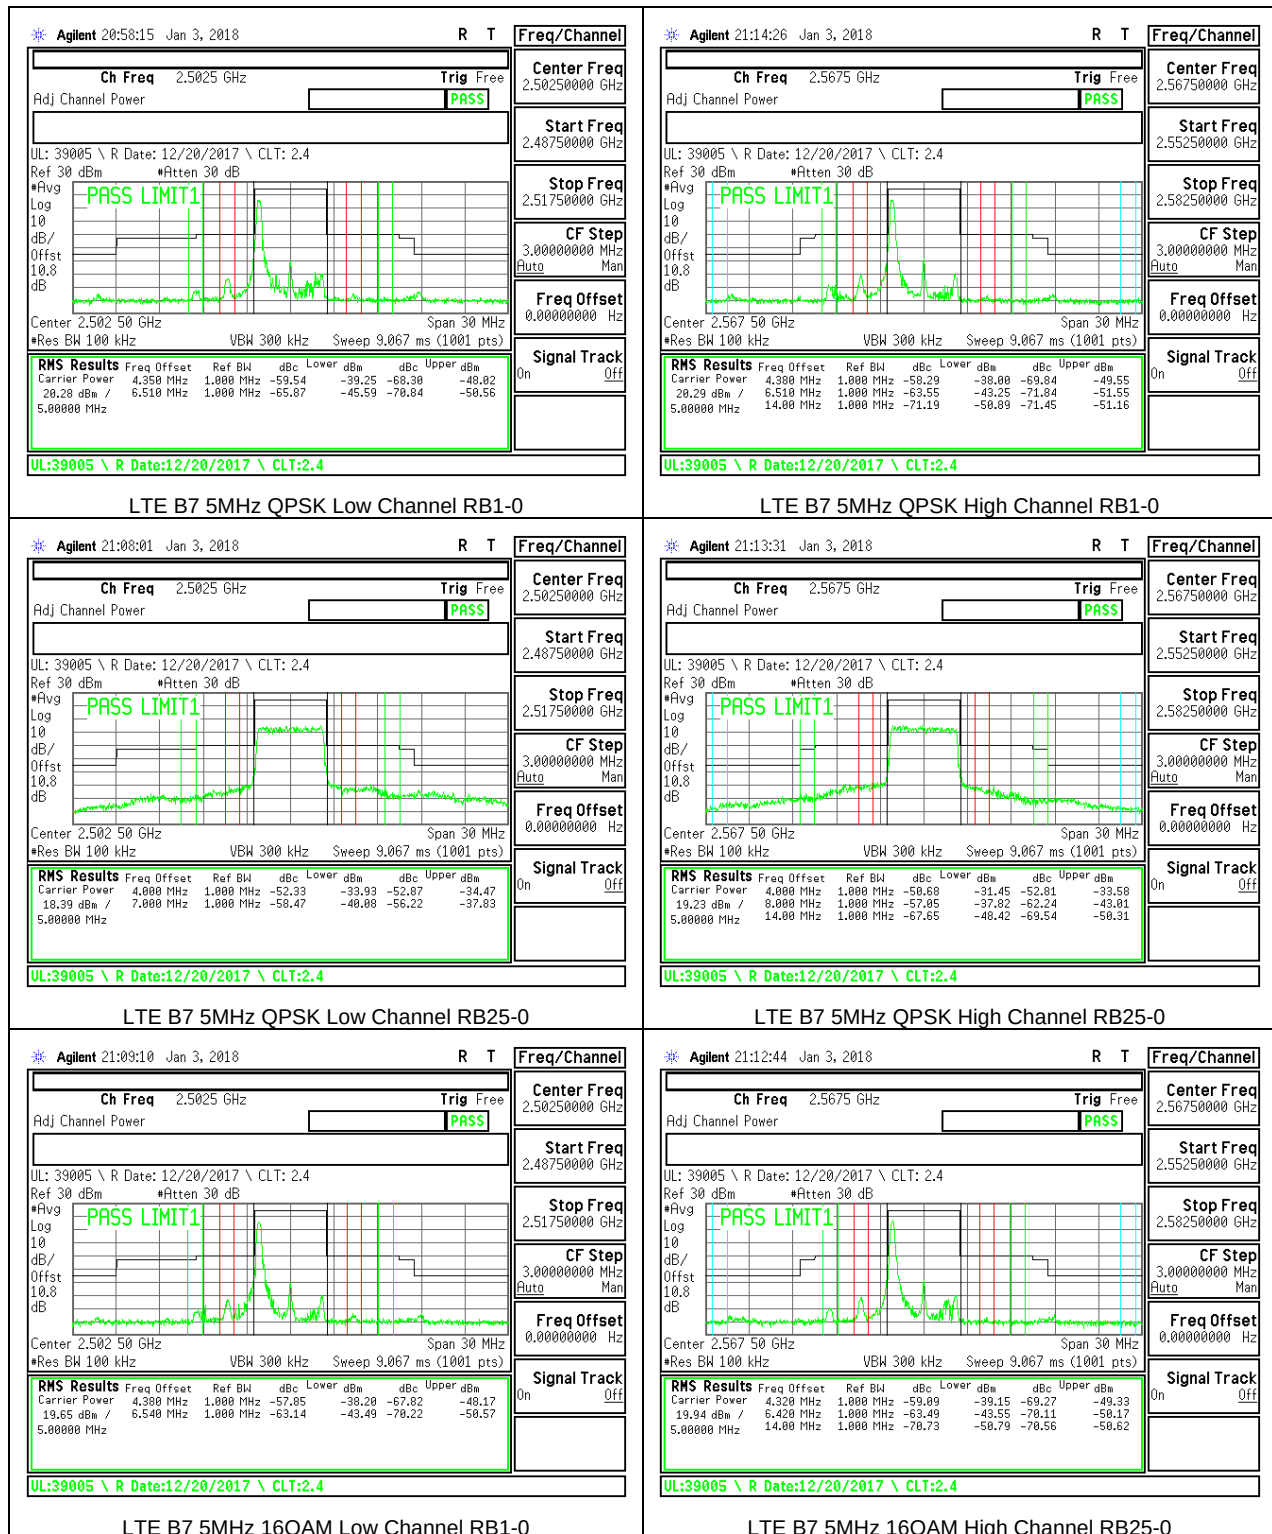


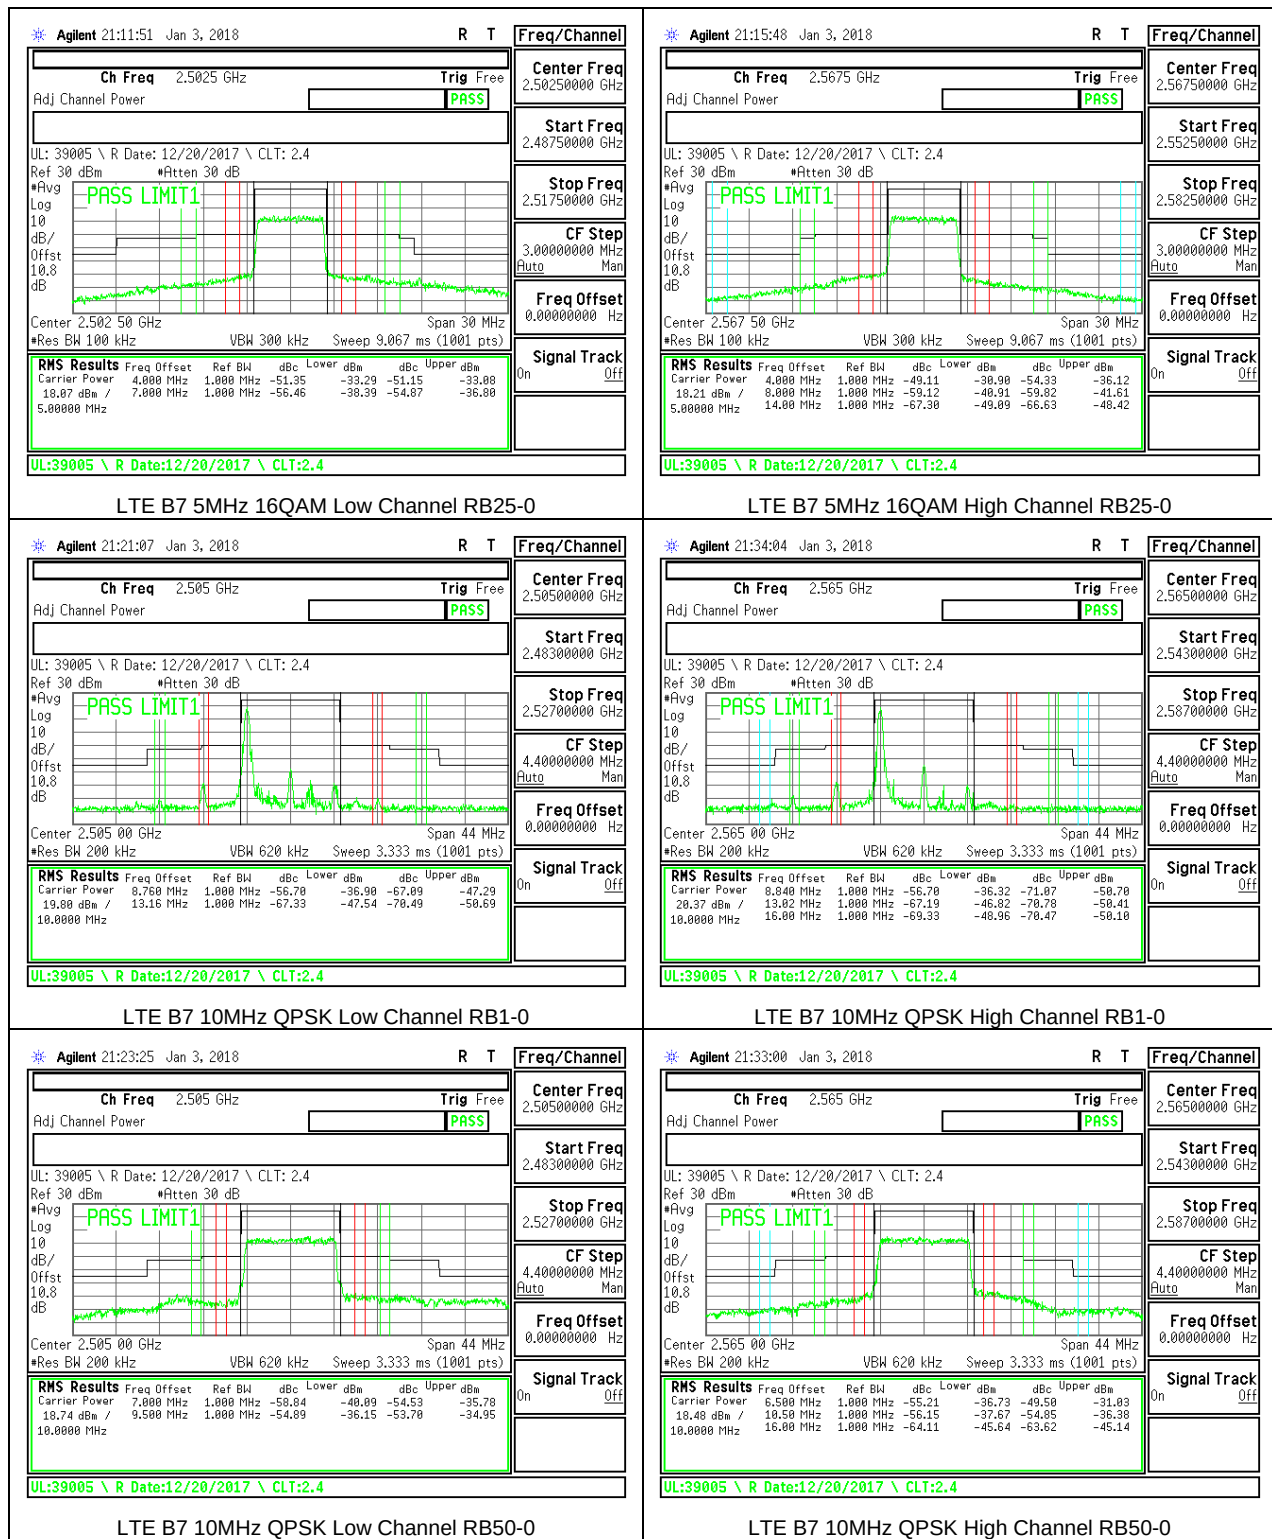




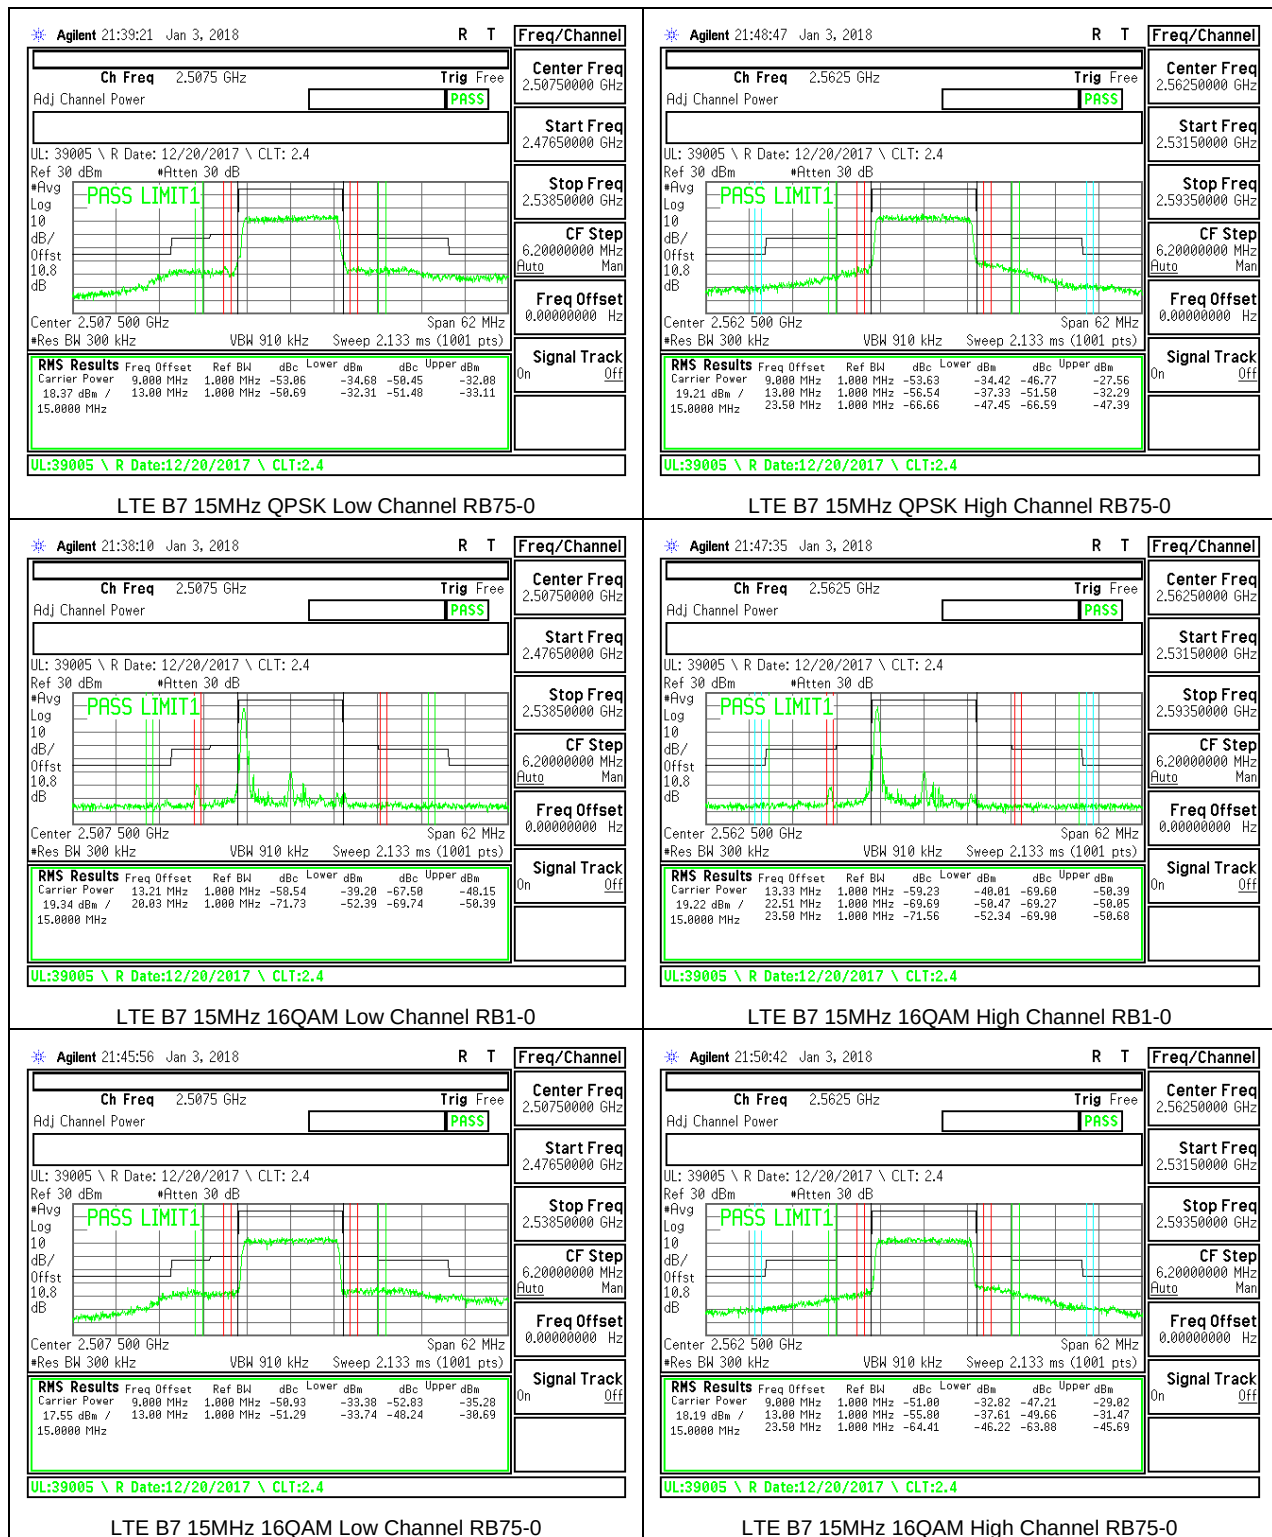


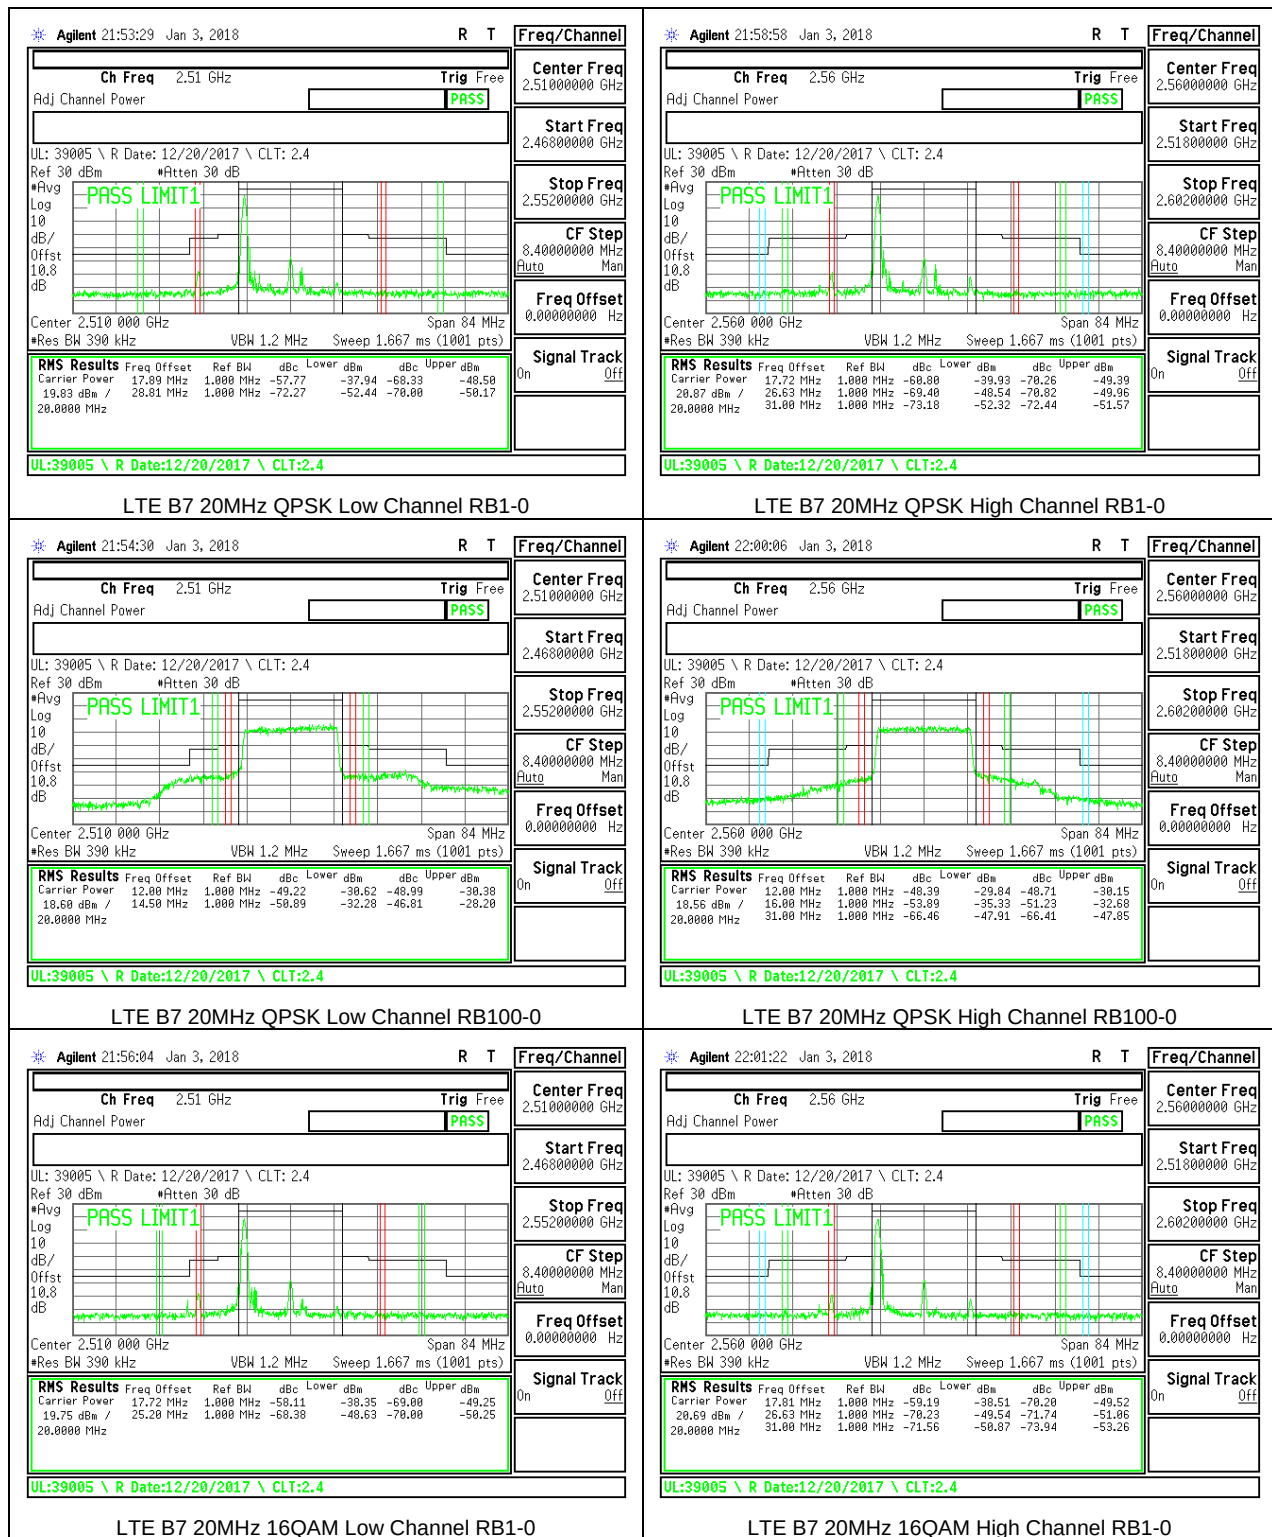

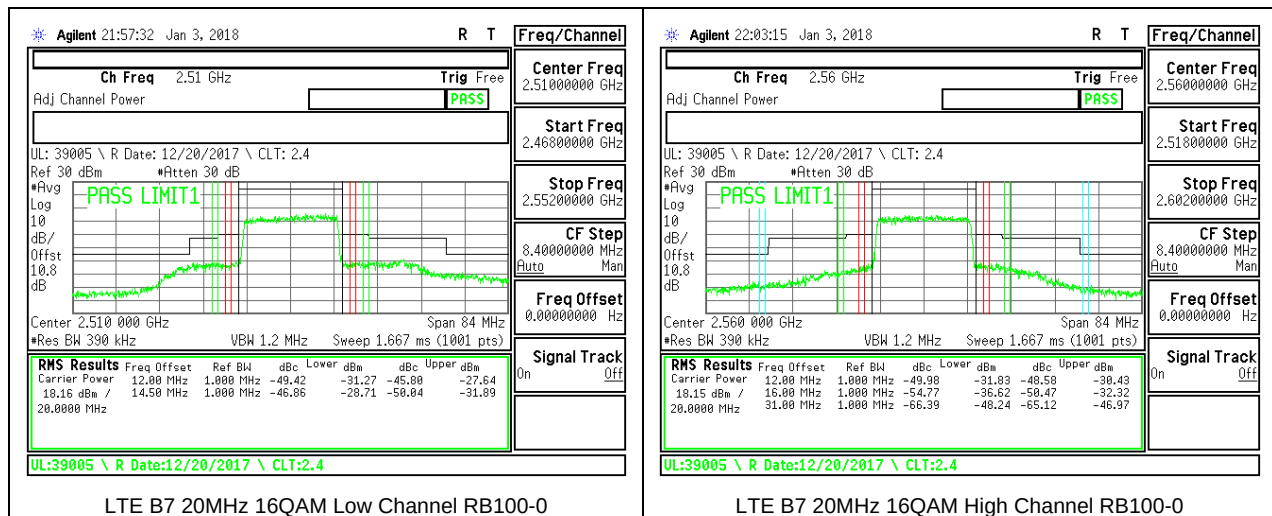


8.2.8. LTE BAND 12 BANDEDGE

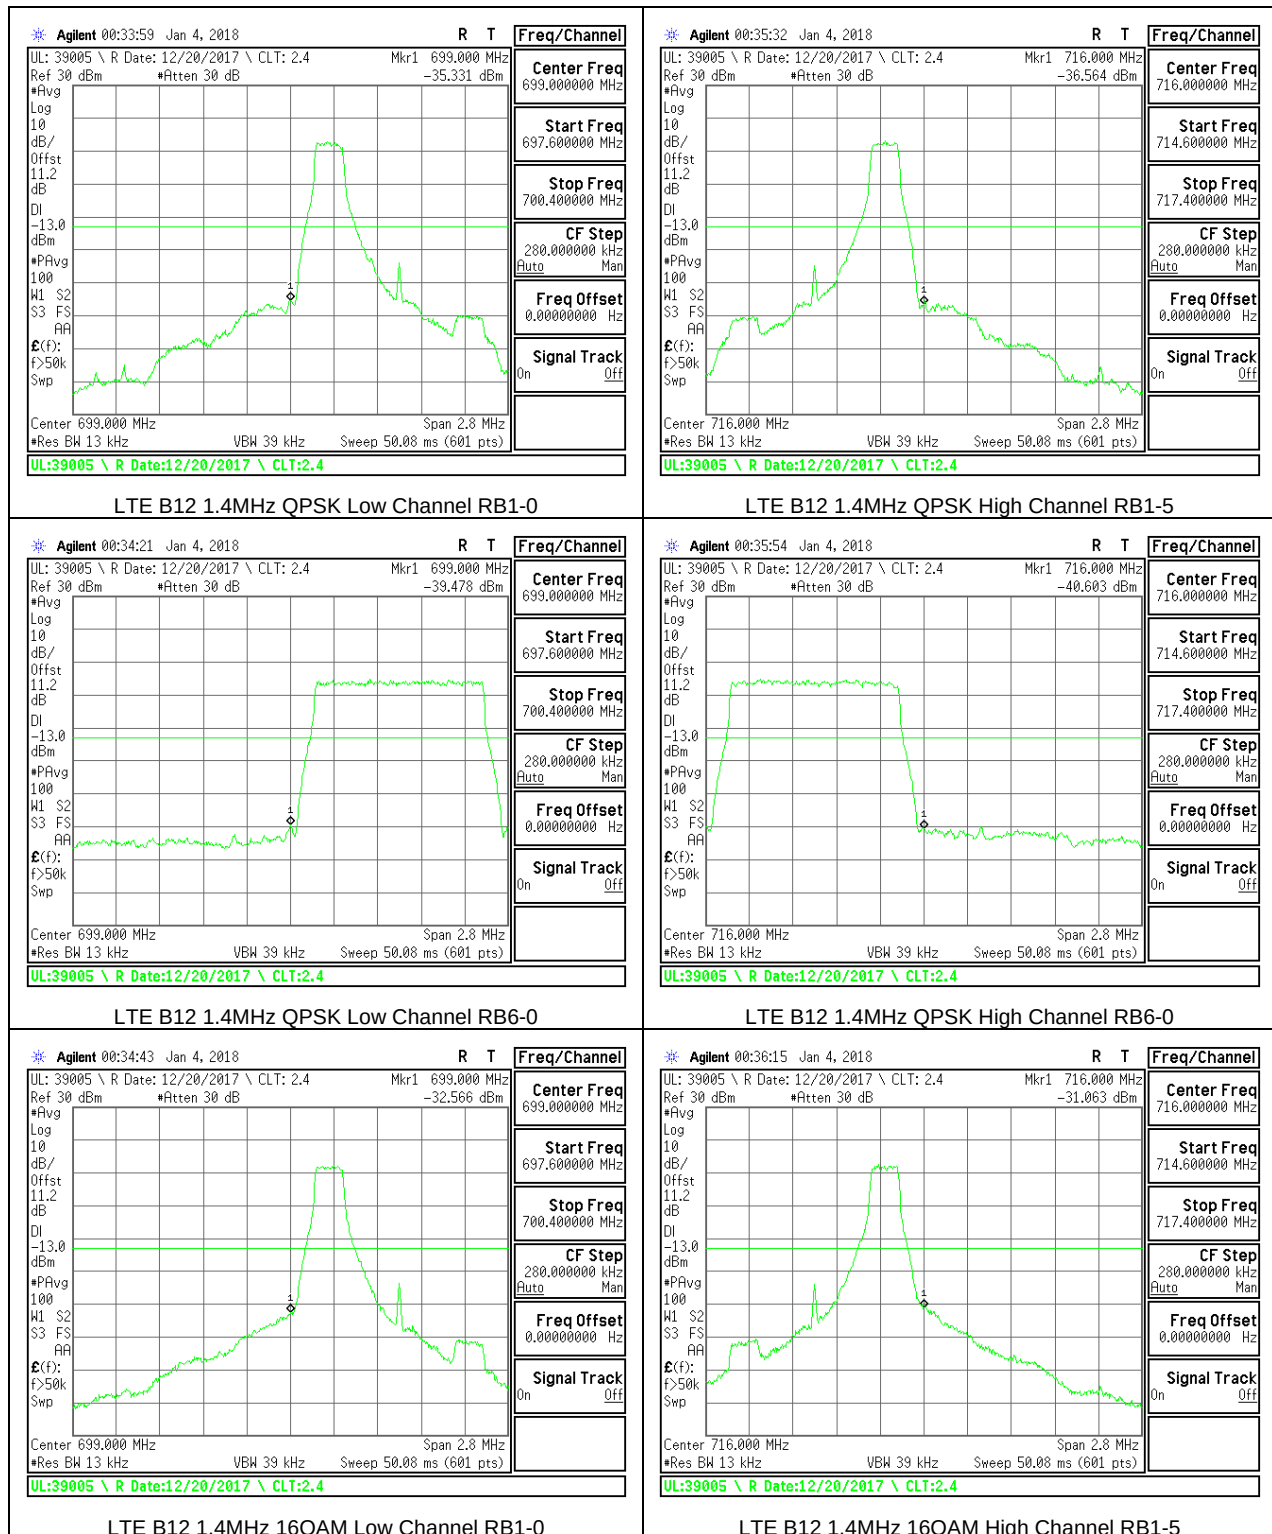


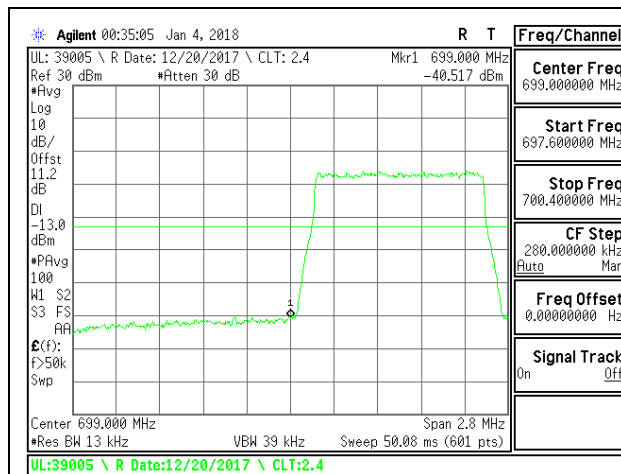


LTE B12 1.4MHz 16QAM Low Channel RB6-0

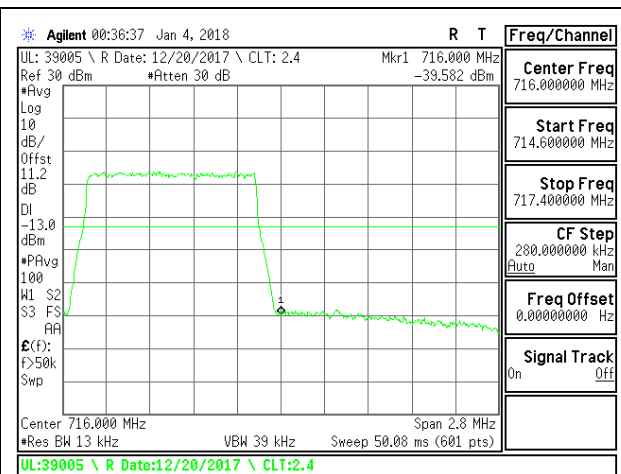


LTE B12 1.4MHz 16QAM High Channel RB6-0

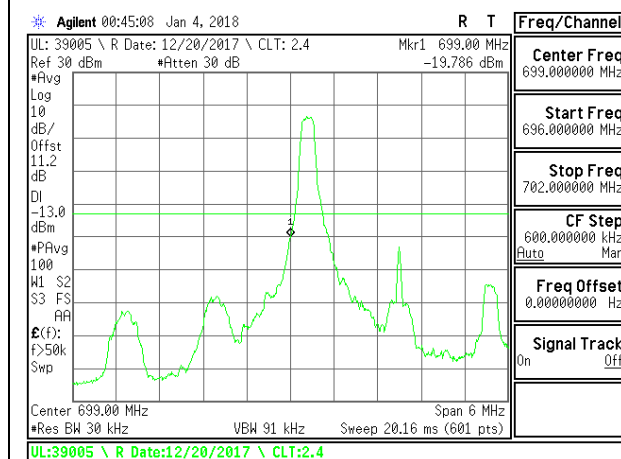


LTE B12 3MHz QPSK Low Channel RB1-0

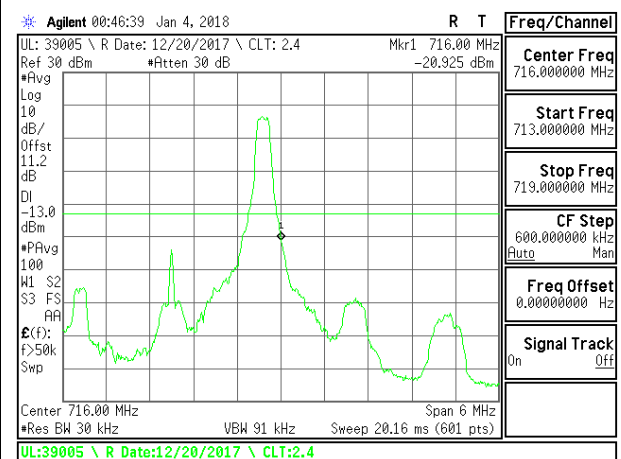


LTE B12 3MHz QPSK High Channel RB1-14

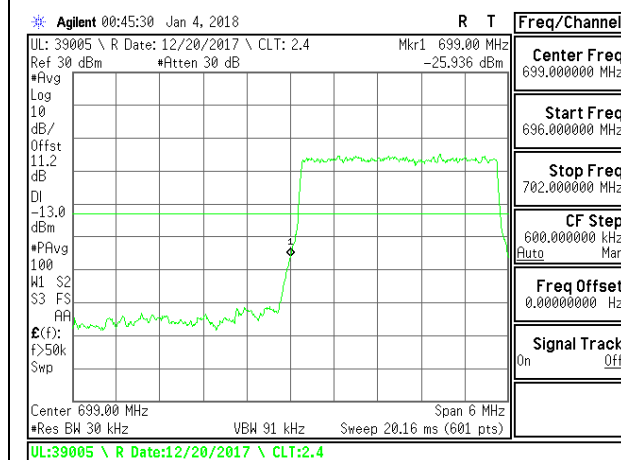



LTE B12 3MHz QPSK Low Channel RB15-0

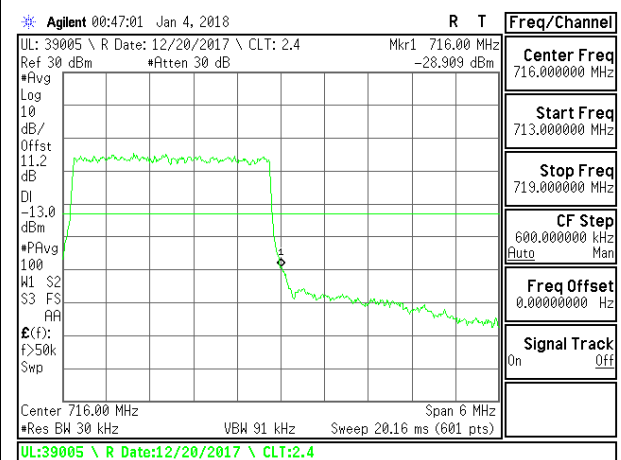


LTE B12 3MHz QPSK High Channel RB15-0

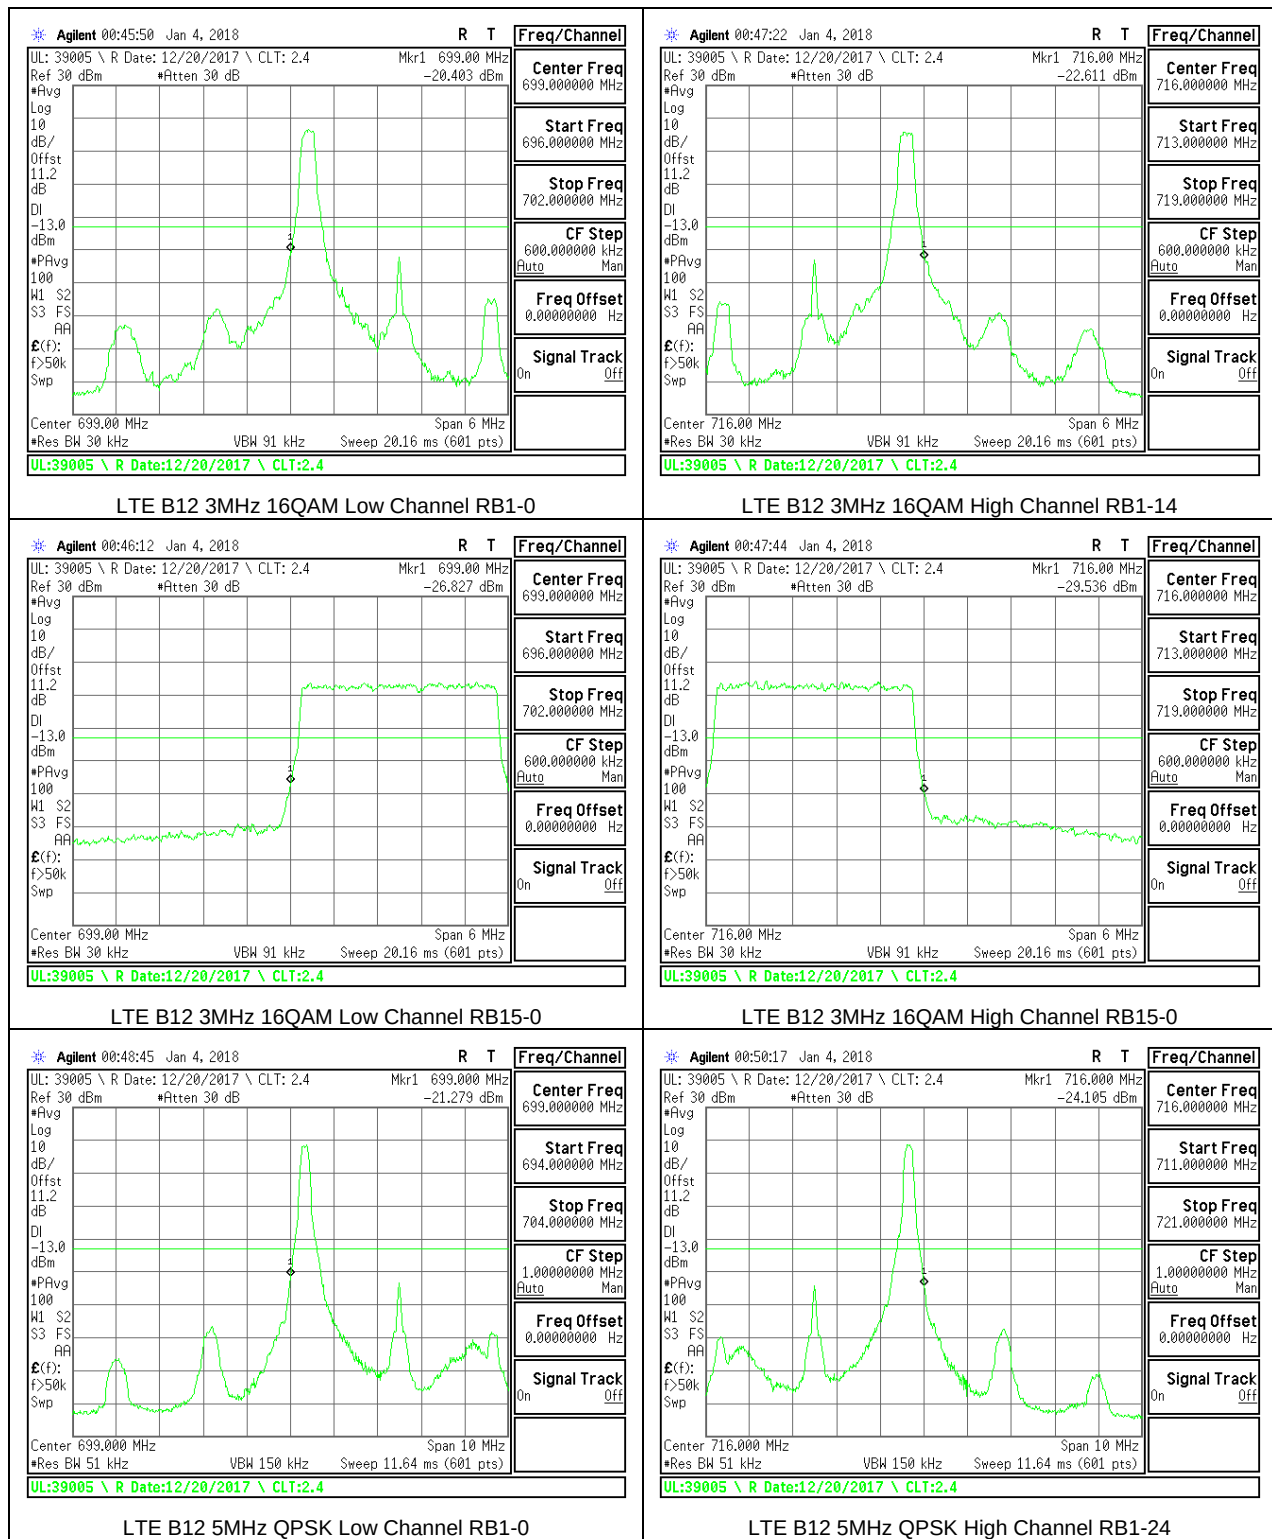


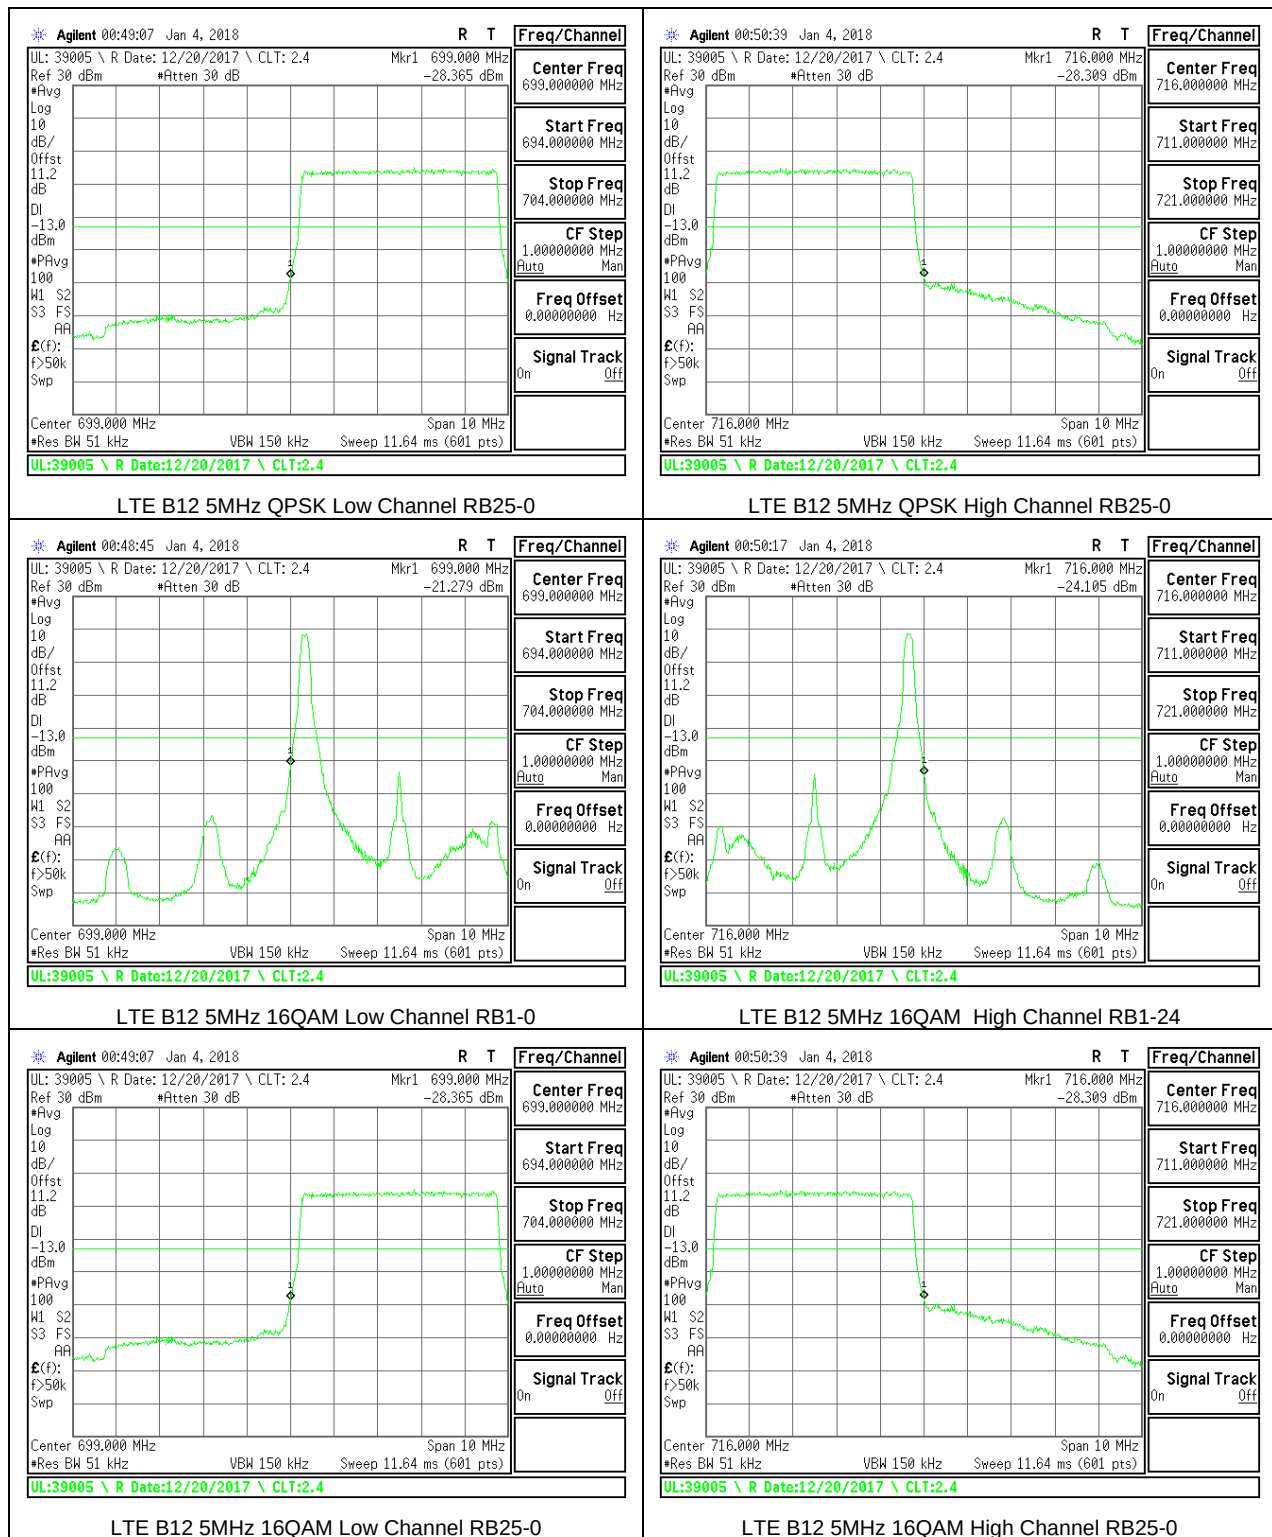


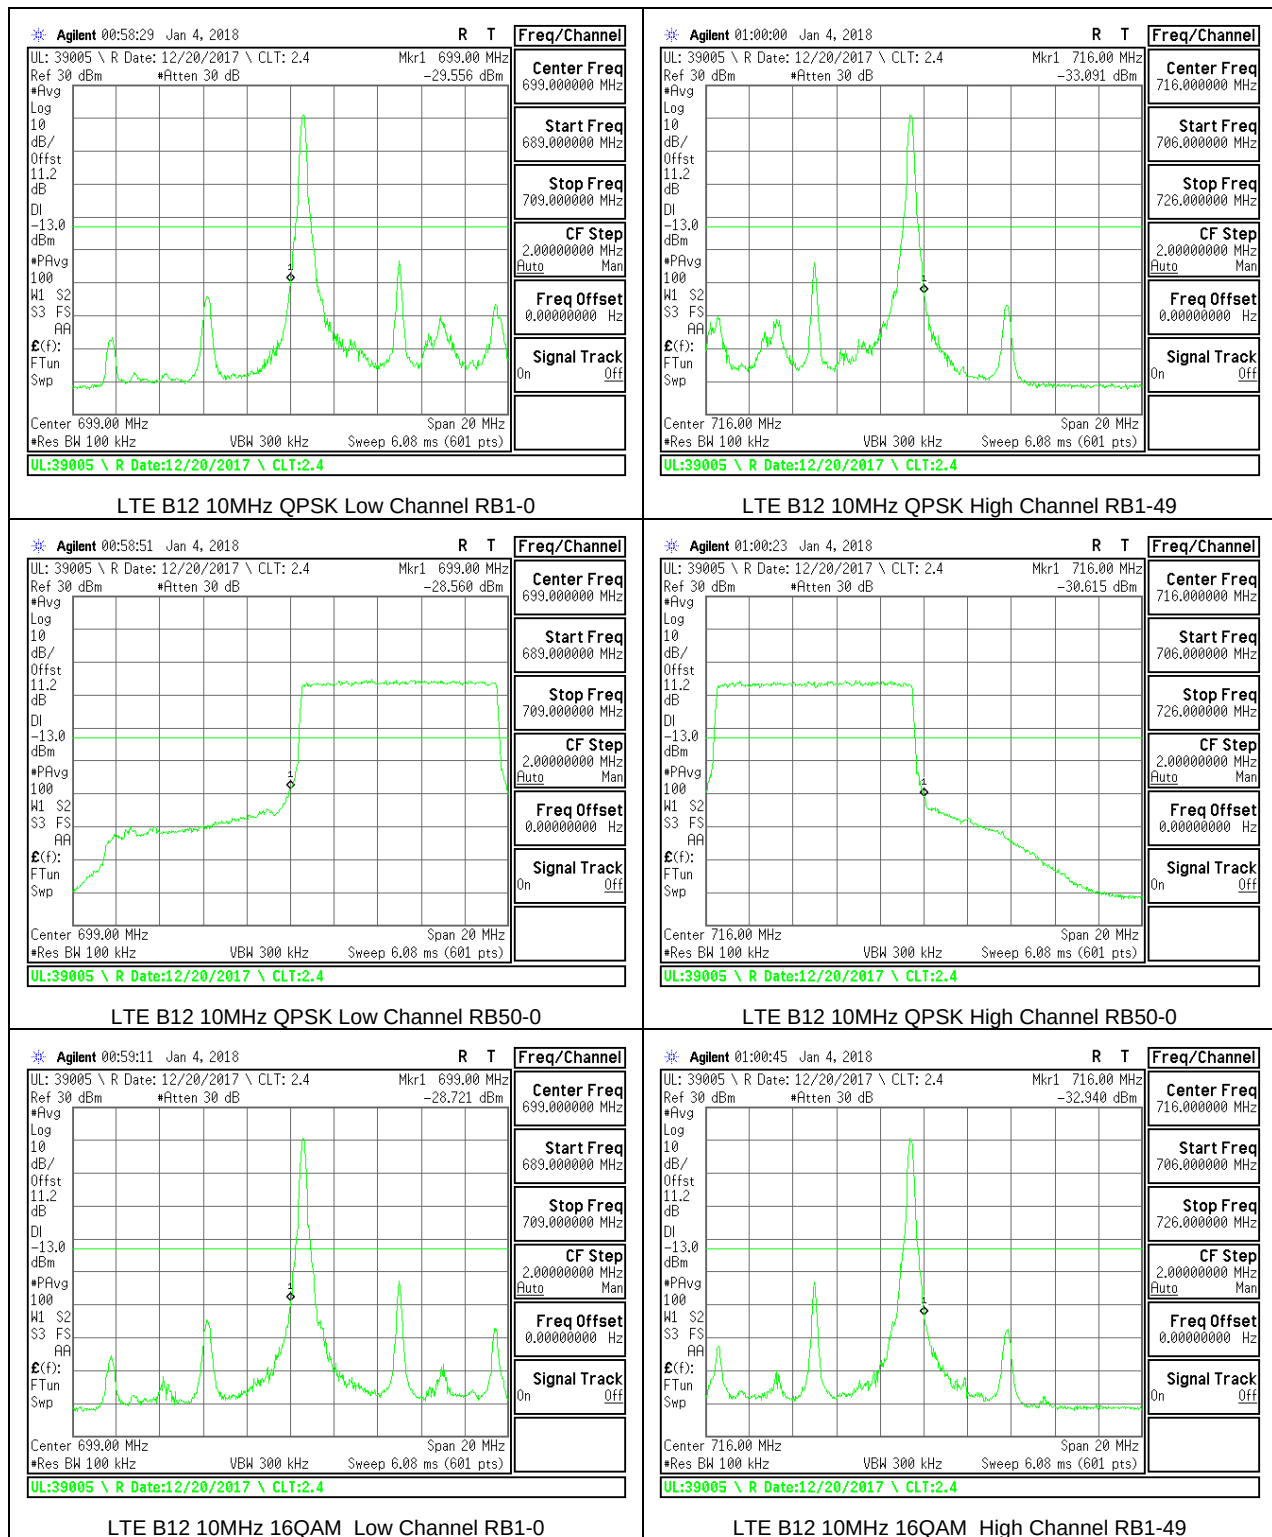

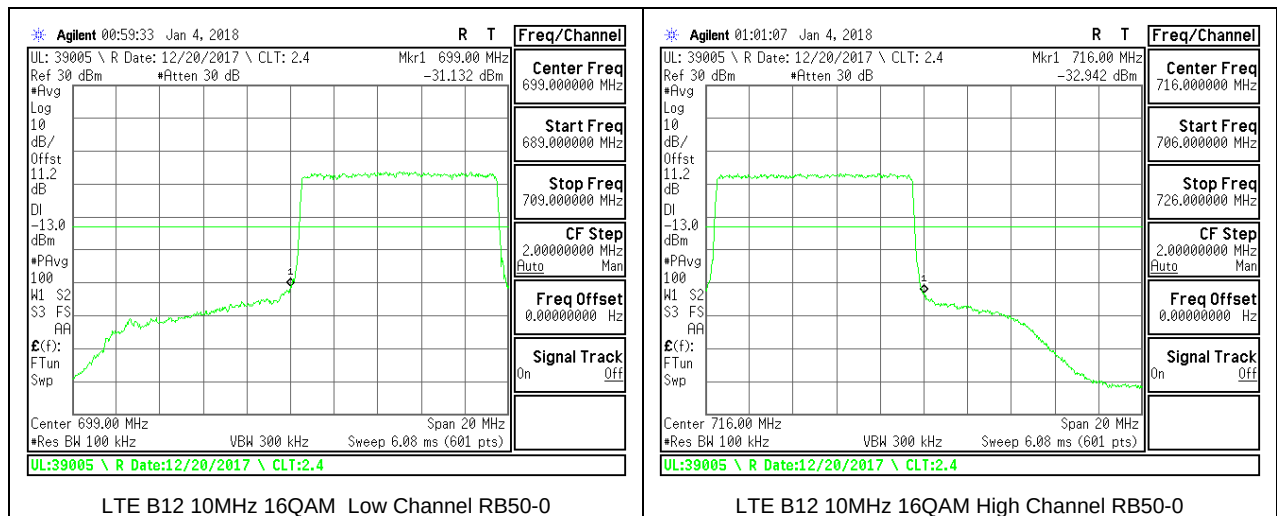

8.2.9. LTE BAND 13 BANDEDGE

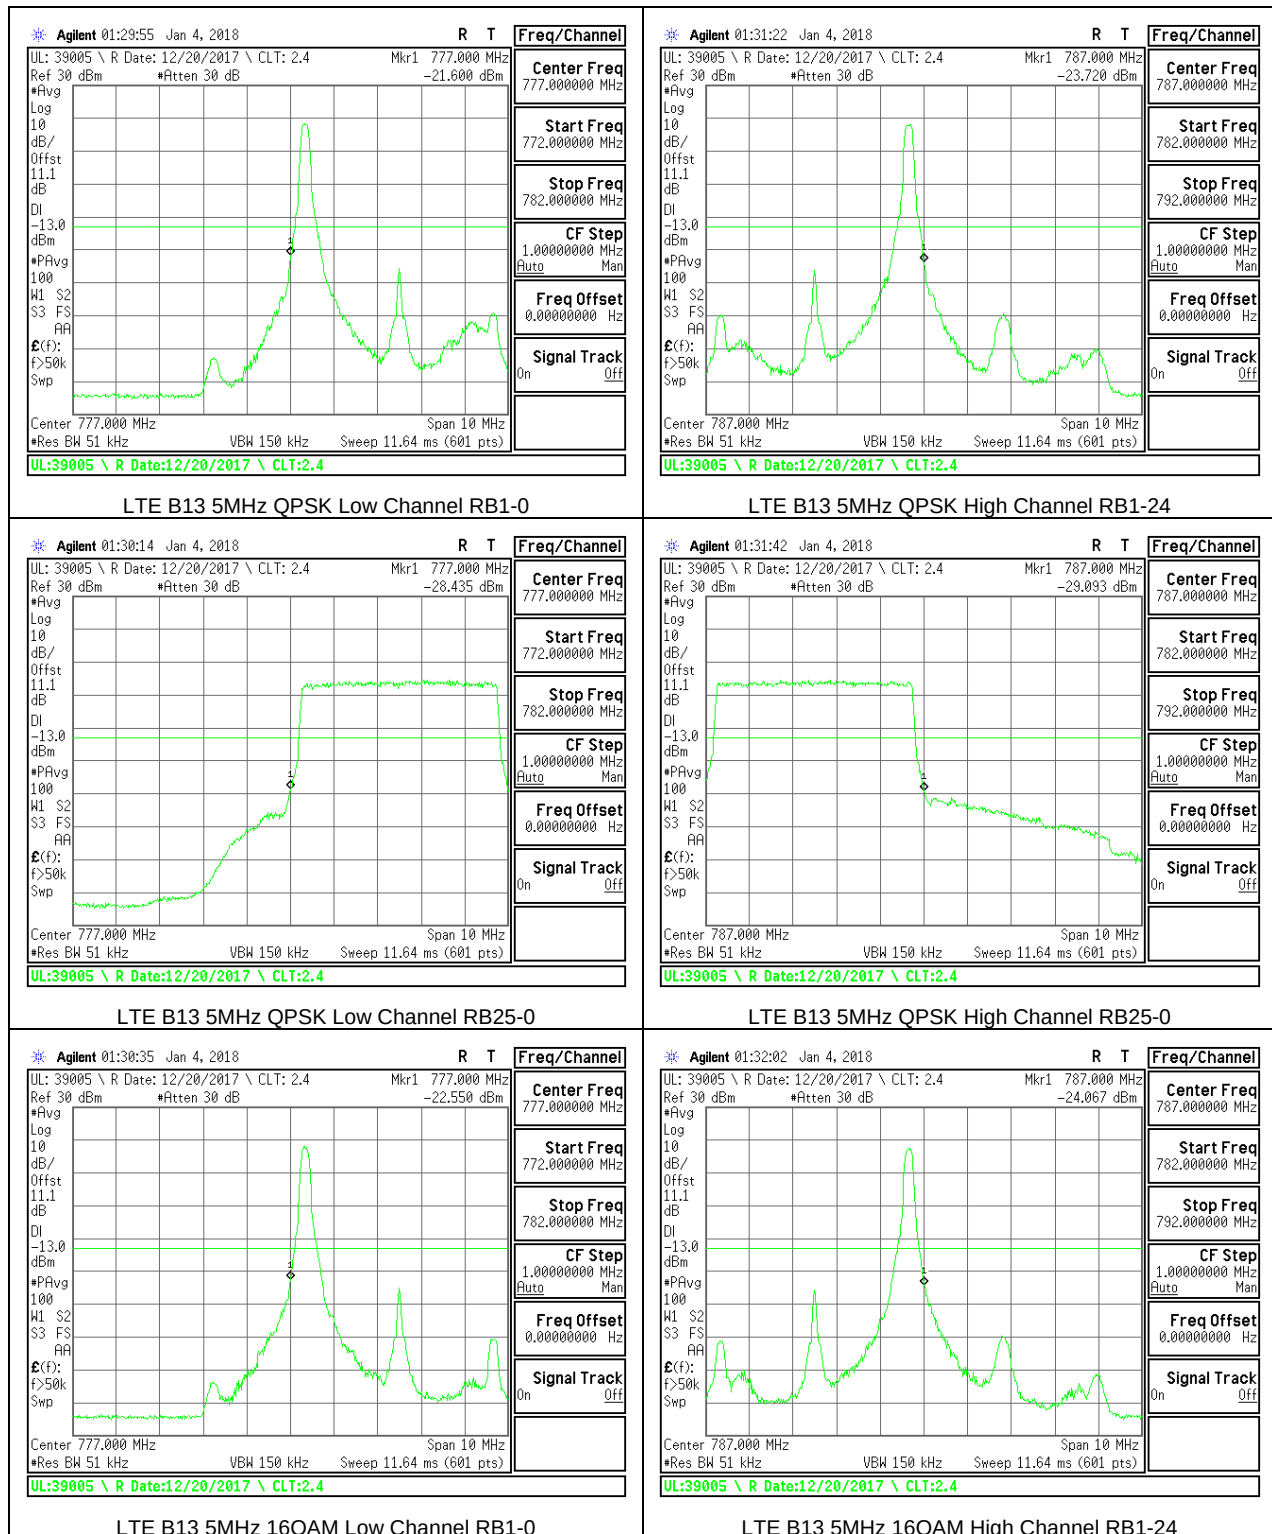


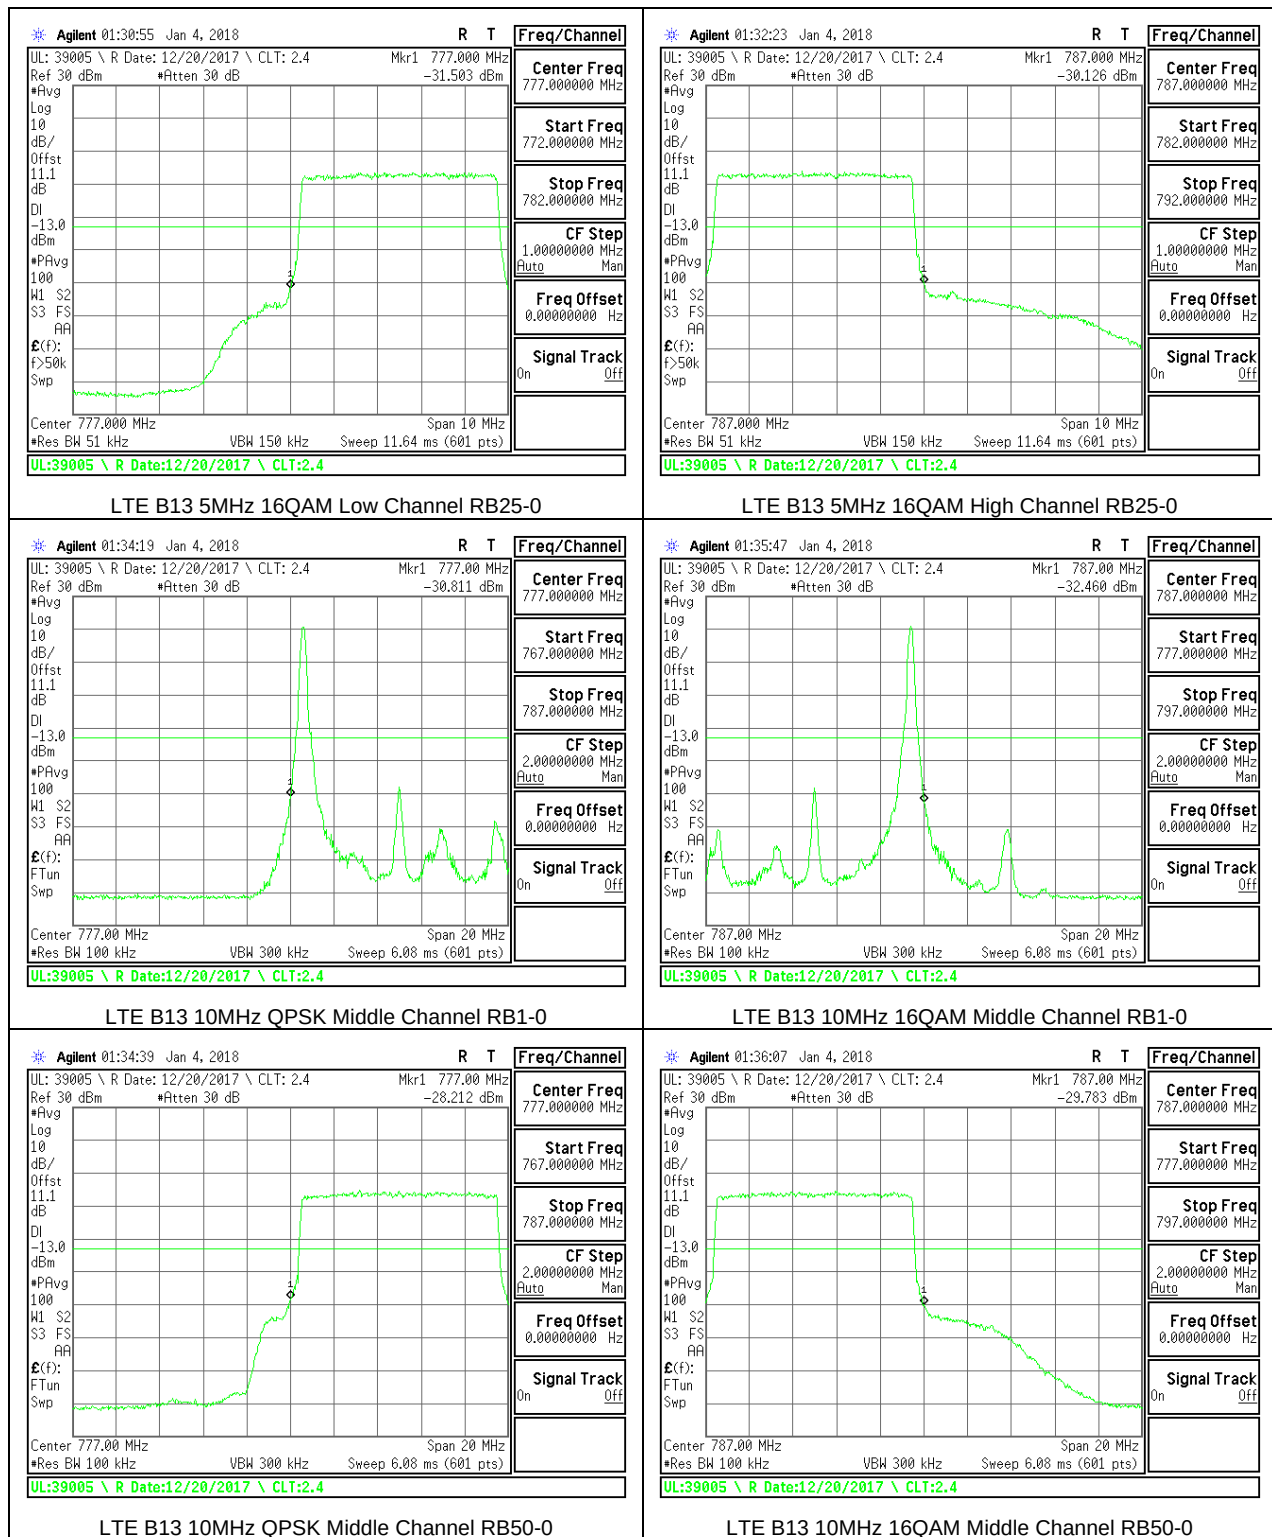



8.2.10. LTE BAND 17 BANDEDGE

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth (5 & 10 MHz).


8.2.11. LTE BAND 26 EMISSION MASK (FCC PART 90S)

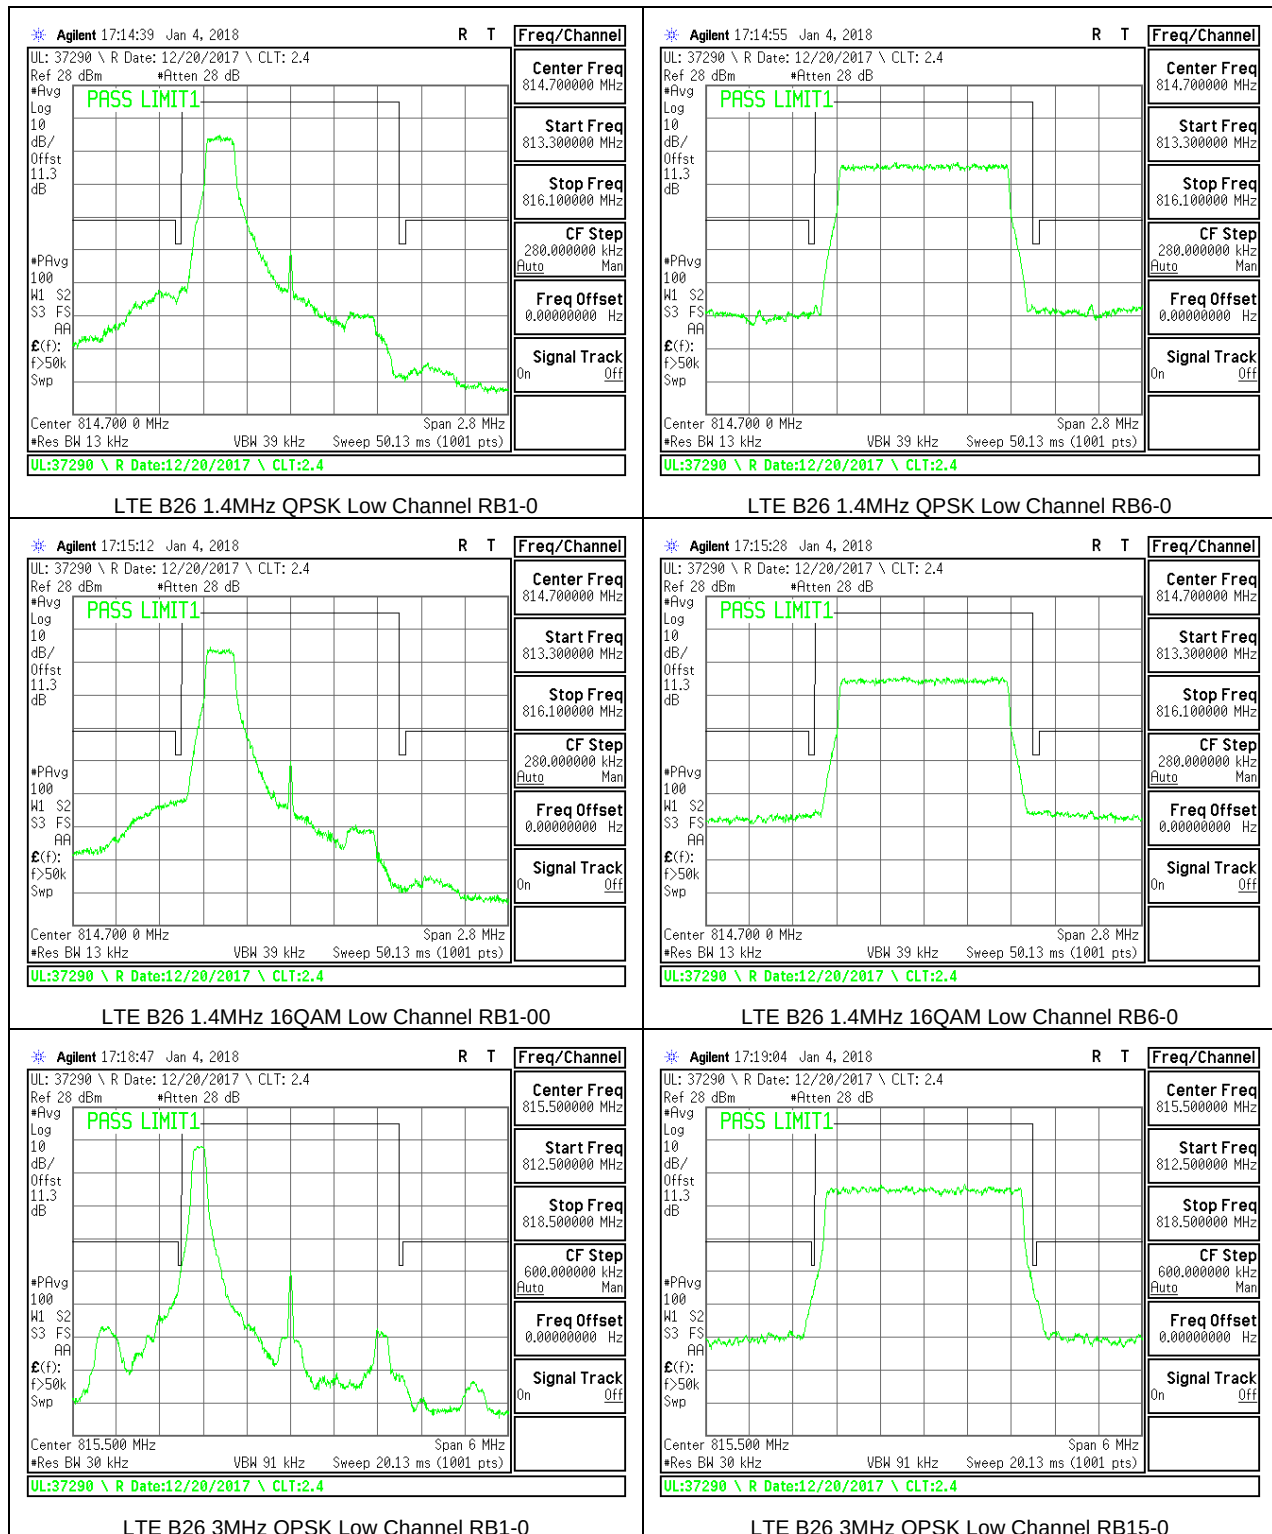


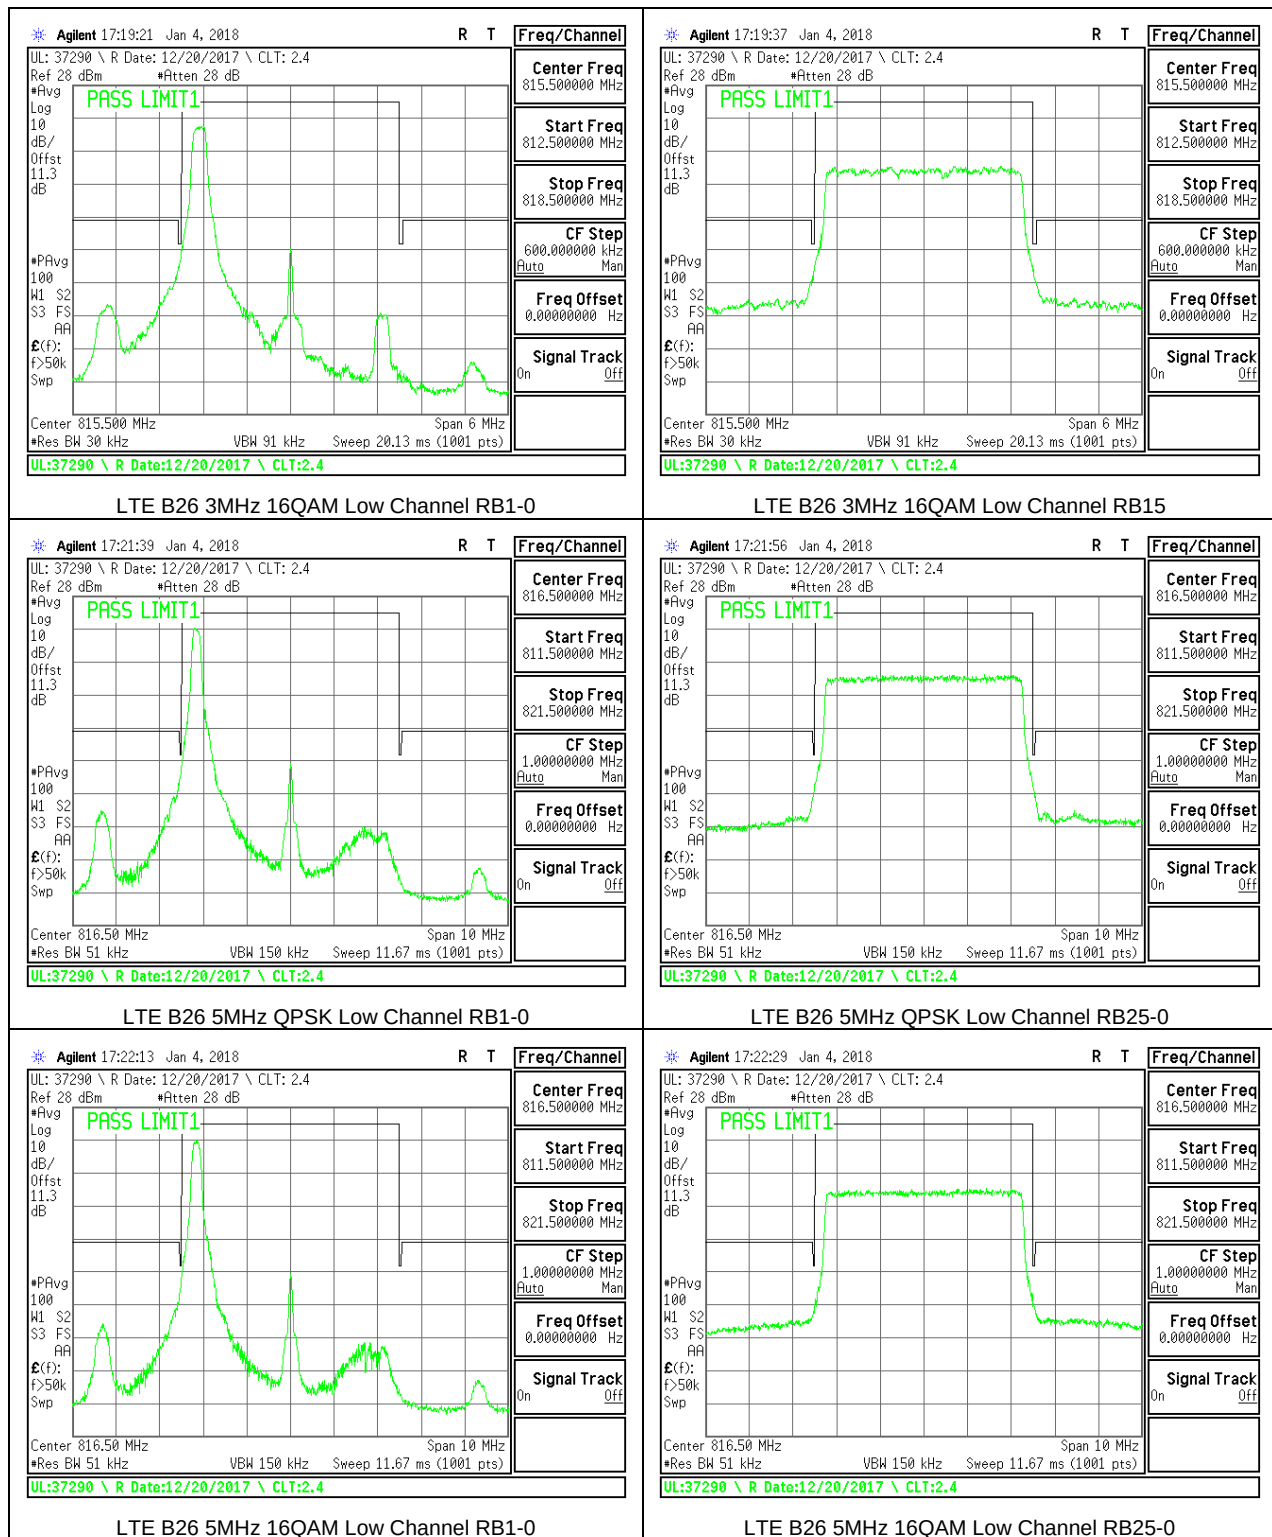


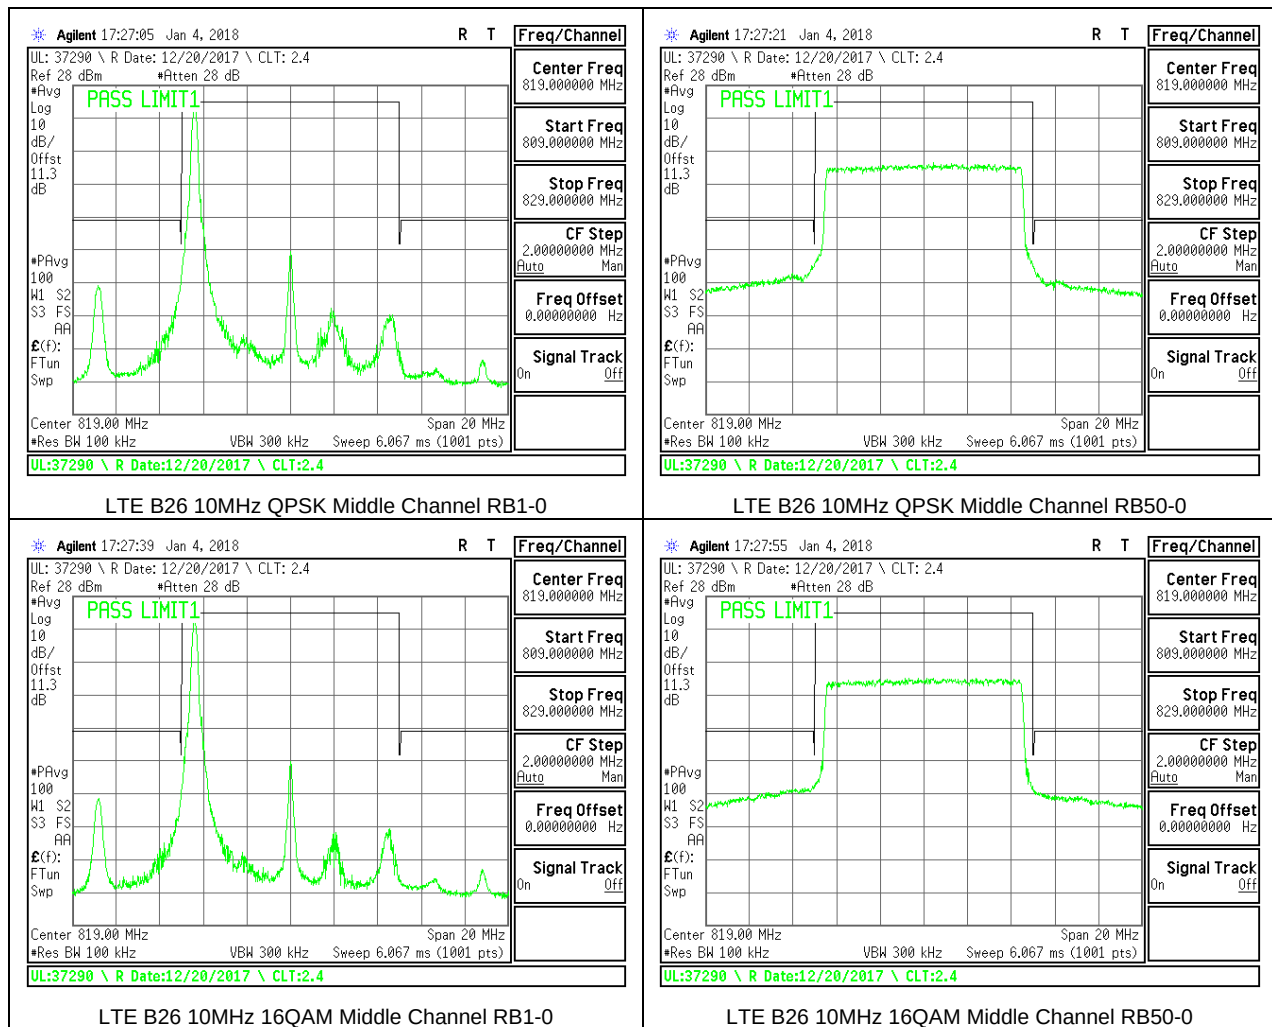



8.2.12. LTE BAND 26 BANDEDGE (FCC PART 22)

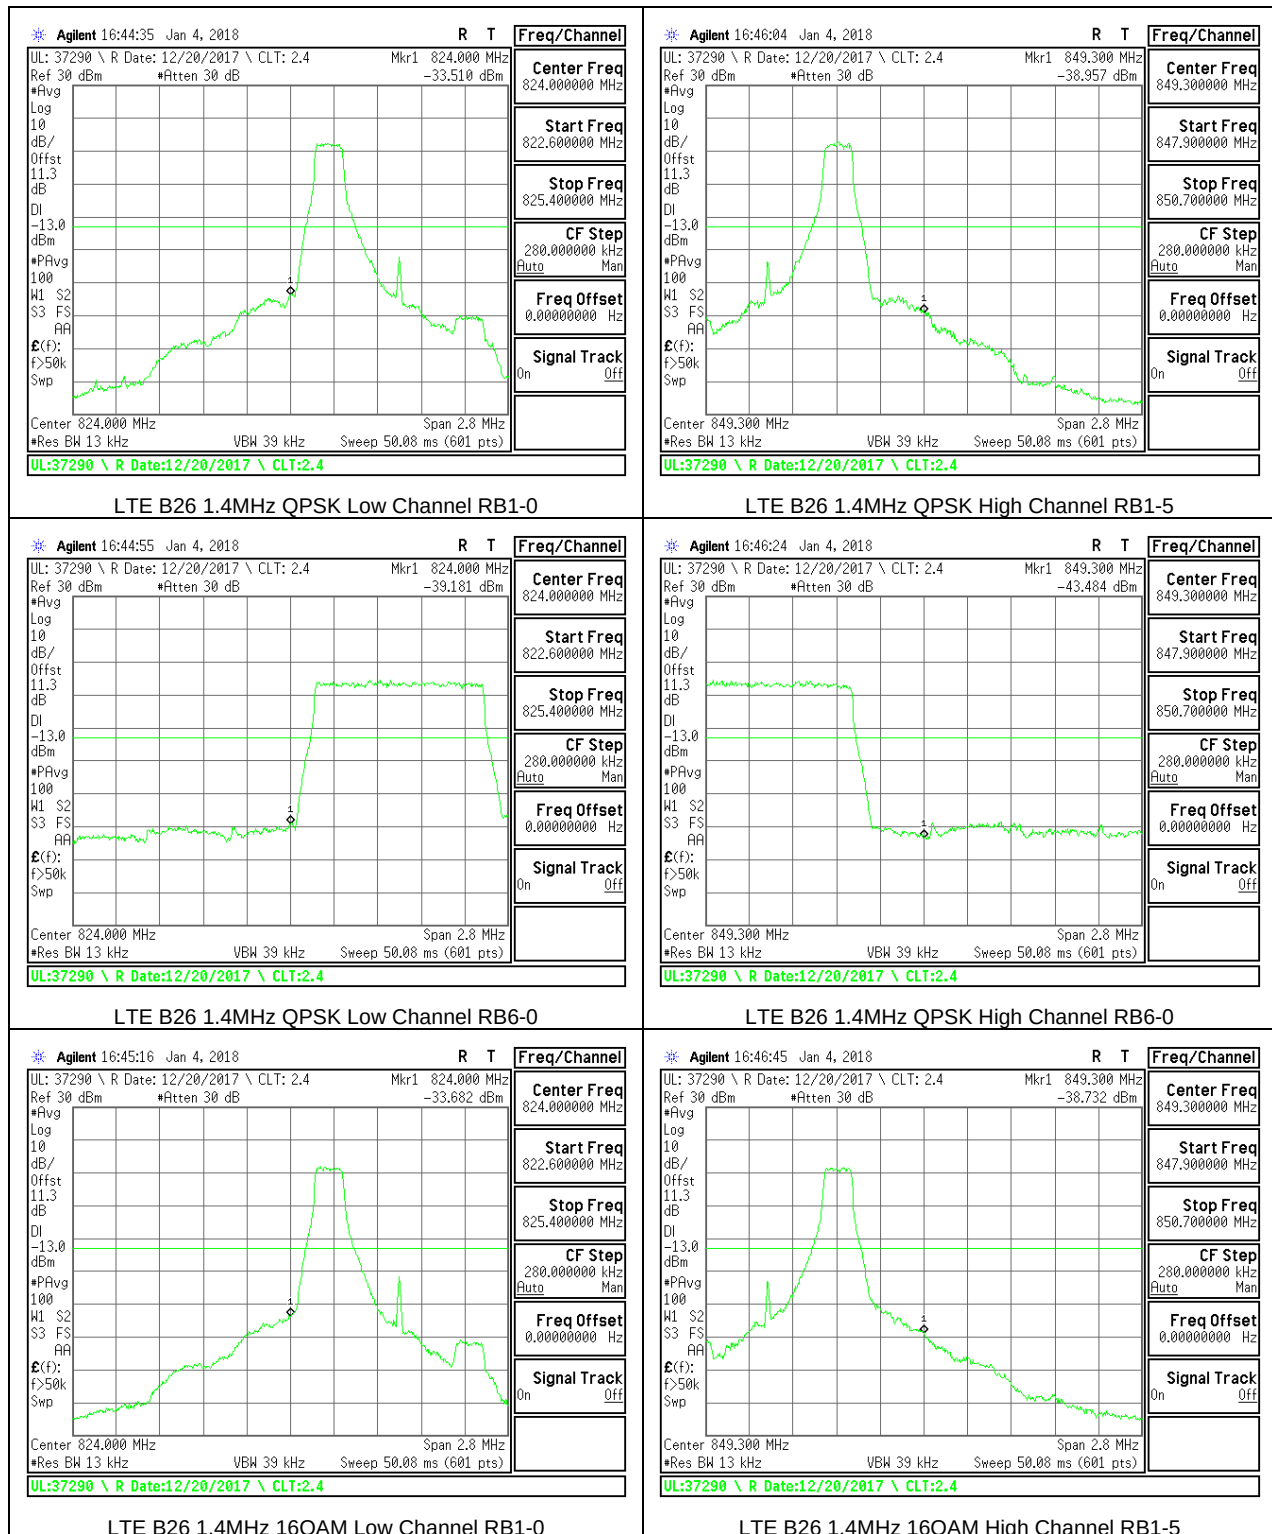


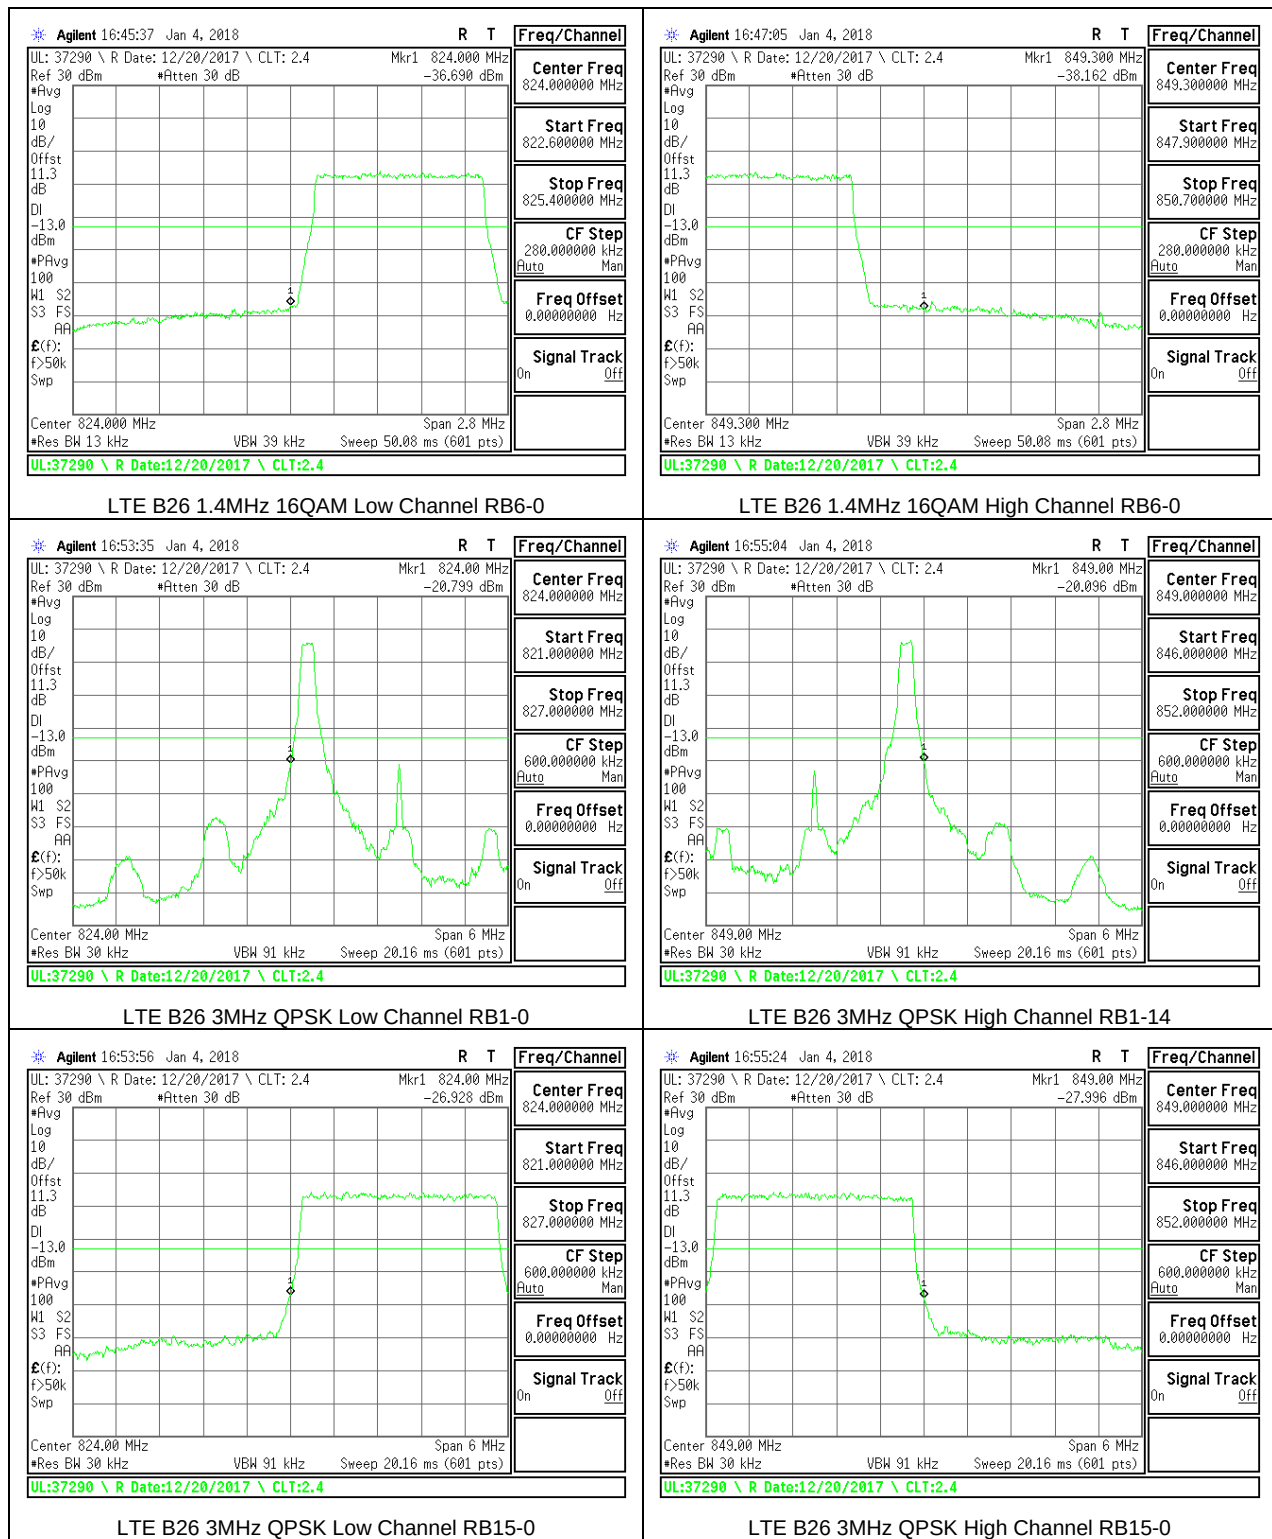


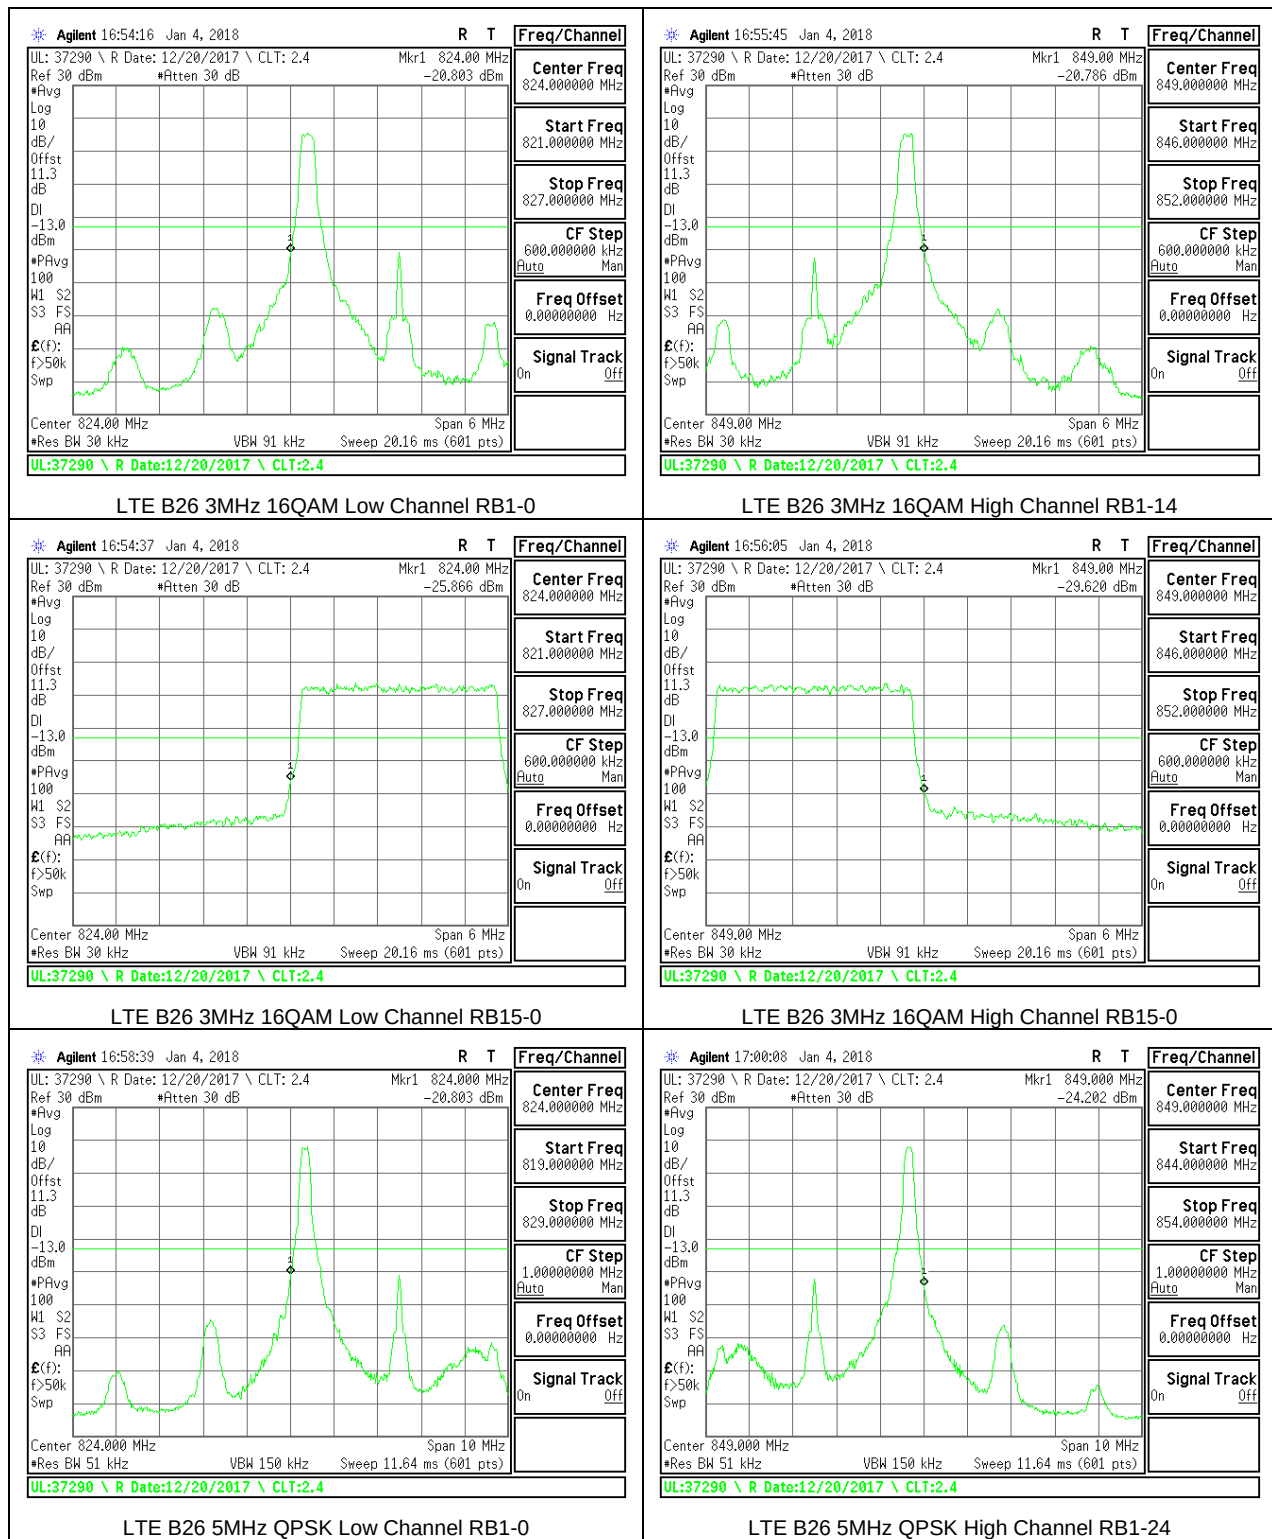

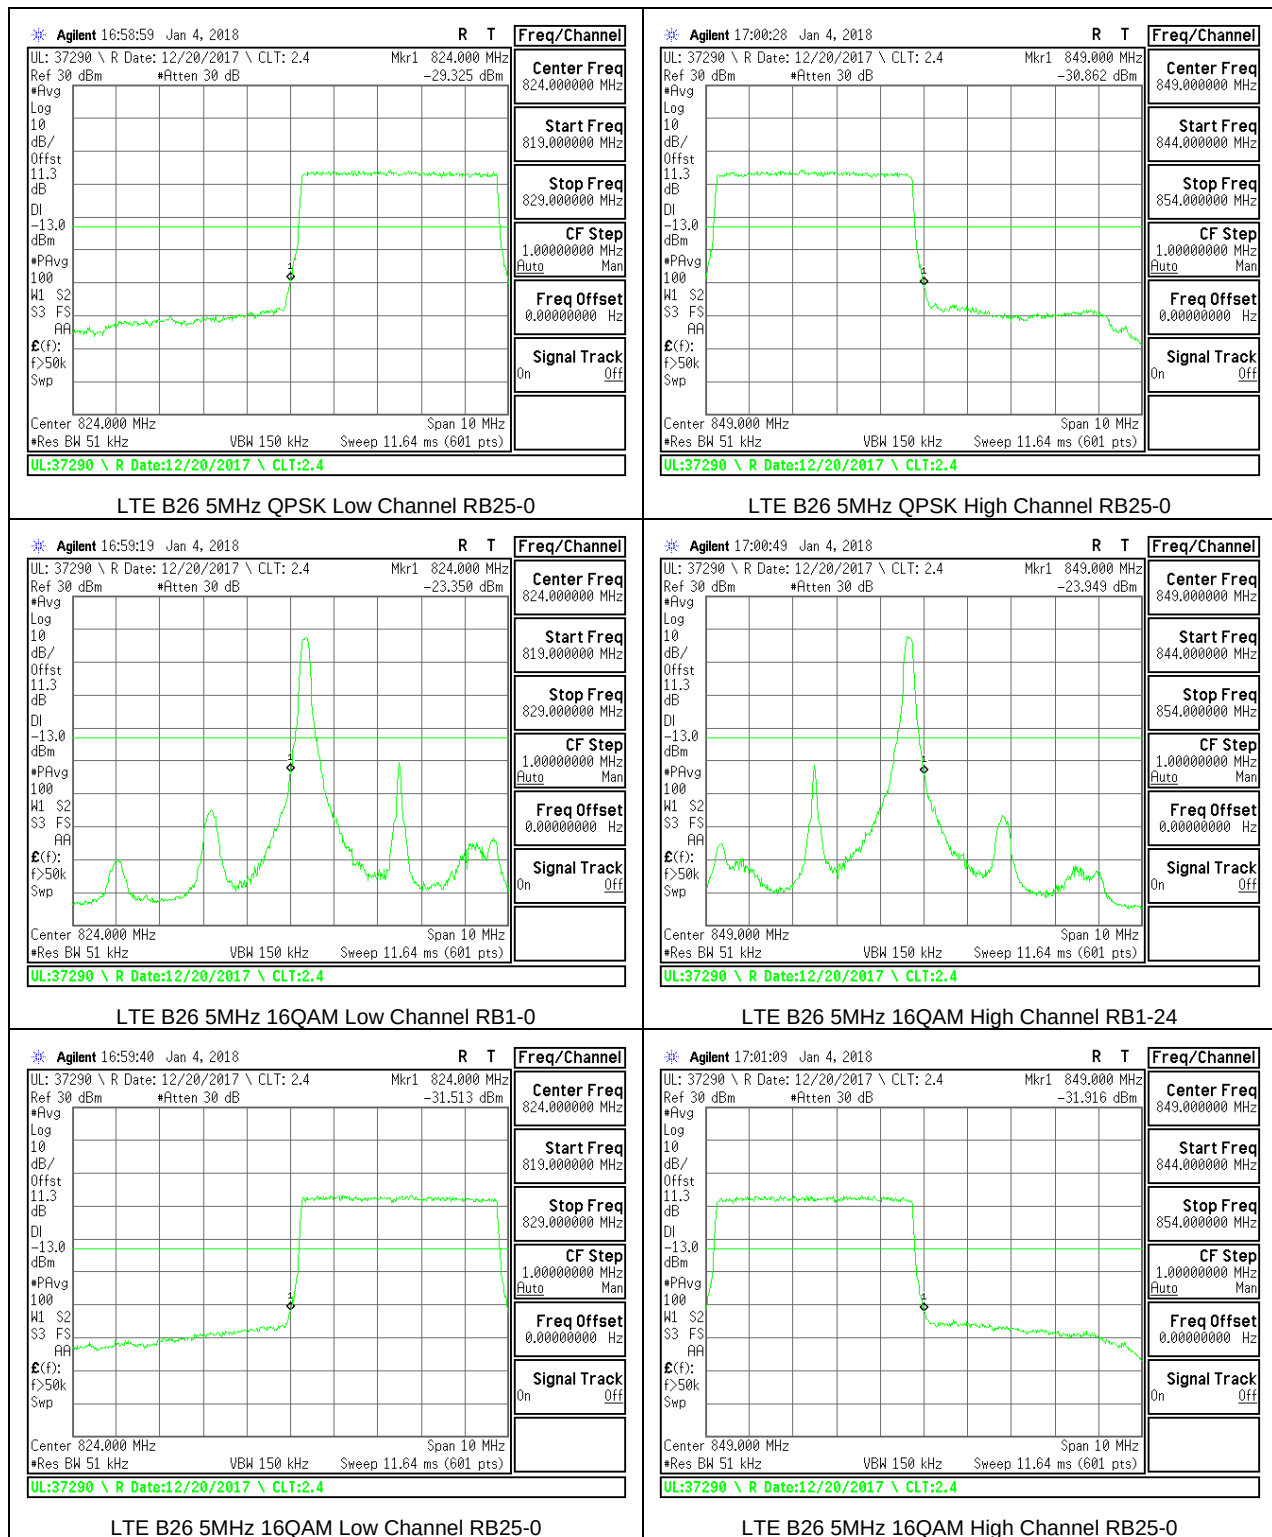


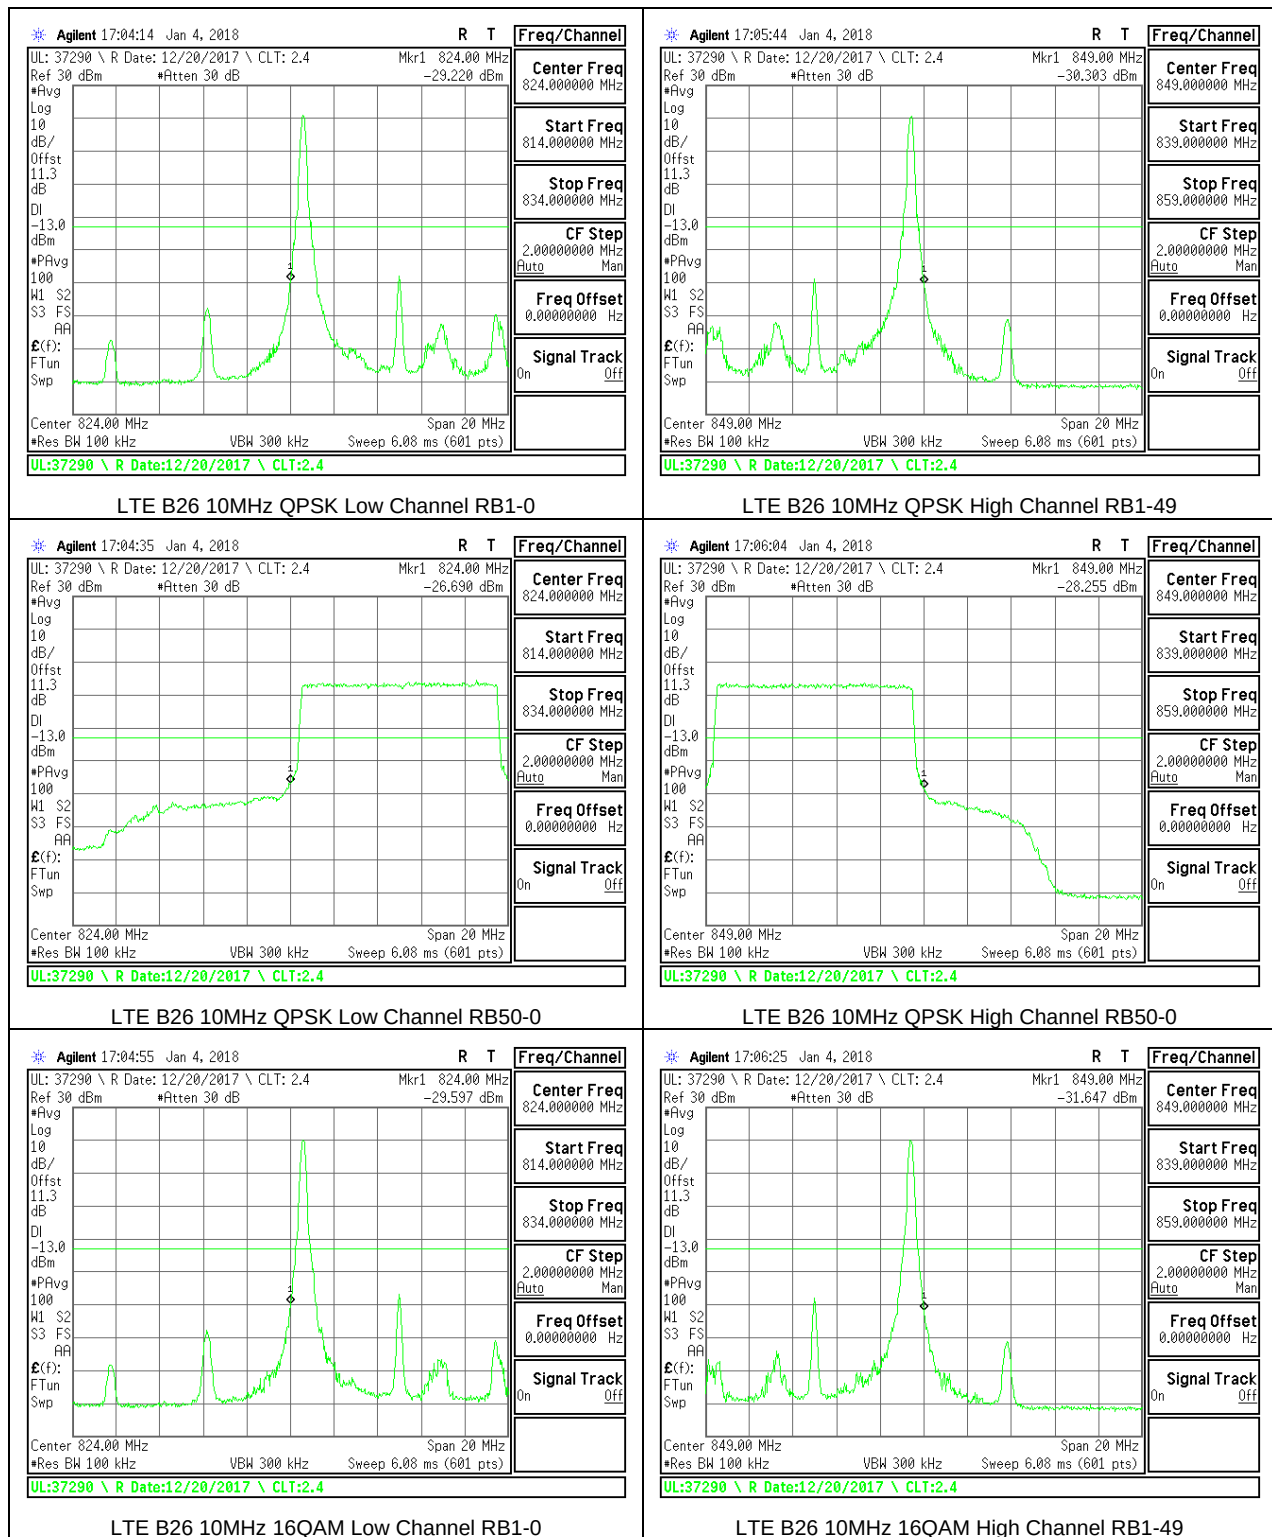


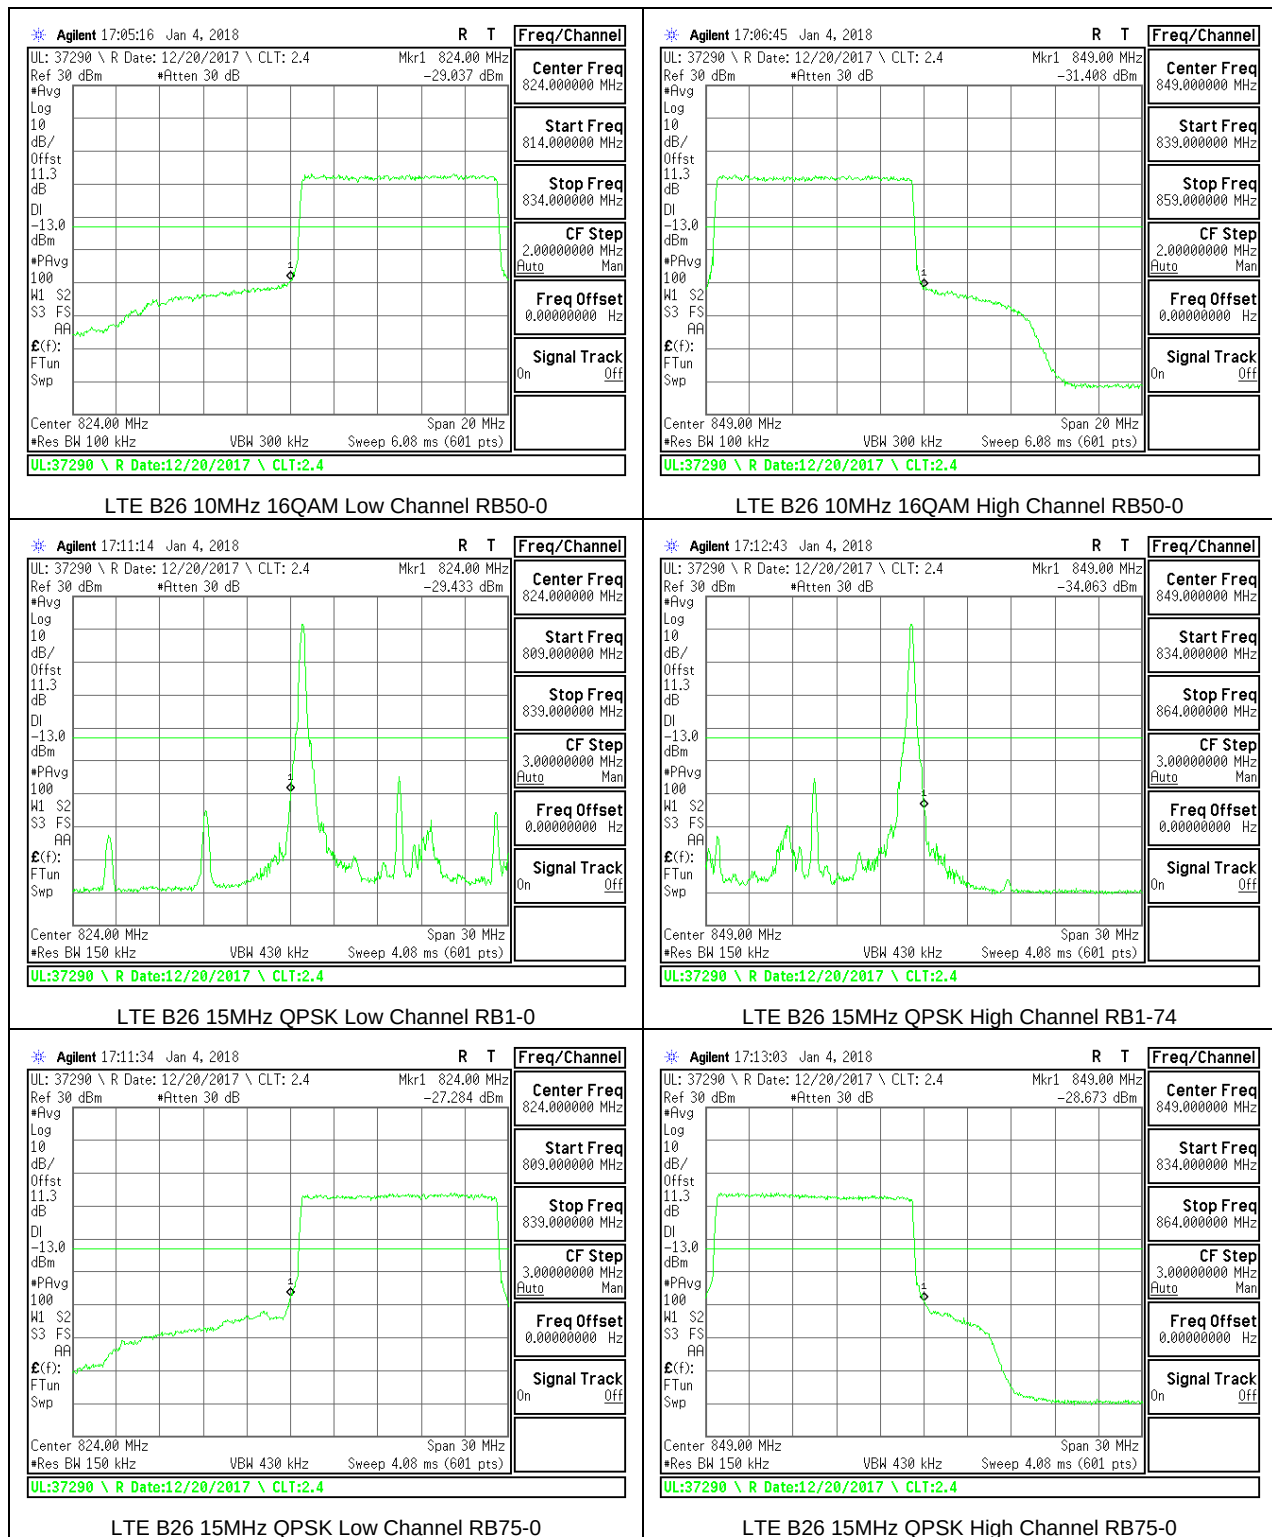


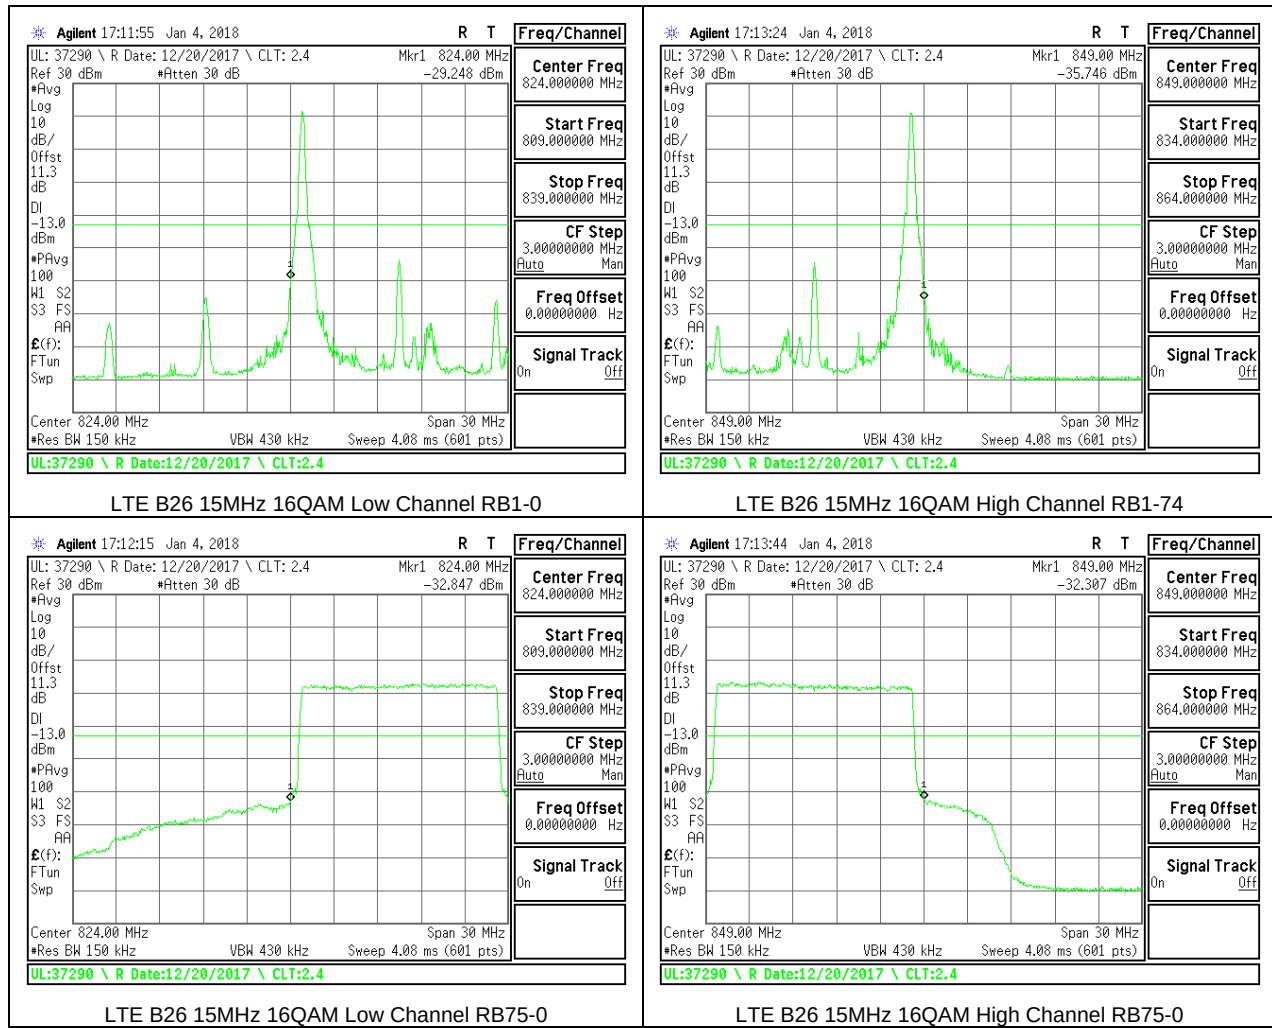



8.2.13. LTE BAND 41 ADJACENT CHANNEL POWER

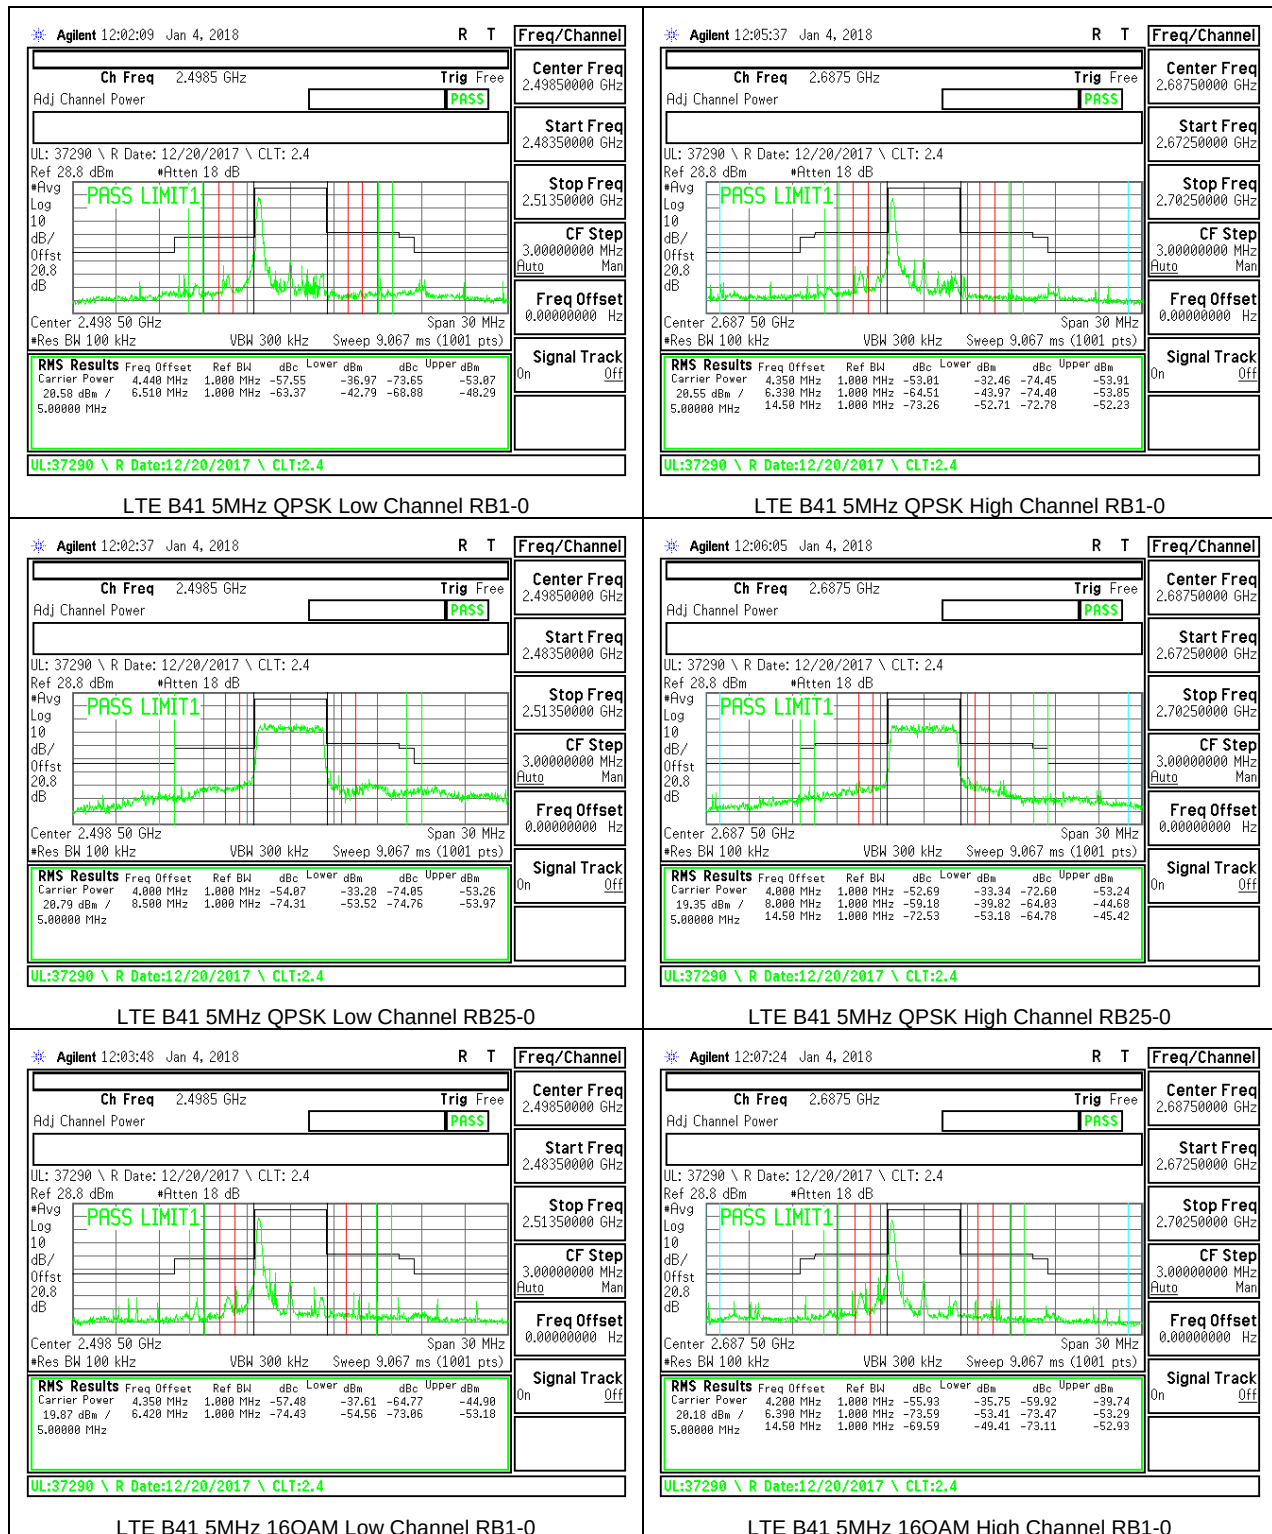


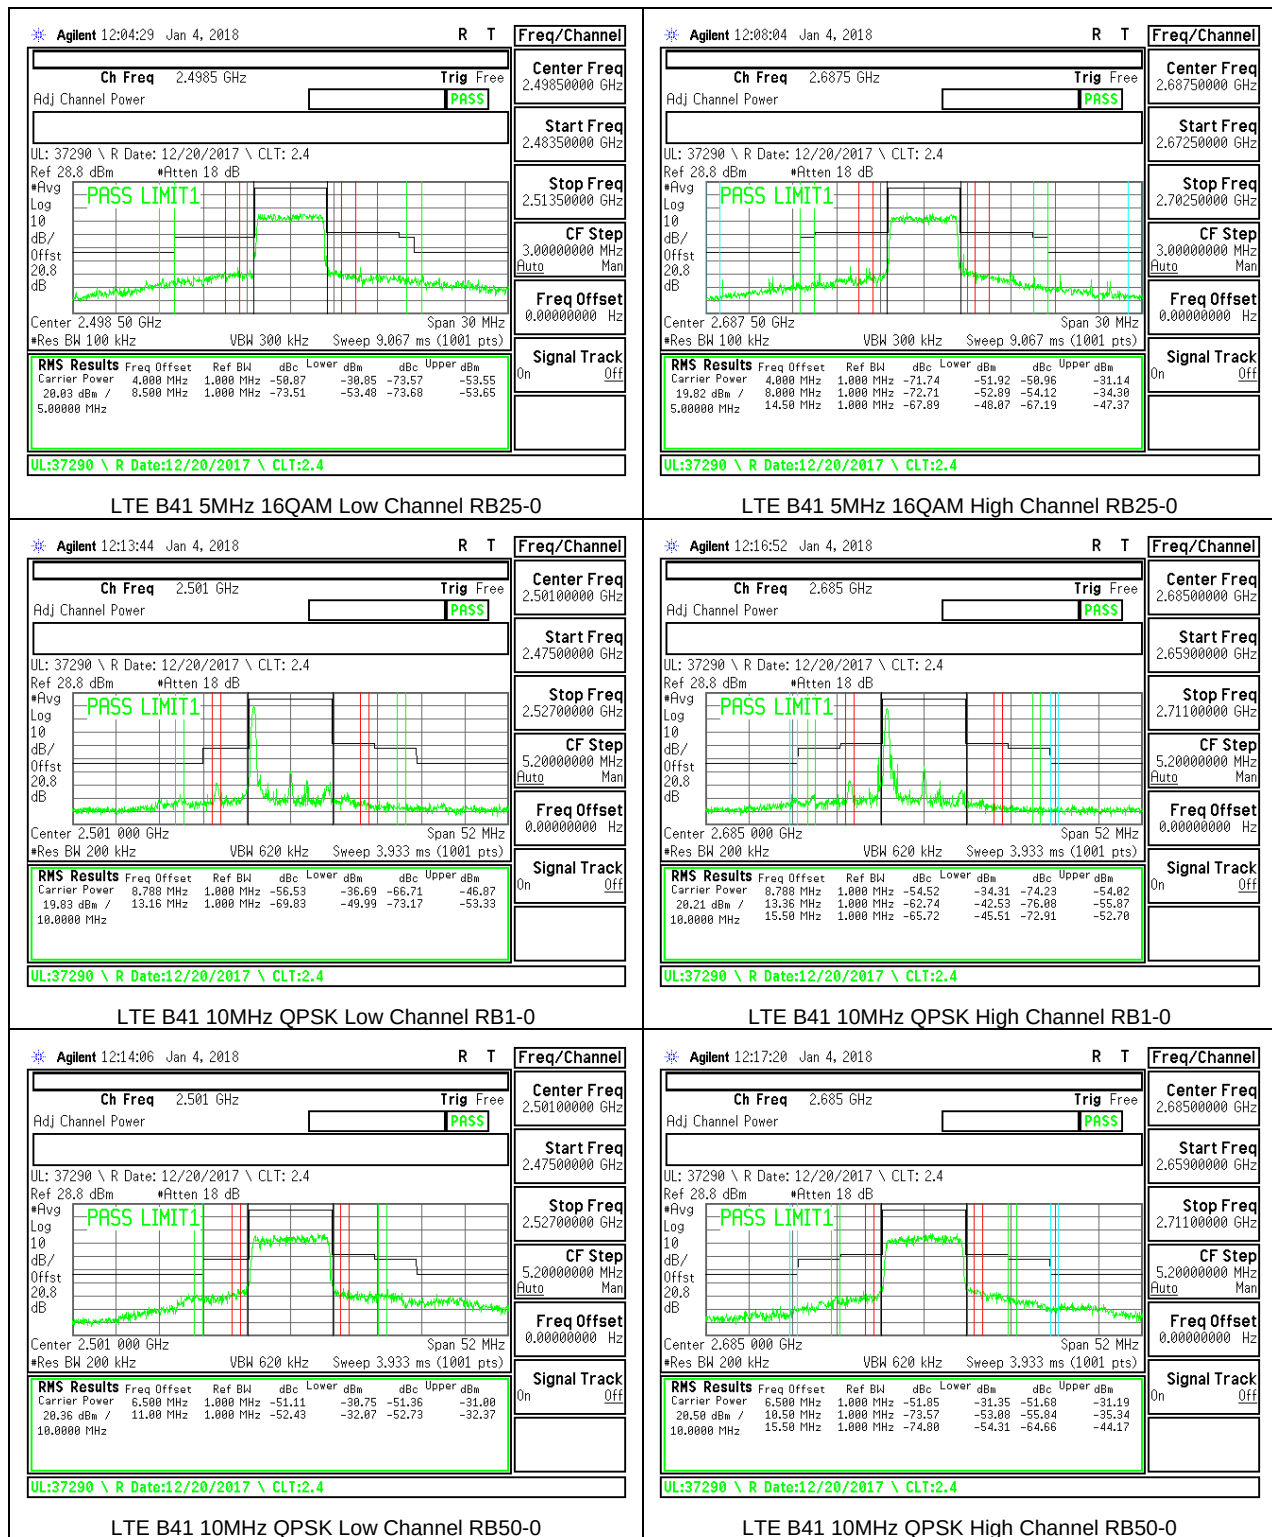

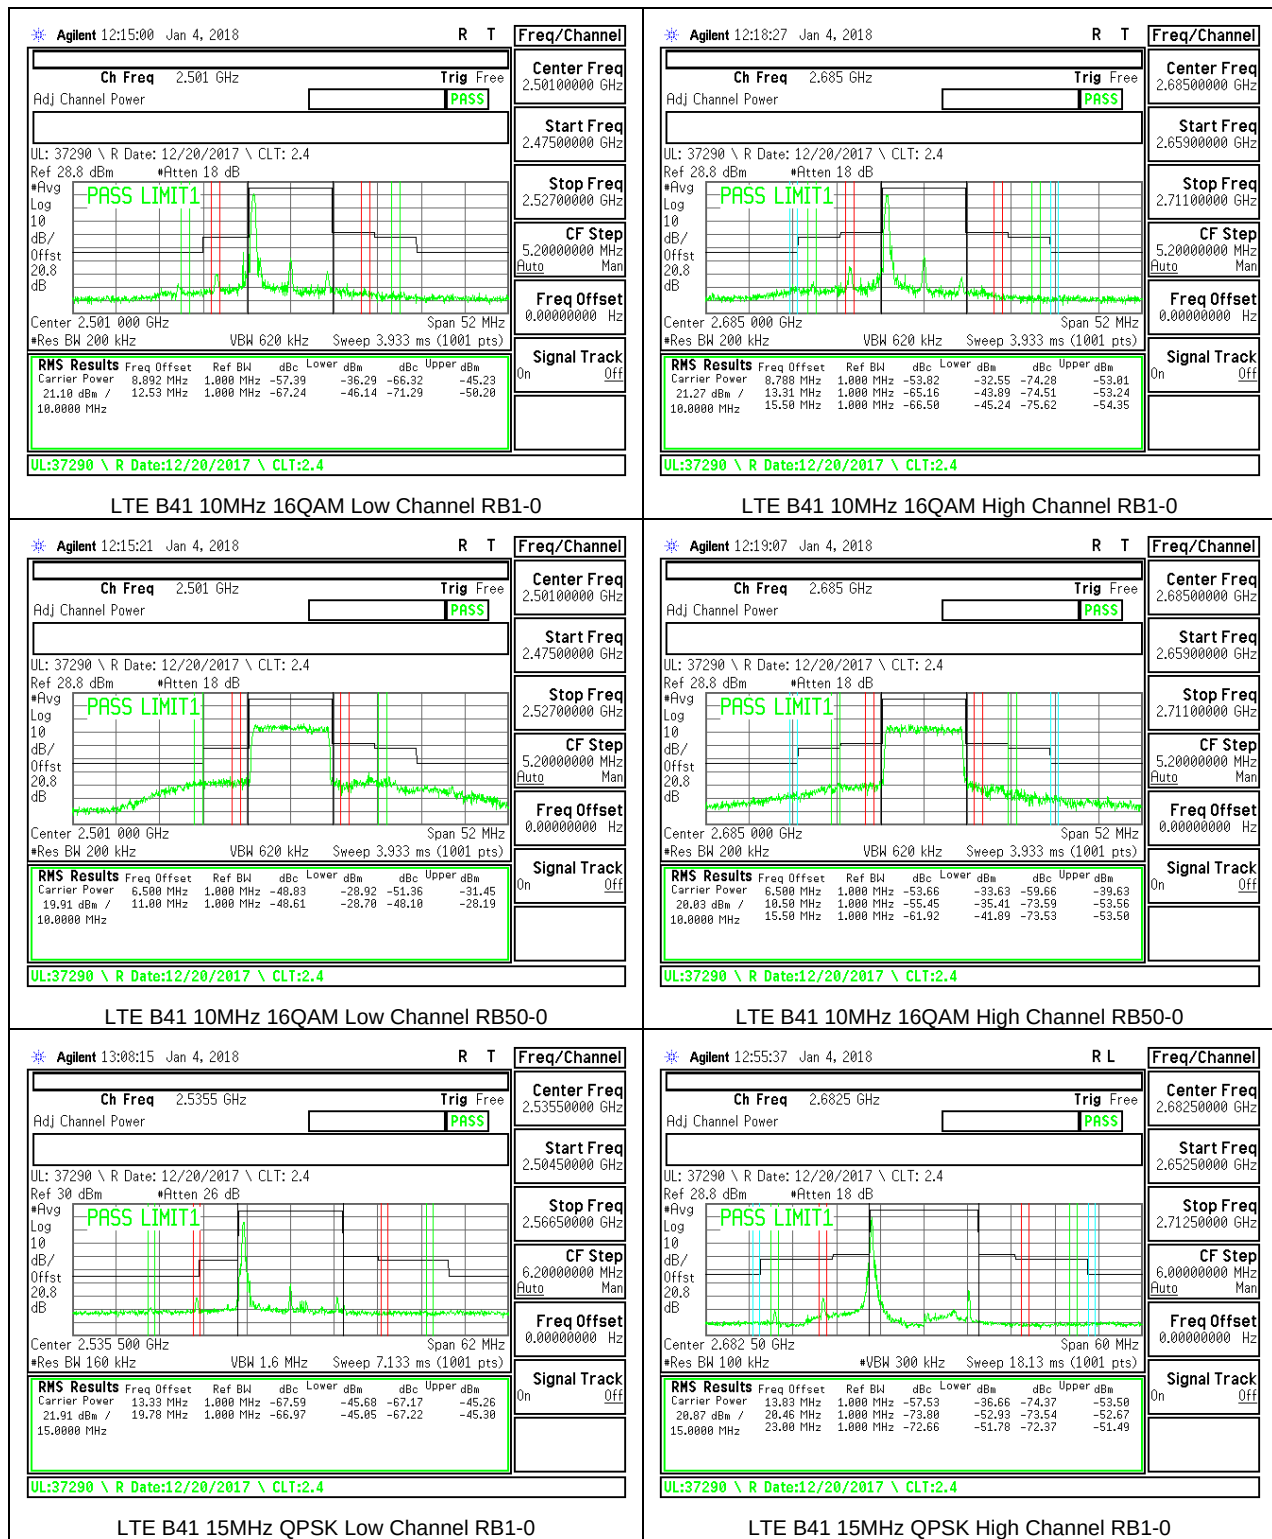


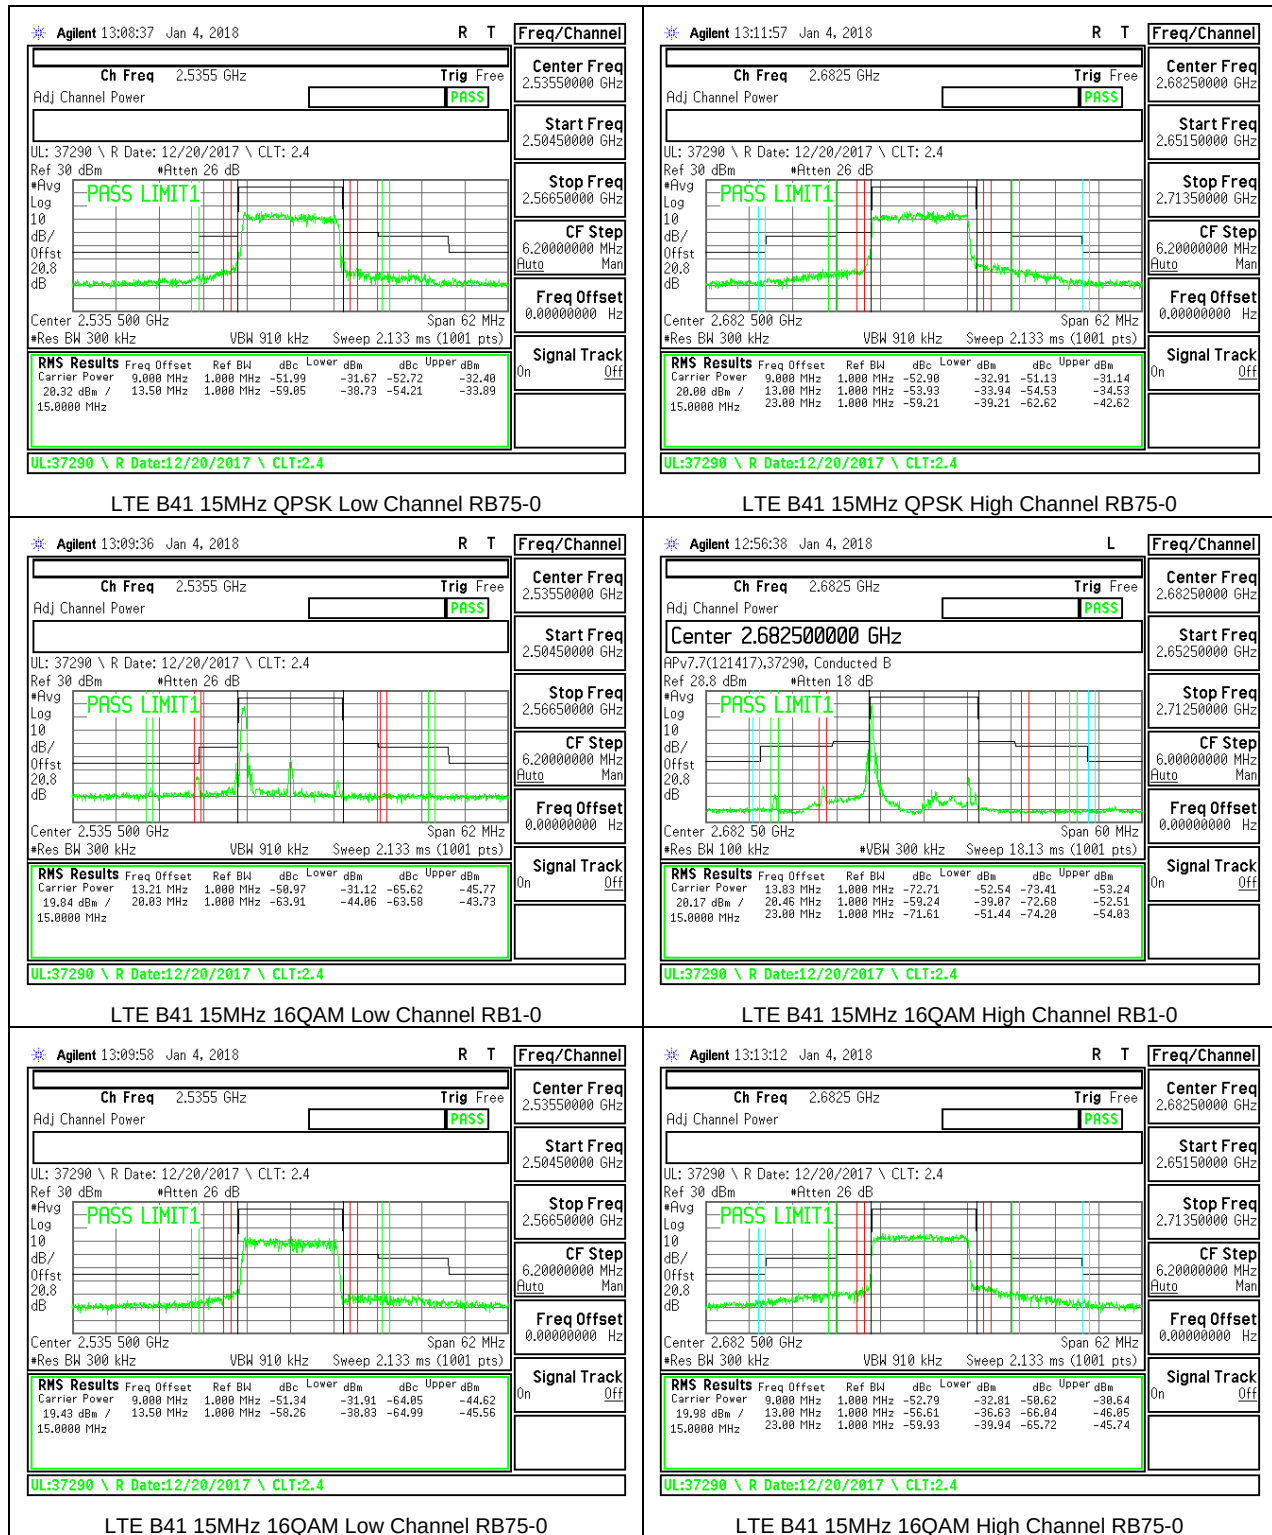


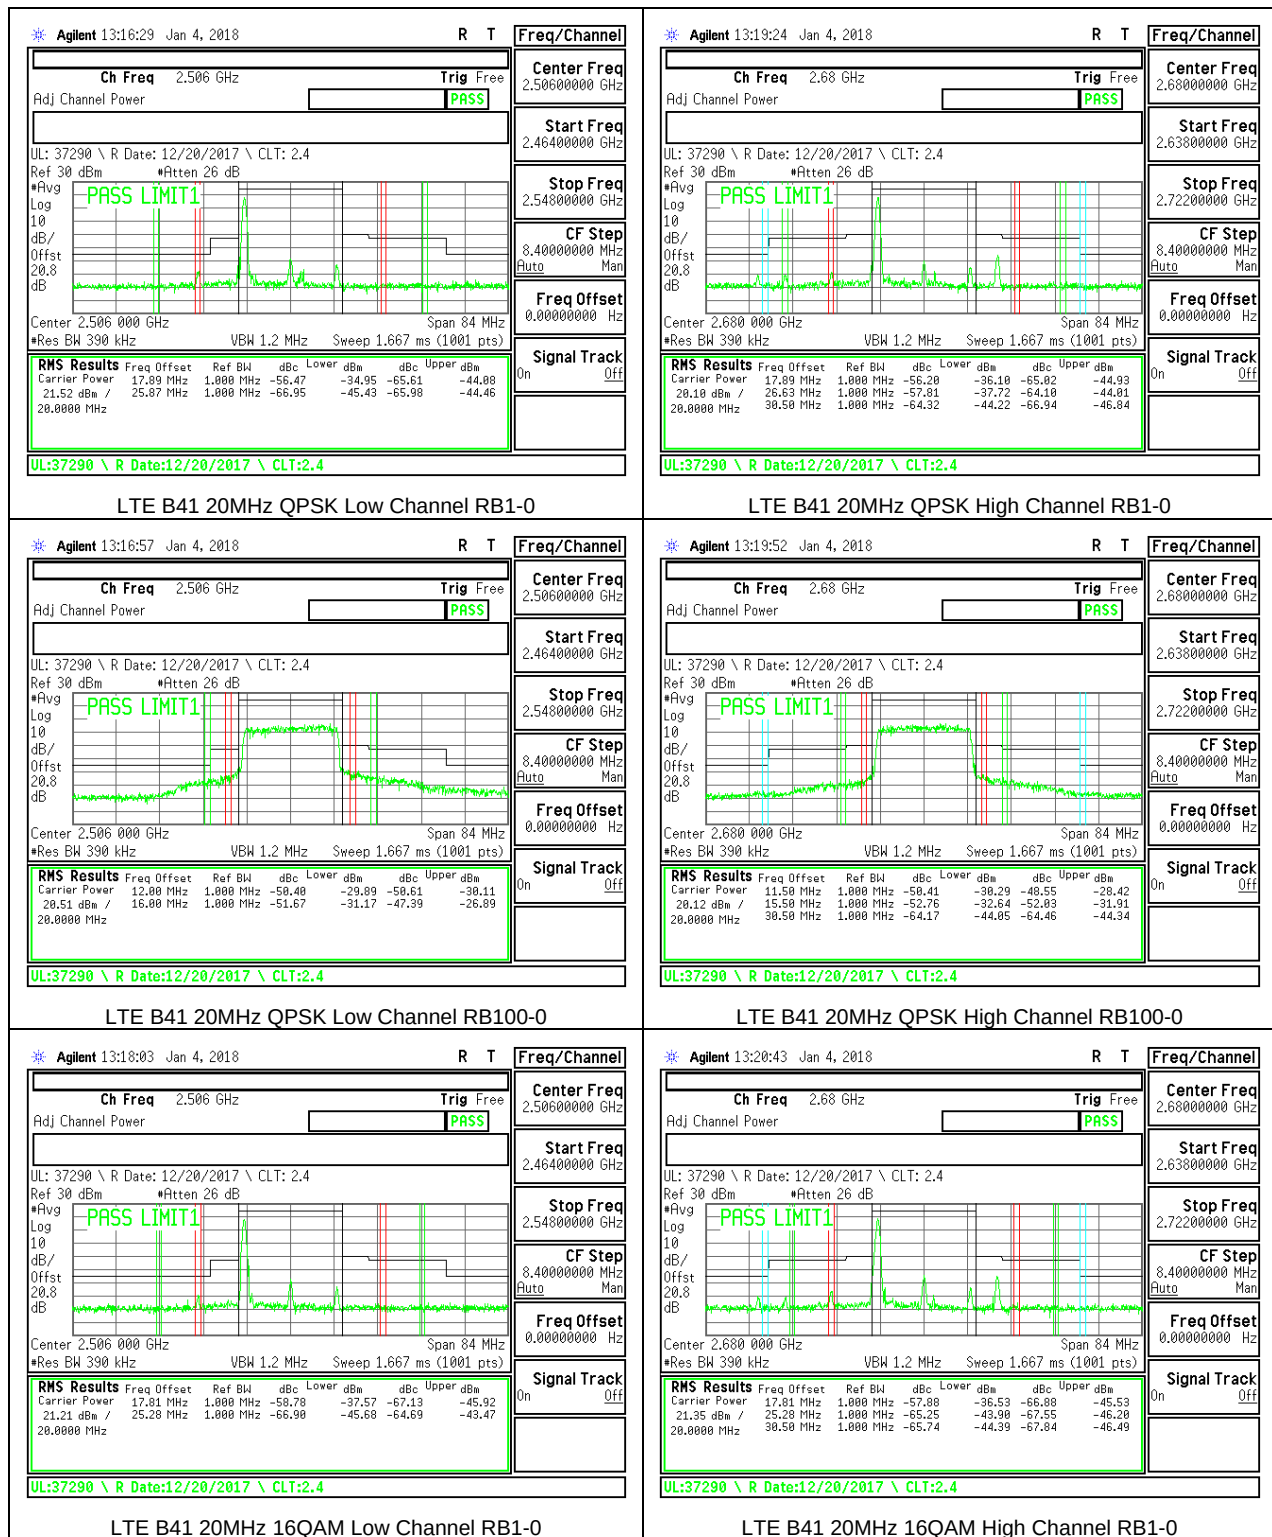


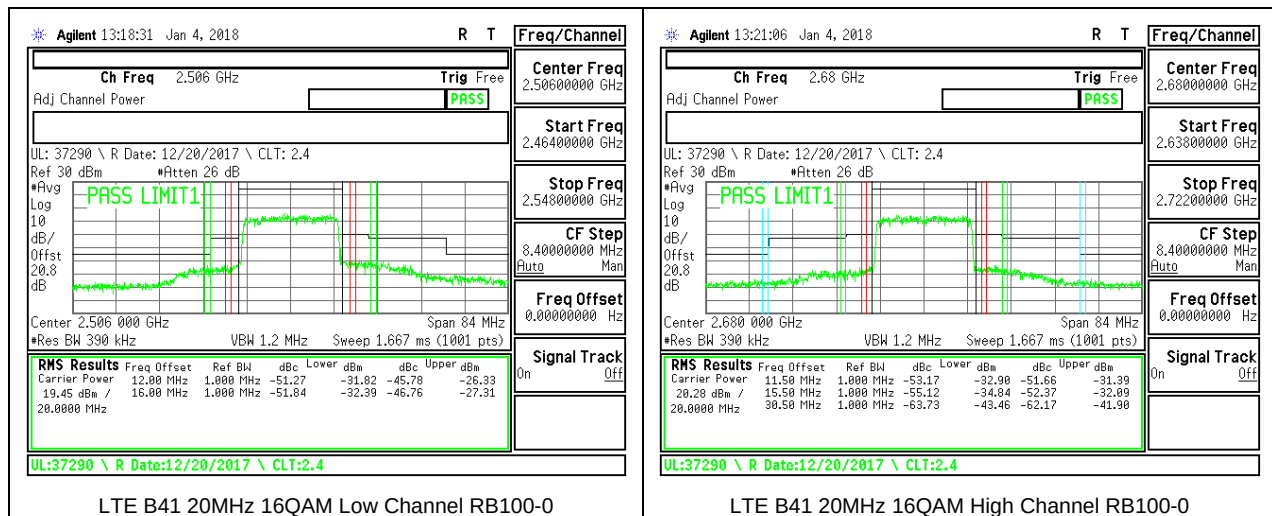



8.2.15. LTE BAND 66 BANDEDGE

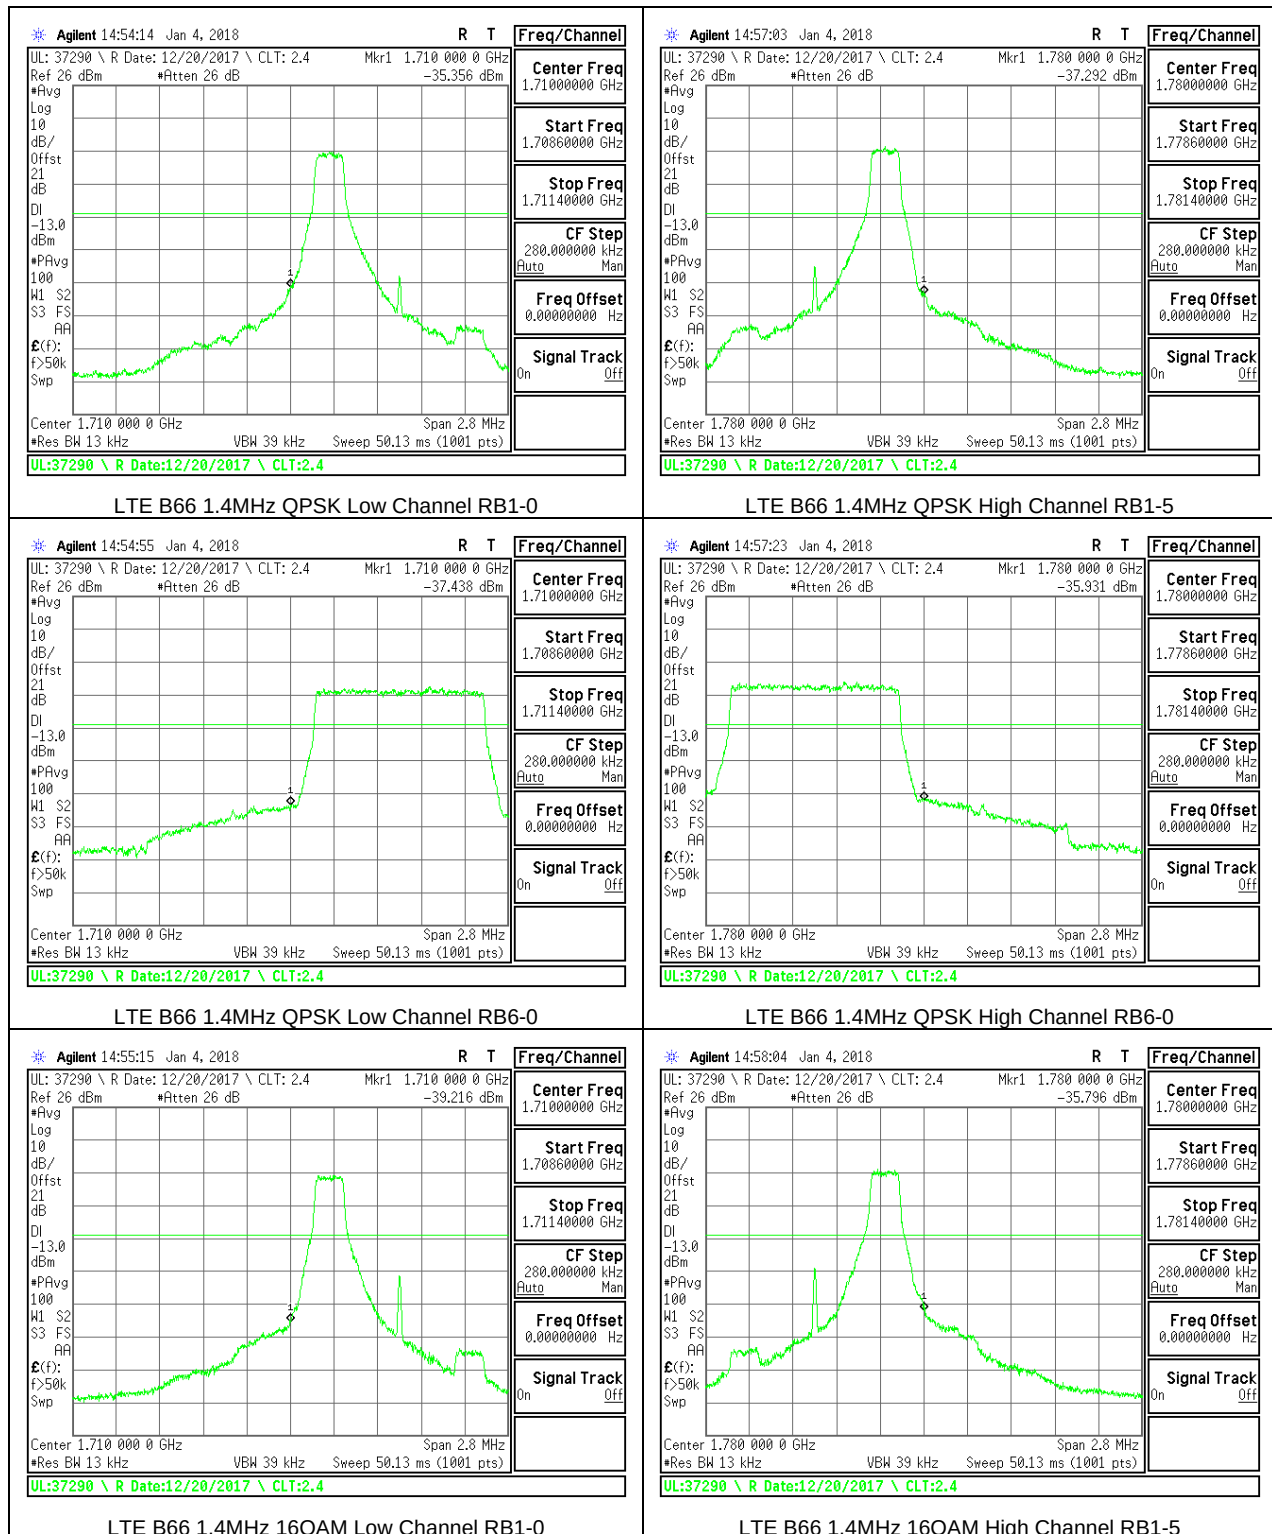


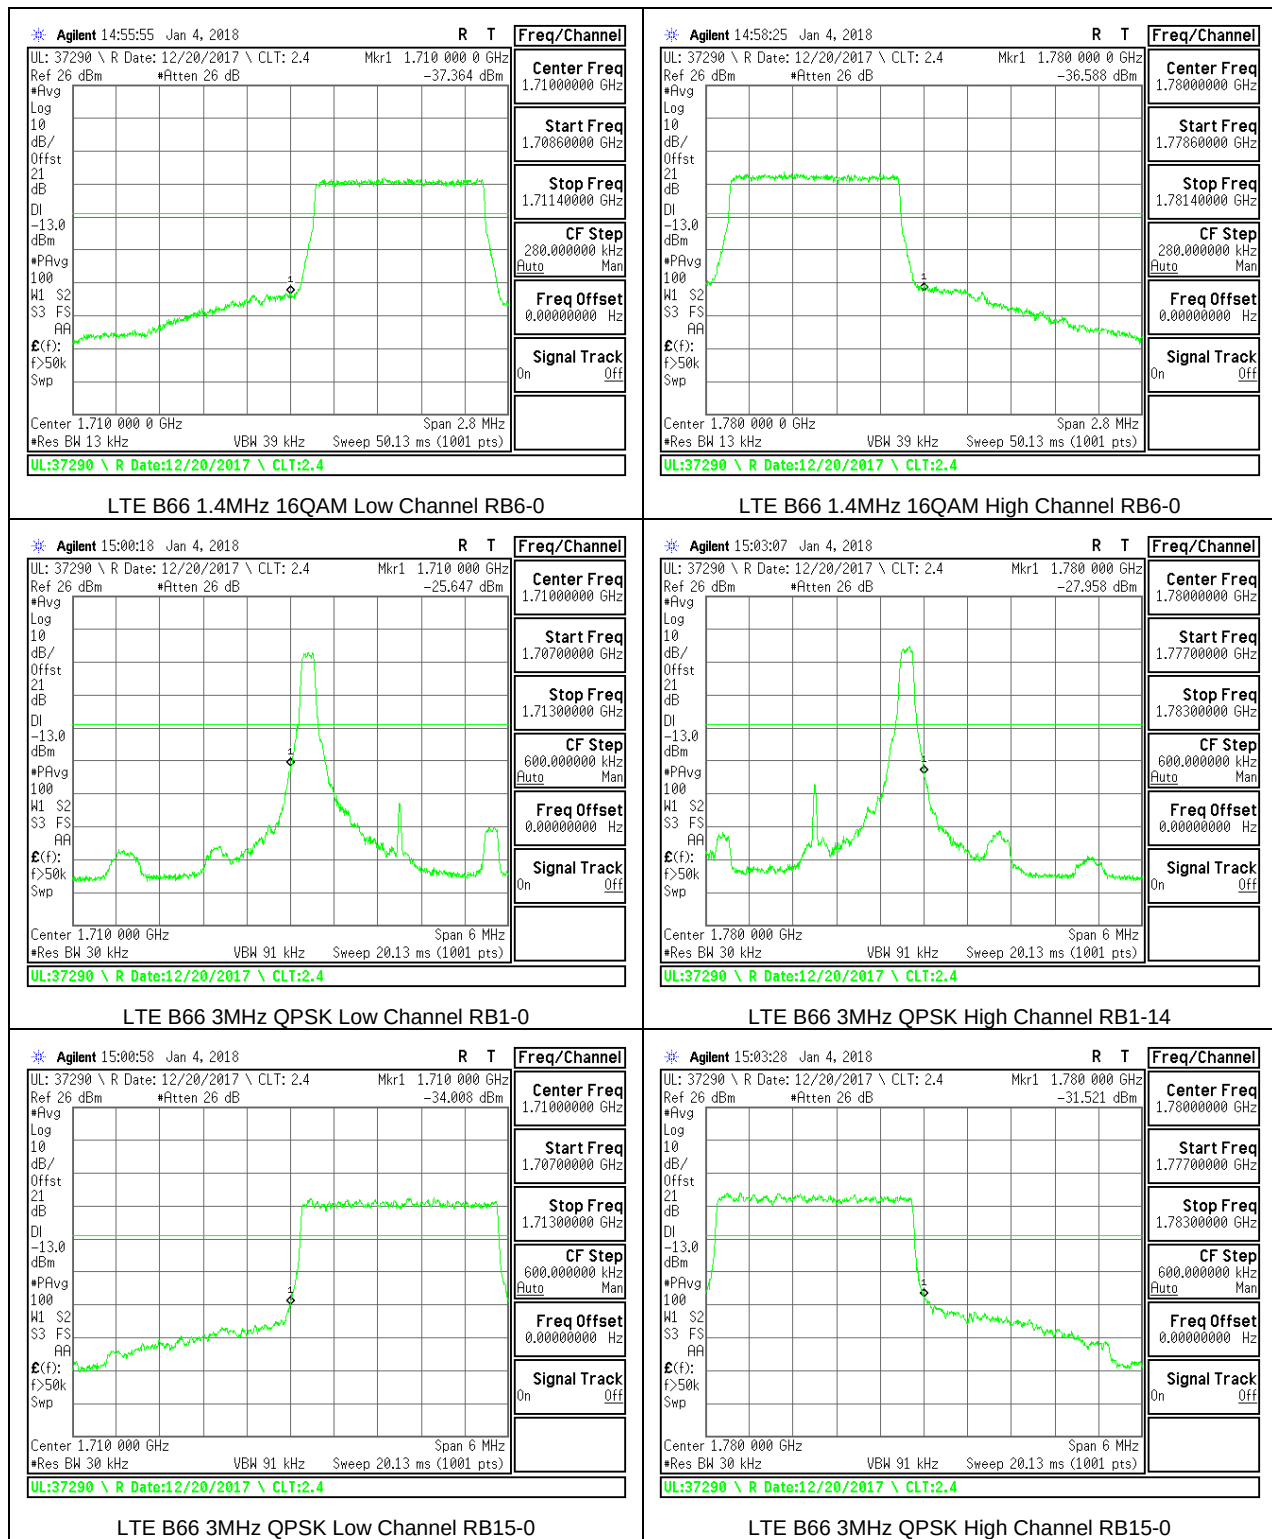


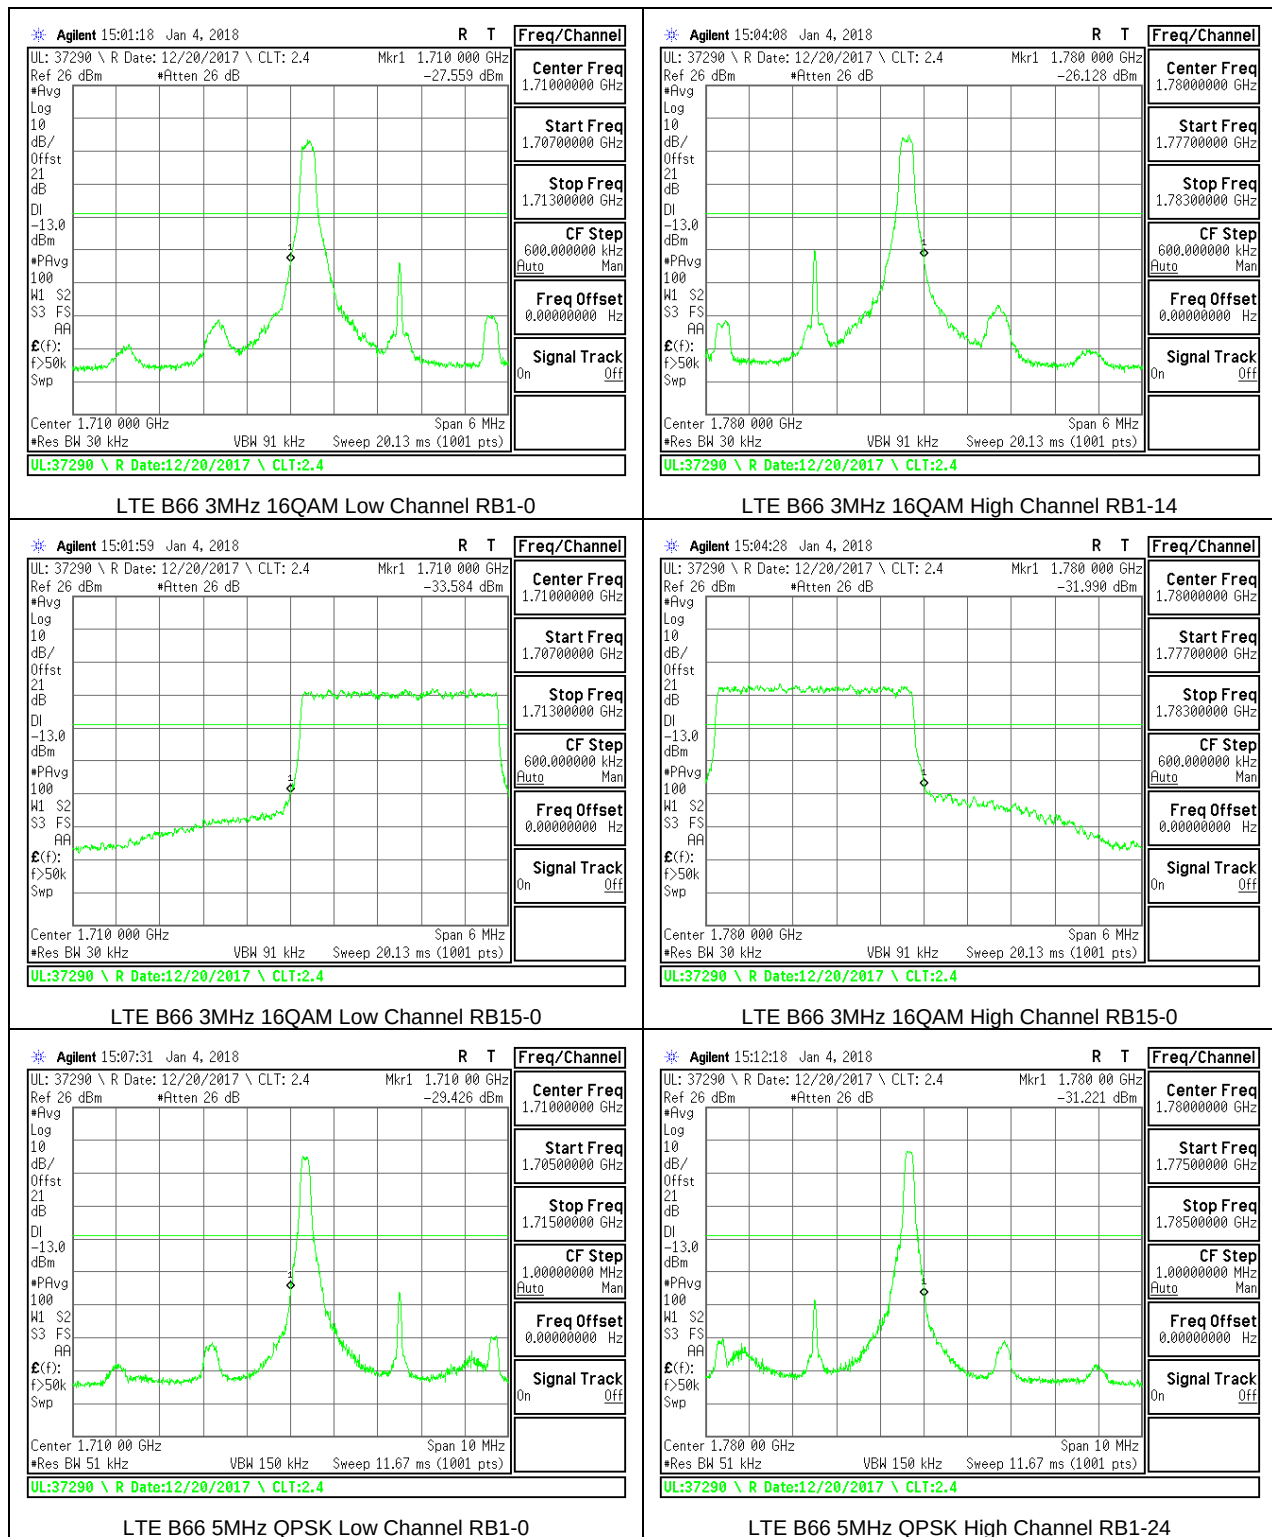

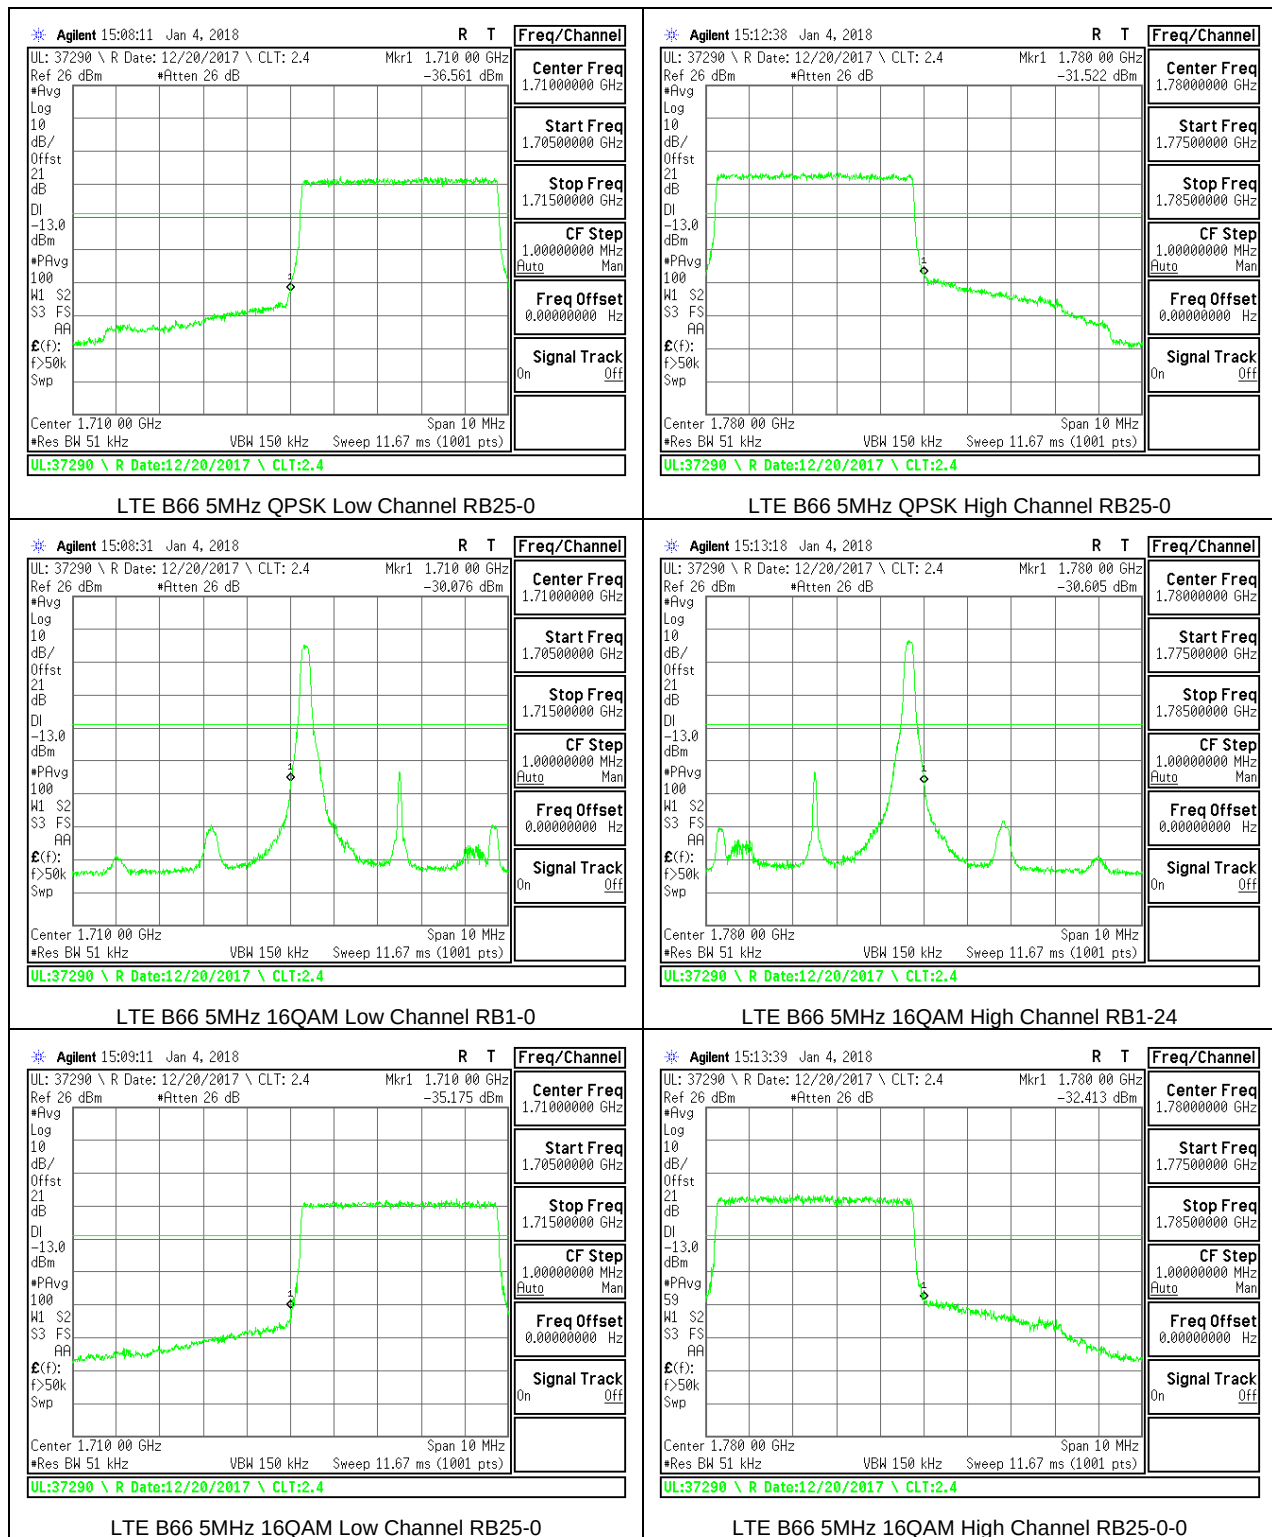


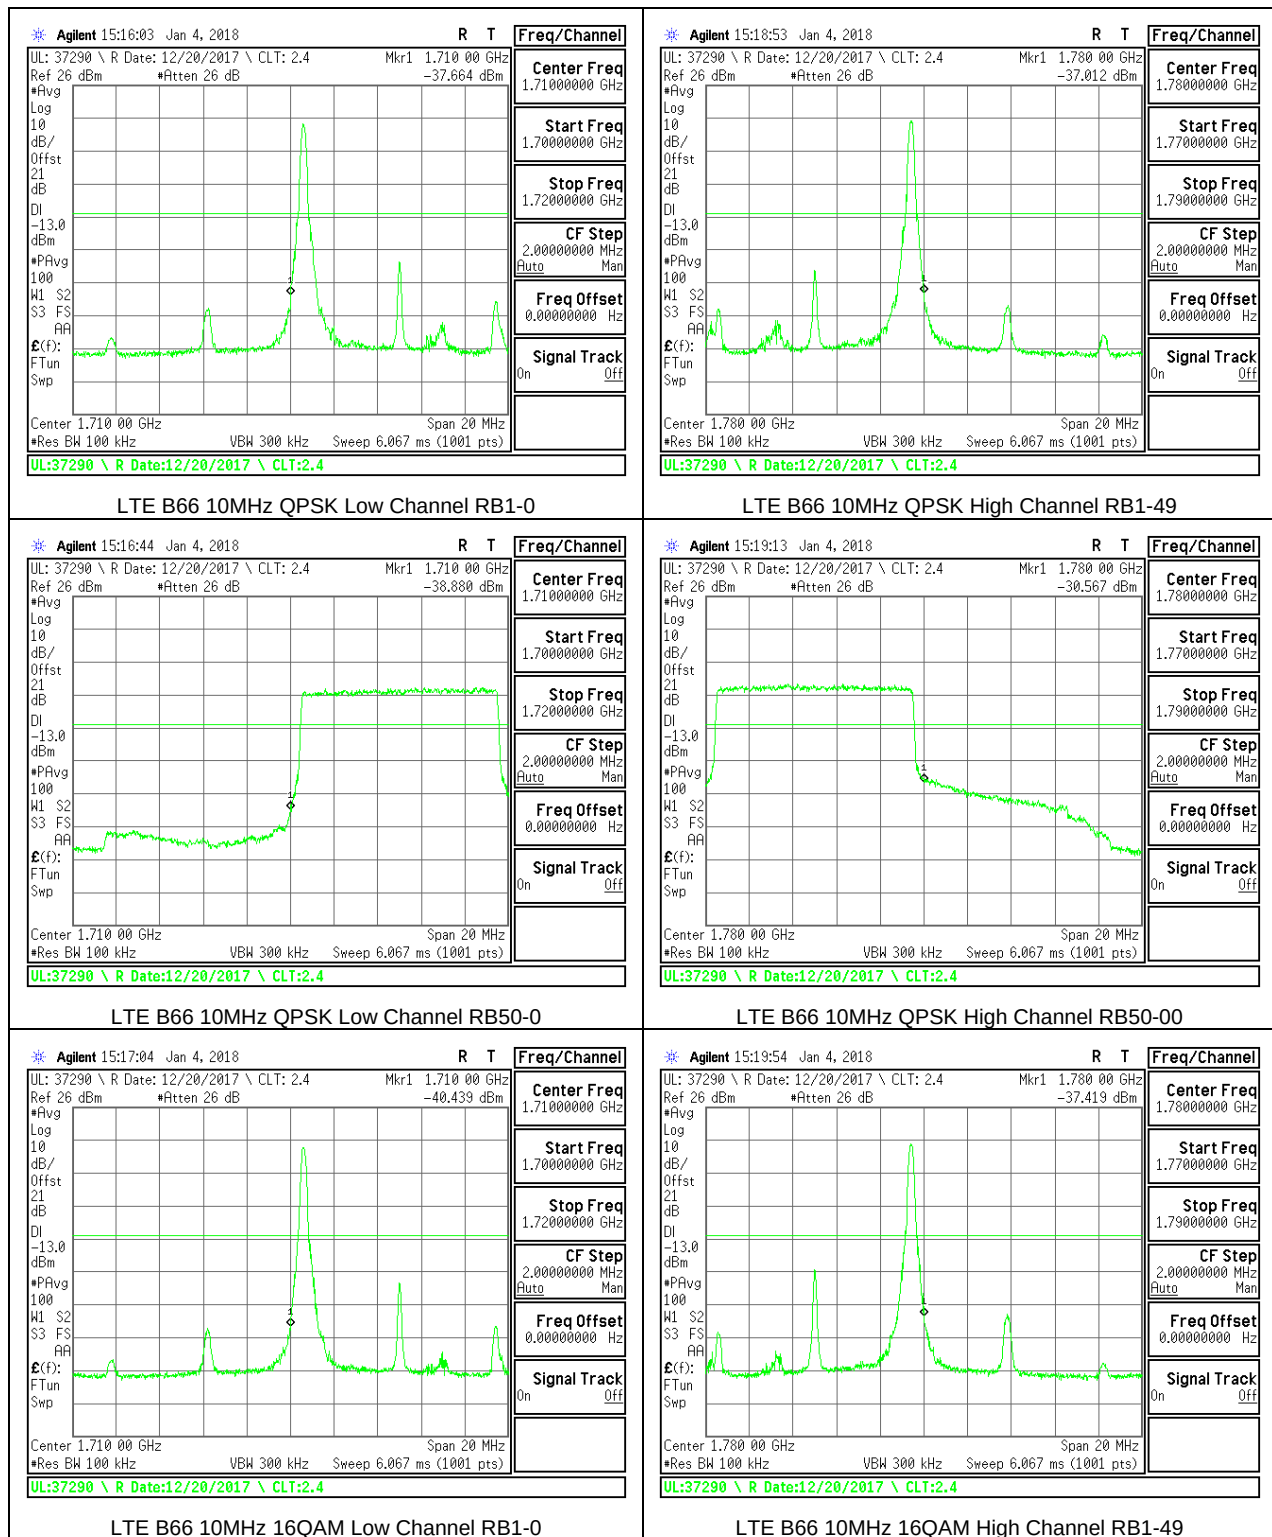

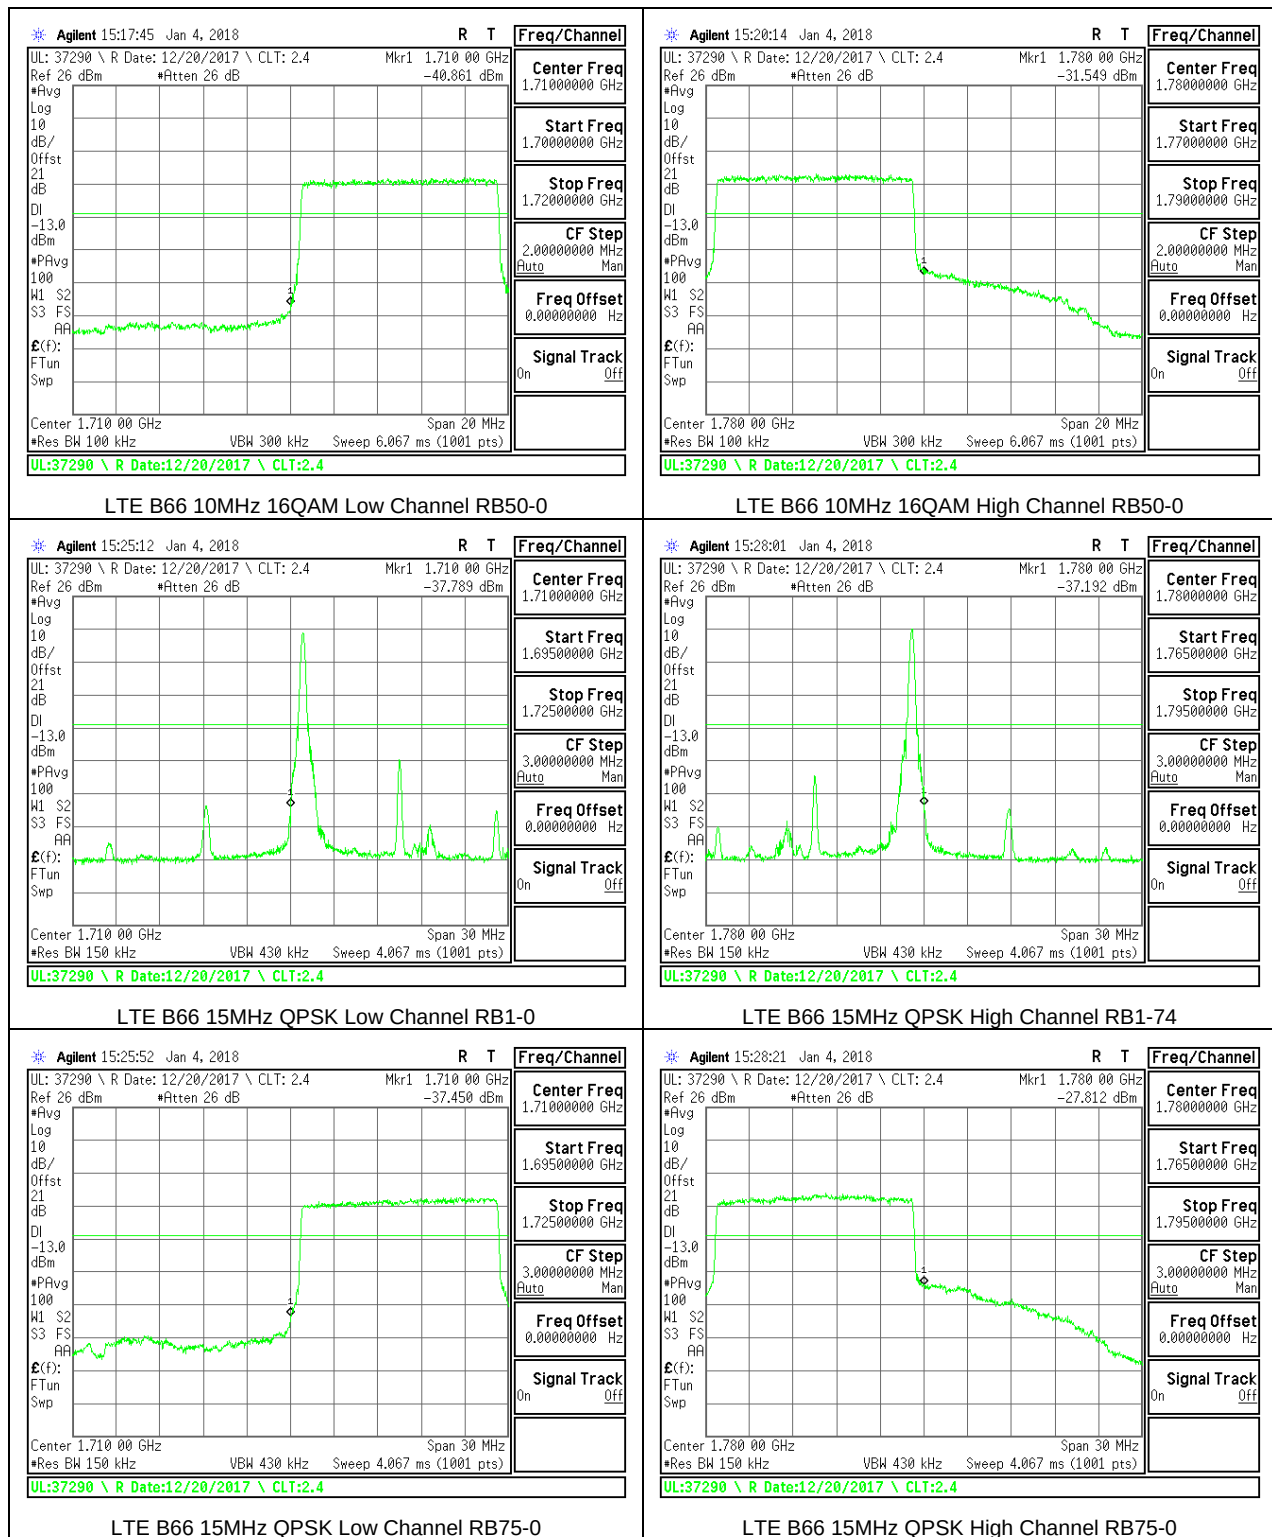


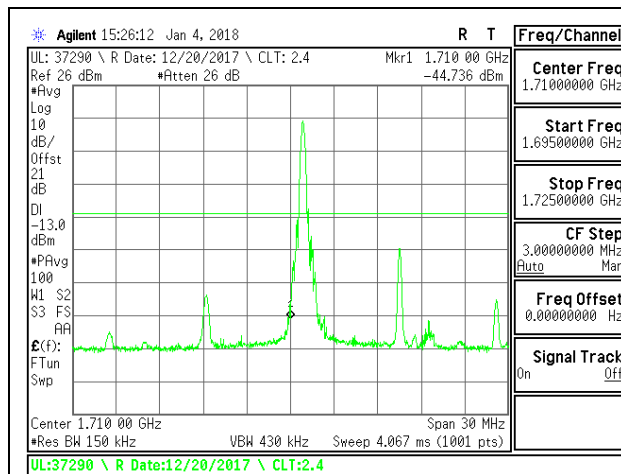


LTE B66 15MHz 16QAM Low Channel RB1-0

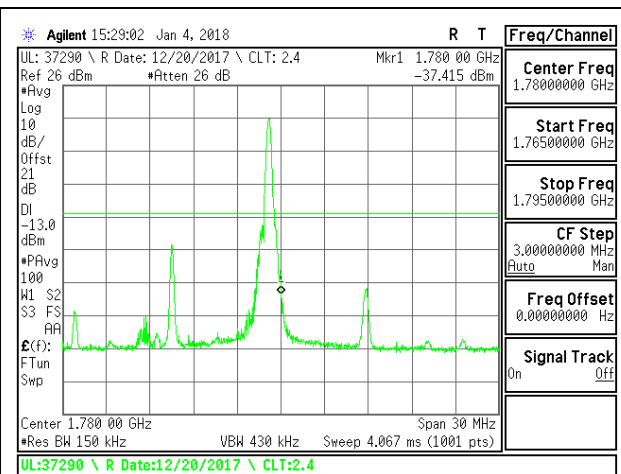


LTE B66 15MHz 16QAM High Channel RB1-74

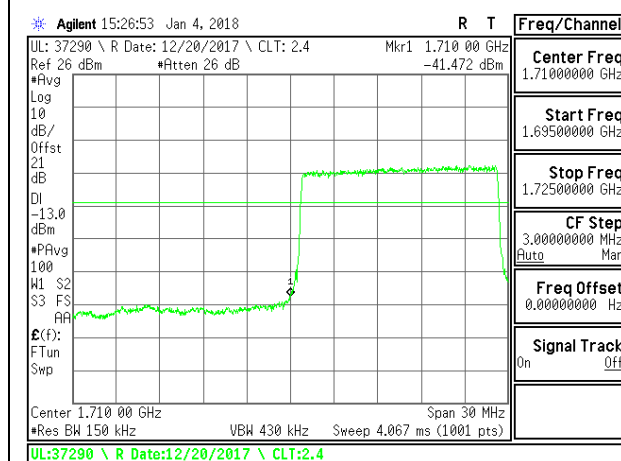


LTE B66 15MHz 16QAM Low Channel RB75-0

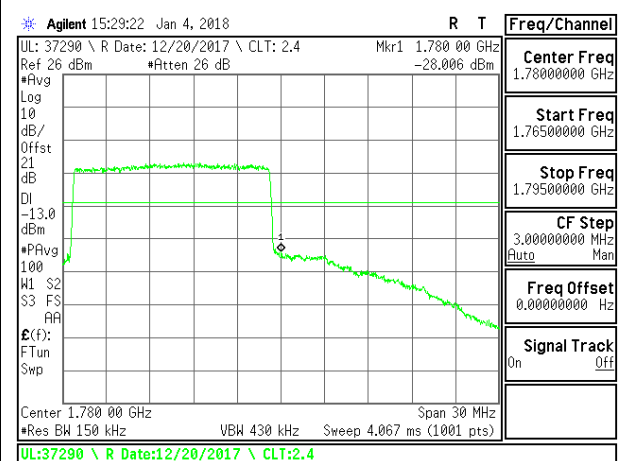


LTE B66 15MHz 16QAM High Channel RB75-0-0

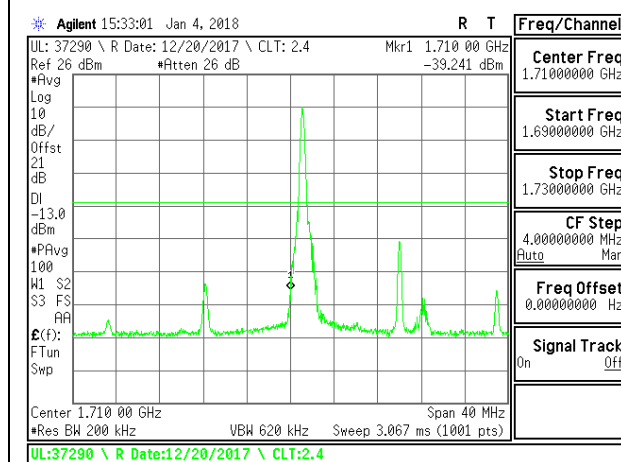

LTE B66 20MHz QPSK Low Channel RB1-0

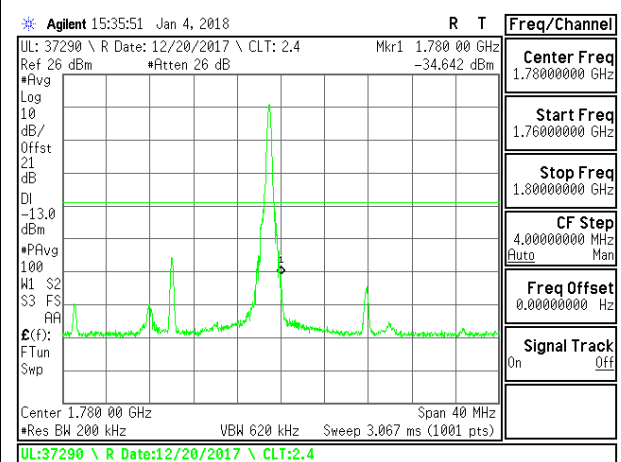

LTE B66 20MHz QPSK High Channel RB1-99

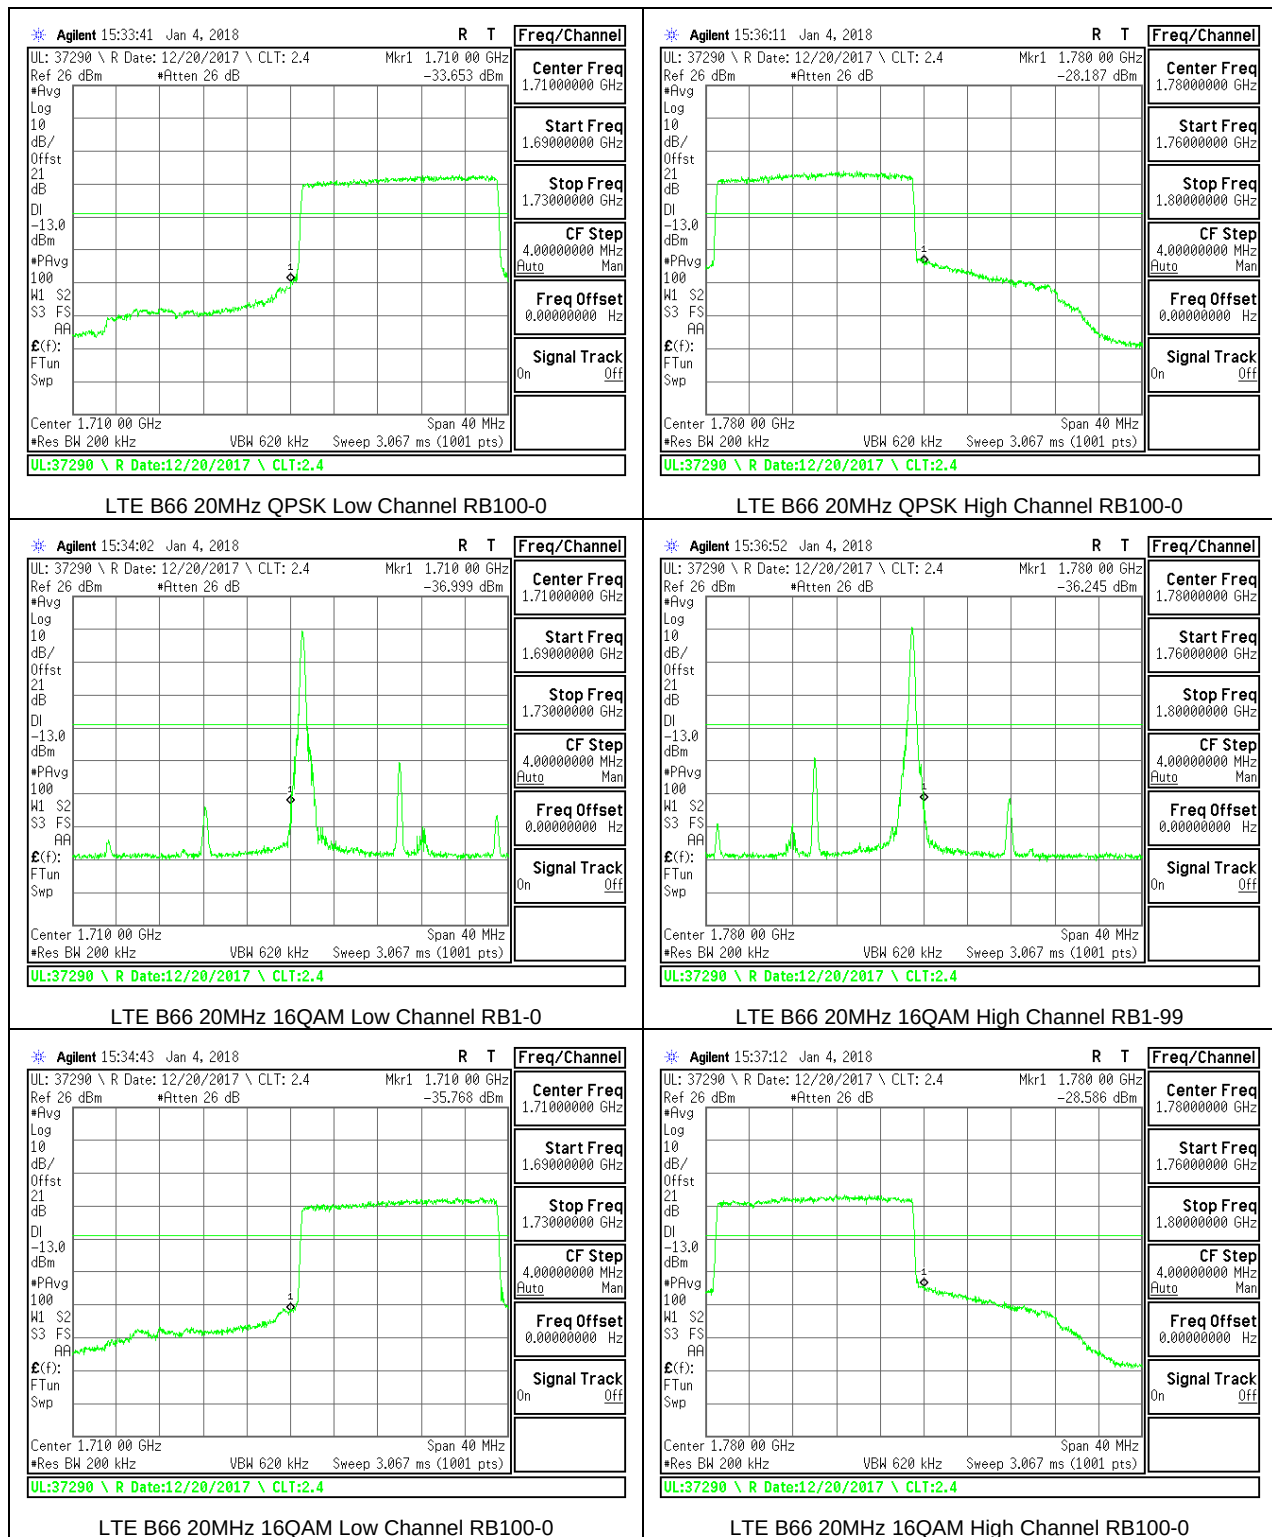

8.3. OUT OF BAND EMISSIONS

RULE PART(S)

FCC: §2.1051, §22.901, §22.917, §24.238, §27.53, §90.691

LIMITS

FCC: §22.917, §24.238, §27.53 (c), (g), (h), §90.691

The minimum permissible attenuation level of any spurious emissions is $43 + 10 \log (P)$ dB where transmitting power (P) in Watts.

FCC: §27.53 (a) (Band 30)

The minimum permissible attenuation level of any spurious emissions is $70 + 10 \log (P)$ dB where transmitting power (P) in Watts.

FCC: §27.53 (m) (Band 7, 41)

The minimum permissible attenuation level of any spurious emissions is $55 + 10 \log (P)$ dB where transmitting power (P) in Watts.

TEST PROCEDURE

The RF output of the transmitter was connected to a spectrum analyzer through a calibrated coaxial cable. Sufficient scans were taken to show the out-of-band Emissions, if any, up to 10th harmonic. Multiple sweeps were recorded in maximum hold mode using a peak detector to ensure that the worst-case emissions were caught.


For each out of band emissions measurement:

- Set display line at -13 dBm, -25dBm and -40dBm according to the band Limit
- Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.
(NOTE: Worst case set RBW/VBW to 1MHz/3MHz)


MODES TESTED

- GSM 850
- GSM 1900
- WCDM Band 2
- WCDM Band 4
- WCDM Band 5
- LTE Band 2
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 26
- LTE Band 41
- LTE Band 66


8.3.1. GSM 850MHz

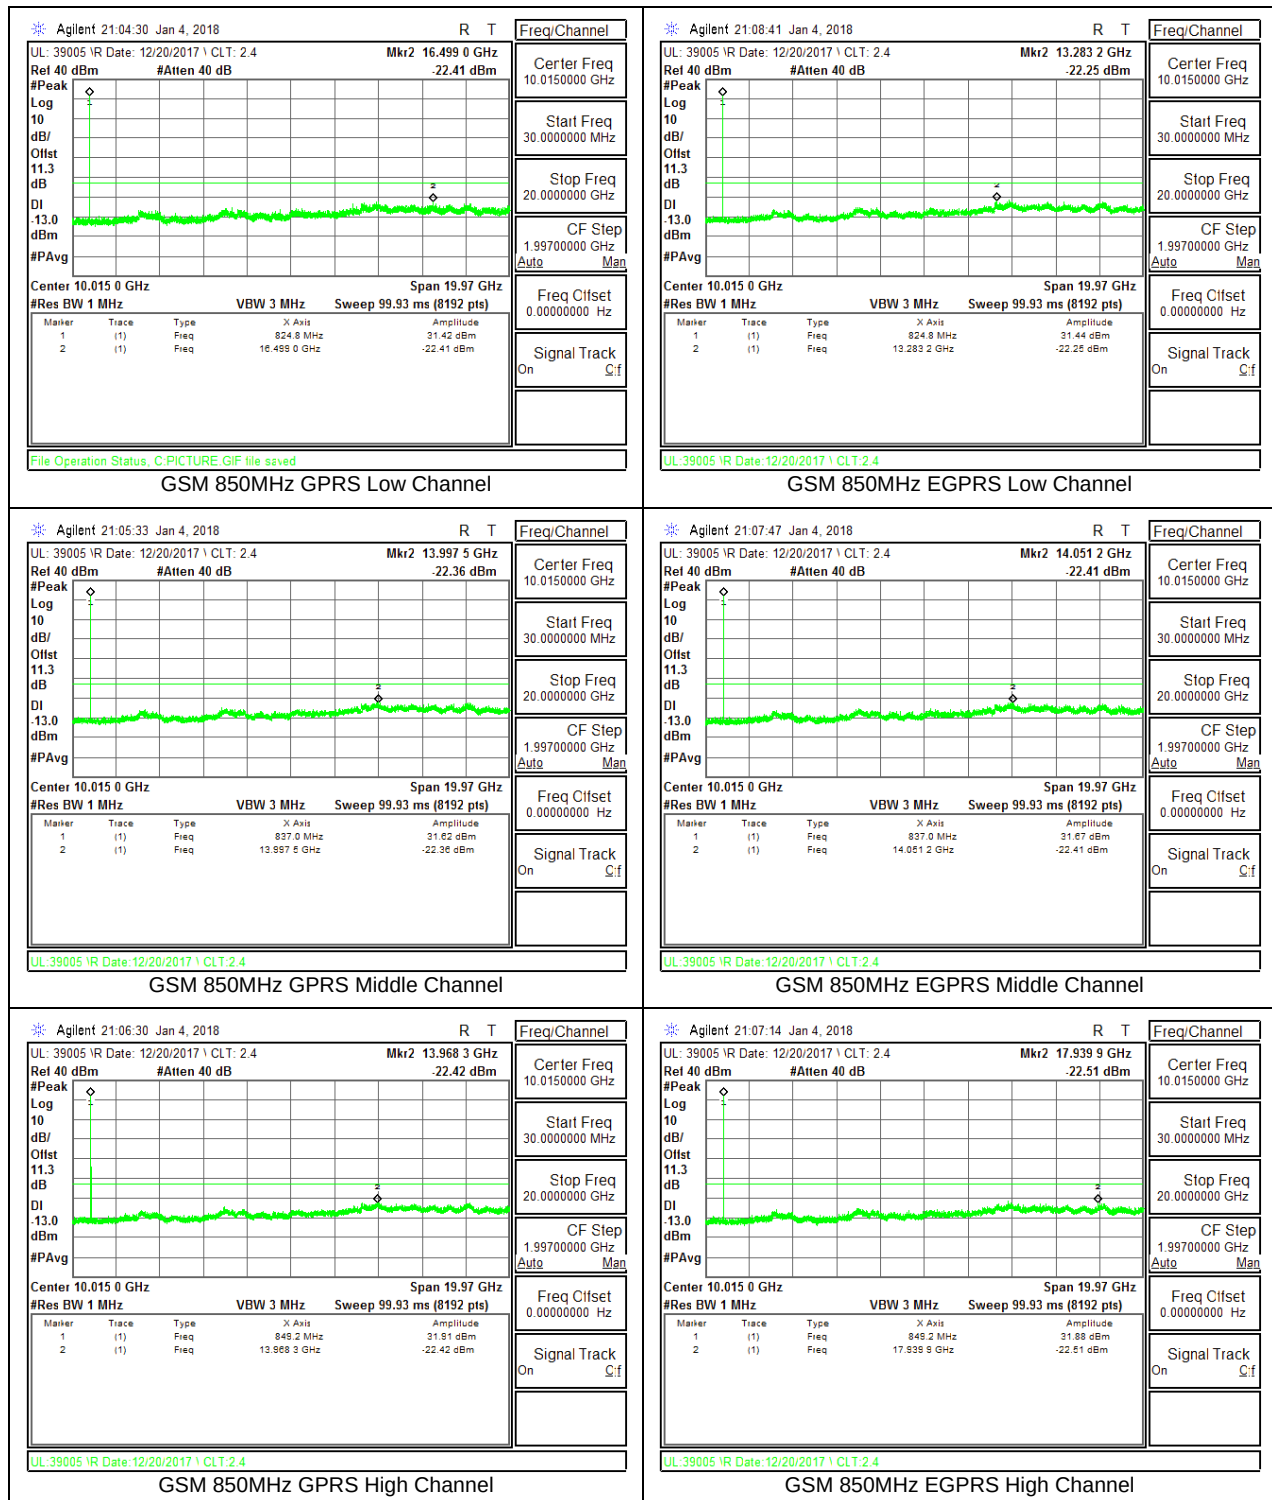


8.3.2. GSM 1900MHz

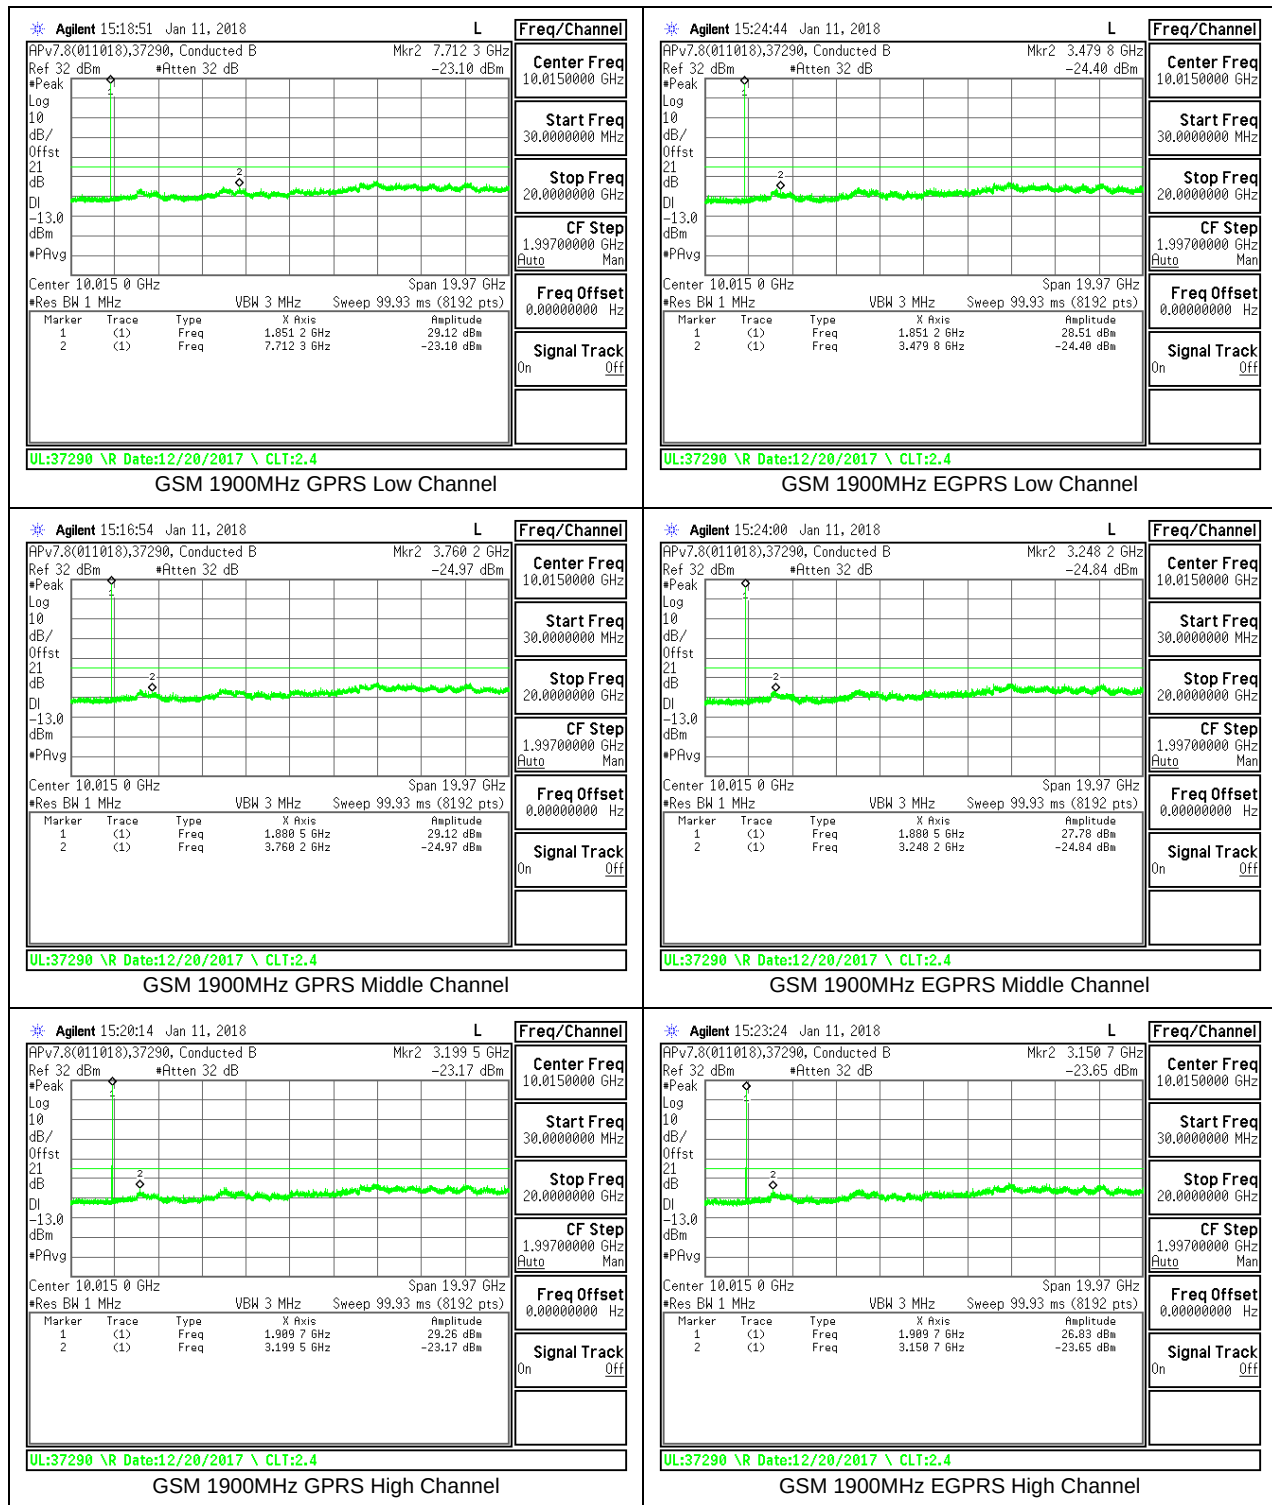


8.3.3. WCDMA BAND 2

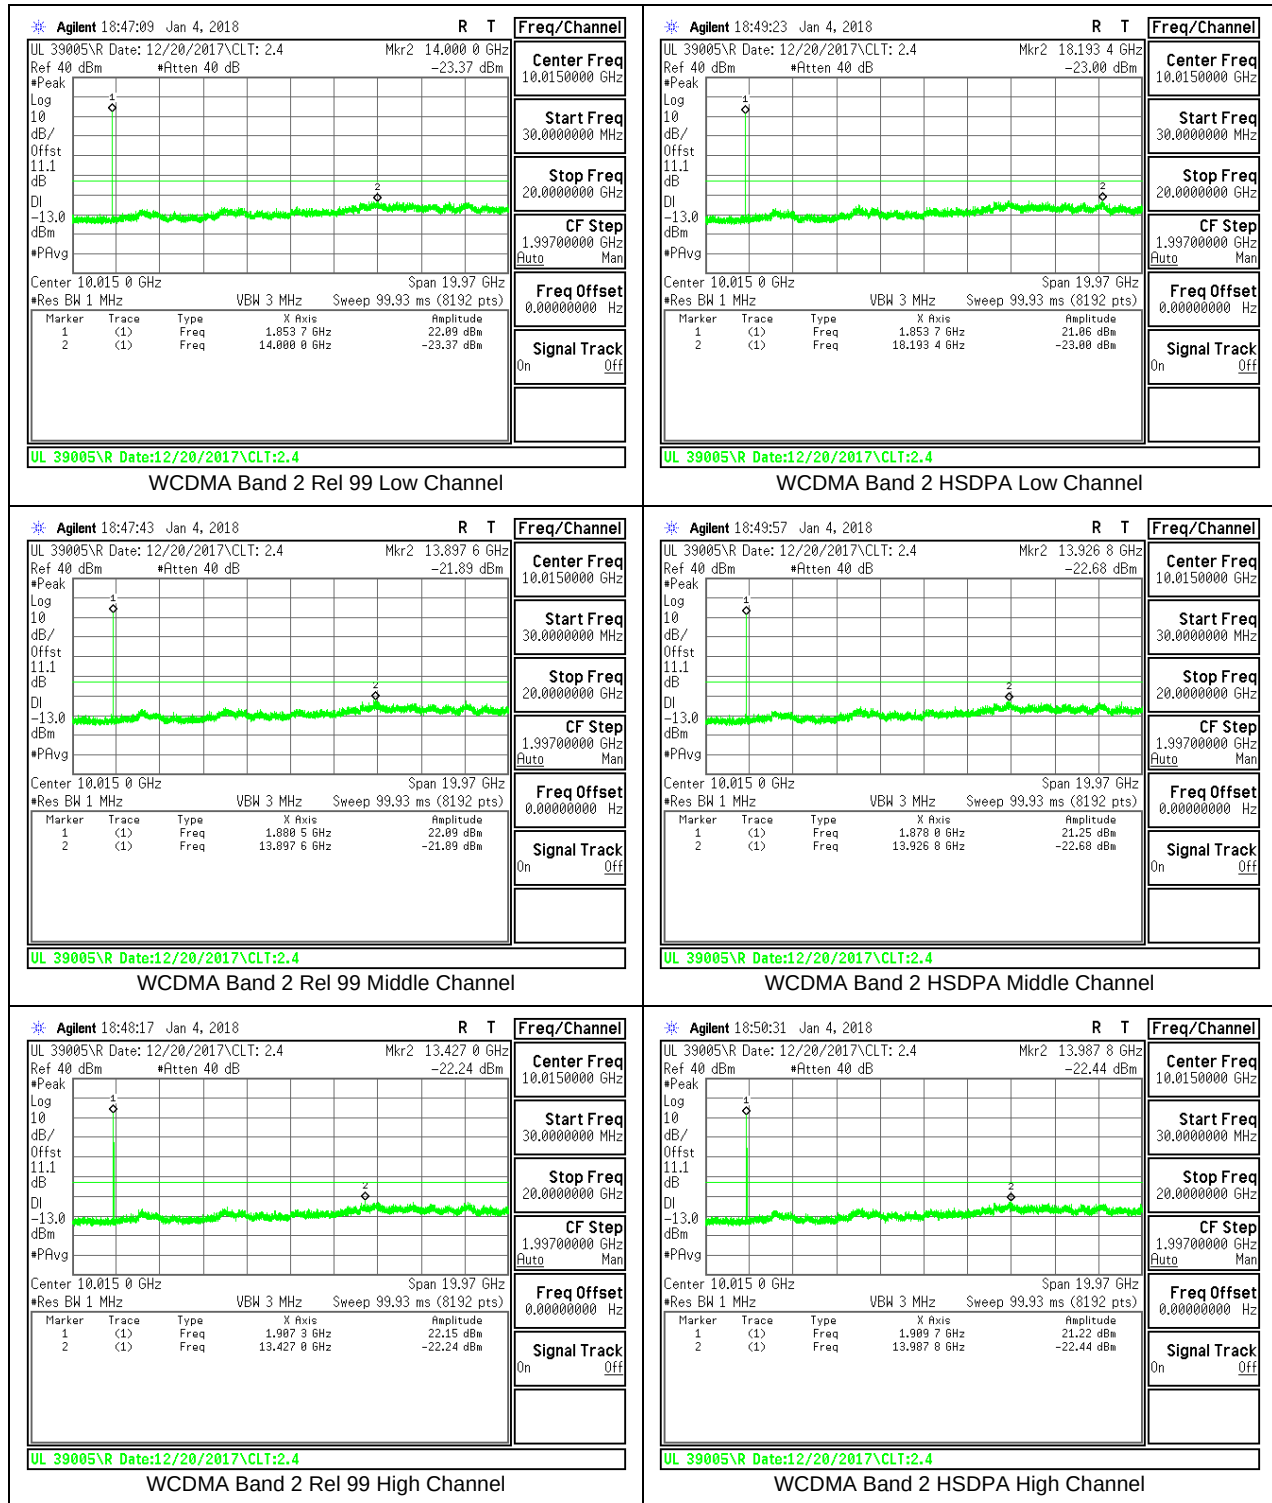


8.3.4. WCDMA BAND 4

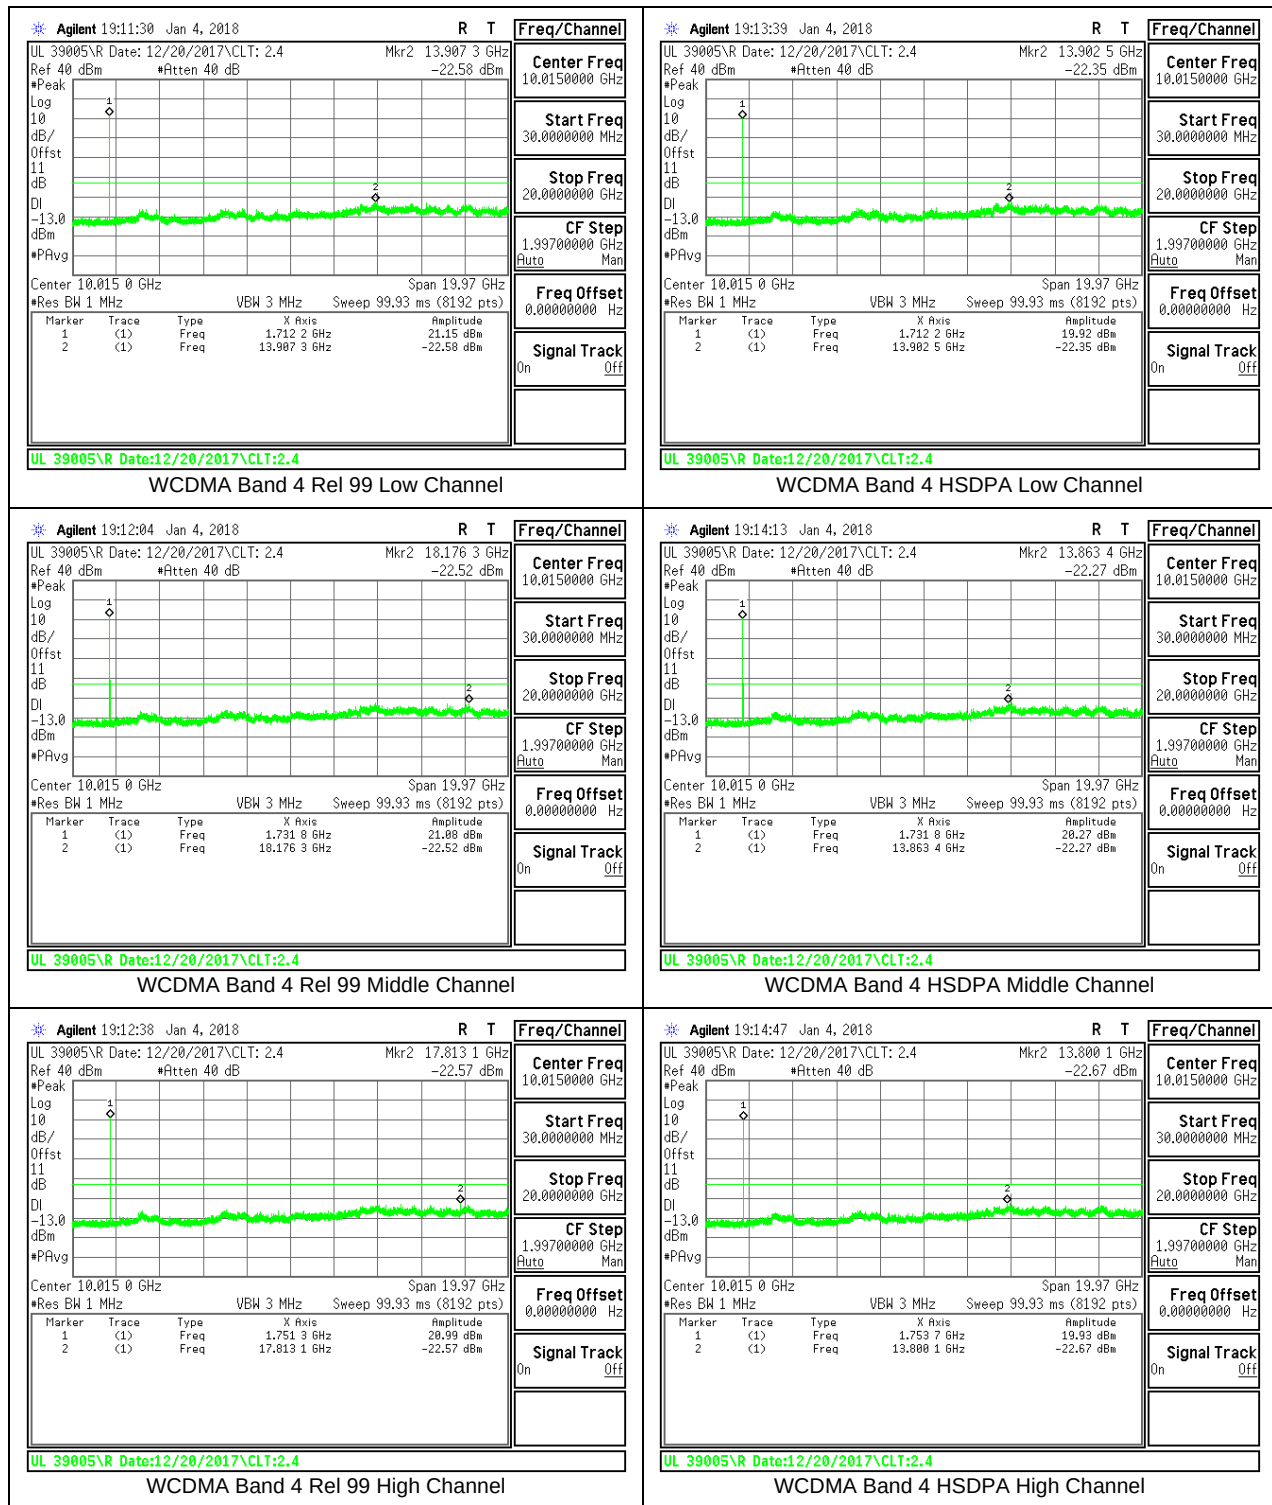



8.3.5. WCDMA BAND 5

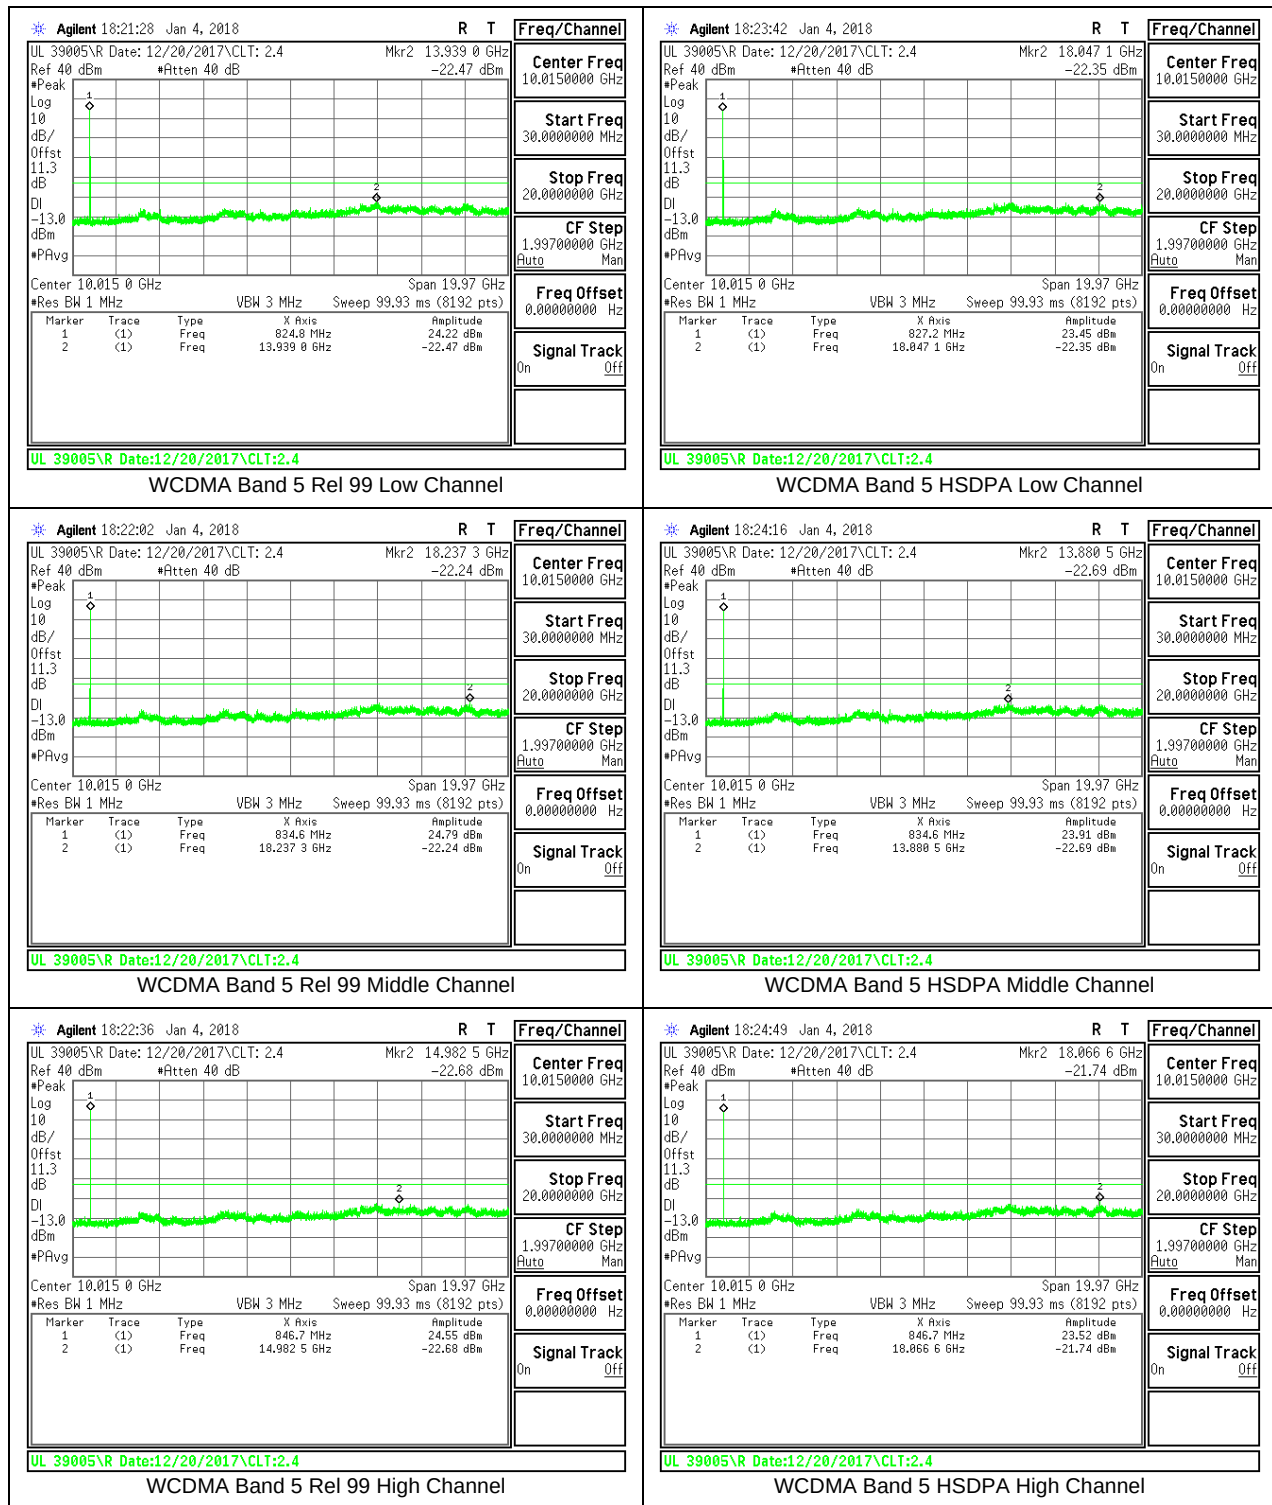



8.3.6. LTE BAND 2

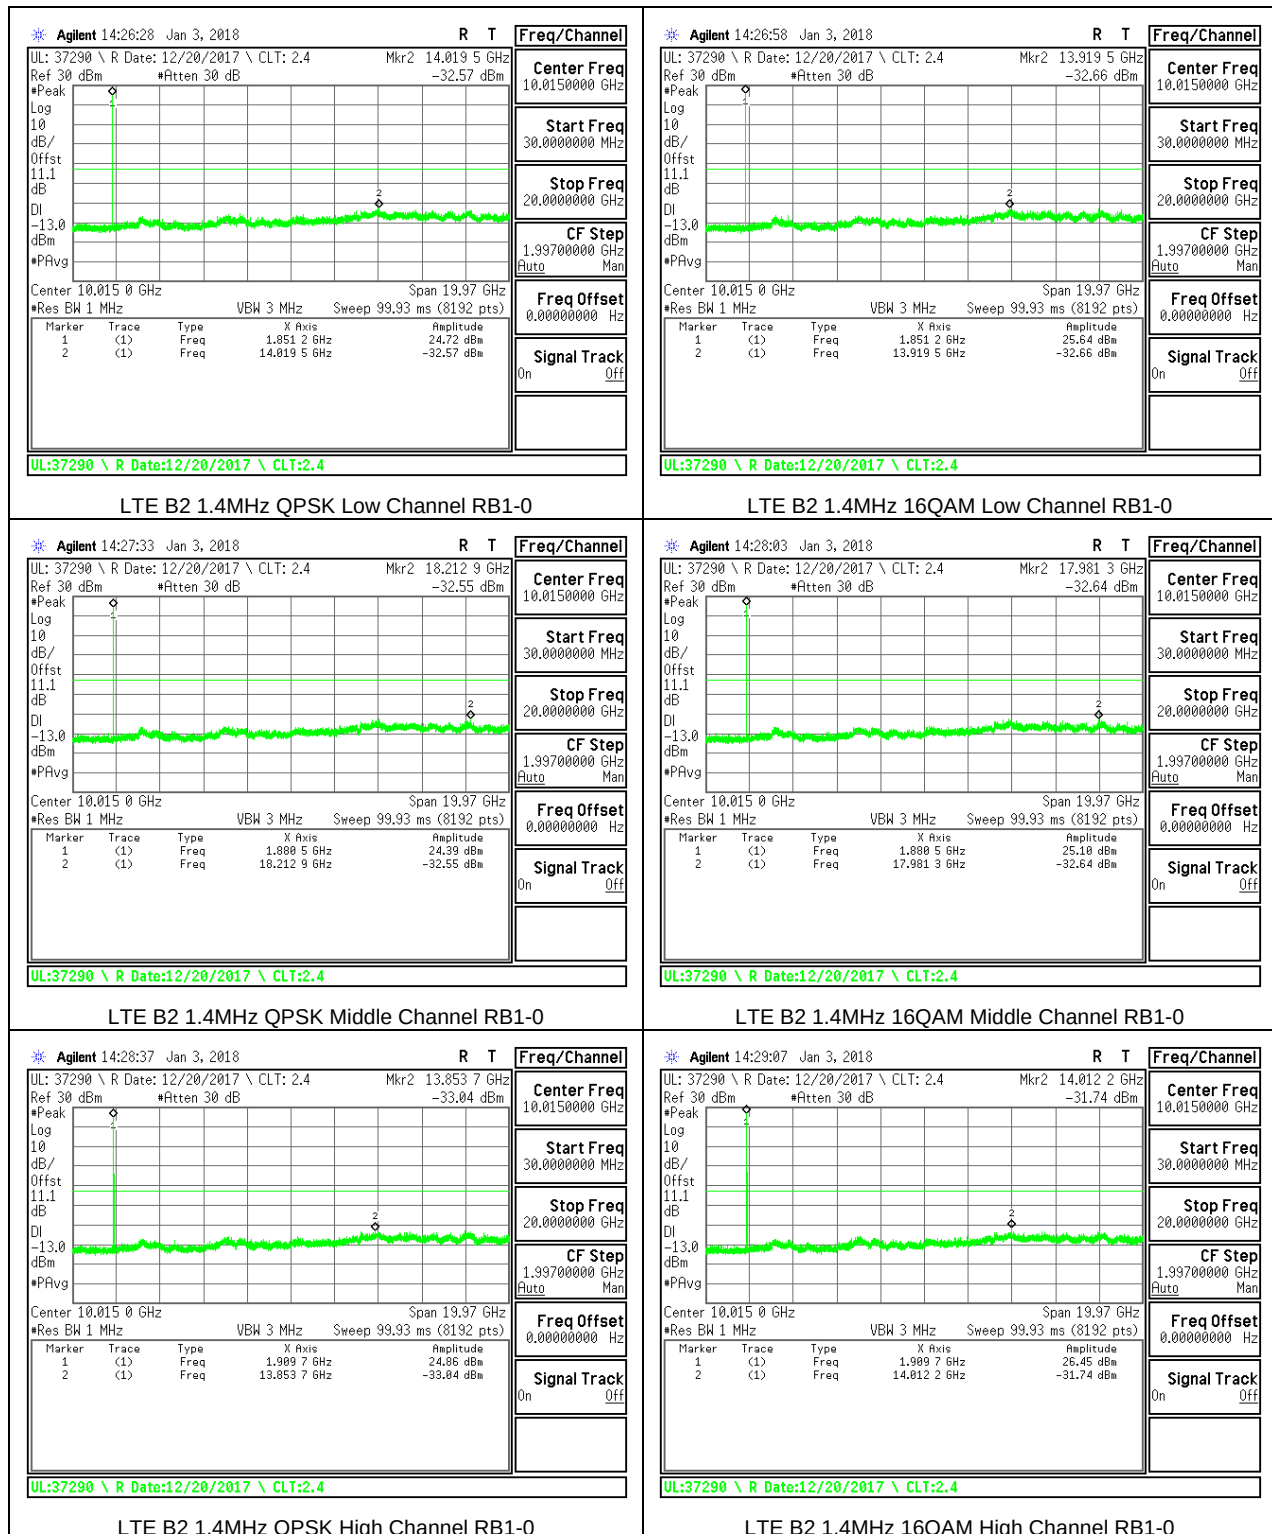


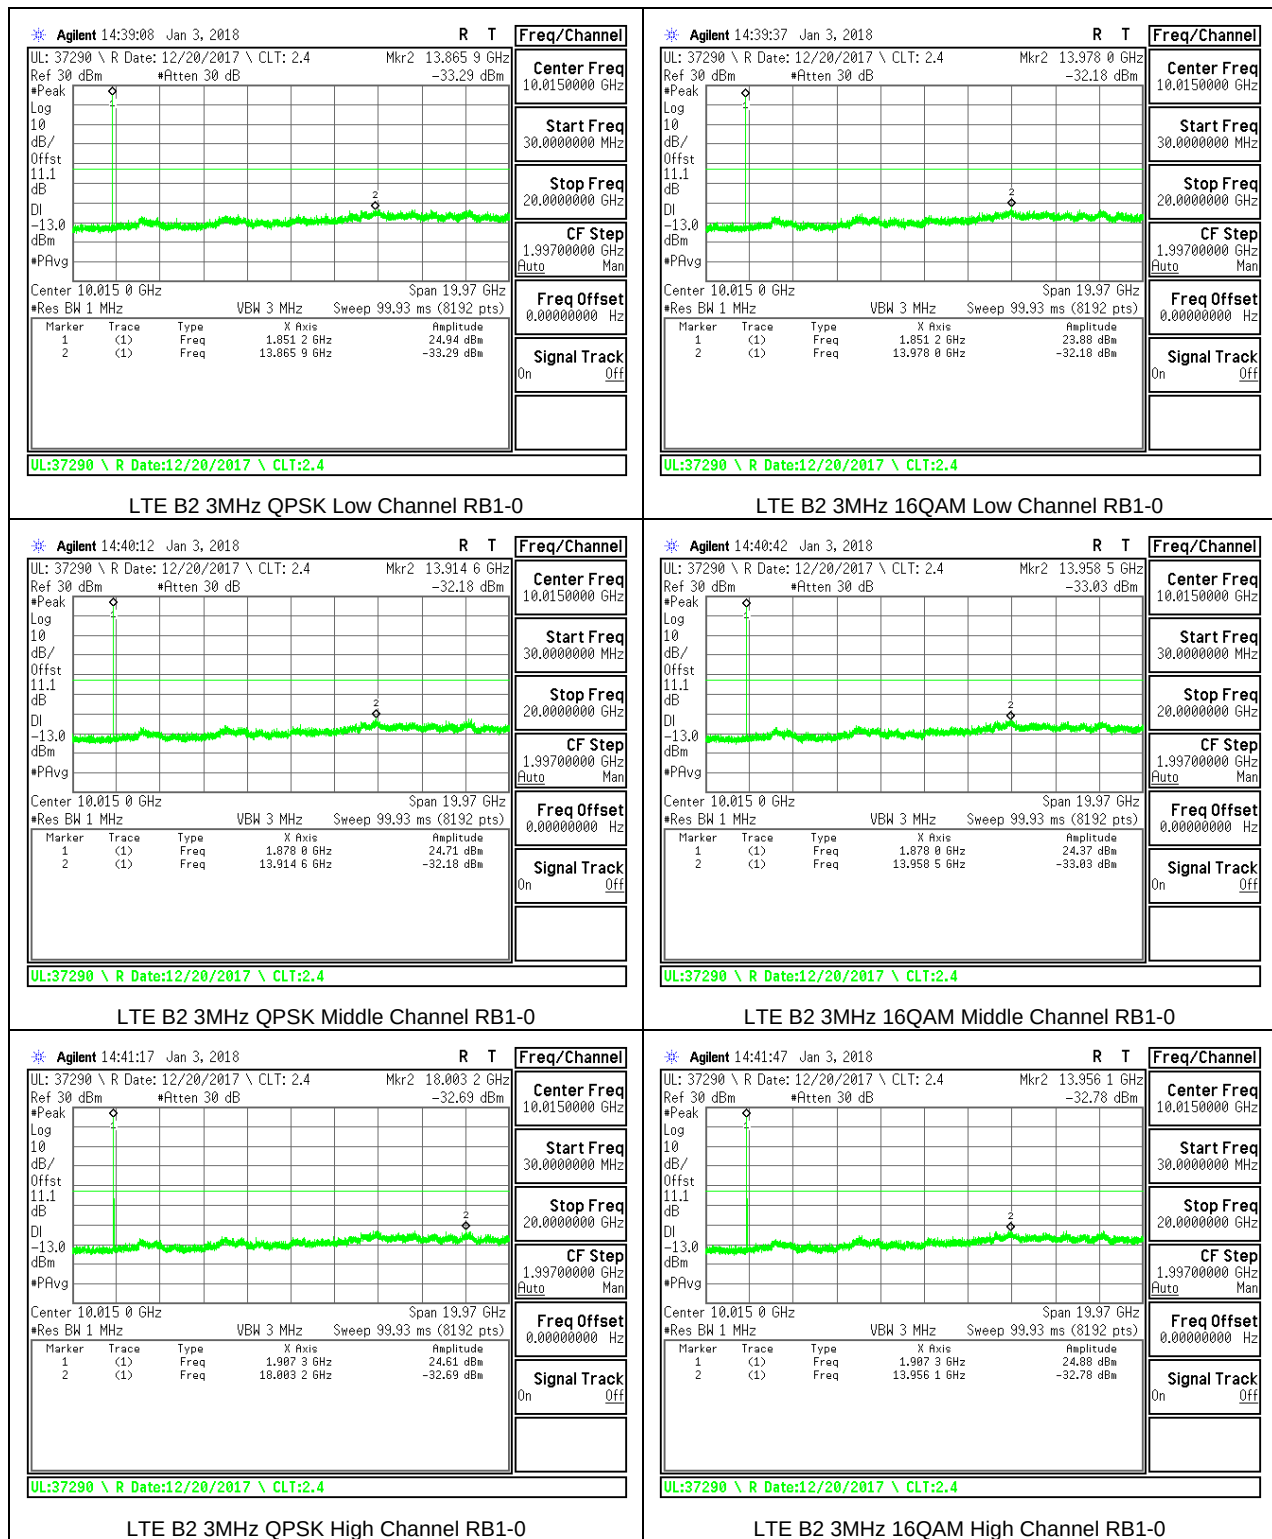

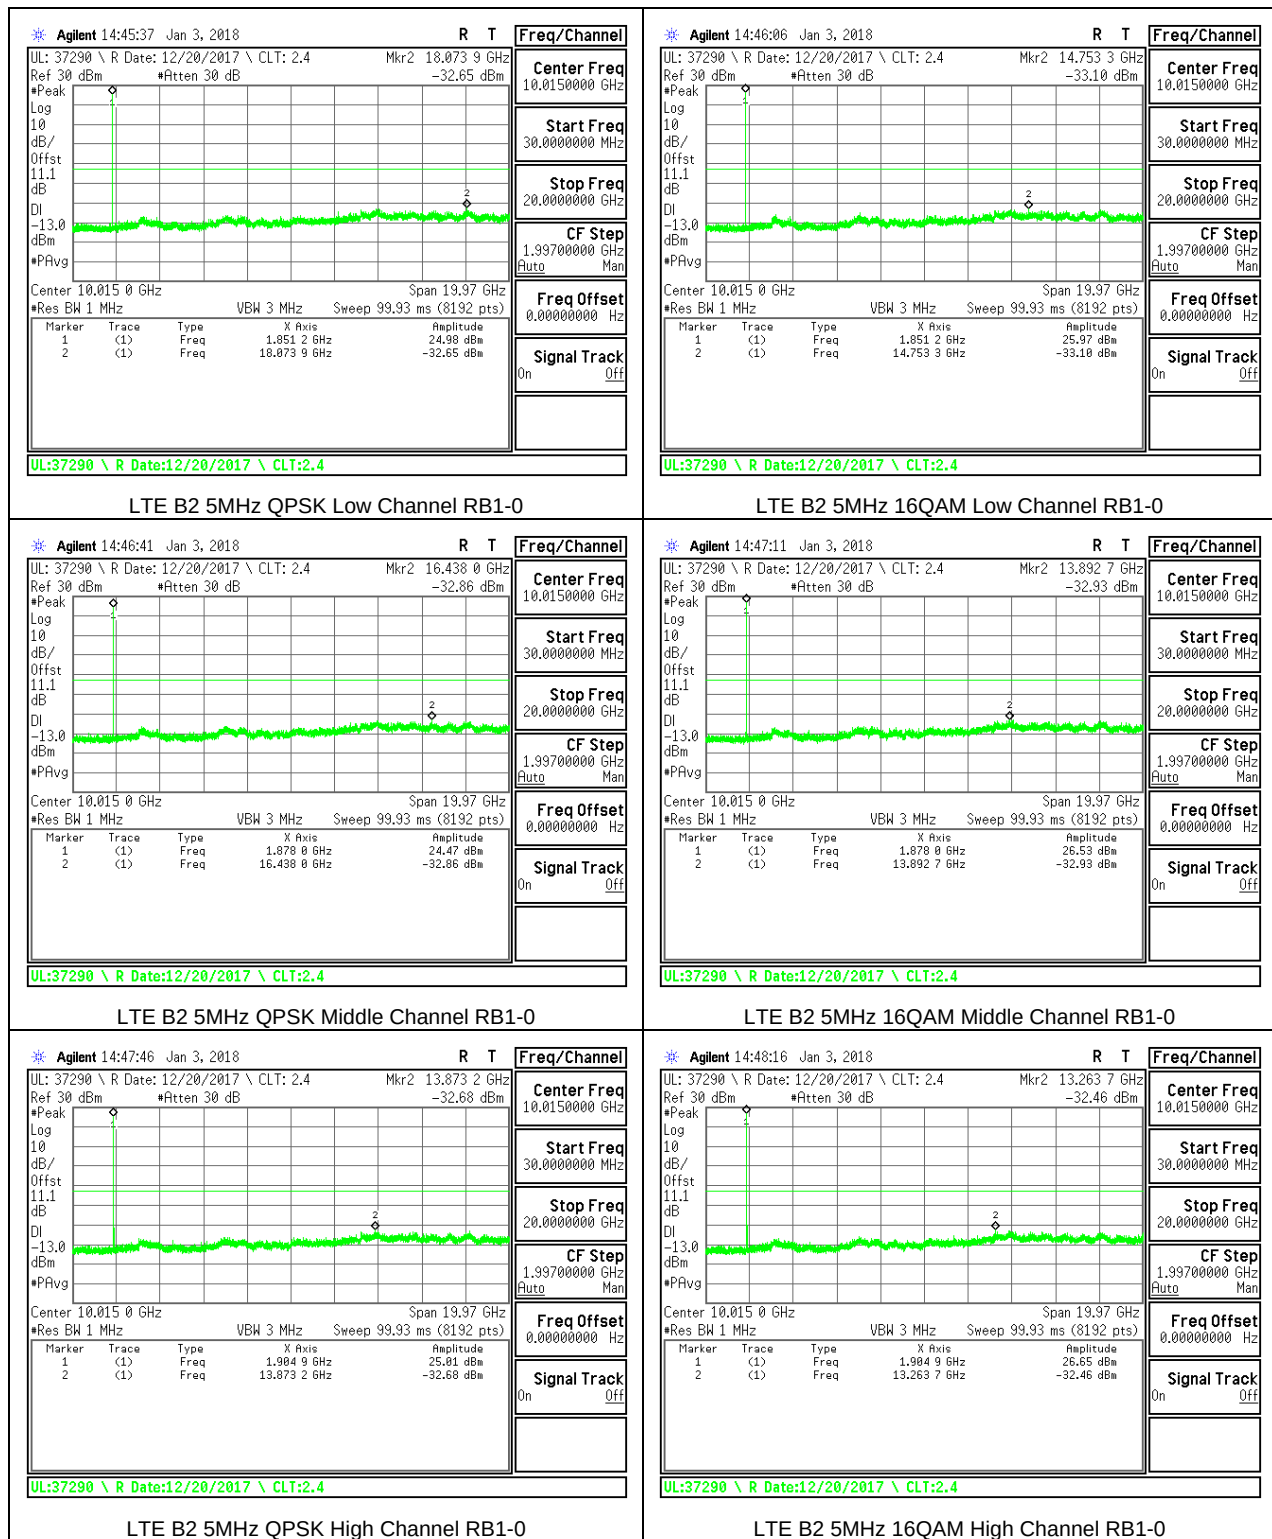

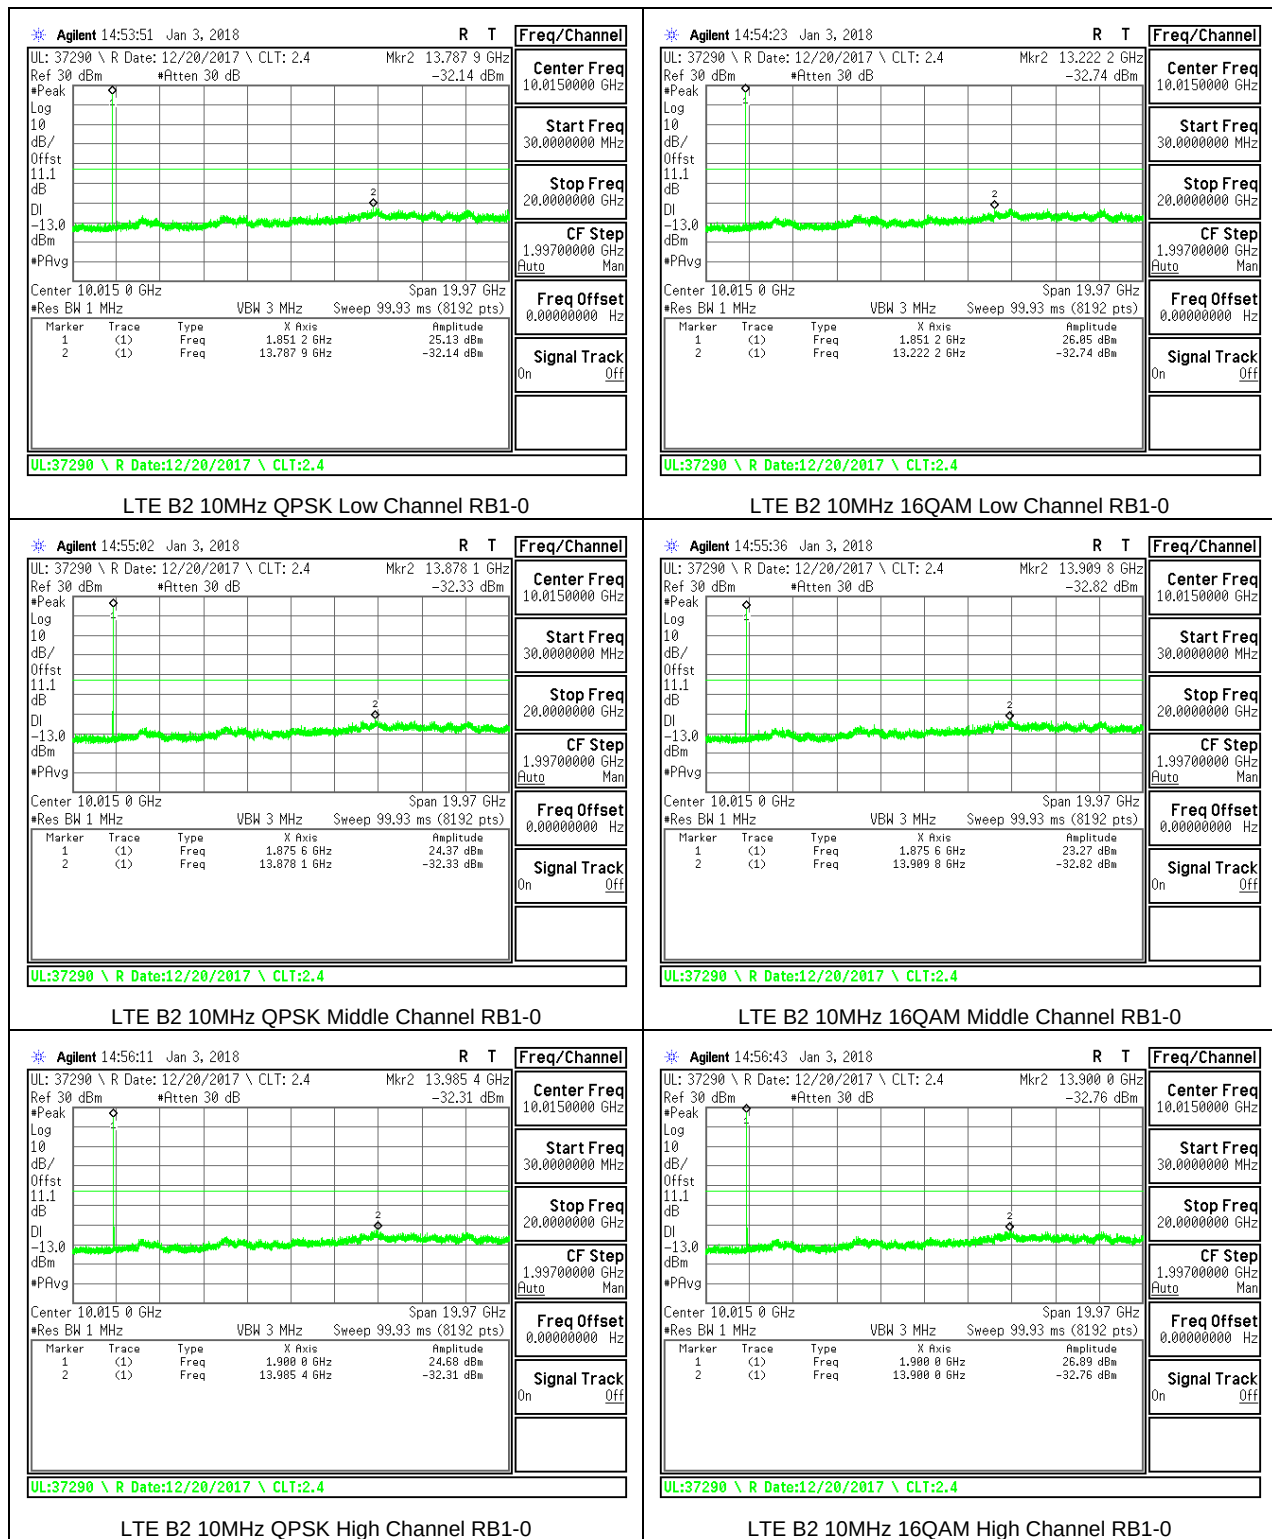

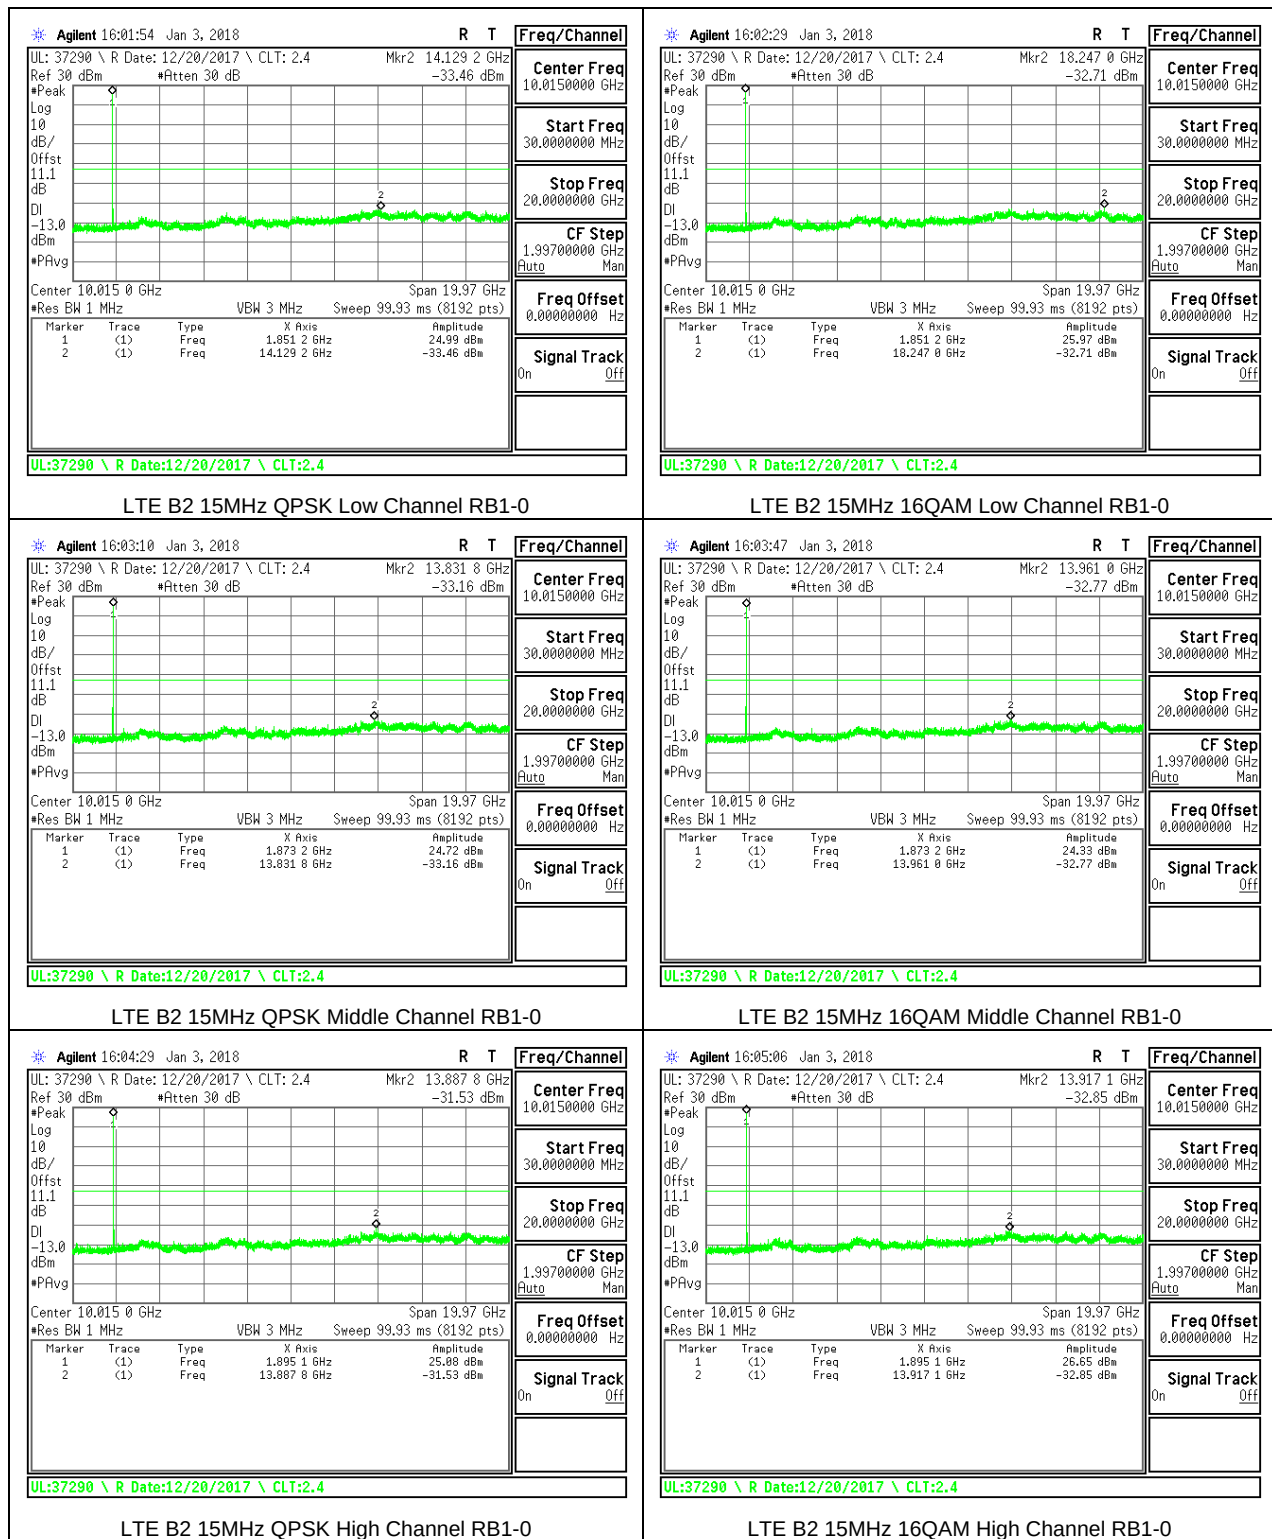

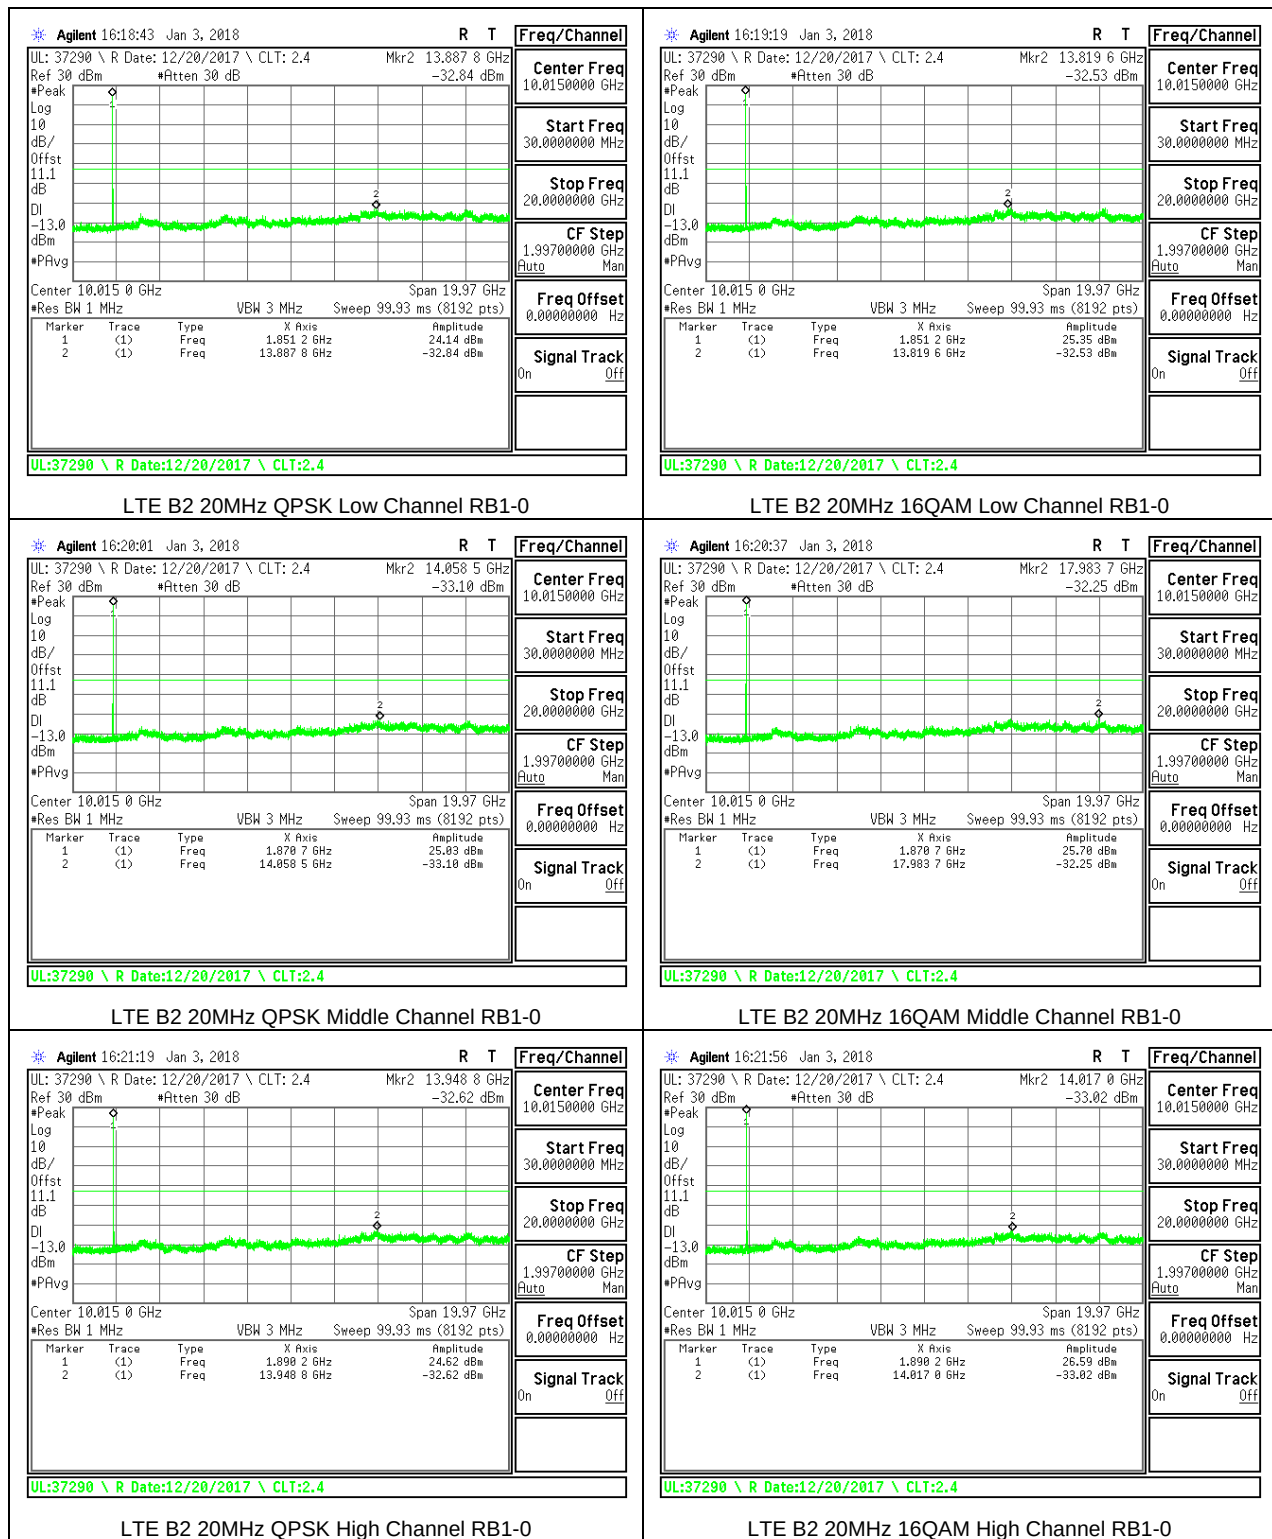

8.3.7. LTE BAND 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.