





8.3.8. LTE BAND 5

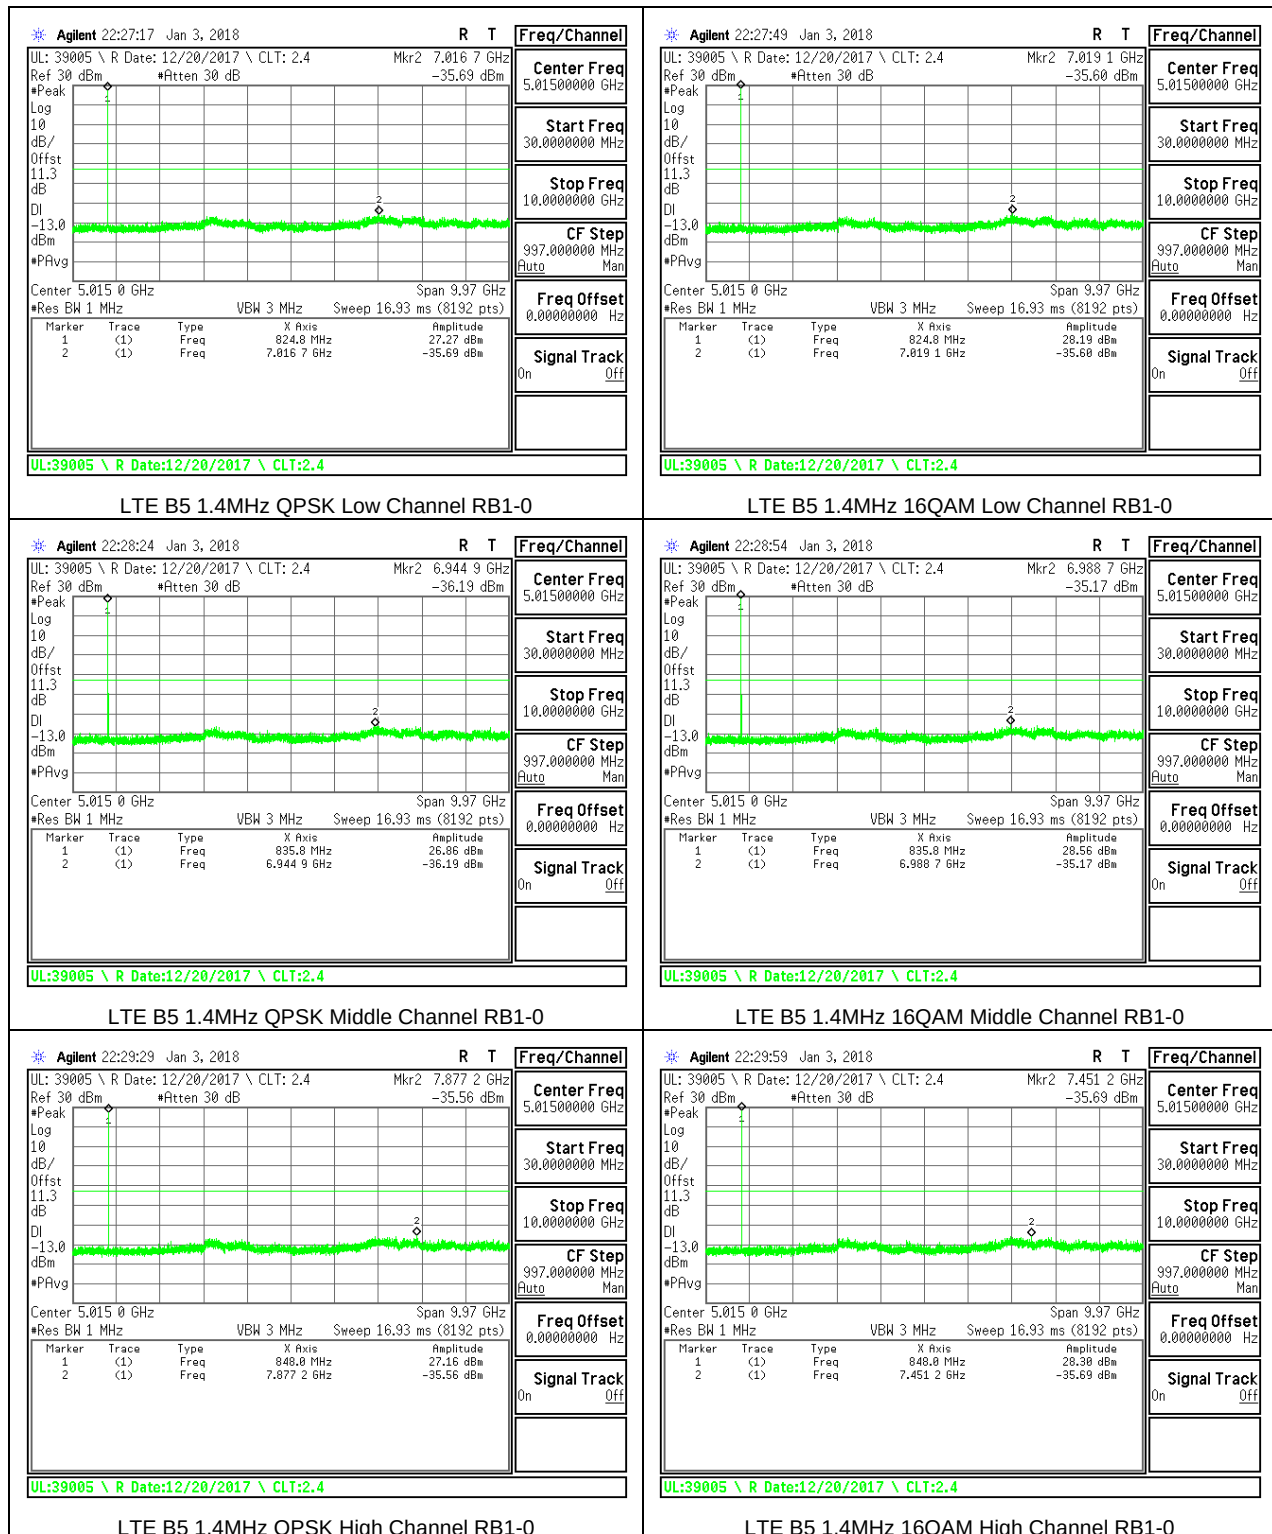


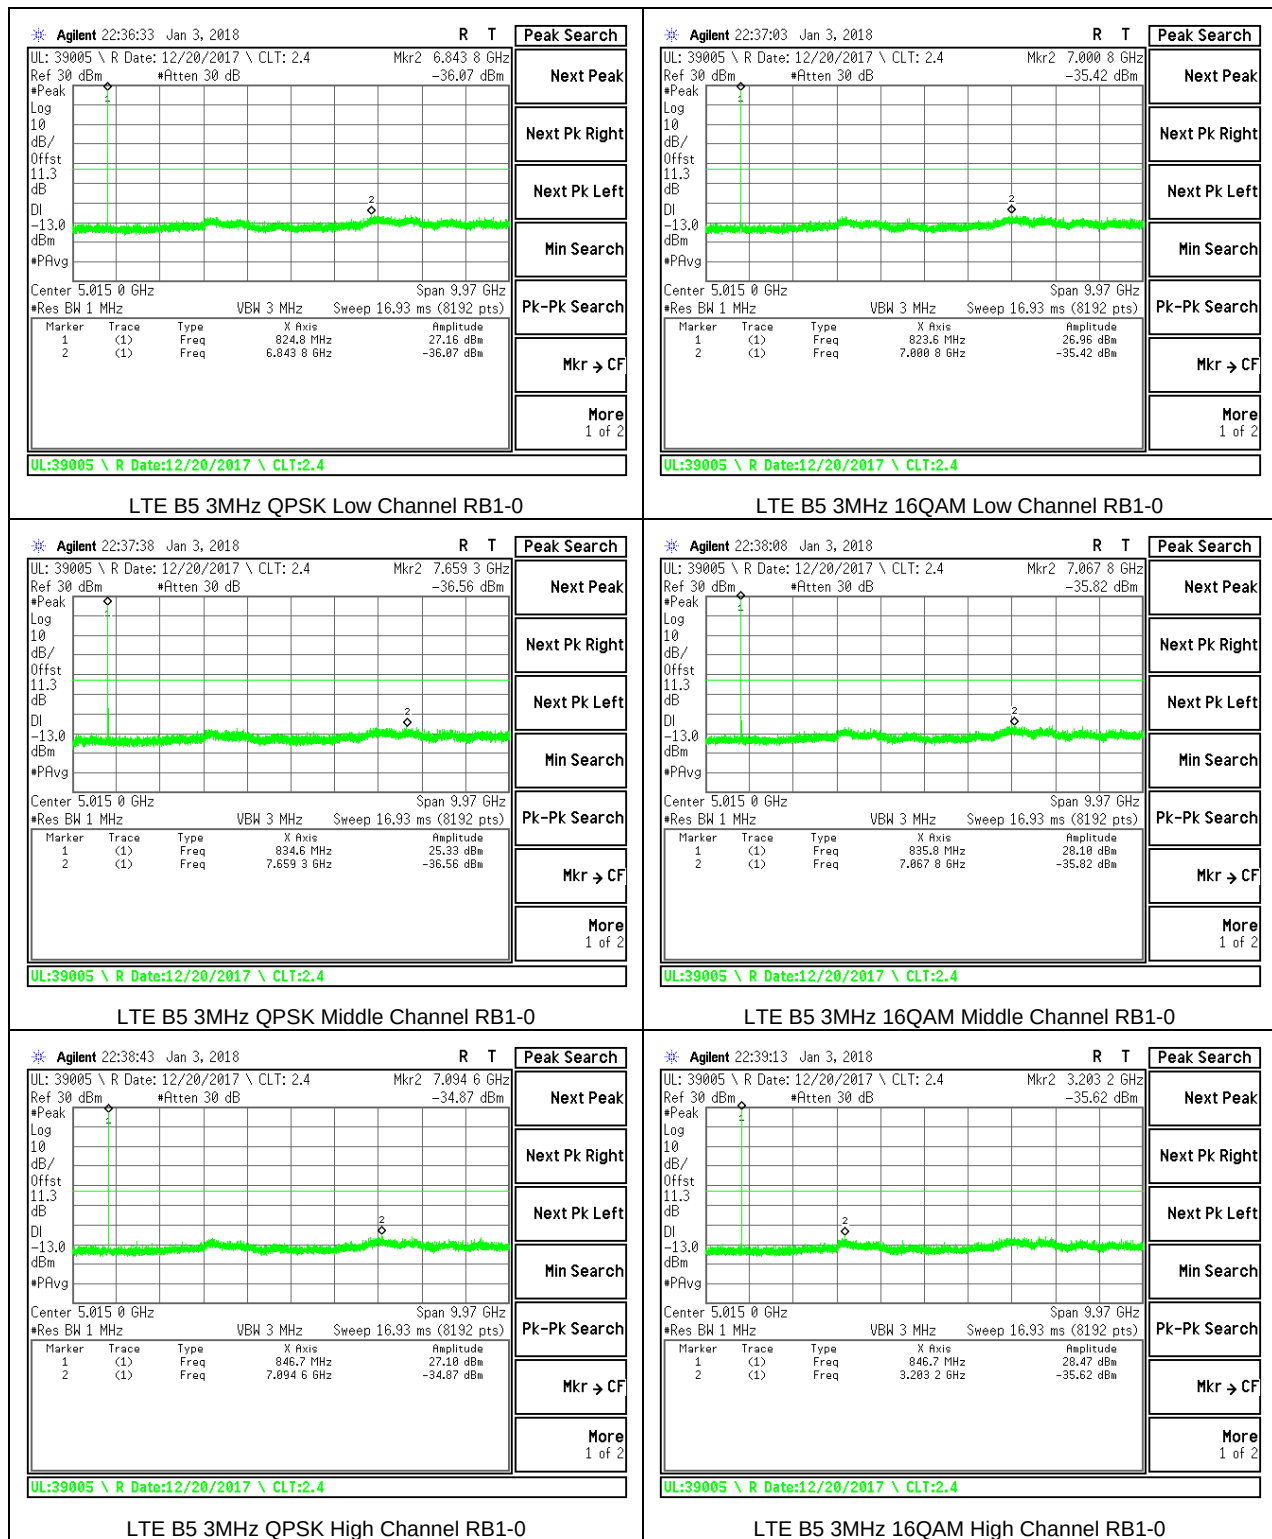


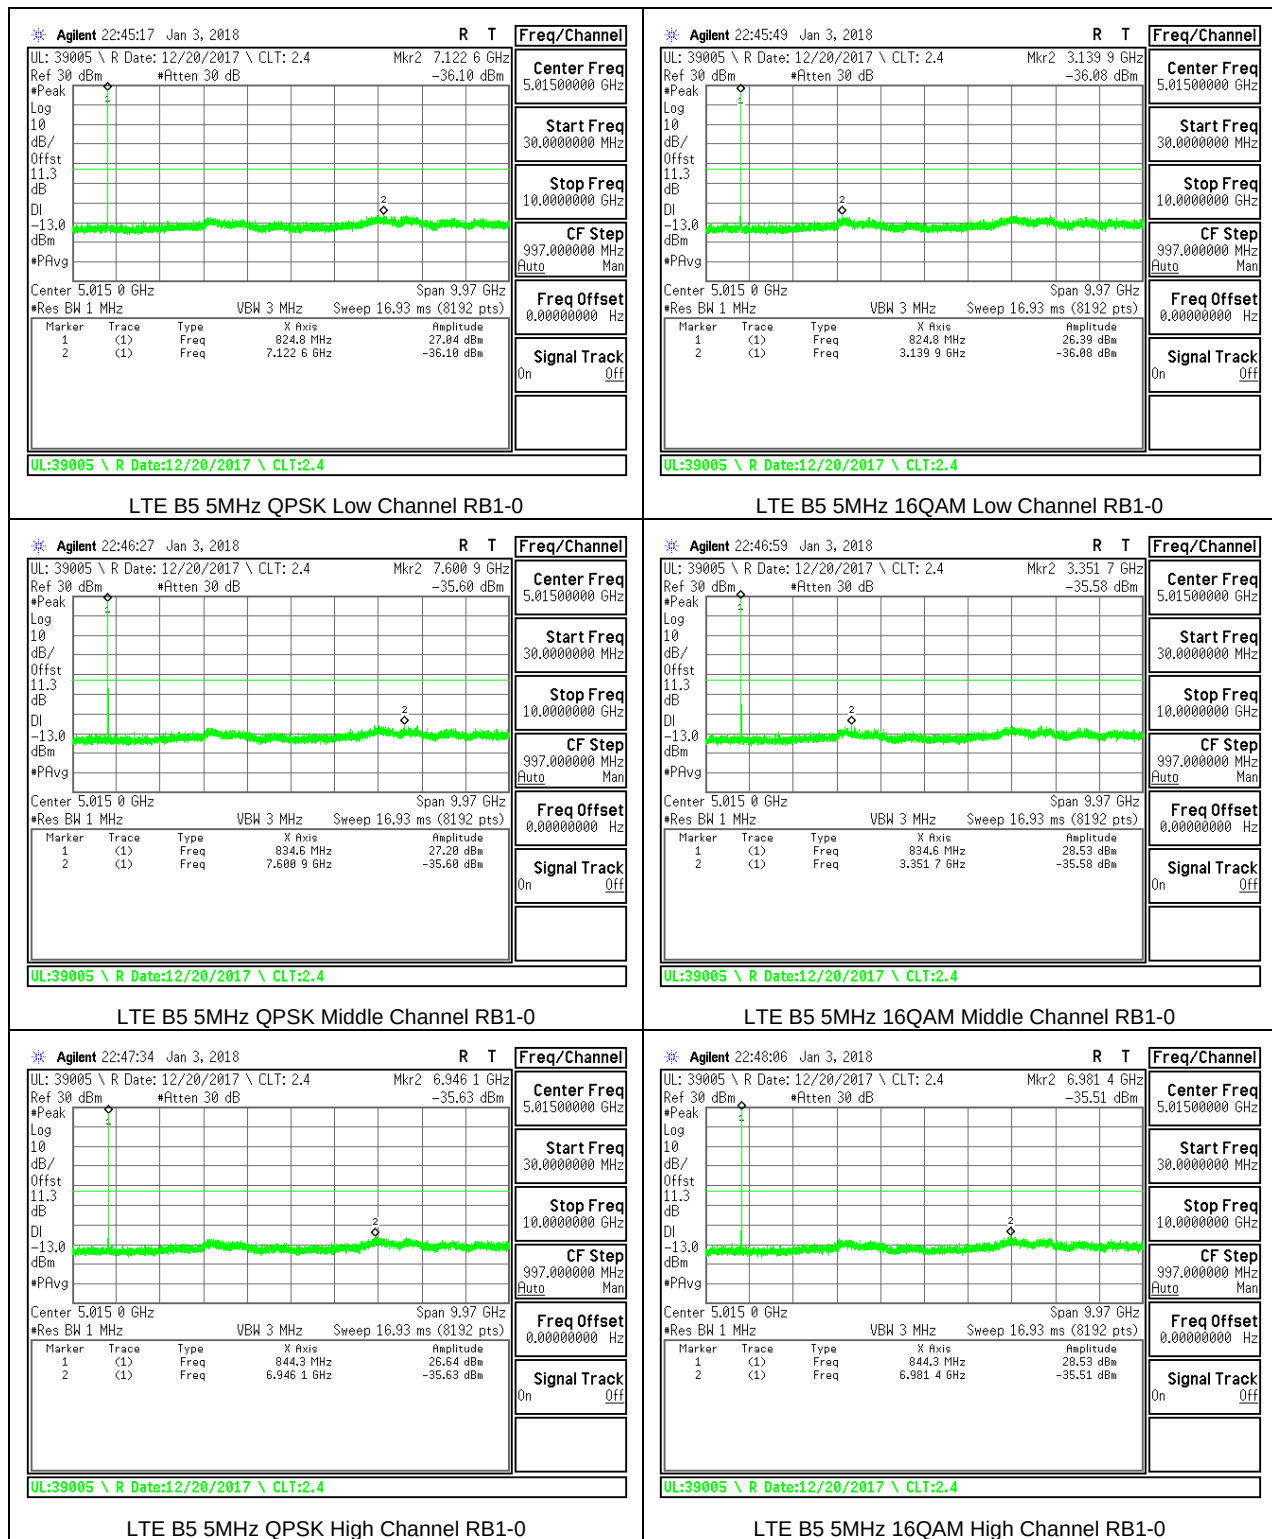


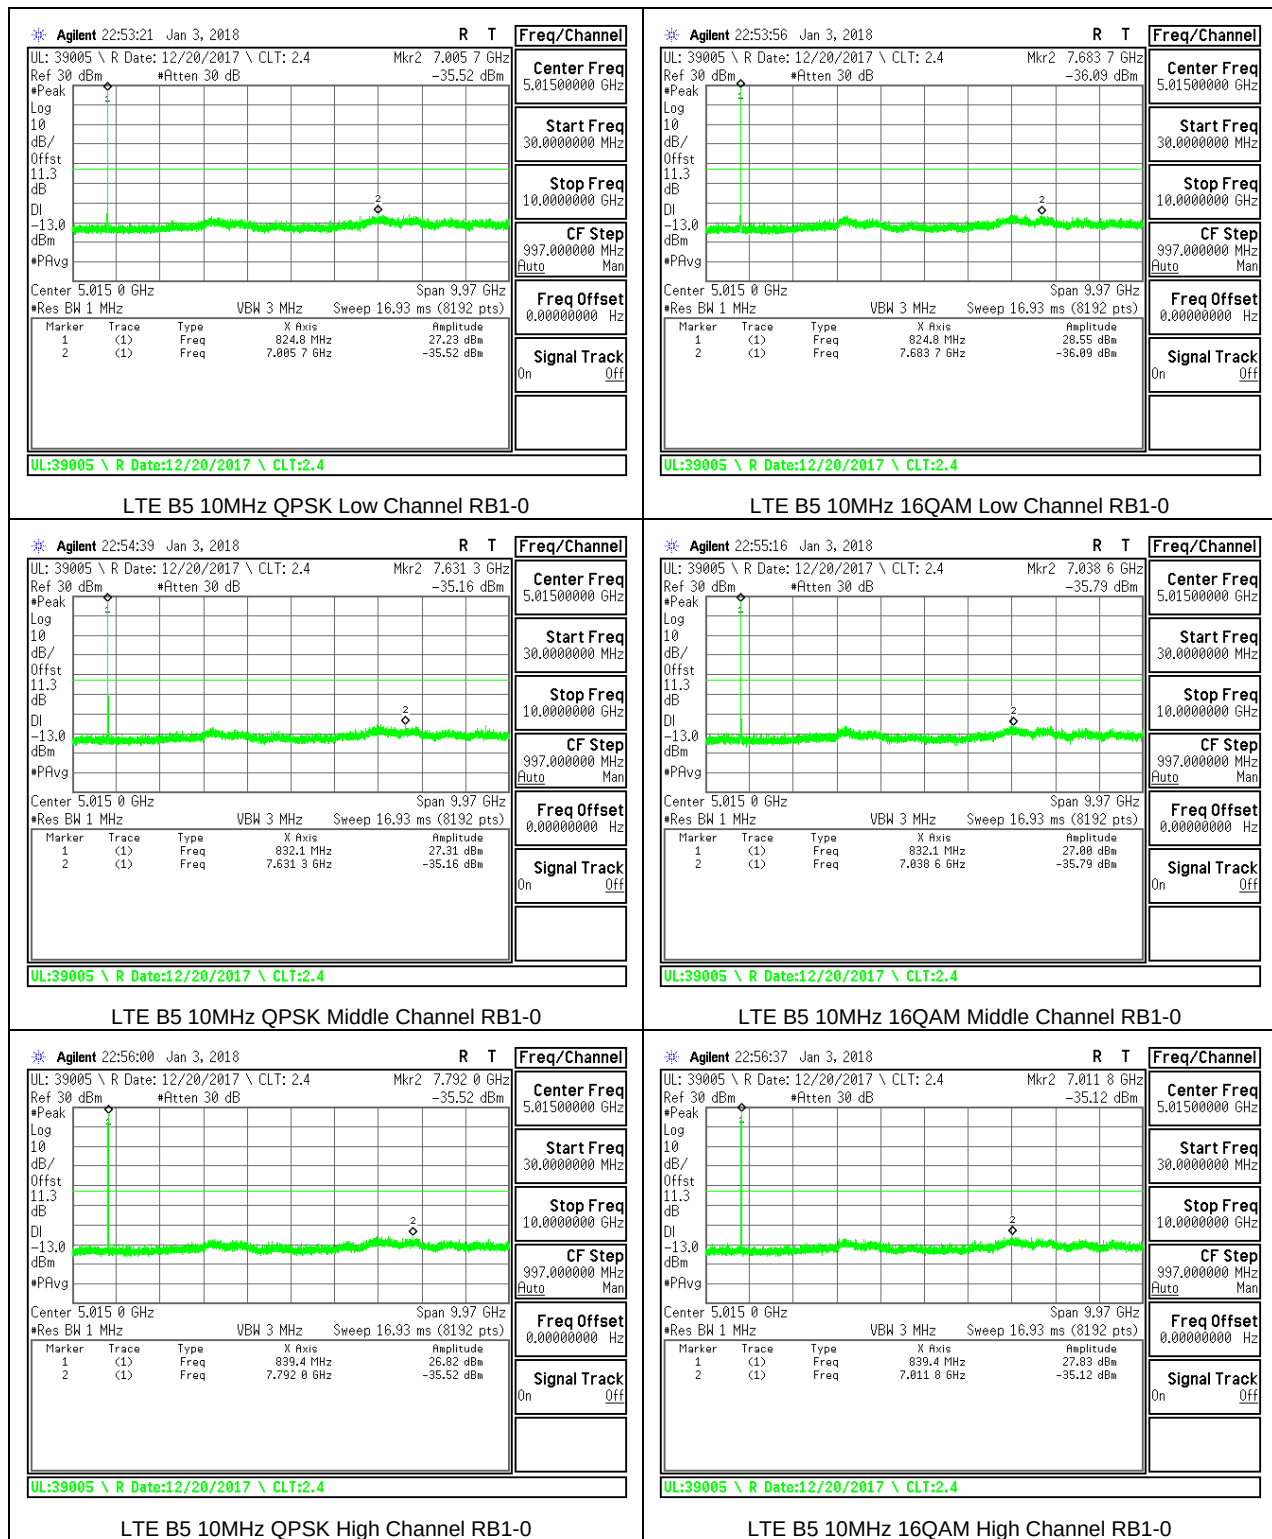


8.3.9. LTE BAND 7

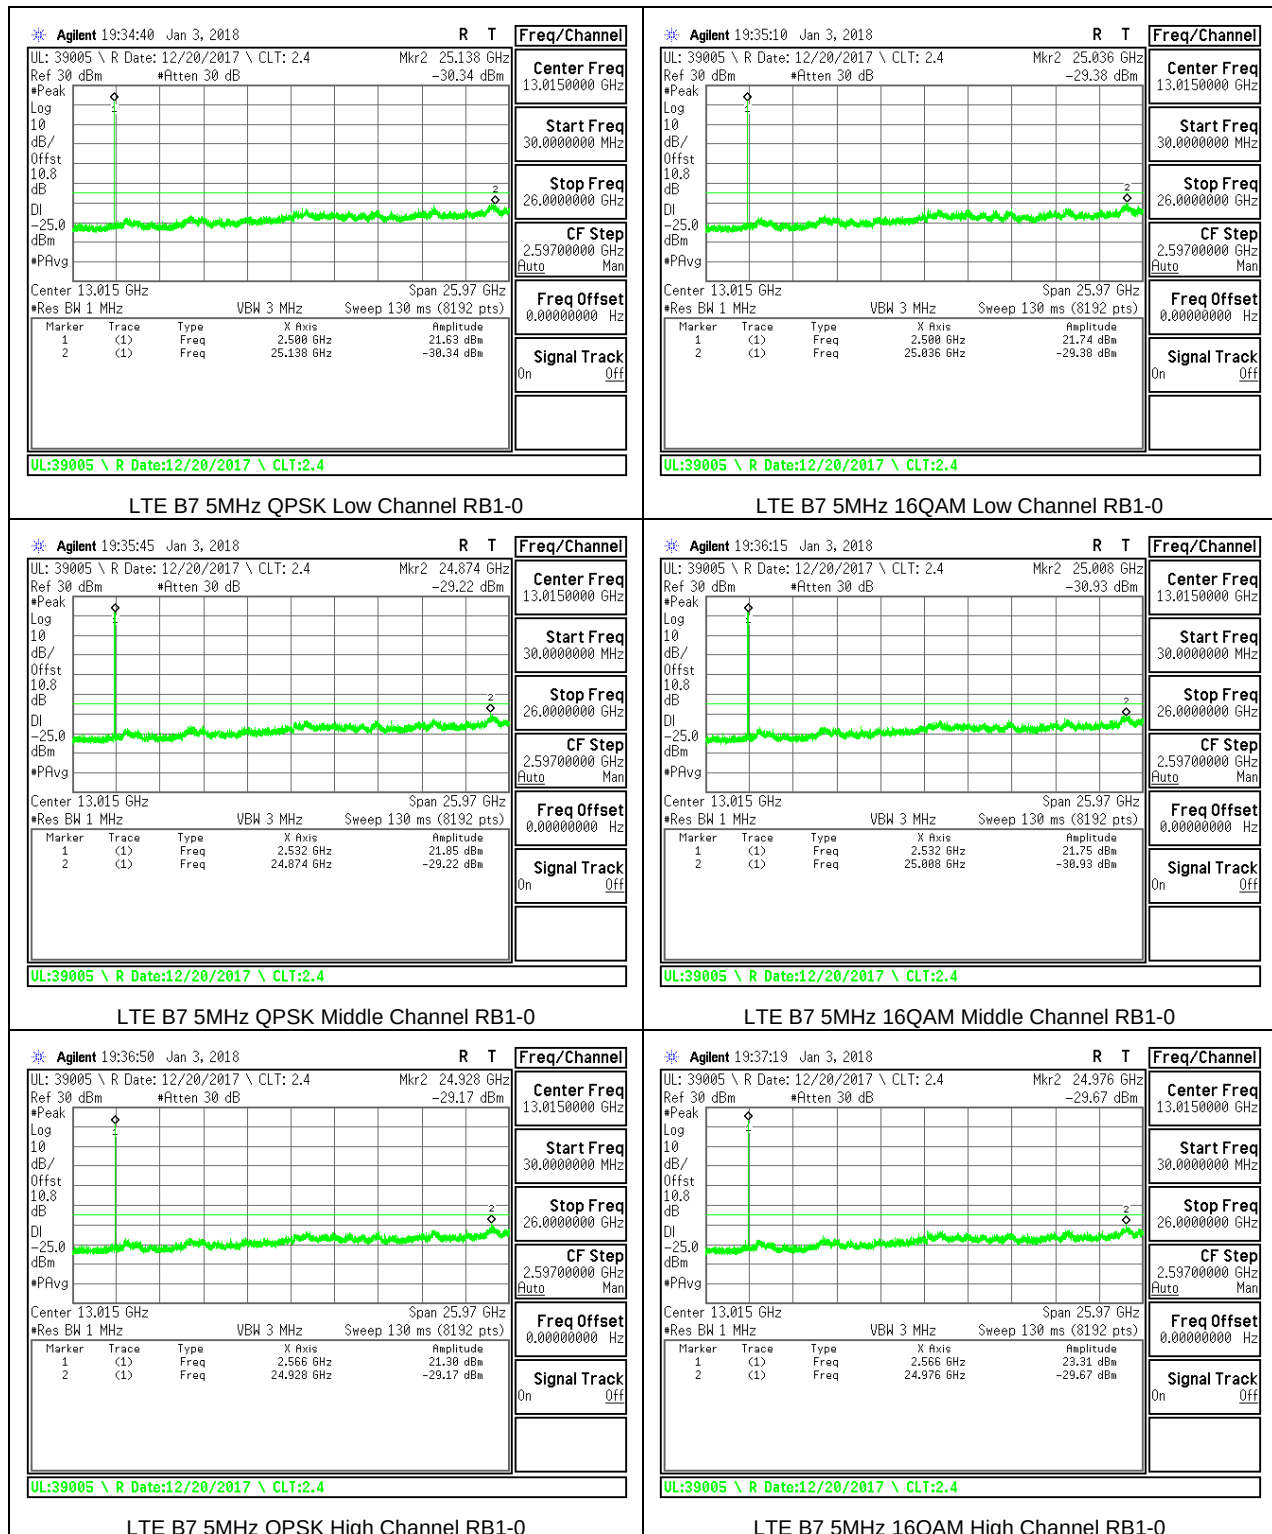


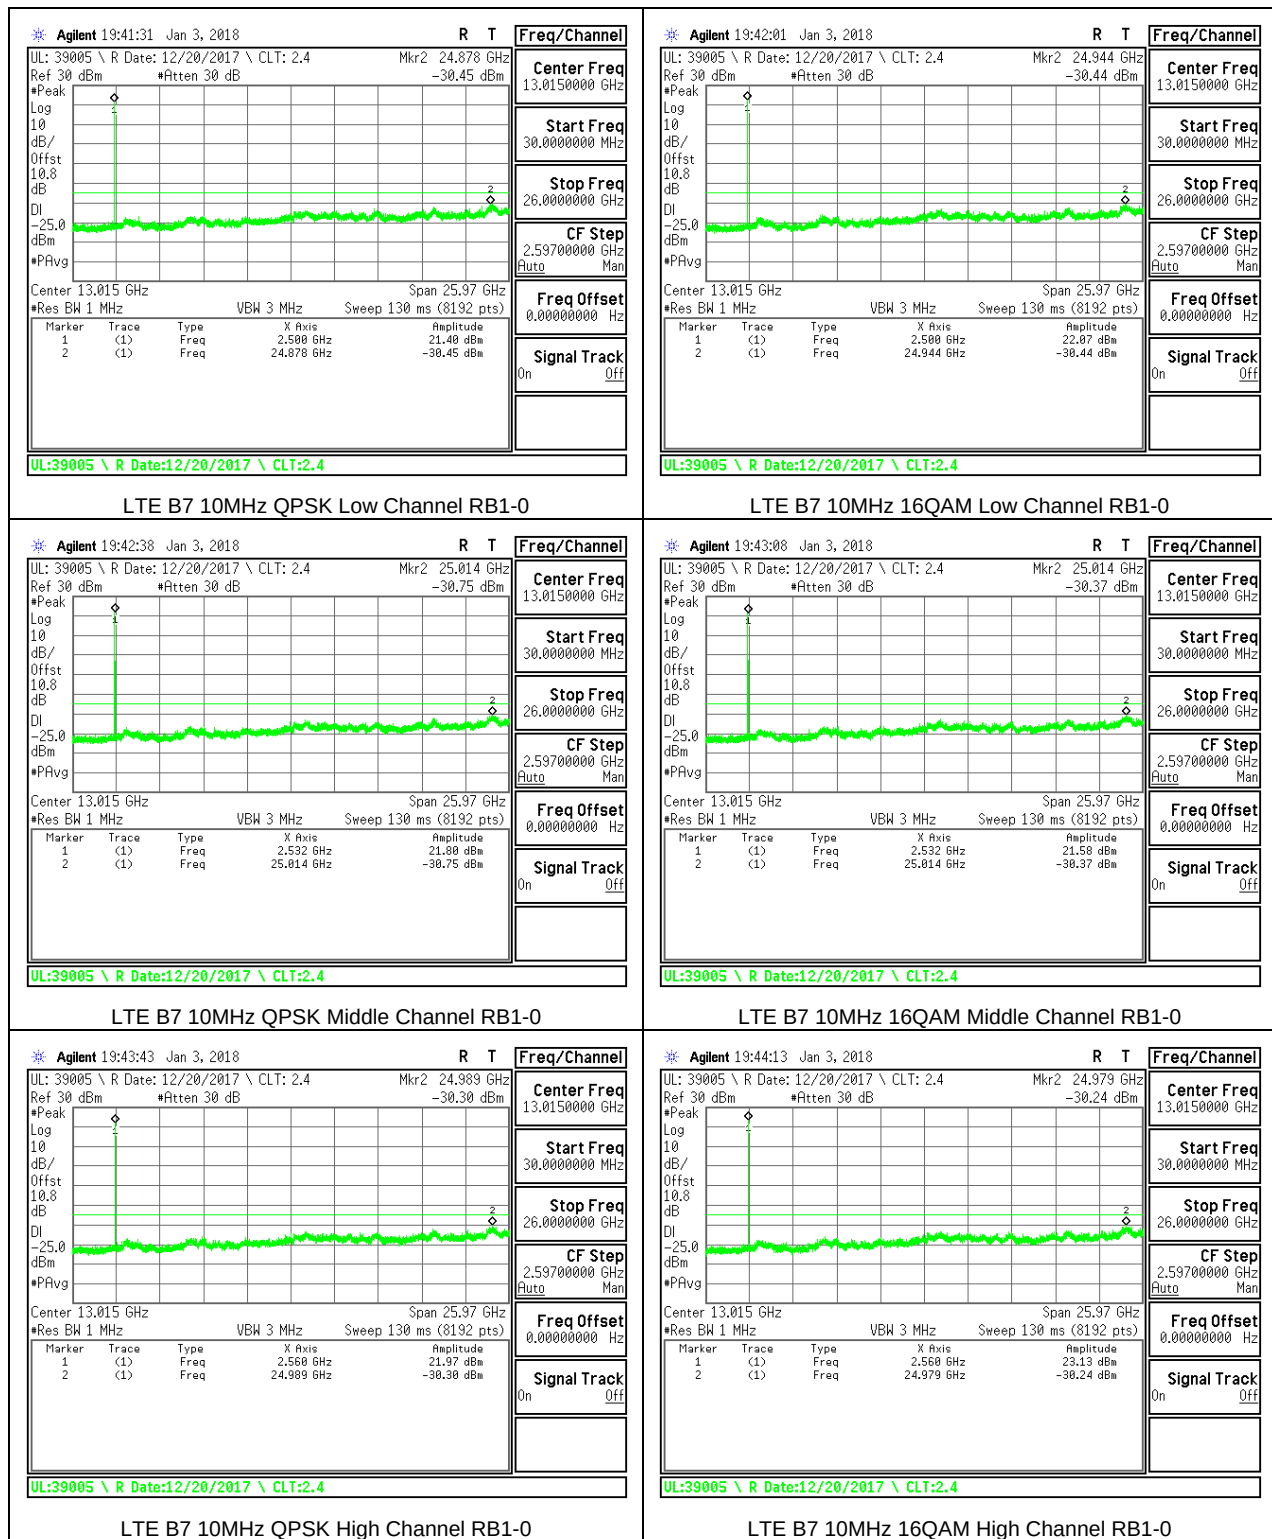

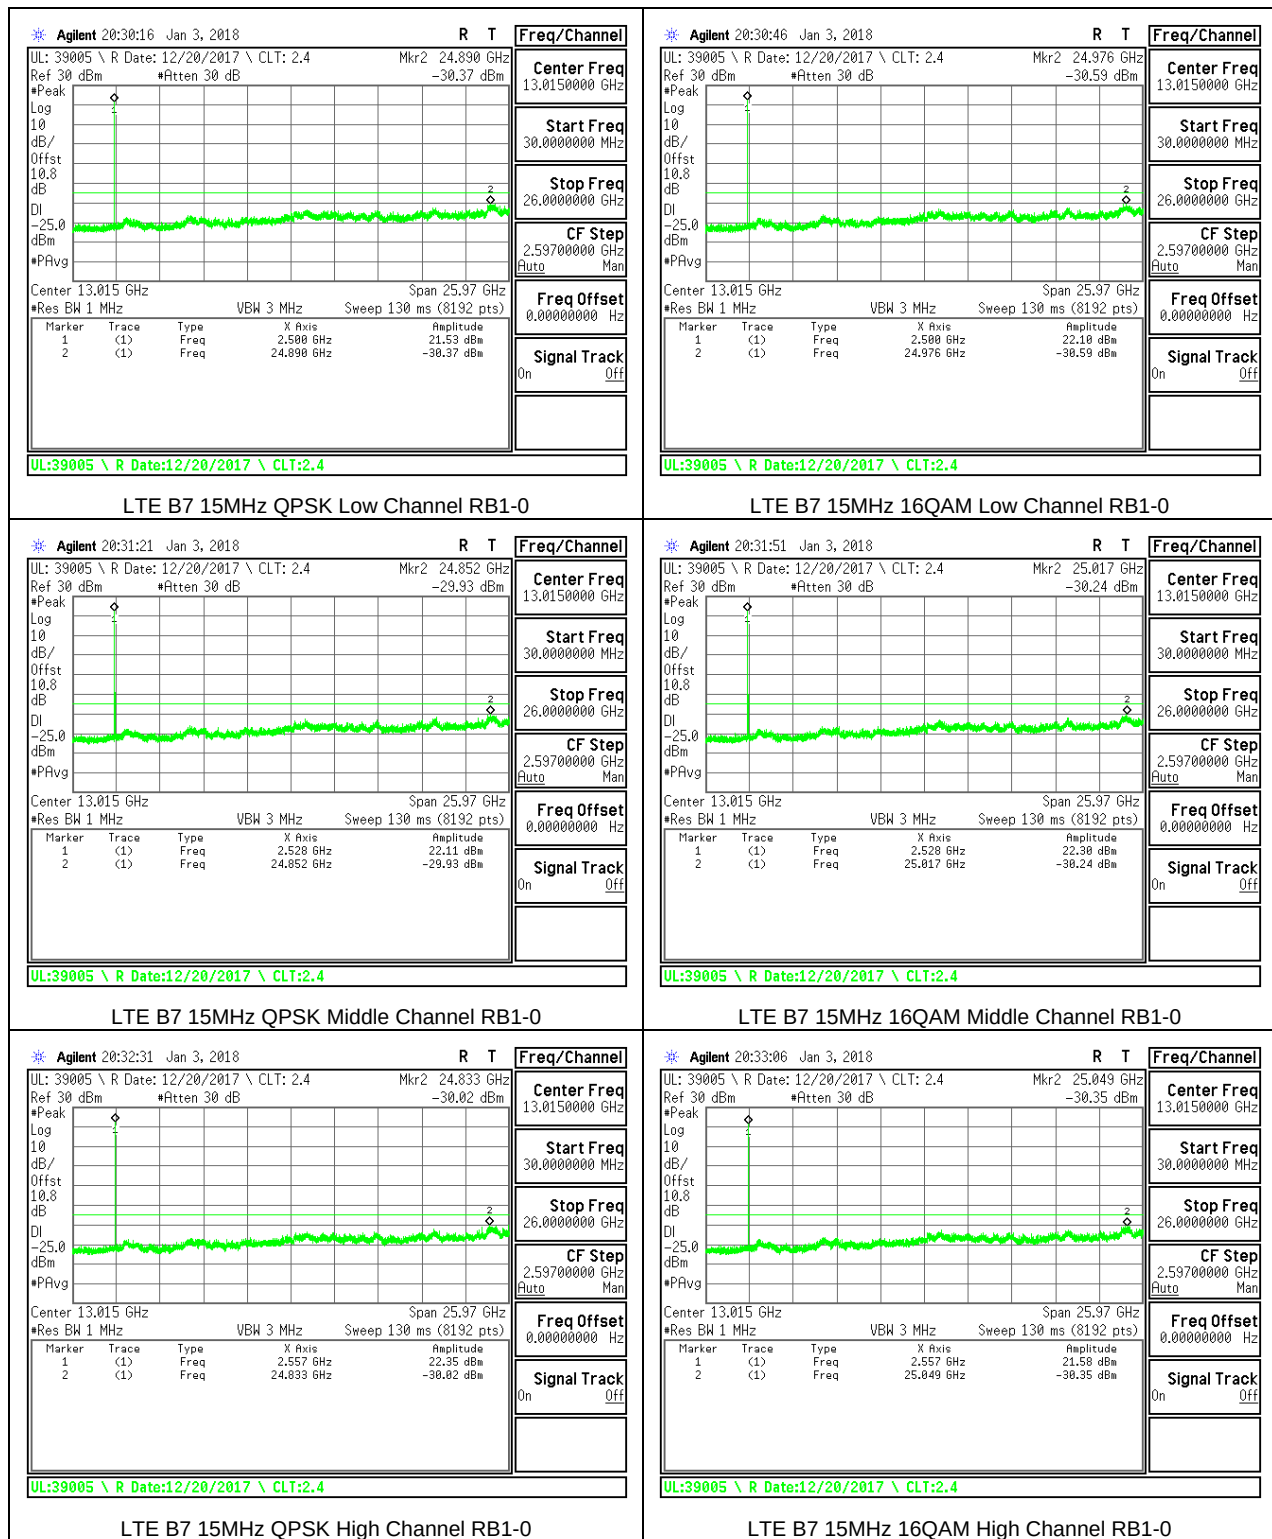


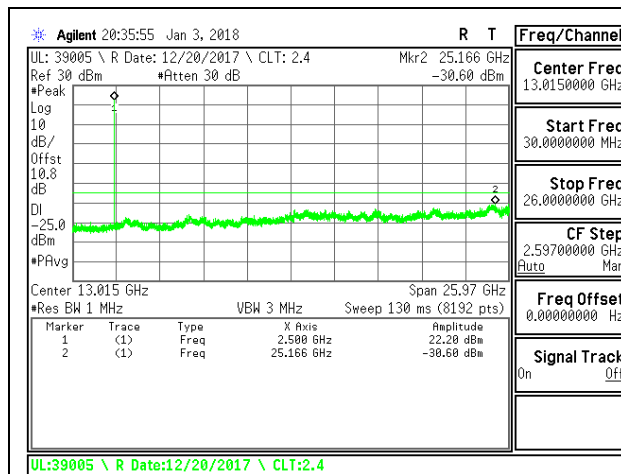


LTE B7 20MHz QPSK Low Channel RB1-0

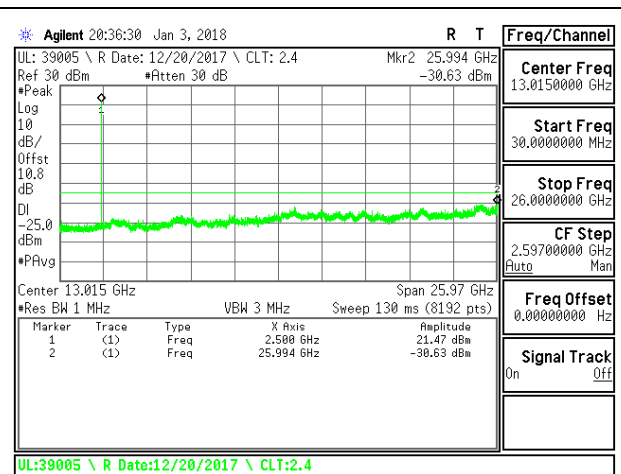


LTE B7 20MHz 16QAM Low Channel RB1-0

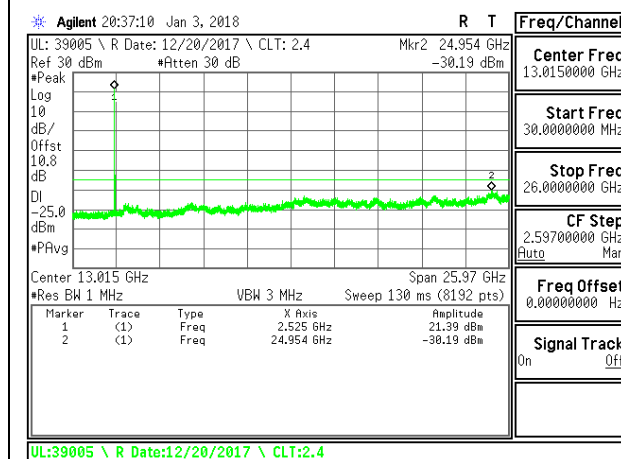


LTE B7 20MHz QPSK Middle Channel RB1-0

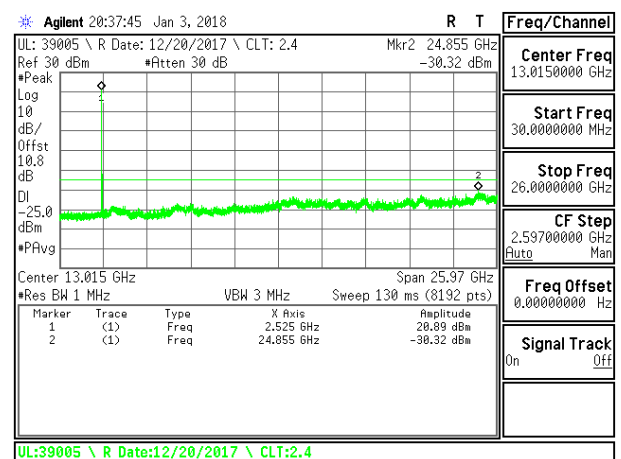

LTE B7 20MHz 16QAM Middle Channel RB1-0

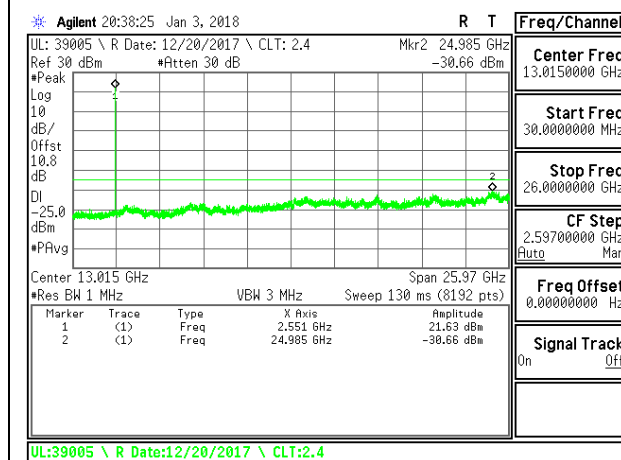



LTE B7 20MHz QPSK High Channel RB1-0

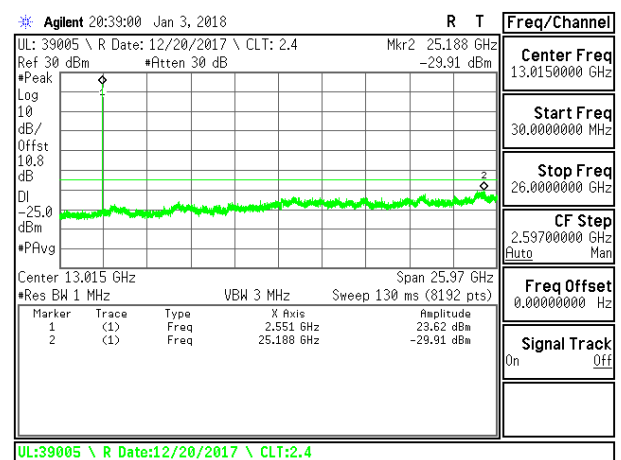


LTE B7 20MHz 16QAM High Channel RB1-0

8.3.10. LTE BAND 12

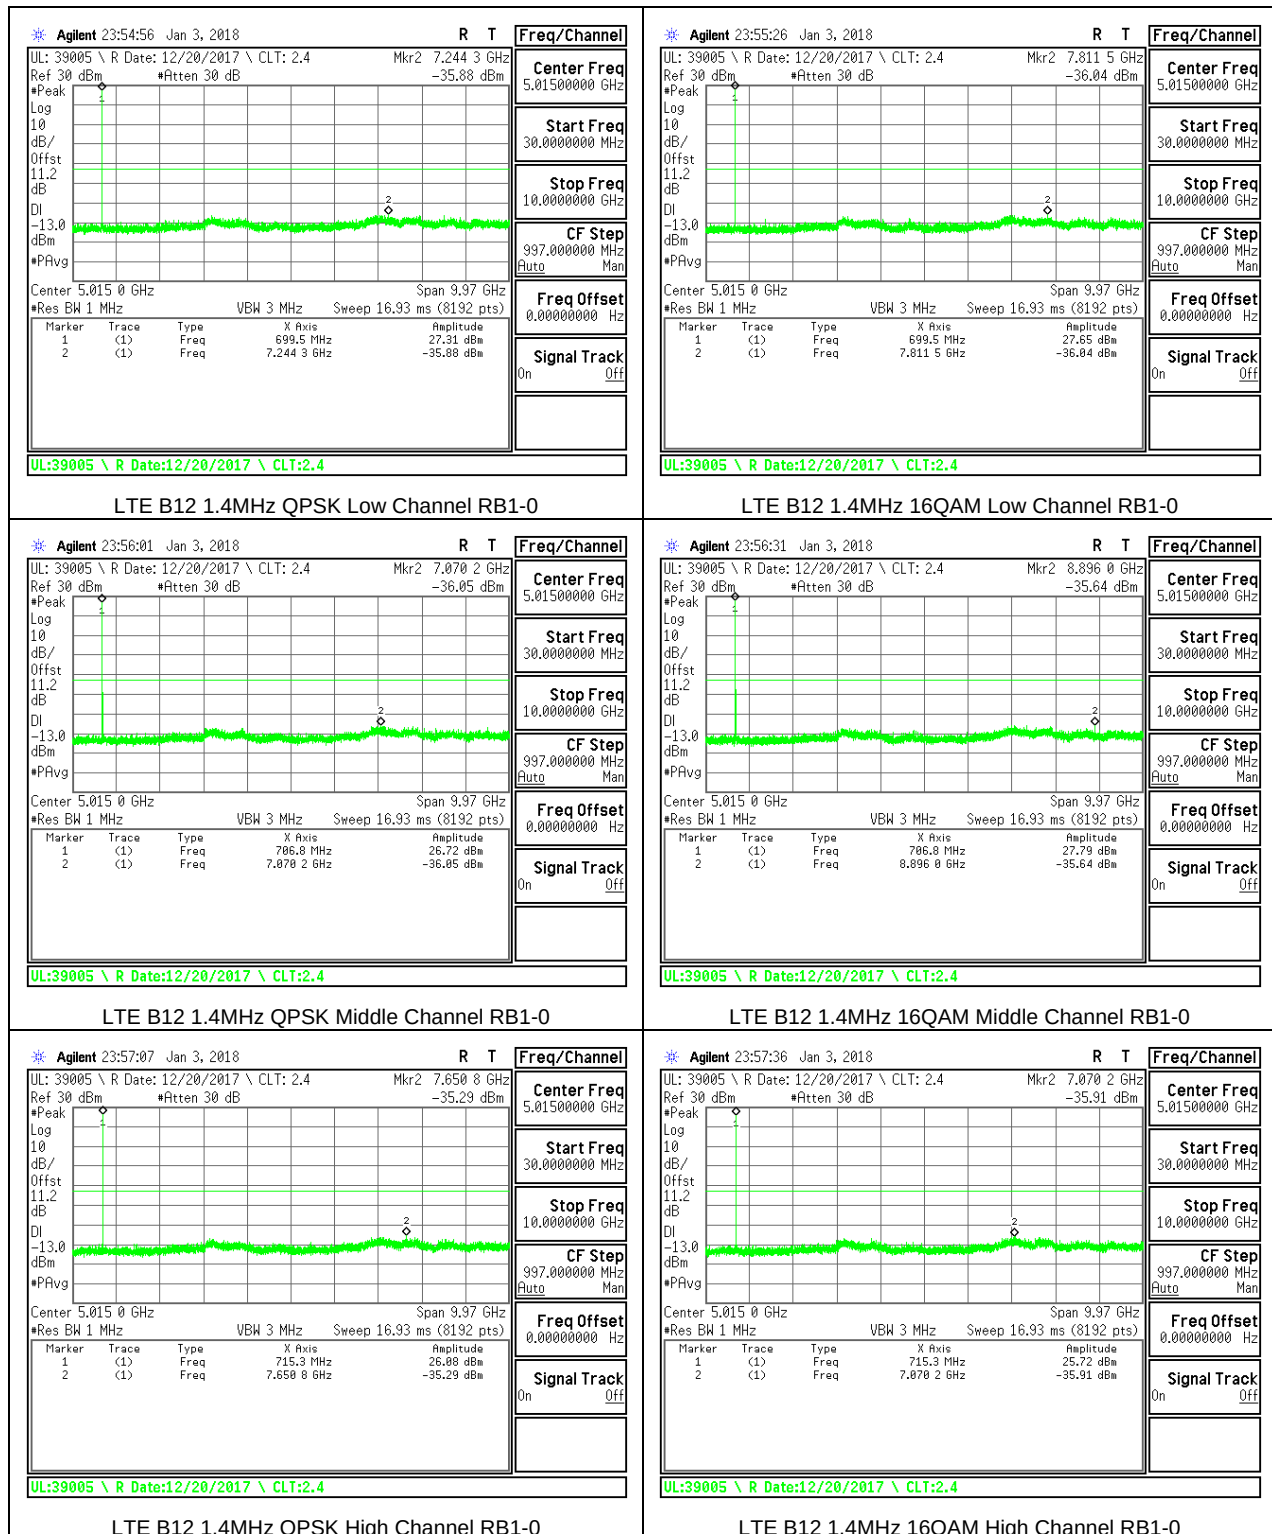


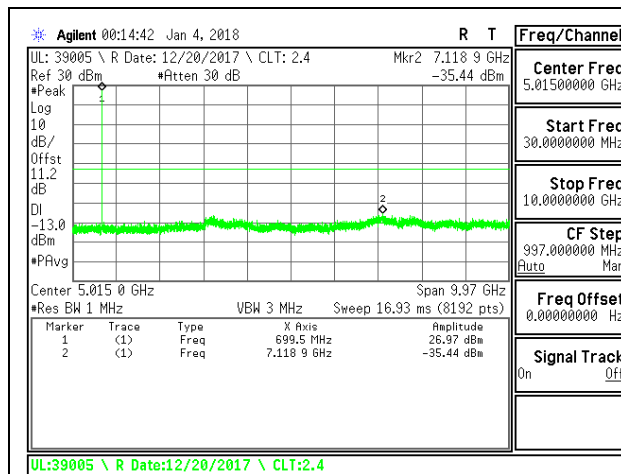


LTE B12 3MHz QPSK Low Channel RB1-0

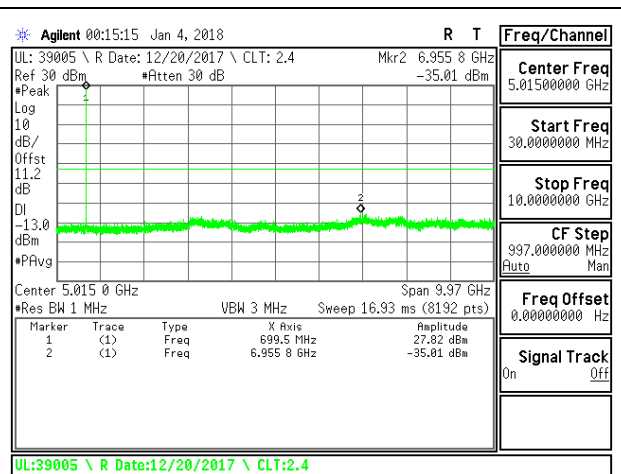


LTE B12 3MHz 16QAM Low Channel RB1-0

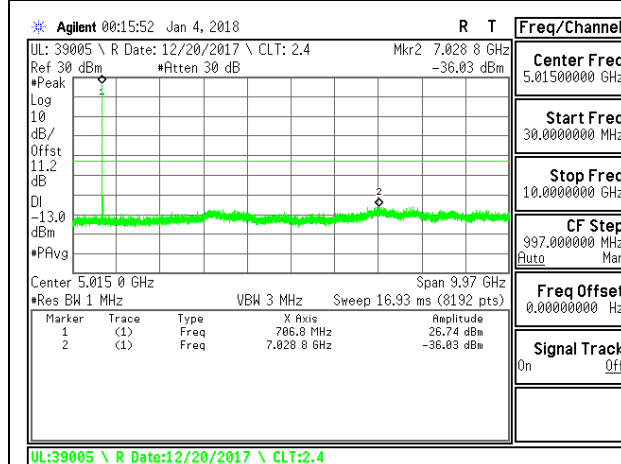


LTE B12 3MHz QPSK Middle Channel RB1-0

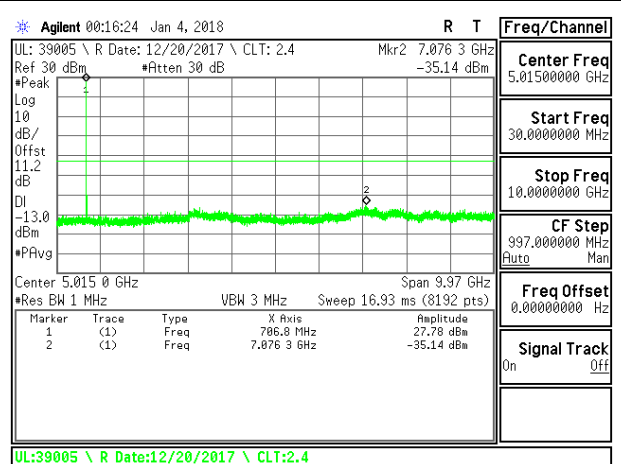


LTE B12 3MHz 16QAM Middle Channel RB1-0

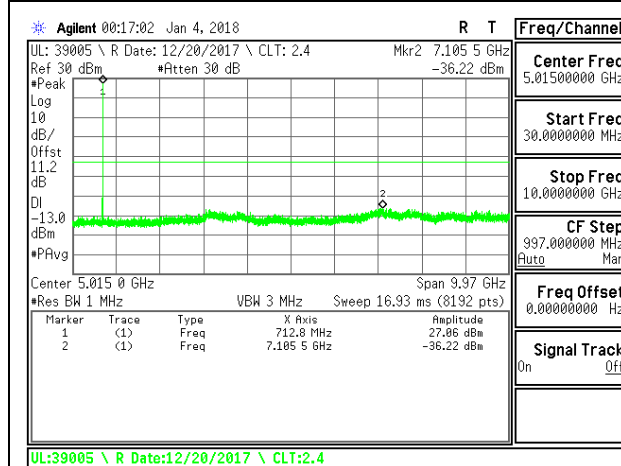


LTE B12 3MHz QPSK High Channel RB1-0

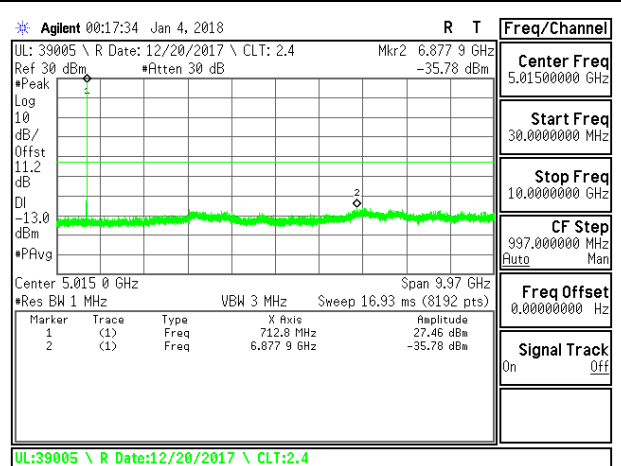



LTE B12 3MHz 16QAM High Channel RB1-0

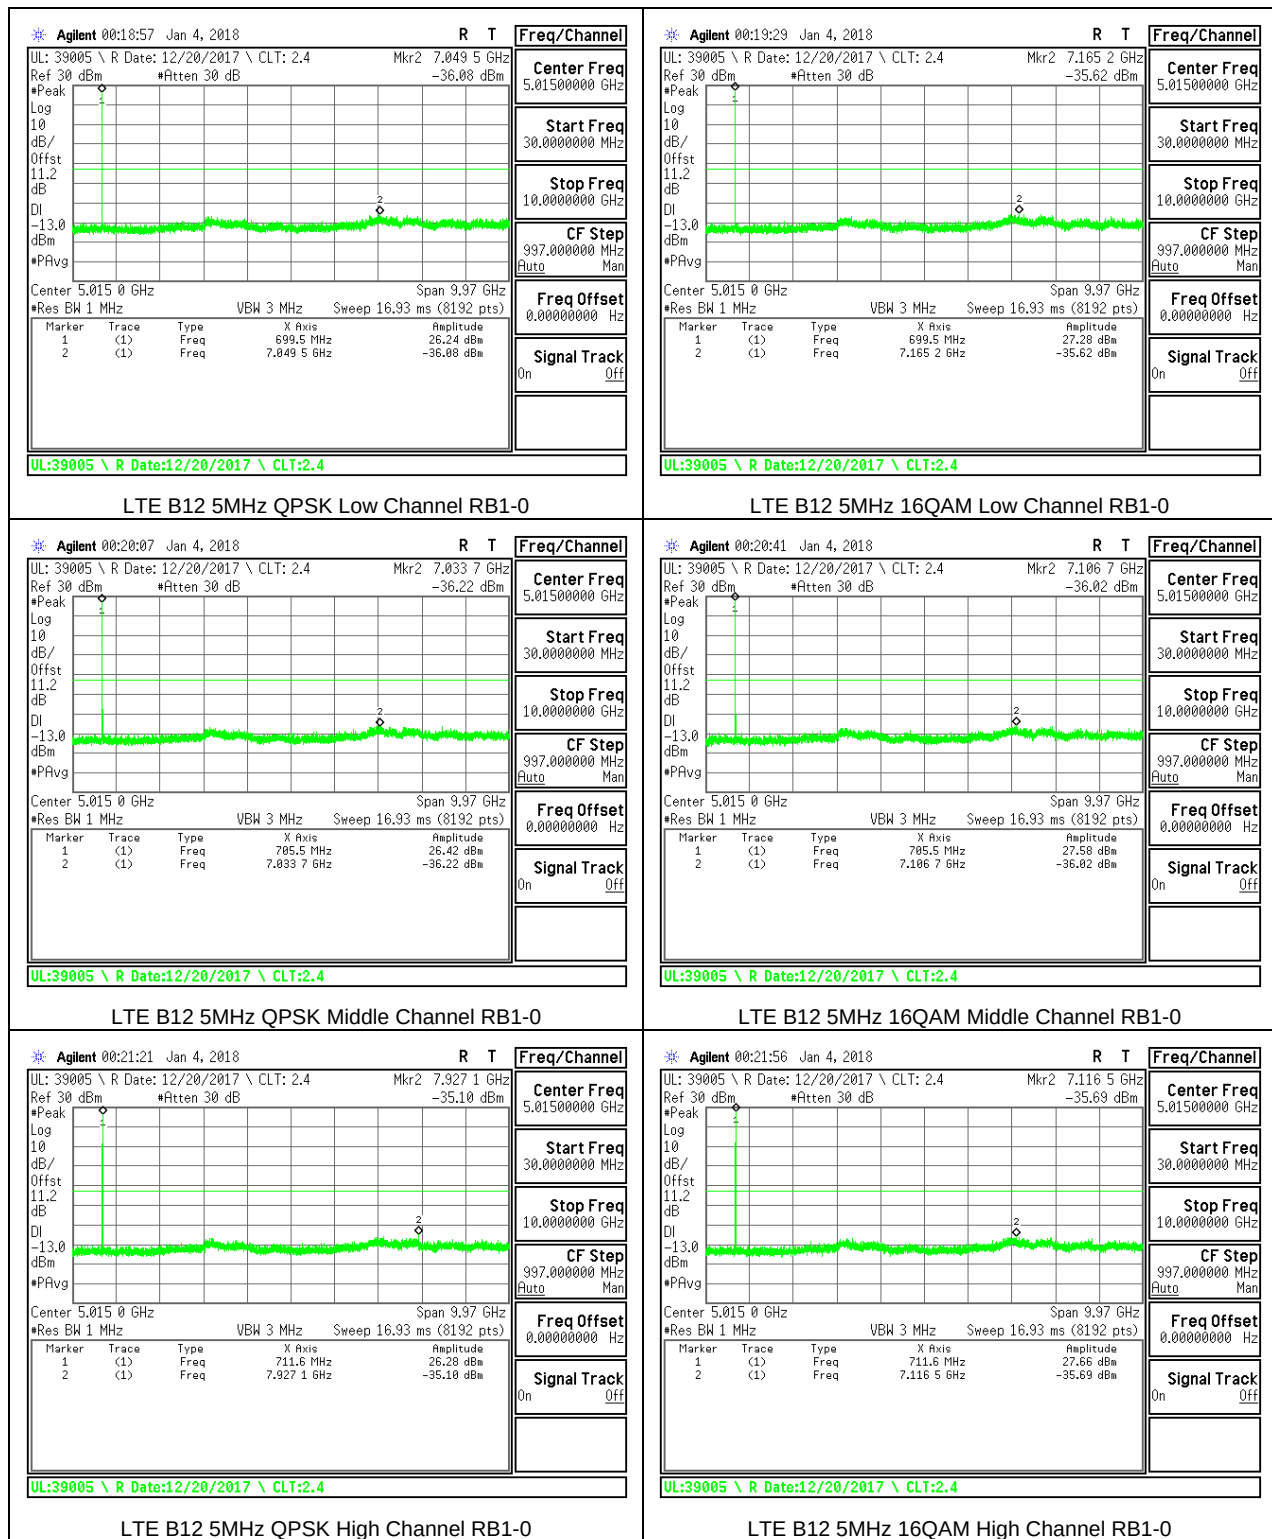

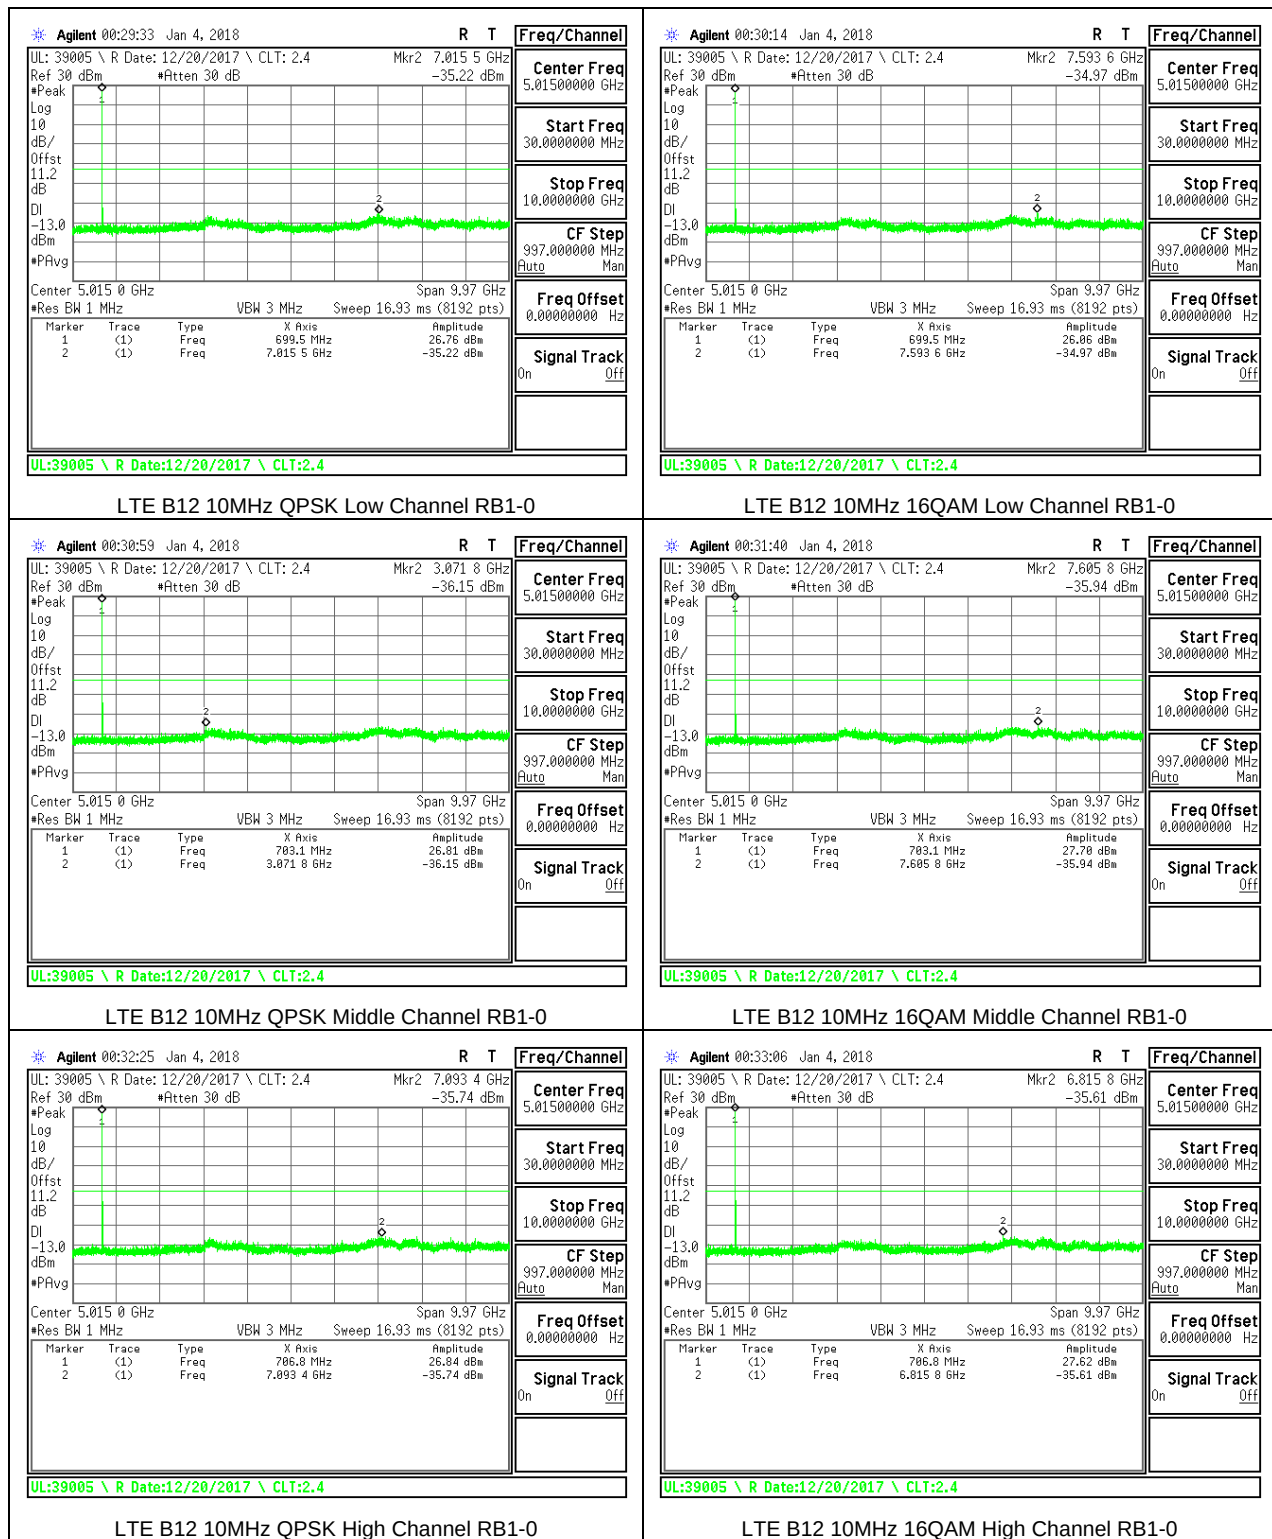

8.3.11. LTE BAND 13

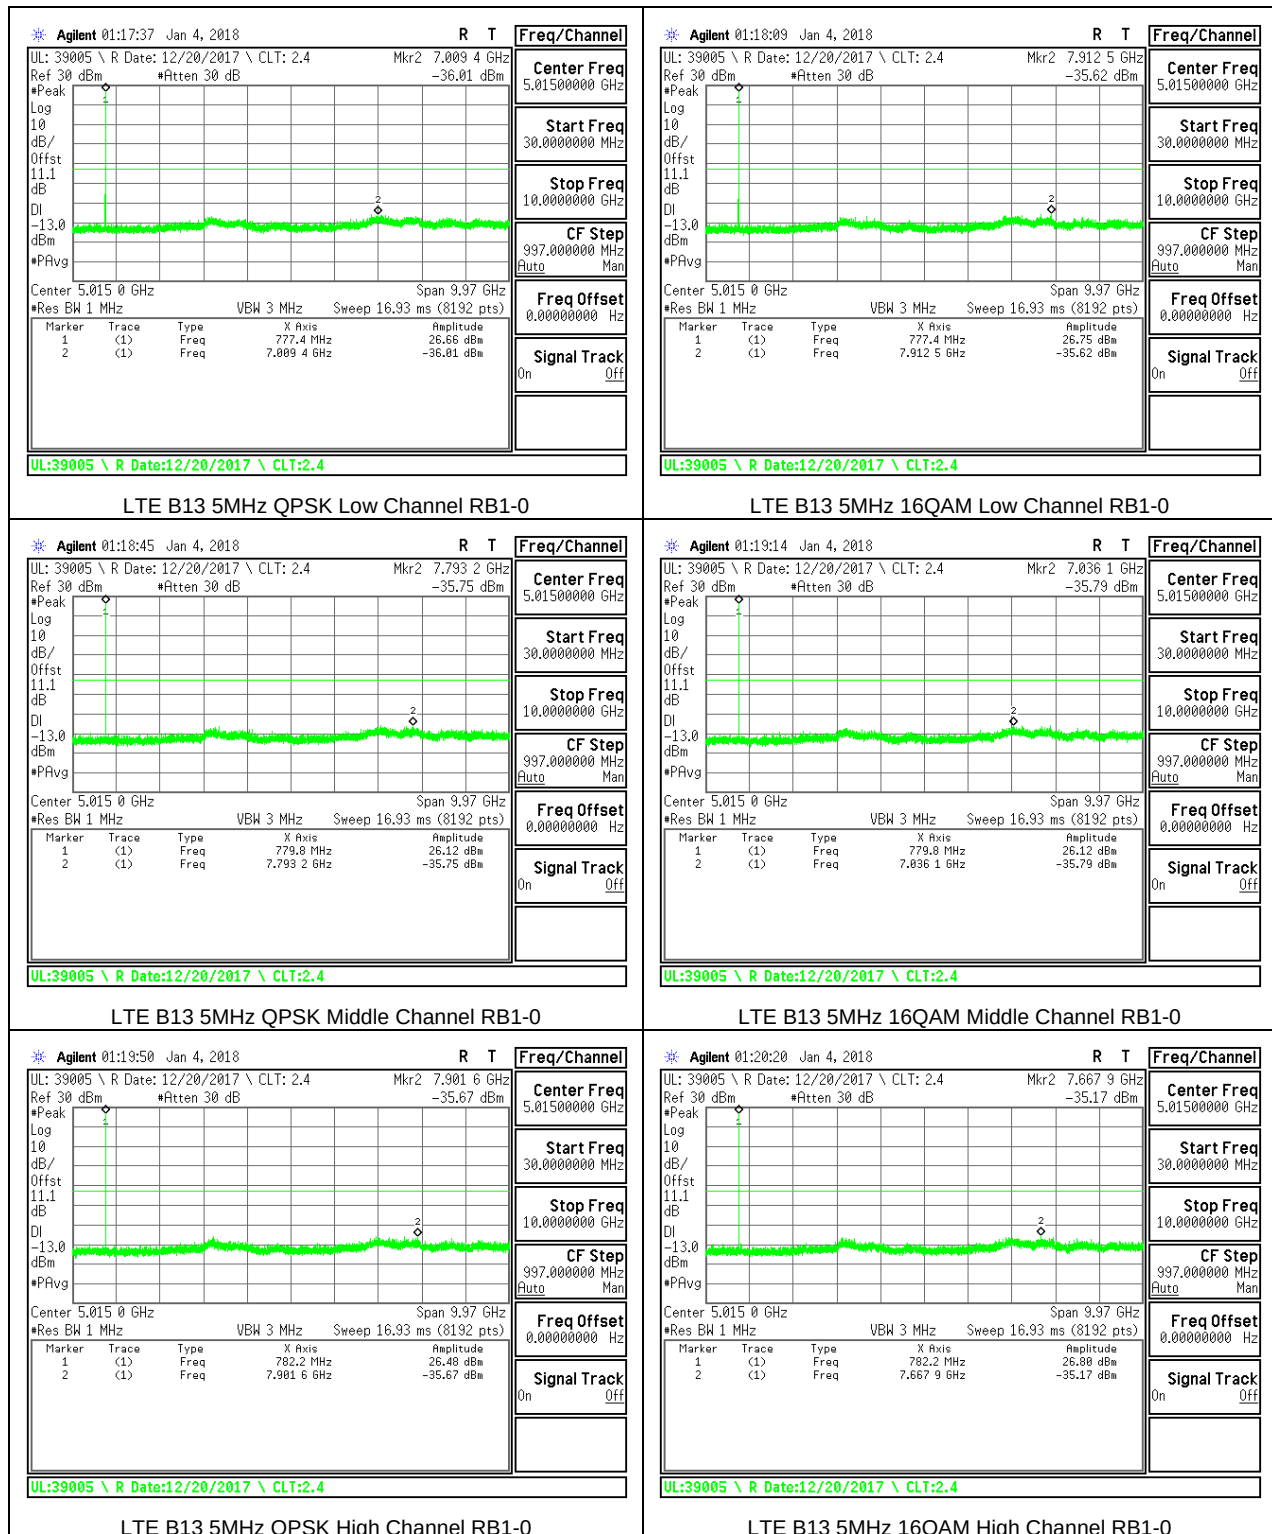


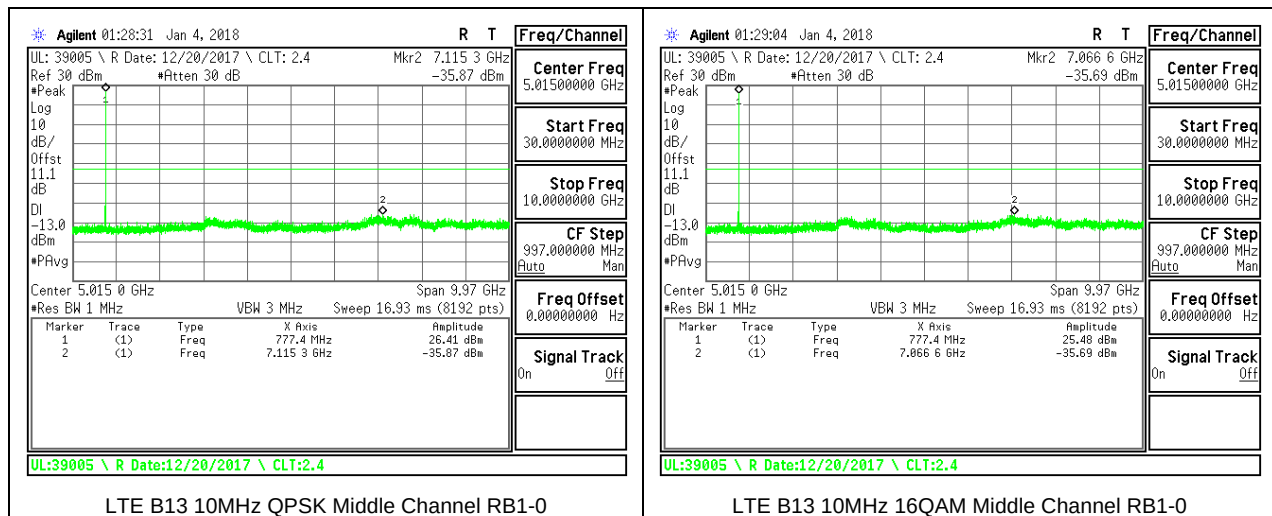



8.3.12. LTE BAND 17


LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth (5 & 10 MHz).


8.3.13. LTE BAND 26

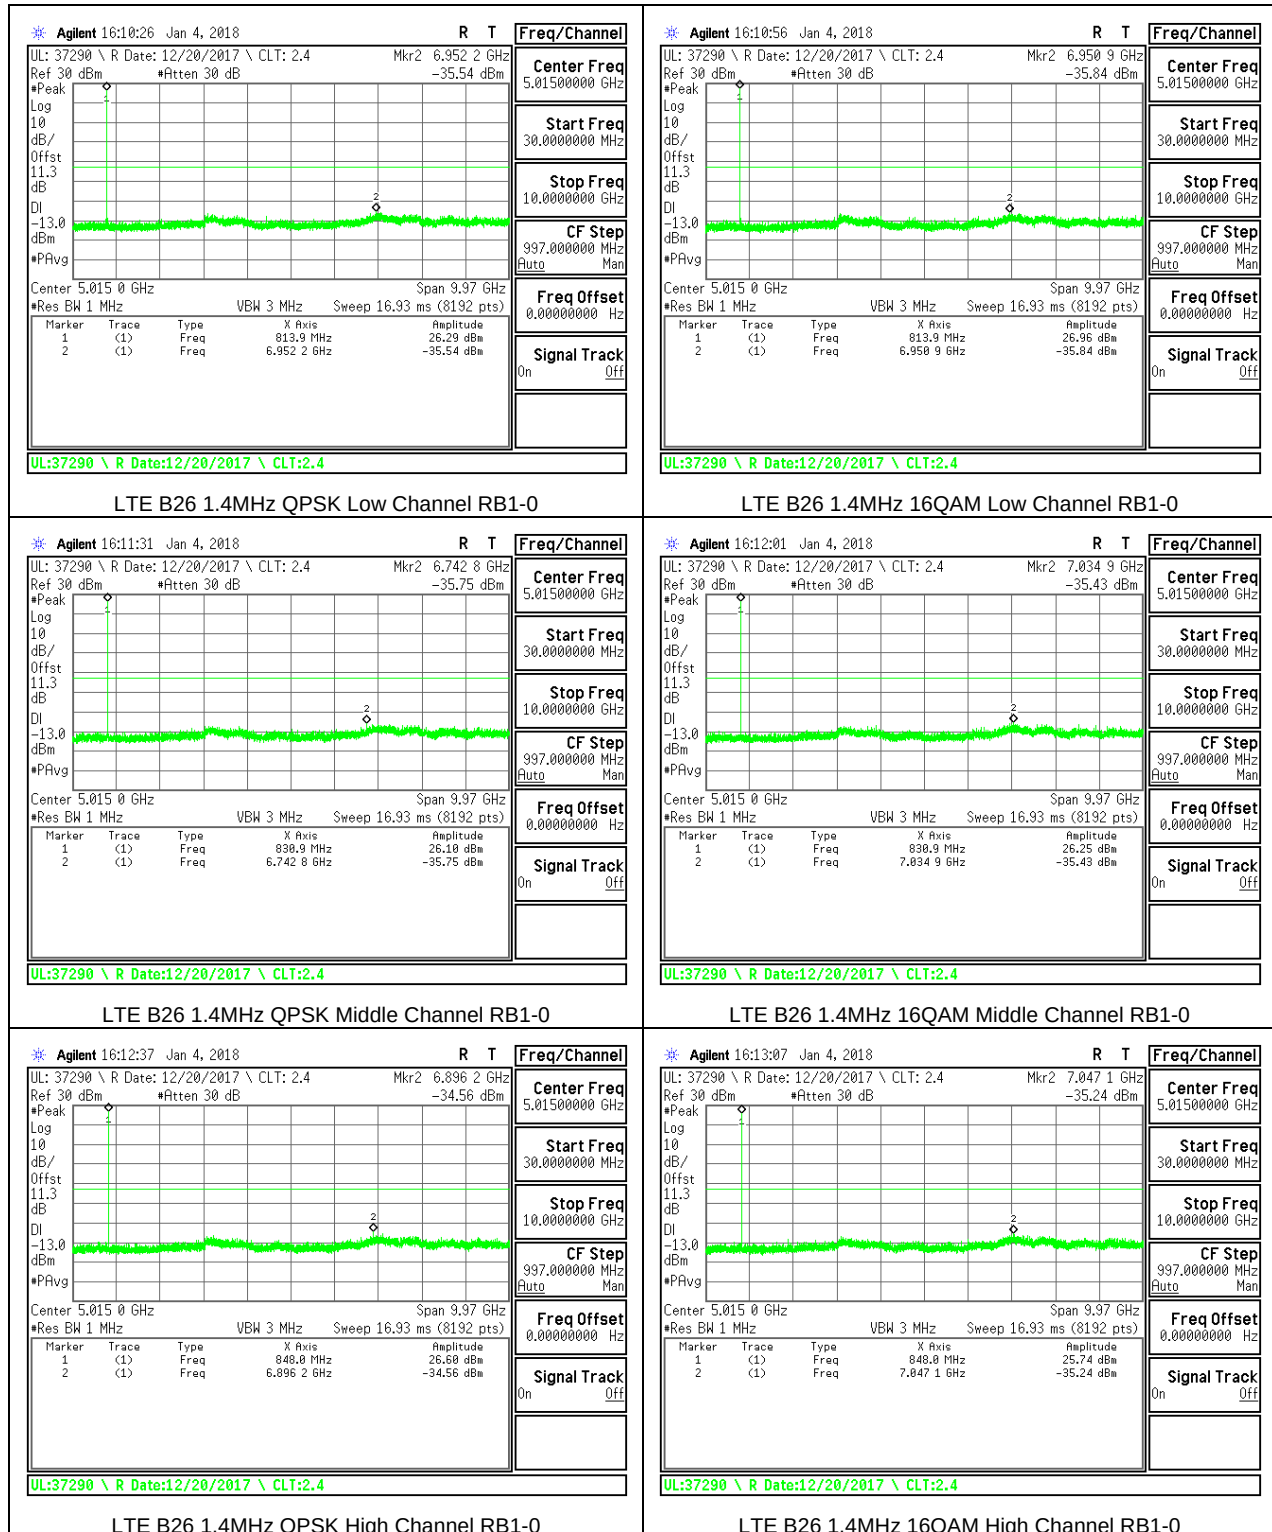

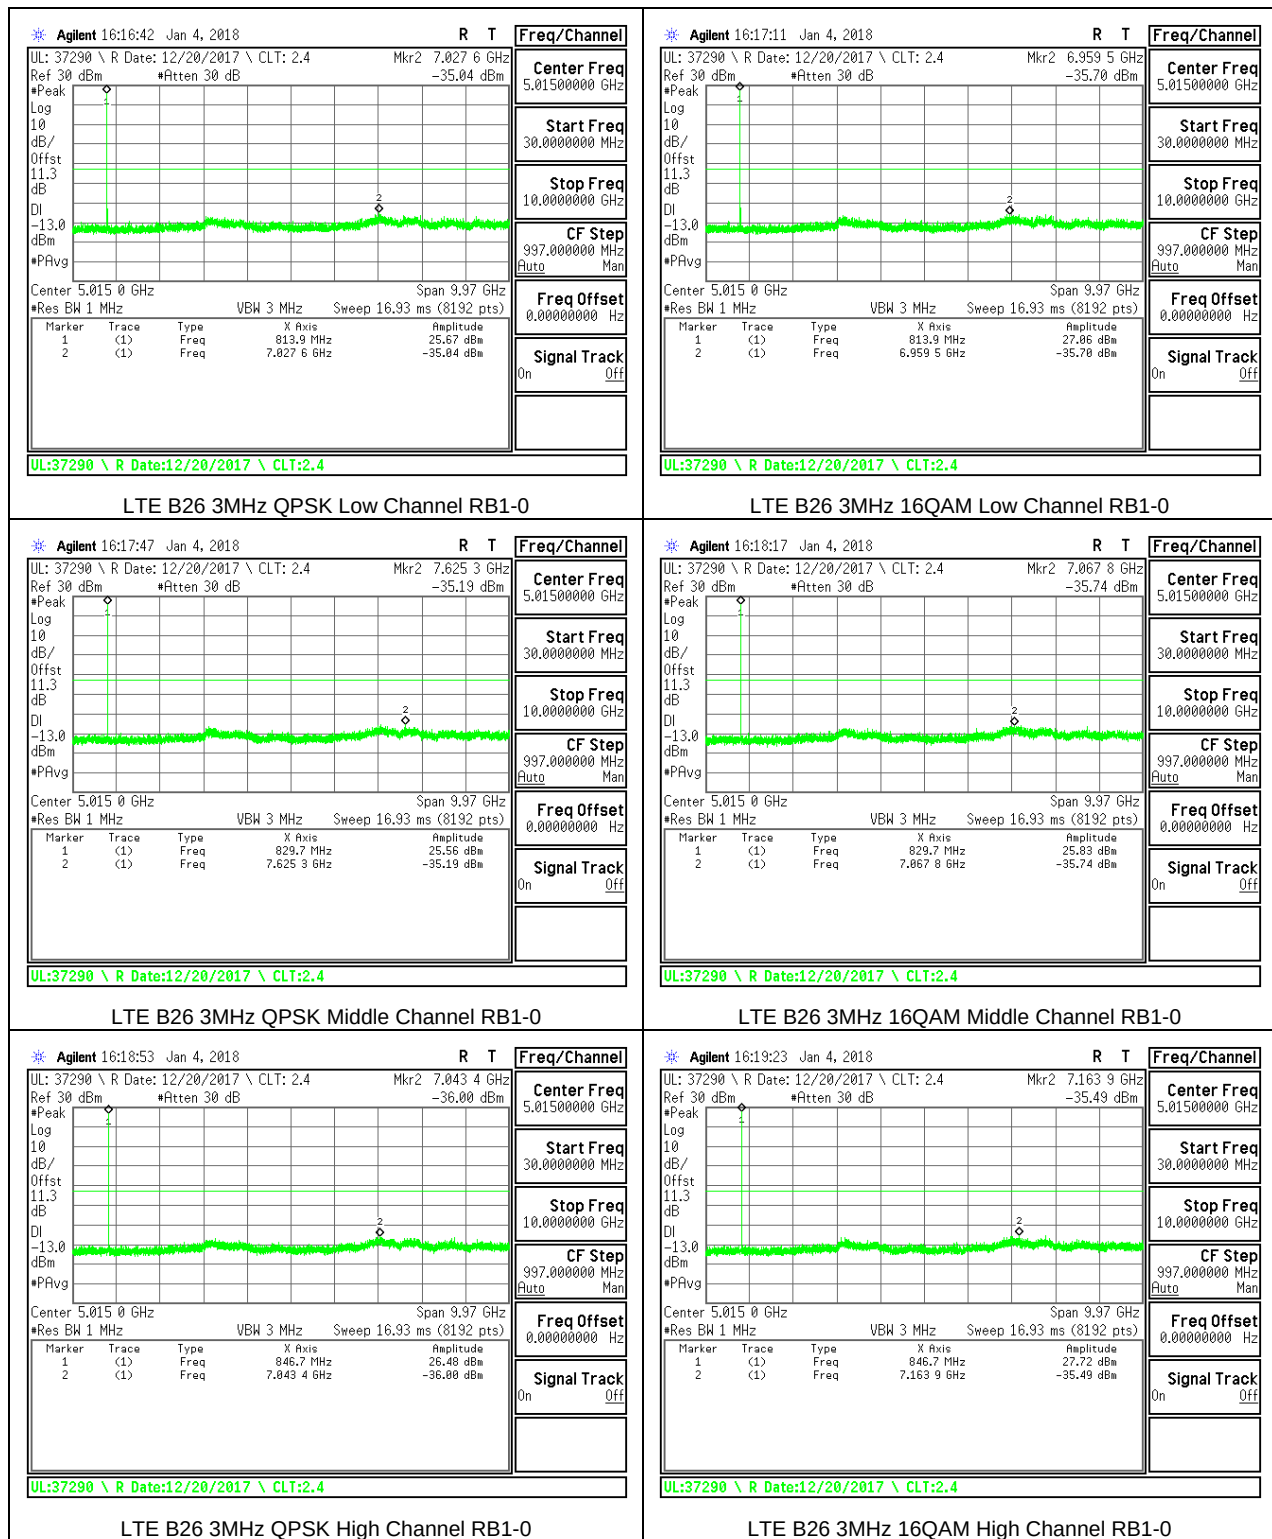


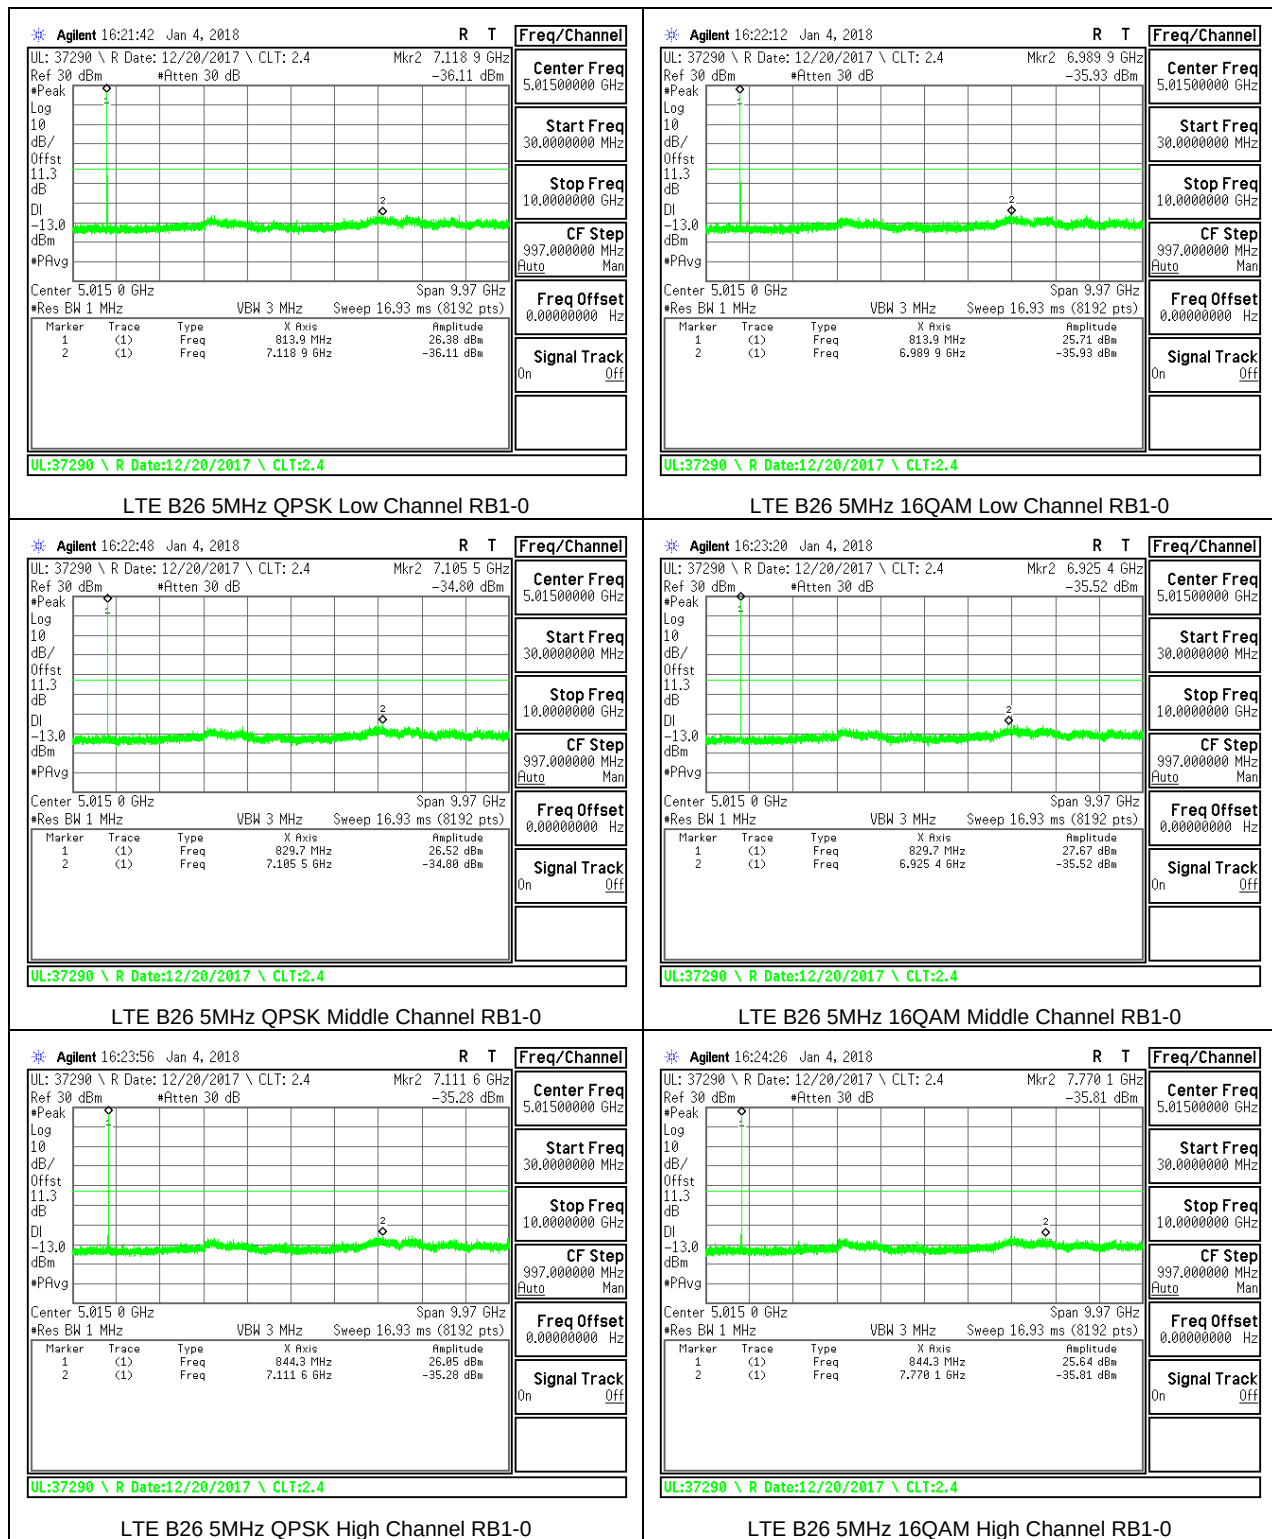


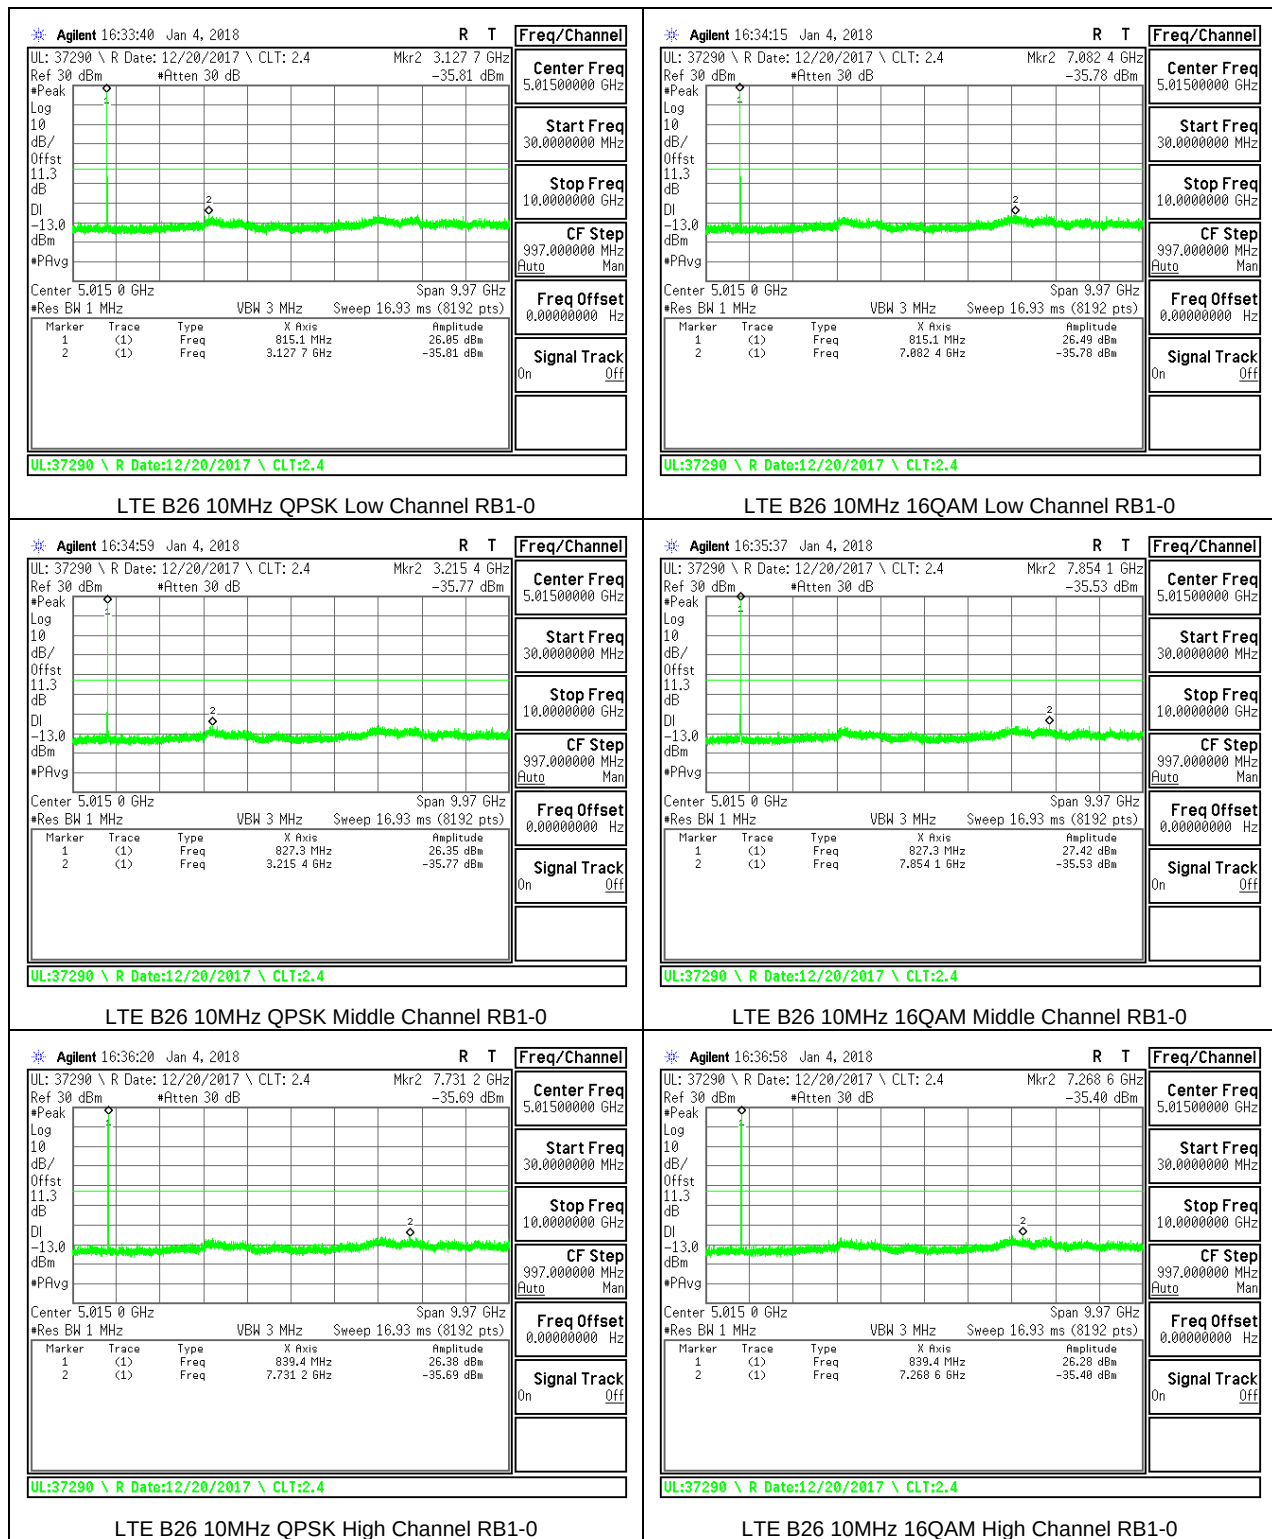


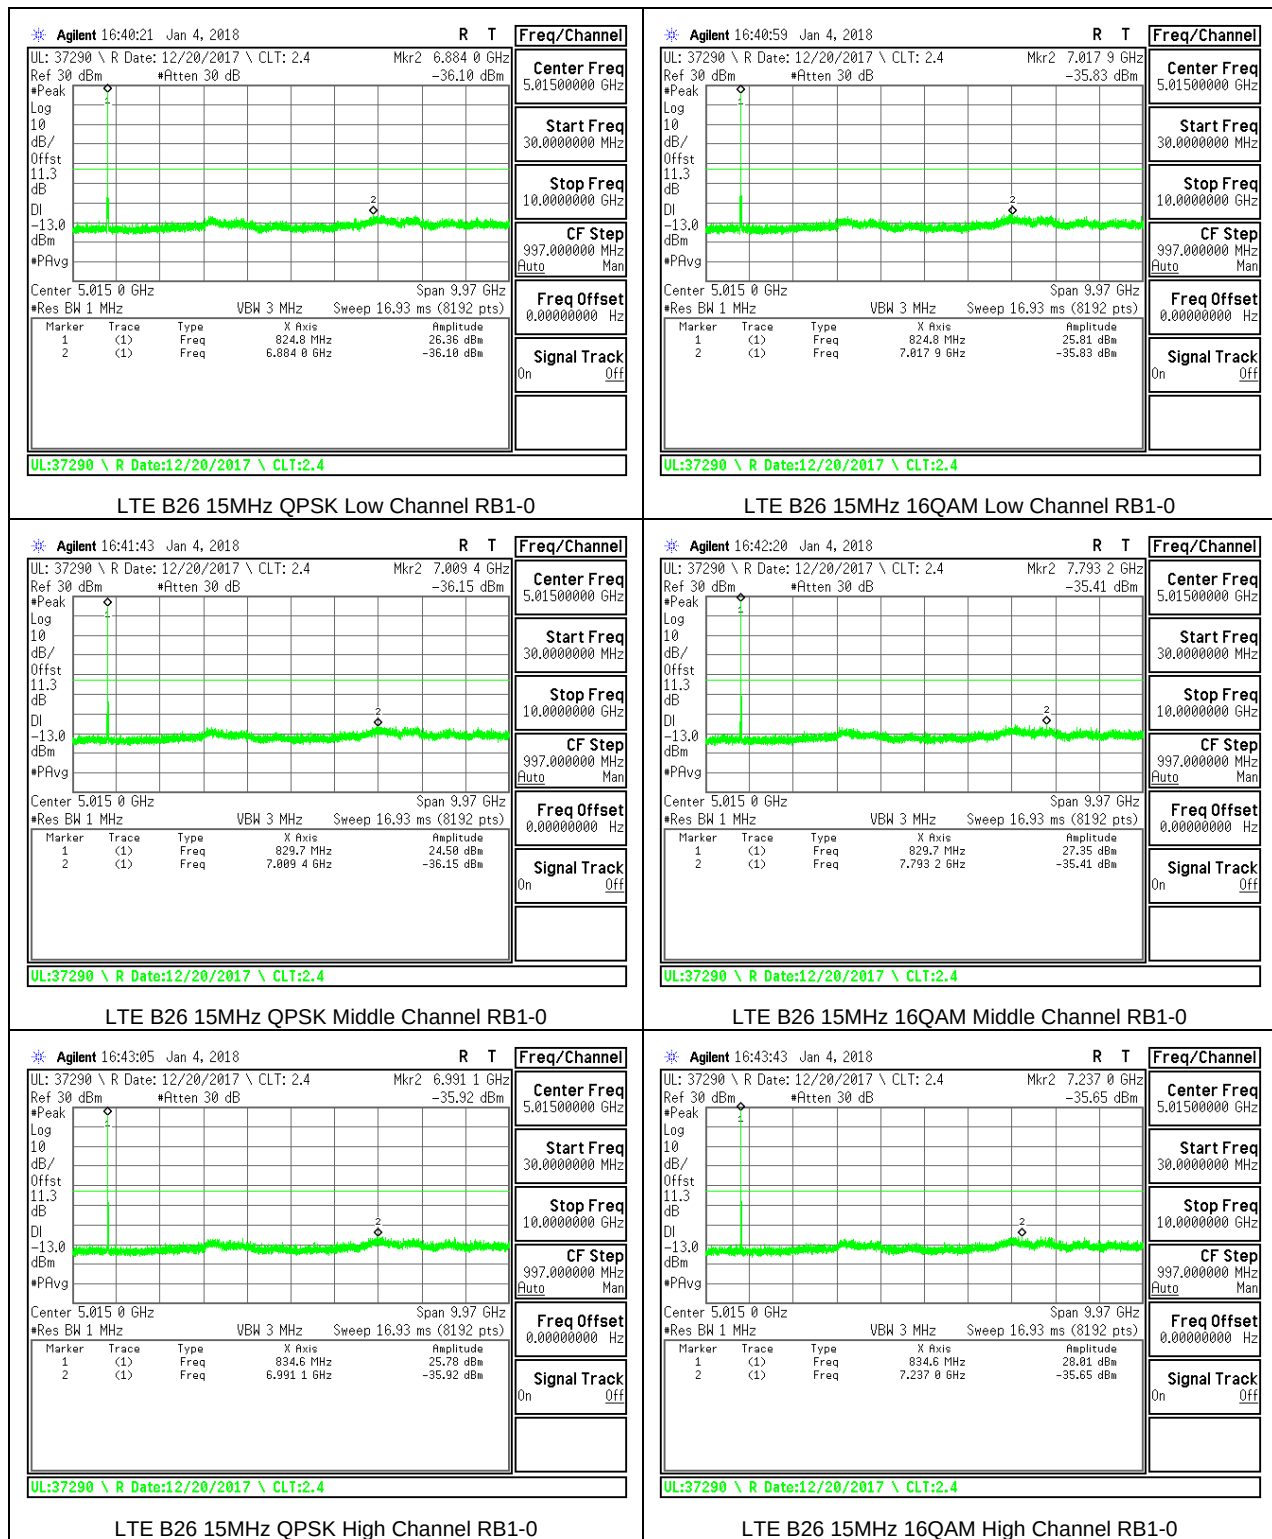


8.3.14. LTE BAND 41

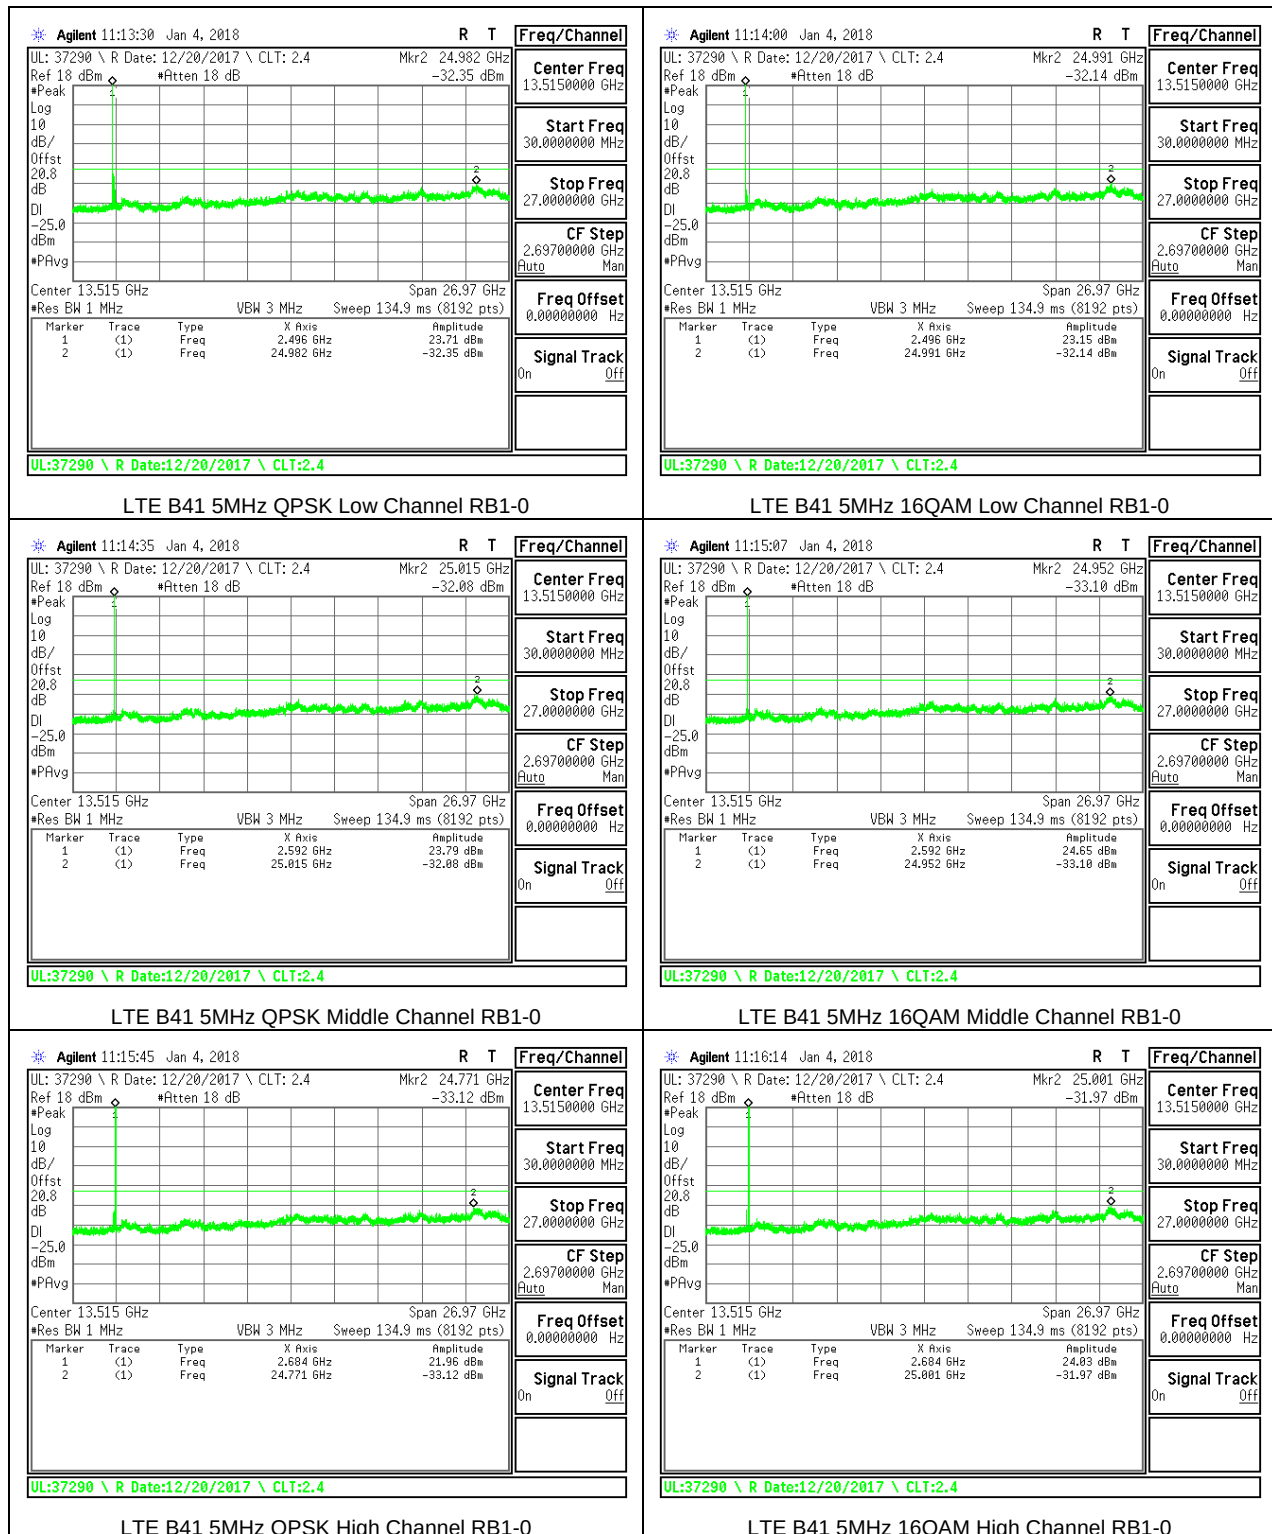


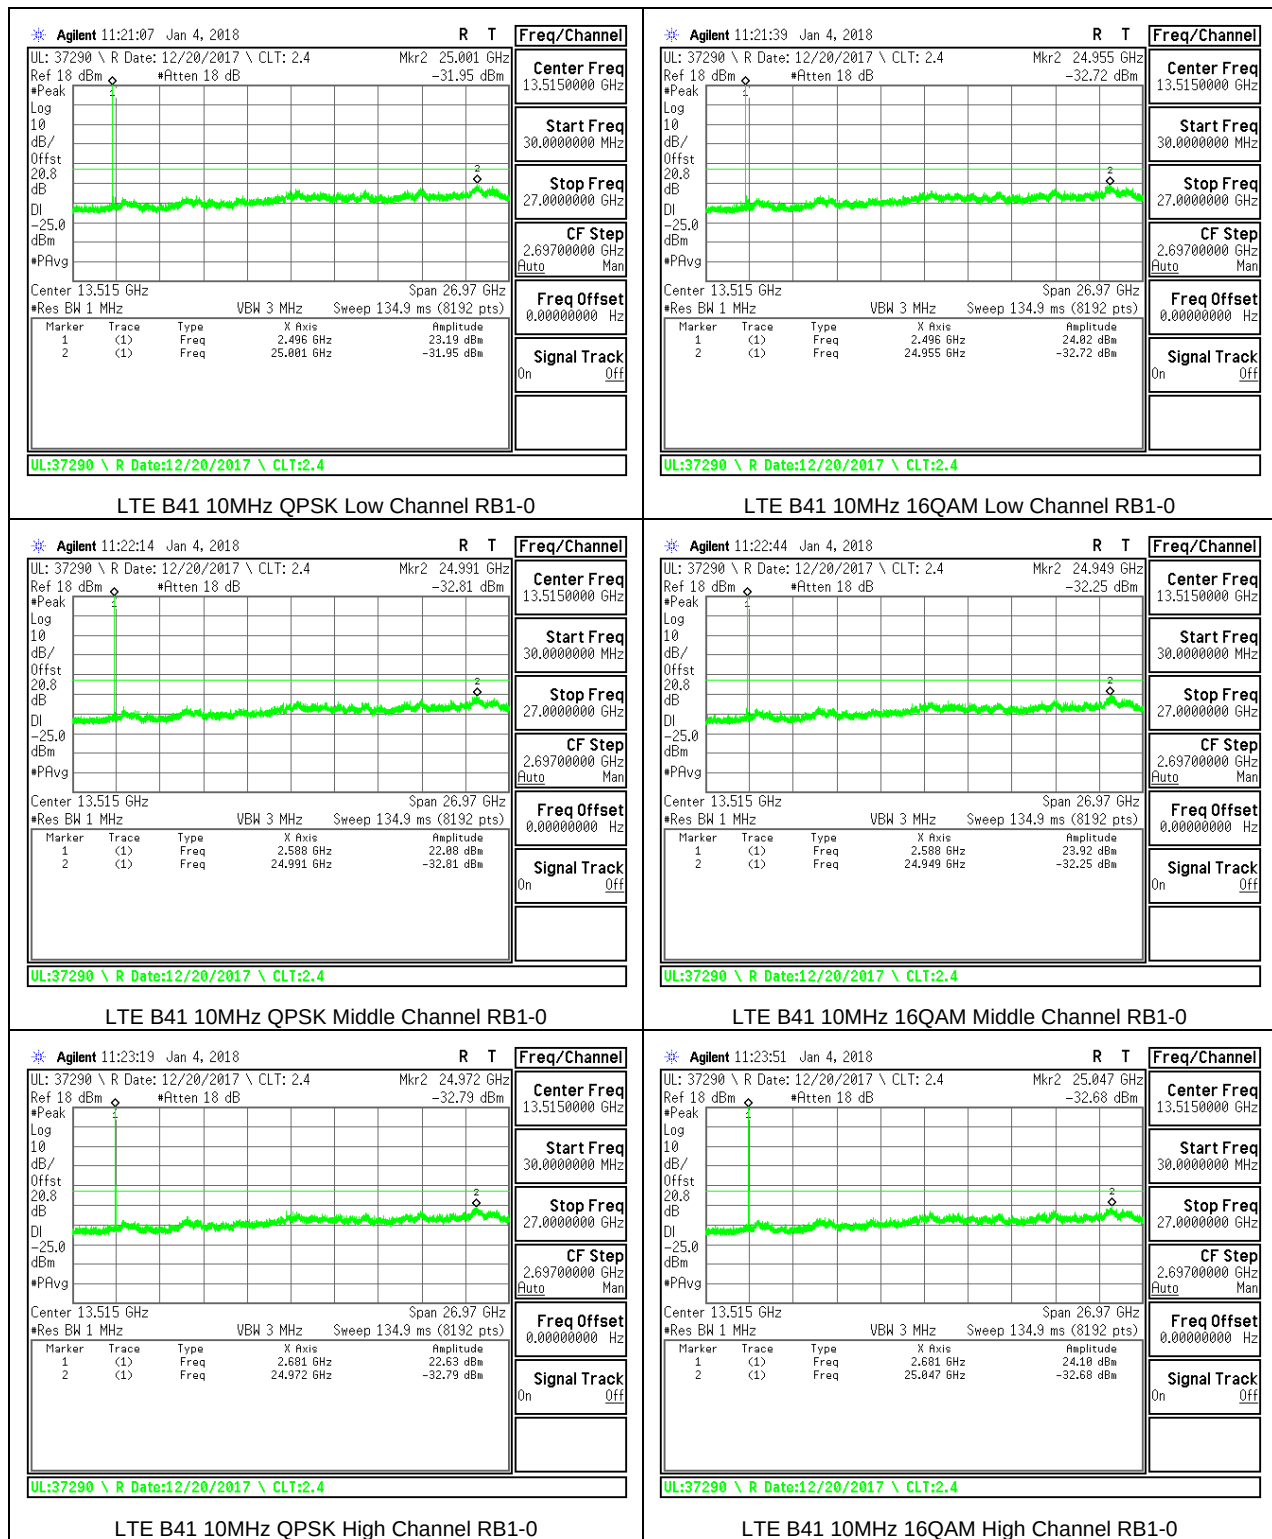


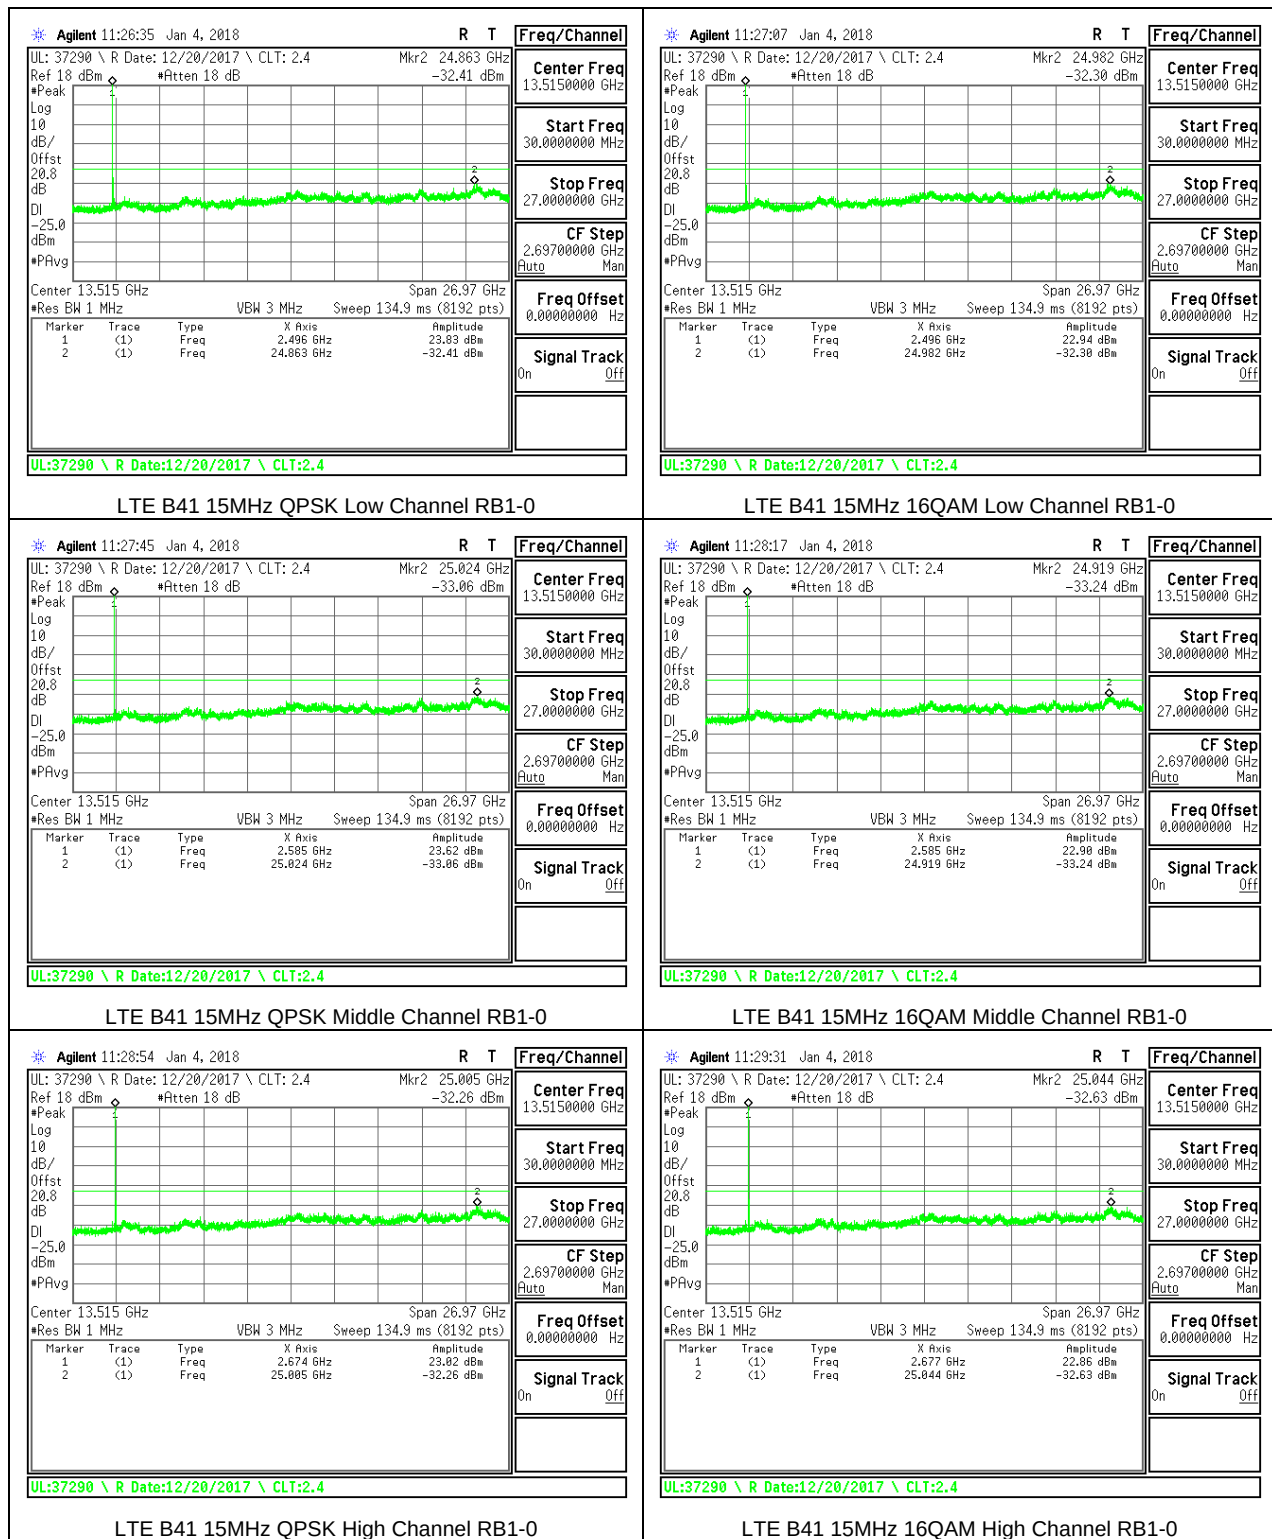

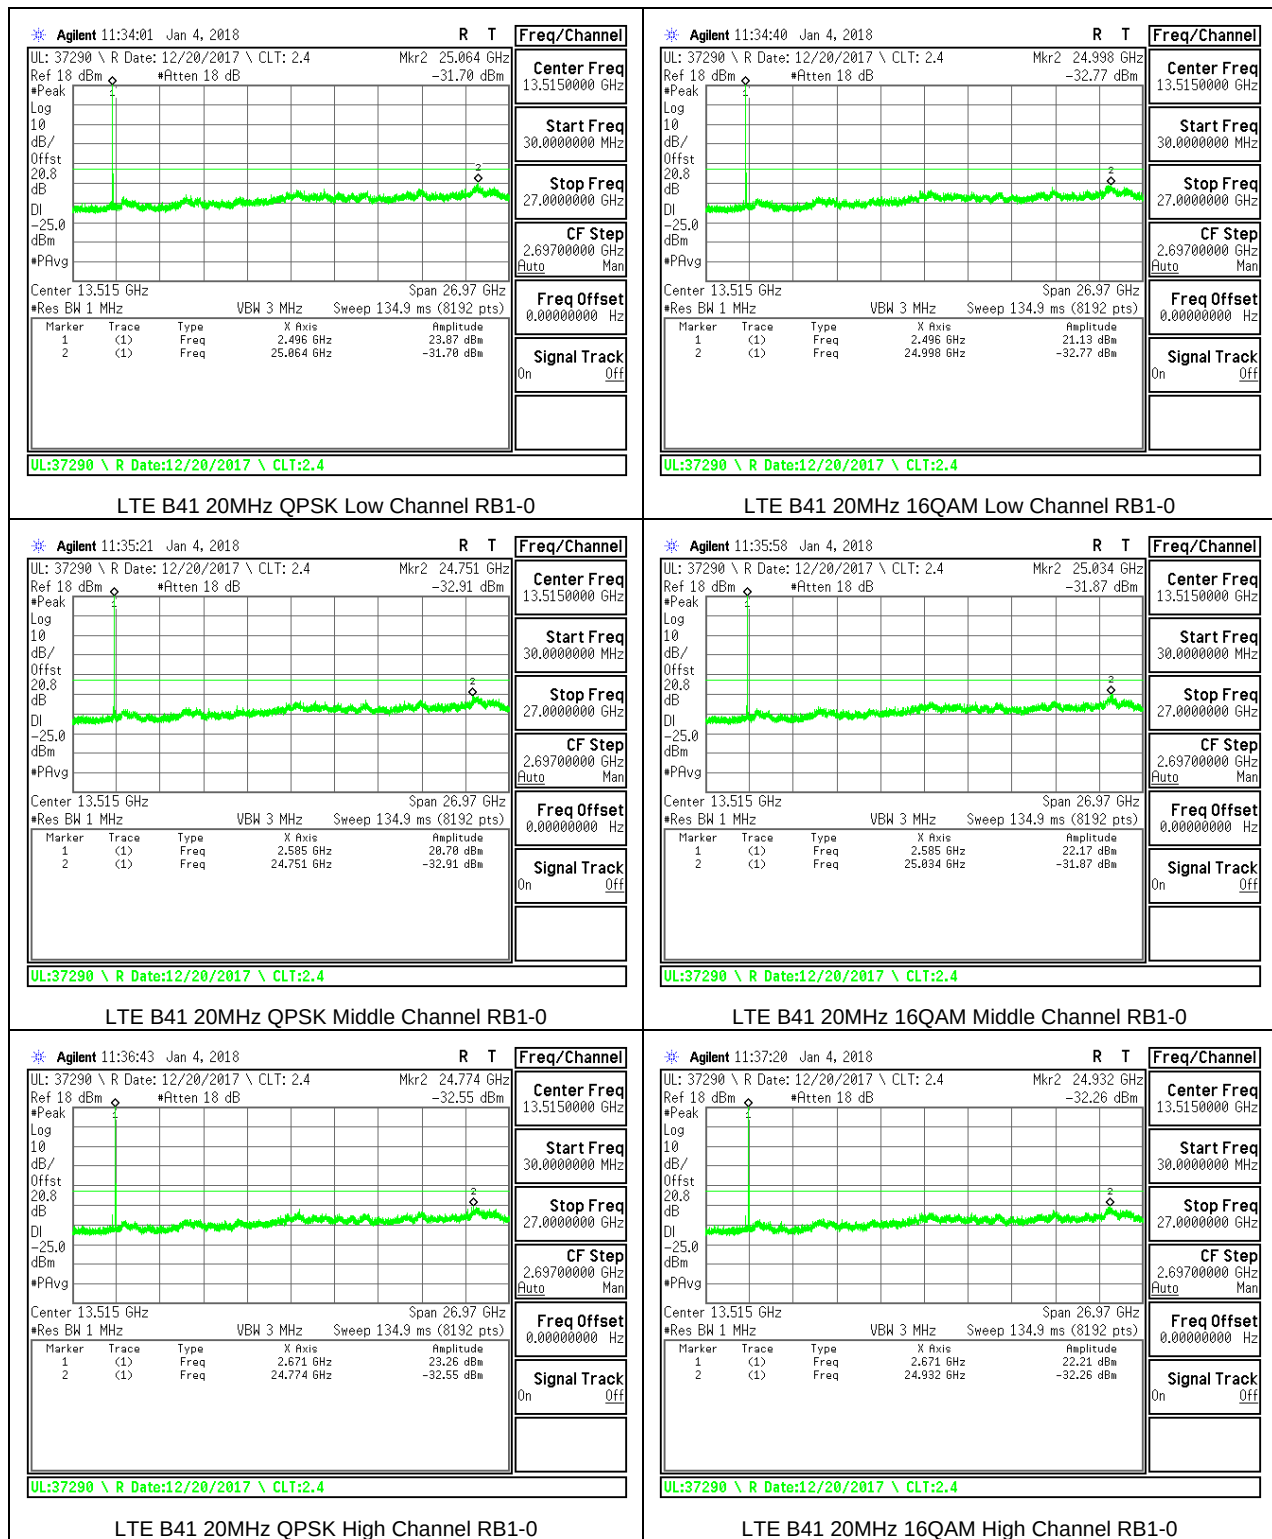


8.3.15. LTE BAND 66

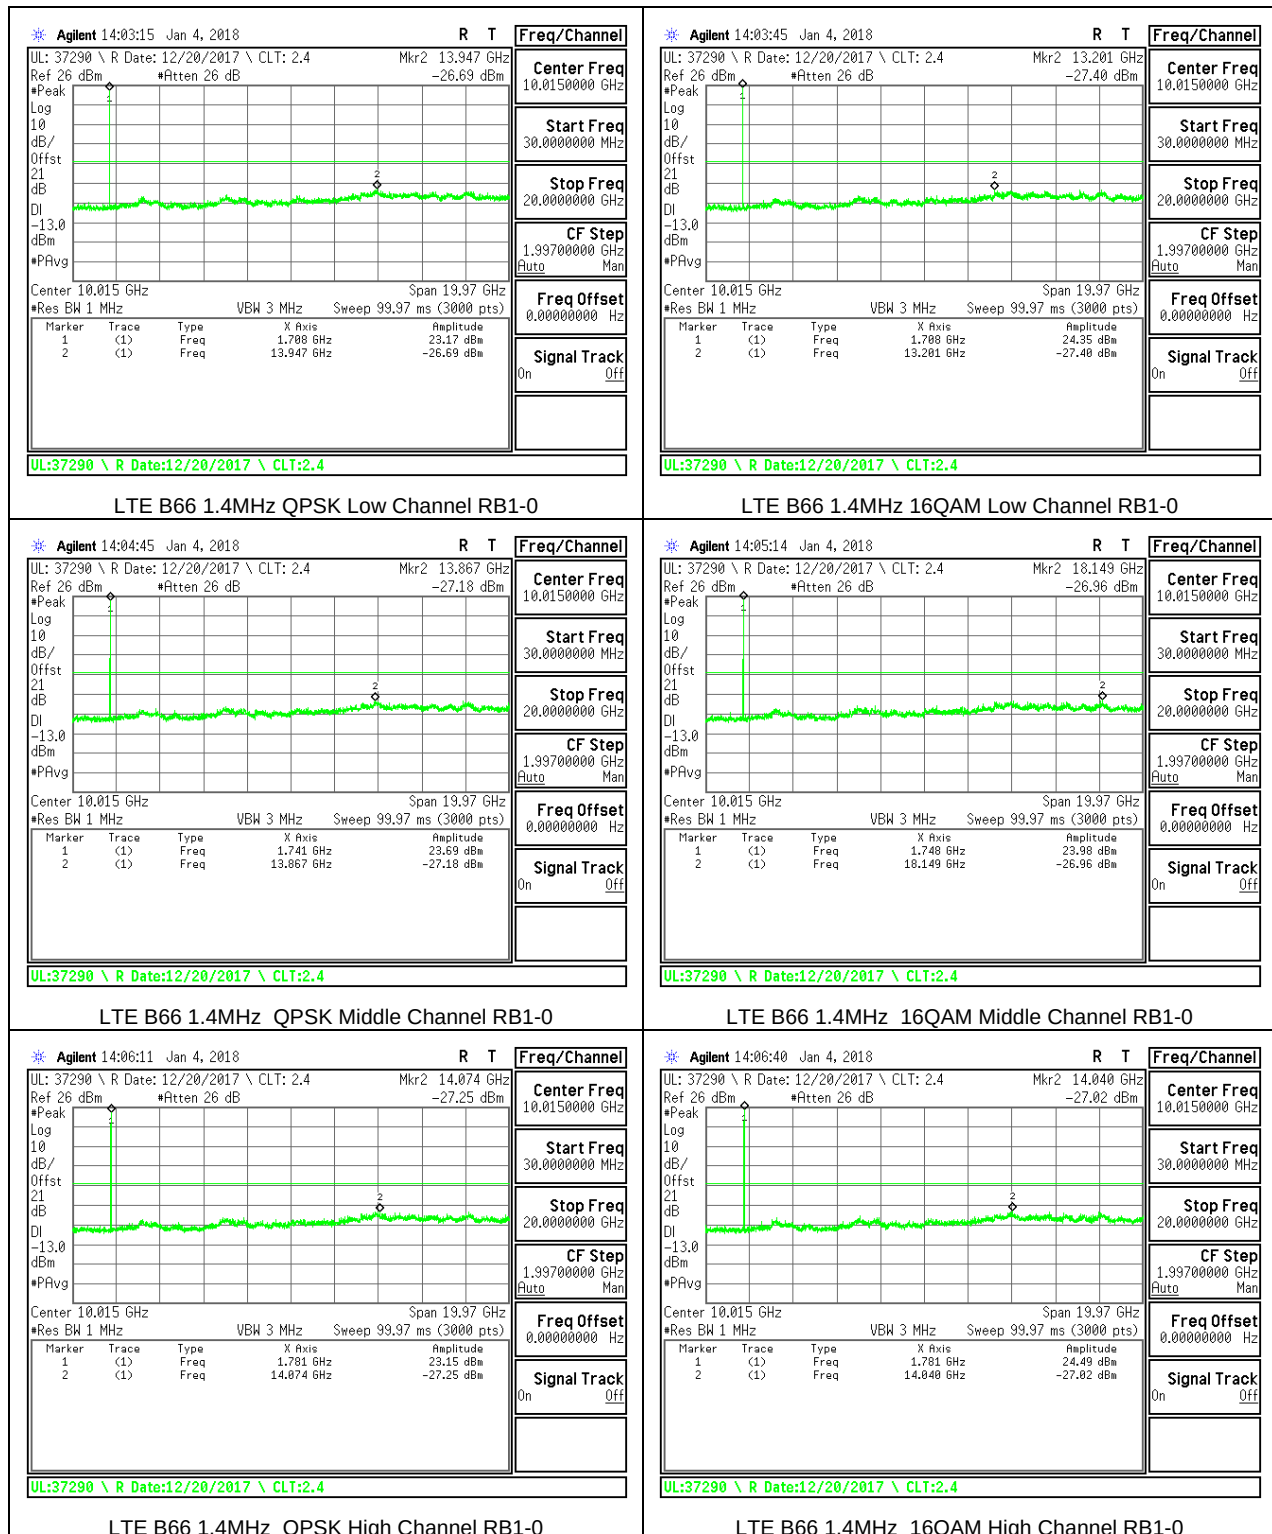


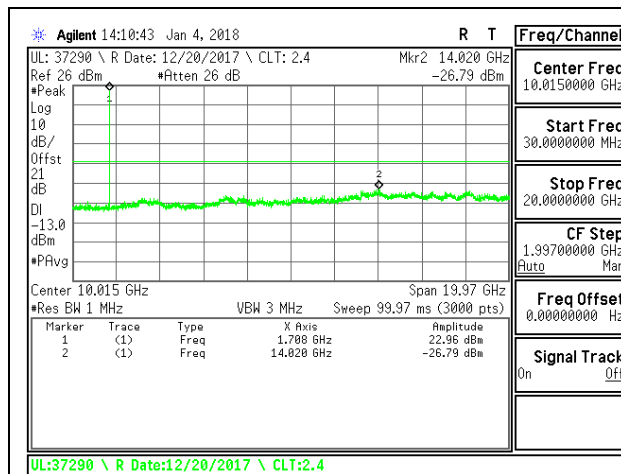


LTE B66 3MHz QPSK Low Channel RB1-0

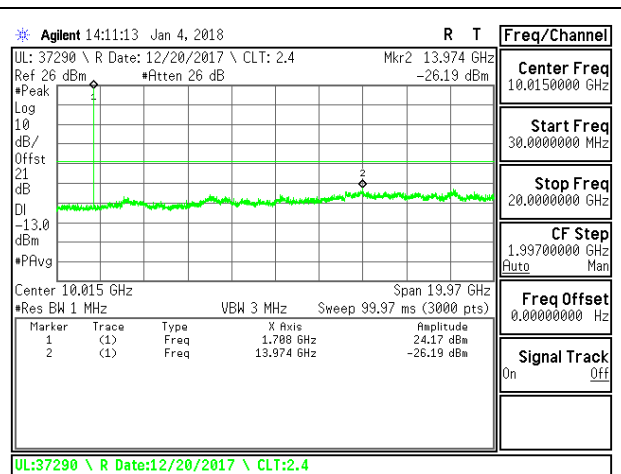


LTE B66 3MHz 16QAM Low Channel RB1-0

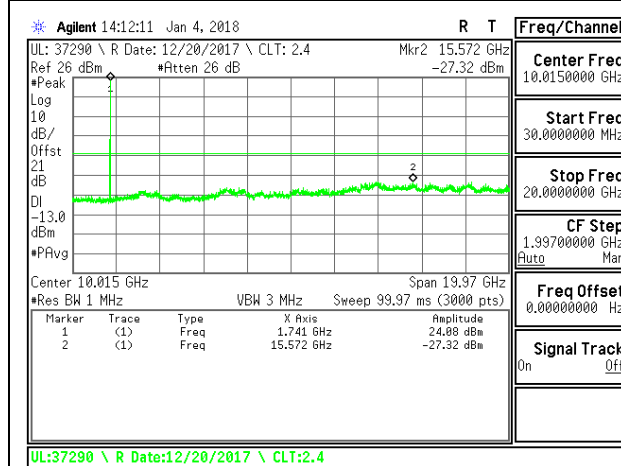


LTE B66 3MHz QPSK Middle Channel RB1-0

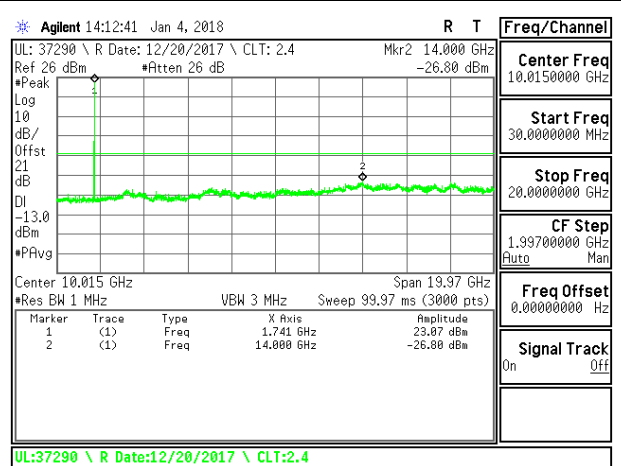


LTE B66 3MHz 16QAM Middle Channel RB1-0

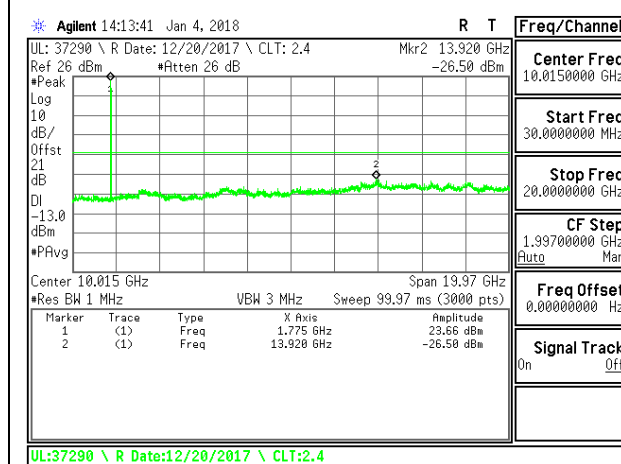


LTE B66 3MHz QPSK High Channel RB1-0

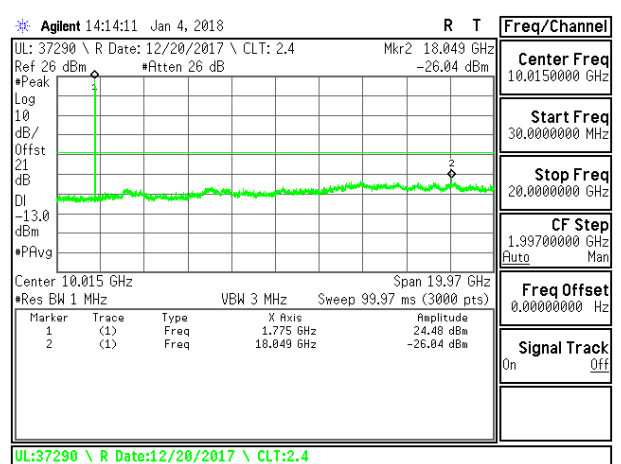


LTE B66 3MHz 16QAM High Channel RB1-0

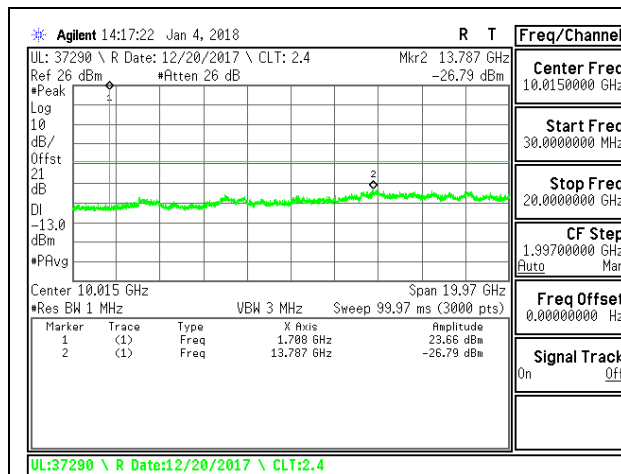


LTE B66 5MHz QPSK Low Channel RB1-0

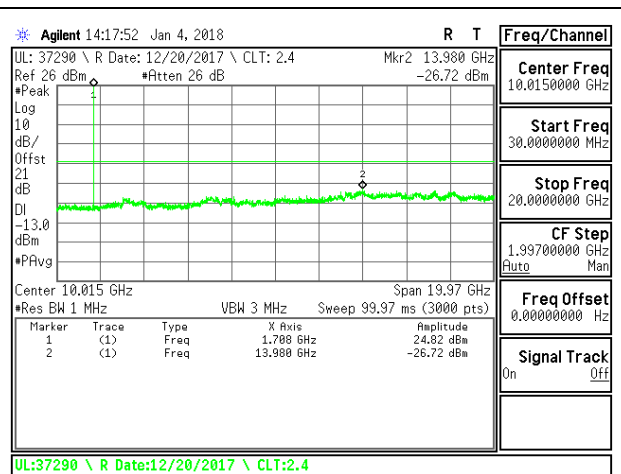


LTE B66 5MHz 16QAM Low Channel RB1-0

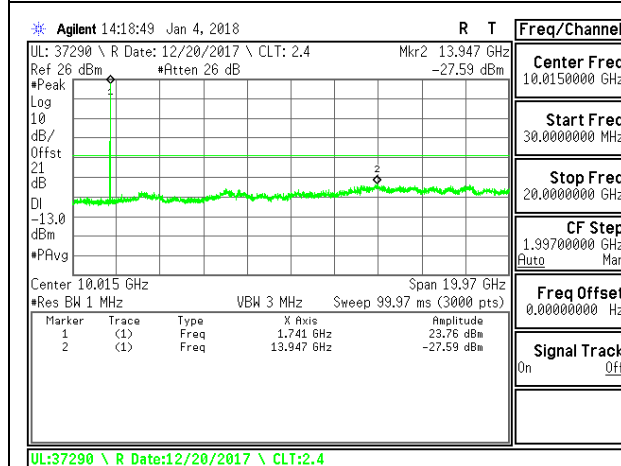


LTE B66 5MHz QPSK Middle Channel RB1-0

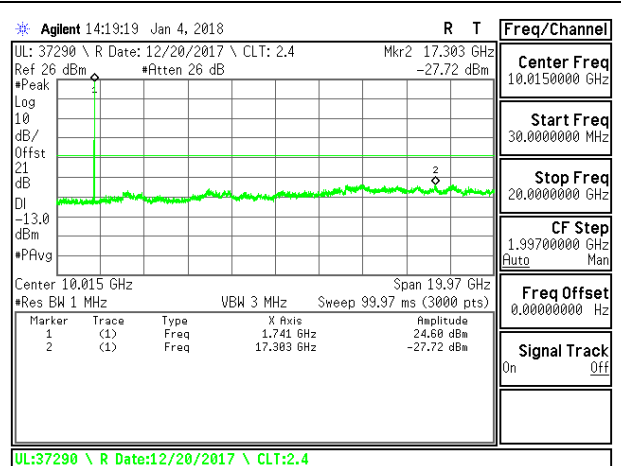


LTE B66 5MHz 16QAM Middle Channel RB1-0

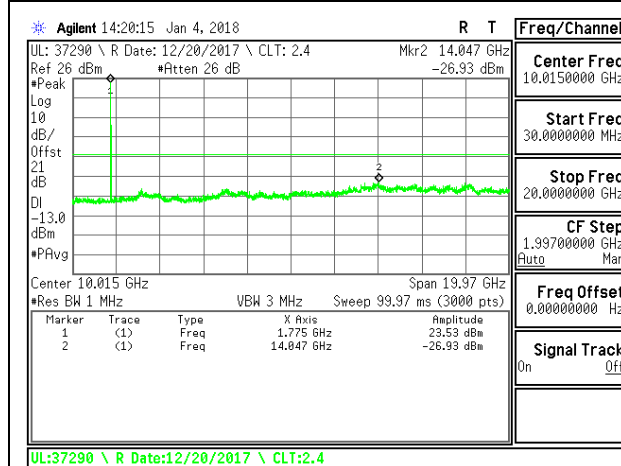



LTE B66 5MHz QPSK High Channel RB1-0

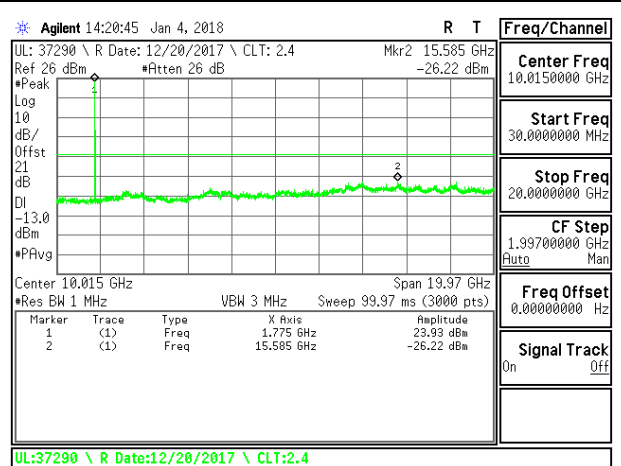

LTE B66 5MHz 16QAM High Channel RB1-0

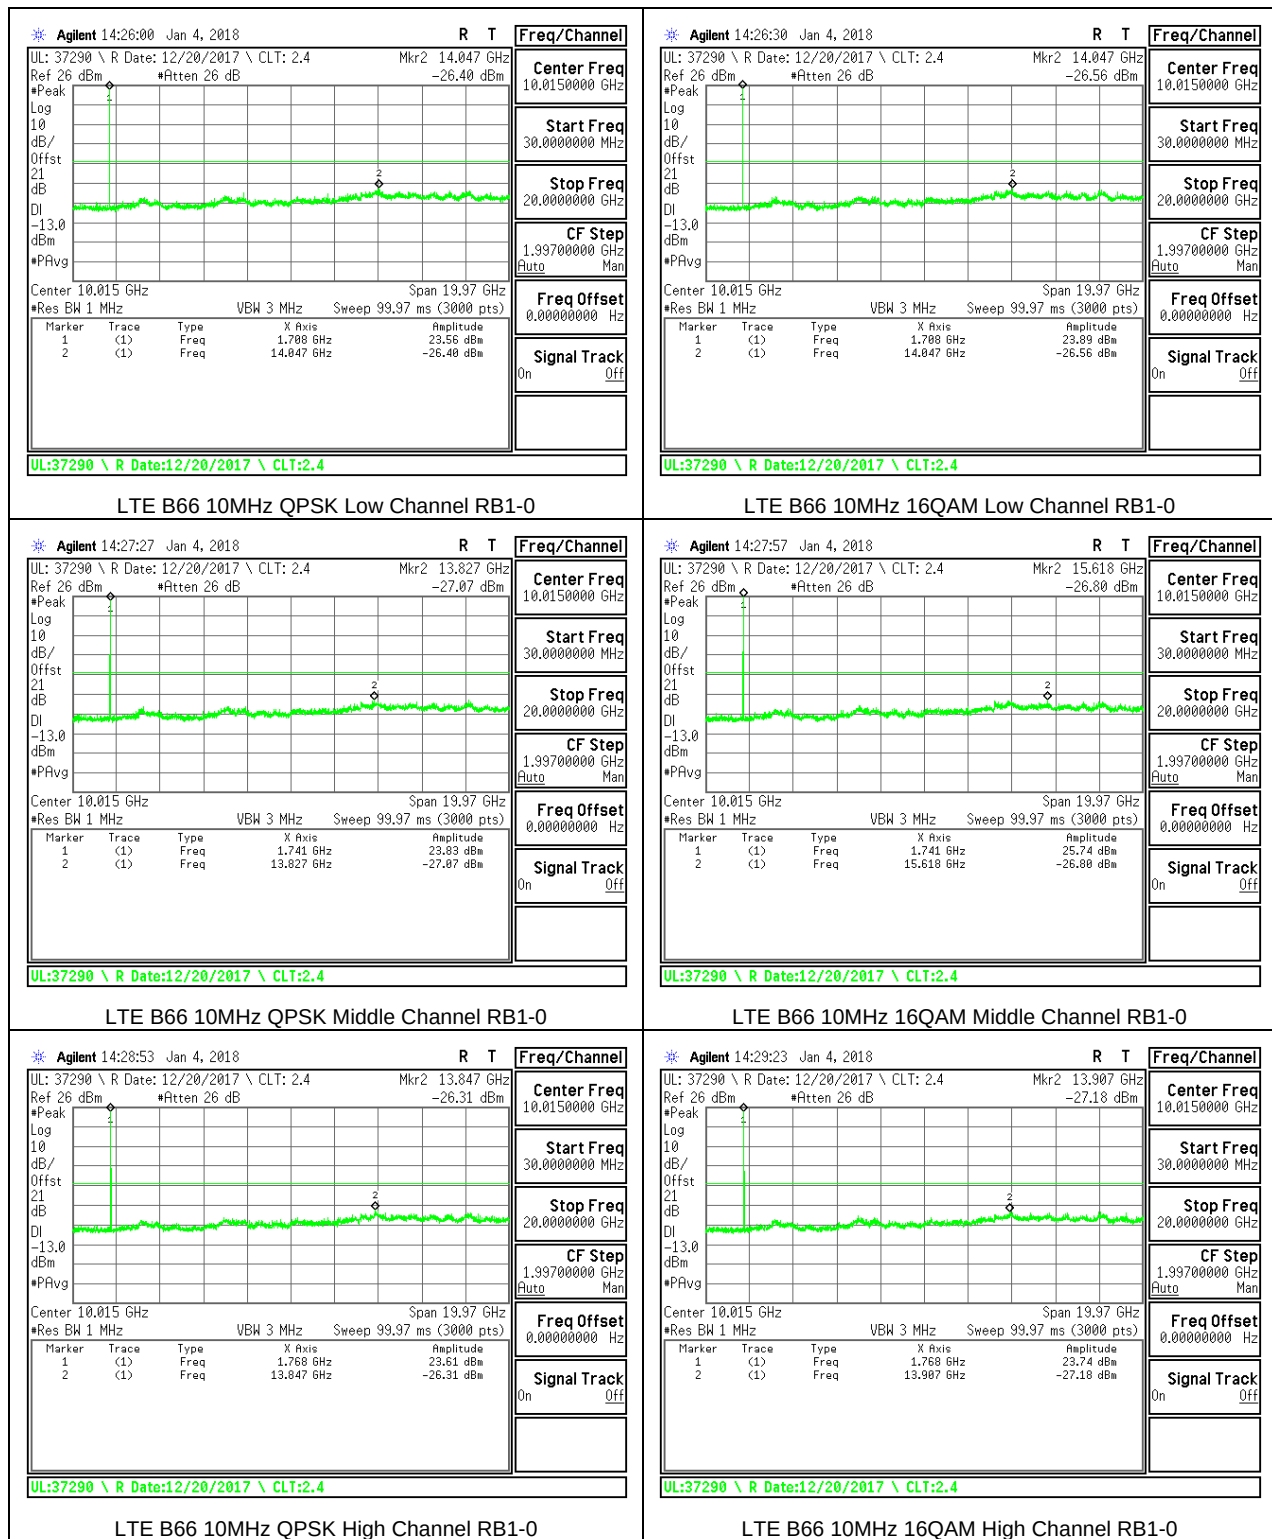

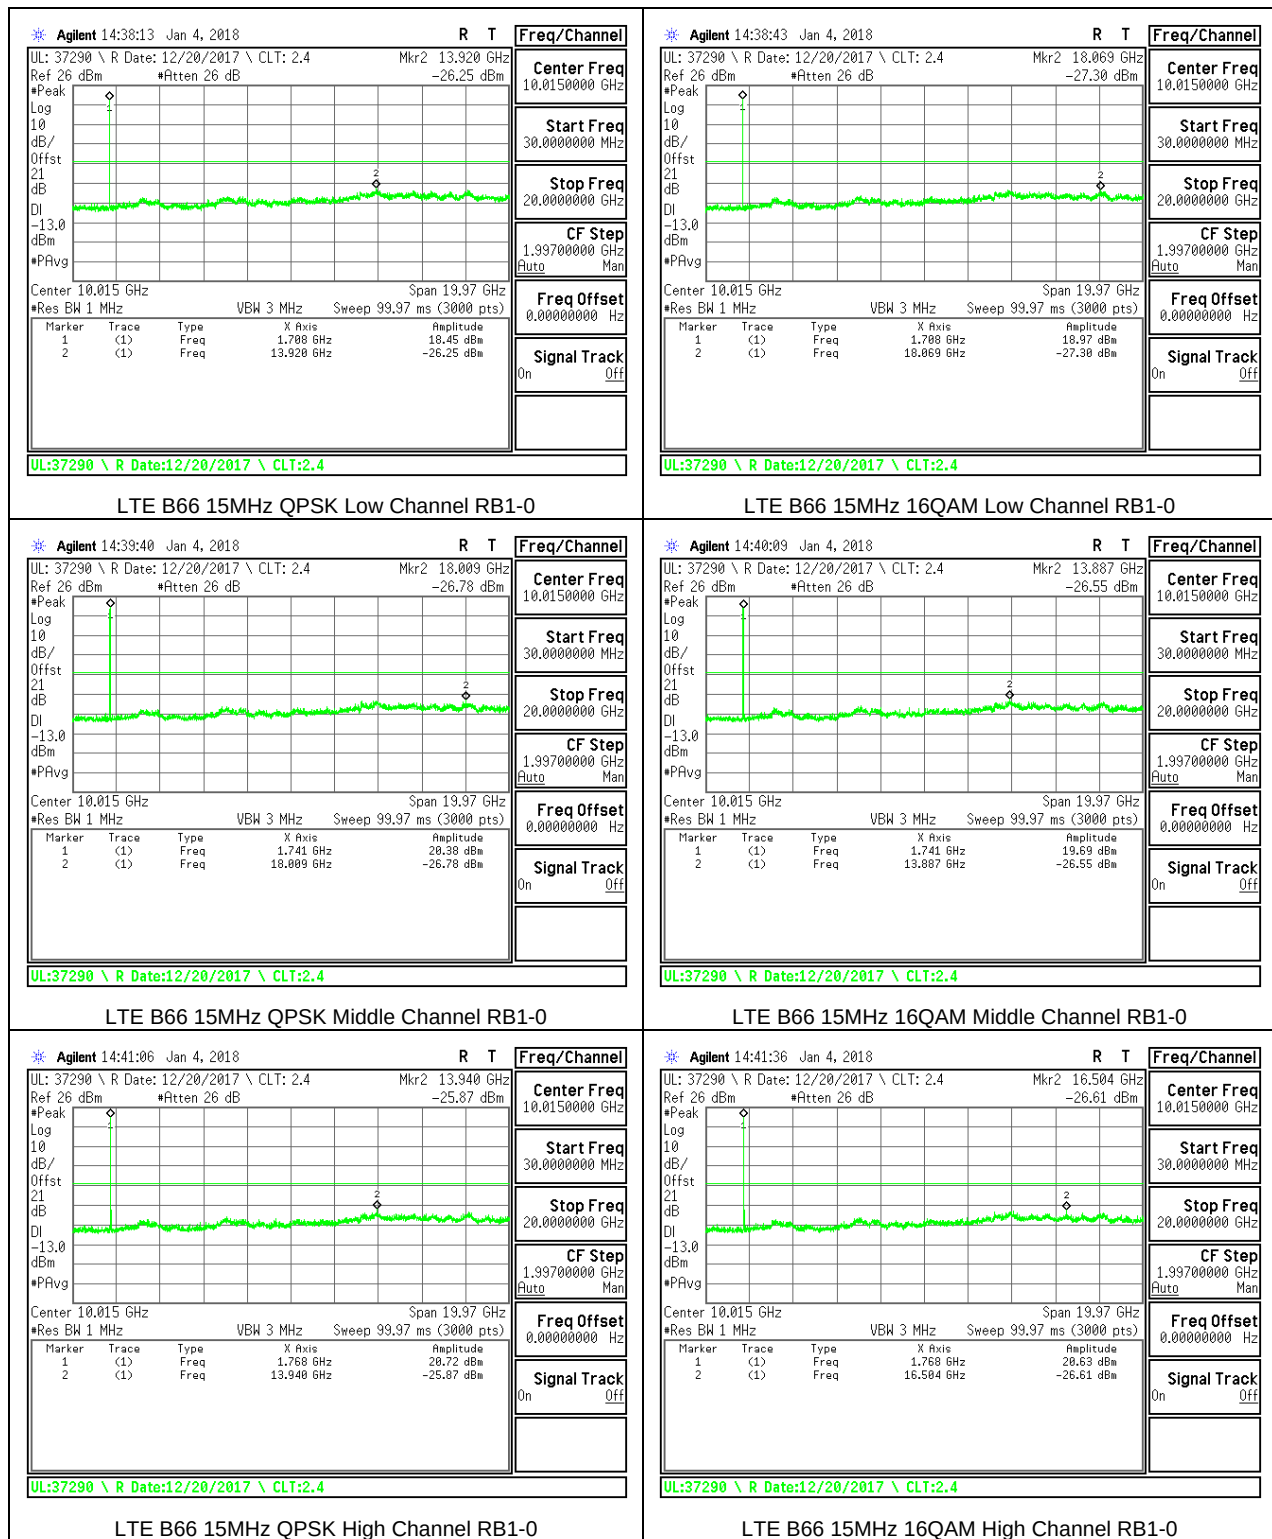

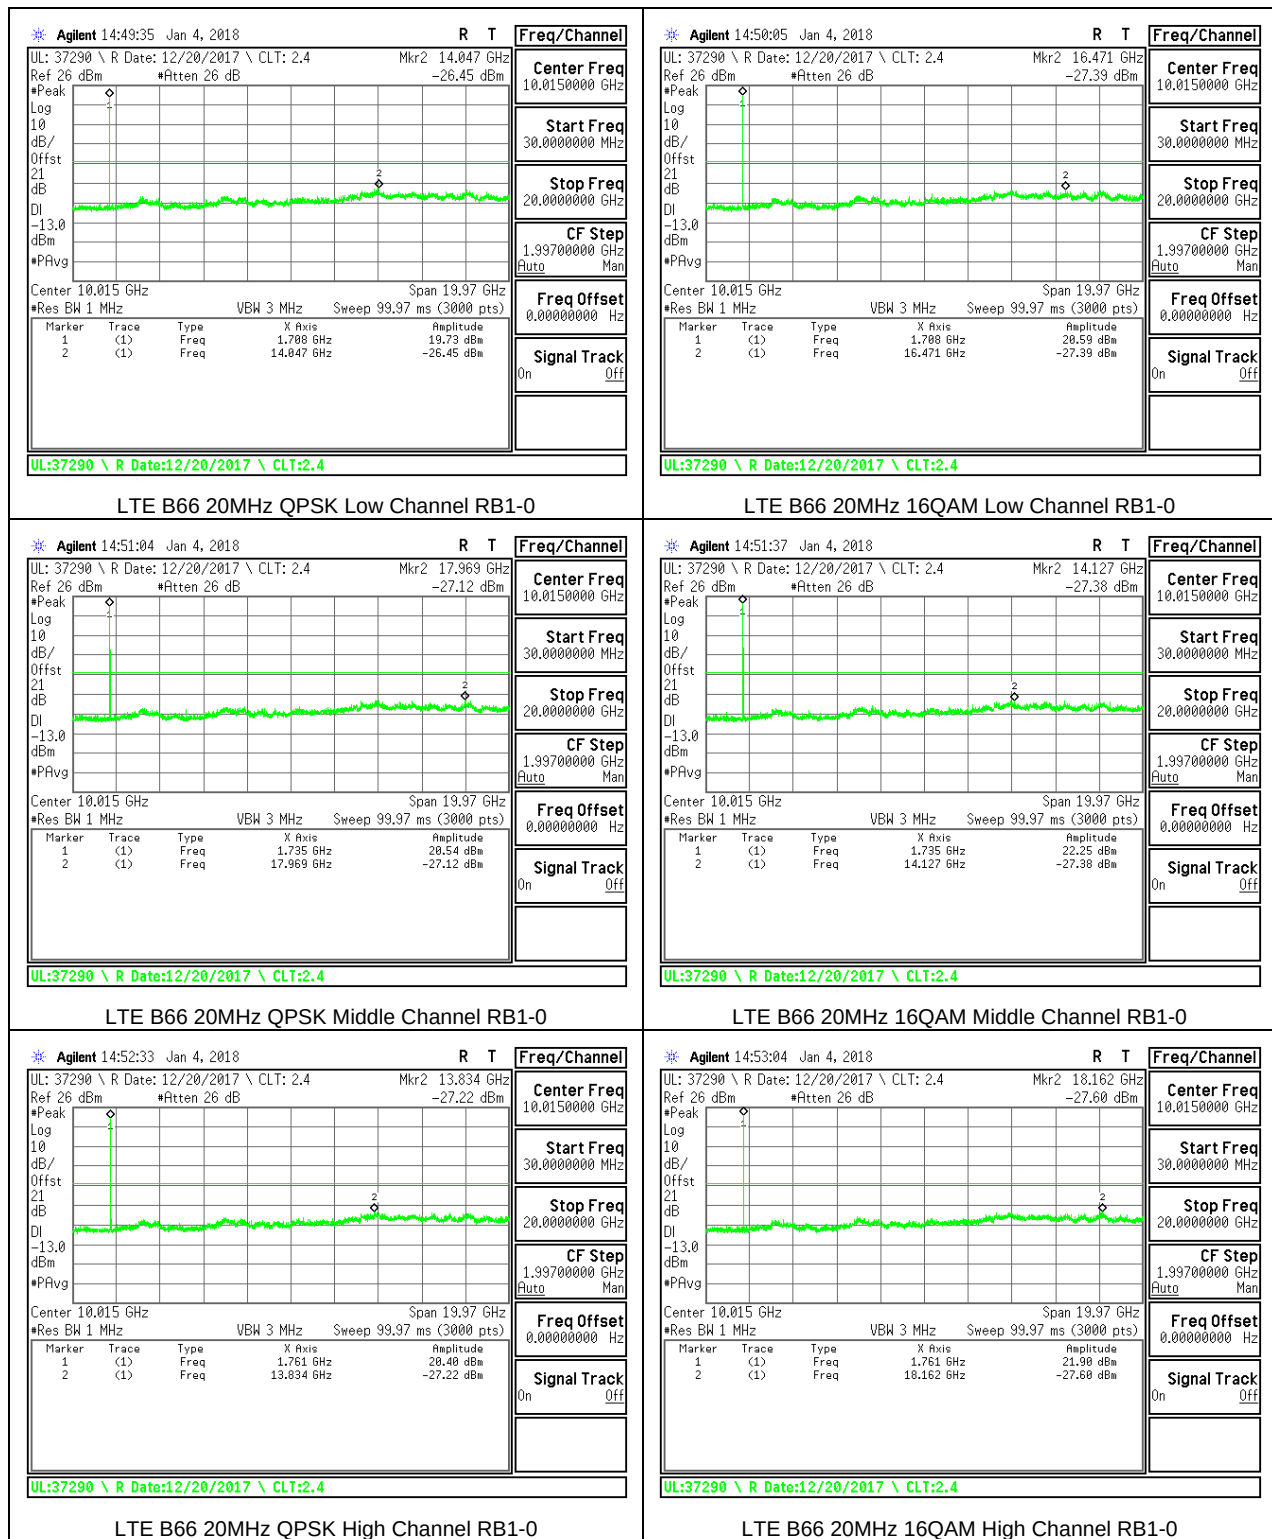

8.4. FREQUENCY STABILITY

RULE PART(S)

FCC: §2.1055, §22.355, §24.235, §27.54 and §90.213

LIMITS

FCC: §22.355, §90.213

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC: §24.235 & §27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

TEST PROCEDURE

Use CMW 500 with Frequency Error measurement capability.

- Temp. = -30°C to $+50^{\circ}\text{C}$
- Voltage = (85% - 115%)
Low voltage, 3.23VDC, Normal, 3.8VDC and High voltage, 4.37VDC.
End Voltage, 3.2VDC.

Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

MODES TESTED

- LTE Band 2
- LTE Band 7
- LTE Band 13
- LTE Band 17
- LTE Band 26
- LTE Band 41
- LTE Band 66

RESULTS

See the following pages.

Note(s):

GSM 850 Band Measured Results

GSM 850 (Frequency range: 824-849 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) no testing is necessary due to overlapping frequency range.

GSM 1900 Band Measured Results

GSM 1900 (Frequency range: 1850-1910 MHz) is covered by LTE Band 2 (Frequency range: 1850-1910 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 5 Measured Results

WCDMA Band 5 (Frequency range: 826-84 MHz) is covered by LTE Band 26 (Frequency range: 814-849 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 2 Measured Results

WCDMA Band 2 (Frequency range: 1850-1910 MHz) is covered by LTE Band 2 (Frequency range: 1850-1910 MHz) no testing is necessary due to overlapping frequency range.

WCDMA Band 4 Measured Results

WCDMA Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) no testing is necessary due to overlapping frequency range.

8.4.1. LTE BAND 2

QPSK, (20MHz BANDWIDTH)

Reference Frequency: LTE Band 2 Mid Channel			1880	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			4700.000	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	1880.000014	0.000	2.5
3.85	40	1880.000015	0.000	2.5
3.85	30	1880.000015	0.000	2.5
3.85	20	1880.000015	0	2.5
3.85	10	1880.000017	-0.001	2.5
3.85	0	1880.000015	0.000	2.5
3.85	-10	1880.000015	0.000	2.5
3.85	-20	1880.000018	-0.001	2.5
3.85	-30	1880.000015	0.000	2.5

Reference Frequency: LTE Band 2 Mid Channel			1880	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			4700.000	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	1880.000015	0	2.5
4.25	25	1880.000016	0.000	2.5
3.65	25	1880.000016	-0.001	2.5

8.4.2. LTE BAND 7

QPSK, (20MHz BANDWIDTH)

Reference Frequency: LTE Band 7 Mid Channel			2535	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			6337.500	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	2534.999988	0.009	2.5
3.85	40	2535.000010	0.001	2.5
3.85	30	2535.000011	0.000	2.5
3.85	20	2535.000012	0	2.5
3.85	10	2535.000009	0.001	2.5
3.85	0	2535.000011	0.000	2.5
3.85	-10	2534.999989	0.009	2.5
3.85	-20	2534.999993	0.008	2.5
3.85	-30	2535.000011	0.000	2.5

Reference Frequency: LTE Band 7 Mid Channel			2535	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			6337.500	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	2535.000012	0	2.5
4.25	25	2535.000008	0.001	2.5
3.65	25	2535.000009	0.001	2.5

8.4.3. LTE BAND 13

QPSK, (10MHz BANDWIDTH)

Reference Frequency: LTE Band 13 Mid Channel 782 MHz @ 20°C Limit: to stay +- 2.5 ppm = 1955.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	781.999994	0.000	2.5
3.85	40	781.999993	0.001	2.5
3.85	30	782.000004	-0.012	2.5
3.85	20	781.999994	0	2.5
3.85	10	781.999996	-0.002	2.5
3.85	0	781.999995	-0.001	2.5
3.85	-10	782.000006	-0.015	2.5
3.85	-20	781.999993	0.001	2.5
3.85	-30	781.999994	0.001	2.5

Reference Frequency: LTE Band 13 Mid Channel 782 MHz @ 20°C Limit: to stay +- 2.5 ppm = 1955.000 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	781.999994	0	2.5
4.25	25	781.999994	0.000	2.5
3.65	25	781.999993	0.001	2.5

8.4.4. LTE BAND 26

QPSK, (10MHz BANDWIDTH)

Reference Frequency: LTE Band 26 Mid Channel 831.5 MHz @ 20°C Limit: to stay +- 2.5 ppm = 2078.750 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	831.500010	0.001	2.5
3.85	40	831.500010	0.001	2.5
3.85	30	831.500011	0.000	2.5
3.85	20	831.500011	0	2.5
3.85	10	831.500012	-0.001	2.5
3.85	0	831.500011	-0.001	2.5
3.85	-10	831.500013	-0.003	2.5
3.85	-20	831.500013	-0.002	2.5
3.85	-30	831.500010	0.000	2.5

Reference Frequency: LTE Band 26 Mid Channel 831.5 MHz @ 20°C Limit: to stay +- 2.5 ppm = 2078.750 Hz				
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	831.500011	0	2.5
4.25	25	831.500009	0.002	2.5
3.65	25	831.500011	0.000	2.5

8.4.5. LTE BAND 66

QPSK, (20MHz BANDWIDTH)

Reference Frequency: LTE Band 66 Mid Channel			1745	MHz @ 20°C
Limit: to stay +/- 2.5 ppm =			4362.500	Hz
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	50	1745.000007	0.001	2.5
3.85	40	1745.000006	0.002	2.5
3.85	30	1745.000005	0.002	2.5
3.85	20	1745.000009	0	2.5
3.85	10	1745.000006	0.002	2.5
3.85	0	1745.000005	0.002	2.5
3.85	-10	1744.999999	0.006	2.5
3.85	-20	1745.000005	0.002	2.5
3.85	-30	1745.000004	0.003	2.5

Reference Frequency: LTE Band 66 Mid Channel		1745	MHz @ 20°C	
Limit: to stay +/- 2.5 ppm =		4362.500	Hz	
Power Supply (Vdc)	Environment Temperature (°C)	Frequency Deviation Measured with Time Elapse		
		(MHz)	Delta (ppm)	Limit (ppm)
3.85	25	1745.000009	0	2.5
4.25	25	1745.000008	0.000	2.5
3.65	25	1745.000006	0.001	2.5

8.5. PEAK-TO-AVERAGE POWER RATIO


LIMIT

In addition, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time and shall use a signal corresponding to the highest PAPR during periods of continuous transmission.


RESULT

Full resource block (FRB) for each bandwidth was used to measure as the worst case. The results from all CCDF measurements are passed with 13dB peak-to-average power ratio criteria.


8.5.1. GSM

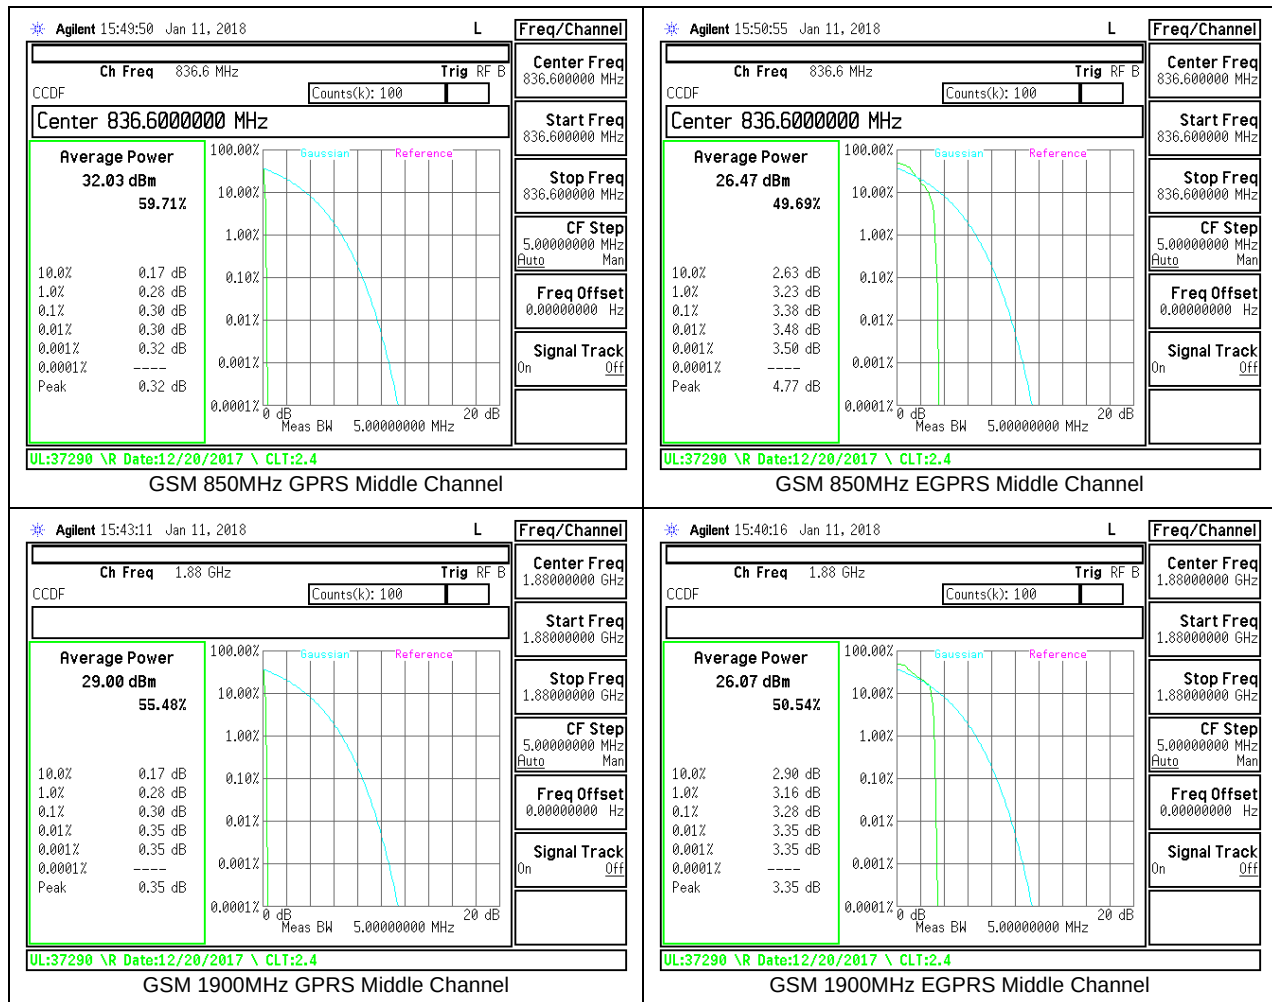


8.5.2. WCDMA

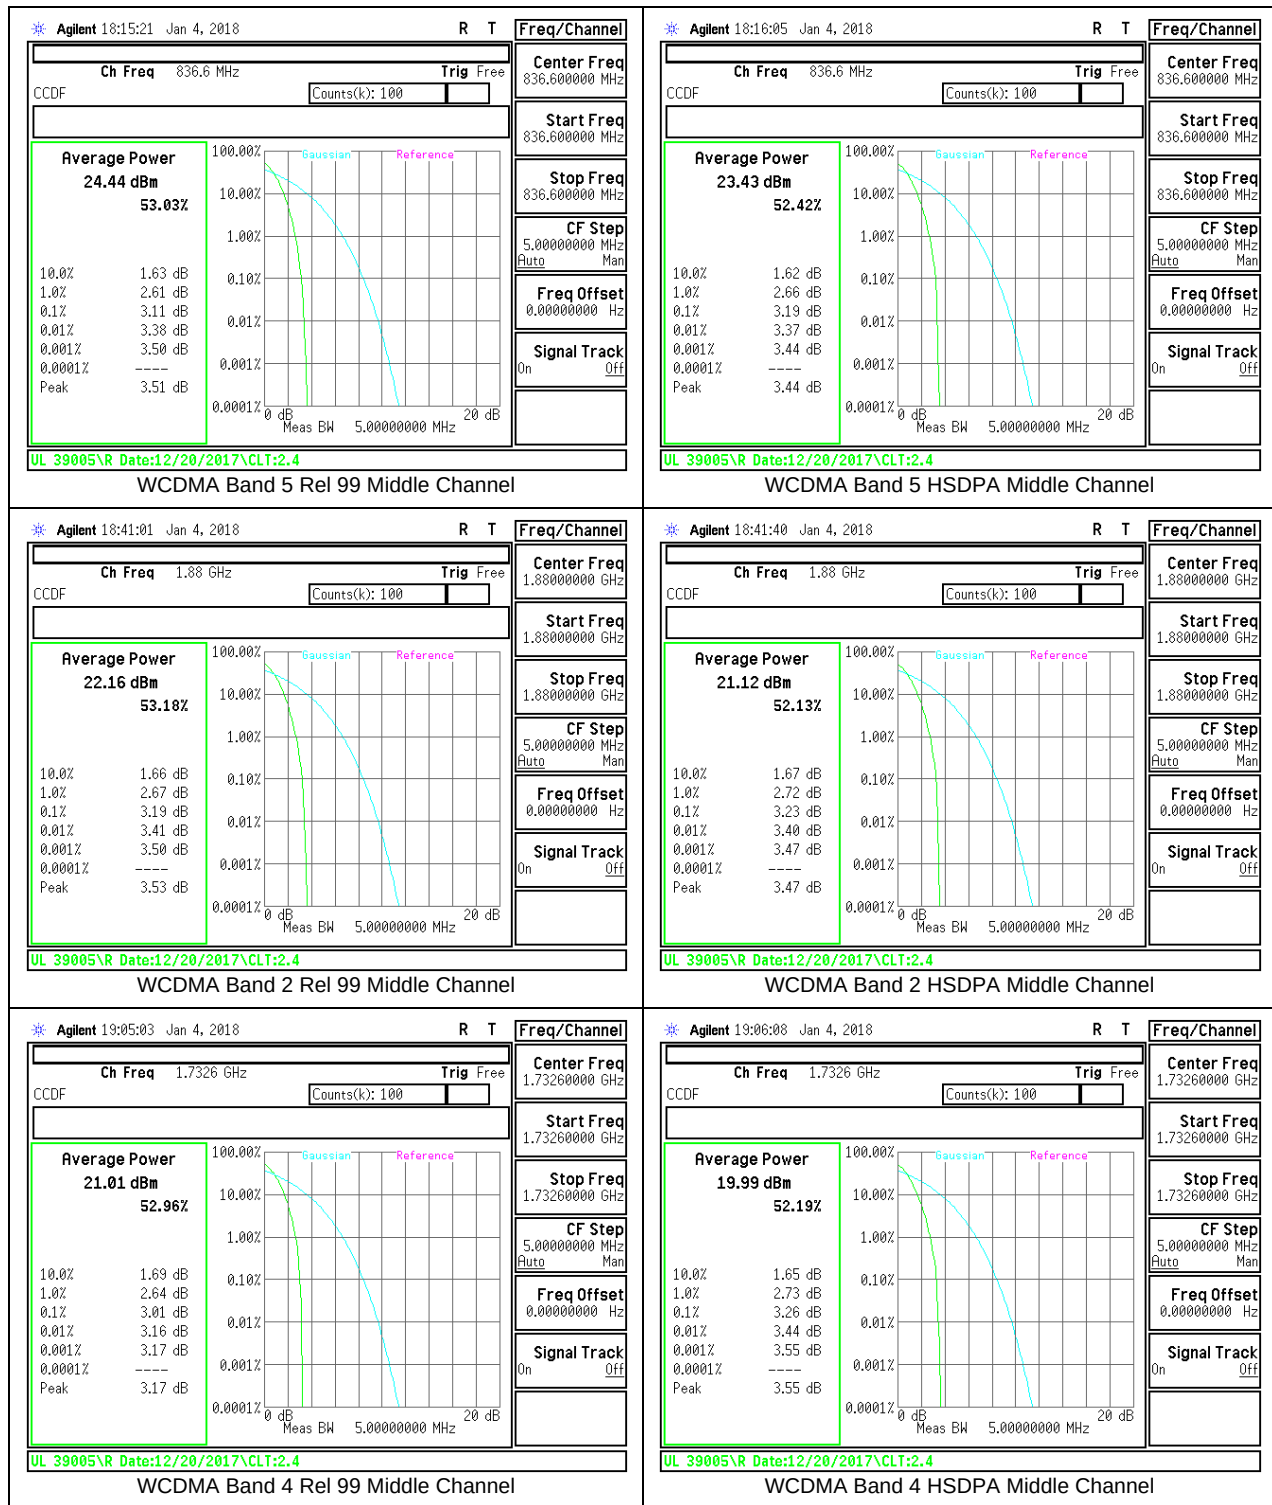

8.5.3. LTE BAND 2

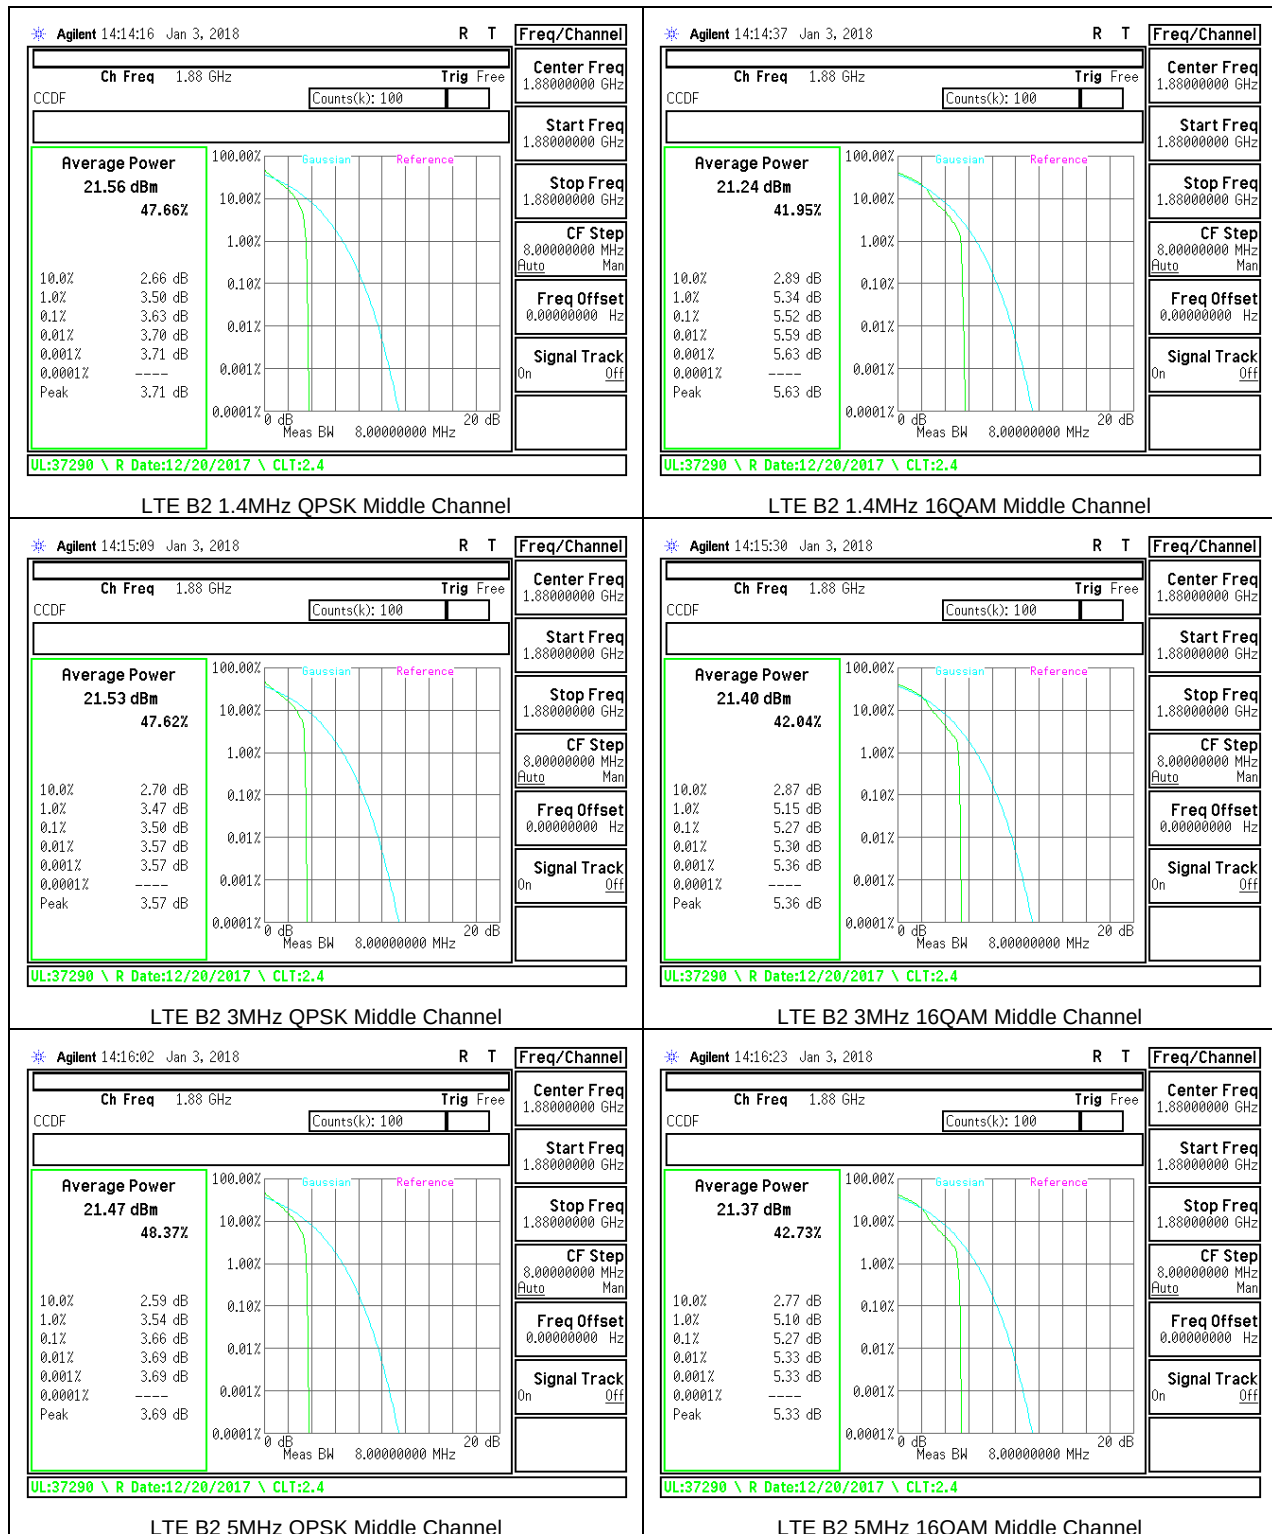


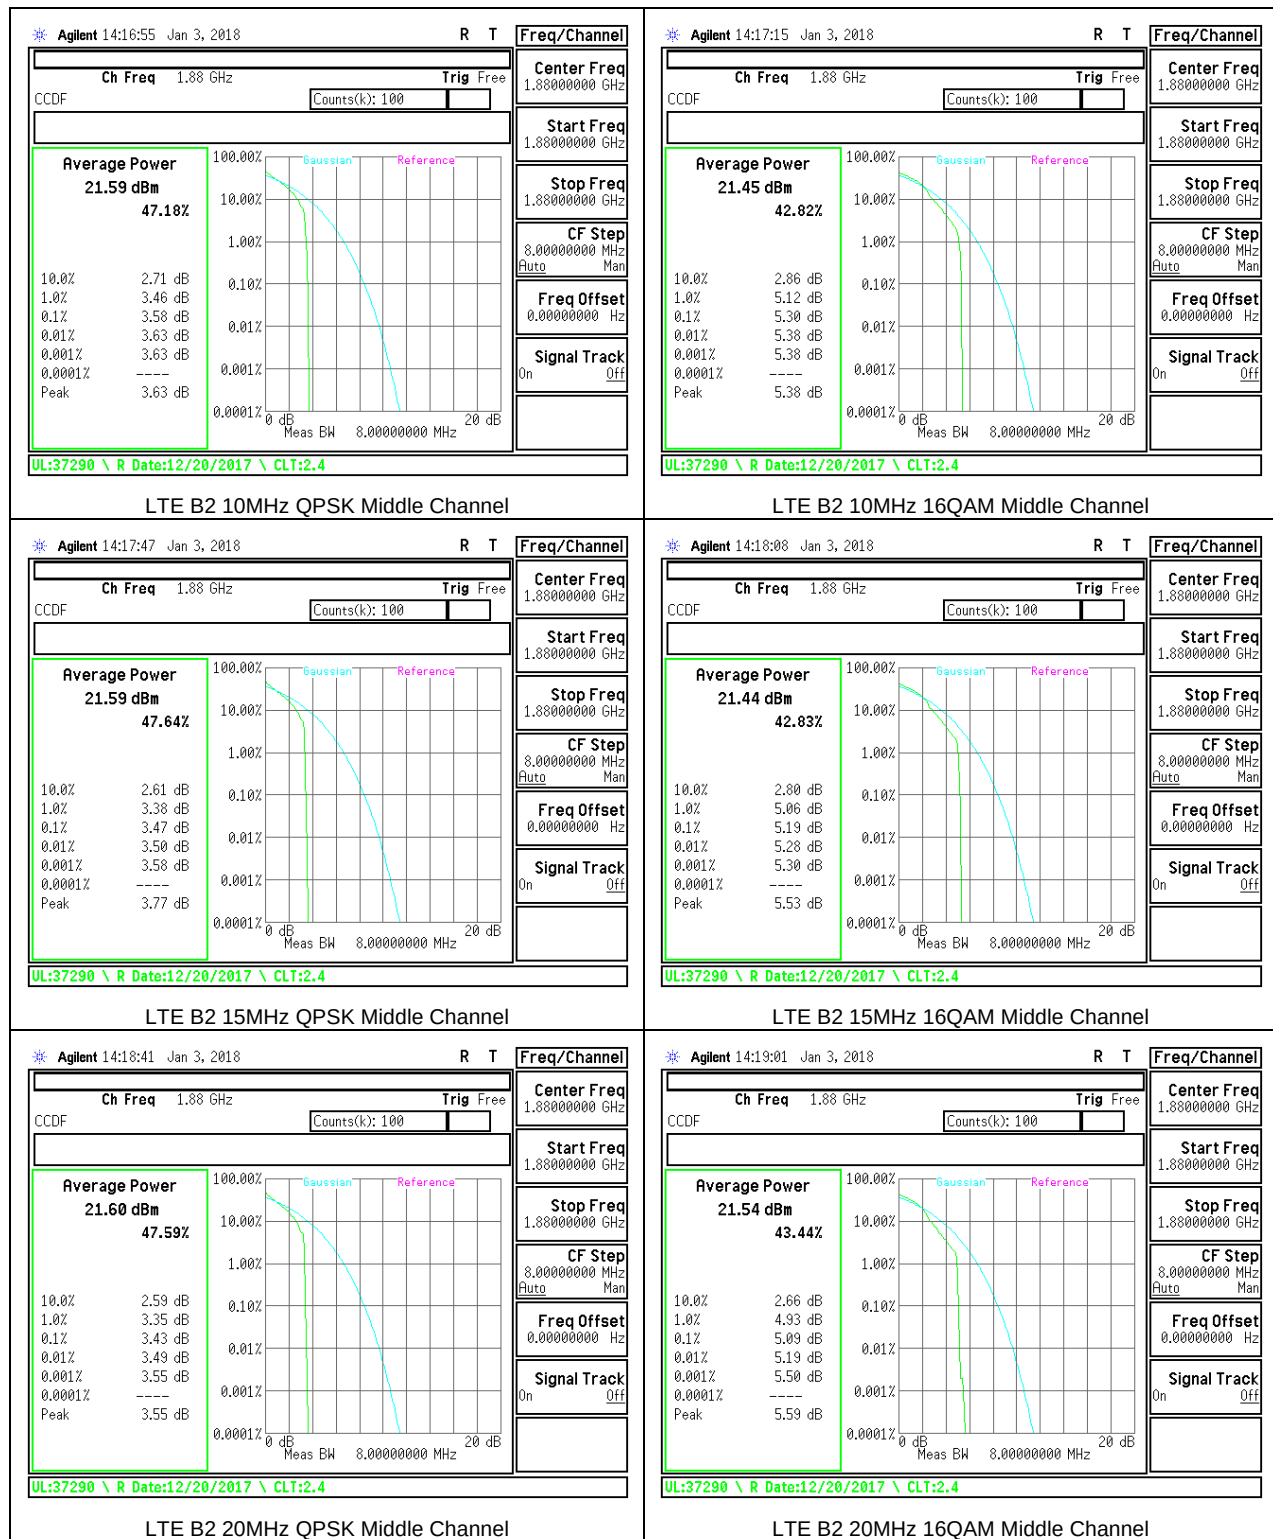


8.5.4. LTE BAND 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.


8.5.5. LTE BAND 5

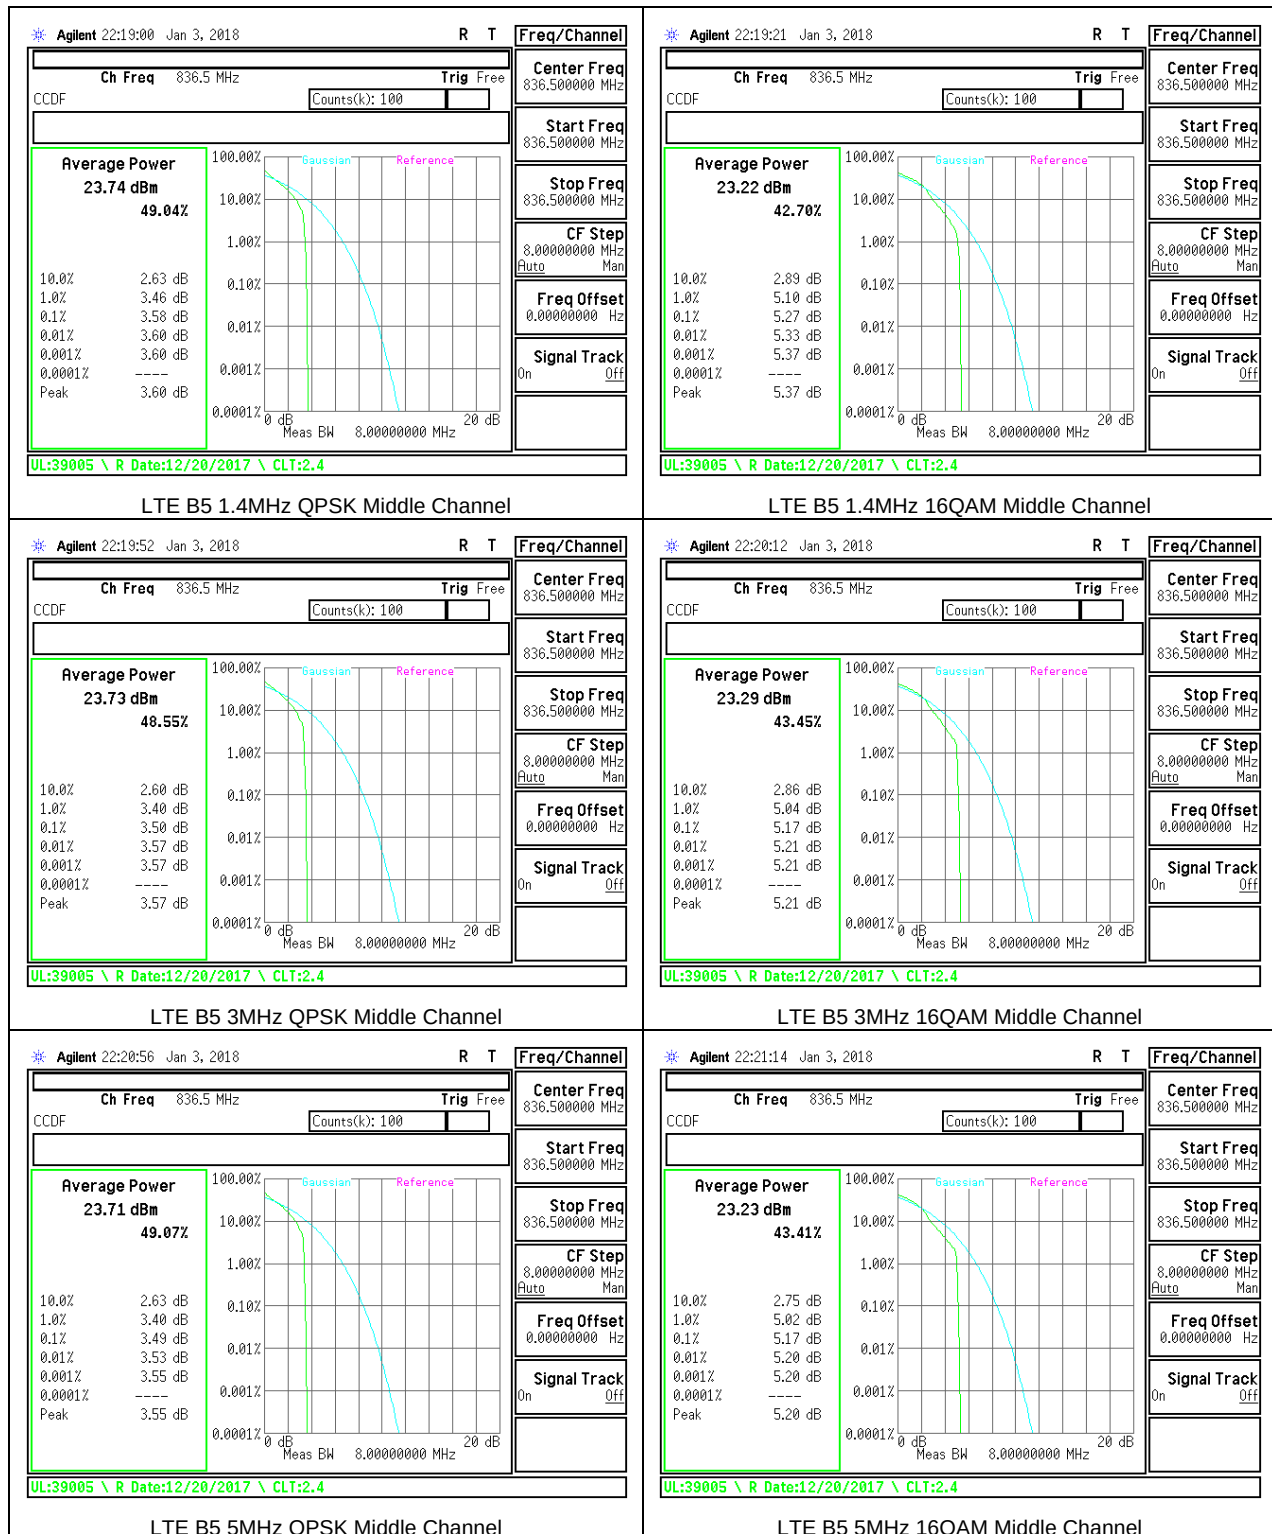

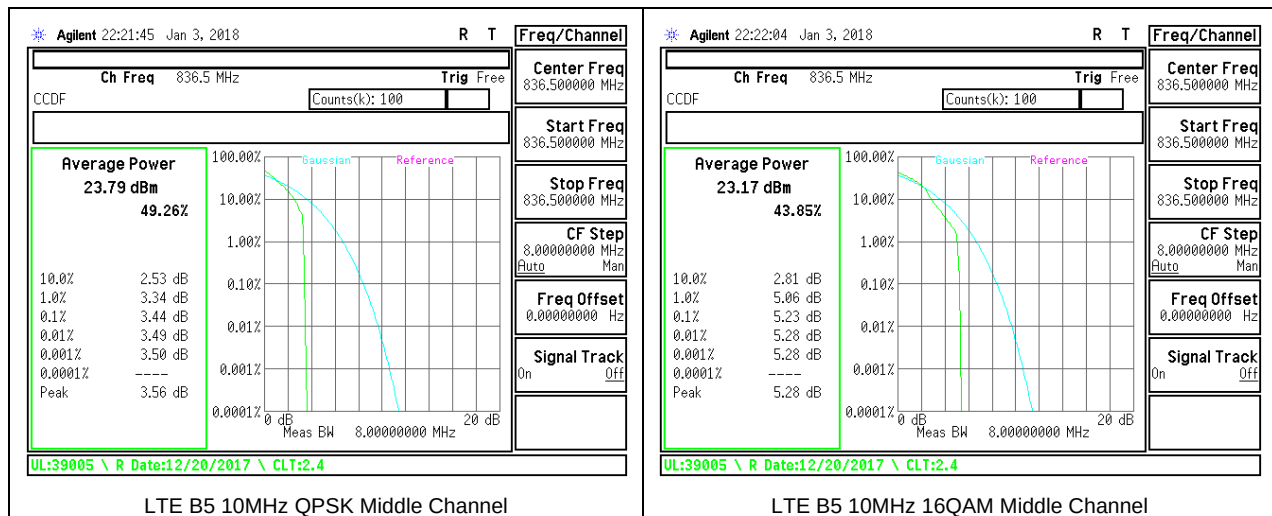


8.5.6. LTE BAND 7



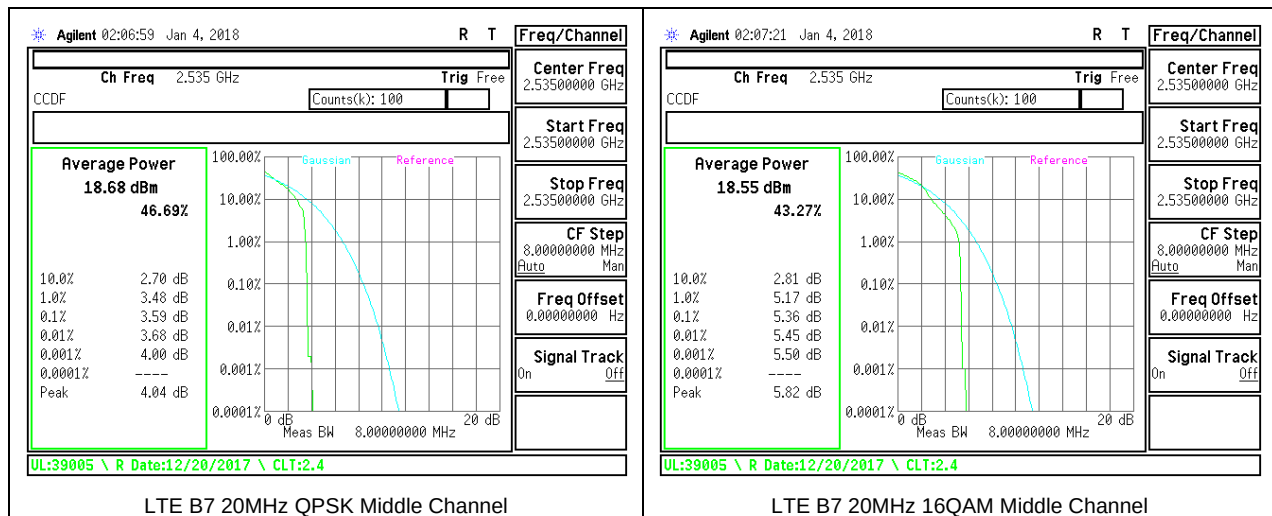


8.5.7. LTE BAND 12



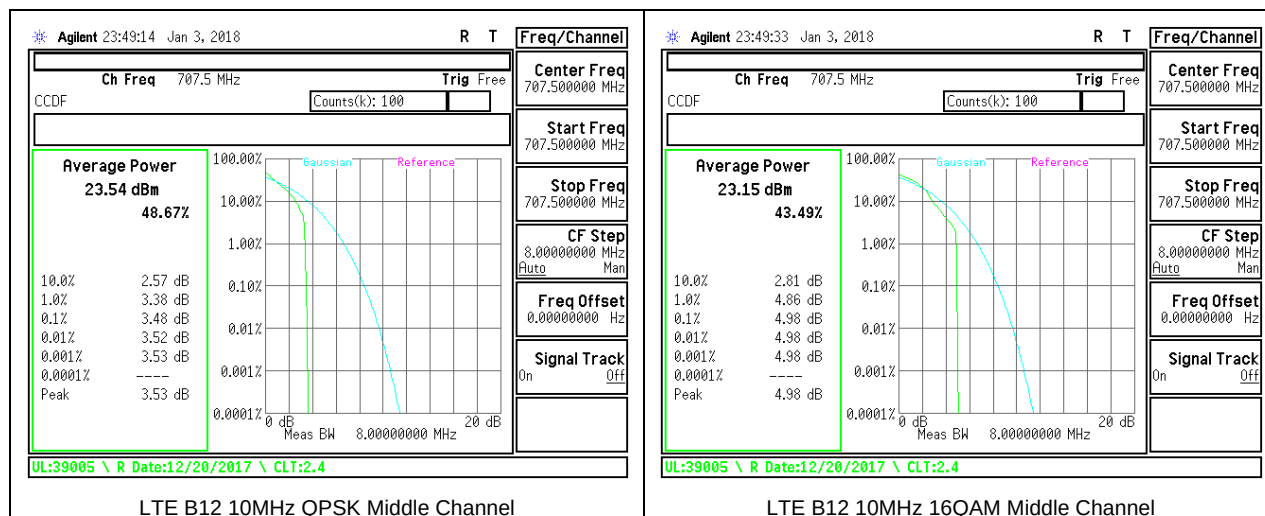


8.5.8. LTE BAND 13

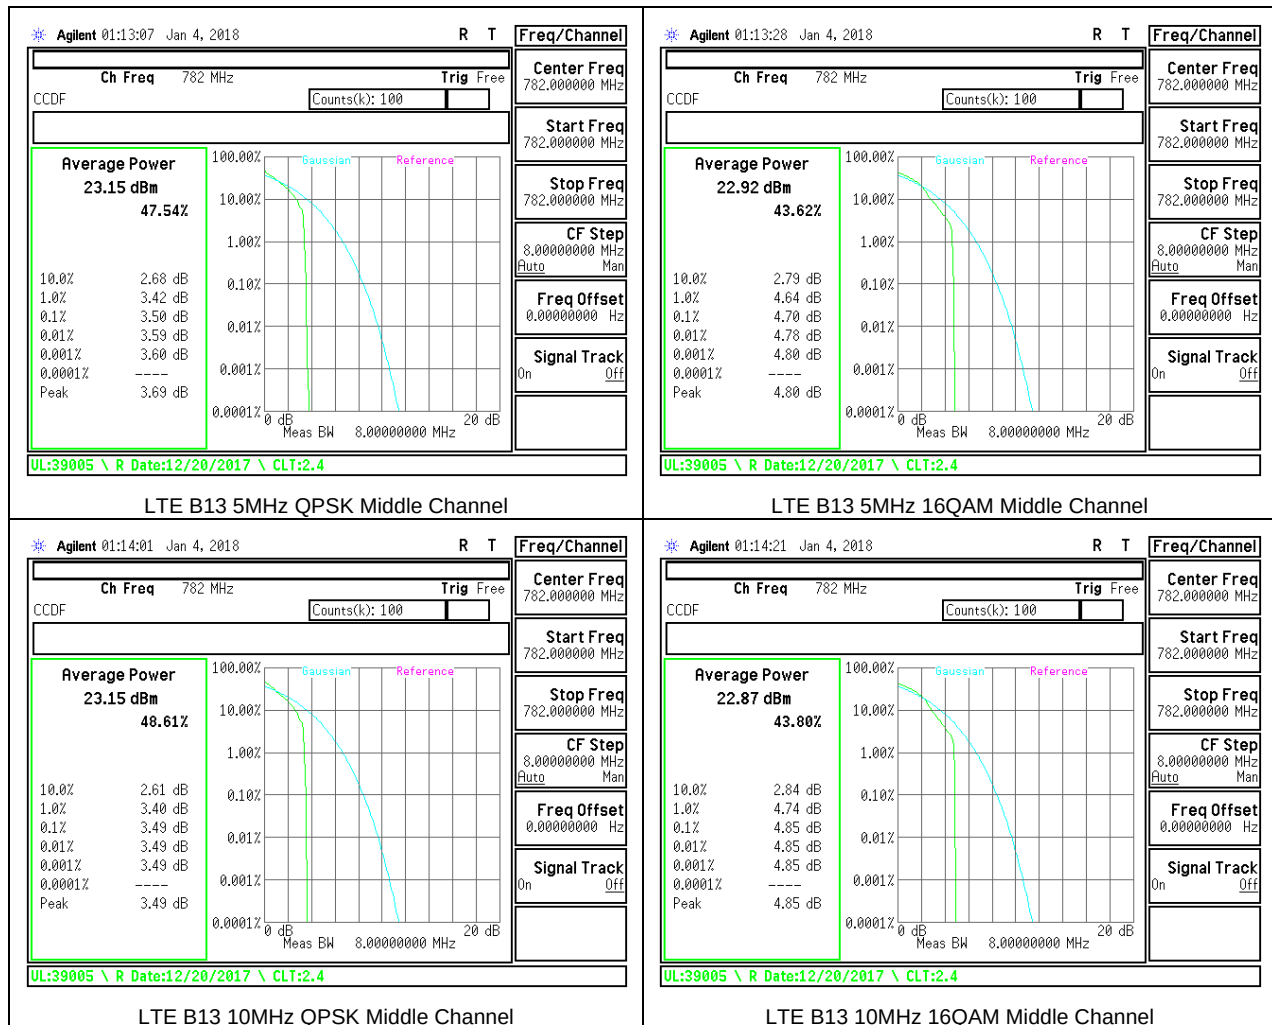


8.5.9. LTE BAND 17


LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth (5 & 10 MHz).


8.5.10. LTE BAND 26

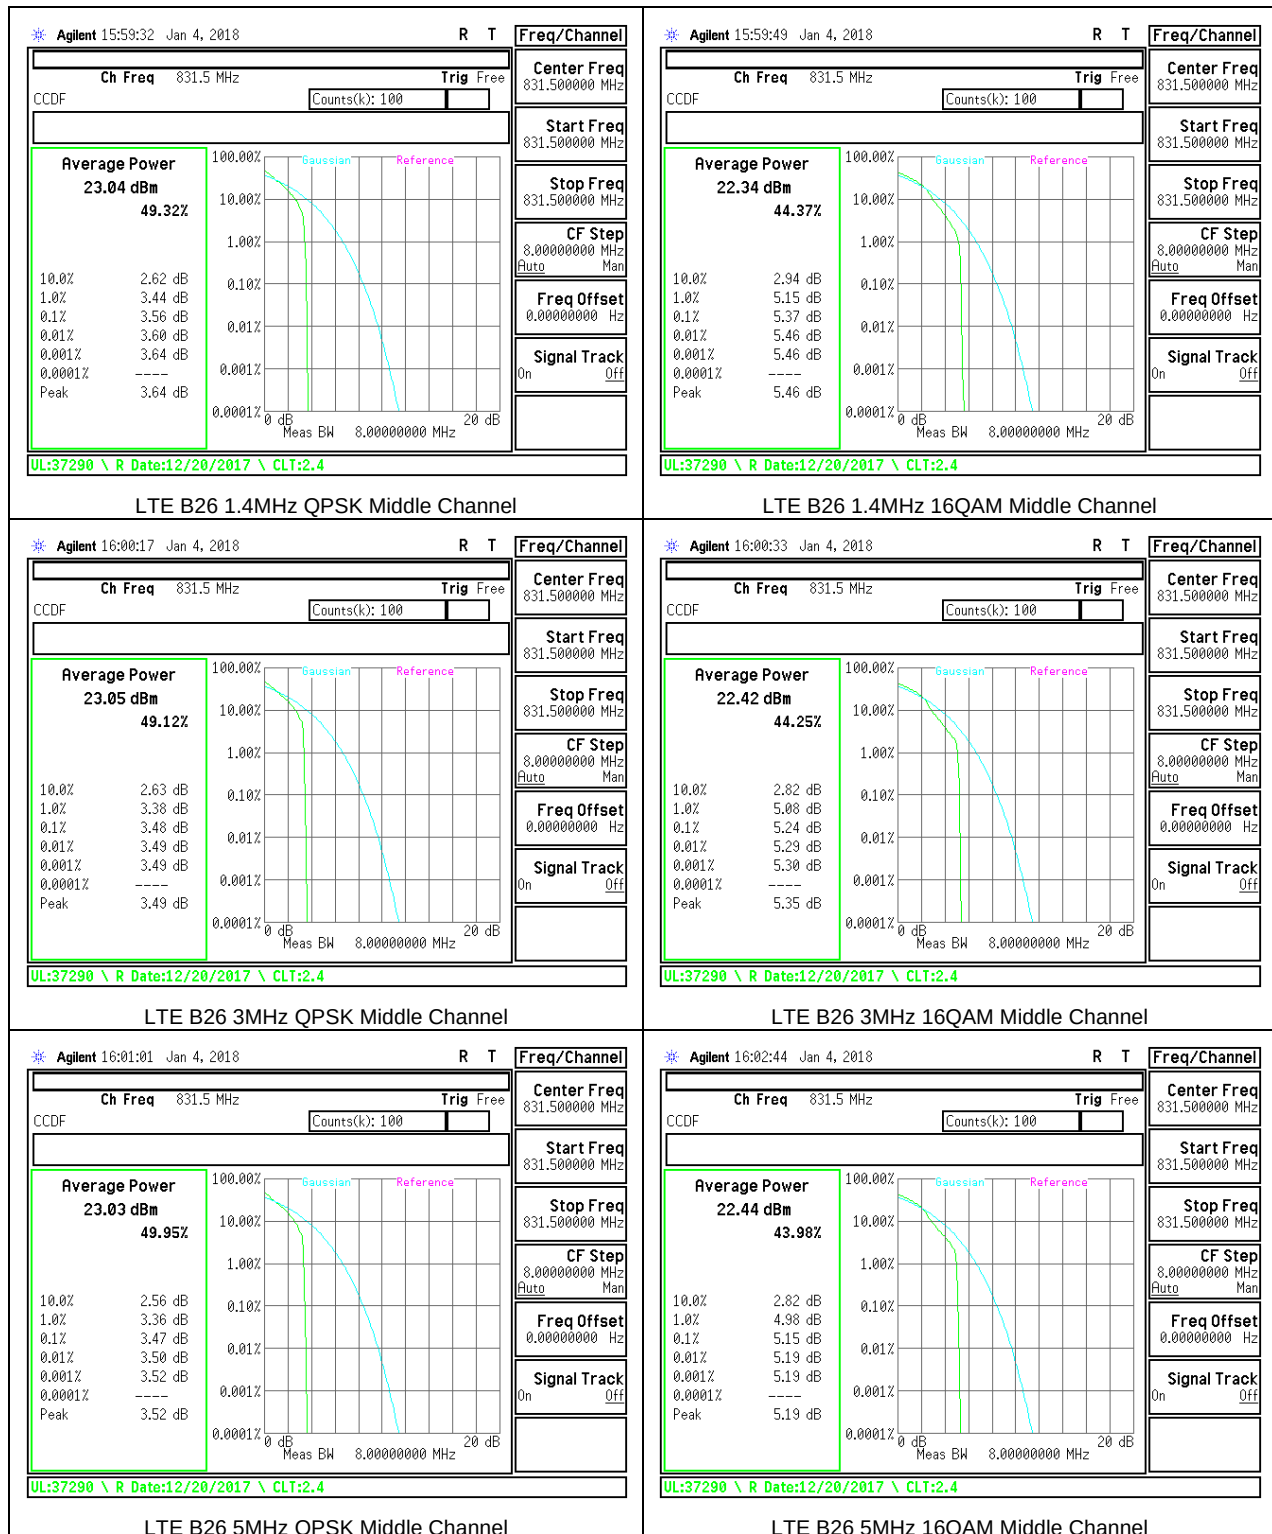

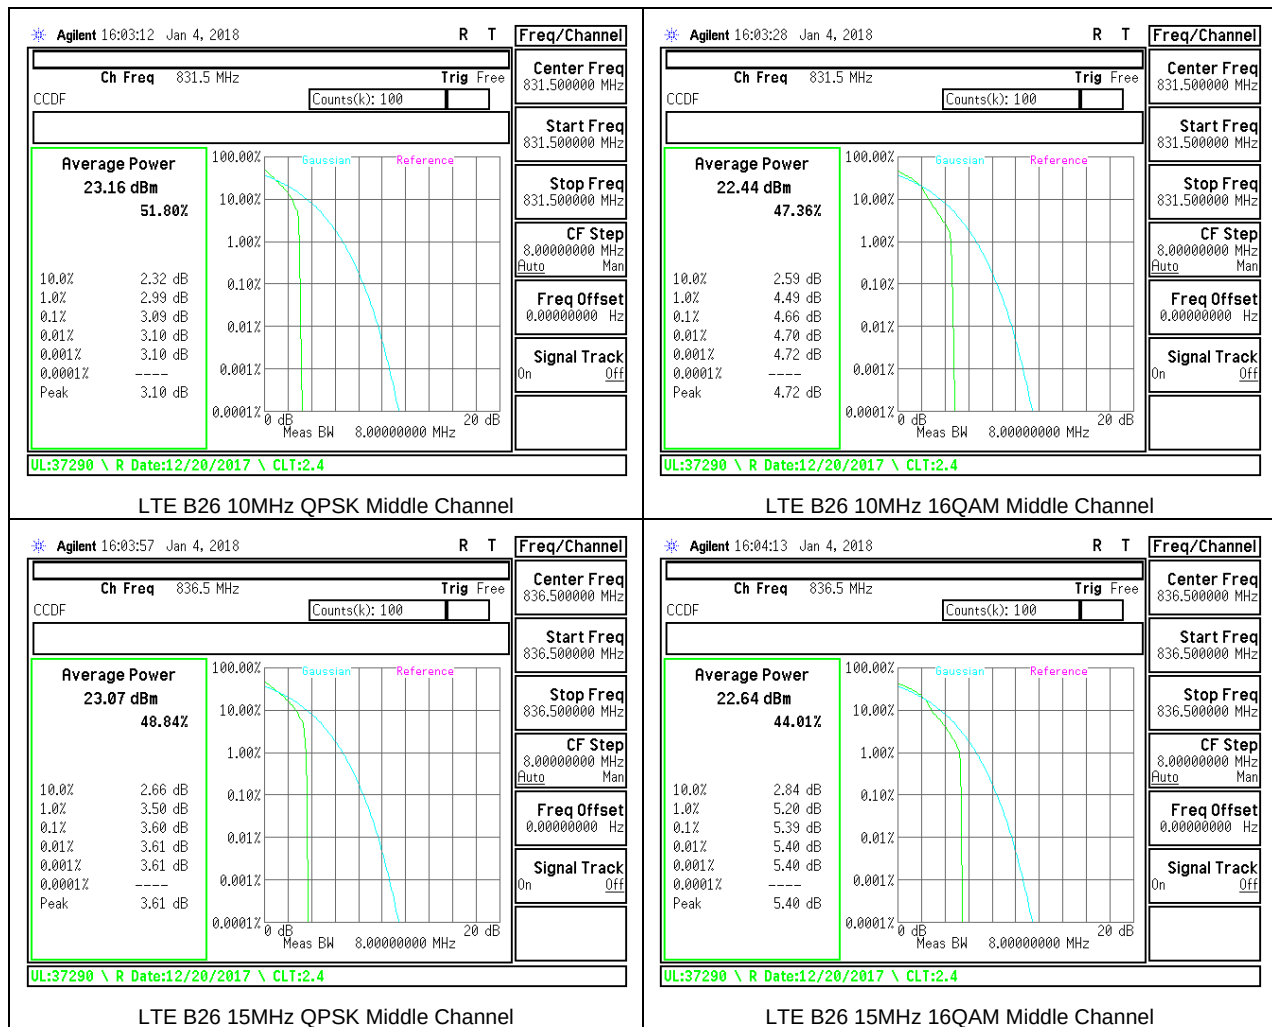


8.5.11. LTE BAND 41

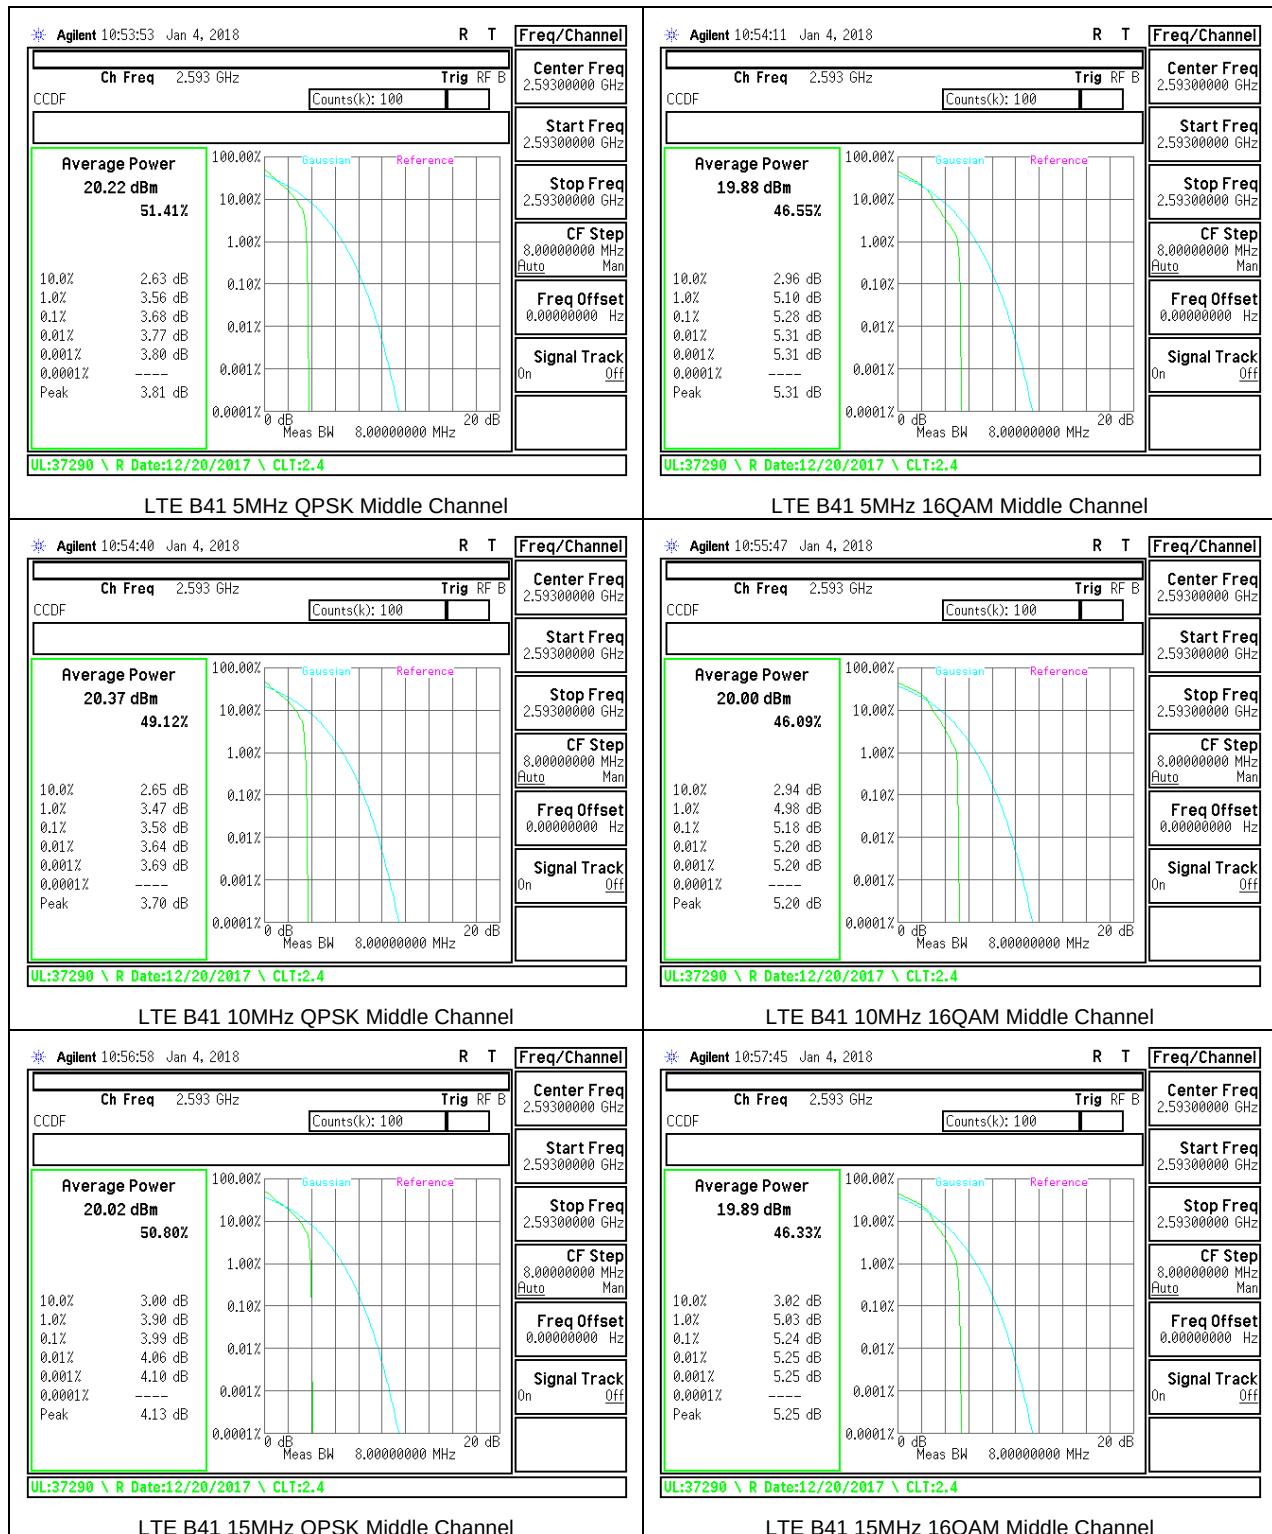

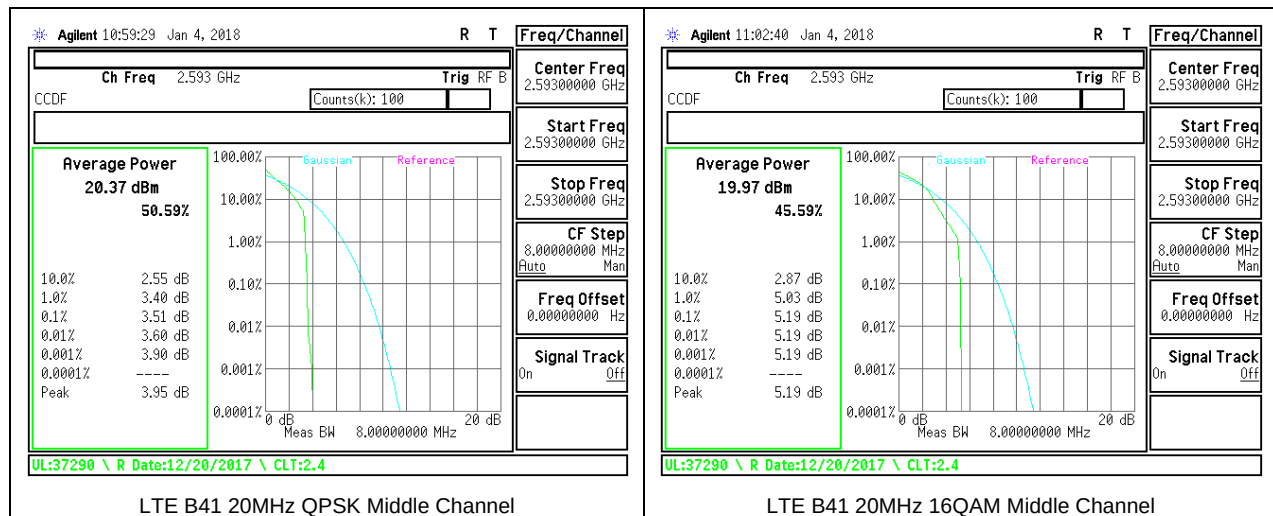

8.5.12. LTE BAND 66



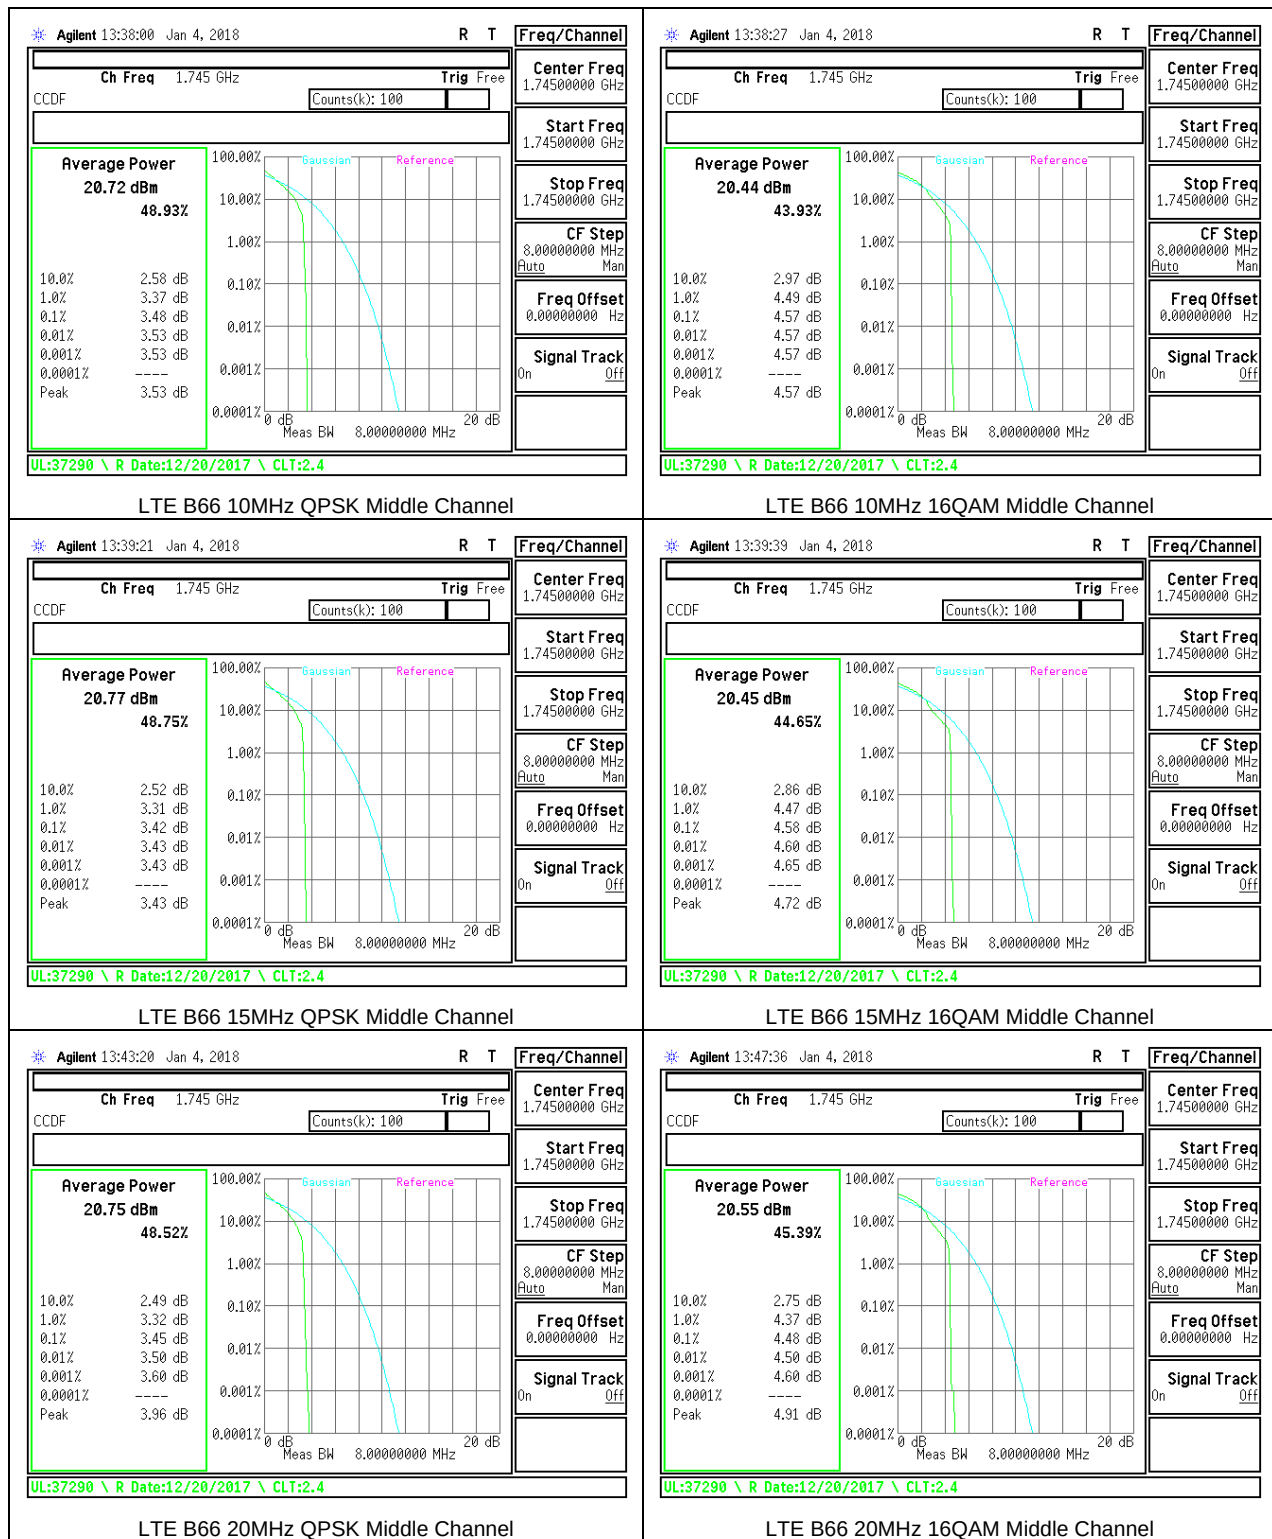

9. RADIATED TEST RESULTS

9.1. FIELD STRENGTH OF SPURIOUS RADIATION

RULE PART(S)

FCC: §2.1053, §22.917, §24.238, §27.53, §90.691

LIMIT

FCC: §22.917(a), §24.238(a), §27.53 (g), (h), §90.691

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

FCC: §27.53 (Band 13)

(c) The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log (P)$ dB.

(f) Emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals. (-70 dBW/MHz = -40 dBm/MHz).

FCC: §27.53 (a) (Band 30)

For mobile and portable stations operating in the 2305-2315 MHz: by a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

FCC: §27.53 (m) (Band 7, 41)

At least $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section.

FCC: §96.41 (Band 42)

(e) 3.5 GHz Emissions and Interference Limits—

(2) Additional protection levels. Notwithstanding paragraph (d)(1) of this section, the conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

TEST PROCEDURE

KDB 971168 D01 v02r02/D02 v01

TIA-603-E, Section 2.2.12.

MODES TESTED

- GSM 850
- GSM 1900
- WCDM Band 2
- WCDM Band 4
- WCDM Band 5
- LTE Band 2
- LTE Band 5
- LTE Band 7
- LTE Band 12
- LTE Band 13
- LTE Band 26
- LTE Band 41
- LTE Band 66

RESULTS

9.1.1. GSM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/8/2018									
Test Engineer: 43575 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: GPRS 850 MHz Harmonics									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 824.2MHz									
1648.40	-23.1	V	3.0	37.0	1.0	-59.1	-13.0	-46.1	
2472.60	-26.0	V	3.0	36.4	1.0	-61.4	-13.0	-48.4	
3296.80	-24.6	V	3.0	36.2	1.0	-59.8	-13.0	-46.8	
1648.40	-23.6	H	3.0	37.0	1.0	-59.6	-13.0	-46.6	
2472.60	-21.3	H	3.0	36.4	1.0	-56.7	-13.0	-43.7	
3296.80	-24.6	H	3.0	36.2	1.0	-59.8	-13.0	-46.8	
Mid Ch. 836.6MHz									
1673.20	-20.6	V	3.0	37.0	1.0	-56.5	-13.0	-43.5	
2509.80	-23.3	V	3.0	36.4	1.0	-58.7	-13.0	-45.7	
3346.40	-24.2	V	3.0	36.1	1.0	-59.4	-13.0	-46.4	
1673.20	-23.5	H	3.0	37.0	1.0	-59.5	-13.0	-46.5	
2509.80	-19.8	H	3.0	36.4	1.0	-55.2	-13.0	-42.2	
3346.40	-24.2	H	3.0	36.1	1.0	-59.3	-13.0	-46.3	
High Ch. 848.8MHz									
1697.60	-19.1	V	3.0	37.0	1.0	-55.1	-13.0	-42.1	
2546.40	-25.6	V	3.0	36.4	1.0	-61.0	-13.0	-48.0	
3395.20	-23.8	V	3.0	36.1	1.0	-58.9	-13.0	-45.9	
1697.60	-24.9	H	3.0	37.0	1.0	-60.8	-13.0	-47.8	
2546.40	-21.7	H	3.0	36.4	1.0	-57.1	-13.0	-44.1	
3395.20	-23.5	H	3.0	36.1	1.0	-58.6	-13.0	-45.6	

GSM 850MHz GPRS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/8/2018									
Test Engineer: 43575 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: GPRS 1900 MHz Harmonics									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 1850.2MHz									
3700.40	-23.8	V	3.0	35.9	1.0	-58.6	-13.0	-45.6	
5550.60	-22.8	V	3.0	35.5	1.0	-57.3	-13.0	-44.3	
7400.80	-20.8	V	3.0	35.7	1.0	-55.5	-13.0	-42.5	
3700.40	-24.3	H	3.0	35.9	1.0	-59.2	-13.0	-46.2	
5550.60	-23.2	H	3.0	35.5	1.0	-57.7	-13.0	-44.7	
7400.80	-21.3	H	3.0	35.7	1.0	-56.0	-13.0	-43.0	
Mid Ch. 1880MHz									
3760.00	-23.3	V	3.0	35.8	1.0	-58.1	-13.0	-45.1	
5640.00	-20.1	V	3.0	35.5	1.0	-54.5	-13.0	-41.5	
7520.00	-21.7	V	3.0	35.7	1.0	-56.4	-13.0	-43.4	
3760.00	-24.0	H	3.0	35.8	1.0	-58.8	-13.0	-45.8	
5640.00	-21.7	H	3.0	35.5	1.0	-56.2	-13.0	-43.2	
7520.00	-22.0	H	3.0	35.7	1.0	-56.7	-13.0	-43.7	
High Ch. 1909.8MHz									
3819.60	-23.3	V	3.0	35.8	1.0	-58.1	-13.0	-45.1	
5729.40	-21.8	V	3.0	35.5	1.0	-56.3	-13.0	-43.3	
7639.20	-21.2	V	3.0	35.8	1.0	-56.0	-13.0	-43.0	
3819.60	-23.0	H	3.0	35.8	1.0	-57.8	-13.0	-44.8	
5729.40	-22.0	H	3.0	35.5	1.0	-56.5	-13.0	-43.5	
7639.20	-21.1	H	3.0	35.8	1.0	-55.9	-13.0	-42.9	

GSM 1900MHz GPRS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/8/2018									
Test Engineer: 43575 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: EGPRS 850 MHz Harmonics									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 824.2MHz									
1645.40	-27.2	V	3.0	37.0	1.0	-63.2	-13.0	-50.2	
2472.60	-25.6	V	3.0	36.4	1.0	-61.1	-13.0	-48.1	
3296.80	-24.5	V	3.0	36.2	1.0	-59.7	-13.0	-46.7	
1645.40	-24.6	H	3.0	37.0	1.0	-60.6	-13.0	-47.6	
2472.60	-25.7	H	3.0	36.4	1.0	-61.2	-13.0	-48.2	
3296.80	-24.4	H	3.0	36.2	1.0	-59.5	-13.0	-46.5	
Mid Ch. 836.6MHz									
1673.20	-21.9	V	3.0	37.0	1.0	-57.9	-13.0	-44.9	
2509.80	-26.3	V	3.0	36.4	1.0	-61.7	-13.0	-48.7	
3346.40	-23.7	V	3.0	36.1	1.0	-58.9	-13.0	-45.9	
1673.20	-27.5	H	3.0	37.0	1.0	-63.5	-13.0	-50.5	
2509.80	-26.0	H	3.0	36.4	1.0	-61.4	-13.0	-48.4	
3346.40	-24.1	H	3.0	36.1	1.0	-59.2	-13.0	-46.2	
High Ch. 848.8MHz									
1697.60	-20.7	V	3.0	37.0	1.0	-56.6	-13.0	-43.6	
2546.40	-24.0	V	3.0	36.4	1.0	-59.4	-13.0	-46.4	
3395.20	-24.4	V	3.0	36.1	1.0	-59.5	-13.0	-46.5	
1697.60	-22.0	H	3.0	37.0	1.0	-58.0	-13.0	-45.0	
2546.40	-25.6	H	3.0	36.4	1.0	-61.0	-13.0	-48.0	
3395.20	-24.4	H	3.0	36.1	1.0	-59.4	-13.0	-46.4	

GSM 850MHz EGPRS

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/8/2018									
Test Engineer: 43575 OS									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: EGPRS 1900 MHz Harmonics									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 1850.2MHz									
3700.40	-23.0	V	3.0	35.9	1.0	-57.9	-13.0	-44.9	
5550.60	-20.5	V	3.0	35.5	1.0	-55.0	-13.0	-42.0	
7400.80	-21.8	V	3.0	35.7	1.0	-56.6	-13.0	-43.6	
3700.40	-23.7	H	3.0	35.9	1.0	-58.5	-13.0	-45.5	
5550.60	-21.7	H	3.0	35.5	1.0	-56.2	-13.0	-43.2	
7400.80	-22.1	H	3.0	35.7	1.0	-56.8	-13.0	-43.8	
Mid Ch. 1880MHz									
3760.00	-23.3	V	3.0	35.8	1.0	-58.1	-13.0	-45.1	
5640.00	-20.9	V	3.0	35.5	1.0	-55.4	-13.0	-42.4	
7520.00	-21.4	V	3.0	35.7	1.0	-56.1	-13.0	-43.1	
3760.00	-23.7	H	3.0	35.8	1.0	-58.5	-13.0	-45.5	
5640.00	-21.0	H	3.0	35.5	1.0	-55.5	-13.0	-42.5	
7520.00	-22.1	H	3.0	35.7	1.0	-56.8	-13.0	-43.8	
High Ch. 1909.8MHz									
3819.60	-23.6	V	3.0	35.8	1.0	-58.3	-13.0	-45.3	
5729.40	-21.0	V	3.0	35.5	1.0	-55.5	-13.0	-42.5	
7639.20	-20.6	V	3.0	35.8	1.0	-55.4	-13.0	-42.4	
3819.60	-22.9	H	3.0	35.8	1.0	-57.7	-13.0	-44.7	
5729.40	-21.4	H	3.0	35.5	1.0	-55.9	-13.0	-42.9	
7639.20	-21.5	H	3.0	35.8	1.0	-56.3	-13.0	-43.3	

GSM 1900MHz EGPRS

9.1.3. LTE BAND 2

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_QPSK Band 2 Harmonics, 1.4MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1850.7MHz										
3701.40	-18.9	V	3.0	35.9	1.0	-53.8	-13.0	-40.8		
5552.10	-18.5	V	3.0	35.5	1.0	-53.0	-13.0	-40.0		
7402.80	-16.0	V	3.0	35.7	1.0	-50.7	-13.0	-37.7		
3701.40	-19.8	H	3.0	35.9	1.0	-54.7	-13.0	-41.7		
5552.10	-16.7	H	3.0	35.5	1.0	-51.2	-13.0	-38.2		
7402.80	-15.9	H	3.0	35.7	1.0	-50.6	-13.0	-37.6		
Mid Ch, 1880MHz										
3760.00	-19.6	V	3.0	35.8	1.0	-54.4	-13.0	-41.4		
5640.00	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7520.00	-14.8	V	3.0	35.7	1.0	-49.5	-13.0	-36.5		
3760.00	-18.8	H	3.0	35.8	1.0	-53.6	-13.0	-40.6		
5640.00	-17.0	H	3.0	35.5	1.0	-51.5	-13.0	-38.5		
7520.00	-15.9	H	3.0	35.7	1.0	-50.6	-13.0	-37.6		
High Ch, 1909.3MHz										
3815.00	-18.0	V	3.0	35.8	1.0	-52.8	-13.0	-39.8		
5722.00	-18.3	V	3.0	35.5	1.0	-52.8	-13.0	-39.8		
7637.20	-14.5	V	3.0	35.8	1.0	-49.3	-13.0	-36.3		
3815.00	-19.0	H	3.0	35.8	1.0	-53.8	-13.0	-40.8		
5722.00	-16.1	H	3.0	35.5	1.0	-51.2	-13.0	-38.2		
7637.20	-15.0	H	3.0	35.8	1.0	-49.7	-13.0	-36.7		

LTE B2 1.4MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_QPSK Band 2 Harmonics, 3MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1851.5MHz										
3703.00	-20.1	V	3.0	35.9	1.0	-55.0	-13.0	-42.0		
5554.50	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7406.00	-16.6	V	3.0	35.7	1.0	-51.3	-13.0	-38.3		
3703.00	-19.1	H	3.0	35.9	1.0	-54.0	-13.0	-41.0		
5554.50	-18.2	H	3.0	35.5	1.0	-52.7	-13.0	-39.7		
7406.00	-16.3	H	3.0	35.7	1.0	-51.0	-13.0	-38.0		
Mid Ch, 1880MHz										
3760.00	-18.3	V	3.0	35.8	1.0	-53.1	-13.0	-40.1		
5640.00	-17.7	V	3.0	35.5	1.0	-52.2	-13.0	-39.2		
7520.00	-15.4	V	3.0	35.7	1.0	-50.1	-13.0	-37.1		
3760.00	-19.9	H	3.0	35.8	1.0	-54.7	-13.0	-41.7		
5640.00	-17.4	H	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7520.00	-15.1	H	3.0	35.7	1.0	-49.9	-13.0	-36.9		
High Ch, 1908.5MHz										
3817.00	-18.0	V	3.0	35.8	1.0	-52.8	-13.0	-39.8		
5725.50	-18.6	V	3.0	35.5	1.0	-53.1	-13.0	-40.1		
7634.00	-15.1	V	3.0	35.8	1.0	-49.9	-13.0	-36.9		
3817.00	-19.2	H	3.0	35.8	1.0	-54.0	-13.0	-41.0		
5725.50	-17.3	H	3.0	35.5	1.0	-52.9	-13.0	-39.9		
7634.00	-14.2	H	3.0	35.8	1.0	-49.0	-13.0	-36.0		

LTE B2 3MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_QPSK Band 2 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1852.5MHz										
3705.00	-18.8	V	3.0	35.9	1.0	-53.6	-13.0	-40.6		
5557.50	-17.4	V	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7410.00	-15.7	V	3.0	35.7	1.0	-50.5	-13.0	-37.5		
3705.00	-19.8	H	3.0	35.9	1.0	-54.7	-13.0	-41.7		
5557.50	-17.3	H	3.0	35.5	1.0	-51.8	-13.0	-38.8		
7410.00	-16.1	H	3.0	35.7	1.0	-50.8	-13.0	-37.8		
Mid Ch, 1880MHz										
3760.00	-18.0	V	3.0	35.8	1.0	-52.8	-13.0	-39.8		
5640.00	-17.6	V	3.0	35.5	1.0	-52.0	-13.0	-39.0		
7520.00	-14.9	V	3.0	35.7	1.0	-49.7	-13.0	-36.7		
3760.00	-19.4	H	3.0	35.8	1.0	-54.3	-13.0	-41.3		
5640.00	-17.2	H	3.0	35.5	1.0	-51.7	-13.0	-38.7		
7520.00	-15.7	H	3.0	35.7	1.0	-50.5	-13.0	-37.5		
High Ch, 1907.5MHz										
3815.00	-17.6	V	3.0	35.8	1.0	-52.4	-13.0	-39.4		
5722.50	-18.0	V	3.0	35.5	1.0	-52.5	-13.0	-39.5		
7630.00	-16.1	V	3.0	35.8	1.0	-50.8	-13.0	-37.8		
3815.00	-17.8	H	3.0	35.8	1.0	-52.6	-13.0	-39.6		
5722.50	-15.6	H	3.0	35.5	1.0	-50.1	-13.0	-37.1		
7630.00	-14.9	H	3.0	35.8	1.0	-49.6	-13.0	-36.6		

LTE B2 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_16QAM Band 2 Harmonics, 1.4MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1850.7MHz										
3701.40	-19.7	V	3.0	35.9	1.0	-54.6	-13.0	-41.6		
5552.10	-19.2	V	3.0	35.5	1.0	-52.7	-13.0	-39.7		
7402.80	-15.3	V	3.0	35.7	1.0	-50.0	-13.0	-37.0		
3701.40	-18.7	H	3.0	35.9	1.0	-53.6	-13.0	-40.6		
5552.10	-17.2	H	3.0	35.5	1.0	-51.7	-13.0	-38.7		
7402.80	-16.3	H	3.0	35.7	1.0	-51.0	-13.0	-38.0		
Mid Ch, 1880MHz										
3760.00	-18.7	V	3.0	35.8	1.0	-53.5	-13.0	-40.5		
5640.00	-17.9	V	3.0	35.5	1.0	-52.4	-13.0	-39.4		
7520.00	-16.4	V	3.0	35.7	1.0	-51.2	-13.0	-38.2		
3760.00	-17.6	H	3.0	35.8	1.0	-52.5	-13.0	-39.5		
5640.00	-17.0	H	3.0	35.5	1.0	-51.5	-13.0	-38.5		
7520.00	-16.1	H	3.0	35.7	1.0	-50.8	-13.0	-37.8		
High Ch, 1909.3MHz										
3815.00	-19.1	V	3.0	35.8	1.0	-53.9	-13.0	-40.9		
5722.00	-17.5	V	3.0	35.5	1.0	-52.0	-13.0	-39.0		
7637.20	-15.2	V	3.0	35.8	1.0	-50.0	-13.0	-37.0		
3815.00	-19.1	H	3.0	35.8	1.0	-53.9	-13.0	-40.9		
5722.00	-17.9	H	3.0	35.5	1.0	-52.4	-13.0	-39.4		
7637.20	-15.5	H	3.0	35.8	1.0	-50.2	-13.0	-37.2		

LTE B2 1.4MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_QPSK Band 2 Harmonics, 3MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1851.5MHz										
3703.00	-20.4	V	3.0	35.9	1.0	-55.3	-13.0	-42.3		
5554.50	-17.5	V	3.0	35.5	1.0	-52.0	-13.0	-39.0		
7406.00	-15.6	V	3.0	35.7	1.0	-50.3	-13.0	-37.3		
3703.00	-20.1	H	3.0	35.9	1.0	-55.0	-13.0	-42.0		
5554.50	-17.3	H	3.0	35.5	1.0	-51.7	-13.0	-38.7		
7406.00	-16.3	H	3.0	35.7	1.0	-51.0	-13.0	-38.0		
Mid Ch, 1880MHz										
3760.00	-19.3	V	3.0	35.8	1.0	-54.1	-13.0	-41.1		
5640.00	-18.0	V	3.0	35.5	1.0	-52.5	-13.0	-39.5		
7520.00	-16.4	V	3.0	35.7	1.0	-50.0	-13.0	-37.0		
3760.00	-18.4	H	3.0	35.8	1.0	-53.2	-13.0	-40.2		
5640.00	-17.5	H	3.0	35.5	1.0	-52.0	-13.0	-39.0		
7520.00	-16.2	H	3.0	35.7	1.0	-50.9	-13.0	-37.9		
High Ch, 1908.5MHz										
3817.00	-19.2	V	3.0	35.8	1.0	-54.0	-13.0	-41.0		
5725.50	-17.8	V	3.0	35.5	1.0	-52.3	-13.0	-39.3		
7634.00	-15.4	V	3.0	35.8	1.0	-49.4	-13.0	-36.4		
3817.00	-19.5	H	3.0	35.8	1.0	-54.3	-13.0	-41.3		
5725.50	-18.3	H	3.0	35.5	1.0	-52.8	-13.0	-39.8		
7634.00	-15.9	H	3.0	35.8	1.0	-50.6	-13.0	-37.6		

LTE B2 3MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_16QAM Band 2 Harmonics, 5MHz Bandwidth										
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1852.5MHz										
3705.00	-19.5	V	3.0	35.9	1.0	-54.4	-13.0	-41.4		
5557.50	-16.4	V	3.0	35.5	1.0	-50.9	-13.0	-37.9		
7410.00	-15.6	V	3.0	35.7	1.0	-50.3	-13.0	-37.3		
3705.00	-19.2	H	3.0	35.9	1.0	-54.1	-13.0	-41.1		
5557.50	-17.3	H	3.0	35.5	1.0	-51.7	-13.0	-38.7		
7410.00	-16.4	H	3.0	35.7	1.0	-51.2	-13.0	-38.2		
Mid Ch, 1880MHz										
3760.00	-19.2	V	3.0	35.8	1.0	-54.0	-13.0	-41.0		
5640.00	-16.7	V	3.0	35.5	1.0	-51.2	-13.0	-38.2		
7520.00	-15.1	V	3.0	35.7	1.0	-49.9	-13.0	-36.9		
3760.00	-17.1	H	3.0	35.8	1.0	-51.9	-13.0	-38.9		
5640.00	-15.3	H	3.0	35.5	1.0	-49.8	-13.0	-36.8		
7520.00	-14.4	H	3.0	35.7	1.0	-49.1	-13.0	-36.1		
High Ch, 1907.5MHz										
3815.00	-18.0	V	3.0	35.8	1.0	-52.8	-13.0	-39.8		
5722.50	-14.9	V	3.0	35.5	1.0	-49.4	-13.0	-36.4		
7630.00	-14.7	V	3.0	35.8	1.0	-49.4	-13.0	-36.4		
3815.00	0.0	H	3.0	35.8	1.0	-34.8	-13.0	-21.8		
5722.50	0.0	H	3.0	35.5	1.0	-34.5	-13.0	-21.5		
7630.00	0.0	H	3.0	35.8	1.0	-34.8	-13.0	-21.8		

LTE B2 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/3/2018									
Test Engineer:	45256 JB									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_QPSK Band 2 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1855MHz										
3710.00	-18.7	V	3.0	35.9	1.0	-53.5	-13.0	-40.5		
5565.00	-16.7	V	3.0	35.5	1.0	-51.2	-13.0	-38.2		
7420.00	-15.5	V	3.0	35.7	1.0	-50.3	-13.0	-37.3		
3710.00	-19.1	H	3.0	35.9	1.0	-53.9	-13.0	-40.9		
5565.00	-17.4	H	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7420.00	-15.3	H	3.0	35.7	1.0	-50.0	-13.0	-37.0		
Mid Ch, 1880MHz										
3760.00	-19.0	V	3.0	35.8	1.0	-53.8	-13.0	-40.8		
5640.00	-14.6	V	3.0	35.5	1.0	-49.1	-13.0	-36.1		
7520.00	-15.6	V	3.0	35.7	1.0	-50.3	-13.0	-37.3		
3760.00	-17.8	H	3.0	35.8	1.0	-52.7	-13.0	-39.7		
5640.00	-17.7	H	3.0	35.5	1.0	-52.2	-13.0	-39.2		
7520.00	-14.9	H	3.0	35.7	1.0	-49.6	-13.0	-36.6		
High Ch, 1905MHz										
3810.00	-18.7	V	3.0	35.8	1.0	-53.5	-13.0	-40.5		
5715.00	-17.5	V	3.0	35.5	1.0	-52.0	-13.0	-39.0		
7620.00	-15.6	V	3.0	35.8	1.0	-50.4	-13.0	-37.4		
3810.00	-19.0	H	3.0	35.8	1.0	-53.7	-13.0	-40.7		
5715.00	-17.6	H	3.0	35.5	1.0	-52.1	-13.0	-39.1		
7620.00	-15.4	H	3.0	35.8	1.0	-50.1	-13.0	-37.1		

LTE B2 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/3/2018									
Test Engineer:	45256 JB									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_QPSK Band 2 Harmonics, 15MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1857.5MHz										
3715.00	-20.3	V	3.0	35.8	1.0	-55.2	-13.0	-42.2		
5572.50	-18.0	V	3.0	35.5	1.0	-52.4	-13.0	-39.4		
7430.00	-15.9	V	3.0	35.7	1.0	-50.7	-13.0	-37.7		
3715.00	-20.1	H	3.0	35.8	1.0	-55.5	-13.0	-42.5		
5572.50	-17.2	H	3.0	35.5	1.0	-51.7	-13.0	-38.7		
7430.00	-15.9	H	3.0	35.7	1.0	-50.6	-13.0	-37.6		
Mid Ch, 1880MHz										
3760.00	-17.7	V	3.0	35.8	1.0	-52.5	-13.0	-39.5		
5640.00	-16.9	V	3.0	35.5	1.0	-51.4	-13.0	-38.4		
7520.00	-16.1	V	3.0	35.7	1.0	-50.9	-13.0	-37.9		
3760.00	-20.1	H	3.0	35.8	1.0	-54.9	-13.0	-41.9		
5640.00	-18.1	H	3.0	35.5	1.0	-52.6	-13.0	-39.6		
7520.00	-15.4	H	3.0	35.7	1.0	-50.1	-13.0	-37.1		
High Ch, 1902.5MHz										
3805.00	-18.3	V	3.0	35.8	1.0	-53.1	-13.0	-40.1		
5707.50	-17.9	V	3.0	35.5	1.0	-52.4	-13.0	-39.4		
7610.00	-14.3	V	3.0	35.8	1.0	-49.1	-13.0	-36.1		
3805.00	-19.7	H	3.0	35.8	1.0	-54.4	-13.0	-41.4		
5707.50	-18.3	H	3.0	35.5	1.0	-52.8	-13.0	-39.8		
7610.00	-14.5	H	3.0	35.8	1.0	-49.3	-13.0	-36.3		

LTE B2 15MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/3/2018									
Test Engineer:	45256 JB									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_QPSK Band 2 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1860MHz										
3720.00	-18.9	V	3.0	35.8	1.0	-53.7	-13.0	-40.7		
5580.00	-17.5	V	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7440.00	-15.0	V	3.0	35.7	1.0	-49.7	-13.0	-36.7		
3720.00	-19.3	H	3.0	35.8	1.0	-54.1	-13.0	-41.1		
5580.00	-17.2	H	3.0	35.5	1.0	-51.6	-13.0	-38.6		
7440.00	-15.6	H	3.0	35.7	1.0	-50.4	-13.0	-37.4		
Mid Ch, 1880MHz										
3760.00	-19.4	V	3.0	35.8	1.0	-54.2	-13.0	-41.2		
5640.00	-17.7	V	3.0	35.5	1.0	-52.2	-13.0	-39.2		
7520.00	-15.6	V	3.0	35.7	1.0	-50.3	-13.0	-37.3		
3760.00	-17.9	H	3.0	35.8	1.0	-52.7	-13.0	-39.7		
5640.00	-17.4	H	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7520.00	-16.5	H	3.0	35.7	1.0	-51.3	-13.0	-38.3		
High Ch, 1900MHz										
3800.00	-18.6	V	3.0	35.8	1.0	-53.4	-13.0	-40.4		
5700.00	-18.1	V	3.0	35.5	1.0	-52.6	-13.0	-39.6		
7600.00	-15.9	V	3.0	35.8	1.0	-50.7	-13.0	-37.7		
3800.00	-19.7	H	3.0	35.8	1.0	-53.4	-13.0	-40.4		
5700.00	-17.8	H	3.0	35.5	1.0	-52.3	-13.0	-39.3		
7600.00	-15.6	H	3.0	35.8	1.0	-50.4	-13.0	-37.4		

LTE B2 20MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/3/2018									
Test Engineer:	45256 JB									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_16QAM Band 2 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes	
Low Ch, 1855MHz										
3710.00	-19.8	V	3.0	35.9	1.0	-54.7	-13.0	-41.7		
5565.00	-17.3	V	3.0	35.5	1.0	-51.2	-13.0	-38.8		
7420.00	-16.2	V	3.0	35.7	1.0	-51.0	-13.0	-38.0		
3710.00	-20.5	H	3.0	35.9	1.0	-55.3	-13.0	-42.3		
5565.00	-17.2	H	3.0	35.5	1.0	-51.7	-13.0	-38.7		
7420.00	-16.1	H	3.0	35.7	1.0	-50.8	-13.0	-37.8		
Mid Ch, 1880MHz										
3760.00	-20.0	V	3.0	35.8	1.0	-54.8	-13.0	-41.8		
5640.00	-15.8	V	3.0	35.5	1.0	-49.7	-13.0	-37.3		
7520.00	-15.9	V	3.0	35.7	1.0	-50.6	-13.0	-37.6		
3760.00	-18.8	H	3.0	35.8	1.0	-53.6	-13.0	-40.6		
5640.00	-17.4	H	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7520.00	-14.8	H	3.0	35.7	1.0	-49.6	-13.0	-36.6		
High Ch, 1905MHz										
3810.00	-20.4	V	3.0	35.8	1.0	-55.1	-13.0	-42.1		
5715.00	-17.5	V	3.0	35.5	1.0	-51.9	-13.0	-38.9		
7620.00	-15.7	V	3.0	35.8	1.0	-50.4	-13.0	-37.4		
3810.00	-19.0	H	3.0	35.8	1.0	-53.8	-13.0	-40.8		
5715.00	-17.5	H	3.0	35.5	1.0	-52.0	-13.0	-39.0		
7620.00	-15.1	H	3.0	35.8	1.0	-49.8	-13.0	-36.8		

LTE B2 10MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:										

9.1.4. LTE BAND 4

LTE Band 4 (Frequency range: 1710-1755 MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth.

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/5/2018									
Test Engineer: 36005 RA									
Configuration: EUT + Charger + Headset									
Location: Chamber A									
Mode: LTE_QPSK Band 5 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 829MHz									
1658.00	-27.7	V	3.0	37.0	1.0	-63.7	-13.0	-50.7	
2487.00	-22.6	V	3.0	36.4	1.0	-58.0	-13.0	-45.0	
3316.00	-20.6	V	3.0	36.1	1.0	-55.7	-13.0	-42.7	
1658.00	-27.9	H	3.0	37.0	1.0	-63.9	-13.0	-50.9	
2487.00	-23.1	H	3.0	36.4	1.0	-58.6	-13.0	-45.6	
3316.00	-21.4	H	3.0	36.1	1.0	-56.6	-13.0	-43.6	
Mid Ch, 836.5MHz									
1673.00	-27.5	V	3.0	37.0	1.0	-63.5	-13.0	-50.5	
2509.50	-23.9	V	3.0	36.4	1.0	-59.3	-13.0	-46.3	
3346.00	-21.7	V	3.0	36.1	1.0	-56.9	-13.0	-43.9	
1673.00	-27.7	H	3.0	37.0	1.0	-63.7	-13.0	-50.7	
2509.50	-23.1	H	3.0	36.4	1.0	-58.5	-13.0	-45.5	
3346.00	-20.6	H	3.0	36.1	1.0	-55.7	-13.0	-42.7	
High Ch, 844MHz									
1688.00	-27.6	V	3.0	37.0	1.0	-63.6	-13.0	-50.6	
2532.00	-23.9	V	3.0	36.4	1.0	-59.3	-13.0	-46.3	
3376.00	-21.7	V	3.0	36.1	1.0	-56.8	-13.0	-43.8	
1688.00	-27.4	H	3.0	37.0	1.0	-63.4	-13.0	-50.4	
2532.00	-23.6	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	
3376.00	-21.4	H	3.0	36.1	1.0	-56.5	-13.0	-43.5	
LTE B5 10MHz QPSK									
UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/5/2018									
Test Engineer: 36005 RA									
Configuration: EUT + Charger + Headset									
Location: Chamber A									
Mode: LTE_16QAM Band 5 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 829MHz									
1658.00	-26.9	V	3.0	37.0	1.0	-62.9	-13.0	-49.9	
2487.00	-23.0	V	3.0	36.4	1.0	-58.4	-13.0	-45.4	
3316.00	-20.7	V	3.0	36.1	1.0	-55.8	-13.0	-42.8	
1658.00	-27.7	H	3.0	37.0	1.0	-63.7	-13.0	-50.7	
2487.00	-23.0	H	3.0	36.4	1.0	-58.4	-13.0	-45.4	
3316.00	-21.5	H	3.0	36.1	1.0	-56.6	-13.0	-43.6	
Mid Ch, 836.5MHz									
1673.00	-27.5	V	3.0	37.0	1.0	-63.5	-13.0	-50.5	
2509.50	-23.2	V	3.0	36.4	1.0	-58.6	-13.0	-45.6	
3346.00	-21.3	V	3.0	36.1	1.0	-56.4	-13.0	-43.4	
1673.00	-27.8	H	3.0	37.0	1.0	-63.8	-13.0	-50.8	
2509.50	-22.7	H	3.0	36.4	1.0	-58.1	-13.0	-45.1	
3346.00	-21.8	H	3.0	36.1	1.0	-56.9	-13.0	-43.9	
High Ch, 844MHz									
1688.00	-27.5	V	3.0	37.0	1.0	-63.5	-13.0	-50.5	
2532.00	-23.8	V	3.0	36.4	1.0	-59.2	-13.0	-46.2	
3376.00	-21.7	V	3.0	36.1	1.0	-56.8	-13.0	-43.8	
1688.00	-27.6	H	3.0	37.0	1.0	-63.6	-13.0	-50.6	
2532.00	-23.5	H	3.0	36.4	1.0	-59.0	-13.0	-46.0	
3376.00	-21.7	H	3.0	36.1	1.0	-56.8	-13.0	-43.8	
LTE B5 10MHz 16QAM									

9.1.6. LTE BAND 7

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_QPSK Band 7 Harmonics, 5MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2502.5MHz									
5005.00	-15.9	V	3.0	35.5	1.0	-50.4	-25.0	-25.4	
7507.50	-16.6	V	3.0	35.7	1.0	-51.3	-25.0	-26.3	
10010.00	-13.1	V	3.0	36.0	1.0	-48.2	-25.0	-23.2	
5005.00	-16.7	H	3.0	35.5	1.0	-51.1	-25.0	-26.1	
7507.50	-11.0	H	3.0	35.7	1.0	-45.7	-25.0	-20.7	
10010.00	-12.0	H	3.0	36.0	1.0	-47.0	-25.0	-22.0	
Mid Ch, 2535MHz									
5070.00	-15.2	V	3.0	35.4	1.0	-49.7	-25.0	-24.7	
7605.00	-13.6	V	3.0	35.8	1.0	-48.4	-25.0	-23.4	
10140.00	-11.7	V	3.0	36.0	1.0	-46.7	-25.0	-21.7	
5070.00	-17.0	H	3.0	35.4	1.0	-51.5	-25.0	-26.5	
7605.00	-13.6	H	3.0	35.8	1.0	-48.4	-25.0	-23.4	
10140.00	-11.9	H	3.0	36.0	1.0	-46.9	-25.0	-21.9	
High Ch, 2567.5MHz									
5135.00	-14.0	V	3.0	35.4	1.0	-48.4	-25.0	-23.4	
7702.50	-14.7	V	3.0	35.8	1.0	-49.5	-25.0	-24.5	
10270.00	-12.0	V	3.0	35.9	1.0	-46.9	-25.0	-21.9	
5135.00	-16.3	H	3.0	35.4	1.0	-50.7	-25.0	-25.7	
7702.50	-11.8	H	3.0	35.8	1.0	-46.8	-25.0	-21.8	
10270.00	-11.6	H	3.0	35.9	1.0	-46.5	-25.0	-21.5	

LTE B7 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_QPSK Band 7 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2505MHz									
5010.00	-15.0	V	3.0	35.5	1.0	-49.5	-25.0	-24.5	
7515.00	-14.4	V	3.0	35.7	1.0	-49.2	-25.0	-24.2	
10020.00	-11.6	V	3.0	36.0	1.0	-46.6	-25.0	-21.6	
5010.00	-13.4	H	3.0	35.5	1.0	-47.9	-25.0	-22.9	
7515.00	-11.1	H	3.0	35.7	1.0	-45.8	-25.0	-20.8	
10020.00	-9.5	H	3.0	36.0	1.0	-44.5	-25.0	-19.5	
Mid Ch, 2535MHz									
5070.00	-16.7	V	3.0	35.4	1.0	-51.1	-25.0	-26.1	
7605.00	-13.6	V	3.0	35.8	1.0	-48.4	-25.0	-23.4	
10140.00	-12.8	V	3.0	36.0	1.0	-47.8	-25.0	-22.8	
5070.00	-15.3	H	3.0	35.4	1.0	-49.7	-25.0	-24.7	
7605.00	-14.5	H	3.0	35.8	1.0	-49.2	-25.0	-24.2	
10140.00	-11.9	H	3.0	36.0	1.0	-46.9	-25.0	-21.9	
High Ch, 2565MHz									
5130.00	-13.1	V	3.0	35.4	1.0	-47.5	-25.0	-22.5	
7685.00	-9.5	V	3.0	35.8	1.0	-44.3	-25.0	-19.3	
10260.00	-6.1	V	3.0	35.9	1.0	-41.0	-25.0	-16.0	
5130.00	-13.2	H	3.0	35.4	1.0	-47.6	-25.0	-22.6	
7685.00	-12.7	H	3.0	35.8	1.0	-47.5	-25.0	-22.5	
10260.00	-7.6	H	3.0	35.9	1.0	-42.5	-25.0	-17.5	

LTE B7 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_QPSK Band 7 Harmonics, 15MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2507.5MHz									
5015.00	-11.0	V	3.0	35.5	1.0	-45.5	-25.0	-20.5	
7522.50	-10.0	V	3.0	35.7	1.0	-44.8	-25.0	-19.8	
10030.00	-6.4	V	3.0	36.0	1.0	-41.4	-25.0	-16.4	
5015.00	-11.6	H	3.0	35.5	1.0	-46.1	-25.0	-21.1	
7522.50	-10.0	H	3.0	35.7	1.0	-44.8	-25.0	-19.8	
10030.00	-6.3	H	3.0	36.0	1.0	-41.4	-25.0	-16.4	
Mid Ch, 2535MHz									
5070.00	-11.0	V	3.0	35.4	1.0	-45.4	-25.0	-20.4	
7605.00	-10.0	V	3.0	35.8	1.0	-44.8	-25.0	-19.8	
10140.00	-5.9	V	3.0	36.0	1.0	-40.9	-25.0	-15.9	
5070.00	-12.2	H	3.0	35.4	1.0	-46.7	-25.0	-21.7	
7605.00	-10.5	H	3.0	35.8	1.0	-45.3	-25.0	-20.3	
10140.00	-6.4	H	3.0	36.0	1.0	-41.4	-25.0	-16.4	
High Ch, 2562.5MHz									
5125.00	-11.8	V	3.0	35.4	1.0	-46.3	-25.0	-21.3	
7687.50	-10.0	V	3.0	35.8	1.0	-44.8	-25.0	-19.8	
10250.00	-6.4	V	3.0	35.9	1.0	-41.3	-25.0	-16.3	
5125.00	-11.7	H	3.0	35.4	1.0	-46.2	-25.0	-21.2	
7687.50	-10.8	H	3.0	35.8	1.0	-45.6	-25.0	-20.6	
10250.00	-5.6	H	3.0	35.9	1.0	-40.5	-25.0	-15.5	

LTE B7 15MHz QPSK

									UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_16QAM Band 7 Harmonics, 5MHz Bandwidth																		
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes									
Low Ch, 2502.5MHz																		
5005.00	-15.3	V	3.0	35.5	1.0	-49.7	-25.0	-24.7										
7507.50	-12.2	V	3.0	35.7	1.0	-46.9	-25.0	-21.9										
10010.00	-12.6	V	3.0	36.0	1.0	-47.6	-25.0	-22.6										
5005.00	-15.4	H	3.0	35.5	1.0	-49.9	-25.0	-24.9										
7507.50	-10.4	H	3.0	35.7	1.0	-45.1	-25.0	-20.1										
10010.00	-12.1	H	3.0	36.0	1.0	-47.1	-25.0	-22.1										
Mid Ch, 2535MHz																		
5070.00	-16.2	V	3.0	35.4	1.0	-52.7	-25.0	-27.7										
7605.00	-13.7	V	3.0	35.8	1.0	-48.5	-25.0	-23.5										
10140.00	-12.6	V	3.0	36.0	1.0	-47.6	-25.0	-22.6										
5070.00	-16.2	H	3.0	35.4	1.0	-50.6	-25.0	-25.6										
7605.00	-15.3	H	3.0	35.8	1.0	-50.6	-25.0	-25.6										
10140.00	-12.6	H	3.0	36.0	1.0	-47.6	-25.0	-22.6										
High Ch, 2567.5MHz																		
5135.00	-14.8	V	3.0	35.4	1.0	-49.0	-25.0	-24.0										
7702.50	-15.4	V	3.0	35.8	1.0	-50.2	-25.0	-25.2										
10270.00	-11.9	V	3.0	35.9	1.0	-46.8	-25.0	-21.8										
5135.00	-17.9	H	3.0	35.4	1.0	-52.4	-25.0	-27.4										
7702.50	-10.3	H	3.0	35.8	1.0	-45.1	-25.0	-20.1										
10270.00	-12.1	H	3.0	35.9	1.0	-47.0	-25.0	-22.0										

LTE B7 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_16QAM Band 7 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2505MHz									
5010.00	-17.8	V	3.0	35.5	1.0	-52.2	-25.0	-27.2	
7515.00	-10.9	V	3.0	35.7	1.0	-45.7	-25.0	-20.7	
10020.00	-13.1	V	3.0	36.0	1.0	-48.1	-25.0	-23.1	
5010.00	-13.1	H	3.0	35.5	1.0	-47.5	-25.0	-22.5	
7515.00	-12.0	H	3.0	35.7	1.0	-46.7	-25.0	-21.7	
10020.00	-9.0	H	3.0	36.0	1.0	-44.0	-25.0	-19.0	
Mid Ch, 2535MHz									
5070.00	-17.5	V	3.0	35.4	1.0	-51.9	-25.0	-26.9	
7605.00	-12.3	V	3.0	35.8	1.0	-47.1	-25.0	-22.1	
10140.00	-12.4	V	3.0	36.0	1.0	-47.4	-25.0	-22.4	
5070.00	-17.4	H	3.0	35.4	1.0	-51.9	-25.0	-26.9	
7605.00	-15.8	H	3.0	35.8	1.0	-50.6	-25.0	-25.6	
10140.00	-12.6	H	3.0	36.0	1.0	-47.6	-25.0	-22.6	
High Ch, 2565MHz									
5130.00	-11.1	V	3.0	35.4	1.0	-45.6	-25.0	-20.6	
7685.00	-9.8	V	3.0	35.8	1.0	-44.6	-25.0	-19.6	
10260.00	-6.0	V	3.0	35.9	1.0	-40.9	-25.0	-15.9	
5130.00	-12.4	H	3.0	35.4	1.0	-46.9	-25.0	-21.9	
7685.00	-10.0	H	3.0	35.8	1.0	-44.8	-25.0	-19.8	
10260.00	-6.0	H	3.0	35.9	1.0	-40.9	-25.0	-15.9	

LTE B7 10MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/3/2018 Test Engineer: 45256_JB Configuration: EUT + Support Equipment Location: Chamber A Mode: LTE_16QAM Band 7 Harmonics, 15MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2507.5MHz									
5015.00	-11.0	V	3.0	35.5	1.0	-45.4	-25.0	-20.4	
7522.50	-9.4	V	3.0	35.7	1.0	-44.1	-25.0	-19.1	
10030.00	-6.3	V	3.0	36.0	1.0	-41.3	-25.0	-16.3	
5015.00	-11.6	H	3.0	35.5	1.0	-46.8	-25.0	-21.8	
7522.50	-10.6	H	3.0	35.7	1.0	-45.3	-25.0	-20.3	
10030.00	-6.4	H	3.0	36.0	1.0	-41.5	-25.0	-16.5	
Mid Ch, 2535MHz									
5070.00	-12.8	V	3.0	35.4	1.0	-47.3	-25.0	-22.3	
7605.00	-9.9	V	3.0	35.8	1.0	-44.6	-25.0	-19.6	
10140.00	-6.0	V	3.0	36.0	1.0	-40.9	-25.0	-15.9	
5070.00	-10.9	H	3.0	35.4	1.0	-46.4	-25.0	-21.4	
7605.00	-10.1	H	3.0	35.8	1.0	-44.9	-25.0	-19.9	
10140.00	-4.9	H	3.0	36.0	1.0	-39.9	-25.0	-14.9	
High Ch, 2562.5MHz									
5125.00	-12.5	V	3.0	35.4	1.0	-46.9	-25.0	-21.9	
7687.50	-10.3	V	3.0	35.8	1.0	-45.1	-25.0	-20.1	
10250.00	-6.9	V	3.0	35.9	1.0	-41.8	-25.0	-16.8	
5125.00	-11.9	H	3.0	35.4	1.0	-46.4	-25.0	-21.4	
7687.50	-9.4	H	3.0	35.8	1.0	-44.1	-25.0	-19.1	
10250.00	-6.2	H	3.0	35.9	1.0	-41.1	-25.0	-16.1	

LTE B7 15MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/3/2018									
Test Engineer: 45256 JB									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_QPSK Band 7 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2510MHz									
5020.00	-11.2	V	3.0	35.5	1.0	-45.6	-25.0	-20.6	
7530.00	-10.3	V	3.0	35.7	1.0	-45.0	-25.0	-20.0	
10040.00	-6.4	V	3.0	36.0	1.0	-41.4	-25.0	-16.4	
5020.00	-11.2	H	3.0	35.5	1.0	-45.7	-25.0	-20.7	
7530.00	-10.4	H	3.0	35.7	1.0	-45.2	-25.0	-20.2	
10040.00	-6.9	H	3.0	36.0	1.0	-41.9	-25.0	-16.9	
Mid Ch, 2535MHz									
5070.00	-11.7	V	3.0	35.4	1.0	-46.2	-25.0	-21.2	
7605.00	-10.0	V	3.0	35.8	1.0	-44.8	-25.0	-19.8	
10140.00	-6.9	V	3.0	36.0	1.0	-41.9	-25.0	-16.9	
5070.00	-12.7	H	3.0	35.4	1.0	-47.1	-25.0	-22.1	
7605.00	-8.9	H	3.0	35.8	1.0	-44.6	-25.0	-19.6	
10140.00	-6.8	H	3.0	36.0	1.0	-41.8	-25.0	-16.8	
High Ch, 2560MHz									
5120.00	-11.3	V	3.0	35.4	1.0	-45.7	-25.0	-20.7	
7680.00	-10.4	V	3.0	35.8	1.0	-45.2	-25.0	-20.2	
10240.00	-6.5	V	3.0	35.9	1.0	-41.4	-25.0	-16.4	
5120.00	-12.6	H	3.0	35.4	1.0	-47.2	-25.0	-22.2	
7680.00	-10.2	H	3.0	35.8	1.0	-45.0	-25.0	-20.0	
10240.00	-6.6	H	3.0	35.9	1.0	-41.5	-25.0	-16.5	
LTE B7 20MHz QPSK									
UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/3/2018									
Test Engineer: 45256 JB									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_16QAM Band 7 Harmonics, 20MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 2510MHz									
5020.00	-10.9	V	3.0	35.5	1.0	-45.3	-25.0	-20.3	
7530.00	-10.2	V	3.0	35.7	1.0	-45.0	-25.0	-20.0	
10040.00	-6.1	V	3.0	36.0	1.0	-41.1	-25.0	-16.1	
5020.00	-12.8	H	3.0	35.5	1.0	-47.3	-25.0	-22.3	
7530.00	-10.4	H	3.0	35.7	1.0	-45.1	-25.0	-20.1	
10040.00	-6.6	H	3.0	36.0	1.0	-41.6	-25.0	-16.6	
Mid Ch, 2535MHz									
5070.00	-12.4	V	3.0	35.4	1.0	-46.9	-25.0	-21.9	
7605.00	-8.6	V	3.0	35.8	1.0	-44.3	-25.0	-19.3	
10140.00	-6.4	V	3.0	36.0	1.0	-41.3	-25.0	-16.3	
5070.00	-10.8	H	3.0	35.4	1.0	-45.3	-25.0	-20.3	
7605.00	-8.5	H	3.0	35.8	1.0	-44.3	-25.0	-19.3	
10140.00	-7.0	H	3.0	36.0	1.0	-41.9	-25.0	-16.9	
High Ch, 2560MHz									
5120.00	-11.9	V	3.0	35.4	1.0	-46.4	-25.0	-21.4	
7680.00	-10.1	V	3.0	35.8	1.0	-44.9	-25.0	-19.9	
10240.00	-6.8	V	3.0	35.9	1.0	-41.7	-25.0	-16.7	
5120.00	-11.4	H	3.0	35.4	1.0	-45.8	-25.0	-20.8	
7680.00	-10.6	H	3.0	35.8	1.0	-45.3	-25.0	-20.3	
10240.00	-6.5	H	3.0	35.9	1.0	-41.4	-25.0	-16.4	
LTE B7 20MHz 16QAM									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/8/2018									
Test Engineer: 38917									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_QPSK Band 12 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 704MHz									
1408.00	-31.0	V	3.0	37.4	1.0	-67.4	-13.0	-54.4	
2112.00	-19.6	V	3.0	36.6	1.0	-55.2	-13.0	-42.2	
2816.00	-21.6	V	3.0	36.4	1.0	-56.9	-13.0	-43.9	
1408.00	-31.2	H	3.0	37.4	1.0	-67.6	-13.0	-54.6	
2112.00	-14.1	H	3.0	36.6	1.0	-49.7	-13.0	-36.7	
2816.00	-22.2	H	3.0	36.4	1.0	-57.6	-13.0	-44.6	
Mid Ch. 707.5MHz									
1415.00	-29.9	V	3.0	37.4	1.0	-66.3	-13.0	-53.3	
2122.50	-19.8	V	3.0	36.6	1.0	-55.4	-13.0	-42.4	
2830.00	-22.2	V	3.0	36.4	1.0	-57.6	-13.0	-44.6	
1415.00	-29.6	H	3.0	37.4	1.0	-65.9	-13.0	-52.9	
2122.50	-13.4	H	3.0	36.6	1.0	-49.0	-13.0	-36.0	
2830.00	-21.5	H	3.0	36.4	1.0	-56.9	-13.0	-43.9	
High Ch. 711MHz									
1422.00	-29.3	V	3.0	37.3	1.0	-65.6	-13.0	-52.6	
2133.00	-18.8	V	3.0	36.6	1.0	-54.4	-13.0	-41.4	
2844.00	-22.1	V	3.0	36.4	1.0	-57.5	-13.0	-44.5	
1422.00	-29.7	H	3.0	37.3	1.0	-66.1	-13.0	-53.1	
2133.00	-13.6	H	3.0	36.6	1.0	-49.2	-13.0	-36.2	
2844.00	-21.5	H	3.0	36.4	1.0	-56.9	-13.0	-43.9	
LTE B12 10MHz QPSK									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC									
Project #: 12097277									
Date: 1/8/2018									
Test Engineer: 38917									
Configuration: EUT + Support Equipment									
Location: Chamber A									
Mode: LTE_16QAM Band 12 Harmonics, 10MHz Bandwidth									
f MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch. 704MHz									
1408.00	-31.6	V	3.0	37.4	1.0	-68.0	-13.0	-55.0	
2112.00	-20.2	V	3.0	36.6	1.0	-55.7	-13.0	-42.7	
2816.00	-22.2	V	3.0	36.4	1.0	-57.5	-13.0	-44.5	
1408.00	-31.8	H	3.0	37.4	1.0	-68.2	-13.0	-55.2	
2112.00	-14.7	H	3.0	36.6	1.0	-50.3	-13.0	-37.3	
2816.00	-22.8	H	3.0	36.4	1.0	-58.2	-13.0	-45.2	
Mid Ch. 707.5MHz									
1415.00	-30.5	V	3.0	37.4	1.0	-66.9	-13.0	-53.9	
2122.50	-20.4	V	3.0	36.6	1.0	-56.0	-13.0	-43.0	
2830.00	-22.8	V	3.0	36.4	1.0	-58.1	-13.0	-45.1	
1415.00	-30.2	H	3.0	37.4	1.0	-66.5	-13.0	-53.5	
2122.50	-14.0	H	3.0	36.6	1.0	-49.6	-13.0	-36.6	
2830.00	-22.1	H	3.0	36.4	1.0	-57.5	-13.0	-44.5	
High Ch. 711MHz									
1422.00	-29.9	V	3.0	37.3	1.0	-66.2	-13.0	-53.2	
2133.00	-19.4	V	3.0	36.6	1.0	-55.0	-13.0	-42.0	
2844.00	-22.7	V	3.0	36.4	1.0	-58.1	-13.0	-45.1	
1422.00	-30.3	H	3.0	37.3	1.0	-66.7	-13.0	-53.7	
2133.00	-14.2	H	3.0	36.6	1.0	-49.8	-13.0	-36.8	
2844.00	-22.1	H	3.0	36.4	1.0	-57.5	-13.0	-44.5	
LTE B12 10MHz 16QAM									

9.1.8. LTE BAND 13

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/5/2018 Test Engineer: 30317 Configuration: EUT + Charger + Headset Location: Chamber A Mode: LTE_QPSK Band 13 Harmonics, 5MHz Bandwidth									
F	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Pramp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-29.9	V	3.0	37.1	1.0	-65.0	-13.0	-52.0	
2338.50	-23.9	V	3.0	36.5	1.0	-59.5	-13.0	-46.5	
3118.00	-22.2	V	3.0	36.3	1.0	-57.5	-13.0	-44.5	
1559.00	-28.6	H	3.0	37.1	1.0	-64.8	-13.0	-51.8	
2338.50	-23.9	H	3.0	36.5	1.0	-59.5	-13.0	-46.5	
3118.00	-21.6	H	3.0	36.3	1.0	-56.9	-13.0	-43.9	
Mid Ch, 782MHz									
1564.00	-27.7	V	3.0	37.1	1.0	-63.9	-13.0	-50.9	
2346.00	-24.1	V	3.0	36.5	1.0	-59.6	-13.0	-46.6	
3128.00	-22.4	V	3.0	36.3	1.0	-57.7	-13.0	-44.7	
1564.00	-27.7	H	3.0	37.1	1.0	-63.9	-13.0	-50.9	
2346.00	-23.7	H	3.0	36.5	1.0	-59.2	-13.0	-46.2	
3128.00	-22.3	H	3.0	36.3	1.0	-57.5	-13.0	-44.5	
High Ch, 784.5MHz									
1569.00	-29.1	V	3.0	37.1	1.0	-65.2	-13.0	-52.2	
2353.50	-24.6	V	3.0	36.5	1.0	-60.1	-13.0	-47.1	
3138.00	-21.9	V	3.0	36.3	1.0	-57.1	-13.0	-44.1	
1569.00	-28.7	H	3.0	37.1	1.0	-64.8	-13.0	-51.8	
2353.50	-24.1	H	3.0	36.5	1.0	-59.6	-13.0	-46.6	
3138.00	-22.2	H	3.0	36.3	1.0	-57.5	-13.0	-44.5	

LTE B13 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/5/2018 Test Engineer: 30317 Configuration: EUT + Charger + Headset Location: Chamber A Mode: LTE_16QAM Band 13 Harmonics, 5MHz Bandwidth									
F	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Pramp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 779.5MHz									
1559.00	-29.6	V	3.0	37.1	1.0	-65.8	-13.0	-52.8	
2338.50	-24.6	V	3.0	36.5	1.0	-60.1	-13.0	-47.1	
3118.00	-22.9	V	3.0	36.3	1.0	-58.2	-13.0	-45.2	
1559.00	-28.4	H	3.0	37.1	1.0	-65.5	-13.0	-52.5	
2338.50	-24.6	H	3.0	36.5	1.0	-60.1	-13.0	-47.1	
3118.00	-22.4	H	3.0	36.3	1.0	-57.7	-13.0	-44.7	
Mid Ch, 782MHz									
1564.00	-28.5	V	3.0	37.1	1.0	-64.6	-13.0	-51.6	
2346.00	-24.9	V	3.0	36.5	1.0	-60.4	-13.0	-47.4	
3128.00	-23.1	V	3.0	36.3	1.0	-58.4	-13.0	-45.4	
1564.00	-28.4	H	3.0	37.1	1.0	-64.6	-13.0	-51.6	
2346.00	-24.5	H	3.0	36.5	1.0	-60.0	-13.0	-47.0	
3128.00	-23.0	H	3.0	36.3	1.0	-58.3	-13.0	-45.3	
High Ch, 784.5MHz									
1569.00	-29.9	V	3.0	37.1	1.0	-66.0	-13.0	-53.0	
2353.50	-25.3	V	3.0	36.5	1.0	-60.9	-13.0	-47.9	
3138.00	-22.8	V	3.0	36.3	1.0	-57.9	-13.0	-44.9	
1569.00	-29.4	H	3.0	37.1	1.0	-65.6	-13.0	-52.6	
2353.50	-24.9	H	3.0	36.5	1.0	-60.4	-13.0	-47.4	
3138.00	-23.0	H	3.0	36.3	1.0	-58.3	-13.0	-45.3	

LTE B13 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/5/2018 Test Engineer: 30317 Configuration: EUT + Charger + Headset Location: Chamber A Mode: LTE_QPSK Band 13 Harmonics, 10MHz Bandwidth									
F	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Pramp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 782MHz									
1564.00	0.0	V	3.0	37.1	1.0	-36.1	-13.0	-23.1	
2346.00	0.0	V	3.0	36.5	1.0	-35.5	-13.0	-22.5	
3128.00	0.0	V	3.0	36.3	1.0	-35.3	-13.0	-22.3	
1564.00	0.0	H	3.0	37.1	1.0	-36.1	-13.0	-23.1	
2346.00	0.0	H	3.0	36.5	1.0	-35.5	-13.0	-22.5	
3128.00	0.0	H	3.0	36.3	1.0	-35.3	-13.0	-22.3	
Mid Ch, 782MHz									
1564.00	-27.9	V	3.0	37.1	1.0	-64.0	-13.0	-51.0	
2346.00	-22.4	V	3.0	36.5	1.0	-57.9	-13.0	-44.9	
3128.00	-21.4	V	3.0	36.3	1.0	-56.7	-13.0	-43.7	
1564.00	-28.3	H	3.0	37.1	1.0	-64.5	-13.0	-51.5	
2346.00	-24.2	H	3.0	36.5	1.0	-59.7	-13.0	-46.7	
3128.00	-22.5	H	3.0	36.3	1.0	-57.7	-13.0	-44.7	
High Ch, 782MHz									
1564.00	0.0	V	3.0	37.1	1.0	-36.1	-13.0	-23.1	
2346.00	0.0	V	3.0	36.5	1.0	-35.5	-13.0	-22.5	
3128.00	0.0	V	3.0	36.3	1.0	-35.3	-13.0	-22.3	
1564.00	0.0	H	3.0	37.1	1.0	-36.1	-13.0	-23.1	
2346.00	0.0	H	3.0	36.5	1.0	-35.5	-13.0	-22.5	
3128.00	0.0	H	3.0	36.3	1.0	-35.3	-13.0	-22.3	

LTE B13 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company: SOMC Project #: 12097277 Date: 1/5/2018 Test Engineer: 30317 Configuration: EUT + Charger + Headset Location: Chamber A Mode: LTE_16QAM Band 13 Harmonics, 10MHz Bandwidth									
F	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Pramp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
Low Ch, 782MHz									
1564.00	0.0	V	3.0	37.1	1.0	-36.1	-13.0	-23.1	
2346.00	0.0	V	3.0	36.5	1.0	-35.5	-13.0	-22.5	
3128.00	0.0	V	3.0	36.3	1.0	-35.3	-13.0	-22.3	
1564.00	0.0	H	3.0	37.1	1.0	-36.1	-13.0	-23.1	
2346.00	0.0	H	3.0	36.5	1.0	-35.5	-13.0	-22.5	
3128.00	0.0	H	3.0	36.3	1.0	-35.3	-13.0	-22.3	
Mid Ch, 782MHz									
1564.00	-28.6	V	3.0	37.1	1.0	-64.8	-13.0	-51.8	
2346.00	-23.2	V	3.0	36.5	1.0	-58.6	-13.0	-45.6	
3128.00	-22.1	V	3.0	36.3	1.0	-57.4	-13.0	-44.4	
1564.00	-29.1	H	3.0	37.1	1.0	-65.2	-13.0	-52.2	
2346.00	-23.0	H	3.0	36.5	1.0	-60.5	-13.0	-47.5	
3128.00	-23.2	H	3.0	36.3	1.0	-58.5	-13.0	-45.5	
High Ch, 782MHz									
1564.00	0.0	V	3.0	37.1	1.0	-36.1	-13.0	-23.1	
2346.00	0.0	V	3.0	36.5	1.0	-35.5	-13.0	-22.5	
3128.00	0.0	V	3.0	36.3	1.0	-35.3	-13.0	-22.3	
1564.00	0.0	H	3.0	37.1	1.0	-36.1	-13.0	-23.1	
2346.00	0.0	H	3.0	36.5	1.0	-35.5	-13.0	-22.5	
3128.00	0.0	H	3.0	36.3	1.0	-35.3	-13.0	-22.3	

LTE B13 10MHz 16QAM

9.1.9. LTE BAND 17

LTE Band 17 (Frequency range: 704-716 MHz) is covered by LTE Band 12 (Frequency range: 699-716 MHz) due to similar frequency range, same maximum tune-up limit and same channel bandwidth (5 & 10 MHz).

9.1.11. LTE BAND 41

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/8/2018									
Test Engineer:	20317									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_QPSK Band 41 Harmonics, 5MHz Bandwidth									

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 2498.5MHz									
4997.00	-17.1	V	3.0	35.5	1.0	-51.6	-25.0	-26.6	
7495.50	-16.9	V	3.0	35.7	1.0	-50.8	-25.0	-25.8	
9994.00	-10.8	V	3.0	36.0	1.0	-45.9	-25.0	-20.9	
4997.00	-16.5	H	3.0	35.5	1.0	-51.0	-25.0	-26.0	
7495.50	-15.7	H	3.0	35.7	1.0	-50.4	-25.0	-25.4	
9994.00	-12.3	H	3.0	36.0	1.0	-47.3	-25.0	-22.3	
Mid Ch, 2503MHz									
5186.00	-17.0	V	3.0	35.4	1.0	-51.4	-25.0	-26.4	
7779.00	-14.4	V	3.0	35.8	1.0	-49.1	-25.0	-24.1	
10372.00	-11.5	V	3.0	35.8	1.0	-46.5	-25.0	-21.5	
5186.00	-17.3	H	3.0	35.4	1.0	-52.0	-25.0	-27.0	
7779.00	-15.3	H	3.0	35.8	1.0	-50.0	-25.0	-25.0	
10372.00	-12.1	H	3.0	35.8	1.0	-46.9	-25.0	-21.9	
High Ch, 2607.5MHz									
5375.00	-17.9	V	3.0	35.4	1.0	-52.3	-25.0	-27.3	
8062.50	-14.3	V	3.0	35.8	1.0	-49.1	-25.0	-24.1	
10750.00	-11.1	V	3.0	35.7	1.0	-46.5	-25.0	-21.5	
5375.00	-16.6	H	3.0	35.4	1.0	-51.1	-25.0	-26.1	
8062.50	-14.4	H	3.0	35.8	1.0	-49.2	-25.0	-24.2	
10750.00	-10.9	H	3.0	35.7	1.0	-45.6	-25.0	-20.6	

LTE B41 5MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/8/2018									
Test Engineer:	20317									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_QPSK Band 41 Harmonics, 10MHz Bandwidth									

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 2501MHz									
5002.00	-16.9	V	3.0	35.5	1.0	-51.4	-25.0	-26.4	
7503.00	-15.6	V	3.0	35.7	1.0	-50.3	-25.0	-25.3	
10004.00	-11.9	V	3.0	36.0	1.0	-46.9	-25.0	-21.9	
5002.00	-15.8	H	3.0	35.5	1.0	-49.5	-25.0	-24.5	
7503.00	-15.5	H	3.0	35.7	1.0	-50.3	-25.0	-25.3	
10004.00	-12.1	H	3.0	36.0	1.0	-47.1	-25.0	-22.1	
Mid Ch, 2503MHz									
5186.00	-17.1	V	3.0	35.4	1.0	-51.5	-25.0	-26.5	
7779.00	-15.2	V	3.0	35.8	1.0	-50.0	-25.0	-25.0	
10372.00	-12.0	V	3.0	35.8	1.0	-46.9	-25.0	-21.9	
5186.00	-17.6	H	3.0	35.4	1.0	-52.0	-25.0	-27.0	
7779.00	-15.6	H	3.0	35.8	1.0	-50.3	-25.0	-25.3	
10372.00	-12.6	H	3.0	35.8	1.0	-47.4	-25.0	-22.4	
High Ch, 2605MHz									
5375.00	-17.8	V	3.0	35.4	1.0	-52.2	-25.0	-27.2	
8055.00	-13.0	V	3.0	35.8	1.0	-48.6	-25.0	-23.6	
10740.00	-10.8	V	3.0	35.7	1.0	-46.5	-25.0	-21.5	
5375.00	-17.7	H	3.0	35.4	1.0	-52.1	-25.0	-27.1	
8055.00	-14.7	H	3.0	35.8	1.0	-49.5	-25.0	-24.5	
10740.00	-11.6	H	3.0	35.7	1.0	-46.3	-25.0	-21.3	

LTE B41 10MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/8/2018									
Test Engineer:	20317									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_QPSK Band 41 Harmonics, 15MHz Bandwidth									

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 2501.5MHz									
5007.00	-17.2	V	3.0	35.5	1.0	-51.7	-25.0	-26.7	
7510.50	-15.3	V	3.0	35.7	1.0	-50.1	-25.0	-25.1	
10014.00	-12.2	V	3.0	36.0	1.0	-47.2	-25.0	-22.2	
5007.00	-15.7	H	3.0	35.5	1.0	-50.1	-25.0	-25.1	
7510.50	-15.5	H	3.0	35.7	1.0	-50.3	-25.0	-25.3	
10014.00	-11.4	H	3.0	36.0	1.0	-46.5	-25.0	-21.5	
Mid Ch, 2503MHz									
5186.00	-10.5	V	3.0	35.4	1.0	-44.9	-25.0	-19.9	
7779.00	-14.6	V	3.0	35.8	1.0	-49.4	-25.0	-24.4	
10372.00	-11.5	V	3.0	35.8	1.0	-46.5	-25.0	-21.5	
5186.00	-15.9	H	3.0	35.4	1.0	-50.3	-25.0	-25.3	
7779.00	-13.9	H	3.0	35.8	1.0	-48.7	-25.0	-23.7	
10372.00	-10.2	H	3.0	35.8	1.0	-45.1	-25.0	-20.1	
High Ch, 2602.5MHz									
5365.00	-17.4	V	3.0	35.4	1.0	-51.9	-25.0	-26.9	
8047.50	-13.6	V	3.0	35.8	1.0	-48.4	-25.0	-23.4	
10730.00	-11.4	V	3.0	35.7	1.0	-46.0	-25.0	-21.0	
5365.00	-18.5	H	3.0	35.4	1.0	-52.9	-25.0	-27.9	
8047.50	-14.1	H	3.0	35.8	1.0	-48.9	-25.0	-23.9	
10730.00	-11.0	H	3.0	35.7	1.0	-45.7	-25.0	-20.7	

LTE B41 15MHz QPSK

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/8/2018									
Test Engineer:	20317									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_16QAM Band 41 Harmonics, 5MHz Bandwidth									

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 2498.5MHz									
4997.00	-17.8	V	3.0	35.5	1.0	-52.3	-25.0	-27.3	
7495.50	-16.8	V	3.0	35.7	1.0	-51.5	-25.0	-26.5	
9994.00	-11.6	V	3.0	36.0	1.0	-46.6	-25.0	-21.6	
4997.00	-17.2	H	3.0	35.5	1.0	-51.7	-25.0	-26.7	
7495.50	-16.4	H	3.0	35.7	1.0	-51.2	-25.0	-26.2	
9994.00	-13.1	H	3.0	36.0	1.0	-48.1	-25.0	-23.1	
Mid Ch, 2503MHz									
5186.00	-17.7	V	3.0	35.4	1.0	-52.1	-25.0	-27.1	
7779.00	-15.1	V	3.0	35.8	1.0	-49.9	-25.0	-24.9	
10372.00	-12.4	V	3.0	35.8	1.0	-47.2	-25.0	-22.2	
5186.00	-18.3	H	3.0	35.4	1.0	-52.7	-25.0	-27.7	
7779.00	-16.0	H	3.0	35.8	1.0	-50.0	-25.0	-25.0	
10372.00	-12.8	H	3.0	35.8	1.0	-47.7	-25.0	-22.7	
High Ch, 2607.5MHz									
5375.00	-18.6	V	3.0	35.4	1.0	-53.1	-25.0	-28.1	
8062.50	-15.0	V	3.0	35.8	1.0	-49.8	-25.0	-24.8	
10750.00	-11.9	V	3.0	35.7	1.0	-46.5	-25.0	-21.5	
5375.00	-17.4	H	3.0	35.4	1.0	-51.8	-25.0	-26.8	
8062.50	-15.2	H	3.0	35.8	1.0	-50.0	-25.0	-25.0	
10750.00	-11.7	H	3.0	35.7	1.0	-46.3	-25.0	-21.3	

LTE B41 5MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement										
Company:	SOMC									
Project #:	12097277									
Date:	1/8/2018									
Test Engineer:	20317									
Configuration:	EUT + Support Equipment									
Location:	Chamber A									
Mode:	LTE_16QAM Band 41 Harmonics, 10MHz Bandwidth									

f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 2501.5MHz									
5007.00	-18.0	V	3.0	35.5	1.0	-52.5	-25.0	-27.5	
7510.50	-16.1	V	3.0	35.7	1.0	-50.8	-25.0	-25.8	
10014.00	-13.0	V	3.0	36.0	1.0	-48.0	-25.0	-23.0	
5007.00	-16.4	H	3.0	35.5	1.0	-50.9	-25.0	-25.9	
7510.50	-16.3	H	3.0	35.7	1.0	-51.0	-25.0	-26.0	
10014.00	-12.2	H	3.0	36.0	1.0	-47.2	-25.0	-22.2	
Mid Ch, 2503MHz									
5186.00	-11.3	V	3.0	35.4	1.0	-45.7	-25.0	-20.7	
7779.00	-15.4	V	3.0	35.8	1.0	-49.6	-25.0	-24.6	
10372.00	-12.4	V	3.0	35.8	1.0	-47.2	-25.0	-22.2	
5186.00	-16.7	H	3.0	35.4	1.0	-51.1	-25.0	-26.1	
7779.00	-14.7	H	3.0	35.8	1.0	-49.4	-25.0	-24.4	
10372.00	-11.0	H	3.0	35.8	1.0	-45.9	-25.0	-20.9	
High Ch, 2602.5MHz									
5365.00	-18.2	V	3.0	35.4	1.0	-52.7	-25.0	-27.7	
8047.50	-14.3	V	3.0	35.8	1.0	-49.1	-25.0	-24.1	
10730.00	-12.1	V	3.0	35.7	1.0	-46.8	-25.0	-21.8	
5365.00	-19.3	H	3.0	35.4	1.0	-53.7	-25.0	-28.7	
8047.50	-14.9	H	3.0	35.8	1.0	-49.7	-25.0	-24.7	
10730.00	-11.8	H	3.0	35.7	1.0	-46.5	-25.0	-21.5	

LTE B41 15MHz 16QAM

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		SOMC							
Project #:		12097277							
Date:		1/8/2018							
Test Engineer:		29317							
Configuration:		EUT + Support Equipment							
Location:		Chamber A							
Mode:		LTE_QPSK Band 41 Harmonics, 20MHz Bandwidth							
f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 2506MHz									
5012.00	-15.9	V	3.0	35.5	1.0	-50.3	-25.0	-25.3	
7518.00	-15.4	V	3.0	35.7	1.0	-50.1	-25.0	-25.1	
10024.00	-12.2	V	3.0	36.0	1.0	-47.2	-25.0	-22.2	
5012.00	-15.9	H	3.0	35.5	1.0	-49.5	-25.0	-24.5	
7518.00	-14.7	H	3.0	35.7	1.0	-49.4	-25.0	-24.4	
10024.00	-12.2	H	3.0	36.0	1.0	-47.2	-25.0	-22.2	
Mid Ch, 2593MHz									
5186.00	-17.1	V	3.0	35.4	1.0	-51.5	-25.0	-26.5	
7779.00	-15.4	V	3.0	35.8	1.0	-50.2	-25.0	-25.2	
10372.00	-12.2	V	3.0	35.8	1.0	-47.0	-25.0	-22.0	
5186.00	-15.4	H	3.0	35.4	1.0	-49.8	-25.0	-24.8	
7779.00	-14.3	H	3.0	35.8	1.0	-49.2	-25.0	-24.2	
10372.00	-11.9	H	3.0	35.8	1.0	-46.7	-25.0	-21.7	
High Ch, 2608MHz									
5360.00	-15.5	V	3.0	35.4	1.0	-50.9	-25.0	-25.9	
8040.00	-14.7	V	3.0	35.8	1.0	-49.5	-25.0	-24.5	
10720.00	-11.2	V	3.0	35.7	1.0	-45.9	-25.0	-20.9	
5360.00	-17.8	H	3.0	35.4	1.0	-52.2	-25.0	-27.2	
8040.00	-14.3	H	3.0	35.8	1.0	-49.1	-25.0	-24.1	
10720.00	-11.0	H	3.0	35.7	1.0	-45.7	-25.0	-20.7	
LTE B41 20MHz QPSK									

UL Verification Services, Inc. Above 1GHz High Frequency Substitution Measurement									
Company:		SOMC							
Project #:		12097277							
Date:		1/8/2018							
Test Engineer:		29317							
Configuration:		EUT + Support Equipment							
Location:		Chamber A							
Mode:		LTE_16QAM Band 41 Harmonics, 20MHz Bandwidth							
f	SG reading	Ant. Pol.	Distance	Preamp	Filter	ERP	Limit	Delta	Notes
MHz	(dBm)	(H/V)	(m)	(dB)	(dB)	(dBm)	(dBm)	(dB)	
Low Ch, 2506MHz									
5012.00	-16.5	V	3.0	35.5	1.0	-50.9	-25.0	-25.9	
7518.00	-16.0	V	3.0	35.7	1.0	-50.7	-25.0	-25.7	
10024.00	-12.8	V	3.0	36.0	1.0	-47.8	-25.0	-22.8	
5012.00	-15.6	H	3.0	35.5	1.0	-50.0	-25.0	-25.0	
7518.00	-15.2	H	3.0	35.7	1.0	-50.0	-25.0	-25.0	
10024.00	-12.8	H	3.0	36.0	1.0	-47.8	-25.0	-22.8	
Mid Ch, 2593MHz									
5186.00	-17.7	V	3.0	35.4	1.0	-52.1	-25.0	-27.1	
7779.00	-16.0	V	3.0	35.8	1.0	-50.7	-25.0	-25.7	
10372.00	-12.8	V	3.0	35.8	1.0	-47.5	-25.0	-22.5	
5186.00	-16.0	H	3.0	35.4	1.0	-50.4	-25.0	-25.4	
7779.00	-15.0	H	3.0	35.8	1.0	-49.8	-25.0	-24.8	
10372.00	-12.4	H	3.0	35.8	1.0	-47.3	-25.0	-22.3	
High Ch, 2608MHz									
5360.00	-17.1	V	3.0	35.4	1.0	-51.5	-25.0	-26.5	
8040.00	-15.2	V	3.0	35.8	1.0	-50.1	-25.0	-25.1	
10720.00	-11.8	V	3.0	35.7	1.0	-46.5	-25.0	-21.5	
5360.00	-18.3	H	3.0	35.4	1.0	-52.8	-25.0	-27.8	
8040.00	-14.9	H	3.0	35.8	1.0	-49.7	-25.0	-24.7	
10720.00	-11.6	H	3.0	35.7	1.0	-46.2	-25.0	-21.2	
LTE B41 20MHz 16QAM									

