



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.element.com>

Part 96 MEASUREMENT REPORT

Applicant Name:

Sony Corporation
1-7-1 Konan
Minato-ku
Tokyo, 108-0075, Japan

Date of Testing:

06/02/2022 - 08/08/2022

Test Report Issue Date:

08/10/2022

Test Site/Location:

Element Lab., Columbia, MD, USA

Test Report Serial No.:

1M2205240063-09.PY7

FCC ID:

PY7-76056F

APPLICANT:

Sony Corporation

Application Type:

Certification

EUT Type:

Portable Handset

FCC Classification:

Citizens Band End User Devices (CBE)

FCC Rule Part(s):

96

Test Procedure(s):

ANSI C63.26-2015, KDB 940660 D01 v03,
WINNF-TS-0122 v1.0.2, KDB 648474 D03 v01r04

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947. Test results reported herein relate only to the item(s) tested.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 1 of 46

TABLE OF CONTENTS

1.0	INTRODUCTION	4
1.1	Scope	4
1.2	Element Test Location.....	4
1.3	Test Facility / Accreditations.....	4
2.0	PRODUCT INFORMATION.....	5
2.1	Equipment Description	5
2.2	Device Capabilities.....	5
2.3	Test Configuration	5
2.4	Software and Firmware	5
2.5	EMI Suppression Device(s)/Modifications	5
3.0	DESCRIPTION OF TESTS	6
3.1	Measurement Procedure.....	6
3.2	Radiated Power and Radiated Spurious Emissions	6
4.0	MEASUREMENT UNCERTAINTY	7
5.0	TEST EQUIPMENT CALIBRATION DATA	8
6.0	SAMPLE CALCULATIONS	9
7.0	TEST RESULTS	10
7.1	Summary.....	10
7.2	Occupied Bandwidth	11
7.3	Spurious and Harmonic Emissions at Antenna Terminal	16
7.4	Band Edge Emissions at Antenna Terminal	24
7.5	Radiated Power (EIRP).....	32
7.6	Radiated Spurious Emissions Measurements.....	34
7.7	Frequency Stability / Temperature Variation	41
7.8	End User Device Additional Requirement (CBSD Protocol).....	43
8.0	CONCLUSION.....	46

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 2 of 46

MEASUREMENT REPORT

FCC Part 96

Mode	Bandwidth	Modulation	Tx Frequency Range [MHz]	EIRP		Emission Designator
				Max. Power [W]	Max. Power [dBm]	
LTE Band 48	20 MHz	QPSK	3560.0 - 3690.0	0.096	19.82	18M0G7D
		16QAM	3560.0 - 3690.0	0.063	18.00	18M1W7D
	15 MHz	QPSK	3557.5 - 3692.5	0.097	19.87	13M5G7D
		16QAM	3557.5 - 3692.5	0.059	17.70	13M5W7D
	10 MHz	QPSK	3555.0 - 3695.0	0.101	20.04	9M05G7D
		16QAM	3555.0 - 3695.0	0.061	17.88	9M02W7D
5 MHz	QPSK	3552.5 - 3697.5	0.101	20.04	4M54G7D	
	16QAM	3552.5 - 3697.5	0.062	17.94	4M53W7D	

EUT Overview

Note: EIRP levels shown in the table above are measured over the full channel bandwidth. These values will appear on the Grant of Authorization.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 3 of 46

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is a OnGo Alliance Approved Test Lab (ATL)
- Element Washington DC LLC is a WinnForum Approved Test Lab
- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreement.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 4 of 46

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Sony Portable Handset FCC ID: PY7-76056F**. The test data contained in this report pertains only to the emissions due to the EUT's LTE Band 48 operation in the CBRS band. Per FCC Part 96, this device is evaluated as a Citizens Band End User Devices (CBE).

Test Device Serial No.: 94880, 00001, 99864

2.2 Device Capabilities

This device contains the following capabilities:

850/1900 GSM/GPRS/EDGE, 850/1700/1900, WCDMA/HSPA, Multi-band LTE, Multi-band 5G NR FR1, 802.11b/g/n/ax WLAN, 802.11a/n/ac/ax UNII (5 and 6 GHz), Bluetooth (1x, EDR, LE), NFC, Wireless Power Transfer

2.3 Test Configuration

The EUT was tested per the guidance of ANSI C63.26-2015. See Section 7.0 of this test report for a description of the radiated and antenna port conducted emissions tests.

This device supports wireless charging capability and, thus, is subject to the test requirements of KDB 648474 D03 v01r04. Additional radiated spurious emission measurements were performed with the EUT lying flat on an authorized wireless charging pad (WCP) Model: Belkin F7U050 while operating under normal conditions in a simulated call or data transmission configuration. The worst case radiated emissions data is shown in this report.

2.4 Software and Firmware

Testing was performed on device(s) using software/firmware version 0.45 installed on the EUT.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 5 of 46

3.0 DESCRIPTION OF TESTS

3.1 Measurement Procedure

The measurement procedures described in the “American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services” (ANSI C63.26-2015) were used in the measurement of the EUT.

Deviation from Measurement Procedure.....None

3.2 Radiated Power and Radiated Spurious Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Figure 5.7 of Clause 5 in ANSI C63.4-2014. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. For measurements below 1GHz, the absorbers are removed. A raised turntable is used for radiated measurement. The turn table is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm tall test table made of Styrodur is placed on top of the turn table. A Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

The equipment under test was transmitting while connected to its integral antenna and is placed on a turntable 3 meters from the receive antenna. The receive antenna height is adjusted between 1 and 4 meter height, the turntable is rotated through 360 degrees, and the EUT is manipulated through all orthogonal planes representative of its typical use to achieve the highest reading on the receive spectrum analyzer.

For radiated power measurements, substitution method is used per the guidance of ANSI C63.26-2015. For emissions below 1GHz, a half-wave dipole is substituted in place of the EUT. For emissions above 1GHz, a horn antenna is substituted in place of the EUT. The substitute antenna is driven by a signal generator with the level of the signal generator being adjusted to obtain the same receive spectrum analyzer level previously recorded from the spurious emission from the EUT. The power of the emission is calculated using the following formula:

$$P_d \text{ [dBm]} = P_g \text{ [dBm]} - \text{cable loss [dB]} + \text{antenna gain [dBd/dBi]};$$

where P_d is the dipole equivalent power, P_g is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to $P_g \text{ [dBm]} - \text{cable loss [dB]}$.

For radiated spurious emissions measurements, the field strength conversion method is used per the formulas in Section 5.2.7 of ANSI C63.26-2015. Field Strength (EIRP) is calculated using the following formulas:

$$E_{\text{[dB}\mu\text{V/m]}} = \text{Measured amplitude level}_{\text{[dBm]}} + 107 + \text{Cable Loss}_{\text{[dB]}} + \text{Antenna Factor}_{\text{[dB/m]}}$$

And

$$\text{EIRP}_{\text{[dBm]}} = E_{\text{[dB}\mu\text{V/m]}} + 20\log D - 104.8; \text{ where } D \text{ is the measurement distance in meters.}$$

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 414788 D01 v01r01.

Radiated power and radiated spurious emission levels are investigated with the receive antenna horizontally and vertically polarized per ANSI C63.26-2015.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 6 of 46

4.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.4-2014. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty (\pm dB)
Conducted Bench Top Measurements	1.13
Radiated Disturbance (<1GHz)	4.98
Radiated Disturbance (>1GHz)	5.07
Radiated Disturbance (>18GHz)	5.09

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 7 of 46

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
-	AP1	EMC Cable and Switch System	3/9/2022	Annual	3/9/2023	AP1
-	ETS	EMC Cable and Switch System	12/9/2022	Annual	12/9/2022	ETS
-	LTx5	Licensed Transmitter Cable Set	12/9/2021	Annual	12/9/2022	LTx5
Anritsu	MT8821C	Radio Communication Analyzer	N/A			6201525694
ETS Lindgren	3117	1-18 GHz DRG Horn (Medium)	4/20/2021	Biennial	4/20/2023	00125518
Keysight Technologies	N9030A	PXA Signal Analyzer (44GHz)	2/14/2022	Annual	2/14/2023	MY52350166
Keysight Technologies	N9030A	PXA Signal Analyzer	2/14/2022	Annual	2/14/2023	MY54490576
Rohde & Schwarz	CMW500	Radio Communication Tester	N/A			112347
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	8/3/2021	Annual	8/3/2022	100342
Rohde & Schwarz	FSW26	2Hz-26.5GHz Signal and Spectrum Analyzer	4/14/2022	Annual	4/14/2023	103187
Sunol	JB5	Bi-Log Antenna (30M - 5GHz)	7/27/2020	Biennial	7/27/2022	A051107
Sunol	JB6	LB6 Antenna	11/13/2020	Biennial	11/13/2022	A082816

Notes:

1. For equipment listed above that has a calibration date or calibration due date that falls within the test date range, care was taken to ensure that this equipment was used after the calibration date and before the calibration due date.
2. Equipment with a calibration date of "N/A" shown in this list was not used to make direct calibrated measurements.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 8 of 46

6.0 SAMPLE CALCULATIONS

Emission Designator

QPSK Modulation

Emission Designator = 8M62G7D

LTE BW = 8.62 MHz

G = Phase Modulation

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

QAM Modulation

Emission Designator = 8M45W7D

LTE BW = 8.45 MHz

W = Amplitude/Angle Modulated

7 = Quantized/Digital Info

D = Data transmission, telemetry, telecommand

Spurious Radiated Emission – LTE Band

Example: Middle Channel LTE Mode 2nd Harmonic (7250 MHz)

The average spectrum analyzer reading at 3 meters with the EUT on the turntable was -81.0 dBm. The gain of the substituted antenna is 8.1 dBi. The signal generator connected to the substituted antenna terminals is adjusted to produce a reading of -81.0 dBm on the spectrum analyzer. The loss of the cable between the signal generator and the terminals of the substituted antenna is 2.0 dB at 1564 MHz. So 6.1 dB is added to the signal generator reading of -30.9 dBm yielding -24.80 dBm. The fundamental EIRP was 25.501 dBm so this harmonic was 25.501 dBm – (-24.80).

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 9 of 46

7.0 TEST RESULTS

7.1 Summary

Company Name: Sony Corporation
 FCC ID: PY7-76056F
 FCC Classification: Citizens Band End User Devices (CBE)
 Mode(s): LTE

Test Condition	Test Description	FCC Part Section(s)	Test Limit	Test Result	Reference
CONDUCTED	Occupied Bandwidth	2.1049(h)	N/A	PASS	Section 7.2
	Conducted Band Edge / Spurious Emissions (EUD)	2.1051, 96.41(e)(ii)	-13 dBm/MHz at frequencies within 0-B MHz of channel edge (where B is the bandwidth of the assigned channel) -25 dBm/MHz at frequencies greater than B MHz above and below channel edge -40 dBm/MHz at frequencies below 3530 MHz and above 3720 MHz	PASS	Sections 7.3, 7.4
	Frequency Stability	2.1055	Fundamental emissions stay within authorized frequency block	PASS	Section 7.7
	End User Device Additional Requirements (CBSD Protocol)	96.47	End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation. An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.	PASS	Section 7.8
RADIATED	Equivalent Isotropic Radiated Power (EIRP) (EUD)	96.41(b)	23 dBm/10MHz	PASS	Section 7.5
	Radiated Spurious Emissions	2.1053, 96.41(e)	-40 dBm/MHz	PASS	Section 7.6

Table 7-1. Summary of Test Results

Notes:

- 1) All modes of operation and data rates were investigated. The test results shown in the following sections represent the worst case emissions.
- 2) The analyzer plots were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables, directional couplers, and attenuators used as part of the system to maintain a link between the call box and the EUT at all frequencies of interest.
- 3) All antenna port conducted emissions testing was performed on a test bench with the antenna port of the EUT connected to the spectrum analyzer through calibrated cables, attenuators, and couplers.
- 4) For conducted spurious emissions, automated test software was used to measure emissions and capture the corresponding plots necessary to show compliance. The measurement software utilized is EMC Software Tool v1.0, Chamber Control v1.3.1.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 10 of 46

7.2 Occupied Bandwidth

Test Overview

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. All modes of operation were investigated and the worst case configuration results are reported in this section.

Test Procedure Used

ANSI C63.26-2015 – Section 5.4.4

Test Settings

1. The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. RBW = 1 – 5% of the expected OBW
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. The trace was allowed to stabilize
8. If necessary, steps 2 – 7 were repeated after changing the RBW such that it would be within 1 – 5% of the 99% occupied bandwidth observed in Step 7

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

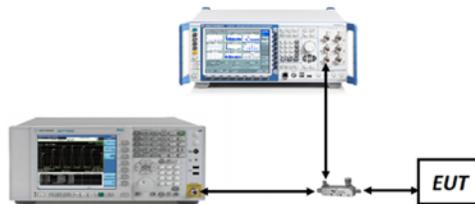



Figure 7-1. Test Instrument & Measurement Setup

Test Notes

None

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 11 of 46

LTE Band 48

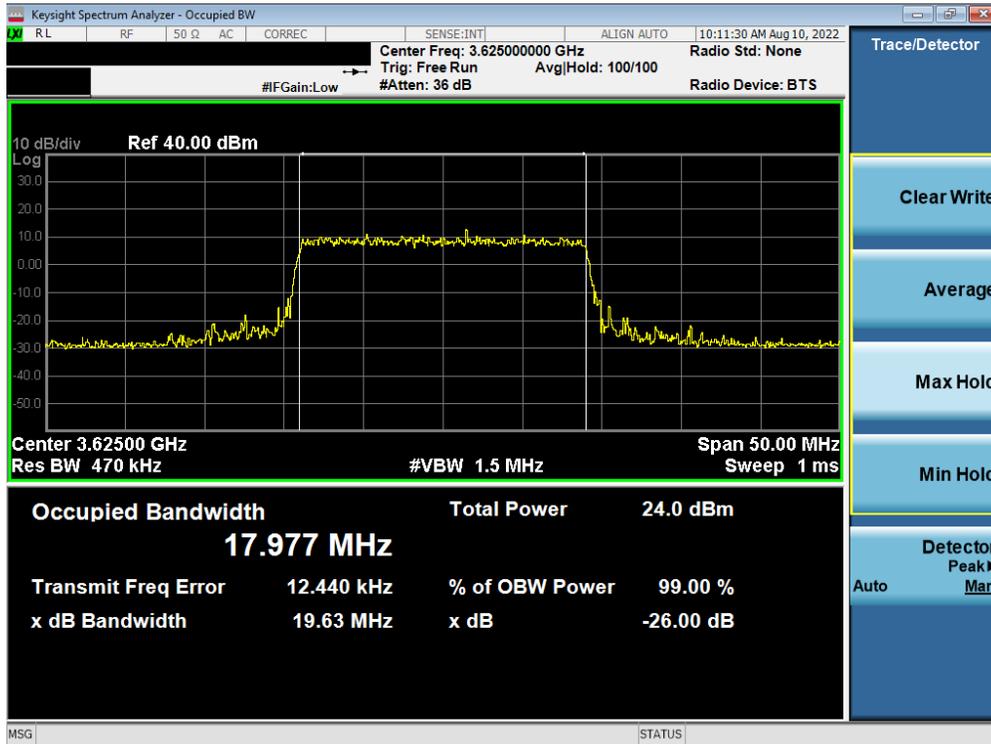


Plot 7-1. Occupied Bandwidth Plot (LTE Band 48 - 20MHz QPSK - Full RB Configuration)




Plot 7-2. Occupied Bandwidth Plot (LTE Band 48 - 20MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 12 of 46

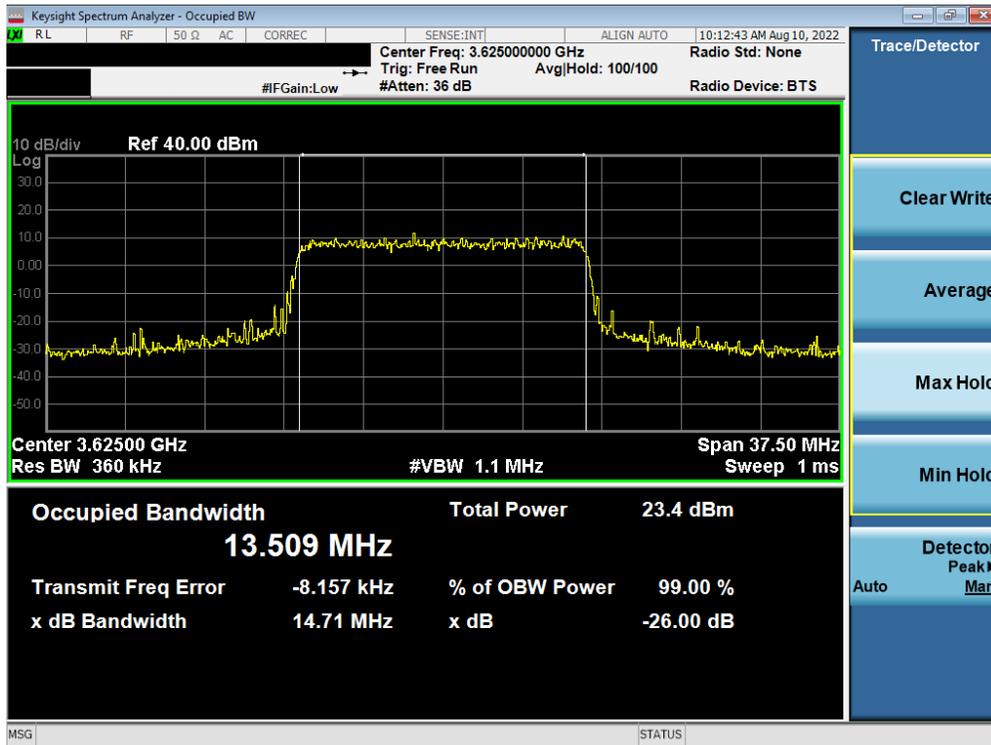


Plot 7-3. Occupied Bandwidth Plot (LTE Band 48 - 15MHz QPSK - Full RB Configuration)

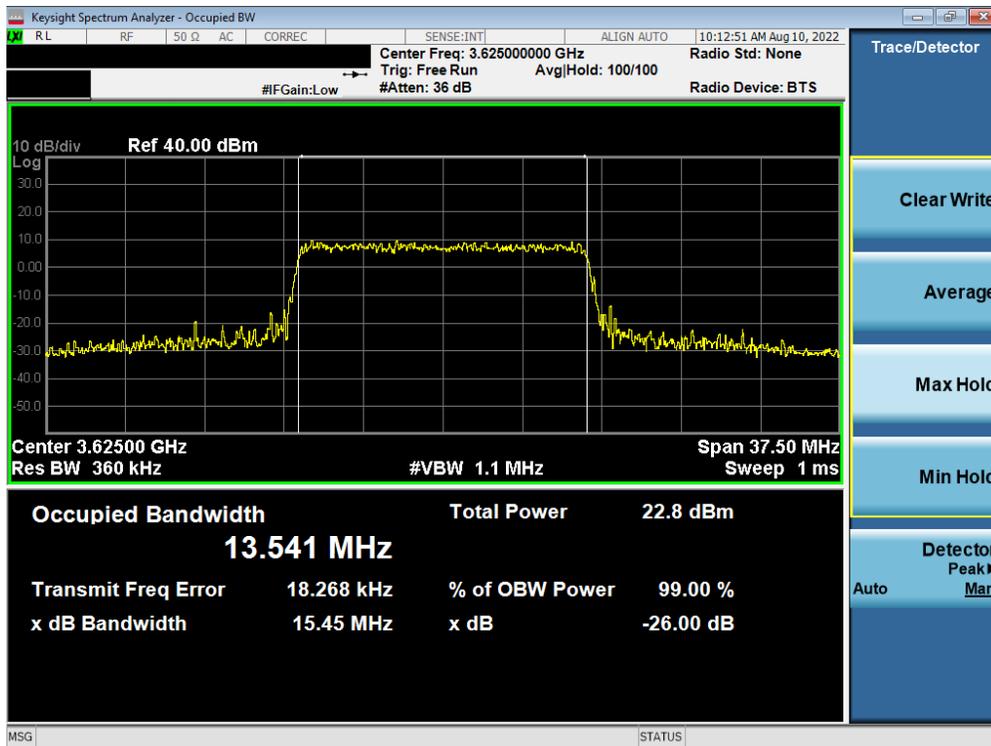


Plot 7-4. Occupied Bandwidth Plot (LTE Band 48 - 15MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 13 of 46

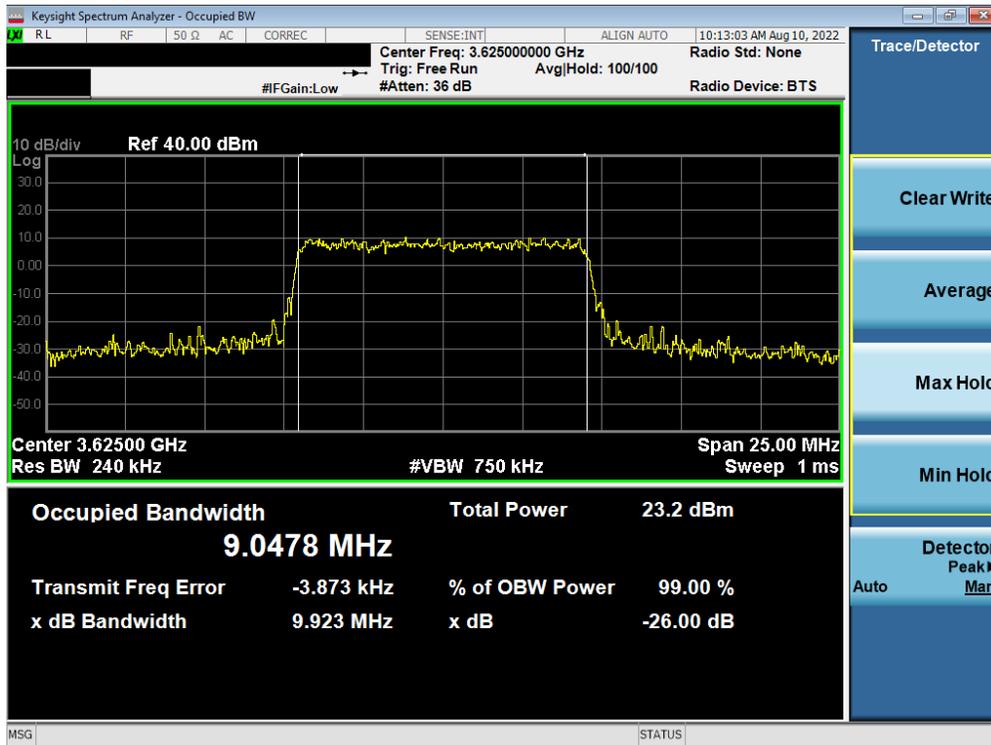


Plot 7-5. Occupied Bandwidth Plot (LTE Band 48 - 10MHz QPSK - Full RB Configuration)

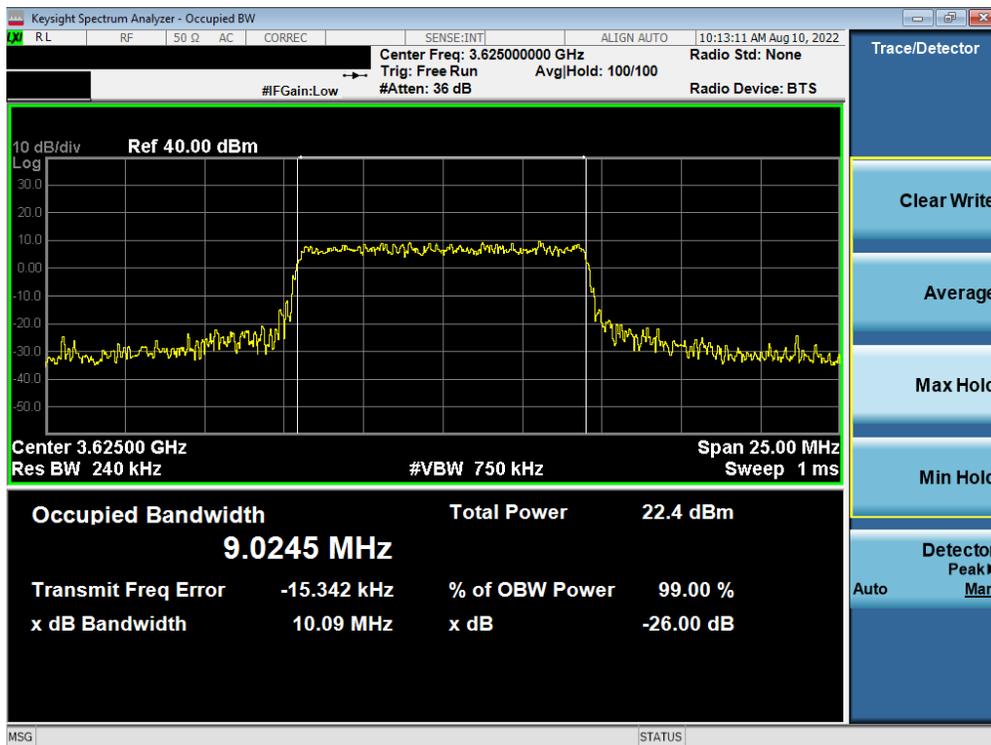


Plot 7-6. Occupied Bandwidth Plot (LTE Band 48 - 10MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 14 of 46

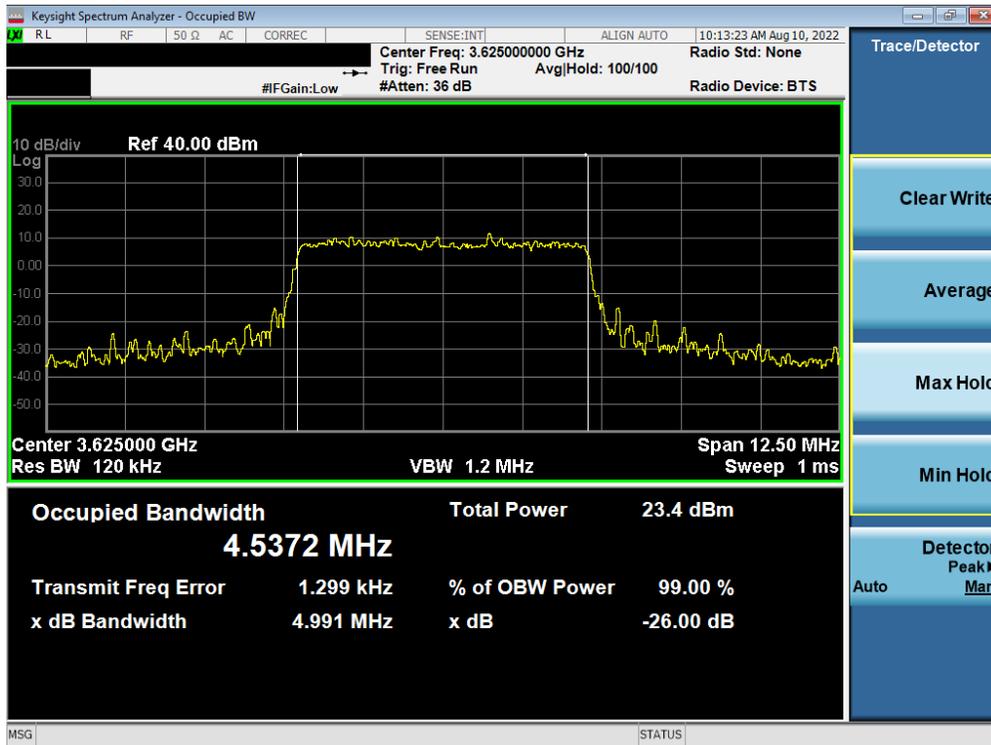

Plot 7-7. Occupied Bandwidth Plot (LTE Band 48 - 5MHz QPSK - Full RB Configuration)

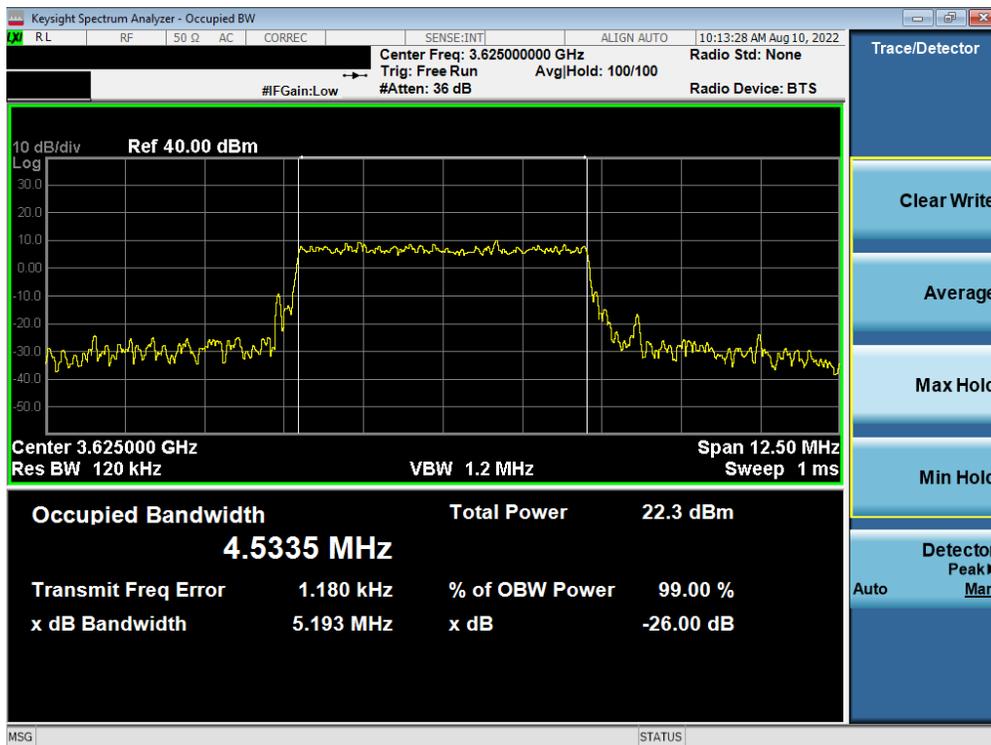

Plot 7-8. Occupied Bandwidth Plot (LTE Band 48 - 5MHz 16-QAM - Full RB Configuration)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 15 of 46

7.3 Spurious and Harmonic Emissions at Antenna Terminal

Test Overview

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/Mhz.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.4

Test Settings

1. Start frequency was set to 30MHz and stop frequency was set to at least 10 * the fundamental frequency (separated into at least two plots per channel)
2. Detector = RMS
3. Trace mode = Max Hold
4. Sweep time = auto couple
5. The trace was allowed to stabilize
6. Please see test notes below for RBW and VBW settings

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

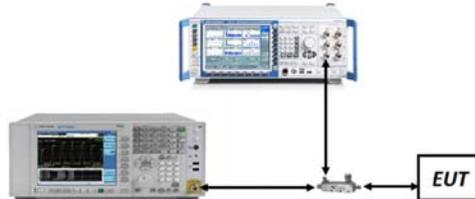



Figure 7-2. Test Instrument & Measurement Setup

Test Notes


1. Compliance with the applicable limits is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz.
2. In plots 7-13 and 7-14 the mid channel spectrum from 30MHz-3.575GHz was fully investigated. Due to the many emissions from 3.50GHz-3.575GHz, the worst of the emission peak was taken as shown in plot 7-14.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 16 of 46

LTE Band 48

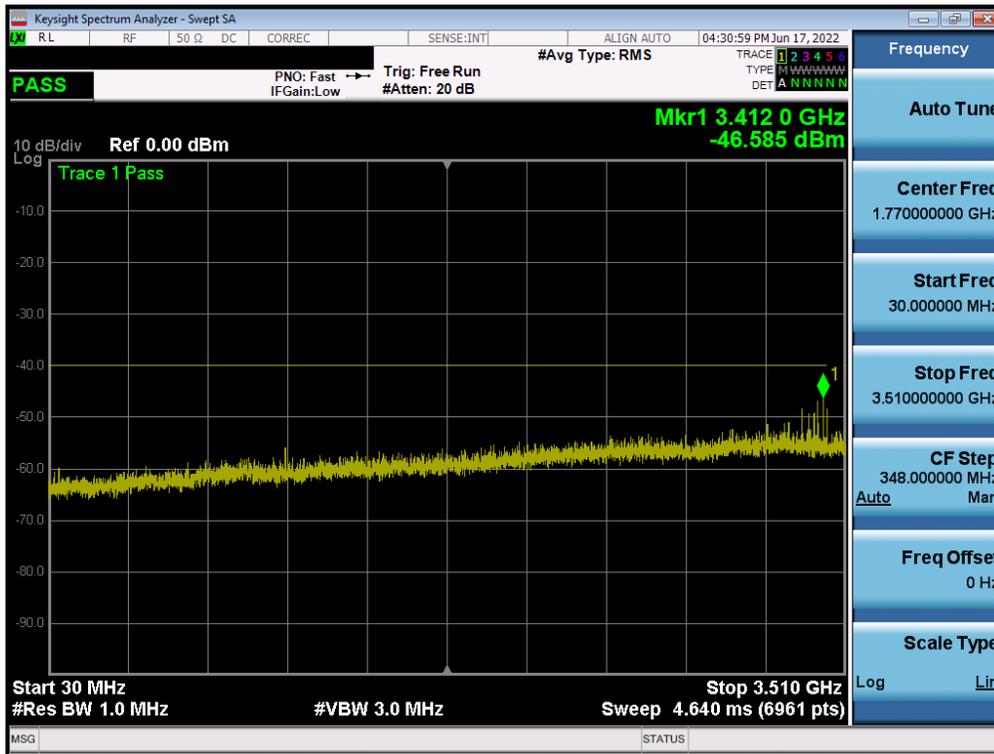


Plot 7-9. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

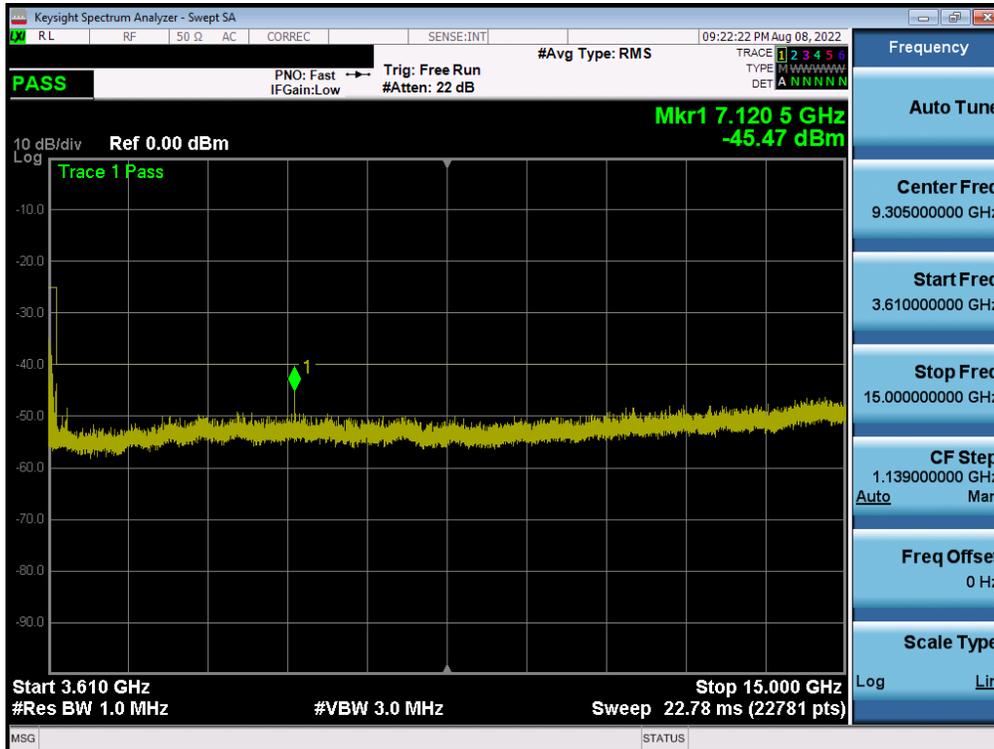


Plot 7-10. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 17 of 46

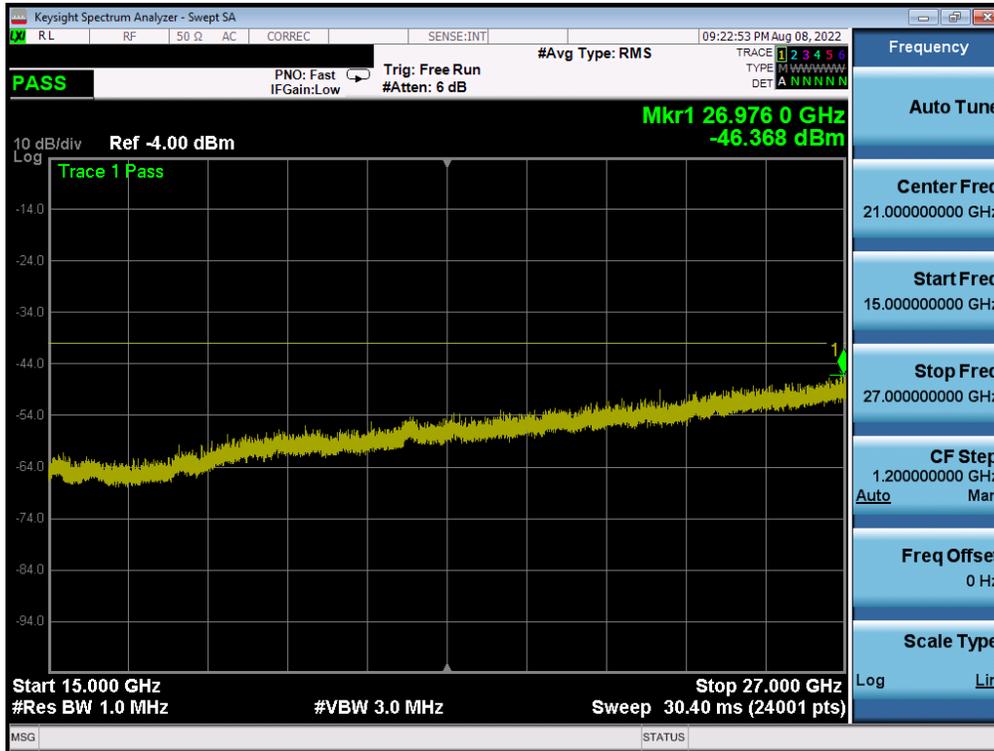


Plot 7-11. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

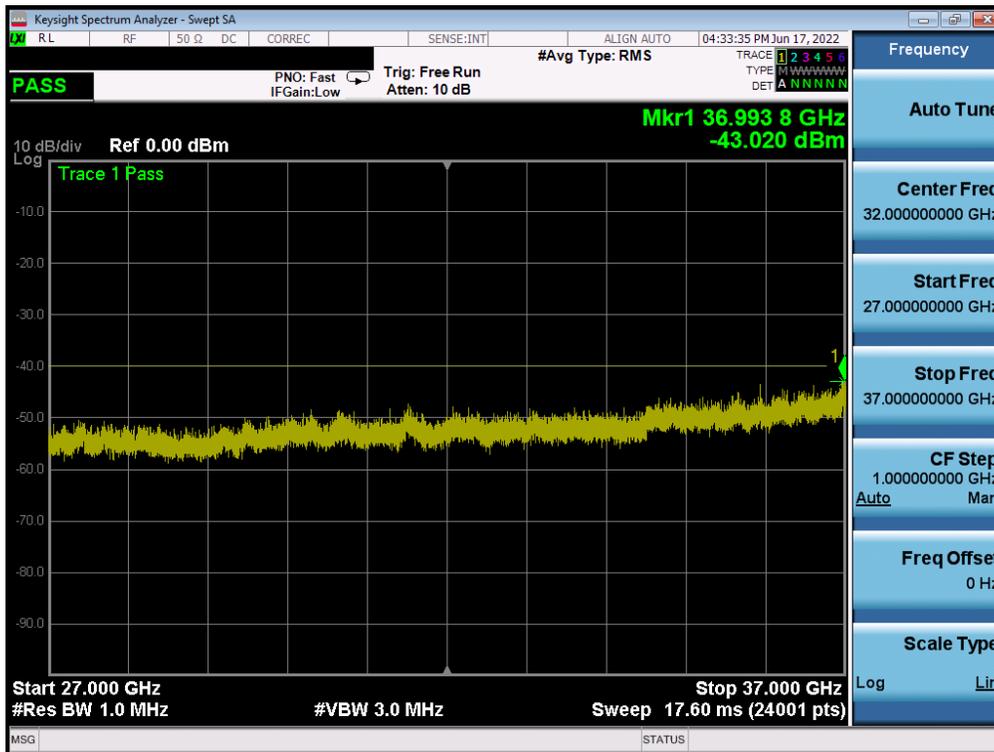


Plot 7-12. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 18 of 46

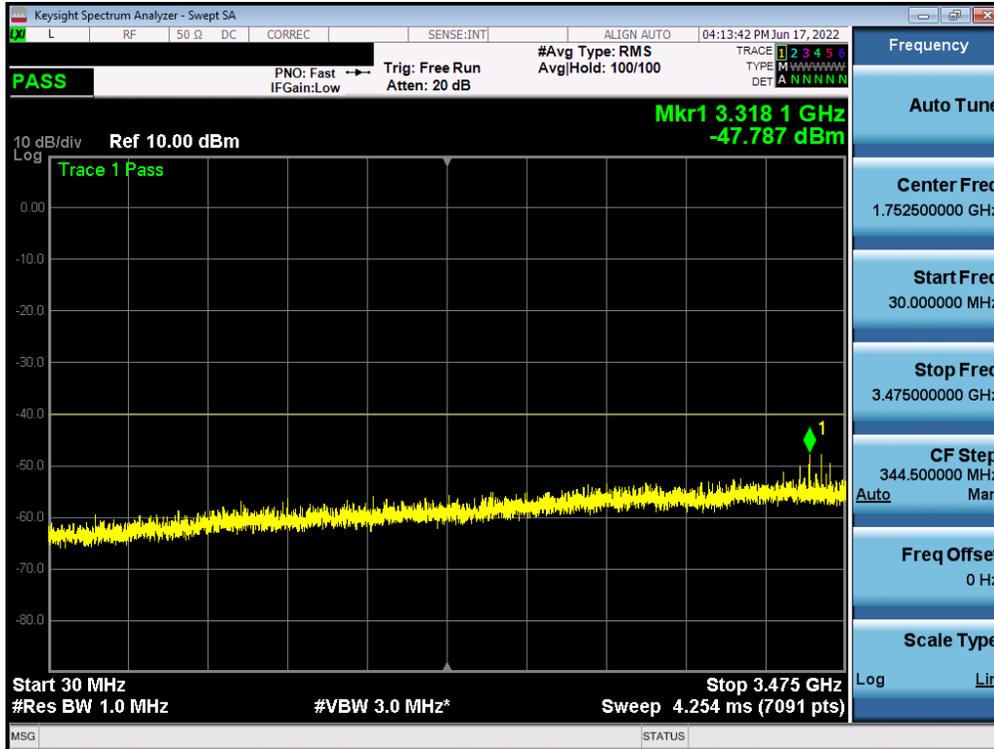

Plot 7-13. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

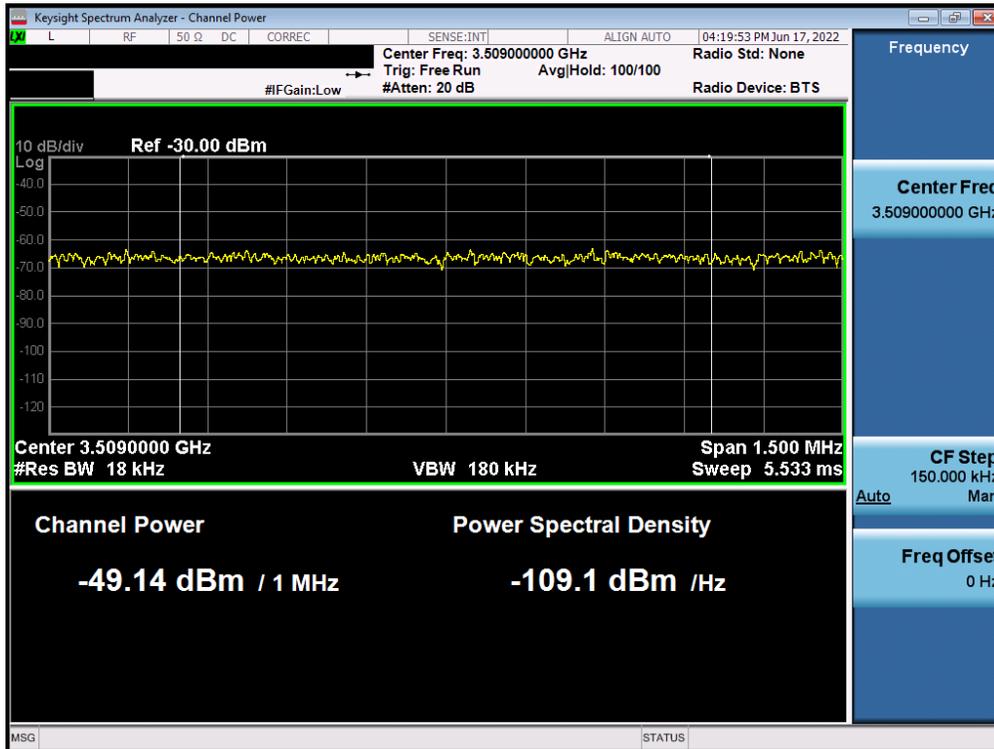


Plot 7-14. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 19 of 46




Plot 7-15. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

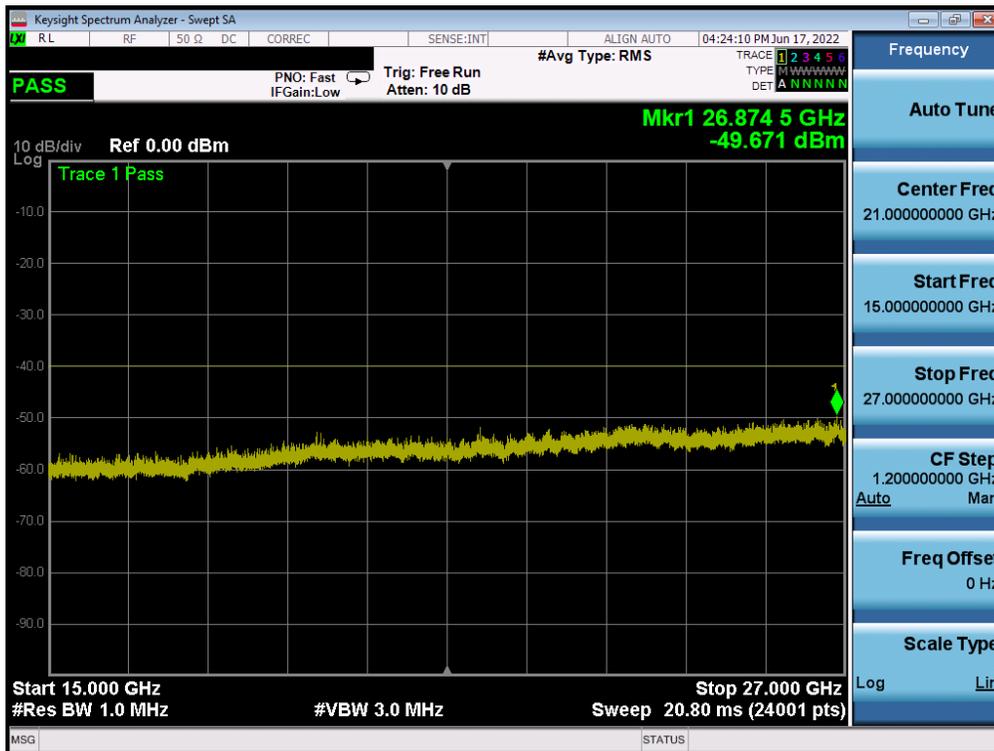


Plot 7-16. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 20 of 46

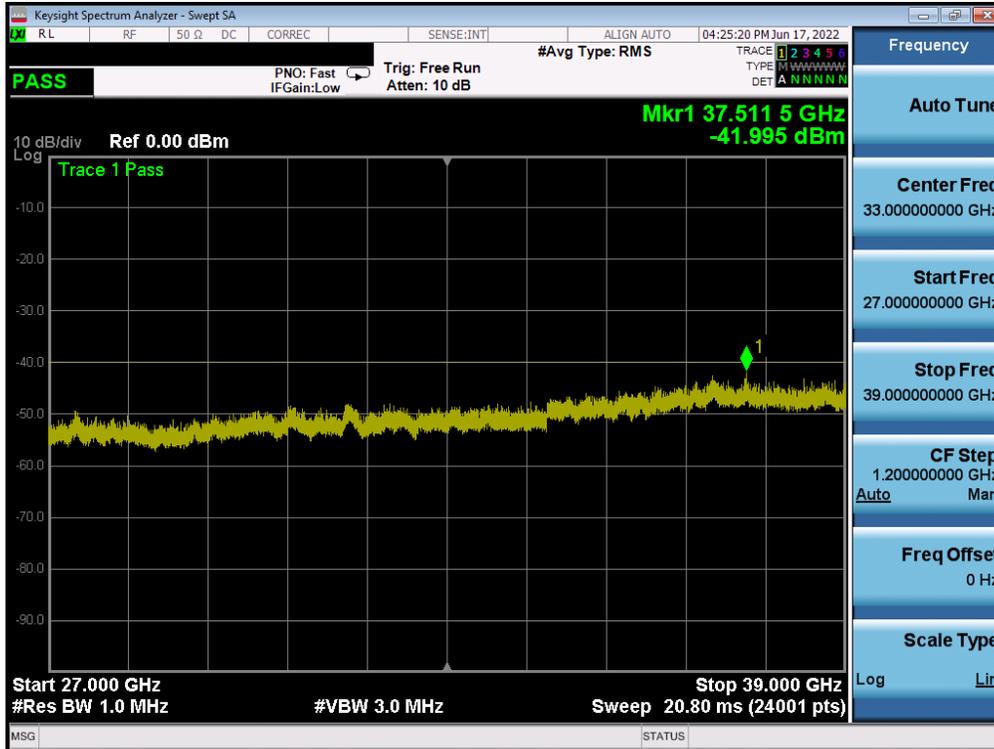


Plot 7-17. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

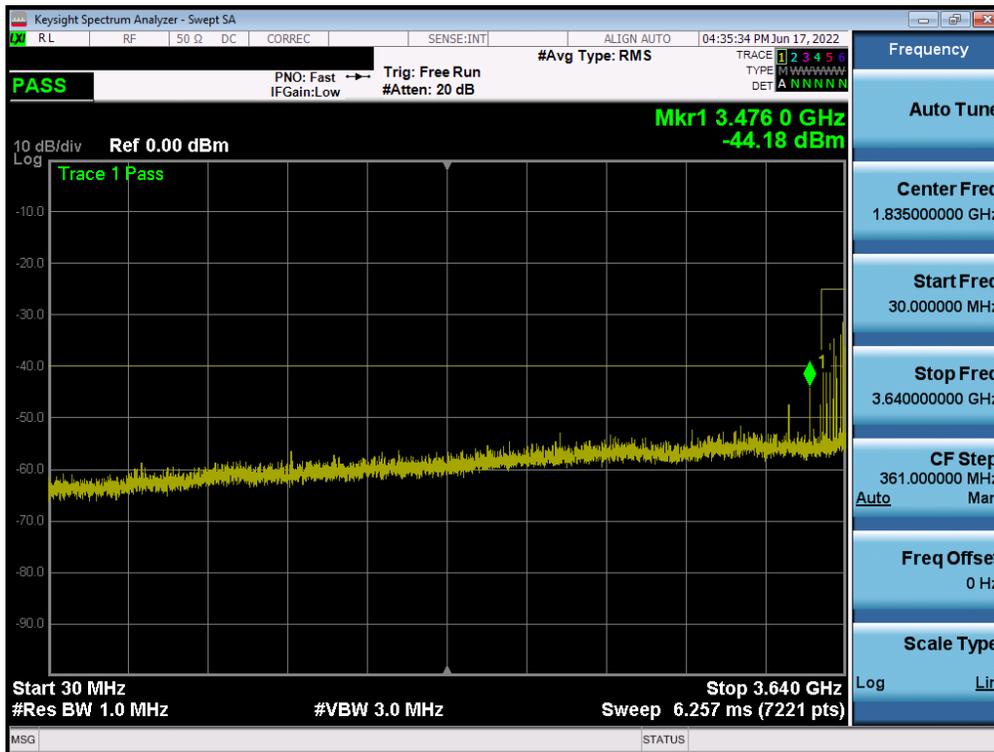


Plot 7-18. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 21 of 46

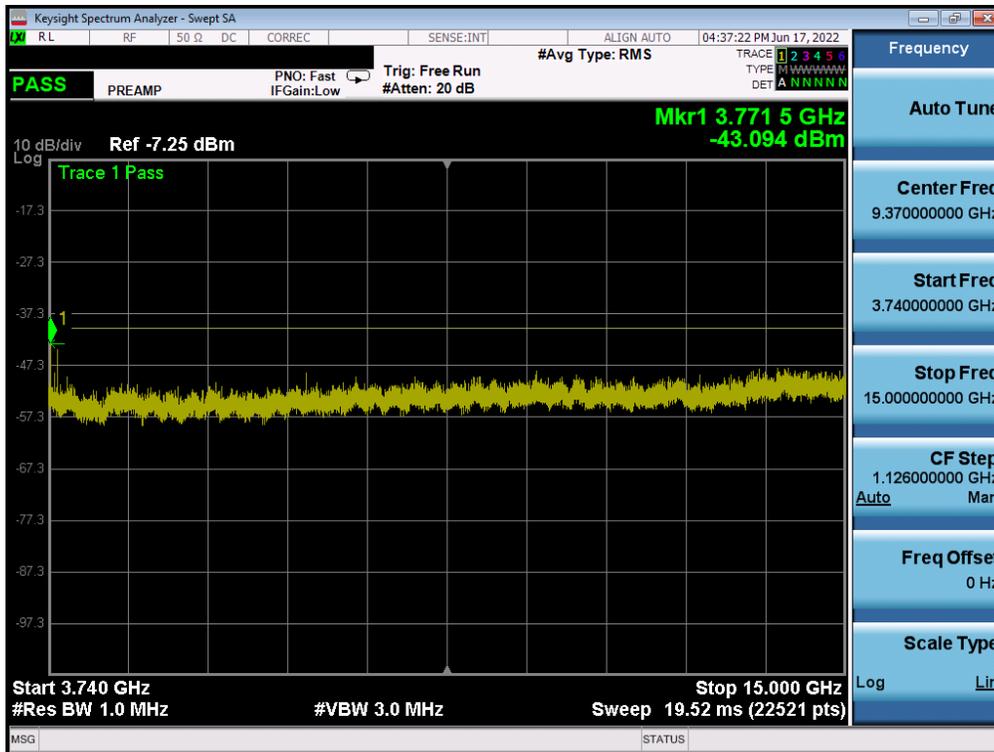


Plot 7-19. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

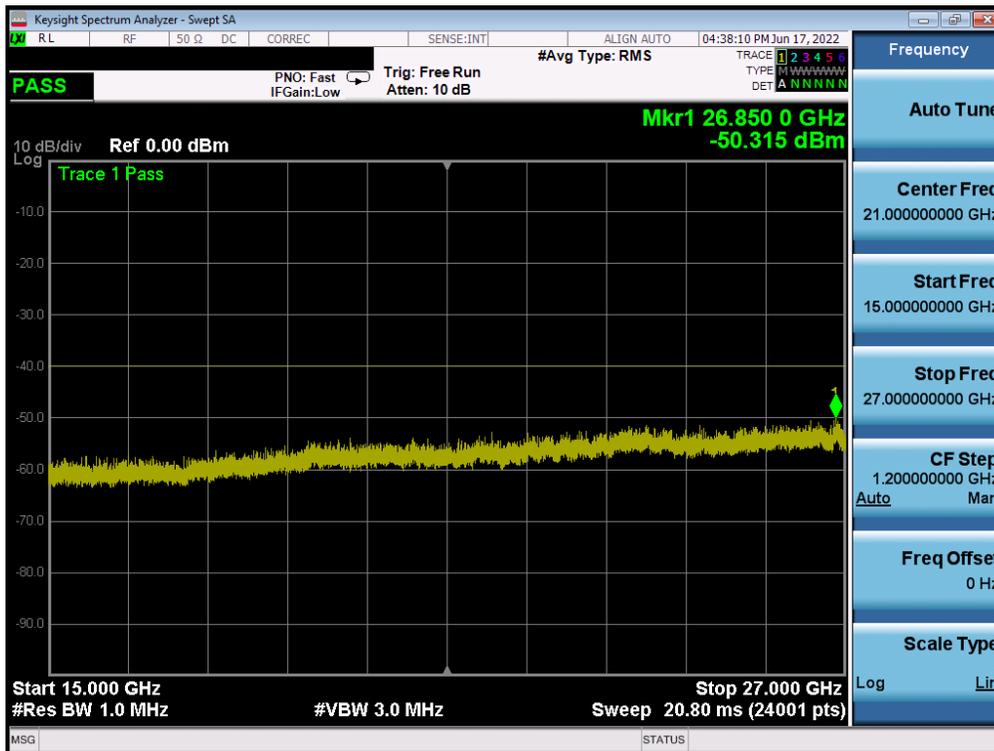

Plot 7-20. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 22 of 46

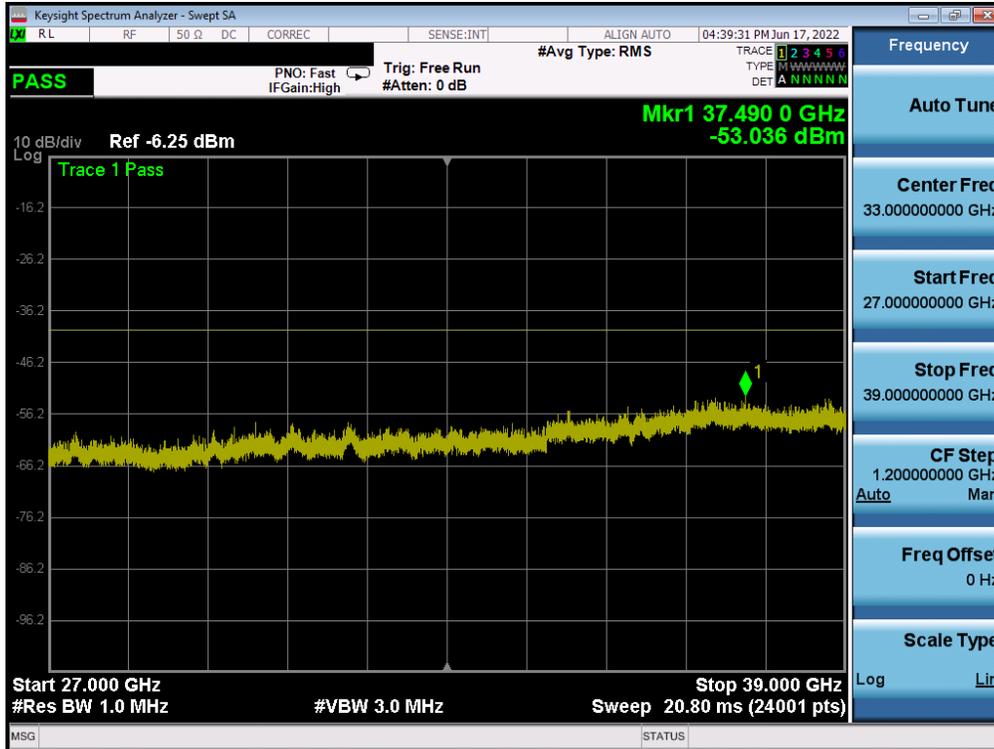

Plot 7-21. Conducted Spurious Plot (LTE Band 48 - 20MHz QPSK - High Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 23 of 46

7.4 Band Edge Emissions at Antenna Terminal

Test Overview

All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates were investigated to determine the worst-case configuration. All modes of operation were investigated and the worst-case configuration results are reported in this section.

For an End User Device, the conducted power of any emission outside the fundamental emission (whether in or outside of the authorized band) shall not exceed -13 dBm/MHz within 0 to B MHz (where B is the bandwidth in MHz of the assigned channel or multiple contiguous channels of the End User Device) above the upper CBSD-assigned channel edge and within 0 to B MHz below the lower CBSD-assigned channel edge. At all frequencies greater than B MHz above the upper CBSD assigned channel edge and less than B MHz below the lower CBSD-assigned channel edge, the conducted power of any end user device emission shall not exceed -25 dBm/MHz. The conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

Test Procedure Used

ANSI C63.26-2015 – Section 5.7.3

Test Settings

1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
2. Span was set large enough so as to capture all out of band emissions near the band edge
3. RBW \geq 1% of the emission bandwidth
4. VBW \geq 3 x RBW
5. Detector = RMS
6. Number of sweep points \geq 2 x Span/RBW
7. Trace mode = trace average
8. Sweep time = auto couple
9. The trace was allowed to stabilize

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

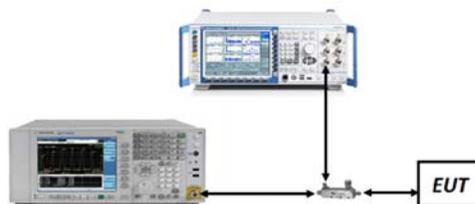


Figure 7-3. Test Instrument & Measurement Setup

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 24 of 46




Test Notes


Per 96.41(e)(3)(i), compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's authorized frequency channel, a resolution bandwidth of no less than one percent of the fundamental emission bandwidth may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full reference bandwidth (i.e., 1 MHz or 1 percent of emission bandwidth, as specified). The fundamental emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 25 of 46

LTE Band 48

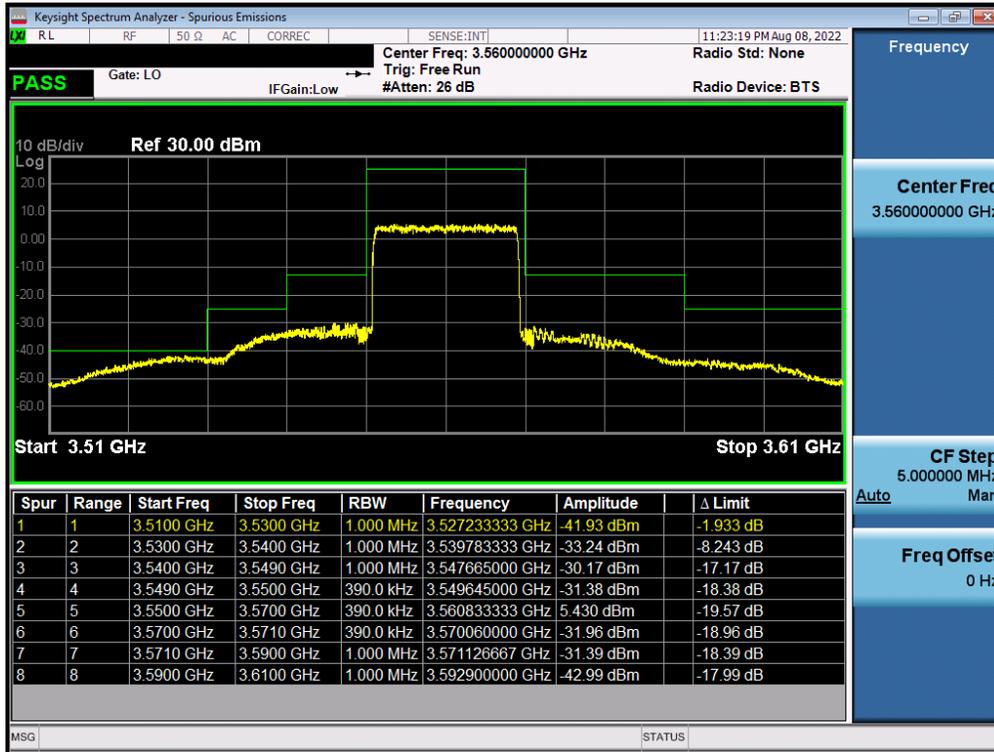


Plot 7-22. Channel - Ant1 Edge Plot (LTE Band 48 - 20MHz QPSK - Low Channel)

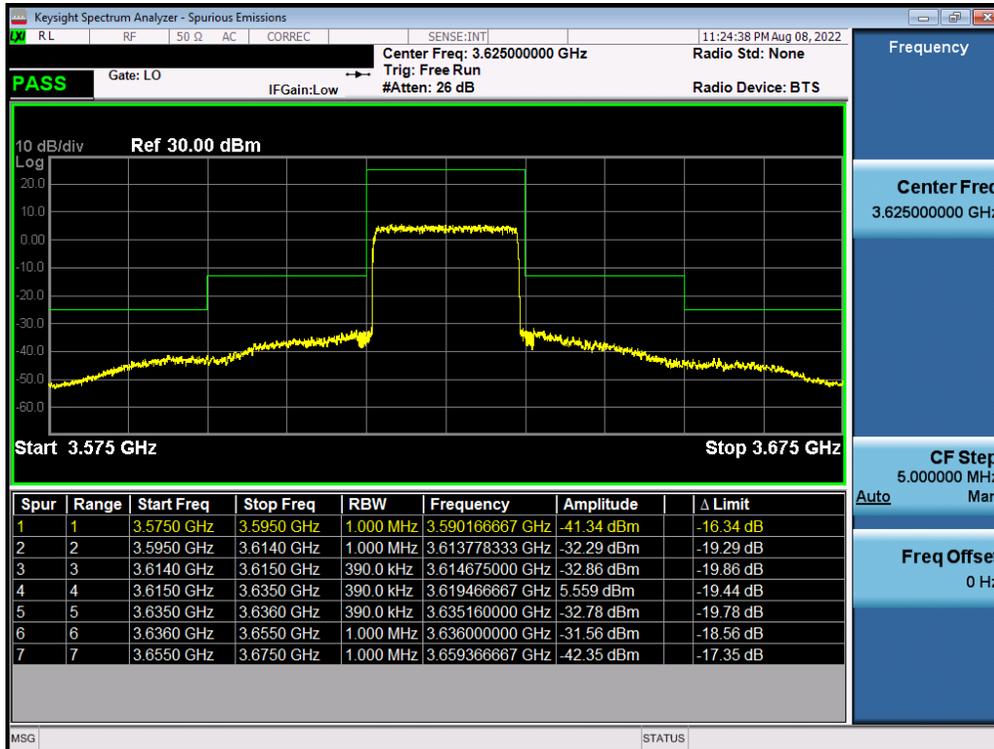


Plot 7-23. Channel - Ant1 Edge Plot (LTE Band 48 - 20MHz QPSK - Mid Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 26 of 46

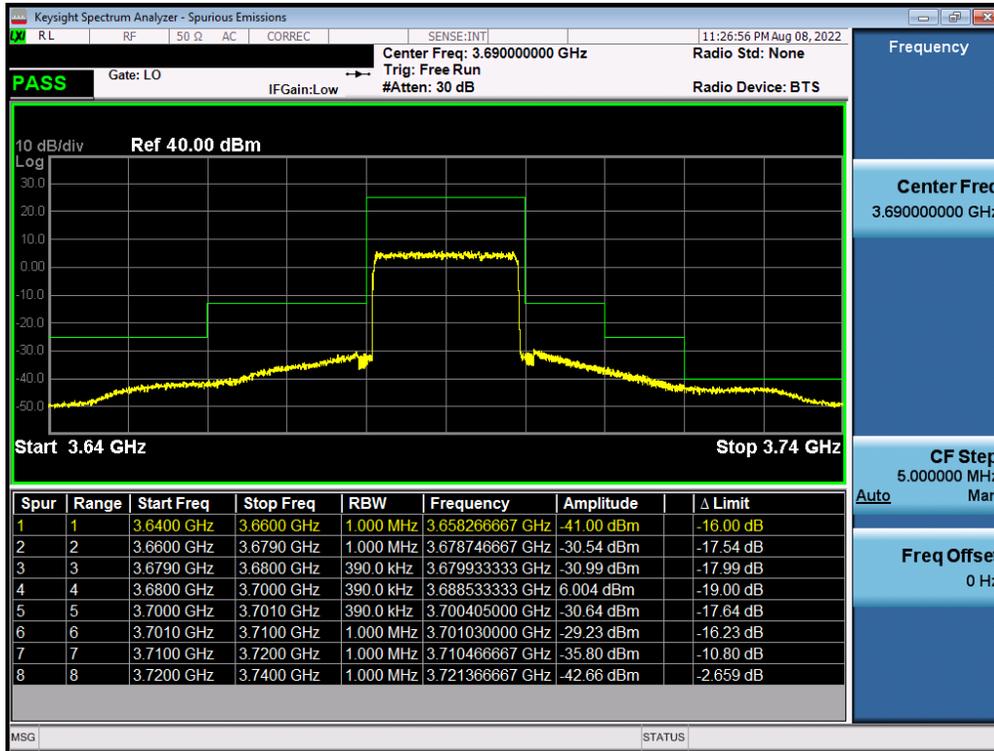


Plot 7-24. Channel - Ant1 Edge Plot (LTE Band 48 - 20MHz QPSK - High Channel)

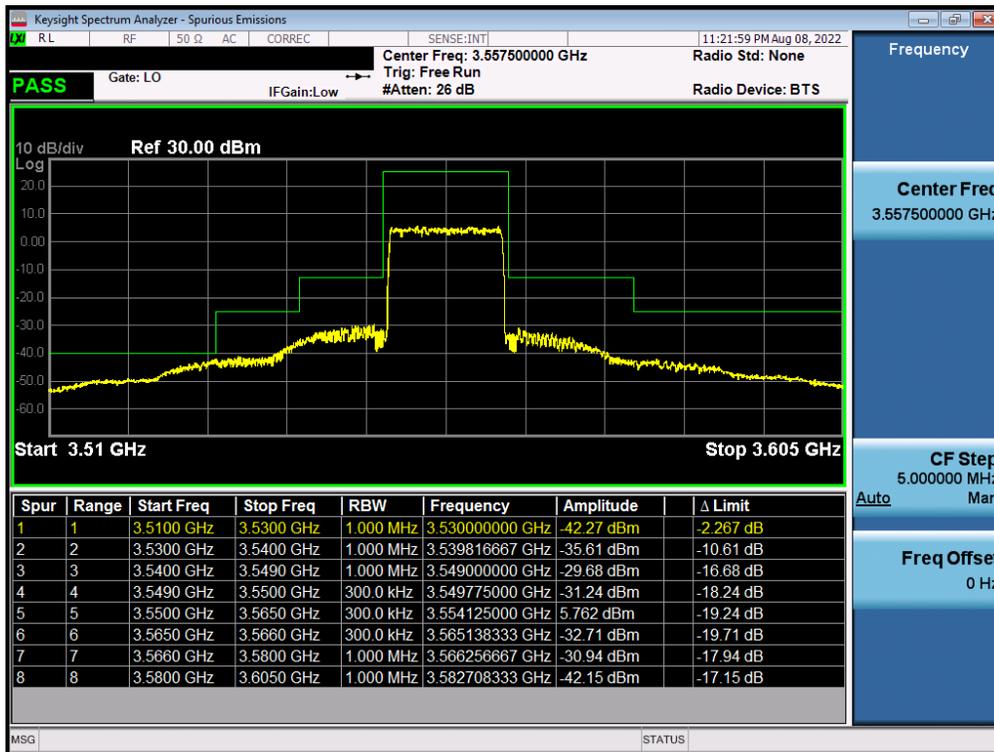


Plot 7-25. Channel - Ant1 Edge Plot (LTE Band 48 - 15MHz QPSK - Low Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 27 of 46

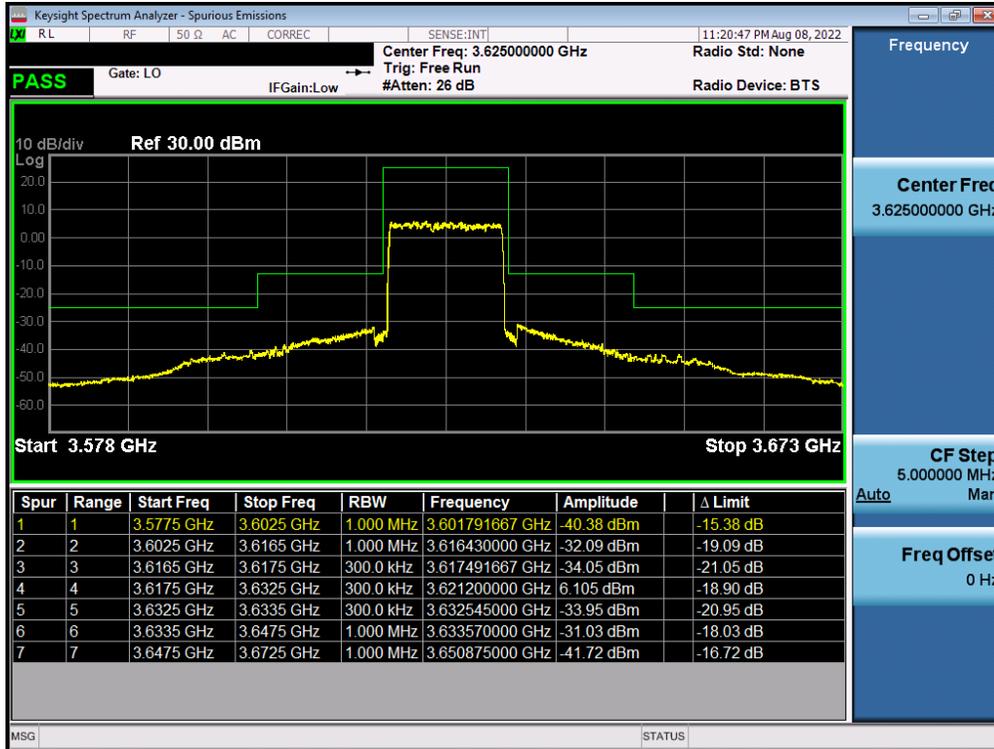


Plot 7-26. Channel - Ant1 Edge Plot (LTE Band 48 - 15MHz QPSK - Mid Channel)

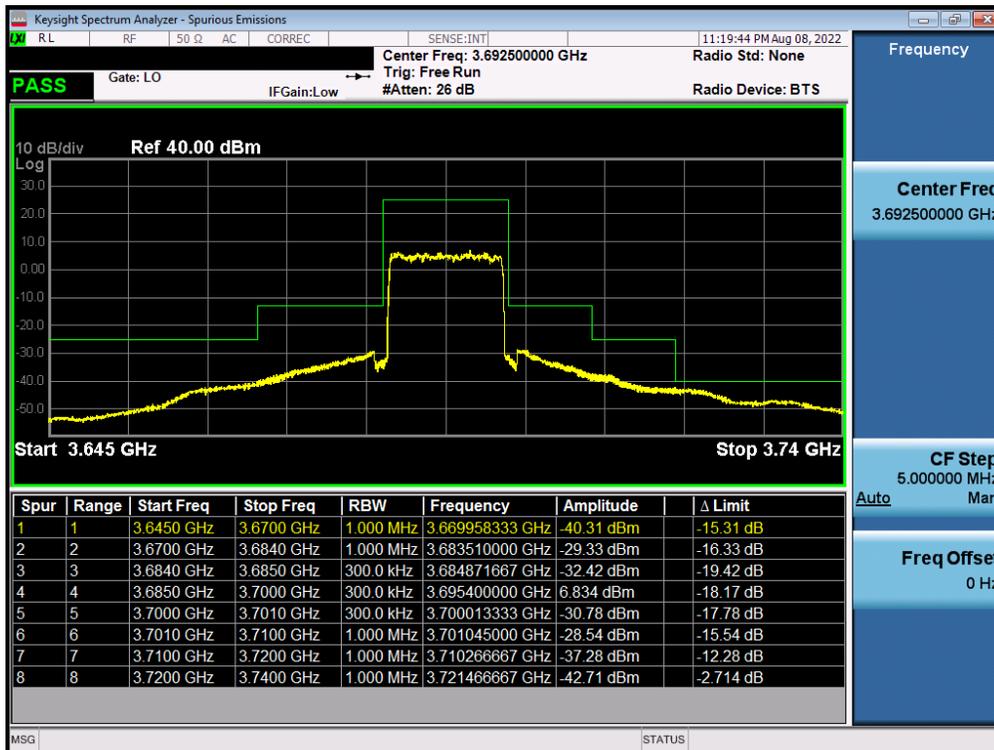


Plot 7-27. Channel - Ant1 Edge Plot (LTE Band 48 - 15MHz QPSK - High Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 28 of 46

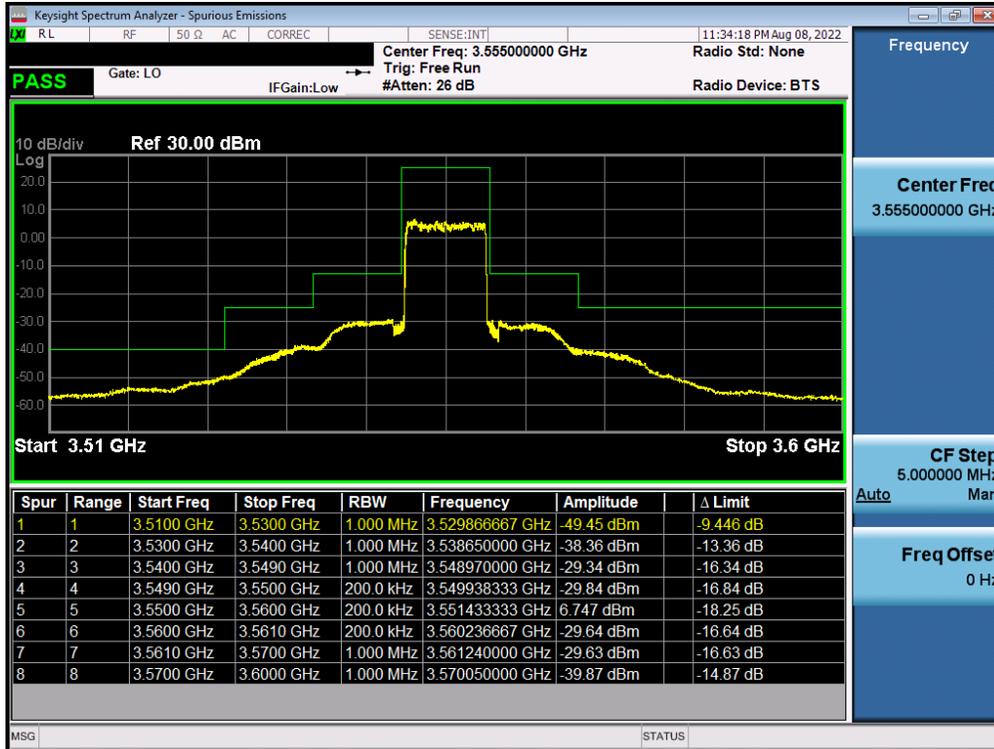


Plot 7-28. Channel - Ant1 Edge Plot (LTE Band 48 - 10MHz QPSK - Low Channel)

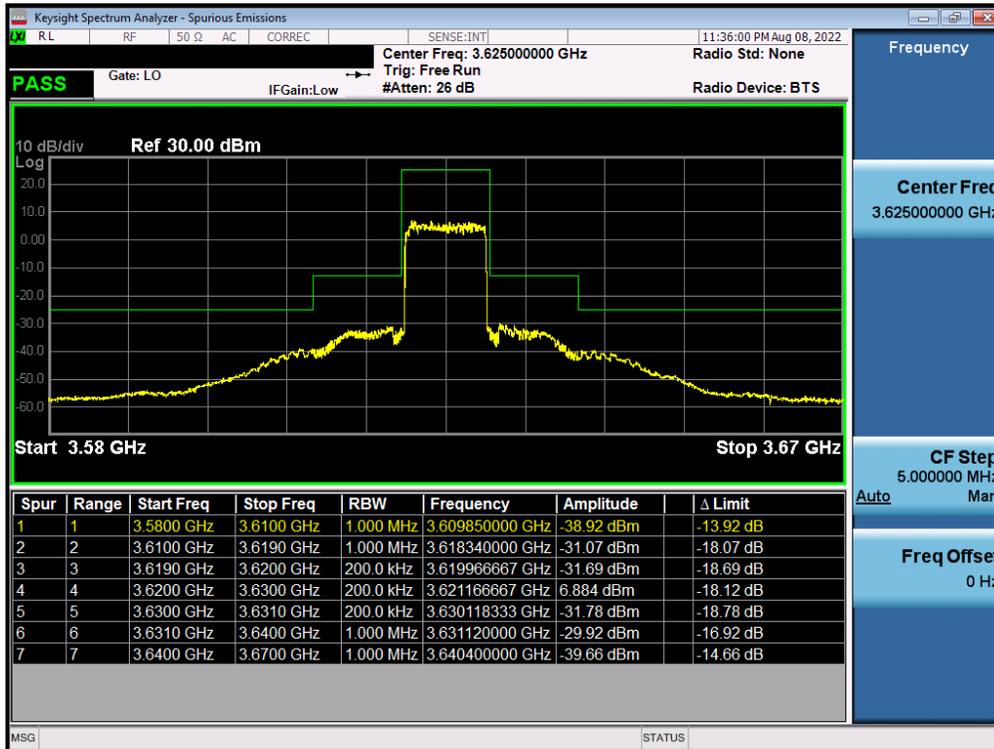


Plot 7-29. Channel - Ant1 Edge Plot (LTE Band 48 - 10MHz QPSK - Mid Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 29 of 46

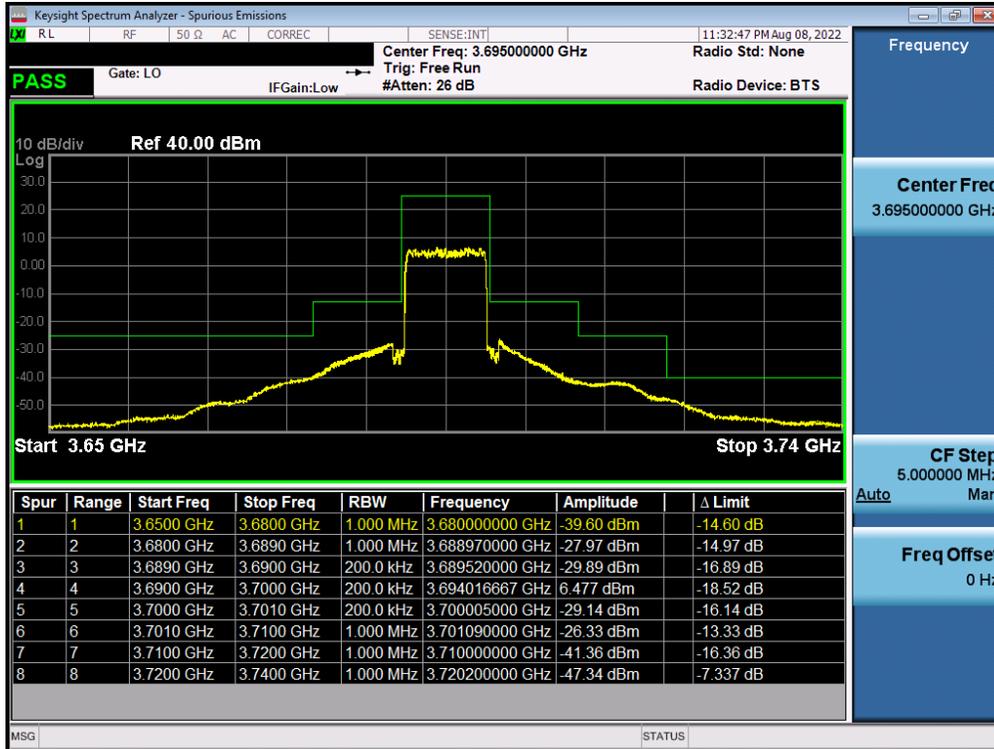


Plot 7-30. Channel - Ant1 Edge Plot (LTE Band 48 - 10MHz QPSK - High Channel)

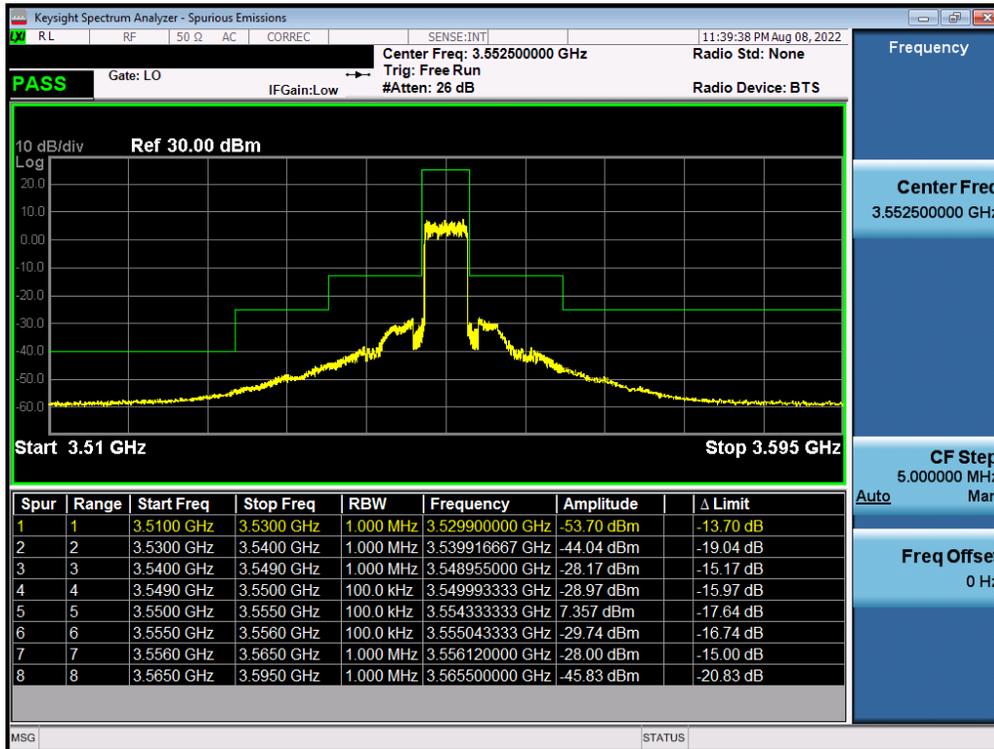


Plot 7-31. Channel - Ant1 Edge Plot (LTE Band 48 - 5MHz QPSK - Low Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 30 of 46

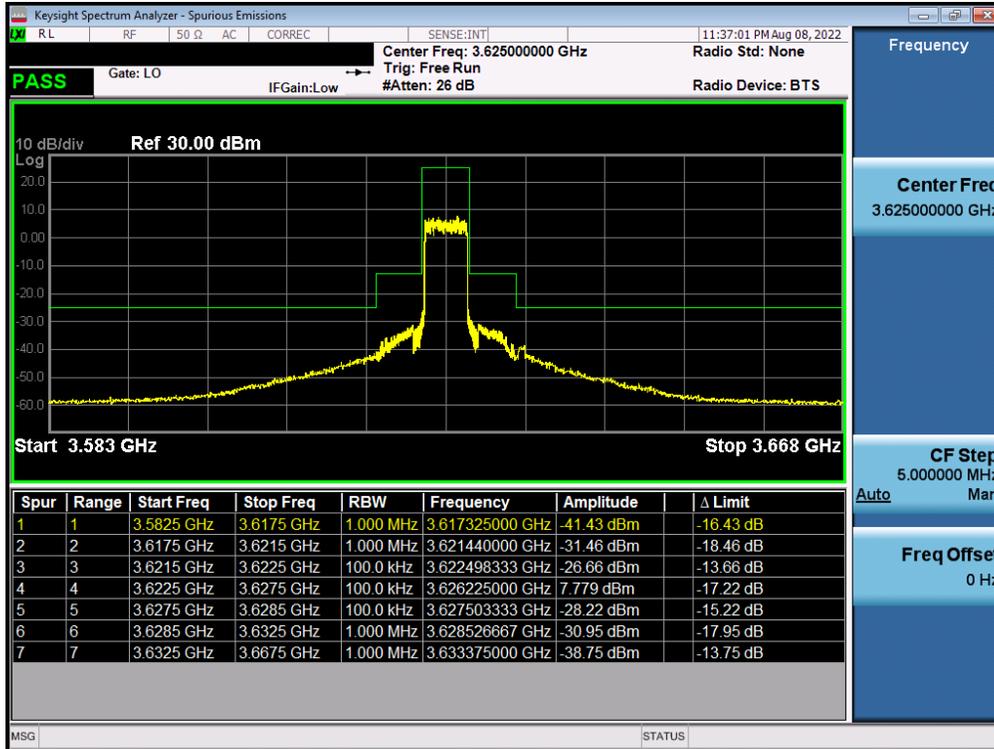

Plot 7-32. Channel - Ant1 Edge Plot (LTE Band 48 - 5MHz QPSK - Mid Channel)

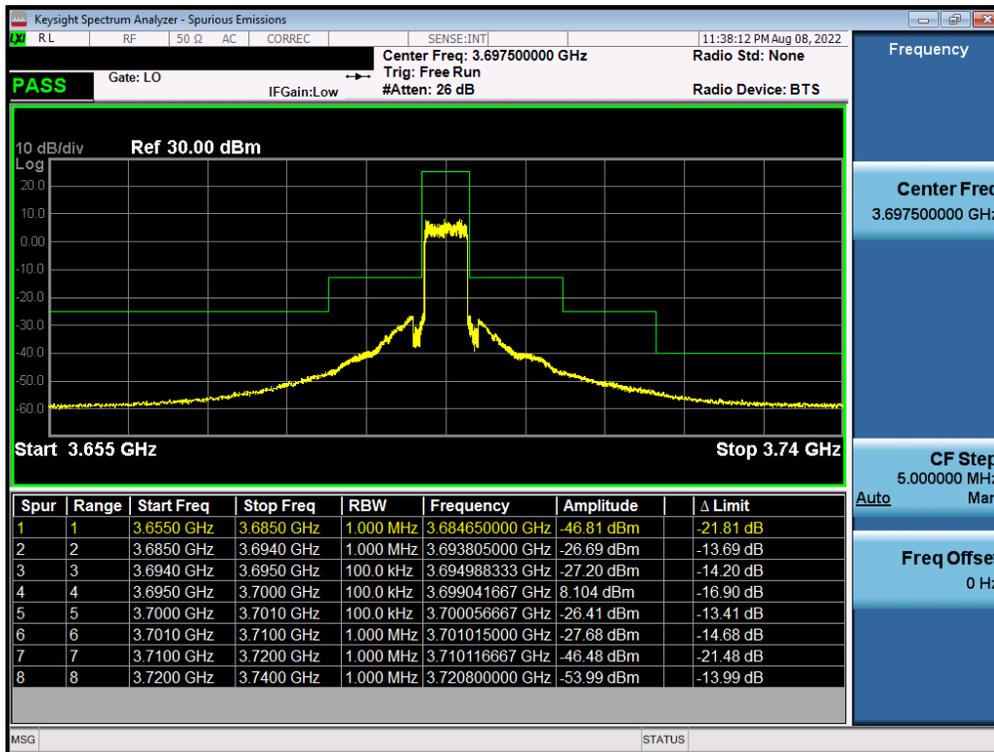

Plot 7-33. Channel - Ant1 Edge Plot (LTE Band 48 - 5MHz QPSK - High Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 31 of 46

7.5 Radiated Power (EIRP)

Test Overview

Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS average measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.2.4.4

Test Settings

1. Radiated power measurements are performed using the signal analyzer's "channel power" measurement capability for signals with continuous operation.
2. RBW = 1 – 5% of the expected OBW
3. VBW \geq 3 x RBW
4. Span = 1.5 times the OBW
5. No. of sweep points \geq 2 x span / RBW
6. Detector = RMS
7. Trigger is set to "free run" for signals with continuous operation with the sweep times set to "auto". Trigger is set to enable triggering only on full power bursts with the sweep time set less than or equal to the transmission burst duration.
8. The integration bandwidth was set equal to 10MHz. For signals with burst transmission, the "gating" function was enabled to ensure that measurements are performed during times in which the transmitter is operating at its maximum power.
9. Trace mode = trace averaging (RMS) over 100 sweeps
10. The trace was allowed to stabilize.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 32 of 46

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

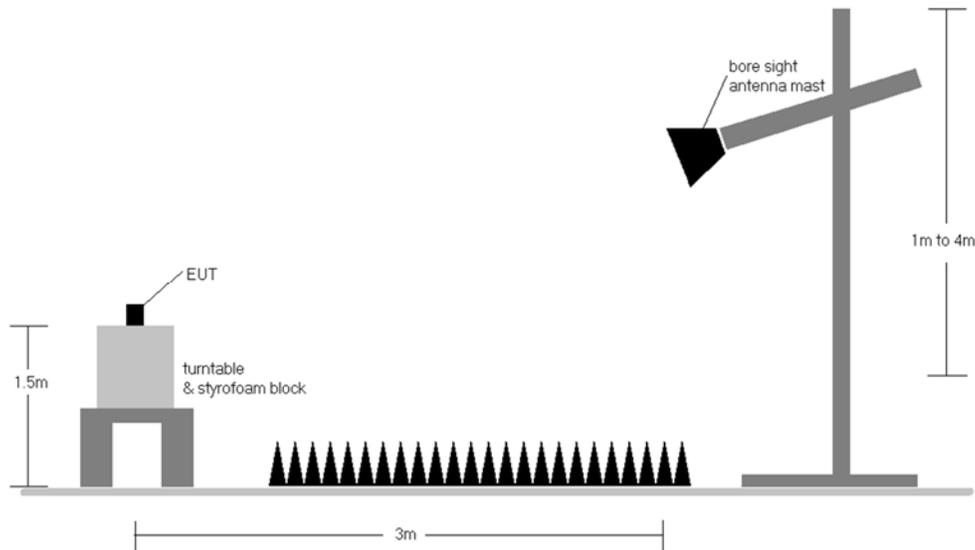


Figure 7-4. Radiated Test Setup >1GHz

Test Notes

- 1) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 2) This unit was tested with its standard battery.
- 3) The worst case EIRP shown in this section is found with LTE operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for LTE Band 48 (i.e. 5, 10, 15, 20MHz).

Bandwidth	Mod.	Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Ant. Gain [dBi]	RB Size/Offset	Substitute Level [dBm]	EIRP [dBm/10MHz]	EIRP [Watts/10MHz]	EIRP Limit [dBm/10MHz]	Margin [dB]
20 MHz	QPSK	3560.0	H	115	32	7.37	1 / 50	10.11	17.48	0.056	23.00	-5.52
	QPSK	3625.0	H	108	31	6.77	1 / 99	12.46	19.23	0.084	23.00	-3.77
	QPSK	3690.0	H	140	33	6.15	1 / 50	13.67	19.82	0.096	23.00	-3.18
	16-QAM	3690.0	H	140	33	6.15	1 / 50	11.85	18.00	0.063	23.00	-5.00
15 MHz	QPSK	3557.5	H	115	32	7.40	1 / 37	9.11	16.51	0.045	23.00	-6.49
	QPSK	3625.0	H	108	31	6.77	1 / 74	12.38	19.15	0.082	23.00	-3.85
	QPSK	3692.5	H	140	33	6.12	1 / 37	13.76	19.87	0.097	23.00	-3.13
	16-QAM	3692.5	H	140	33	6.12	1 / 74	11.58	17.70	0.059	23.00	-5.30
10 MHz	QPSK	3555.0	H	115	32	7.43	1 / 25	9.25	16.68	0.047	23.00	-6.32
	QPSK	3625.0	H	108	31	6.77	1 / 25	12.55	19.32	0.085	23.00	-3.68
	QPSK	3695.0	H	140	33	6.09	1 / 25	13.95	20.04	0.101	23.00	-2.96
	16-QAM	3695.0	H	140	33	6.09	1 / 25	11.78	17.88	0.061	23.00	-5.12
5 MHz	QPSK	3552.5	H	115	32	7.45	1 / 12	9.21	16.67	0.046	23.00	-6.33
	QPSK	3625.0	H	108	31	6.77	1 / 12	12.58	19.35	0.086	23.00	-3.65
	QPSK	3697.5	H	140	33	6.06	1 / 12	13.98	20.04	0.101	23.00	-2.96
	16-QAM	3697.5	H	140	33	6.06	1 / 12	11.87	17.94	0.062	23.00	-5.06
20 MHz	QPSK (Opposite Pol.)	3690.0	V	120	341	6.91	1/50	11.85	18.76	0.075	23.00	-4.24
	QPSK (WCP)	3690.0	H	152	37	6.77	1/50	7.08	13.85	0.024	23.00	-9.15

Table 7-2. EIRP Data (LTE Band 48)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 33 of 46



7.6 Radiated Spurious Emissions Measurements

Test Overview

Radiated spurious emissions measurements are performed using the field strength conversion method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signals operating below 1GHz are performed using hybrid (biconical/log) antennas. Measurements on signals operating above 1GHz are performed using vertically and horizontally polarized broadband horn antennas. All measurements are performed as RMS measurements while the EUT is operating at maximum power, and at the appropriate frequencies.

Test Procedures Used

ANSI C63.26-2015 – Section 5.5.4

Test Settings

1. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
2. VBW $\geq 3 \times$ RBW
3. Span = 1.5 times the OBW
4. No. of sweep points $\geq 2 \times$ span / RBW
5. Detector = RMS
6. Trace mode = Max Hold (In cases where the level is within 2dB of the limit, the final measurement is taken using triggering/gating and trace averaging.)
7. The trace was allowed to stabilize

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 34 of 46

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

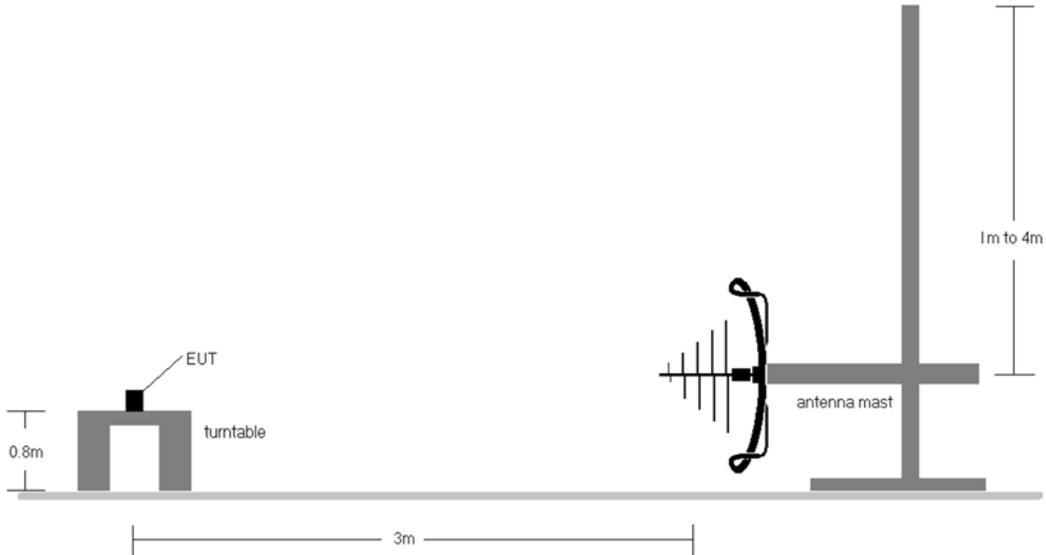


Figure 7-5. Test Instrument & Measurement Setup < 1GHz

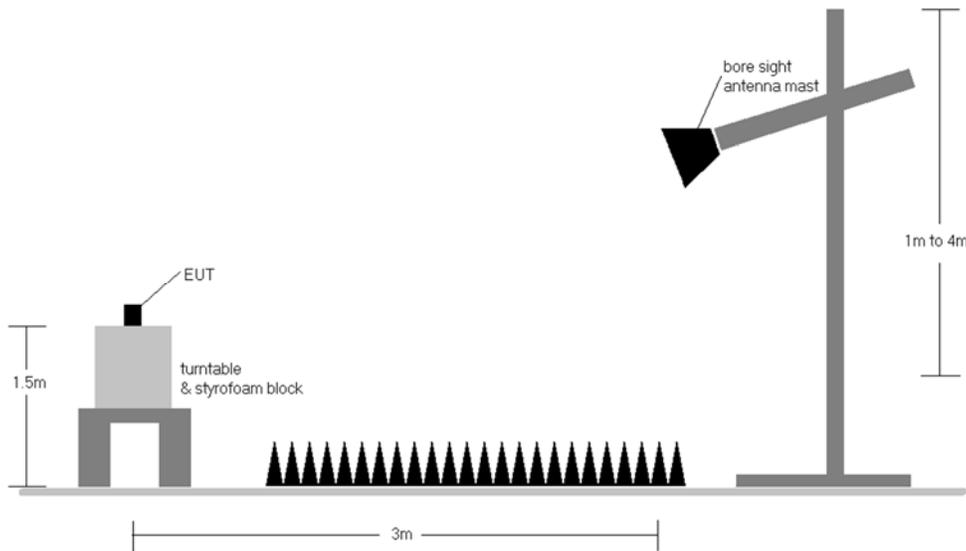


Figure 7-6. Test Instrument & Measurement Setup >1 GHz


FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 35 of 46

Test Notes

- 1) Field strengths are calculated using the Measurement quantity conversions in ANSI C63.26-2015 Section 5.2.7:
 - a) $E(\text{dB}\mu\text{V}/\text{m}) = \text{Measured amplitude level (dBm)} + 107 + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$
 - b) $\text{EIRP (dBm)} = E(\text{dB}\mu\text{V}/\text{m}) + 20\log D - 104.8$; where D is the measurement distance in meters.
- 2) The EUT was tested in three orthogonal planes and in all possible test configurations and positioning. The worst case emissions are reported with the EUT positioning, modulations, RB sizes and offsets, and channel bandwidth configurations shown in the tables below.
- 3) This unit was tested with its standard battery.
- 4) The spectrum is measured from 9kHz to the 10th harmonic of the fundamental frequency of the transmitter. The worst-case emissions are reported.
- 5) Emissions below 18GHz were measured at a 3-meter test distance while emissions above 18GHz were measured at a 1 meter test distance with the application of a distance correction factor.
- 6) The "-" shown in the following RSE tables are used to denote a noise floor measurement.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 36 of 46

LTE Band 48

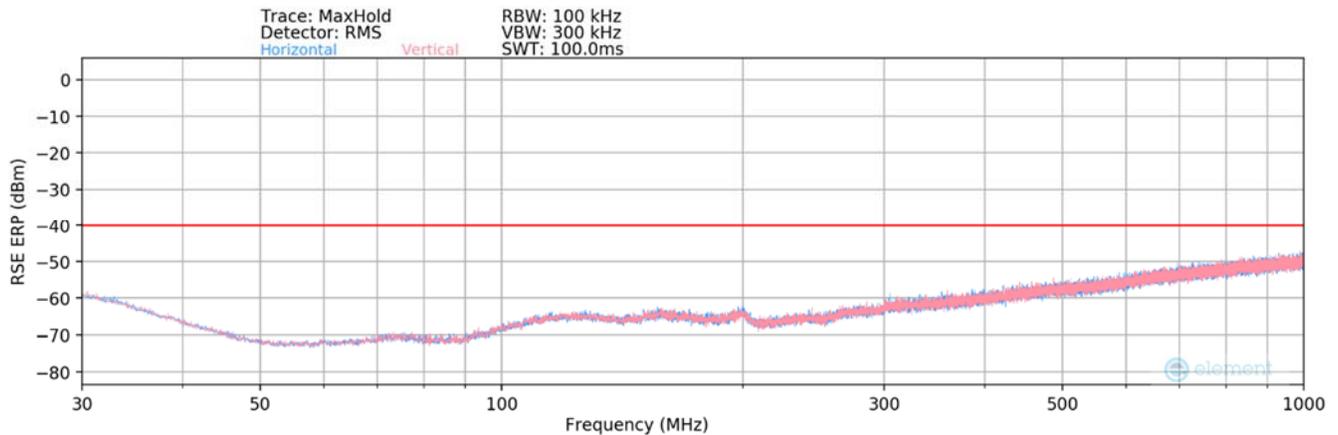


Plot 7-34. Radiated Spurious Plot (LTE Band 48 – 30MHz-1GHz)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50


Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBμV/m]	ERP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
200.00	H	-	-	-98.49	20.24	28.75	-66.51	-40.00	-26.51
800.00	H	-	-	-97.56	30.08	39.52	-55.74	-40.00	-15.74

Table 7-3. Radiated Spurious Data (LTE Band 48 – 30MHz-1GHz)


FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 37 of 46

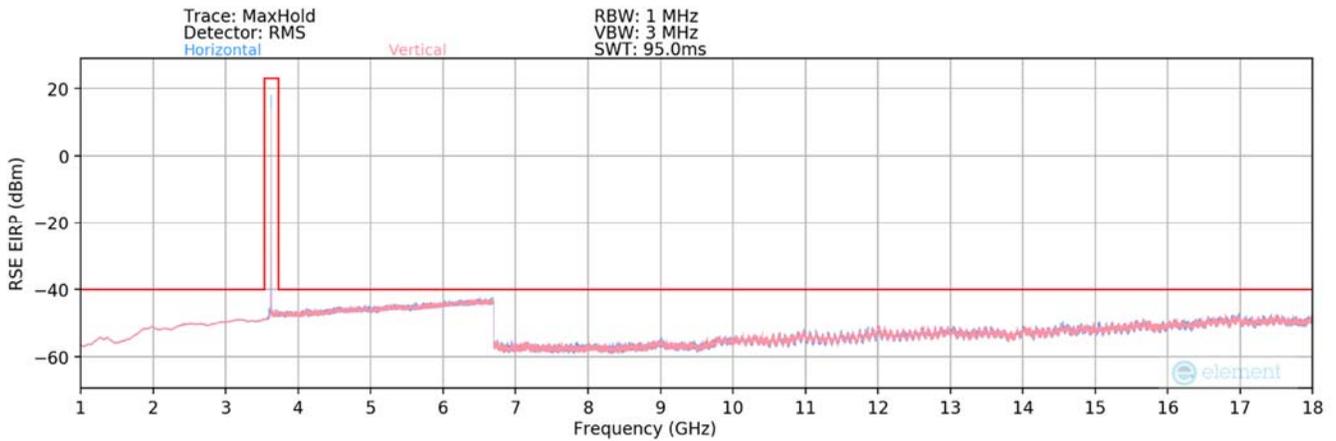

Plot 7-35. Radiated Spurious Plot (LTE Band 48 1-18GHz)

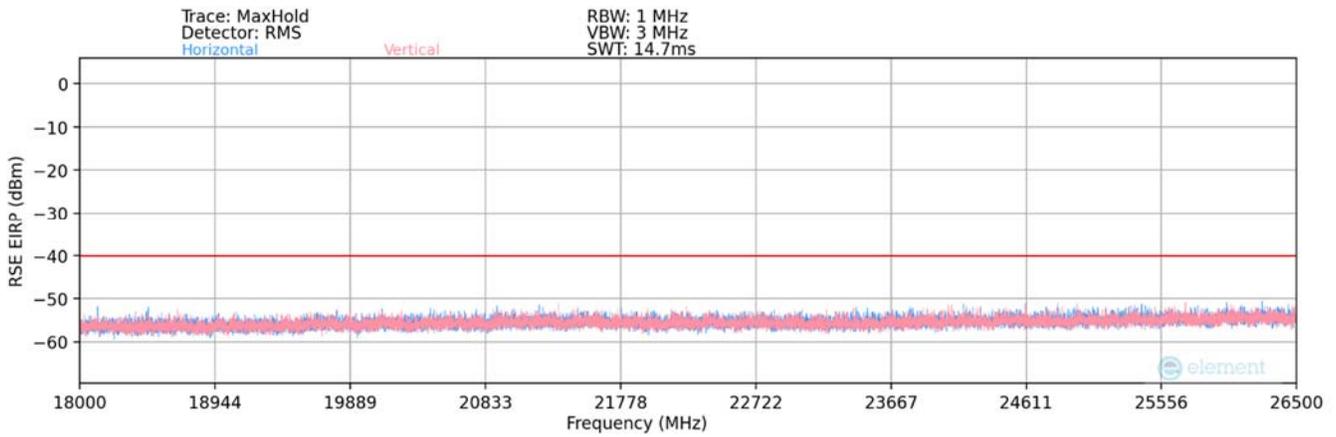

Plot 7-36. Radiated Spurious Plot (LTE Band 48 18-26.5GHz)

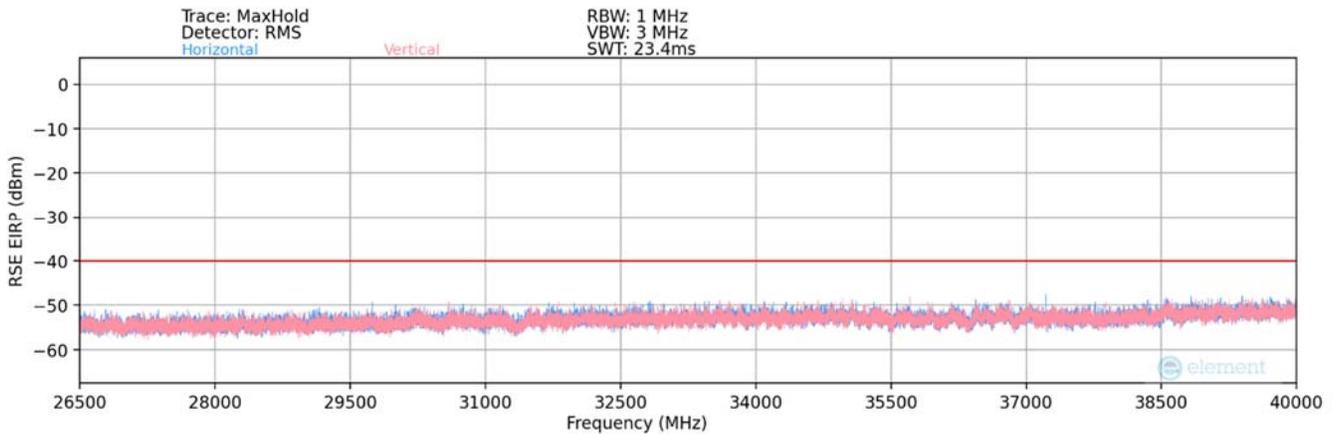

Plot 7-37. Radiated Spurious Plot (LTE Band 48 26.5-40GHz)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 38 of 46



Bandwidth (MHz):	20
Frequency (MHz):	3560.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7120.00	H	-	-	-77.56	8.23	37.67	-57.59	-40.00	-17.59
10680.00	H	-	-	-80.09	12.63	39.54	-55.72	-40.00	-15.72
14240.00	H	-	-	-81.31	15.38	41.07	-54.19	-40.00	-14.19
21360.00	H	-	-	-58.22	3.87	52.65	-52.15	-40.00	-12.15
24920.00	H	-	-	-58.85	4.28	52.42	-52.38	-40.00	-12.38
28480.00	H	-	-	-59.78	5.39	52.60	-52.20	-40.00	-12.20

Table 7-4. Radiated Spurious Data (LTE Band 48 – Low Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3625.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7250.00	H	-	-	-77.26	7.61	37.35	-57.91	-40.00	-17.91
10875.00	H	-	-	-80.16	12.18	39.02	-56.23	-40.00	-16.23
14500.00	H	-	-	-81.40	15.49	41.09	-54.17	-40.00	-14.17
18125.00	H	150	8	-53.43	1.45	55.02	-49.78	-40.00	-9.78
21750.00	H	-	-	-57.71	3.79	53.08	-51.72	-40.00	-11.72
25375.00	H	-	-	-57.25	4.67	54.42	-50.38	-40.00	-10.38
29000.00	H	-	-	-57.61	5.52	54.91	-49.89	-40.00	-9.89
32625.00	H	-	-	-58.83	6.91	55.08	-49.72	-40.00	-9.72

Table 7-5. Radiated Spurious Data (LTE Band 48 – Mid Channel)

Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	H	178	315	-74.23	8.30	41.07	-54.18	-40.00	-14.18
11070.00	H	295	11	-71.30	12.57	48.27	-46.99	-40.00	-6.99
14760.00	H	-	-	-78.35	16.23	44.88	-50.38	-40.00	-10.38
18450.00	H	150	10	-53.64	1.91	55.27	-49.53	-40.00	-9.53
22140.00	H	-	-	-58.84	3.85	52.01	-52.79	-40.00	-12.79
25830.00	H	-	-	-59.60	4.89	52.30	-52.50	-40.00	-12.50

Table 7-6. Radiated Spurious Data (LTE Band 48 – High Channel)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 39 of 46



Case:	w/ Wireless Charging Pad
Bandwidth (MHz):	20
Frequency (MHz):	3690.0
Modulation Signal:	QPSK
RB Config (Size / Offset):	1 / 50

Frequency [MHz]	Ant. Pol. [H/V]	Antenna Height [cm]	Turntable Azimuth [degree]	Analyzer Level [dBm]	AFCL [dB/m]	Field Strength [dBµV/m]	EIRP Spurious Emission Level [dBm]	Limit [dBm]	Margin [dB]
7380.00	V	384	192	-76.76	8.30	38.54	-56.71	-40.00	-16.71
11070.00	V	243	198	-74.52	12.57	45.05	-50.21	-40.00	-10.21
14760.00	V	-	-	-80.43	16.23	42.80	-52.46	-40.00	-12.46
18450.00	V	-	-	-60.66	1.91	48.25	-56.55	-40.00	-16.55
22140.00	V	-	-	-65.69	3.85	45.16	-59.64	-40.00	-19.64

Table 7-7. Radiated Spurious Data with WCP (LTE Band 48)

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 40 of 46

7.7 Frequency Stability / Temperature Variation

Test Overview and Limit

Frequency stability testing is performed in accordance with the guidelines of ANSI C63.26-2015. The frequency stability of the transmitter is measured by:

- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

For Part 96, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Procedure Used

ANSI C63.26-2015 – Section 5.6

Test Settings

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

Test Setup

The EUT was connected via an RF cable to a spectrum analyzer with the EUT placed inside an environmental chamber.

Test Notes


None

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 41 of 46

Frequency Stability / Temperature Variation

LTE Band 48					
		Operating Frequency (Hz):		3,625,000,000	
		Ref. Voltage (VDC):		4.28	
Voltage (%)	Power (VDC)	Temp (°C)	Frequency (Hz)	Freq. Dev. (Hz)	Deviation (%)
100 %	4.28	- 30	3,625,090,143	2,178	0.0000601
		- 20	3,625,090,452	2,487	0.0000686
		- 10	3,625,096,246	8,281	0.0002284
		0	3,625,086,149	-1,816	-0.0000501
		+ 10	3,625,095,864	7,899	0.0002179
		+ 20 (Ref)	3,625,087,965	0	0.0000000
		+ 30	3,625,079,035	-8,930	-0.0002463
		+ 40	3,625,089,464	1,499	0.0000414
		+ 50	3,625,087,474	-491	-0.0000135
Battery Endpoint	3.69	+ 20	3,625,088,544	579	0.0000160

Table 7-8. LTE Band 48 Frequency Stability Data

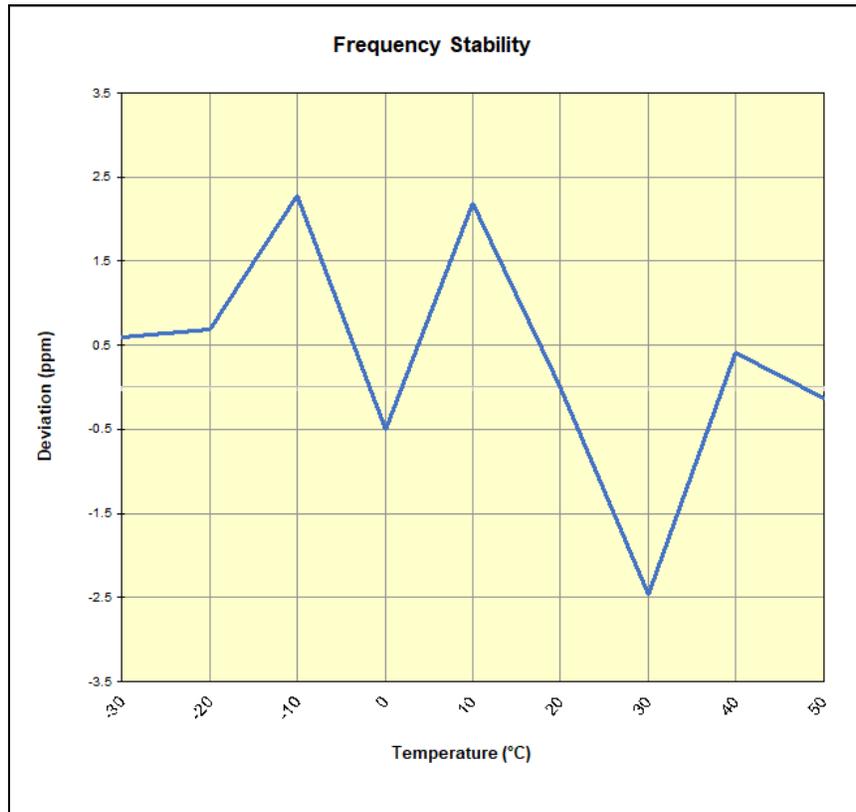

Plot 7-38. LTE Band 48 Frequency Stability Chart

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 42 of 46



7.8 End User Device Additional Requirement (CBSD Protocol)

Test Overview and Limit

End user device additional requirements (CBSD Protocol) are tested per the test procedures listed below. During testing, the EUT is connected to a certified CBSD (Ruckus FCC ID: S9GQ910US00) as a companion device to show compliance with Part 96.47.

End User Devices may operate only if they can positively receive and decode an authorization signal transmitted by a CBSD, including the frequencies and power limits for their operation.

An End User Device must discontinue operations, change frequencies, or change its operational power level within 10 seconds of receiving instructions from its associated CBSD.

Test Procedure Used

KDB 940660 D01 v03, WINNF-TS-0122 V1.0.2

Test Setup/Method

The EUT was connected via an RF cable to a certified CBSD and spectrum analyzer. The following procedure is performed by applying WINNF-TS-0122 CBRS CBSD Test Specification.


1. Run#1:
 - a. Setup WINNF.PT.C.HBT.1 with 3615MHz – 3635MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.
2. Run#2:
 - a. Setup WINNF.PT.C.HBT.1 with 3660MHz – 3680MHz.
 - b. Enable AP service from Ruckus Cloud management.
 - c. Check EUT Tx frequency.
 - d. Disable AP service from Ruckus Cloud management and check EUT stop transmission within 10s.

Test Notes

The EUT is an End User Device.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 43 of 46

Run#1:

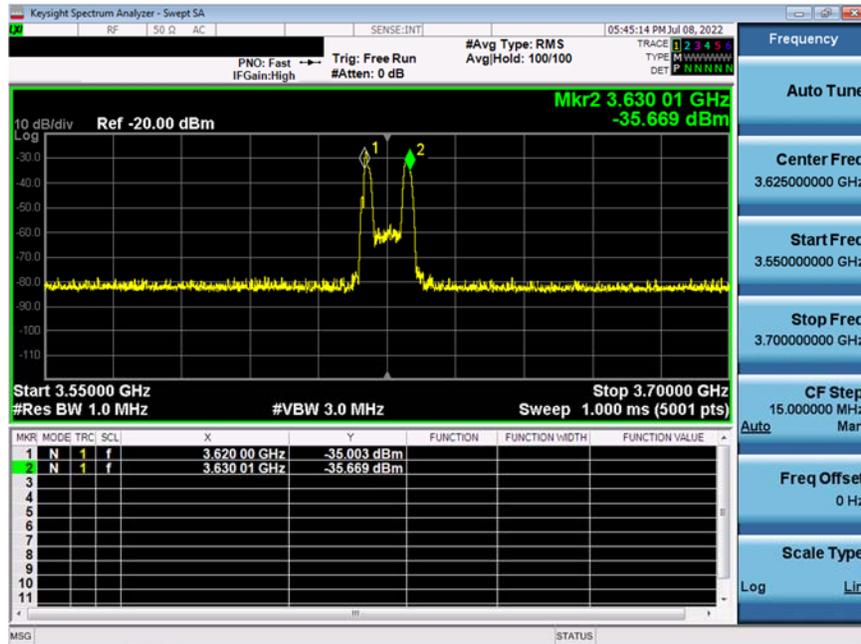

Plot 7-39. Run#1 End User Device Frequency of Operations




Plot 7-40. Run#1 End User Device Discontinues Operations within 10s

Note:

- Marker 1: CBSD sends instructions to discontinue LTE operations.
- Marker 2: EUT discontinues operation.
- Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 44 of 46

Run#2:

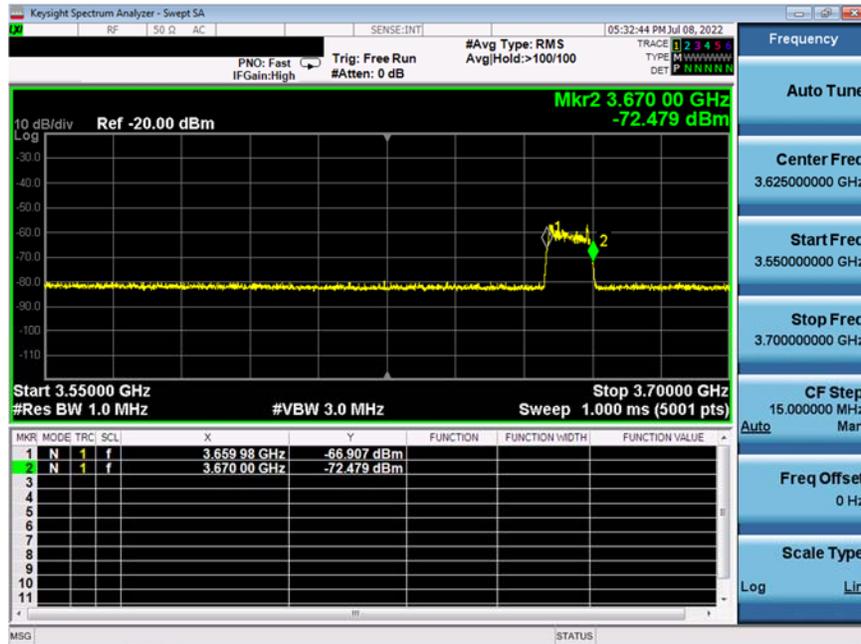

Plot 7-41. Run#2 End User Device Frequency of Operations



Plot 7-42. Run#2 End User Device Discontinues Operations within 10s

Note:

- Marker 1: CBSD sends instructions to discontinue LTE operations.
- Marker 2: EUT discontinues operation.
- Marker 3: 10 seconds elapsed time from CBSD sending instructions to EUT.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 45 of 46

8.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **Sony Corporation Portable Handset FCC ID: PY7-76056F** complies with all of the End User Device requirements of Part 96 of the FCC Rules for LTE operation only.

FCC ID: PY7-76056F	PART 96 MEASUREMENT REPORT		Approved by: Technical Manager
Test Report S/N: 1M2205240063-09.PY7	Test Dates: 06/02/2022 - 08/08/2022	EUT Type: Portable Handset	Page 46 of 46