



# **C2PC CERTIFICATION TEST REPORT**

**Report Number. :** 11740661-E9V1

**Applicant :** SONY MOBILE COMMUNICATIONS INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA -KU,TOKYO, 140-0002, JAPAN

**FCC ID :** PY7-81775I

**EUT Description :** GSM/WCDMA/LTE Phone with BT,DTS/UNII a/b/g/n/ac, GPS &  
NFC

**Test Standard(s) :** FCC CFR47 PART 27 SUBPART L

**Date Of Issue:**

August 30, 2017

**Prepared by:**

UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

---

**Revision History**

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	08/30/17	Initial Issue	D. Corona

## TABLE OF CONTENTS

<b>1.</b>	<b>ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2.</b>	<b>TEST METHODOLOGY .....</b>	<b>5</b>
<b>3.</b>	<b>FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4.</b>	<b>CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1.	<i>MEASURING INSTRUMENT CALIBRATION .....</i>	5
4.2.	<i>SAMPLE CALCULATION .....</i>	5
4.3.	<i>MEASUREMENT UNCERTAINTY .....</i>	6
<b>5.</b>	<b>EQUIPMENT UNDER TEST .....</b>	<b>6</b>
5.1.	<i>DESCRIPTION OF EUT .....</i>	6
<b>6.</b>	<b>MAXIMUM OUTPUT POWER .....</b>	<b>7</b>
6.1.	<i>MAXIMUM OUTPUT POWER (LTE) .....</i>	7
<b>7.</b>	<b>DESCRIPTION OF AVAILABLE ANTENNAS .....</b>	<b>8</b>
<b>8.</b>	<b>DESCRIPTION OF TEST SETUP .....</b>	<b>9</b>
<b>9.</b>	<b>TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
<b>10.</b>	<b>SUMMARY TABLE .....</b>	<b>12</b>
<b>11.</b>	<b>RF POWER OUTPUT VERIFICATION .....</b>	<b>13</b>
11.1.	<i>LTE OUTPUT POWER RESULT .....</i>	14
<b>12.</b>	<b>RADIATED TEST RESULTS .....</b>	<b>27</b>
12.1.	<i>FIELD STRENGTH OF SPURIOUS RADIATION .....</i>	27
12.1.1.	<i>SPURIOUS RADIATION PLOTS .....</i>	28
<b>13.</b>	<b>SETUP PHOTOS .....</b>	<b>31</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATIONS, INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA –KU, TOKYO, 140-0002, JAPAN

**EUT DESCRIPTION:** GSM/WCDMA/LTE PHONE with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

**SERIAL NUMBER:** QV7001QP0N, QV7001RA0N

**DATE TESTED:** August 30, 2017

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC 27L	PASS

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Prepared By:



DAN CORONIA  
CONSUMER TECHNOLOGY DIVISION  
WISE PROJECT LEAD  
UL VERIFICATION SERVICES INC

KIYA KEDIDA  
CONSUMER TECHNOLOGY DIVISION  
WISE ENGINEER  
UL VERIFICATION SERVICES INC

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-D, FCC CFR 47 Part 2, FCC KDB 971168 D01 v02r02 and Part 27

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street	47266 Benicia Street
<input type="checkbox"/> Chamber A(IC: 2324B-1)	<input type="checkbox"/> Chamber D(IC: 22541-1)
<input type="checkbox"/> Chamber B(IC: 2324B-2)	<input type="checkbox"/> Chamber E(IC: 22541-2)
<input checked="" type="checkbox"/> Chamber C(IC: 2324B-3)	<input type="checkbox"/> Chamber F(IC: 22541-3)
	<input type="checkbox"/> Chamber G(IC: 22541-4)
	<input type="checkbox"/> Chamber H(IC: 22541-5)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313. UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. Chambers A through C are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under Industry Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$EIRP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)}$

$ERP = \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)}$

(Path loss = Signal generator output – PSA reading with substitution antenna)

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Occupied Channel Bandwidth	±1.1 %
RF output power, conducted	±0.35 dB
Power Spectral Density, conducted	±0.39 dB
Unwanted Emissions, conducted	±2.9 dB
All emissions, radiated	±5.36 dB
Temperature	±0.9 °C
Humidity	±2.26% RH
Supply Voltages	±0.45 %
Time	±0.2 %

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

This EUT is a GSM/WCDMA/LTE PHONE with BT, DTS/UNII a/b/g/n/ac, GPS & NFC.

The purpose of this C2PC:

Change in Antenna tuning parameter affecting LTE Band 4 and Band 66. This change do not affect SAR testing results as confirmed with preliminary testing and indicated in C2PC submittal documents for details. Therefore SAR Report is not required for the C2PC.

## 6. MAXIMUM OUTPUT POWER

### 6.1. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and ERP/EIRP output powers as follows:

#### LTE Band 66

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted (Average)		EIRP (Average)	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE66	1710~1780	1.4MHz	QPSK	20.2	104.71	17.10	51.29
			16QAM	20.1	102.33	17.00	50.12
		3MHz	QPSK	20.3	107.15	17.20	52.48
			16QAM	20.1	102.33	17.00	50.12
		5MHz	QPSK	20.4	109.65	17.30	53.70
			16QAM	20.3	107.15	17.20	52.48
		10MHz	QPSK	20.3	107.15	17.20	52.48
			16QAM	20.2	104.71	17.10	51.29
		15MHz	QPSK	20.4	109.65	17.30	53.70
			16QAM	20.3	107.15	17.20	52.48
		20MHz	QPSK	20.5	112.20	17.40	54.95
			16QAM	20.3	107.15	17.20	52.48

## 7. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
LTE Band 66, 1710~1780MHz	-3.1

## 8. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	1300-7137.1	4016W40310044	NA
Earphone	SONY	N/A	N/A	N/A

### I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of Identical ports	Connector Type	Serial Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


### I/O CABLES (RADIATED SETUP)

I/O Cable List						
Cable No	Port	# of Identical ports	Connector Type	Serial Type	Cable Length (m)	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes

### TEST SETUP

The EUT is continuously communicated to the call box during the tests.

**SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)**

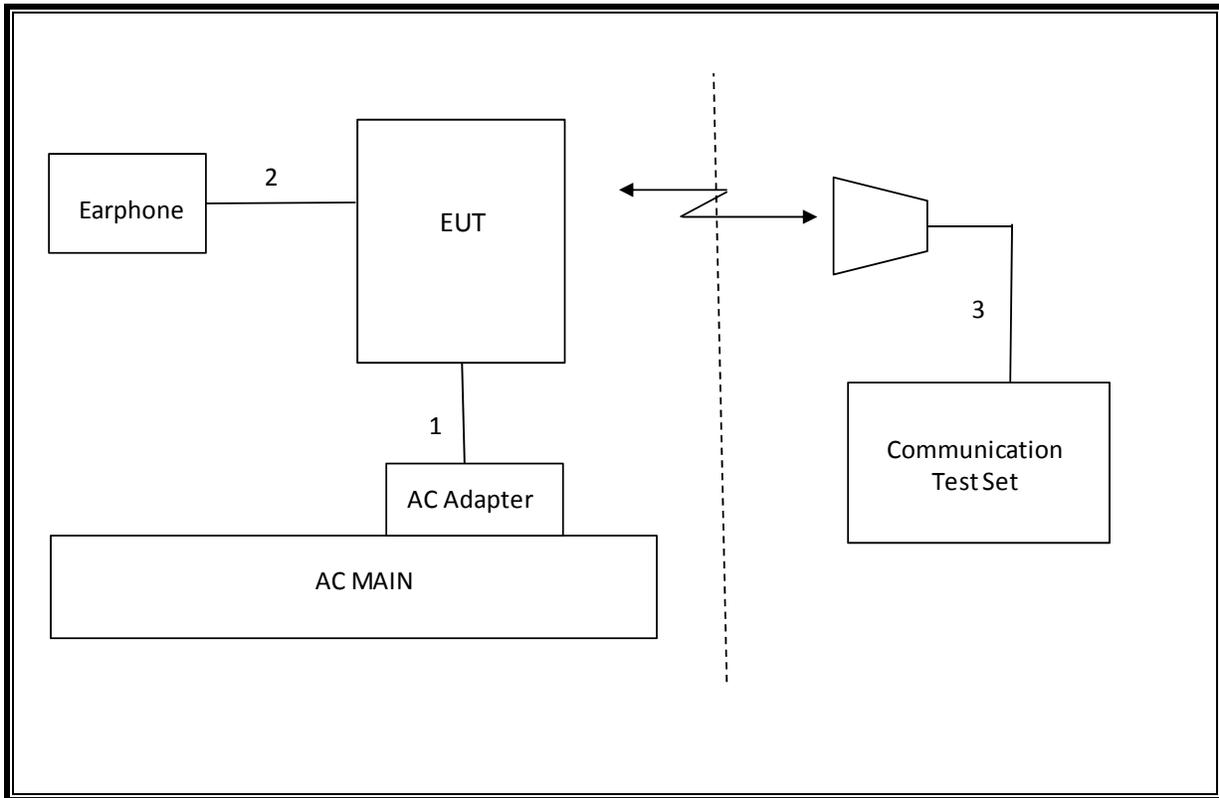

## 9. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	T Number	Cal Date	Cal Due
Amplifier, 1 to 8 GHz	Miteq	AMF-4D-01000800-30-29P	1156	02/15/17	02/15/18
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB3	408	11/10/16	11/10/17
Highpass Filter, 2.7 GHz	Micro-Circuits	H2G518G6	T772	7/5/16	07/5/18
Highpass Filter, 1 GHz	Micro-Tronics	HPM18129	T889	2/21/17	02/21/18
Highpass Filter, 4GHz	Micro-Tronics	HPM13351	T1241	7/19/16	07/19/17
Amplifier, 1-18GHz	Miteq	AFS42-00101800-25-S-42	931	08/26/16	08/26/17
Amplifier, 10KHz to 1GHz, 32dB	Keysight	8447D	15	08/26/16	08/26/17
Antenna, Horn 1-18GHz	ETS Lindgren	3117	712	01/30/17	01/30/18
Spectrum Analyzer, PXA, 3Hz to 44GHz	Keysight	N9030A	905	01/11/17	01/11/18
Antenna, Tuned Dipole 400~1000 MHz	ETS	3121C DB4	T273	6/08/17	6/08/18

Test Equipment List			
Description	Manufacturer	Model	T Number
Radiated Software	UL	UL EMC	Ver 9.5, June 24, 2015
Conducted Software	UL	UL EMC	Ver 9.5, May 26, 2015
CLT Software	UL	UL RF	Ver 1.0, Feb 2, 2015
Antenna Port Software	UL	UL RF	Ver 3.7, Nov 12, 2015

## 10. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result
2.1046	Conducted output power	N/A		Pass
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated Power	33dBm	Radiated	Pass
22.917(a) 24.238(a) 27.53(g)	Radiated Spurious Emission	-13dBm		Pass

## 11. RF POWER OUTPUT VERIFICATION

### TEST PROCEDURE

ANSI C63.26:2015/ TIA / EIA 603-D Clause 2.2.17  
KDB 971168 Section 5.6

$$\text{ERP/EIRP} = \text{PMeas} + \text{GT} - \text{LC}$$

where: ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, typically dBW or dBm);

PMeas = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

### MODES TESTED

- LTE Band 66

## 11.1. LTE OUTPUT POWER RESULT

### LTE Band 4 Measured Results

LTE Band 4 (Frequency range: 1710-1755MHz) is covered by LTE Band 66 (Frequency range: 1710-1780 MHz) and no testing is necessary due to overlapping frequency range, same maximum tune-up limit and same channel bandwidth and same modulations.

### 64QAM Measured Results

Measured QPSK, 16QAM & 64QAM Mode Output power and found that QPSK and 16QAM results was the worst case. All testing were performed using QPSK and 16QAM mode to represent the worst case mode.

Tested By	AJ Newcomer/ Vanessa Moestopo
Date	6/5-12/2017

**LTE Band 66**

Antenna gain (dBi)		-3.10										
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)			
1.4	131979	1710.7	QPSK	1	0	20.1	17.0	33.0	-16.0			
				1	3	20.1	17.0	33.0	-16.0			
				1	5	20.1	17.0	33.0	-16.0			
				3	0	20.2	17.1	33.0	-15.9			
				3	1	20.2	17.1	33.0	-15.9			
				3	3	20.2	17.1	33.0	-15.9			
			16QAM	6	0	20.1	17.0	33.0	-16.0			
				1	0	20.0	16.9	33.0	-16.1			
				1	3	20.1	17.0	33.0	-16.0			
				1	5	20.0	16.9	33.0	-16.1			
				3	0	19.9	16.8	33.0	-16.2			
				3	1	20.0	16.9	33.0	-16.1			
			64QAM	3	3	19.9	16.8	33.0	-16.2			
				6	0	19.6	16.5	33.0	-16.5			
				1	0	19.3	16.2	33.0	-16.8			
				1	3	19.4	16.3	33.0	-16.7			
				1	5	19.3	16.2	33.0	-16.8			
				3	0	19.1	16.0	33.0	-17.0			
			1.4	132322	1745.0	QPSK	3	1	19.2	16.1	33.0	-16.9
							3	3	19.1	16.0	33.0	-17.0
							6	0	19.1	16.0	33.0	-17.0
							1	0	20.0	16.9	33.0	-16.1
							1	3	20.0	16.9	33.0	-16.1
							1	5	20.0	16.9	33.0	-16.1
16QAM	3	0				20.0	16.9	33.0	-16.1			
	3	1				20.0	16.9	33.0	-16.1			
	3	3				20.0	16.9	33.0	-16.1			
	6	0				20.0	16.9	33.0	-16.1			
	1	0				19.3	16.2	33.0	-16.8			
	1	3				19.4	16.3	33.0	-16.7			
64QAM	1	5				19.3	16.2	33.0	-16.8			
	3	0				19.7	16.6	33.0	-16.4			
	3	1				19.7	16.6	33.0	-16.4			
	3	3				19.7	16.6	33.0	-16.4			
	6	0				19.7	16.6	33.0	-16.4			
	1	0				18.8	15.7	33.0	-17.3			
64QAM	1	3				18.9	15.8	33.0	-17.2			
	1	5				18.8	15.7	33.0	-17.3			
	3	0				18.7	15.6	33.0	-17.4			
	3	1				18.8	15.7	33.0	-17.3			
	3	3				18.7	15.6	33.0	-17.4			
	6	0				18.7	15.6	33.0	-17.4			

Antenna gain (dBi)		-3.10									
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)		
1.4	132665	1779.3	QPSK	1	0	19.9	16.8	33.0	-16.2		
				1	3	19.9	16.8	33.0	-16.2		
				1	5	19.9	16.8	33.0	-16.2		
				3	0	19.9	16.8	33.0	-16.2		
				3	1	20.0	16.9	33.0	-16.1		
				3	3	19.9	16.8	33.0	-16.2		
			16QAM	1	0	19.1	16.0	33.0	-17.0		
				1	3	19.2	16.1	33.0	-16.9		
				1	5	19.2	16.1	33.0	-16.9		
				3	0	19.5	16.4	33.0	-16.6		
				3	1	19.5	16.4	33.0	-16.6		
				3	3	19.5	16.4	33.0	-16.6		
			64QAM	6	0	19.6	16.5	33.0	-16.5		
				1	0	18.5	15.4	33.0	-17.6		
				1	3	18.5	15.4	33.0	-17.6		
				1	5	18.5	15.4	33.0	-17.6		
				3	0	18.5	15.4	33.0	-17.6		
				3	1	18.5	15.4	33.0	-17.6		
						3	3	18.5	15.4	33.0	-17.6
						6	0	18.5	15.4	33.0	-17.6

Antenna gain (dBi)		-3.10							
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
3.0	131987	1711.5	QPSK	1	0	20.2	17.1	33.0	-15.9
				1	8	20.2	17.1	33.0	-15.9
				1	14	20.2	17.1	33.0	-15.9
				8	0	20.2	17.1	33.0	-15.9
				8	4	20.3	17.2	33.0	-15.8
				8	7	20.2	17.1	33.0	-15.9
				15	0	20.2	17.1	33.0	-15.9
			16QAM	1	0	20.1	17.0	33.0	-16.0
				1	8	20.1	17.0	33.0	-16.0
				1	14	20.1	17.0	33.0	-16.0
				8	0	19.8	16.7	33.0	-16.3
				8	4	19.9	16.8	33.0	-16.2
				8	7	19.8	16.7	33.0	-16.3
				15	0	19.8	16.7	33.0	-16.3
			64QAM	1	0	19.3	16.2	33.0	-16.8
				1	8	19.3	16.2	33.0	-16.8
				1	14	19.3	16.2	33.0	-16.8
				8	0	19.1	16.0	33.0	-17.0
				8	4	19.1	16.0	33.0	-17.0
				8	7	19.1	16.0	33.0	-17.0
				15	0	19.1	16.0	33.0	-17.0
3.0	132322	1745.0	QPSK	1	0	20.0	16.9	33.0	-16.1
				1	8	20.0	16.9	33.0	-16.1
				1	14	20.0	16.9	33.0	-16.1
				8	0	20.1	17.0	33.0	-16.0
				8	4	20.1	17.0	33.0	-16.0
				8	7	20.1	17.0	33.0	-16.0
				15	0	20.1	17.0	33.0	-16.0
			16QAM	1	0	19.5	16.4	33.0	-16.6
				1	8	19.5	16.4	33.0	-16.6
				1	14	19.5	16.4	33.0	-16.6
				8	0	19.7	16.6	33.0	-16.4
				8	4	19.7	16.6	33.0	-16.4
				8	7	19.6	16.5	33.0	-16.5
				15	0	19.7	16.6	33.0	-16.4
			64QAM	1	0	18.6	15.5	33.0	-17.5
				1	8	18.5	15.4	33.0	-17.6
				1	14	18.5	15.4	33.0	-17.6
				8	0	18.7	15.6	33.0	-17.4
				8	4	18.8	15.7	33.0	-17.3
				8	7	18.7	15.6	33.0	-17.4
				15	0	18.7	15.6	33.0	-17.4

Antenna gain (dBi)		-3.10							
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
3.0	132657	1778.5	QPSK	1	0	20.0	16.9	33.0	-16.1
				1	8	19.9	16.8	33.0	-16.2
				1	14	19.9	16.8	33.0	-16.2
				8	0	20.0	16.9	33.0	-16.1
				8	4	20.0	16.9	33.0	-16.1
				8	7	20.0	16.9	33.0	-16.1
			16QAM	15	0	20.0	16.9	33.0	-16.1
				1	0	19.3	16.2	33.0	-16.8
				1	8	19.2	16.1	33.0	-16.9
				1	14	19.2	16.1	33.0	-16.9
				8	0	19.5	16.4	33.0	-16.6
				8	4	19.5	16.4	33.0	-16.6
			64QAM	8	7	19.5	16.4	33.0	-16.6
				15	0	19.5	16.4	33.0	-16.6
				1	0	18.5	15.4	33.0	-17.6
				1	8	18.5	15.4	33.0	-17.6
				1	14	18.5	15.4	33.0	-17.6
				8	0	18.5	15.4	33.0	-17.6
			8	4	18.5	15.4	33.0	-17.6	
			8	7	18.5	15.4	33.0	-17.6	
			15	0	18.5	15.4	33.0	-17.6	

Antenna gain (dBi)		-3.10										
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)			
5.0	131997	1712.5	QPSK	1	0	20.3	17.2	33.0	-15.8			
				1	12	20.2	17.1	33.0	-15.9			
				1	24	20.2	17.1	33.0	-15.9			
				12	0	20.3	17.2	33.0	-15.8			
				12	7	20.3	17.2	33.0	-15.8			
				12	13	20.3	17.2	33.0	-15.8			
			16QAM	25	0	20.3	17.2	33.0	-15.8			
				1	0	20.4	17.3	33.0	-15.7			
				1	12	20.4	17.3	33.0	-15.7			
				1	24	20.4	17.3	33.0	-15.7			
				12	0	19.9	16.8	33.0	-16.2			
				12	7	19.9	16.8	33.0	-16.2			
			64QAM	12	13	19.9	16.8	33.0	-16.2			
				25	0	19.9	16.8	33.0	-16.2			
				1	0	19.1	16.0	33.0	-17.0			
				1	12	19.0	15.9	33.0	-17.1			
				1	24	19.0	15.9	33.0	-17.1			
				12	0	18.9	15.8	33.0	-17.2			
			5.0	132322	1745.0	QPSK	12	7	18.9	15.8	33.0	-17.2
							12	13	18.9	15.8	33.0	-17.2
							12	13	18.8	15.7	33.0	-17.3
							25	0	18.8	15.7	33.0	-17.3
							1	0	20.3	17.2	33.0	-15.8
							1	12	20.2	17.1	33.0	-15.9
16QAM	1	24				20.2	17.1	33.0	-15.9			
	12	0				20.2	17.1	33.0	-15.9			
	12	7				20.2	17.1	33.0	-15.9			
	12	13				20.1	17.0	33.0	-16.0			
	25	0				20.2	17.1	33.0	-15.9			
	1	0				19.7	16.6	33.0	-16.4			
64QAM	1	2				19.6	16.5	33.0	-16.5			
	1	5				19.6	16.5	33.0	-16.5			
	3	0				19.7	16.6	33.0	-16.4			
	3	1				19.7	16.6	33.0	-16.4			
	3	2				19.7	16.6	33.0	-16.4			
	6	0				19.7	16.6	33.0	-16.4			
64QAM	1	0				18.7	15.6	33.0	-17.4			
	1	12				18.6	15.5	33.0	-17.5			
	1	24				18.6	15.5	33.0	-17.5			
	12	0				18.6	15.5	33.0	-17.5			
	12	7				18.6	15.5	33.0	-17.5			
	12	13				18.6	15.5	33.0	-17.5			
	25	0	18.6	15.5	33.0	-17.5						
	25	0	18.6	15.5	33.0	-17.5						

Antenna gain (dBi)		-3.10							
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
5.0	132647	1777.5	QPSK	1	0	20.0	16.9	33.0	-16.1
				1	12	19.9	16.8	33.0	-16.2
				1	24	19.9	16.8	33.0	-16.2
				12	0	20.0	16.9	33.0	-16.1
				12	7	20.0	16.9	33.0	-16.1
				12	13	20.0	16.9	33.0	-16.1
				25	0	20.0	16.9	33.0	-16.1
			16QAM	1	0	19.6	16.5	33.0	-16.5
				1	12	19.5	16.4	33.0	-16.6
				1	24	19.5	16.4	33.0	-16.6
				12	0	19.7	16.6	33.0	-16.4
				12	7	19.7	16.6	33.0	-16.4
				12	13	19.6	16.5	33.0	-16.5
				25	0	19.5	16.4	33.0	-16.6
			64QAM	1	0	18.3	15.2	33.0	-17.8
				1	12	18.5	15.4	33.0	-17.6
				1	24	18.5	15.4	33.0	-17.6
				12	0	18.5	15.4	33.0	-17.6
				12	7	18.5	15.4	33.0	-17.6
				12	13	18.5	15.4	33.0	-17.6
				25	0	18.5	15.4	33.0	-17.6

Antenna gain (dBi)		-3.10										
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)			
10.0	132022	1715.0	QPSK	1	0	20.3	17.2	33.0	-15.8			
				1	25	20.2	17.1	33.0	-15.9			
				1	49	20.2	17.1	33.0	-15.9			
				25	0	20.3	17.2	33.0	-15.8			
				25	12	20.3	17.2	33.0	-15.8			
				25	25	20.3	17.2	33.0	-15.8			
			16QAM	50	0	20.3	17.2	33.0	-15.8			
				1	0	20.2	17.1	33.0	-15.9			
				1	25	20.1	17.0	33.0	-16.0			
				1	49	20.2	17.1	33.0	-15.9			
				25	0	19.9	16.8	33.0	-16.2			
				25	12	19.9	16.8	33.0	-16.2			
			64QAM	25	25	19.8	16.7	33.0	-16.3			
				25	25	19.8	16.7	33.0	-16.3			
				50	0	19.8	16.7	33.0	-16.3			
				1	0	19.2	16.1	33.0	-16.9			
				1	25	19.1	16.0	33.0	-17.0			
				1	49	19.1	16.0	33.0	-17.0			
			10.0	132322	1745.0	QPSK	25	0	18.8	15.7	33.0	-17.3
							25	12	18.8	15.7	33.0	-17.3
							25	25	18.8	15.7	33.0	-17.3
							50	0	18.8	15.7	33.0	-17.3
							1	0	20.0	16.9	33.0	-16.1
							1	25	20.0	16.9	33.0	-16.1
16QAM	1	49				20.0	16.9	33.0	-16.1			
	25	0				20.2	17.1	33.0	-15.9			
	25	12				20.2	17.1	33.0	-15.9			
	25	25				20.1	17.0	33.0	-16.0			
	50	0				20.1	17.0	33.0	-16.0			
	1	0				19.6	16.5	33.0	-16.5			
64QAM	1	25				19.6	16.5	33.0	-16.5			
	1	49				19.5	16.4	33.0	-16.6			
	25	0				19.8	16.7	33.0	-16.3			
	25	12				19.8	16.7	33.0	-16.3			
	25	25				19.7	16.6	33.0	-16.4			
	50	0				19.7	16.6	33.0	-16.4			
10.0	132322	1745.0	64QAM	1	0	18.6	15.5	33.0	-17.5			
				1	25	18.6	15.5	33.0	-17.5			
				1	49	18.5	15.4	33.0	-17.6			
				25	0	18.5	15.4	33.0	-17.6			
				25	12	18.5	15.4	33.0	-17.6			
				25	25	18.6	15.5	33.0	-17.5			
50	0	18.5	15.4	33.0	-17.6							

Antenna gain (dBi)		-3.10							
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
10.0	132622	1775.0	QPSK	1	0	20.2	17.1	33.0	-15.9
				1	25	20.0	16.9	33.0	-16.1
				1	49	20.0	16.9	33.0	-16.1
				25	0	20.2	17.1	33.0	-15.9
				25	12	20.1	17.0	33.0	-16.0
				25	25	20.0	16.9	33.0	-16.1
			16QAM	50	0	20.1	17.0	33.0	-16.0
				1	0	19.5	16.4	33.0	-16.6
				1	25	19.3	16.2	33.0	-16.8
				1	49	19.3	16.2	33.0	-16.8
				25	0	19.9	16.8	33.0	-16.2
				25	12	19.7	16.6	33.0	-16.4
			64QAM	25	25	19.7	16.6	33.0	-16.4
				50	0	19.6	16.5	33.0	-16.5
				1	0	18.6	15.5	33.0	-17.5
				1	25	18.3	15.2	33.0	-17.8
				1	49	18.5	15.4	33.0	-17.6
				25	0	18.5	15.4	33.0	-17.6
				25	12	18.5	15.4	33.0	-17.6
				25	25	18.5	15.4	33.0	-17.6
			50	0	18.5	15.4	33.0	-17.6	

Antenna gain (dBi)		-3.10										
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)			
15.0	132047	1717.5	QPSK	1	0	20.4	17.3	33.0	-15.7			
				1	37	20.2	17.1	33.0	-15.9			
				1	74	20.2	17.1	33.0	-15.9			
				36	0	20.3	17.2	33.0	-15.8			
				36	20	20.2	17.1	33.0	-15.9			
				36	39	20.3	17.2	33.0	-15.8			
			16QAM	75	0	20.2	17.1	33.0	-15.9			
				1	0	20.3	17.2	33.0	-15.8			
				1	37	20.1	17.0	33.0	-16.0			
				1	74	20.1	17.0	33.0	-16.0			
				36	0	19.9	16.8	33.0	-16.2			
				36	20	19.8	16.7	33.0	-16.3			
			64QAM	36	39	19.9	16.8	33.0	-16.2			
				75	0	19.8	16.7	33.0	-16.3			
				1	0	19.3	16.2	33.0	-16.8			
				1	37	19.0	15.9	33.0	-17.1			
				1	74	19.1	16.0	33.0	-17.0			
				36	0	18.9	15.8	33.0	-17.2			
			15.0	132322	1745.0	QPSK	36	20	18.8	15.7	33.0	-17.3
							36	39	18.9	15.8	33.0	-17.2
							75	0	18.8	15.7	33.0	-17.3
1	0	20.1					17.0	33.0	-16.0			
1	37	19.9					16.8	33.0	-16.2			
1	74	19.9					16.8	33.0	-16.2			
16QAM	36	0				20.0	16.9	33.0	-16.1			
	36	20				20.1	17.0	33.0	-16.0			
	36	39				20.1	17.0	33.0	-16.0			
	75	0				20.1	17.0	33.0	-16.0			
	1	0				19.6	16.5	33.0	-16.5			
	1	37				19.5	16.4	33.0	-16.6			
64QAM	1	74				19.4	16.3	33.0	-16.7			
	36	0				19.7	16.6	33.0	-16.4			
	36	20				19.7	16.6	33.0	-16.4			
	36	39	19.7	16.6	33.0	-16.4						
	75	0	19.7	16.6	33.0	-16.4						
	1	0	19.0	15.9	33.0	-17.1						
64QAM	1	37	18.9	15.8	33.0	-17.2						
	1	74	18.8	15.7	33.0	-17.3						
	36	0	18.7	15.6	33.0	-17.4						
	36	20	18.8	15.7	33.0	-17.3						
	36	39	18.7	15.6	33.0	-17.4						
	75	0	18.7	15.6	33.0	-17.4						

Antenna gain (dBi)		-3.10							
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
15.0	132572	1772.5	QPSK	1	0	20.3	17.2	33.0	-15.8
				1	37	20.0	16.9	33.0	-16.1
				1	74	19.9	16.8	33.0	-16.2
				36	0	20.1	17.0	33.0	-16.0
				36	20	20.1	17.0	33.0	-16.0
				36	39	20.0	16.9	33.0	-16.1
				75	0	20.0	16.9	33.0	-16.1
			16QAM	1	0	19.9	16.8	33.0	-16.2
				1	37	19.6	16.5	33.0	-16.5
				1	74	19.4	16.3	33.0	-16.7
				36	0	19.5	16.4	33.0	-16.6
				36	20	19.7	16.6	33.0	-16.4
				36	39	19.5	16.4	33.0	-16.6
				75	0	19.5	16.4	33.0	-16.6
			64QAM	1	0	18.8	15.7	33.0	-17.3
				1	37	18.5	15.4	33.0	-17.6
				1	74	18.3	15.2	33.0	-17.8
				36	0	18.4	15.3	33.0	-17.7
				36	20	18.3	15.2	33.0	-17.8
				36	39	18.5	15.4	33.0	-17.6
				75	0	18.5	15.4	33.0	-17.6

Antenna gain (dBi)		-3.10										
Bandwidth	UL Channel	Frequency (MHz)	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)			
20.0	132072	1720.0	QPSK	1	0	20.3	17.2	33.0	-15.8			
				1	49	20.2	17.1	33.0	-15.9			
				1	99	20.2	17.1	33.0	-15.9			
				50	0	20.3	17.2	33.0	-15.8			
				50	24	20.3	17.2	33.0	-15.8			
				50	50	20.2	17.1	33.0	-15.9			
			16QAM	1	0	20.5	17.4	33.0	-15.6			
				1	49	20.3	17.2	33.0	-15.8			
				1	99	20.4	17.3	33.0	-15.7			
				50	0	19.8	16.7	33.0	-16.3			
				50	24	19.8	16.7	33.0	-16.3			
				50	50	19.7	16.6	33.0	-16.4			
			64QAM	1	0	19.4	16.3	33.0	-16.7			
				1	49	19.1	16.0	33.0	-17.0			
				1	99	19.2	16.1	33.0	-16.9			
				50	0	19.1	16.0	33.0	-17.0			
				50	24	19.1	16.0	33.0	-17.0			
				50	50	19.0	15.9	33.0	-17.1			
			20.0	132322	1745.0	QPSK	1	0	20.4	17.3	33.0	-15.7
							1	49	20.1	17.0	33.0	-16.0
							1	99	20.0	16.9	33.0	-16.1
50	0	20.3					17.2	33.0	-15.8			
50	24	20.2					17.1	33.0	-15.9			
50	50	20.1					17.0	33.0	-16.0			
16QAM	1	0				20.2	17.1	33.0	-15.9			
	1	49				19.8	16.7	33.0	-16.3			
	1	99				19.8	16.7	33.0	-16.3			
	50	0				19.7	16.6	33.0	-16.4			
	50	24				19.7	16.6	33.0	-16.4			
	50	50				19.6	16.5	33.0	-16.5			
64QAM	1	0				19.7	16.6	33.0	-16.4			
	1	49				19.0	15.9	33.0	-17.1			
	1	99				18.9	15.8	33.0	-17.2			
	1	99				18.7	15.6	33.0	-17.4			
	50	0				18.8	15.7	33.0	-17.3			
	50	24				18.7	15.6	33.0	-17.4			
	50	50				18.5	15.4	33.0	-17.6			
	100	0				18.7	15.6	33.0	-17.4			

Antenna gain (dBi)		-3.10							
Bandwidth	UL Channel	-1.5	Modulation	RB Size	RB Offset	Conducted Average (dBm)	EIRP Average (dBm)	EIRP Limit (dBm)	Margin (dB)
20.0	132572	1770.0	QPSK	1	0	20.4	17.3	33.0	-15.7
				1	12	20.1	17.0	33.0	-16.0
				1	24	20.1	17.0	33.0	-16.0
				12	0	20.3	17.2	33.0	-15.8
				12	7	20.3	17.2	33.0	-15.8
				12	13	20.1	17.0	33.0	-16.0
				25	0	20.3	17.2	33.0	-15.8
			16QAM	1	0	20.2	17.1	33.0	-15.9
				1	12	19.8	16.7	33.0	-16.3
				1	24	19.8	16.7	33.0	-16.3
				12	0	19.9	16.8	33.0	-16.2
				12	7	19.8	16.7	33.0	-16.3
				12	13	19.6	16.5	33.0	-16.5
				25	0	19.8	16.7	33.0	-16.3
			64QAM	1	0	18.9	15.8	33.0	-17.2
				1	12	18.5	15.4	33.0	-17.6
				1	24	18.5	15.4	33.0	-17.6
				12	0	18.6	15.5	33.0	-17.5
				12	7	18.5	15.4	33.0	-17.6
				12	13	18.3	15.2	33.0	-17.8
				25	0	18.5	15.4	33.0	-17.6

## 12. RADIATED TEST RESULTS

### 12.1. FIELD STRENGTH OF SPURIOUS RADIATION

#### RULE PART(S)

FCC: §2.1053 and §27.53

#### FCC LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

Part 27: (m)(4) (4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the Channel edge and 5 megahertz from the Channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the Channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the Channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on Channel BRS Channel 1 on the same terms and conditions as adjacent Channel BRS or EBS licensees.

#### TEST PROCEDURE

For Cellular equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

For PCS equipment - Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

## 12.1.1. SPURIOUS RADIATION PLOTS

### LTE Band 66

UL Verification Services, Inc.  
Above 1GHz High Frequency Substitution Measurement

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_QPSK Band 66 Harmonics, 1.4MHz Bandwidth

F Mhz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1710.7MHz</b>									
3421.40	-18.3	V	3.0	35.4	1.0	-53.3	-13.0	-40.3	
5132.10	-14.0	V	3.0	35.4	1.0	-48.4	-13.0	-35.4	
6842.80	-12.6	V	3.0	35.7	1.0	-47.2	-13.0	-34.2	
3421.40	-19.0	H	3.0	35.1	1.0	-54.0	-13.0	-41.0	
5132.10	-14.2	H	3.0	35.4	1.0	-48.6	-13.0	-35.6	
6842.80	-11.6	H	3.0	35.7	1.0	-46.2	-13.0	-33.2	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.7	V	3.0	36.0	1.0	-53.7	-13.0	-40.7	
5235.00	-14.1	V	3.0	35.4	1.0	-48.5	-13.0	-35.5	
6980.00	-12.7	V	3.0	35.7	1.0	-47.4	-13.0	-34.4	
3490.00	-18.1	H	3.0	36.0	1.0	-53.1	-13.0	-40.1	
5235.00	-14.3	H	3.0	35.4	1.0	-48.7	-13.0	-35.7	
6980.00	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-33.6	
<b>High Ch, 1779.3MHz</b>									
3558.60	-18.0	V	3.0	36.0	1.0	-53.0	-13.0	-40.0	
5337.90	-14.0	V	3.0	35.4	1.0	-48.5	-13.0	-35.5	
7117.20	-12.3	V	3.0	35.7	1.0	-47.0	-13.0	-34.0	
3558.60	-18.7	H	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5337.90	-13.7	H	3.0	35.4	1.0	-48.2	-13.0	-35.2	
7117.20	-11.6	H	3.0	35.7	1.0	-46.3	-13.0	-33.3	

LTE B66 1.4MHz QPSK

UL Verification Services, Inc.  
Above 1GHz High Frequency Substitution Measurement

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_QPSK Band 66 Harmonics, 3MHz Bandwidth

F Mhz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1711.5MHz</b>									
3423.00	-18.6	V	3.0	36.1	1.0	-53.7	-13.0	-40.7	
5134.50	-13.9	V	3.0	35.4	1.0	-48.4	-13.0	-35.4	
6846.00	-12.5	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
3423.00	-18.8	H	3.0	36.1	1.0	-53.9	-13.0	-40.9	
5134.50	-14.0	H	3.0	35.4	1.0	-48.4	-13.0	-35.4	
6846.00	-12.5	H	3.0	35.7	1.0	-47.1	-13.0	-34.1	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.6	V	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5235.00	-14.0	V	3.0	35.4	1.0	-48.4	-13.0	-35.4	
6980.00	-13.4	V	3.0	35.7	1.0	-48.1	-13.0	-35.1	
3490.00	-18.8	H	3.0	36.0	1.0	-53.8	-13.0	-40.8	
5235.00	-13.9	H	3.0	35.4	1.0	-48.3	-13.0	-35.3	
6980.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
<b>High Ch, 1778.5MHz</b>									
3557.00	-18.3	V	3.0	36.0	1.0	-53.3	-13.0	-40.3	
5335.50	-13.8	V	3.0	35.4	1.0	-48.2	-13.0	-35.2	
7114.00	-13.0	V	3.0	35.7	1.0	-47.7	-13.0	-34.7	
3557.00	-18.3	H	3.0	36.0	1.0	-53.2	-13.0	-40.2	
5335.50	-13.3	H	3.0	35.4	1.0	-47.7	-13.0	-34.7	
7114.00	-11.9	H	3.0	35.7	1.0	-46.6	-13.0	-33.6	

LTE B66 3MHz QPSK

UL Verification Services, Inc.  
Above 1GHz High Frequency Substitution Measurement

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_16QAM Band 66 Harmonics, 1.4MHz Bandwidth

F Mhz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1710.7MHz</b>									
3421.40	-18.1	V	3.0	36.1	1.0	-53.2	-13.0	-40.2	
5132.10	-13.9	V	3.0	35.4	1.0	-48.3	-13.0	-35.3	
6842.80	-13.1	V	3.0	35.7	1.0	-47.8	-13.0	-34.8	
3421.40	-19.2	H	3.0	36.1	1.0	-54.2	-13.0	-41.2	
5132.10	-14.2	H	3.0	35.4	1.0	-48.7	-13.0	-35.7	
6842.80	-11.8	H	3.0	35.7	1.0	-46.4	-13.0	-33.4	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.4	V	3.0	36.0	1.0	-53.4	-13.0	-40.4	
5235.00	-13.6	V	3.0	35.4	1.0	-48.0	-13.0	-35.0	
6980.00	-13.1	V	3.0	35.7	1.0	-47.5	-13.0	-34.7	
3490.00	-18.6	H	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5235.00	-13.7	H	3.0	35.4	1.0	-48.1	-13.0	-35.1	
6980.00	-11.6	H	3.0	35.7	1.0	-46.3	-13.0	-33.3	
<b>High Ch, 1779.3MHz</b>									
3558.60	-18.3	V	3.0	36.0	1.0	-53.3	-13.0	-40.3	
5337.90	-14.2	V	3.0	35.4	1.0	-48.7	-13.0	-35.7	
7117.20	-12.4	V	3.0	35.7	1.0	-47.1	-13.0	-34.1	
3558.60	-18.7	H	3.0	36.0	1.0	-53.7	-13.0	-40.7	
5337.90	-14.0	H	3.0	35.4	1.0	-48.4	-13.0	-35.4	
7117.20	-11.4	H	3.0	35.7	1.0	-46.1	-13.0	-33.1	

LTE B66 1.4MHz 16QAM

UL Verification Services, Inc.  
Above 1GHz High Frequency Substitution Measurement

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_16QAM Band 66 Harmonics, 3MHz Bandwidth

F Mhz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1711.5MHz</b>									
3423.00	-18.8	V	3.0	36.1	1.0	-53.8	-13.0	-40.8	
5134.50	-14.2	V	3.0	35.4	1.0	-48.6	-13.0	-35.6	
6846.00	-13.4	V	3.0	35.7	1.0	-48.0	-13.0	-35.0	
3423.00	-19.2	H	3.0	36.1	1.0	-54.2	-13.0	-41.2	
5134.50	-14.0	H	3.0	35.4	1.0	-48.4	-13.0	-35.4	
6846.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.5	V	3.0	36.0	1.0	-53.5	-13.0	-40.5	
5235.00	-13.6	V	3.0	35.4	1.0	-48.0	-13.0	-35.0	
6980.00	-13.9	V	3.0	35.7	1.0	-48.6	-13.0	-35.6	
3490.00	-19.0	H	3.0	36.0	1.0	-54.0	-13.0	-41.0	
5235.00	-14.2	H	3.0	35.4	1.0	-48.6	-13.0	-35.6	
6980.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	
<b>High Ch, 1778.5MHz</b>									
3557.00	-18.6	V	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5335.50	-14.1	V	3.0	35.4	1.0	-48.6	-13.0	-35.6	
7114.00	-13.0	V	3.0	35.7	1.0	-47.6	-13.0	-34.6	
3557.00	-18.5	H	3.0	36.0	1.0	-53.4	-13.0	-40.4	
5335.50	-13.5	H	3.0	35.4	1.0	-47.9	-13.0	-34.9	
7114.00	-12.1	H	3.0	35.7	1.0	-46.8	-13.0	-33.8	

LTE B66 3MHz 16QAM

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_QPSK Band 66 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1712.5MHz</b>									
3425.00	-18.9	V	3.0	36.1	1.0	-53.9	-13.0	-40.9	
5137.50	-14.3	V	3.0	35.4	1.0	-48.8	-13.0	-35.8	
6850.00	-13.7	V	3.0	35.7	1.0	-48.4	-13.0	-35.4	
3425.00	-19.3	H	3.0	36.1	1.0	-54.3	-13.0	-41.3	
5137.50	-14.3	H	3.0	35.4	1.0	-48.7	-13.0	-35.7	
6850.00	-12.9	H	3.0	35.7	1.0	-47.5	-13.0	-34.5	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.8	V	3.0	36.0	1.0	-53.8	-13.0	-40.8	
5235.00	-14.2	V	3.0	35.4	1.0	-48.7	-13.0	-35.7	
6980.00	-13.5	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
3490.00	-19.0	H	3.0	36.0	1.0	-54.0	-13.0	-41.0	
5235.00	-14.2	H	3.0	35.4	1.0	-48.7	-13.0	-35.7	
6980.00	-12.5	H	3.0	35.7	1.0	-47.2	-13.0	-34.2	
<b>High Ch, 1777.5MHz</b>									
3555.00	-18.6	V	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5332.50	-14.1	V	3.0	35.4	1.0	-48.6	-13.0	-35.6	
7110.00	-13.3	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
3555.00	-18.5	H	3.0	36.0	1.0	-53.8	-13.0	-40.8	
5332.50	-14.3	H	3.0	35.4	1.0	-48.7	-13.0	-35.7	
7110.00	-12.5	H	3.0	35.7	1.0	-47.2	-13.0	-34.2	

LTE B66 5MHz QPSK

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_16QAM Band 66 Harmonics, 5MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1712.5MHz</b>									
3425.00	-18.7	V	3.0	36.1	1.0	-53.7	-13.0	-40.7	
5137.50	-14.5	V	3.0	35.4	1.0	-48.9	-13.0	-35.9	
6850.00	-13.8	V	3.0	35.7	1.0	-48.5	-13.0	-35.5	
3425.00	-19.4	H	3.0	36.1	1.0	-54.5	-13.0	-41.5	
5137.50	-14.5	H	3.0	35.4	1.0	-48.9	-13.0	-35.9	
6850.00	-9.8	H	3.0	35.7	1.0	-44.5	-13.0	-31.5	
<b>Mid Ch, 1745MHz</b>									
3490.00	-17.9	V	3.0	36.0	1.0	-53.0	-13.0	-40.0	
5235.00	-14.4	V	3.0	35.4	1.0	-48.8	-13.0	-35.8	
6980.00	-13.7	V	3.0	35.7	1.0	-48.4	-13.0	-35.4	
3490.00	-18.8	H	3.0	36.0	1.0	-53.9	-13.0	-40.9	
5235.00	-14.5	H	3.0	35.4	1.0	-48.9	-13.0	-35.9	
6980.00	-12.7	H	3.0	35.7	1.0	-47.4	-13.0	-34.4	
<b>High Ch, 1777.5MHz</b>									
3555.00	-18.8	V	3.0	36.0	1.0	-53.8	-13.0	-40.8	
5332.50	-14.3	V	3.0	35.4	1.0	-48.7	-13.0	-35.7	
7110.00	-13.4	V	3.0	35.7	1.0	-48.1	-13.0	-35.1	
3555.00	-18.7	H	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5332.50	-14.5	H	3.0	35.4	1.0	-48.9	-13.0	-35.9	
7110.00	-9.7	H	3.0	35.7	1.0	-44.4	-13.0	-31.4	

LTE B66 5MHz 16QAM

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_QPSK Band 66 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1715MHz</b>									
3430.00	-18.5	V	3.0	36.1	1.0	-53.6	-13.0	-40.6	
5145.00	-14.4	V	3.0	35.4	1.0	-48.9	-13.0	-35.9	
6860.00	-10.9	V	3.0	35.7	1.0	-45.6	-13.0	-32.6	
3430.00	-18.9	H	3.0	36.1	1.0	-54.0	-13.0	-41.0	
5145.00	-14.8	H	3.0	35.4	1.0	-49.2	-13.0	-36.2	
6860.00	-12.7	H	3.0	35.7	1.0	-47.3	-13.0	-34.3	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.7	V	3.0	36.0	1.0	-53.8	-13.0	-40.8	
5235.00	-14.4	V	3.0	35.4	1.0	-48.8	-13.0	-35.8	
6980.00	-13.8	V	3.0	35.7	1.0	-48.5	-13.0	-35.5	
3490.00	-18.8	H	3.0	36.0	1.0	-53.9	-13.0	-40.9	
5235.00	-14.7	H	3.0	35.4	1.0	-49.1	-13.0	-36.1	
6980.00	-12.5	H	3.0	35.7	1.0	-47.2	-13.0	-34.2	
<b>High Ch, 1775MHz</b>									
3550.00	-18.6	V	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5325.00	-14.2	V	3.0	35.4	1.0	-48.7	-13.0	-35.7	
7100.00	-13.6	V	3.0	35.7	1.0	-48.3	-13.0	-35.3	
3550.00	-18.8	H	3.0	36.0	1.0	-53.7	-13.0	-40.7	
5325.00	-14.6	H	3.0	35.4	1.0	-49.0	-13.0	-36.0	
7100.00	-12.3	H	3.0	35.7	1.0	-47.0	-13.0	-34.0	

LTE B66 10MHz QPSK

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_16QAM Band 66 Harmonics, 10MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1715MHz</b>									
3430.00	-18.3	V	3.0	36.1	1.0	-53.3	-13.0	-40.3	
5145.00	-14.2	V	3.0	35.4	1.0	-48.7	-13.0	-35.7	
6860.00	-10.8	V	3.0	35.7	1.0	-45.5	-13.0	-32.5	
3430.00	-18.7	H	3.0	36.1	1.0	-53.8	-13.0	-40.8	
5145.00	-14.9	H	3.0	35.4	1.0	-49.3	-13.0	-36.3	
6860.00	-12.8	H	3.0	35.7	1.0	-47.5	-13.0	-34.5	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.7	V	3.0	36.0	1.0	-53.7	-13.0	-40.7	
5235.00	-14.0	V	3.0	35.4	1.0	-48.4	-13.0	-35.4	
6980.00	-13.3	V	3.0	35.7	1.0	-48.0	-13.0	-35.0	
3490.00	-18.7	H	3.0	36.0	1.0	-53.7	-13.0	-40.7	
5235.00	-13.8	H	3.0	35.4	1.0	-48.2	-13.0	-35.2	
6980.00	-12.4	H	3.0	35.7	1.0	-47.1	-13.0	-34.1	
<b>High Ch, 1775MHz</b>									
3550.00	-18.6	V	3.0	36.0	1.0	-53.5	-13.0	-40.5	
5325.00	-14.1	V	3.0	35.4	1.0	-48.6	-13.0	-35.6	
7100.00	-13.5	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
3550.00	-18.7	H	3.0	36.0	1.0	-53.7	-13.0	-40.7	
5325.00	-14.5	H	3.0	35.4	1.0	-49.0	-13.0	-36.0	
7100.00	-12.4	H	3.0	35.7	1.0	-47.1	-13.0	-34.1	

LTE B66 10MHz 16QAM

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_QPSK Band 66 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1717.5MHz</b>									
3435.00	-18.9	V	3.0	36.1	1.0	-54.0	-13.0	-41.0	
5152.50	-14.8	V	3.0	35.4	1.0	-49.2	-13.0	-36.2	
6870.00	-14.0	V	3.0	35.7	1.0	-48.7	-13.0	-35.7	
3435.00	-18.9	H	3.0	36.1	1.0	-54.0	-13.0	-41.0	
5152.50	-14.3	H	3.0	35.4	1.0	-48.7	-13.0	-35.7	
6870.00	-13.2	H	3.0	35.7	1.0	-47.9	-13.0	-34.9	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.6	V	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5235.00	-14.9	V	3.0	35.4	1.0	-49.3	-13.0	-36.3	
6980.00	-13.4	V	3.0	35.7	1.0	-48.1	-13.0	-35.1	
3490.00	-18.8	H	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5235.00	-14.0	H	3.0	35.4	1.0	-48.4	-13.0	-35.4	
6980.00	-12.9	H	3.0	35.7	1.0	-47.5	-13.0	-34.5	
<b>High Ch, 1772.5MHz</b>									
3545.00	-18.5	V	3.0	36.0	1.0	-53.4	-13.0	-40.4	
5317.50	-13.8	V	3.0	35.4	1.0	-48.2	-13.0	-35.2	
7090.00	-11.7	V	3.0	35.7	1.0	-46.4	-13.0	-33.4	
3545.00	-18.5	H	3.0	36.0	1.0	-53.5	-13.0	-40.5	
5317.50	-14.0	H	3.0	35.4	1.0	-48.5	-13.0	-35.5	
7090.00	-10.9	H	3.0	35.7	1.0	-45.6	-13.0	-32.6	

LTE B66 15MHz QPSK

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

Company: SOMC  
 Project #: 11740661 C2PC  
 Date: 8/30/2017  
 Test Engineer: 43574 JS  
 Configuration: EUT + HS + Charger  
 Location: Chamber C  
 Mode: LTE\_16QAM Band 66 Harmonics, 15MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	ERP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1717.5MHz</b>									
3435.00	-19.2	V	3.0	36.1	1.0	-54.3	-13.0	-41.3	
5152.50	-15.1	V	3.0	35.4	1.0	-49.5	-13.0	-36.5	
6870.00	-14.3	V	3.0	35.7	1.0	-48.9	-13.0	-35.9	
3435.00	-19.0	H	3.0	36.1	1.0	-54.1	-13.0	-41.1	
5152.50	-14.5	H	3.0	35.4	1.0	-49.0	-13.0	-36.0	
6870.00	-13.1	H	3.0	35.7	1.0	-47.7	-13.0	-34.7	
<b>Mid Ch, 1745MHz</b>									
3490.00	-18.8	V	3.0	36.0	1.0	-53.8	-13.0	-40.8	
5235.00	-14.9	V	3.0	35.4	1.0	-49.3	-13.0	-36.3	
6980.00	-13.5	V	3.0	35.7	1.0	-48.2	-13.0	-35.2	
3490.00	-18.7	H	3.0	36.0	1.0	-53.7	-13.0	-40.7	
5235.00	-13.8	H	3.0	35.4	1.0	-48.2	-13.0	-35.2	
6980.00	-12.8	H	3.0	35.7	1.0	-47.5	-13.0	-34.5	
<b>High Ch, 1772.5MHz</b>									
3545.00	-18.7	V	3.0	36.0	1.0	-53.7	-13.0	-40.7	
5317.50	-14.2	V	3.0	35.4	1.0	-48.7	-13.0	-35.7	
7090.00	-12.0	V	3.0	35.7	1.0	-46.7	-13.0	-33.7	
3545.00	-18.6	H	3.0	36.0	1.0	-53.6	-13.0	-40.6	
5317.50	-14.0	H	3.0	35.4	1.0	-48.4	-13.0	-35.4	
7090.00	-10.6	H	3.0	35.7	1.0	-45.3	-13.0	-32.3	

LTE B66 15MHz 16QAM

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** SOMC  
**Project #:** 11740661 C2PC  
**Date:** 8/30/2017  
**Test Engineer:** 39703 HK  
**Configuration:** EUT + HS + Charger  
**Location:** Chamber C  
**Mode:** LTE\_QPSK Band 66 Harmonics, 20MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1720MHz</b>									
3440.00	-20.8	V	3.0	36.0	1.0	-55.9	-13.0	-42.9	
5160.00	-17.0	V	3.0	35.4	1.0	-51.4	-13.0	-38.4	
6880.00	-15.4	V	3.0	35.7	1.0	-50.1	-13.0	-37.1	
3440.00	-21.8	H	3.0	36.0	1.0	-56.9	-13.0	-43.9	
5160.00	-16.6	H	3.0	35.4	1.0	-51.1	-13.0	-38.1	
6880.00	-14.9	H	3.0	35.7	1.0	-49.6	-13.0	-36.6	
<b>Mid Ch, 1745MHz</b>									
3490.00	-21.4	V	3.0	36.0	1.0	-56.4	-13.0	-43.4	
5235.00	-17.1	V	3.0	35.4	1.0	-51.5	-13.0	-38.5	
6980.00	-15.2	V	3.0	35.7	1.0	-49.9	-13.0	-36.9	
3490.00	-21.5	H	3.0	36.0	1.0	-56.6	-13.0	-43.6	
5235.00	-16.2	H	3.0	35.4	1.0	-50.7	-13.0	-37.7	
6980.00	-15.0	H	3.0	35.7	1.0	-49.7	-13.0	-36.7	
<b>High Ch, 1770MHz</b>									
3540.00	-21.7	V	3.0	36.0	1.0	-56.7	-13.0	-43.7	
5310.00	-16.7	V	3.0	35.4	1.0	-51.2	-13.0	-38.2	
7080.00	-15.3	V	3.0	35.7	1.0	-50.0	-13.0	-37.0	
3540.00	-21.8	H	3.0	36.0	1.0	-56.8	-13.0	-43.8	
5310.00	-17.1	H	3.0	35.4	1.0	-51.5	-13.0	-38.5	
7080.00	-14.0	H	3.0	35.7	1.0	-48.7	-13.0	-35.7	

**LTE B66 20MHz QPSK**

**UL Verification Services, Inc.**  
**Above 1GHz High Frequency Substitution Measurement**

**Company:** SOMC  
**Project #:** 11740661 C2PC  
**Date:** 8/30/2017  
**Test Engineer:** 39703 HK  
**Configuration:** EUT + HS + Charger  
**Location:** Chamber C  
**Mode:** LTE\_16QAM Band 66 Harmonics, 20MHz Bandwidth

F MHz	SG reading (dBm)	Ant. Pol. (H/V)	Distance (m)	Preamp (dB)	Filter (dB)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Notes
<b>Low Ch, 1720MHz</b>									
3440.00	-21.1	V	3.0	36.0	1.0	-56.2	-13.0	-43.2	
5160.00	-15.7	V	3.0	35.4	1.0	-50.1	-13.0	-37.1	
6880.00	-14.3	V	3.0	35.7	1.0	-48.9	-13.0	-35.9	
3440.00	-22.5	H	3.0	36.0	1.0	-57.5	-13.0	-44.5	
5160.00	-15.9	H	3.0	35.4	1.0	-50.3	-13.0	-37.3	
6880.00	-11.7	H	3.0	35.7	1.0	-46.4	-13.0	-33.4	
<b>Mid Ch, 1745MHz</b>									
3490.00	-19.9	V	3.0	36.0	1.0	-54.9	-13.0	-41.9	
5235.00	-16.7	V	3.0	35.4	1.0	-51.1	-13.0	-38.1	
6980.00	-15.9	V	3.0	35.7	1.0	-50.5	-13.0	-37.5	
3490.00	-19.5	H	3.0	36.0	1.0	-54.6	-13.0	-41.6	
5235.00	-16.2	H	3.0	35.4	1.0	-50.6	-13.0	-37.6	
6980.00	-13.4	H	3.0	35.7	1.0	-48.1	-13.0	-35.1	
<b>High Ch, 1770MHz</b>									
3540.00	-18.8	V	3.0	36.0	1.0	-53.8	-13.0	-40.8	
5310.00	-16.4	V	3.0	35.4	1.0	-50.8	-13.0	-37.8	
7080.00	-14.6	V	3.0	35.7	1.0	-49.3	-13.0	-36.3	
3540.00	-20.4	H	3.0	36.0	1.0	-55.4	-13.0	-42.4	
5310.00	-16.7	H	3.0	35.4	1.0	-51.1	-13.0	-38.1	
7080.00	-14.3	H	3.0	35.7	1.0	-49.0	-13.0	-36.0	

**LTE B66 20MHz 16QAM**