



# **CERTIFICATION TEST REPORT**

**Report Number. :** 11783639-E7V3

**Applicant :** SONY MOBILE COMMUNICATIONS, INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

**FCC ID :** PY7-88607S

**EUT Description :** GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

**Test Standard(s) :** FCC 47 CFR PART 15 SUBPART C

**Date Of Issue:**

August 11, 2017

**Prepared by:**

UL Verification Services Inc.  
47173 Benicia Street  
Fremont, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

---

Revision History

| Rev. | Issue Date | Revisions           | Revised By |
|------|------------|---------------------|------------|
| V1   | 08/04/17   | Initial Review      | D. Corona  |
| V2   | 08/08/17   | Updated Appendix A  | D. Corona  |
| V3   | 08/11/17   | Updated Section 6.3 | D. Corona  |

## TABLE OF CONTENTS

|                                                           |           |
|-----------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS.....</b>                | <b>4</b>  |
| <b>2. TEST METHODOLOGY .....</b>                          | <b>5</b>  |
| <b>3. FACILITIES AND ACCREDITATION.....</b>               | <b>5</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>               | <b>6</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....               | 6         |
| 4.2. SAMPLE CALCULATION.....                              | 6         |
| 4.3. MEASUREMENT UNCERTAINTY .....                        | 6         |
| <b>5. EQUIPMENT UNDER TEST .....</b>                      | <b>7</b>  |
| 5.1. DESCRIPTION OF EUT.....                              | 7         |
| <b>6. REUSE OF TEST DATA .....</b>                        | <b>8</b>  |
| 6.1. INTRODUCTION.....                                    | 8         |
| 6.2. DEVICES DIFFERENCES .....                            | 8         |
| 6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY .....        | 8         |
| 6.4. REFERENCE DETAIL.....                                | 8         |
| <b>7. SPOT CHECK DATA .....</b>                           | <b>9</b>  |
| 7.1.1. FUNDAMENTAL EMISSION MASK (11.56 – 15.56MHz) ..... | 9         |
| <b>8. SETUP PHOTOS.....</b>                               | <b>11</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATIONS, INC.  
4-12-3 HIGASHI-SHINAGAWA,  
SHINAGAWA -KU, TOKYO, 140-0002, JAPAN

**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC

**SERIAL NUMBER:** BH9000K881; BH9000BN81

**DATE TESTED:** JUNE 24 – JULY 25, 2017

| APPLICABLE STANDARDS     |              |
|--------------------------|--------------|
| STANDARD                 | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:



DAN CORONIA  
WiSE PROJECT LEAD  
UL VERIFICATION SERVICES INC.

Prepared By:



GLENN ESCANO  
WiSE LAB ENGINEER  
UL VERIFICATION SERVICES INC.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street                                       | 47266 Benicia Street                            |
|------------------------------------------------------------|-------------------------------------------------|
| <input checked="" type="checkbox"/> Chamber A(IC: 2324B-1) | <input type="checkbox"/> Chamber D(IC: 22541-1) |
| <input type="checkbox"/> Chamber B(IC: 2324B-2)            | <input type="checkbox"/> Chamber E(IC: 22541-2) |
| <input type="checkbox"/> Chamber C(IC: 2324B-3)            | <input type="checkbox"/> Chamber F(IC: 22541-3) |
|                                                            | <input type="checkbox"/> Chamber G(IC: 22541-4) |
|                                                            | <input type="checkbox"/> Chamber H(IC: 22541-5) |

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

Chambers A through C are covered under Industry Canada company address code 2324B with site numbers 2324B -1 through 2324B-3, respectively. Chambers D through H are covered under Industry Canada company address code 22541 with site numbers 22541 -1 through 22541-5, respectively.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| Parameter                                           | Uncertainty |
|-----------------------------------------------------|-------------|
| Worst Case Conducted Disturbance, 9KHz to 0.15 MHz  | 3.84 dB     |
| Worst Case Conducted Disturbance, 0.15 to 30 MHz    | 3.65 dB     |
| Worst Case Radiated Disturbance, 9KHz to 30 MHz     | 3.15 dB     |
| Worst Case Radiated Disturbance, 30 to 1000 MHz     | 5.36 dB     |
| Worst Case Radiated Disturbance, 1000 to 18000 MHz  | 4.32 dB     |
| Worst Case Radiated Disturbance, 18000 to 26000 MHz | 4.45 dB     |
| Worst Case Radiated Disturbance, 26000 to 40000 MHz | 5.24 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac, GPS & NFC.

## 6. REUSE OF TEST DATA

### 6.1. INTRODUCTION

According to manufacturer, FCC ID: PY7-65365K and FCC ID: PY7-88607S unlicensed radios (WLAN/BT/BLE/NFC) are electrically identical. They share the same chipset, same power and same antenna performance including antenna gain. The FCC ID: PY7-65365K test data shall remain representative of FCC ID: PY7-88607S so, FCC ID: PY7-88607S leverages test data from FCC ID: PY7-65365K.

The applicant takes full responsibility that the test data as referenced in this section represent compliance for this FCC ID.

### 6.2. DEVICES DIFFERENCES

Difference between PY7-65365K and PY7-88607S:

Various components were removed from PY7-65365K to establish PY7-88607S; such components are related only to the cellular part and there are no changes in non-cellular (WLAN/BT/BLE/NFC) parts, which are electronically identical.

### 6.3. SPOT CHECK VERIFICATION RESULTS SUMMARY

Spot check verification has been done on device PY7-88607S for fundamental. The data from the application has been verified through appropriate spot checks to demonstrate compliance for this device as shown in the summary and appendix A.


### 6.4. REFERENCE DETAIL

| Equipment Class | Reference FCC ID | Report Title/Section                |
|-----------------|------------------|-------------------------------------|
| DSS (BT)        | PY7-65365K       | 11785223-E2V1 FCC Report BT         |
| DTS (BLE)       | PY7-65365K       | 11785223-E3V2 FCC Report BLE        |
| DTS (WLAN)      | PY7-65365K       | 11785223-E4V3 FCC Report DTS        |
| UNII (WLAN)     | PY7-65365K       | 11785223-E5V3 FCC Report UNII       |
| NFC             | PY7-65365K       | <b>11785223-E7V2 FCC Report NFC</b> |
| JBP             | PY7-65365K       | 11785223-EV2 FCC Report 15B         |



## 7. SPOT CHECK DATA

### 7.1.1. FUNDAMENTAL EMISSION MASK (11.56 – 15.56MHz)

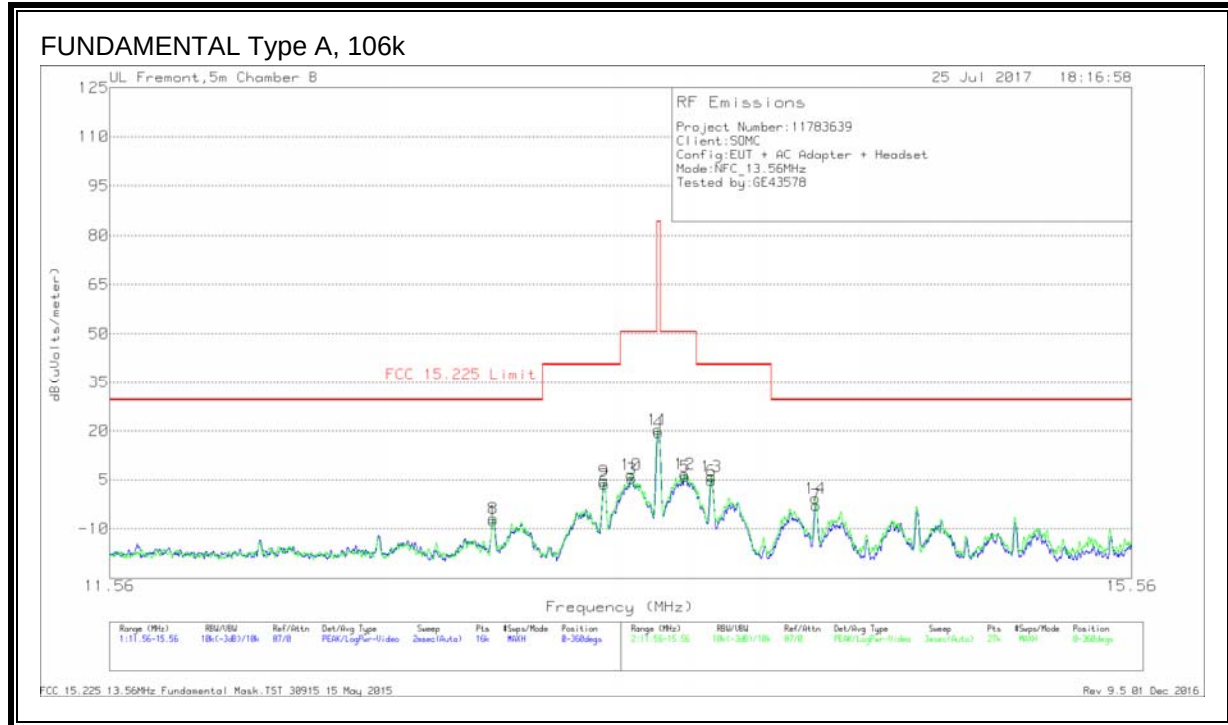

Note: All data rate Field Strength was investigated and Type A, 106k found to have the highest Field Strength results and represents as the worst case data rate.

## Trace Markers

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | Loop Antenna (dB/m) | Cbl (dB) | Dist Corr (dB) 40Log | Corrected Reading dB(uVolts/meter) | FCC 15.225 Limit | PK Margin (dB) | Azimuth (Degs) | Polarity |
|--------|-----------------|----------------------|-----|---------------------|----------|----------------------|------------------------------------|------------------|----------------|----------------|----------|
| 1      | 12.92275        | 20.18                | Pk  | 10.7                | 1.6      | -40                  | -7.52                              | 29.54            | -37.06         | 0-360          | Face-On  |
| 8      | 12.92345        | 20.85                | Pk  | 10.7                | 1.6      | -40                  | -6.85                              | 29.54            | -36.39         | 0-360          | Face-Off |
| 9      | 13.34673        | 32.19                | Pk  | 10.7                | 1.6      | -40                  | 4.49                               | 40.51            | -36.02         | 0-360          | Face-Off |
| 2      | 13.34775        | 31.41                | Pk  | 10.7                | 1.6      | -40                  | 3.71                               | 40.51            | -36.8          | 0-360          | Face-On  |
| 10     | 13.45359        | 34.36                | Pk  | 10.7                | 1.6      | -40                  | 6.66                               | 50.5             | -43.84         | 0-360          | Face-Off |
| 3      | 13.45438        | 32.93                | Pk  | 10.7                | 1.6      | -40                  | 5.23                               | 50.5             | -45.27         | 0-360          | Face-On  |
| 11     | *13.55807       | 48.25                | Pk  | 10.6                | 1.6      | -40                  | 20.45                              | 84               | -63.55         | 0-360          | Face-Off |
| 4      | *13.56          | 47.19                | Pk  | 10.6                | 1.6      | -40                  | 19.39                              | 84               | -64.61         | 0-360          | Face-On  |
| 12     | 13.66419        | 34.63                | Pk  | 10.6                | 1.6      | -40                  | 6.83                               | 50.5             | -43.67         | 0-360          | Face-Off |
| 5      | 13.66625        | 33.78                | Pk  | 10.6                | 1.6      | -40                  | 5.98                               | 50.5             | -44.52         | 0-360          | Face-On  |
| 13     | 13.76957        | 33.87                | Pk  | 10.6                | 1.6      | -40                  | 6.07                               | 40.51            | -34.44         | 0-360          | Face-Off |
| 6      | 13.77163        | 32.54                | Pk  | 10.6                | 1.6      | -40                  | 4.74                               | 40.51            | -35.77         | 0-360          | Face-On  |
| 14     | 14.19329        | 27.2                 | Pk  | 10.6                | 1.6      | -40                  | -.6                                | 29.54            | -30.14         | 0-360          | Face-Off |
| 7      | 14.19563        | 25                   | Pk  | 10.6                | 1.6      | -40                  | -2.8                               | 29.54            | -32.34         | 0-360          | Face-On  |

\* - indicates fundamental frequency

Pk - Peak detector

## APPENDIX A

| PY7-88607S SPOT CHECK RESULTS        |             |         |                    |            |       |            |       |            |       |
|--------------------------------------|-------------|---------|--------------------|------------|-------|------------|-------|------------|-------|
| Technology                           | Test Item   | Channel | Measured Frequency | PY7-65265K |       | PY7-88607S |       | Delta (dB) |       |
|                                      |             |         |                    | Peak       | Ave   | Peak       | Ave   | Peak       | Ave   |
| BT                                   | RBE         | 78      | 2480 MHz           | 54.86      | 37.78 | 54.27      | 38.03 | -0.59      | 0.25  |
|                                      | RSE         | 39      | 14270 MHz          | 48.75      | 35.14 | 49.39      | 37.83 | 0.64       | 2.69  |
| Note: GFSK is the worst mode         |             |         |                    |            |       |            |       |            |       |
| BLE                                  | RBE         | 0       | 2402 MHz           | 49.75      | 38.93 | 49.47      | 38.87 | 0.32       | 0.06  |
|                                      | RSE         | 19      | 11740 MHz          | 48.94      | 38.07 | 49.6       | 39.31 | 0.66       | 1.24  |
| Note:                                |             |         |                    |            |       |            |       |            |       |
| DTS                                  | RBE         | 13      | 2472 MHz           | 66.03      | 50.67 | 66.5       | 52.25 | 0.47       | 1.58  |
|                                      | RSE         | 6       | 15840 MHz          | 54.5       | 42.42 | 54.08      | 42.19 | -0.42      | -0.23 |
| NOTE: 802.11n HT20 is the worst mode |             |         |                    |            |       |            |       |            |       |
| NFC                                  | Fundamental | -       | 13.56 MHz          | 26.96      |       | 20.45      |       | -6.51      |       |
| UNII<br>(20MHz)                      | RBE         | 100     | 5470 MHz           | 60.77      | 44.25 | 55.6       | 46.7  | -5.17      | 2.45  |
|                                      | RSE         | 100     | 15850 MHz          | 54.14      | 42.08 | 54.33      | 43.02 | 0.19       | 0.94  |
| NOTE: 802.11n HT20 mode is the worst |             |         |                    |            |       |            |       |            |       |

## END OF REPORT