



FCC Test Report

APPLICANT : Sony Mobile Communications Inc
EQUIPMENT : PDA Phone
BRAND NAME : Sony
TYPE NAME : PM-0787-BV
FCC ID : PY7-PM0787
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : FCC CLASS B PERSONAL
COMPUTERS AND PERIPHERALS

The product was received on Dec. 04, 2014 and testing was completed on Mar. 11, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2009 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Louis Wu

Reviewed by: Louis Wu / Manager

Jones Tsai

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7-PM0787

Page Number : 1 of 24

Report Issued Date : Mar. 27, 2015

Report Version : Rev. 01

Report Template No.: BU5-FC15B Version 1.1



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1. GENERAL DESCRIPTION 5

 1.1. Applicant.....5

 1.2. Manufacturer5

 1.3. Feature of Equipment Under Test.....5

 1.4. Details of Tested Sample (EUT) Information6

 1.5. Modification of EUT6

 1.6. Test Location7

 1.7. Applied Standards7

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1. Test Mode8

 2.2. Connection Diagram of Test System9

 2.3. Support Unit used in test configuration and system.....10

 2.4. EUT Operation Test Setup10

3. TEST RESULT..... 11

 3.1. Test of AC Conducted Emission Measurement 11

 3.2. Test of Radiated Emission Measurement 17

4. LIST OF MEASURING EQUIPMENT 23

5. UNCERTAINTY OF EVALUATION 24



SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description | Limit | Result | Remark |
|----------------|----------|-----------------------|-----------------|--------|--|
| 3.1 | 15.107 | AC Conducted Emission | < 15.107 limits | PASS | Under limit 6.30 dB at 0.190 MHz |
| 3.2 | 15.109 | Radiated Emission | < 15.109 limits | PASS | Under limit 8.58 dB at 250.050 MHz |



1. General Description

1.1. Applicant

Sony Mobile Communications Inc
Nya Vattentorget 22188 Lund/Sweden

1.2. Manufacturer

Sony Mobile Communications Inc
Nya Vattentorget 22188 Lund/Sweden

1.3. Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is PDA Phone supporting, GSM/WCDMA/LTE, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, Bluetooth with FM Receiver, GPS, Ant +, and NFC features, and below is details of information.

| Product Feature | |
|-------------------------------|---|
| Equipment | PDA Phone |
| Brand Name | Sony |
| Type Name | PM-0787-BV |
| FCC ID | PY7-PM0787 |
| GSM Operating Band(s) | GSM 850/900/1800/1900MHz |
| GPRS / EGPRS Multi Slot Class | GPRS Class 33, EGPRS Class 33 |
| WCDMA Operating Band(s) | FDD Band I / II / V / VIII |
| WCDMA Rel. Version | Rel. 8 |
| LTE Operating Band(s) | FDD Band I / III / V / VII / VIII / XXVIII TDD Band XL |
| LTE Rel. Version | Rel. 10 |
| Wi-Fi Specification | 802.11b/g/n HT20 802.11a/n HT20/HT40 |
| Bluetooth Version | v3.0 + EDR / v4.0 - LE |
| NFC Specification | ISO14443A / ISO14443B / Felica / ISO15693 |
| ANT+ | ANT+ |
| Power Supply | Battery / AC Adapter / Car Charger |

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Details of Tested Sample (EUT) Information

Below EUT sample and accessory are used to test.

| EUT Information List | | | | |
|--|------------|-------------|------------|---------------------|
| IMEI | HW Version | SW Version | S/N | Performed Test Item |
| IMEI 1: 004402454037015 IMEI 2: 004402454037007 | AP | 26.1.B.1.23 | YT9111CG6U | Conducted Emission |
| IMEI 1: 004402454037015 IMEI 2: 004402454037007 | | | YT9111CG6U | Radiated Emission |

| Accessory List | |
|--------------------|--|
| Battery | Model No. : Bellis |
| Earphone | Model No. : MH410c |
| | Type No. : AG-1100 |
| | S/N : 12431A1B0011582 (For Conducted Emission) 12431A180011AEC (For Radiated Emission) |
| USB Cable 1 | Model No. : EC450 |
| | Type No. : AI-0700 |
| | S/N : 142412D8250297C (For Conducted Emission) 132312D02961412 (For Radiated Emission) |
| USB Cable 2 | Model No. : AA9 |
| | Type No. : N/A |
| | S/N : N/A |

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

1.5. Modification of EUT

No modifications are made to the EUT during all test items.



1.6. Test Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

| | | |
|---------------------------|--|-----------|
| Test Site | SPORTON INTERNATIONAL INC. | |
| Test Site Location | No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978 | |
| Test Site No. | Sporton Site No. | |
| | CO05-HY | 03CH06-HY |

1.7. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. For FCC 15 Subpart B - Unintentional Radiators, device supporting USB interface or similar peripherals (defined as the Section 15.3 (r) Peripheral device) acting as a peripheral for personal computers shall be authorized as "The Class B personal computers and peripherals" per the Section 15.101 (a) Equipment authorization of unintentional radiators.
3. For other Unintentional Radiators features of this EUT, test reports are be issued separately.
Per the Note of the Section 15.101, when device supports features (USB, FM Radio, digital devices...etc) more than one category of authorization, type of authorization shall be appropriately chosen for FCC 15B compliance rule, and the Section 15.101 (b), only those receivers that operate (tune) within the frequency range of 30-960 MHz, CB receivers and radar detectors are subject to the authorizations shown in paragraph (a) of the Section 15.101. However, receivers indicated as being subject to Declaration of Conformity that are contained within a transceiver, the transmitter portion of which is subject to certification, shall be authorized under the verification procedure.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2009 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The following tables are showing the test modes as the worst cases and recorded in this report.


| Item | EUT Configuration | Test Condition | |
|------|-------------------------|-------------------------------------|-------------------------------------|
| | | EMI AC | EMI RE |
| 1. | Data Link with Notebook | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

The data application (each file size is greater than 30Mbytes) is continuously transferred between the EUT and Notebook connected via USB cable, while GSM, WLAN, and Bluetooth and GPS idle.

Abbreviations:

- EMI AC: AC conducted emissions
- EMI RE: EUT radiated emissions

2.2. Connection Diagram of Test System

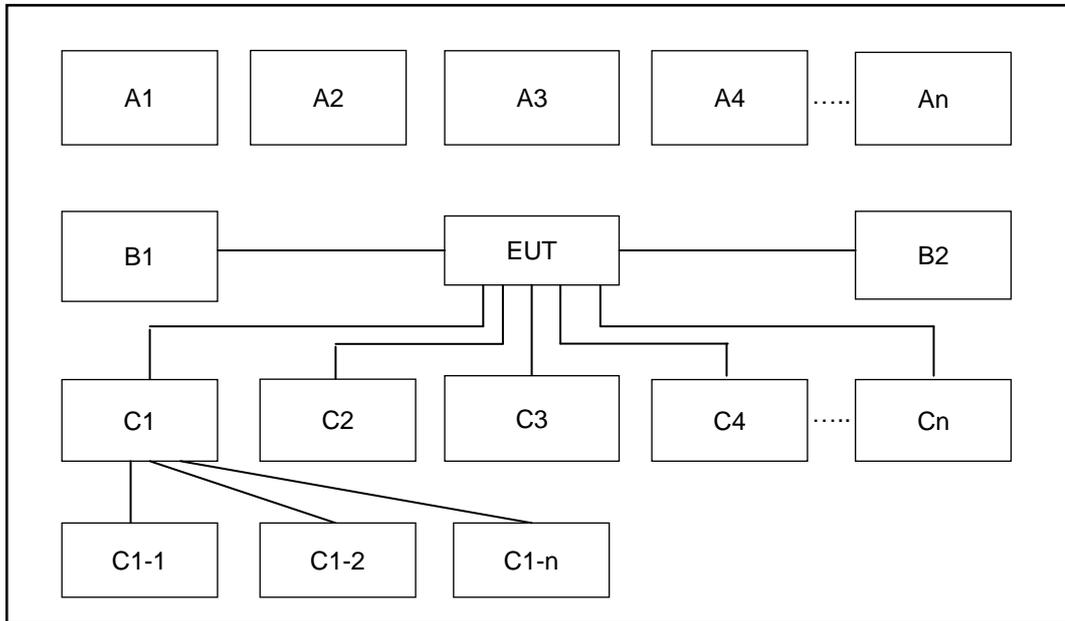

| Conduction and Radiation Test Setup | | | | | | | | | |
|-------------------------------------|--------------------|--------------------------------|-----------|---|---|---|---|---|---|
| No. | Wireless Station | Connection Type | Test Mode | | | | | | |
| | | | 1 | 2 | - | - | - | - | - |
| A1 | Bluetooth Earphone | Bluetooth | X | X | | | | | |
| A2 | System Simulator | GSM | X | X | | | | | |
| A3 | AP router | WiFi | X | X | | | | | |
| A4 | NFC Card | NFC | X | X | | | | | |
| No. | Setup Peripherals | Connection Type | 1 | 2 | - | - | - | - | - |
| C1 | Notebook | USB cable | X | X | | | | | |
| C1-1 | iPod | USB Cable to C1 | X | X | | | | | |
| C1-2 | AP router | RJ-45 Cable to C1 | X | X | | | | | |
| C2 | Earphone | Earphone jack | X | X | | | | | |
| C3 | SD card | SD I/O interface without cable | X | X | | | | | |



2.3. Support Unit used in test configuration and system

| Item | Equipment | Trade Name | Model Name | FCC ID | Data Cable | Power Cord |
|------|--------------------|--------------|----------------|--|-------------------|--|
| 1. | System Simulator | R&S | CMU 200 | N/A | N/A | Unshielded, 1.8 m |
| 2. | System Simulator | Anritsu | MT8820C | N/A | N/A | Unshielded, 1.8 m |
| 3. | WLAN AP | D-Link | DIR-865L | KA2IR865LA1 | N/A | Unshielded, 1.8 m |
| 4. | Bluetooth Earphone | Sony | SBH20 | PY7-RD0010 | Unshielded, 0.75m | N/A |
| 5. | Notebook | DELL | Latitude E6320 | FCC DoC/ Contains FCC ID: QDS-BRCM1054 | N/A | AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m |
| 6. | iPod | Apple | A1285 | FCC DoC | Shielded, 1.0 m | N/A |
| 7. | SD Card | SanDisk | MicroSD HC | FCC DoC | N/A | N/A |
| 8. | NFC Card | Metro Taipei | Easy Card | N/A | N/A | N/A |

2.4. EUT Operation Test Setup

The data application (each file size is greater than 30Mbytes) is continuously transferred between the EUT and Notebook connected via USB cable, while GSM and Bluetooth, and WLAN idle.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

| Frequency of emission (MHz) | Conducted limit (dBuV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15-0.5 | 66 to 56* | 56 to 46* |
| 0.5-5 | 56 | 46 |
| 5-30 | 60 | 50 |

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.1.4 Test Setup

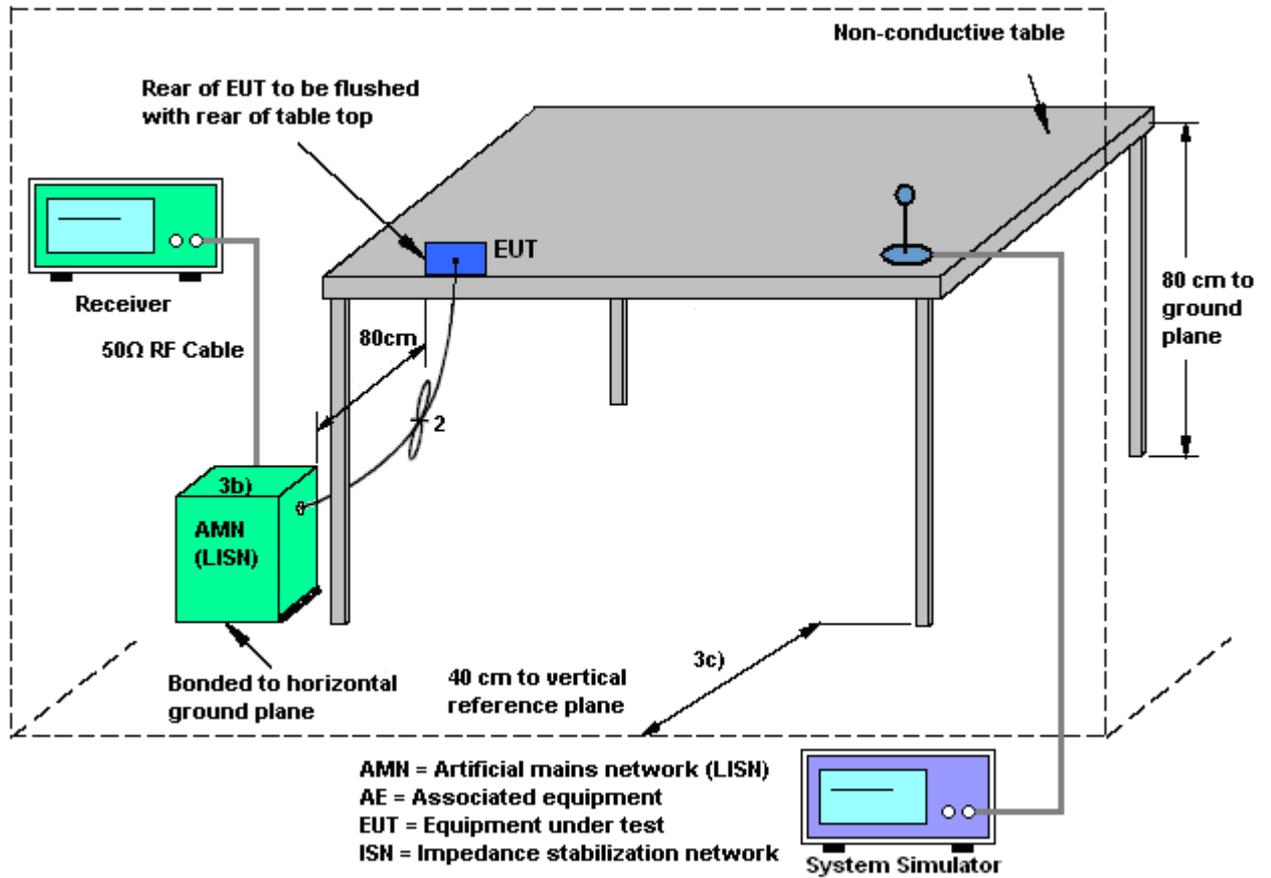

3.1.5 Test Result of AC Conducted Emission

| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 1 | Temperature : | 21~23°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 46~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Function Type : | Data Link with Notebook (with USB cable 2) + SIM 1 | | |

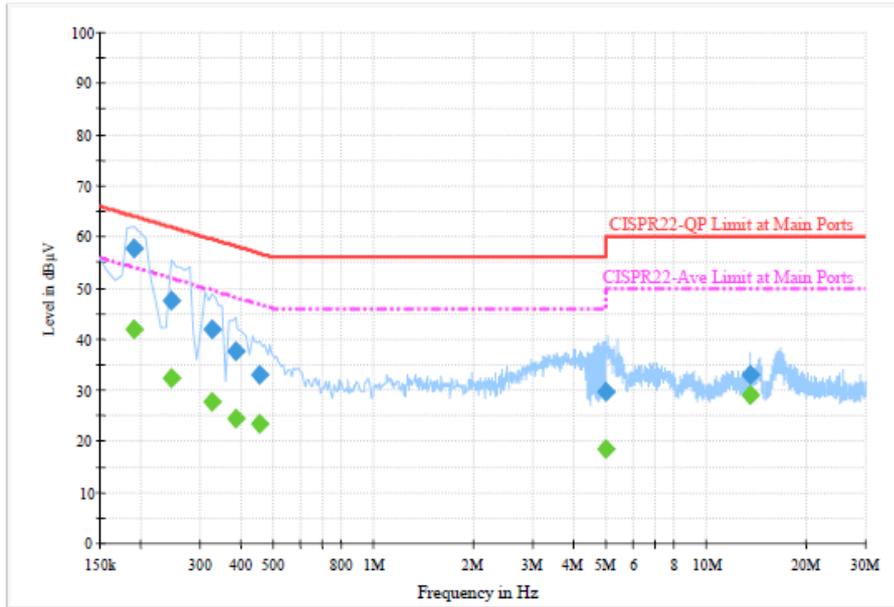

Final Result : Quasi-Peak


| Frequency (MHz) | Quasi-Peak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.190000 | 57.7 | Off | L1 | 19.5 | 6.3 | 64.0 |
| 0.246000 | 47.4 | Off | L1 | 19.6 | 14.5 | 61.9 |
| 0.326000 | 41.8 | Off | L1 | 19.5 | 17.8 | 59.6 |
| 0.382000 | 37.8 | Off | L1 | 19.6 | 20.4 | 58.2 |
| 0.454000 | 33.0 | Off | L1 | 19.6 | 23.8 | 56.8 |
| 4.982000 | 29.6 | Off | L1 | 19.7 | 26.4 | 56.0 |
| 13.558000 | 32.9 | Off | L1 | 19.8 | 27.1 | 60.0 |

Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.190000 | 42.0 | Off | L1 | 19.5 | 12.0 | 54.0 |
| 0.246000 | 32.3 | Off | L1 | 19.6 | 19.6 | 51.9 |
| 0.326000 | 27.9 | Off | L1 | 19.5 | 21.7 | 49.6 |
| 0.382000 | 24.4 | Off | L1 | 19.6 | 23.8 | 48.2 |
| 0.454000 | 23.3 | Off | L1 | 19.6 | 23.5 | 46.8 |
| 4.982000 | 18.3 | Off | L1 | 19.7 | 27.7 | 46.0 |
| 13.558000 | 29.0 | Off | L1 | 19.8 | 21.0 | 50.0 |



| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 1 | Temperature : | 21~23°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 46~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Function Type : | Data Link with Notebook (with USB cable 2) + SIM 1 | | |

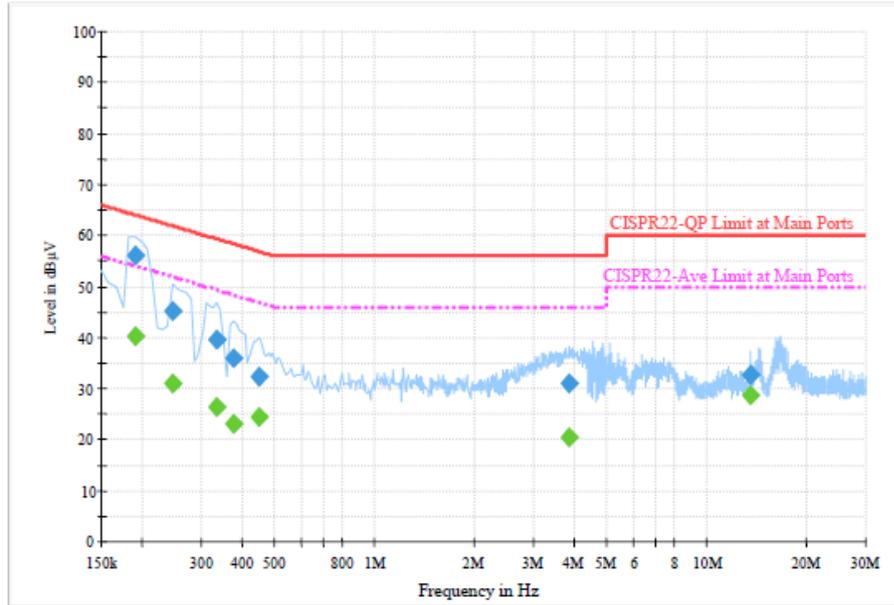

Final Result : Quasi-Peak


| Frequency (MHz) | Quasi-Peak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.190000 | 56.1 | Off | N | 19.5 | 7.9 | 64.0 |
| 0.246000 | 45.3 | Off | N | 19.6 | 16.6 | 61.9 |
| 0.334000 | 39.5 | Off | N | 19.5 | 19.9 | 59.4 |
| 0.374000 | 35.9 | Off | N | 19.5 | 22.5 | 58.4 |
| 0.446000 | 32.5 | Off | N | 19.6 | 24.4 | 56.9 |
| 3.838000 | 30.9 | Off | N | 19.6 | 25.1 | 56.0 |
| 13.558000 | 32.6 | Off | N | 19.8 | 27.4 | 60.0 |

Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.190000 | 40.4 | Off | N | 19.5 | 13.6 | 54.0 |
| 0.246000 | 30.9 | Off | N | 19.6 | 21.0 | 51.9 |
| 0.334000 | 26.3 | Off | N | 19.5 | 23.1 | 49.4 |
| 0.374000 | 23.0 | Off | N | 19.5 | 25.4 | 48.4 |
| 0.446000 | 24.4 | Off | N | 19.6 | 22.5 | 46.9 |
| 3.838000 | 20.6 | Off | N | 19.6 | 25.4 | 46.0 |
| 13.558000 | 28.7 | Off | N | 19.8 | 21.3 | 50.0 |



| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 2 | Temperature : | 21~23°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 46~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Line |
| Function Type : | Data Link with Notebook (with USB cable 2) + SIM 2 | | |

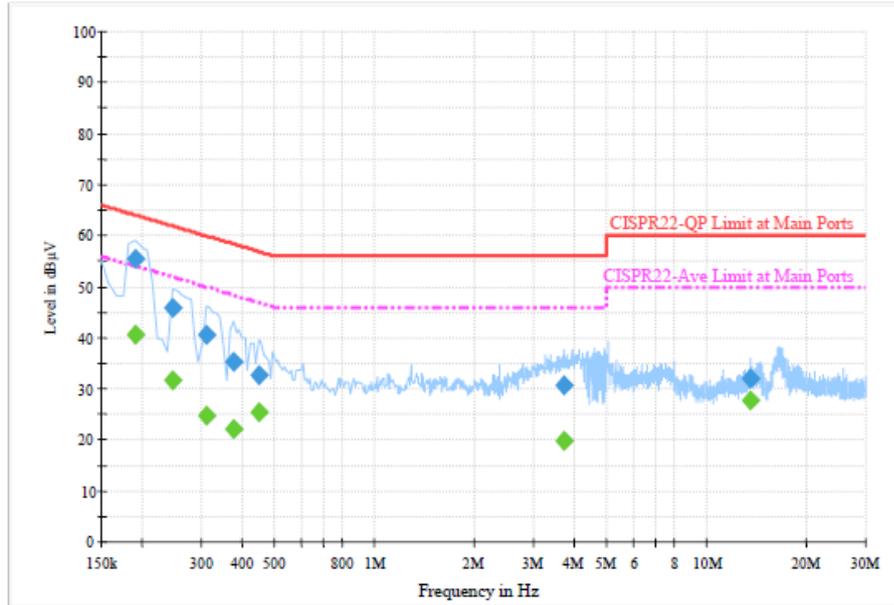

Final Result : Quasi-Peak


| Frequency (MHz) | Quasi-Peak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.190000 | 55.5 | Off | L1 | 19.5 | 8.5 | 64.0 |
| 0.246000 | 46.0 | Off | L1 | 19.6 | 15.9 | 61.9 |
| 0.310000 | 40.6 | Off | L1 | 19.5 | 19.4 | 60.0 |
| 0.374000 | 35.4 | Off | L1 | 19.5 | 23.0 | 58.4 |
| 0.446000 | 32.7 | Off | L1 | 19.6 | 24.2 | 56.9 |
| 3.718000 | 30.6 | Off | L1 | 19.6 | 25.4 | 56.0 |
| 13.558000 | 32.2 | Off | L1 | 19.8 | 27.8 | 60.0 |

Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.190000 | 40.5 | Off | L1 | 19.5 | 13.5 | 54.0 |
| 0.246000 | 31.7 | Off | L1 | 19.6 | 20.2 | 51.9 |
| 0.310000 | 24.8 | Off | L1 | 19.5 | 25.2 | 50.0 |
| 0.374000 | 22.0 | Off | L1 | 19.5 | 26.4 | 48.4 |
| 0.446000 | 25.3 | Off | L1 | 19.6 | 21.6 | 46.9 |
| 3.718000 | 19.8 | Off | L1 | 19.6 | 26.2 | 46.0 |
| 13.558000 | 27.7 | Off | L1 | 19.8 | 22.3 | 50.0 |



| | | | |
|-----------------|--|---------------------|---------|
| Test Mode : | Mode 2 | Temperature : | 21~23°C |
| Test Engineer : | Kai-Chun Chu | Relative Humidity : | 46~48% |
| Test Voltage : | 120Vac / 60Hz | Phase : | Neutral |
| Function Type : | Data Link with Notebook (with USB cable 2) + SIM 2 | | |

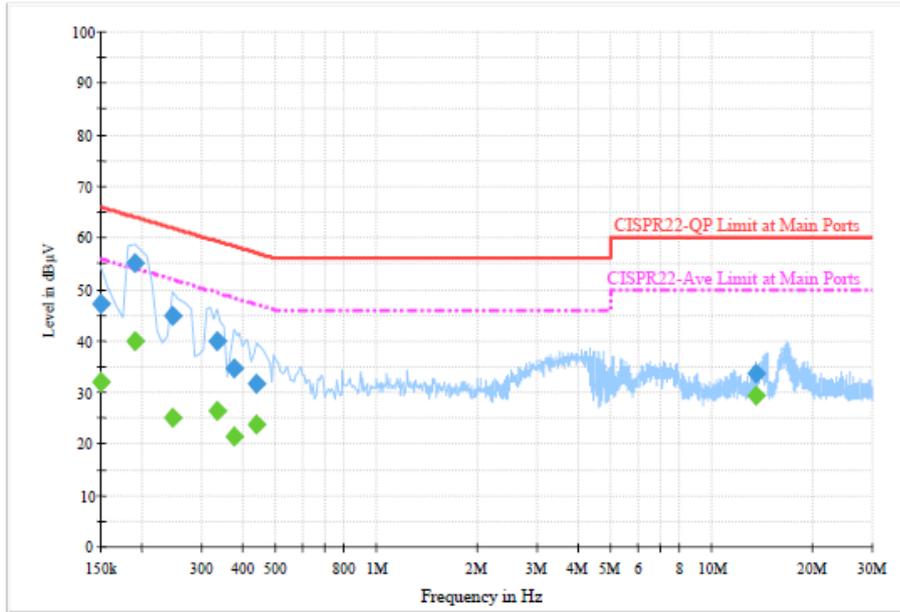

Final Result : Quasi-Peak

| Frequency (MHz) | Quasi-Peak (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|-------------------|--------|------|------------|-------------|--------------|
| 0.150000 | 47.2 | Off | N | 19.5 | 18.8 | 66.0 |
| 0.190000 | 55.0 | Off | N | 19.5 | 9.0 | 64.0 |
| 0.246000 | 44.9 | Off | N | 19.6 | 17.0 | 61.9 |
| 0.334000 | 40.0 | Off | N | 19.5 | 19.4 | 59.4 |
| 0.374000 | 34.6 | Off | N | 19.5 | 23.8 | 58.4 |
| 0.438000 | 31.7 | Off | N | 19.6 | 25.4 | 57.1 |
| 13.558000 | 33.6 | Off | N | 19.8 | 26.4 | 60.0 |

Final Result : Average

| Frequency (MHz) | Average (dBµV) | Filter | Line | Corr. (dB) | Margin (dB) | Limit (dBµV) |
|-----------------|----------------|--------|------|------------|-------------|--------------|
| 0.150000 | 32.0 | Off | N | 19.5 | 24.0 | 56.0 |
| 0.190000 | 40.0 | Off | N | 19.5 | 14.0 | 54.0 |
| 0.246000 | 25.2 | Off | N | 19.6 | 26.7 | 51.9 |
| 0.334000 | 26.3 | Off | N | 19.5 | 23.1 | 49.4 |
| 0.374000 | 21.5 | Off | N | 19.5 | 26.9 | 48.4 |
| 0.438000 | 23.8 | Off | N | 19.6 | 23.3 | 47.1 |
| 13.558000 | 29.4 | Off | N | 19.8 | 20.6 | 50.0 |



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 30 – 88 | 100 | 3 |
| 88 – 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dBµV/m) = 20 log Emission level (µV/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

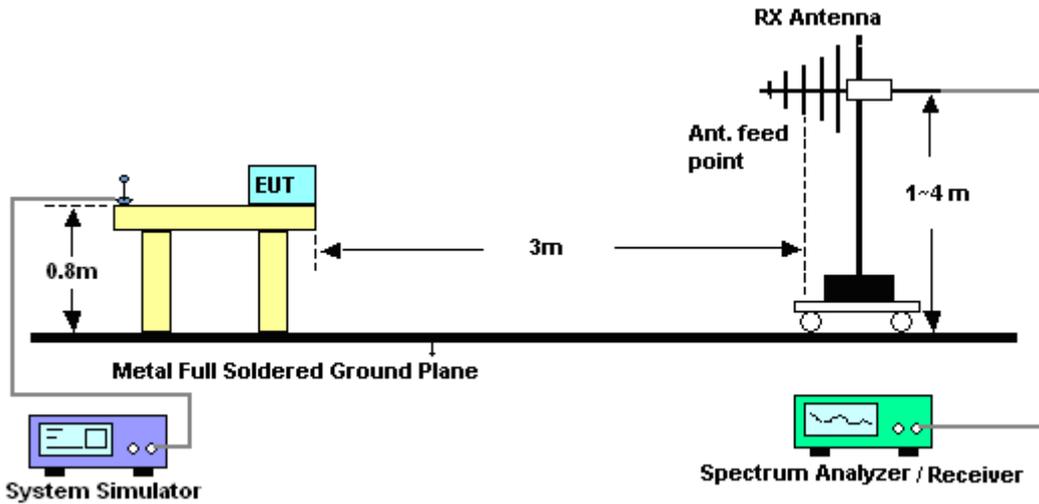


For radiated emissions above 1GHz

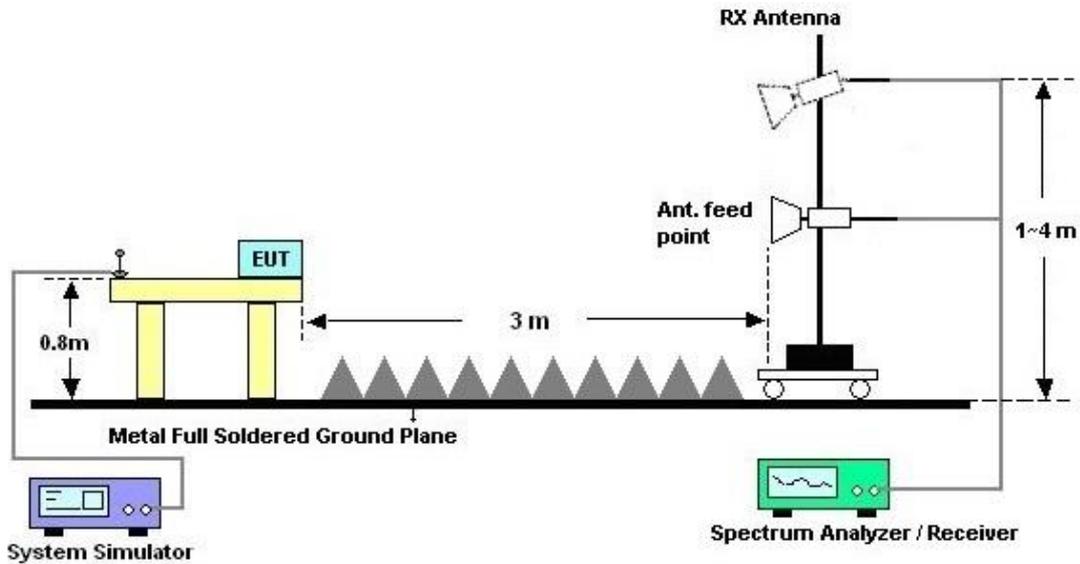



3.2.5. Test Result of Radiated Emission

| | | | |
|-----------------|---|---------------------|------------|
| Test Mode : | Mode 1 | Temperature : | 20~23°C |
| Test Engineer : | Daniel Lee | Relative Humidity : | 50~53% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Function Type : | Data Link with Notebook (with USB cable 2) + SIM 1 | | |
| Remark : | #7 is system simulator signal which can be ignored. | | |

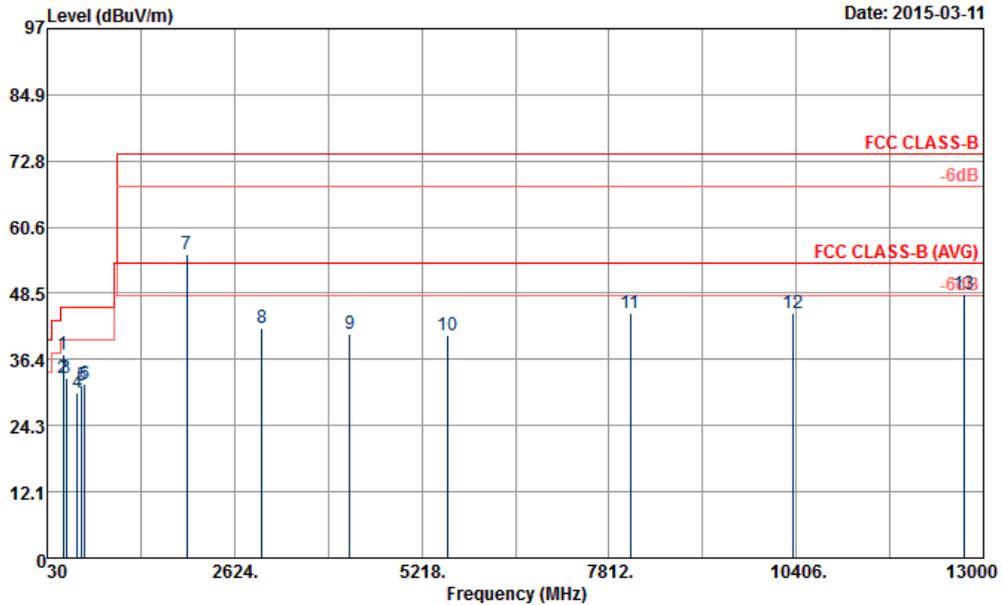


Site : 03CH06-HY
 Condition : FCC CLASS-B 3m HF-ANT_583_140731 HORIZONTAL
 Project : 4D0472
 Power : From System
 Mode : Mode 1

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark | |
|----|----------|--------|--------|--------|-------------|-------|--------|-------|-------|---------|------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 250.05 | 37.42 | -8.58 | 46.00 | 55.13 | 12.30 | 1.73 | 31.74 | 100 | 46 Peak | |
| 2 | 254.10 | 32.96 | -13.04 | 46.00 | 50.08 | 12.86 | 1.75 | 31.73 | --- | --- | Peak |
| 3 | 290.55 | 32.88 | -13.12 | 46.00 | 49.72 | 13.01 | 1.87 | 31.72 | --- | --- | Peak |
| 4 | 450.50 | 30.33 | -15.67 | 46.00 | 43.08 | 16.82 | 2.31 | 31.88 | --- | --- | Peak |
| 5 | 508.60 | 31.73 | -14.27 | 46.00 | 43.77 | 17.40 | 2.50 | 31.94 | --- | --- | Peak |
| 6 | 550.60 | 31.96 | -14.04 | 46.00 | 42.62 | 18.80 | 2.54 | 32.00 | --- | --- | Peak |
| 7 | 1960.00 | 55.69 | | | 79.45 | 31.33 | 5.40 | 60.49 | --- | --- | Peak |
| 8 | 3000.00 | 42.02 | -31.98 | 74.00 | 63.48 | 32.80 | 6.74 | 61.00 | --- | --- | Peak |
| 9 | 4226.00 | 41.16 | -32.84 | 74.00 | 60.32 | 33.73 | 8.76 | 61.65 | --- | --- | Peak |
| 10 | 5574.00 | 40.72 | -33.28 | 74.00 | 56.22 | 35.04 | 8.88 | 59.42 | --- | --- | Peak |
| 11 | 8112.00 | 44.83 | -29.17 | 74.00 | 56.42 | 35.76 | 12.31 | 59.66 | --- | --- | Peak |
| 12 | 10360.00 | 44.86 | -29.14 | 74.00 | 55.34 | 37.29 | 12.92 | 60.69 | --- | --- | Peak |
| 13 | 12738.00 | 48.28 | -25.72 | 74.00 | 53.09 | 39.39 | 15.79 | 59.99 | 100 | 0 Peak | |



| | | | |
|-----------------|---|---------------------|----------|
| Test Mode : | Mode 1 | Temperature : | 20~23°C |
| Test Engineer : | Daniel Lee | Relative Humidity : | 50~53% |
| Test Distance : | 3m | Polarization : | Vertical |
| Function Type : | Data Link with Notebook (with USB cable 2) + SIM 1 | | |
| Remark : | #8 is system simulator signal which can be ignored. | | |

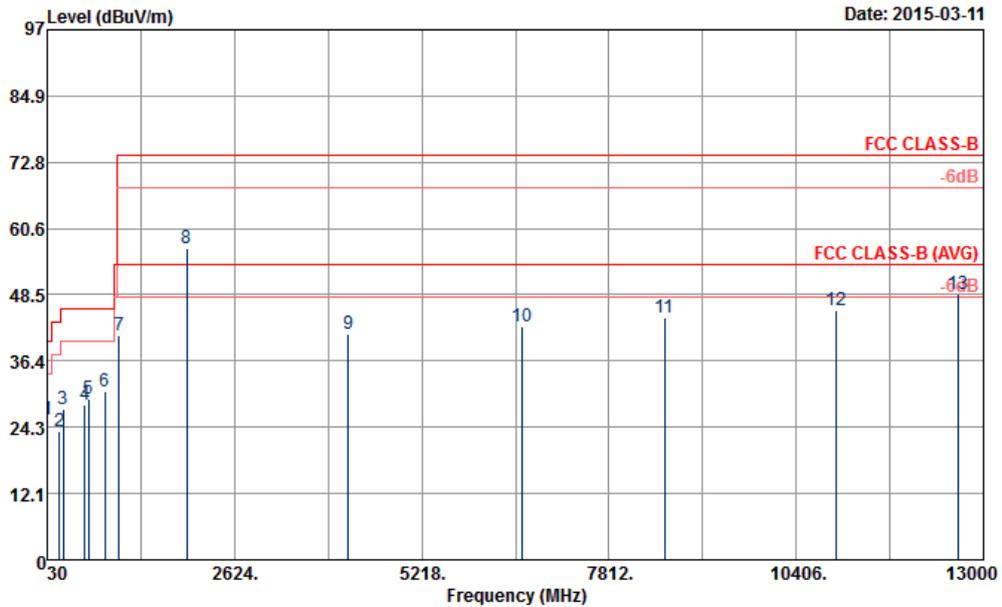


Site : 03CH06-HY
 Condition : FCC CLASS-B 3m HF-ANT_583_140731 VERTICAL
 Project : 4D0472
 Power : From System
 Mode : Mode 1

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Cable Factor | Preamp Loss | A/Pos | T/Pos | Remark |
|----|----------|--------|------------|------------|-------------------|--------------|-------------|-------|-------|----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg |
| 1 | 30.54 | 25.79 | -14.21 | 40.00 | 38.92 | 18.02 | 0.65 | 31.80 | 100 | 151 Peak |
| 2 | 200.10 | 23.53 | -19.97 | 43.50 | 44.54 | 9.20 | 1.54 | 31.75 | --- | Peak |
| 3 | 250.05 | 27.52 | -18.48 | 46.00 | 45.23 | 12.30 | 1.73 | 31.74 | --- | Peak |
| 4 | 550.60 | 28.49 | -17.51 | 46.00 | 39.15 | 18.80 | 2.54 | 32.00 | --- | Peak |
| 5 | 601.00 | 29.34 | -16.66 | 46.00 | 40.03 | 18.60 | 2.77 | 32.06 | --- | Peak |
| 6 | 832.00 | 30.90 | -15.10 | 46.00 | 39.51 | 20.04 | 3.17 | 31.82 | --- | Peak |
| 7 | 1022.00 | 41.14 | -32.86 | 74.00 | 70.50 | 27.71 | 3.81 | 60.88 | --- | Peak |
| 8 | 1960.00 | 57.05 | | | 80.81 | 31.33 | 5.40 | 60.49 | --- | Peak |
| 9 | 4200.00 | 41.22 | -32.78 | 74.00 | 60.20 | 33.68 | 9.00 | 61.66 | --- | Peak |
| 10 | 6618.00 | 42.69 | -31.31 | 74.00 | 57.55 | 35.80 | 9.82 | 60.48 | --- | Peak |
| 11 | 8578.00 | 44.39 | -29.61 | 74.00 | 55.50 | 35.67 | 12.87 | 59.65 | --- | Peak |
| 12 | 10950.00 | 45.54 | -28.46 | 74.00 | 53.39 | 37.67 | 13.72 | 59.24 | --- | Peak |
| 13 | 12648.00 | 48.72 | -25.28 | 74.00 | 53.56 | 39.36 | 15.72 | 59.92 | 100 | 0 Peak |



| | | | |
|-----------------|--|---------------------|------------|
| Test Mode : | Mode 2 | Temperature : | 20~23°C |
| Test Engineer : | Daniel Lee | Relative Humidity : | 50~53% |
| Test Distance : | 3m | Polarization : | Horizontal |
| Function Type : | Data Link with Notebook (with USB cable 2) + SIM 2 | | |

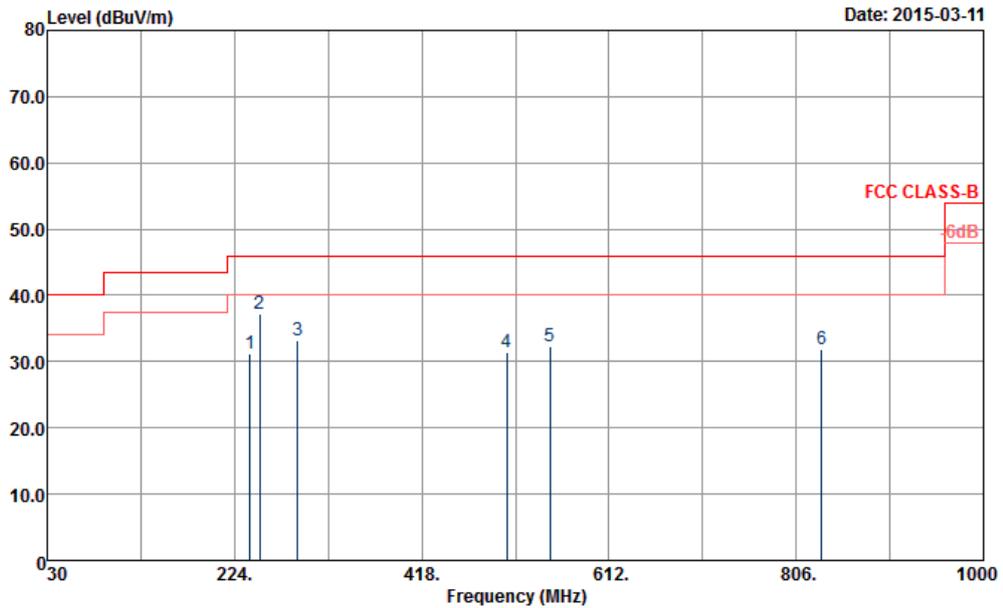


Site : 03CH06-HY
 Condition : FCC CLASS-B 3m BILOG_131010_9664 HORIZONTAL
 Project : 4D0472
 Power : From System
 Mode : Mode 2

| | Freq | Level | Over Limit | Limit Line | ReadAntenna Level | Antenna Factor | Cable Loss | Preamplifier Factor | A/Pos | T/Pos | Remark |
|---|--------|--------|------------|------------|-------------------|----------------|------------|---------------------|-------|-------|--------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg | |
| 1 | 240.06 | 31.30 | -14.70 | 46.00 | 49.96 | 11.39 | 1.69 | 31.74 | --- | --- | Peak |
| 2 | 250.05 | 37.29 | -8.71 | 46.00 | 55.00 | 12.30 | 1.73 | 31.74 | 100 | 314 | Peak |
| 3 | 289.74 | 33.25 | -12.75 | 46.00 | 50.11 | 13.00 | 1.86 | 31.72 | --- | --- | Peak |
| 4 | 506.50 | 31.46 | -14.54 | 46.00 | 43.50 | 17.40 | 2.50 | 31.94 | --- | --- | Peak |
| 5 | 550.60 | 32.23 | -13.77 | 46.00 | 42.89 | 18.80 | 2.54 | 32.00 | --- | --- | Peak |
| 6 | 832.00 | 31.97 | -14.03 | 46.00 | 40.58 | 20.04 | 3.17 | 31.82 | --- | --- | Peak |



| | | | |
|-----------------|--|---------------------|----------|
| Test Mode : | Mode 2 | Temperature : | 20~23°C |
| Test Engineer : | Daniel Lee | Relative Humidity : | 50~53% |
| Test Distance : | 3m | Polarization : | Vertical |
| Function Type : | Data Link with Notebook (with USB cable 2) + SIM 2 | | |

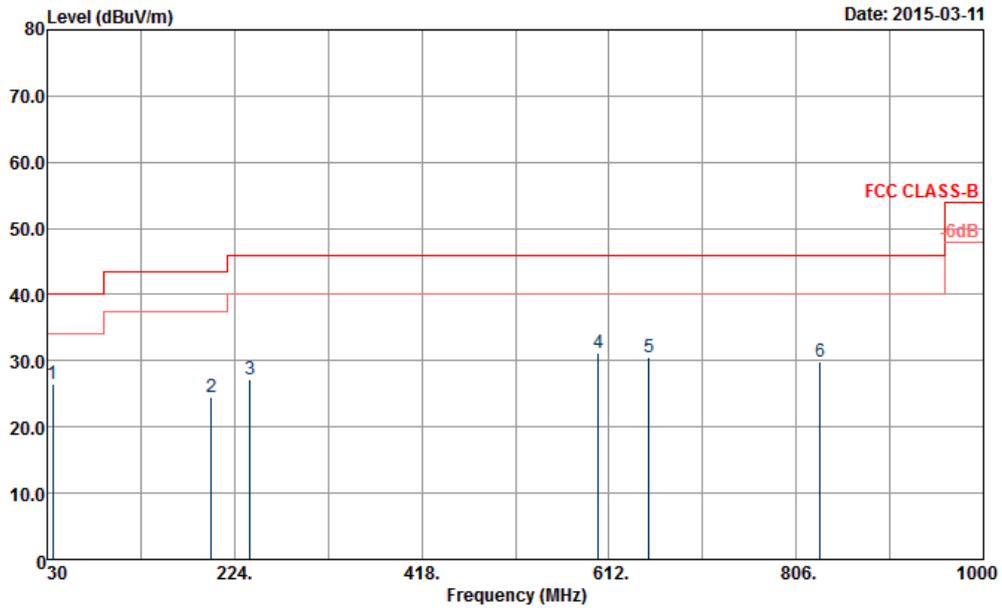

Site : 03CH06-HY
 Condition : FCC CLASS-B 3m BILOG_131010_9664 VERTICAL
 Project : 4D0472
 Power : From System
 Mode : Mode 2

| | Freq | Level | Over | Limit | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark |
|---|--------|--------|--------|--------|-------------|-------|--------|-------|-------|----------|
| | MHz | dBuV/m | dB | dBuV/m | dBuV | dB/m | dB | dB | cm | deg |
| 1 | 35.94 | 26.52 | -13.48 | 40.00 | 41.71 | 15.90 | 0.70 | 31.79 | 100 | 288 Peak |
| 2 | 200.10 | 24.57 | -18.93 | 43.50 | 45.58 | 9.20 | 1.54 | 31.75 | --- | --- |
| 3 | 240.06 | 27.12 | -18.88 | 46.00 | 45.78 | 11.39 | 1.69 | 31.74 | --- | --- |
| 4 | 601.00 | 31.26 | -14.74 | 46.00 | 41.95 | 18.60 | 2.77 | 32.06 | --- | --- |
| 5 | 653.50 | 30.46 | -15.54 | 46.00 | 40.73 | 18.96 | 2.81 | 32.04 | --- | --- |
| 6 | 830.60 | 29.88 | -16.12 | 46.00 | 38.54 | 20.00 | 3.16 | 31.82 | --- | --- |



4. List of Measuring Equipment

| Instrument | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Test Date | Due Date | Remark |
|--------------------------------|-----------------|----------------------------|---------------------------------|-----------------|------------------|---------------|---------------|-----------------------|
| EMI Test Receiver | Rohde & Schwarz | ESCS 30 | 100356 | 9kHz ~ 2.75GHz | Dec. 01, 2014 | Mar. 11, 2015 | Nov. 30, 2015 | Conduction (CO05-HY) |
| LISN | Rohde & Schwarz | ENV216 | 100080 | 9kHz ~ 30MHz | Dec. 02, 2014 | Mar. 11, 2015 | Dec. 01, 2015 | Conduction (CO05-HY) |
| LISN (for auxiliary equipment) | Rohde & Schwarz | ENV216 | 100081 | 9kHz ~ 30MHz | Dec. 08, 2014 | Mar. 11, 2015 | Dec. 07, 2015 | Conduction (CO05-HY) |
| AC Power Source | ChainTek | APC-1000W | N/A | N/A | N/A | Mar. 11, 2015 | N/A | Conduction (CO05-HY) |
| Hygrometer | Testo | 608-H1 | 34913912 | N/A | Apr. 23, 2014 | Mar. 11, 2015 | Apr. 22, 2015 | Conduction (CO05-HY) |
| LF Cable | Shuner | RG-402 | N/A | N/A | Oct. 07, 2014 | Mar. 11, 2015 | Oct. 06, 2015 | Conduction (CO05-HY) |
| Test Software | N/A | EMC32 | 8.40.0 | N/A | N/A | Mar. 11, 2015 | N/A | Conduction (CO05-HY) |
| EMI Test Receiver | Rohde & Schwarz | ESVS10 | 834468/0003 | 20MHz-1000MHz | May. 06, 2014 | Mar. 11, 2015 | May. 05, 2015 | Radiation (03CH06-HY) |
| Spectrum Analyzer | Agilent | E4408B | MY44211028 | 9kHz ~ 26.5GHz | Aug. 23, 2014 | Mar. 11, 2015 | Aug. 22, 2015 | Radiation (03CH06-HY) |
| EMI Test Receiver | Rohde & Schwarz | ESU26 | 100472 | 20Hz~26.5GHz | Jan. 19, 2015 | Mar. 11, 2015 | Jan. 18, 2016 | Radiation (03CH06-HY) |
| Bilog Antenna | Teseq GmbH | CBL6112D | 35379 | 30MHz -2GHz | Sep. 27, 2014 | Mar. 11, 2015 | Sep. 26, 2015 | Radiation (03CH06-HY) |
| Double Ridge Horn Antenna | EMCO | 3117 | 00066583 | 1GHz~18GHz | Jul. 24, 2014 | Mar. 11, 2015 | Jul. 23, 2015 | Radiation (03CH06-HY) |
| Amplifier | SONOMA | 310N | 186713 | 9kHz~1GHz | Apr. 16, 2014 | Mar. 11, 2015 | Apr. 15, 2015 | Radiation (03CH06-HY) |
| Preamplifier | MITEQ | AMF-7D-0010 1800-30-10P | 1815698 | 1GHz~18GHz | Dec. 12, 2014 | Mar. 11, 2015 | Dec. 11, 2015 | Radiation (03CH06-HY) |
| Controller | INN-CO | CO2000 | 8000604 | N/A | N/A | Mar. 11, 2015 | N/A | Radiation (03CH06-HY) |
| Turn Table | INN-CO | DS2000 | 420/650/00 | 0 ~ 360 degree | N/A | Mar. 11, 2015 | N/A | Radiation (03CH06-HY) |
| Antenna Mast | MF | MF-7802 | MF780208212 | 1 m ~ 4 m | N/A | Mar. 11, 2015 | N/A | Radiation (03CH06-HY) |
| Hygrometer | WISEWIND | 410 | BU5004 | N/A | May. 06, 2014 | Mar. 11, 2015 | May. 05, 2015 | Radiation (03CH06-HY) |
| RF Cable | HUBER + SUHNER | RG 142 | NA | 30MHz ~ 1GHz | Nov. 27, 2014 | Mar. 11, 2015 | Nov. 26, 2015 | Radiation (03CH06-HY) |
| RF Cable | Infinet | LL142 | Infinet CA3601-3601 -1000 | 1GHz ~ 26.5GHz | Nov. 27, 2014 | Mar. 11, 2015 | Nov. 26, 2015 | Radiation (03CH06-HY) |
| Test Software | Audix | E3 | Version 6.2009-8-24 | N/A | N/A | Mar. 11, 2015 | N/A | Radiation (03CH06-HY) |

Note: The test equipment calibration is traceable to the ISO17025.



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 2.26 |
|---|------|

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

| | |
|---|------|
| Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) | 4.50 |
|---|------|