



**FCC 47 CFR PART 15 SUBPART C**

**C2PC CERTIFICATION TEST REPORT**

**FOR**

**GSM/WCDMA/LTE Phone + Bluetooth, DTS/UNII a/b/g/n/ac, ANT+ and NFC**

**FCC ID: PY7-PM0816**

**REPORT NUMBER: 15U19770-E2**

**ISSUE DATE: MARCH 18, 2015**

**Prepared for  
SONY MOBILE COMMUNICATIONS, INC.  
NYA VATTENTORNET MOBILVAGEN 10  
LUND 22188  
SWEDEN**

**Prepared by  
UL VERIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888**



**NVLAP LAB CODE 200065-0**

Revision History

| Issue |          |               |            |
|-------|----------|---------------|------------|
| Rev.  | Date     | Revisions     | Revised By |
| --    | 03/18/15 | Initial Issue | CHOON OOI  |

## TABLE OF CONTENTS

|                                                 |           |
|-------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>     | <b>4</b>  |
| <b>2. TEST METHODOLOGY .....</b>                | <b>5</b>  |
| <b>3. FACILITIES AND ACCREDITATION .....</b>    | <b>5</b>  |
| <b>4. CALIBRATION AND UNCERTAINTY .....</b>     | <b>6</b>  |
| 4.1. MEASURING INSTRUMENT CALIBRATION .....     | 6         |
| 4.2. SAMPLE CALCULATION .....                   | 6         |
| 4.3. MEASUREMENT UNCERTAINTY .....              | 6         |
| <b>5. EQUIPMENT UNDER TEST .....</b>            | <b>7</b>  |
| 8.1. DESCRIPTION OF EUT .....                   | 7         |
| 8.2. MAXIMUM OUTPUT POWER.....                  | 7         |
| 8.3. DESCRIPTION OF AVAILABLE ANTENNAS .....    | 7         |
| 8.4. WORST-CASE CONFIGURATION AND MODE .....    | 8         |
| 8.5. DESCRIPTION OF TEST SETUP.....             | 9         |
| <b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>  | <b>11</b> |
| <b>7. SUMMARY TABLE .....</b>                   | <b>12</b> |
| <b>8. RADIATED TEST RESULTS.....</b>            | <b>13</b> |
| 8.1. LIMITS AND PROCEDURE .....                 | 13        |
| 8.2. TRANSMITTER ABOVE 1 GHz .....              | 14        |
| 8.2.1. BASIC DATA RATE GFSK MODULATION .....    | 14        |
| 8.2.2. ENHANCED DATA RATE 8PSK MODULATION ..... | 27        |
| 8.3. WORST-CASE BELOW 1 GHz.....                | 40        |
| <b>6. SETUP PHOTOS.....</b>                     | <b>43</b> |

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SONY MOBILE COMMUNICATIONS, INC.  
**EUT DESCRIPTION:** GSM/WCDMA/LTE Phone + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC  
**SERIAL NUMBER:** YT910XTJRB (Radiated)  
**DATE TESTED:** FEBRUARY 13-MARCH 13, 2015

| APPLICABLE STANDARDS     |              |
|--------------------------|--------------|
| STANDARD                 | TEST RESULTS |
| CFR 47 Part 15 Subpart C | Pass         |

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Verification Services Inc. By:

Tested By:



CHOON OOI  
CONSUMER TECHNOLOGY DIVISION  
WISE PROJECT LEAD  
UL Verification Services Inc.



STEVEN TRAN  
CONSUMER TECHNOLOGY DIVISION  
WISE LAB ENGINEER  
UL Verification Services Inc.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

| 47173 Benicia Street                                       | 47266 Benicia Street                            |
|------------------------------------------------------------|-------------------------------------------------|
| <input checked="" type="checkbox"/> Chamber A(IC: 2324B-1) | <input type="checkbox"/> Chamber D(IC: 2324B-4) |
| <input type="checkbox"/> Chamber B(IC: 2324B-2)            | <input type="checkbox"/> Chamber E(IC: 2324B-5) |
| <input checked="" type="checkbox"/> Chamber C(IC: 2324B-3) | <input type="checkbox"/> Chamber F(IC: 2324B-6) |
|                                                            | <input type="checkbox"/> Chamber G(IC: 2324B-7) |
|                                                            | <input type="checkbox"/> Chamber H(IC: 2324B-8) |

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\text{Field Strength (dBuV/m)} = \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Preamp Gain (dB)}$$

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| Conducted Disturbance, 0.15 to 30 MHz | 3.52 dB     |
| Radiated Disturbance, 30 to 18000 MHz | 4.94 dB     |

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **8.1. DESCRIPTION OF EUT**

The EUT is a GSM/WCDMA/LTE Phone + BLUETOOTH, DTS/UNII a/b/g/n/ac, ANT+ and NFC.

### **8.2. MAXIMUM OUTPUT POWER**

Please refer to test report 14U17919-2A (FCC ID: PY7PM-0813)

### **8.3. DESCRIPTION OF AVAILABLE ANTENNAS**

The radio utilizes an FPCB antenna, with a maximum gain of -1.6dBi.

---

## **8.4. WORST-CASE CONFIGURATION AND MODE**

Radiated emission and power line conducted emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three orthogonal orientations X,Y,Z, it was determined that X orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in X orientation.

## 8.5. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

| Support Equipment List |              |        |                 |        |
|------------------------|--------------|--------|-----------------|--------|
| Description            | Manufacturer | Model  | Serial Number   | FCC ID |
| AC Adapter             | SONY         | EP880  | 3514W 01 S08328 | N/A    |
| Earphone               | SONY         | MH410C | N/A             | N/A    |

### I/O CABLES


| I/O Cable List |          |                      |                |            |                  |         |
|----------------|----------|----------------------|----------------|------------|------------------|---------|
| Cable No       | Port     | # of identical ports | Connector Type | Cable Type | Cable Length (m) | Remarks |
| 1              | DC Power | 1                    | Mini-USB       | Shielded   | 1.2m             | N/A     |
| 2              | Audio    | 1                    | Mini-Jack      | Unshielded | 1m               | N/A     |

### TEST SETUP

The EUT is continuously communicating to the Bluetooth tester during the tests.

EUT was set in the Hidden menu mode to enable BT communications.

**SETUP DIAGRAM FOR TESTS**

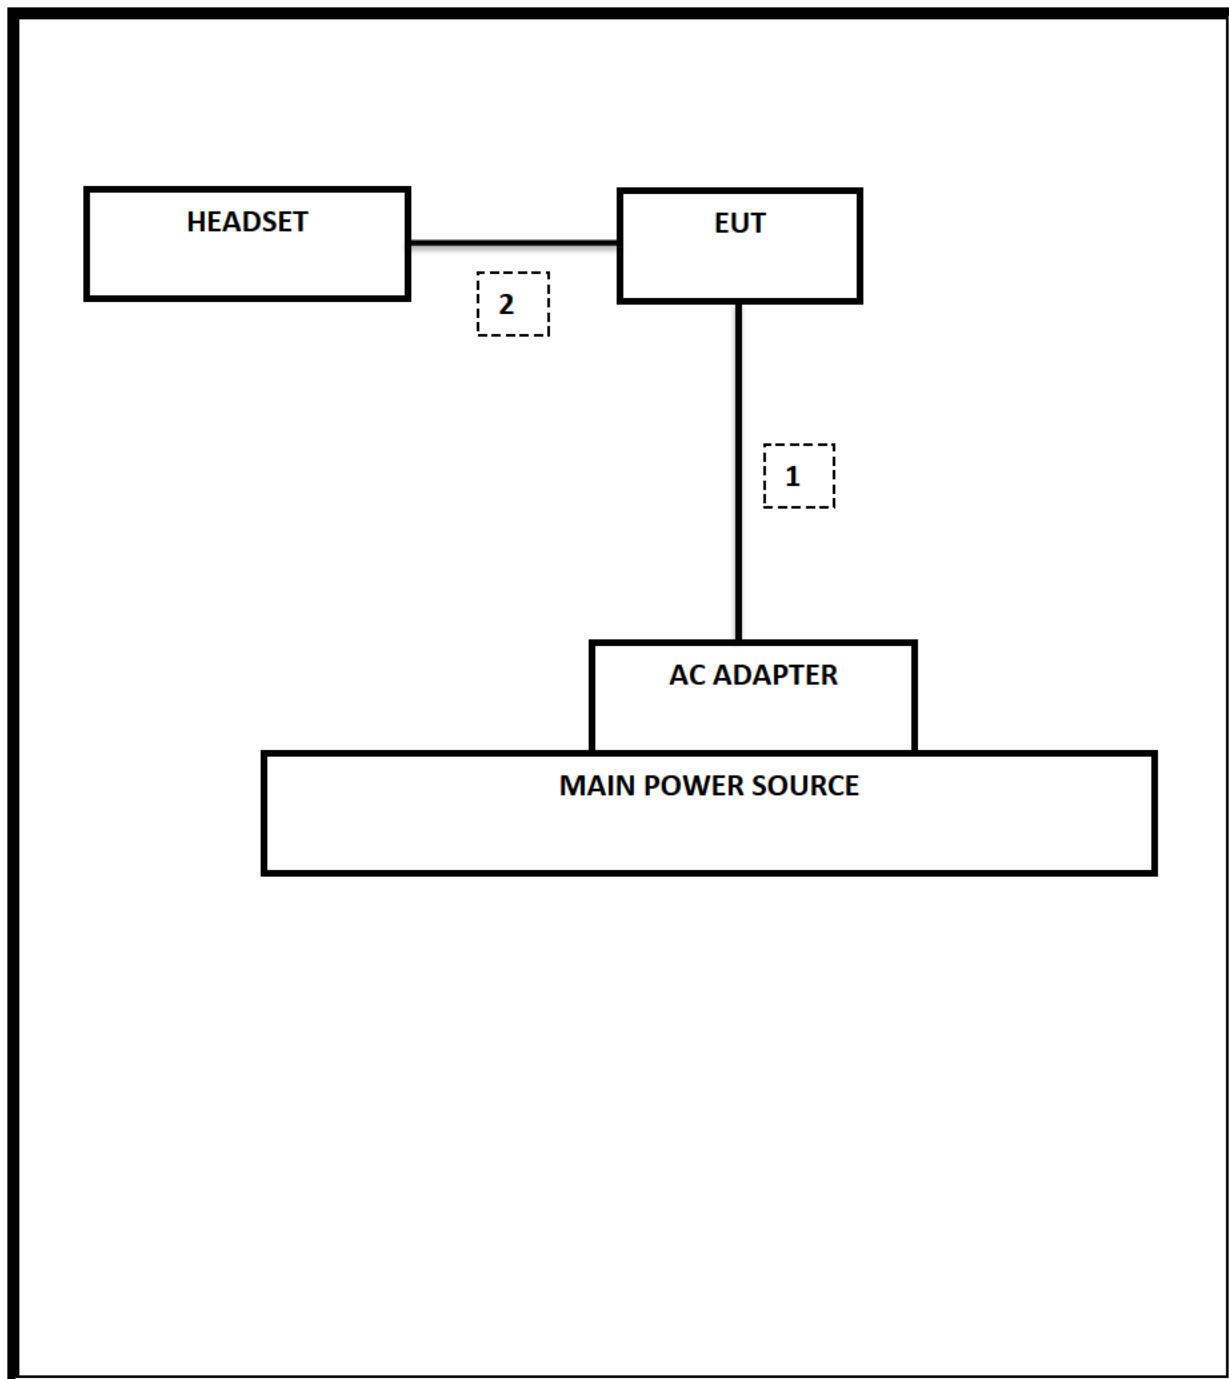

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

| Test Equipment List                |                |                        |         |          |
|------------------------------------|----------------|------------------------|---------|----------|
| Description                        | Manufacturer   | Model                  | Asset   | Cal Due  |
| Spectrum Analyzer, 44 GHz          | Agilent / HP   | E4446A                 | C01069  | 12/20/15 |
| Spectrum Analyzer, 9KHz-40GHz      | HP             | 8564E                  | C00986  | 04/01/15 |
| EMI Test Receiver, 9 kHz-7 GHz     | R & S          | ESCI 7                 | 100773  | 08/15/15 |
| Peak Power Meter                   | Agilent / HP   | E4416A                 | C00963  | 12/13/15 |
| Peak / Average Power Sensor        | Agilent / HP   | E9327A                 | C00964  | 12/13/15 |
| Antenna, Horn, 18GHz               | EMCO           | 3115                   | C00783  | 10/25/15 |
| Antenna, Horn, 18- 26 GHz          | ARA            | MWH-1826/B             | C00946  | 11/12/15 |
| Antenna, Horn, 26-40 GHz           | ARA            | MWH-2640               | C00891  | 06/28/15 |
| Antenna, Bilog, 30MHz-1 GHz        | Sunol Sciences | JB1                    | T243    | 12/08/15 |
| RF Preamplifier, 100KHz -> 1300MHz | HP             | TBD                    | C00825  | 06/01/15 |
| RF Preamplifier, 1GHz - 18GHz      | Miteq          | NSP4000-SP2            | 924343  | 03/23/15 |
| RF Preamplifier, 1GHz - 26.5GHz    | HP             | 8449B                  | F00351  | 06/27/15 |
| AC Power Supply, 2,500VA 45-500Hz  | Elgar-Ametek   | CW2501M                | F00013  | CNR      |
| RF Preamplifier, 1GHz - 18GHz      | Miteq          | AFS42-00101800-25-S-42 | 1818466 | 05/09/15 |
| Attenuator / Switch driver         | HP             | 11713A                 | F00204  | CNR      |
| Low Pass Filter 3GHz               | Micro-Tronics  | LPS17541               | F00219  | 05/23/15 |
| High Pass Filter 5GHz              | Micro-Tronics  | HPS17542               | F00222  | 05/22/15 |
| High Pass Filter 6GHz              | Micro-Tronics  | HPM17543               | F00224  | 05/22/15 |

| Test Software List    |              |        |                          |
|-----------------------|--------------|--------|--------------------------|
| Description           | Manufacturer | Model  | Version                  |
| Radiated Software     | UL           | UL EMC | Version 9.5, 07/22/14    |
| Conducted Software    | UL           | UL EMC | Version 9.5, 05/17/14    |
| CLT Software          | UL           | UL RF  | Version 1.0, 02/02/15    |
| Antenna Port Software | UL           | UL RF  | Version 2.1.1.1, 1/20/15 |

## 7. SUMMARY TABLE

| FCC Part Section   | RSS Section(s)                       | Test Description                        | Test Limit                            | Test Condition | Test Result | Worst Case   |
|--------------------|--------------------------------------|-----------------------------------------|---------------------------------------|----------------|-------------|--------------|
| 2.1049             | RSS-GEN 4.6                          | Occupied Band width (99%)               | N/A                                   | Conducted      | Pass        | See Original |
| 2.1051, 15.247 (d) | RSS-210 A8.5                         | Band Edge / Conducted Spurious Emission | -20dBc                                |                | Pass        | See Original |
| 15.247 (b)(1)      | RSS-210 A8.4                         | TX conducted output power               | <21dBm                                |                | Pass        | See Original |
| 15.247 (a)(1)      | RSS-210 A8.1(b)                      | Hopping frequency separation            | > 25KHz                               |                | Pass        | See Original |
| 15.247 (a)(1)(iii) | RSS-210 A8.1(d)                      | Number of Hopping channels              | More than 15 non-overlapping channels |                | Pass        | See Original |
| 15.247 (a)(1)(iii) | RSS-210 A8.1(d)                      | Avg Time of Occupancy                   | < 0.4sec                              |                | Pass        | See Original |
| 15.207 (a)         | RSS-GEN 7.2.2                        | AC Power Line conducted emissions       | Section 10                            | Radiated       | Pass        | See Original |
| 15.205, 15.209     | RSS-210 Clause 2.6, RSS-210 Clause 6 | Radiated Spurious Emission              | < 54dBuV/m                            |                | Pass        | 44.2 dBuV/m  |

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE LIMITS

FCC §15.205 and §15.209

| Frequency Range<br>(MHz) | Field Strength Limit<br>(uV/m) at 3 m | Field Strength Limit<br>(dBuV/m) at 3 m |
|--------------------------|---------------------------------------|-----------------------------------------|
| 30 - 88                  | 100                                   | 40                                      |
| 88 - 216                 | 150                                   | 43.5                                    |
| 216 - 960                | 200                                   | 46                                      |
| Above 960                | 500                                   | 54                                      |

### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For band edge measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 1/T (on time) for average measurement.  
 $GFSK = 1/T = 1 / 0.0038S = 360Hz$ .

The spectrum from 1GHzHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

## 8.2. TRANSMITTER ABOVE 1 GHz

### 8.2.1. BASIC DATA RATE GFSK MODULATION

#### RESTRICTED BANDEDGE (LOW CHANNEL)


#### HORIZONTAL PEAK AND AVERAGE PLOT

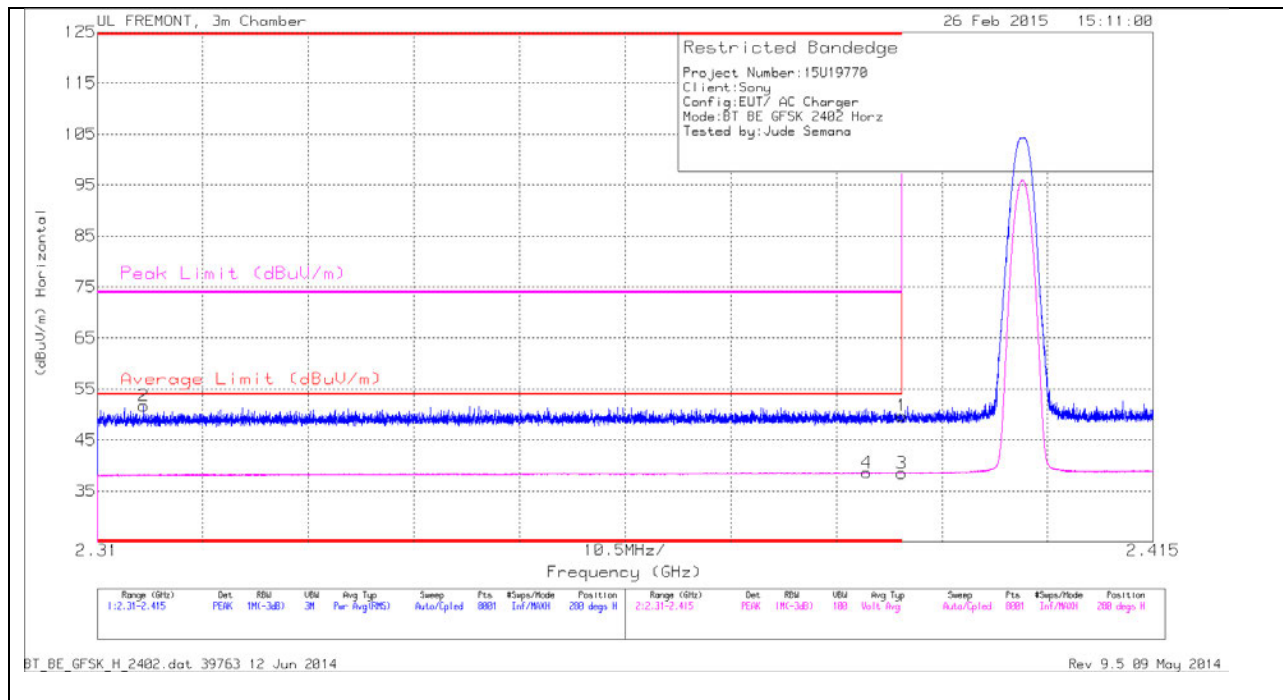

#### HORIZONTAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.315         | 43.13                | PK   | 31.7          | -23.1                  | 0            | 51.73                      | -                      | -           | 74                  | -22.27         | 280            | 314         | H        |
| 4      | * 2.387         | 29.72                | VB1T | 32            | -23.1                  | 0            | 38.62                      | 54                     | -15.38      | -                   | -              | 280            | 314         | H        |
| 1      | * 2.39          | 40.86                | PK   | 32            | -23.1                  | 0            | 49.76                      | -                      | -           | 74                  | -24.24         | 280            | 314         | H        |
| 3      | * 2.39          | 29.61                | VB1T | 32            | -23.1                  | 0            | 38.51                      | 54                     | -15.49      | -                   | -              | 280            | 314         | H        |

## VERTICAL PEAK AND AVERAGE PLOT

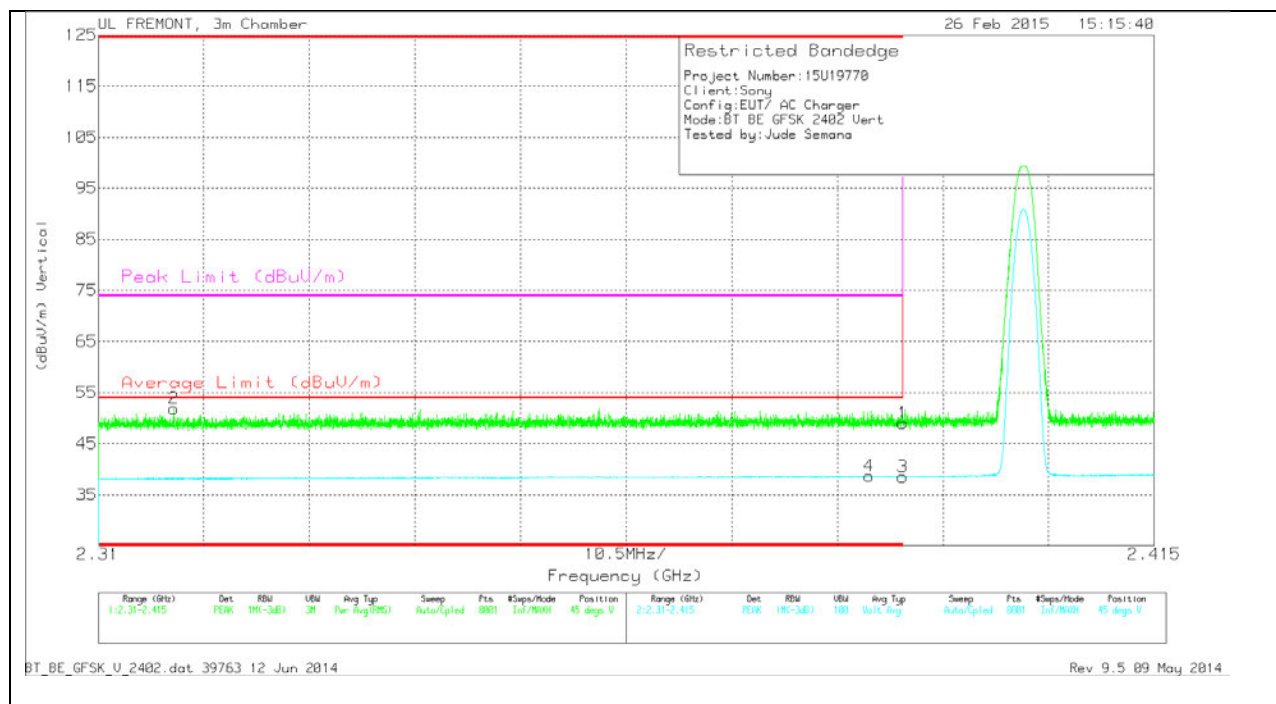


## VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.318         | 43.29                | PK   | 31.7          | -23.1                  | 0            | 51.89                      | -                      | -           | 74                  | -22.11         | 45             | 391         | V        |
| 4      | * 2.387         | 29.76                | VB1T | 32            | -23.1                  | 0            | 38.66                      | 54                     | -15.34      | -                   | -              | 45             | 391         | V        |
| 1      | * 2.39          | 40.12                | PK   | 32            | -23.1                  | 0            | 49.02                      | -                      | -           | 74                  | -24.98         | 45             | 391         | V        |
| 3      | * 2.39          | 29.64                | VB1T | 32            | -23.1                  | 0            | 38.54                      | 54                     | -15.46      | -                   | -              | 45             | 391         | V        |

## AUTHORIZED BANDEDGE (HIGH CHANNEL)


### HORIZONTAL PEAK AND AVERAGE PLOT

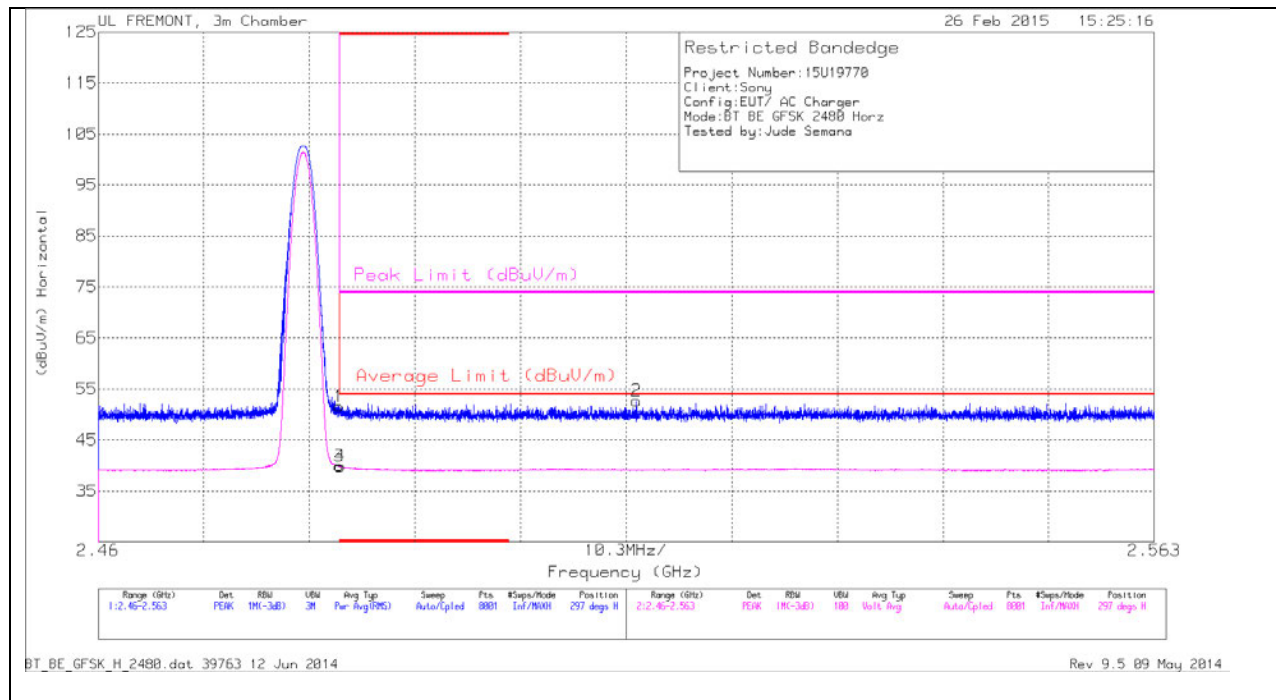

### HORIZONTAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 42.12                | PK   | 32.3           | -22.8                   | 0            | 51.62                      | -                      | -           | 74                  | -22.38         | 297            | 359         | H        |
| 3      | * 2.484         | 30.43                | VB1T | 32.3           | -22.8                   | 0            | 39.93                      | 54                     | -14.07      | -                   | -              | 297            | 359         | H        |
| 4      | * 2.484         | 30.33                | VB1T | 32.3           | -22.8                   | 0            | 39.83                      | 54                     | -14.17      | -                   | -              | 297            | 359         | H        |
| 2      | 2.512           | 43.18                | PK   | 32.3           | -22.8                   | 0            | 52.68                      | -                      | -           | 74                  | -21.32         | 297            | 359         | H        |

## VERTICAL PEAK AND AVERAGE PLOT

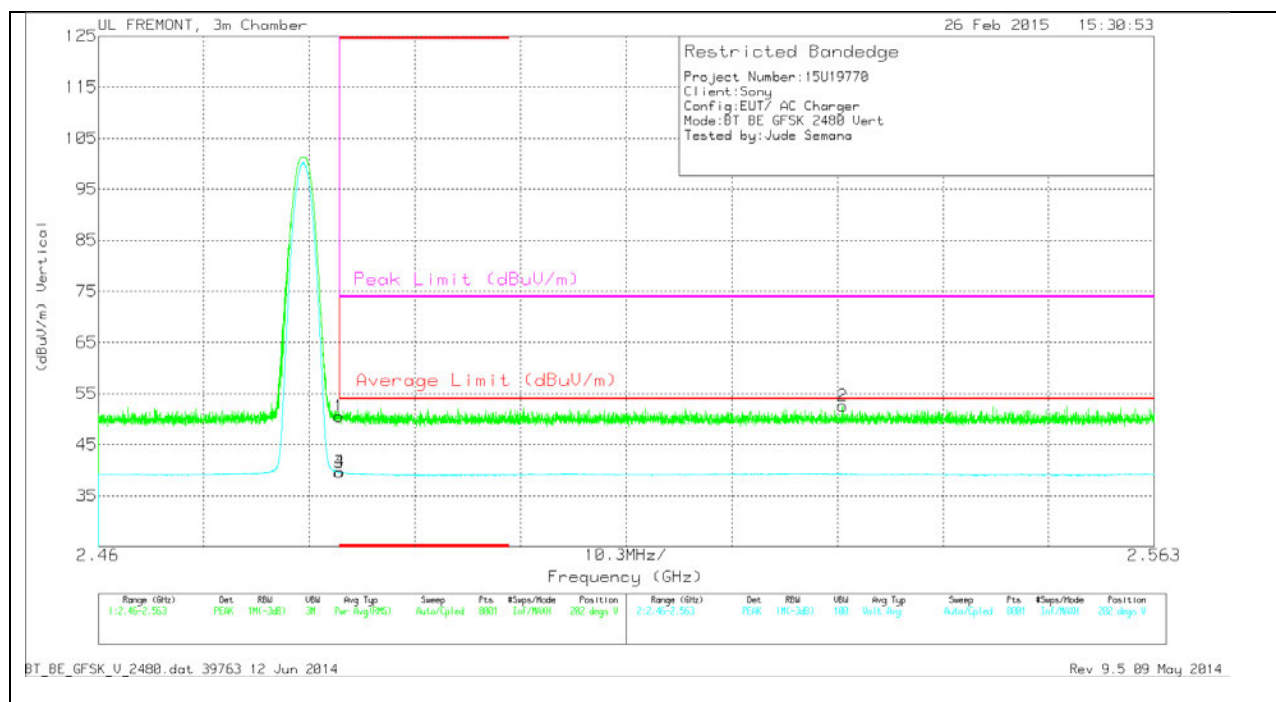


## VERTICAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Ftr/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|----------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 41.06                | PK   | 32.3           | -22.8                | 0            | 50.56                      | -                      | -           | 74                  | -23.44         | 202            | 368         | V        |
| 3      | * 2.484         | 30.12                | VB1T | 32.3           | -22.8                | 0            | 39.62                      | 54                     | -14.38      | -                   | -              | 202            | 368         | V        |
| 4      | * 2.484         | 30.17                | VB1T | 32.3           | -22.8                | 0            | 39.67                      | 54                     | -14.33      | -                   | -              | 202            | 368         | V        |
| 2      | 2.533           | 42.93                | PK   | 32.4           | -22.7                | 0            | 52.63                      | -                      | -           | 74                  | -21.37         | 202            | 368         | V        |

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

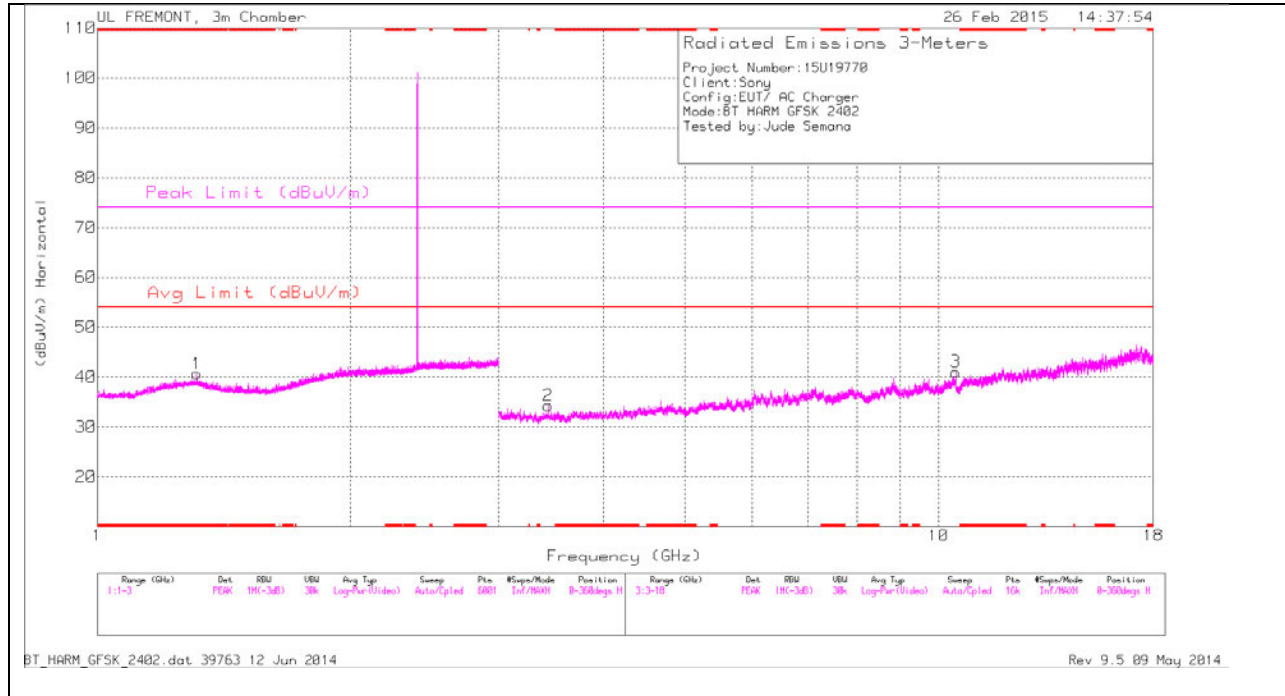

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

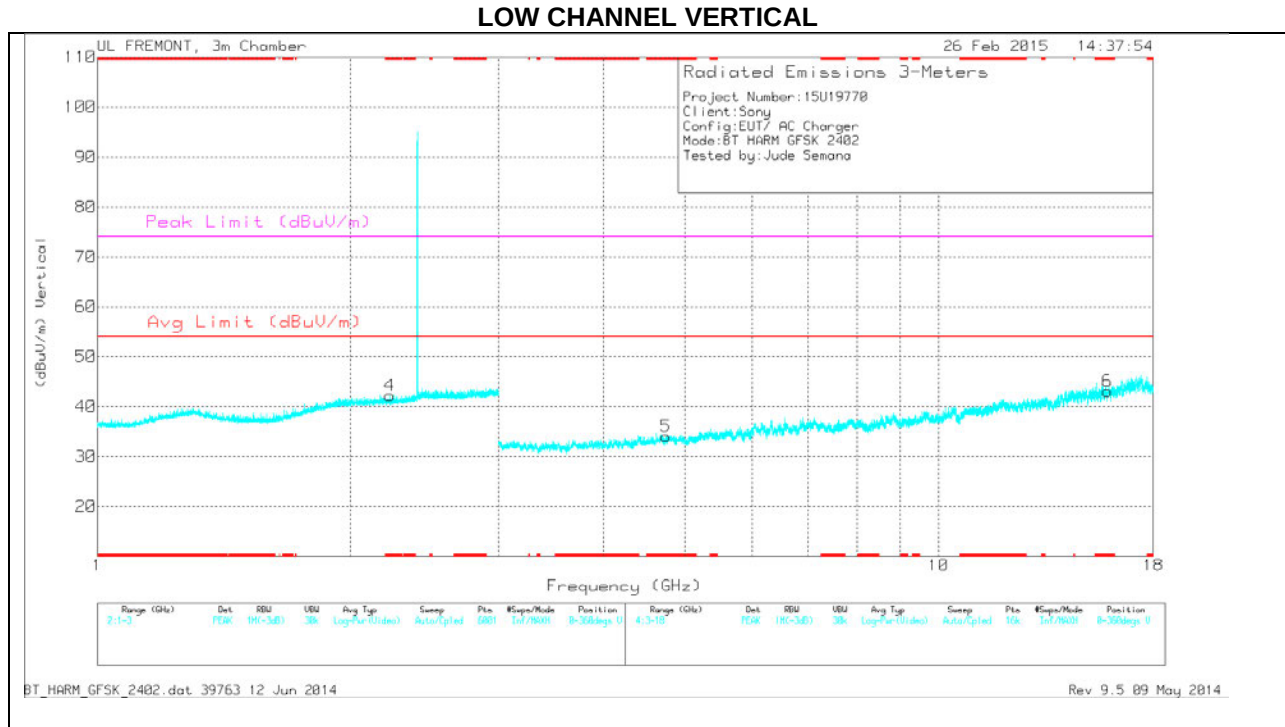

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.313         | 34.75                | PK  | 29.7           | -23.8                | 0            | 40.65                      | -                  | -           | 74                  | -33.35         | 0-360          | 100         | H        |
| 6      | * 15.881        | 28.99                | PK  | 40.3           | -26.2                | 0            | 43.09                      | -                  | -           | 74                  | -30.91         | 0-360          | 100         | V        |
| 4      | * 2.228         | 33.76                | PK  | 31.5           | -23                  | 0            | 42.26                      | -                  | -           | 74                  | -31.74         | 0-360          | 100         | V        |
| 5      | * 4.744         | 30.85                | PK  | 34             | -30.8                | 0            | 34.05                      | -                  | -           | 74                  | -39.95         | 0-360          | 200         | V        |
| 3      | 10.484          | 28.95                | PK  | 37.4           | -25.3                | 0            | 41.05                      | -                  | -           | -                   | -              | 0-360          | 200         | H        |
| 2      | 3.437           | 33.19                | PK  | 32.7           | -31.6                | 0            | 34.29                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |

PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

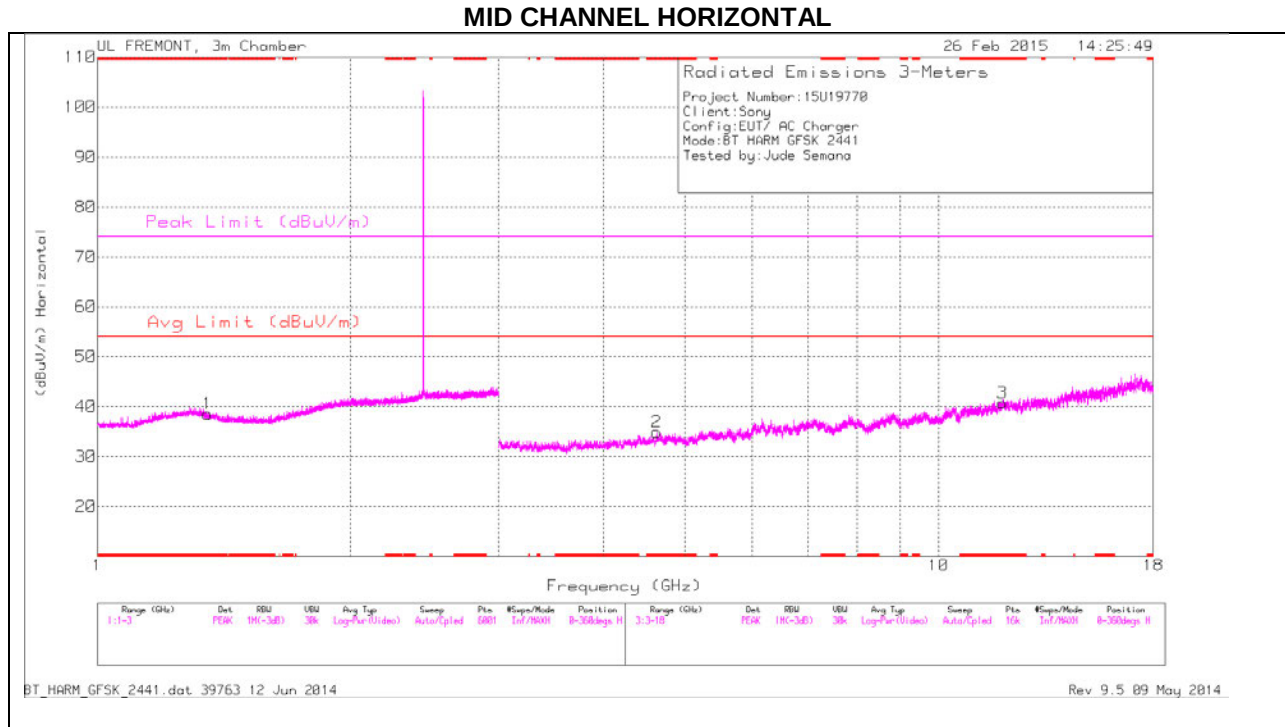

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

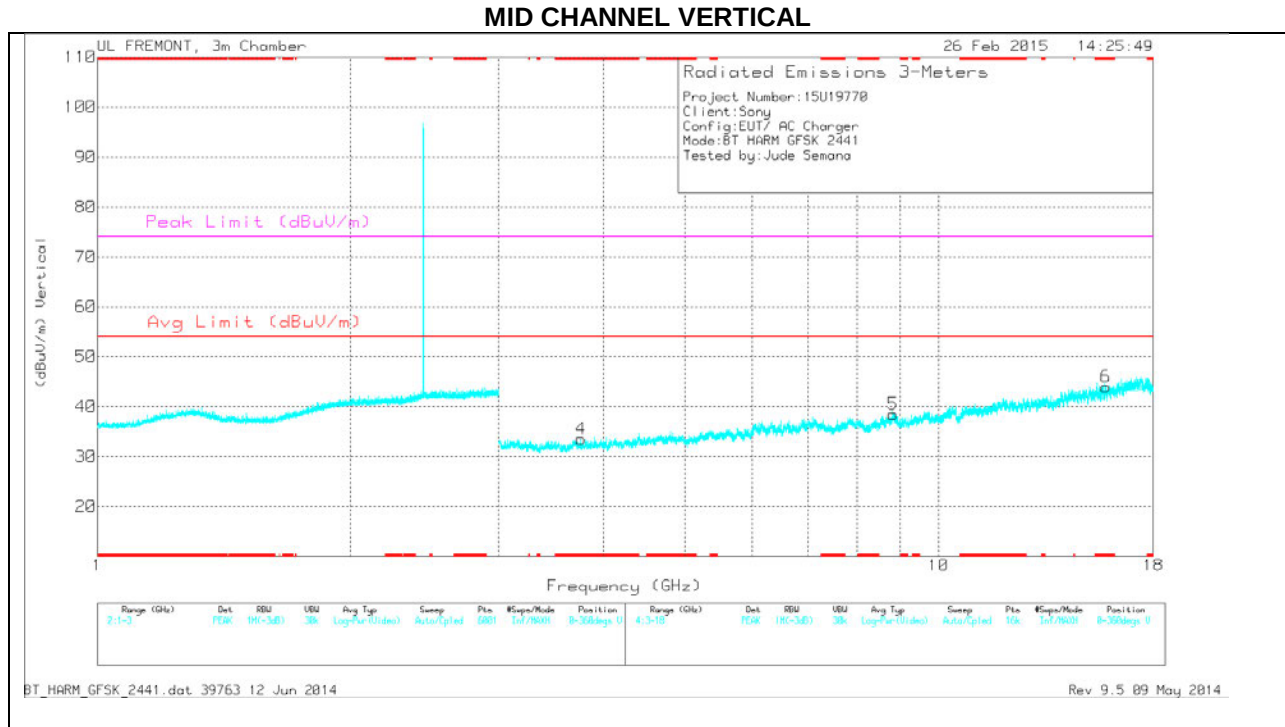

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


## MID CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.353         | 33.17                | PK  | 29.2           | -23.8                 | 0            | 38.57                      | -                  | -           | 74                  | -35.43         | 0-360          | 100         | H        |
| 3      | * 11.909        | 28.03                | PK  | 39.1           | -26.4                 | 0            | 40.73                      | -                  | -           | 74                  | -33.27         | 0-360          | 100         | H        |
| 6      | * 15.806        | 29.87                | PK  | 40.3           | -26.2                 | 0            | 43.97                      | -                  | -           | 74                  | -30.03         | 0-360          | 100         | V        |
| 4      | * 3.76          | 31.75                | PK  | 33.1           | -31.3                 | 0            | 33.55                      | -                  | -           | 74                  | -40.45         | 0-360          | 200         | V        |
| 2      | * 4.624         | 31.72                | PK  | 33.9           | -30.7                 | 0            | 34.92                      | -                  | -           | 74                  | -39.08         | 0-360          | 100         | H        |
| 5      | 8.835           | 29.08                | PK  | 35.9           | -26.5                 | 0            | 38.48                      | -                  | -           | -                   | -              | 0-360          | 100         | V        |

PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

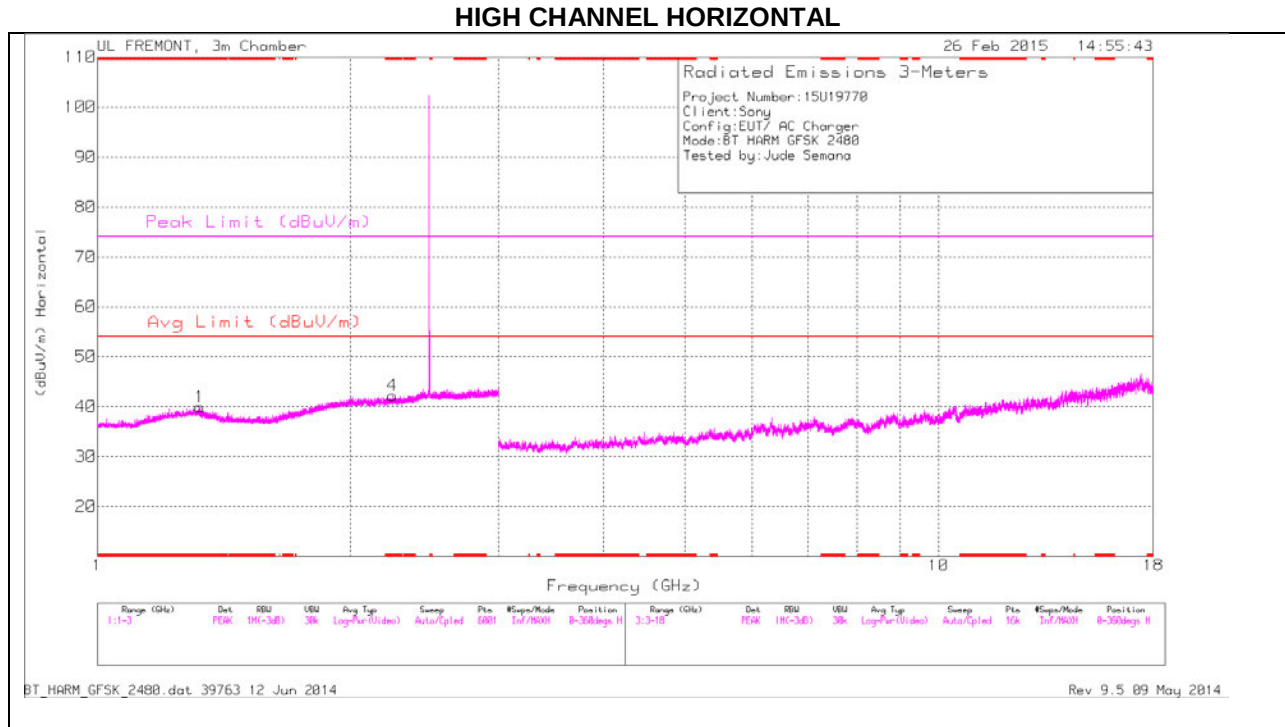

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

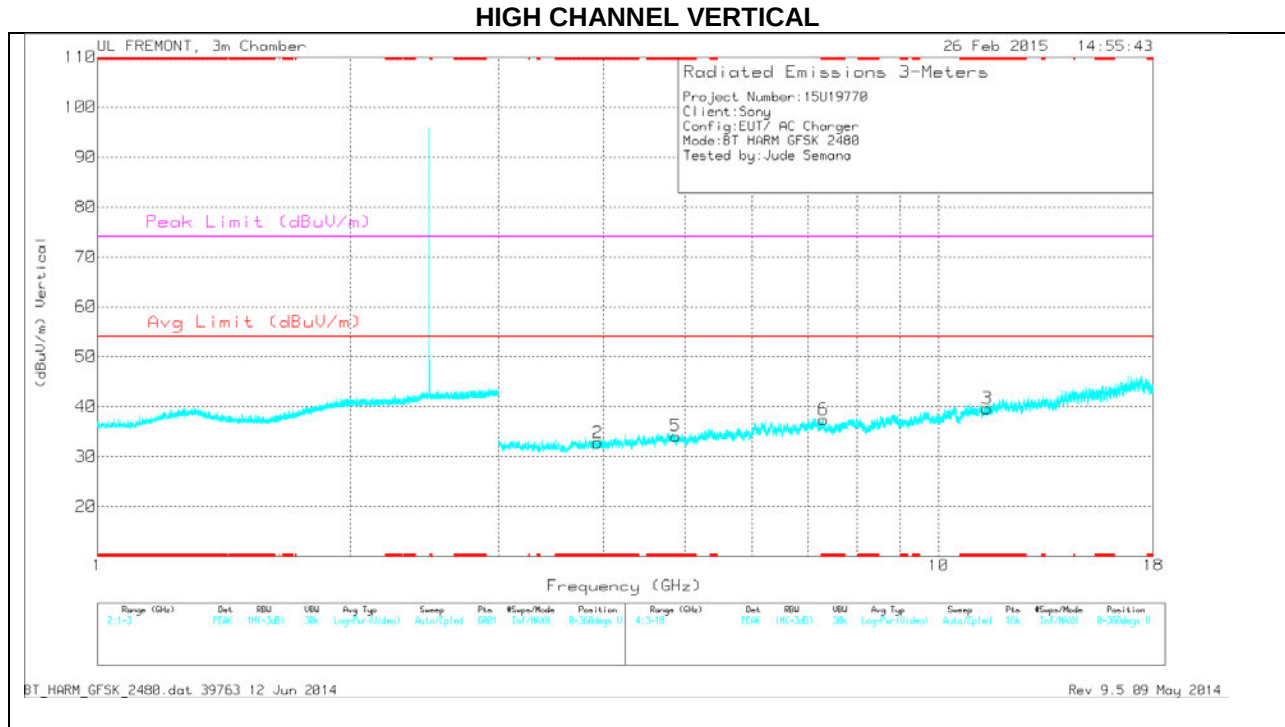

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.325         | 34.18                | PK  | 29.6           | -23.8                 | 0            | 39.98                      | -                  | -           | 74                  | -34.02         | 0-360          | 200         | H        |
| 3      | * 11.421        | 27.25                | PK  | 38.2           | -25.8                 | 0            | 39.65                      | -                  | -           | 74                  | -34.35         | 0-360          | 200         | V        |
| 4      | * 2.244         | 33.75                | PK  | 31.5           | -23                   | 0            | 42.25                      | -                  | -           | 74                  | -31.75         | 0-360          | 100         | H        |
| 2      | * 3.935         | 30.79                | PK  | 33.2           | -31.2                 | 0            | 32.79                      | -                  | -           | 74                  | -41.21         | 0-360          | 200         | V        |
| 5      | * 4.873         | 30.22                | PK  | 34             | -30.1                 | 0            | 34.12                      | -                  | -           | 74                  | -39.88         | 0-360          | 200         | V        |
| 6      | * 7.298         | 30.62                | PK  | 35.6           | -28.8                 | 0            | 37.42                      | -                  | -           | 74                  | -36.58         | 0-360          | 200         | V        |

PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

## 8.2.2. ENHANCED DATA RATE 8PSK MODULATION RESTRICTED BANDEDGE (LOW CHANNEL)


### HORIZONTAL PEAK AND AVERAGE PLOT

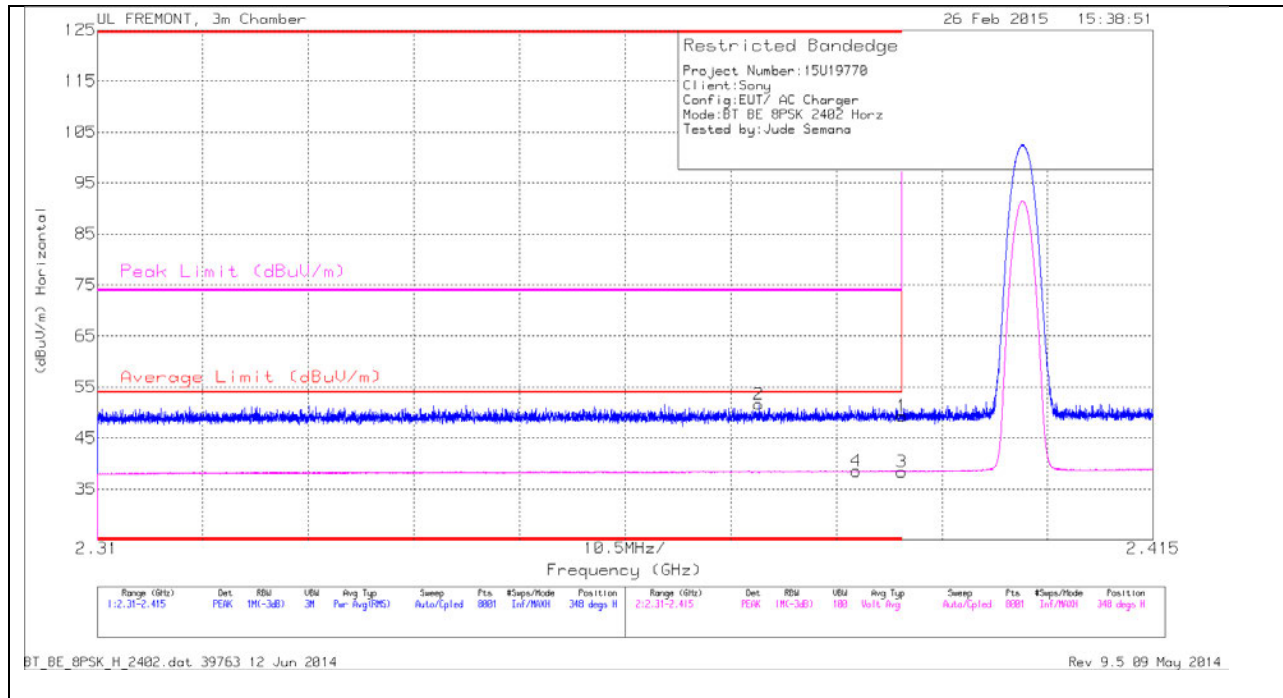

### HORIZONTAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.376         | 42.83                | PK   | 31.9           | -23.1                  | 0            | 51.63                      | -                      | -           | 74                  | -22.37         | 348            | 208         | H        |
| 4      | * 2.385         | 29.65                | VB1T | 32             | -23.1                  | 0            | 38.55                      | 54                     | -15.45      | -                   | -              | 348            | 208         | H        |
| 1      | * 2.39          | 40.42                | PK   | 32             | -23.1                  | 0            | 49.32                      | -                      | -           | 74                  | -24.68         | 348            | 208         | H        |
| 3      | * 2.39          | 29.49                | VB1T | 32             | -23.1                  | 0            | 38.39                      | 54                     | -15.61      | -                   | -              | 348            | 208         | H        |

## VERTICAL PEAK AND AVERAGE PLOT

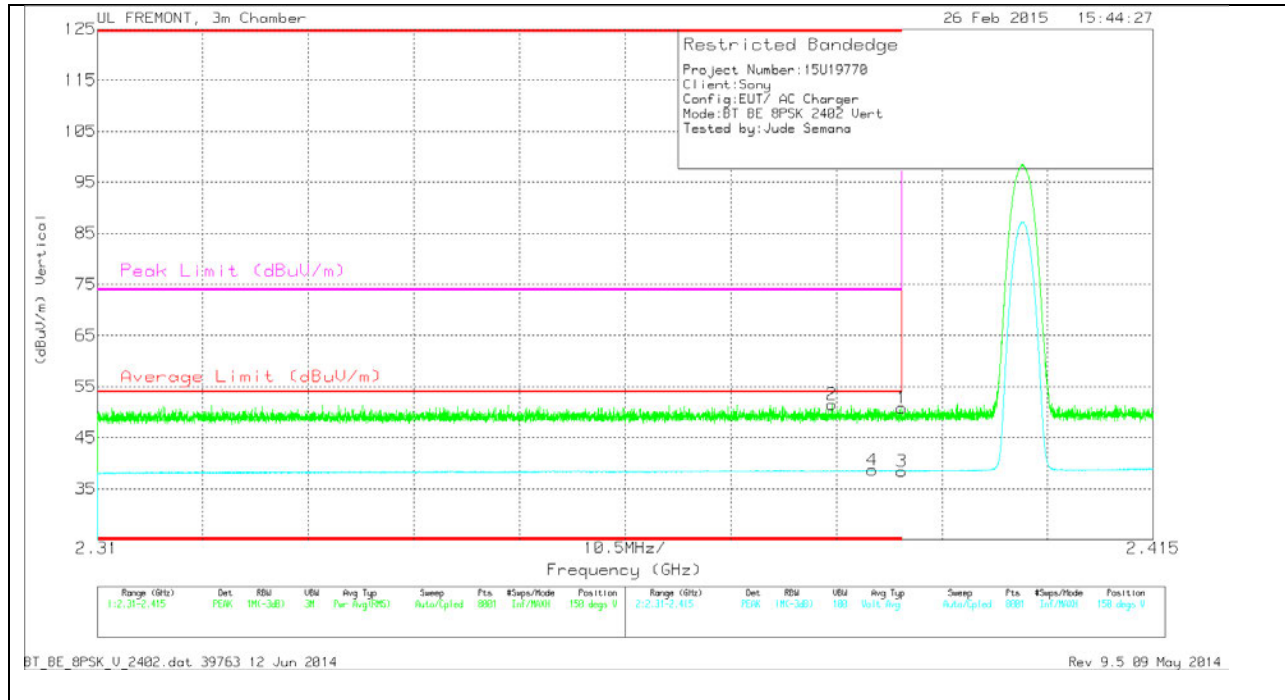


## VERTICAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AFT119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|---------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 2      | * 2.383         | 42.63                | PK   | 32            | -23.1                  | 0            | 51.53                      | -                      | -           | 74                  | -22.47         | 150            | 263         | V        |
| 4      | * 2.387         | 29.75                | VB1T | 32            | -23.1                  | 0            | 38.65                      | 54                     | -15.35      | -                   | -              | 150            | 263         | V        |
| 1      | * 2.39          | 41.94                | PK   | 32            | -23.1                  | 0            | 50.84                      | -                      | -           | 74                  | -23.16         | 150            | 263         | V        |
| 3      | * 2.39          | 29.54                | VB1T | 32            | -23.1                  | 0            | 38.44                      | 54                     | -15.56      | -                   | -              | 150            | 263         | V        |

## AUTHORIZED BANDEDGE (HIGH CHANNEL)


### HORIZONTAL PEAK AND AVERAGE PLOT

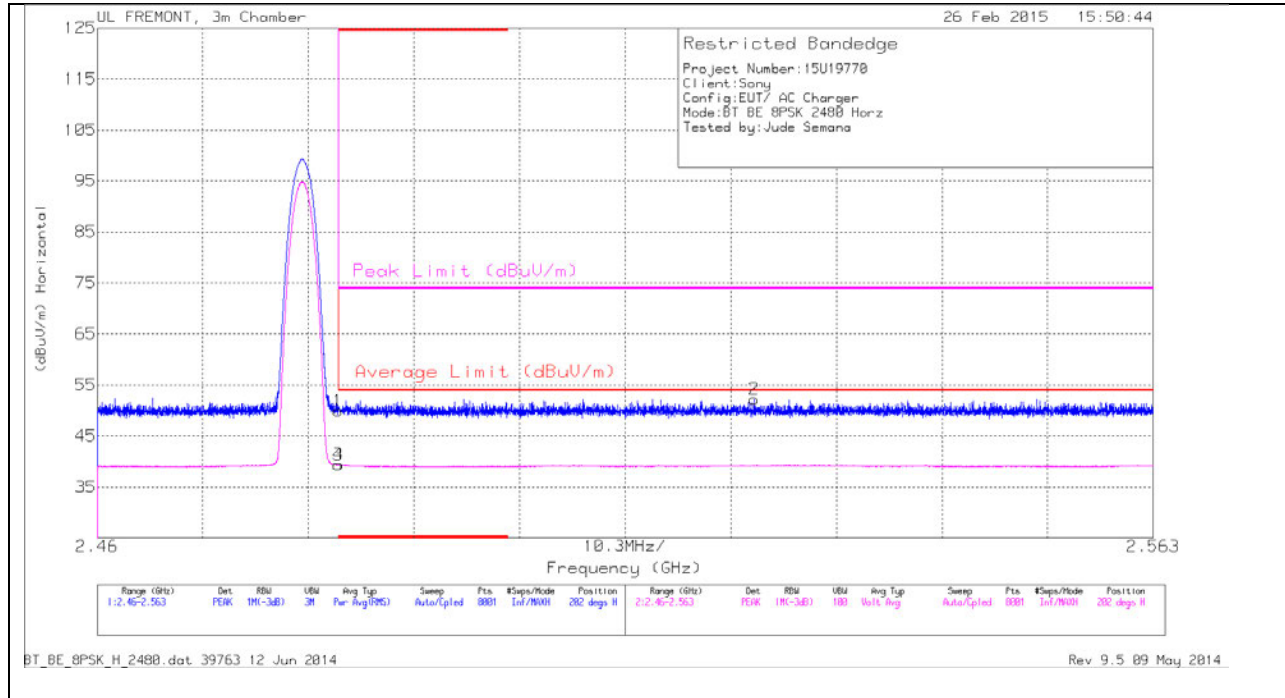

### HORIZONTAL DATA

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Filt r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|-------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 40.47                | PK   | 32.3           | -22.8                   | 0            | 49.97                      | -                      | -           | 74                  | -24.03         | 202            | 305         | H        |
| 3      | * 2.484         | 29.84                | VB1T | 32.3           | -22.8                   | 0            | 39.34                      | 54                     | -14.66      | -                   | -              | 202            | 305         | H        |
| 4      | * 2.484         | 29.88                | VB1T | 32.3           | -22.8                   | 0            | 39.38                      | 54                     | -14.62      | -                   | -              | 202            | 305         | H        |
| 2      | 2.524           | 42.53                | PK   | 32.4           | -22.7                   | 0            | 52.23                      | -                      | -           | 74                  | -21.77         | 202            | 305         | H        |

## VERTICAL PEAK AND AVERAGE PLOT

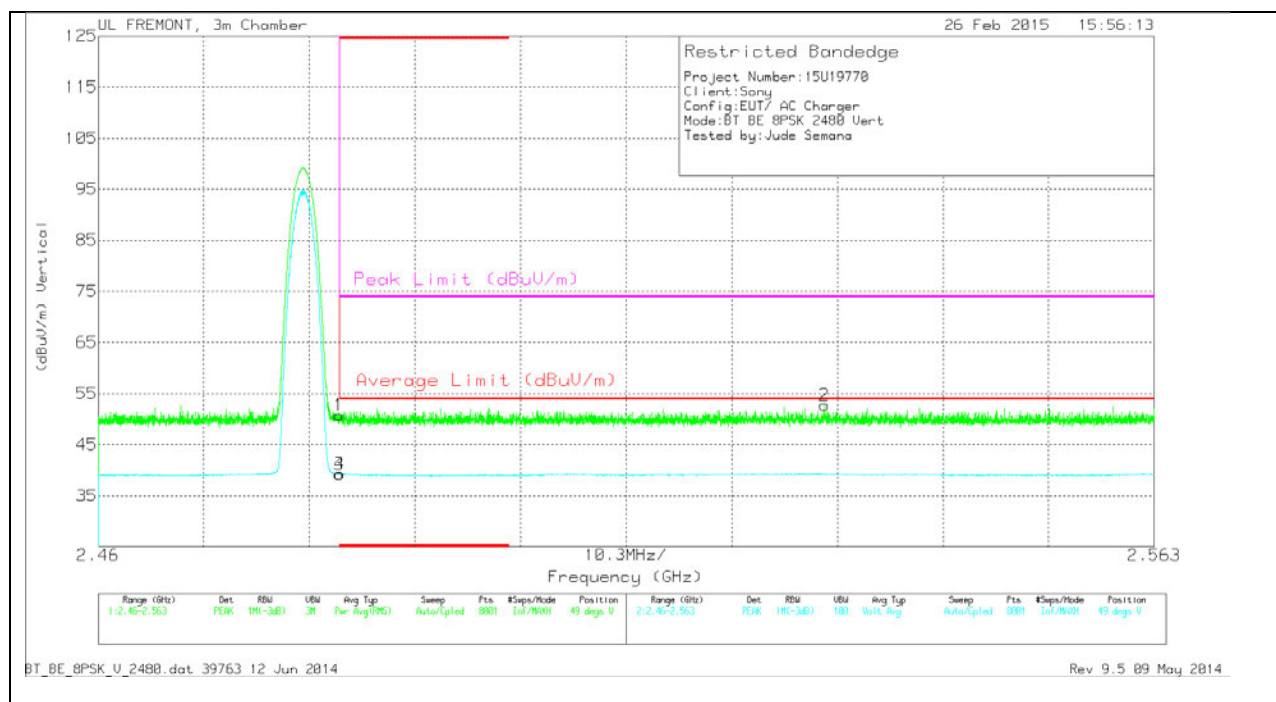


## VERTICAL DATA


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det  | AF T119 (dB/m) | Amp/Cbl/Fit r/Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Average Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|------|----------------|------------------------|--------------|----------------------------|------------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 2.484         | 41.26                | PK   | 32.3           | -22.8                  | 0            | 50.76                      | -                      | -           | 74                  | -23.24         | 49             | 291         | V        |
| 3      | * 2.484         | 29.71                | VB1T | 32.3           | -22.8                  | 0            | 39.21                      | 54                     | -14.79      | -                   | -              | 49             | 291         | V        |
| 4      | * 2.484         | 29.8                 | VB1T | 32.3           | -22.8                  | 0            | 39.3                       | 54                     | -14.7       | -                   | -              | 49             | 291         | V        |
| 2      | 2.531           | 42.9                 | PK   | 32.4           | -22.6                  | 0            | 52.7                       | -                      | -           | 74                  | -21.3          | 49             | 291         | V        |

## HARMONICS AND SPURIOUS EMISSIONS

### LOW CHANNEL HORIZONTAL

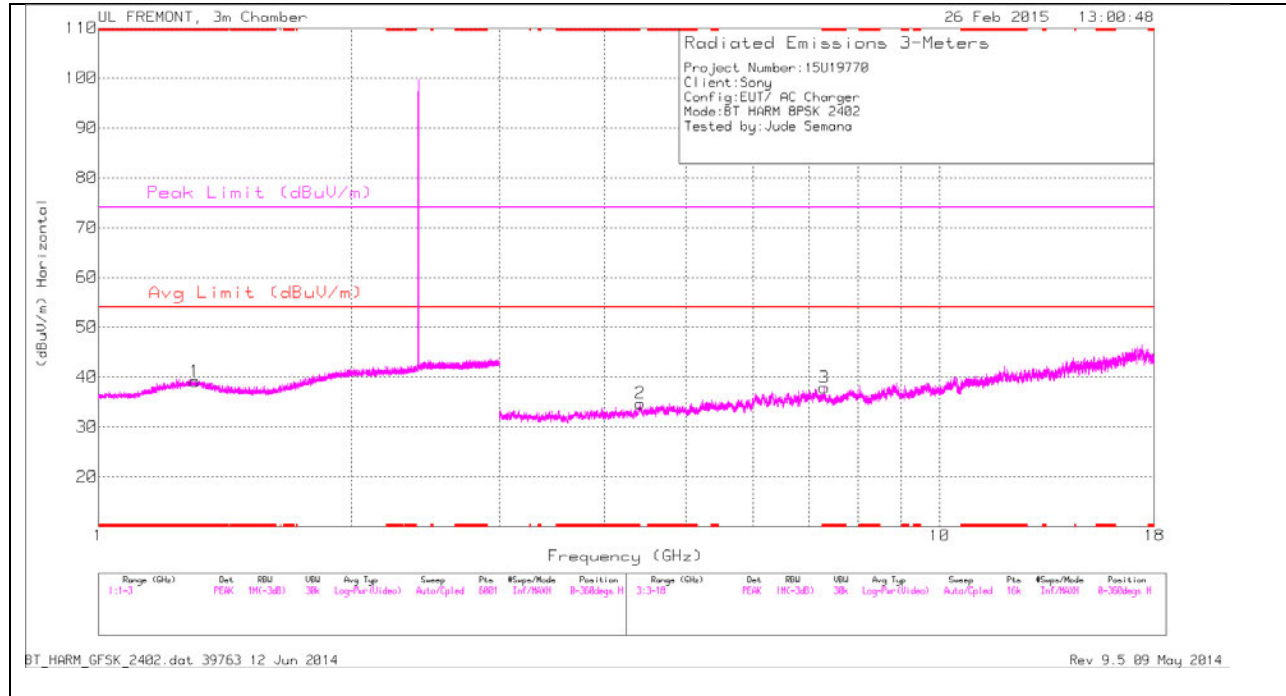

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

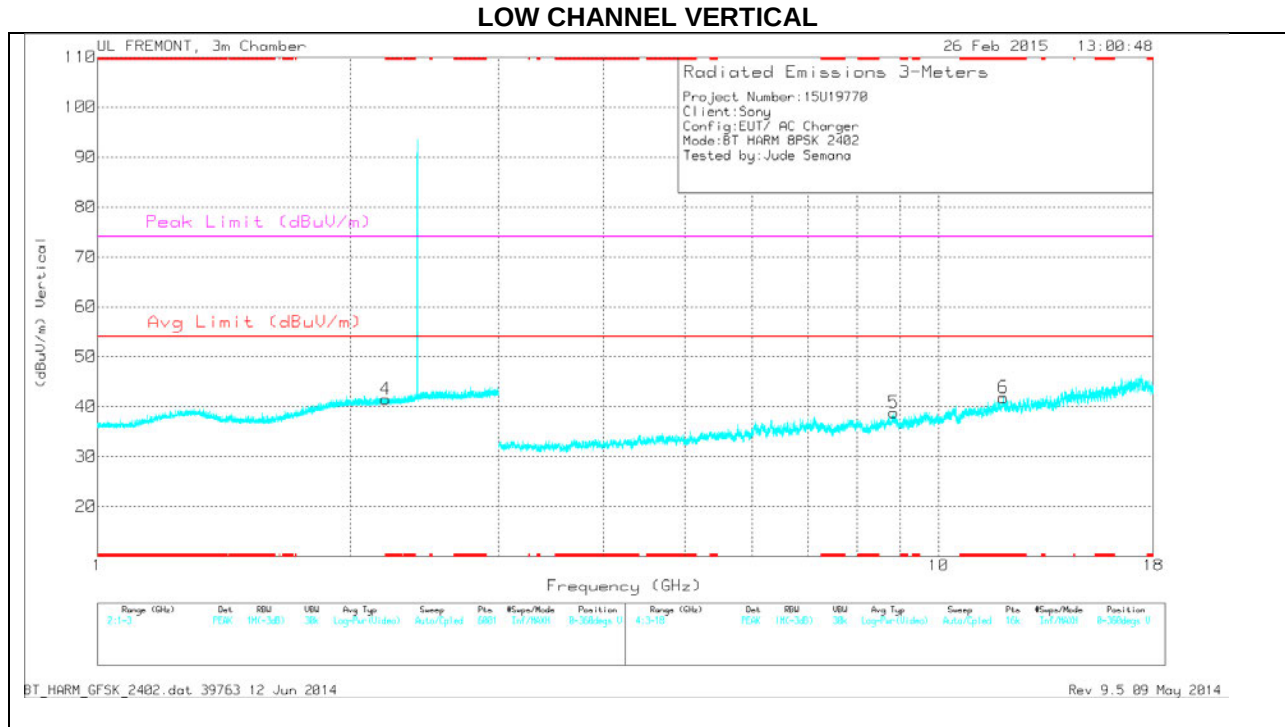

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


## LOW CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.304         | 33.18                | PK  | 29.8           | -23.8                 | 0            | 39.18                      | -                  | -           | 74                  | -34.82         | 0-360          | 100         | H        |
| 6      | * 11.946        | 28.82                | PK  | 39.1           | -26.1                 | 0            | 41.82                      | -                  | -           | 74                  | -32.18         | 0-360          | 100         | V        |
| 4      | * 2.201         | 33.11                | PK  | 31.4           | -23                   | 0            | 41.51                      | -                  | -           | 74                  | -32.49         | 0-360          | 100         | V        |
| 3      | * 7.295         | 31.11                | PK  | 35.6           | -28.8                 | 0            | 37.91                      | -                  | -           | 74                  | -36.09         | 0-360          | 200         | H        |
| 2      | 4.408           | 31.22                | PK  | 33.7           | -30.2                 | 0            | 34.72                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |
| 5      | 8.849           | 29.5                 | PK  | 35.9           | -26.6                 | 0            | 38.8                       | -                  | -           | -                   | -              | 0-360          | 100         | V        |

PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

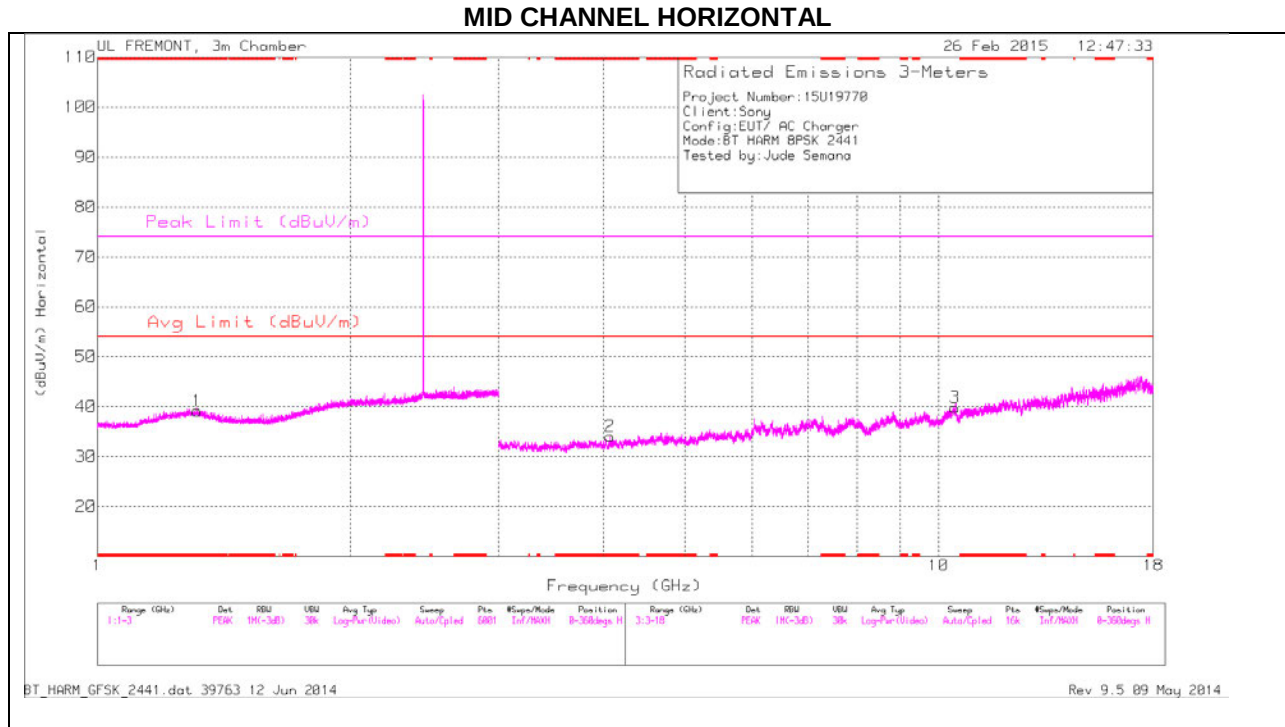

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

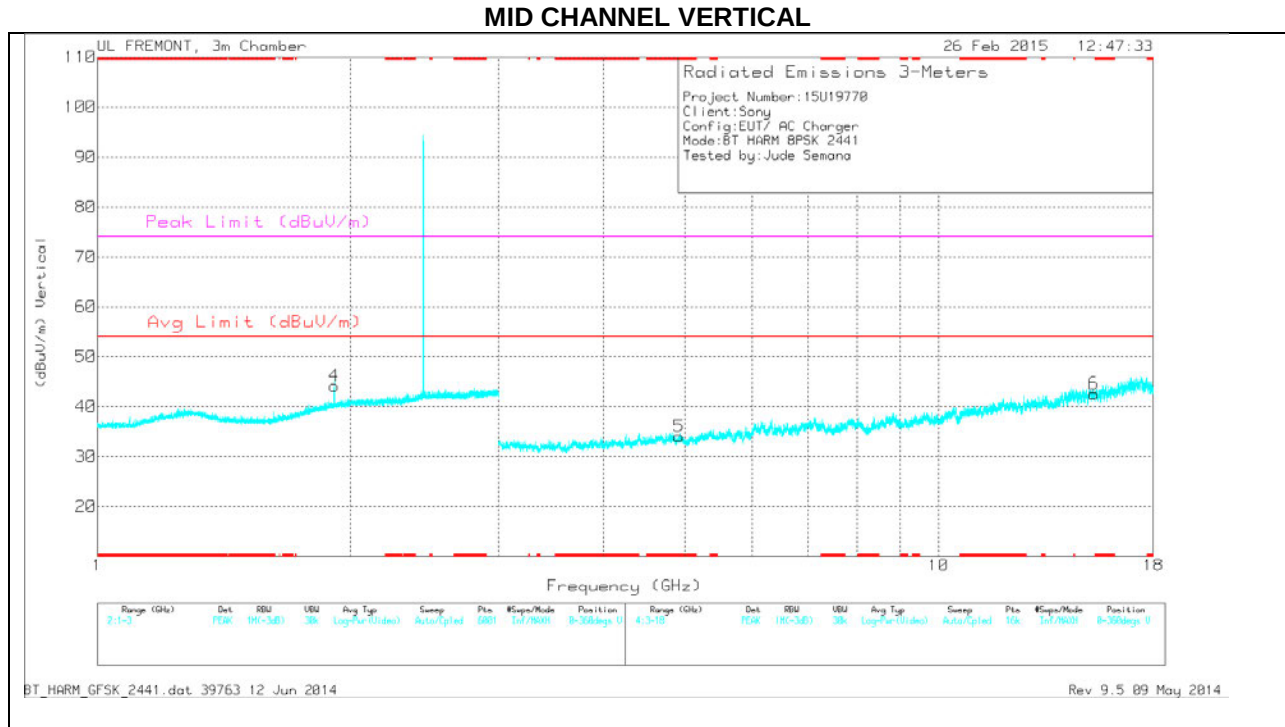

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.


## MID CHANNEL DATA

### TRACE MARKERS


| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cb/Ftr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.315         | 33.28                | PK  | 29.7           | -23.8                | 0            | 39.18                      | -                  | -           | 74                  | -34.82         | 0-360          | 200         | H        |
| 2      | * 4.072         | 32.37                | PK  | 33.3           | -31.6                | 0            | 34.07                      | -                  | -           | 74                  | -39.93         | 0-360          | 200         | H        |
| 5      | * 4.916         | 30.15                | PK  | 34             | -30.1                | 0            | 34.05                      | -                  | -           | 74                  | -39.95         | 0-360          | 100         | V        |
| 4      | 1.914           | 36.29                | PK  | 31.2           | -23.3                | 0            | 44.19                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |
| 3      | 10.461          | 27.61                | PK  | 37.4           | -25.2                | 0            | 39.81                      | -                  | -           | -                   | -              | 0-360          | 200         | H        |
| 6      | 15.295          | 29.58                | PK  | 40             | -27                  | 0            | 42.58                      | -                  | -           | -                   | -              | 0-360          | 200         | V        |

PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013

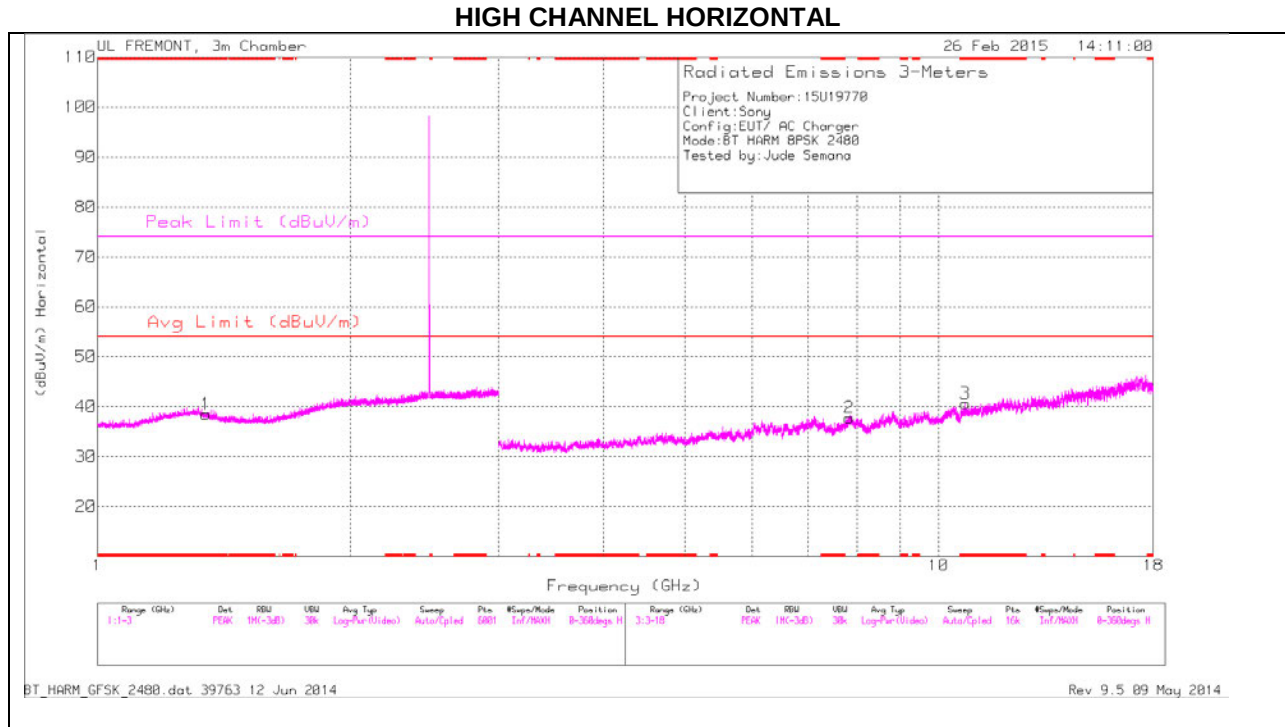

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

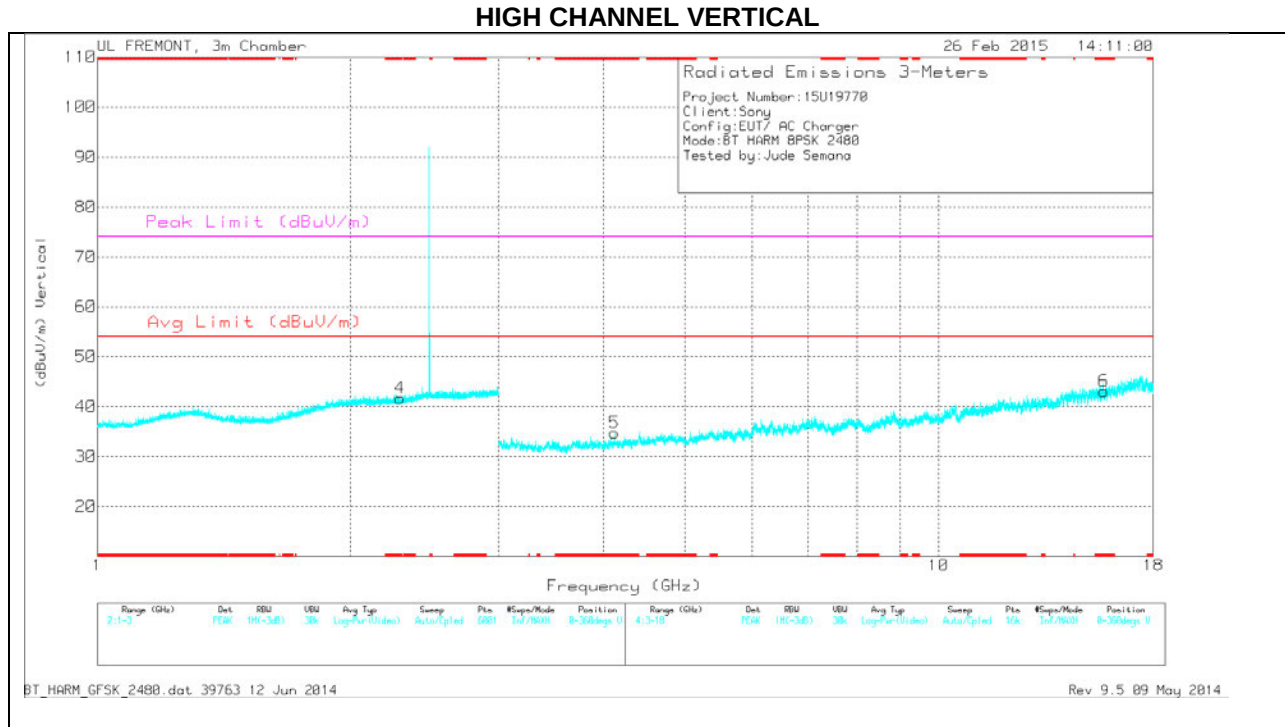

Note: Emission was scanned up to 26GHz; No emissions were detected above the noise floor which was at least 20dB below the specification limit.

## HIGH CHANNEL DATA

### TRACE MARKERS

| Marker | Frequency (GHz) | Meter Reading (dBuV) | Det | AF T119 (dB/m) | Amp/Cb/Fitr /Pad (dB) | DC Corr (dB) | Corrected Reading (dBuV/m) | Avg Limit (dBuV/m) | Margin (dB) | Peak Limit (dBuV/m) | PK Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|-----------------------|--------------|----------------------------|--------------------|-------------|---------------------|----------------|----------------|-------------|----------|
| 1      | * 1.346         | 32.99                | PK  | 29.3           | -23.8                 | 0            | 38.49                      | -                  | -           | 74                  | -35.51         | 0-360          | 200         | H        |
| 3      | * 10.762        | 27.71                | PK  | 37.8           | -24.9                 | 0            | 40.61                      | -                  | -           | 74                  | -33.39         | 0-360          | 200         | H        |
| 6      | * 15.725        | 29.32                | PK  | 40.4           | -26.6                 | 0            | 43.12                      | -                  | -           | 74                  | -30.88         | 0-360          | 100         | V        |
| 4      | * 2.29          | 33.2                 | PK  | 31.6           | -23.1                 | 0            | 41.7                       | -                  | -           | 74                  | -32.3          | 0-360          | 100         | V        |
| 5      | * 4.12          | 32.45                | PK  | 33.3           | -31                   | 0            | 34.75                      | -                  | -           | 74                  | -39.25         | 0-360          | 200         | V        |
| 2      | 7.833           | 29.56                | PK  | 35.8           | -27.6                 | 0            | 37.76                      | -                  | -           | -                   | -              | 0-360          | 100         | H        |


PK - Peak detector

FCC Part15 Subpart C T186 2400MHz Spurious Emissions.TST 12746Rev 9.5 12 Jun 2013


### 8.3. WORST-CASE BELOW 1 GHz

#### GFSK SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

##### HORIZONTAL PLOT

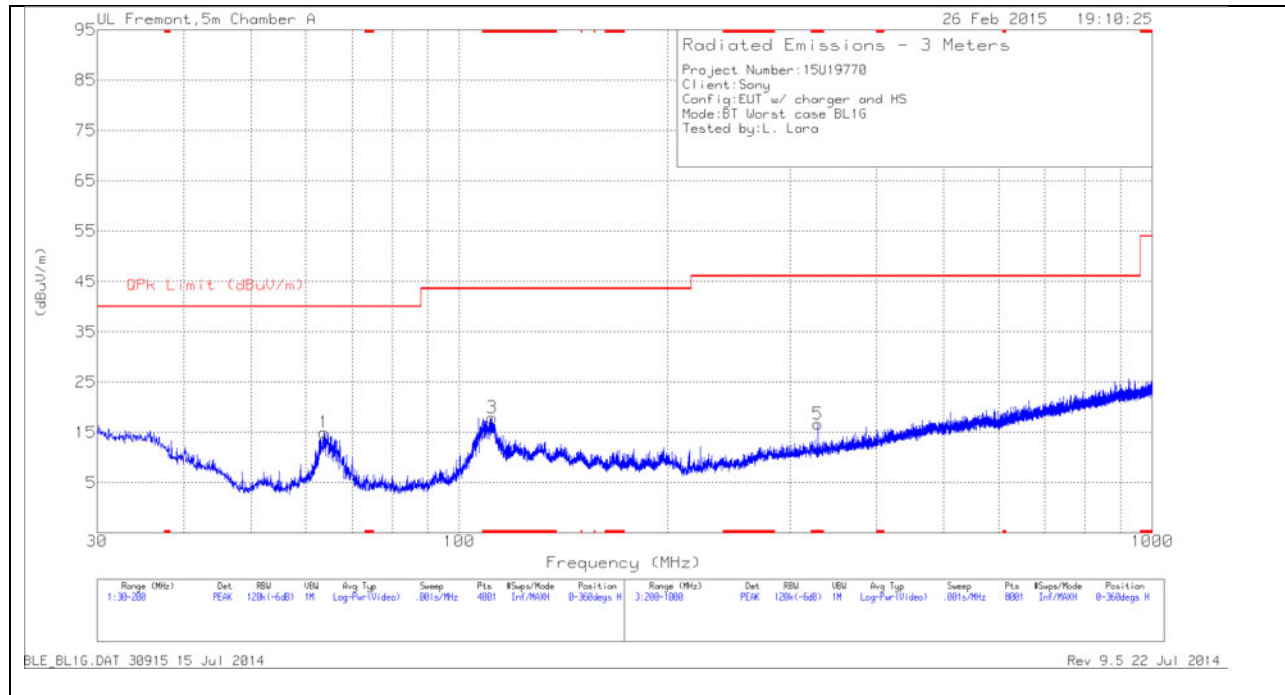

### VERTICAL PLOT

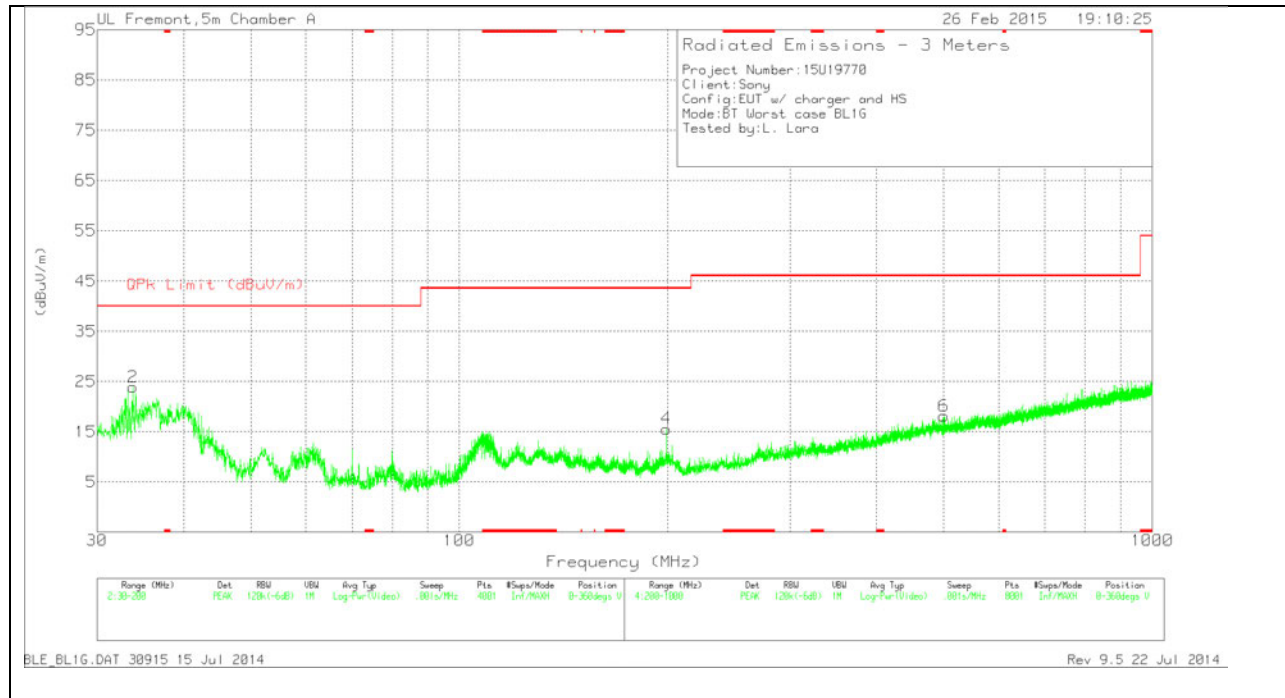

## BELOW 1 GHz TABLE

| Marker | Frequency (MHz) | Meter Reading (dBuV) | Det | AF T130 (dB/m) | Amp/Cbl (dB/m) | Corrected Reading (dBuV/m) | QPk Limit (dBuV/m) | Margin (dB) | Azimuth (Degs) | Height (cm) | Polarity |
|--------|-----------------|----------------------|-----|----------------|----------------|----------------------------|--------------------|-------------|----------------|-------------|----------|
| 3      | * 111.4725      | 35.65                | PK  | 12.8           | -30.5          | 17.95                      | 43.52              | -25.57      | 0-360          | 300         | H        |
| 5      | * 329.3         | 32.09                | PK  | 13.9           | -29.3          | 16.69                      | 46.02              | -29.33      | 0-360          | 200         | H        |
| 2      | 33.825          | 36.57                | PK  | 18.5           | -31.2          | 23.87                      | 40                 | -16.13      | 0-360          | 101         | V        |
| 1      | 63.7875         | 37.99                | PK  | 7.9            | -30.9          | 14.99                      | 40                 | -25.01      | 0-360          | 300         | H        |
| 4      | 199.065         | 32.98                | PK  | 12.5           | -29.9          | 15.58                      | 43.52              | -27.94      | 0-360          | 101         | V        |
| 6      | 500.4           | 29.24                | PK  | 17.6           | -28.7          | 18.14                      | 46.02              | -27.88      | 0-360          | 200         | V        |

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

PK - Peak detector