



FCC RF Test Report

APPLICANT : Sony Mobile Communications Inc.
EQUIPMENT : Smart phone
BRAND NAME : SONY
TYPE NAME : PM-0893-BV
FCC ID : PY7-PM0893
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Apr. 30, 2015 and testing was completed on May 19, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7-PM0893

Page Number : 1 of 33

Report Issued Date : Jul. 06, 2015

Report Version : Rev. 01

Report Template No.: BU5-FR15EWL Version 1.0



TABLE OF CONTENTS

SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	6
1.5 Modification of EUT	7
1.6 Testing Location	8
1.7 Applicable Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Carrier Frequency Channel	9
2.2 Pre-Scanned RF Power	10
2.3 Test Mode	10
2.4 Connection Diagram of Test System	12
2.5 Support Unit used in test configuration and system	13
2.6 EUT Operation Test Setup	13
2.7 Measurement Results Explanation Example	13
3 TEST RESULT	14
3.1 26dB & 99% Occupied Bandwidth Measurement	14
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	18
3.4 Unwanted Radiated Emission Measurement	20
3.5 AC Conducted Emission Measurement	24
3.6 Frequency Stability Measurement	28
3.7 Automatically Discontinue Transmission	29
3.8 Antenna Requirements	30
4 LIST OF MEASURING EQUIPMENT	31
5 UNCERTAINTY OF EVALUATION	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR543001D	Rev. 01	Initial issue of report	Jul. 06, 2015

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 15.403(i)	26dB & 99% Bandwidth	-	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm (depend on band)	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm (depend on band)	Pass	-
3.4	15.407(b)	Unwanted Emissions	$\leq -17, -27$ dBm (depend on band) & 15.209(a)	Pass	Under limit 3.90 dB at 35.400 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 13.40 dB at 0.318 MHz
3.6	15.407(g)	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Sony Mobile Communications Inc.

Nya Vattentornet, 22188 Lund, Sweden

1.2 Manufacturer

Arima Communications Corp.

6F, No. 866, Jhongjheng Rd., Jhonghe Dist., New Taipei City 23586, Taiwan

1.3 Feature of Equipment Under Test

The Equipment Under Test (hereafter called: EUT) is Smart phone supporting, GSM/WCDMA/LTE, Wi-Fi 2.4GHz 802.11b/g/n, Wi-Fi 5GHz 802.11a/n, Bluetooth with FM Receiver, GPS, and NFC features, and below is details of information.

General Information of Equipment Under Test	
Equipment	Smart phone
Brand Name	SONY
Type Name	PM-0893-BV
FCC ID	PY7-PM0893
GSM Operating Band(s)	GSM 850/900/1800/1900MHz
GPRS / EGPRS Multi Slot Class	GPRS Class 12, EGPRS Class 12
WCDMA Operating Band(s)	FDD Band I / II / V / VIII
WCDMA Rel. Version	Rel. 8
LTE Operating Band(s)	FDD Band I / III / V / VII / VIII / XX
LTE Rel. Version	Rel. 8
Wi-Fi Specification	802.11a/b/g/n (HT20/HT40)
Bluetooth Version	v3.0+EDR / v4.0-LE
NFC Specification	ISO14443A / ISO14443B / Felica
Power Supply	Battery / AC Adapter / Car Charger

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5580 MHz 5660 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 11.17 dBm / 0.0131 W 802.11n HT20 : 11.49 dBm / 0.0141 W 802.11n HT40 : 11.48 dBm / 0.0141 W <5260 MHz ~ 5320 MHz> 802.11a : 11.46 dBm / 0.0140 W 802.11n HT20 : 11.40 dBm / 0.0138 W 802.11n HT40 : 11.36 dBm / 0.0137 W <5500 MHz ~ 5580 MHz and 5660 MHz ~ 5700 MHz> 802.11a : 11.43 dBm / 0.0139 W 802.11n HT20 : 11.49 dBm / 0.0141 W 802.11n HT40 : 11.49 dBm / 0.0141 W
99% Occupied Bandwidth	802.11a : 17.85 MHz 802.11n HT20 : 18.55 MHz 802.11n HT40 : 36.70 MHz
Antenna Type	<5180 MHz ~ 5240 MHz> PIFA Antenna with gain -1.60 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna with gain -1.50 dBi <5500 MHz ~ 5580 MHz and 5660 MHz ~ 5700 MHz> PIFA Antenna with gain -1.50 dBi
Type of Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
IMEI 1: 004402454656582 IMEI 2: 004402454656590	A	29.0.B.0.76	WUJ01HXKHQ	RF conducted measurement
IMEI 1: 004402454657267 IMEI 2: 004402454657275			XR5422D03190	Radiated Spurious Emission
IMEI 1: 004402454657382 IMEI 2: 004402454657390			WUJ01HXL75	Conducted Emission



Accessory List	
AC Adapter	Model No. : EP800
	Type No. : CAA-0002016-US B
	S/N :
	3113W 45 108545 (for Radiation Spurious Emission) 3113W 38 210631 (for Conducted Emission)
Battery	Model No. : LIS1579ERPC
Earphone 1	Model No. : MH410c
	Type No. : AG-1100
	S/N :
	13511E63001BFF6 (for Radiated Spurious Emission) 14371E6600174A0 (for Conducted Emission)
USB Cable	Model No. : EC450
	Type No. : AI-0700
	S/N :
	143412DE1065866 (for Radiated Spurious Emission) 134912D1000585A (for Conducted Emission)

Note:

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.		
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978		
Test Site No.	Sporton Site No.		
	TH02-HY	CO05-HY	03CH05-HY

Note: The test site complies with ANSI C63.4 2009 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- ♦ ANSI C63.10-2009

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. FCC permits the use of the 1.5 meter table as an alternative in C63.10-2013 through inquiry tracking number 961829.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The final configuration from all the combinations and the worst-case data rates were investigated by measuring the maximum power across all the data rates and modulation modes under section 2.2.

Based on the worst configuration found above, the RF power setting is set individually to meet FCC compliance limit for the final conducted and radiated tests shown in section 2.3.

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38	5190	46	5230
	40	5200	48	5240

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54	5270	62	5310
	56	5280	64	5320

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5600 MHz and 5650-5725 MHz Band 3 (U-NII-2C)	100	5500	116	5580
	102	5510	132	5660
	104	5520	134	5670
	108	5540	136	5680
	110	5550	140	5700
	112	5560		

Note: The above Frequency and Channel in boldface were 802.11n HT40.

2.2 Pre-Scanned RF Power

Preliminary tests were performed in different data rate and data rate associated with the highest power were chosen for full test in the following tables. Final Output Power equals to Measured Output Power adds the duty factor.

5GHz 802.11a mode								
Data Rate (MHz)	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
Average Power (dBm)	11.46	11.44	11.38	11.41	11.44	11.34	11.44	11.39

5GHz 802.11n HT20 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	11.49	11.40	11.47	11.41	11.47	11.46	11.28	11.18

5GHz 802.11n HT40 mode								
Data Rate (MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Average Power (dBm)	11.49	11.43	11.36	11.44	11.34	11.46	11.41	11.25

2.3 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

AC Conducted Emission	Mode 1 : GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + Camera + Earphone 1 + Battery + USB Cable (Charging from Adapter) + SIM 1
Remark:	For radiated TCS, the tests were performed with Adapter, Battery, Earphone 1, USB Cable, and SIM 1.




Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11n HT20	802.11n HT20	802.11n HT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5600 MHz and 5650-5725MHz
		802.11n HT40	802.11n HT40	802.11n HT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

2.4 Connection Diagram of Test System

<WLAN Tx Mode>

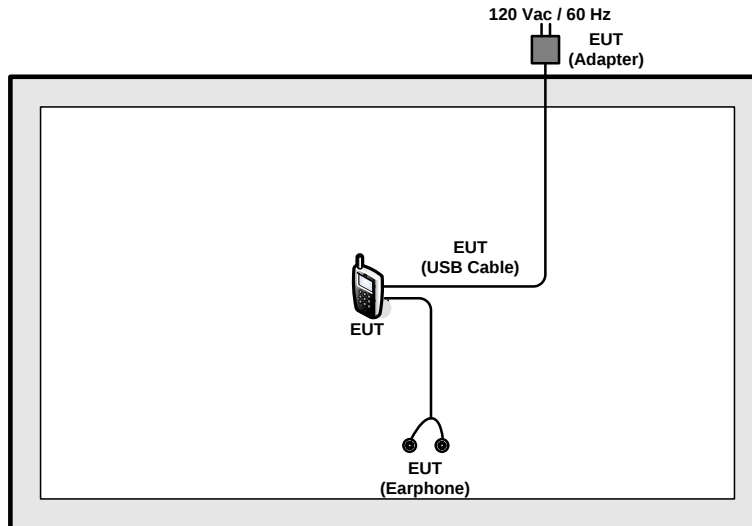

<AC Conducted Emission Mode>

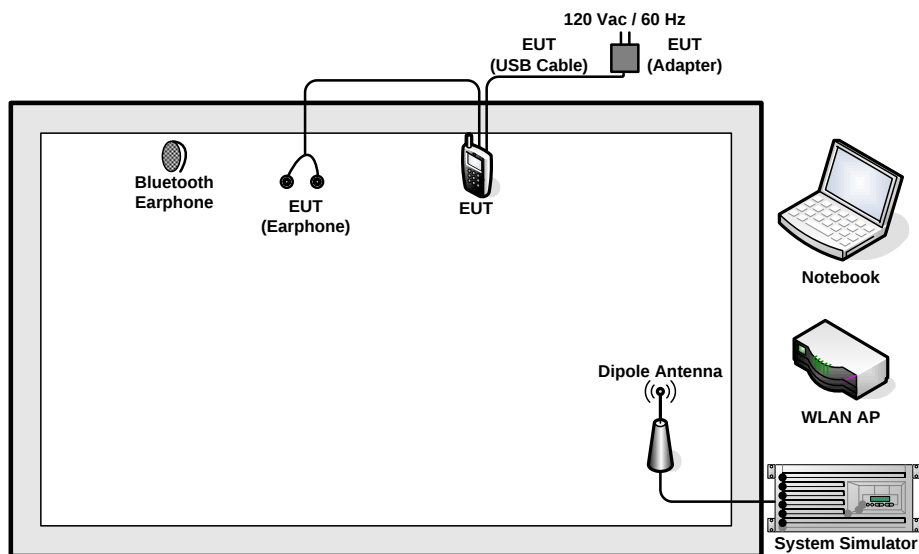

2.5 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-628	KA2DIR628A2	N/A	Unshielded, 1.8 m
3.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	Unshielded, 0.75m	N/A
4.	Notebook	DELL	Latitude E6320	FCC DoC/ Contains FCC ID: QDS-BRCM1054	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
5.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	N/A

2.6 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

2.7 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 4.2 + 10 = 14.2 \text{ (dB)}
 \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement
as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set
1MHz and set the Video bandwidth (VBW) $\geq 3 * \text{RBW}$.
8. Measure and record the results in the test report.



3.1.4 Test Setup

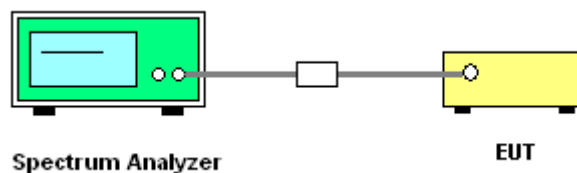



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth Plots

Please refer to Appendix A.

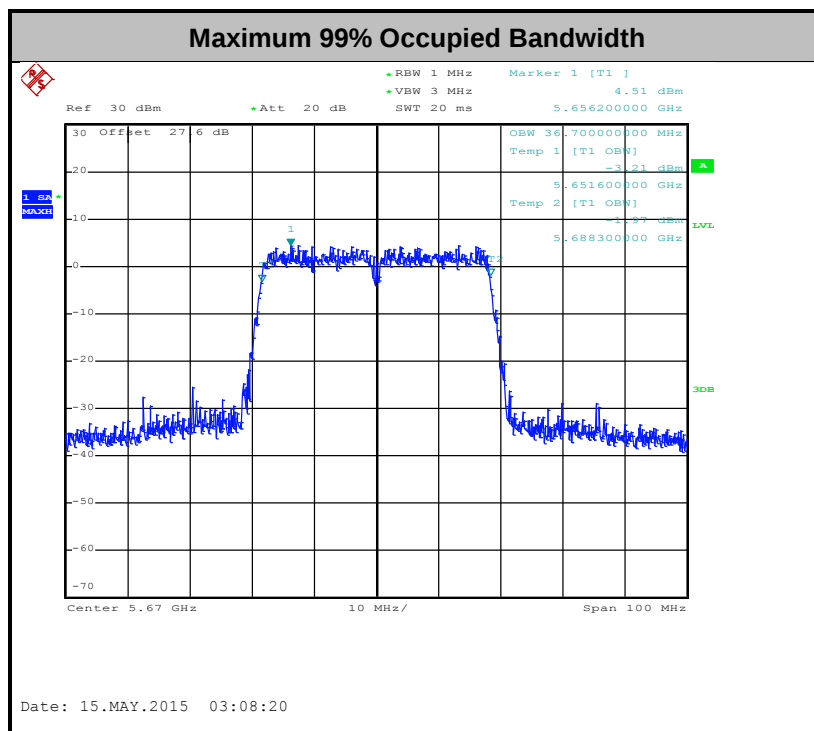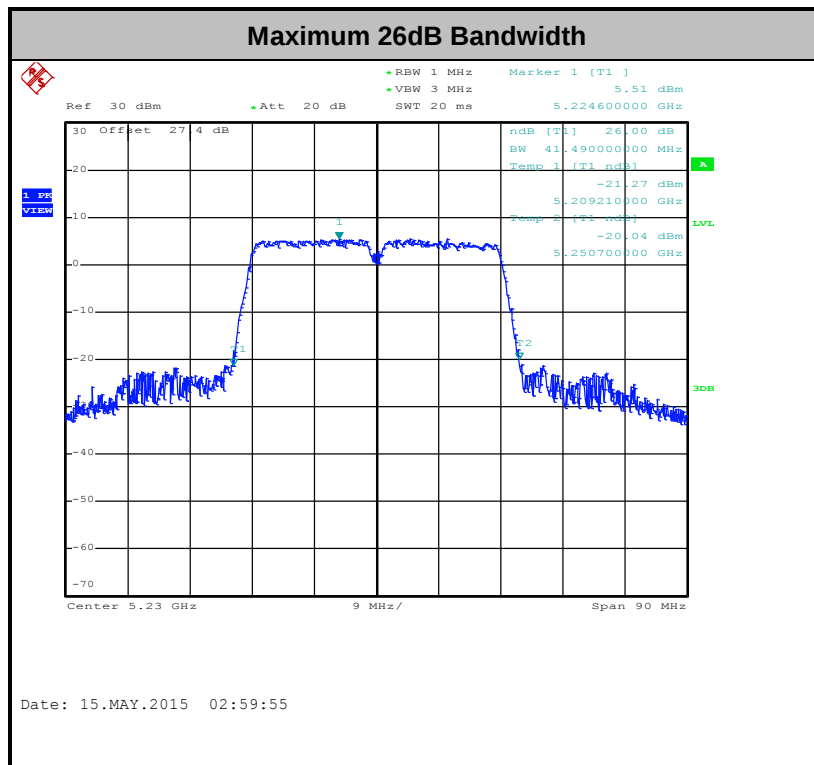

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

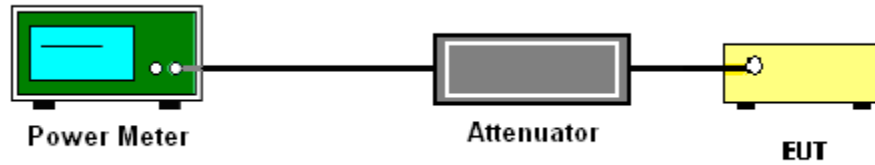

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.35 GHz and 5.47–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

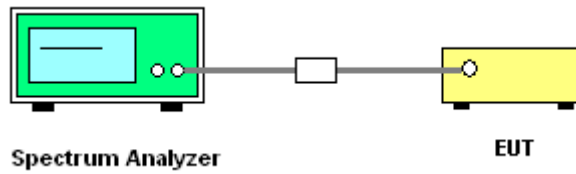

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

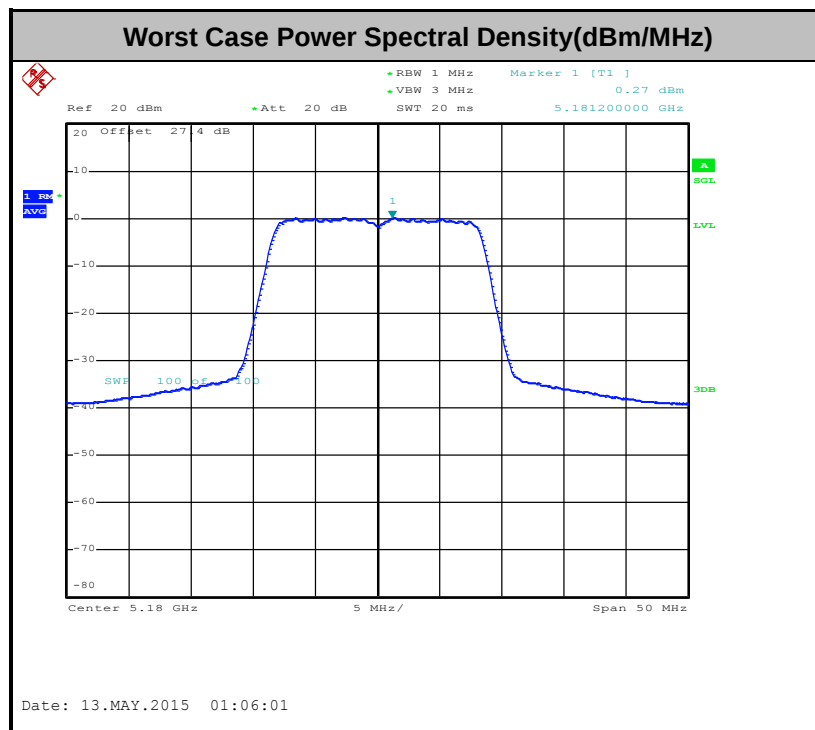

Note: Average Power Density (dB) = Measured value+ Duty Factor

3.4 Unwanted Radiated Emission Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB789033 v01 G2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(μ s)	1/T(kHz)	VBW Setting
802.11a	88.54	1390.00	0.72	1kHz
802.11n HT20	88.44	1300.00	0.77	1kHz
802.11n HT40	79.56	654.00	1.53	3kHz


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

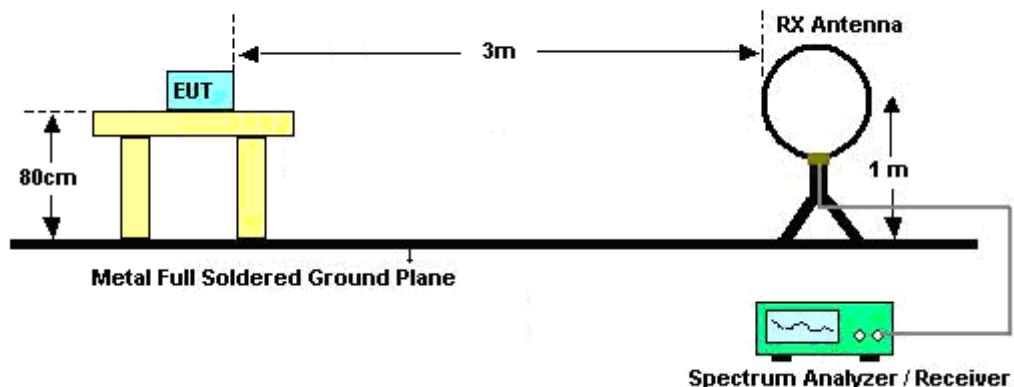

For radiated emissions from 30MHz to 1GHz

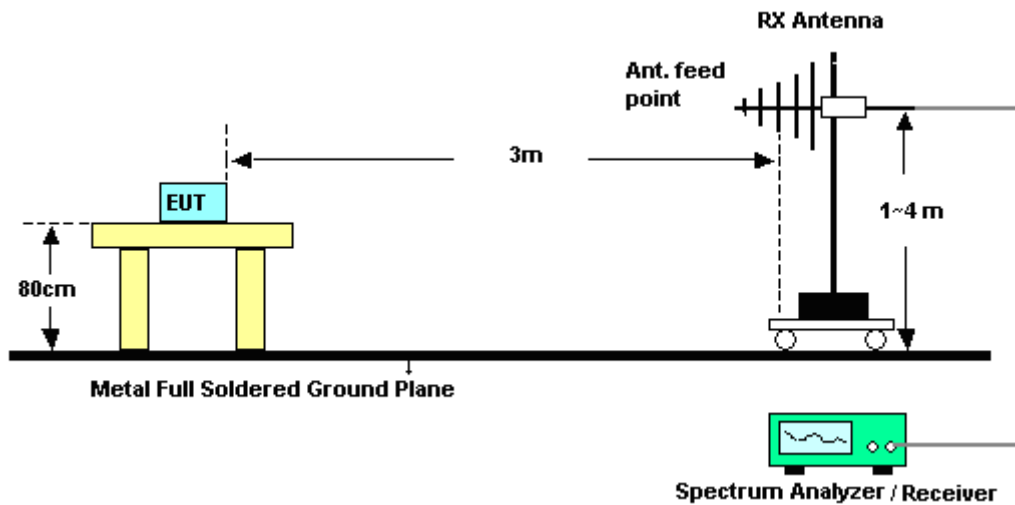

For radiated emissions above 1GHz

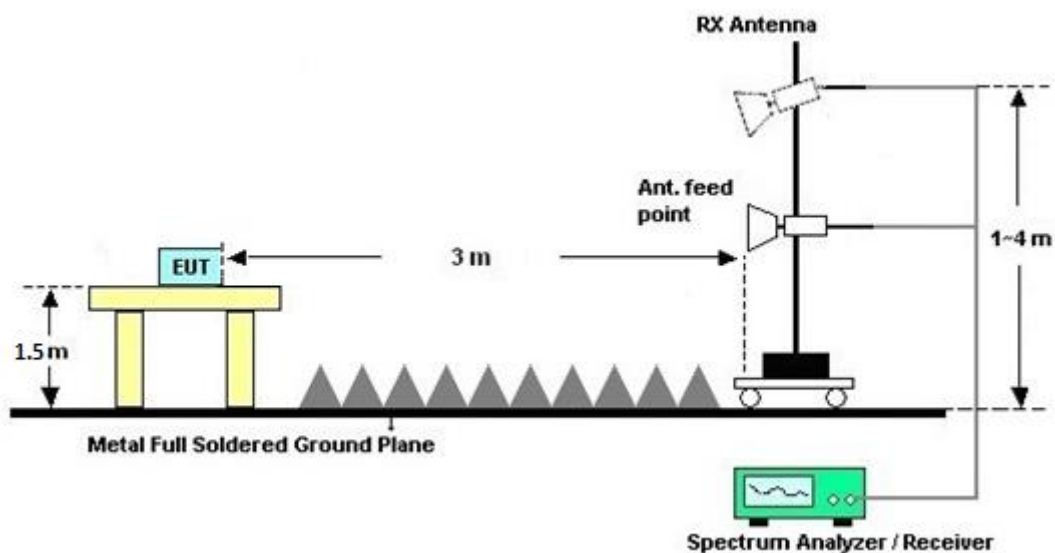

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix A.

3.4.7 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

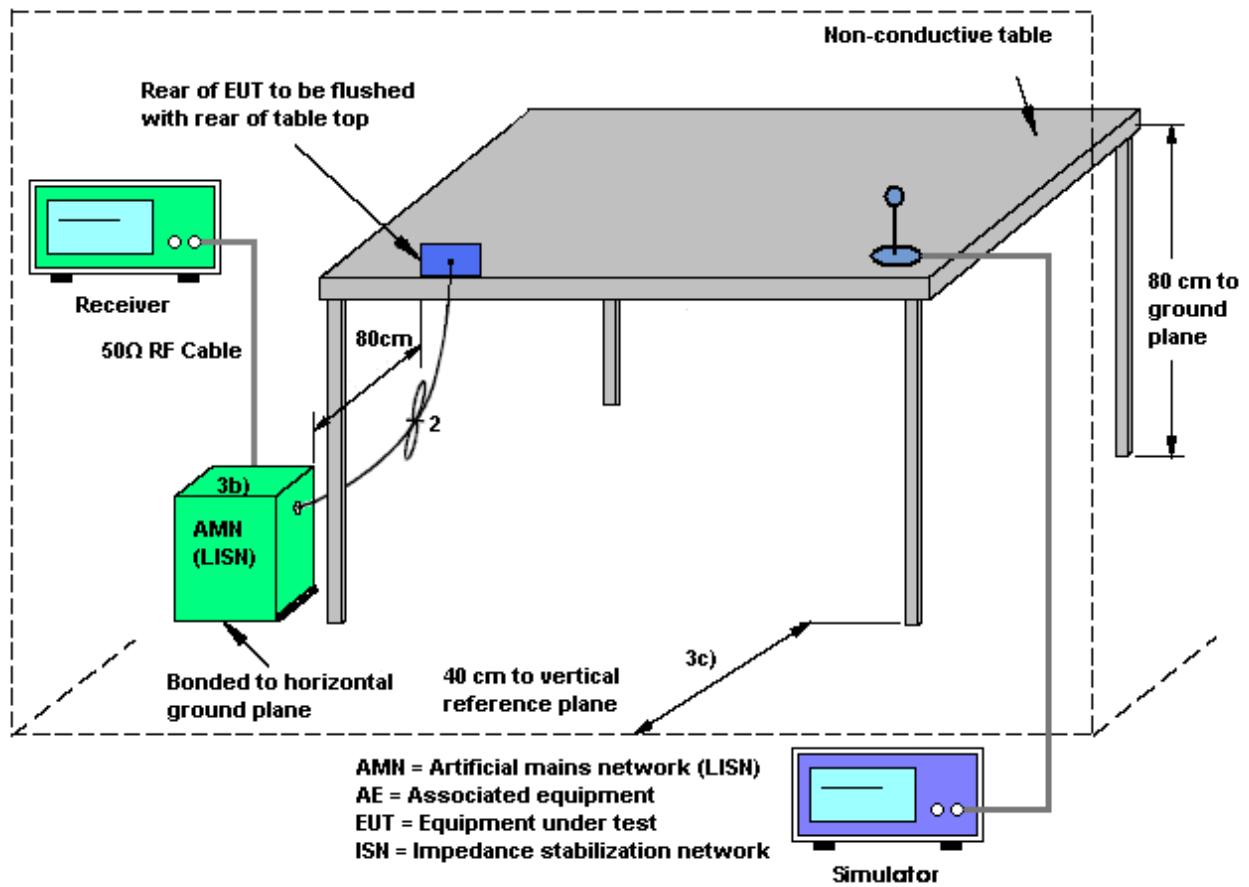

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Eric Jeng	Relative Humidity :	56~58%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + Camera + Earphone 1 + Battery + USB Cable (Charging from Adapter) + SIM 1		

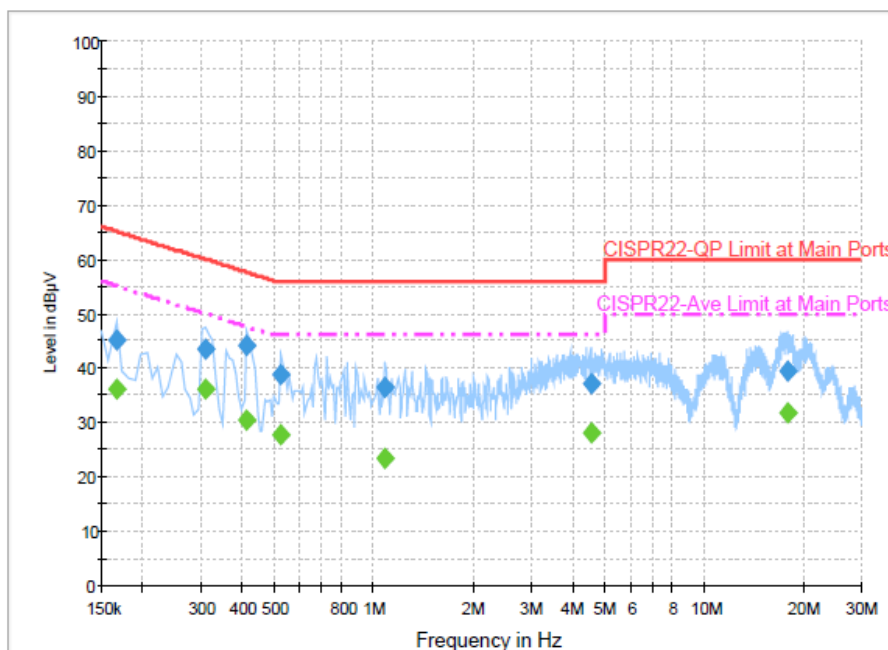

Final Result : QuasiPeak


Frequency (MHz)	QuasiPeak (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	45.0	Off	L1	19.4	20.2	65.2
0.310000	43.5	Off	L1	19.5	16.5	60.0
0.414000	44.1	Off	L1	19.4	13.5	57.6
0.526000	38.8	Off	L1	19.5	17.2	56.0
1.086000	36.3	Off	L1	19.5	19.7	56.0
4.566000	37.0	Off	L1	19.8	19.0	56.0
17.902000	39.5	Off	L1	20.0	20.5	60.0

Final Result : Average

Frequency (MHz)	Average (dBμV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.166000	36.0	Off	L1	19.4	19.2	55.2
0.310000	36.2	Off	L1	19.5	13.8	50.0
0.414000	30.3	Off	L1	19.4	17.3	47.6
0.526000	27.8	Off	L1	19.5	18.2	46.0
1.086000	23.5	Off	L1	19.5	22.5	46.0
4.566000	28.0	Off	L1	19.8	18.0	46.0
17.902000	31.9	Off	L1	20.0	18.1	50.0



Test Mode :	Mode 1	Temperature :	23~25°C
Test Engineer :	Eric Jeng	Relative Humidity :	56~58%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM1900 Idle + Bluetooth Link + WLAN (5GHz) Link + Camera + Earphone 1 + Battery + USB Cable (Charging from Adapter) + SIM 1		

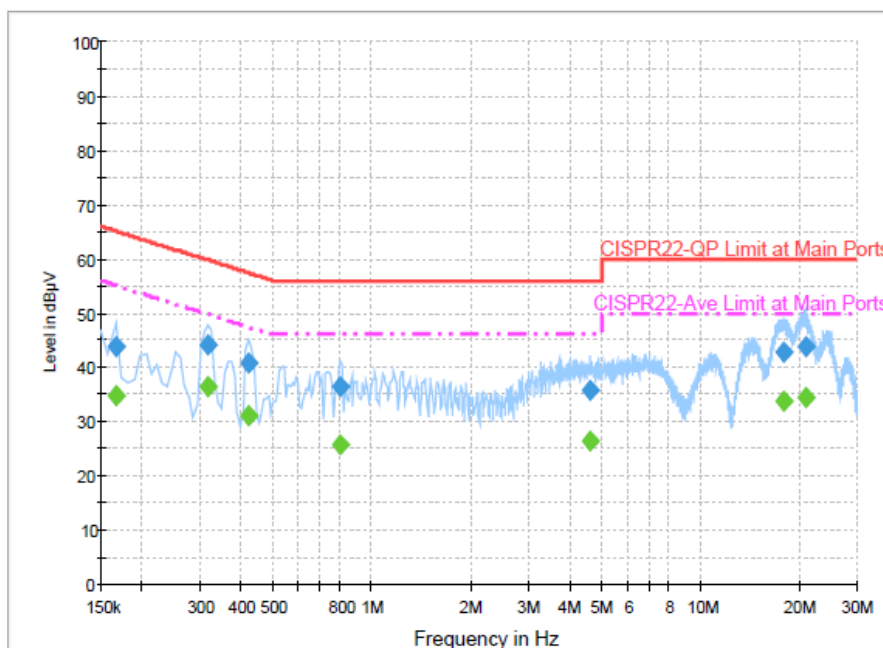**Final Result : QuasiPeak**

Frequency (MHz)	QuasiPeak (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	43.9	Off	N	19.4	21.3	65.2
0.318000	44.2	Off	N	19.4	15.6	59.8
0.422000	40.8	Off	N	19.4	16.6	57.4
0.806000	36.5	Off	N	19.6	19.5	56.0
4.638000	35.6	Off	N	19.7	20.4	56.0
18.038000	42.9	Off	N	20.1	17.1	60.0
20.974000	43.8	Off	N	20.1	16.2	60.0

Final Result : Average

Frequency (MHz)	Average (dBµV)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.166000	34.7	Off	N	19.4	20.5	55.2
0.318000	36.4	Off	N	19.4	13.4	49.8
0.422000	31.2	Off	N	19.4	16.2	47.4
0.806000	25.9	Off	N	19.6	20.1	46.0
4.638000	26.4	Off	N	19.7	19.6	46.0
18.038000	33.7	Off	N	20.1	16.3	50.0
20.974000	34.6	Off	N	20.1	15.4	50.0

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

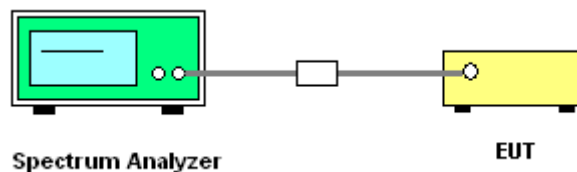

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34897199	N/A	May 04, 2015	May 09, 2015 ~ May 19, 2015	May 03, 2016	Conducted (TH02-HY)
Power Meter	Agilent	E4416A	GB41292344	300MHz~40GHz	Jan. 14, 2015	May 09, 2015 ~ May 19, 2015	Jan. 13, 2016	Conducted (TH02-HY)
Power Sensor	Agilent	E9327A	US40441548	300MHz~40GHz	Jan. 14, 2015	May 09, 2015 ~ May 19, 2015	Jan. 13, 2016	Conducted (TH02-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP40	100055	9kHz~40GHz	Jun. 09, 2014	May 09, 2015 ~ May 19, 2015	Jun. 08, 2015	Conducted (TH02-HY)
Thermal Chamber	Ten Billion	TTH-D3SP	TBN-930701	N/A	Jul. 16, 2014	May 09, 2015 ~ May 19, 2015	Jul. 15, 2015	Conducted (TH02-HY)
RF Cable	HARBOUR INDUSTRIES	LL142	Infinet CA3601-360 1-DLL	0.1MHz~40GHz	Mar. 06, 2015	May 09, 2015 ~ May 19, 2015	Mar. 05, 2016	Conducted (TH02-HY)
EMI Test Receiver	Rohde & Schwarz	ESCS 30	100356	9kHz ~ 2.75GHz	Dec. 01, 2014	May 15, 2015	Nov. 30, 2015	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Apr. 20, 2015	May 15, 2015	Apr. 19, 2016	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100080	9kHz~30MHz	Dec. 02, 2014	May 15, 2015	Dec. 01, 2015	Conduction (CO05-HY)
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 15, 2015	N/A	Conduction (CO05-HY)
LF Cable	HUBER + SUHNER	RG-214/U	LF01	N/A	Jan. 02, 2015	May 15, 2015	Jan. 01, 2016	Conduction (CO05-HY)
Test Software	N/A	EMC32	8.40.0	N/A	N/A	May 15, 2015	N/A	Conduction (CO05-HY)
Preamplifier	COM-POWER	PA-103A	161075	10MHz~1GHz	Apr. 09, 2015	May 11, 2015 ~ May 14, 2015	Apr. 08, 2016	Radiation (03CH05-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590074	1GHz~18GHz	Jul. 07, 2014	May 11, 2015 ~ May 14, 2015	Jul. 06, 2015	Radiation (03CH05-HY)
Preamplifier	EMCI	EMC011830	980148	1GHz~18GHz	Jun. 23, 2014	May 11, 2015 ~ May 14, 2015	Jun. 22, 2015	Radiation (03CH05-HY)
Bilog Antenna	Schaffner	CBL6111C	2725	30MHz~1GHz	Sep. 27, 2014	May 11, 2015 ~ May 14, 2015	Sep. 26, 2015	Radiation (03CH05-HY)
Horn Antenna	ESCO	3117	00066584	1GHz~18GHz	Aug. 30, 2014	May 11, 2015 ~ May 14, 2015	Aug. 29, 2015	Radiation (03CH05-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jul. 28, 2014	May 11, 2015 ~ May 14, 2015	Jul. 27, 2015	Radiation (03CH05-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA917025 1	18GHz- 40GHz	Oct. 02, 2014	May 11, 2015 ~ May 14, 2015	Oct. 01, 2015	Radiation (03CH05-HY)
Preamplifier	MITEQ	JS44-1800400 0-33-8P	1840917	18GHz ~ 40GHz	Jun. 09, 2014	May 11, 2015 ~ May 14, 2015	Jun. 08, 2015	Radiation (03CH05-HY)
EMI Test Receiver	Rohde & Schwarz	ESU26	100390	20Hz~26.5GHz	Dec. 15, 2014	May 11, 2015 ~ May 14, 2015	Dec. 14, 2015	Radiation (03CH05-HY)
Controller	ChamPro	EM1000	N/A	Control Turn table & Ant Mast	N/A	May 11, 2015 ~ May 14, 2015	N/A	Radiation (03CH05-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Turn Table	EMEC	TT 2000	N/A	0-360 degree	N/A	May 11, 2015 ~ May 14, 2015	N/A	Radiation (03CH05-HY)
Antenna Mast	ChamPro	AM-BS-4500-B	N/A	1~4m	N/A	May 11, 2015 ~ May 14, 2015	N/A	Radiation (03CH05-HY)
Hygrometer	WISEWIND	0207	N/A	N/A	May 04, 2015	May 11, 2015 ~ May 14, 2015	May 03, 2016	Radiation (03CH05-HY)
RF Cable	Infinet	LL142	Infinet CA3601-360 1-1000	30MHz~1GHz	Jan. 06, 2015	May 11, 2015 ~ May 14, 2015	Jan. 05, 2016	Radiation (03CH05-HY)
RF Cable	Infinet	LL142	Infinet CA3601-360 1-1000	1GHz~25GHz	Jan. 06, 2015	May 11, 2015 ~ May 14, 2015	Jan. 05, 2016	Radiation (03CH05-HY)
RF Cable	Infinet	LL142	Infinet CA3601-360 1-1000	25GHz~40GHz	Jan. 06, 2015	May 11, 2015 ~ May 14, 2015	Jan. 05, 2016	Radiation (03CH05-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY84209521	9KHz~1GHz	Dec. 04, 2014	May 11, 2015 ~ May 14, 2015	Dec. 03, 2015	Radiation (03CH05-HY)
Filter	Wainwright	WLKS4500-8S S	SN19	4.5G Low Pass	Oct. 01, 2014	May 11, 2015 ~ May 14, 2015	Sep. 30, 2015	Radiation (03CH05-HY)
Filter	Microwave Circuits	H07G18G3	SN8009-01	7GHz HPF	Oct. 01, 2014	May 11, 2015 ~ May 14, 2015	Sep. 30, 2015	Radiation (03CH05-HY)
Test Software	Audix	E3	Version 6.2009-8-24	N/A	N/A	May 11, 2015 ~ May 14, 2015	N/A	Radiation (03CH05-HY)



5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.26
---	------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.10
---	------



Appendix A. Conducted Test Results

Test Engineer:	Osolemio Chang	Temperature:	21~25	°C
Test Date:	2015/05/09~2015/05/19	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	17.75	21.45	-	22.49		
11a	6Mbps	1	44	5220	17.70	21.30	-	22.48		
11a	6Mbps	1	48	5240	17.75	21.55	-	22.49		
HT20	MCS0	1	36	5180	18.55	22.25	-	22.68		
HT20	MCS0	1	44	5220	18.50	21.85	-	22.67		
HT20	MCS0	1	48	5240	18.50	21.90	-	22.67		
HT40	MCS0	1	38	5190	36.50	40.95	-	23.01		
HT40	MCS0	1	46	5230	36.50	41.49	-	23.01		

TEST RESULTS DATA
Average Power Table

FCC Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6Mbps	1	36	5180	0.53	11.17	24.00	-1.60		Pass
11a	6Mbps	1	44	5220	0.53	10.88	24.00	-1.60		Pass
11a	6Mbps	1	48	5240	0.53	11.08	24.00	-1.60		Pass
HT20	MCS0	1	36	5180	0.53	11.49	24.00	-1.60		Pass
HT20	MCS0	1	44	5220	0.53	11.31	24.00	-1.60		Pass
HT20	MCS0	1	48	5240	0.53	11.46	24.00	-1.60		Pass
HT40	MCS0	1	38	5190	0.99	11.48	24.00	-1.60		Pass
HT40	MCS0	1	46	5230	0.99	11.09	24.00	-1.60		Pass

TEST RESULTS DATA
Power Spectral Density

FCC Band I										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.53	0.80	11.00	-1.60		Pass
11a	6Mbps	1	44	5220	0.53	-0.30	11.00	-1.60		Pass
11a	6Mbps	1	48	5240	0.53	-0.57	11.00	-1.60		Pass
HT20	MCS0	1	36	5180	0.53	0.01	11.00	-1.60		Pass
HT20	MCS0	1	44	5220	0.53	-0.85	11.00	-1.60		Pass
HT20	MCS0	1	48	5240	0.53	-0.60	11.00	-1.60		Pass
HT40	MCS0	1	38	5190	0.99	-3.35	11.00	-1.60		Pass
HT40	MCS0	1	46	5230	0.99	-2.80	11.00	-1.60		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band II										
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	17.65	21.5	23.47	29.47	23.98	
11a	6M bps	1	60	5300	17.85	21.4	23.52	29.52	23.98	
11a	6M bps	1	64	5320	17.7	21.5	23.48	29.48	23.98	
HT20	MCS 0	1	52	5260	18.45	21.8	23.66	29.66	23.98	
HT20	MCS 0	1	60	5300	18.55	21.85	23.68	29.68	23.98	
HT20	MCS 0	1	64	5320	18.45	21.8	23.66	29.66	23.98	
HT40	MCS 0	1	54	5270	36.6	41.31	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.6	41.31	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band II										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.53	11.44	23.98	-1.50		Pass
11a	6M bps	1	60	5300	0.53	11.26	23.98	-1.50		Pass
11a	6M bps	1	64	5320	0.53	11.46	23.98	-1.50		Pass
HT20	MCS 0	1	52	5260	0.53	11.11	23.98	-1.50		Pass
HT20	MCS 0	1	60	5300	0.53	11.18	23.98	-1.50		Pass
HT20	MCS 0	1	64	5320	0.53	11.40	23.98	-1.50		Pass
HT40	MCS 0	1	54	5270	0.99	11.10	23.98	-1.50		Pass
HT40	MCS 0	1	62	5310	0.99	11.36	23.98	-1.50		Pass

TEST RESULTS DATA
Power Spectral Density

Band II										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.53	-0.16	11.00	-1.50		Pass
11a	6M bps	1	60	5300	0.53	0.19	11.00	-1.50		Pass
11a	6M bps	1	64	5320	0.53	-0.07	11.00	-1.50		Pass
HT20	MCS 0	1	52	5260	0.53	0.09	11.00	-1.50		Pass
HT20	MCS 0	1	60	5300	0.53	-0.04	11.00	-1.50		Pass
HT20	MCS 0	1	64	5320	0.53	-0.48	11.00	-1.50		Pass
HT40	MCS 0	1	54	5270	0.99	-2.92	11.00	-1.50		Pass
HT40	MCS 0	1	62	5310	0.99	-2.75	11.00	-1.50		Pass

TEST RESULTS DATA
26dB and 99% OBW

Band III										
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	17.8	21.4	23.50	29.50	23.98	
11a	6M bps	1	116	5580	17.65	21.55	23.47	29.47	23.98	
11a	6M bps	1	140	5700	17.75	21.3	23.49	29.49	23.98	
HT20	MCS 0	1	100	5500	18.5	21.8	23.67	29.67	23.98	
HT20	MCS 0	1	116	5580	18.5	21.85	23.67	29.67	23.98	
HT20	MCS 0	1	140	5700	18.45	21.8	23.66	29.66	23.98	
HT40	MCS 0	1	102	5510	36.6	41.31	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.5	41.13	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.7	41.4	23.98	30.00	23.98	

TEST RESULTS DATA
Average Power Table

FCC Band III										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.53	11.40	23.98	-1.50		Pass
11a	6M bps	1	116	5580	0.53	11.19	23.98	-1.50		Pass
11a	6M bps	1	140	5700	0.53	11.43	23.98	-1.50		Pass
HT20	MCS 0	1	100	5500	0.53	11.08	23.98	-1.50		Pass
HT20	MCS 0	1	116	5580	0.53	11.13	23.98	-1.50		Pass
HT20	MCS 0	1	140	5700	0.53	11.49	23.98	-1.50		Pass
HT40	MCS 0	1	102	5510	0.99	11.49	23.98	-1.50		Pass
HT40	MCS 0	1	110	5550	0.99	11.09	23.98	-1.50		Pass
HT40	MCS 0	1	134	5670	0.99	11.01	23.98	-1.50		Pass

TEST RESULTS DATA
Power Spectral Density

Band III										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.53	0.66	11.00	-1.50		Pass
11a	6M bps	1	116	5580	0.53	0.66	11.00	-1.50		Pass
11a	6M bps	1	140	5700	0.53	-0.42	11.00	-1.50		Pass
HT20	MCS 0	1	100	5500	0.53	0.34	11.00	-1.50		Pass
HT20	MCS 0	1	116	5580	0.53	0.44	11.00	-1.50		Pass
HT20	MCS 0	1	140	5700	0.53	0.73	11.00	-1.50		Pass
HT40	MCS 0	1	102	5510	0.99	-2.79	11.00	-1.50		Pass
HT40	MCS 0	1	110	5550	0.99	-3.07	11.00	-1.50		Pass
HT40	MCS 0	1	134	5670	0.99	-3.11	11.00	-1.50		Pass

TEST RESULTS DATA
Frequency Stability

Band I										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	25	3.5	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	25	4.1	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	25	3.7	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	-20	3.7	
11a	6Mbps	1	36	5180	5180.000	0.000	0.00	60	3.7	

Band II										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	64	5320	5319.975	-0.025	-4.70	25	3.5	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	25	4.1	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	25	3.7	
11a	6Mbps	1	64	5320	5320.000	0.000	0.00	-20	3.7	
11a	6Mbps	1	64	5320	5319.975	-0.025	-4.70	60	3.7	

Band III										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)	Note
11a	6Mbps	1	100	5500	5500.025	0.025	4.55	25	3.5	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	25	4.1	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	25	3.7	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	-20	3.7	
11a	6Mbps	1	100	5500	5500.000	0.000	0.00	60	3.7	



Appendix B. Radiated Spurious Emission

Test Engineer :	Karl Hou and Citta Ke	Temperature :	21~25°C
		Relative Humidity :	49~65%

Band 1 - 5150~5250MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		5141.6	55.44	-18.56	74	44.78	32.73	10.22	32.29	100	98	P	H
		5141.3	44.94	-9.06	54	34.28	32.73	10.22	32.29	100	98	A	H
	*	5182	105.18	-	-	94.42	32.74	10.3	32.28	100	98	P	H
	*	5182	94.91	-	-	84.15	32.74	10.3	32.28	100	98	A	H
													H
													H
		5032.4	53.18	-20.82	74	42.83	32.71	9.96	32.32	388	131	P	V
		5149.55	42.84	-11.16	54	32.18	32.73	10.22	32.29	388	131	A	V
	*	5182	97.13	-	-	86.37	32.74	10.3	32.28	388	131	P	V
	*	5182	86.84	-	-	76.08	32.74	10.3	32.28	388	131	A	V
													V
													V
802.11a CH 44 5220MHz		5139.95	54.51	-19.49	74	43.85	32.73	10.22	32.29	100	122	P	H
		5140.1	43.69	-10.31	54	33.03	32.73	10.22	32.29	100	122	A	H
	*	5218	103.91	-	-	93.12	32.74	10.32	32.27	100	122	P	H
	*	5218	92.85	-	-	82.06	32.74	10.32	32.27	100	122	A	H
		5350.11	53.62	-20.38	74	42.68	32.77	10.4	32.23	100	122	P	H
		5371.89	43.08	-10.92	54	32.12	32.77	10.42	32.23	100	122	A	H
		5140.55	53.86	-20.14	74	43.2	32.73	10.22	32.29	361	135	P	V
		5140.55	42.68	-11.32	54	32.02	32.73	10.22	32.29	361	135	A	V
	*	5220	98.08	-	-	87.29	32.74	10.32	32.27	361	135	P	V
	*	5220	87.89	-	-	77.1	32.74	10.32	32.27	361	135	A	V
		5435.03	53.9	-20.1	74	42.89	32.79	10.43	32.21	361	135	P	V
		5425.79	42.84	-11.16	54	31.84	32.78	10.43	32.21	361	135	A	V



802.11a CH 48 5240MHz		5108.75	54.03	-19.97	74	43.48	32.72	10.13	32.3	121	119	P	H
		5148.5	43.06	-10.94	54	32.4	32.73	10.22	32.29	121	119	A	H
	*	5241	103.44	-	-	92.63	32.75	10.32	32.26	121	119	P	H
	*	5241	93.14	-	-	82.33	32.75	10.32	32.26	121	119	A	H
		5376.07	53.07	-20.93	74	42.11	32.77	10.42	32.23	121	119	P	H
		5392.57	43.19	-10.81	54	32.21	32.78	10.42	32.22	121	119	A	H
		5052.35	52.24	-21.76	74	41.8	32.71	10.05	32.32	100	105	P	V
		5148.65	42.52	-11.48	54	31.86	32.73	10.22	32.29	100	105	A	V
	*	5241	94.45	-	-	83.64	32.75	10.32	32.26	100	105	P	V
	*	5241	84.06	-	-	73.25	32.75	10.32	32.26	100	105	A	V
		5356.49	53.18	-20.82	74	42.24	32.77	10.4	32.23	100	105	P	V
		5395.21	42.87	-11.13	54	31.89	32.78	10.42	32.22	100	105	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	43.8	-30.2	74	50.17	36.57	14.24	57.18	100	0	P	H
		15540	49.22	-24.78	74	47.58	41.41	18.5	58.27	100	0	P	H
													H
													H
		10360	44.04	-29.96	74	50.41	36.57	14.24	57.18	100	0	P	V
		15540	49.25	-24.75	74	47.61	41.41	18.5	58.27	100	0	P	V
													V
													V
802.11a CH 44 5220MHz		10440	43.96	-30.04	74	50.22	36.59	14.29	57.14	100	0	P	H
		15660	49.12	-24.88	74	47.19	41.46	18.65	58.18	100	0	P	H
													H
													H
		10440	44.37	-29.63	74	50.63	36.59	14.29	57.14	100	0	P	V
		15660	48.87	-25.13	74	46.94	41.46	18.65	58.18	100	0	P	V
													V
													V
802.11a CH 48 5240MHz		10480	43.64	-30.36	74	49.83	36.6	14.32	57.11	100	0	P	H
		15720	49.03	-24.97	74	46.91	41.49	18.75	58.12	100	0	P	H
													H
													H
		10480	44.19	-29.81	74	50.38	36.6	14.32	57.11	100	0	P	V
		15720	49.51	-24.49	74	47.39	41.49	18.75	58.12	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		5143.25	56.55	-17.45	74	45.89	32.73	10.22	32.29	100	102	P	H
		5141.15	45.37	-8.63	54	34.71	32.73	10.22	32.29	100	102	A	H
	*	5182	105.23	-	-	94.47	32.74	10.3	32.28	100	102	P	H
	*	5182	95.14	-	-	84.38	32.74	10.3	32.28	100	102	A	H
													H
													H
		5147.45	54.97	-19.03	74	44.31	32.73	10.22	32.29	105	153	P	V
		5148.5	42.99	-11.01	54	32.33	32.73	10.22	32.29	105	153	A	V
	*	5181	96.98	-	-	86.22	32.74	10.3	32.28	105	153	P	V
	*	5181	86.88	-	-	76.12	32.74	10.3	32.28	105	153	A	V
													V
													V
802.11n HT20 CH 44 5220MHz		5145.05	54.88	-19.12	74	44.22	32.73	10.22	32.29	114	103	P	H
		5148.05	44.35	-9.65	54	33.69	32.73	10.22	32.29	114	103	A	H
	*	5222	104.92	-	-	94.13	32.74	10.32	32.27	114	103	P	H
	*	5222	94.58	-	-	83.79	32.74	10.32	32.27	114	103	A	H
		5375.74	53.61	-20.39	74	42.65	32.77	10.42	32.23	114	103	P	H
		5372.22	43.54	-10.46	54	32.58	32.77	10.42	32.23	114	103	A	H
		5041.4	53.22	-20.78	74	42.87	32.71	9.96	32.32	387	170	P	V
		5140.1	42.76	-11.24	54	32.1	32.73	10.22	32.29	387	170	A	V
	*	5222	97.93	-	-	87.14	32.74	10.32	32.27	387	170	P	V
	*	5222	87.51	-	-	76.72	32.74	10.32	32.27	387	170	P	V
		5437.56	53.45	-20.55	74	42.44	32.79	10.43	32.21	387	170	P	V
		5372.44	42.99	-11.01	54	32.03	32.77	10.42	32.23	387	170	A	V



802.11n HT20 CH 48 5240MHz		5139.05	53.58	-20.42	74	42.92	32.73	10.22	32.29	119	107	P	H
		5149.85	43.33	-10.67	54	32.67	32.73	10.22	32.29	119	107	A	H
	*	5242	104.17	-	-	93.36	32.75	10.32	32.26	119	107	P	H
	*	5242	93.99	-	-	83.18	32.75	10.32	32.26	119	107	A	H
		5391.58	54.73	-19.27	74	43.75	32.78	10.42	32.22	119	107	P	H
		5391.58	43.8	-10.2	54	32.82	32.78	10.42	32.22	119	107	A	H
		5075.6	53.12	-20.88	74	42.66	32.72	10.05	32.31	100	156	P	V
		5147	42.62	-11.38	54	31.96	32.73	10.22	32.29	100	156	A	V
	*	5238	95.95	-	-	85.14	32.75	10.32	32.26	100	156	P	V
	*	5238	86.15	-	-	75.34	32.75	10.32	32.26	100	156	A	V
		5384.21	53.43	-20.57	74	42.45	32.78	10.42	32.22	100	156	P	V
		5408.19	43.02	-10.98	54	32.03	32.78	10.43	32.22	100	156	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 36 5180MHz		10360	44.56	-29.44	74	50.93	36.57	14.24	57.18	100	0	P	H
		15540	48.39	-25.61	74	46.75	41.41	18.5	58.27	100	0	P	H
													H
													H
		10360	43.89	-30.11	74	50.26	36.57	14.24	57.18	100	0	P	V
		15540	48.05	-25.95	74	46.41	41.41	18.5	58.27	100	0	P	V
													V
													V
802.11n HT20 CH 44 5220MHz		10440	44.79	-29.21	74	51.05	36.59	14.29	57.14	100	0	P	H
		15660	49.01	-24.99	74	47.08	41.46	18.65	58.18	100	0	P	H
													H
													H
		10440	44.79	-29.21	74	51.05	36.59	14.29	57.14	100	0	P	V
		15660	48.89	-25.11	74	46.96	41.46	18.65	58.18	100	0	P	V
													V
													V
802.11n HT20 CH 48 5240MHz		10480	44.66	-29.34	74	50.85	36.6	14.32	57.11	100	0	P	H
		15720	49.23	-24.77	74	47.11	41.49	18.75	58.12	100	0	P	H
													H
													H
		10480	44.9	-29.1	74	51.09	36.6	14.32	57.11	100	0	P	V
		15720	49.27	-24.73	74	47.15	41.49	18.75	58.12	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		5145.95	65.22	-8.78	74	54.56	32.73	10.22	32.29	100	110	P	H
		5149.55	47.73	-6.27	54	37.07	32.73	10.22	32.29	100	110	A	H
	*	5192	101.36	-	-	90.59	32.74	10.3	32.27	100	110	P	H
	*	5192	91.58	-	-	80.81	32.74	10.3	32.27	100	110	P	H
		5387.51	53.57	-20.43	74	42.59	32.78	10.42	32.22	100	110	P	H
		5362.43	43.25	-10.75	54	32.31	32.77	10.4	32.23	100	110	A	H
		5148.8	55.61	-18.39	74	44.95	32.73	10.22	32.29	149	216	P	V
		5148.65	43.69	-10.31	54	33.03	32.73	10.22	32.29	149	216	A	V
	*	5188	93.25	-	-	82.49	32.74	10.3	32.28	149	216	P	V
	*	5188	83.97	-	-	73.21	32.74	10.3	32.28	149	216	A	V
		5434.81	53.19	-20.81	74	42.18	32.79	10.43	32.21	149	216	P	V
		5432.39	43.14	-10.86	54	32.13	32.79	10.43	32.21	149	216	A	V
802.11n HT40 CH 46 5230MHz		5137.1	53.78	-20.22	74	43.12	32.73	10.22	32.29	100	110	P	H
		5149.4	43.75	-10.25	54	33.09	32.73	10.22	32.29	100	110	A	H
	*	5232	101.61	-	-	90.8	32.75	10.32	32.26	100	110	P	H
	*	5232	92.21	-	-	81.4	32.75	10.32	32.26	100	110	A	H
		5377.5	53.55	-20.45	74	42.57	32.78	10.42	32.22	100	110	P	H
		5378.49	43.55	-10.45	54	32.57	32.78	10.42	32.22	100	110	A	H
		5142.8	52.59	-21.41	74	41.93	32.73	10.22	32.29	100	215	P	V
		5145.95	42.95	-11.05	54	32.29	32.73	10.22	32.29	100	215	A	V
	*	5232	93.43	-	-	82.62	32.75	10.32	32.26	100	215	P	V
	*	5232	83.97	-	-	73.16	32.75	10.32	32.26	100	215	A	V
		5431.29	54.01	-19.99	74	43	32.79	10.43	32.21	100	215	P	V
		5418.09	43.09	-10.91	54	32.09	32.78	10.43	32.21	100	215	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 38 5190MHz		10380	43.8	-30.2	74	50.12	36.58	14.27	57.17	100	0	P	H
		15570	49.06	-24.94	74	47.32	41.43	18.55	58.24	100	0	P	H
													H
													H
		10380	43.71	-30.29	74	50.03	36.58	14.27	57.17	100	0	P	V
		15570	50.2	-23.8	74	48.46	41.43	18.55	58.24	100	0	P	V
													V
													V
802.11n HT40 CH 46 5230MHz		10460	44.45	-29.55	74	50.67	36.59	14.32	57.13	100	0	P	H
		15690	48.75	-25.25	74	46.72	41.48	18.7	58.15	100	0	P	H
													H
													H
		10460	43.46	-30.54	74	49.68	36.59	14.32	57.13	100	0	P	V
		15690	48.57	-25.43	74	46.54	41.48	18.7	58.15	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 - 5250~5350MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		5106.8	53.78	-20.22	74	43.23	32.72	10.13	32.3	100	115	P	H
		5141	43.12	-10.88	54	32.46	32.73	10.22	32.29	100	115	A	H
	*	5258	103.99	-	-	93.15	32.75	10.35	32.26	100	115	P	H
	*	5258	93.71	-	-	82.87	32.75	10.35	32.26	100	115	A	H
		5354.07	54.16	-19.84	74	43.22	32.77	10.4	32.23	100	115	P	H
		5351.76	43.59	-10.41	54	32.65	32.77	10.4	32.23	100	115	A	H
		5129.45	52.68	-21.32	74	42.02	32.73	10.22	32.29	377	137	P	V
		5149.25	42.72	-11.28	54	32.06	32.73	10.22	32.29	377	137	A	V
	*	5258	97.99	-	-	87.15	32.75	10.35	32.26	377	137	P	V
	*	5258	87.79	-	-	76.95	32.75	10.35	32.26	377	137	A	V
		5395.76	53.09	-20.91	74	42.11	32.78	10.42	32.22	377	137	P	V
		5434.48	42.95	-11.05	54	31.94	32.79	10.43	32.21	377	137	A	V
802.11a CH 60 5300MHz		5134.55	53.48	-20.52	74	42.82	32.73	10.22	32.29	120	118	P	H
		5147.75	43.46	-10.54	54	32.8	32.73	10.22	32.29	120	118	A	H
	*	5302	104.5	-	-	93.62	32.76	10.37	32.25	120	118	P	H
	*	5302	94.26	-	-	83.38	32.76	10.37	32.25	120	118	A	H
		5365.07	55.71	-18.29	74	44.77	32.77	10.4	32.23	120	118	P	H
		5350	44.43	-9.57	54	33.49	32.77	10.4	32.23	120	118	A	H
		5026.4	52.95	-21.05	74	42.6	32.71	9.96	32.32	373	131	P	V
		5147.9	42.68	-11.32	54	32.02	32.73	10.22	32.29	373	131	A	V
	*	5302	98.35	-	-	87.47	32.76	10.37	32.25	373	131	P	V
	*	5302	88.01	-	-	77.13	32.76	10.37	32.25	373	131	A	V
		5446.8	54.2	-19.8	74	43.17	32.79	10.44	32.2	373	131	P	V
		5426.45	43.05	-10.95	54	32.05	32.78	10.43	32.21	373	131	A	V



802.11a CH 64 5320MHz	*	5318	104.53	-	-	93.64	32.76	10.37	32.24	110	117	P	H
	*	5318	94.14	-	-	83.25	32.76	10.37	32.24	110	117	A	H
		5352.2	56.55	-17.45	74	45.61	32.77	10.4	32.23	110	117	P	H
		5352.53	45.2	-8.8	54	34.26	32.77	10.4	32.23	110	117	A	H
													H
													H
	*	5322	99.22	-	-	88.33	32.76	10.37	32.24	368	140	P	V
	*	5322	88.98	-	-	78.09	32.76	10.37	32.24	368	140	A	V
		5428.21	53.69	-20.31	74	42.69	32.78	10.43	32.21	368	140	P	V
		5350.66	43.42	-10.58	54	32.48	32.77	10.4	32.23	368	140	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		10520	43.87	-30.13	74	50.05	36.58	14.34	57.1	100	0	P	H
		15780	49.1	-24.9	74	46.87	41.51	18.8	58.08	100	0	P	H
													H
													H
		10520	43.93	-30.07	74	50.11	36.58	14.34	57.1	100	0	P	V
		15780	48.73	-25.27	74	46.5	41.51	18.8	58.08	100	0	P	V
													V
													V
802.11a CH 60 5300MHz		10600	43.45	-30.55	74	49.72	36.46	14.39	57.12	100	0	P	H
		15900	48.95	-25.05	74	46.42	41.56	18.95	57.98	100	0	P	H
													H
													H
		10600	44.02	-29.98	74	50.29	36.46	14.39	57.12	100	0	P	V
		15900	49.44	-24.56	74	46.91	41.56	18.95	57.98	100	0	P	V
													V
													V
802.11a CH 64 5320MHz		10640	43.12	-30.88	74	49.42	36.41	14.42	57.13	100	0	P	H
		15960	48.57	-25.43	74	45.86	41.59	19.05	57.93	100	0	P	H
													H
													H
		10640	42.63	-31.37	74	48.93	36.41	14.42	57.13	100	0	P	V
		15960	49.01	-24.99	74	46.3	41.59	19.05	57.93	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		5065.4	53.05	-20.95	74	42.6	32.71	10.05	32.31	100	104	P	H
		5142.2	42.93	-11.07	54	32.27	32.73	10.22	32.29	100	104	A	H
	*	5258	104.37	-	-	93.53	32.75	10.35	32.26	100	104	P	H
	*	5258	94.22	-	-	83.38	32.75	10.35	32.26	100	104	A	H
		5358.58	53.62	-20.38	74	42.68	32.77	10.4	32.23	100	104	P	H
		5351.76	43.38	-10.62	54	32.44	32.77	10.4	32.23	100	104	A	H
		5118.95	52.75	-21.25	74	42.2	32.72	10.13	32.3	382	170	P	V
		5141.75	42.64	-11.36	54	31.98	32.73	10.22	32.29	382	170	A	V
	*	5261	97.66	-	-	86.82	32.75	10.35	32.26	382	170	P	V
	*	5261	87.63	-	-	76.79	32.75	10.35	32.26	382	170	A	V
		5416.11	53.29	-20.71	74	42.29	32.78	10.43	32.21	382	170	P	V
		5425.24	42.92	-11.08	54	31.92	32.78	10.43	32.21	382	170	A	V
802.11n HT20 CH 60 5300MHz		5142.65	53.33	-20.67	74	42.67	32.73	10.22	32.29	100	114	P	H
		5148.35	43.22	-10.78	54	32.56	32.73	10.22	32.29	100	114	A	H
	*	5302	106.69	-	-	95.81	32.76	10.37	32.25	100	114	P	H
	*	5302	95.01	-	-	84.13	32.76	10.37	32.25	100	114	A	H
		5356.6	55.76	-18.24	74	44.82	32.77	10.4	32.23	100	114	P	H
		5350	44.22	-9.78	54	33.28	32.77	10.4	32.23	100	114	A	H
		5149.1	52.81	-21.19	74	42.15	32.73	10.22	32.29	129	216	P	V
		5148.65	42.63	-11.37	54	31.97	32.73	10.22	32.29	129	216	A	V
	*	5298	97.73	-	-	86.85	32.76	10.37	32.25	129	216	P	V
	*	5298	87.2	-	-	76.32	32.76	10.37	32.25	129	216	A	V
		5364.63	53.45	-20.55	74	42.51	32.77	10.4	32.23	129	216	P	V
		5360.78	43.1	-10.9	54	32.16	32.77	10.4	32.23	129	216	A	V



802.11n HT20 CH 64 5320MHz	*	5322	104.77	-	-	93.88	32.76	10.37	32.24	111	114	P	H
	*	5322	94.27	-	-	83.38	32.76	10.37	32.24	111	114	A	H
		5354.07	56.01	-17.99	74	45.07	32.77	10.4	32.23	111	114	P	H
		5354.18	44.68	-9.32	54	33.74	32.77	10.4	32.23	111	114	A	H
													H
													H
	*	5318	96.63	-	-	85.74	32.76	10.37	32.24	124	216	P	V
	*	5318	86.59	-	-	75.7	32.76	10.37	32.24	124	216	A	V
		5414.35	53.61	-20.39	74	42.61	32.78	10.43	32.21	124	216	P	V
		5356.82	43.08	-10.92	54	32.14	32.77	10.4	32.23	124	216	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 52 5260MHz		10520	43.65	-30.35	74	49.83	36.58	14.34	57.1	100	0	P	H
		15780	48.13	-25.87	74	45.9	41.51	18.8	58.08	100	0	P	H
													H
													H
		10520	43.89	-30.11	74	50.07	36.58	14.34	57.1	100	0	P	V
		15780	48.44	-25.56	74	46.21	41.51	18.8	58.08	100	0	P	V
													V
													V
802.11n HT20 CH 60 5300MHz		10600	43.46	-30.54	74	49.73	36.46	14.39	57.12	100	0	P	H
		15900	48.58	-25.42	74	46.05	41.56	18.95	57.98	100	0	P	H
													H
													H
		10600	43.4	-30.6	74	49.67	36.46	14.39	57.12	100	0	P	V
		15900	48.49	-25.51	74	45.96	41.56	18.95	57.98	100	0	P	V
													V
													V
802.11n HT20 CH 64 5320MHz		10640	42.99	-31.01	74	49.29	36.41	14.42	57.13	100	0	P	H
		15960	48.29	-25.71	74	45.58	41.59	19.05	57.93	100	0	P	H
													H
													H
		10640	43.49	-30.51	74	49.79	36.41	14.42	57.13	100	0	P	V
		15960	47.76	-26.24	74	45.05	41.59	19.05	57.93	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		5121.95	53.16	-20.84	74	42.61	32.72	10.13	32.3	100	113	P	H
		5123.45	43.67	-10.33	54	33.1	32.73	10.13	32.29	100	113	A	H
	*	5272	101.6	-	-	90.76	32.75	10.35	32.26	100	113	P	H
	*	5272	91.81	-	-	80.97	32.75	10.35	32.26	100	113	P	H
		5350	55.06	-18.94	74	44.12	32.77	10.4	32.23	100	113	P	H
		5361.99	43.73	-10.27	54	32.79	32.77	10.4	32.23	100	113	A	H
		5119.4	52.79	-21.21	74	42.24	32.72	10.13	32.3	145	216	P	V
		5141.9	42.87	-11.13	54	32.21	32.73	10.22	32.29	145	216	A	V
	*	5272	93.07	-	-	82.23	32.75	10.35	32.26	145	216	P	V
	*	5272	83.75	-	-	72.91	32.75	10.35	32.26	145	216	P	V
		5375.96	52.93	-21.07	74	41.97	32.77	10.42	32.23	145	216	P	V
		5441.96	43.16	-10.84	54	32.15	32.79	10.43	32.21	145	216	A	V
802.11n HT40 CH 62 5310MHz		5085.5	53.76	-20.24	74	43.3	32.72	10.05	32.31	100	112	P	H
		5137.25	43.45	-10.55	54	32.79	32.73	10.22	32.29	100	112	A	H
	*	5308	102.28	-	-	91.4	32.76	10.37	32.25	100	112	P	H
	*	5308	92.8	-	-	81.92	32.76	10.37	32.25	100	112	A	H
		5350.22	64.38	-9.62	74	53.44	32.77	10.4	32.23	100	112	P	H
		5350	47.5	-6.5	54	36.56	32.77	10.4	32.23	100	112	A	H
		5103.35	52.57	-21.43	74	42.02	32.72	10.13	32.3	125	215	P	V
		5148.2	42.81	-11.19	54	32.15	32.73	10.22	32.29	125	215	A	V
	*	5312	93.89	-	-	83	32.76	10.37	32.24	125	215	P	V
	*	5312	84.2	-	-	73.31	32.76	10.37	32.24	125	215	A	V
		5350.99	54.57	-19.43	74	43.63	32.77	10.4	32.23	125	215	P	V
		5350.77	43.68	-10.32	54	32.74	32.77	10.4	32.23	125	215	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 54 5270MHz		10540	44.06	-29.94	74	50.25	36.55	14.37	57.11	100	0	P	H
		15810	48.29	-25.71	74	45.97	41.52	18.85	58.05	100	0	P	H
													H
													H
		10540	43.72	-30.28	74	49.91	36.55	14.37	57.11	100	0	P	V
		15810	48.48	-25.52	74	46.16	41.52	18.85	58.05	100	0	P	V
													V
													V
802.11n HT40 CH 62 5310MHz		10620	42.99	-31.01	74	49.26	36.43	14.42	57.12	100	0	P	H
		15930	48.21	-25.79	74	45.6	41.57	19	57.96	100	0	P	H
													H
													H
		10620	43.32	-30.68	74	49.59	36.43	14.42	57.12	100	0	P	V
		15930	47.97	-26.03	74	45.36	41.57	19	57.96	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		5458	56.28	-17.72	74	45.25	32.79	10.44	32.2	108	101	P	H
		5468.88	45.29	-8.71	54	34.26	32.79	10.44	32.2	108	101	A	H
	*	5502	104.47	-	-	93.41	32.8	10.45	32.19	108	101	P	H
	*	5502	94.18	-	-	83.12	32.8	10.45	32.19	108	101	A	H
													H
													H
		5415.28	53.85	-20.15	74	42.85	32.78	10.43	32.21	100	127	P	V
		5469.84	43.48	-10.52	54	32.45	32.79	10.44	32.2	100	127	A	V
	*	5499	98	-	-	86.94	32.8	10.45	32.19	100	127	P	V
	*	5499	87.69	-	-	76.63	32.8	10.45	32.19	100	127	A	V
													V
													V
802.11a CH 116 5580MHz		5445.52	53.73	-20.27	74	42.71	32.79	10.43	32.2	117	104	P	H
		5427.28	43.57	-10.43	54	32.57	32.78	10.43	32.21	117	104	A	H
	*	5582	104.25	-	-	92.97	32.97	10.47	32.16	117	104	P	H
	*	5582	94	-	-	82.72	32.97	10.47	32.16	117	104	A	H
		5756.28	53.61	-20.39	74	41.87	33.32	10.53	32.11	117	104	P	H
		5738.28	43.57	-10.43	54	31.87	33.28	10.53	32.11	117	104	A	H
		5420.24	53.16	-20.84	74	42.16	32.78	10.43	32.21	100	112	P	V
		5435.12	42.93	-11.07	54	31.92	32.79	10.43	32.21	100	112	A	V
	*	5578	98.57	-	-	87.33	32.94	10.47	32.17	100	112	P	V
	*	5578	88.28	-	-	77.04	32.94	10.47	32.17	100	112	A	V
		5751.96	54.03	-19.97	74	42.29	33.32	10.53	32.11	100	112	P	V
		5734.6	43.54	-10.46	54	31.84	33.28	10.53	32.11	100	112	A	V



802.11a CH 140 5700MHz	*	5698	103.11	-	-	91.54	33.18	10.52	32.13	111	106	P	H
	*	5698	92.96	-	-	81.39	33.18	10.52	32.13	111	106	A	H
		5733.48	55.99	-18.01	74	44.33	33.25	10.53	32.12	111	106	P	H
		5725.48	44.81	-9.19	54	33.16	33.25	10.52	32.12	111	106	A	H
													H
													H
	*	5699	97.31	-	-	85.74	33.18	10.52	32.13	132	142	P	V
	*	5699	87.43	-	-	75.86	33.18	10.52	32.13	132	142	A	V
		5760.84	54.5	-19.5	74	42.76	33.32	10.53	32.11	132	142	P	V
		5726.84	43.83	-10.17	54	32.17	33.25	10.53	32.12	132	142	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	42.34	-31.66	74	48.99	35.9	14.65	57.2	100	0	P	H
		16500	47.98	-26.02	74	44.29	41.7	19.09	57.1	100	0	P	H
													H
													H
		11000	42.8	-31.2	74	49.45	35.9	14.65	57.2	100	0	P	V
		16500	48.03	-25.97	74	44.34	41.7	19.09	57.1	100	0	P	V
													V
													V
802.11a CH 116 5580MHz		11160	42.68	-31.32	74	49.03	36	14.75	57.1	100	0	P	H
		16740	48.55	-25.45	74	44.97	41.6	19.08	57.1	100	0	P	H
													H
													H
		11160	43.05	-30.95	74	49.4	36	14.75	57.1	100	0	P	V
		16740	47.63	-26.37	74	44.05	41.6	19.08	57.1	100	0	P	V
													V
													V
802.11a CH 140 5700MHz		11400	43.22	-30.78	74	49.13	36.14	14.91	56.96	100	0	P	H
		17100	46.82	-27.18	74	43.45	41.66	19.07	57.36	100	0	P	H
													H
													H
		11400	43.37	-30.63	74	49.28	36.14	14.91	56.96	100	0	P	V
		17100	46.48	-27.52	74	43.11	41.66	19.07	57.36	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		5445.36	55.66	-18.34	74	44.65	32.79	10.43	32.21	100	113	P	H
		5470	44.93	-9.07	54	33.9	32.79	10.44	32.2	100	113	A	H
	*	5502	103.63	-	-	92.57	32.8	10.45	32.19	100	113	P	H
	*	5502	93.3	-	-	82.24	32.8	10.45	32.19	100	113	A	H
													H
													H
		5468.72	53.4	-20.6	74	42.37	32.79	10.44	32.2	100	212	P	V
		5447.44	43.11	-10.89	54	32.08	32.79	10.44	32.2	100	212	A	V
	*	5503	97.13	-	-	86.07	32.8	10.45	32.19	100	212	P	V
	*	5503	86.7	-	-	75.64	32.8	10.45	32.19	100	212	A	V
													V
													V
802.11n HT20 CH 116 5580MHz		5443.12	53.5	-20.5	74	42.49	32.79	10.43	32.21	108	114	P	H
		5427.44	43.7	-10.3	54	32.7	32.78	10.43	32.21	108	114	A	H
	*	5578	103.71	-	-	92.47	32.94	10.47	32.17	108	114	P	H
	*	5578	93.43	-	-	82.19	32.94	10.47	32.17	108	114	A	H
		5752.28	53.53	-20.47	74	41.79	33.32	10.53	32.11	108	114	P	H
		5733.24	43.75	-10.25	54	32.09	33.25	10.53	32.12	108	114	A	H
		5450.48	53.47	-20.53	74	42.44	32.79	10.44	32.2	100	119	P	V
		5457.04	42.96	-11.04	54	31.93	32.79	10.44	32.2	100	119	A	V
	*	5578	96.45	-	-	85.21	32.94	10.47	32.17	100	119	P	V
	*	5578	86.48	-	-	75.24	32.94	10.47	32.17	100	119	A	V
		5761	54.11	-19.89	74	42.37	33.32	10.53	32.11	100	119	P	V
		5736.76	43.5	-10.5	54	31.8	33.28	10.53	32.11	100	119	A	V



802.11n HT20 CH 140 5700MHz	*	5698	102.03	-	-	90.46	33.18	10.52	32.13	132	113	P	H
	*	5698	91.55	-	-	79.98	33.18	10.52	32.13	132	113	A	H
		5725.64	56.32	-17.68	74	44.67	33.25	10.52	32.12	132	113	P	H
		5725	45.03	-8.97	54	33.38	33.25	10.52	32.12	132	113	A	H
													H
													H
	*	5702	95.22	-	-	83.61	33.21	10.52	32.12	102	123	P	V
	*	5702	85.39	-	-	73.78	33.21	10.52	32.12	102	123	A	V
		5728.2	53.82	-20.18	74	42.16	33.25	10.53	32.12	102	123	P	V
		5725	43.85	-10.15	54	32.2	33.25	10.52	32.12	102	123	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 100 5500MHz		11000	42.45	-31.55	74	49.1	35.9	14.65	57.2	100	0	P	H
		16500	47.99	-26.01	74	44.3	41.7	19.09	57.1	100	0	P	H
													H
													H
		11000	43.7	-30.3	74	50.35	35.9	14.65	57.2	100	0	P	V
		16500	48.8	-25.2	74	45.11	41.7	19.09	57.1	100	0	P	V
													V
													V
802.11n HT20 CH 116 5580MHz		11160	43.16	-30.84	74	49.51	36	14.75	57.1	100	0	P	H
		16740	47.29	-26.71	74	43.71	41.6	19.08	57.1	100	0	P	H
													H
													H
		11160	42.33	-31.67	74	48.68	36	14.75	57.1	100	0	P	V
		16740	47.68	-26.32	74	44.1	41.6	19.08	57.1	100	0	P	V
													V
													V
802.11n HT20 CH 140 5700MHz		11400	43.31	-30.69	74	49.22	36.14	14.91	56.96	100	0	P	H
		17100	47.76	-26.24	74	44.39	41.66	19.07	57.36	100	0	P	H
													H
													H
		11400	42.99	-31.01	74	48.9	36.14	14.91	56.96	100	0	P	V
		17100	48.11	-25.89	74	44.74	41.66	19.07	57.36	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		5470	64.72	-9.28	74	53.69	32.79	10.44	32.2	112	115	P	H
		5469.84	47.67	-6.33	54	36.64	32.79	10.44	32.2	112	115	A	H
	*	5510	101.27	-	-	90.21	32.8	10.45	32.19	112	115	P	H
	*	5510	91.51	-	-	80.45	32.8	10.45	32.19	112	115	A	H
		5734.36	54.17	-19.83	74	42.51	33.25	10.53	32.12	112	115	P	H
		5758.2	43.71	-10.29	54	31.97	33.32	10.53	32.11	112	115	A	H
		5469.36	58.33	-15.67	74	47.3	32.79	10.44	32.2	105	121	P	V
		5469.68	44.27	-9.73	54	33.24	32.79	10.44	32.2	105	121	A	V
	*	5508	93.57	-	-	82.51	32.8	10.45	32.19	105	121	P	V
	*	5508	84.48	-	-	73.42	32.8	10.45	32.19	105	121	A	V
		5761.88	53.7	-20.3	74	41.96	33.32	10.53	32.11	105	121	P	V
		5758.28	43.7	-10.3	54	31.96	33.32	10.53	32.11	105	121	A	V
802.11n HT40 CH 110 5550MHz		5468.4	54.91	-19.09	74	43.88	32.79	10.44	32.2	103	116	P	H
		5468.88	43.65	-10.35	54	32.62	32.79	10.44	32.2	103	116	A	H
	*	5548	100.3	-	-	89.11	32.9	10.46	32.17	103	116	P	H
	*	5548	90.57	-	-	79.38	32.9	10.46	32.17	103	116	A	H
		5761.32	53.99	-20.01	74	42.25	33.32	10.53	32.11	103	116	P	H
		5738.12	43.79	-10.21	54	32.09	33.28	10.53	32.11	103	116	A	H
		5406.8	53.23	-20.77	74	42.24	32.78	10.43	32.22	100	119	P	V
		5439.12	43.19	-10.81	54	32.18	32.79	10.43	32.21	100	119	A	V
	*	5552	93.77	-	-	82.58	32.9	10.46	32.17	100	119	P	V
	*	5552	83.87	-	-	72.68	32.9	10.46	32.17	100	119	A	V
		5729.72	53.79	-20.21	74	42.13	33.25	10.53	32.12	100	119	P	V
		5739.32	43.75	-10.25	54	32.05	33.28	10.53	32.11	100	119	A	V



802.11n HT40 CH 134 5670MHz		5436.08	53.01	-20.99	74	42	32.79	10.43	32.21	131	115	P	H
		5457.04	43.44	-10.56	54	32.41	32.79	10.44	32.2	131	115	A	H
	*	5668	99.23	-	-	87.72	33.14	10.5	32.13	131	115	P	H
	*	5668	89.89	-	-	78.38	33.14	10.5	32.13	131	115	A	H
		5748.28	55.65	-18.35	74	43.95	33.28	10.53	32.11	131	115	P	H
		5725.48	44.3	-9.7	54	32.65	33.25	10.52	32.12	131	115	A	H
		5423.12	52.95	-21.05	74	41.95	32.78	10.43	32.21	106	123	P	V
		5443.44	43.15	-10.85	54	32.14	32.79	10.43	32.21	106	123	A	V
	*	5672	92.48	-	-	80.97	33.14	10.5	32.13	106	123	P	V
	*	5672	82.9	-	-	71.39	33.14	10.5	32.13	106	123	A	V
		5761.48	53.48	-20.52	74	41.74	33.32	10.53	32.11	106	123	P	V
		5751.8	43.77	-10.23	54	32.03	33.32	10.53	32.11	106	123	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz

WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 102 5510MHz		11020	44.09	-29.91	74	50.69	35.91	14.68	57.19	100	0	P	H
		16530	47.54	-26.46	74	43.86	41.69	19.09	57.1	100	0	P	H
													H
													H
		11020	42.68	-31.32	74	49.28	35.91	14.68	57.19	100	0	P	V
		16530	48.97	-25.03	74	45.29	41.69	19.09	57.1	100	0	P	V
													V
													V
802.11n HT40 CH 110 5550MHz		11100	43.13	-30.87	74	49.58	35.96	14.73	57.14	100	0	P	H
		16650	48.35	-25.65	74	44.73	41.64	19.08	57.1	100	0	P	H
													H
													H
		11100	43.02	-30.98	74	49.47	35.96	14.73	57.14	100	0	P	V
		16650	47.86	-26.14	74	44.24	41.64	19.08	57.1	100	0	P	V
													V
													V
802.11n HT40 CH 134 5670MHz		11340	42.51	-31.49	74	48.53	36.1	14.88	57	100	0	P	H
		17010	47.97	-26.03	74	44.5	41.53	19.08	57.14	100	0	P	H
													H
													H
		11340	42.97	-31.03	74	48.99	36.1	14.88	57	100	0	P	V
		17010	47.83	-26.17	74	44.36	41.53	19.08	57.14	100	0	P	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

WIFI 802.11a (LF @ 3m)

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a LF		35.4	36.1	-3.9	40	49.65	15.8	0.92	30.27	100	0	P	H
		42.15	34.5	-5.5	40	52.17	11.76	0.92	30.35	-	-	P	H
		99.93	25.08	-18.42	43.5	43.61	10.4	1.48	30.41	-	-	P	H
		546.4	23.44	-22.56	46	30.84	19.22	3.09	29.71	-	-	P	H
		698.3	24.83	-21.17	46	30.26	20.65	3.4	29.48	-	-	P	H
		806.8	27.12	-18.88	46	30.55	22.21	3.72	29.36	-	-	P	H
													H
													H
													H
													H
													H
													H
		33.51	35.87	-4.13	40	48.38	16.82	0.92	30.25	100	0	P	V
		41.07	29.23	-10.77	40	45.53	13.12	0.92	30.34	-	-	P	V
		63.75	25.06	-14.94	40	48.3	5.98	1.22	30.44	-	-	P	V
		466.6	21.03	-24.97	46	30.67	17.46	2.77	29.87	-	-	P	V
		550.6	24.33	-21.67	46	31.2	19.74	3.09	29.7	-	-	P	V
		626.2	24.58	-21.42	46	30.43	20.39	3.33	29.57	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Emission below 1GHz

WIFI 802.11n HT20 (LF @ 3m)[illegible]

Emission below 1GHz

WIFI 802.11n HT40 (LF @ 3m)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.		(MHz)	(dBμV/m)	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1				(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 LF		36.21	23.99	-16.01	40	37.54	15.8	0.92	30.27	100	0	P	H
		98.31	20.8	-22.7	43.5	39.81	9.92	1.48	30.41	-	-	P	H
		143.94	18.56	-24.94	43.5	35.73	11.5	1.71	30.38	-	-	P	H
		431.6	20.64	-25.36	46	30.98	16.92	2.68	29.94	-	-	P	H
		552.7	24.09	-21.91	46	30.88	19.82	3.09	29.7	-	-	P	H
		689.9	24.8	-21.2	46	30.49	20.4	3.4	29.49	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
		34.59	34.32	-5.68	40	47.36	16.3	0.92	30.26	100	0	P	V
		67.53	21.16	-18.84	40	44.14	6.24	1.22	30.44	-	-	P	V
		136.38	16.17	-27.33	43.5	33.34	11.5	1.71	30.38	-	-	P	V
		498.8	22.44	-23.56	46	31.31	17.98	2.96	29.81	-	-	P	V
		650.7	25.25	-20.75	46	31.03	20.39	3.37	29.54	-	-	P	V
		737.5	26.89	-19.11	46	30.68	22.11	3.54	29.44	-	-	P	V
													V
												V	
												V	
												V	
												V	
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	Peak or Average
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.