



SAR EVALUATION REPORT
CLASS II PERMISSIVE CHANGE

FCC 47 CFR § 2.1093
IEEE Std 1528-2013

For
GSM/WCDMA/LTE Phone with BT, DTS/UNII a/b/g/n/ac & NFC

FCC ID: PY7-PM0903

Report Number: 16U23577-S2V2
Issue Date: 6/8/2016

Prepared for
SONY MOBILE COMMUNICATIONS INC.
4-12-3 HIGASHI-SHINAGAWA
SHINAGAWA-KU, TOKYO, 140-0002, JAPAN

Prepared by
UL VERIFICATION SERVICES INC.
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Date	Revisions	Revised By
V1	6/6/2016	Initial Issue	--
V2	6/8/2016	Section 6.2: Changed LTE to Release 10	Coltyce Sanders

Table of Contents

1. Attestation of Test Results 5

2. Test Specification, Methods and Procedures..... 6

3. Facilities and Accreditation 7

4. SAR Measurement System & Test Equipment 8

 4.1. SAR Measurement System..... 8

 4.2. SAR Scan Procedures..... 9

 4.3. Test Equipment..... 11

5. Measurement Uncertainty..... 11

6. Device Under Test (DUT) Information 12

 6.1. DUT Description 12

 6.2. Wireless Technologies..... 13

 6.3. Maximum Output Power from Tune-up Procedure 13

 6.4. General LTE SAR Test and Reporting Considerations..... 14

 6.5. Test Rationale..... 14

7. RF Exposure Conditions (Test Configurations)..... 15

8. Dielectric Property Measurements & System Check 16

 8.1. Dielectric Property Measurements 16

 8.2. System Check..... 17

9. Conducted Output Power Measurements..... 18

 9.1. LTE..... 18

10. Measured and Reported (Scaled) SAR Results..... 21

 10.2. LTE Band 26 (15MHz Bandwidth) 22

11. SAR Measurement Variability..... 22

12. Simultaneous Transmission SAR Analysis..... 23

 12.1. Sum of the SAR for LTE Band 26 & Wi-Fi DTS 24

 12.2. Sum of the SAR for LTE Band 26 & Wi-Fi U-NII & BT 24

 12.3. Sum of the SAR for LTE Band 26 & Wi-Fi DTS Chain 0 & Wi-Fi U-NII Chain 1 25

 12.4. Sum of the SAR for LTE Band 26 & Wi-Fi DTS Chain 1 & Wi-Fi U-NII Chain 0 & BT 25

Appendixes 26

 16U23577-S2V1 SAR_App A Setup Photos..... 26

 16U23577-S2V1 SAR_App B System Check Plots 26

 16U23577-S2V1 SAR_App C Highest Test Plots 26

16U23577-S2V1 SAR_App D Tissue Ingredients	26
16U23577-S2V1 SAR_App E Probe Cal. Certificates.....	26
16U23577-S2V1 SAR_App F Dipole Cal. Certificates	26

1. Attestation of Test Results

Applicant Name	SONY MOBILE COMMUNICATIONS INC.			
FCC ID	PY7-PM0903			
Applicable Standards	FCC 47 CFR § 2.1093 Published RF exposure KDB procedures IEEE Std 1528-2013			
Exposure Category	SAR Limits (W/Kg)			
	Peak spatial-average(1g of tissue)		Extremities (hands, wrists, ankles, etc.) (10g of tissue)	
General population / Uncontrolled exposure	1.6		4	
RF Exposure Conditions	Equipment Class - Highest Reported SAR (W/kg)			
	PCE	DTS	NII	DSS
Head	0.426	0.535	0.388	N/A
Body-worn*	0.429	0.048	0.038	
Hotspot/Wi-Fi Direct	0.492	0.091	N/A	
Simultaneous TX	1.130		1.014	
Date Tested	5/31/2016 to 6/2/2016			
Test Results	Pass			

Note: The proposed CIIPC to add LTE band 26 is via software and does not affect previously reported values for other modes. The SAR measurement results from the original filing can be found in FCC SAR report FA571615. This report only contains the SAR values for the added LTE Band. Please refer to the original filing for the highest SAR values. The Wi-Fi and BT results from the original filing have been used in this report for simultaneous transmission analysis. The Wi-Fi and BT results from the original filing are listed above.

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government (NIST Handbook 150, Annex A). This report is written to support regulatory compliance of the applicable standards stated above.

Approved & Released By: 	Prepared By: 
Devin Chang Senior Engineer UL Verification Services Inc.	AJ Newcomer Laboratory Engineer UL Verification Services Inc.

2. Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE STD 1528-2013, the following FCC Published RF exposure [KDB](#) procedures:

- 447498 D01 General RF Exposure Guidance v06
- 447498 D03 Supplement C Cross-Reference v01
- 648474 D04 Handset SAR v01r03
- 690783 D01 SAR Listings on Grants v01r03
- 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04
- 865664 D02 RF Exposure Reporting v01r02
- 941225 D05 SAR for LTE Devices v02r05
- 941225 D05A LTE Rel.10 KDB Inquiry Sheet v01r02
- 941225 D06 Hotspot Mode v02r01

3. Facilities and Accreditation

The test sites and measurement facilities used to collect data are located at


47173 Benicia Street	47266 Benicia Street
SAR Lab A	SAR Lab 1
SAR Lab B	SAR Lab 2
SAR Lab C	SAR Lab 3
SAR Lab D	SAR Lab 4
SAR Lab E	
SAR Lab F	
SAR Lab G	
SAR Lab H	

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0.

4. SAR Measurement System & Test Equipment

4.1. SAR Measurement System

The DASY5 system used for performing compliance tests consists of the following items:

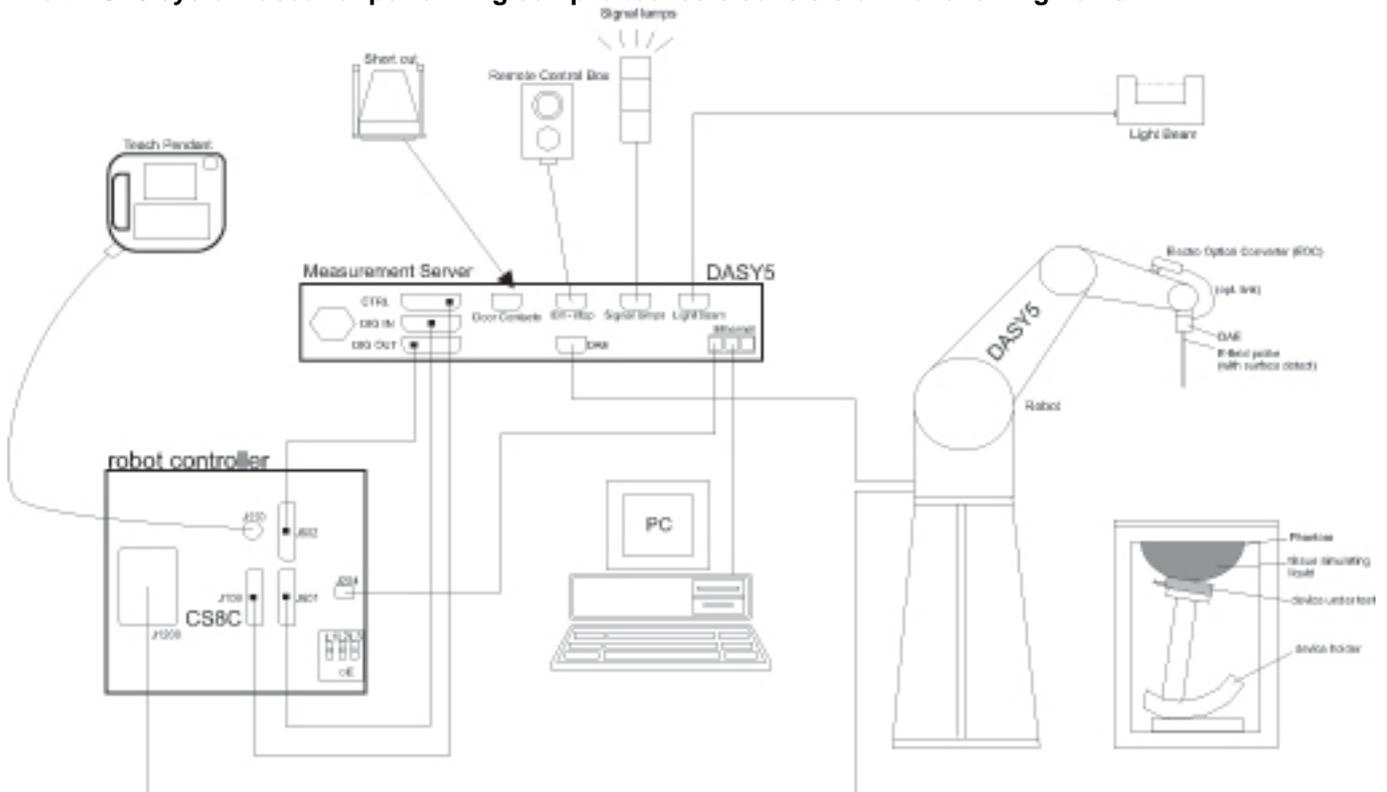

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

4.2. SAR Scan Procedures

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Area Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

Zoom Scan Parameters extracted from KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

		≤ 3 GHz	> 3 GHz	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan (FCC only)

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation the extrapolated distance should not be larger than the step size in Z-direction.

4.3. Test Equipment

The measuring equipment used to perform the tests documented in this report has been calibrated in accordance with the manufacturers' recommendations, and is traceable to recognized national standards.

Dielectric Property Measurements

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Network Analyzer	Agilent	8753ES	MY40001647	7/28/2016
Dielectric Probe kit	SPEAG	DAK-3.5	1087	11/10/2016
Shorting block	SPEAG	DAK-3.5 Short	SM DAK 200 BA	11/10/2016
Thermometer	Fisher Scientific	Traceable	140493798	8/4/2016

System Check

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Synthesized Signal Generator	HP	8665B	3546A00784	6/27/2016
Power Meter	HP	437B	3125U09248	9/3/2016
Power Meter	HP	437B	3125U09516	9/17/2016
Power Sensor	Agilent	8481A	2349A36506	9/16/2016
Power Sensor	Agilent	8481A	3318A92374	9/16/2016
Amplifier	MITEQ	AMF-4D-00400600-50-30P	1622052	N/A
Bi-directional coupler	Werlatone, Inc.	C8060-102	2711	N/A
DC Power Supply	Sorensen Ametek	XT 15-4	1319A02780	N/A
E-Field Probe (SAR Lab 3)	SPEAG	EX3DV4	3901	1/26/2017
Data Acquisition Electronics (SAR Lab 3)	SPEAG	DAE4	1360	3/16/2017
System Validation Dipole	SPEAG	D835V2	4d142	9/23/2016
Thermometer (SAR Lab 3)	EXTECH	445703	CCS-237	6/5/2016

Other

Name of Equipment	Manufacturer	Type/Model	Serial No.	Cal. Due Date
Base Station Simulator	R & S	CMW500	134851-CY	3/2/2017

5. Measurement Uncertainty

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

6. Device Under Test (DUT) Information

6.1. DUT Description

Device Dimension	Overall (Length x Width): 145.5 mm x 72.5 mm Overall Diagonal: 159 mm Display Diagonal: 133 mm									
Back Cover	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.									
Battery Options	<input checked="" type="checkbox"/> The rechargeable battery is not user accessible.									
Accessory	Headset									
Wireless Router (Hotspot)	Wi-Fi Hotspot mode permits the device to share its cellular data connection with other Wi-Fi-enabled devices. <input checked="" type="checkbox"/> Mobile Hotspot (Wi-Fi 2.4 GHz) <input type="checkbox"/> Mobile Hotspot (Wi-Fi 5 GHz)									
Wi-Fi Direct	Wi-Fi Direct enabled devices transfer data directly between each other <input checked="" type="checkbox"/> Wi-Fi Direct (Wi-Fi 2.4 GHz) <input type="checkbox"/> Wi-Fi Direct (Wi-Fi 5 GHz)									
Test sample information	<table border="1"> <thead> <tr> <th>S/N</th> <th>IMEI</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>BH90011C4F</td> <td>4402455484828</td> <td>SAR RAD LTE B26 #1</td> </tr> <tr> <td>BH9000QY4F</td> <td>4402455484794</td> <td>SAR LTE POWER #1</td> </tr> </tbody> </table>	S/N	IMEI	Notes	BH90011C4F	4402455484828	SAR RAD LTE B26 #1	BH9000QY4F	4402455484794	SAR LTE POWER #1
S/N	IMEI	Notes								
BH90011C4F	4402455484828	SAR RAD LTE B26 #1								
BH9000QY4F	4402455484794	SAR LTE POWER #1								
Hardware Version	A									
Software Version	32.0.D.0.328									

6.2. Wireless Technologies

Wireless technologies	Frequency bands	Operating mode		Duty Cycle used for SAR testing
GSM	850 1900	Voice (GMSK)	GPRS Multi-Slot Class:	GSM Voice: 12.5% (E)GPRS: 1 Slot: 12.5% 2 Slots: 25% 3 Slots: 37.5% 4 Slots: 50%
		GPRS (GMSK)	<input type="checkbox"/> Class 8 - 1 Up, 4 Down	
		EGPRS (8PSK)	<input type="checkbox"/> Class 10 - 2 Up, 4 Down	
			<input type="checkbox"/> Class 12 - 4 Up, 4 Down	
			<input checked="" type="checkbox"/> Class 33 - 4 Up, 5 Down	
Does this device support DTM (Dual Transfer Mode)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
W-CDMA (UMTS)	Band II Band V	UMTS Rel. 99 (Voice & Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 7)		100%
LTE	FDD Band 5 FDD Band 7 FDD Band 13 FDD Band 17 FDD Band 26 TDD Band 41	QPSK		100% (FDD) 63.3% (TDD)
		16QAM		
		<input type="checkbox"/> Rel. 10 Does not support Carrier Aggregation (CA)		
		<input type="checkbox"/> Rel. 10 Carrier Aggregation (1 Uplink and 2 Downlinks)		
		<input checked="" type="checkbox"/> Rel. 10 Carrier Aggregation (2 Uplink and 2 Downlinks) (No Band Combinations are supported for Carrier Aggregation)		
Does this device support SV-LTE (1xRTT-LTE)? <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No				
Wi-Fi	2.4 GHz	802.11b 802.11g 802.11n (HT20)		100%
	5 GHz	802.11a		100%
		802.11n (HT20)		
		802.11n (HT40)		
	802.11ac (VHT20)			
	802.11ac (VHT40)			
	802.11ac (VHT80)			
Does this device support bands 5.60 ~ 5.65 GHz? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Does this device support Band gap channel(s)? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No				
Bluetooth	2.4 GHz	Version 4.2 LE		77.5% (DH5)

6.3. Maximum Output Power from Tune-up Procedure

KDB 447498 sec.4.1.(3) at the maximum rated output power and within the tune-up tolerance range specified for the product, but not more than 2 dB lower than the maximum tune-up tolerance limit

LTE				Data			
Band	BW	CH	RB Config	QPSK		16QAM	
				Target [dBm]	Tolerance +/-[dB]	Target [dBm]	Tolerance +/-[dB]
LTEB26	1.4MHz	Low	1RB	23.7	-1.7~+1.0	22.7	-1.7~+1.0
		Mid	50% RB	23.7	-1.7~+1.0	22.7	-1.7~+1.0
		High	100% RB	22.7	-1.7~+1.0	21.7	-1.7~+1.0
	3MHz, 5MHz 10MHz, 15MHz	Low	1RB	23.7	-1.7~+1.0	22.7	-1.7~+1.0
		Mid	50% RB	22.7	-1.7~+1.0	21.7	-1.7~+1.0
		High	100% RB	22.7	-1.7~+1.0	21.7	-1.7~+1.0

6.4. General LTE SAR Test and Reporting Considerations

Item	Description																																												
Frequency range, Channel Bandwidth, Numbers and Frequencies	Band 26	Frequency range: 814 - 849 MHz																																											
		Channel Bandwidth																																											
		20 MHz	15 MHz	10 MHz	5 MHz	3 MHz	1.4 MHz																																						
	Low			26740/ 819	26715/ 816.5	26705/ 815.5	26697/ 814.7																																						
Mid		26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5	26865/ 831.5																																							
High			26990/ 844	27015/ 846.5	27025/ 847.5	27033/ 848.3																																							
LTE transmitter and antenna implementation	Refer to Antenna distance document.																																												
Maximum power reduction (MPR)	<p align="center">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</p> <table border="1"> <thead> <tr> <th rowspan="2">Modulation</th> <th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th> <th rowspan="2">MPR (dB)</th> </tr> <tr> <th>1.4 MHz</th> <th>3.0 MHz</th> <th>5 MHz</th> <th>10 MHz</th> <th>15 MHz</th> <th>20 MHz</th> </tr> </thead> <tbody> <tr> <td>QPSK</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>≤ 5</td> <td>≤ 4</td> <td>≤ 8</td> <td>≤ 12</td> <td>≤ 16</td> <td>≤ 18</td> <td>≤ 1</td> </tr> <tr> <td>16 QAM</td> <td>> 5</td> <td>> 4</td> <td>> 8</td> <td>> 12</td> <td>> 16</td> <td>> 18</td> <td>≤ 2</td> </tr> </tbody> </table> <p>MPR Built-in by design A-MPR (additional MPR) was disabled during SAR testing</p>							Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																						
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																							
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																						
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																						
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																						
Power reduction	No																																												
Spectrum plots for RB configurations	A properly configured base station simulator was used for the SAR and power measurements; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																												

6.5. Test Rationale

FCC ID: PY7-PM0903 Original was previously tested for all wireless technologies and bands except LTE Band 26. The results for these tests are in FCC SAR report FA571615. LTE band 26 has subsequently been added to FCC ID: PY7-PM0903 Original through a software change. This report contains test results for LTE band 26 only. The Wi-Fi and BT results from FCC SAR report FA571615 have been used in this report for simultaneous transmission analysis.

7. RF Exposure Conditions (Test Configurations)

Refer to “Antenna distance document” submission for the specific details of the antenna-to-antenna and antenna-to-edge(s) distances.

Wireless technologies	RF Exposure Conditions	DUT-to-User Separation	Test Position	Antenna-to-edge/surface	SAR Required	Note
WWAN	Head	0 mm	Left Touch	N/A	Yes	
			Left Tilt (15°)	N/A	Yes	
			Right Touch	N/A	Yes	
			Right Tilt (15°)	N/A	Yes	
	Body	15 mm	Rear	N/A	Yes	1
			Front	N/A	Yes	1
	Hotspot	10 mm	Rear	< 25 mm	Yes	
			Front	< 25 mm	Yes	
			Edge 1 (Top)	< 25 mm	No	
			Edge 2 (Right)	> 25 mm	Yes	
			Edge 3 (Bottom)	> 25 mm	Yes	
			Edge 4 (Left)	< 25 mm	Yes	

Notes:

- SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hot Spot SAR.

8. Dielectric Property Measurements & System Check

8.1. Dielectric Property Measurements

The temperature of the tissue-equivalent medium used during measurement must also be within 18°C to 25°C and within $\pm 2^\circ\text{C}$ of the temperature when the tissue parameters are characterized.

The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 – 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.

Tissue dielectric parameters were measured at the low, middle and high frequency of each operating frequency range of the test device.

For SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ may be relaxed to $\pm 10\%$. This is limited to frequencies ≤ 3 GHz.

Tissue Dielectric Parameters

FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5000	36.2	4.45	49.3	5.07
5100	36.1	4.55	49.1	5.18
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5400	35.8	4.86	48.7	5.53
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5700	35.4	5.17	48.3	5.88
5800	35.3	5.27	48.2	6.00

IEEE Std 1528-2013

Refer to Table 3 within the IEEE Std 1528-2013

Dielectric Property Measurements Results:

SAR Room	Date	Tissue Type	Band (MHz)	Frequency (MHz)	Relative Permittivity (ϵ_r)			Conductivity (σ)		
					Measured	Target	Delta $\pm 5\%$	Measured	Target	Delta $\pm 5\%$
3	5/31/2016	835	Head	835	40.97	41.50	-1.28	0.94	0.90	4.44
				805	41.01	41.68	-1.61	0.92	0.90	2.38
				905	39.87	41.50	-3.93	1.00	0.97	2.83
3	5/31/2016	835	Body	835	54.76	55.20	-0.80	1.00	0.97	2.87
				805	55.04	55.33	-0.53	0.97	0.97	0.00
				905	54.08	55.00	-1.67	1.07	1.05	1.19

8.2. System Check

SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue-equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium. Additional system verification should be considered according to the conditions of the tissue-equivalent medium and measured tissue dielectric parameters, typically every three to four days when the liquid parameters are re-measured or sooner when marginal liquid parameters are used at the beginning of a series of measurements.

System Performance Check Measurement Conditions:

- The measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness: 2.0 ±0.2 mm (bottom plate) filled with Body or Head simulating liquid of the following parameters.
- The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm for SAR measurements ≤ 3 GHz and ≥ 10.0 cm for measurements > 3 GHz.
- The DASY system with an E-Field Probe was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 7x7x7 (below 3 GHz) and/or 8x8x7 (above 3 GHz) fine cube was chosen for the cube.
- Distance between probe sensors and phantom surface was set to 3 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.5 mm
- The dipole input power (forward power) was 100 mW.
- The results are normalized to 1 W input power.

System Check Results

The 1-g and 10-g SAR measured with a reference dipole, using the required tissue-equivalent medium at the test frequency, must be within 10% of the manufacturer calibrated dipole SAR target.

SAR Room	Date	Tissue Type	Dipole Type _Serial #	Dipole Cal. Due Data	Measured Results for 1g SAR				Measured Results for 10g SAR				Plot No.
					Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	Zoom Scan to 100 mW	Normalize to 1 W	Target (Ref. Value)	Delta ±10 %	
3	5/31/2016	Head	D835V2 SN:4d142	9/23/2016	0.880	8.80	9.27	-5.07	0.581	5.81	6.01	-3.33	
3	5/31/2016	Body	D835V2 SN:4d142	9/23/2016	1.010	10.10	9.41	7.33	0.668	6.68	6.18	8.09	1,2

9. Conducted Output Power Measurements

9.1. LTE

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 26 Measured Results

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Avg Pwr (dBm)		
						819 MHz	831.5 MHz	844 MHz
LTE Band 26	15	QPSK	1	0	0	23.9		
			1	36	0	23.5		
			1	74	0	23.8		
			36	0	1	22.6		
			36	20	1	22.7		
			36	39	1	22.6		
			75	0	1	22.6		
		16QAM	1	0	1	22.8		
			1	36	1	22.5		
			1	74	1	22.8		
			36	0	2	21.6		
			36	20	2	21.6		
			36	39	2	21.6		
			75	0	2	21.6		
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Avg Pwr (dBm)		
						819 MHz	831.5 MHz	844 MHz
LTE Band 26	10	QPSK	1	0	0	23.9	23.9	23.7
			1	25	0	23.8	23.6	23.6
			1	49	0	23.8	23.8	23.6
			25	0	1	22.7	22.7	22.4
			25	12	1	22.7	22.6	22.4
			25	25	1	22.7	22.7	22.4
			50	0	1	22.7	22.7	22.4
		16QAM	1	0	1	23.2	23.0	22.9
			1	25	1	23.2	22.7	22.9
			1	49	1	23.2	23.0	22.8
			25	0	2	21.8	21.7	21.4
			25	12	2	21.8	21.6	21.4
			25	25	2	21.8	21.7	21.4
			50	0	2	21.8	21.6	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Avg Pwr (dBm)		
						816.5 MHz	831.5 MHz	846.5 MHz
LTE Band 26	5	QPSK	1	0	0	23.9	23.9	23.5
			1	12	0	23.8	23.8	23.2
			1	24	0	23.8	23.9	23.3
			12	0	1	22.7	22.6	22.3
			12	7	1	22.6	22.7	22.3
			12	13	1	22.7	22.6	22.1
			25	0	1	22.7	22.6	22.3
		16QAM	1	0	1	23.0	22.8	23.0
			1	12	1	22.6	22.8	22.8
			1	24	1	22.9	22.8	22.8
			12	0	2	21.7	21.6	21.5
			12	7	2	21.7	21.7	21.4
			12	13	2	21.7	21.7	21.3
			25	0	2	21.7	21.6	21.3

Note(s):

15 MHz Bandwidth does not support at least three non-overlapping channels. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply per KDB 941225 D05 SAR for LTE Devices.

LTE Band 26 Measured Results (continued)

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Avg Pwr (dBm)		
						815.5 MHz	831.5 MHz	847.5 MHz
LTE Band 26	3	QPSK	1	0	0	23.9	23.6	23.5
			1	8	0	23.7	23.7	23.5
			1	14	0	23.8	23.7	23.4
			8	0	1	22.6	22.6	22.3
			8	4	1	22.7	22.5	22.3
			8	7	1	22.6	22.6	22.3
			15	0	1	22.6	22.6	22.2
		16QAM	1	0	1	22.9	22.6	22.9
			1	8	1	22.8	22.5	22.6
			1	14	1	23.1	22.7	22.9
			8	0	2	21.6	21.6	21.3
			8	4	2	21.6	21.6	21.3
			8	7	2	21.6	21.6	21.3
			15	0	2	21.6	21.6	21.3
Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Max. Avg Pwr (dBm)		
						814.7 MHz	831.5 MHz	848.3 MHz
LTE Band 26	1.4	QPSK	1	0	0	23.8	23.6	23.6
			1	3	0	23.8	23.6	23.4
			1	5	0	23.9	23.7	23.5
			3	0	0	23.6	23.5	23.3
			3	1	0	23.7	23.5	23.3
			3	3	0	23.6	23.5	23.3
			6	0	1	22.6	22.5	22.2
		16QAM	1	0	1	22.8	22.9	22.8
			1	3	1	22.9	22.8	22.9
			1	5	1	22.9	22.9	22.7
			3	0	1	22.7	22.6	22.4
			3	1	1	22.8	22.6	22.4
			3	3	1	22.7	22.5	22.4
			6	0	2	21.8	21.6	21.2

10. Measured and Reported (Scaled) SAR Results

SAR Test Reduction criteria are as follows:

KDB 447498 D01 General RF Exposure Guidance:

Testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:

- ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 648474 D04 Handset SAR:

With headset attached, when the reported SAR for body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

KDB 941225 D05 SAR for LTE Devices:

SAR test reduction is applied using the following criteria:

- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB, and 50% RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel.
- When the reported SAR is > 0.8 W/kg, testing for other Channels is performed at the highest output power level for 1RB, and 50% RB configuration for that channel.
- Testing for 100% RB configuration is performed at the highest output power level for 100% RB configuration across the Low, Mid and High Channel when the highest reported SAR for 1 RB and 50% RB are > 0.8 W/kg. Testing for the remaining required channels is not needed because the reported SAR for 100% RB Allocation < 1.45 W/kg.
- Testing for 16-QAM modulation is not required because the reported SAR for QPSK is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of QPSK.
- Testing for the other channel bandwidths is not required because the reported SAR for the highest channel bandwidth is < 1.45 W/Kg and its output power is not more than 0.5 dB higher than that of the highest channel bandwidth.
- For LTE bands that do not support at least three non-overlapping channels in certain channel bandwidths, test the available non-overlapping channels instead. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing; therefore, the requirement for H, M and L channels may not fully apply.

10.2. LTE Band 26 (15MHz Bandwidth)

RF Exposure Conditions	Mode	Dist. (mm)	Test Position	Ch #.	Freq. (MHz)	RB Allocation	RB offset	Power (dBm)		1-g SAR (W/kg)		Plot No.
								Tune-up limit	Meas.	Meas.	Scaled	
Head	QPSK	0	Left Touch	26865	831.5	1	0	24.7	23.9	0.333	0.400	
						36	20	23.7	22.7	0.244	0.307	
			Left Tilt	26865	831.5	1	0	24.7	23.9	0.223	0.268	
						36	20	23.7	22.7	0.167	0.210	
			Right Touch	26865	831.5	1	0	24.7	23.9	0.354	0.426	1
						36	20	23.7	22.7	0.278	0.350	
			Right Tilt	26865	831.5	1	0	24.7	23.9	0.256	0.308	
						36	20	23.7	22.7	0.197	0.248	
Body-worn	QPSK	15	Rear	26865	831.5	1	0	24.7	23.9	0.357	0.429	2
						36	20	23.7	22.7	0.290	0.365	
			Front	26865	831.5	1	0	24.7	23.9	0.323	0.388	
						36	20	23.7	22.7	0.271	0.341	
Hotspot	QPSK	10	Rear	26865	831.5	1	0	24.7	23.9	0.409	0.492	3
						36	20	23.7	22.7	0.321	0.404	
			Front	26865	831.5	1	0	24.7	23.9	0.346	0.416	
						36	20	23.7	22.7	0.279	0.351	
			Edge 2	26865	831.5	1	0	24.7	23.9	0.308	0.370	
						36	20	23.7	22.7	0.253	0.319	
			Edge 3	26865	831.5	1	0	24.7	23.9	0.035	0.042	
						36	20	23.7	22.7	0.030	0.038	
			Edge 4	26865	831.5	1	0	24.7	23.9	0.104	0.125	
						36	20	23.7	22.7	0.085	0.107	

11. SAR Measurement Variability

In accordance with published RF Exposure KDB 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is <0.8 or 2 W/kg (1-g or 10-g respectively); steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.8 or 2 W/kg (1-g or 10-g respectively), repeat that measurement once.
- 3) Perform a second repeated measurement only if the **ratio of largest to smallest SAR** for the original and first repeated measurements is > 1.20 or 3 (1-g or 10-g respectively) or when the original or repeated measurement is ≥ 1.45 or 3.6 W/kg (~ 10% from the 1-g or 10-g respective SAR limit).
- 4) Perform a third repeated measurement only if the original, first, or second repeated measurement is ≥ 1.5 or 3.75 W/kg (1-g or 10-g respectively) and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 or 3 (1-g or 10-g respectively).

Frequency Band (MHz)	Air Interface	RF Exposure Conditions	Test Position	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	First Repeated		Second Repeated		Third Repeated
						Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)	Largest to Smallest SAR Ratio	Measured SAR (W/kg)
850	LTE Band 26	Hotspot	Rear	No	0.409	N/A	N/A	N/A	N/A	N/A

Note(s):

Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 or 3 (1-g or 10-g respectively).

12. Simultaneous Transmission SAR Analysis

Case	Cellular	WLAN/BT Main	WLAN/BT Sub	Note
1	GSM/GPRS/EDGE	BT/BLE	(None)	
2	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 2.4G	
3	GSM/GPRS/EDGE	WLAN 5G	WLAN 5G	
4	UMTS/HSPA	BT/BLE	(None)	
5	UMTS/HSPA	WLAN 2.4G	WLAN 2.4G	
6	UMTS/HSPA	WLAN 5G	WLAN 5G	
7	LTE	BT/BLE	(None)	
8	LTE	WLAN 2.4G	WLAN 2.4G	
9	LTE	WLAN 5G	WLAN 5G	
10	(None)	BT WLAN 5G	WLAN 5G	
11	GSM/GPRS/EDGE	BT WLAN 5G	WLAN 5G	
12	UMTS/HSPA	BT WLAN 5G	WLAN 5G	
13	LTE	BT WLAN 5G	WLAN 5G	
14	GSM/GPRS/EDGE	WLAN 2.4G	WLAN 5G	
15	GSM/GPRS/EDGE	WLAN 5G	WLAN 2.4G	
16	GSM/GPRS/EDGE	BT WLAN 5G	WLAN 2.4G	
17	UMTS/HSPA	WLAN 2.4G	WLAN 5G	
18	UMTS/HSPA	WLAN 5G	WLAN 2.4G	
19	UMTS/HSPA	BT WLAN 5G	WLAN 2.4G	
20	LTE	WLAN 2.4G	WLAN 5G	
21	LTE	WLAN 5G	WLAN 2.4G	
22	LTE	BT WLAN 5G	WLAN 2.4G	

12.1. Sum of the SAR for LTE Band 26 & Wi-Fi DTS

RF Exposure conditions	Test Position	Standalone SAR (W/kg)			Σ 1-g SAR (W/kg)
		WWAN ①	DTS Chain 0 ②	DTS Chain 1 ③	WWAN + DTS ① + ② + ③
Head	Left Touch	0.400	0.357	0.124	0.881
	Left Tilt	0.268	0.121	0.049	0.438
	Right Touch	0.426	0.169	0.535	1.130
	Right Tilt	0.308	0.063	0.154	0.525
Body-w orn	Rear	0.429	0.048	0.014	0.491
	Front	0.388	0.039	0.022	0.449
Hotspot	Rear	0.492	0.068	0.045	0.605
	Front	0.416	0.091	0.065	0.572
	Edge 1		0.021	0.010	0.031
	Edge 2	0.370	0.026	0.001	0.397
	Edge 3	0.042			0.042
	Edge 4	0.125	0.003	0.029	0.157

Note(s):

Please refer to SAR Report FA571615 for Standalone Wi-Fi (DTS) and Bluetooth data. Wi-Fi (DTS) and Bluetooth data is used for Simultaneous SAR evaluations.

12.2. Sum of the SAR for LTE Band 26 & Wi-Fi U-NII & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)				Σ 1-g SAR (W/kg)	
		WWAN ①	U-NII Chain 0 ②	U-NII Chain 1 ③	BT ④	WWAN + U-NII ① + ② + ③	WWAN + U-NII + BT ① + ② + ③ + ④
Head	Left Touch	0.400	0.274	0.178		0.852	
	Left Tilt	0.268	0.140	0.126		0.534	
	Right Touch	0.426	0.053	0.388		0.867	
	Right Tilt	0.308	0.019	0.212		0.539	
Body-w orn	Rear	0.429	0.022	0.029	0.196	0.480	0.676
	Front	0.388	0.025	0.038	0.196	0.451	0.647

Note(s):

Please refer to SAR Report FA571615 for Standalone Wi-Fi (DTS) and Bluetooth data. Wi-Fi (DTS) and Bluetooth data is used for Simultaneous SAR evaluations.

12.3. Sum of the SAR for LTE Band 26 & Wi-Fi DTS Chain 0 & Wi-Fi U-NII Chain 1

RF Exposure conditions	Test Position	Standalone SAR (W/kg)			Σ 1-g SAR (W/kg)
		WWAN ①	DTS Chain 0 ②	U-NII Chain 1 ③	WWAN + DTS + U-NII ① + ② + ③
Head	Left Touch	0.400	0.357	0.178	0.935
	Left Tilt	0.268	0.121	0.126	0.515
	Right Touch	0.426	0.169	0.388	0.983
	Right Tilt	0.308	0.063	0.212	0.583
Body-w orn	Rear	0.429	0.048	0.029	0.506
	Front	0.388	0.039	0.038	
Hotspot	Rear	0.492	0.068		0.560
	Front	0.416	0.091		0.507
	Edge 1		0.021		0.021
	Edge 2	0.370	0.026		0.396
	Edge 3	0.042			0.042
	Edge 4	0.125	0.003		0.128

Note(s):

Please refer to SAR Report FA571615 for Standalone Wi-Fi (DTS) and Bluetooth data. Wi-Fi (DTS) and Bluetooth data is used for Simultaneous SAR evaluations.

12.4. Sum of the SAR for LTE Band 26 & Wi-Fi DTS Chain 1 & Wi-Fi U-NII Chain 0 & BT

RF Exposure conditions	Test Position	Standalone SAR (W/kg)				Σ 1-g SAR (W/kg)	
		WWAN ①	DTS Chain 1 ②	U-NII Chain 0 ③	BT ④	WWAN + DTS + U-NII ① + ② + ③	WWAN + DTS + U-NII + BT ① + ② + ③ + ④
Head	Left Touch	0.400	0.124	0.274		0.798	
	Left Tilt	0.268	0.049	0.140		0.457	
	Right Touch	0.426	0.535	0.053		1.014	
	Right Tilt	0.308	0.154	0.019		0.481	
Body-w orn	Rear	0.429	0.014	0.022	0.196	0.465	0.661
	Front	0.388	0.022	0.025	0.196	0.435	0.631
Hotspot	Rear	0.492	0.045			0.537	
	Front	0.416	0.065			0.481	
	Edge 1		0.010			0.010	
	Edge 2	0.370	0.001			0.371	
	Edge 3	0.042				0.042	
	Edge 4	0.125	0.029			0.154	

Note(s):

Please refer to SAR Report FA571615 for Standalone Wi-Fi (DTS) and Bluetooth data. Wi-Fi (DTS) and Bluetooth data is used for Simultaneous SAR evaluations.

Conclusion:

Simultaneous transmission SAR measurement (Volume Scan) is not required because either the sum of the 1-g SAR is < 1.6 W/kg or the SPLSR is ≤ 0.04 for all circumstances that require SPLSR calculation.

Appendixes

Refer to separated files for the following appendixes.

16U23577-S2V1 SAR_App A Setup Photos

16U23577-S2V1 SAR_App B System Check Plots

16U23577-S2V1 SAR_App C Highest Test Plots

16U23577-S2V1 SAR_App D Tissue Ingredients

16U23577-S2V1 SAR_App E Probe Cal. Certificates

16U23577-S2V1 SAR_App F Dipole Cal. Certificates

END OF REPORT