



# FCC RF Test Report

**APPLICANT** : Sony Mobile Communications Inc.  
**EQUIPMENT** : GSM/WCDMA/LTE Phone+Bluetooth,  
DTS/UNII a/b/g/n and NFC  
**BRAND NAME** : Sony  
**FCC ID** : PY7-PM0920  
**STANDARD** : 47 CFR Part 2, 22(H), 24(E), 27  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Oct. 07, 2015 and completely tested on Nov. 30, 2015. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA / EIA-603-D-2010 and the testing has shown the tested sample to be in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



## **SPORTON INTERNATIONAL INC.**

**No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C.**

SPORTON INTERNATIONAL INC.

TEL : 886-3-327-3456

FAX : 886-3-328-4978

FCC ID : PY7-PM0920

Page Number : 1 of 28

Report Issued Date : Jan. 14, 2016

Report Version : Rev. 01

Report Template No.: BU5-FGLTE Version 1.4



TABLE OF CONTENTS

REVISION HISTORY..... 4
SUMMARY OF TEST RESULT ..... 5
1 GENERAL DESCRIPTION ..... 6
1.1 Applicant ..... 6
1.2 Manufacturer ..... 6
1.3 Product Feature of Equipment Under Test..... 6
1.4 Modification of EUT ..... 7
1.5 Emission Designator ..... 7
1.6 Testing Location ..... 8
1.7 Applicable Standards ..... 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 9
2.1 Test Mode ..... 9
2.2 Connection Diagram of Test System ..... 11
2.3 Support Unit used in test configuration and system ..... 11
2.4 Measurement Results Explanation Example ..... 11
2.5 Frequency List of Low/Middle/High Channels ..... 12
3 CONDUCTED TEST ITEMS ..... 14
3.1 Measuring Instruments ..... 14
3.2 Test Setup ..... 14
3.3 Test Result of Conducted Test ..... 14
3.4 Conducted Output Power ..... 15
3.5 Peak-to-Average Ratio ..... 16
3.6 Occupied Bandwidth ..... 17
3.7 Conducted Band Edge ..... 18
3.8 Conducted Spurious Emission ..... 20
3.9 Frequency Stability ..... 21
4 RADIATED TEST ITEMS ..... 22
4.1 Measuring Instruments ..... 22
4.2 Test Setup ..... 22
4.3 Test Result of Radiated Test ..... 22
4.4 Effective Radiated Power and Effective Isotropic Radiated Power ..... 23
4.5 Radiated Spurious Emission ..... 25
5 LIST OF MEASURING EQUIPMENT ..... 26
6 UNCERTAINTY OF EVALUATION ..... 28

APPENDIX A. TEST RESULTS OF CONDUCTED TEST



**APPENDIX B. TEST RESULTS OF RADIATED TEST**





**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a)	Conducted Band Edge Measurement (Band 2) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (Band 7)	§27.53(m)(4)		
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Spurious Emission (Band 2) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])		
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§2.1055 §24.235 §27.54		Within Authorized Band		
4.4	§22.913(a)(2)	Effective Radiated Power (Band 5)	ERP < 7 Watt	PASS	-
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2) (Band 7)	EIRP < 2Watt		
4.5	§2.1053 §22.917(a) §24.238(a)	Radiated Spurious Emission (Band 2) (Band 5)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 3.11 dB at 12660.000 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log <sub>10</sub> (P[Watts])		



# 1 General Description

## 1.1 Applicant

Sony Mobile Communications Inc.  
Nya Vattentorget, 22188 Lund, Sweden

## 1.2 Manufacturer

Sony Mobile Communications Inc.  
1-8-15 Konan, Minato-ku, Tokyo, 108-0075, Japan

## 1.3 Product Feature of Equipment Under Test

GSM/WCDMA/LTE, Bluetooth, DTS/UNII, a/b/g/n, GPS, and NFC

Product Feature	
Antenna Type	Coupling type (LDS) Antenna

EUT Information List				
IMEI	HW Version	SW Version	S/N	Performed Test Item
00440245535512	A	33.2.A.0.19	RQ3000D4PB	RF conducted measurement ERP/EIRP Test
00440245535231			RQ3000D4EV	Radiated Spurious Emission

Accessory List	
AC Adapter 1	Model No. : UCH20
	Type No. : AC-0060-US
	S/N : 1215W43609278 (Radiated Spurious Emission)
Battery 1	Model No. : LIS1618ERPC
Earphone	Model No. : MH410c
	Type No. : AG-1100
	S/N : 1541A8180036F24 (Radiated Spurious Emission)
USB Cable 1	Model No. : EC803
	Type No. : AI-0404
	S/N : 153812A45005976 (Radiated Spurious Emission)

**Note:**

1. Above EUT list and accessory list used are electrically identical per declared by manufacturer.
2. Above the accessories list are used to exercise the EUT during test.
3. For other wireless features of this EUT, test report will be issued separately.



### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.5 Emission Designator

LTE Band 2		QPSK		16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
1.4	1M09G7D	-	0.2321	1M10W7D	-	0.1933
3	2M72G7D	-	0.2586	2M72W7D	-	0.2035
5	4M50G7D	-	0.2420	4M50W7D	-	0.1964
10	9M01G7D	0.0085	0.2295	9M07W7D	-	0.2131
15	13M5G7D	-	0.2277	13M5W7D	-	0.1886
20	18M5G7D	-	0.2368	18M5W7D	-	0.2161
LTE Band 5		QPSK		16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum ERP(W)
1.4	1M10G7D	-	0.0709	1M09W7D	-	0.0458
3	2M73G7D	-	0.0511	2M73W7D	-	0.0428
5	4M51G7D	-	0.0710	4M50W7D	-	0.0649
10	9M11G7D	0.0041	0.0624	9M03W7D	-	0.0500
LTE Band 7		QPSK		16QAM		
BW(MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum EIRP(W)
			AVG.			AVG.
5	4M50G7D	-	0.1450	4M52W7D	-	0.1241
10	9M01G7D	0.0069	0.1459	9M05W7D	-	0.1206
15	13M5G7D	-	0.1241	13M5W7D	-	0.1207
20	18M4G7D	-	0.1317	18M5W7D	-	0.1186



### 1.6 Testing Location

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan District, Tao Yuan City, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	TH05-HY

<b>Test Site</b>	SPORTON INTERNATIONAL INC.
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd Rd. Guishan Dist, Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b>
	03CH10HY

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22(H), 24(E), 27
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.


Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	5	✓	✓	✓	✓	-	-	✓	✓	✓	✓	✓	✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Peak-to-Average Ratio	2						✓	✓	✓	✓		✓	✓	✓	✓
	5				✓	-	-	✓	✓	✓		✓	✓	✓	✓
	7	-	-				✓	✓	✓	✓		✓	✓	✓	✓
26dB and 99% Bandwidth	2	✓	✓	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
	5	✓	✓	✓	✓	-	-	✓	✓			✓	✓	✓	✓
	7	-	-	✓	✓	✓	✓	✓	✓			✓	✓	✓	✓
Conducted Band Edge	2	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓
	5	✓	✓	✓	✓	-	-	✓	✓	✓		✓	✓		✓
	7	-	-	✓	✓	✓	✓	✓	✓	✓		✓	✓		✓



Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	√	√	√	√	√	√	√	√	√			√	√	√
	5	√	√	√	√	-	-	√	√	√			√	√	√
	7	-	-	√	√	√	√	√	√	√			√	√	√
Frequency Stability	2				√			√				√		√	
	5				√	-	-	√				√		√	
	7	-	-		√			√				√		√	
E.R.P./ E.I.R.P.	2	√	√	√	√	√	√	√	√	√	√	√	√	√	√
	5	√	√	√	√	-	-	√	√	√	√	√	√	√	√
	7	-	-	√	√	√	√	√	√	√	√	√	√	√	√
Radiated Spurious Emission	2	√	√	√	√	√	√	√		√	√	√	√	√	√
	5	√	√	√	√	-	-	√		√	√	√	√	√	√
	7	-	-	√	√	√	√	√		√	√	√	√	√	√
Note	<ol style="list-style-type: none"> <li>The mark “√” means that this configuration is chosen for testing</li> <li>The mark “-” means that this bandwidth is not supported.</li> <li>The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.</li> </ol>														

## 2.2 Connection Diagram of Test System

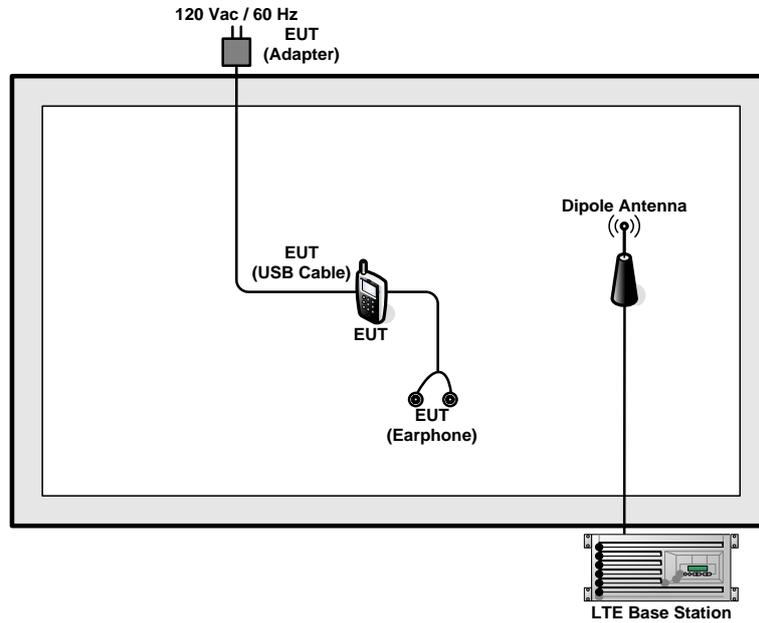

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset}(dB) &= \text{RF cable loss}(dB) + \text{attenuator factor}(dB). \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$



### 2.5 Frequency List of Low/Middle/High Channels

LTE Band 2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	18700	18900	19100
	Frequency	1860	1880	1900
15	Channel	18675	18900	19125
	Frequency	1857.5	1880	1902.5
10	Channel	18650	18900	19150
	Frequency	1855	1880	1905
5	Channel	18625	18900	19175
	Frequency	1852.5	1880	1907.5
3	Channel	18615	18900	19185
	Frequency	1851.5	1880	1908.5
1.4	Channel	18607	18900	19193
	Frequency	1850.7	1880	1909.3

LTE Band 5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	20450	20525	20600
	Frequency	829	836.5	844
5	Channel	20425	20525	20625
	Frequency	826.5	836.5	846.5
3	Channel	20415	20525	20635
	Frequency	825.5	836.5	847.5
1.4	Channel	20407	20525	20643
	Frequency	824.7	836.5	848.3



LTE Band 7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	20850	21100	21350
	Frequency	2510	2535	2560
15	Channel	20825	21100	21375
	Frequency	2507.5	2535	2562.5
10	Channel	20800	21100	21400
	Frequency	2505	2535	2565
5	Channel	20775	21100	21425
	Frequency	2502.5	2535	2567.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

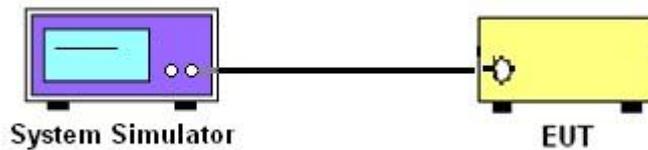

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

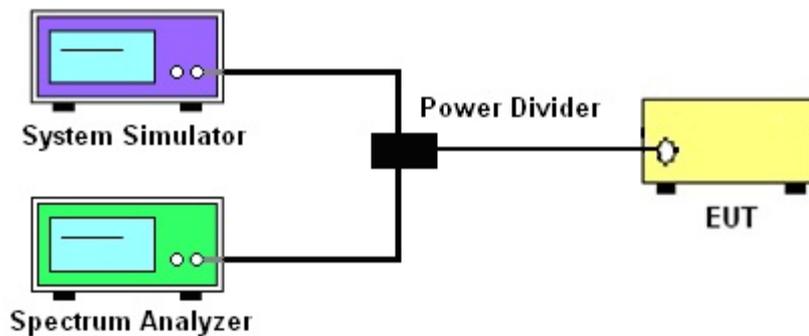

##### 3.2.3 Frequency Stability

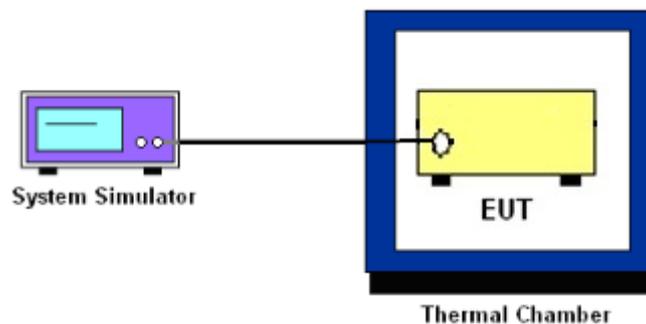

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



## **3.4 Conducted Output Power**

### **3.4.1 Description of the Conducted Output Power Measurement**

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

### **3.4.2 Test Procedures**

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



## **3.6 Occupied Bandwidth**

### **3.6.1 Description of Occupied Bandwidth Measurement**

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

### **3.6.2 Test Procedures**

1. The testing follows FCC KDB 971168 v02r02 Section 4.2.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### **3.7 Conducted Band Edge**

#### **3.7.1 Description of Conducted Band Edge Measurement**

22.917(a) for Band 5:

For operations in the 824 – 849 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power P(Watts) in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a) for Band 2:

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power P(Watts) in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53(m)(4) for FCC Band 7:

For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.



### 3.7.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB) = -13dBm.

9. For LTE Band 7, the other 40 dB, and 55 dB have additionally applied same calculation above.



## 3.8 Conducted Spurious Emission

### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### 3.8.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
 $= -13$ dBm.
11. For Band 7  
The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [55 + 10\log(P)]$  (dB)  
 $= [30 + 10\log(P)]$  (dBm) -  $[55 + 10\log(P)]$  (dB)  
 $= -25$ dBm.



### 3.9 Frequency Stability

#### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

#### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup

#### 4.2.1 For radiated test from 30MHz to 1GHz

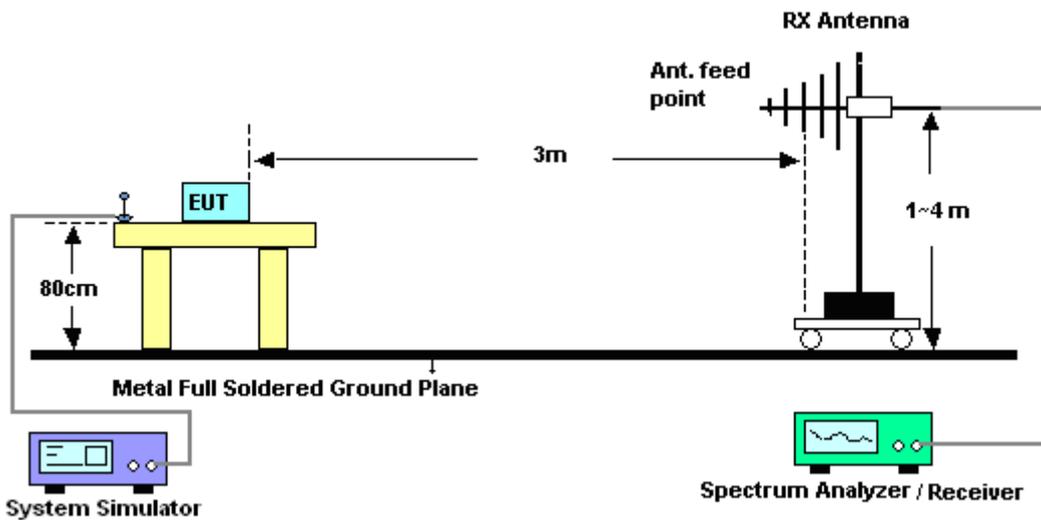

#### 4.2.2 For radiated test above 1GHz

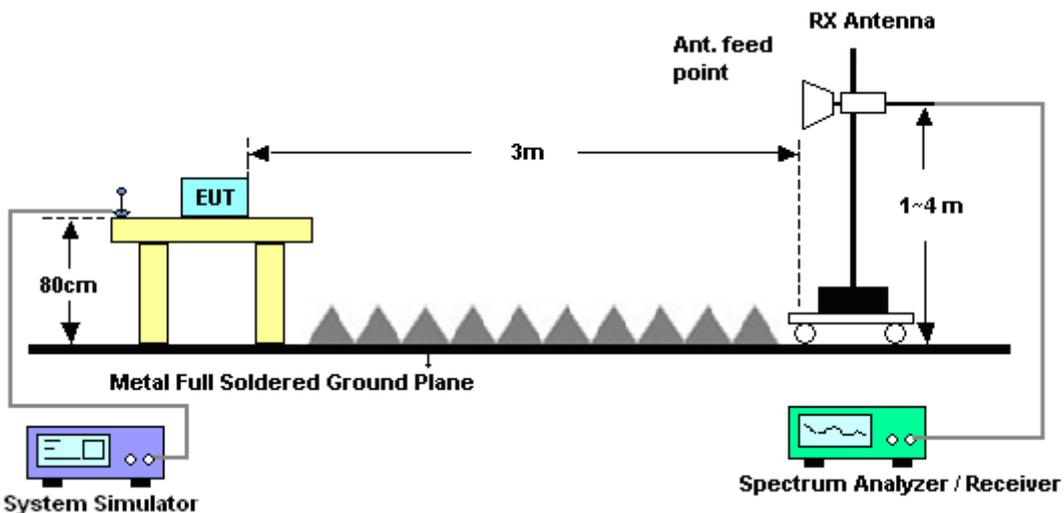

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.



## **4.4 Effective Radiated Power and Effective Isotropic Radiated Power**

### **4.4.1 Description of the ERP/EIRP Measurement**

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average ERP of 7 watts with LTE band 5.

Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D-2010, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems v02r02. Mobile and portable (hand-held) stations operating are limited to average EIRP of 2 watts with LTE band 2 / 7.

### **4.4.2 Test Procedures**

1. The EUT was placed on a non-conductive rotating platform 0.8 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with RMS detector per section 5. of KDB 971168 D01.
2. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
3. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor,  $EIRP = LVL + \text{Correction factor}$  and  $ERP = EIRP - 2.15$ . Take the record of the output power at substitution antenna.



	LTE Average					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Average	Average	Average	Average	Average	Average
Average Type	Power	Power	Power	Power	Power	Power
Sweep Count	100	100	100	100	100	100

	LTE Peak					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	100kHz	100kHz	300kHz	300kHz	300kHz
VBW	100kHz	300kHz	300kHz	1MHz	1MHz	1MHz
Detector	Peak	Peak	Peak	Peak	Peak	Peak
Trace	Max Hold					
Power	Channel	Channel	Channel	Channel	Channel	Channel



## 4.5 Radiated Spurious Emission

### 4.5.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

For Band 7

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $55 + 10 \log (P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12.
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.

For Band 7:

The limit line is derived from  $55 + 10\log(P)$ dB below the transmitter power P(Watts)

12. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain
13. ERP (dBm) = EIRP - 2.15



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	Rohde & Schwarz	FSV40	101397	10Hz~40GHz	Sep. 11, 2015	Oct. 28, 2015 ~ Nov. 02, 2015	Sep. 10 2016	Conducted (TH05-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-30°C~70°C	Dec. 04, 2014	Oct. 28, 2015 ~ Nov. 02, 2015	Dec. 03, 2015	Conducted (TH05-HY)
Hygrometer	Testo	608-H1	34897199	N/A	May 04, 2015	Oct. 28, 2015 ~ Nov. 02, 2015	May 03, 2016	Conducted (TH05-HY)
RF cable	WOKEN	S05	S05-130708-038	N/A	Jan. 21, 2015	Oct. 28, 2015 ~ Nov. 02, 2015	Jan. 20, 2016	Conducted (TH05-HY)
Preamplifier	MITEQ	JS44-18004 000-33-8P	1840917	18GHz ~ 40GHz	Jun. 02, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Jun. 01, 2016	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 03, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 02, 2015	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170584	18GHz- 40GHz	Nov. 02, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 03, 2016	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Nov. 24, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 23, 2015	Radiation (03CH10-HY)
Amplifier	SONOMA	310N	187311	9kHz~1GHz	Nov. 16, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 15, 2016	Radiation (03CH10-HY)
Bilog Antenna	TESEQ	CBL 6111D	35414	30MHz~1GHz	Nov. 17, 2015	Nov. 18, 2015 ~ Nov. 30, 2015	Nov. 16, 2016	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A	MY54130085	20Hz ~ 8.4GHz	Nov. 05, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 04, 2015	Radiation (03CH10-HY)
EMI Test Receiver	Keysight	N9038A	MY54130085	20Hz ~ 8.4GHz	Nov. 04, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 03, 2016	Radiation (03CH10-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1325	1GHz ~ 18GHz	Sep. 30, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 29, 2016	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 20, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 19, 2015	Radiation (03CH10-HY)
Preamplifier	Keysight	83017A	MY53270078	1GHz~26.5GHz	Nov. 13, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 12, 2016	Radiation (03CH10-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200485	10Hz ~ 44GHZ	Oct. 15, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Oct. 14, 2016	Radiation (03CH10-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Oct. 28, 2015 ~ Nov. 30, 2015	N/A	Radiation (03CH10-HY)
Antenna Mast	EMEC	AM-BS-450 0-B	N/A	1~4m	N/A	Oct. 28, 2015 ~ Nov. 30, 2015	N/A	Radiation (03CH10-HY)
Turn Table	EMEC	TT 2200	N/A	0-360 degree	N/A	Oct. 28, 2015 ~ Nov. 30, 2015	N/A	Radiation (03CH10-HY)
Hygrometer	TECPEL	DTM-303B	TP140320	N/A	Nov. 17, 2014	Oct. 28, 2015 ~ Oct. 31, 2015	Nov. 16, 2015	Radiation (03CH10-HY)
Hygrometer	TECPEL	DTM-303B	TP140320	N/A	Nov. 17, 2015	Nov. 17, 2015 ~ Nov. 30, 2015	Nov. 16, 2016	Radiation (03CH10-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY24958/4,MY2 8653/4,MY24953	25GHz~40GHz	Jan. 13, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Jan. 12, 2016	Radiation (03CH10-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WLKS1200-8SS	SN3	1.2G Low Pass	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Filter	Wainwright	WHK1.5/15G-10SS	SN32	1.5G High Pass	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Filter	Microwave	H3G018G1	SN477220	3.0G High Pass	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCG824/849-40/8SS	SN35	CDMA 850	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCT1850/1910-40/8SS	SN21	1900	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Notch Filter	Wainwright	WRCT2500/2570-10/40-10	SN1 R	LTE Band7	Oct. 01, 2015	Oct. 28, 2015 ~ Nov. 30, 2015	Sep. 30, 2016	Radiation (03CH10-HY)
Test Software	N/A	E3	6.2009-8-24	N/A	N/A	Oct. 28, 2015 ~ Nov. 30, 2015	N/A	Radiation (03CH10-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.9
---	-----

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.5
---	-----



## **Appendix A. Test Results of Conducted Test**

### **Conducted Output Power(Average power)**



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	23.69	23.81	23.80
20	1	49		23.63	23.65	23.71
20	1	99		23.60	23.56	23.70
20	50	0		22.77	22.92	22.83
20	50	24		22.69	22.80	22.73
20	50	50		22.59	22.75	22.68
20	100	0		22.66	22.85	22.76
20	1	0	16-QAM	22.88	23.01	22.93
20	1	49		22.76	22.96	22.96
20	1	99		22.79	22.80	22.85
20	50	0		21.73	21.86	21.92
20	50	24		21.64	21.75	21.81
20	50	50		21.56	21.69	21.78
20	100	0		21.63	21.77	21.84
15	1	0	QPSK	23.73	23.75	23.60
15	1	37		23.64	23.73	23.59
15	1	74		23.53	23.68	23.54
15	36	0		22.75	22.81	22.68
15	36	20		22.71	22.76	22.65
15	36	39		22.66	22.74	22.60
15	75	0		22.70	22.76	22.65
15	1	0	16-QAM	22.80	22.93	22.92
15	1	37		22.77	22.91	22.88
15	1	74		22.75	22.83	22.80
15	36	0		21.65	21.79	21.83
15	36	20		21.62	21.73	21.78
15	36	39		21.57	21.70	21.73
15	75	0		21.62	21.74	21.79



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.72	23.73	23.60
10	1	25		23.62	23.71	23.53
10	1	49		23.56	23.70	23.52
10	25	0		22.72	22.74	22.65
10	25	12		22.65	22.78	22.64
10	25	25		22.63	22.71	22.56
10	50	0		22.69	22.77	22.64
10	1	0	16-QAM	22.91	22.94	22.77
10	1	25		22.85	22.86	22.74
10	1	49		22.86	22.82	22.72
10	25	0		21.75	21.78	21.62
10	25	12		21.69	21.77	21.59
10	25	25		21.64	21.68	21.52
10	50	0		21.73	21.76	21.60
5	1	0	QPSK	23.67	23.80	23.54
5	1	12		23.70	23.79	23.68
5	1	24		23.57	23.74	23.52
5	12	0		22.68	22.75	22.59
5	12	7		22.68	22.80	22.63
5	12	13		22.61	22.71	22.57
5	25	0		22.66	22.77	22.61
5	1	0	16-QAM	22.80	22.84	22.74
5	1	12		22.79	22.83	22.80
5	1	24		22.75	22.80	22.71
5	12	0		21.74	21.71	21.57
5	12	7		21.78	21.73	21.61
5	12	13		21.70	21.66	21.55
5	25	0		21.74	21.67	21.57



LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.68	23.77	23.56
3	1	8		23.67	23.75	23.56
3	1	14		23.68	23.73	23.54
3	8	0		22.71	22.80	22.63
3	8	4		22.71	22.81	22.64
3	8	7		22.67	22.78	22.61
3	15	0		22.73	22.77	22.68
3	1	0	16-QAM	22.76	22.86	22.82
3	1	8		22.76	22.85	22.82
3	1	14		22.71	22.84	22.84
3	8	0		21.64	21.77	21.80
3	8	4		21.67	21.80	21.83
3	8	7		21.62	21.74	21.78
3	15	0		21.62	21.73	21.79
1.4	1	0	QPSK	23.74	23.80	23.62
1.4	1	3		23.71	23.78	23.65
1.4	1	5		23.73	23.75	23.61
1.4	3	0		23.58	23.61	23.45
1.4	3	1		23.55	23.62	23.42
1.4	3	3		23.59	23.68	23.47
1.4	6	0		22.75	22.85	22.68
1.4	1	0	16-QAM	22.67	22.79	22.74
1.4	1	3		22.64	22.77	22.68
1.4	1	5		22.66	22.78	22.75
1.4	3	0		22.57	22.67	22.64
1.4	3	1		22.60	22.69	22.64
1.4	3	3		22.56	22.66	22.66
1.4	6	0		21.67	21.80	21.69



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	23.31	23.35	23.24
10	1	25		23.25	23.30	23.22
10	1	49		23.21	23.28	23.11
10	25	0		22.31	22.32	22.26
10	25	12		22.28	22.31	22.24
10	25	25		22.20	22.26	22.13
10	50	0		22.30	22.35	22.25
10	1	0	16-QAM	22.52	22.61	22.53
10	1	25		22.49	22.55	22.48
10	1	49		22.40	22.47	22.40
10	25	0		21.31	21.25	21.27
10	25	12		21.29	21.30	21.22
10	25	25		21.28	21.32	21.11
10	50	0		21.33	21.29	21.22
5	1	0	QPSK	23.20	23.26	23.22
5	1	12		23.18	23.20	23.20
5	1	24		23.11	23.16	23.10
5	12	0		22.30	22.26	22.21
5	12	7		22.35	22.35	22.21
5	12	13		22.30	22.35	22.13
5	25	0		22.30	22.30	22.16
5	1	0	16-QAM	22.45	22.58	22.42
5	1	12		22.53	22.66	22.46
5	1	24		22.50	22.53	22.36
5	12	0		21.26	21.26	21.18
5	12	7		21.31	21.35	21.20
5	12	13		21.26	21.34	21.12
5	25	0		21.24	21.28	21.13



LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
3	1	0	QPSK	23.21	23.22	23.18
3	1	8		23.20	23.21	23.17
3	1	14		23.19	23.19	23.13
3	8	0		22.35	22.37	22.22
3	8	4		22.37	22.38	22.23
3	8	7		22.35	22.35	22.19
3	15	0		22.36	22.39	22.23
3	1	0	16-QAM	22.47	22.58	22.39
3	1	8		22.48	22.56	22.41
3	1	14		22.52	22.53	22.38
3	8	0		21.36	21.40	21.27
3	8	4		21.38	21.43	21.27
3	8	7		21.33	21.40	21.22
3	15	0		21.32	21.34	21.18
1.4	1	0	QPSK	23.19	23.27	23.12
1.4	1	3		23.18	23.24	23.13
1.4	1	5		23.16	23.17	23.11
1.4	3	0		23.13	23.12	22.95
1.4	3	1		23.10	23.09	22.93
1.4	3	3		23.26	23.14	22.97
1.4	6	0		22.32	22.28	22.13
1.4	1	0	16-QAM	22.32	22.44	22.24
1.4	1	3		22.31	22.42	22.22
1.4	1	5		22.32	22.43	22.22
1.4	3	0		22.22	22.29	22.10
1.4	3	1		22.24	22.31	22.12
1.4	3	3		22.21	22.28	22.09
1.4	6	0		21.29	21.31	21.16



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
20	1	0	QPSK	22.25	22.36	21.84
20	1	49		22.24	22.05	21.80
20	1	99		22.23	21.99	21.70
20	50	0		21.28	20.93	20.86
20	50	24		21.30	21.05	20.81
20	50	50		21.31	21.34	20.91
20	100	0		21.05	21.30	20.81
20	1	0	16-QAM	21.47	21.54	21.09
20	1	49		21.41	21.33	21.13
20	1	99		21.49	21.23	21.06
20	50	0		20.22	19.92	19.87
20	50	24		20.26	20.04	19.83
20	50	50		20.30	20.14	19.93
20	100	0		20.25	20.04	19.92
15	1	0	QPSK	22.27	22.28	21.80
15	1	37		22.04	22.06	21.80
15	1	74		22.23	21.96	21.70
15	36	0		21.30	21.00	20.81
15	36	20		21.30	21.05	20.80
15	36	39		21.30	21.11	20.82
15	75	0		21.29	21.05	20.80
15	1	0	16-QAM	21.46	21.48	21.11
15	1	37		21.47	21.37	21.14
15	1	74		21.46	21.24	21.05
15	36	0		20.23	20.00	19.83
15	36	20		20.25	20.06	19.81
15	36	39		20.26	20.08	19.84
15	75	0		20.25	20.06	19.84



LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
10	1	0	QPSK	22.25	22.26	21.72
10	1	25		22.24	22.04	21.75
10	1	49		22.23	22.01	21.71
10	25	0		21.20	20.92	20.64
10	25	12		21.27	21.02	20.71
10	25	25		21.29	21.06	20.76
10	50	0		21.26	21.02	20.72
10	1	0	16-QAM	21.32	21.45	21.06
10	1	25		21.43	21.33	21.09
10	1	49		21.43	21.28	21.03
10	25	0		20.15	19.91	19.67
10	25	12		20.23	20.00	19.73
10	25	25		20.23	20.05	19.79
10	50	0		20.21	20.00	19.74
5	1	0	QPSK	22.28	22.29	21.69
5	1	12		22.27	22.10	21.77
5	1	24		22.24	21.99	21.66
5	12	0		21.24	21.04	20.68
5	12	7		21.32	21.06	20.75
5	12	13		21.33	21.08	20.75
5	25	0		21.29	21.03	20.70
5	1	0	16-QAM	21.43	21.53	21.03
5	1	12		21.29	21.37	21.10
5	1	24		21.44	21.26	20.98
5	12	0		20.20	19.98	19.74
5	12	7		20.27	20.05	19.78
5	12	13		20.27	20.09	19.78
5	25	0		20.23	20.01	19.72



## **Appendix B. Test Results of Radiated Test**

**ERP/EIRP**



LTE Band 2 / 1.4MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	18.91	0.0778	23.20	0.2087
Middle		1	0	19.50	0.0892	23.51	0.2242
Highest		1	0	19.55	0.0902	23.66	0.2321
Lowest	16QAM	1	0	18.27	0.0672	22.26	0.1681
Middle		1	0	18.56	0.0718	22.65	0.1840
Highest		1	0	18.55	0.0715	22.86	0.1933
Limit	EIRP < 2W			Result		PASS	

LTE Band 2 / 3MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	19.30	0.0850	23.36	0.2166
Middle		1	0	19.80	0.0956	23.69	0.2340
Highest		1	0	19.46	0.0883	24.13	0.2586
Lowest	16QAM	1	0	18.29	0.0675	22.47	0.1765
Middle		1	0	18.62	0.0728	22.66	0.1846
Highest		1	0	18.79	0.0757	23.09	0.2035
Limit	EIRP < 2W			Result		PASS	

LTE Band 2 / 5MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	19.17	0.0826	23.29	0.2132
Middle		1	0	19.68	0.0929	23.54	0.2259
Highest		1	0	19.70	0.0934	23.84	0.2420
Lowest	16QAM	1	0	18.21	0.0663	22.40	0.1739
Middle		1	0	18.78	0.0754	22.58	0.1812
Highest		1	0	18.60	0.0725	22.93	0.1964
Limit	EIRP < 2W			Result		PASS	



LTE Band 2 / 10MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	19.33	0.0857	23.43	0.2205
Middle		1	0	19.66	0.0924	23.61	0.2295
Highest		1	0	19.16	0.0825	23.23	0.2105
Lowest	16QAM	1	0	18.33	0.0681	22.56	0.1804
Middle		1	0	18.76	0.0751	22.67	0.1848
Highest		1	0	19.04	0.0803	23.29	0.2131
Limit	EIRP < 2W			Result		PASS	

LTE Band 2 / 15MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	19.36	0.0863	23.32	0.2149
Middle		1	0	19.71	0.0935	23.57	0.2277
Highest		1	0	19.05	0.0804	23.07	0.2026
Lowest	16QAM	1	0	18.50	0.0708	22.62	0.1826
Middle		1	0	18.93	0.0782	22.76	0.1886
Highest		1	0	19.13	0.0819	22.73	0.1873
Limit	EIRP < 2W			Result		PASS	

LTE Band 2 / 20MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	19.33	0.0856	23.35	0.2162
Middle		1	0	19.85	0.0965	23.61	0.2294
Highest		1	0	19.99	0.0997	23.74	0.2368
Lowest	16QAM	1	0	17.97	0.0626	22.77	0.1892
Middle		1	0	18.50	0.0708	22.86	0.1933
Highest		1	0	19.06	0.0805	23.35	0.2161
Limit	EIRP < 2W			Result		PASS	



LTE Band 5 / 1.4MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	0	4.09	0.0026	16.58	0.0455
Middle		1	0	4.75	0.0030	17.05	0.0507
Highest		1	0	6.31	0.0043	18.51	0.0709
Lowest	16QAM	1	0	2.46	0.0018	15.61	0.0364
Middle		1	0	4.86	0.0031	16.61	0.0458
Highest		1	0	5.77	0.0038	16.40	0.0437
Limit	ERP < 7W			Result		PASS	

LTE Band 5 / 3MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	0	4.12	0.0026	16.65	0.0462
Middle		1	0	5.47	0.0035	16.41	0.0438
Highest		1	0	6.41	0.0044	17.08	0.0511
Lowest	16QAM	1	0	2.98	0.0020	15.65	0.0367
Middle		1	0	4.63	0.0029	15.66	0.0368
Highest		1	0	5.54	0.0036	16.32	0.0428
Limit	ERP < 7W			Result		PASS	



LTE Band 5 / 5MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	0	3.12	0.0021	16.87	0.0486
Middle		1	0	5.13	0.0033	17.39	0.0548
Highest		1	0	6.84	0.0048	18.51	0.0710
Lowest	16QAM	1	12	2.61	0.0018	16.10	0.0407
Middle		1	12	4.82	0.0030	16.71	0.0469
Highest		1	12	6.33	0.0043	18.12	0.0649
Limit	ERP < 7W			Result		PASS	

LTE Band 5 / 10MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	ERP(dBm)	ERP(W)	ERP(dBm)	ERP(W)
Lowest	QPSK	1	0	3.72	0.0024	16.57	0.0454
Middle		1	0	4.21	0.0026	17.08	0.0511
Highest		1	0	5.59	0.0036	17.95	0.0624
Lowest	16QAM	1	0	2.28	0.0017	15.74	0.0375
Middle		1	0	4.35	0.0027	16.57	0.0454
Highest		1	0	5.62	0.0036	16.99	0.0500
Limit	ERP < 7W			Result		PASS	



LTE Band 7 / 5MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	19.11	0.0815	21.55	0.1427
Middle		1	0	18.80	0.0758	21.61	0.1450
Highest		1	0	18.78	0.0756	20.72	0.1179
Lowest	16QAM	1	0	18.38	0.0688	20.71	0.1177
Middle		1	0	18.35	0.0684	20.94	0.1241
Highest		1	0	18.14	0.0651	20.10	0.1024
Limit	EIRP < 2W			Result		PASS	

LTE Band 7 / 10MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	18.60	0.0724	21.64	0.1459
Middle		1	0	18.57	0.0720	21.23	0.1327
Highest		1	0	18.67	0.0736	20.87	0.1222
Lowest	16QAM	1	0	17.98	0.0628	20.81	0.1206
Middle		1	0	17.90	0.0617	20.50	0.1122
Highest		1	0	18.30	0.0676	20.44	0.1106
Limit	EIRP < 2W			Result		PASS	



LTE Band 7 / 15MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	17.77	0.0598	20.81	0.1204
Middle		1	0	17.80	0.0603	20.43	0.1104
Highest		1	0	18.48	0.0704	20.94	0.1241
Lowest	16QAM	1	0	17.58	0.0573	20.82	0.1207
Middle		1	0	17.50	0.0562	20.28	0.1067
Highest		1	0	18.13	0.0651	20.53	0.1129
Limit	EIRP < 2W			Result		PASS	

LTE Band 7 / 20MHz (Average)							
Channel	Modulation	RB		Horizontal		Vertical	
		Size	Offset	EIRP(dBm)	EIRP(W)	EIRP(dBm)	EIRP(W)
Lowest	QPSK	1	0	18.26	0.0670	20.68	0.1170
Middle		1	0	18.38	0.0689	20.75	0.1189
Highest		1	0	19.07	0.0808	21.20	0.1317
Lowest	16QAM	1	0	18.10	0.0646	20.74	0.1186
Middle		1	0	18.21	0.0662	20.47	0.1115
Highest		1	0	18.42	0.0695	20.64	0.1158
Limit	EIRP < 2W			Result		PASS	