



**FCC CFR47 PART 22 SUBPART H
FCC CFR47 PART 24 SUBPART E
FCC CFR47 PART 27 SUBPART F, H and M**

CERTIFICATION TEST REPORT

GSM/WCDMA/LTE PHONE with BT, DTS/UNII a/b/g/n/ac & NFC

FCC ID: PY7-PM0942

REPORT NUMBER: R11139405C-E1V2

ISSUE DATE: 5/5/2016

Prepared for
**SONY MOBILE COMMUNICATIONS INC.
4-12-3 HIGASHI-SHINAGAWA,
SHINAGAWA -KU,TOKYO, 140-0002, JAPAN**

Prepared by
**UL LLC
12 LABORATORY DR.
RESEARCH TRIANGLE PARK, NC 27709 USA
TEL: (919) 549-1400**



NVLAP LAB CODE 200065-0

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
V1	4/15/2016	Initial Issue	C. OOI
V2	5/5/2016	Updated Page 16	C. OOI

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS 5

2. TEST METHODOLOGY 6

3. FACILITIES AND ACCREDITATION 6

4. CALIBRATION AND UNCERTAINTY 6

 4.1. *MEASURING INSTRUMENT CALIBRATION 6*

 4.2. *SAMPLE CALCULATION 6*

 4.3. *MEASUREMENT UNCERTAINTY 7*

5. EQUIPMENT UNDER TEST 8

 5.1. *DESCRIPTION OF EUT 8*

 5.2. *MAXIMUM OUTPUT POWER (GSM/EGPRS) 8*

 5.3. *MAXIMUM OUTPUT POWER (WCDMA) 9*

 5.1. *MAXIMUM OUTPUT POWER (LTE) 10*

 5.2. *DESCRIPTION OF AVAILABLE ANTENNAS 15*

 5.3. *DESCRIPTION OF TEST SETUP 16*

6. TEST AND MEASUREMENT EQUIPMENT 19

7. SUMMARY TABLE 21

8. RF POWER OUTPUT VERIFICATION 22

 8.1. *GSM/GPRS/EDGE 22*

 8.2. *GSM OUTPUT POWER RESULT 23*

 8.3. *UMTS REL 99 25*

 8.4. *UMTS REL 99 OUTPUT POWER RESULT 26*

 8.5. *UMTS HSDPA 27*

 8.6. *UMTS HSDPA OUTPUT POWER RESULT 28*

 8.7. *UMTS HSUPA 29*

 8.8. *UMTS HSUPA OUTPUT POWER RESULT 30*

 8.9. *LTE OUTPUT POWER RESULT 31*

9. PEAK TO AVERAGE RATIO 42

 9.1. *CONDUCTED PEAK TO AVERAGE RESULT 43*

10. OCCUPIED BANDWIDTH 54

 10.1. *OCCUPIED BANDWIDTH RESULTS AND PLOTS 55*

11. BAND EDGE EMISSIONS 73

 11.1. *BAND EDGE PLOTS 74*

11.2.	EMISSION MASK PLOTS	103
12.	OUT OF BAND EMISSIONS.....	109
12.1.	OUT OF BAND EMISSIONS RESULT AND PLOTS	110
13.	FREQUENCY STABILITY.....	128
13.1.	FREQUENCY STABILITY RESULTS.....	129
14.	RADIATED TEST RESULTS	135
14.1.	RADIATED POWER (ERP & EIRP).....	135
14.1.1.	ERP/EIRP RESULTS AND TABLE	136
14.2.	FIELD STRENGTH OF SPURIOUS RADIATION.....	154
14.2.1.	SPURIOUS RADIATION PLOTS.....	155
15.	SETUP PHOTOS	166

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: SONY MOBILE COMMUNICATIONS, INC.
EUT DESCRIPTION: GSM/WCDMA/LTE PHONE with BT, DTS/UNII a/b/g/n/ac & NFC
SERIAL NUMBER: Radiated - CB5129Z2CL (GSM/WCDMA),
CB5129Z27H (sample #2)/ CB5129Z315 (sample #1) (LTE)
Conducted – CB5129YQX0 (GSM/WCDMA), CB5129YQFT (LTE)
DATE TESTED: April 11- 15, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 22H, 24E, 27H, 27F, 27M	PASS

UL LLC reports apply only to the specific samples tested under stated test conditions. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. UL LLC shall have no liability for any deductions, inferences or generalizations drawn by the client or others from UL LLC issued reports. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

This report may contain test results that are not covered by the NVLAP or A2LA accreditation. The scope of accreditation is limited to the specific tests that are listed on the NVLAP and/or A2LA websites referenced at the end of this report.

Approved & Released For

UL LLC. By:

Prepared By:



FRANK IBRAHIM
CONSUMER TECHNOLOGY DIVISION
WISE PROJECT LEAD
UL VERIFICATION SERVICES INC

CHOON SIAN OOI
CONSUMER TECHNOLOGY DIVISION
WISE LAB ENGINEER
UL VERIFICATION SERVICES INC

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with TIA-603-D, FCC CFR 47 Part 22/24, FCC CFR Part 2 and FCC CFR 47 Part 27.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA and 2800 Suite B, Perimeter Park Drive, Morrisville, NC 27560.

12 Laboratory Dr., RTP, NC 27709	
<input type="checkbox"/>	Chamber A
<input type="checkbox"/>	Chamber C

2800 Suite B Perimeter Park Dr., Morrisville, NC 27560	
<input checked="" type="checkbox"/>	Chamber NORTH
<input type="checkbox"/>	Chamber SOUTH

The onsite chambers are covered under Industry Canada company address code 2180C with site numbers 2180C -1 through 2180C-4

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <http://www.nist.gov/nvlap/>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{EIRP} &= \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} + \text{Substitution Antenna Factor (dBi)} \\ \text{ERP} &= \text{PSA reading with EUT worst orientation (dBm)} + \text{Path loss (dB)} - \text{cable loss (between the SG and substitution antenna)} \\ &(\text{Path loss} = \text{Signal generator output} - \text{PSA reading with substitution antenna}) \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER		UNCERTAINTY
Total RF power, conducted	+/-	0.45
RF power density, conducted	+/-	1.50
Spurious emissions, conducted	+/-	2.94
All emissions, radiated up to 26 GHz	+/-	5.36
Temperature	+/-	0.07
Humidity	+/-	2.26
DC and low frequency voltages	+/-	1.27
Conducted Emissions (0.150-30MHz)	+/-	2.37

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

This EUT is a GSM/WCDMA/LTE PHONE with BT, DTS/UNII a/b/g/n/ac & NFC.

5.2. MAXIMUM OUTPUT POWER (GSM/EGPRS)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
GSM850	824~849	GMSK	32.6	1819.70		
	824~849	GPRS	32.6	1819.70	25.49	354.00
	824~849	EGPRS	27.4	549.54	21.06	127.64
GSM1900	1850~1910	GMSK	30.4	1096.48		
	1850~1910	GPRS	30.4	1096.48	25.94	392.64
	1850~1910	EGPRS	26.8	478.63	22.31	170.22

5.3. MAXIMUM OUTPUT POWER (WCDMA)

The transmitter has a maximum peak conducted and radiated ERP / EIRP output powers as follows:

FCC Part 22/24/27						
Band	Frequency Range(MHz)	Modulation	Conducted		Radiated	
			AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
Band 2	1850~1910	REL99	23.7	234.42	20.06	101.39
	1850~1910	HSDPA	22.6	181.97	18.75	74.99
	1850~1910	HSUPA	22.3	169.82		
Band 4	1710~1755	REL99	24.2	263.03	21.66	146.55
	1710~1755	HSDPA	22.6	181.97	20.31	107.40
	1710~1755	HSUPA	22.6	181.97		

5.1. MAXIMUM OUTPUT POWER (LTE)

The transmitter has a maximum peak conducted and radiated ERP/EIRP output powers as follows:

LTE Band 2

FCC Part 24							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE2	1850~1910	1.4MHz	QPSK	23.1	204.64	19.97	99.31
			16QAM	22.5	176.20	19.11	81.47
		3MHz	QPSK	23.2	208.45	20.05	101.16
			16QAM	22.6	180.72	19.25	84.14
		5MHz	QPSK	23.2	208.45	19.94	98.63
			16QAM	22.7	186.64	19.01	79.62
		10MHz	QPSK	23.4	216.27	20.29	106.91
			16QAM	22.7	187.93	19.45	88.10
		15MHz	QPSK	23.4	216.27	20.38	109.14
			16QAM	22.8	191.87	19.40	87.10
		20MHz	QPSK	23.3	213.80	20.24	105.68
			16QAM	22.8	190.55	19.72	93.76

LTE Band 4

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE4	1710~1755	1.4MHz	QPSK	23.7	232.27	20.79	119.95
			16QAM	22.7	187.07	19.79	95.28
		3MHz	QPSK	23.6	229.61	20.59	114.55
			16QAM	23.0	197.70	19.77	94.84
		5MHz	QPSK	23.6	227.51	20.74	118.58
			16QAM	22.8	190.55	19.88	97.27
		10MHz	QPSK	23.7	236.59	20.95	124.45
			16QAM	22.8	190.55	20.00	100.00
		15MHz	QPSK	23.7	234.42	21.11	129.12
			16QAM	22.8	188.36	20.27	106.41
		20MHz	QPSK	23.6	226.46	21.44	139.32
			16QAM	23.0	199.53	20.48	111.69

LTE Band 12

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE12	699~716	1.4MHz	QPSK	23.4	218.78	13.75	23.71
			16QAM	22.5	177.83	12.93	19.63
		3MHz	QPSK	23.4	218.78	13.69	23.39
			16QAM	22.7	186.21	12.76	18.88
		5MHz	QPSK	23.3	213.80	13.86	24.32
			16QAM	22.8	190.55	13.17	20.75
		10MHz	QPSK	23.5	223.87	12.93	19.63
			16QAM	22.9	194.98	12.04	16.00

LTE Band 17

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	AVG(dBm)	AVG(mW)
LTE17	704~716	5MHz	QPSK	23.3	213.80	13.75	23.71
			16QAM	22.6	181.97	12.74	18.79
		10MHz	QPSK	23.4	218.78	13.89	24.49
			16QAM	22.5	177.83	12.98	19.86

LTE Band 41

FCC Part 27							
Band	Frequency Range(MHz)	BandWidth (MHz)	Modulation	Conducted		Radiated	
				AVG(dBm)	AVG(mW)	PEAK(dBm)	PEAK(mW)
LTE41	2496~2690	5MHz	QPSK	18.2	66.22	24.73	297.17
			16QAM	18.4	68.71	25.72	373.25
		10MHz	QPSK	18.2	66.53	24.91	309.74
			16QAM	18.2	66.37	26.30	426.58
		15MHz	QPSK	18.2	65.61	25.86	385.48
			16QAM	18.2	66.68	26.75	473.15
		20MHz	QPSK	18.5	70.63	26.13	410.20
			16QAM	18.4	69.34	27.23	528.45

5.2. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna for the [List the bands supported] with a maximum peak gain as follow:

Frequency (MHz)	Peak Gain (dBi)
GSM850, 824~849MHz	-6.5
GSM1900, 1850~1910MHz	-1.5
WCDMA Band 2, 1850~1910	-1.5
WCDMA Band 4, 1710~1755	-2.2
LTE Band 2, 1850~1910MHz	-1.5
LTE Band 4, 1710~1755MHz	-2.2
LTE Band 12, 699~716MHz	-11.3
LTE Band 17, 704~716MHz	-11.3
LTE Band 41, 2496~2690MHz	-0.9

5.3. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
AC Adapter	SONY	UCH 20 1295-70821	N/A	N/A
Earphone	SONY	N/A	N/A	N/A

I/O CABLES (CONDUCTED SETUP)

I/O Cable List						
Cable No	Port	# of Identical ports	Connector Type	Serial Type	Cable Length (m)	Remarks
1	RF Out	1	Spectrum Analyzer	Shielded	None	NA
2	Antenna Port	1	EUT	Shielded	0.1m	NA
3	RF In/Out	1	Communication Test Set	Shielded	1m	NA


I/O CABLES (RADIATED SETUP)

I/O Cable List						
Cable No	Port	# of Identical ports	Connector Type	Serial Type	Cable Length (m)	Remarks
1	USB	1	AC Adapter	Un-shielded	1.2m	No
2	Jack	1	Headset	Shielded	1m	No
3	RF In/out	1	Communication Test Set	Un-shielded	2m	Yes


TEST SETUP

The EUT is continuously communicated to the call box during the tests.

SETUP DIAGRAM FOR TESTS (CONDUCTED TEST SETUP)

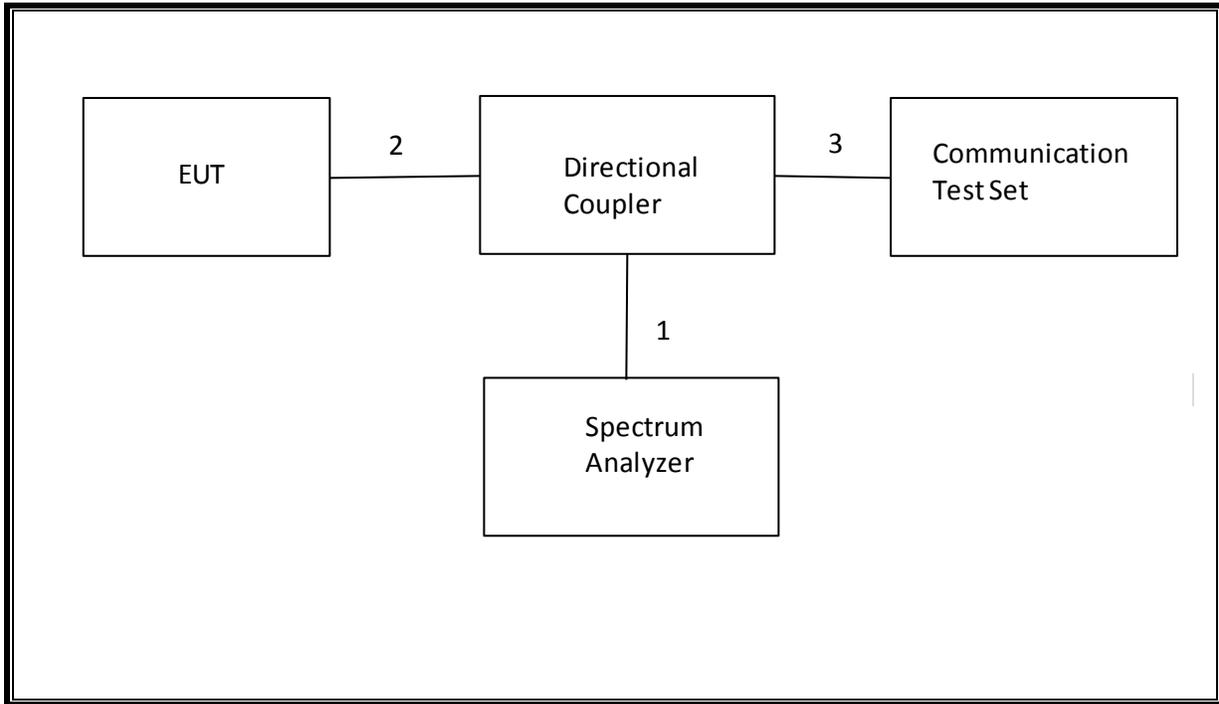

SETUP DIAGRAM FOR TESTS (RADIATED TEST SETUP)

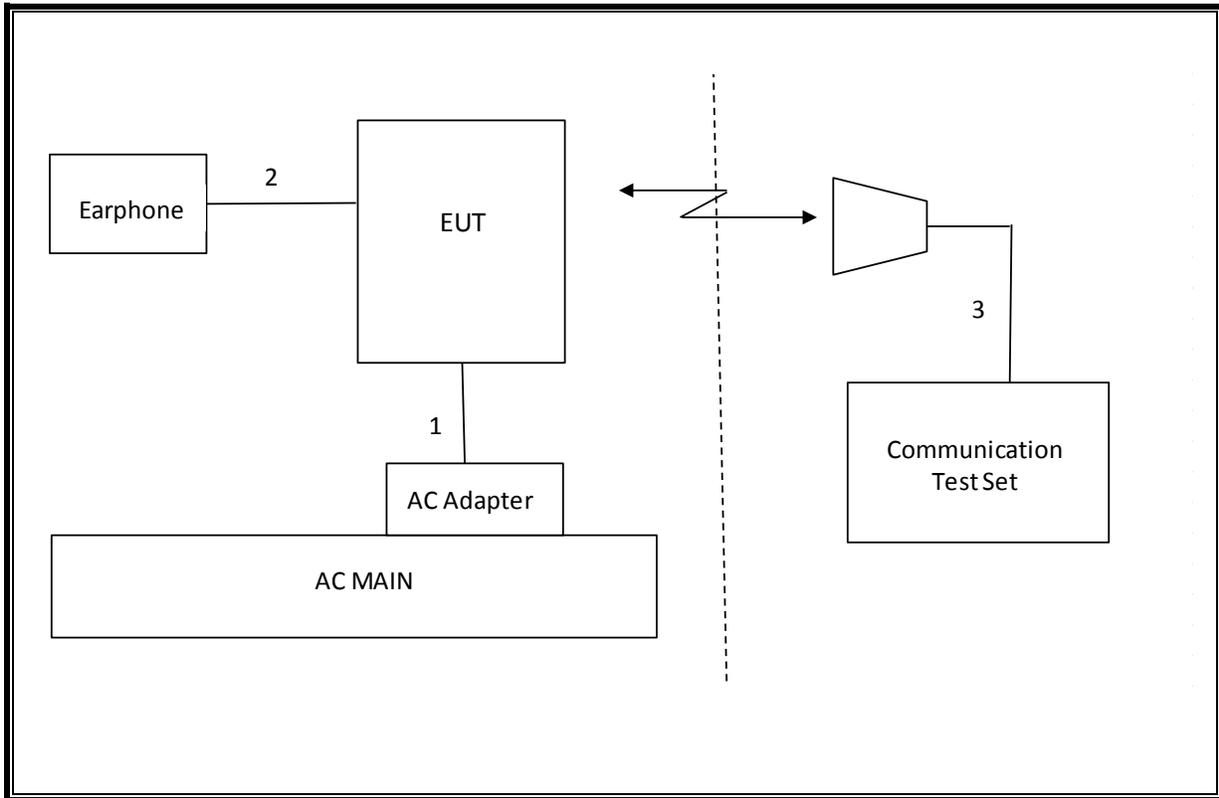

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville - North Chamber)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	0.009-30MHz	(Loop Ant.)			
AT0079	Active Loop Antenna	ETS-Lindgren	6502	2015-12-08	2016-12-31
	30-1000 MHz				
AT0073	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2015-06-10	2016-06-30
	1-18 GHz				
AT0072	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2016-03-07	2017-03-31
	Tuned Dipole Set				
AT0013-AT0016	Four Dipole Antenna Set, 30 to 1000 MHz	EMCO	3121C-DB-1, -2, -3, -4	2015-05-06	2016-05-31
	Gain-Loss Chains				
N-SAC01	Gain-loss string: 0.009-30MHz	Various	Various	2015-10-07	2016-10-31
N-SAC02	Gain-loss string: 30-1000MHz	Various	Various	2015-06-04	2016-06-30
N-SAC03	Gain-loss string: 1-18GHz	Various	Various	2015-09-29	2016-09-30
	Receiver & Software				
SA0027	Spectrum Analyzer	Agilent	N9030A	2016-02-08	2017-02-08
T374	Wideband Radio Communications Tester	Rohde and Schwartz	CMW500	2014-10-13	2015-10-31
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	Additional Equipment used				
HI0079	Temp/Humid/Pressure Meter (Module)	Springfield Precision	PreciseTemp	2015-07-01	2016-07-31
AT0078	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz. Used for substitution.	ETS Lindgren	3117	2015-10-15	2016-10-31
T374	Wideband Radio Communications Tester	Rohde and Schwartz	CMW500	2015-10-21	2016-10-31

Test Equipment Used - Wireless Conducted Measurement Equipment

Equipment ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
Conducted Room 1					
SA0026	Spectrum Analyzer	Agilent	N9030A	2016-02-24	2017-02-28
PWM004	RF Power Meter	Keysight Technologies	N1911A	2015-06-08	2017-06-08
PWS004	Peak and Avg Power Sensor, 50MHz to 6GHz	Keysight Technologies	E9323A	2015-06-05	2016-06-05
HI0079	Temp/Humid/Pressure Meter (Base)	Springfield	PreciseTemp	2015-07-01	2016-07-31
MM0167	True RMS Multimeter	Agilent	U1232A	2015-08-17	2016-08-31
76022	DC Regulated Power Supply	CircuitSpecialists. Com	CSI3005X5	NA	NA
Conducted Room 2					
SA0026	Spectrum Analyzer	Agilent	N9030A	2016-02-24	2017-02-28
PWM003	RF Power Meter	Keysight Technologies	N1911A	2015-06-08	2017-06-08
PWS003	Peak and Avg Power Sensor, 50MHz to 6GHz	Keysight Technologies	E9323A	2015-06-05	2016-06-05
1100502	Temp/Humid Chamber	Cincinnati Sub-Zero	ZPH-8-3.5-SCT/AC	2015-05-13	2016-05-31
HI0080	Temp/Humid/Pressure Meter (Module)	Springfield Precision	PreciseTemp	2015-07-01	2016-07-31
MM0168	True RMS Multimeter	Agilent	U1232A	2015-08-17	2016-08-31
76021	DC Regulated Power Supply	CircuitSpecialists. Com	CSI3005X5	NA	NA
Additional Equipment used					
T918	Wideband Radio Communications Tester	Rohde and Schwartz	CMW500	2016-01-21	2016-01-31

7. SUMMARY TABLE

FCC Part Section	Test Description	Test Limit	Test Condition	Test Result	
2.1049	Occupied Bandwidth (99%)	N/A	Conducted	Pass	
22.917(a) 24.238(a) 27.53(g)	Band Edge / Conducted Spurious Emission	-13dBm		Pass	
27.53(m)		-25dBm			
2.1046	Conducted output power	N/A		Pass	
27.53(m) 90.691	Emission Mask	Please refer to limit under section 11		Pass	
22.355	Frequency Stability	2.5PPM		Pass	
24.235 27.54		Please refer to limit under section 13		Pass	
22.913(a)(2)	Effective Radiated Power	38dBm		Radiated	Pass
27.50©(10)		34.77dBm			Pass
24.232(c) 27.50(h)(2)	Equivalent Isotropic Radiated Power	33dBm		Pass	
27.50(d)(4)		30dBm	Pass		
27.53(m)		-25dBm	Pass		

8. RF POWER OUTPUT VERIFICATION

8.1. GSM/GPRS/EDGE

Function: Menu select > GSM Mobile Station > GSM 850/900/1800/1900
Press Connection control to choose the different menus
Press RESET > choose all to reset all settings
Connection Press Signal Off to turn off the signal and change settings
Network Support > GSM+GPRS or GSM+EGPRS
Main Service > Packet Data
Service selection > Test Mode A – Auto Slot Config. off
MS Signal Press Slot Config bottom on the right twice to select and change the number of time slots and power setting
 > Slot configuration > Uplink/Gamma
 > 33 dBm for GPRS 850/900
 > 30 dBm for GPRS1800/1900
BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel
Frequency Offset > + 0 Hz
Mode > BCCH and TCH
BCCH Level > -85 dBm (May need to adjust if link is not stable)
BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]
Channel Type > Off
P0> 4 dB
Slot Config > Unchanged (if already set under MS Signal)
TCH > choose desired test channel
Hopping > Off
Main Timeslot > 3 (Default)
Network Coding Scheme > CS4 (GPRS) and MCS5 ~ MCS9 (EGPRS)
 Bit Stream > 2E9-1PSR Bit Pattern
AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
Connection Press Signal On to turn on the signal and change settings

8.2. GSM OUTPUT POWER RESULT

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
GSM (Voice)	CS1	1	128	824.4	32.6	23.6
			190	836.6	32.5	23.5
			251	848.8	32.5	23.5
GPRS (GMSK)	CS1	1	128	824.4	32.6	23.6
			190	836.6	32.5	23.5
			251	848.8	32.5	23.5
		2	128	824.4	32.0	26.0
			190	836.6	31.9	25.9
			251	848.8	31.8	25.8
		3	128	824.4	30.0	25.7
			190	836.6	30.0	25.7
			251	848.8	30.0	25.7
		4	128	824.4	28.8	25.8
			190	836.6	28.6	25.6
			251	848.8	28.6	25.6

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
EGPRS (8PSK)	MCS5	1	128	824.4	27.4	18.4
			190	836.6	27.3	18.3
			251	848.8	27.2	18.2
		2	128	824.4	26.0	20.0
			190	836.6	25.9	19.9
			251	848.8	25.8	19.8
		3	128	824.4	24.0	19.7
			190	836.6	24.0	19.7
			251	848.8	23.9	19.6
		4	128	824.4	23.2	20.2
			190	836.6	23.0	20.0
			251	848.8	23.0	20.0

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
GSM (Voice)	CS1	1	512	1850.2	30.4	21.4
			661	1880.0	30.3	21.3
			810	1909.8	30.3	21.3
GPRS (GMSK)	CS1	1	512	1850.2	30.4	21.4
			661	1880.0	30.3	21.3
			810	1909.8	30.3	21.3
		2	512	1850.2	28.9	22.9
			661	1880.0	28.8	22.8
			810	1909.8	28.9	22.9
		3	512	1850.2	27.0	22.7
			661	1880.0	26.8	22.5
			810	1909.8	27.0	22.7
		4	512	1850.2	25.9	22.9
			661	1880.0	25.7	22.7
			810	1909.8	25.9	22.9

Mode	Coding Scheme	Time Slots	Ch No.	Freq. (MHz)	Burst Pwr (dBm)	Frame Pwr (dBm)
EGPRS (8PSK)	MCS5	1	512	1850.2	26.8	17.8
			661	1880.0	26.6	17.6
			810	1909.8	26.8	17.8
		2	512	1850.2	25.2	19.2
			661	1880.0	25.0	19.0
			810	1909.8	25.4	19.4
		3	512	1850.2	22.7	18.4
			661	1880.0	22.9	18.6
			810	1909.8	22.8	18.5
		4	512	1850.2	21.7	18.7
			661	1880.0	21.6	18.6
			810	1909.8	22.0	19.0

8.3. UMTS REL 99

TEST PROCEDURE

The following summary of these settings are illustrated below:

	Mode	Rel99
	Subtest	-
WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	HSDPA FRC	Not Applicable
	HSUPA Test	Not Applicable
	Power Control Algorithm	Algorithm2
	β_c	Not Applicable
	β_d	Not Applicable
	β_{ec}	Not Applicable
	β_c/β_d	8/15
	β_{hs}	Not Applicable
β_{ed}	Not Applicable	

8.4. UMTS REL 99 OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Rel 99 (RMC, 12.2 kbps)	9262	1852.4	0	23.6
		9400	1880.0	0	23.7
		9538	1907.6	0	23.5

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band IV	Rel 99 (RMC, 12.2 kbps)	1312	1712.4	0	24.2
		1413	1732.6	0	24.1
		1513	1752.6	0	24.2

8.5. UMTS HSDPA

The following 4 Sub-tests were completed according to Release 5 procedures in section 5.2 of 3GPP TS34.121. A summary of these settings are illustrated below:

	Mode	Rel5 HSDPA			
	Subtest	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm 2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	Bd (SF)	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR (dB)	0	0	0.5	0.5
HSDPA Specific Settings	D_{ACK}	8			
	D_{NAK}	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback (Table 5.2B.4)	4ms			
	CQI Repetition Factor (Table 5.2B.4)	2			
	$A_{hs} = \beta_{hs}/\beta_c$	30/15			

8.6. UMTS HSDPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	22.2
		9400	1880.0	0	22.2
		9538	1907.6	0	22.6
	Subtest 2	9262	1852.4	0	22.2
		9400	1880.0	0	22.2
		9538	1907.6	0	22.1
	Subtest 3	9262	1852.4	0.5	22.2
		9400	1880.0	0.5	22.2
		9538	1907.6	0.5	22.1
	Subtest 4	9262	1852.4	0.5	22.2
		9400	1880.0	0.5	22.2
		9538	1907.6	0.5	22.1

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band IV	Subtest 1	1312	1712.4	0	22.6
		1413	1732.6	0	22.5
		1513	1752.6	0	22.6
	Subtest 2	1312	1712.4	0	22.6
		1413	1732.6	0	22.5
		1513	1752.6	0	22.6
	Subtest 3	1312	1712.4	0.5	22.6
		1413	1732.6	0.5	22.5
		1513	1752.6	0.5	22.6
	Subtest 4	1312	1712.4	0.5	22.6
		1413	1732.6	0.5	22.5
		1513	1752.6	0.5	22.6

8.7. UMTS HSUPA

TEST PROCEDURE

The following summary of these settings are illustrated below: (ETSI TS 134.121-1 Table C.11.1)

	Mode	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA	Rel6 HSUPA
	Subtest	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	P-CPICH (dB)	-10				
	P-CCPCH (dB)	-12				
	SCH (dB)	-12				
	PICH(dB)	-15				
	DPCH (dB)	-9				
	HS-SCCH_1 (dB)	-8				
	HS-PDSCH (dB)	-3				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	Bc	11/15	6/15	15/15	2/15	15/15
	Bd	15/15	15/15	9/15	15/15	15/15
	Bec	209/225	12/15	30/15	2/15	5/15
	$\beta c/\beta d$	11/15	6/15	15/9	2/15	15/15
	Bhs	22/15	12/15	30/15	4/15	30/15
βed (note1)	1309/225	94/75	47/15	56/75	134/15	
MPR	0	2	1	2	0	
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback (Table 5.2B.4)	4ms				
	CQI Repetition Factor (Table 5.2B.4)	2				
Ahs = $\beta hs/\beta c$	30/15					
HSUPA Specific Settings	D E-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	Reference E-TFCIs	5	5	2	5	5
	ETFCI (from 34.121 Table C.11.1.3)	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_TFCIs	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO 4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO 23 E-TFCI 75 E-TFCI PO 26 E-TFCI 81 E-TFCI PO 27

Note1: βed cannot be set directly, it is set by Absolute Grant Value.

8.8. UMTS HSUPA OUTPUT POWER RESULT

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band II	Subtest 1	9262	1852.4	0	22.2
		9400	1880.0	0	22.2
		9538	1907.6	0	22.3
	Subtest 2	9262	1852.4	2	20.4
		9400	1880.0	2	20.3
		9538	1907.6	2	20.4
	Subtest 3	9262	1852.4	1	21.3
		9400	1880.0	1	21.3
		9538	1907.6	1	21.4
	Subtest 4	9262	1852.4	2	20.3
		9400	1880.0	2	20.4
		9538	1907.6	2	20.4
	Subtest 5	9262	1852.4	0	22.2
		9400	1880.0	0	22.2
		9538	1907.6	0	22.3

Band	Mode	UL Ch No.	Freq. (MHz)	MPR	Avg Pwr (dBm)
W-CDMA Band IV	Subtest 1	1312	1712.4	0	22.6
		1413	1732.6	0	22.5
		1513	1752.6	0	22.6
	Subtest 2	1312	1712.4	2	21.1
		1413	1732.6	2	21.1
		1513	1752.6	2	21.1
	Subtest 3	1312	1712.4	1	21.6
		1413	1732.6	1	21.4
		1513	1752.6	1	21.7
	Subtest 4	1312	1712.4	2	21.1
		1413	1732.6	2	21.1
		1513	1752.6	2	21.1
	Subtest 5	1312	1712.4	0	22.6
		1413	1732.6	0	22.5
		1513	1752.6	0	22.6

8.9. LTE OUTPUT POWER RESULT

LTE Band 2

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						18607	18900	19193
						1850.7 MHz	1880 MHz	1909.3 MHz
LTE Band 2	1.4	QPSK	1	0	0	22.93	23.02	22.71
			1	3	0	22.96	23.07	22.62
			1	5	0	22.86	23.01	22.41
			3	0	0	22.91	23.07	22.62
			3	1	0	22.93	23.09	22.60
			3	3	0	22.97	23.11	22.54
		16QAM	6	0	1	21.92	22.03	21.80
			1	0	1	22.05	22.38	21.80
			1	3	1	22.09	22.46	21.74
			1	5	1	22.07	22.40	21.58
			3	0	1	22.02	22.24	21.97
			3	1	1	22.07	22.30	21.96
			3	3	1	22.09	22.29	21.92
			6	0	2	21.12	20.97	21.16

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						18615	18900	19185
						1851.5 MHz	1880 MHz	1908.5 MHz
LTE Band 2	3	QPSK	1	0	0	22.98	23.11	23.15
			1	8	0	23.07	23.19	22.92
			1	14	0	23.01	23.17	22.47
			8	0	1	22.02	22.14	22.10
			8	4	1	22.05	22.16	22.08
			8	7	1	22.05	22.17	22.08
			15	0	1	22.07	22.17	22.18
		16QAM	1	0	1	21.93	22.47	22.30
			1	8	1	22.04	22.57	22.03
			1	14	1	21.94	22.54	21.62
			8	0	2	21.18	21.01	21.34
			8	4	2	21.18	21.03	21.33
			8	7	2	21.18	21.04	21.35
			15	0	2	21.11	21.15	21.14

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						18625	18900	19175
						1852.5 MHz	1880 MHz	1907.5 MHz
LTE Band 2	5	QPSK	1	0	0	23.02	23.16	23.13
			1	12	0	23.01	23.11	22.93
			1	24	0	23.02	23.19	22.42
			12	0	1	22.07	22.12	22.17
			12	7	1	22.11	22.13	22.16
			12	13	1	22.08	22.09	22.20
		16QAM	25	0	1	22.06	22.11	22.10
			1	0	1	22.26	22.65	22.27
			1	12	1	22.23	22.66	22.21
			1	24	1	22.24	22.71	21.73
			12	0	2	21.17	21.29	21.25
			12	7	2	21.19	21.29	21.22
			12	13	2	21.17	21.30	21.22
			25	0	2	21.14	21.21	21.14

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						18650	18900	19150
						1855 MHz	1880 MHz	1905 MHz
LTE Band 2	10	QPSK	1	0	0	23.19	23.26	23.35
			1	25	0	23.03	23.14	23.25
			1	49	0	23.35	23.33	22.55
			25	0	1	22.10	22.22	22.21
			25	12	1	22.12	22.22	22.25
			25	25	1	22.15	22.27	22.20
		16QAM	50	0	1	22.11	22.17	22.27
			1	0	1	22.24	22.60	22.20
			1	25	1	22.06	22.55	22.26
			1	49	1	22.29	22.74	21.65
			25	0	2	21.19	21.21	21.46
			25	12	2	21.13	21.22	21.44
			25	25	2	21.19	21.28	21.31
			50	0	2	21.16	21.22	21.37

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						18675	18900	19125
						1857.5 MHz	1880 MHz	1902.5 MHz
LTE Band 2	15	QPSK	1	0	0	22.77	22.73	22.71
			1	37	0	23.34	23.35	23.29
			1	74	0	23.20	23.08	22.81
			36	0	1	22.05	22.04	22.13
			36	20	1	22.30	22.23	22.36
			36	39	1	22.34	22.27	22.50
		16QAM	75	0	1	22.18	22.15	22.38
			1	0	1	21.74	22.10	22.20
			1	37	1	22.34	22.54	22.83
			1	74	1	22.20	22.46	22.19
			36	0	2	21.17	21.09	21.19
			36	20	2	21.41	21.28	21.48
			36	39	2	21.41	21.37	21.64
			75	0	2	21.28	21.17	21.50

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						18700	18900	19100
						1860 MHz	1880 MHz	1900 MHz
LTE Band 2	20	QPSK	1	0	0	22.70	22.60	22.70
			1	49	0	23.30	23.30	23.30
			1	99	0	23.20	23.10	22.90
			50	0	1	22.10	21.90	22.00
			50	24	1	22.30	22.30	22.10
			50	50	1	22.40	22.30	22.30
		16QAM	100	0	1	22.10	22.10	22.10
			1	0	1	22.10	22.10	22.10
			1	49	1	22.50	22.80	22.60
			1	99	1	22.60	22.70	22.30
			50	0	2	21.10	21.00	21.00
			50	24	2	21.40	21.30	21.10
			50	50	2	21.50	21.30	21.30
			100	0	2	21.20	21.20	21.30

LTE Band 4

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						19957	20175	20393
						1710.7 MHz	1732.5 MHz	1754.3 MHz
LTE Band 4	1.4	QPSK	1	0	0	23.62	23.49	23.38
			1	3	0	23.61	23.64	23.37
			1	5	0	23.47	23.38	23.34
			3	0	0	23.59	23.53	23.36
			3	1	0	23.65	23.53	23.36
			3	3	0	23.66	23.49	23.34
		16QAM	6	0	1	22.46	22.38	22.27
			1	0	1	22.54	22.57	22.68
			1	3	1	22.63	22.64	22.72
			1	5	1	22.57	22.53	22.65
			3	0	1	22.66	22.60	22.54
			3	1	1	22.76	22.64	22.45
			3	3	1	22.81	22.57	22.45
			6	0	2	21.79	21.58	21.49

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						19965	20175	20385
						1711.5 MHz	1732.5 MHz	1753.5 MHz
LTE Band 4	3	QPSK	1	0	0	23.54	23.47	23.23
			1	8	0	23.61	23.50	23.41
			1	14	0	23.48	23.46	23.37
			8	0	1	22.55	22.55	22.32
			8	4	1	22.57	22.57	22.25
			8	7	1	22.58	22.52	22.33
			15	0	1	22.58	22.49	22.41
		16QAM	1	0	1	22.37	22.86	22.34
			1	8	1	22.50	22.96	22.52
			1	14	1	22.34	22.86	22.43
			8	0	2	21.70	21.46	21.54
			8	4	2	21.73	21.57	21.50
			8	7	2	21.73	21.50	21.58
			15	0	2	21.62	21.54	21.39

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						19975	20175	20375
						1712.5 MHz	1732.5 MHz	1752.5 MHz
LTE Band 4	5	QPSK	1	0	0	23.47	23.54	23.40
			1	12	0	23.41	23.44	23.42
			1	24	0	23.42	23.57	23.52
			12	0	1	22.58	22.55	22.52
			12	7	1	22.60	22.47	22.55
			12	13	1	22.56	22.49	22.53
		16QAM	25	0	1	22.53	22.50	22.46
			1	0	1	22.74	22.70	22.54
			1	12	1	22.68	22.80	22.59
			1	24	1	22.73	22.70	22.62
			12	0	2	21.66	21.70	21.59
			12	7	2	21.69	21.67	21.61
			12	13	2	21.67	21.67	21.59
			25	0	2	21.62	21.60	21.54

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						20000	20175	20350
						1715 MHz	1732.5 MHz	1750 MHz
LTE Band 4	10	QPSK	1	0	0	23.62	23.74	23.58
			1	25	0	23.37	23.57	23.42
			1	49	0	23.67	23.67	23.58
			25	0	1	22.44	22.59	22.44
			25	12	1	22.40	22.61	22.47
			25	25	1	22.41	22.62	22.45
		16QAM	50	0	1	22.46	22.53	22.50
			1	0	1	22.54	22.70	22.69
			1	25	1	22.29	22.80	22.51
			1	49	1	22.53	22.80	22.62
			25	0	2	21.52	21.63	21.60
			25	12	2	21.50	21.69	21.61
			25	25	2	21.50	21.66	21.56
			50	0	2	21.52	21.62	21.56

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						20025	20175	20325
						1717.5 MHz	1732.5 MHz	1747.5 MHz
LTE Band 4	15	QPSK	1	0	0	23.13	23.15	23.03
			1	37	0	23.70	23.49	23.55
			1	74	0	23.16	23.24	23.07
			36	0	1	22.39	22.36	22.28
			36	20	1	22.46	22.51	22.42
			36	39	1	22.50	22.45	22.40
		16QAM	75	0	1	22.43	22.41	22.24
			1	0	1	22.05	22.49	22.24
			1	37	1	22.48	22.75	22.75
			1	74	1	22.19	22.51	22.29
			36	0	2	21.54	21.47	21.34
			36	20	2	21.58	21.64	21.47
			36	39	2	21.61	21.61	21.49
			75	0	2	21.52	21.50	21.33

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						20050	20175	20300
						1720 MHz	1732.5 MHz	1745 MHz
LTE Band 4	20	QPSK	1	0	0	22.81	22.88	22.83
			1	49	0	23.45	23.55	23.48
			1	99	0	22.85	22.93	22.78
			50	0	1	22.28	22.22	22.30
			50	24	1	22.47	22.49	22.52
			50	50	1	22.41	22.27	22.38
		16QAM	100	0	1	22.38	22.33	22.29
			1	0	1	22.38	22.30	22.25
			1	49	1	23.00	22.94	22.88
			1	99	1	22.42	22.29	22.14
			50	0	2	21.36	21.34	21.36
			50	24	2	21.57	21.58	21.56
			50	50	2	21.44	21.39	21.40
			100	0	2	21.54	21.39	21.39

LTE Band 12

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						23017	23095	23173
						699.7 MHz	707.5 MHz	715.3 MHz
LTE Band 12	1.4	QPSK	1	0	0	23.1	23.1	23.1
			1	3	0	23.2	23.1	23.3
			1	5	0	23.1	23.0	23.2
			3	0	0	23.2	23.1	23.3
			3	1	0	23.2	23.2	23.4
			3	3	0	23.2	23.1	23.4
		16QAM	6	0	1	22.1	22.1	22.3
			1	0	1	22.2	22.5	22.2
			1	3	1	22.2	22.5	22.4
			1	5	1	22.2	22.4	22.3
			3	0	1	22.2	22.4	22.5
			3	1	1	22.2	22.3	22.5
			3	3	1	22.3	22.3	22.5
			6	0	2	21.3	21.1	21.4

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						23025	23095	23165
						700.5 MHz	707.5 MHz	714.5 MHz
LTE Band 12	3	QPSK	1	0	0	23.2	23.1	23.2
			1	8	0	23.2	23.3	23.4
			1	14	0	23.0	23.1	23.2
			8	0	1	22.2	22.3	22.4
			8	4	1	22.2	22.3	22.3
			8	7	1	22.2	22.2	22.4
			15	0	1	22.1	22.2	22.3
		16QAM	1	0	1	22.0	22.5	22.3
			1	8	1	22.1	22.7	22.5
			1	14	1	22.0	22.5	22.3
			8	0	2	21.4	21.2	21.6
			8	4	2	21.3	21.1	21.5
			8	7	2	21.3	21.1	21.6
			15	0	2	21.2	21.3	21.2

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						23035	23095	23155
						701.5 MHz	707.5 MHz	713.5 MHz
LTE Band 12	5	QPSK	1	0	0	23.3	23.3	23.3
			1	12	0	23.2	23.2	23.3
			1	24	0	23.2	23.3	23.3
			12	0	1	22.3	22.2	22.1
			12	7	1	22.2	22.2	22.2
			12	13	1	22.2	22.2	22.2
		16QAM	25	0	1	22.2	22.2	22.2
			1	0	1	22.5	22.8	22.4
			1	12	1	22.4	22.7	22.4
			1	24	1	22.4	22.8	22.3
			12	0	2	21.4	21.4	21.2
			12	7	2	21.3	21.4	21.2
			12	13	2	21.3	21.4	21.3
			25	0	2	21.2	21.3	21.1

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)		
						23060	23095	23130
						704 MHz	707.5 MHz	711 MHz
LTE Band 12	10	QPSK	1	0	0	23.3	23.4	23.5
			1	25	0	23.2	23.2	23.2
			1	49	0	23.2	23.2	23.3
			25	0	1	22.3	22.3	22.3
			25	12	1	22.3	22.3	22.3
			25	25	1	22.2	22.2	22.2
			50	0	1	22.3	22.3	22.3
		16QAM	1	0	1	22.4	22.5	22.9
			1	25	1	22.1	22.3	22.6
			1	49	1	22.1	22.1	22.7
			25	0	2	21.3	21.4	21.3
			25	12	2	21.3	21.4	21.3
			25	25	2	21.2	21.3	21.2
			50	0	2	21.3	21.3	21.3

LTE Band 17

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)	
						23790	710 MHz
						LTE Band 17	5
		1	12	0	23.3		
		1	24	0	23.2		
		12	0	1	22.2		
		12	7	1	22.3		
		12	13	1	22.3		
		25	0	1	22.2		
		16QAM	1	0	1	22.4	
			1	12	1	22.6	
			1	24	1	22.5	
			12	0	2	21.3	
			12	7	2	21.4	
			12	13	2	21.4	
			25	0	2	21.3	

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)	
						23790	710 MHz
						LTE Band 17	10
		1	25	0	23.2		
		1	49	0	23.3		
		25	0	1	22.3		
		25	12	1	22.3		
		25	25	1	22.2		
		50	0	1	22.4		
		16QAM	1	0	1	22.5	
			1	25	1	22.3	
			1	49	1	22.3	
			25	0	2	21.4	
			25	12	2	21.4	
			25	25	2	21.3	
			50	0	2	21.4	

LTE Band 41

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)				
						39750	40185	40620	41055	41490
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	5	QPSK	1	0	0	17.75	18.17	17.78	17.94	17.80
			1	12	0	17.75	18.21	17.76	17.90	17.77
			1	24	0	17.76	18.21	17.74	17.89	17.75
			12	0	1	17.61	18.10	17.62	17.74	17.61
			12	7	1	17.61	18.11	17.63	17.76	17.67
			12	13	1	17.65	18.21	17.67	17.81	17.64
		16QAM	25	0	1	17.62	18.07	17.62	17.78	17.63
			1	0	1	17.60	18.25	17.50	17.63	17.64
			1	12	1	17.60	18.23	17.60	17.62	17.62
			1	24	1	17.55	18.37	17.53	17.66	17.62
			12	0	2	17.65	18.14	17.67	17.78	17.56
			12	7	2	17.66	18.16	17.66	17.79	17.63
			12	13	2	17.64	18.24	17.65	17.78	17.63
			25	0	2	17.66	18.12	17.67	17.80	17.68

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)				
						39750	40185	40620	41055	41490
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	10	QPSK	1	0	0	18.13	18.18	17.80	17.94	17.70
			1	25	0	18.03	18.14	17.74	17.84	17.74
			1	49	0	18.05	18.18	17.84	17.89	17.79
			25	0	1	18.14	18.20	17.68	17.80	17.69
			25	12	1	18.06	18.18	17.73	17.83	17.75
			25	25	1	18.11	18.23	17.70	17.81	17.69
		16QAM	50	0	1	18.11	18.18	17.72	17.83	17.63
			1	0	1	18.08	18.12	17.64	17.77	17.78
			1	25	1	17.97	18.03	17.60	17.73	17.80
			1	49	1	18.02	18.16	17.74	17.82	17.90
			25	0	2	18.10	18.15	17.62	17.75	17.68
			25	12	2	18.04	18.12	17.67	17.76	17.70
			25	25	2	18.09	18.22	17.66	17.78	17.69
			50	0	2	18.10	18.16	17.69	17.81	17.67

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)				
						39750	40185	40620	41055	41490
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	15	QPSK	1	0	0	18.17	18.09	18.06	18.05	17.81
			1	37	0	17.81	17.80	17.92	17.65	17.60
			1	74	0	18.11	18.16	18.14	18.03	17.73
			36	0	1	18.06	18.07	17.99	17.84	17.72
			36	20	1	17.94	17.92	17.93	17.76	17.71
			36	39	1	18.01	18.04	17.99	17.83	17.74
			75	0	1	18.00	18.00	18.00	17.85	17.75
		16QAM	1	0	1	18.24	18.17	18.03	18.00	18.04
			1	37	1	17.84	17.77	17.70	17.60	17.69
			1	74	1	18.23	18.24	18.15	18.01	18.00
			36	0	2	17.97	18.01	17.92	17.77	17.70
			36	20	2	17.85	17.87	17.87	17.69	17.69
			36	39	2	17.98	17.99	17.94	17.78	17.72
			75	0	2	18.02	17.95	17.97	17.80	17.75

Band	BW (MHz)	Mode	RB Allocation	RB offset	MPR	Avg Pwr (dBm)				
						39750	40185	40620	41055	41490
						2506 MHz	2549.5 MHz	2593 MHz	2636.5 MHz	2680 MHz
LTE Band 41	20	QPSK	1	0	0	18.49	18.18	18.27	18.18	17.99
			1	49	0	17.92	17.79	17.86	17.61	17.54
			1	99	0	18.45	18.30	18.35	18.09	17.96
			50	0	1	18.14	17.99	18.03	17.79	17.74
			50	24	1	18.07	18.00	17.98	17.73	17.64
			50	50	1	18.08	18.08	18.09	17.81	17.72
			100	0	1	18.18	18.04	18.06	17.84	17.76
		16QAM	1	0	1	18.41	18.21	18.18	18.08	17.93
			1	49	1	17.83	17.81	17.70	17.60	17.60
			1	99	1	18.33	18.26	18.24	18.00	17.87
			50	0	2	18.08	17.97	17.95	17.75	17.70
			50	24	2	18.01	17.94	17.90	17.69	17.60
			50	50	2	18.03	18.07	18.00	17.74	17.64
			100	0	2	18.13	18.04	18.01	17.81	17.72

9. PEAK TO AVERAGE RATIO

TEST PROCEDURE


Per KDB 971168 D01 Power Meas License Digital Systems v02r02

TEST SPEC


In addition, when the transmitter power is measured in terms of average value, the peak-to-average ratio of the power shall not exceed 13 dB.

9.1. CONDUCTED PEAK TO AVERAGE RESULT


GSM

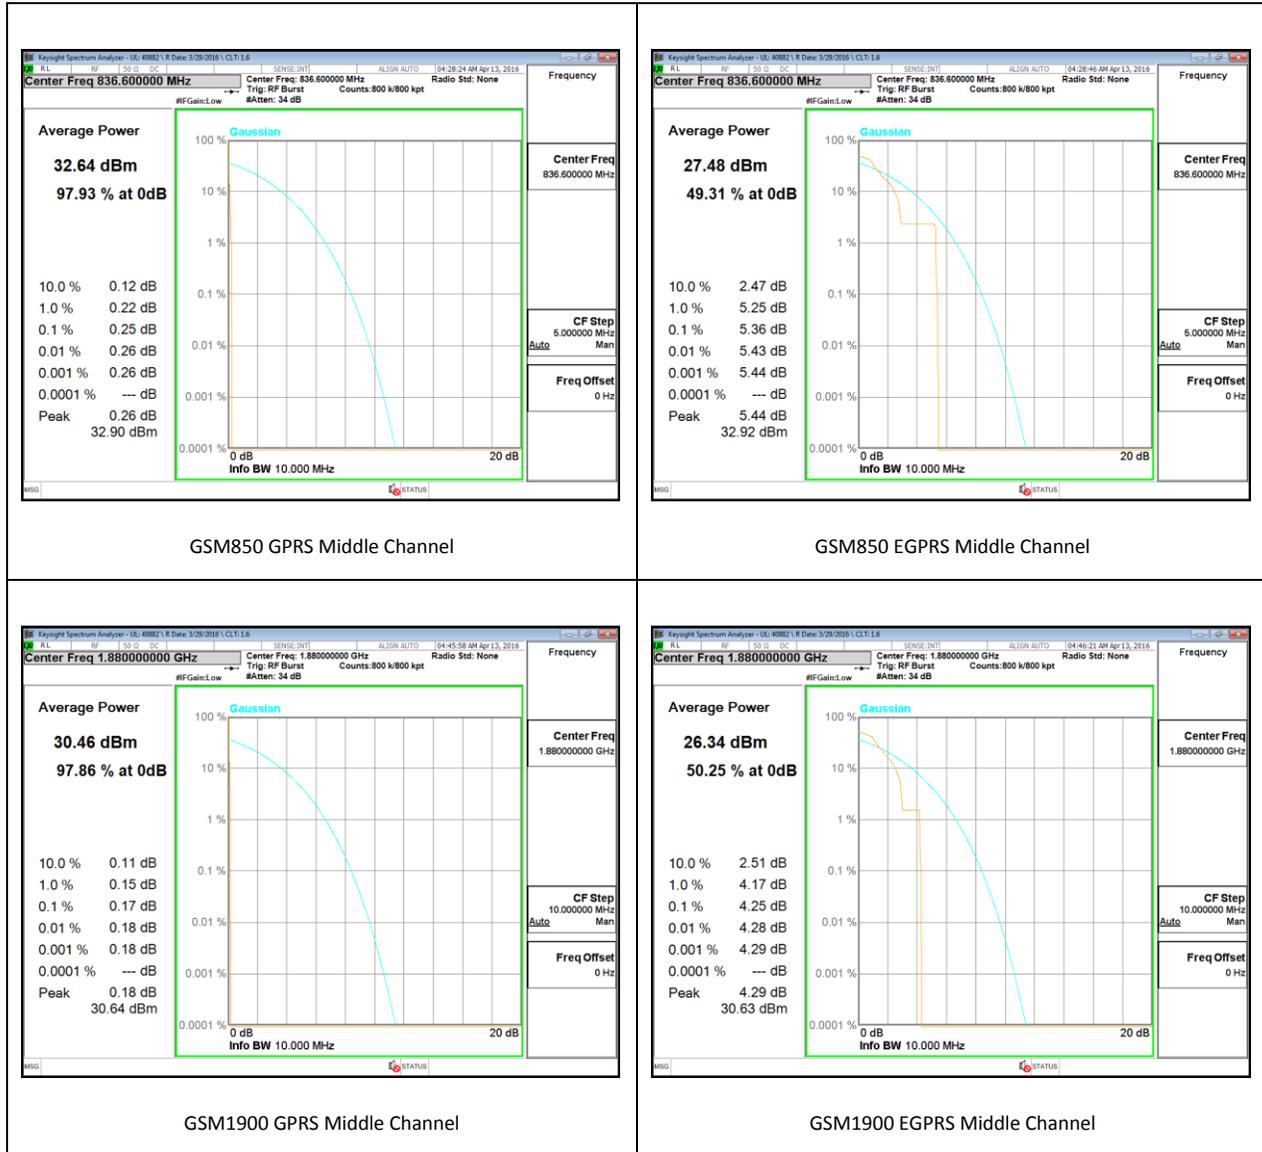


WCDMA

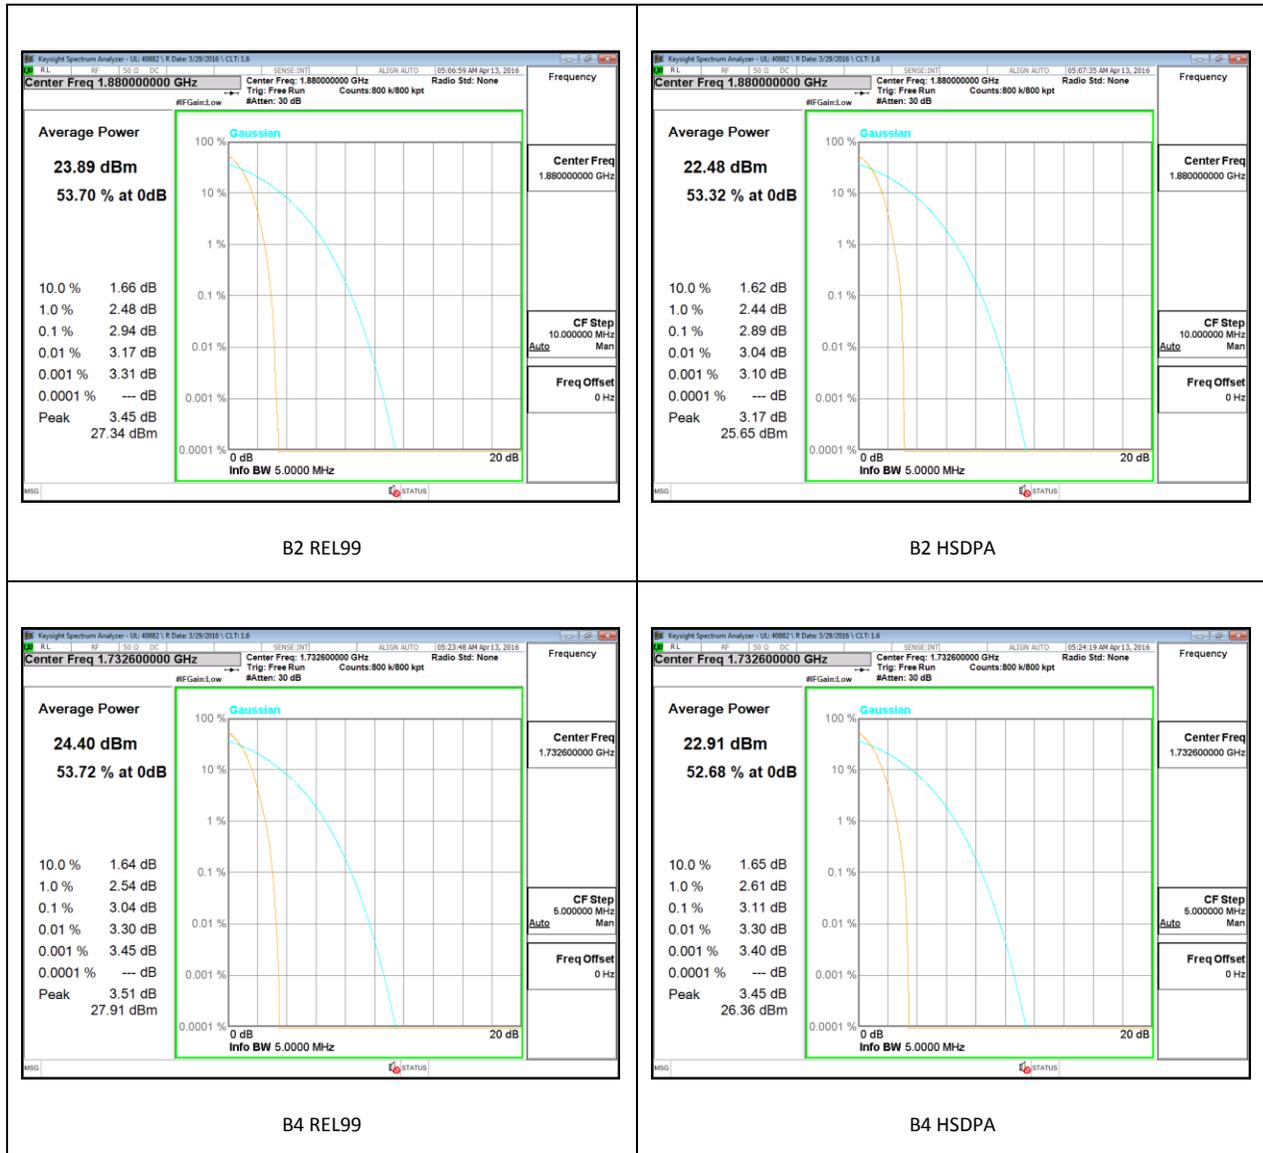

LTE Band 2

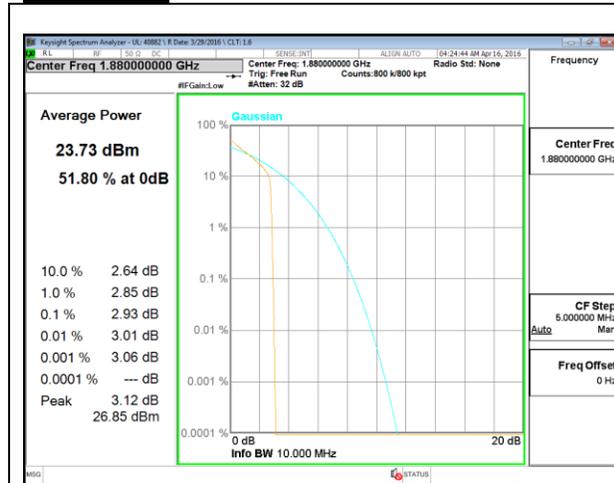

LTE B2 1.4MHz QPSK Middle Channel

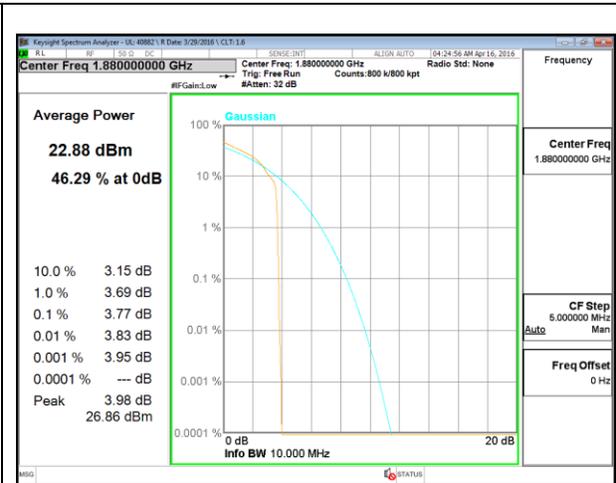

LTE B2 1.4MHz 16QAM Middle Channel



LTE B2 3MHz QPSK Middle Channel




LTE B2 3MHz 16QAM Middle Channel



LTE B2 5MHz QPSK Middle Channel




LTE B2 5MHz 16QAM Middle Channel

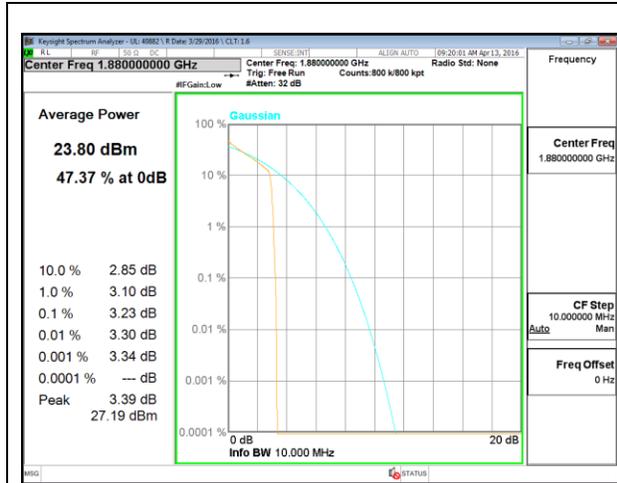


LTE B2 10MHz QPSK Middle Channel




LTE B2 10MHz 16QAM Middle Channel

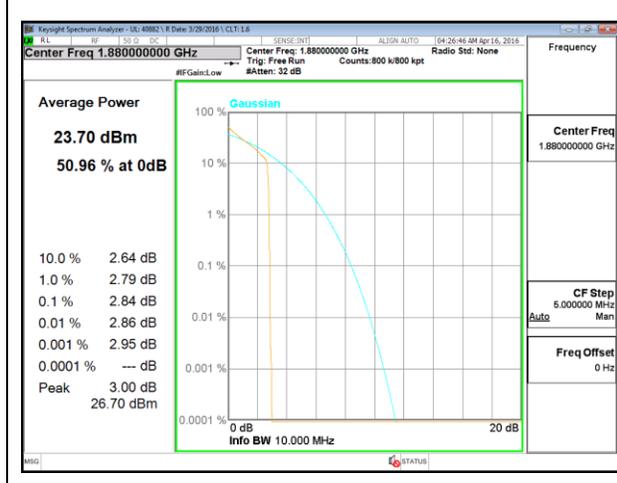

LTE B2 15MHz QPSK Middle Channel

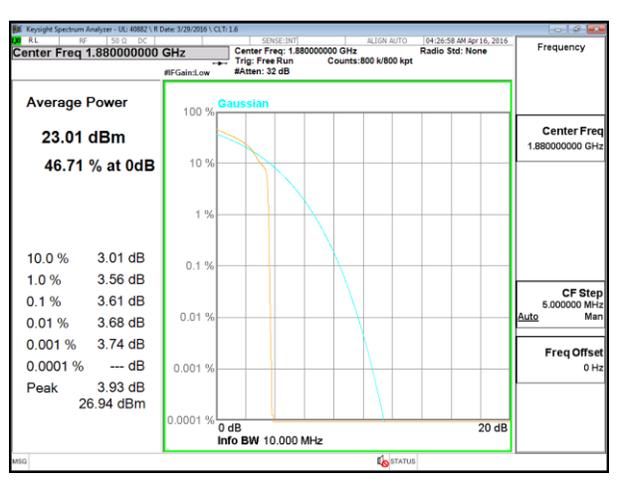

LTE B2 15MHz 16QAM Middle Channel

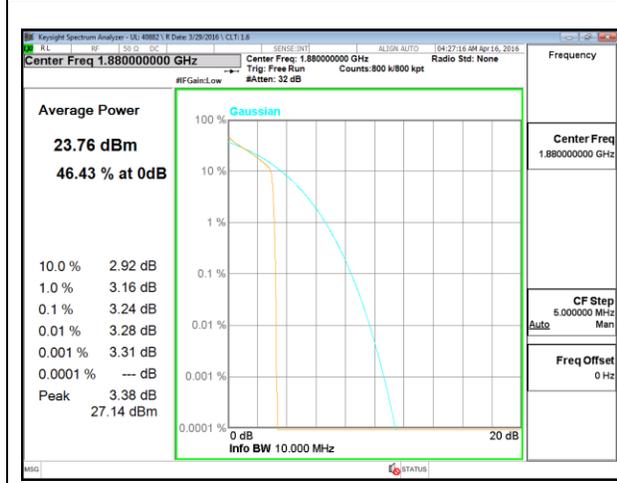



LTE B2 20MHz QPSK Middle Channel




LTE B2 20MHz 16QAM Middle Channel

LTE Band 4

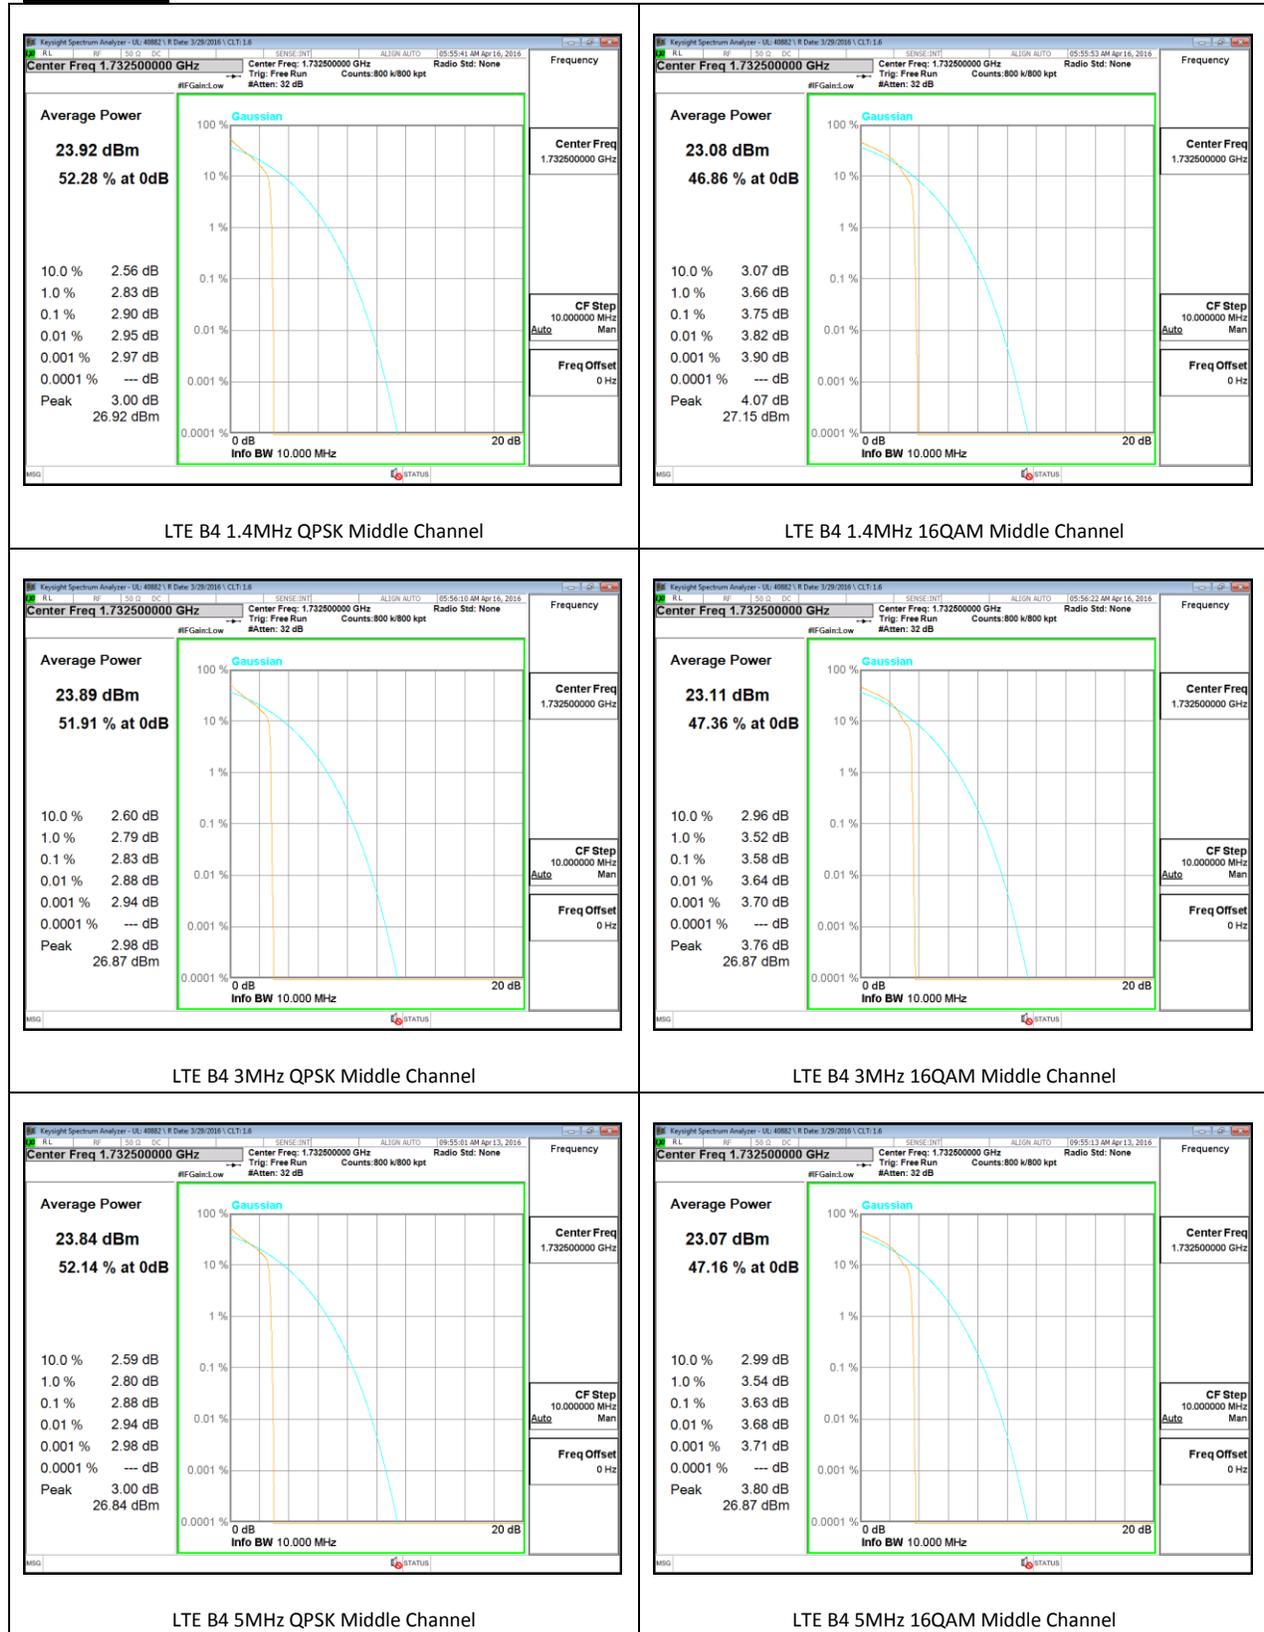

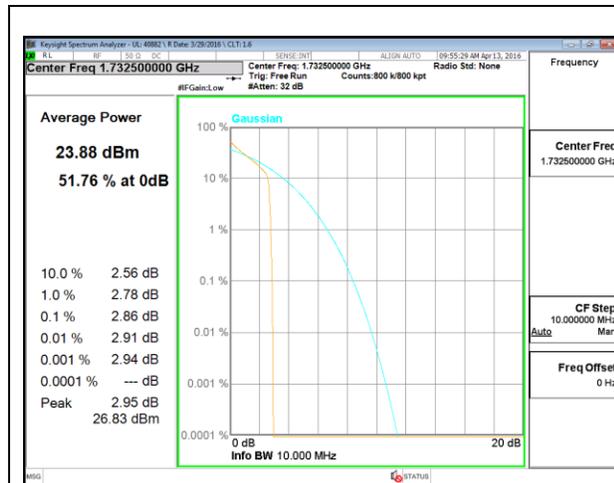

LTE B4 10MHz QPSK Middle Channel

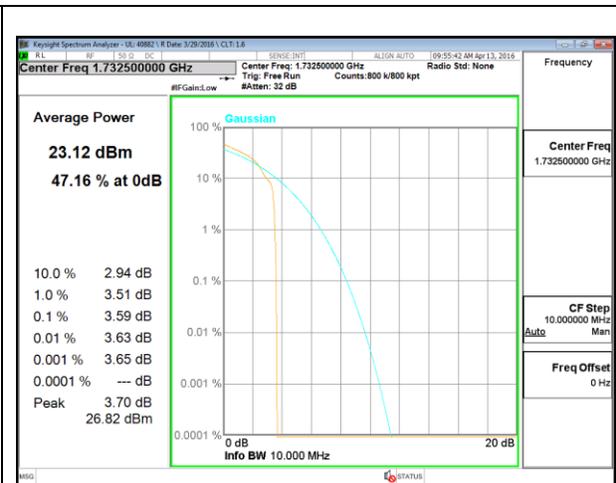


LTE B4 10MHz 16QAM Middle Channel




LTE B4 15MHz QPSK Middle Channel



LTE B4 15MHz 16QAM Middle Channel

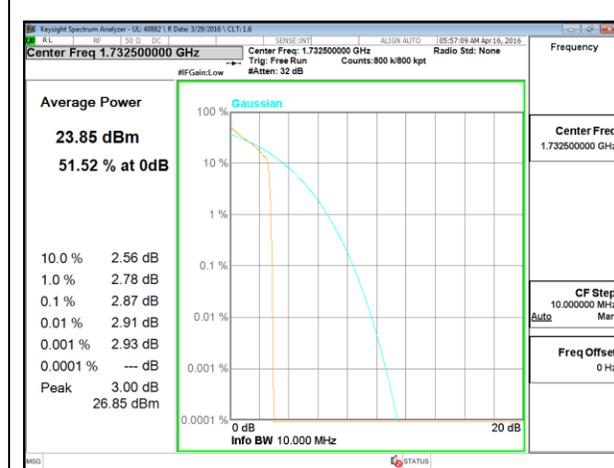


LTE B4 20MHz QPSK Middle Channel

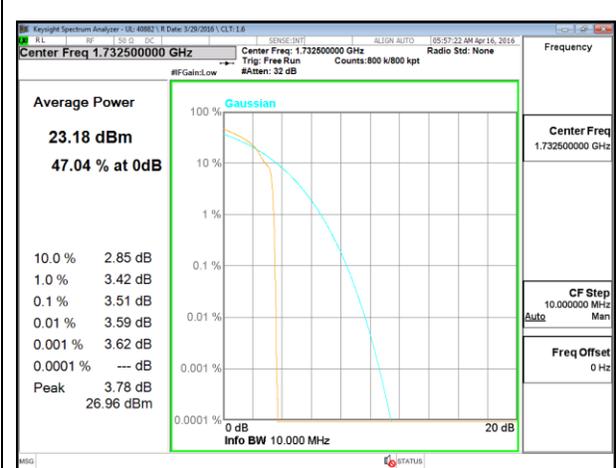

LTE B4 20MHz 16QAM Middle Channel


LTE Band 12

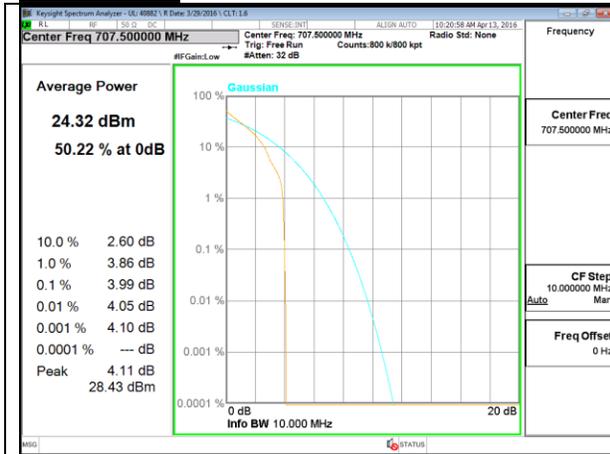


LTE B12 1.4MHz QPSK Middle Channel




LTE B12 1.4MHz 16QAM Middle Channel

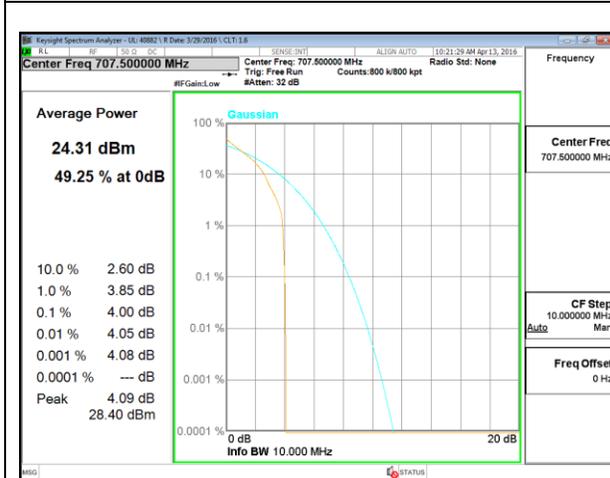


LTE B12 3MHz QPSK Middle Channel

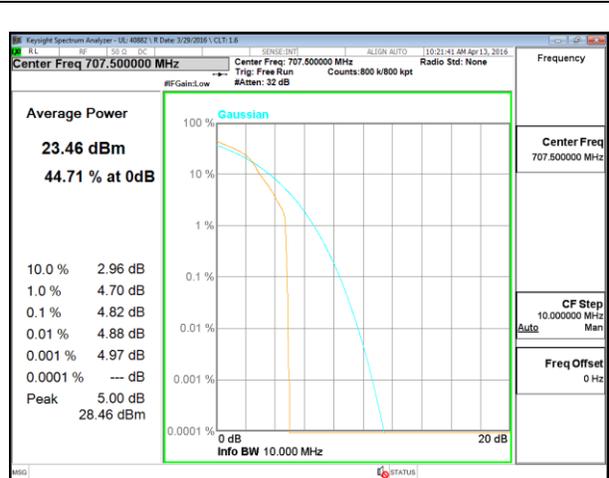


LTE B12 3MHz 16QAM Middle Channel

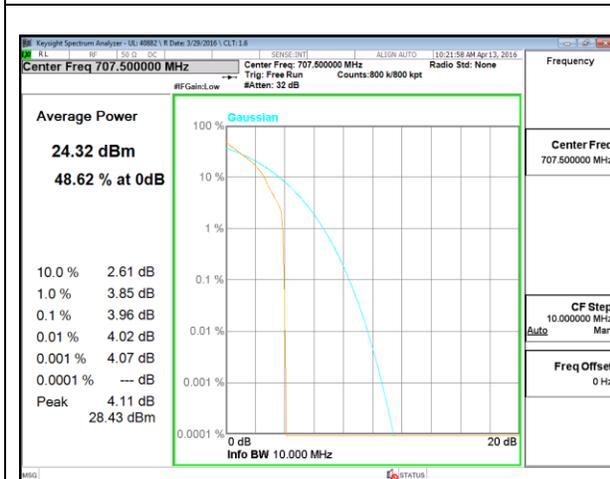


LTE B12 5MHz QPSK Middle Channel

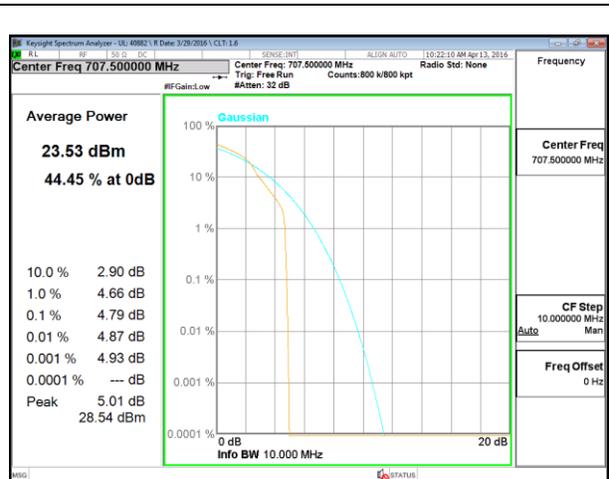


LTE B12 5MHz 16QAM Middle Channel

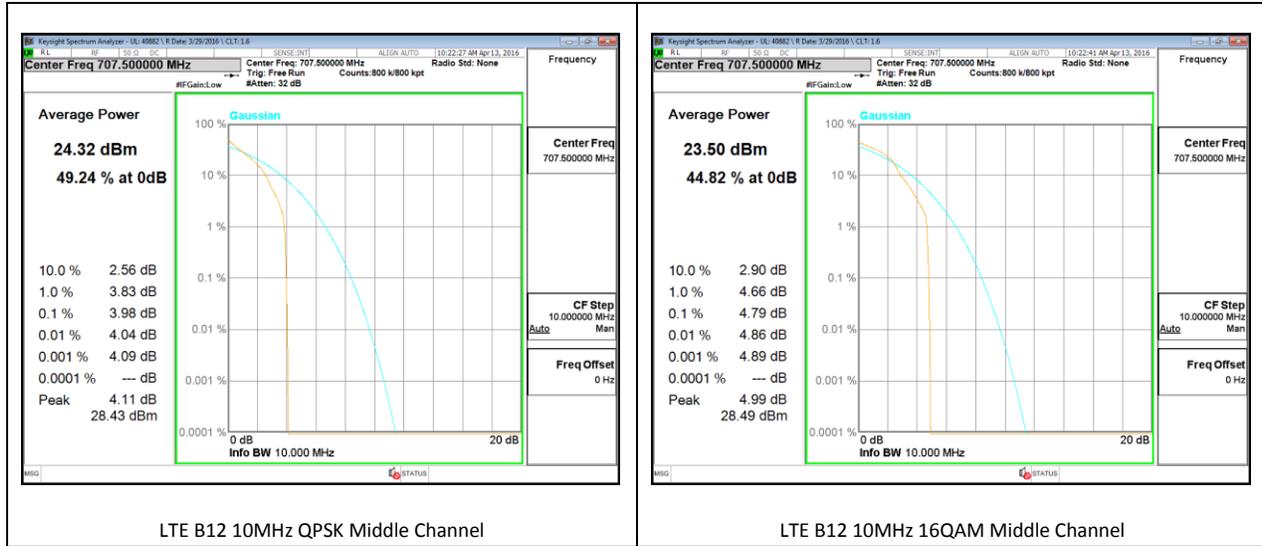


LTE Band 17

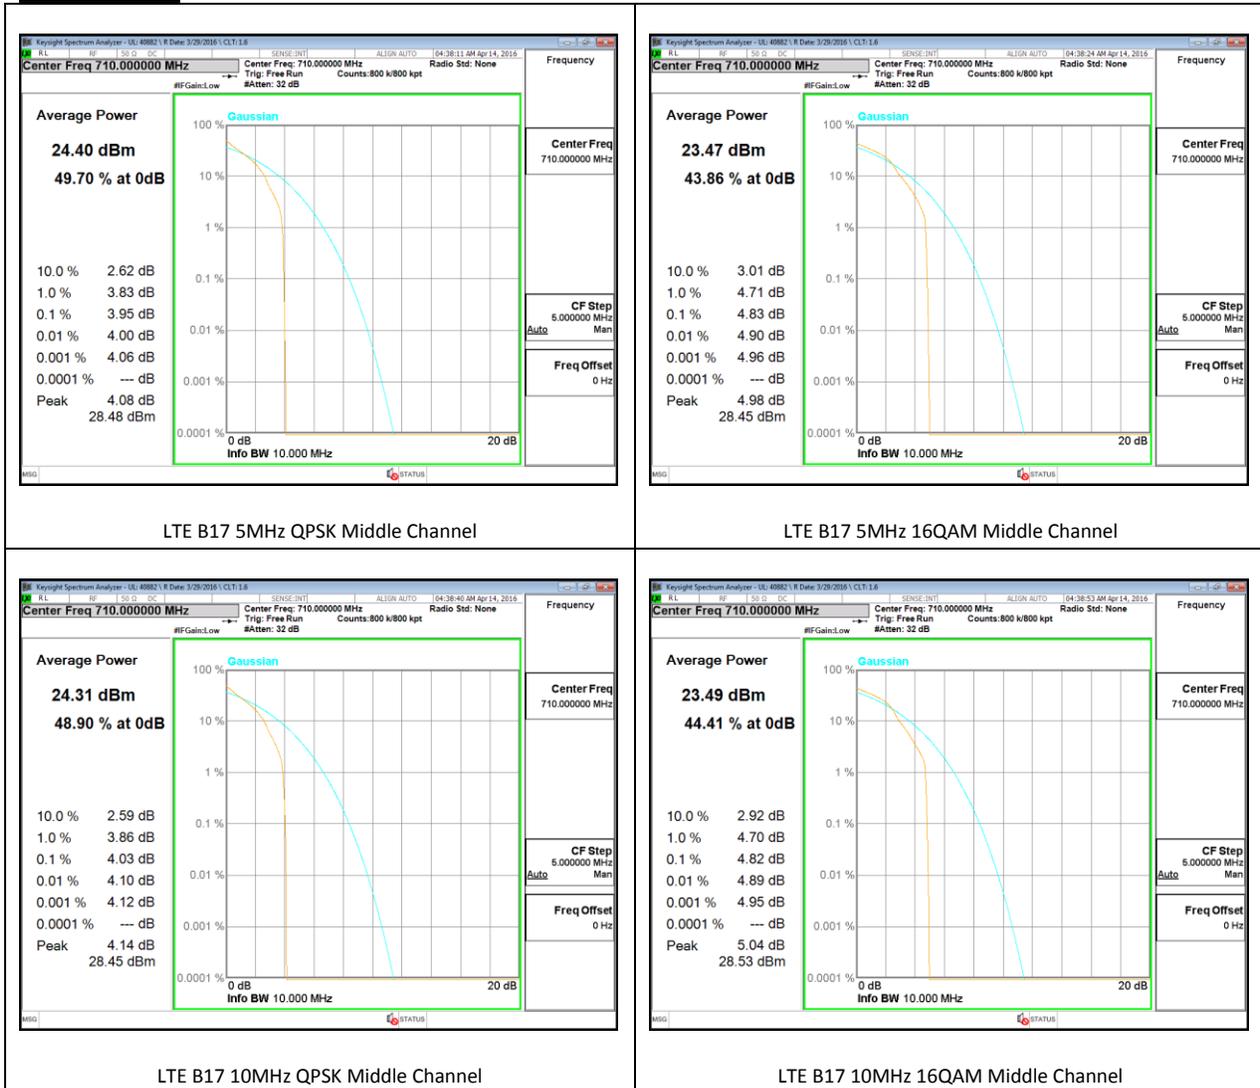


LTE Band 41

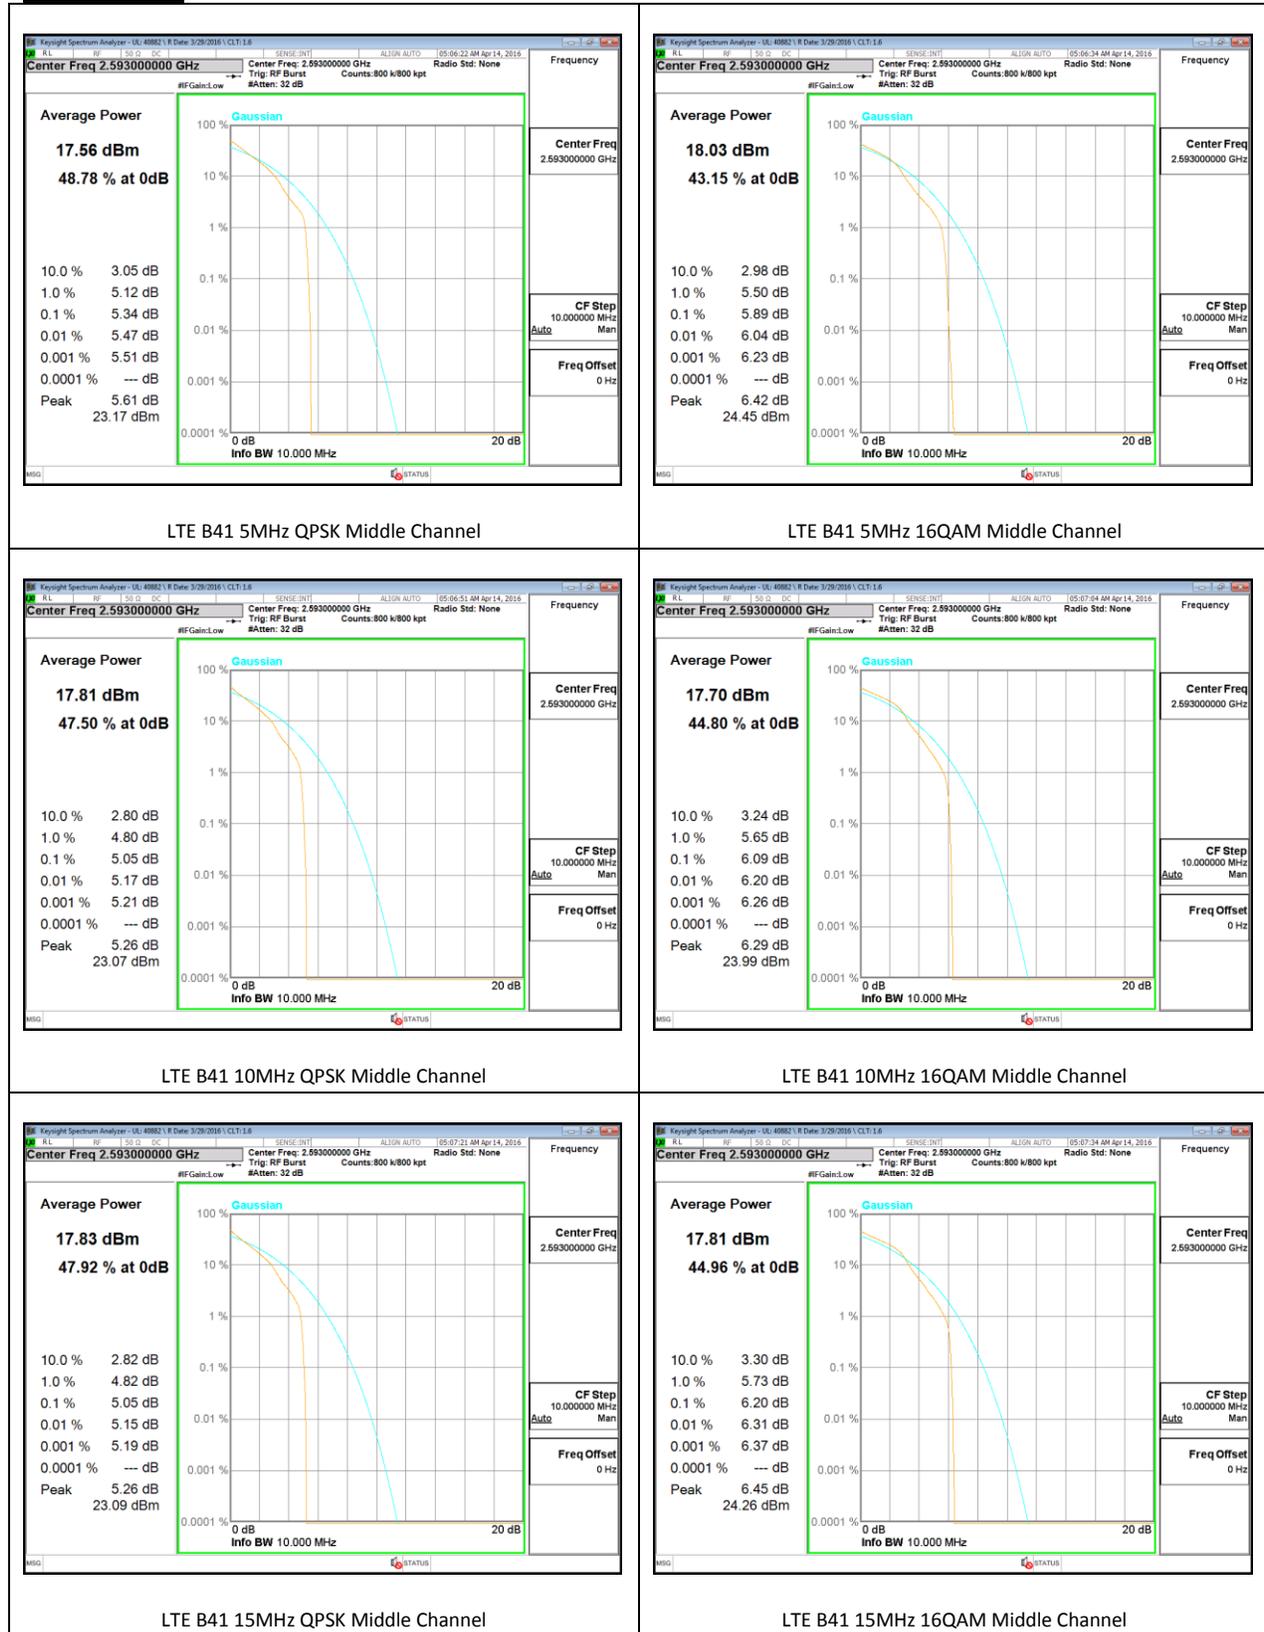

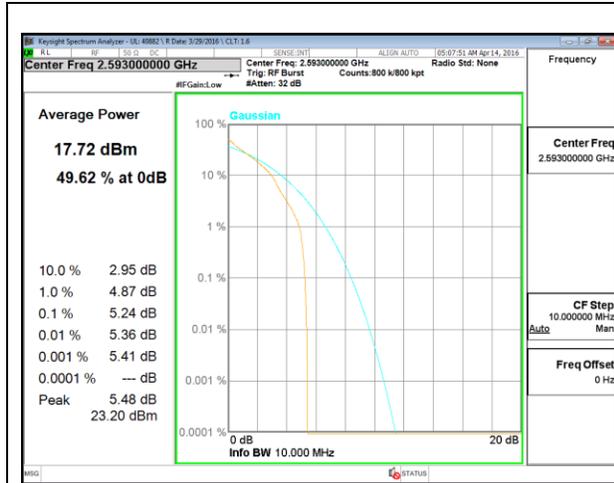

LTE B41 20MHz QPSK Middle Channel

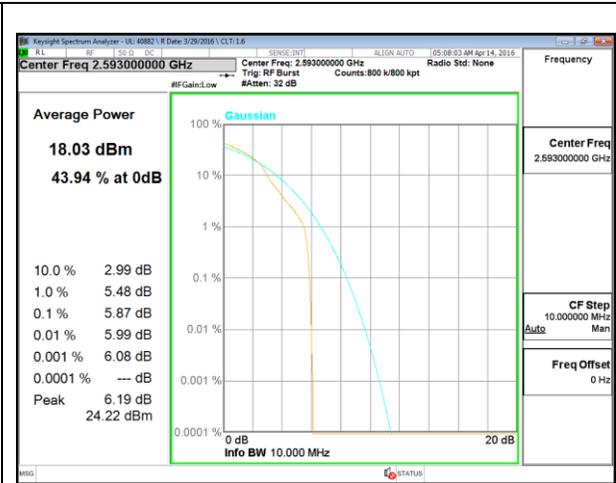

LTE B41 20MHz 16QAM Middle Channel

10. OCCUPIED BANDWIDTH

RULE PART(S)

FCC: §2.1049

LIMITS

For reporting purposes only

TEST PROCEDURE


The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The -26dB bandwidth was also measured and recorded.

(KDB 971168 D01 Power Meas License Digital Systems v02r02)


10.1. OCCUPIED BANDWIDTH RESULTS AND PLOTS

GSM


Band	Mode	Channel	f (MHz)	99% BW (kHz)	-26dB (kHz)
GSM850	GPRS	128	824.2	244.5	312.8
GSM850	GPRS	190	836.6	245.4	318.5
GSM850	GPRS	251	848.8	244.8	317.8
GSM850	EGPRS	128	824.2	237	300
GSM850	EGPRS	190	836.6	240.7	298
GSM850	EGPRS	251	848.8	243.6	313.4
GSM1900	GPRS	512	1850.2	242.6	316.4
GSM1900	GPRS	661	1880	245.2	315.2
GSM1900	GPRS	810	1909.8	244.5	313.2
GSM1900	EGPRS	512	1850.2	243.3	303.3
GSM1900	EGPRS	661	1880	241.1	311.7
GSM1900	EGPRS	810	1909.8	240.7	312.5

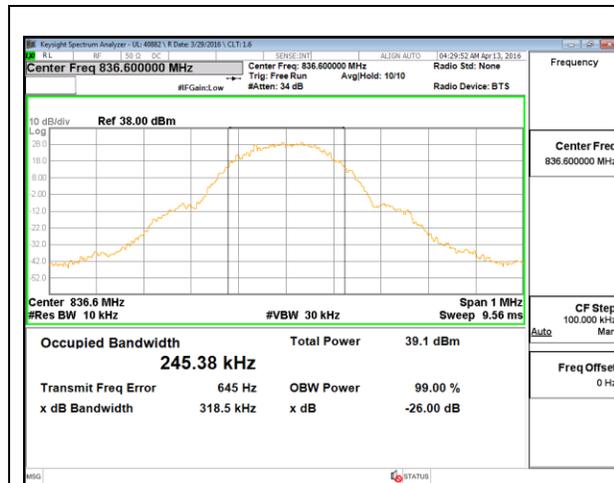


GSM850 GPRS Middle Channel

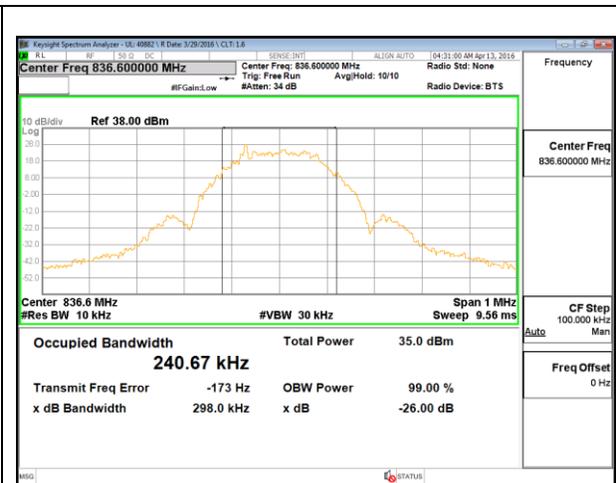

GSM850 EGPRS Middle Channel

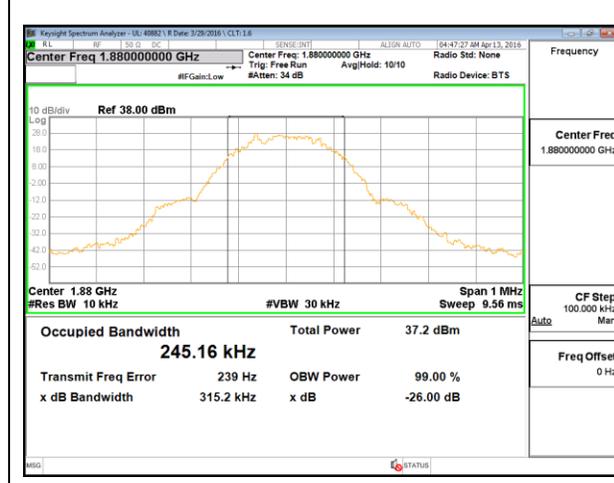


GSM1900 GPRS Middle Channel

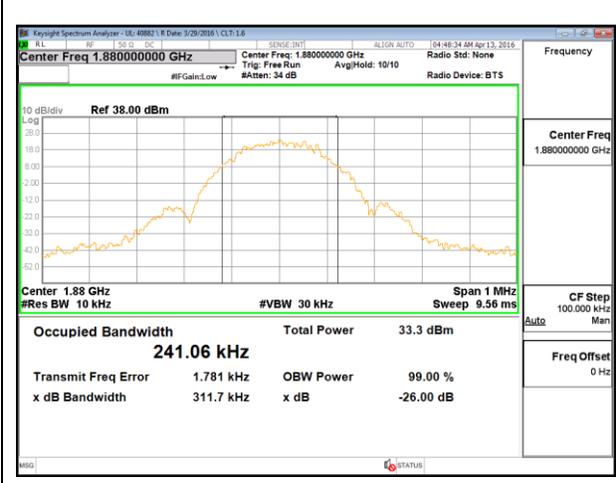


GSM1900 EGPRS Middle Channel

WCDMA


Band	Mode	Channel	f (MHz)	99% BW (MHz)	-26dB (MHz)
Band 2	REL99	9262	1852.4	4.135	4.677
Band 2	REL99	9400	1880	4.138	4.712
Band 2	REL99	9538	1907.6	4.15	4.725
Band 2	HSDPA	9262	1852.4	4.144	4.684
Band 2	HSDPA	9400	1880	4.158	4.721
Band 2	HSDPA	9538	1907.6	4.139	4.691
Band 4	REL99	9262	1712.4	4.133	4.737
Band 4	REL99	9400	1732.6	4.129	4.704
Band 4	REL99	9538	1752.6	4.123	4.709
Band 4	HSDPA	9262	1712.4	4.142	4.679
Band 4	HSDPA	9400	1732.6	4.143	4.669
Band 4	HSDPA	9538	1752.6	4.126	4.668

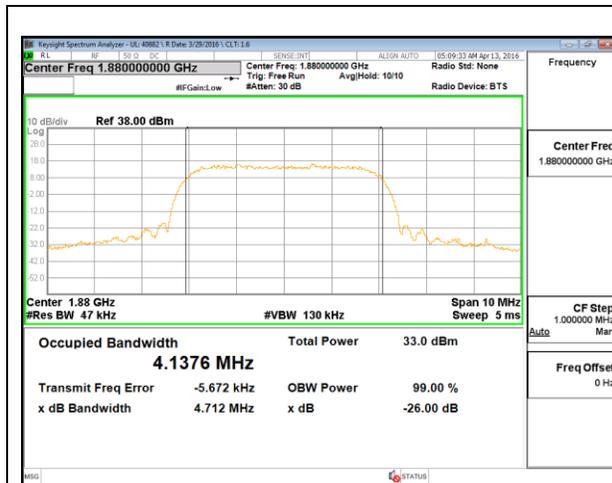


B2 REL99 Middle Channel

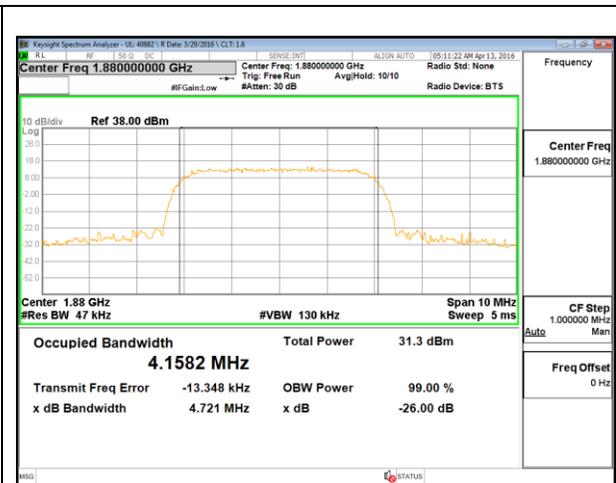

B2 HSDPA Middle Channel

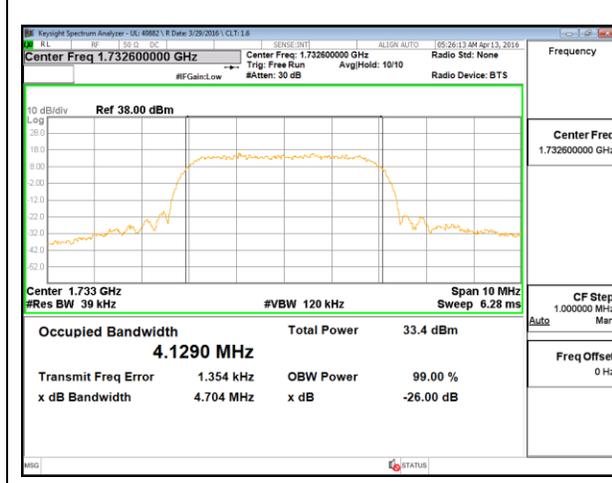

B4 REL99 Middle Channel

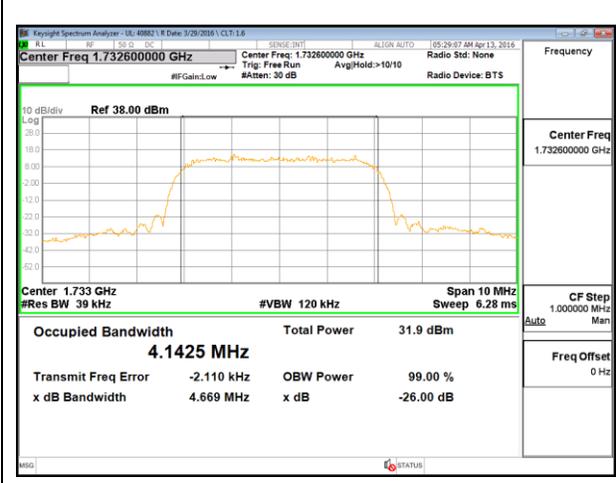

B4 HSDPA Middle Channel

LTE Band 2

BW(MHz)	Mode	RB/RB Size	f (MHz)	99% BW (MHz)	-26dB BW (MHz)
1.4	QPSK	6/0	1850.7	1.09	1.24
1.4	QPSK	6/0	1880	1.08	1.24
1.4	QPSK	6/0	1909.3	1.08	1.26
1.4	16QAM	6/0	1850.7	1.08	1.23
1.4	16QAM	6/0	1880	1.08	1.23
1.4	16QAM	6/0	1909.3	1.09	1.24
3	QPSK	15/0	1851.5	2.7	3.01
3	QPSK	15/0	1880	2.69	2.98
3	QPSK	15/0	1908.5	2.7	3.05
3	16QAM	15/0	1851.5	2.7	3
3	16QAM	15/0	1880	2.7	3.02
3	16QAM	15/0	1908.5	2.7	3.02
5	QPSK	25/0	1852.5	4.5	4.94
5	QPSK	25/0	1880	4.48	4.92
5	QPSK	25/0	1907.5	4.5	4.98
5	16QAM	25/0	1852.5	4.49	4.93
5	16QAM	25/0	1880	4.48	4.91
5	16QAM	25/0	1907.5	4.5	4.98
10	QPSK	50/0	1855	8.96	9.78
10	QPSK	50/0	1880	8.97	9.79
10	QPSK	50/0	1905	8.96	9.82
10	16QAM	50/0	1855	8.99	9.74
10	16QAM	50/0	1880	8.96	9.78
10	16QAM	50/0	1905	8.95	9.76
15	QPSK	75/0	1857.5	13.44	14.6
15	QPSK	75/0	1880	13.42	14.65
15	QPSK	75/0	1902.5	13.43	14.7
15	16QAM	75/0	1857.5	13.44	14.58
15	16QAM	75/0	1880	13.44	14.6
15	16QAM	75/0	1902.5	13.44	14.53
20	QPSK	100/0	1860	17.89	19.39
20	QPSK	100/0	1880	17.93	19.42
20	QPSK	100/0	1900	17.96	19.31
20	16QAM	100/0	1860	17.9	19.32
20	16QAM	100/0	1880	17.91	19.37
20	16QAM	100/0	1900	17.91	19.44

