

TEST REPORT

Test report no.: 1-5831/13-36-05-A



Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01. Area of Testing: Radio/Satellite Communications

Applicant

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 1 08 00 24 41
Contact: Fredrik Björk
e-mail: Fredrik.Bjork@sonymobile.com
Phone: +46 1 08 01 46 75

Manufacturer

Sony Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I
Part 15 - Radio frequency devices
RSS - 210 Issue 8 Spectrum Management and Telecommunications - Radio Standards Specification
Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands):
Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: BT watch with NFC passive tag
Type name: RD-0050
Model name: SW2
Commercial name: SW2
FCC ID: PY7-RD0050
IC: 4170B-RD0050
Frequency: DTS band 2400 MHz to 2483.5 MHz
(lowest channel 00 – 2402 MHz; highest channel 78 – 2480 MHz)
Technology tested: Bluetooth®, +EDR
Antenna: Integrated antenna
Power supply: 3.7 V DC by Li - polymer battery
Temperature range: -20°C to +55°C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:

cn=Stefan Boes, o=CETECOM ICT
Services GmbH, ou=BOE-111011,
email=Stefan.Boes@cetecom.com, c=DE
2013.07.15 06:54:54 +02'00'

Stefan Böes
Senior Testing Manager

Test performed:

cn=Marco Bertolino, o=CETECOM ICT
Services GmbH, ou=BTL-100826,
email=marco.bertolino@cetecom.com,
c=DE
2013.07.15 06:49:17 +02'00'

Marco Bertolino
Testing Manager

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	4
5	Test item	4
5.1	Additional information	4
6	Test laboratories sub-contracted	4
7	Description of the test setup	5
7.1	Radiated measurements chamber F	5
7.2	Radiated measurements chamber C	6
7.3	Radiated measurements 12.75 GHz to 40 GHz	7
7.4	AC conducted	8
7.5	Conducted measurements	9
8	Summary of measurement results	10
9	Additional comments	11
10	RSP100 test report cover sheet / performance test data	12
11	Measurement results	13
11.1	Antenna gain	13
11.2	Power spectral density	14
11.3	Carrier frequency separation	15
11.4	Number of hopping channels	17
11.5	Time of occupancy (dwell time)	19
11.6	Spectrum bandwidth of a FHSS system – 20 dB bandwidth	20
11.7	Maximum output power	26
11.8	Band edge compliance conducted	33
11.9	Band edge compliance radiated	40
11.10	TX spurious emissions conducted	44
11.11	TX spurious emissions radiated	52
11.12	RX spurious emissions radiated	63
11.13	Spurious emissions radiated < 30 MHz	67
11.14	Spurious emissions conducted < 30 MHz	69
12	Test equipment and ancillaries used for tests	72
13	Observations	73
Annex A	Document history	74
Annex B	Further information	74
Annex C	Accreditation Certificate	75

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2013-07-05
Date of receipt of test item:	2013-07-11
Start of test:	2013-07-11
End of test:	2013-07-12
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	01.10.2010	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	01.12.2010	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		50 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - polymer battery
	V_{max}	4.2 V
	V_{min}	3.0 V

5 Test item

Kind of test item	:	BT watch with NFC passive tag
Type name	:	RD-0050
Model name	:	SW2
Commercial name	:	SW2
S/N serial number	Radiated units:	1323057C00005A6; 1323057A00007AA
	Conducted unit:	132305770000B56; 1323057D0000912
HW hardware status	:	AP1
SW software status	:	Test sw v.2.0 (BT test mode)
Frequency band [MHz]	:	DTS band 2400 MHz to 2483.5 MHz (lowest channel 00 – 2402 MHz; highest channel 78 – 2480 MHz)
Type of radio transmission	:	FHSS
Use of frequency spectrum	:	
Type of modulation	:	GFSK, Pi/4 DQPSK and 8 DPSK
Number of channels	:	79
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Li - polymer battery
Temperature range	:	-20°C to +55 °C

5.1 Additional information

Test setup- and EUT-photos are included in test report: 1-5831/13-36-01-AnnexA
 1-5831/13-36-01-AnnexB
 1-5831/13-36-01-AnnexD

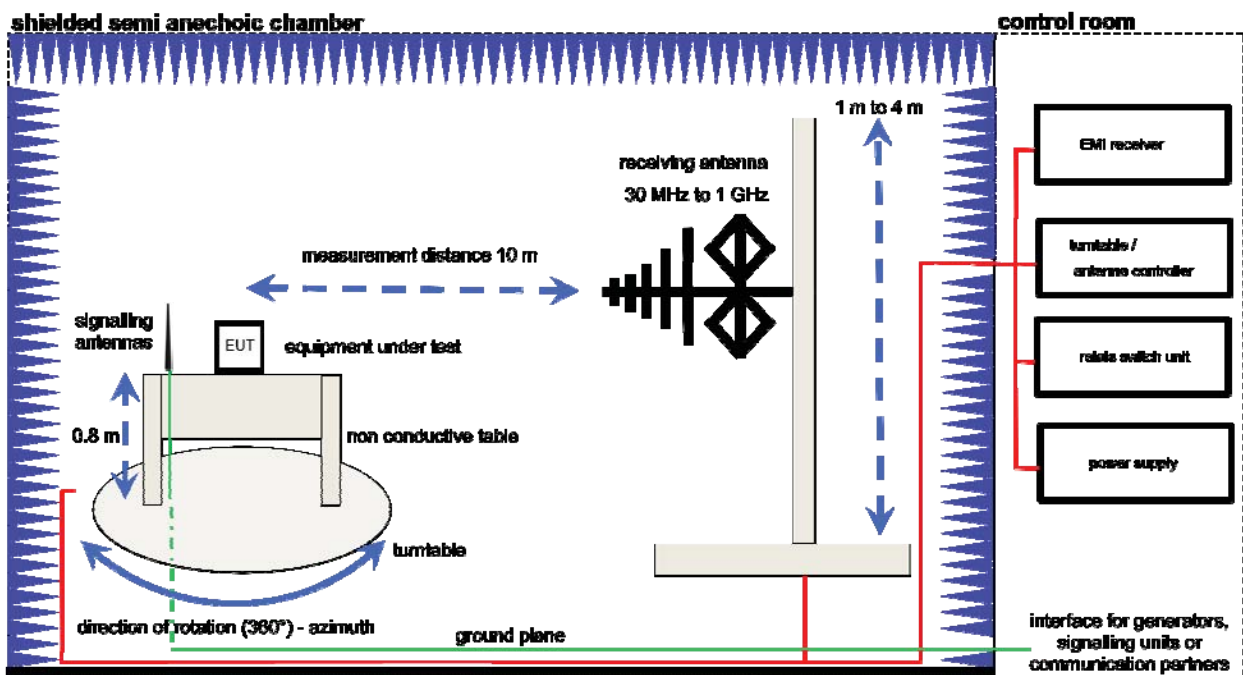
6 Test laboratories sub-contracted

None

7 Description of the test setup

7.1 Radiated measurements chamber F

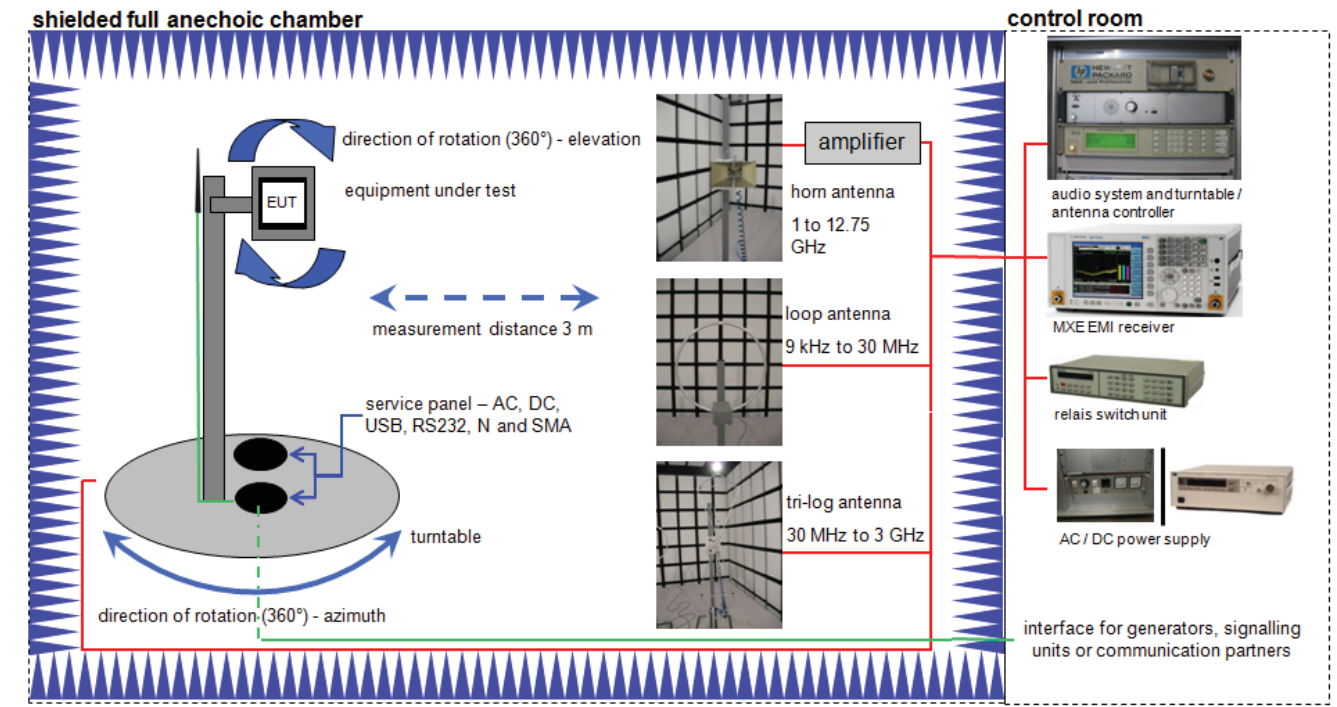
The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368
DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580
EMI Test Receiver	ESCI 3	R&S	100083	300003312
Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379
Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745
Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746
Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35, CBT-B55, CBT-K55	R&S	100313	300003516

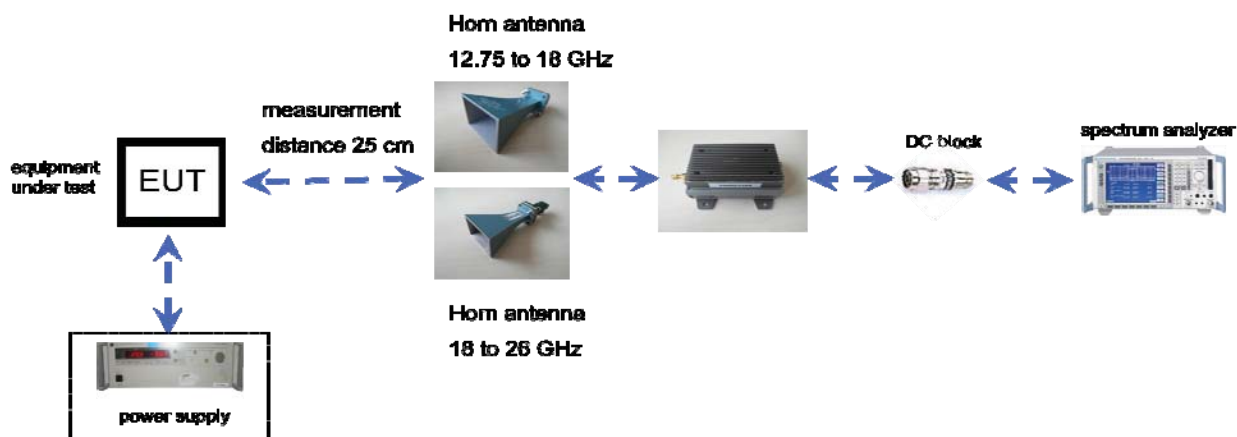
7.2 Radiated measurements chamber C



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854
Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789
Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032
Active Loop Antenna	6502	EMCO	8905-2342	300000256
Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997
Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35, CBT-B55, CBT-K55	R&S	100313	300003516

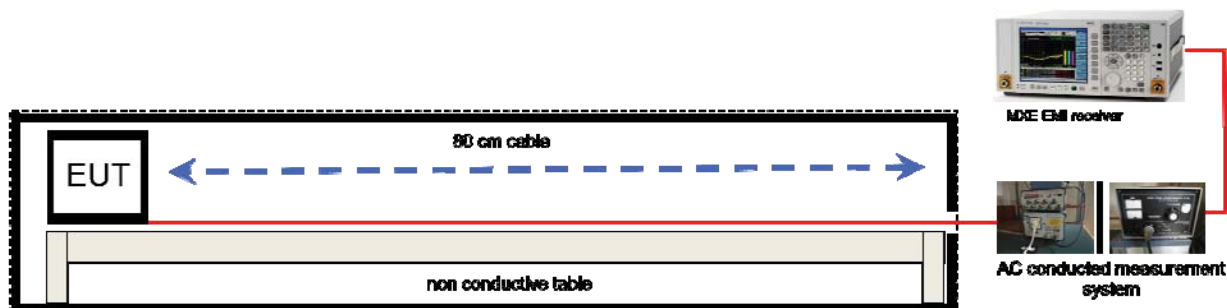
7.3 Radiated measurements 12.75 GHz to 40 GHz



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786
Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300000486
Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268
Spectrum Analyzer 20 Hz - 50 GHz	FSU50	R&S	200012	300003443
Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35, CBT-B55, CBT-K55	R&S	100313	300003516

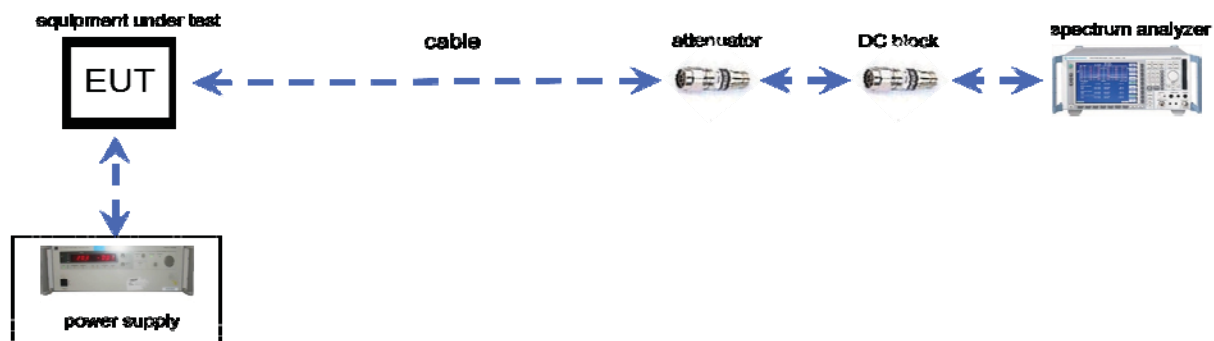
7.4 AC conducted



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405
Isolating Transformer	MPL IEC625 Bus Regeltrenntravo	Erfi	91350	300001155
Switch / Control Unit	3488A	HP Meßtechnik	*	300000199
Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001168
Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35, CBT-B55, CBT-K55	R&S	100313	300003516

7.5 Conducted measurements



Equipment table:

Equipment	Type	Manufacturer	Serial No.	INV. No Cetecom
Switch / Control Unit	3488A	HP Meßtechnik		300001691
Power Supply DC	NGPE 40/40	R&S	388	400000078
DC-Blocker	8143	Inmet Corp.	none	300002842
CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000K35	R&S	100185	300003416
Spectrum Analyzer 9kHz to 30GHz - 140...+30dBm	FSP30	R&S	100886	300003575

8 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2013-07-15	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	GFSK	☒	☐	☐	☐	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	GFSK Pi/4 DQPSK 8 DPSK	☐	☐	☒	☐	Not applicable for FHSS!
§15.247(a)(1) RSS 210 / A8.1(b)	Carrier frequency separation	Nominal	Nominal	GFSK	☒	☐	☐	☐	complies
§15.247(a)(1) RSS 210 / A8.1(d)	Number of hopping channels	Nominal	Nominal	GFSK	☒	☐	☐	☐	complies
§15.247(a)(1) (iii) RSS 210 / A8.3(1)	Time of occupancy (dwell time)	Nominal	Nominal	GFSK Pi/4 DQPSK 8 DPSK	☒	☐	☐	☐	complies
§15.247(a)(1) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 20dB bandwidth	Nominal	Nominal	GFSK Pi/4 DQPSK 8 DPSK	☒ ☒ ☒	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐	complies
§15.247(b)(1) RSS-210 / A8.4(2)	Maximum output power	Nominal	Nominal	GFSK Pi/4 DQPSK 8 DPSK	☒ ☒ ☒	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	GFSK Pi/4 DQPSK 8 DPSK	☒ ☒ ☒	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	GFSK Pi/4 DQPSK 8 DPSK	☒ ☒ ☒	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	GFSK Pi/4 DQPSK 8 DPSK	☒ ☒ ☒	☐ ☐ ☐	☐ ☐ ☐	☐ ☐ ☐	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	GFSK	☒	☐	☐	☐	complies
§15.109 RSS-Gen	RX spurious emissions radiated	Nominal	Nominal	-/-	☒	☐	☐	☐	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	GFSK	☒	☐	☐	☐	complies
§15.107(a)	Conducted emissions < 30 MHz	Nominal	Nominal	GFSK	☒	☐	☐	☐	complies

Note: NA = Not Applicable; NP = Not Performed

9 Additional comments

The Bluetooth[®] word mark and logos are owned by the Bluetooth SIG Inc. and any use of such marks by Cetecom ICT Services GmbH is under license.

Reference documents: None

Special test descriptions: None

Configuration descriptions: TX tests: were performed with x-DH5 packets and static PRBS pattern payload.
RX/Standby tests: BT test mode enabled, scan enabled, TX Idle

Test mode:

- ☒ Bluetooth Test mode loop back enabled
(EUT is controlled over CBT/CMU)
- ☐ Special software is used.
EUT is transmitting pseudo random data by itself

10 RSP100 test report cover sheet / performance test data

Test report number	:	1-5831/13-36-05-A
Equipment model number	:	SW2
Certification number	:	4170B-RD0050
Manufacturer (complete address)	:	Sony Mobile Communications AB Nya Vattentorget 22188 Lund / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	lowest channel 2402 MHz, highest channel 2480 MHz
RF-power [W] (max.)	:	Cond.: 6.0 mW (GFSK modulation) EIRP: 1.9 mW (GFSK modulation) Cond.: 4.4 mW (Pi/4-DQPSK modulation) EIRP: 1.3 mW (Pi/4-DQPSK modulation) Cond.: 4.6 mW (8DPSK modulation) EIRP: 1.3 mW (8DPSK modulation)
Occupied bandwidth (99%-BW) [kHz]	:	938 (GFSK modulation) 1317 (Pi/4-DQPSK modulation) 1299 (8DPSK modulation)
Type of modulation	:	FHSS technology with GFSK, Pi/4 DQPSK and 8 DPSK modulation.
Emission designator (TRC-43)	:	938KFXD (GFSK modulation) 1M32GXD (Pi/4-DQPSK modulation) 1M30GXD (8DPSK modulation)
Antenna information	:	Integrated antenna
Transmitter spurious (worst case) [dBμV/m @ 3m]:	:	53.5 @ 2483.5 MHz Peak

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2013-07-15

Date

Marco Bertolino

Name



Signature

cn=Marco Bertolino, o=CETECOM ICT Services
GmbH, ou=BTL-100826,
email=marco.bertolino@cetecom.com, c=DE
2013.07.15 06:49:46 +02'00'

11 Measurement results

11.1 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal Bluetooth® devices, the GFSK modulation is used.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	3 MHz
Span:	5 MHz
Trace-Mode:	Max hold

Limits:

FCC	IC
Antenna Gain	
6 dBi	

Results:

T _{nom}	V _{nom}	lowest channel 2402 MHz	middle channel 2441 MHz	highest channel 2480 MHz
Conducted power [dBm] Measured with GFSK modulation		6.4	7.6	7.8
Radiated power [dBm] Measured with GFSK modulation		1.7	2.8	2.5
Gain [dBi] Calculated		-4.7	-4.8	-5.3

Result: Passed

11.2 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. This requirement is only valid for digitally modulated systems without hopping functionality.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	500 s
Video bandwidth:	3 kHz
Resolution bandwidth:	3 kHz
Span:	150 kHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
Power Spectral Density	
For digitally modulated systems the transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	

Results:

Modulation	Power spectral density [dBm/3kHz]		
Frequency	2412 MHz	2437 MHz	2462 MHz
GFSK	Not required for hopping systems!		
Pi/4 DQPSK			
8DPSK			
Measurement uncertainty	± 1.5 dB		

11.3 Carrier frequency separation

Description:

Measurement of the carrier frequency separation of a hopping system. The carrier frequency separation is constant for all modulation-modes. We use GFSK-modulation to show compliance. EUT in hopping mode.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	4 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
Carrier Frequency Separation	
Minimum 25 kHz or two-thirds of the 20 dB bandwidth of the hopping system whichever is greater.	

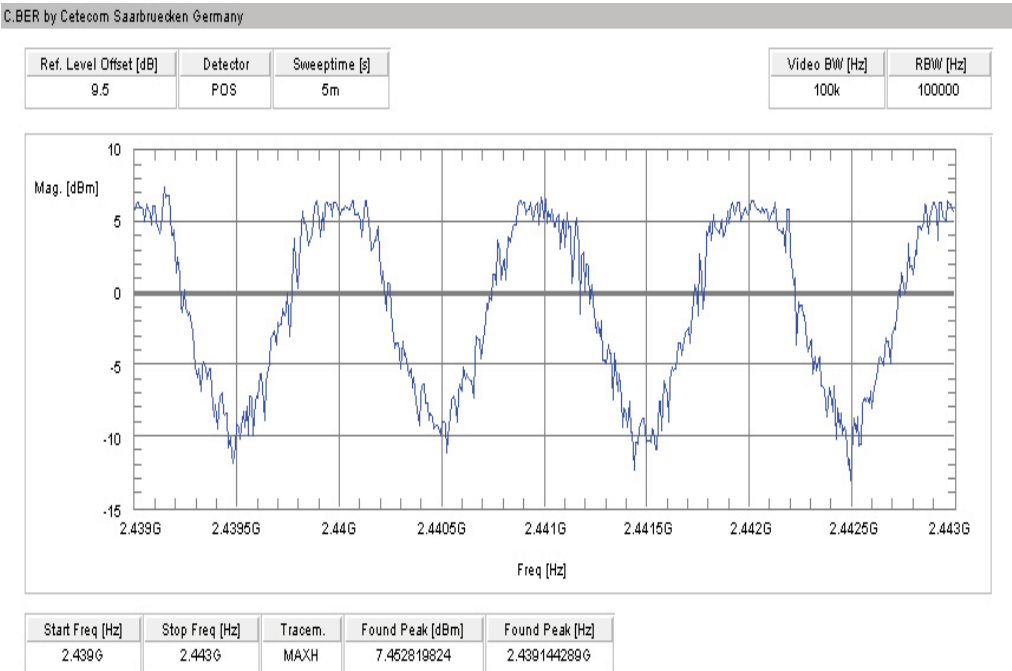
Result:

Carrier frequency separation	~ 1 MHz
------------------------------	---------

Result: **Passed**

Plot:

Plot 1: Carrier frequency separation (GFSK modulation)



11.4 Number of hopping channels

Description:

Measurement of the total number of used hopping channels. The number of hopping channels is constant for all modulation-modes. We use GFSK-modulation to show compliance. EUT in hopping mode.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	500 kHz
Resolution bandwidth:	500 kHz
Span:	Plot 1: 2400 – 2445 MHz Plot 2: 2445 – 2485 MHz
Trace-Mode:	Max Hold

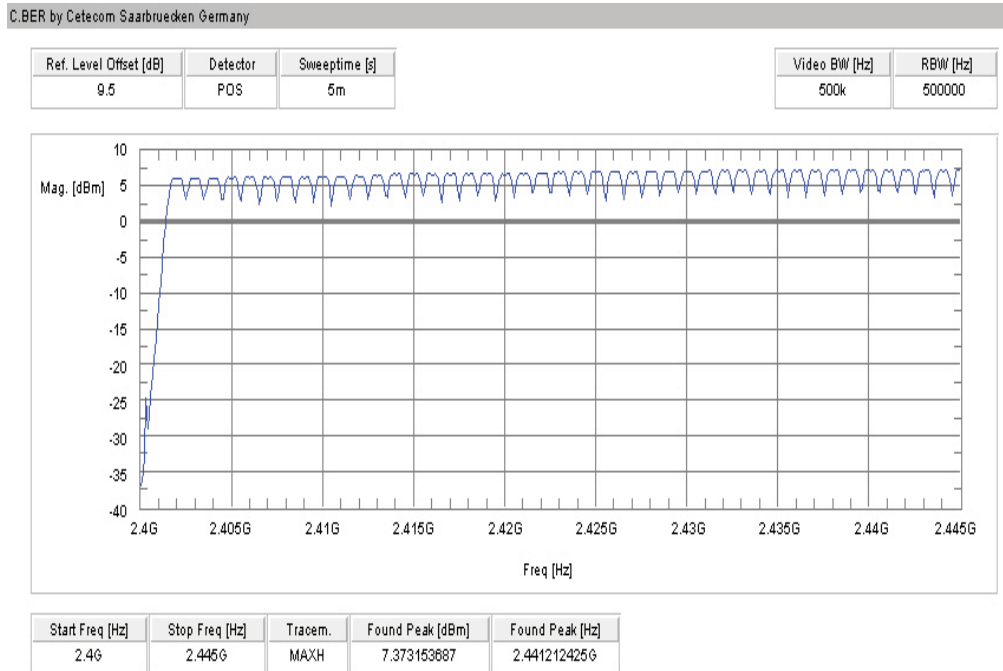
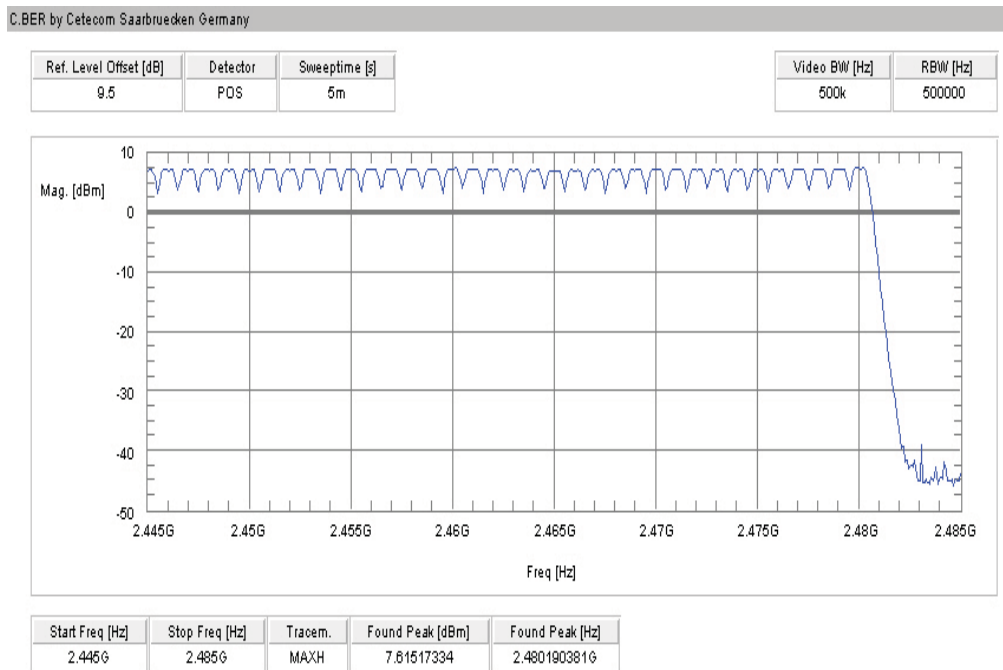
Limits:

FCC	IC
Number of hopping channels	
At least 15 non overlapping hopping channels	

Result:

Number of hopping channels	79
----------------------------	----

Result: **Passed**

Plots:**Plot 1:** Number of hopping channels (GFSK modulation)**Plot 2:** Number of hopping channels (GFSK modulation)

11.5 Time of occupancy (dwell time)

Measurement:

For Bluetooth® devices no measurements mandatory depending on the fixed requirements according to the Bluetooth® Core Specifications!

For Bluetooth® devices:

The channel staying time of 0.4 s within a 31.6 second period in data mode is constant for Bluetooth® devices and independent from the packet type (packet length). The calculation for a 31.6 second period is as follows:

Channel staying time = time slot length * hop rate / number of hopping channels * 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Channel staying time = $625 \mu\text{s} * 1600 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

For multi-slot packets the hopping is reduced according to the length of the packet.

Example for a DH3 packet (with a maximum length of three time slots)

Channel staying time = $3 * 625 \mu\text{s} * 1600/3 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

Example for a DH5 packet (with a maximum length of five time slots)

Channel staying time = $5 * 625 \mu\text{s} * 1600/5 * 1/\text{s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

This is according to the Bluetooth® Core Specification V2.0 & V2.1 & V3.0 & V4.0 (+ critical errata) for all Bluetooth® devices.

The following table shows the relations:

Packet Size	Pulse Width [ms] *	Max. number of transmissions per channel in 31.6 sec
DH1	0.366	640
DH3	1.622	214
DH5	2.870	128

* according to Bluetooth® specification

Results:

Packet Size	Pulse Width [ms]*	Max. number of transmissions in 31.6 sec	Dwell time [Pulse width * Number of transmissions]
DH1	0.366	640	234.2 ms
DH3	1.622	214	347.1 ms
DH5	2.870	128	367.4 ms

Limits:

FCC	IC
Time of occupancy (dwell time)	
The frequency hopping operation shall have an average time of occupancy on any frequency not exceeding 0.4 seconds within a duration in seconds equal to the number of hopping frequencies multiplied by 0.4.	

Result: **Passed**

11.6 Spectrum bandwidth of a FHSS system – 20 dB bandwidth

Description:

Measurement of the 20dB bandwidth of the modulated signal. The measurement is performed according to the "Measurement Guidelines" (DA 00-705, March 30, 2000). EUT in single channel mode.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	2 s
Video bandwidth:	30 kHz
Resolution bandwidth:	10 kHz
Span:	3 MHz
Trace-Mode:	Max Hold

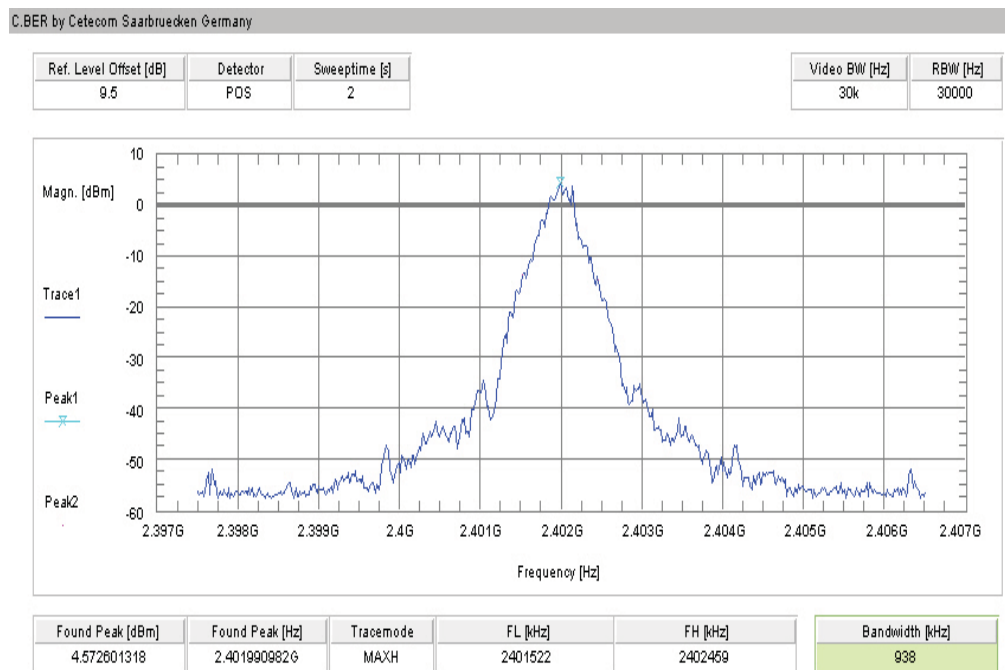
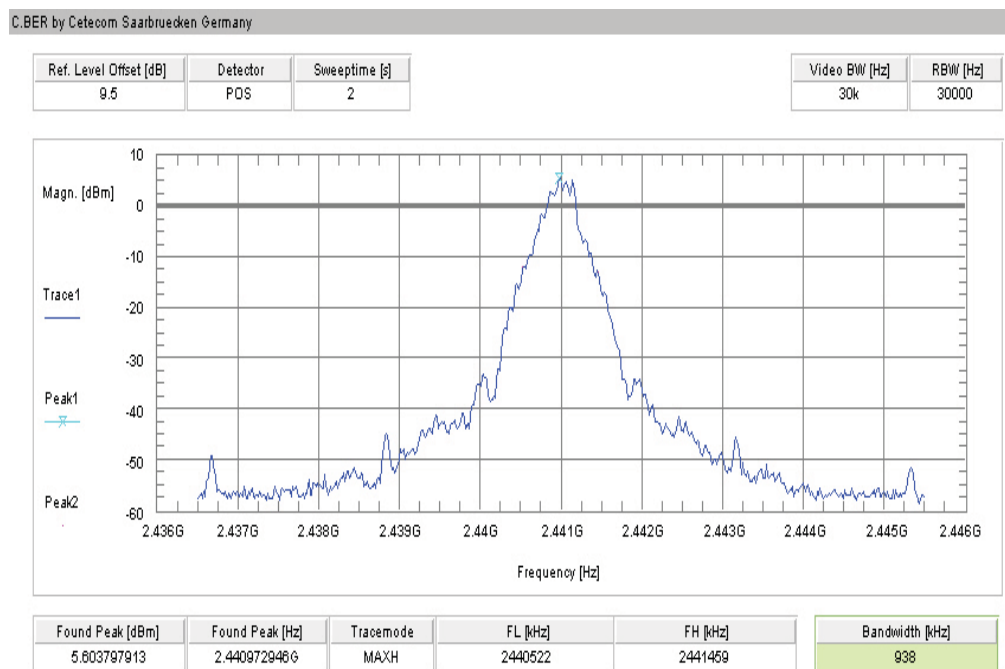
Limits:

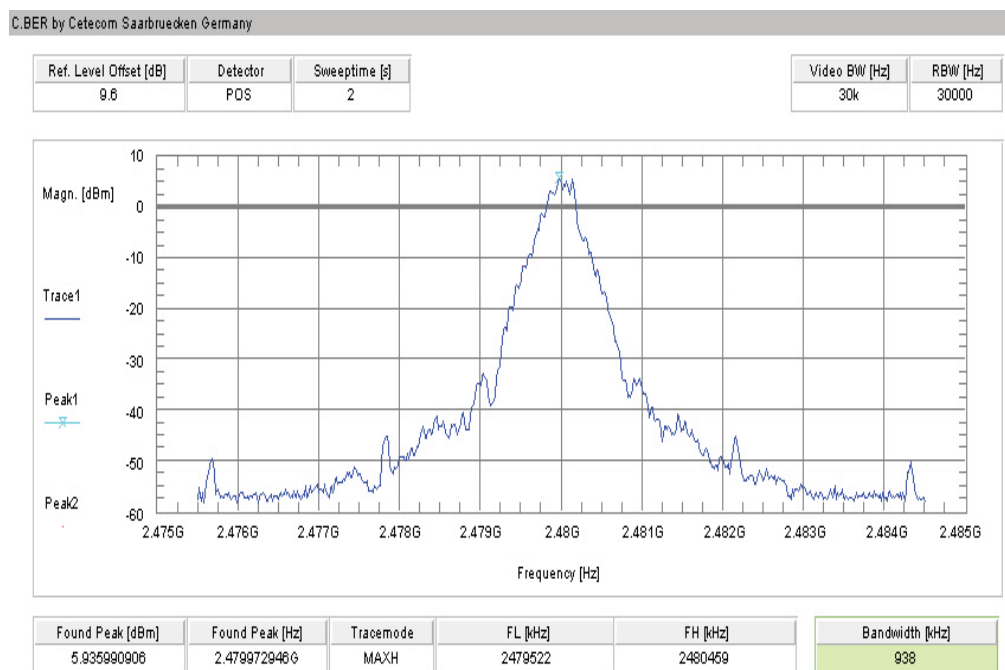
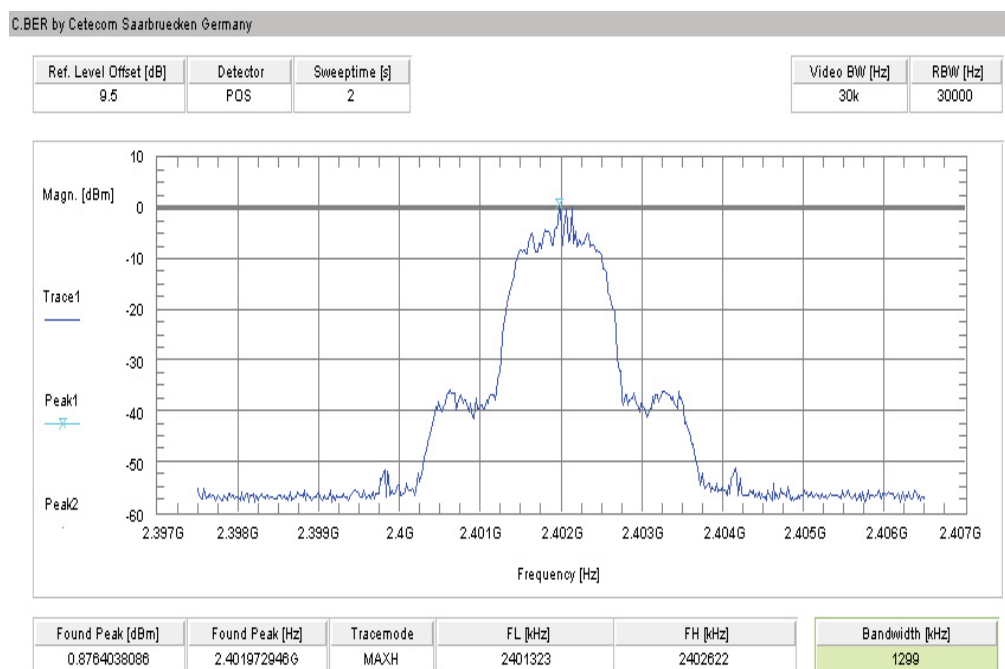
FCC	IC
Spectrum bandwidth of a FHSS system – 20 dB bandwidth	
GFSK < 1500 kHz Pi/4 DQPSK < 1500 kHz 8DPSK < 1500 kHz	

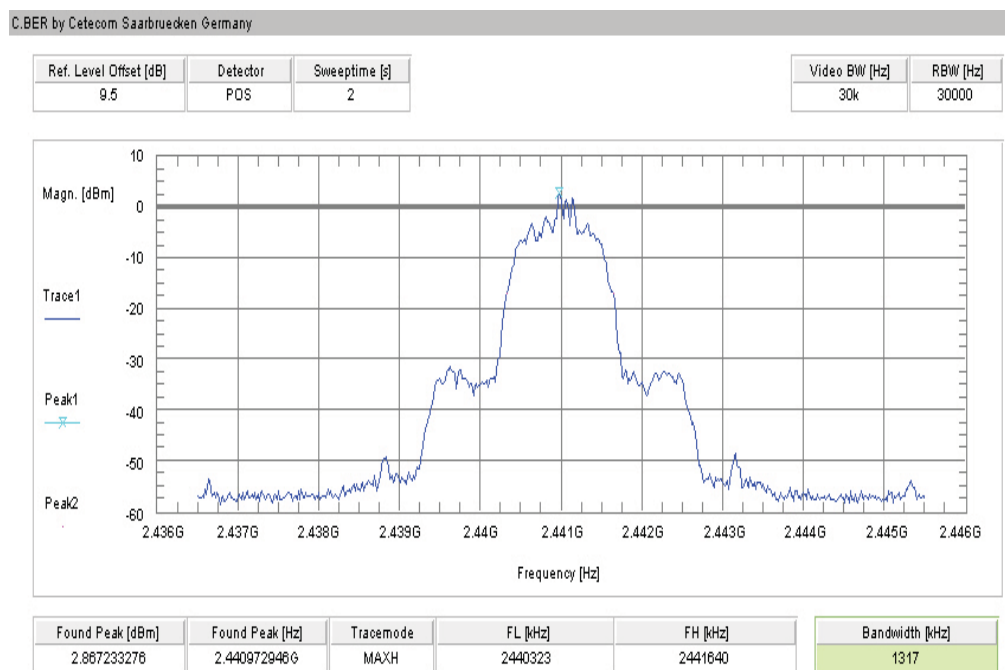
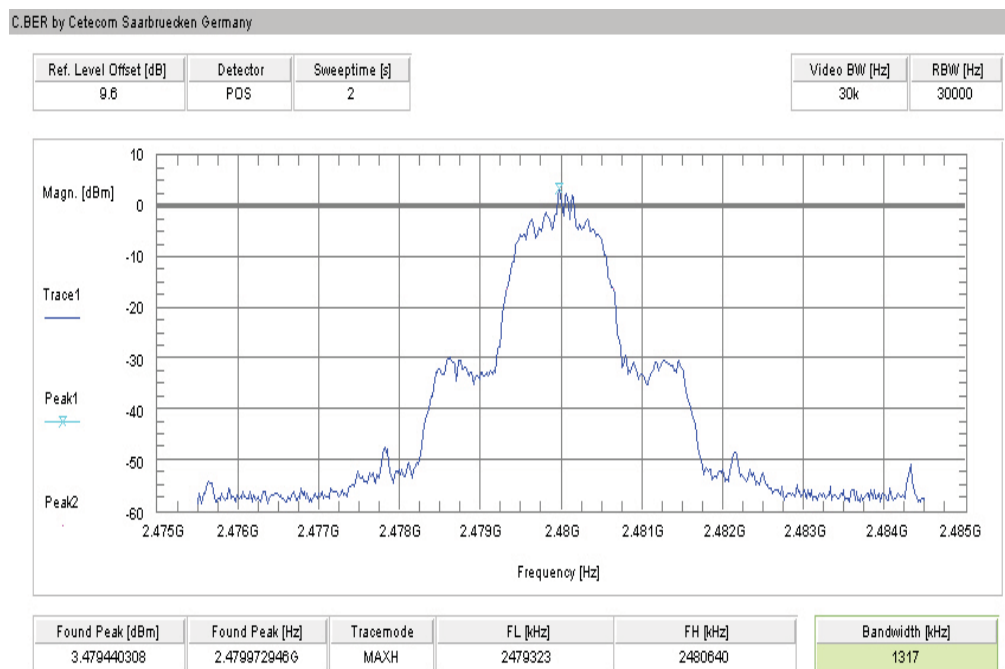
Results:

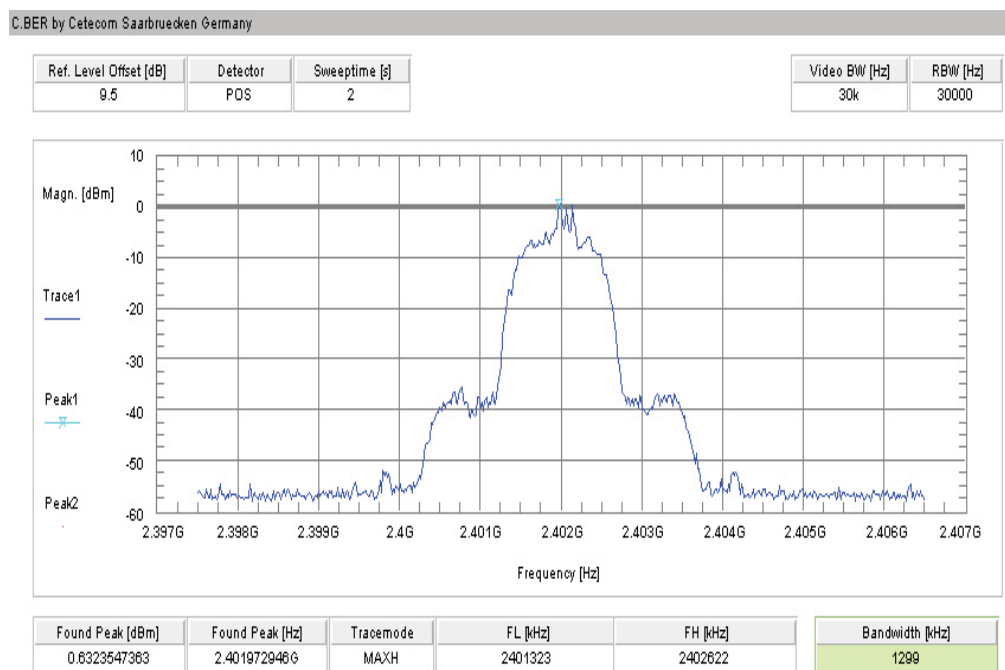
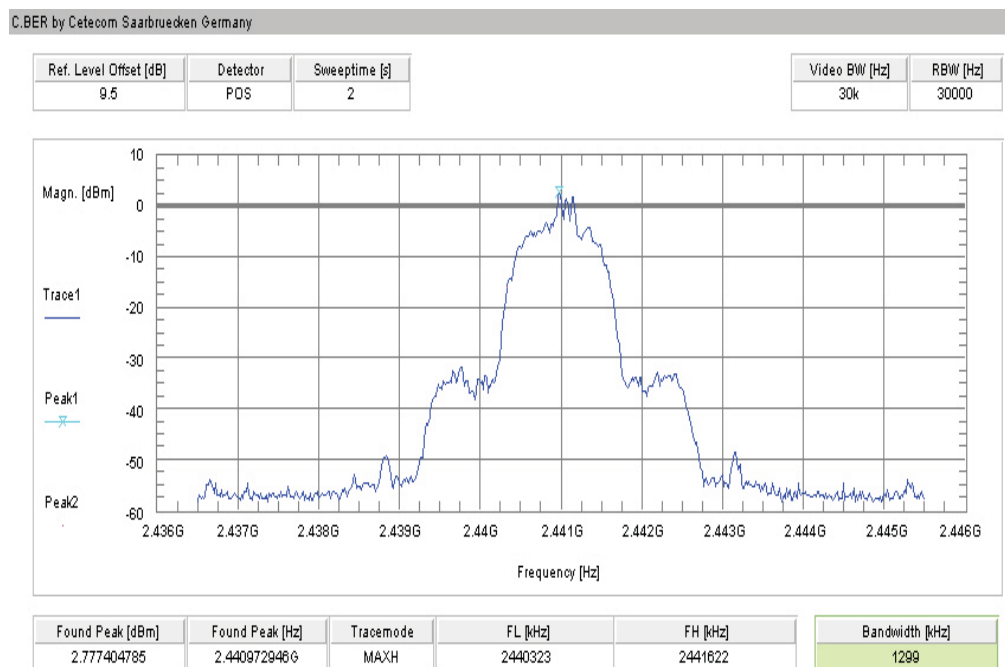
Modulation Frequency	20 dB BANDWIDTH [kHz]		
	2402 MHz	2441 MHz	2480 MHz
GFSK	938	938	938
Pi/4 DQPSK	1299	1317	1317
8DPSK	1299	1299	1299
Measurement uncertainty	± 10 kHz		

Result: Passed

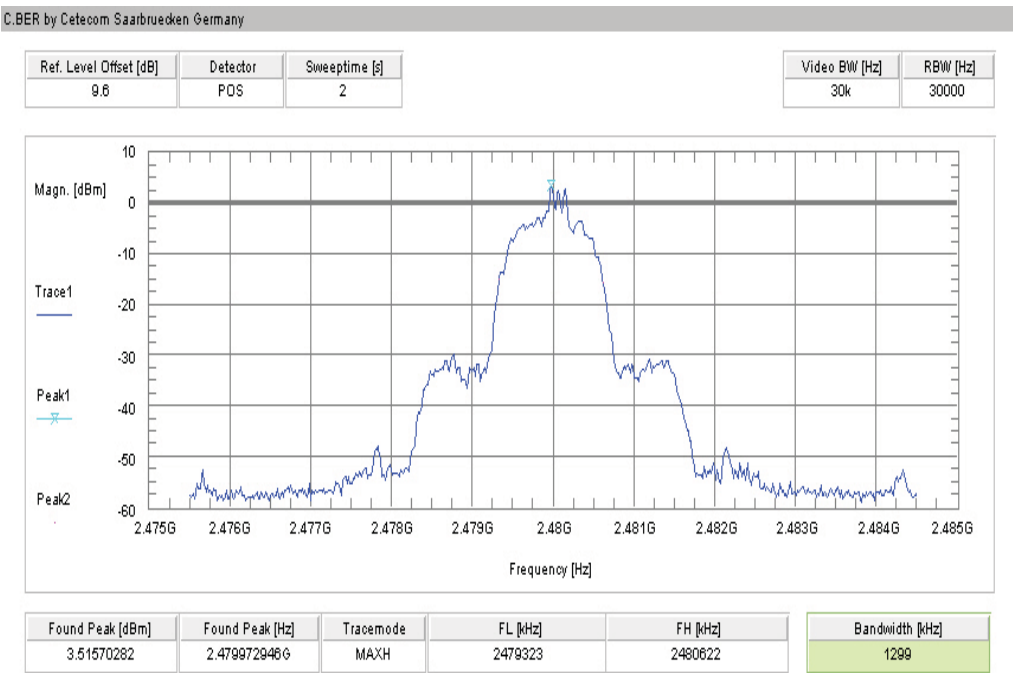
Plots:**Plot 1:** lowest channel – 2402 MHz, GFSK modulation**Plot 2:** middle channel – 2441 MHz, GFSK modulation

Plot 3: highest channel – 2480 MHz, GFSK modulation**Plot 4:** lowest channel – 2402 MHz, Pi / DQPSK modulation

Plot 5: middle channel – 2441 MHz, Pi / DQPSK modulation**Plot 6:** highest channel – 2480 MHz, Pi / DQPSK modulation

Plot 7: lowest channel – 2402 MHz, 8 DPSK modulation**Plot 8:** middle channel – 2441 MHz, 8 DPSK modulation

Plot 9: highest channel – 2480 MHz, 8 DPSK modulation



11.7 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. EUT in single channel mode.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	3 MHz
Span:	5 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
Maximum output power	
[Conducted: 0.125 W – antenna gain max. 6 dBi] Systems using more than 75 hopping channels: Conducted: 1.0 W – antenna gain max. 6 dBi	

Results:

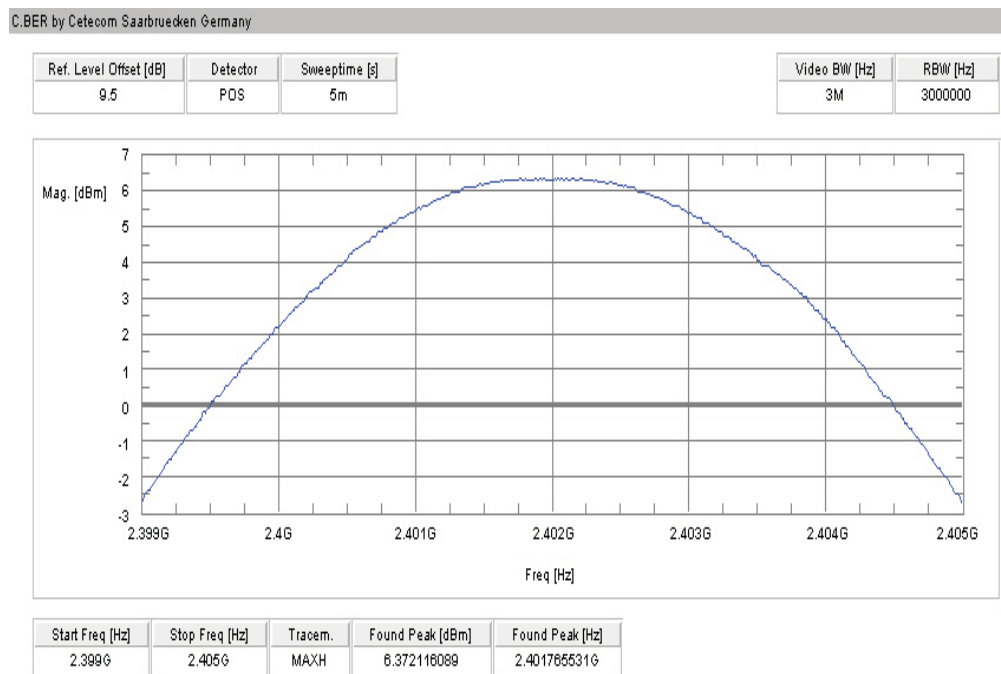
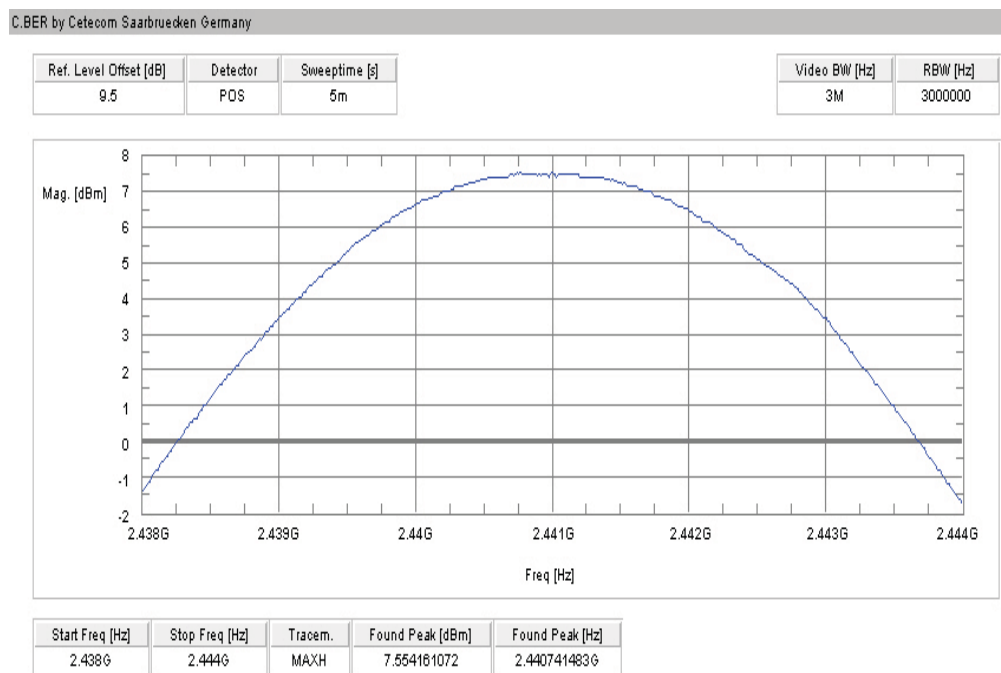
Modulation Frequency	Maximum output power conducted [dBm]		
	2402 MHz	2441 MHz	2480 MHz
GFSK	6.4	7.6	7.8
Pi/4 DQPSK	4.2	5.8	6.4
8DPSK	4.4	5.9	6.6
Measurement uncertainty	± 1 dB		

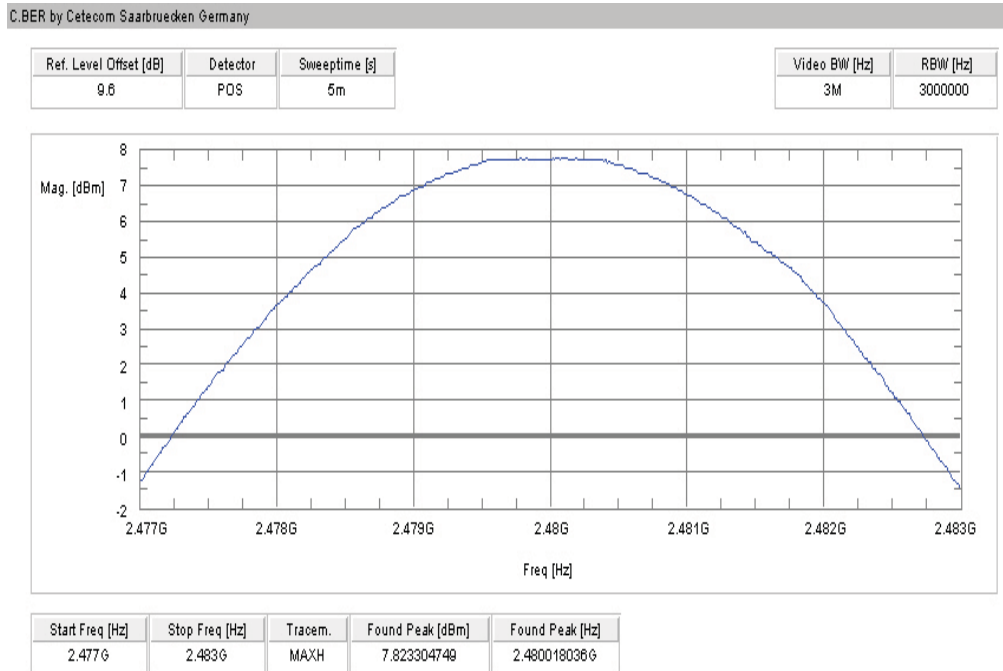
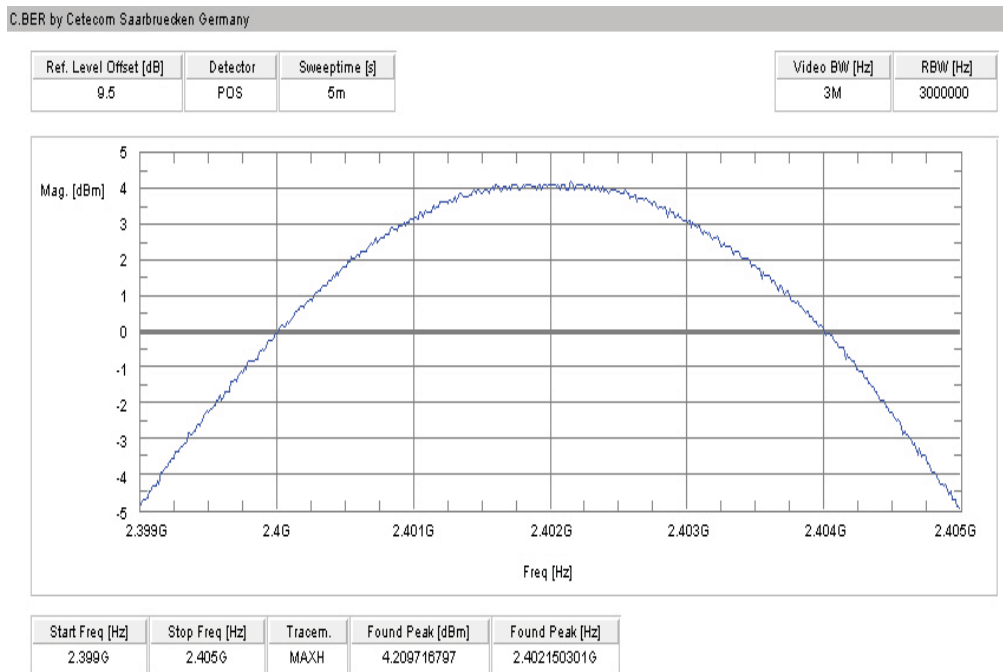
Result: Passed**Results:**

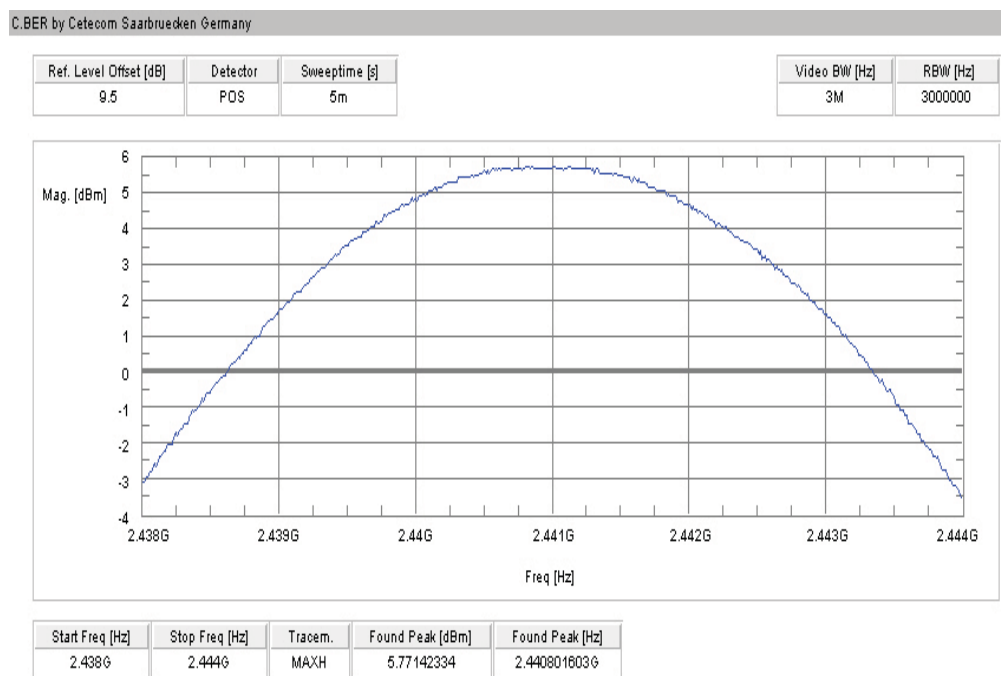
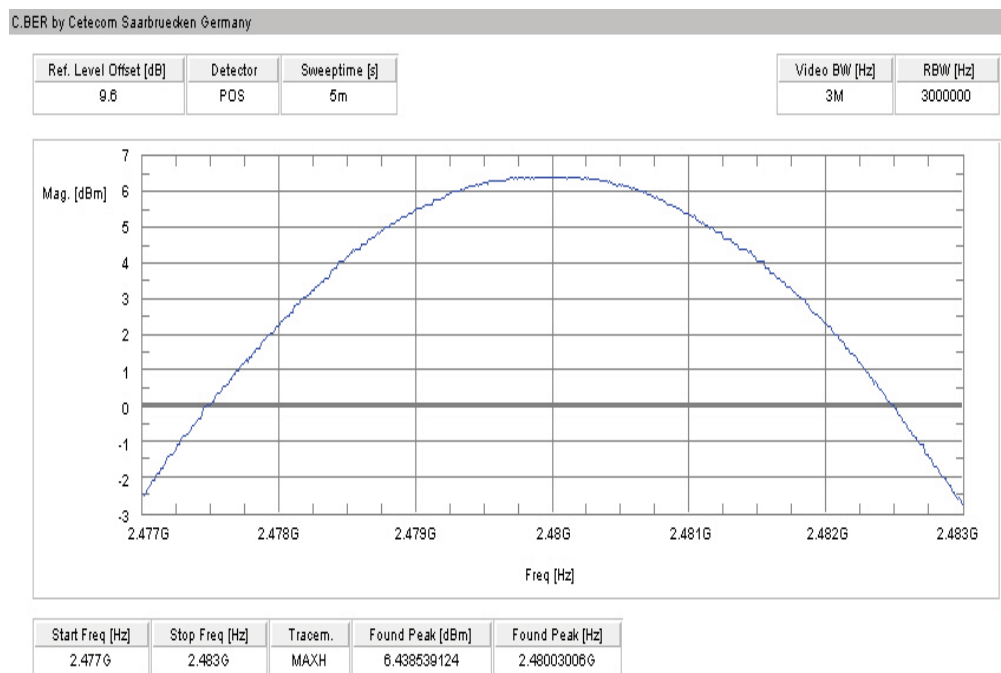
Modulation Frequency	Maximum output power radiated - EIRP [dBm]		
	2402 MHz	2441 MHz	2480 MHz
GFSK	1.7	2.8	2.5
Pi/4 DQPSK *)	-0.5	1.0	1.1
8DPSK *)	-0.3	1.1	1.3
Measurement uncertainty	± 3 dB		

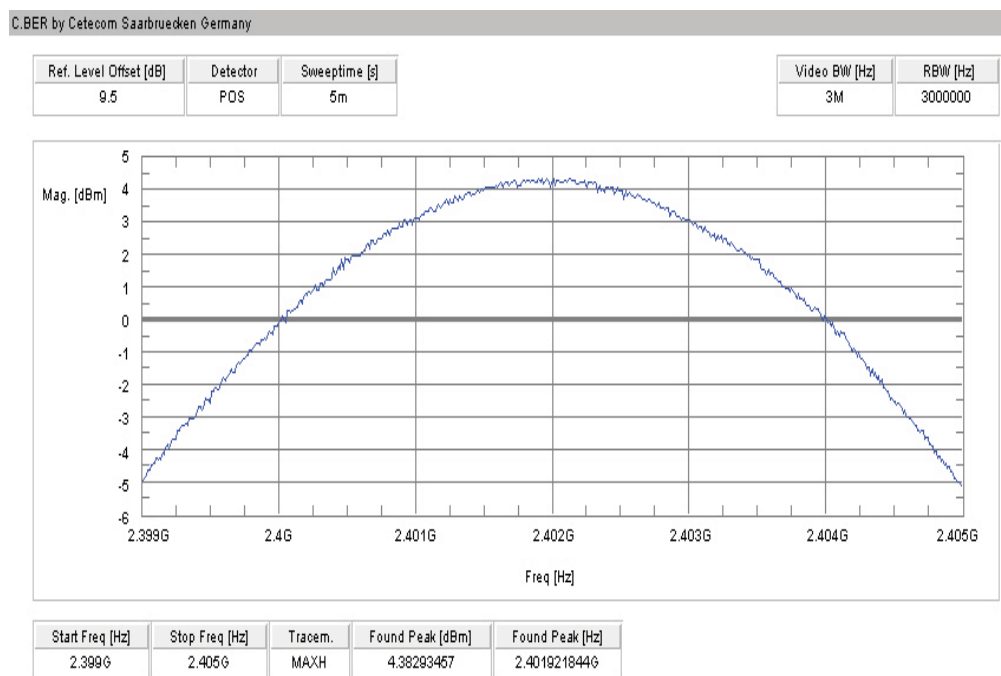
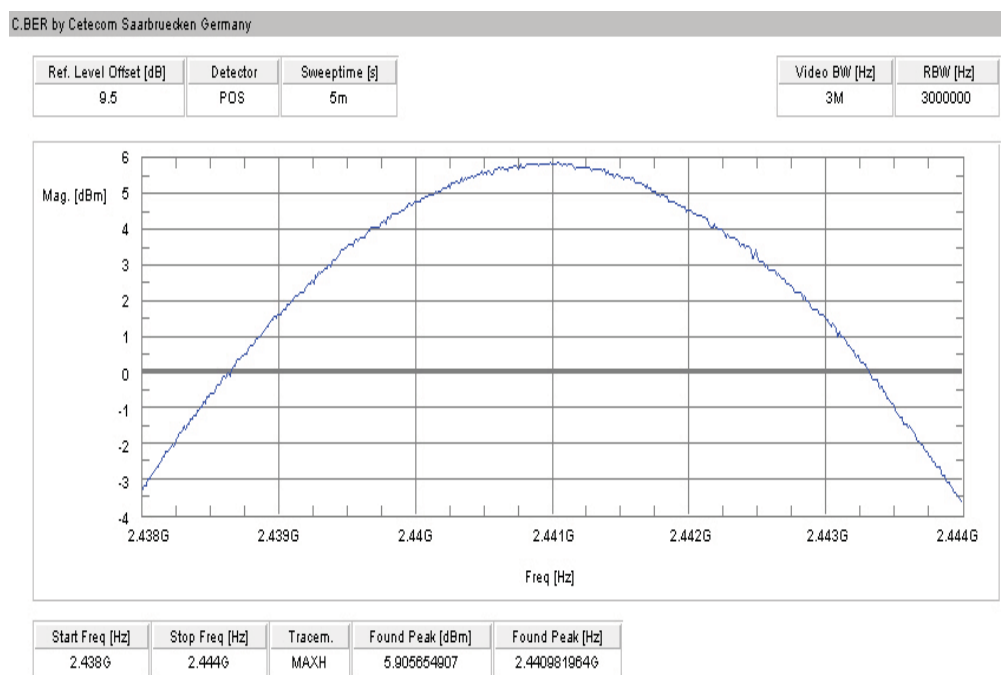
*) - Values calculated with antenna gain

Result: Passed

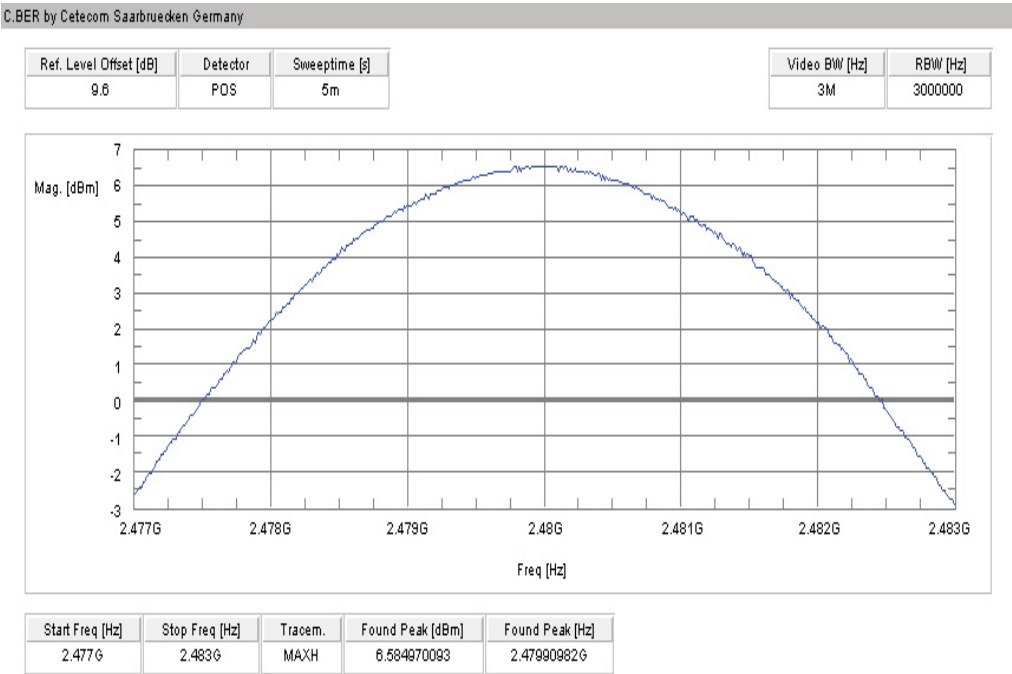
Plots:**Plot 1:** lowest channel – 2402 MHz, GFSK modulation**Plot 2:** middle channel – 2441 MHz, GFSK modulation

Plot 3: highest channel – 2480 MHz, GFSK modulation**Plot 4:** lowest channel – 2402 MHz, Pi / DQPSK modulation

Plot 5: middle channel – 2441 MHz, Pi / DQPSK modulation**Plot 6:** highest channel – 2480 MHz, Pi / DQPSK modulation

Plot 7: lowest channel – 2402 MHz, 8 DPSK modulation**Plot 8:** middle channel – 2441 MHz, 8 DPSK modulation

Plot 9: highest channel – 2480 MHz, 8 DPSK modulation



11.8 Band edge compliance conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in single channel and hopping mode. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	Lower Band Edge: 2395 – 2405 MHz Upper Band Edge: 2478 – 2489 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
Band edge compliance conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	

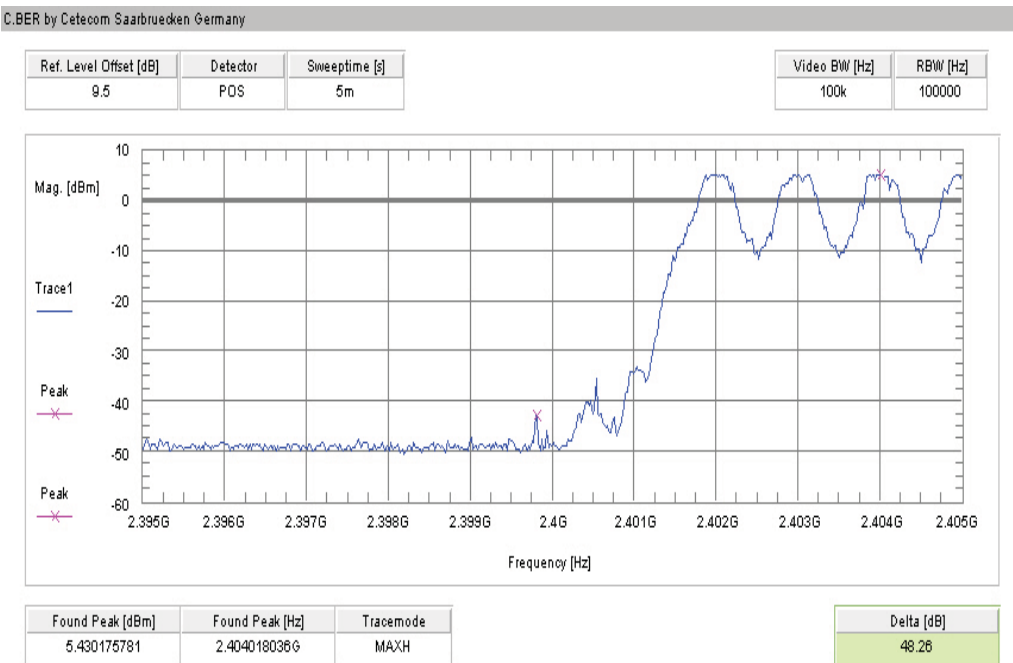
Results:

Scenario Modulation	Band edge compliance conducted [dB]		
	GFSK	Pi/4 DQPSK	8DPSK
Lower band edge – hopping off	> 20 dB	> 20 dB	> 20 dB
Lower band edge – hopping on	> 20 dB	> 20 dB	> 20 dB
Upper band edge – hopping off	> 20 dB	> 20 dB	> 20 dB
Upper band edge – hopping on	> 20 dB	> 20 dB	> 20 dB
Measurement uncertainty	± 1.5 dB		

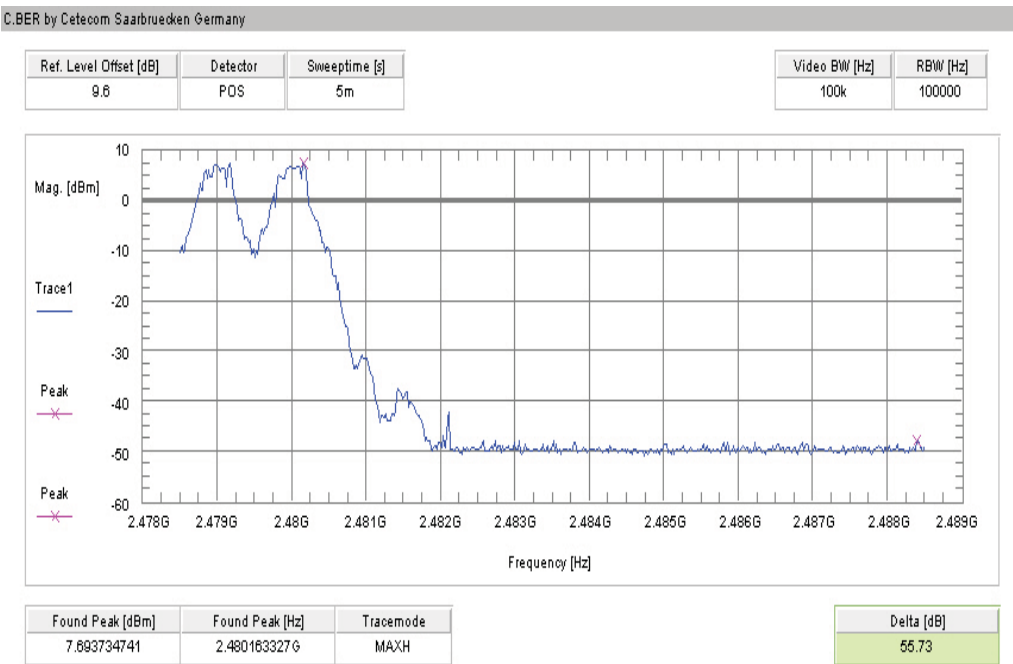
Result: Passed

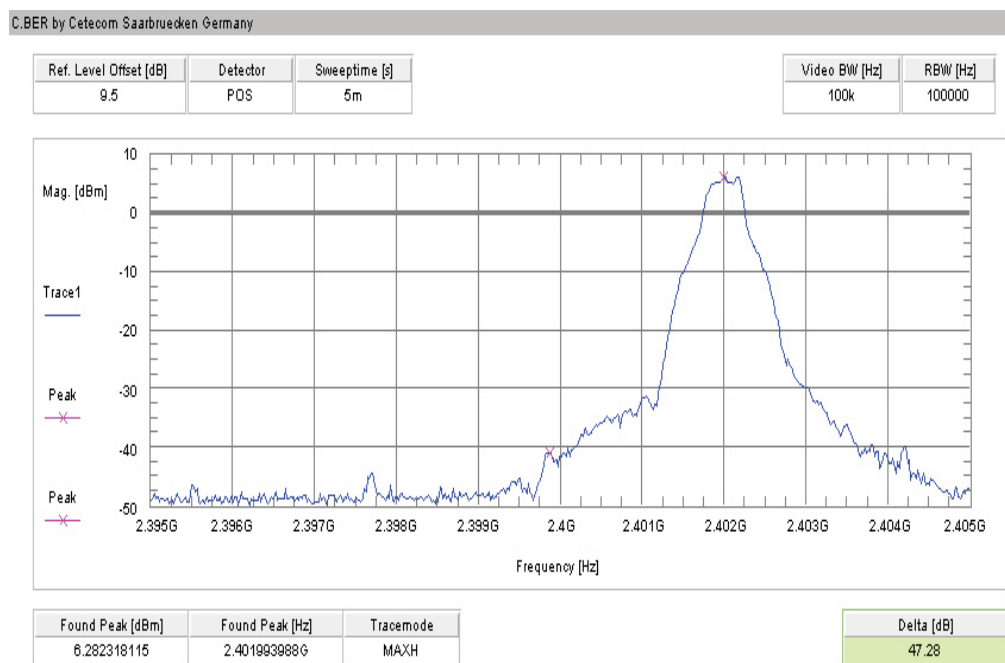
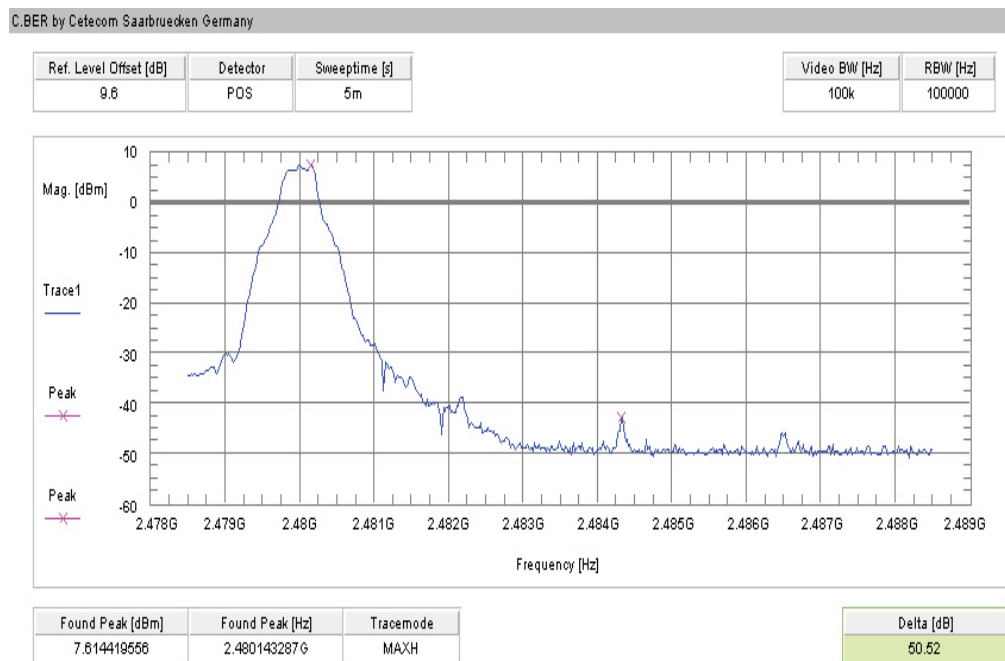
Plots:

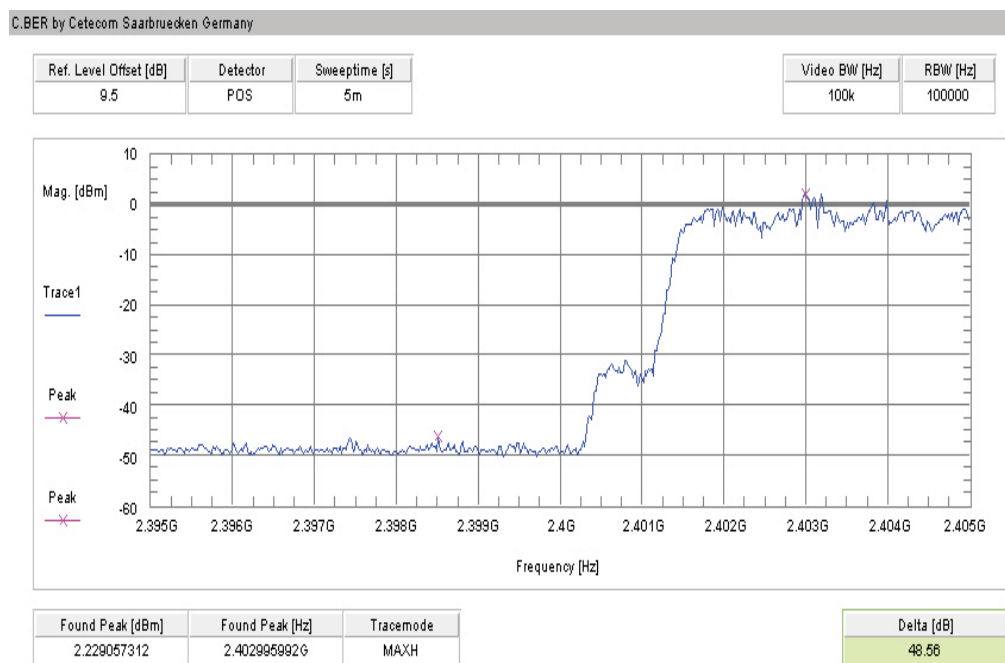
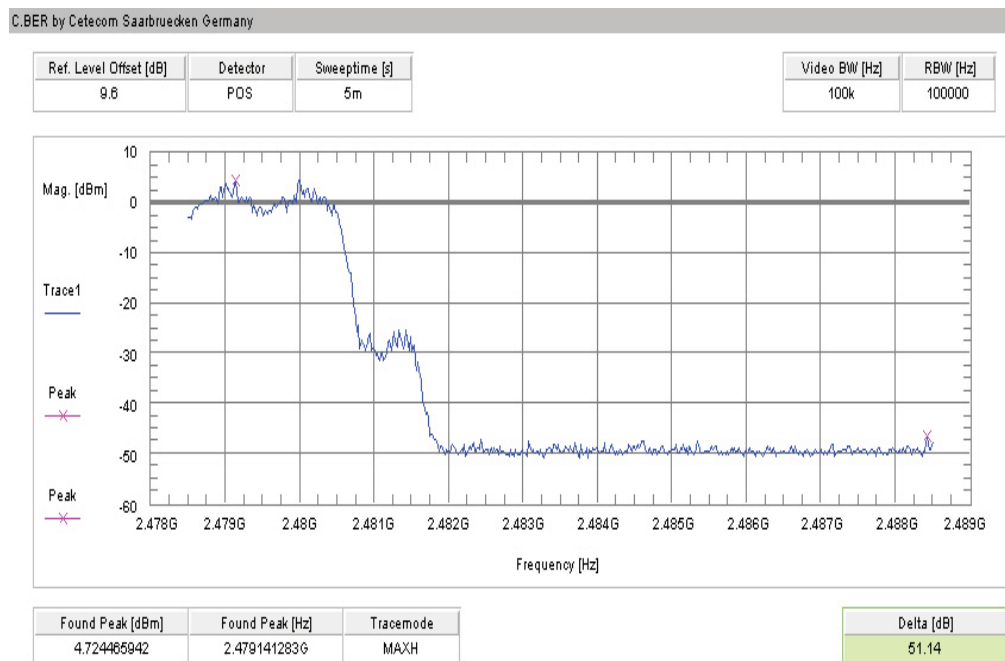
Plot 1: Lower band edge – hopping on, GFSK modulation

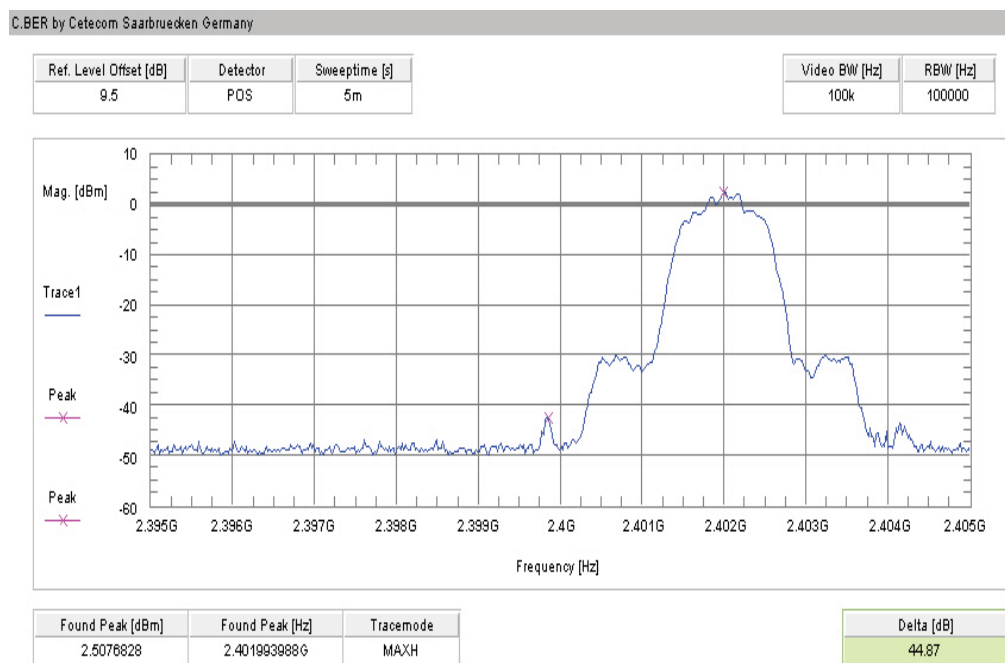
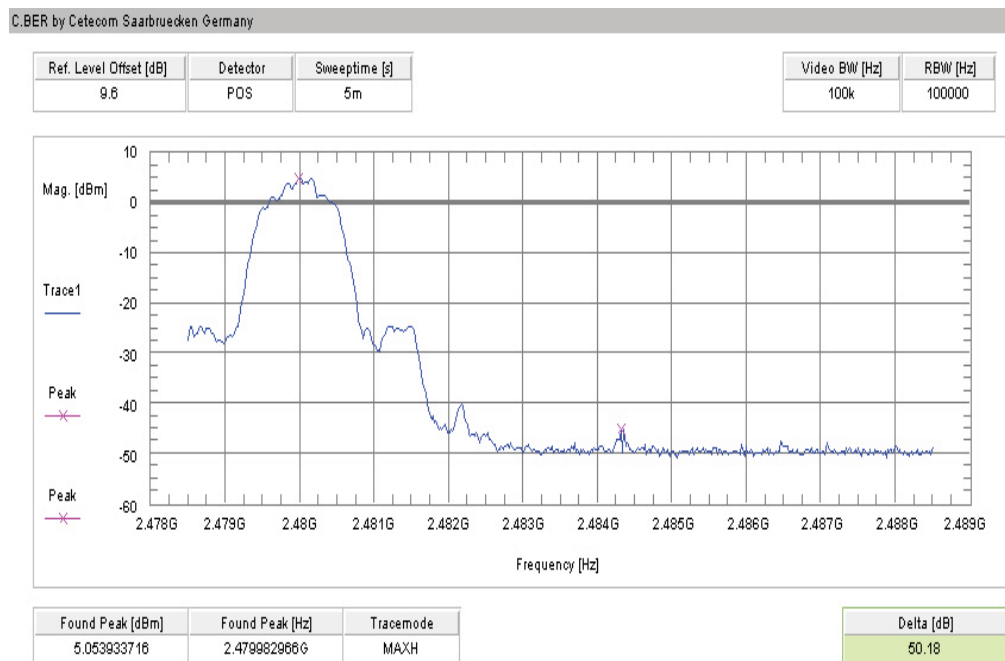


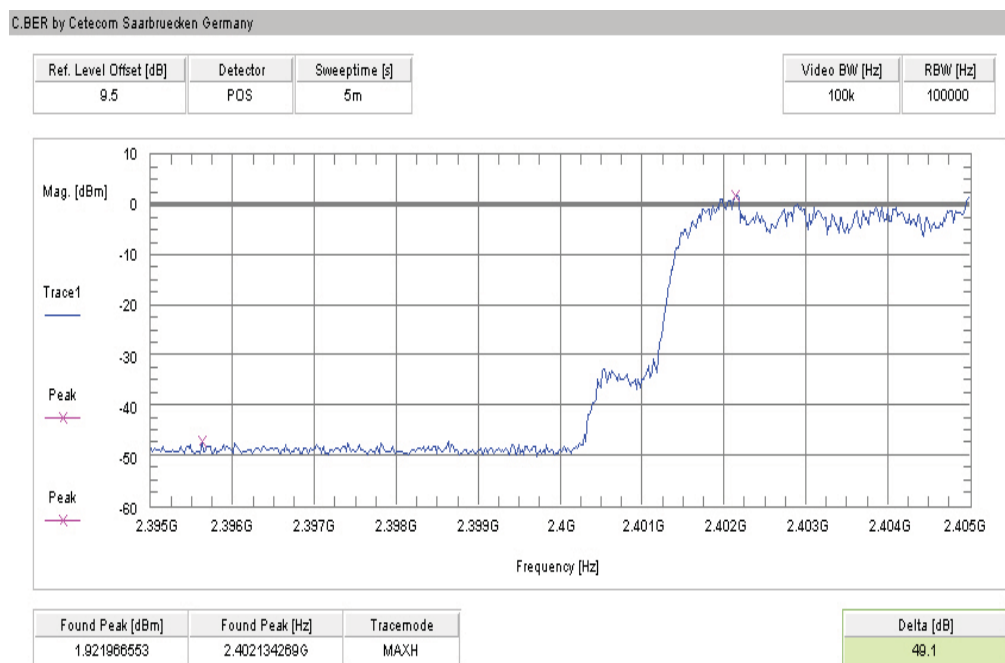
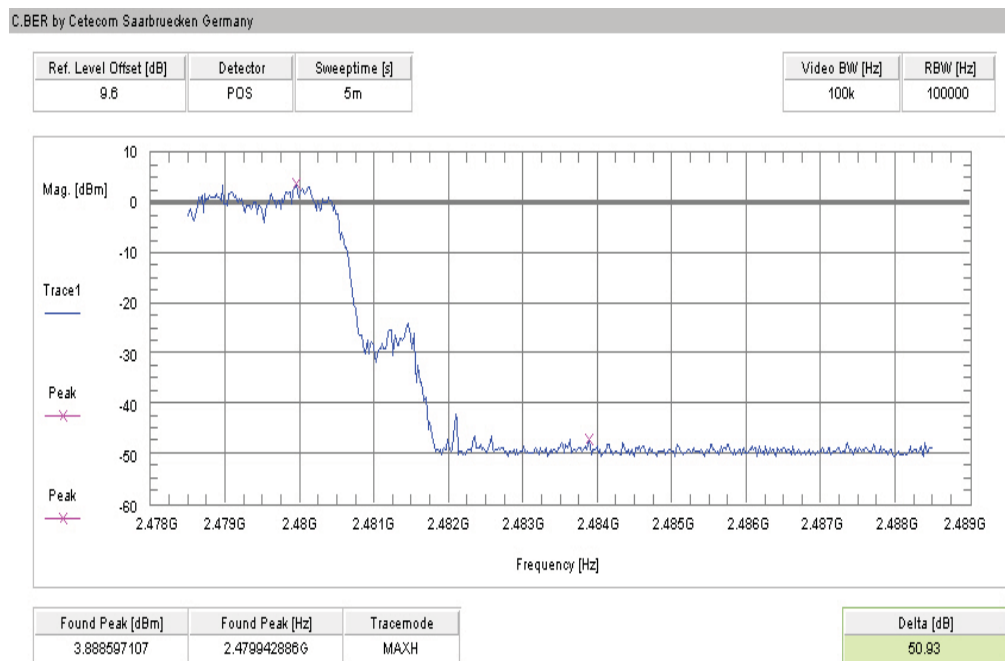
Plot 2: Upper band edge – hopping on, GFSK modulation

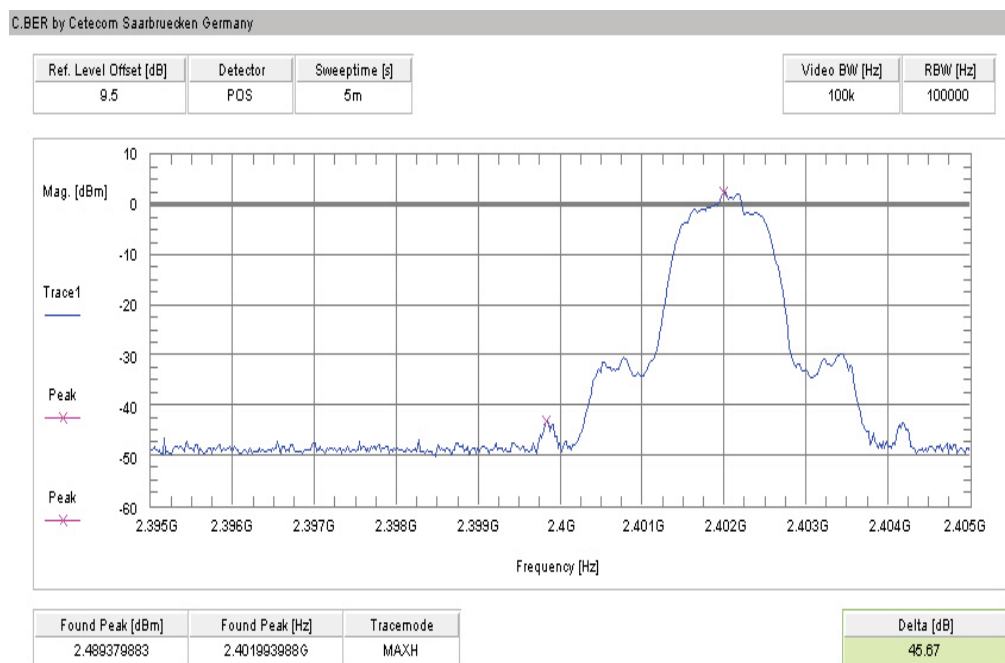
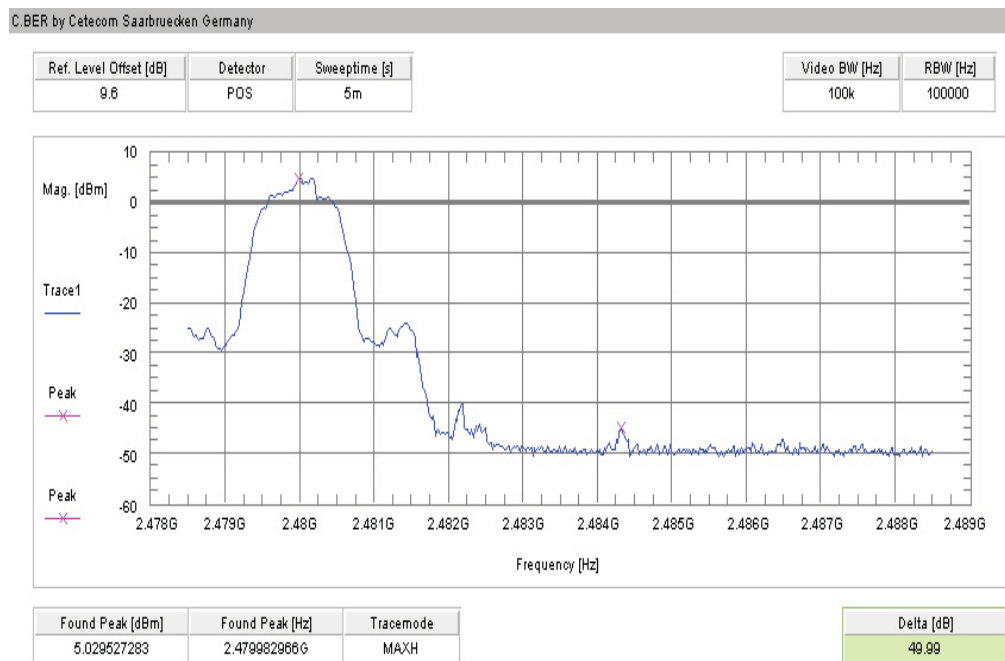


Plot 3: Lower band edge – hopping off, GFSK modulation**Plot 4: Upper band edge – hopping off, GFSK modulation**

Plot 5: Lower band edge – hopping on, Pi/4 DQPSK modulation**Plot 6:** Upper band edge – hopping on, Pi/4 DQPSK modulation

Plot 7: Lower band edge – hopping off, Pi/4 DQPSK modulation**Plot 8: Upper band edge – hopping off, Pi/4 DQPSK modulation**

Plot 9: Lower band edge – hopping on, 8DPSK modulation**Plot 10: Upper band edge – hopping on, 8DPSK modulation**

Plot 11: Lower band edge – hopping off, 8DPSK modulation**Plot 12:** Upper band edge – hopping off, 8DPSK modulation

11.9 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to single channel mode and the transmit channel is channel 00 for the lower restricted band and channel 78 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	1 MHz Peak / 10 Hz AVG
Resolution bandwidth:	1 MHz
Span:	Lower Band: 2370 – 2400 MHz Upper Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

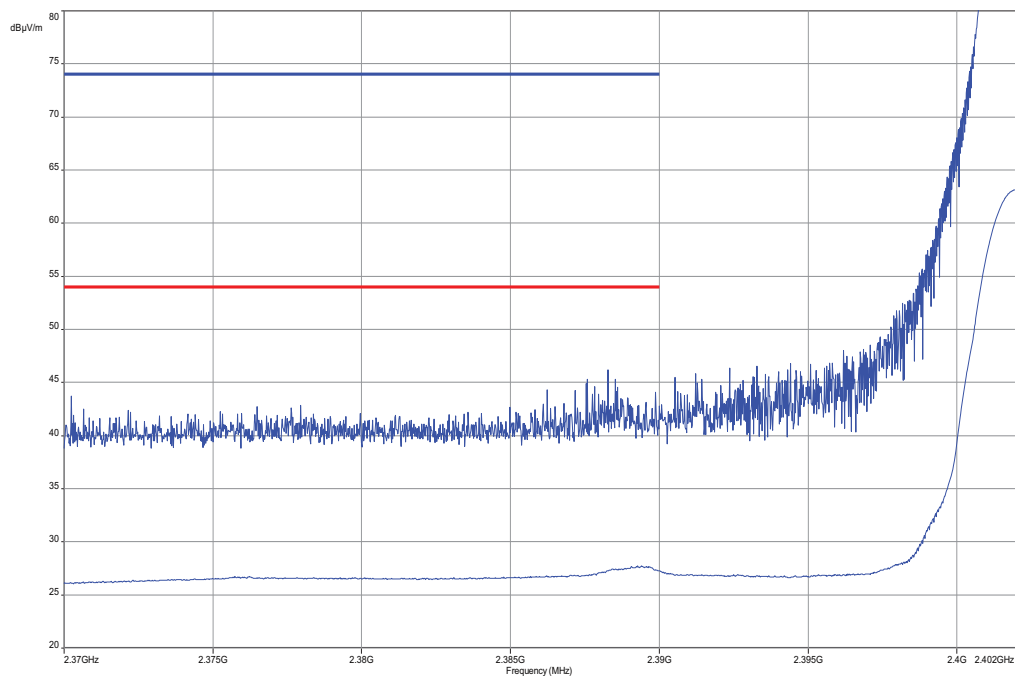
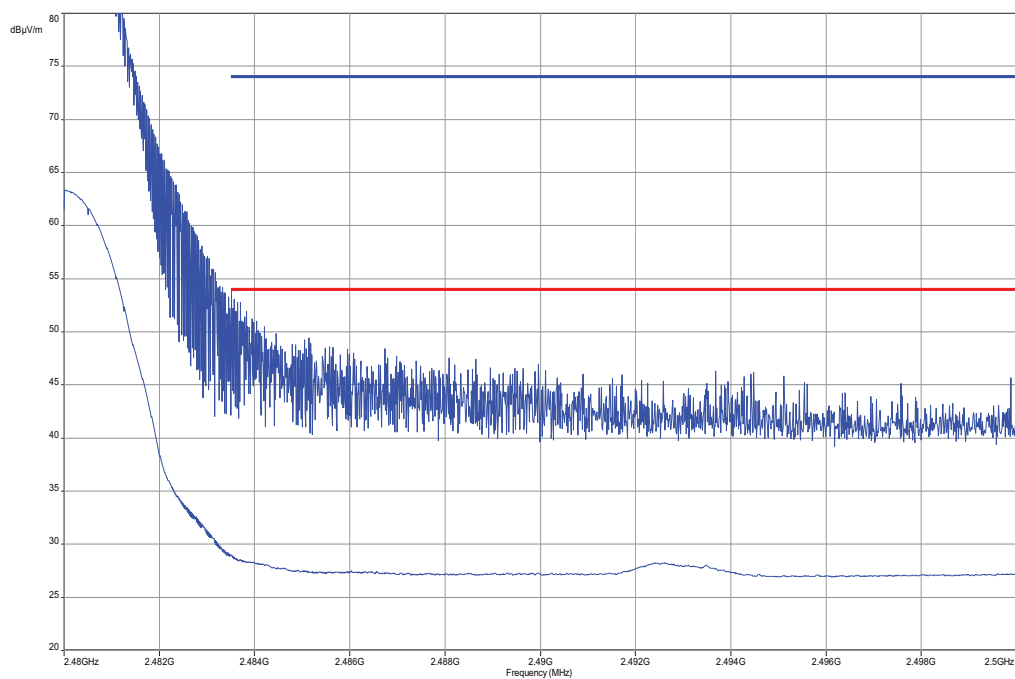
Limits:

FCC	IC
Band edge compliance radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
54 dBµV/m AVG 74 dBµV/m Peak	

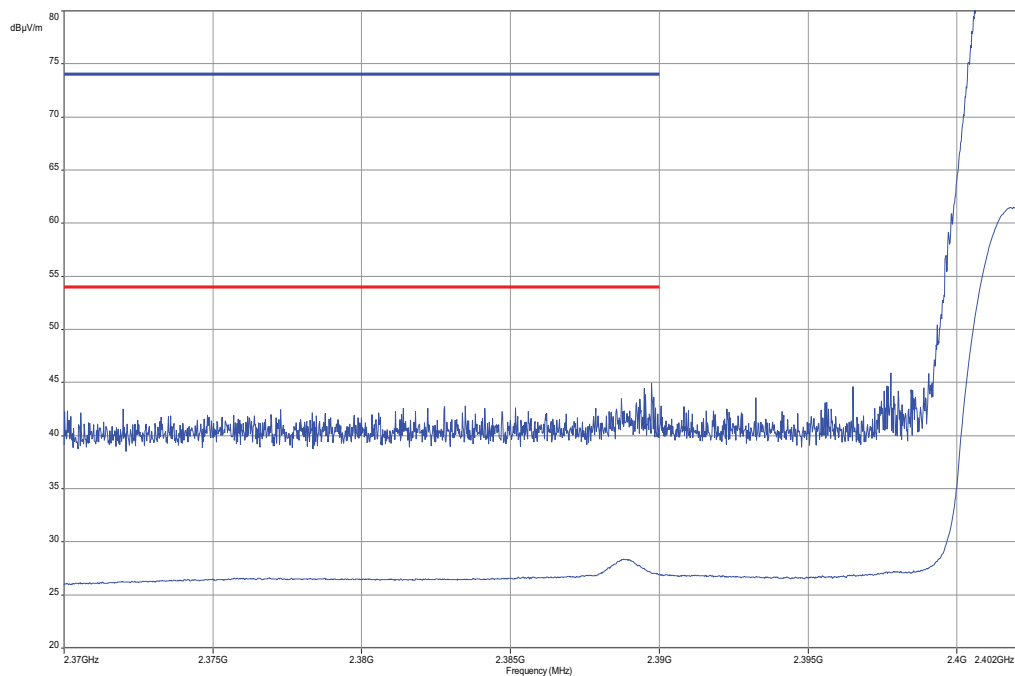
Results:

Scenario Modulation	Band edge compliance radiated [dBµV/m]		
	GFSK	Pi/4 DQPSK	8DPSK
Lower restricted band	< 54 AVG / < 74 PP	< 54 AVG / < 74 PP	< 54 AVG / < 74 PP
Upper restricted band	< 54 AVG / < 74 PP	< 54 AVG / < 74 PP	< 54 AVG / < 74 PP
Measurement uncertainty	± 3 dB		

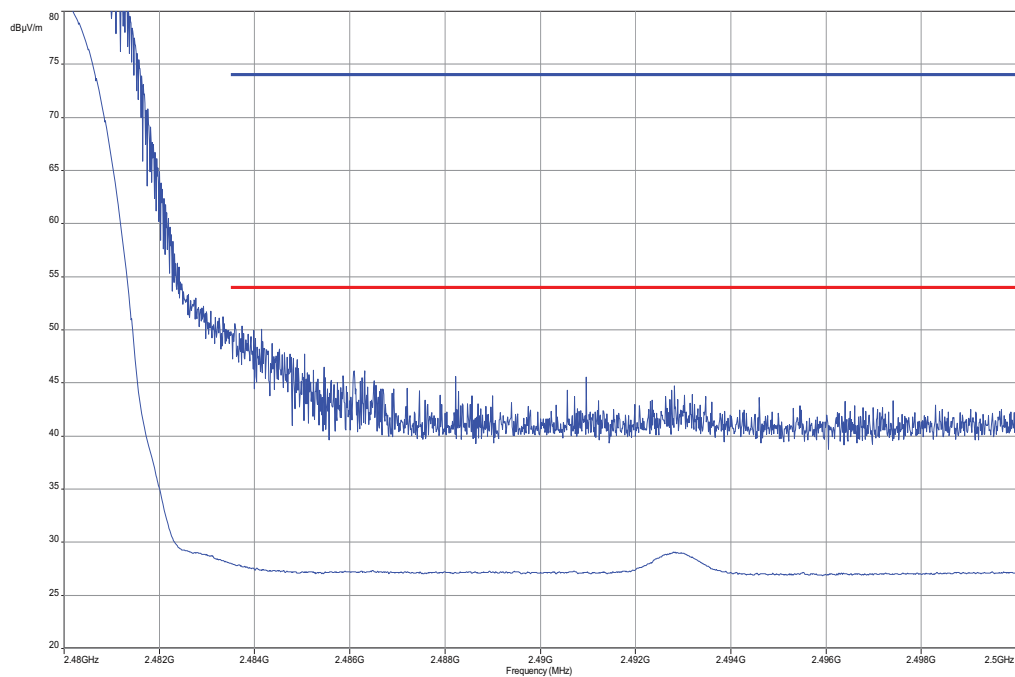
Result: Passed

Plots:**Plot 1:** Lower band edge, GFSK modulation, vertical & horizontal polarization**Plot 2:** Upper band edge, GFSK modulation, vertical & horizontal polarization

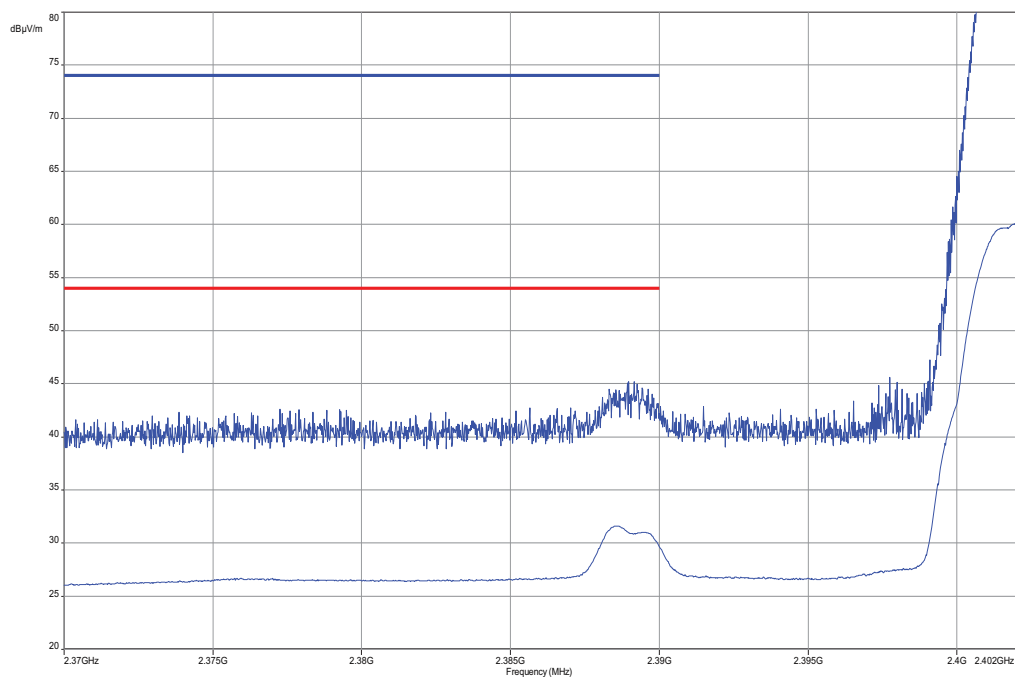
Plot 3: Lower band edge, Pi/4 DQPSK modulation, vertical & horizontal polarization



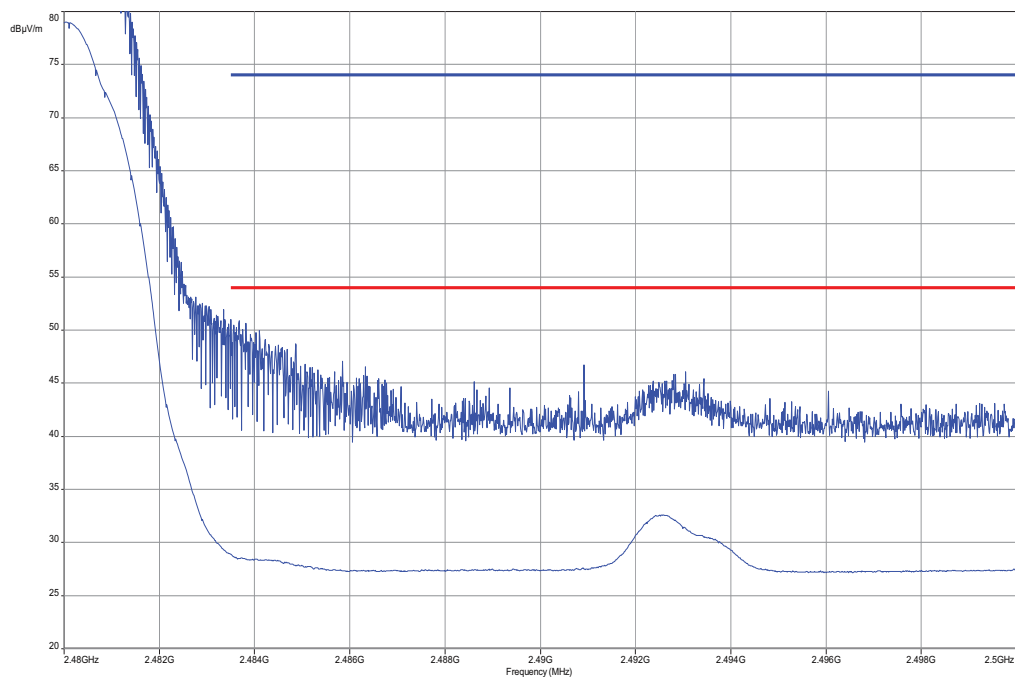
Plot 4: Upper band edge, Pi/4 DQPSK modulation, vertical & horizontal polarization



Plot 5: Lower band edge, 8 DPSK modulation, vertical & horizontal polarization



Plot 6: Upper band edge, 8 DPSK modulation, vertical & horizontal polarization



11.10 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 500 kHz F > 1 GHz: 500 kHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
TX spurious emissions conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

Results:

TX spurious emissions conducted					
GFSK - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		6.2	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
2441		7.3	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
2480		7.6	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
Measurement uncertainty		± 3 dB			

Result: Passed**Results:**

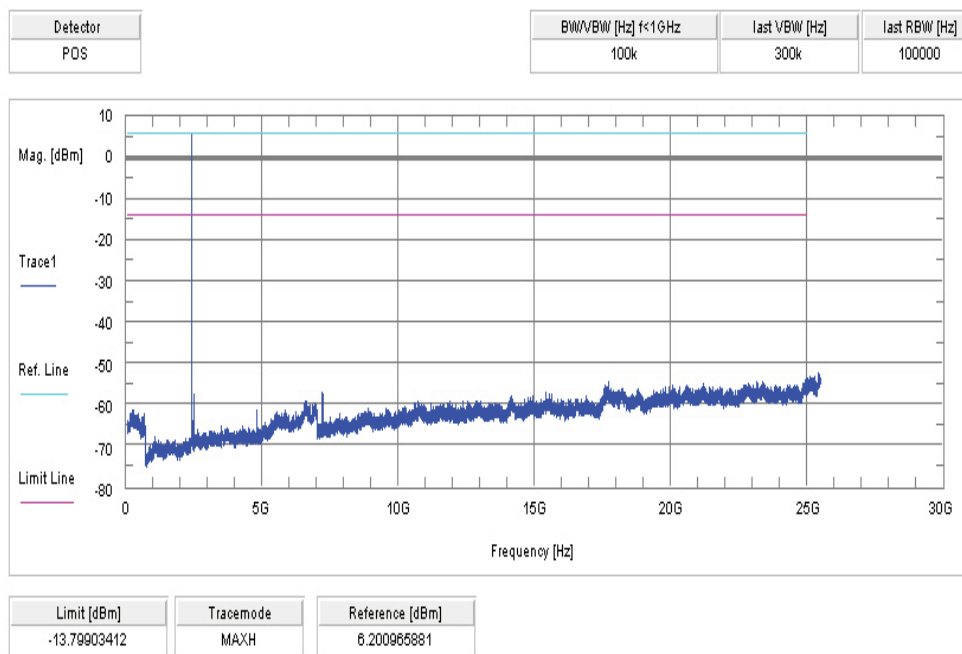
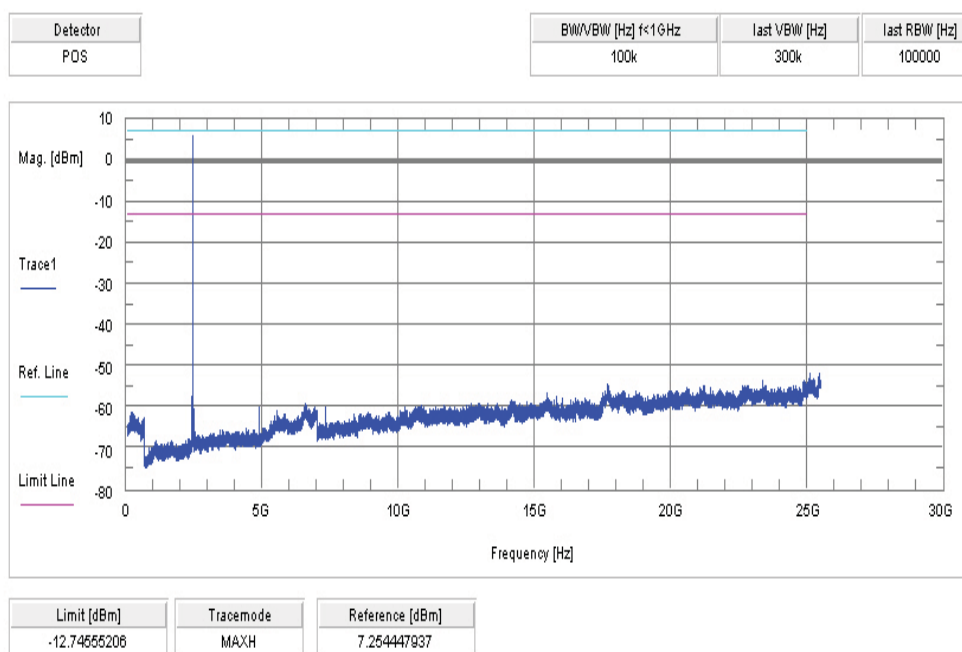
TX spurious emissions conducted					
Pi/4-DQPSK - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		3.6	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
2441		5.3	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
2480		6.0	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
Measurement uncertainty		± 3dB			

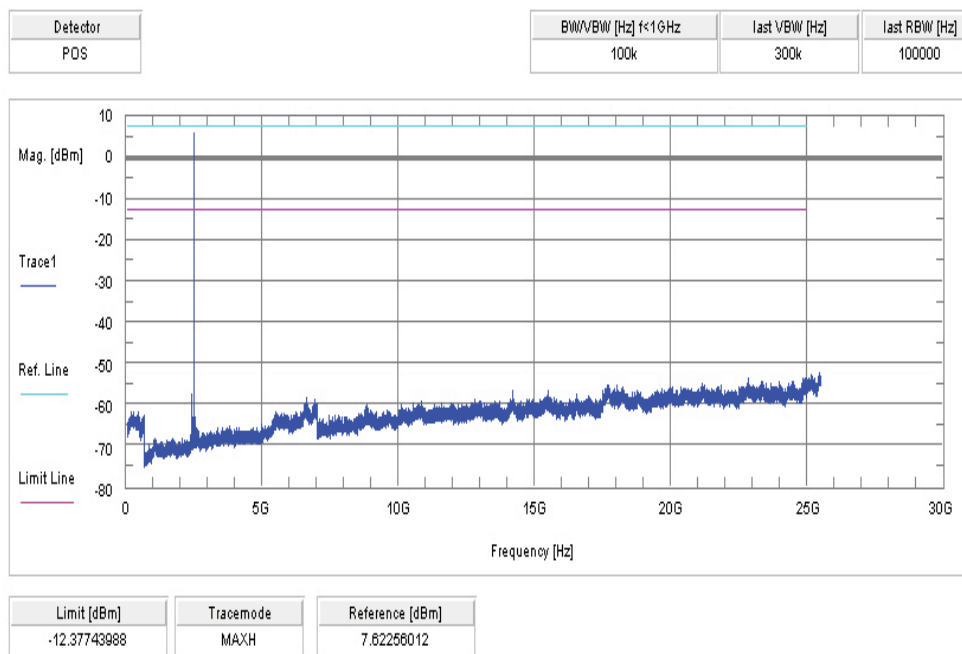
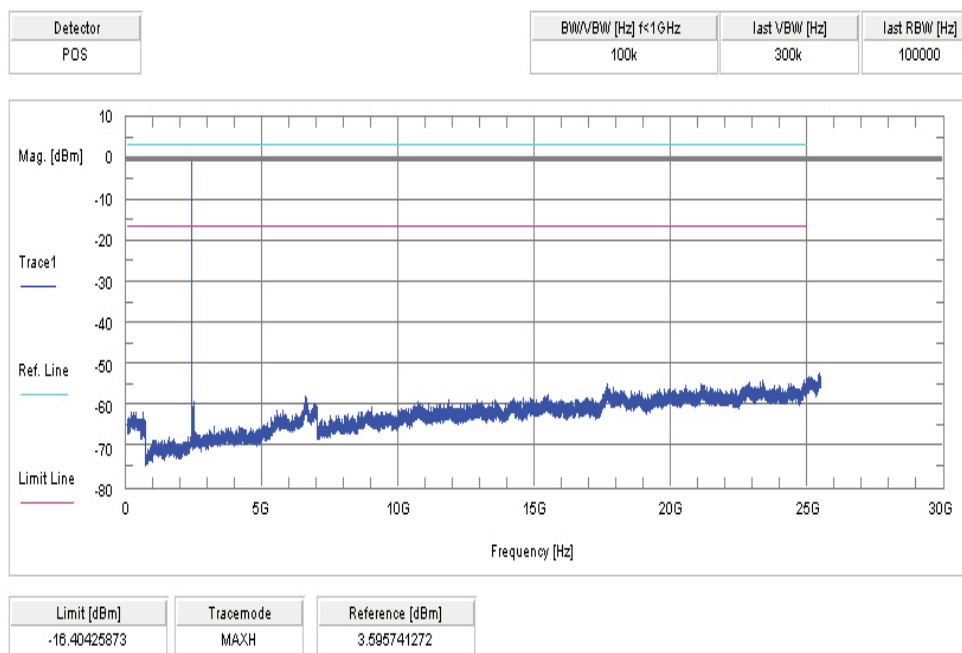
Result: Passed

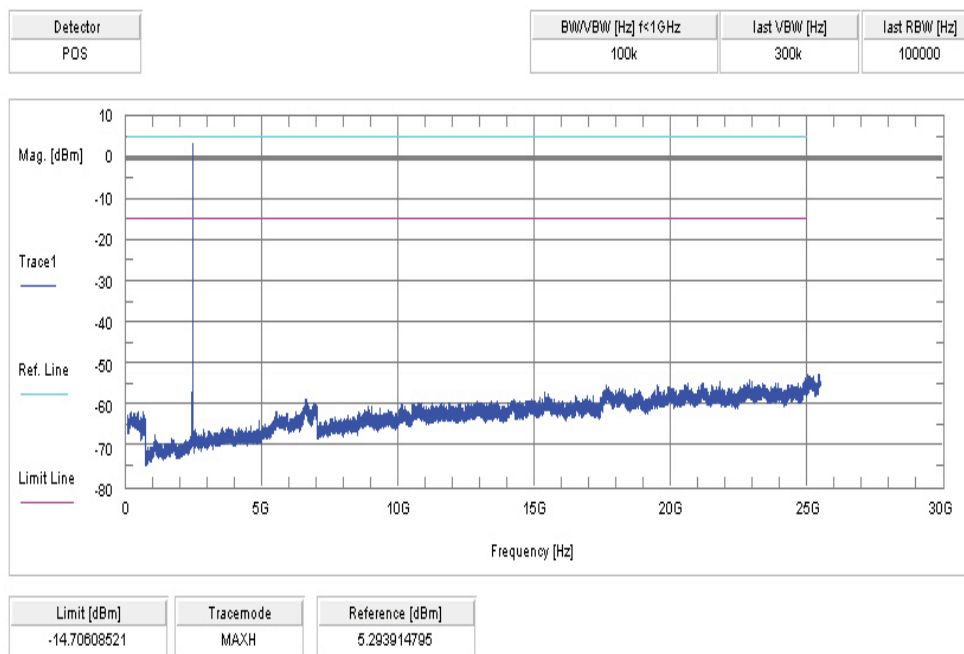
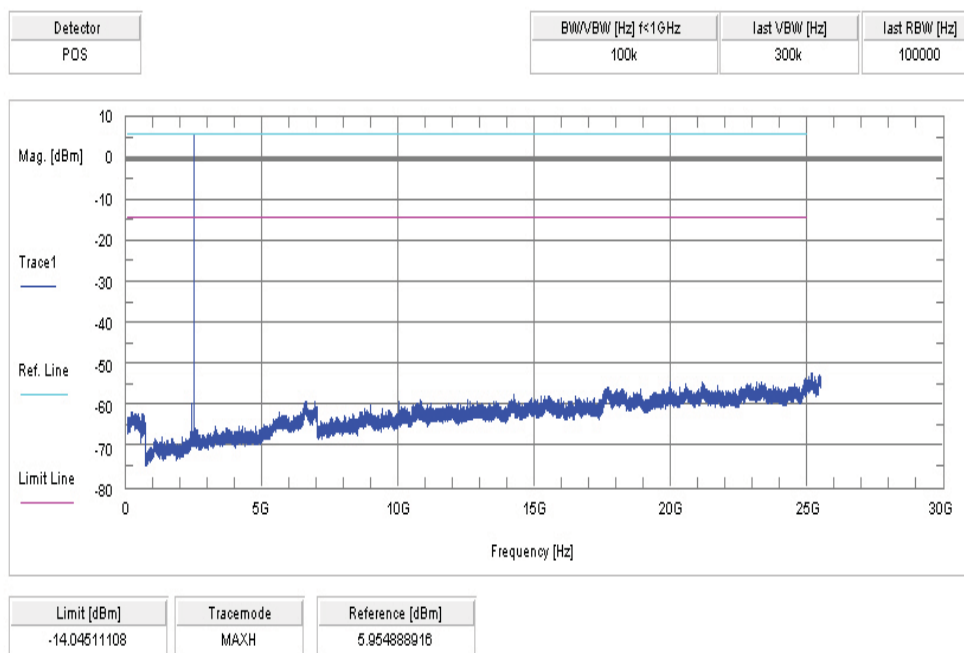
Results:

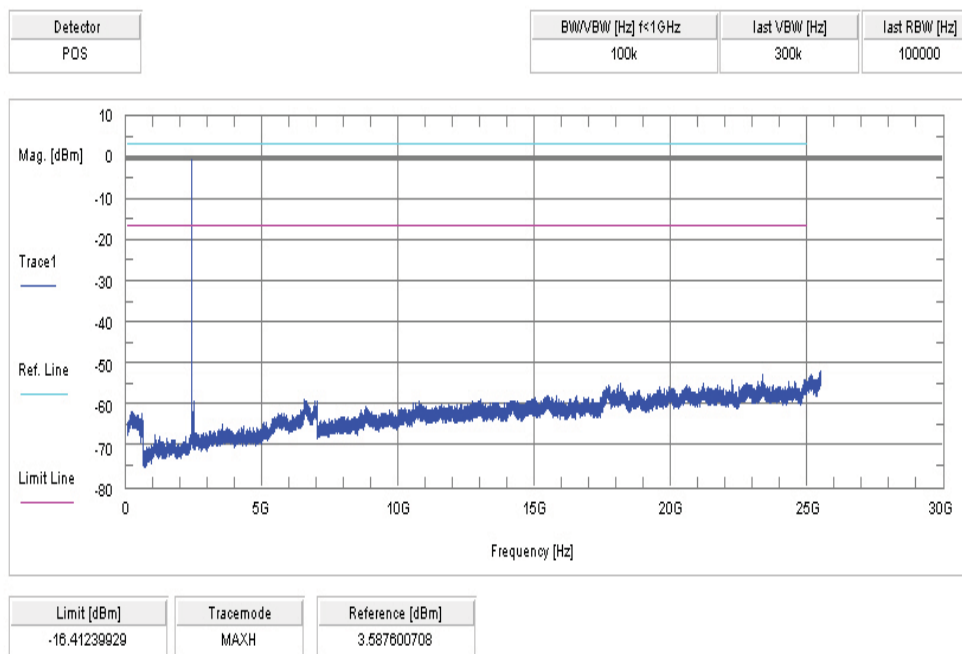
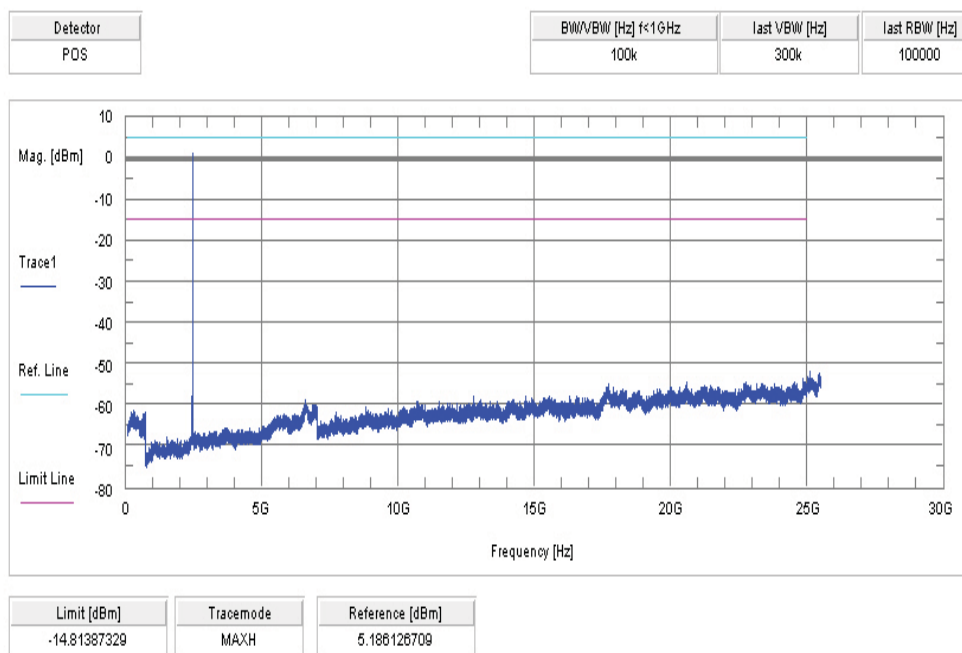
TX spurious emissions conducted					
8DPSK - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		3.6	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
2441		5.2	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
2480		5.9	30 dBm		Operating frequency
No emissions detected closer than 20 dB below the limit!			-20 dBc		complies
Measurement uncertainty		± 3dB			

Result: Passed

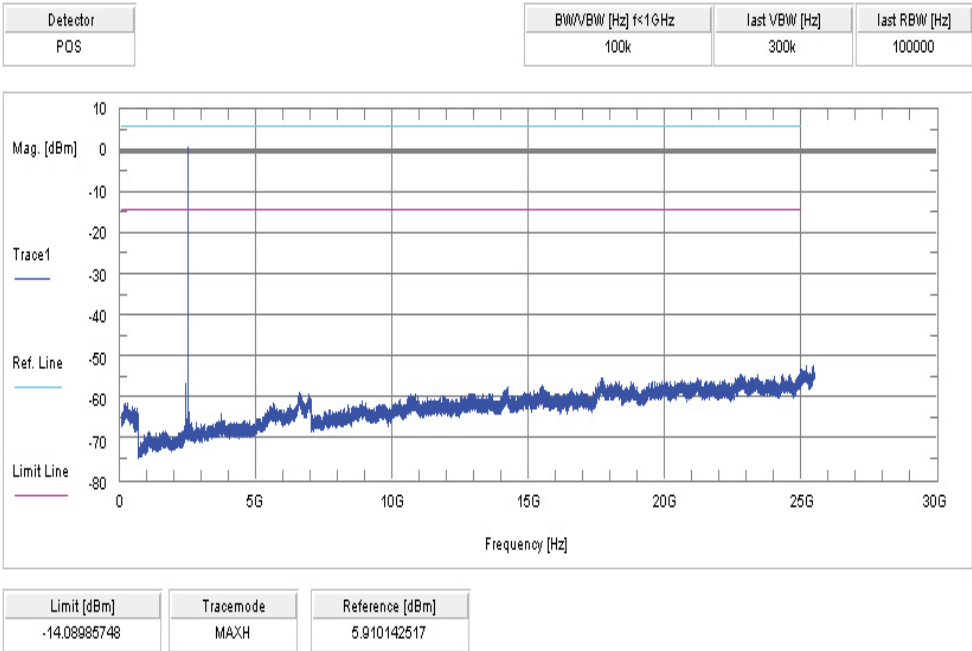
Plots:**Plot 1:** lowest channel – 2402 MHz, GFSK modulation**Plot 2:** middle channel – 2441 MHz, GFSK modulation

Plot 3: highest channel – 2480 MHz, GFSK modulation**Plot 4:** lowest channel – 2402 MHz, Pi / DQPSK modulation

Plot 5: middle channel – 2441 MHz, Pi / DQPSK modulation**Plot 6:** highest channel – 2480 MHz, Pi / DQPSK modulation

Plot 7: lowest channel – 2402 MHz, 8 DPSK modulation**Plot 8:** middle channel – 2441 MHz, 8 DPSK modulation

Plot 9: highest channel – 2480 MHz, 8 DPSK modulation



11.11 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The EUT is set to single channel mode and the transmit channel is channel 00, channel 39 and channel 78. The measurement is performed in the mode with the highest output power.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold
Measured Modulation:	☒ GFSK ☐ Pi/4 DQPSK ☐ 8DPSK

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC		IC
TX spurious emissions radiated		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
§15.209		
Frequency (MHz)	Field strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
Above 960	54.0	3

Results:

TX spurious emissions radiated [dBμV/m]								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]	F [MHz]	Detector	Level [dBμV/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No emissions detected above 1 GHz.			No emissions detected above 1 GHz.			No emissions detected above 1 GHz.		
Measurement uncertainty			± 3 dB					

Result: Passed

Plots:

Plot 1: 30 MHz to 1 GHz, TX mode, channel 00, vertical & horizontal polarization

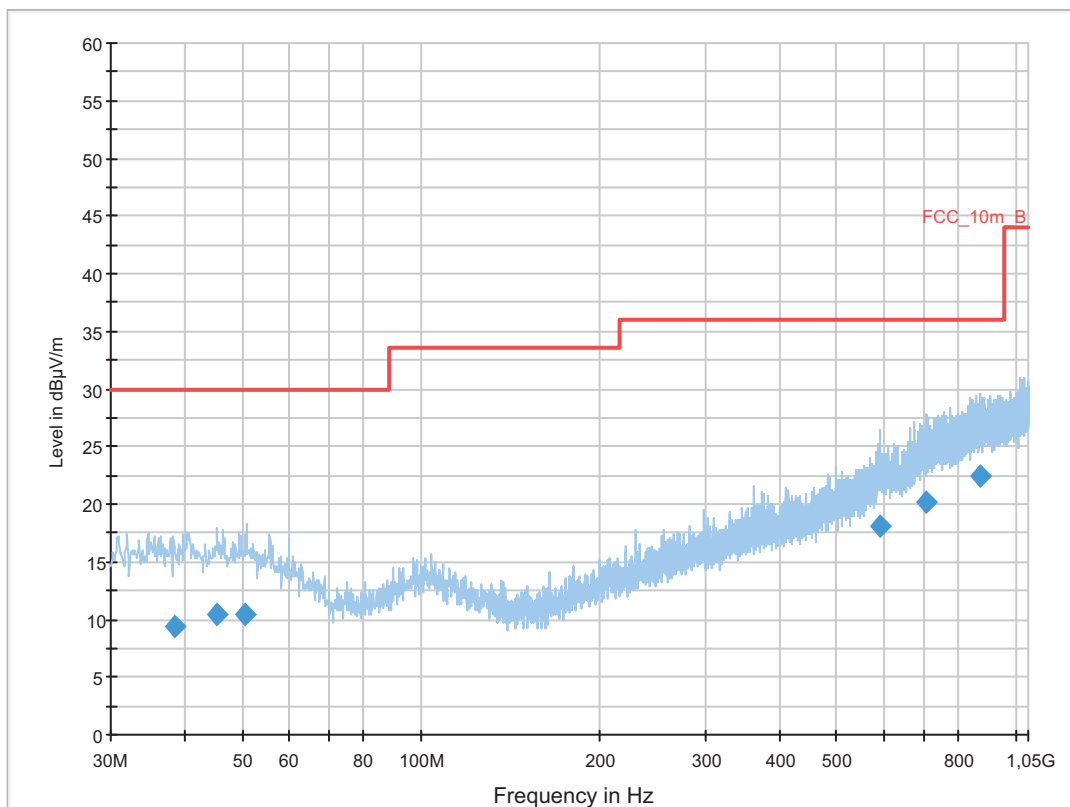
Common Information

EUT: RD-0050
 Serial Number: 1323057A00007AA
 Test Description: FCC part 15 C class B
 Operating Conditions: BT TX Ch. 0 | DH5
 Operator Name: Hennemann
 Comment: battery powered

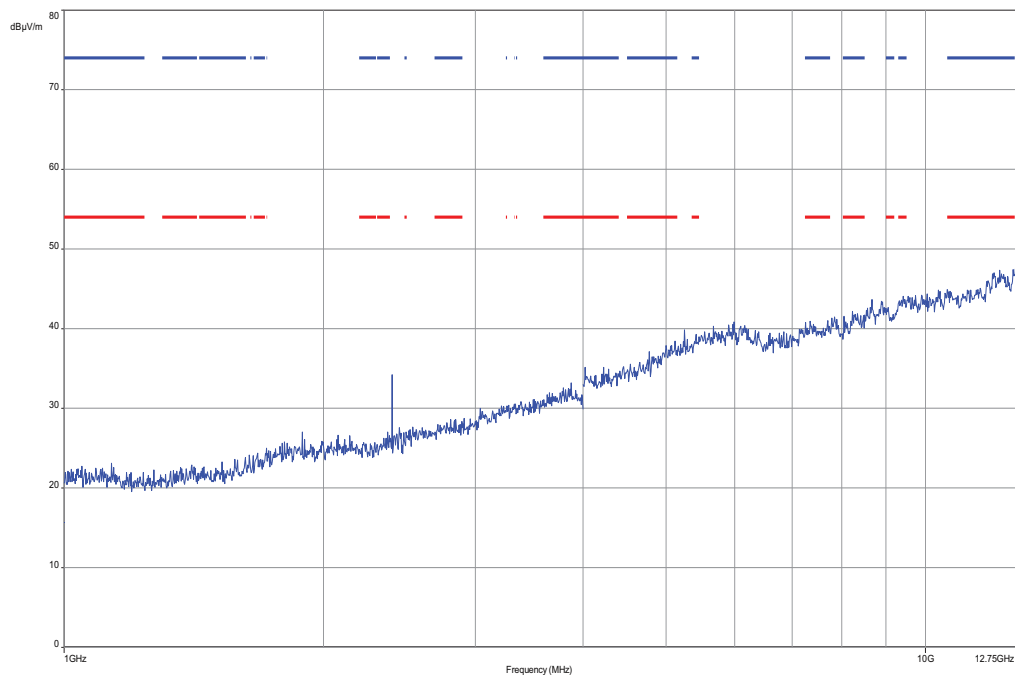
Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m

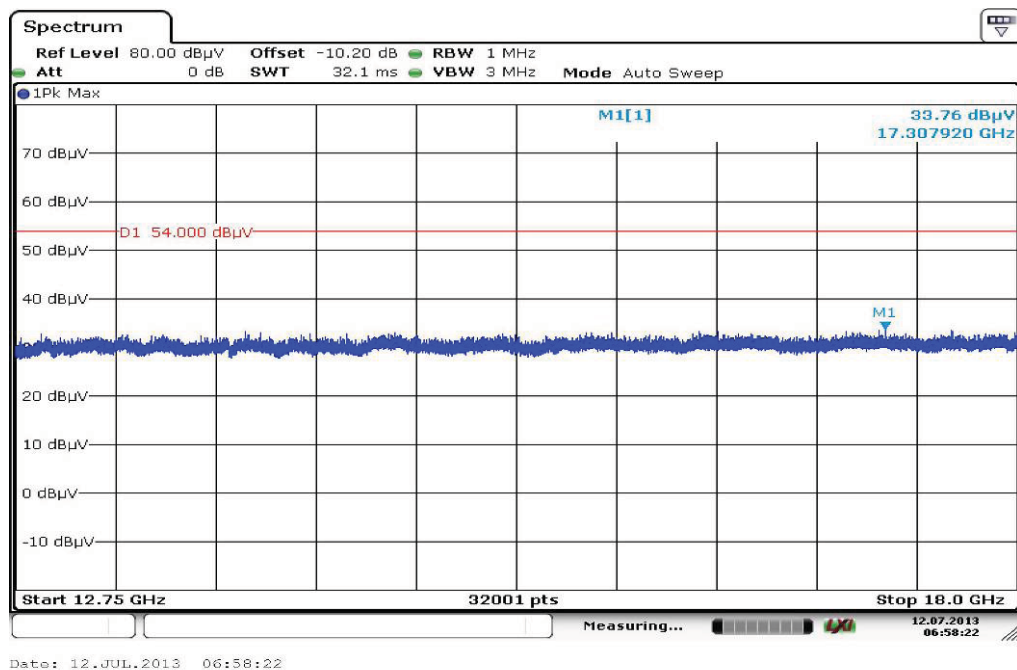
Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

**Final Result**

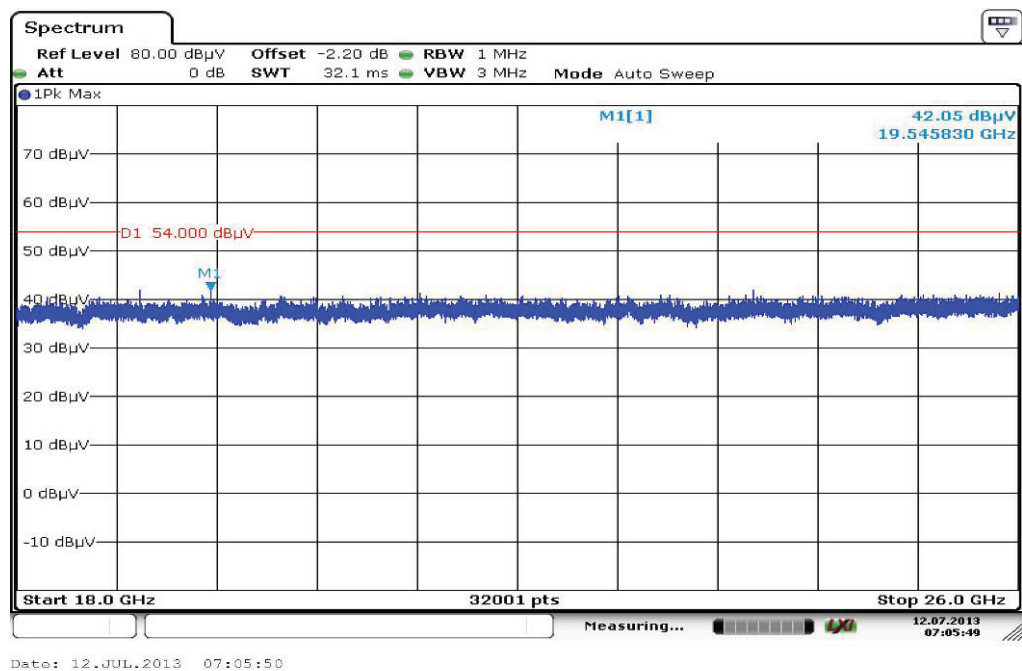
Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
38.533050	9.4	1000.0	120.000	120.0	V	92.0	13.3	20.6	30.0	
45.330750	10.5	1000.0	120.000	170.0	V	260.0	13.3	19.5	30.0	
50.453550	10.4	1000.0	120.000	170.0	H	88.0	13.3	19.6	30.0	
590.153850	18.0	1000.0	120.000	154.0	H	92.0	20.5	18.0	36.0	
709.076250	20.2	1000.0	120.000	170.0	V	190.0	22.7	15.8	36.0	
868.768200	22.4	1000.0	120.000	98.0	V	178.0	24.8	13.6	36.0	

Plot 2: 1 GHz to 12.75 GHz, TX mode, channel 00, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: 12.75 GHz to 18 GHz, TX mode, channel 00, vertical & horizontal polarization

Plot 4: 18 GHz to 26 GHz, TX mode, channel 00, vertical & horizontal polarization



Plot 5: 30 MHz to 1 GHz, TX mode, channel 39, vertical & horizontal polarization

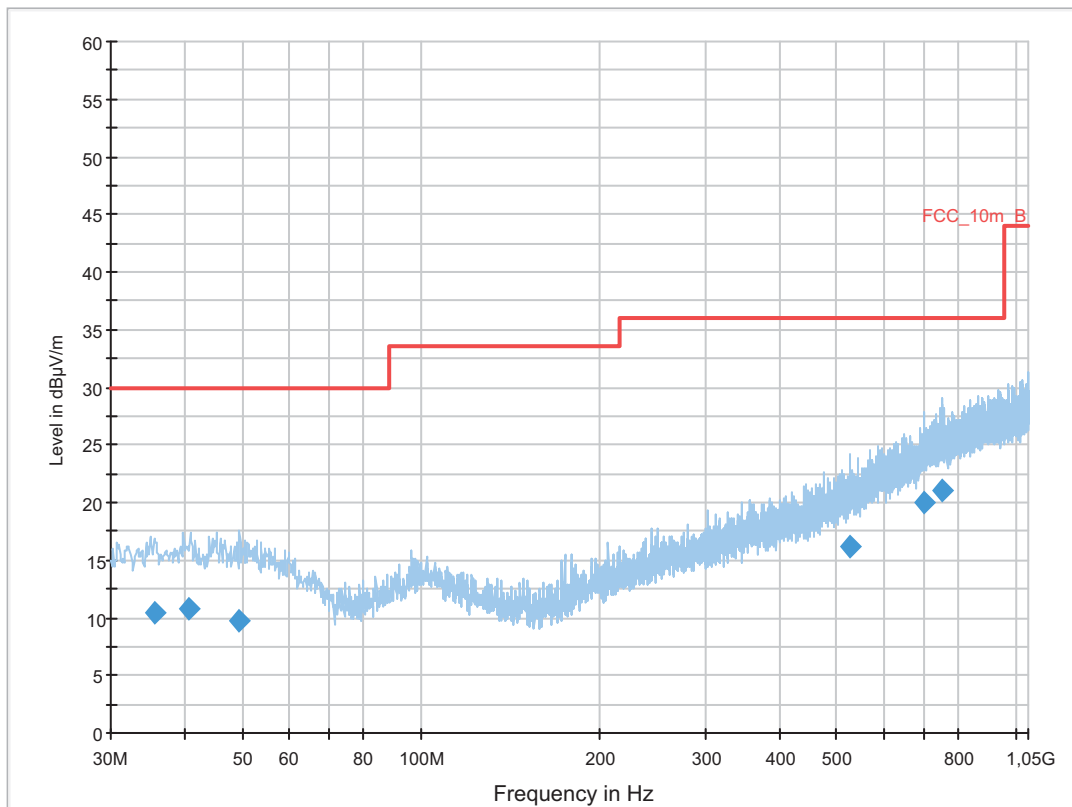
Common Information

EUT: RD-0050
 Serial Number: 1323057A00007AA
 Test Description: FCC part 15 C class B
 Operating Conditions: BT TX Ch. 39 | DH5
 Operator Name: Hennemann
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

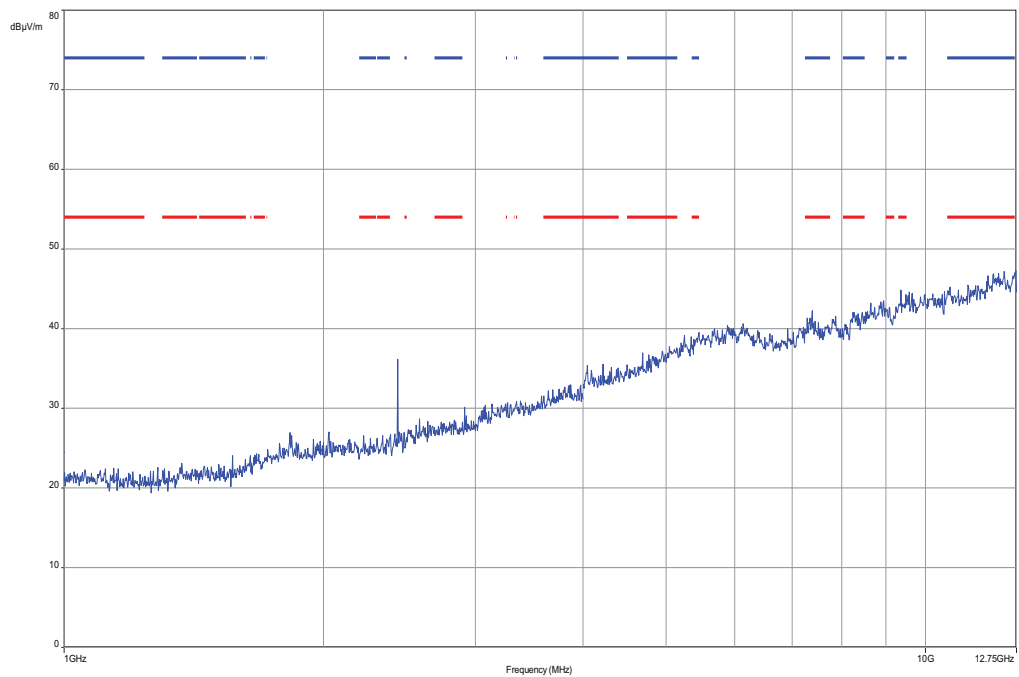
Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

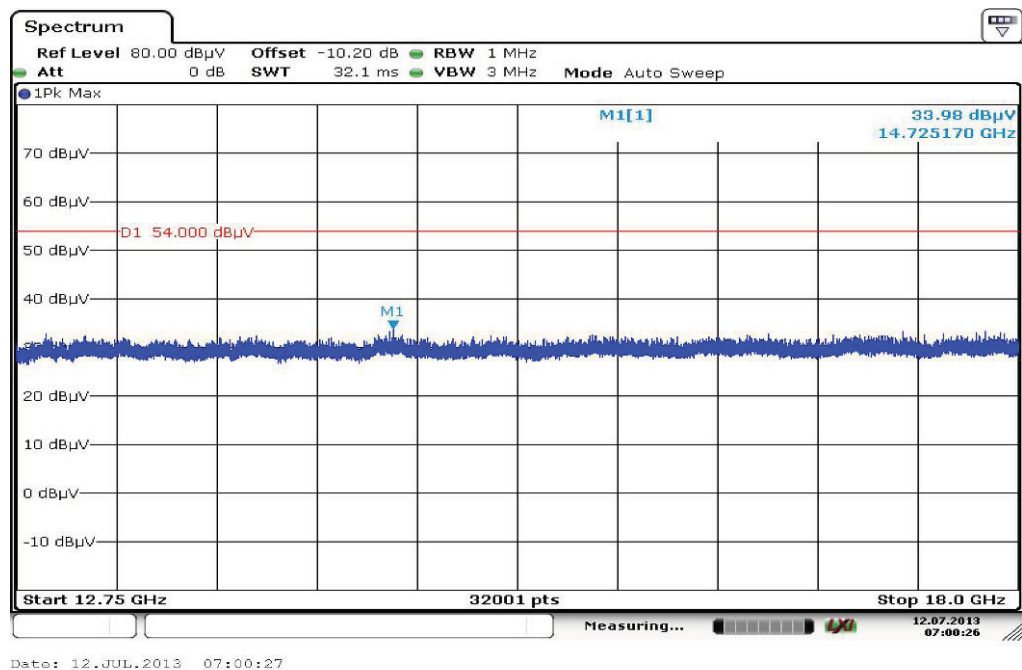


Final Result

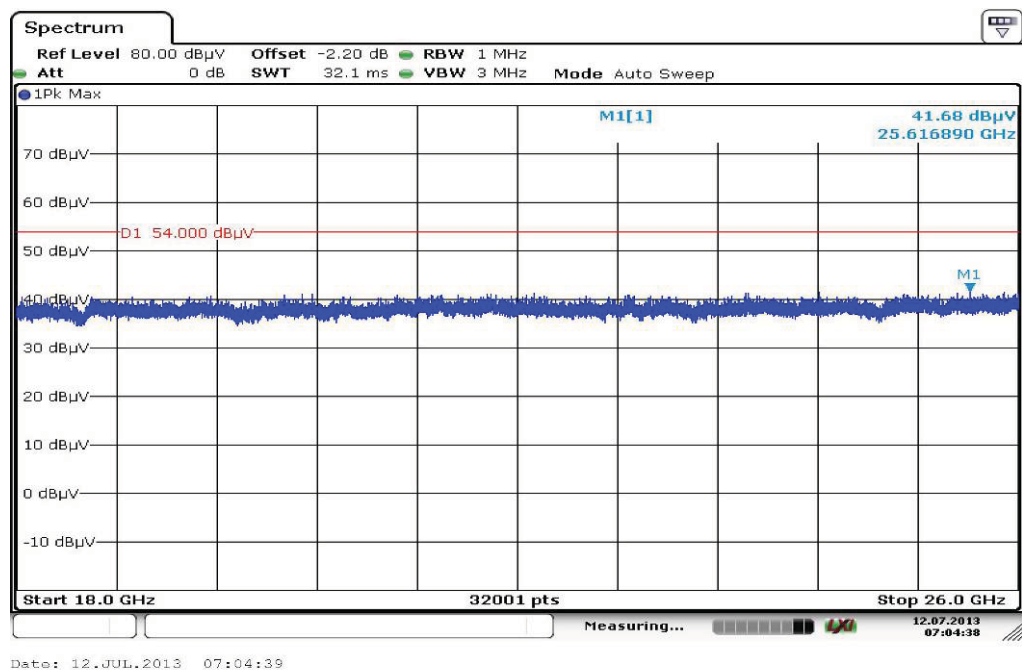
Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
35.673450	10.5	1000.0	120.000	170.0	H	100.0	13.1	19.5	30.0	
40.732500	10.8	1000.0	120.000	161.0	V	182.0	13.4	19.2	30.0	
49.401300	9.8	1000.0	120.000	170.0	H	170.0	13.4	20.2	30.0	
526.593750	16.1	1000.0	120.000	105.0	V	182.0	19.1	19.9	36.0	
702.323100	20.0	1000.0	120.000	170.0	V	190.0	22.6	16.0	36.0	
751.555200	21.1	1000.0	120.000	98.0	H	190.0	23.7	14.9	36.0	

Plot 6: 1 GHz to 12.75 GHz, TX mode, channel 39, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 7: 12.75 GHz to 18 GHz, TX mode, channel 39, vertical & horizontal polarization

Plot 8: 18 GHz to 26 GHz, TX mode, channel 39, vertical & horizontal polarization



Plot 9: 30 MHz to 1 GHz, TX mode, channel 78, vertical & horizontal polarization

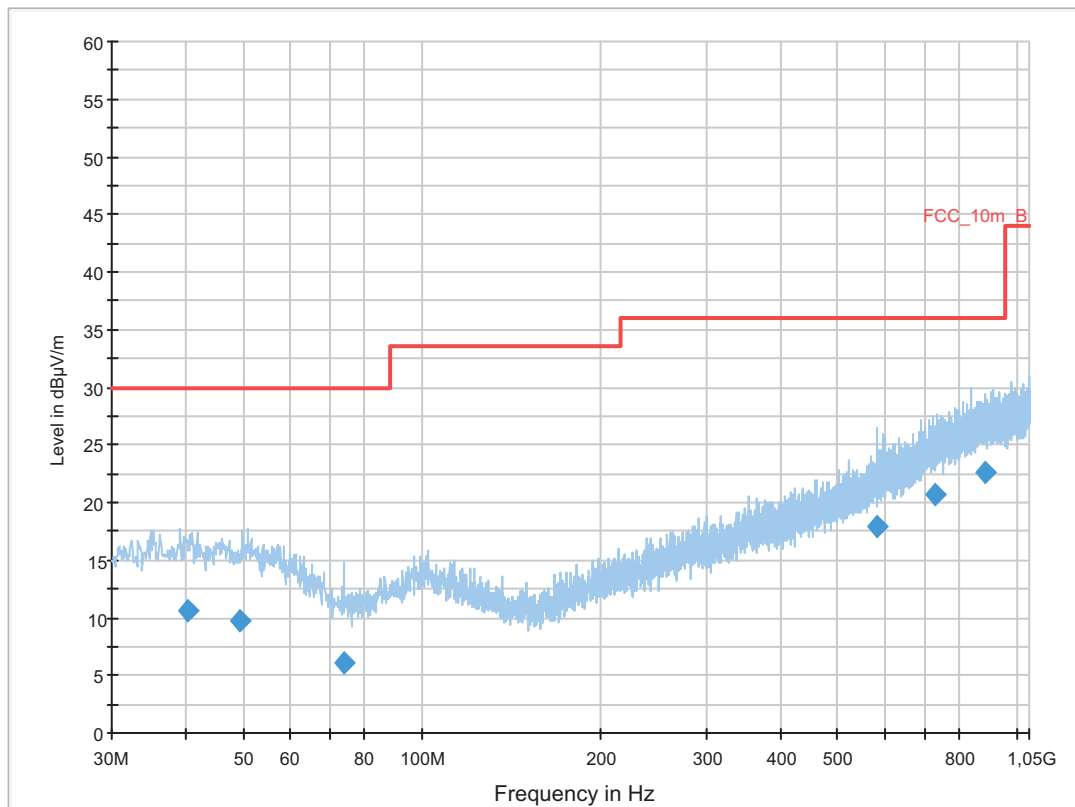
Common Information

EUT: RD-0050
 Serial Number: 1323057A00007AA
 Test Description: FCC part 15 C class B
 Operating Conditions: BT TX Ch. 78 | DH5
 Operator Name: Hennemann
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

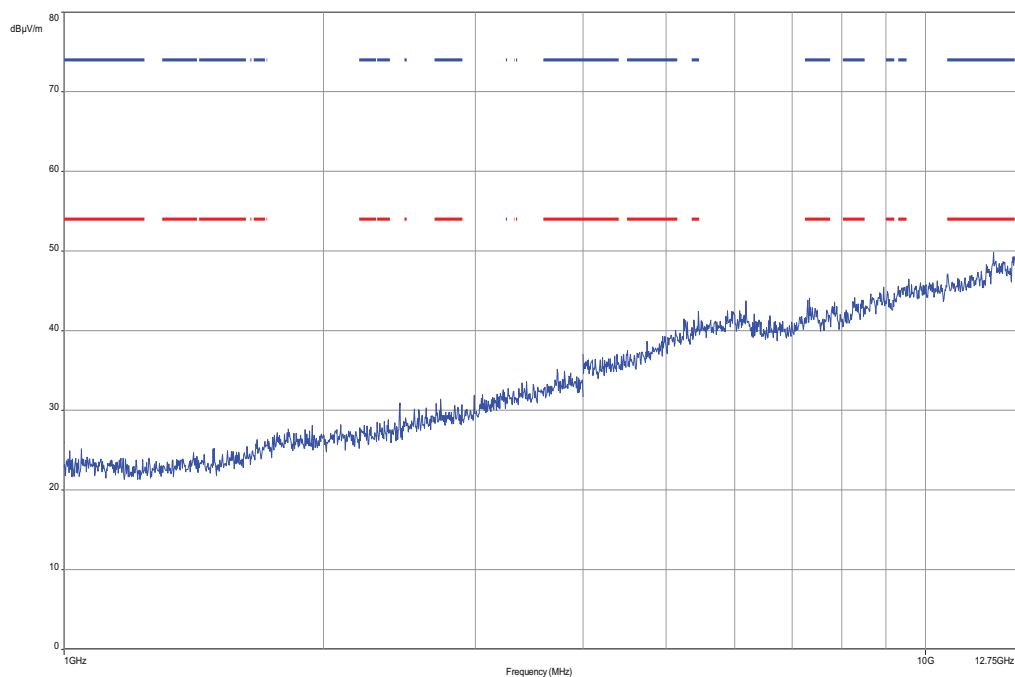
Hardware Setup: Electric Field (NOS)
 Receiver: [ESC1 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

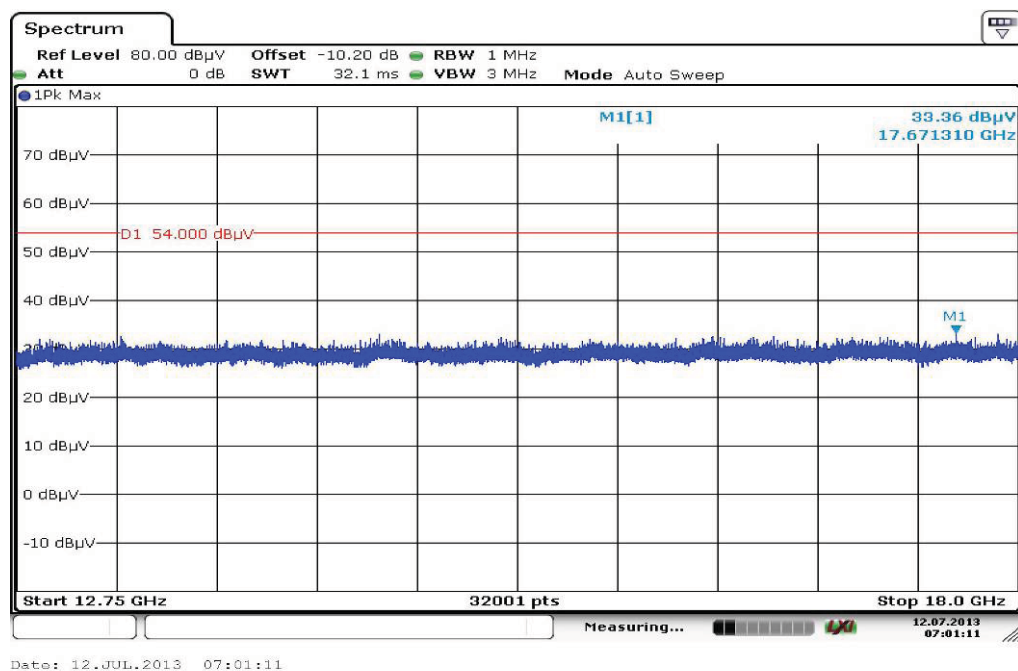


Final Result

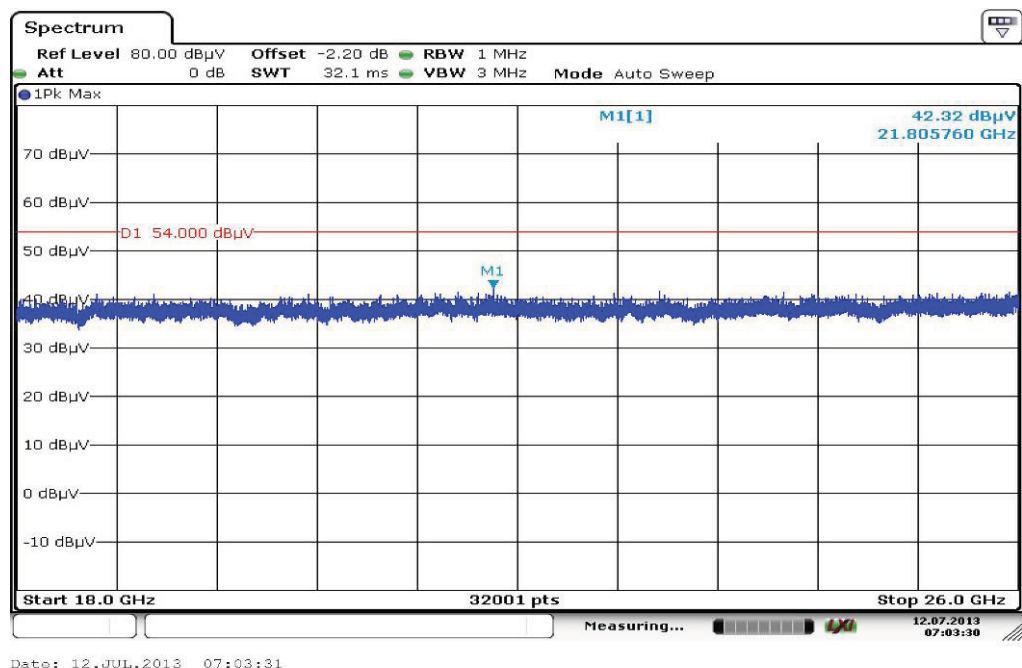
Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
40.190850	10.7	1000.0	120.000	170.0	H	178.0	13.4	19.3	30.0	
49.414050	9.8	1000.0	120.000	170.0	V	272.0	13.4	20.2	30.0	
73.811700	6.1	1000.0	120.000	170.0	V	177.0	9.2	23.9	30.0	
584.166150	17.9	1000.0	120.000	111.0	H	268.0	20.4	18.1	36.0	
731.729250	20.6	1000.0	120.000	170.0	H	-10.0	23.2	15.4	36.0	
885.933900	22.6	1000.0	120.000	170.0	V	100.0	25.0	13.4	36.0	

Plot 10: 1 GHz to 12.75 GHz, TX mode, channel 78, vertical & horizontal polarization

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 11: 12.75 GHz to 18 GHz, TX mode, channel 78, vertical & horizontal polarization

Plot 12: 18 GHz to 26 GHz, TX mode, channel 78, vertical & horizontal polarization



11.12 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The EUT is detached so all oscillators are active.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
RX Spurious Emissions Radiated		
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
Above 960	54.0	3

Results:

RX spurious emissions radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
No emissions detected above 1 GHz.		
Measurement uncertainty	± 3 dB	

Result: Passed

Plots:

Plot 1: 30 MHz to 1 GHz, RX mode, vertical & horizontal polarization

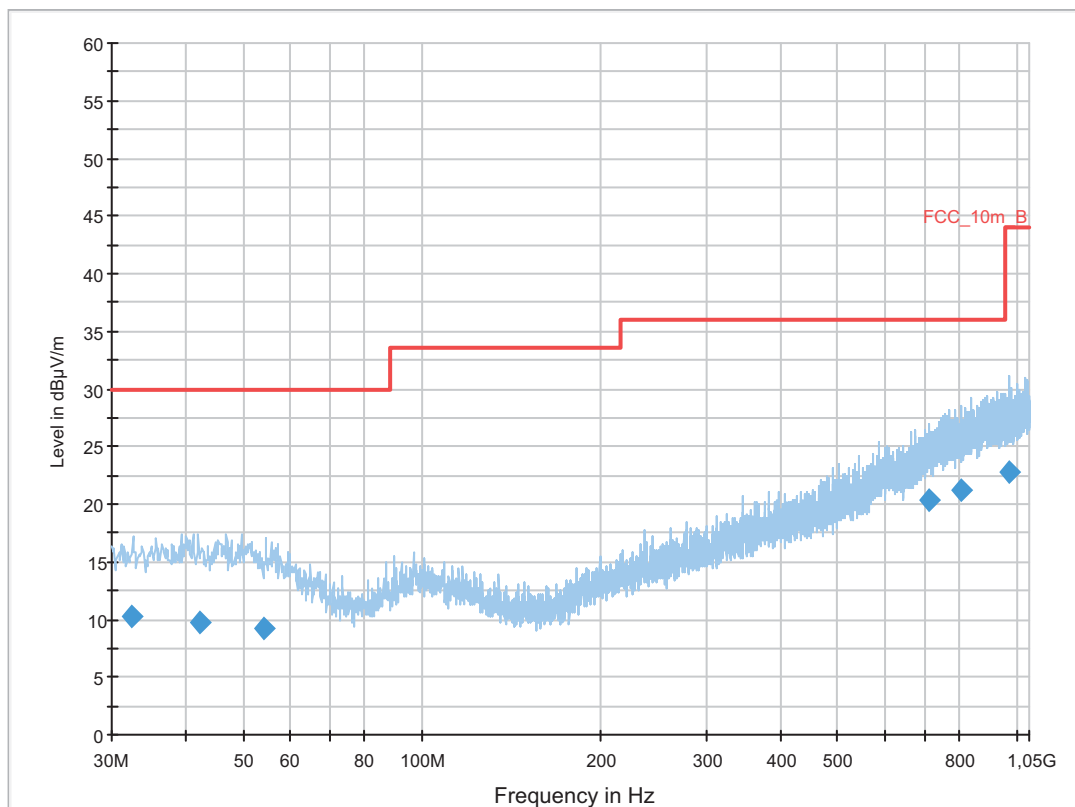
Common Information

EUT: RD-0050
 Serial Number: 1323057A00007AA
 Test Description: FCC part 15 C class B
 Operating Conditions: BT RX | DH5
 Operator Name: Hennemann
 Comment: battery powered

Scan Setup: STAN_Fin [EMI radiated]

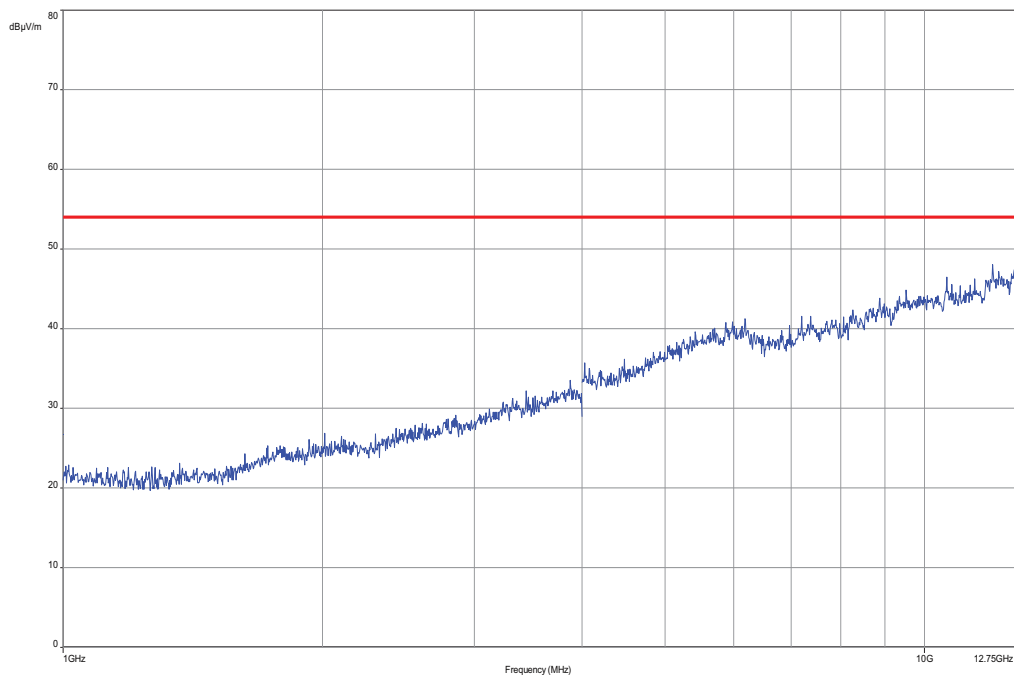
Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dB μ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

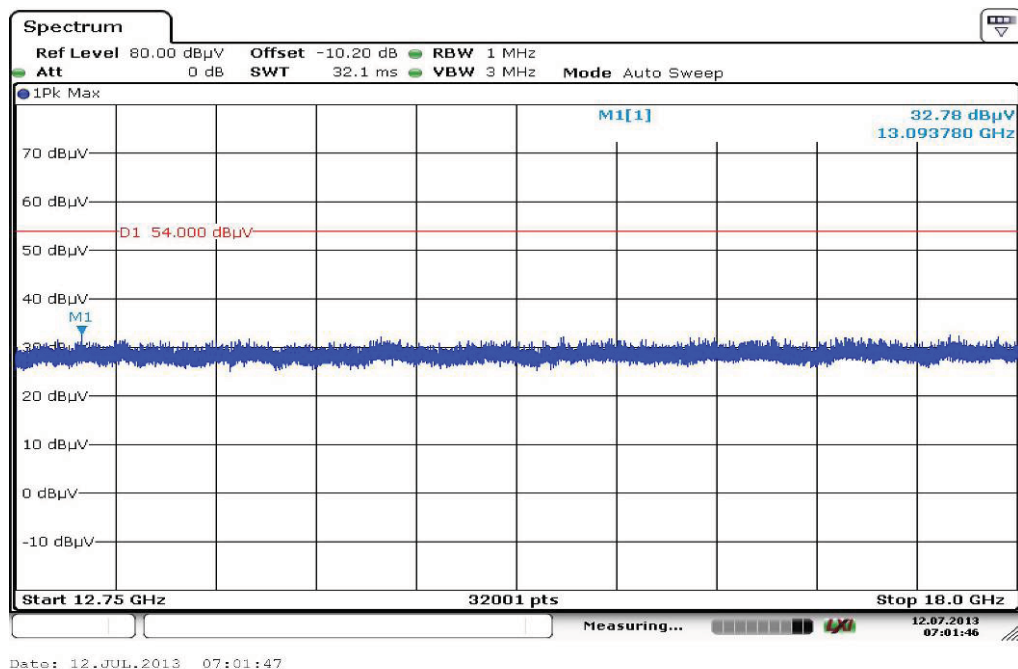
**Final Result**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
32.426100	10.2	1000.0	120.000	111.0	V	265.0	12.8	19.8	30.0	
42.085950	9.7	1000.0	120.000	98.0	H	100.0	13.4	20.3	30.0	
54.170850	9.2	1000.0	120.000	170.0	H	272.0	13.0	20.8	30.0	
712.217250	20.3	1000.0	120.000	120.0	V	190.0	22.8	15.7	36.0	
803.919300	21.2	1000.0	120.000	98.0	V	280.0	23.9	14.8	36.0	
969.905400	22.8	1000.0	120.000	170.0	V	268.0	25.5	21.2	44.0	

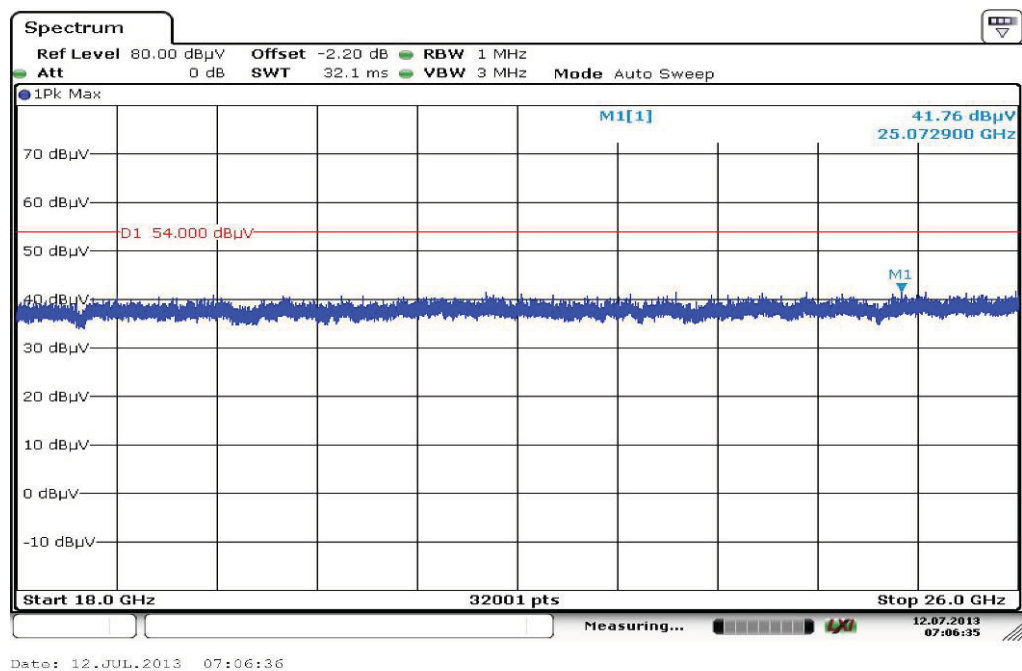
Plot 2: 1 GHz to 12.75 GHz, RX mode, vertical & horizontal polarization



Plot 3: 12.75 GHz to 18 GHz, RX mode, vertical & horizontal polarization



Plot 4: 18 GHz to 26 GHz, RX mode, vertical & horizontal polarization



11.13 Spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 39. This measurement is representative for all channels and modes. If critical peaks are found channel 00 and channel 78 will be measured too. The measurement is performed in the mode with the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

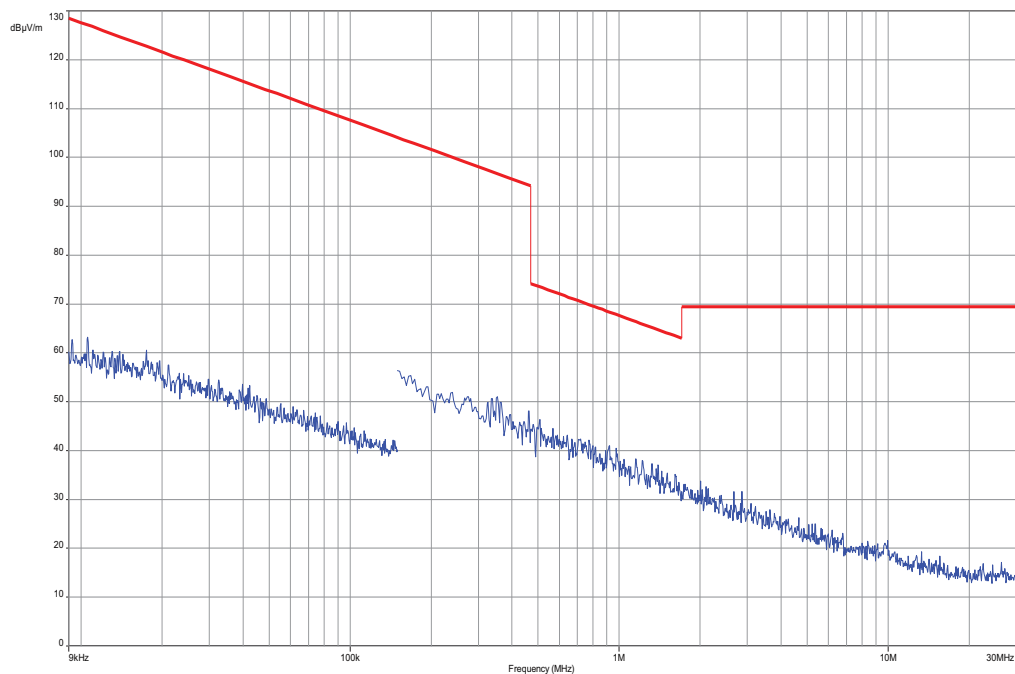
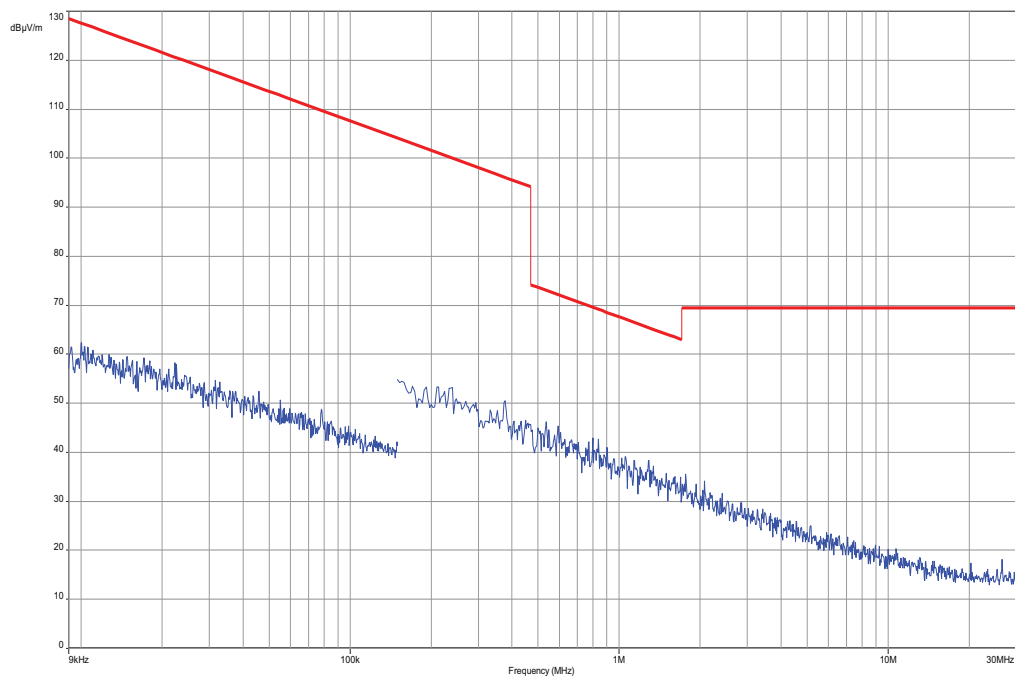
Limits:

FCC		IC
TX spurious emissions radiated < 30 MHz		
Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:

TX spurious emissions radiated < 30 MHz [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
No emissions detected.		
Measurement uncertainty	± 3 dB	

Result: Passed

Plots:**Plot 1: 9 kHz to 30 MHz, TX mode****Plot 2: 9 kHz to 30 MHz, RX mode**

11.14 Spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to single channel mode and the transmit channel is channel 39. This measurement is representative for all channels and modes. If critical peaks are found channel 00 and channel 78 will be measured too. The measurement is performed in the mode with the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi peak / average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC
TX spurious emissions conducted < 30 MHz		
Frequency (MHz)	Quasi-peak (dBμV/m)	Average (dBμV/m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency

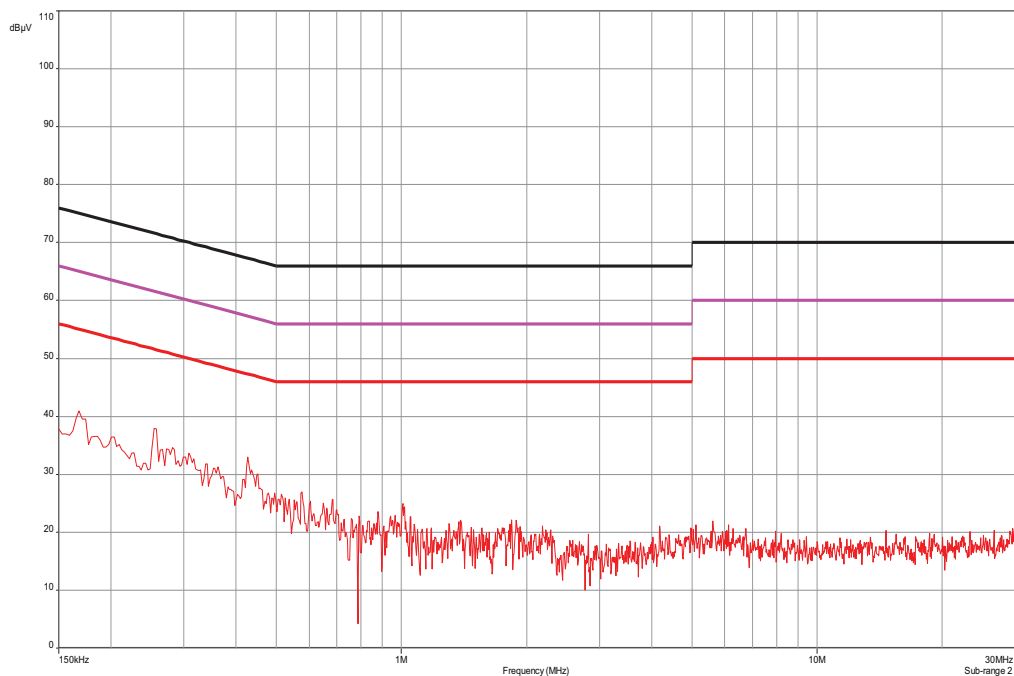
Results:

TX spurious emissions conducted < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
No emissions detected.		
Measurement uncertainty	± 3 dB	

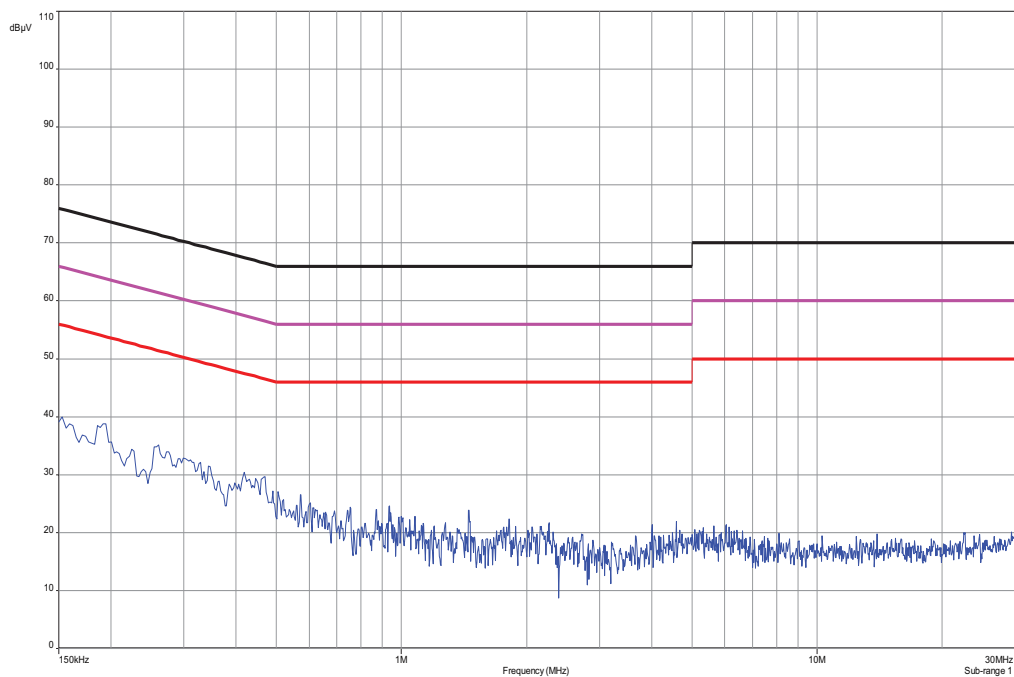
Result: Passed

Plots:

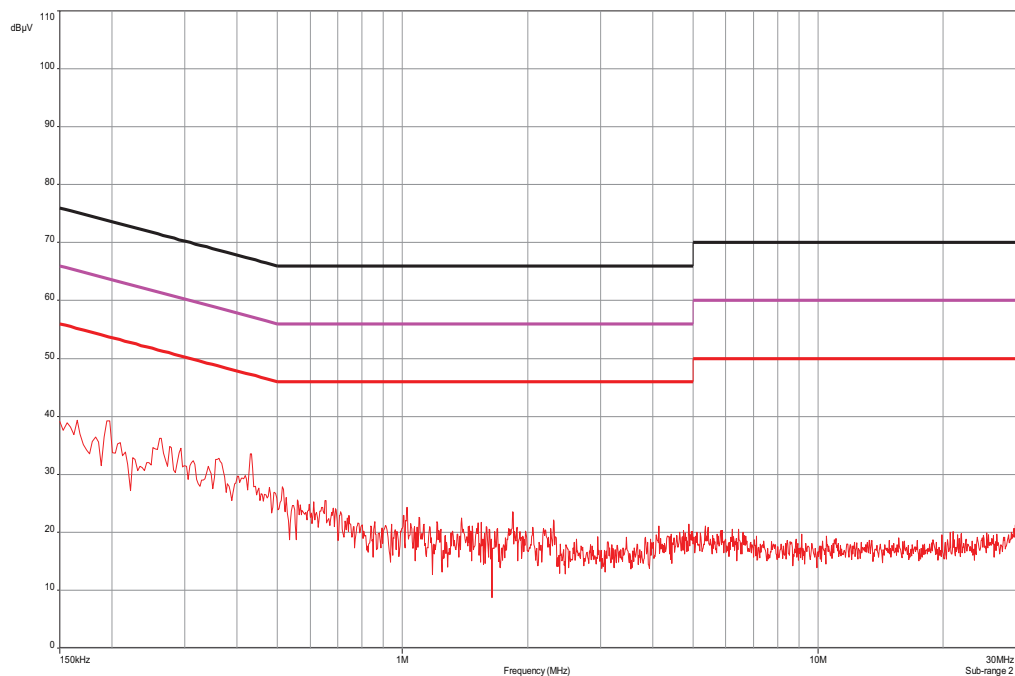
Plot 1: 150 kHz to 30 MHz, TX mode, phase line



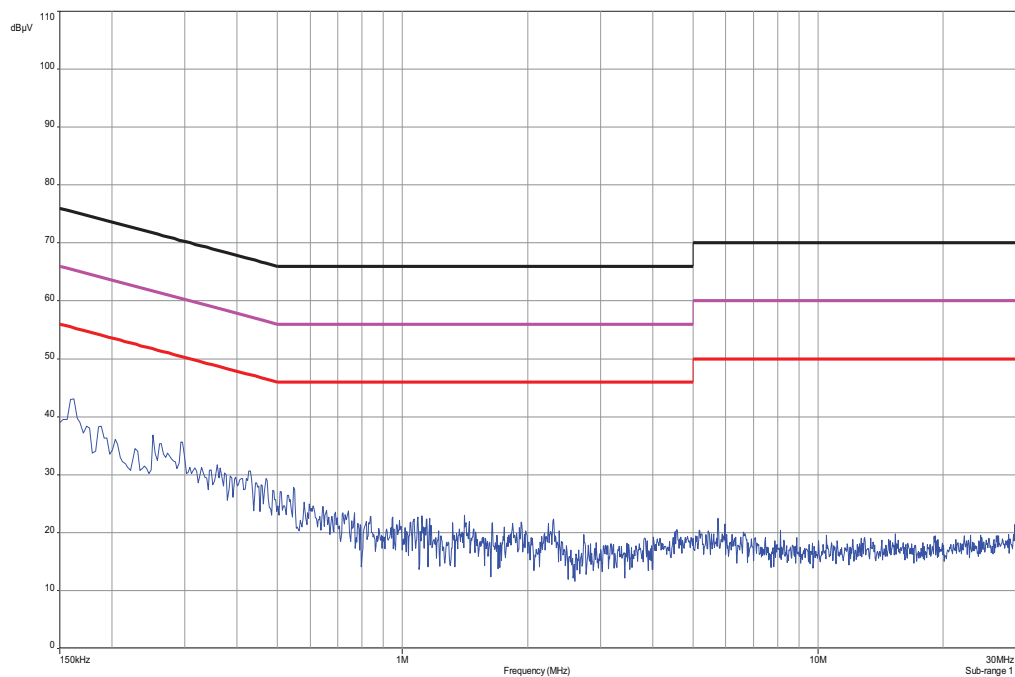
Plot 2: 150 kHz to 30 MHz, TX mode, neutral line



Plot 3: 150 kHz to 30 MHz, RX mode, phase line



Plot 4: 150 kHz to 30 MHz, RX mode, neutral line



12 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	12.01.2012	12.01.2015
2	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	08.05.2013	08.05.2015
3	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
4	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	*	300000199	ne		
5	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2012	06.01.2014
6	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
7	9	Isolating Transformer	MPL IEC625 Bus Regeltrennt ravo	Erfi	91350	300001155	ne		
8	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
9	90	Active Loop Antenna 10 kHz to 30 MHz	6502	Kontron Psychotech	8905-2342	300000256	k	13.06.2013	13.06.2015
10	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
11	n. a.	Band Reject filter	WRCG240 0/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
12	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	14.10.2011	14.10.2014
13	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	21.02.2013	21.02.2014
14	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
15	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
16	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081; B5979	300000210	ne		
17	n. a.	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	09.01.2013	09.01.2014
18	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
19	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
20	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
21	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		

22	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
23	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	12.04.2012	12.04.2014
24	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	16.01.2013	16.01.2014
25	n. a.	Switch / Control Unit	3488A	HP Meßtechnik		300001691	ne		
26	n. a.	Power Supply DC	NGPE 40/40	R&S	388	400000078	viKI!	21.08.2012	21.08.2014
27	n. a.	DC-Blocker	8143	Inmet Corp.	none	300002842	ne		
28	n. a.	Powersplitter	6005-3	Inmet Corp.		300002841	ev		
29	n. a.	CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000 K35	R&S	100185	300003416	viKI!	21.08.2012	21.08.2014
30	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140..+30dBm	FSP30	R&S	100886	300003575	k	22.08.2012	22.08.2014
31	n. a.	CBT (Bluetooth Tester + EDR Signalling)	CBT 1153.9000 K35, CBT-B55, CBT-K55	R&S	100313	300003516	viKI!	21.08.2012	21.08.2014
32	11b	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP Meßtechnik	00419	300002268	ev		
33	A025	Std. Gain Horn Antenna 12.4 to 18.0 GHz	639	Narda		300000786	ne		
34	A027	Std. Gain Horn Antenna 18.0 to 26.5 GHz	638	Narda		300000486	ne		
35	n. a.	Signal Analyzer 40 GHz	FSV40	R&S	101042	300004517	k	22.10.2012	22.10.2013

Agenda: Kind of Calibration

k calibration / calibrated
 ne not required (k, ev, izw, zw not required)
 ev periodic self verification
 Ve long-term stability recognized
 viKI! Attention: extended calibration interval
 NK! Attention: not calibrated

EK limited calibration
 zw cyclical maintenance (external cyclical maintenance)
 izw internal cyclical maintenance
 g blocked for accredited testing
 *) next calibration ordered / currently in progress

13 Observations

No observations exceeding those reported with the single test cases have been made.

Annex A Document history

Version	Applied changes	Date of release
1.0	Initial release	2013-07-12
A	Editorial changes front page and RSP100	2013-07-15

Annex B Further information**Glossary**

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex C Accreditation Certificate

Back side of certificate

