

CETECOM ICT Services GmbH

Radio Satellite Communication

Untertürkheimer Straße 6-10 . D-66117 Saarbrücken

Telephon: +49 (0)681 598-0

Telefax: -9075

RSC14

issue test report consist of 66 Pages

Page 1 (66)

Recognized by the
Federal Communications Commission
FCC-Identification Number: 90462
TCB ID: DE 0001



Accredited by the
German Accreditation Council
DAR-Registration Number
TTI-P-G 166/98



Independent ETSI
compliance test house



Accredited Bluetooth™ Test Facility (BQTF)

Test Report No.: 2_3357-01-02/03
FCC Part 15.247 / CANADA RSS-210
8408001
FCC ID: PY78408001
IC: 4170B-8408001

CETECOM – ICT Services GmbH
Untertürkheimerstr. 6-10
66117 Saarbrücken, Germany

Telephone: + 49 (0) 681 / 598-0

Fax: + 49 (0) 681 / 589-9075

Table of Contents

1 General Information

1.1 Notes

1.2 Testing Laboratory

1.3 Details of Applicant

1.4 Application Details

1.5 Test Item

1.6 Test Specifications

2 Technical Test

2.1 Summary of Test Results


2.2 Test Report

1 General Information


1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test Laboratory Manager:

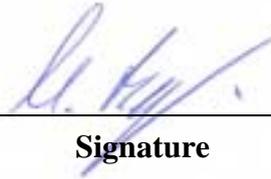2003-08-06	RSC8411	Berg M.	
Date	Section	Name	Signature

Technical Responsibility for Area of Testing:

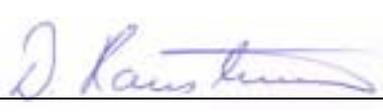2003-08-06	RSC8412	Hausknecht D.	
Date	Section	Name	Signature

1.2 Testing Laboratory

CETECOM ICT Services GmbH
Untertürkheimer Straße 6 - 10
66117 Saarbrücken
Germany

Telephone : + 49 681 598 - 0
Telefax : + 49 681 598 - 9075
E-mail : info@ict.cetecom.de
Internet : www.cetecom-ict.de

Accredited testing laboratory

The Test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025.

DAR-registration number : TTI-P-G 166/98-30

Accredited Bluetooth™ Test Facility (BQTF)

[BLUETOOTH is a trademark owned by Bluetooth SIG, Inc. and licensed to CETECOM](#)

1.3 Details of Applicant

Name : Sony Ericsson Mobile Communications AB
Street : Nya Vattentornet
City : 22188 Lund
Country : Sweden
Telephone : +46-46-193-559
Telefax : +46-46-193-295
Contact : Mr. Håkan Sjöberg
Telephone : +46-46-193-559

1.4 Application Details

Date of receipt of application : 2003-08-04
Date of receipt of test item : 2003-08-04
Date of test : 2003-08-04/05

1.5 Test Item

Type of equipment : **Bluetooth™ Music Player HBM-30**
Type designation : 8408001
Manufacturer : Applicant
Street :
City :
Country :
Serial number : -.-
FCC – ID : PY78408001
IC : 4170B-8408001
Hardware : P1A
Software : Bluetooth SW : P1AC
Music Player SW : P2F

Additional information :
Frequency : 2402 – 2480 MHz
Type of modulation : 1M00FXD / 79M8FXD (FHSS)
Number of channels : 79
Antenna : Print antenna
Power supply : 1.5V Battery (Alcaline)
Output power : EIRP: 2.40 mW (worst case); conducted : 2.49 mW
Field strength : max. 101.3 dBμV/m
Occupied bandwidth : 873.547 kHz
Transmitter spurious : 88.1 μV/m in 3m
Receiver spurious : 126.6 μV/m in 3m

Temperature range : -30°C - +60°C

DECLARATION OF COMPLIANCE: I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Signature: _____

Date: 2003-05-09 Michael Berg ; Test management
NAME AND TITLE (Please print or type):

1.6 Test Specifications:

**FCC Part 15 §15.247
CANADA RSS-210**

2 Technical Test

2.1 Summary of Test Results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform with specifications ANSI C63.2-1987 clause 15 and ANSI C63.4-1992 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-1992 clause 4.2.

Antennas are conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

1GHz: Average, RBW 1MHz, VBW 10 MHz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A "BLUETOOTH APPROVALS"

The product fullfills also the requirements for CANADA RSS-210

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

Final verdict : PASS

2.2 Test Report

TEST REPORT

Test Report No. : 2_3357-01-02/03

TEST REPORT REFERENCE

LIST OF MEASUREMENTS

PARAMETER TO BE MEASURED	PAGE
Antenna Gain	9
Carrier frequency separation §15.247(a1)	10
Time of occupancy (dwell time) §15.247(a1 iii)	13
Power Spectral density (Hybrid system in Inquiry mode / Page scan) §15.247(d)	14
Spectrum Bandwidth of a FHSS System §15.247(a1)	17
MAXIMUM PEAK OUTPUT POWER SUBCLAUSE § 15.247 (b) (1)	21
Band-edge compliance of conducted emissions §15.247 (c)	26
Delta marker plots see above pages	33
EMISSION LIMITATIONS- Conducted (Transmitter) § 15.247 (c) (1)	36
SPURIOUS RADIATED EMISSION § 15.247 (c) (1)	40
EMISSION LIMITATIONS (Receiver) SUBCLAUSE § 15.109	51
Spectrum Analyzer	57
TEST SETUP	58
PHOTOGRAPH OF THE EQUIPMENT	60

Equipment under test : 8408001
Ambient temperature : 27.8°C
Relative humidity : 43%


Antenna Gain

The antenna gain of the complete system is calculated by the difference of conducted power of the module and the radiated power in EIRP.

	low channel	mid channel	high channel
Conducted power	+3.96 dBm	+3.46 dBm	+2.47 dBm
Radiated power	+3.40 dBm	+3.80 dBm	+2.70 dBm
Gain	-0.56 dB	+0.36 dB	+0.23 dB

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Carrier frequency separation §15.247(a1)

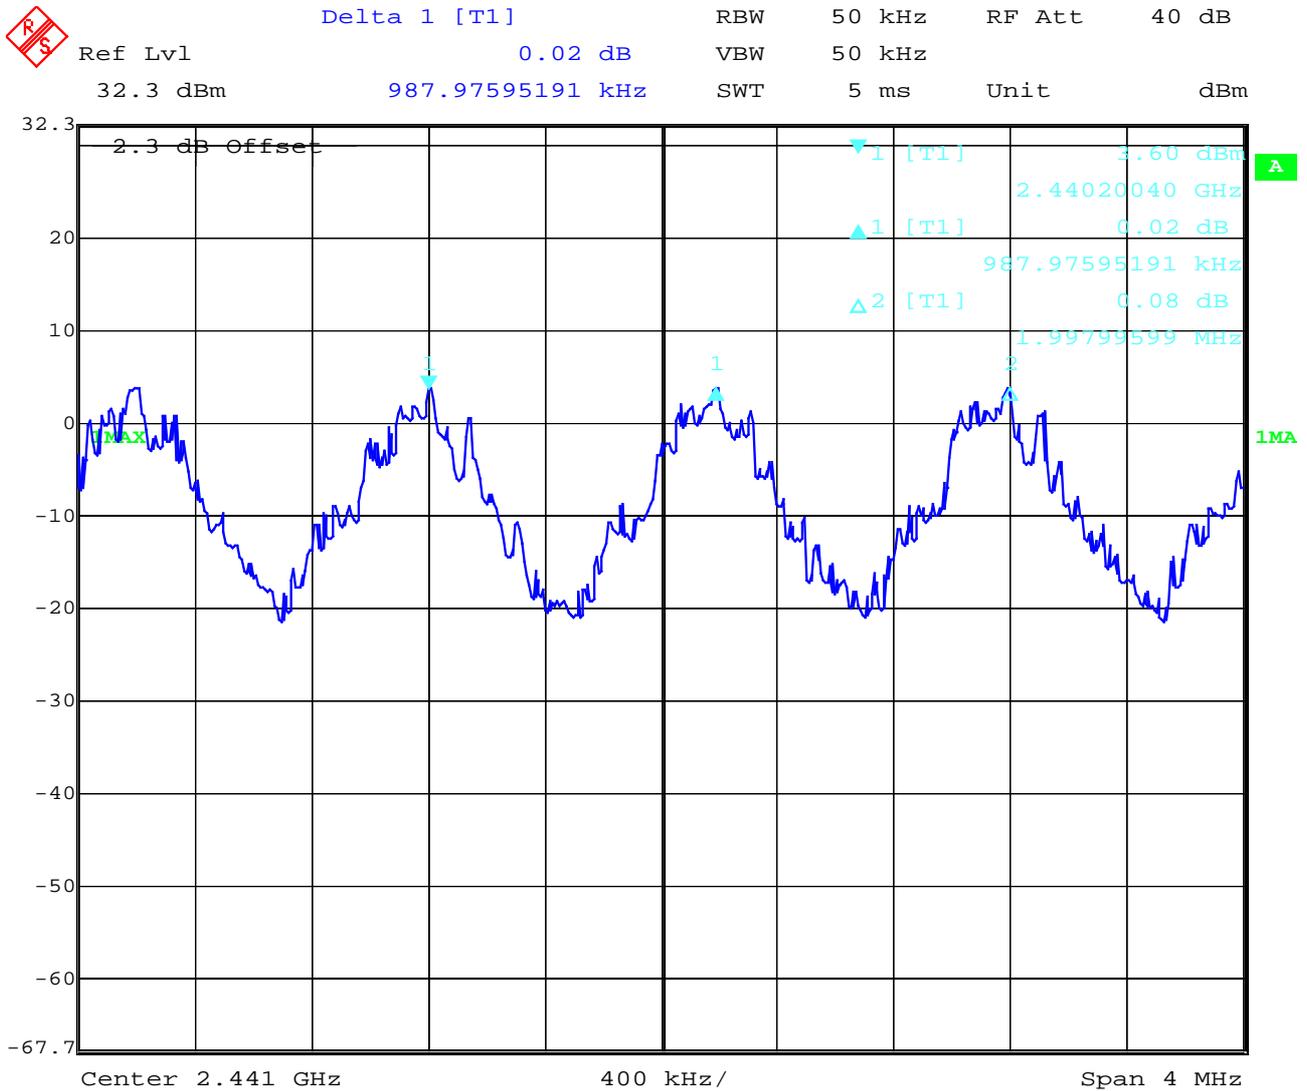

Date: 5.AUG.2003 09:02:47

Channel separation is ~ 1 MHz


Limit: minimum 25 kHz or the 20 dB Bandwidth of the hopping system

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Number of hopping channels §15.247(a1)
 Channel 1 - 40

	Marker 2 [T1]	RBW	500 kHz	RF Att	30 dB
	Ref Lvl	3.67 dBm	VBW	500 kHz	
	22.3 dBm	2.44100000 GHz	SWT	5 ms	Unit dBm

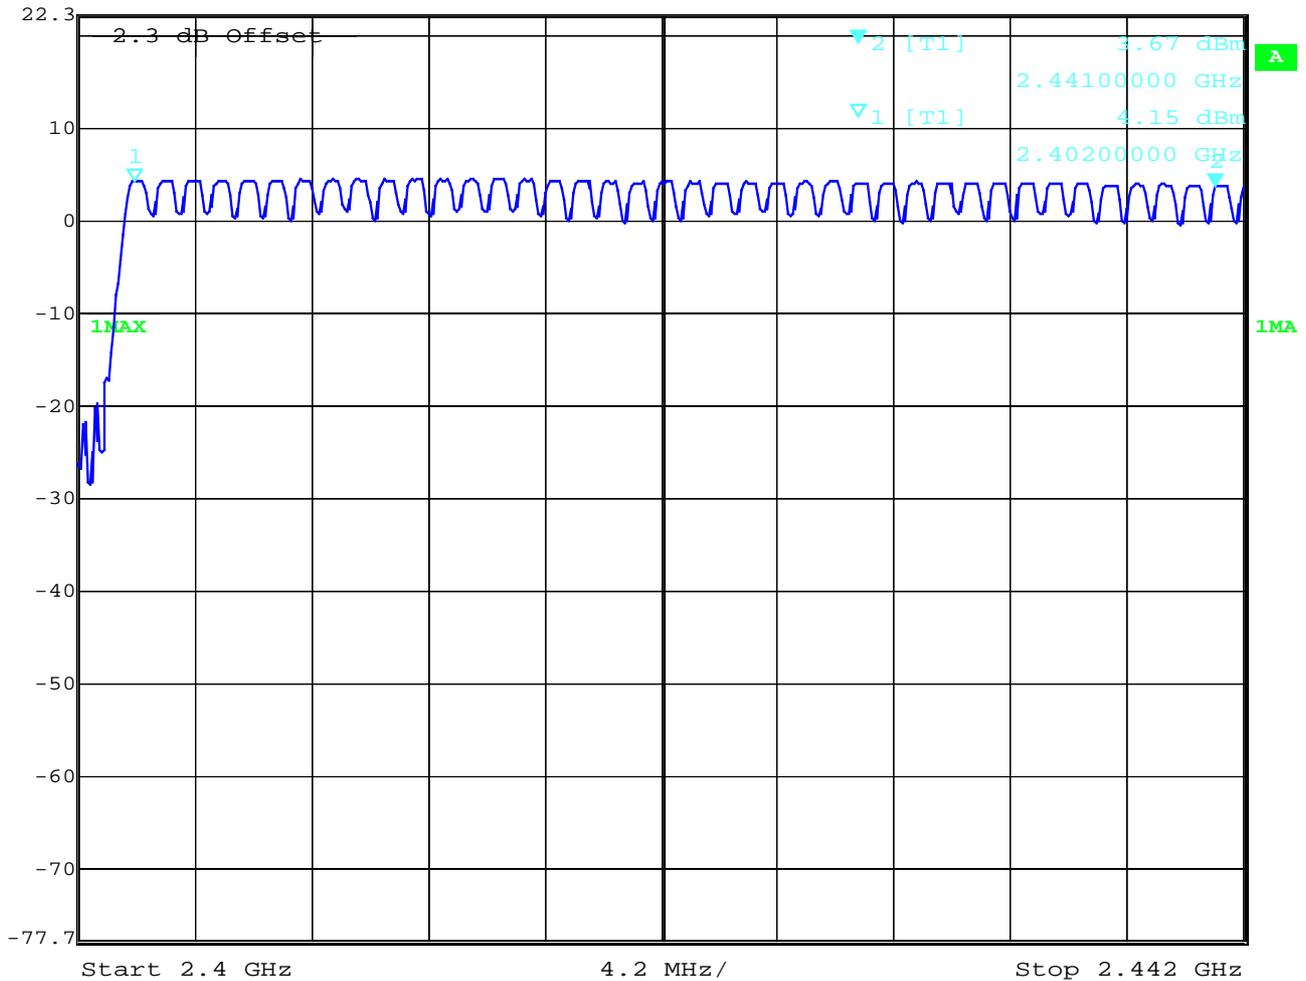

Date: 5.AUG.2003 09:07:20

The number of hopping channels is 79.

Limit: at least 15 non-overlapping channels


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Number of hopping channels
 Channel 41 - 79

§15.247(a1)

	Marker 2 [T1]	RBW	500 kHz	RF Att	30 dB
	Ref Lvl	2.45 dBm	VBW	500 kHz	
	22.3 dBm	2.48000000 GHz	SWT	5 ms	Unit dBm

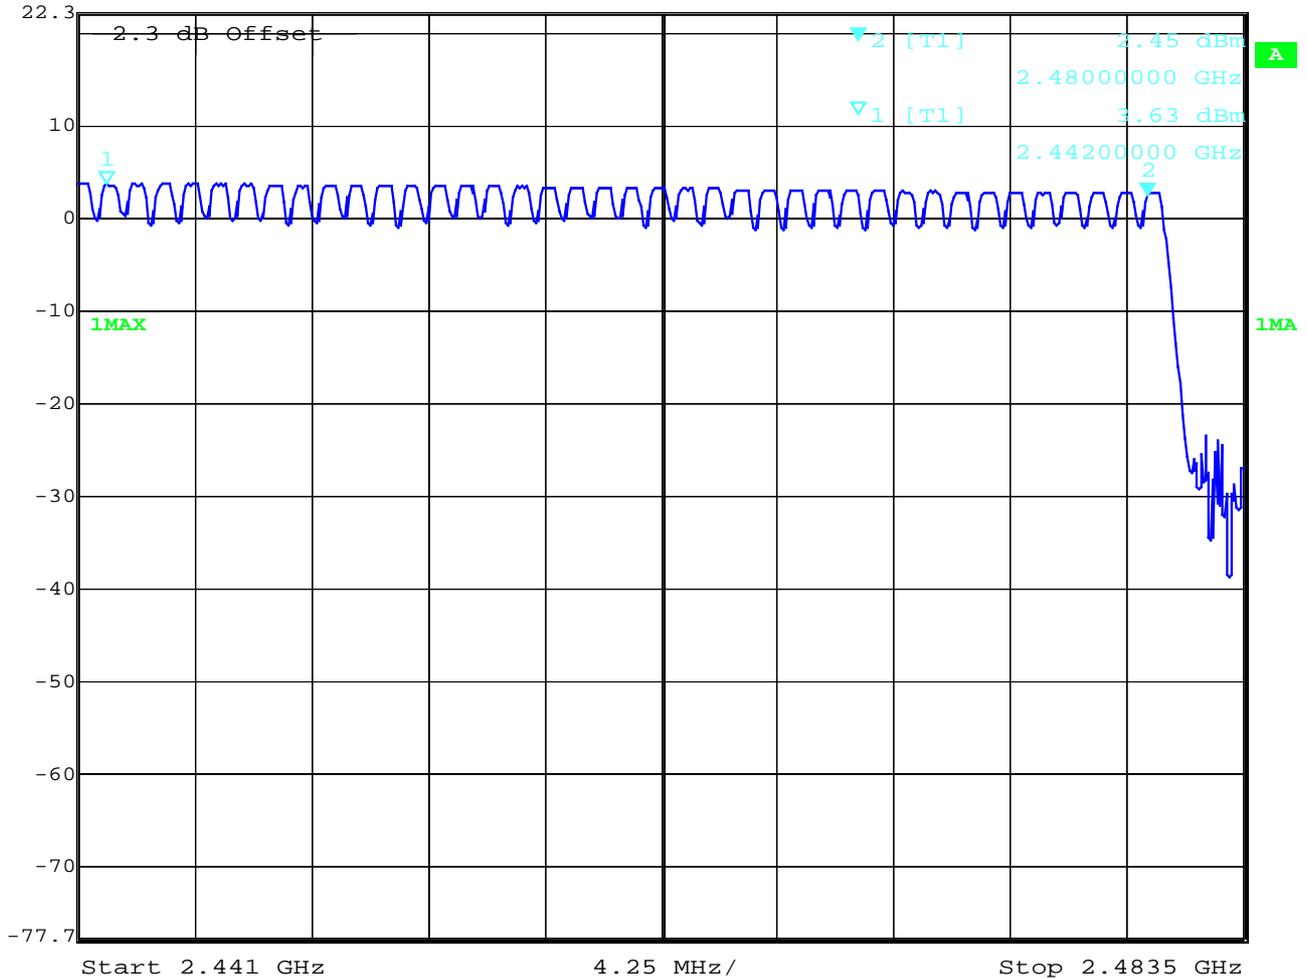

Date: 5.AUG.2003 09:09:46

The number of hopping channels is 79.

Limit: at least 15 non-overlapping channels

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
Ambient temperature : 27.8°C
Relative humidity : 43%

Time of occupancy (dwell time) §15.247(a1 iii)

For Bluetooth devives:

The dwell time of 0.3797s within a 30 second period in data mode is independent from the packet type (packet length). The calculation for a 30 second period is a follows:

Dwell time = time slot length * hop rate / number of hopping channels *30s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 30\text{s} = 0.3797\text{s}$ (in a 30s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 30\text{s} = 0.3797\text{s}$ (in a 30s period)

This is according the Bluetooth Core Specification V 1.0B (+ critical errata) for all Bluetooth devices. Therefore, all Bluetooth devices **comply** with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 mS (in a 12.8s period)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Power Spectral density (Hybrid system in Inquiry mode / Page scan) §15.247(d)
 Low channel



Date: 5.AUG.2003 09:20:34

Power density : -44.08 dBm/Hz = -9.28 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34.8 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Equipment under test : 8408001

Ambient temperature : 27.8°C

Relative humidity : 43%

Power Spectral density (Hybrid system in Inquiry mode / Page scan) §15.247(d)

Middle channel

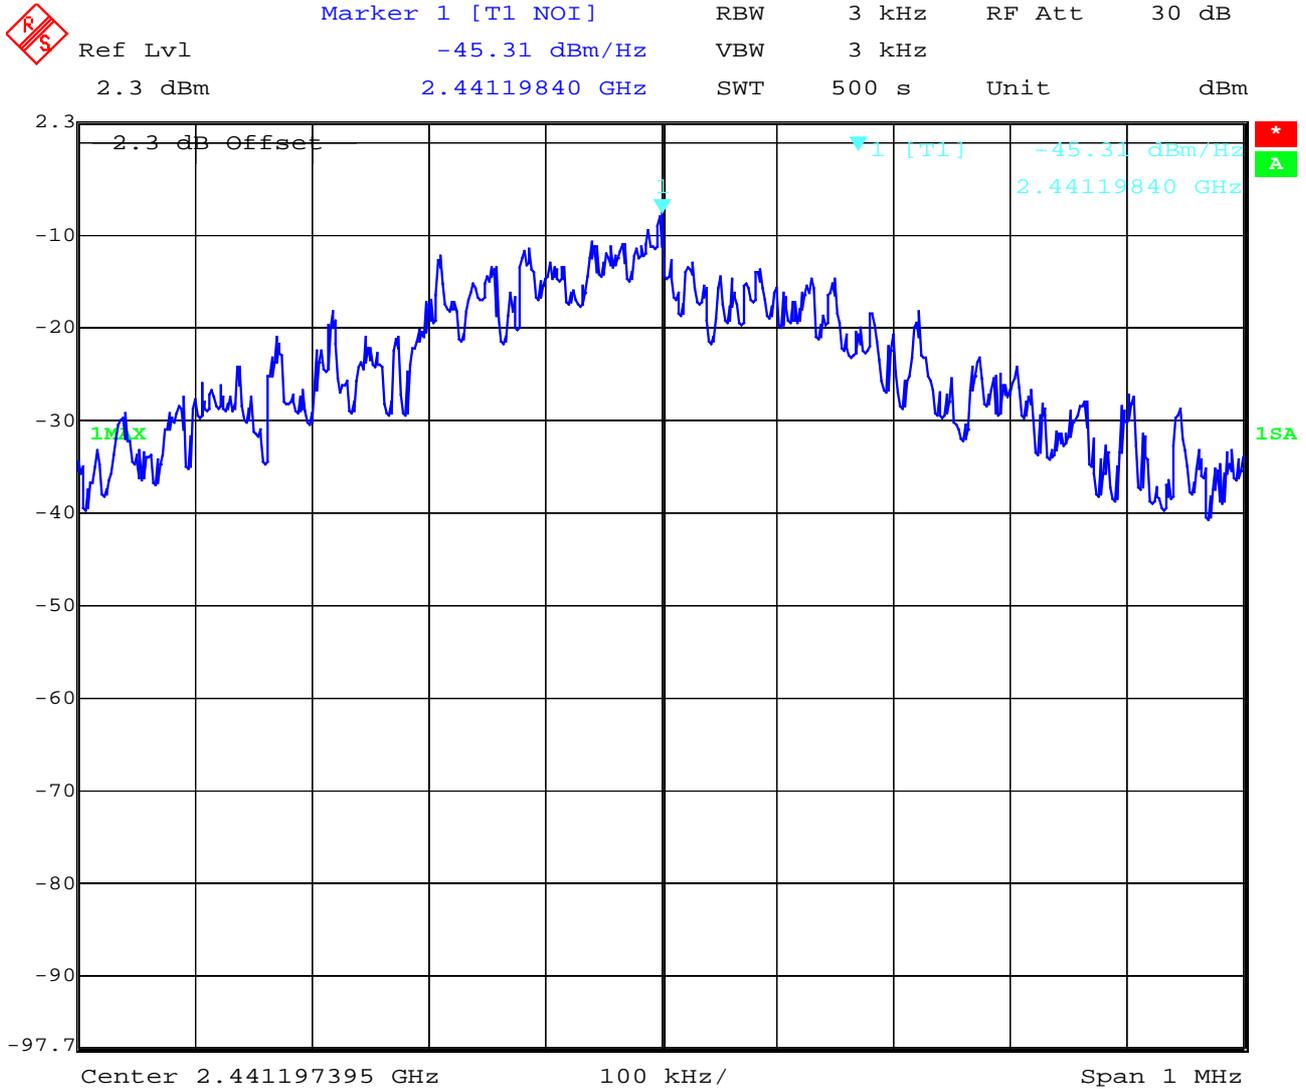

Date: 5.AUG.2003 09:22:19

Power density : -45.31 dBm/Hz = -10.51 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34.8 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : 8408001


Ambient temperature : 27.8°C

Relative humidity : 43%

Power Spectral density (Hybrid system in Inquiry mode / Page scan) §15.247(d)

High channel

	Marker 1 [T1 NOI]	RBW	3 kHz	RF Att	30 dB
	Ref Lvl	-46.59 dBm/Hz	VBW	3 kHz	
	2.3 dBm	2.48020240 GHz	SWT	500 s	Unit dBm

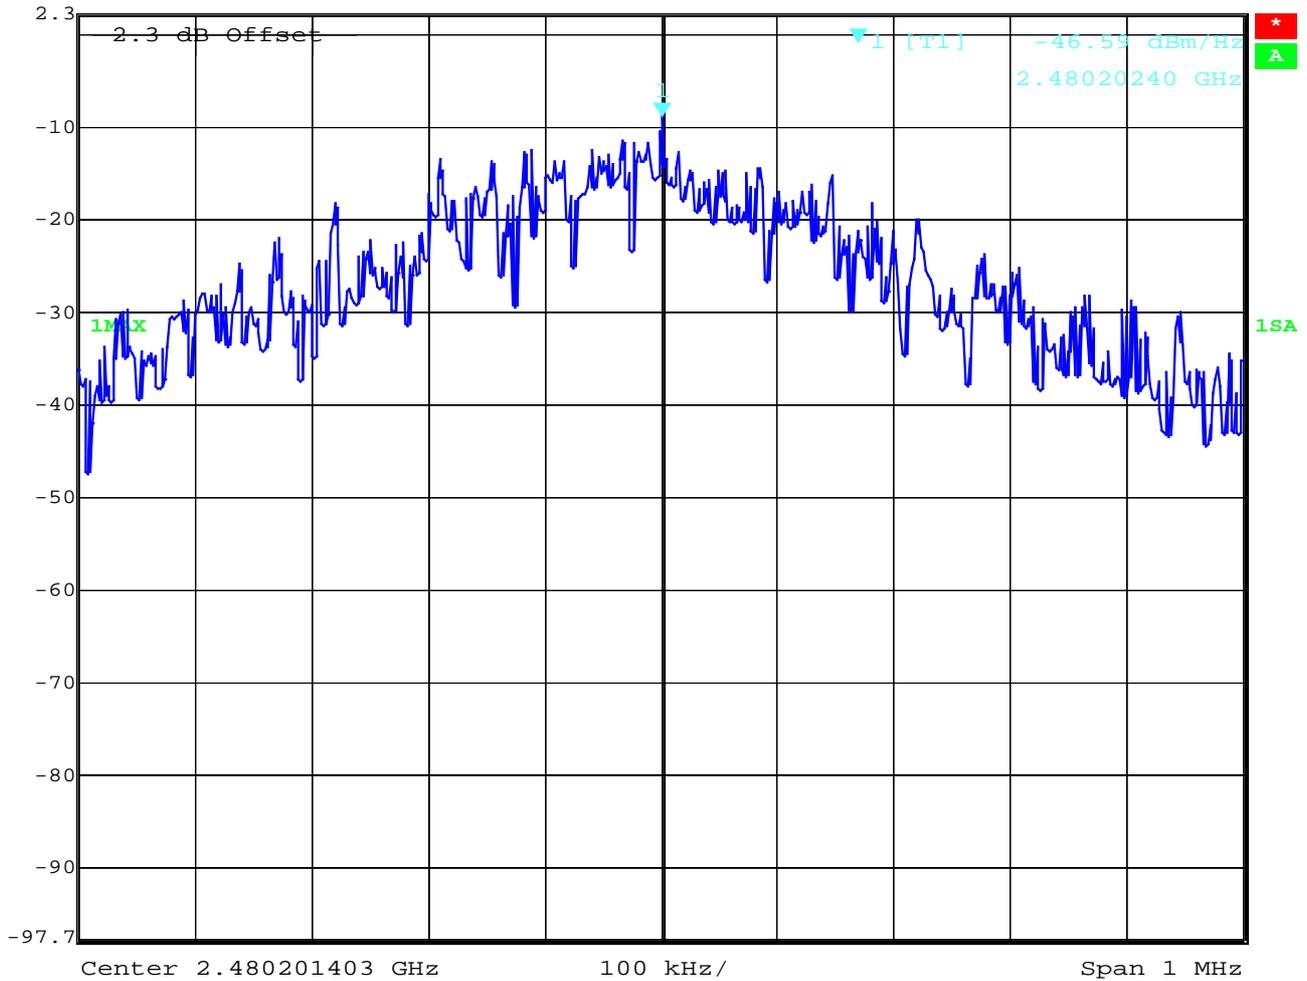

Date: 5.AUG.2003 09:32:12

Power density : -46.59 dBm/Hz = -11.79 dBm / 3 KHz

Correction factor from dBm/Hz to dBm/3KHz is +34.8 dB

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Spectrum Bandwidth of a FHSS System §15.247(a1)
20 dB bandwidth

TEST CONDITIONS		20 dB BANDWIDTH (kHz)		
		2402	2441	2480
Frequency (MHz)				
T _{nom} (23)°C	V _{nom} (1.5)V	721.443	733.467	873.547
Measurement uncertainty		±1kHz		

RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)
 RBW: 10 kHz / VBW 10 kHz


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Spectrum Bandwidth of a FHSS System
 20 dB bandwidth

§15.247(a1)

Channel 1

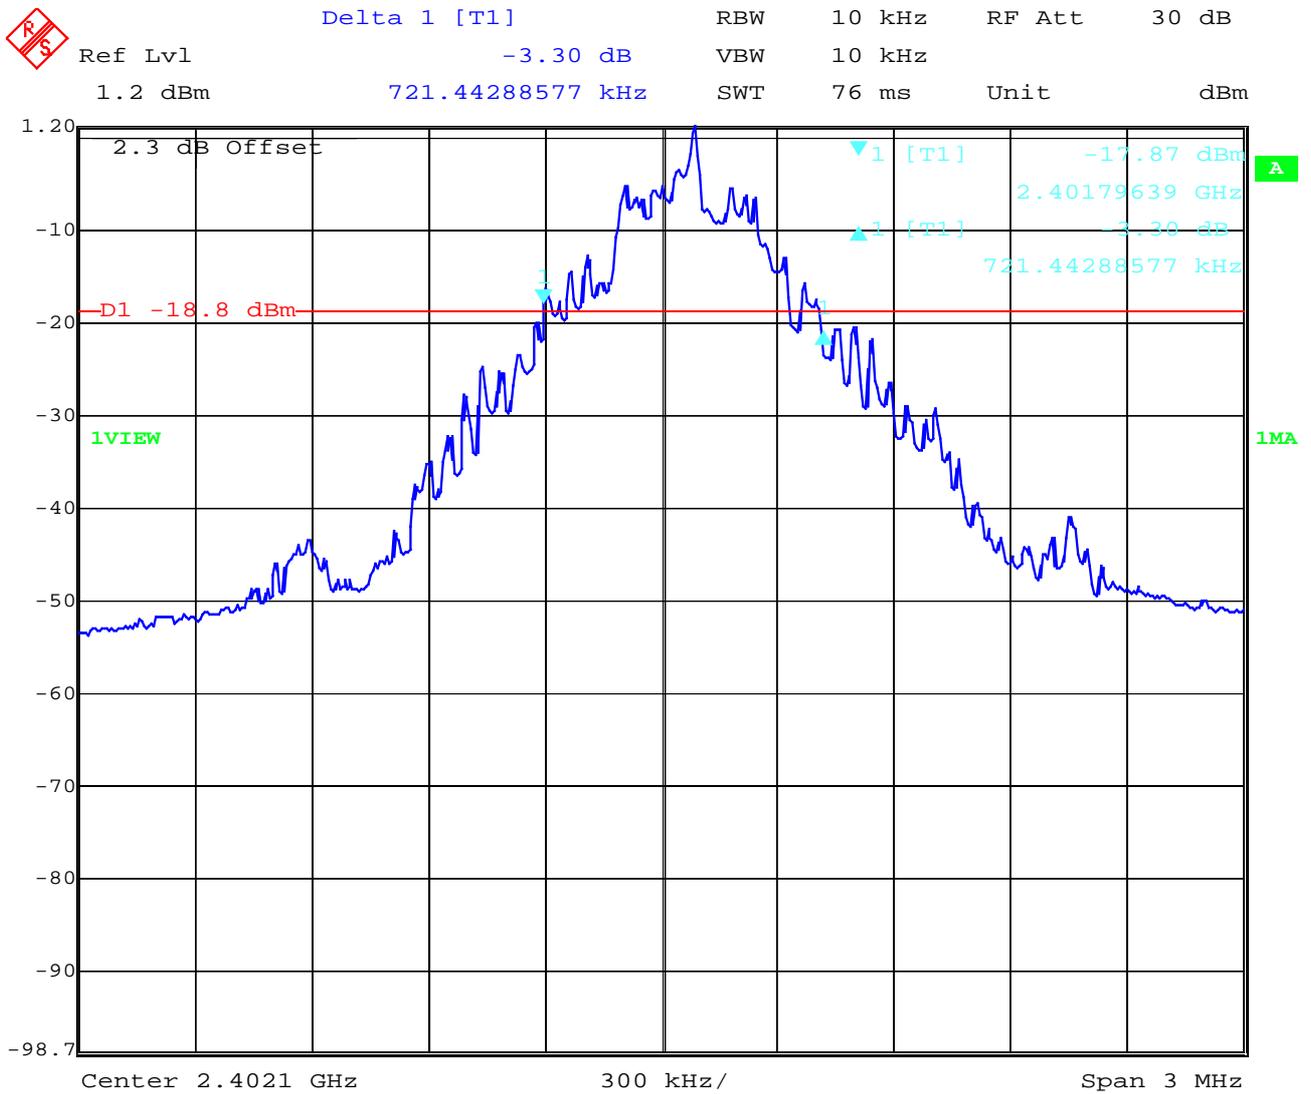

Date: 5.AUG.2003 09:42:41


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Spectrum Bandwidth of a FHSS System
 20 dB bandwidth

§15.247(a1)

Channel 2

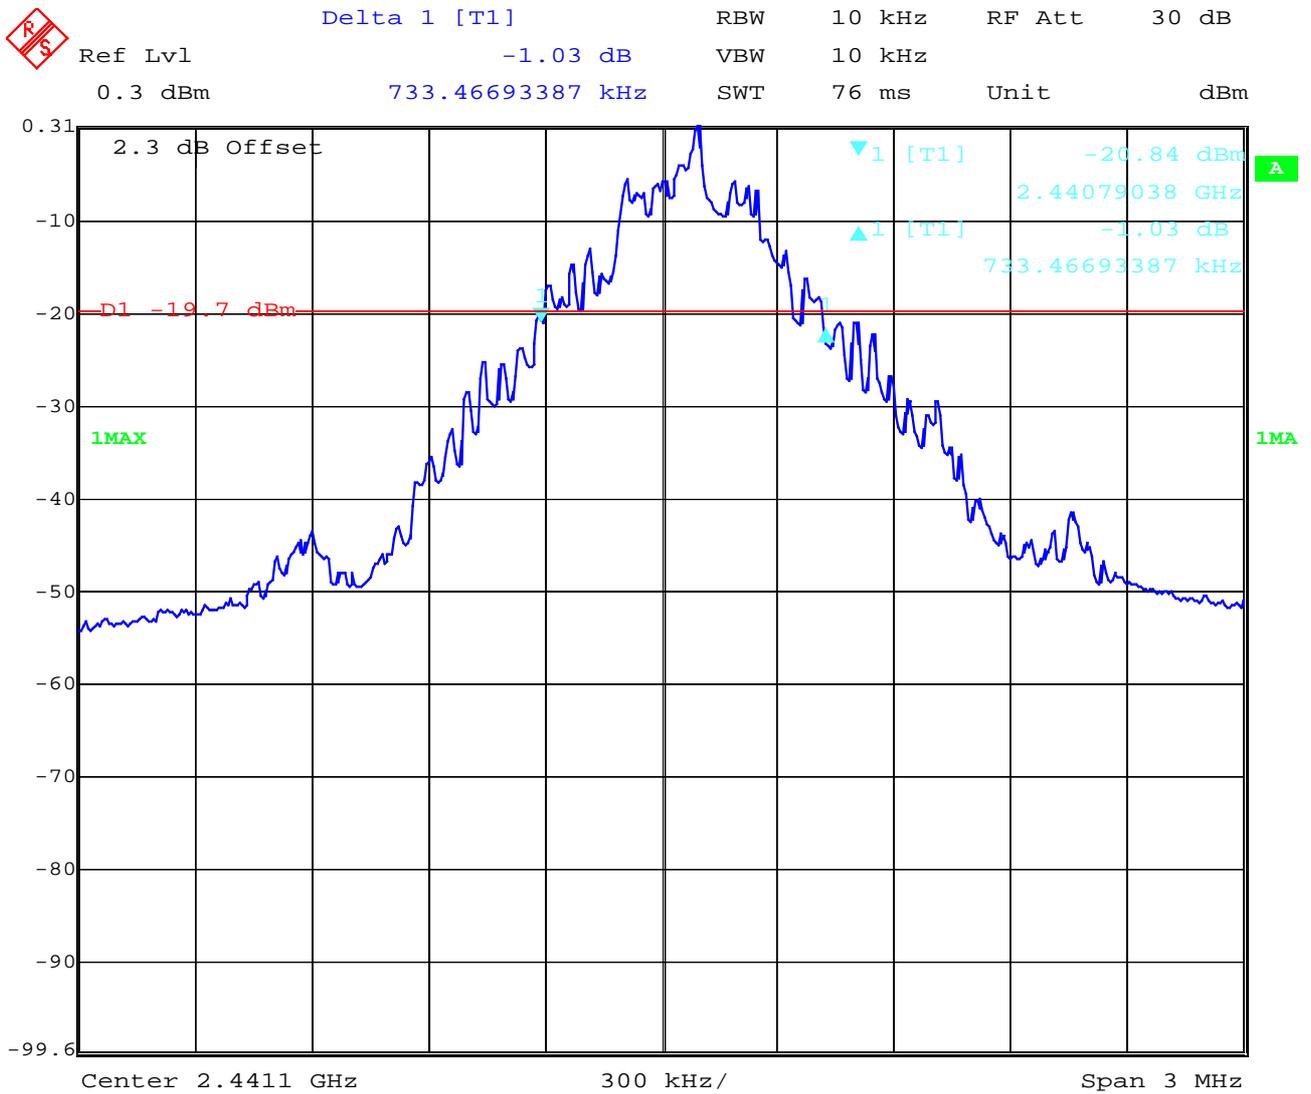

Date: 5.AUG.2003 09:41:03

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)


Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

**Spectrum Bandwidth of a FHSS System
 20 dB bandwidth**

§15.247(a1)

Channel 3:

	Delta 1 [T1]	RBW	10 kHz	RF Att	30 dB
Ref Lvl	-0.15 dB	VBW	10 kHz		
-3.1 dBm	873.54709419 kHz	SWT	76 ms	Unit	dBm

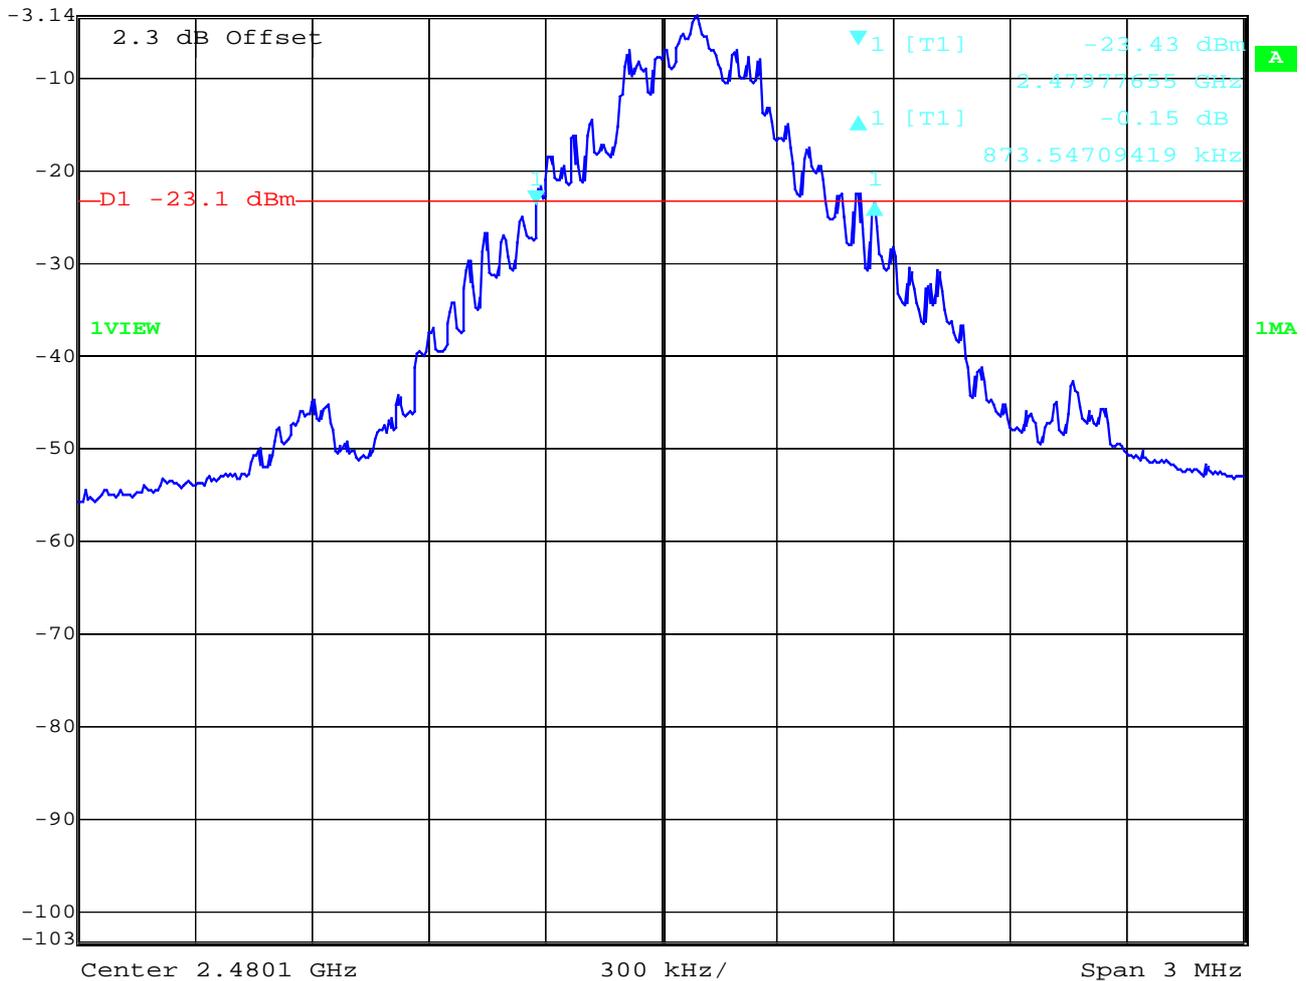

Date: 5.AUG.2003 09:45:06

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

MAXIMUM PEAK OUTPUT POWER SUBCLAUSE § 15.247 (b) (1)
(conducted)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (mW)				
		2402		2441	2480	
Frequency (MHz)	T _{nom} (23.3)°C	V _{nom} (1.5)V	PK	+3.96	+3.46	+2.47
De facto EIRP (Peak)			2.19 mW	2.40 mW	1.86 mW	
(Antenna gain)			(-0.56 dBi)	(+0.36 dBi)	(+0.23 dBi)	
Measurement uncertainty		±3dB				

RBW / VBW : 3 MHz

LIMIT SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

MAXIMUM PEAK OUTPUT POWER
 (conducted)
 Channel 1

SUBCLAUSE § 15.247 (b) (1)

Marker 1 [T1] RBW 3 MHz RF Att 30 dB
 Ref Lvl 3.96 dBm VBW 3 MHz
 5 dBm 2.40218337 GHz SWT 5 ms Unit dBm

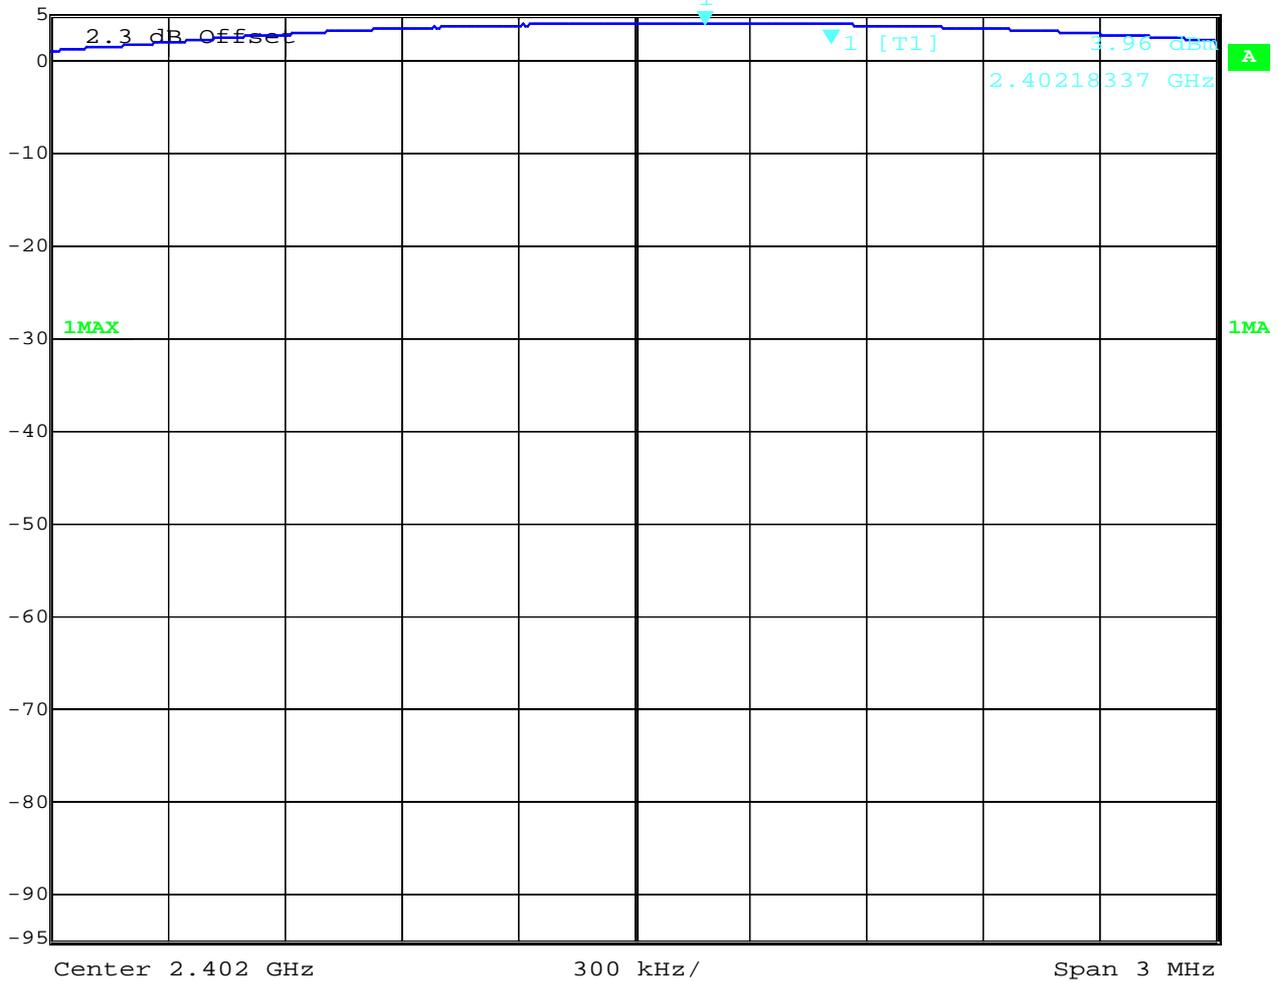

Date: 5.AUG.2003 09:48:31

LIMIT **SUBCLAUSE § 15.247 (b) (1)**

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

MAXIMUM PEAK OUTPUT POWER
 (conducted)
 Channel 2

SUBCLAUSE § 15.247 (b) (1)

Marker 1 [T1] RBW 3 MHz RF Att 30 dB
 Ref Lvl 3.46 dBm VBW 3 MHz
 5 dBm 2.44109319 GHz SWT 5 ms Unit dBm

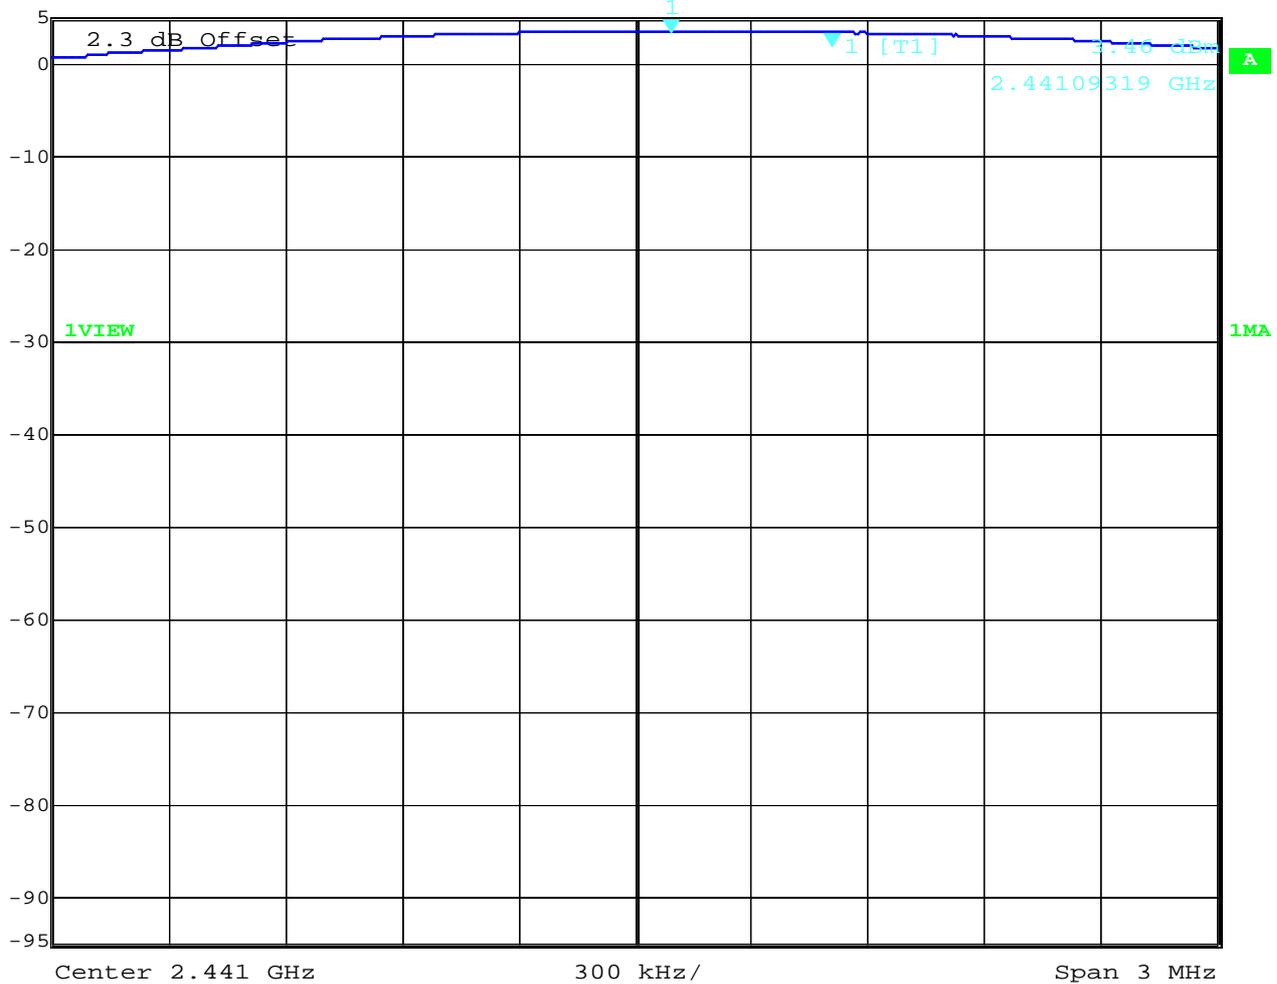

Date: 5.AUG.2003 09:47:43

LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

MAXIMUM PEAK OUTPUT POWER
 (conducted)
 Channel 3

SUBCLAUSE § 15.247 (b) (1)

Marker 1 [T1] RBW 3 MHz RF Att 30 dB
 Ref Lvl 2.47 dBm VBW 3 MHz
 5 dBm 2.48028337 GHz SWT 5 ms Unit dBm

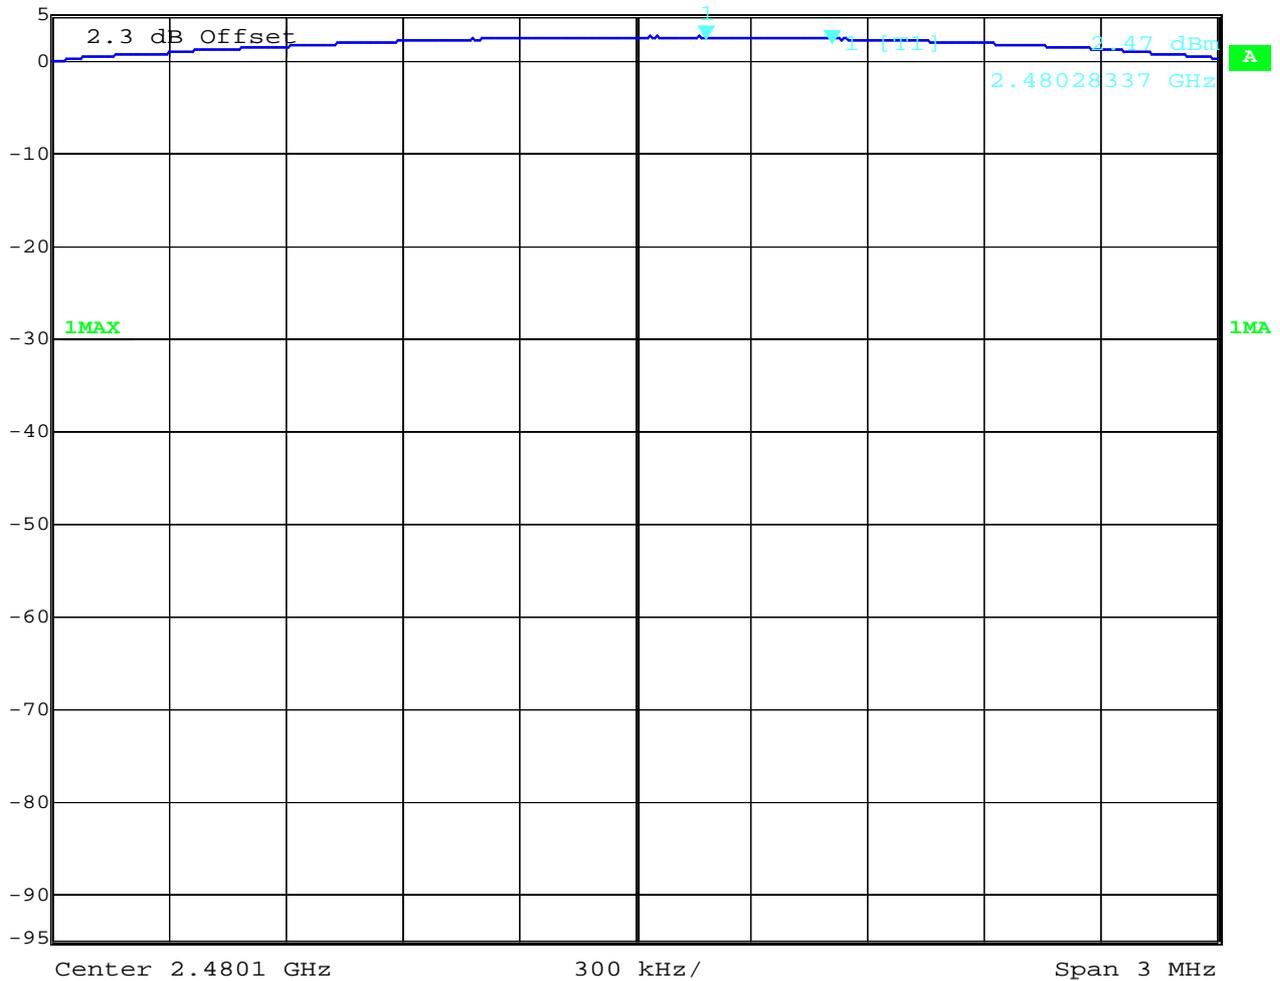

Date: 5.AUG.2003 09:46:51

LIMIT

SUBCLAUSE § 15.247 (b) (1)

Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

MAXIMUM PEAK OUTPUT POWER SUBCLAUSE § 15.247 (b) (1)
(RADIATED)

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER		
		EIRP (mW)		
Frequency (MHz)		2402	2441	2480
T _{nom} (23.0)°C	V _{nom} (1.5)V	2.19 mW	2.40 mW	1.86 mW
Measurement uncertainty		±3dB		

RBW/VBW : 3 MHz

Measured at a distance of 3m

LIMIT SUBCLAUSE § 15.247 (b) (1)


Frequency range	RF power output
2400-2483.5 MHz	1.0 Watt

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance of conducted emissions

§15.247 (c)

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl 41.18 dB VBW 100 kHz
 5 dBm 2.20440882 MHz SWT 5 ms Unit dBm

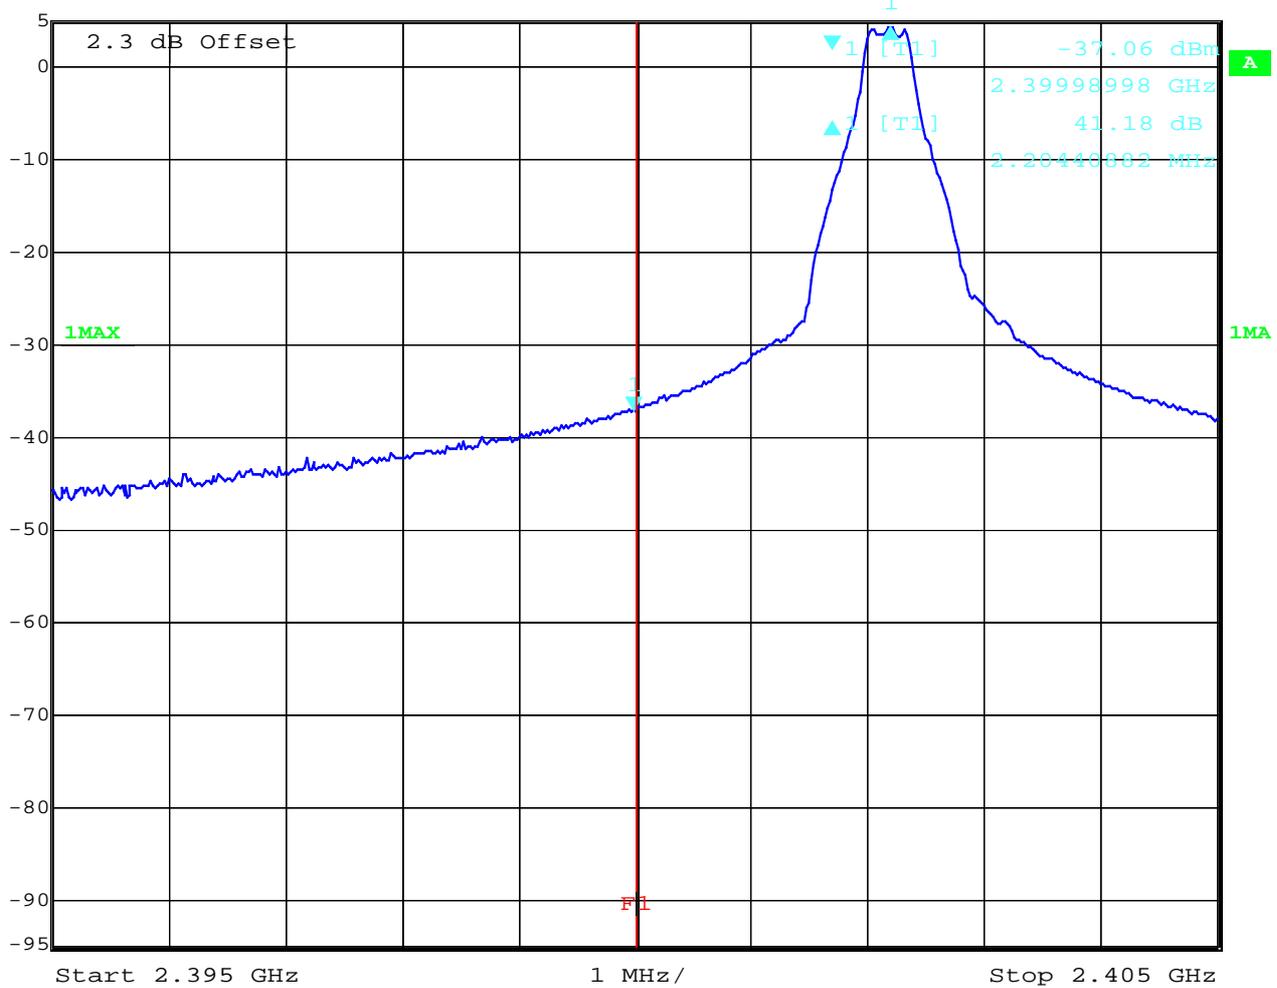

Date: 5.AUG.2003 09:51:00

Low frequency section (hopping off)

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance of conducted emissions

§15.247 (c)

Low frequency section (hopping on)

Delta 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl 41.52 dB VBW 100 kHz
 5 dBm 3.20641283 MHz SWT 5 ms Unit dBm

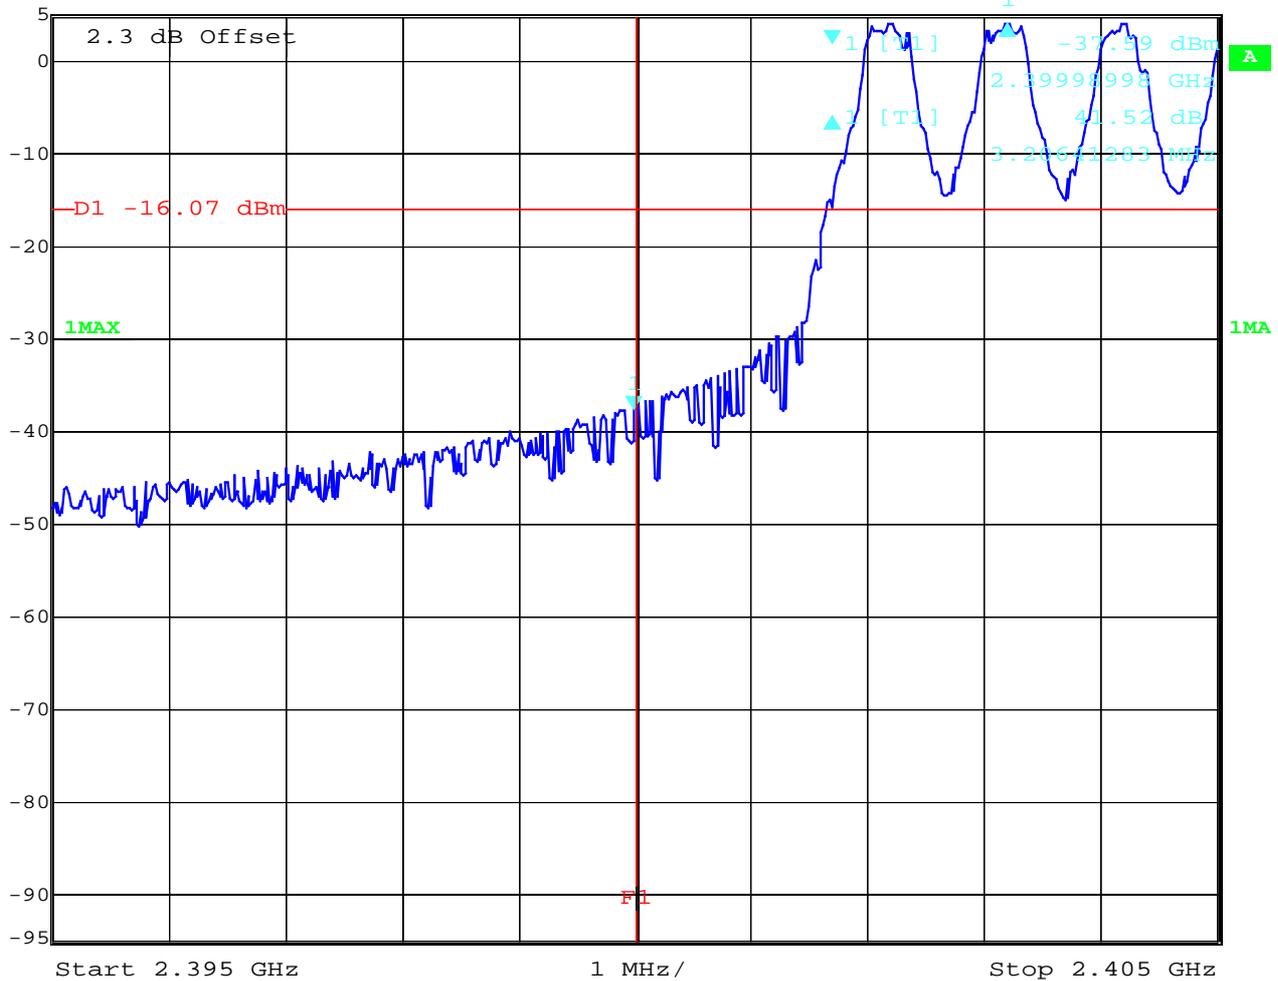

Date: 5.AUG.2003 10:11:44

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 - 24, 64


Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance of conducted emissions

§15.247 (c)

high frequency section (hopping off)

Marker 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -40.89 dBm VBW 100 kHz
 5 dBm 2.48355511 GHz SWT 5.5 ms Unit dBm

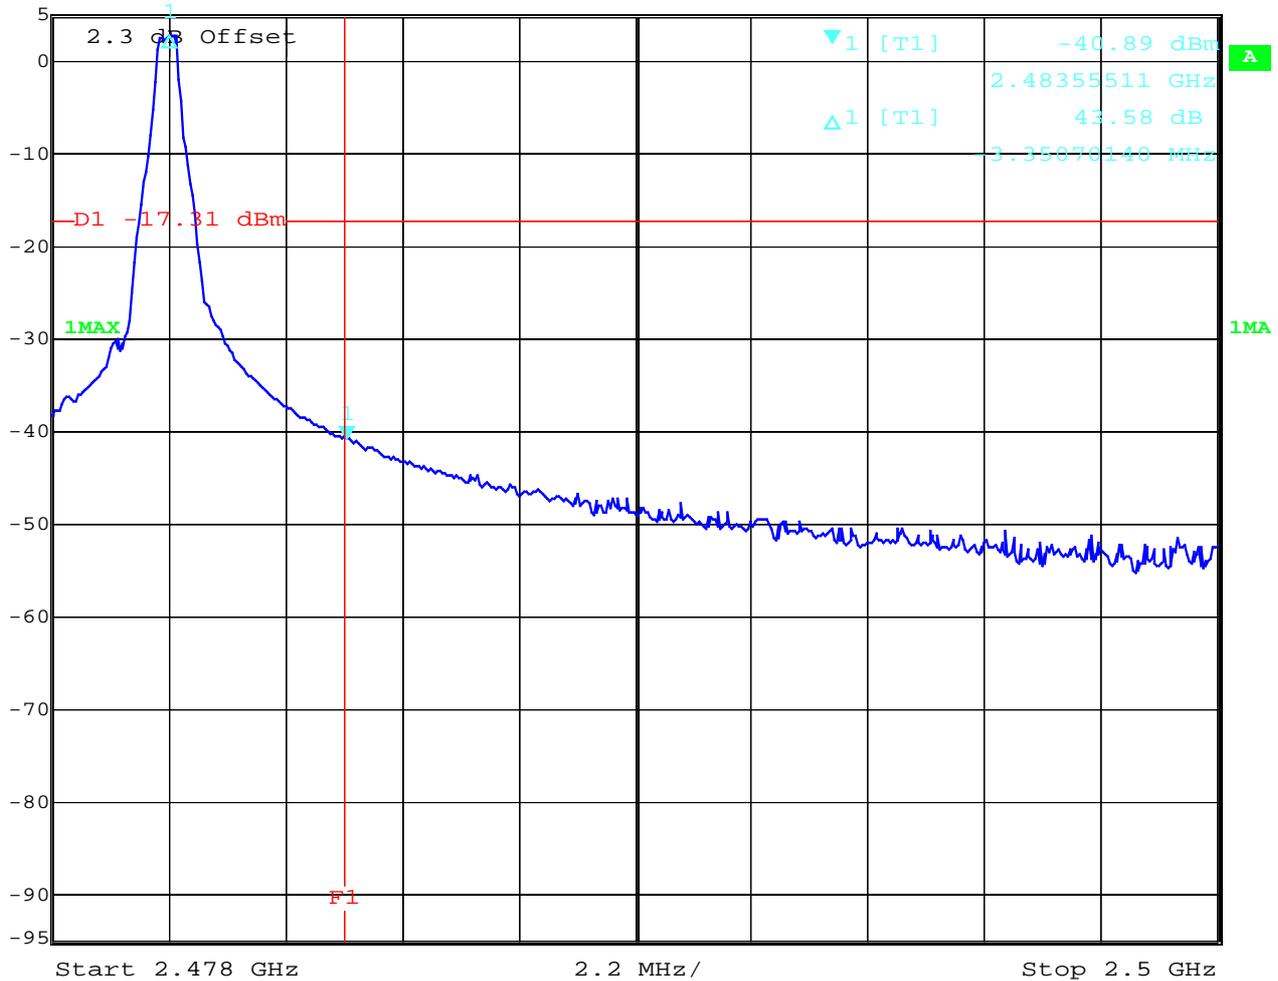

Date: 5.AUG.2003 10:02:25

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 - 24, 64


Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance of conducted emissions

§15.247 (c)

high frequency section (hopping on)

Marker 1 [T1] RBW 100 kHz RF Att 30 dB
 Ref Lvl -41.63 dBm VBW 100 kHz
 5 dBm 2.48359920 GHz SWT 5.5 ms Unit dBm

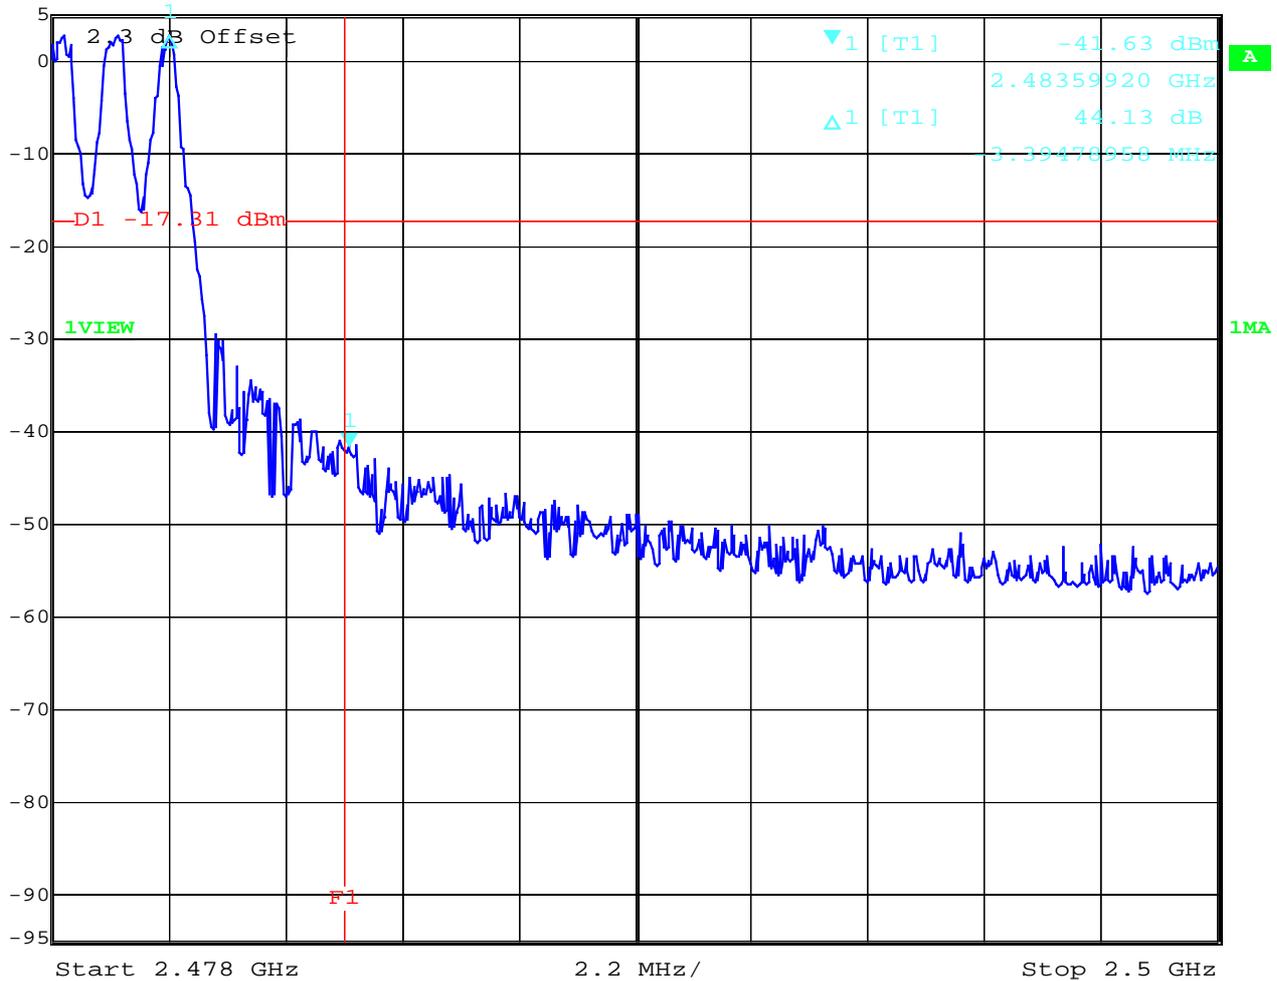

Date: 5.AUG.2003 10:06:42


Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 - 24, 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance radiated
Max field strength in 3m distance
(singel frequency)

Marker 1 [T1] RBW 1 MHz RF Att 10 dB
 Ref Lvl 100.21 dBµV/m VBW 1 MHz
 107 dB* 2.47998497 GHz SWT 5 ms Unit dBµV/m

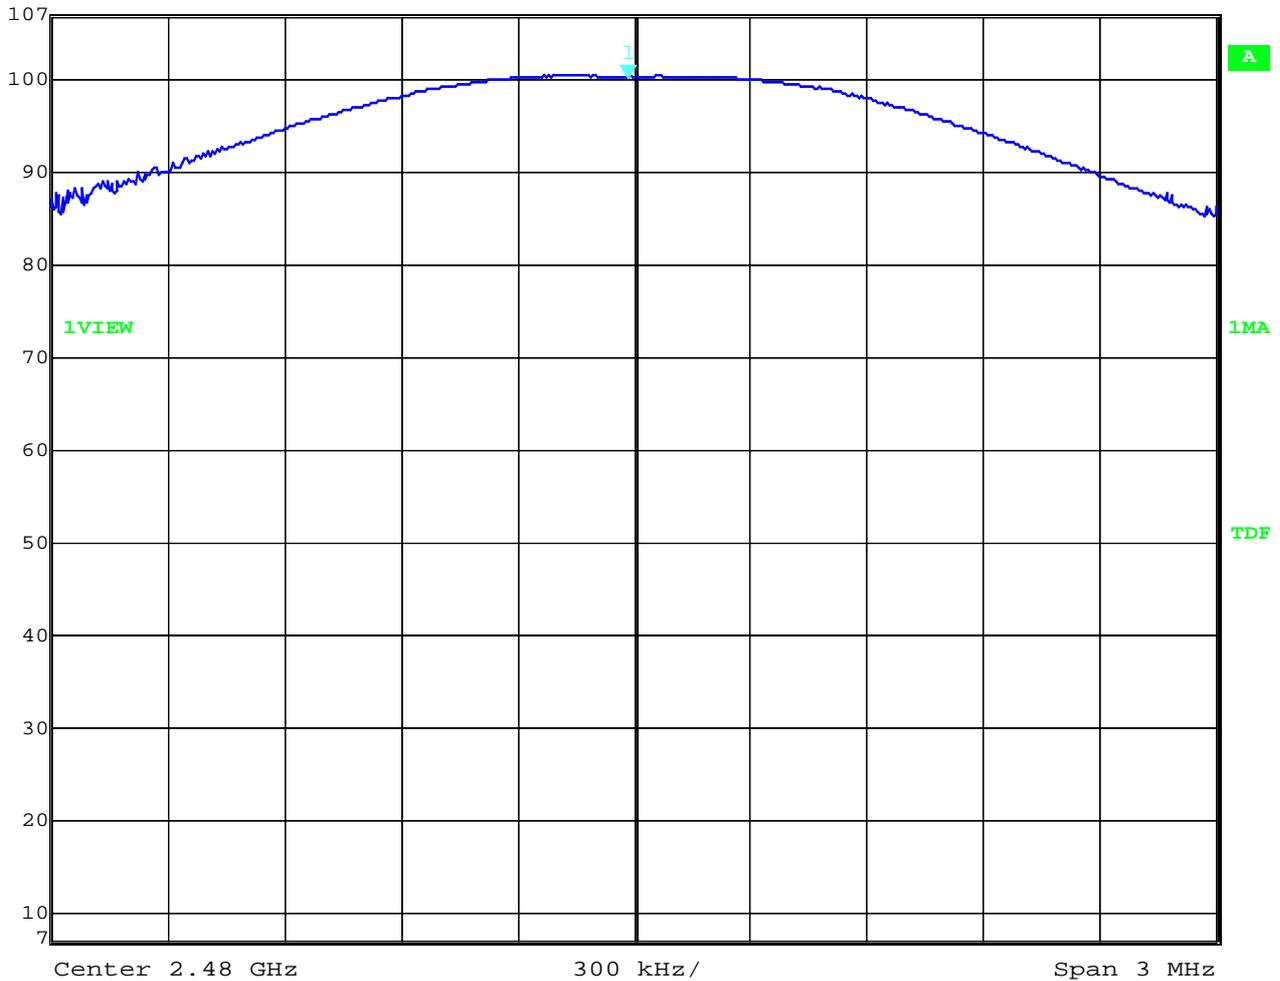

Date: 5.AUG.2003 08:11:33


Frequency	Meter reading	Cable loss	Antenna factor	Results
2480 MHz		2.5	-6.3	101.21 dBµV/m
Coreccting factor in grafic implemented				

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 – 24, 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance radiated
Marker-Delta Method (single carrier)

	Delta 1 [T1]	RBW	100 kHz	RF Att	0 dB
	Ref Lvl	45.59 dB	VBW	100 kHz	
	5 dBm	-4.31362725 MHz	SWT	5 ms	Unit dBm

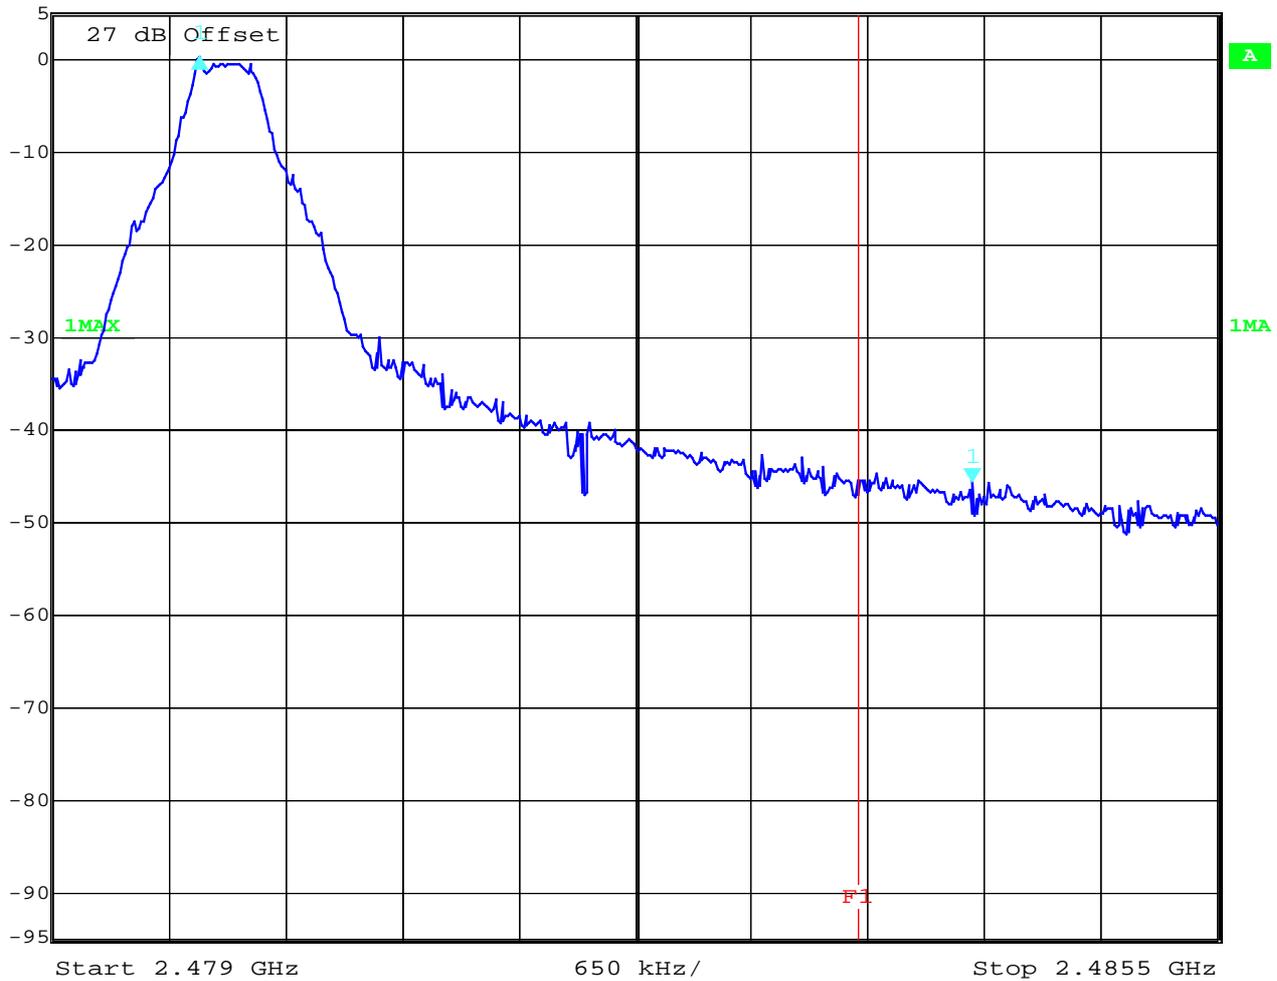

Date: 5.AUG.2003 08:33:24

Marker-Delta-Value : 45.59 dB

This measurement was made to show that the behavior of the system is conform to

FCC 15.205 (restricted bands)


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance radiated
Marker-Delta Method (hopping mode)

Delta 1 [T1] RBW 100 kHz RF Att 0 dB
 Ref Lvl 45.47 dB VBW 100 kHz
 5 dBm -3.56412826 MHz SWT 5 ms Unit dBm

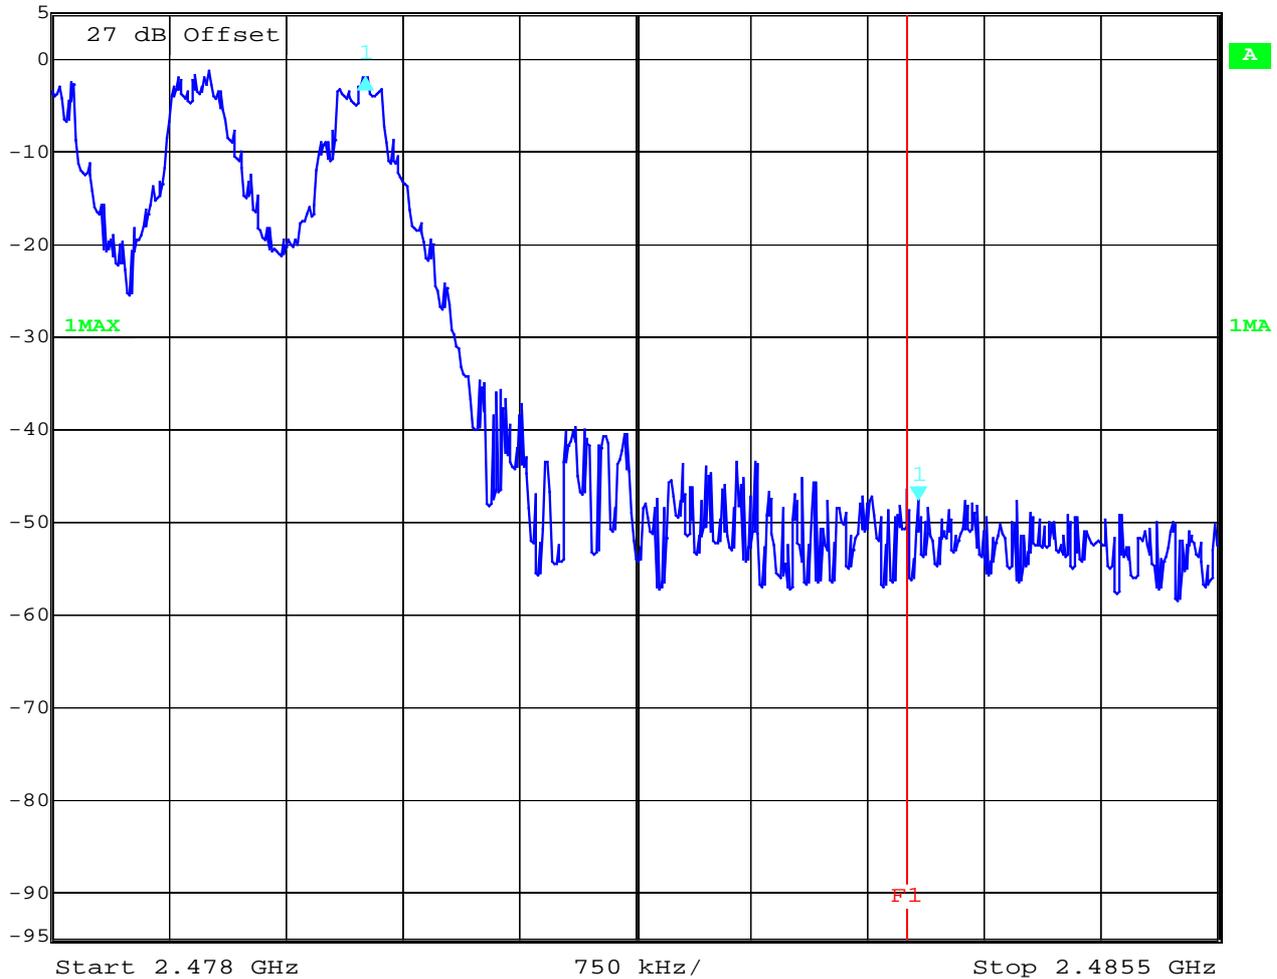

Date: 5.AUG.2003 08:44:25

Marker-Delta-Value : 51.72 dB

This measurement was made to show that the behavior of the system is conform to FCC 15.205 (restricted bands)

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

17 - 24, 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance of radiated emissions §15.205

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

high channel	setup	measured value (3m)	correction factor (3m)	calculated value (3m)
Max. peak value	1 MHz RBW 1 MHz VBW	105.01 dBµV/m Peak	-3.8	101.21 dBµV/m
Max. average value	Calculated with duty cycle correction factor	101.21 dBµV/m peak	-4.11 dB duty cycle correction factor	97.10 dBµV/m
Delta value	Peak min. 30 kHz RBW/VBW	45.59 dB (single carrier) 45.47 dB (hopping mode)	-	-
Value at band edge	limit 54 dBµV/m			51.51 dBµV/m (single carrier) 51.63 dBµV/m (hopping mode)
Statement:				Complies


The product complies with the limit of the restricted bands.

Delta marker plots see above pages

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance radiated (average)
Restricted band 2310 – 2390 MHz

	Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	102 dB*	39.78 dBµV/m	VBW	10 Hz		
		2.38900802 GHz	SWT	24 s	Unit	dBµV/m

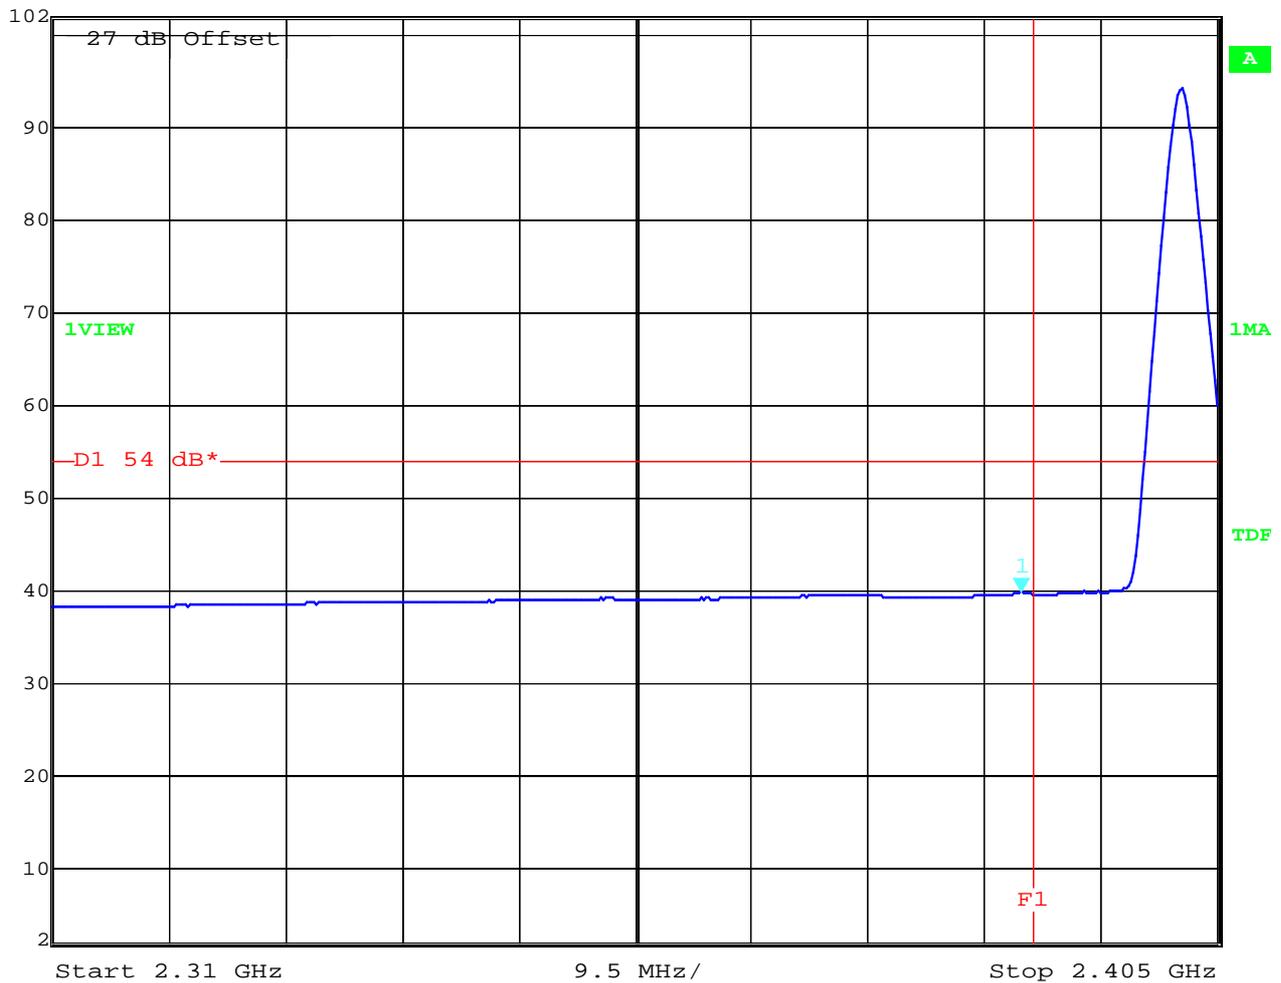


Date: 5.AUG.2003 08:53:34

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 – 24, 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

Band-edge compliance radiated (average)
Restricted band 2483.5 - 2500 MHz

	Marker 1 [T1]	RBW	1 MHz	RF Att	0 dB
	Ref Lvl	50.41 dB μ V/m	VBW	10 Hz	
	102 dB*	2.48359920 GHz	SWT	5.6 s	Unit dB μ V/m

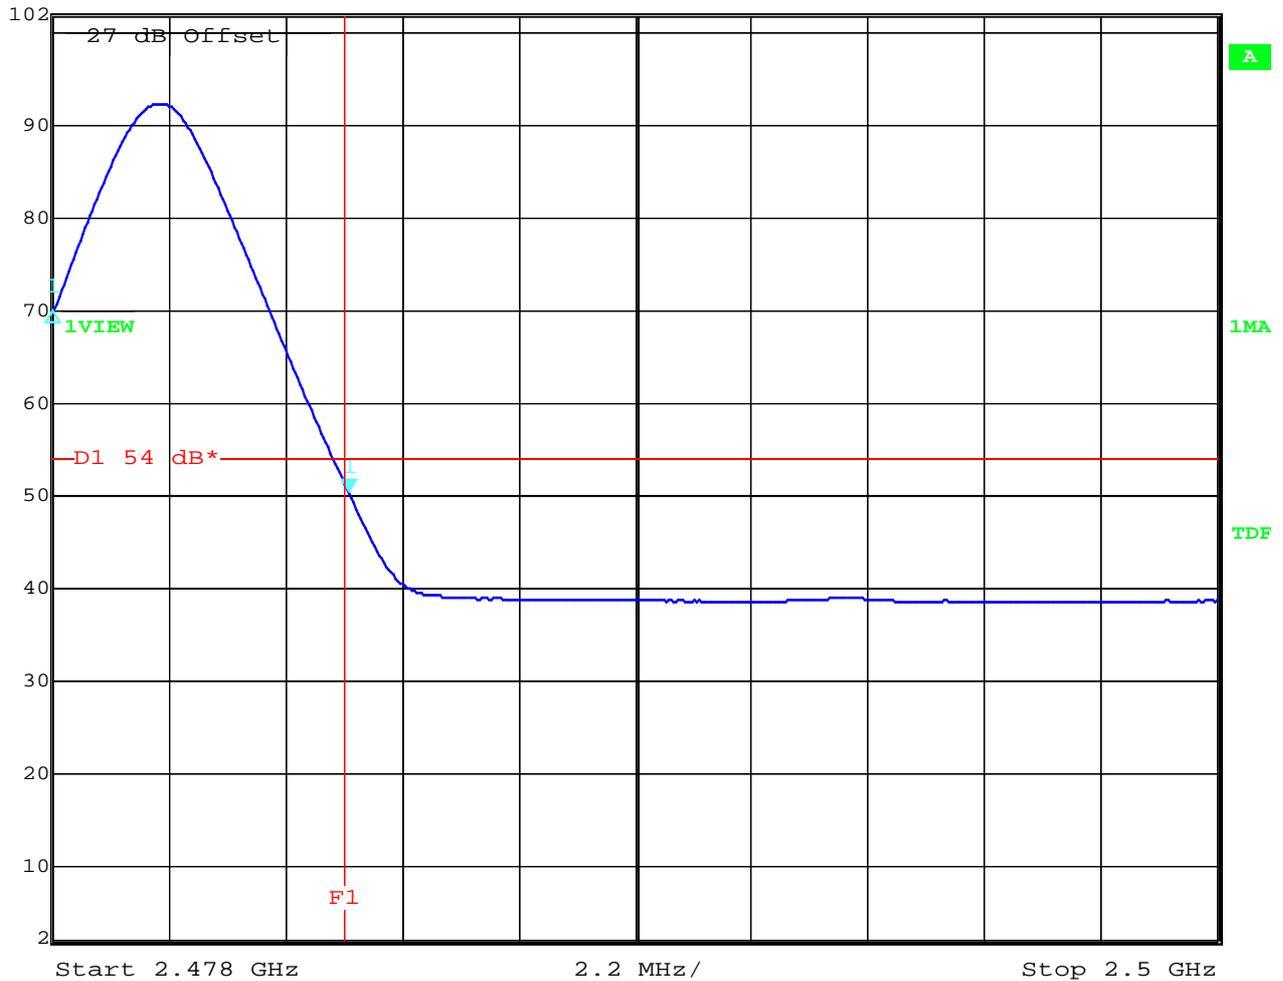

Date: 5.AUG.2003 08:55:44

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dBm)	limit max. allowed emission power	actual attenuation below frequency of operation (dB)	results
2402		+3.96	30 dBm	-	Operating frequency
no traceable signal found			-20 dBc (-16.04 dBm)		complies
2441		+3.46	30 dBm	-	Operating frequency
no traceable signal found			-20 dBc (-16.54 dBm)		complies
2480		+2.47	30 dBm		Operating frequency
no traceable signal found			-20 dBc (-17.53 dBm)		complies
Measurement uncertainty		± 3dB			

RBW : 100 kHz VBW: 100 MHz

For emissions that fall into restricted bands you find the radiated emissions later in the report.

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 1: 9 kHz - 25 GHz

§ 15.247 (c) (1)


 Ref Lvl 5 dBm
 Marker 1 [T1] 2.39998998 GHz
 RBW 100 kHz RF Att 30 dB
 VBW 100 kHz
 SWT 6.4 s Unit dBm

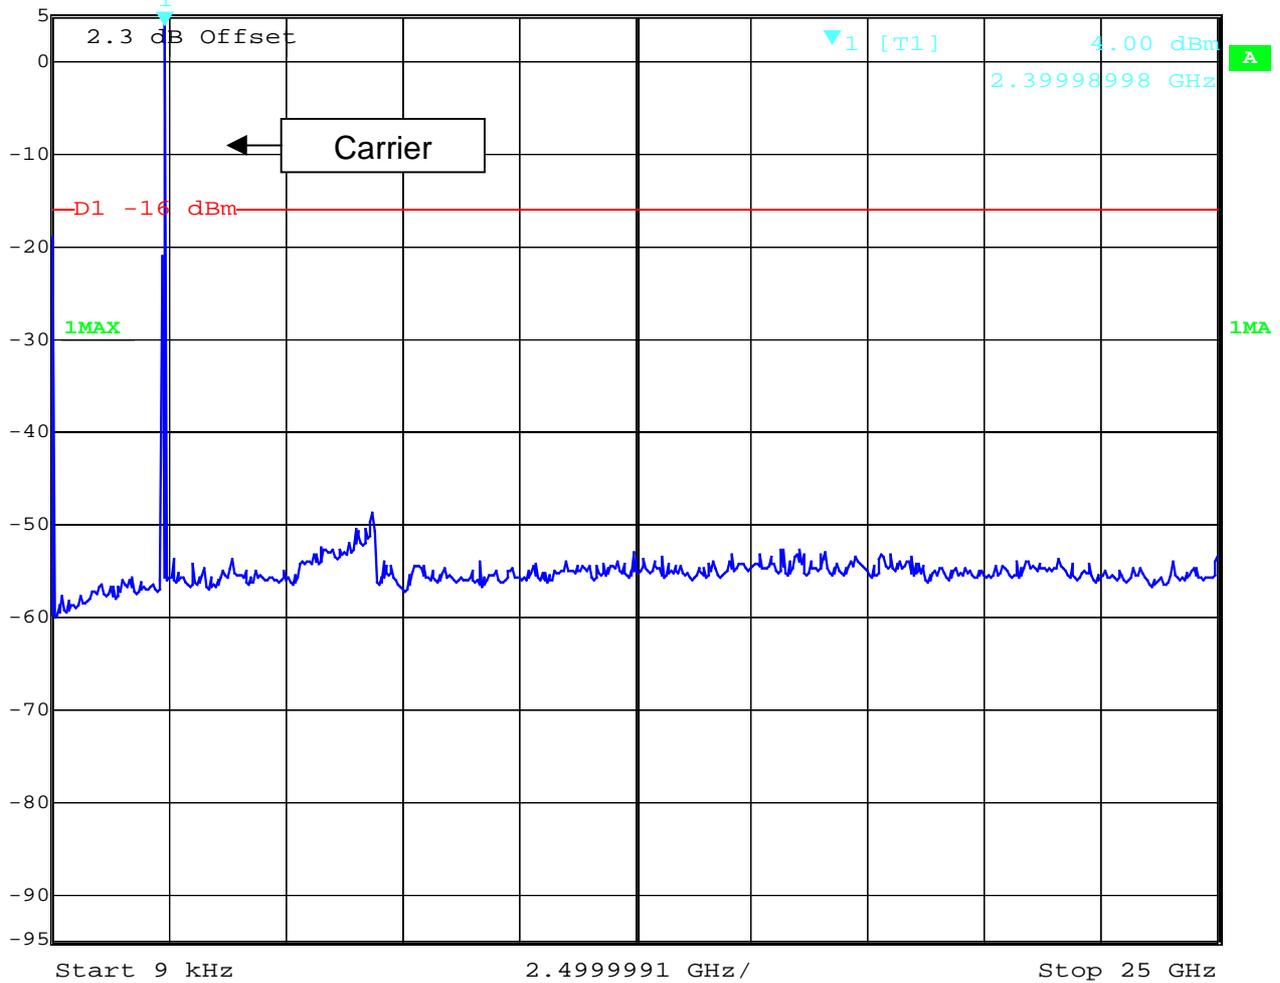

Date: 5.AUG.2003 09:54:34


RBW:100 kHz / VBW: 100 kHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 - 24, 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS- Conducted (Transmitter)
Channel 2: 9 kHz – 25 GHz

§ 15.247 (c) (1)

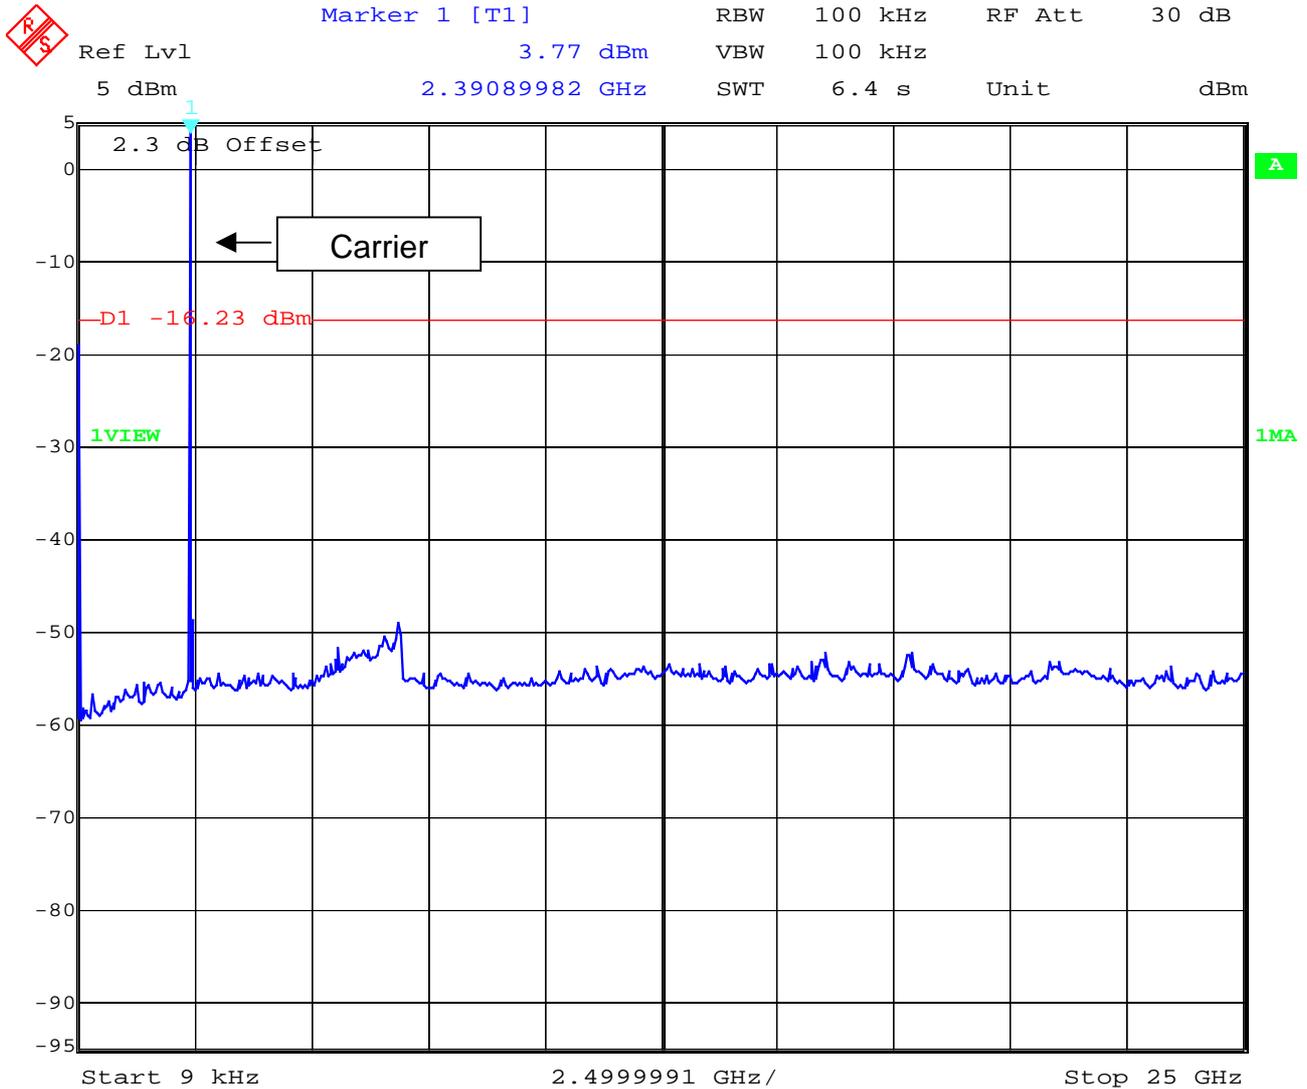

Date: 5.AUG.2003 09:58:08
RBW:100 kHz / VBW: 100 kHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 – 24, 64


Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS- Conducted (Transmitter)

§ 15.247 (c) (1)

Channel 3: 9kHz – 25 GHz

	Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	30 dB
	5 dBm	0.58 dBm	VBW	100 kHz		
		2.45491794 GHz	SWT	6.4 s	Unit	dBm

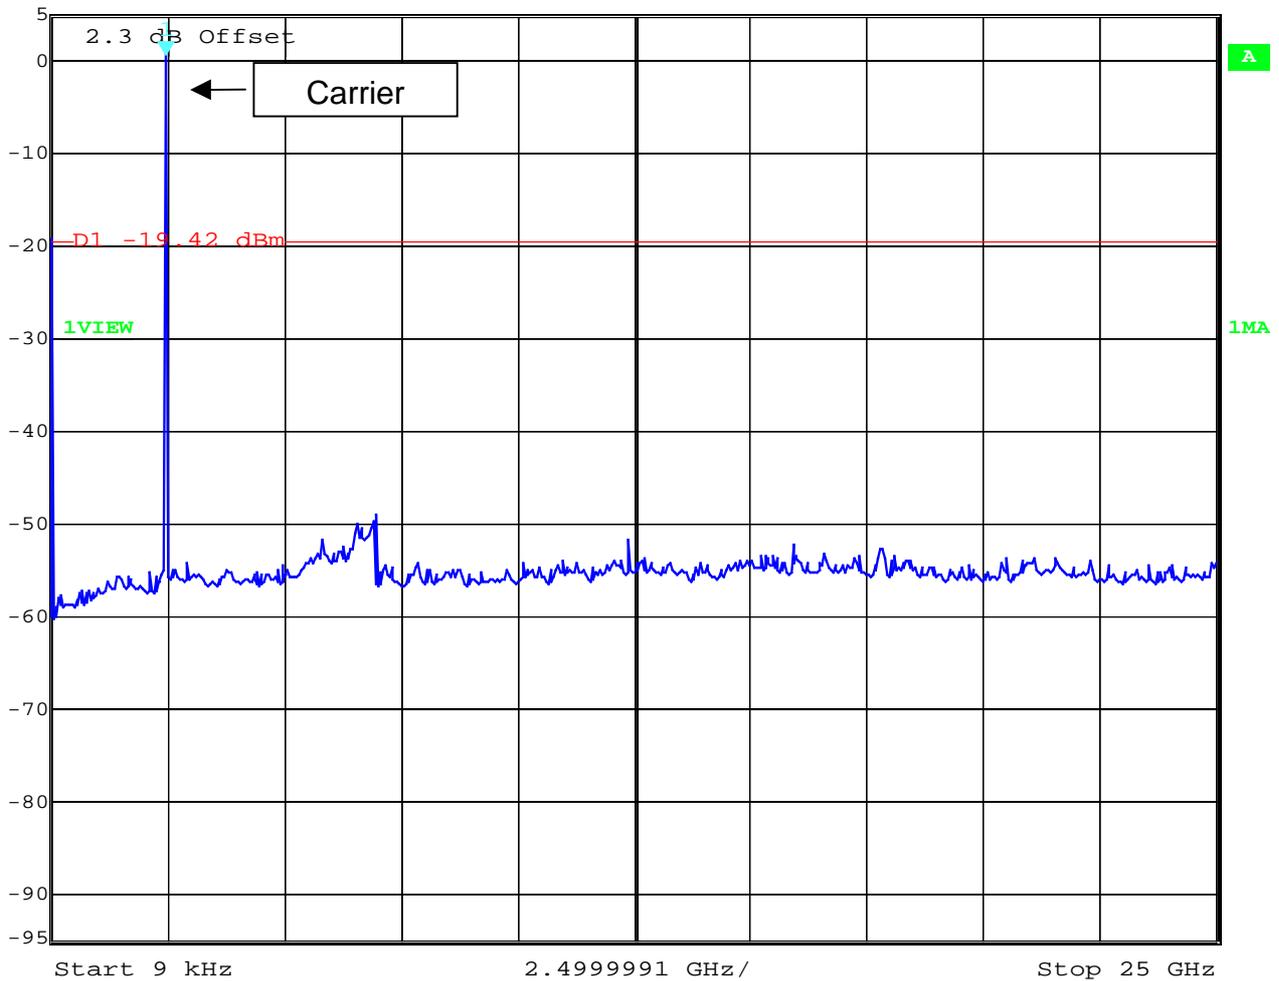

Date: 5.AUG.2003 09:59:59

RBW:100 kHz / VBW: 100 kHz

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


Equipment under test : 8408001
Ambient temperature : 27.8°C
Relative humidity : 43%

EMISSION LIMITATIONS (valid for all channels)

SUBCLAUSE § 15.247 (c) (1)

9 kHz - 30 MHz

EUT: 8408001
Manufacturer: Sony Ericsson Mobile Communications AB
Operating Condition: continuous Tx mode
Test Site: Cetecom, Room 6
Operator: Berg
Test Specification:
Comment:
Start of Test: 05.08.03 / 07:05:36

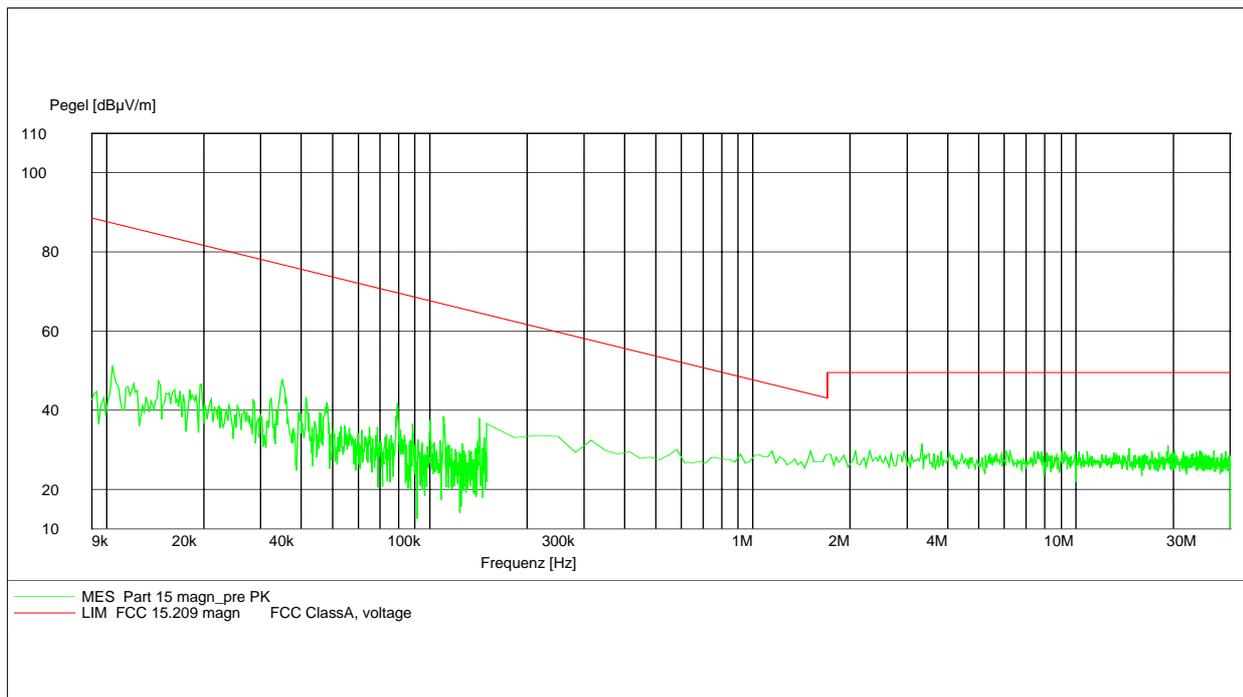


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 - 24; 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS
 2402 MHz - 4 GHz

SUBCLAUSE § 15.247 (c) (1)

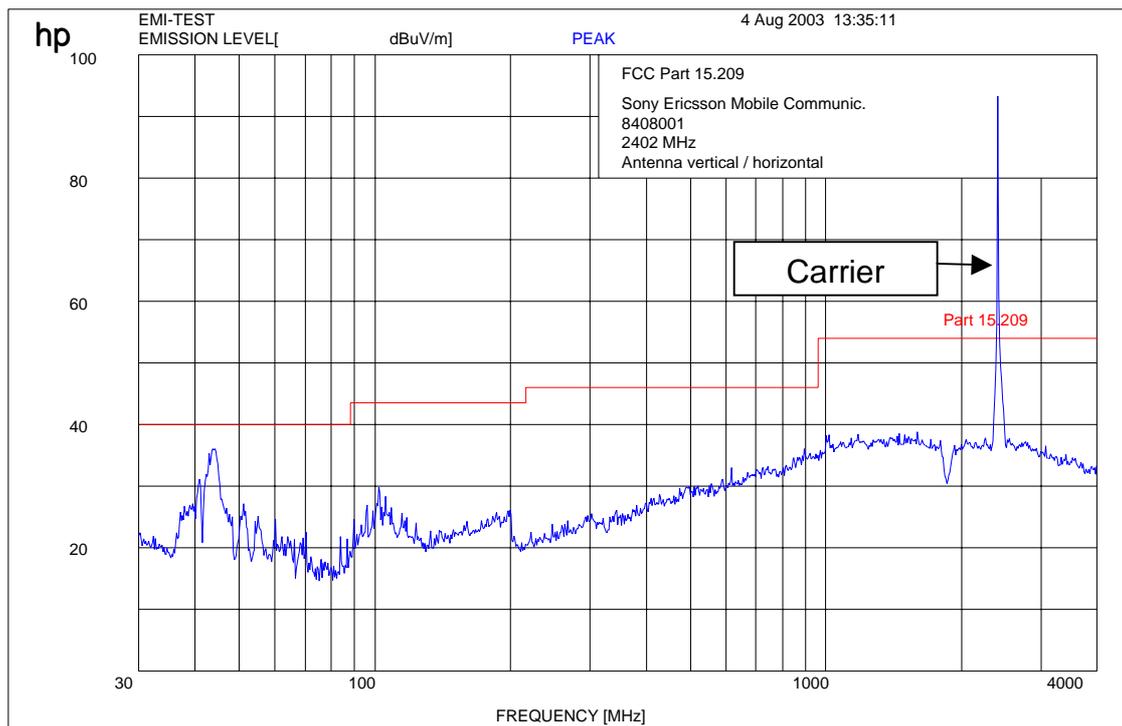

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : 8408001
Ambient temperature : 27.8°C
Relative humidity : 43%

EMISSION LIMITATIONS
2402 MHz - 12 GHz

SUBCLAUSE § 15.247 (c) (1)

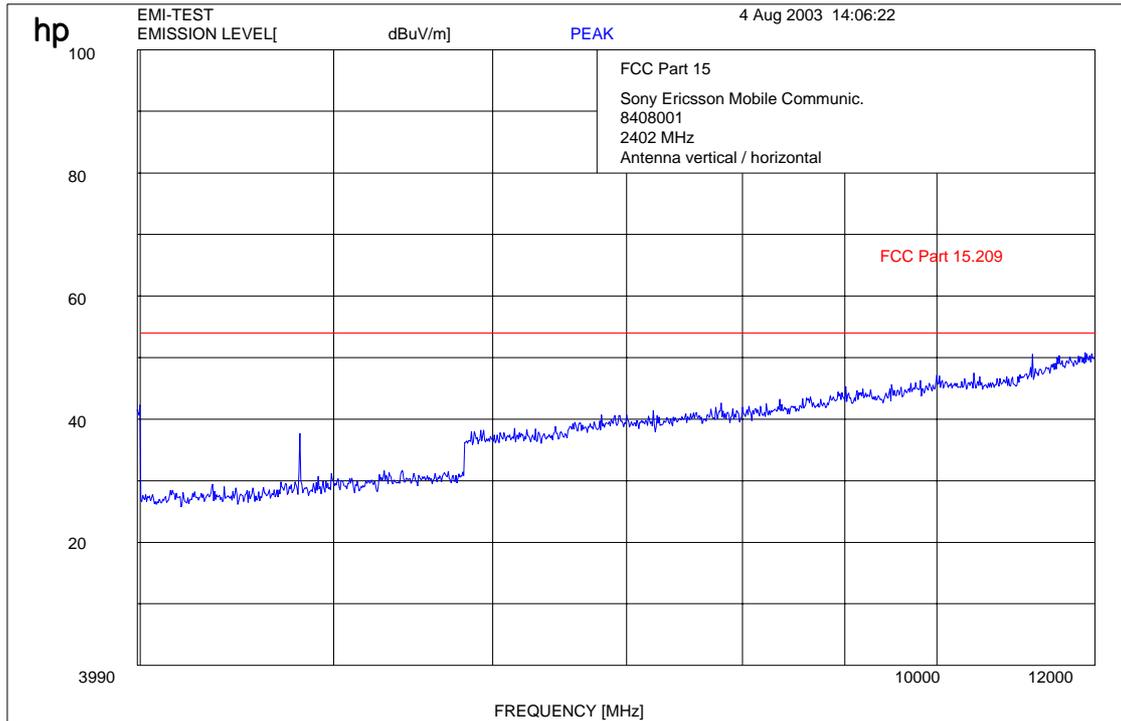

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24; 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS
 2402 MHz

SUBCLAUSE § 15.247 (c) (1)

	Marker 1 [T1]	RBW	10 MHz	RF Att	0 dB
	Ref Lvl	43.75 dBµV/m	VBW	10 MHz	
	97 dB*	19.21643287 GHz	SWT	74 ms	Unit dBµV/m

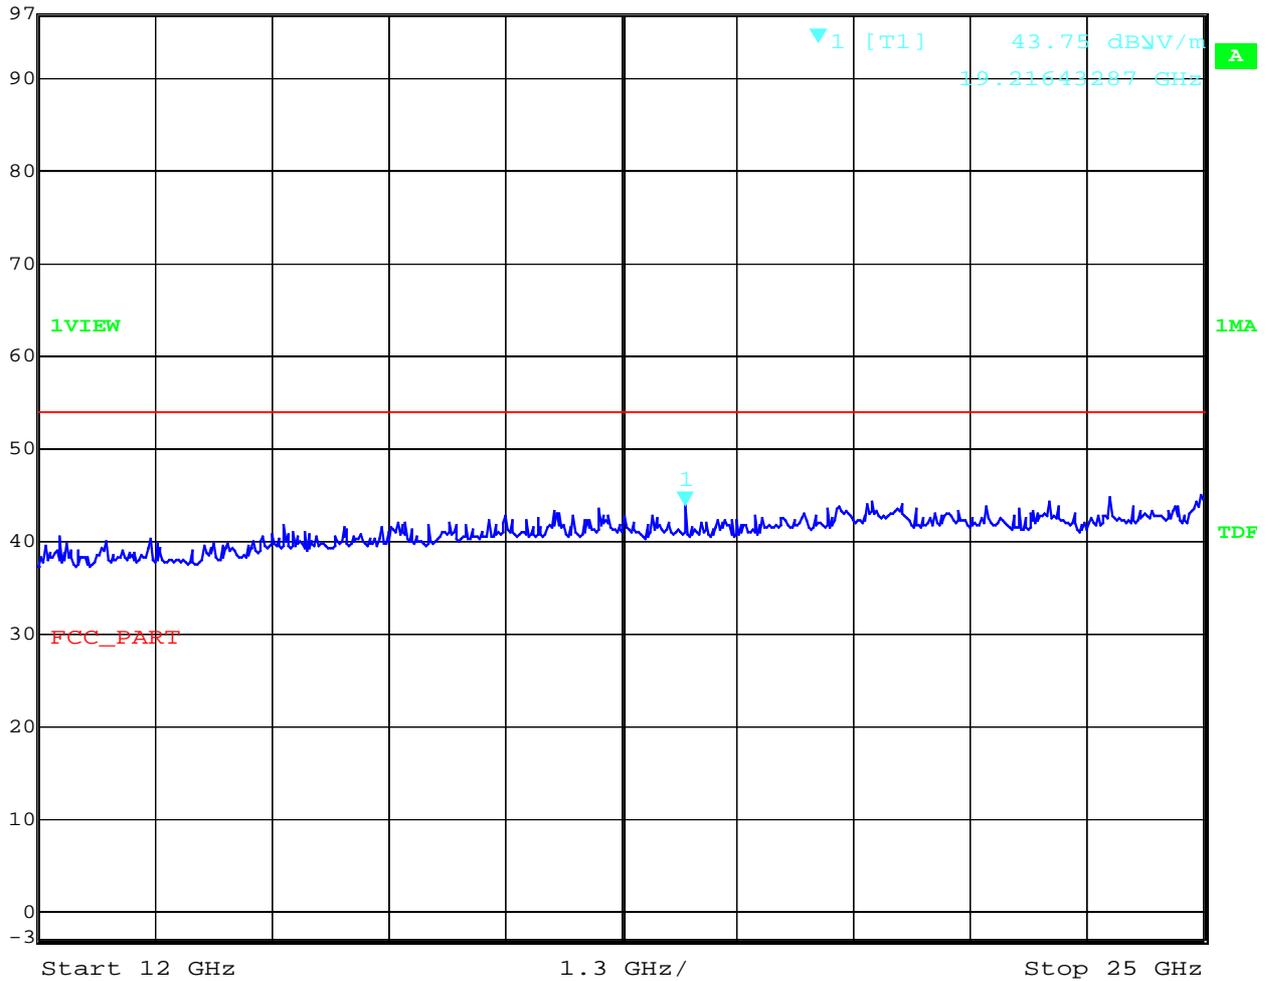

Date: 4.AUG.2003 10:52:55
 f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS **SUBCLAUSE § 15.247 (c)**


In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 – 24; 64

Equipment under test : 8408001
Ambient temperature : 27.8°C
Relative humidity : 43%

EMISSION LIMITATIONS
2441 MHz -4 GHz

SUBCLAUSE § 15.247 (c) (1)

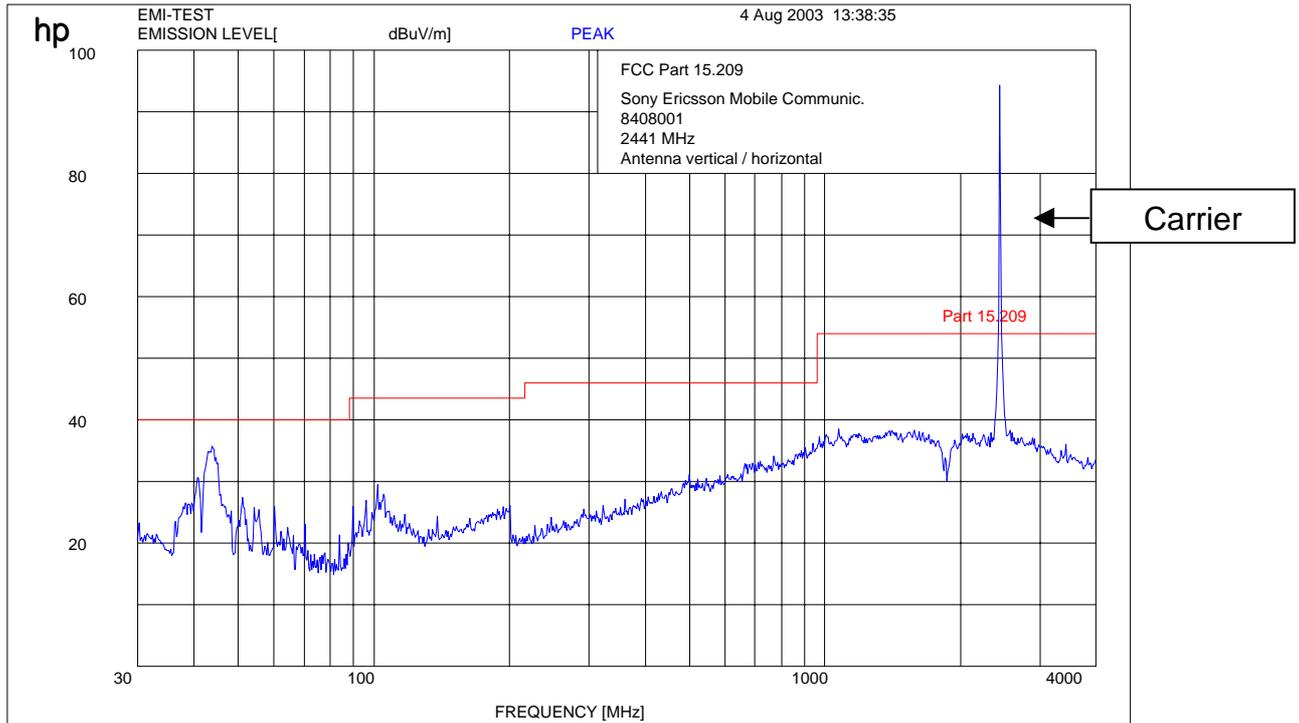

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS


SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS
2441 MHz - 12 GHz

SUBCLAUSE § 15.247 (c) (1)

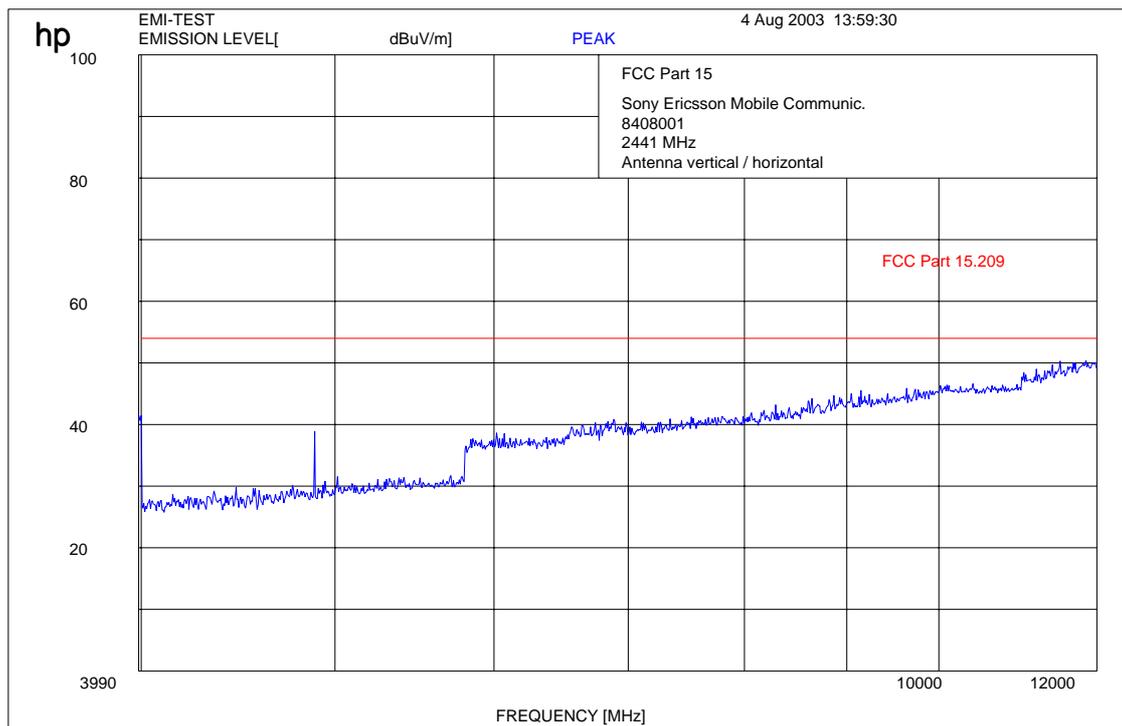

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)

Equipment under test : 8408001
Ambient temperature : 27.8°C
Relative humidity : 43%

EMISSION LIMITATIONS
2480 MHz – 4 GHz

SUBCLAUSE § 15.247 (c) (1)

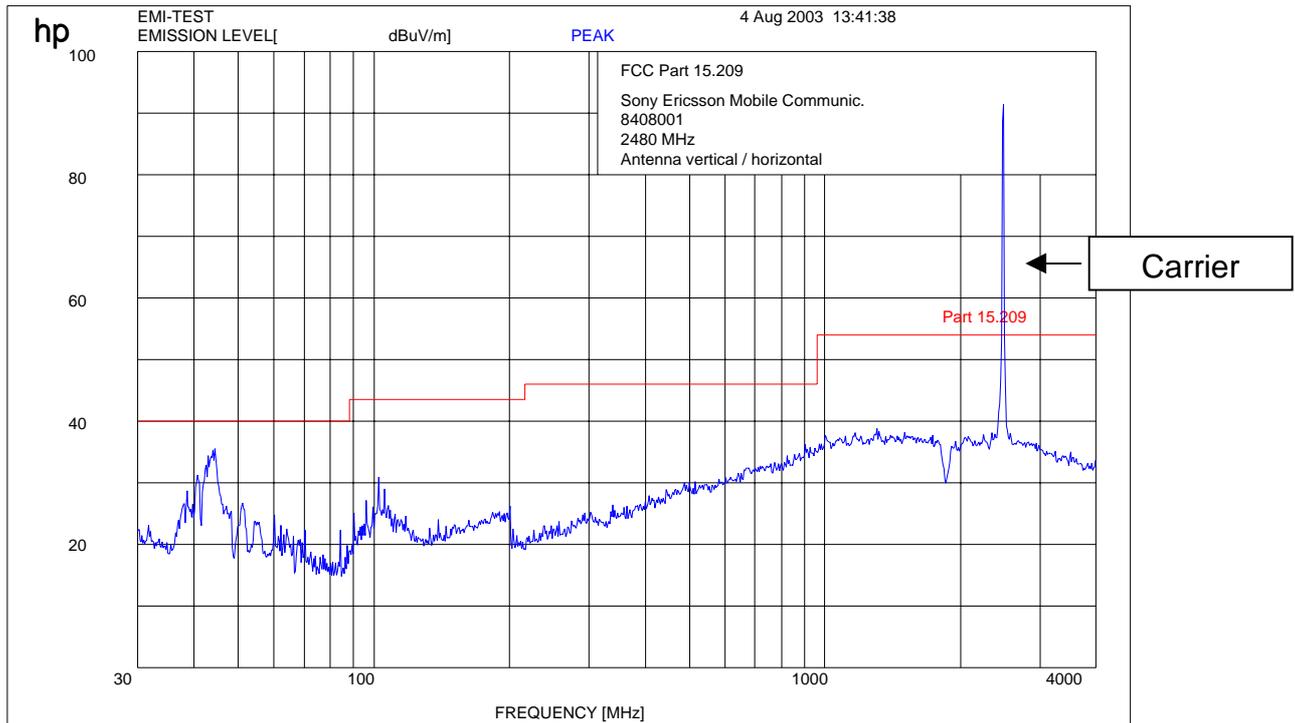

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24; 64

Equipment under test : 8408001
Ambient temperature : 27.8°C
Relative humidity : 43%

EMISSION LIMITATIONS
2480 MHz – 12 GHz

SUBCLAUSE § 15.247 (c) (1)

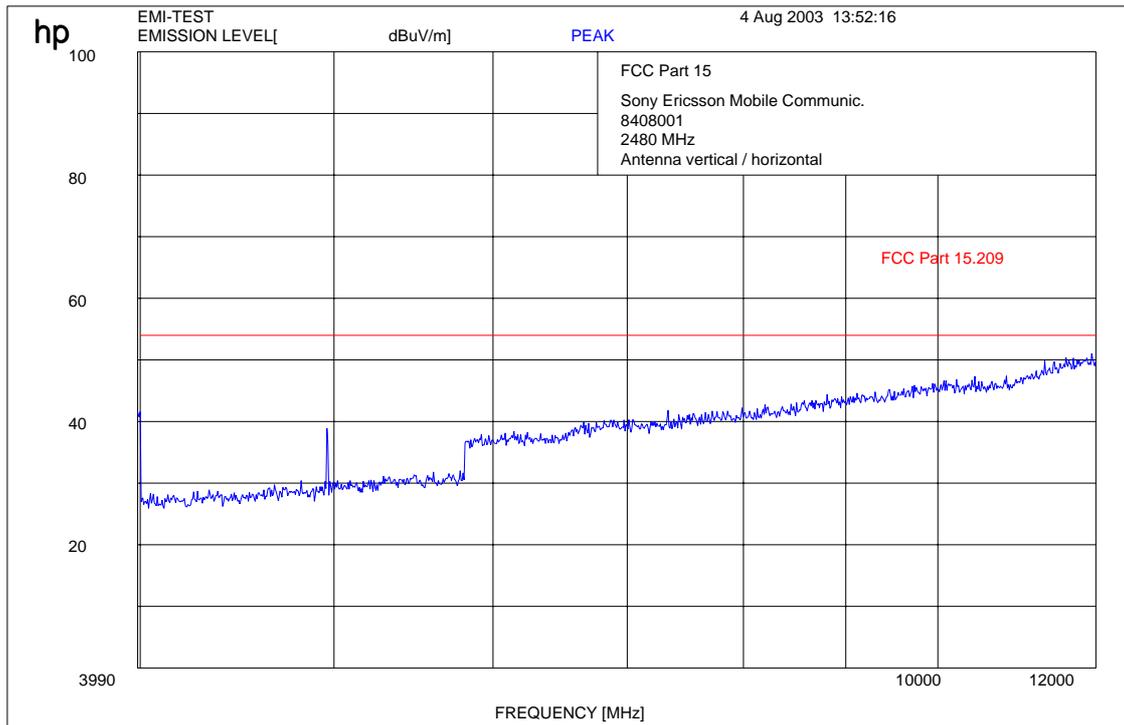

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED

(for reference numbers see test equipment listing)


17 – 24; 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS
 2480 MHz –25 GHz

SUBCLAUSE § 15.247 (c) (1)

	Ref Lvl	44.93 dBµV/m	RBW	10 MHz	RF Att	0 dB
	97 dB*	24.45290581 GHz	VBW	10 MHz		
			SWT	74 ms	Unit	dBµV/m

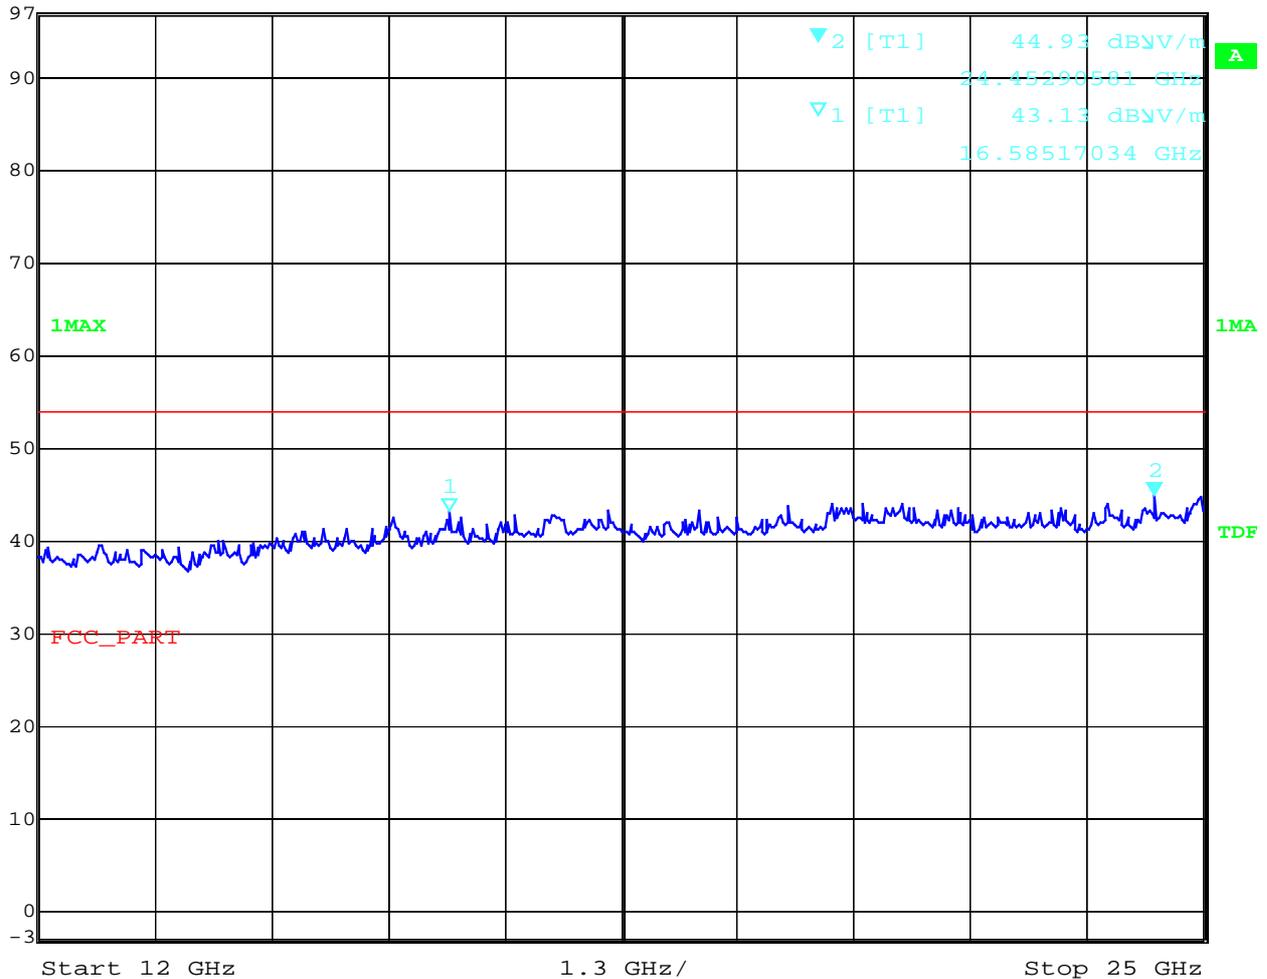

Date: 4.AUG.2003 10:45:30

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz

LIMITS

SUBCLAUSE § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED


(for reference numbers see test equipment listing)

17 – 24; 64

Equipment under test : 8408001
Ambient temperature : 27.8°C
Relative humidity : 43%

EMISSION LIMITATIONS (Receiver) SUBCLAUSE § 15.109
9 kHz –30 MHz


EUT: 8408001
Manufacturer: Sony Ericsson Mobile Communocations AB
Operating Condition: Rx, Idle mode
Test Site: Cetecom, Room 6
Operator: Berg
Test Specification:
Comment:
Start of Test: 05.08.03 / 07:23:09

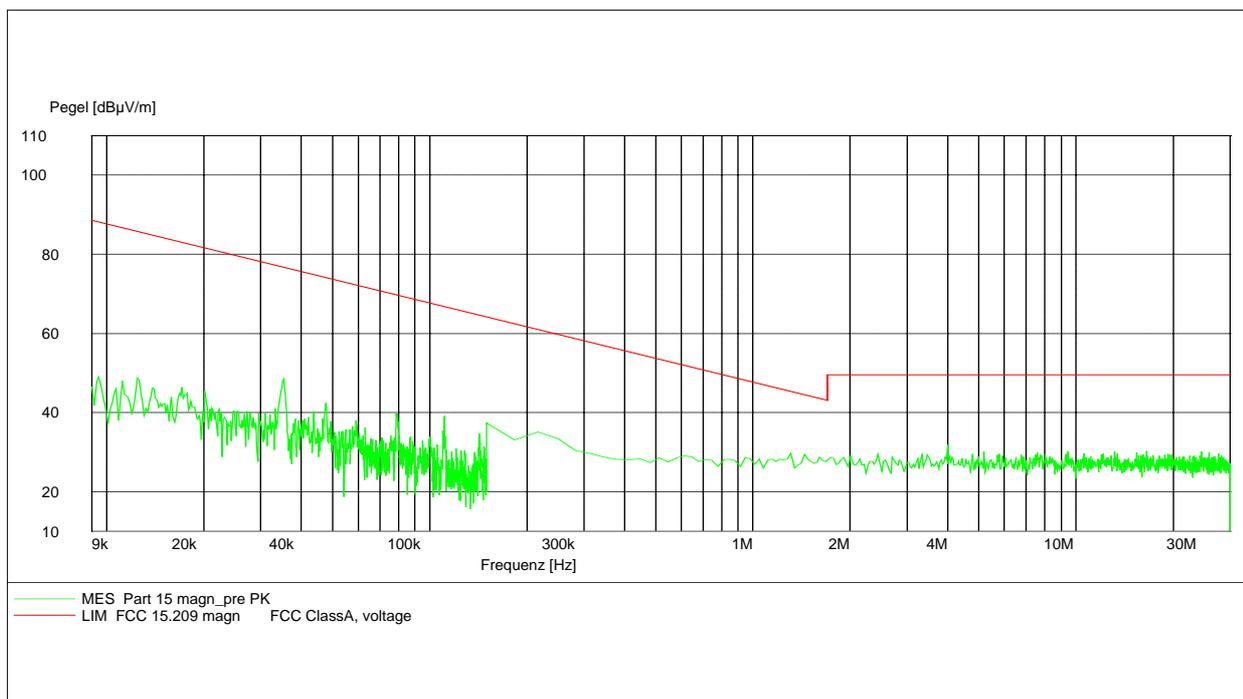

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
(for reference numbers see test equipment listing)
17 – 24; 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS (Receiver) SUBCLAUSE § 15.109

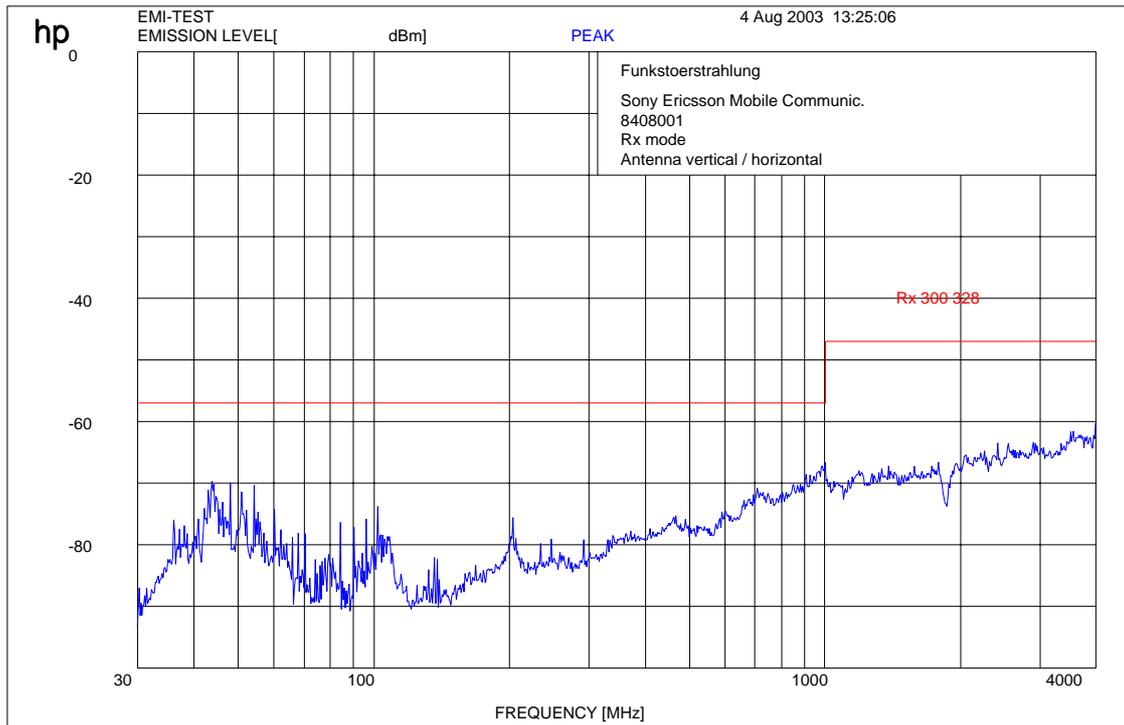

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz


Limits SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 – 24; 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

EMISSION LIMITATIONS (Receiver) SUBCLAUSE § 15.109

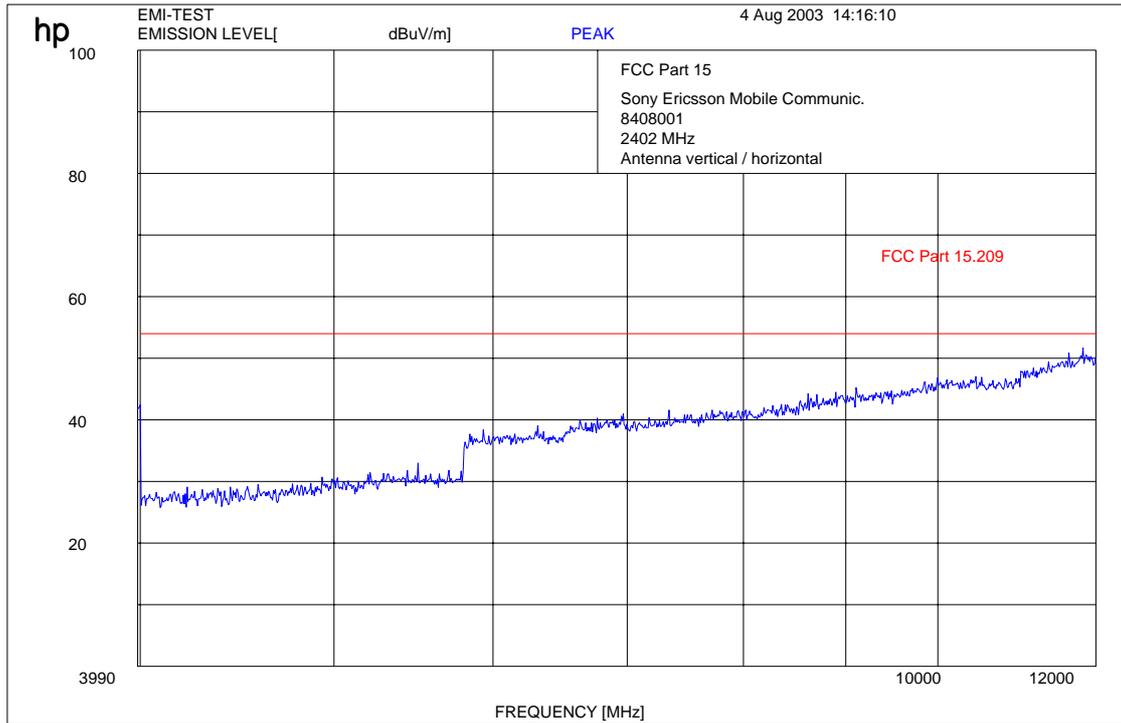

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz

Limits SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

REFERENCE NUMBER(S) OF TEST EQUIPMENT USED
 (for reference numbers see test equipment listing)
 17 – 24; 64

Equipment under test : 8408001
 Ambient temperature : 27.8°C
 Relative humidity : 43%

RECEIVER SPURIOUS RADIATION
 Radiated

§ 15.109

SPURIOUS EMISSIONS LEVEL (µV/m)								
CH 1 / 2 / 3								
f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)	f (MHz)	Detector	Level (µV/m)
< 1 GHz all peaks < 45.2								
1358.1	PK	90.2						
2394.2	PK	97.7						
19793.6	PK	126.6						
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz
 see above plots

Measurement distance see table

Limits

SUBCLAUSE § 15.109

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS


To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	8566 A	Hewlett-Packard	1925A00257
02	Analyzer Display	8566 A	Hewlett-Packard	1925A00860
03	Oscilloscope	7633	Tektronix	230054
04	Radio Analyzer	CMTA 54	Rohde & Schwarz	894 043/010
05	System Power Supply	6038 A	Hewlett-Packard	2848A07027
06	Signal Generator	8111 A	Hewlett-Packard	2215G00867
07	Signal Generator	8662 A	Hewlett-Packard	2224A01012
08	Funktionsgenerator	AFGU	Rohde & Schwarz	862 480/032
09	Regeltrenntrafo	MPL	Erfi	91350
10	Netznachbildung	NNLA 8120	Schwarzbeck	8120331
11	Relais-Matrix	PSU	Rohde & Schwarz	893 285/020
12	Power-Meter	436 A	Hewlett-Packard	2101A12378
13	Power-Sensor	8484 A	Hewlett-Packard	2237A10156
14	Power-Sensor	8482 A	Hewlett-Packard	2237A00616
15	Modulationsmeter	9008	Racal-Dana	2647
16	Frequenzzähler	5340 A	Hewlett-Packard	1532A03899
17	Absorber Schirmkabine	---	MWB	87400/002
18	Spectrum Analyzer	85660 B	Hewlett-Packard	2747A05306
19	Analyzer Display	85662 A	Hewlett-Packard	2816A16541
20	Quasi Peak Adapter	85650 A	Hewlett-Packard	2811A01131
21	RF-Preselector	85685 A	Hewlett-Packard	2833A00768
22	Biconical Antenne	3104	Emco	3758
23	Log. Per. Antenne	3146	Emco	2130
24	Double Ridge Horn	3115	Emco	3088
25	EMI-Testreceiver	ESAI	Rohde & Schwarz	863 180/013
26	EMI-Analyzer-Display	ESAI-D	Rohde & Schwarz	862 771/008
27	Biconical Antenne	HK 116	Rohde & Schwarz	888 945/013
28	Log. Per. Antenne	HL 223	Rohde & Schwarz	825 584/002
29	Relais-Switch-Unit	RSU	Rohde & Schwarz	375 339/002
30	Highpass	HM985955	FSY Microwave	001
31	Amplifier	P42-GA29	Tron-Tech	B 23602
32	Absorber Schirmkabine		Frankonia	
33	Steuerrechner	PSM 7	Rohde & Schwarz	834 621/004
34	EMI Test Reciever	ESMI	Rohde & Schwarz	827 063/010
35	EMI Test Receiver	Display	Rohde & Schwarz	829 808/010


No	Instrument/Ancillary	Type	Manufacturer	Serial No.
36	Controler	HD 100	Deisel	100/322/93
37	Relais Matrix	PSN	Rohde & Schwarz	829 065/003
38	Control Unit	GB 016 A2	Rohde & Schwarz	344 122/008
39	Relais Switch Unit	RSU	Rohde & Schwarz	316 790/001
40	Power Supply	6032A	Hewlett Packard	2846A04063
41	Spektrum Monitor	EZM	Rohde & Schwarz	883 720/006
42	Meßempfänger	ESH 3	Rohde & Schwarz	890 174/002
43	Meßempfänger	ESVP	Rohde & Schwarz	891 752/005
44	Biconi Ant. 20-300MHz	HK 116	Rohde & Schwarz	833 162/011
45	Logper Ant. 0.3-1 GHz	HL 223	Rohde & Schwarz	832 914/010
46	Amplifier 0.1-4 GHz	AFS4	Miteq Inc.	206461
47	Logper Ant. 1-18 GHz	HL 024 A2	Rohde & Schwarz	342 662/002
48	Polarisationsnetzwerk	HL 024 Z1	Rohde & Schwarz	341 570/002
49	Double Ridge G Horn Antenne 1-26.5 GHz	3115	EMCO	9107-3696
50	Microw. Sys. Amplifier 0.5- 26.5 GHz	8317A	Hewlett Packard	3123A00105
51	Audio Analyzer	UPD	Rohde & Schwarz	1030.7500.04
52	Steuerrechner	PSM 7	Rohde & Schwarz	883 086/026
53	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	861 406/005
54	DC V-Netzwerk	ESH3-Z6	Rohde & Schwarz	893 689/012
55	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	861 189/014
56	AC 2 Phasen V-Netzwerk	ESH3-Z5	Rohde & Schwarz	894 981/019
57	AC-3 Phasen V-Netzwerk	ESH2-Z5	Rohde & Schwarz	882 394/007
58	Stromversorgung	6032A	Rohde & Schwarz	2933A05441
59	HF-Test Empfänger	ESVP.52	Rohde & Schwarz	881 487/021
60	Spectrum Monitor	EZM	Rohde & Schwarz	883 086/026
61	HF-Test Empfänger	ESH3	Rohde & Schwarz	881 515/002
62	Relais Matrix	PSU	Rohde & Schwarz	882 943/029
63	Relais Matrix	PSU	Rohde & Schwarz	828 628/007
64	Spectrum Analyzer	FSIQ 26	Rohde & Schwarz	119.6001.27
65	Spectrum Analyzer	HP 8565E	Hewlett Packard	3473A00773
66				

Test setup

Radiated Emissions

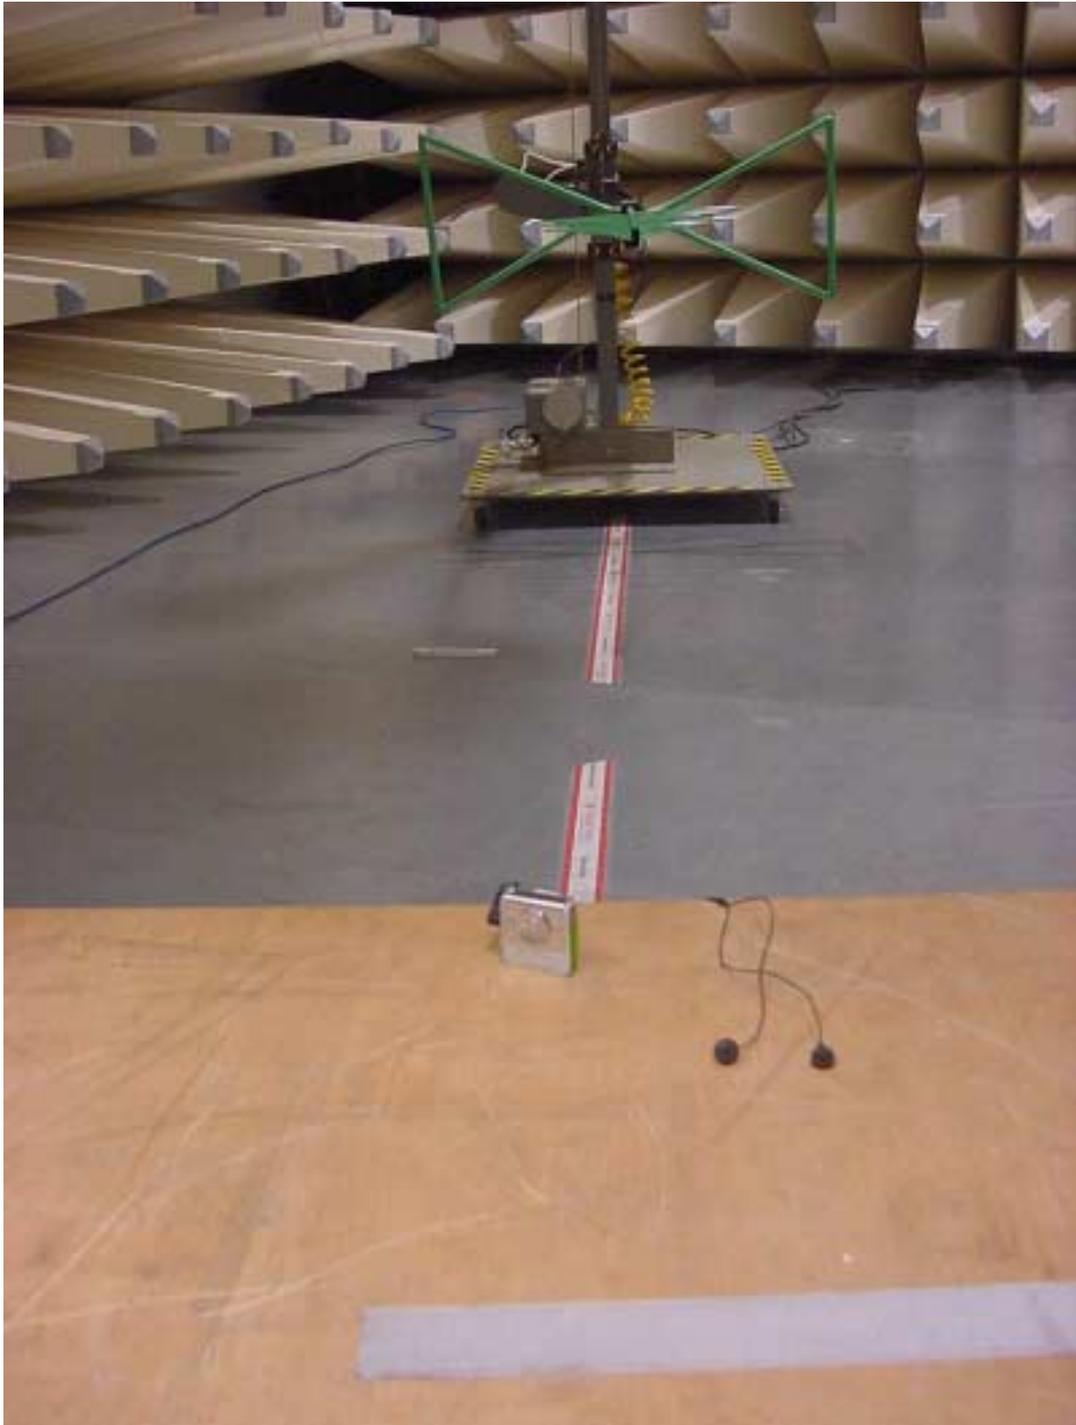

Test site

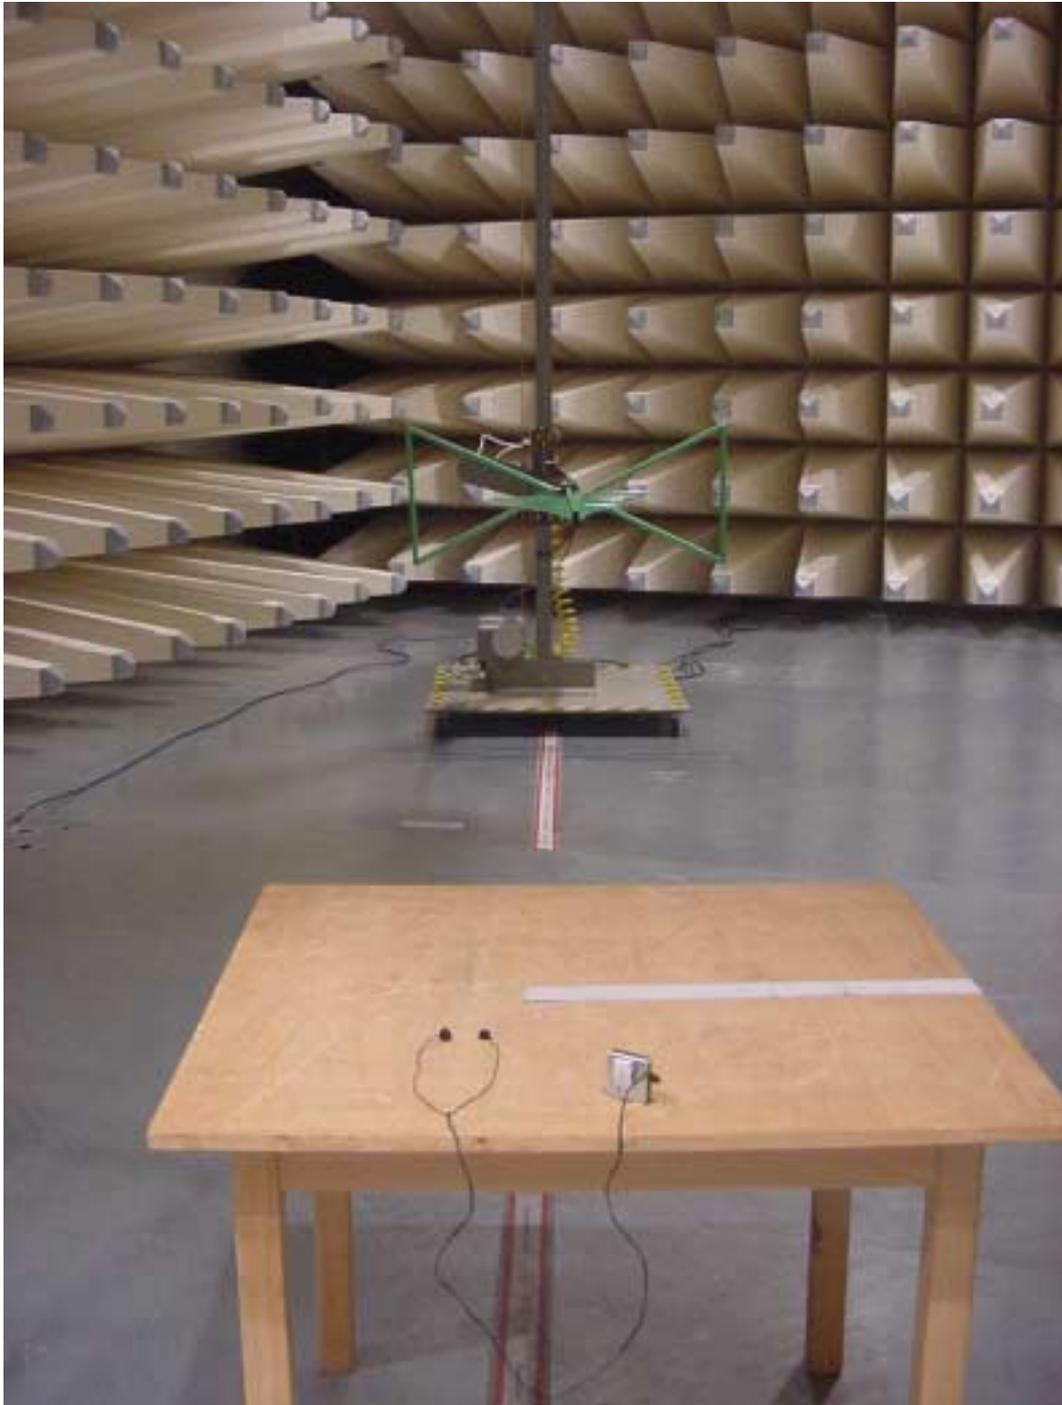

PHOTOGRAPH OF THE EQUIPMENT




PHOTOGRAPH OF THE EQUIPMENT




PHOTOGRAPH OF THE EQUIPMENT



PHOTOGRAPH OF THE EQUIPMENT

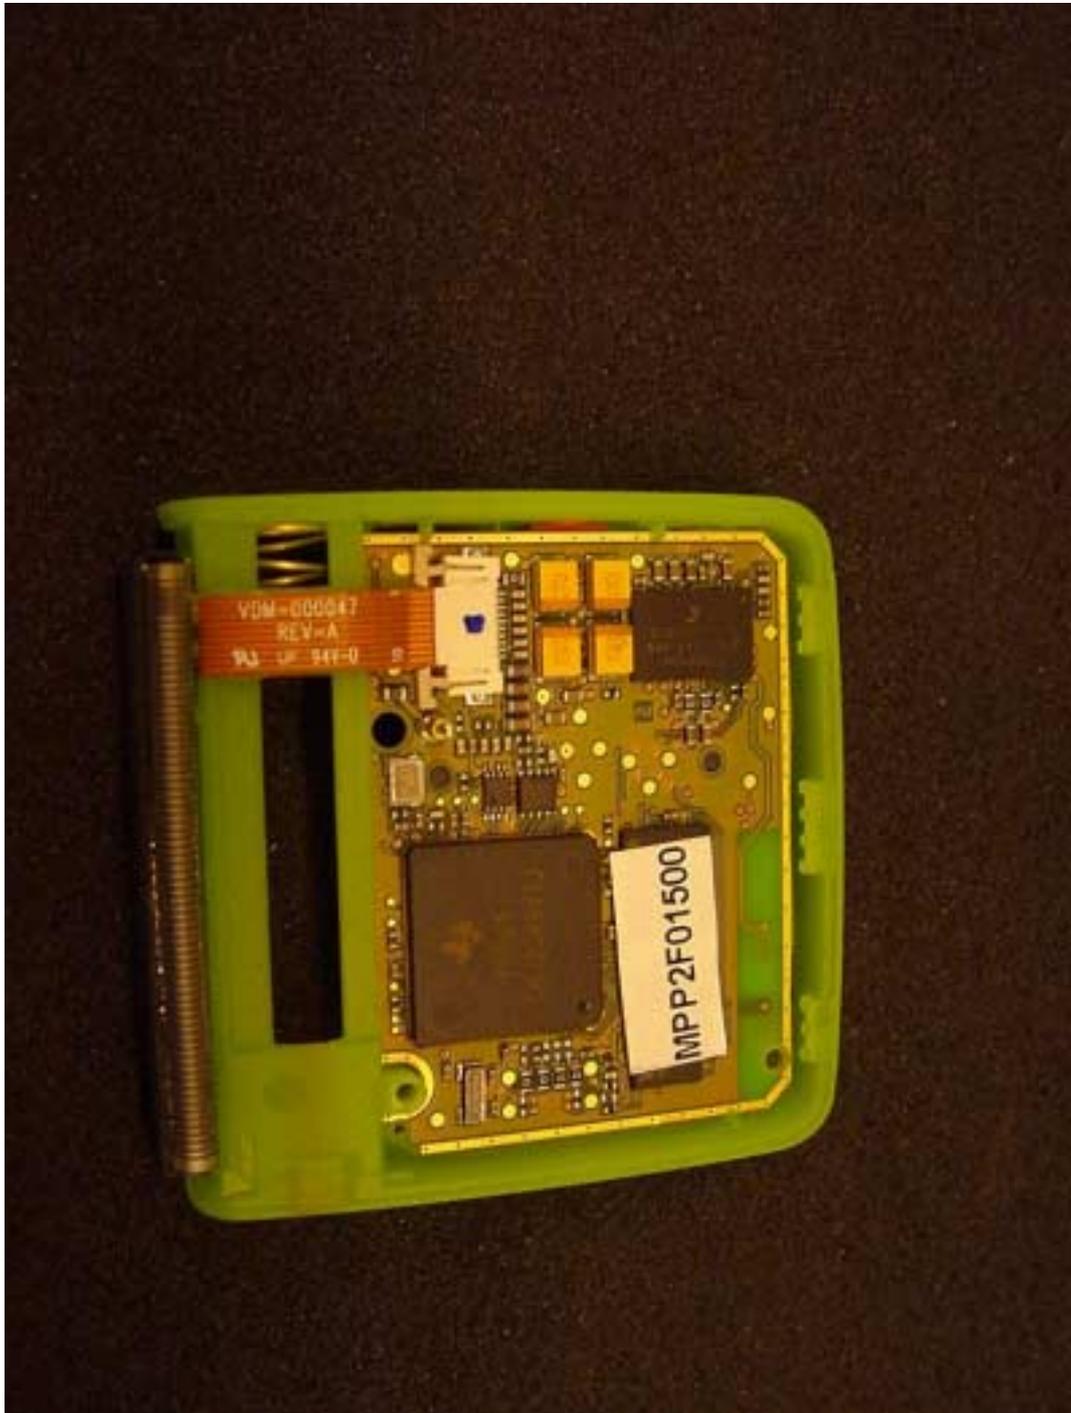

PHOTOGRAPH OF THE EQUIPMENT

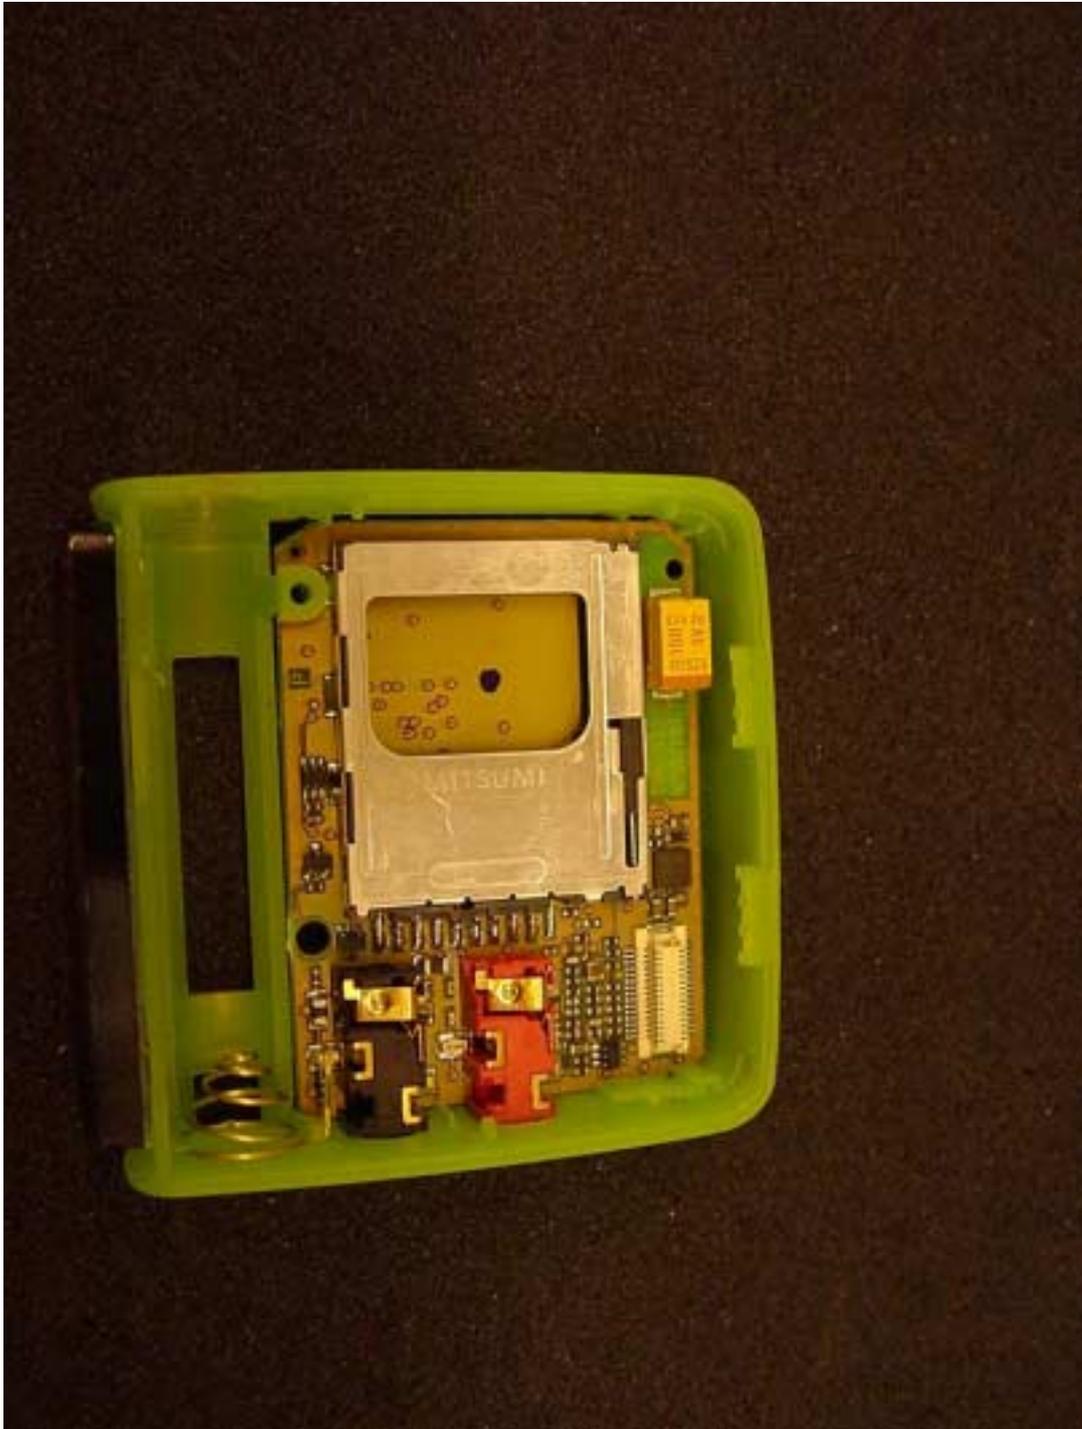

PHOTOGRAPH OF THE EQUIPMENT



PHOTOGRAPH OF THE EQUIPMENT

