



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

No.

BGGIN05:107

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGGI/NM *Ramadan Plicanic*

050429

050429

A

File

Report issued by Accredited SAR Laboratory

for

PY7A1022012

Date of test: *26-27, April, 2005*

Laboratory: Sony Ericsson SAR Test Laboratory
Sonyericsson Mobile Communications AB
Nya Vattentornet
SE-221 82 LUND, Sweden

Testing Engineer: *Hamid Kami Shirazi*
Kami.shirazi@sonyericsson.com
+4646232644

Testing Approval *Ramadan Plicanic*
Ramadan.Plicanic@sonyericsson.com
+46 46 19 38 62

Statement of Compliance

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the product

Sony Ericsson Type AAB-1022012-BV; FCC ID:PY7A1022012;IC:4170B-A1022012

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

This laboratory is accredited to ISO/IEC 17025 (SWEDAC accreditation no. 1847).



Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. The accredited laboratory activities meet the requirements in SS-EN ISO/IEC 17025 (2000). This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory.

The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this report.
© Sony Ericsson Mobile Communication AB, 2005



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File

1 Table of contents

2 INTRODUCTION 3

3 DEVICE UNDER TEST 3

3.1 ANTENNA DESCRIPTION 3

3.2 DEVICE DESCRIPTION 3

4 TEST EQUIPMENT..... 4

4.1 DOSIMETRIC SYSTEM 4

4.2 ADDITIONAL EQUIPMENT 4

5 ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID 5

6 SYSTEM ACCURACY VERIFICATION 5

7 SAR MEASUREMENT UNCERTAINTY 6

8 TEST RESULTS 7

9 REFERENCES 8

10 APPENDIX..... 9

10.1 PHOTOGRAPHS OF THE DEVICE UNDER TEST 10

10.2 DEVICE POSITION ON SAM TWINS PHANTOM 11



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File

2 Introduction

In this test report, compliance of the Sony Ericsson PY7A1022012 portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specifications of Wireless Handsets* [1].

3 Device Under Test

3.1 Antenna Description

Type	Build in	
Location	Up on the back side	
Dimensions	Max length	32mm
	Max width	20mm
Configuration	PIFA	

3.2 Device description

Device model	PY7A1022012
Serial number	692360-0
Mode	GSM1900
Multiple Access Scheme	TDMA
Maximum Output Power Setting	30.0dBm
Factory Tolerance in Power Setting	±0.5dBm
Maximum Peak Output Power for GPRS	28.5±0.5dBm
Crest Factor	8
Transmitting Frequency Range(MHz)	1850.2 – 1909.8
Prototype or Production Unit	Preproduction
Device Category	Portable
RF exposure environment	General population / uncontrolled



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File

4 Test equipment

4.1 Dosimetric system

SAR measurements were made using the DASY3 professional system (software version 3.1c) with SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

Description	Serial Number	Due Date
DASY3 DAE V1	419	032006
E-field probe ETDV6	1585	032006
Dipole Validation Kit, D1900V2	5d002	032006

4.2 Additional equipment

Description	Inventory Number	Due Date
Signal generator ESG-D4000A	INV 462935	112006
Directional coupler HP778D	INV 2903	012006
Power meter R&S NRVD	INV 483920	012006
Power sensor R&S NRV-Z5	INV 2333	012006
Power sensor R&S NRV-Z5	INV 2334	012006
Termination 65N50-0-11	INV 2903	012006
Network analyzer HP8753C	INV421671	092005
S-parameter test set HP85047A	INV 421670	092005
Dielectric probe kit HP8507D	INV 2000053	012006
CMU200	Ser 833870/062	032006



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File

5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity, ϵ_r , and the conductivity, σ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density, ρ , entered into the DASY3 software is also given.

Recommended limits for permittivity ϵ_r , conductivity σ and mass density ρ are also shown.

f (MHz)	Tissue type	Limits / Measured	Dielectric Parameters		
			ϵ_r	σ (S/m)	ρ (g/cm ³)
1900	Head	Measured, 15/04/2005	38.4	1.46	1.00
		Recommended	40.0	1.40	1.00
1900	Body	Measured, 17/04/2005	50.8	1.52	1.00
		Recommended	53.3	1.52	1.00

6 System accuracy verification

A system accuracy verification of the DASY3 was performed using the dipole validation kit listed in section 3.1. The system verification test was conducted on the same day as the measurement of the DUT. Measurement made in ambient temperature 23.5 °C and humidity 24%. The obtained results are displayed in the table below.

RF noise had been measured in liquid when all RF equipment in lab was set off. Measured value was 0.00002mW/g in 1g mass.

f (MHz)	Tissue type	Measured / Reference	SAR (W/kg) 1g/10g	Dielectric Parameters			Liquid t(°C)
				ϵ_r	σ (S/m)	ρ (g/cm ³)	
1900	Head	Measured, 26/04/2005	41.4/21.0	38.4	1.46	1.00	23
		Measured, 27/04/2005	43.0/21.6	38.4	1.46	1.00	23
		Reference	41.6/21.5	38.8	1.44	1.00	-
1900	Body	Measured, 27/04/2005	43.1/22.1	50.8	1.52	1.00	23.5
		Reference	43.2/22.4	51.2	1.59	1.00	-



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File

7 SAR measurement uncertainty

SAR measurement uncertainty evaluation for Sonyericsson PY7A1022012 phone

Uncertainty Component	Uncer. (%)	Prob Dist.	Div.	C _i	GSM 1900-Head	GSM 1900-Body
Measurement System						
Probe Calibration	±4.4	N	1	1	±4.4	±4.4
Axial Isotropy	±4.7	R	√3	0.5	±1.4	±1.4
Spherical Isotropy	±9.6	R	√3	0.5	±2.8	±2.8
Spatial resolution	±0.0	R	√3	1	±0.0	±0.0
Boundary effect	±5.5	R	√3	1	±3.2	±3.2
Probe linearity	±4.7	R	√3	1	±2.7	±2.7
Detection limit	±1.0	R	√3	1	±0.6	±0.6
Readout electronics	±1.0	N	1	1	±1.0	±1.0
Response time	±0.8	R	√3	1	±0.5	±0.5
Integration time	±1.4	R	√3	1	±0.8	±0.8
RF Ambient Conditions	±3.0	R	√3	1	±1.7	±1.7
Mech. Constraints of robot	±0.4	R	√3	1	±0.2	±0.2
Probe positioning	±2.9	R	√3	1	±1.7	±1.7
Extrap, interpolation and integration	±3.9	R	√3	1	±2.3	±2.3
Measurement System Uncertainty					±7.8	±7.8
Test Sample Related						
Device positioning	±6.0	N	0.89	1	±6.7	±6.7
Device holder uncertainty	±5.0	N	0.84	1	±5.9	±5.9
Power drift	-0.7/2.1	R	√3	1	-0.4	-1.2
Test Sample Related Uncertainty					±8.9	±9.0
Phantom and Tissue Parameters						
Phantom uncertainty	±4.0	R	√3	1	±2.3	±2.3
Liquid conductivity (meas)	+4.3/0.0	R	√3	0.6	+1.5	0.0
Liquid conductivity (target)	±5.0	R	√3	0.6	±1.7	±1.7
Liquid Permittivity (meas)	-0.08/-4.1	R	√3	0.6	-0.03	-1.4
Liquid Permittivity (target)	±5.0	R	√3	0.6	±1.7	±1.7
Phantom and Tissue Parameters Uncertainty					±3.6	±3.6
Combined standard uncertainty					±12.4	±12.4
Extended standard uncertainty (k=2)					±24.8	±24.8



Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

No.

BGGIN05:107

Approved

Checked

Date

Rev

Reference

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

050429

File

8 Test results

The measured 1-gram averaged SAR values of the device against head and body are provided in Table 1 and Table 2. The ambient humidity and temperature of test facility were (22-25) % and (23–24) °C respectively.

The depth of the head and body tissue simulating liquids were 15.6cm and 15.1cm. A base station simulator was used to control the device during the SAR measurements. The phone was supplied with full-charged battery for each measurement.

For head measurement, the device was tested on the right-hand phantom (corresponding to the right side of the head) and the left-hand phantom in two different phones position, cheek (touch) and tilt (cheek + 15deg). For all modes, the device was tested at the lowest, middle and highest frequencies in the transmit band.

For body measurements the phone was tested on either the phone's antenna (Back) or the Front side phone against the flat section of the phantom with 15mm distance. GPRS measurements are done only for back side of the phone for all three different channels

For Blue Tooth mode the phone was pared with Sony Ericsson HBH-60 Blue tooth head set and measured only on the worst case on both head and Body positions.

Mode	Channel	Power (dB)	Phone Position	Liquid t (°C)	SAR (W/kg)	
					Right-hand	Left-hand
					1g mass	1g mass
1900 GSM	512	30.4	Cheek	22-23	0.62	0.53
			Tilt	22-23	0.71	0.63
	661	30.3	Cheek	22-23	0.70	0.58
			Tilt	22-23	0.77	0.63
			Tilt-Blue tooth	22-23	0.75	-
	810	30.2	Cheek	22-23	0.50	0.41
Tilt			22-23	0.55	0.47	

Table1: SAR measurement result for Sony Ericsson PY7A1022012 telephone at highest possible output power. measured against the head.

Mode	Channel	Power (dBm)	Phone Position	Liquid t (°C)	SAR (W/kg) in 1 g mass	
GSM 1900 Body	512	30.4	Front to phantom	22-23	0.14	
			Antenna to phantom	22-23	0.52	
		29	Antenna to phantom, GPRS 2 Slots	22-23	0.70	
	661	30.3	Front to phantom	22-23	0.16	
			Antenna to phantom	22-23	0.67	
			Antenna to phantom Blue Tooth	22-23	0.59	
	810	30.2	29	Antenna to phantom, GPRS 2 Slots	22-23	0.79
			30.2	Front to phantom	22-23	0.11
				Antenna to phantom	22-23	0.57
29	Antenna to phantom, GPRS 2 Slots	22-23	0.90			

Table2: SAR measurement result for Sony Ericsson PY7A1022012 telephone at highest possible output power. measured against the Body.



Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File

9 References

- [1] R.Plicanic, "SAR Measurement Specification of Wireless Handsets", Sony Ericsson SAR Test Laboratory internal document GUG/N 03:141
- [2] Basic standard for the Measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300MHz-3GHz), European Standard EN 50361, July 2001
- [3] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).
- [4] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques," Std 1528-2003, June, 2003.

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File

10 Appendix

10.1 Photographs of the device under test



Front & Back sides



Down Connector

**Company Internal
REPORT**

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File



Back side with battery

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File

10.2 Device position on SAM Twins Phantom



Device position against the head: Cheek (touch) phone position



Device position against the head: Tilt (cheek+15deg) phone position

Company Internal
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGGI/NM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGGI/NM *Ramadan Plicanic* 050429

Checked

No.

BGGIN05:107

Date

050429

Rev

Reference

File



Device position against the body: 15mm distance from Phantom.

DASY4 Validation Report for Body TSL

Date/Time: 15.03.2005 15:20:32

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.57$ mho/m; $\epsilon_r = 52.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.43, 4.43, 4.43); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.3 V/m; Power Drift = 0.061 dB

Peak SAR (extrapolated) = 16.8 W/kg

SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.23 mW/g

Maximum value of SAR (measured) = 11.3 mW/g

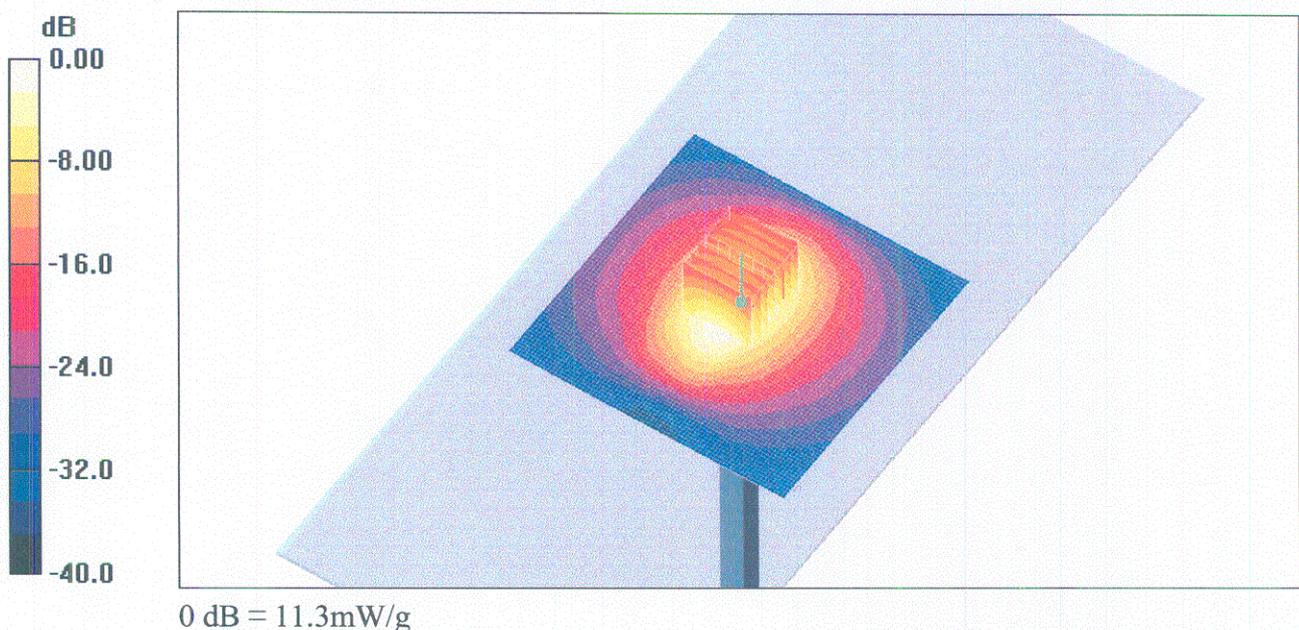

DASY4 Validation Report for Head TSL

Date/Time: 09.03.2005 15:20:45

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002

Communication System: CW-1900; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 MHz;

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.46$ mho/m; $\epsilon_r = 39.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1507; ConvF(4.96, 4.96, 4.96); Calibrated: 26.10.2004
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 07.01.2005
- Phantom: Flat Phantom 5.0; Type: QD000P50AA; Serial: 1001;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Pin = 250 mW; d = 10 mm/Area Scan (81x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 11.4 mW/g


Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 91.4 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.81 mW/g; SAR(10 g) = 5.15 mW/g


Maximum value of SAR (measured) = 11.0 mW/g

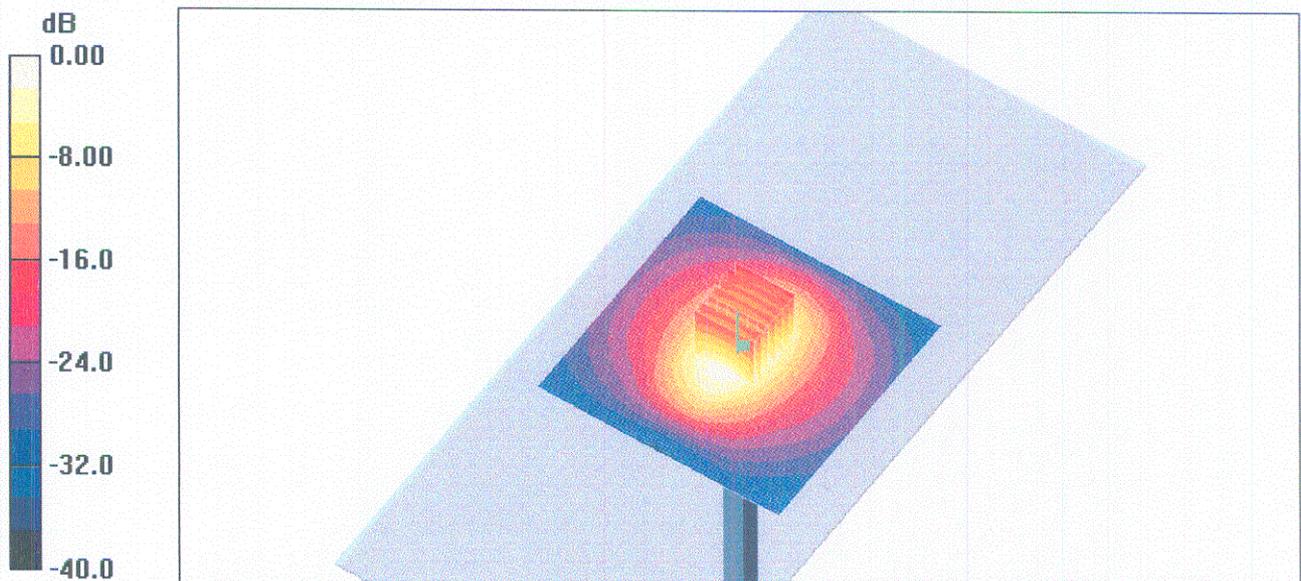

0 dB = 11.0mW/g

PY7A1022012

SAM 4 Phantom; Left Hand Section; Position: (103°,59°); Frequency: 1850 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.627 mW/g, SAR (10g): 0.348 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0
Powerdrift: -0.10 dB
PY7A1022012,IMEI:692360-0 ;1850MHz(ch512), Left Hand Side,Tilt(103°) Phone
Position, meas. Power=30.4dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427
Room's temprature=22(C-degree);Humidity=22%

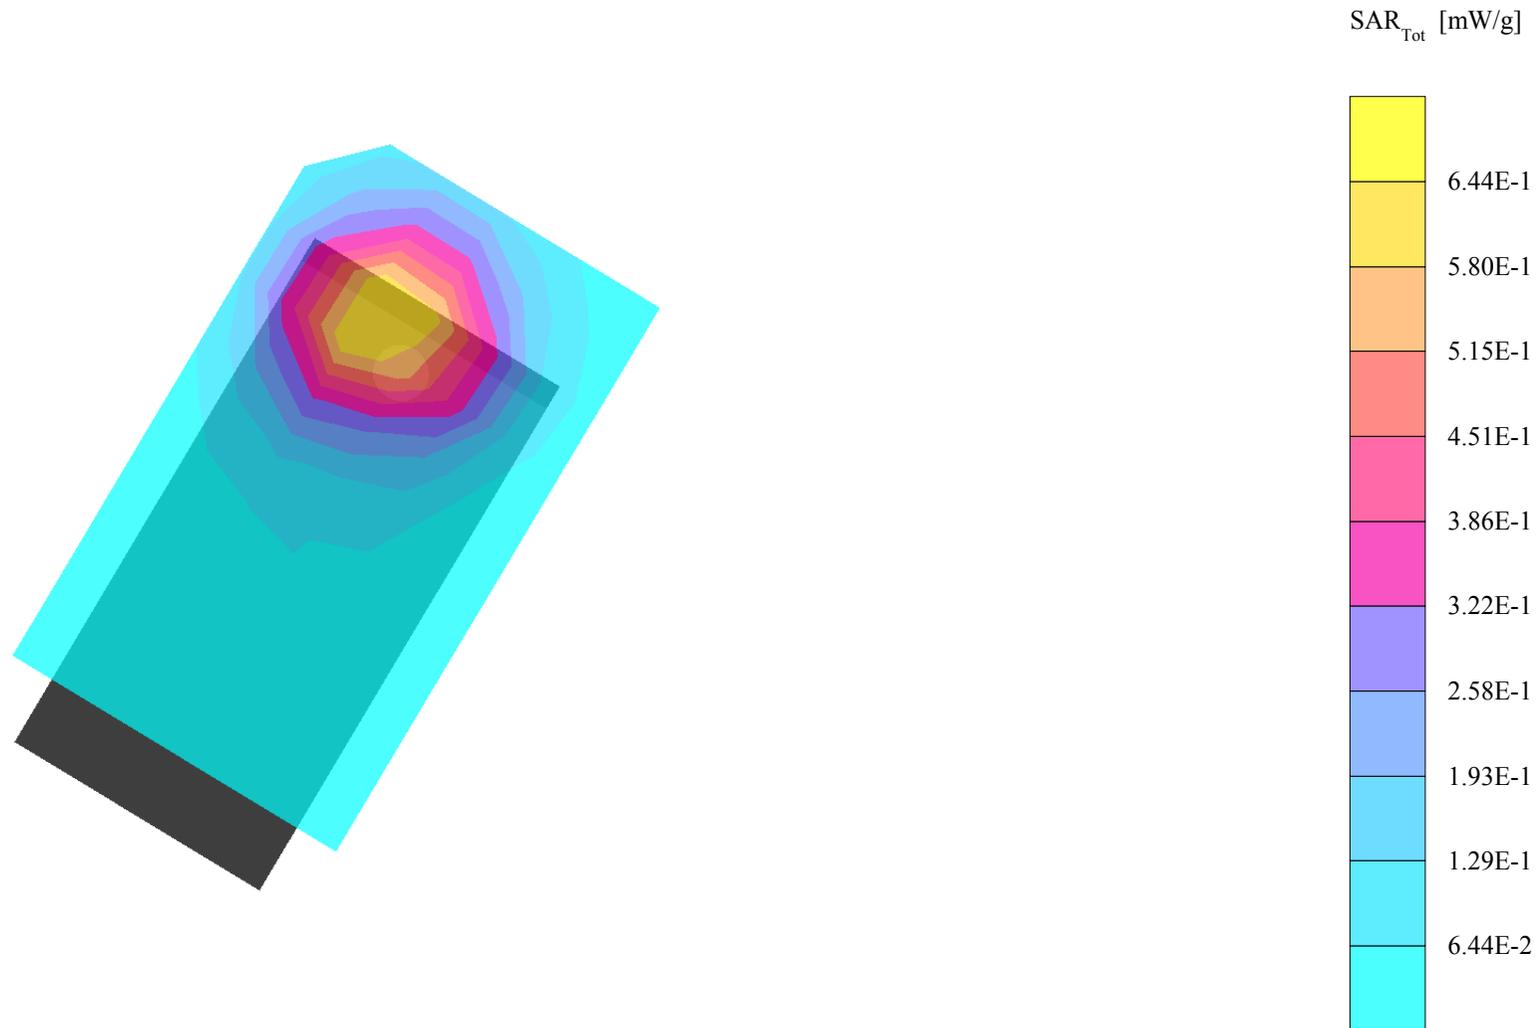

PY7A1022012

SAM 4 Phantom; Left Hand Section; Position: (88°,59°); Frequency: 1850 MHz

Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.525 mW/g, SAR (10g): 0.290 mW/g, (Worst-case extrapolation)


Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0

Powerdrift: -0.03 dB

PY7A1022012,IMEI:692360-0 ;1850MHz(ch512), Left Hand Side,Cheek(88°) Phone

Position, meas. Power=30.4dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%

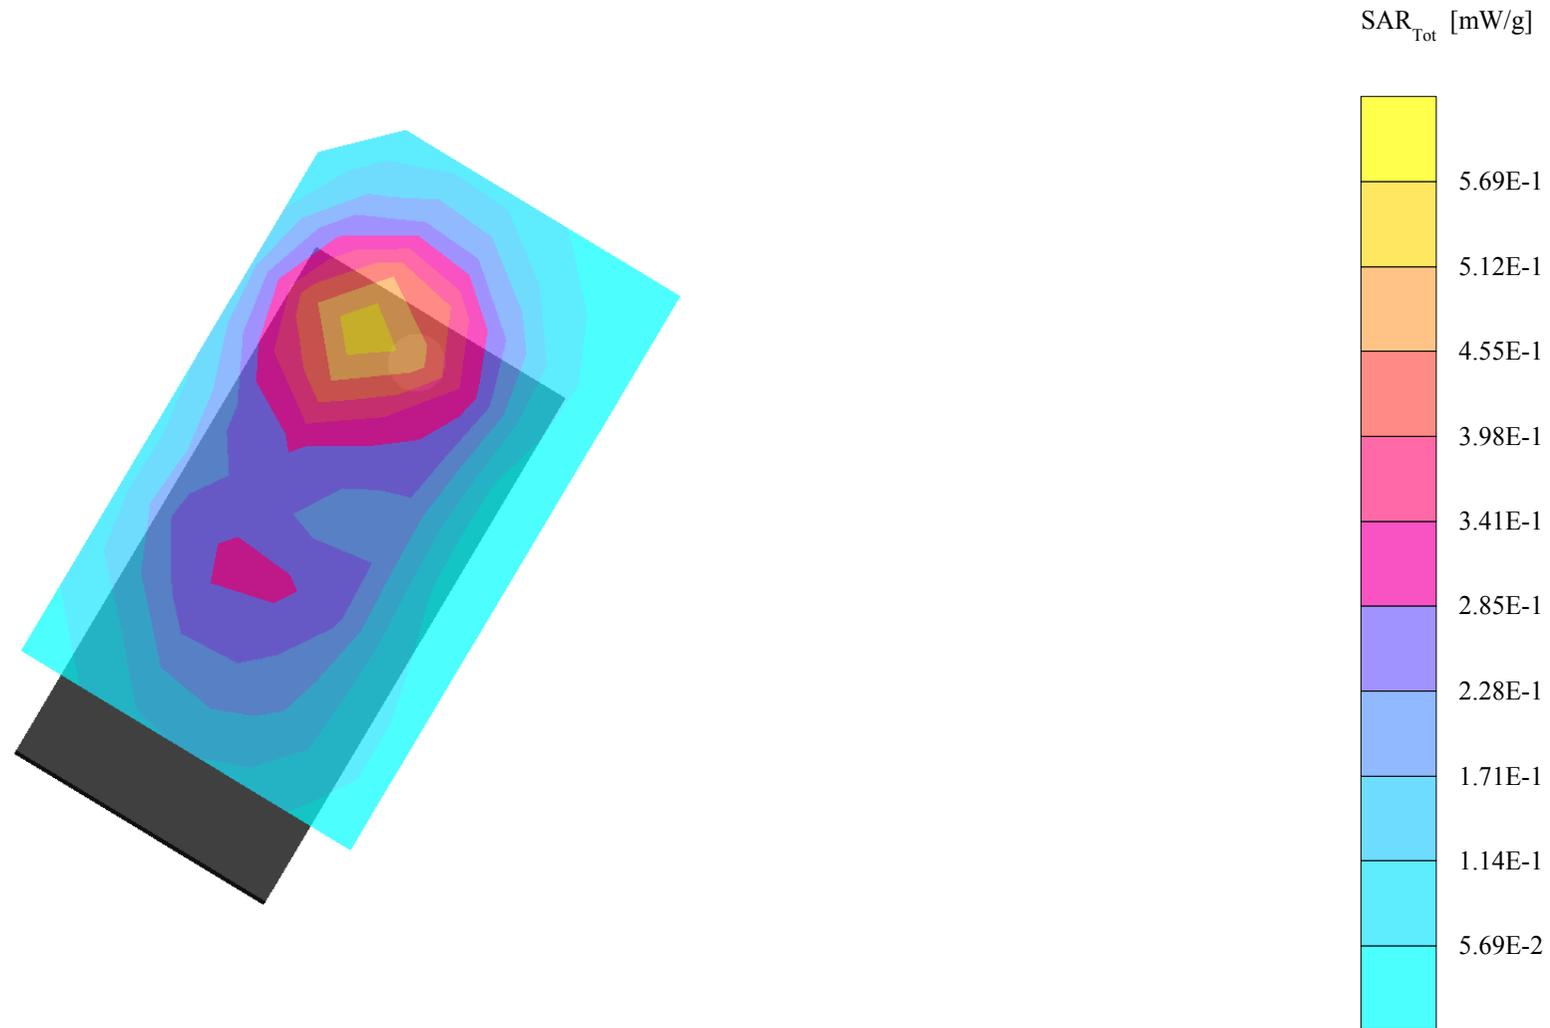

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1850 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 8.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.139 mW/g, SAR (10g): 0.0843 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.06 dB

PY7A1022012,IMEI:692360-0 ;1850MHz(ch512),Flat Hand Side phantom,Front+15mm Phone

Position, meas. Power=30.4dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%

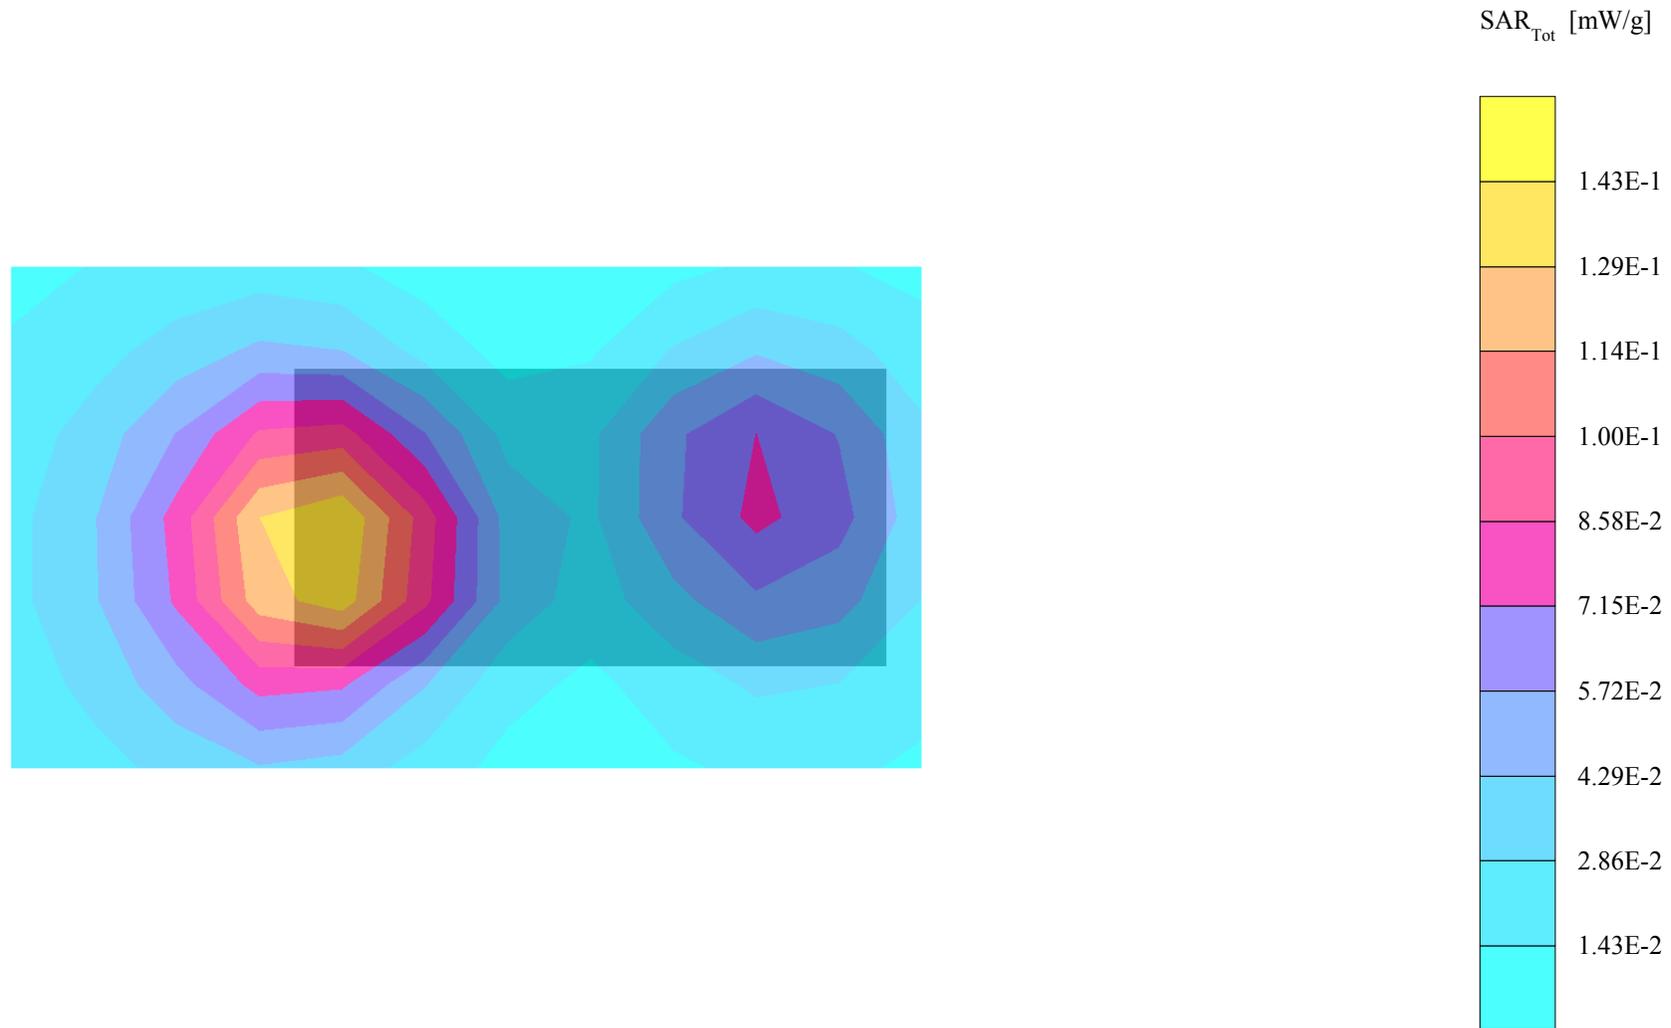

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1850 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 4.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.699 mW/g, SAR (10g): 0.389 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.06 dB

PY7A1022012,IMEI:692360-0 ;1850MHz(ch512),Flat Hand Side phantom,Back+15mm Phone


Position, meas. Power=30.4dBm, Nom.Power=30.5dBm;liquid's temprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22% Measurement of 2 GPRS 2TX

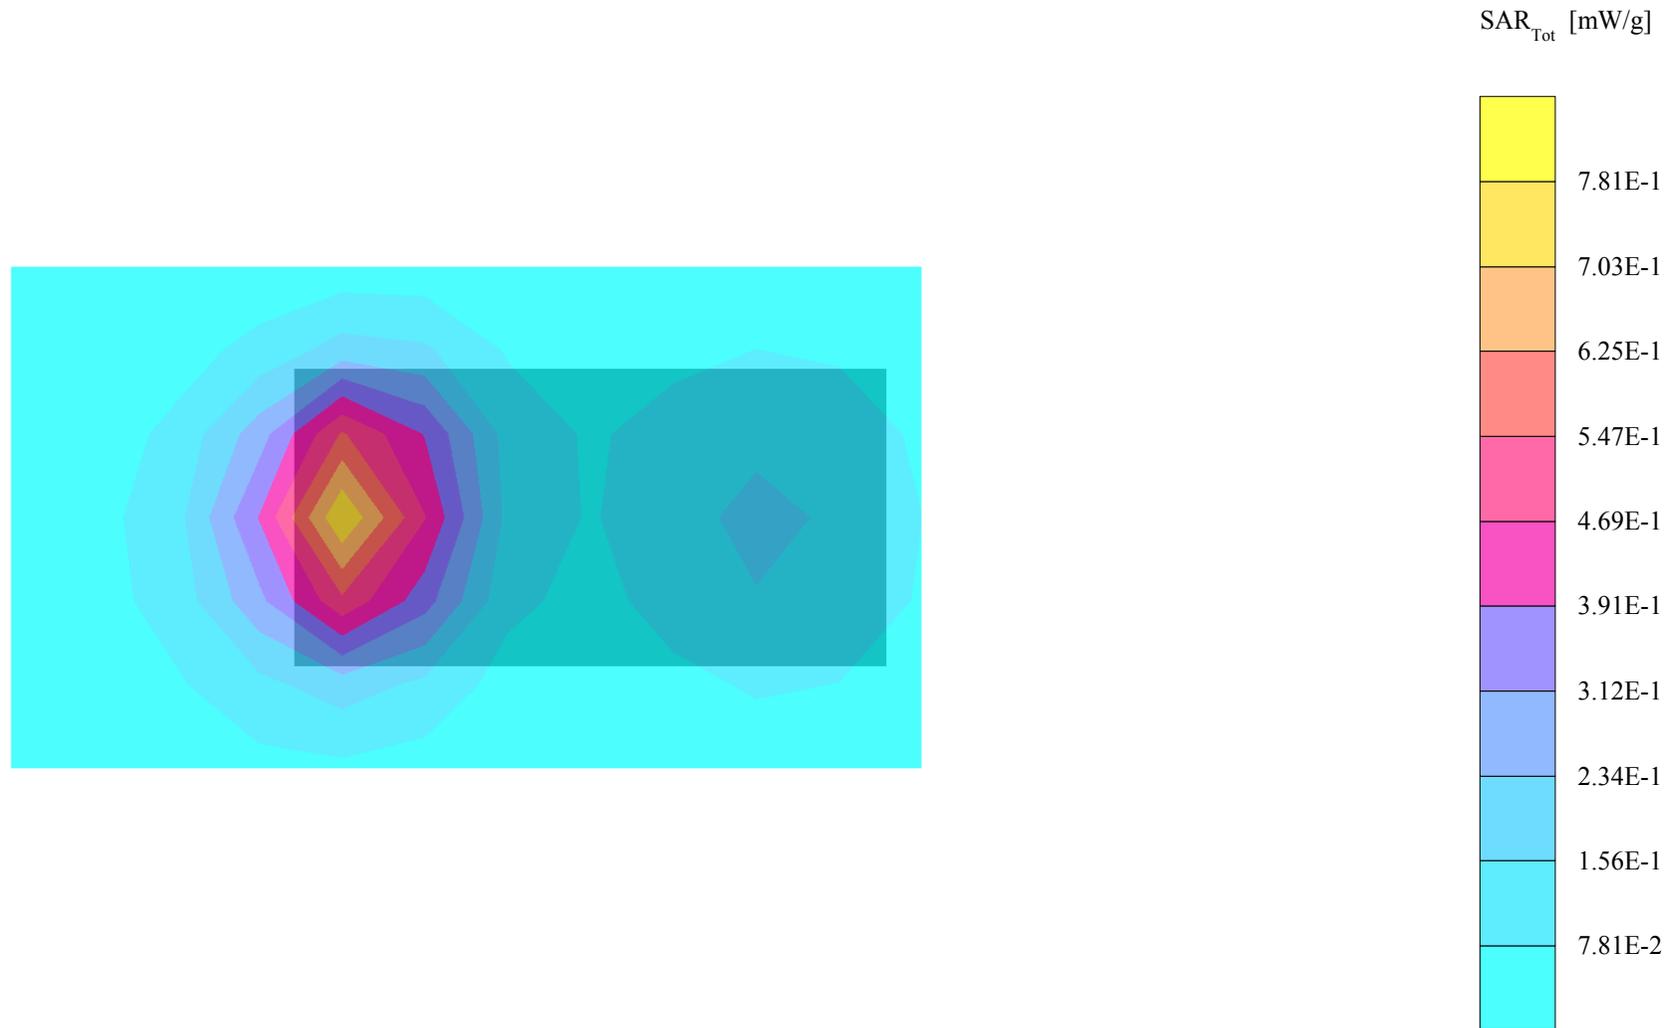


PY7A1022012

SAM 4 Phantom; Left Hand Section; Position: (103°,59°); Frequency: 1850 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.627 mW/g, SAR (10g): 0.348 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0
Powerdrift: -0.10 dB
PY7A1022012,IMEI:692360-0 ;1850MHz(ch512), Left Hand Side,Tilt(103°) Phone
Position, meas. Power=30.4dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427
Room's temprature=22(C-degree);Humidity=22%

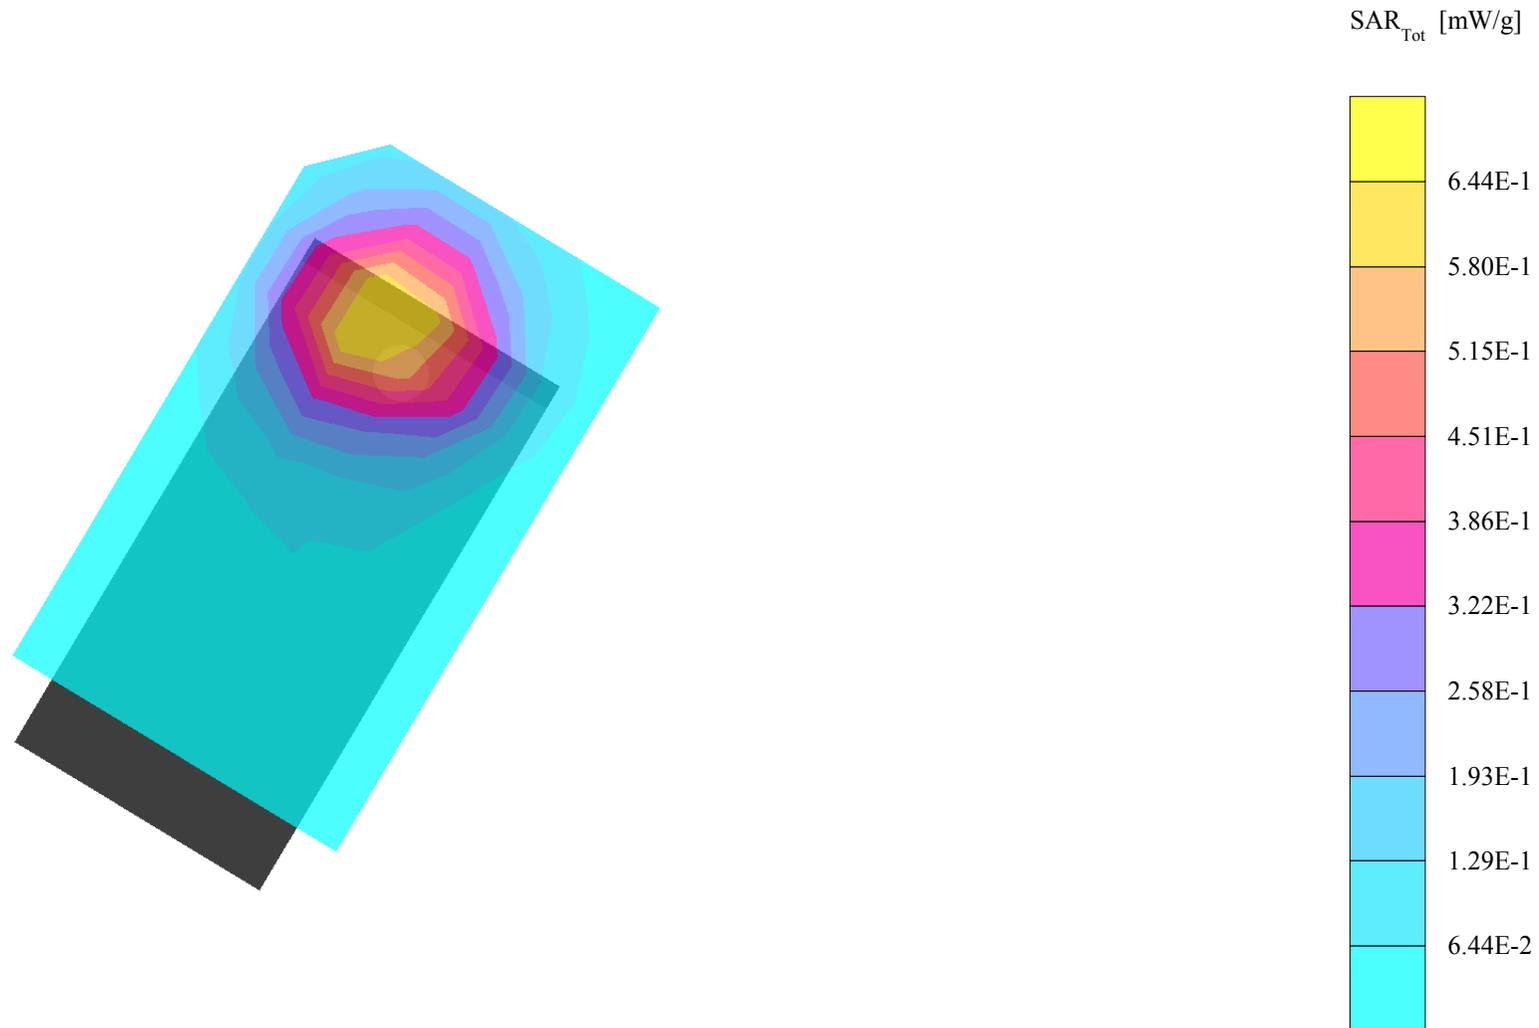


PY7A1022012

SAM 4 Phantom; Righ Hand Section; Position: (88°,301°); Frequency: 1880 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.695 mW/g, SAR (10g): 0.364 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: -0.03 dB
PY7A1022012,IMEI:692360-0 ;1880MHz(ch661), Right Hand Side,Cheek(88°) Phone
Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050426
Room's temprature=22(C-degree);Humidity=22%

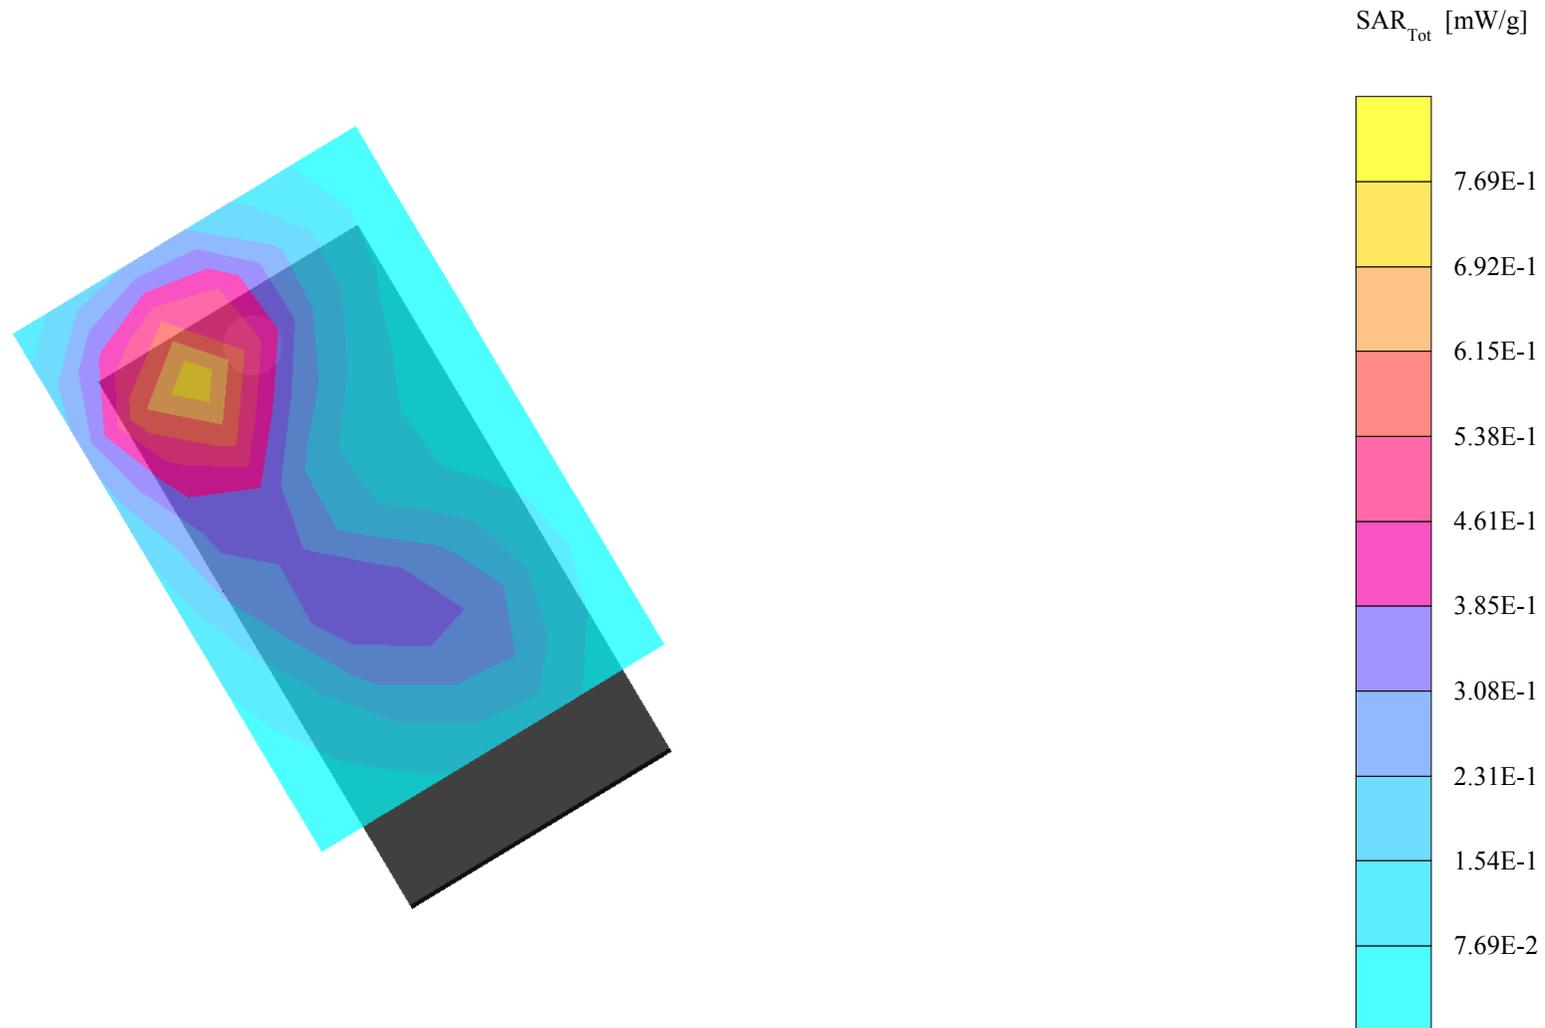

PY7A1022012

SAM 4 Phantom; Left Hand Section; Position: (103°,59°); Frequency: 1880 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.634 mW/g, SAR (10g): 0.347 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0
Powerdrift: -0.13 dB
PY7A1022012,IMEI:692360-0 ;1880MHz(ch661), Left Hand Side,Tilt(103°) Phone
Position, meas. Power=30.4dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427
Room's temprature=22(C-degree);Humidity=22%

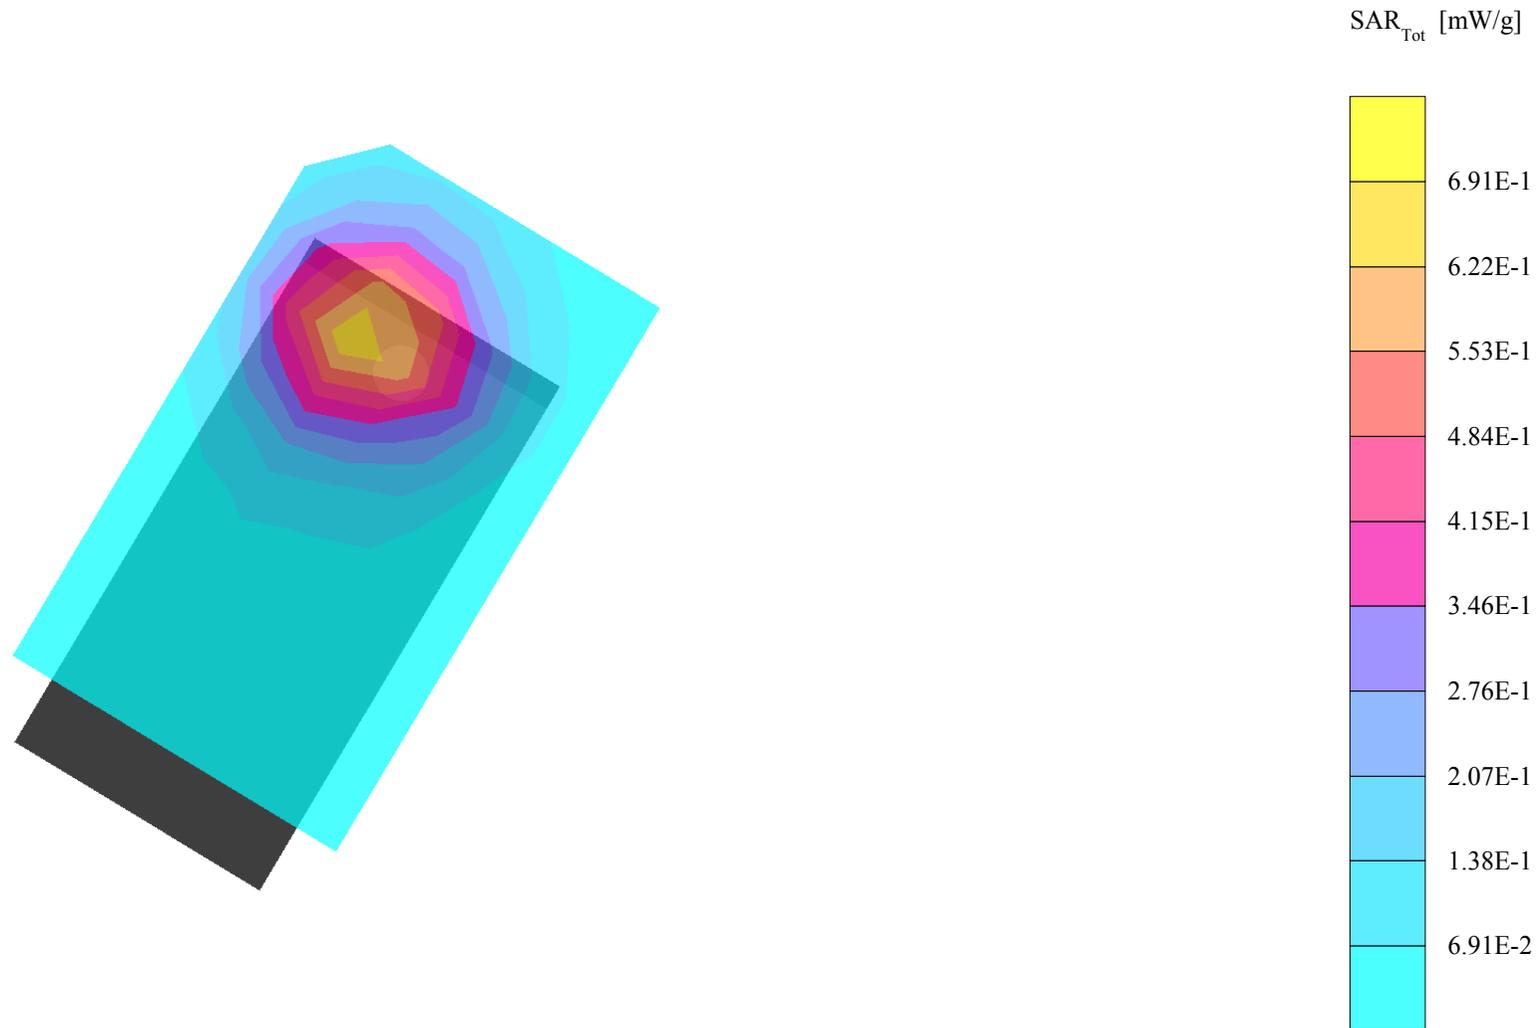

PY7A1022012

SAM 4 Phantom; Left Hand Section; Position: (88°,59°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46 \text{ mho/m}$ $\epsilon_r = 38.4$ $\rho = 1.00 \text{ g/cm}^3$

Cube 5x5x7: SAR (1g): 0.576 mW/g, SAR (10g): 0.314 mW/g, (Worst-case extrapolation)


Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0

Powerdrift: -0.06 dB

PY7A1022012,IMEI:692360-0 ;1880MHz(ch661), Left Hand Side,Cheek(88°) Phone

Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%

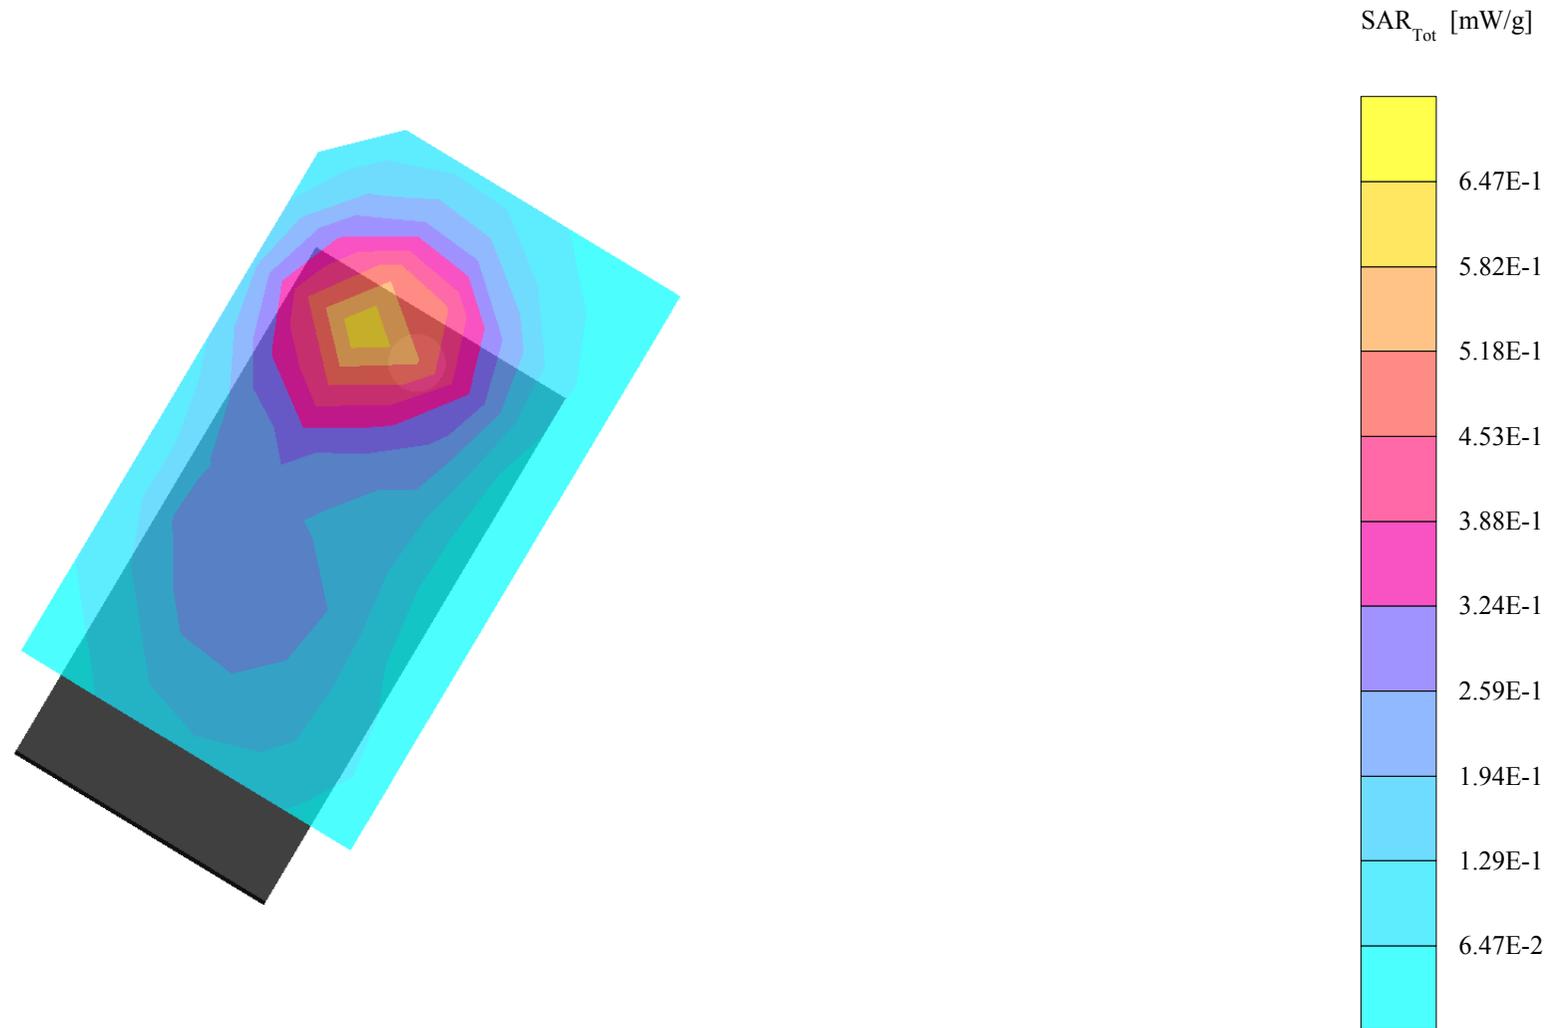

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 8.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.156 mW/g, SAR (10g): 0.0942 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.09 dB

PY7A1022012,IMEI:692360-0 ;1880MHz(ch661),Flat Hand Side phantom,Front+15mm Phone

Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%

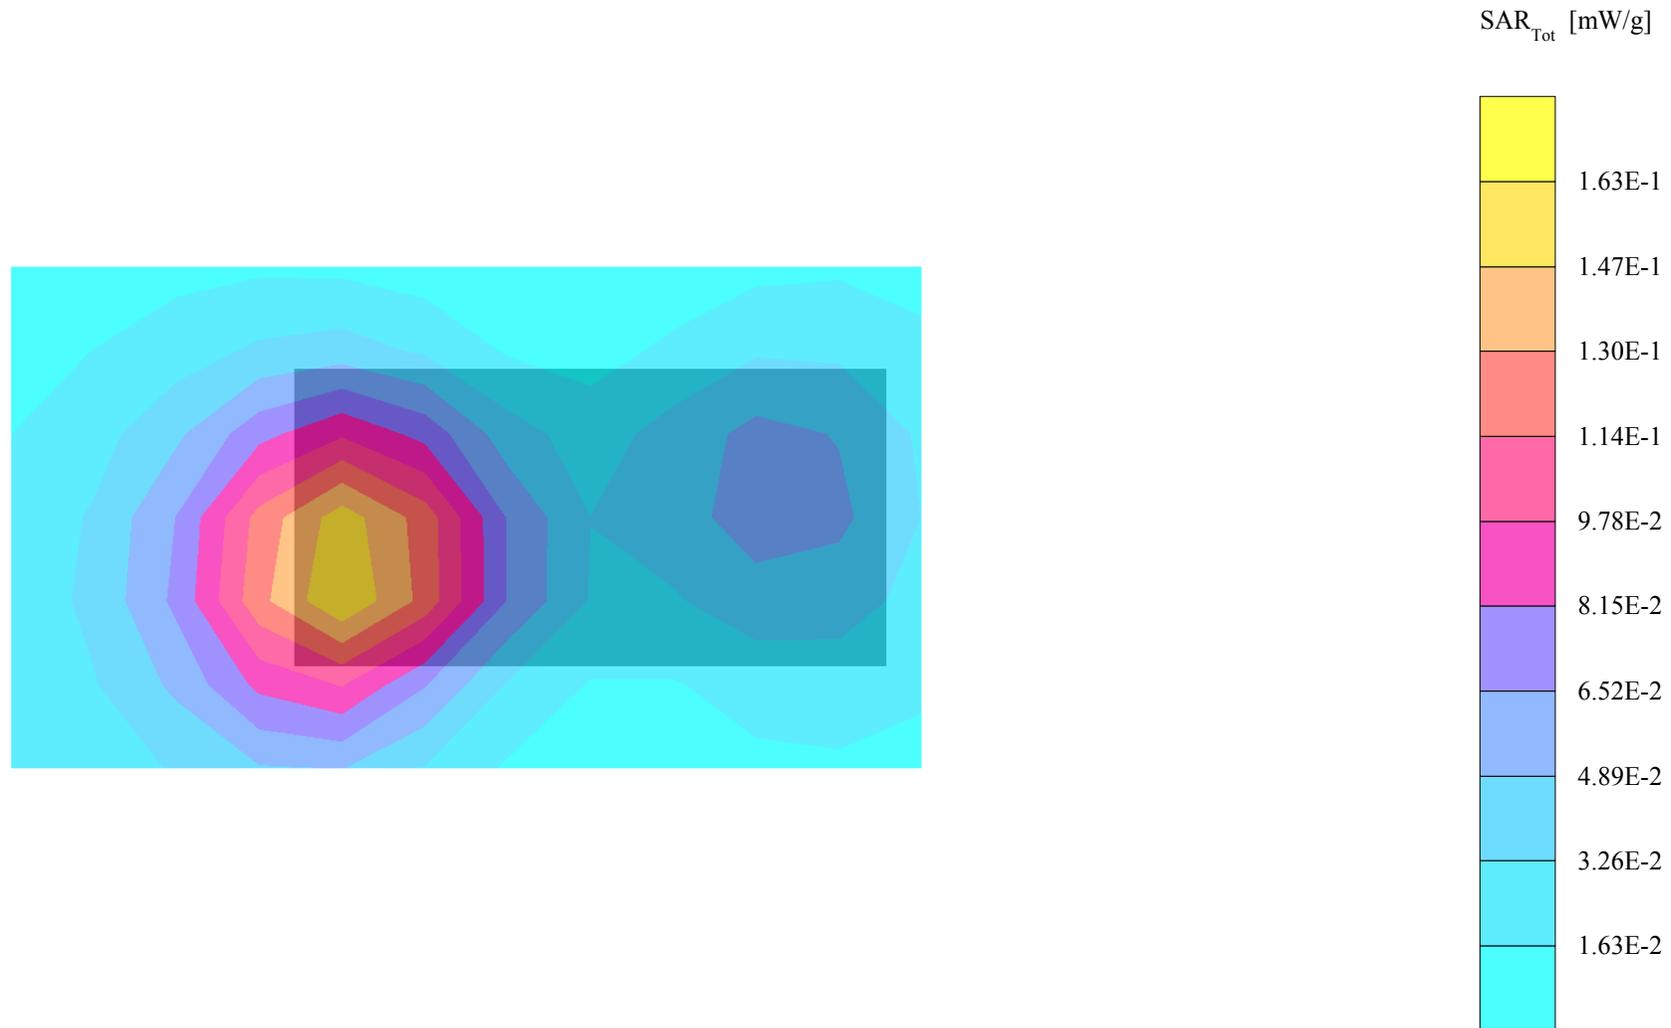

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 4.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.790 mW/g, SAR (10g): 0.440 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.10 dB

PY7A1022012,IMEI:692360-0 ;1880MHz(ch661),Flat Hand Side phantom,Back+15mm Phone

Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid's temprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%; Measurement of 2 GPRS 2TX

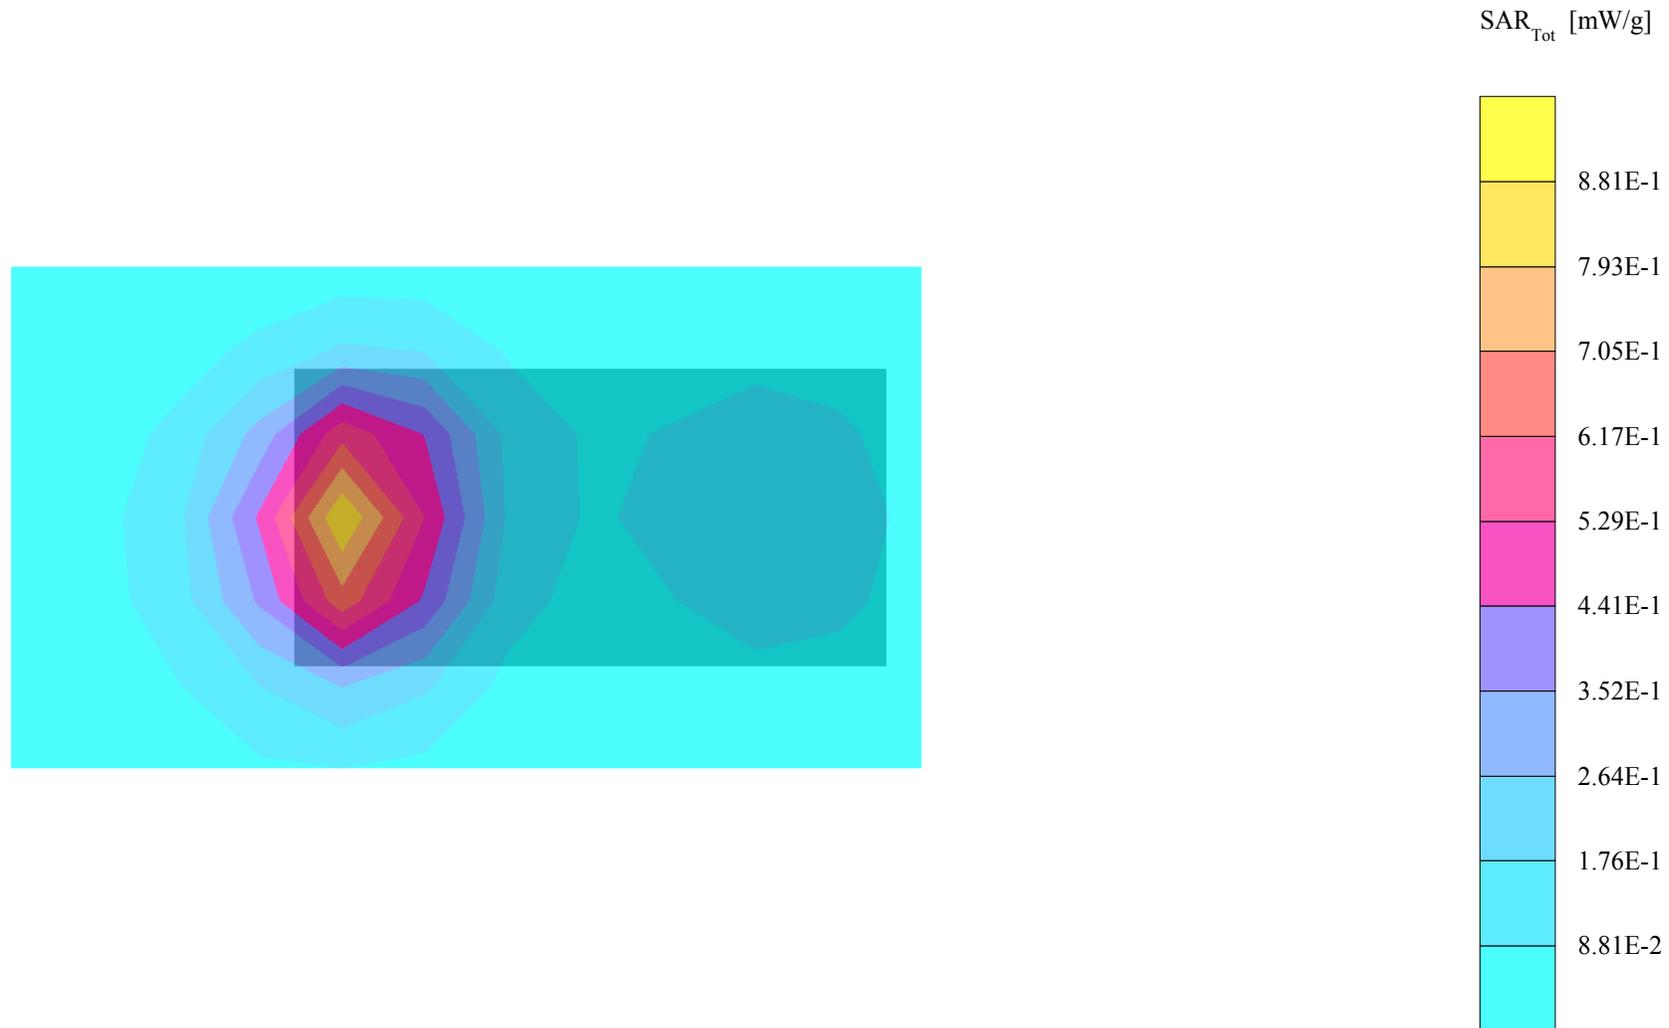

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 8.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.592 mW/g, SAR (10g): 0.329 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.14 dB

PY7A1022012,IMEI:692360-0 ;1880MHz(ch661),Flat Hand Side phantom,Back+15mm Phone

Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid's temprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%; Measurement of Blue tooth;

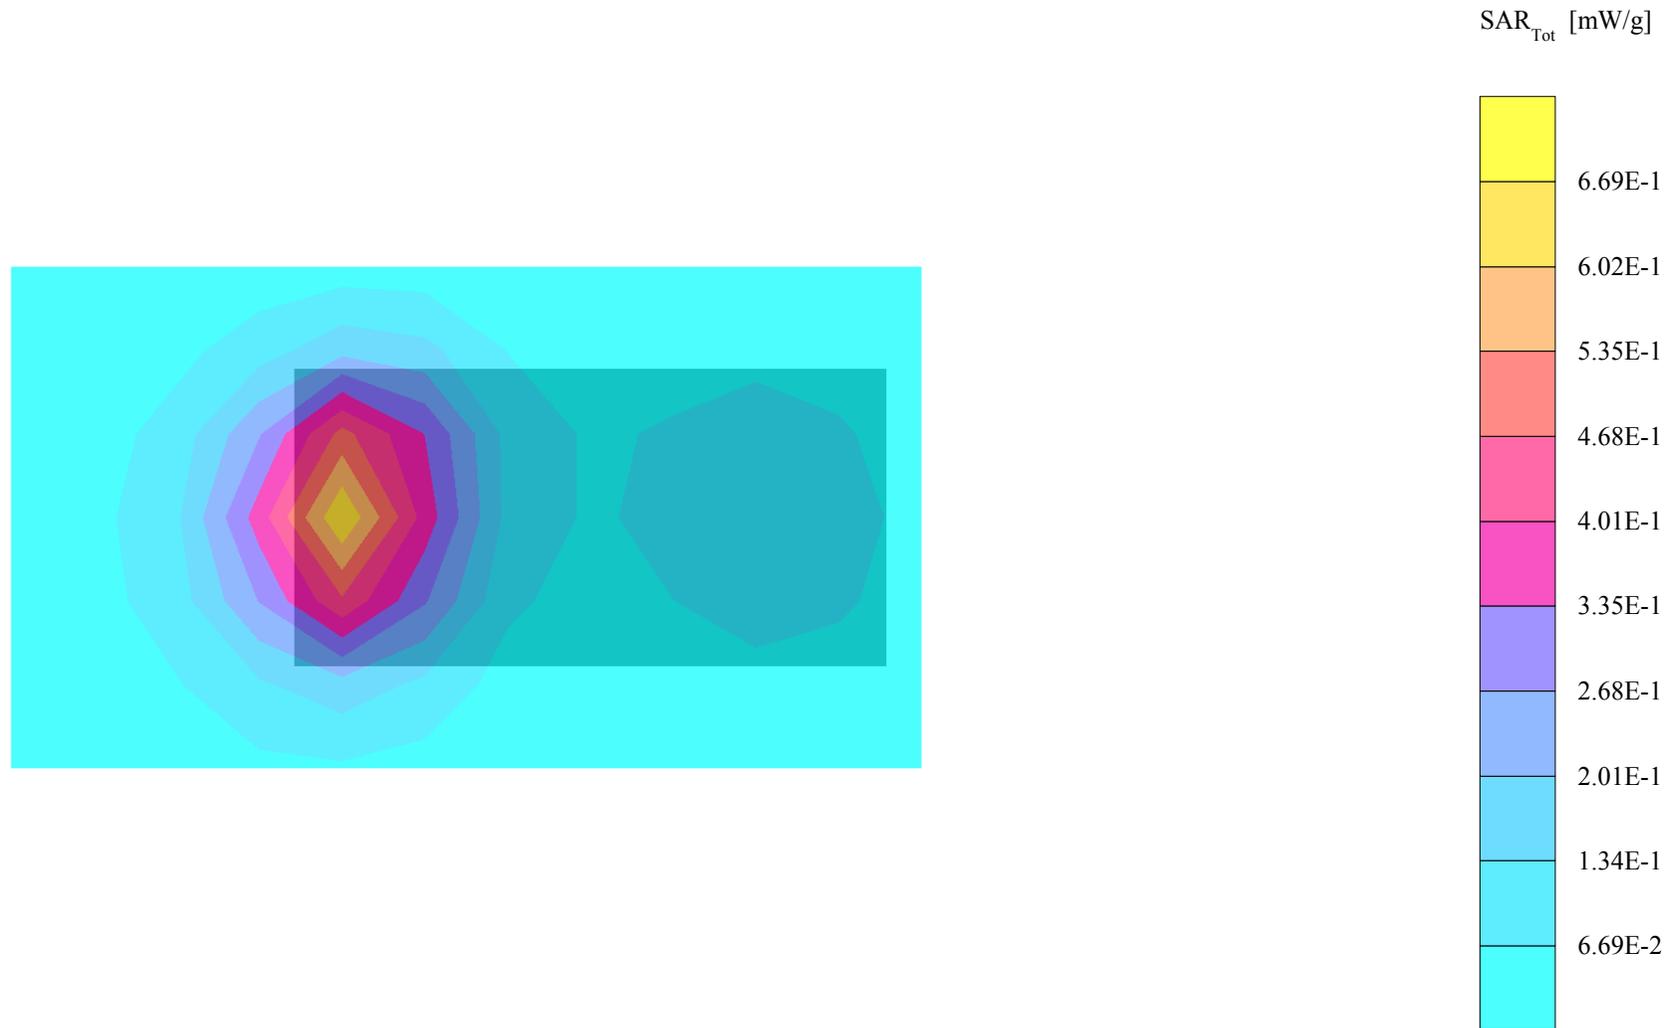

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 8.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.674 mW/g, SAR (10g): 0.373 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.09 dB

PY7A1022012,IMEI:692360-0 ;1880MHz(ch661),Flat Hand Side phantom,Back+15mm Phone


Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%

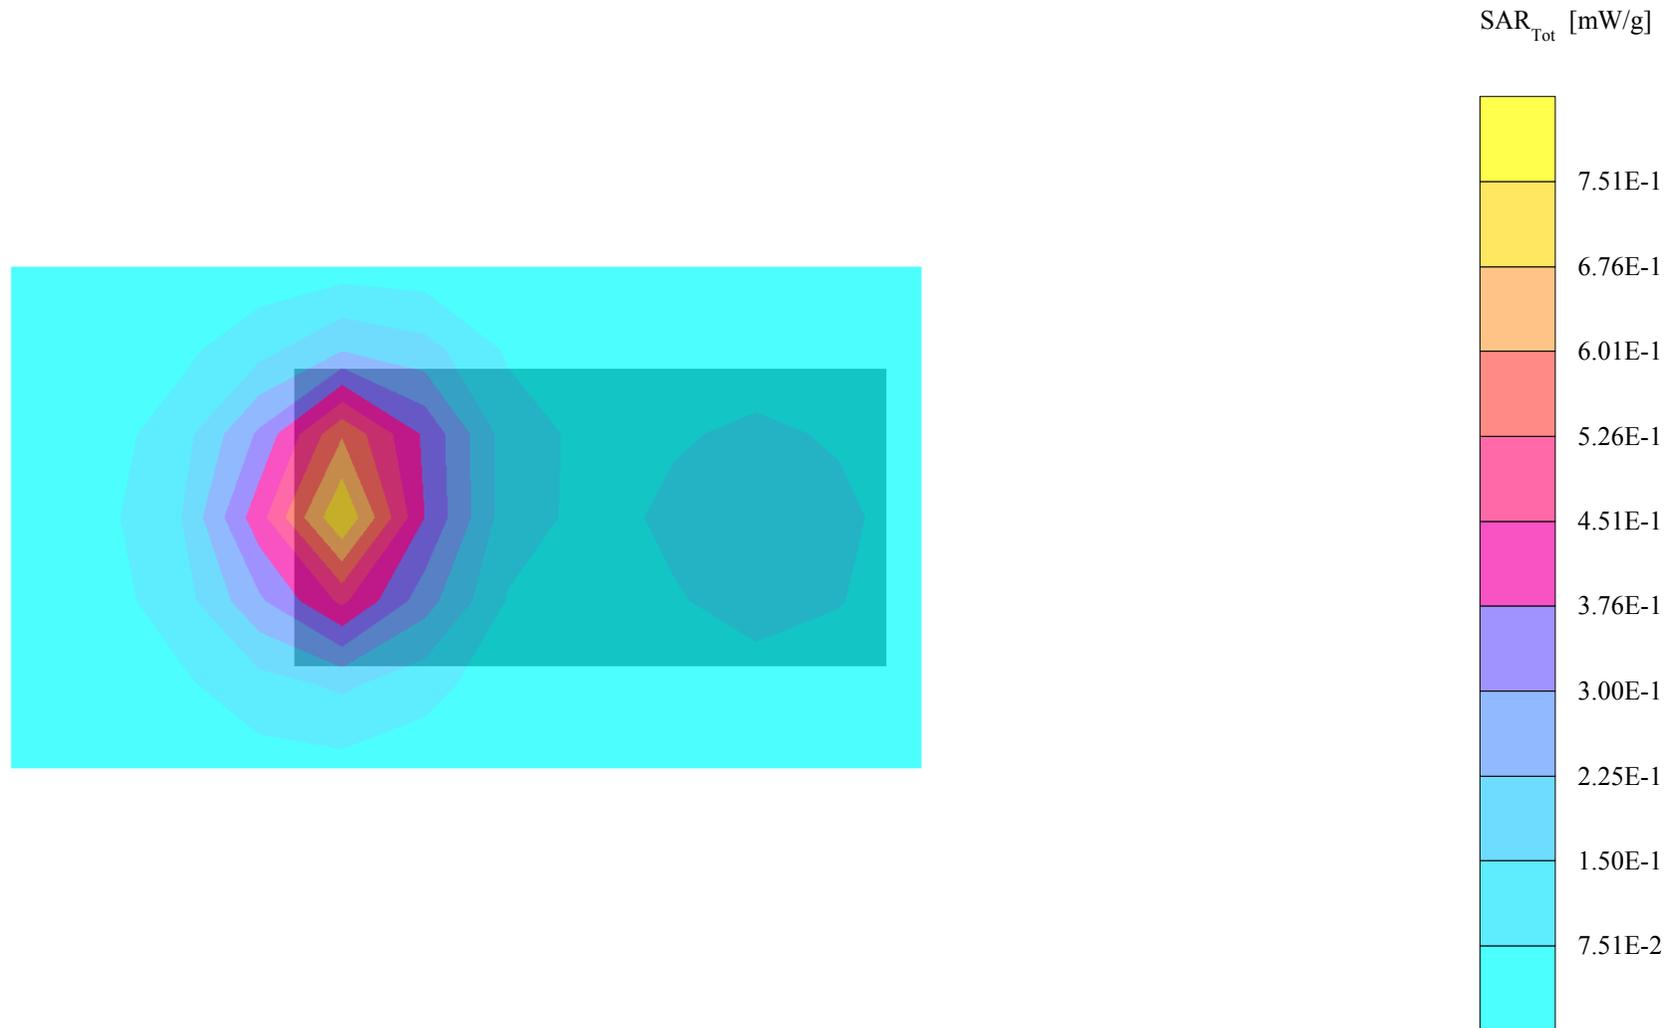


PY7A1022012

SAM 4 Phantom; Righ Hand Section; Position: (103°,301°); Frequency: 1850 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.707 mW/g, SAR (10g): 0.377 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: -0.16 dB
PY7A1022012,IMEI:692360-0 ;1850MHz(ch512), Right Hand Side,Tilt(103°) Phone
Position, meas. Power=30.4dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050426
Room's temprature=22(C-degree);Humidity=22%

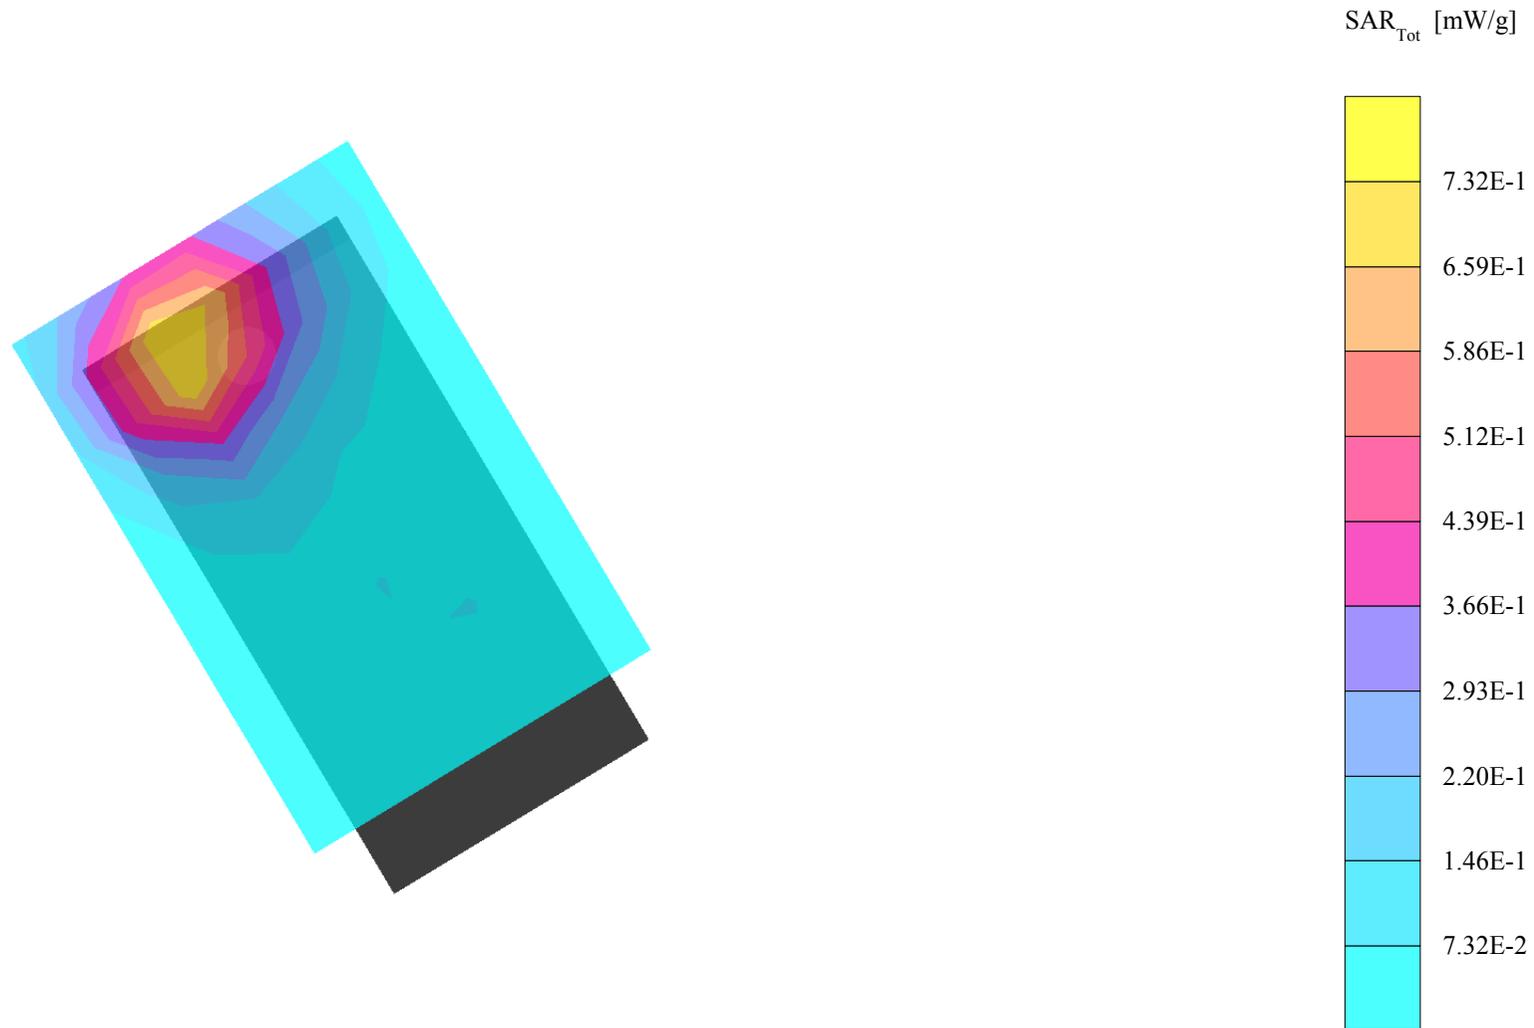


PY7A1022012

SAM 4 Phantom; Righ Hand Section; Position: (88°,301°); Frequency: 1850 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.616 mW/g, SAR (10g): 0.322 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: -0.01 dB
PY7A1022012,IMEI:692360-0 ;1850MHz(ch512), Right Hand Side,Cheek(88°) Phone
Position, meas. Power=30.4dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050426
Room's temprature=22(C-degree);Humidity=22%

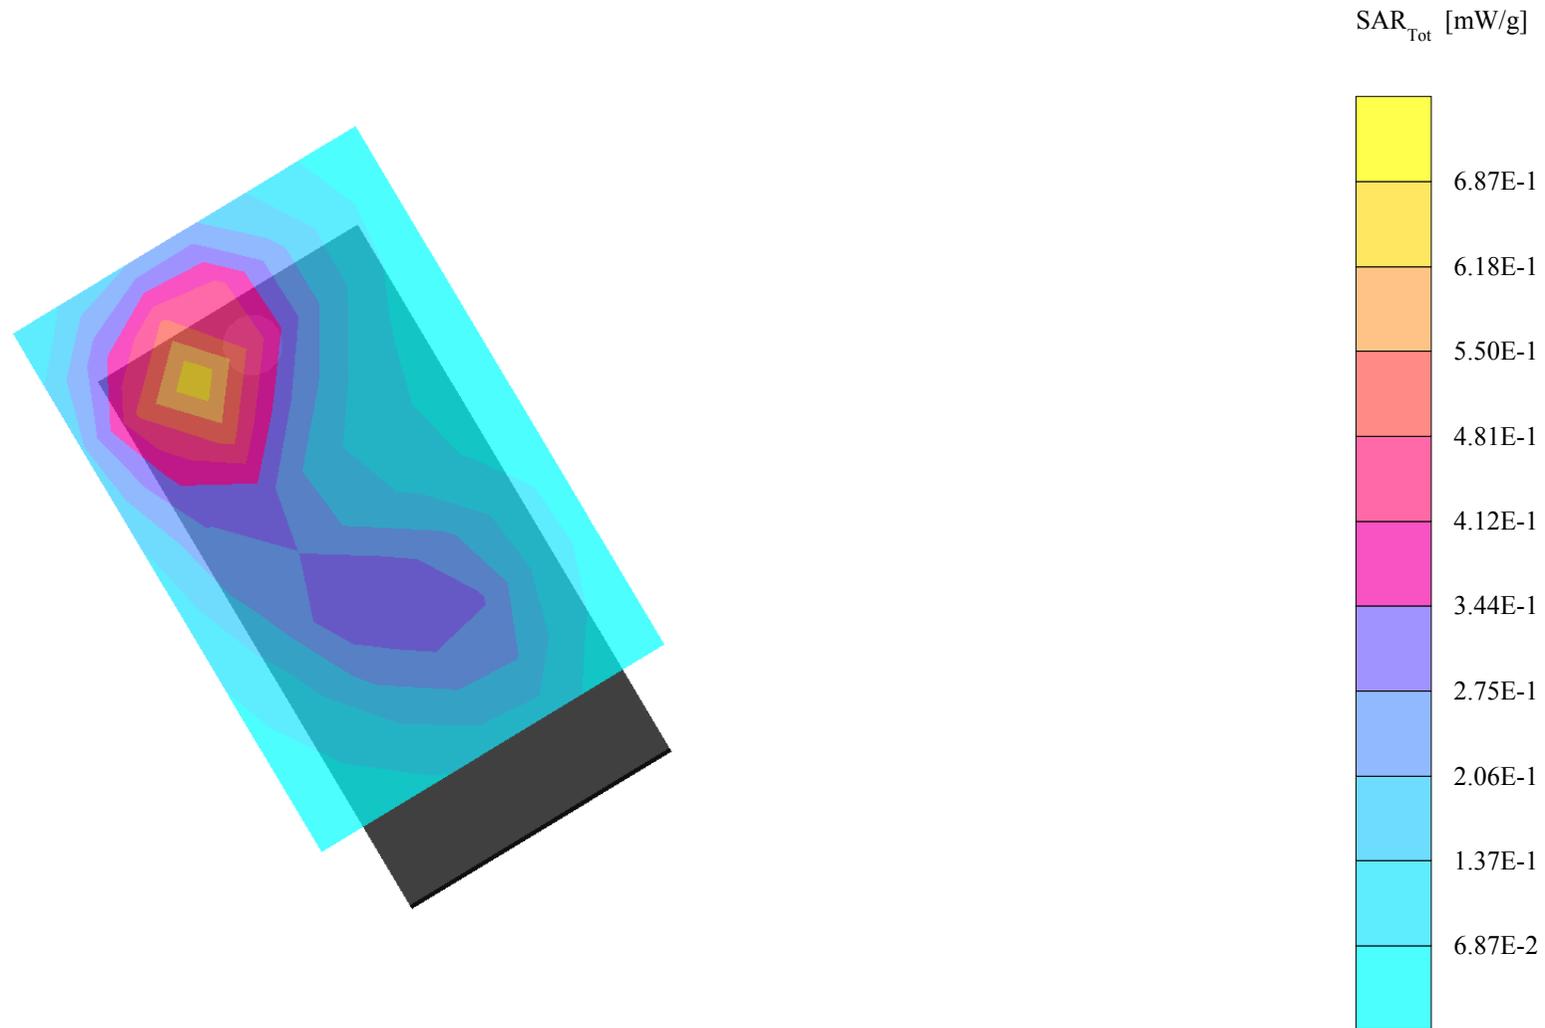


PY7A1022012

SAM 4 Phantom; Righ Hand Section; Position: (103°,301°); Frequency: 1880 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.772 mW/g, SAR (10g): 0.415 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: -0.03 dB
PY7A1022012,IMEI:692360-0 ;1880MHz(ch661), Right Hand Side,Tilt(103°) Phone
Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050426
Room's temprature=22(C-degree);Humidity=22%

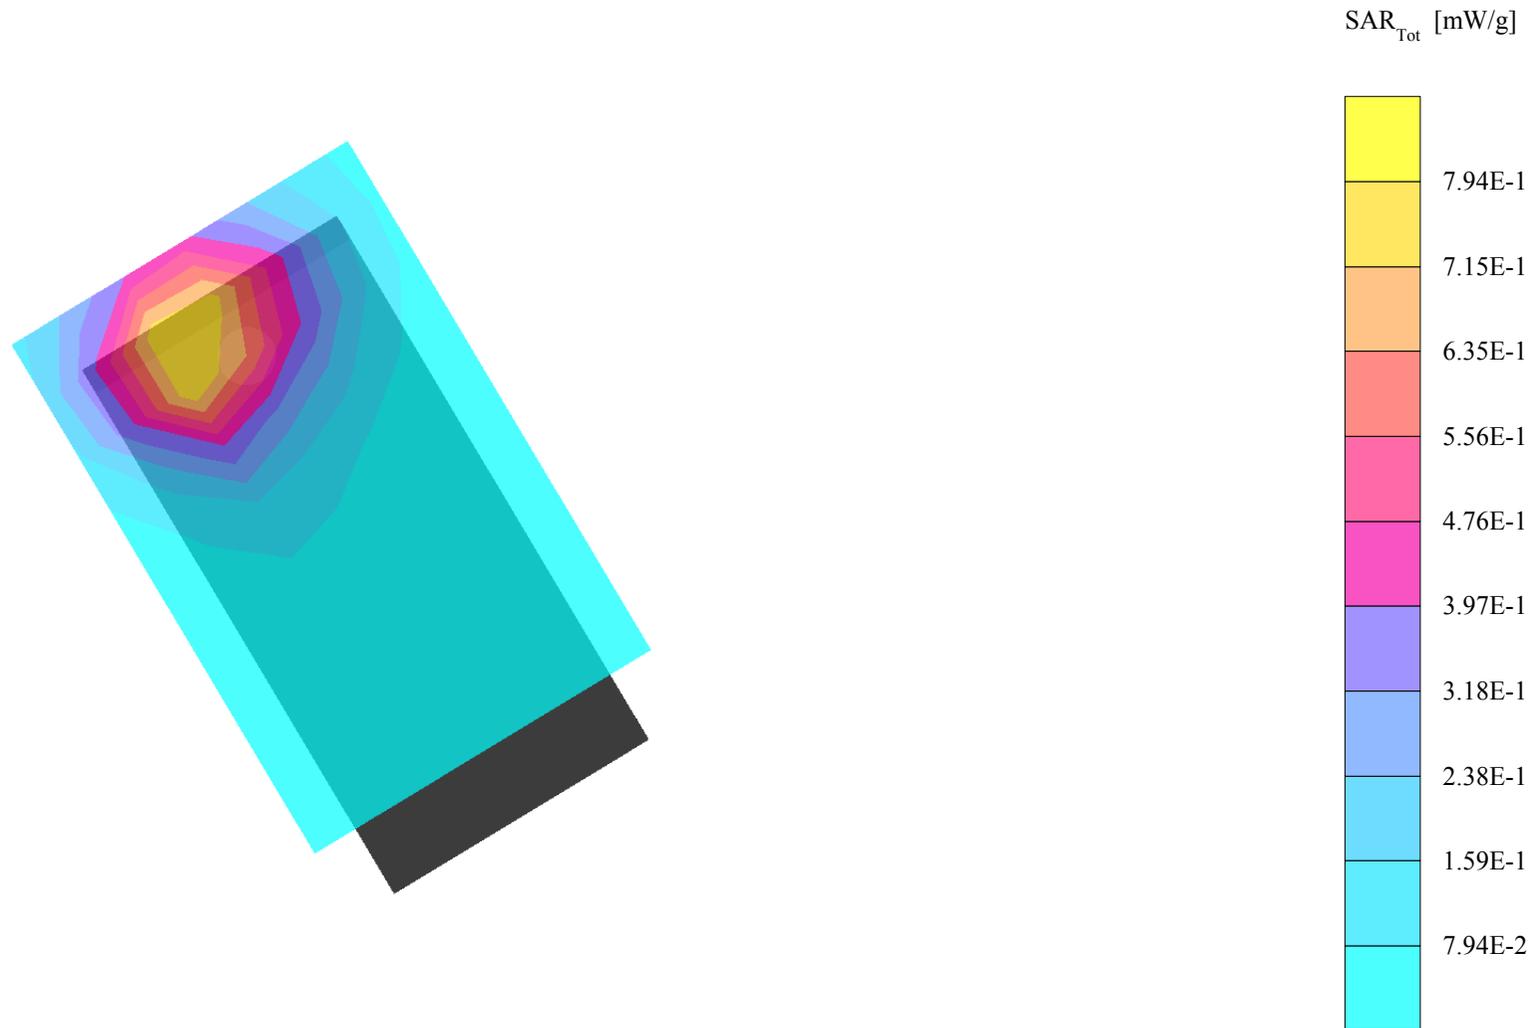


PY7A1022012

SAM 4 Phantom; Righ Hand Section; Position: (88°,301°); Frequency: 1910 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.499 mW/g, SAR (10g): 0.263 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: -0.17 dB
PY7A1022012,IMEI:692360-0 ;1910MHz(ch810), Right Hand Side,Cheek(88°) Phone
Position, meas. Power=30.2dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050426
Room's temprature=22(C-degree);Humidity=22%

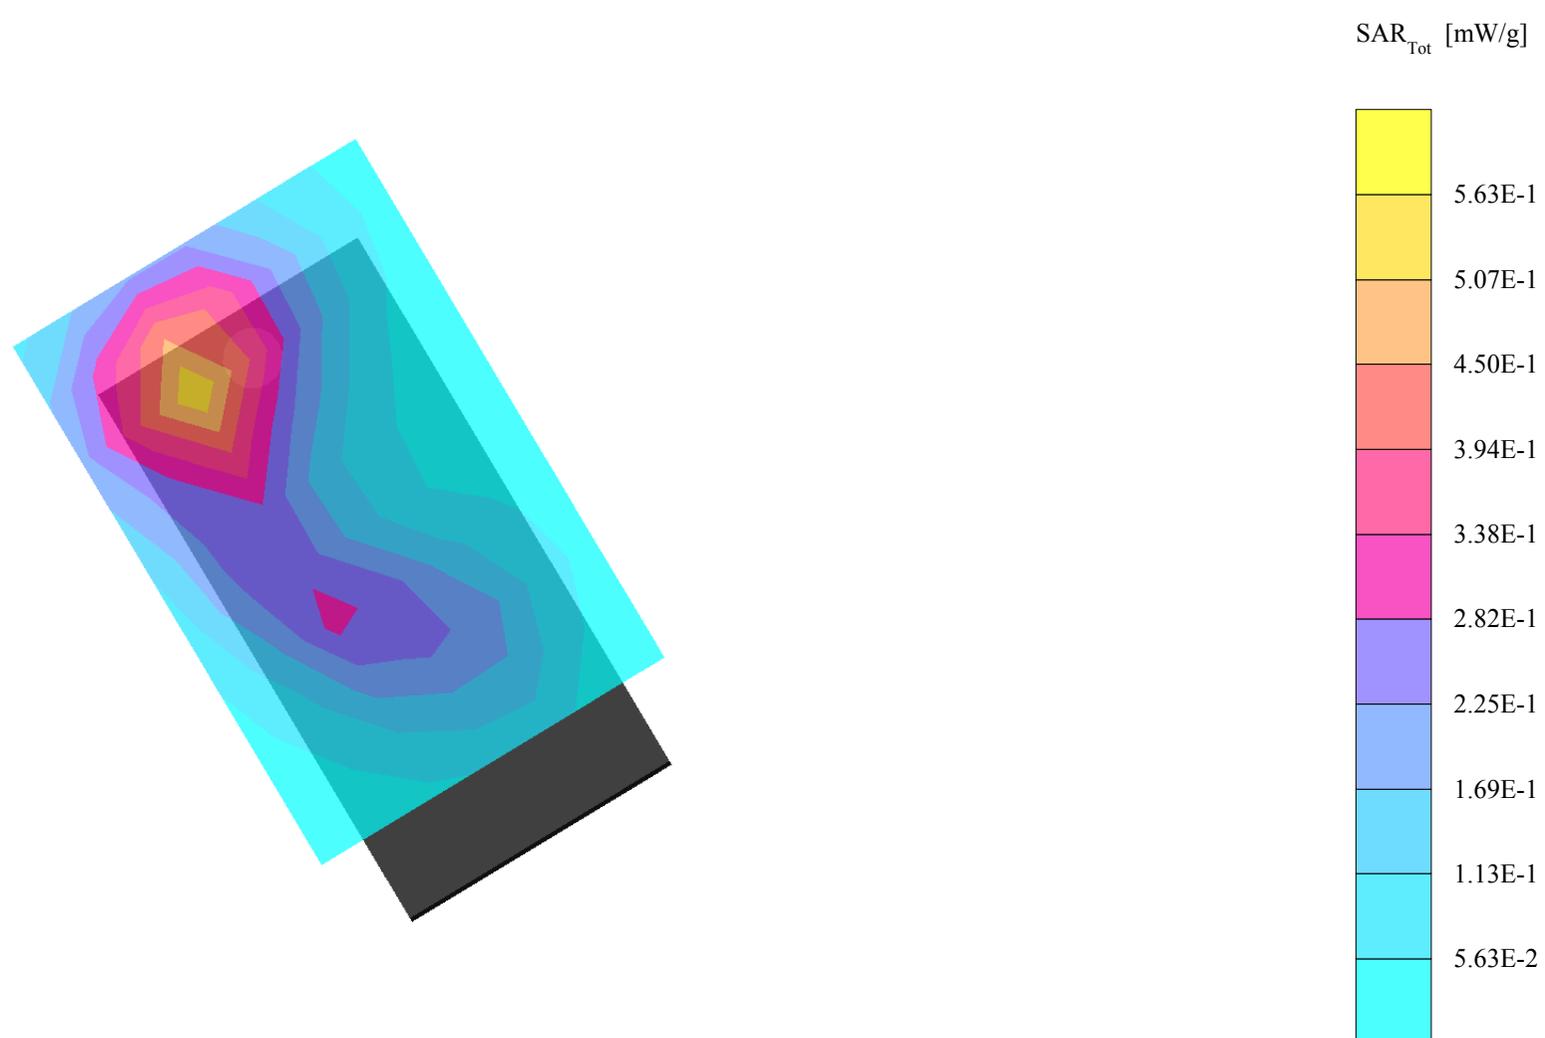


PY7A1022012

SAM 4 Phantom; Left Hand Section; Position: (103°,59°); Frequency: 1910 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.469 mW/g, SAR (10g): 0.257 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0
Powerdrift: -0.18 dB
PY7A1022012,IMEI:692360-0 ;1910MHz(ch810), Left Hand Side,Tilt(103°) Phone
Position, meas. Power=30.2dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427
Room's temprature=22(C-degree);Humidity=22%

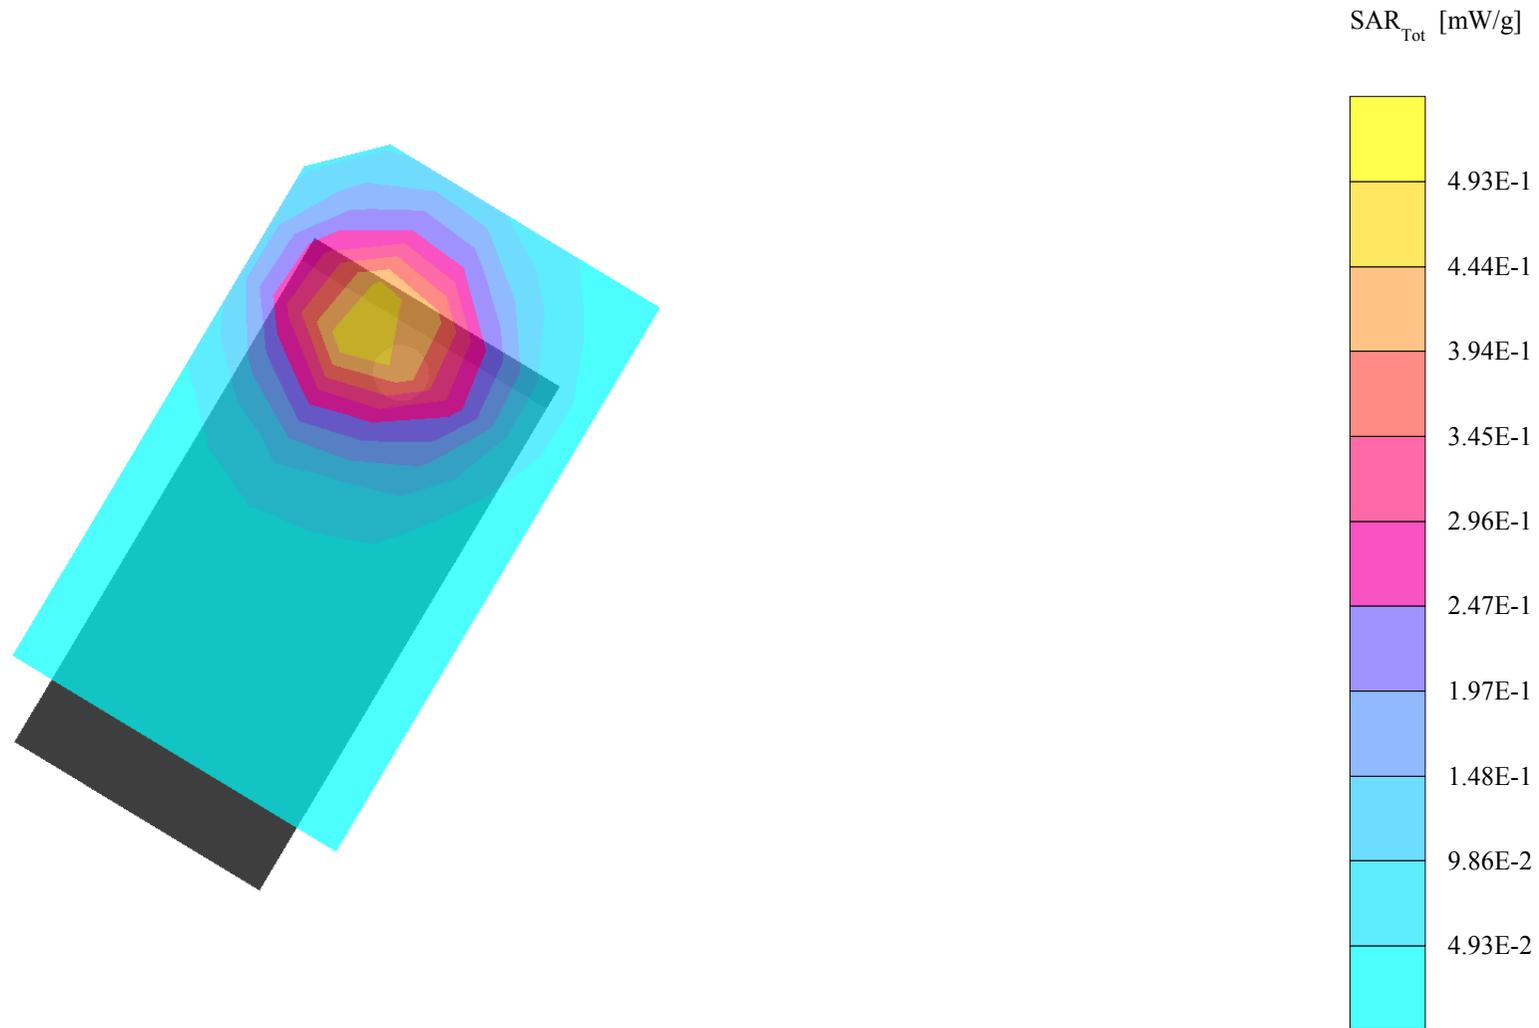

PY7A1022012

SAM 4 Phantom; Left Hand Section; Position: (88°,59°); Frequency: 1910 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.409 mW/g, SAR (10g): 0.223 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 11.0
Powerdrift: -0.15 dB
PY7A1022012,IMEI:692360-0 ;1910MHz(ch810), Left Hand Side,Cheek(88°) Phone
Position, meas. Power=30.2dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427
Room's temprature=22(C-degree);Humidity=22%

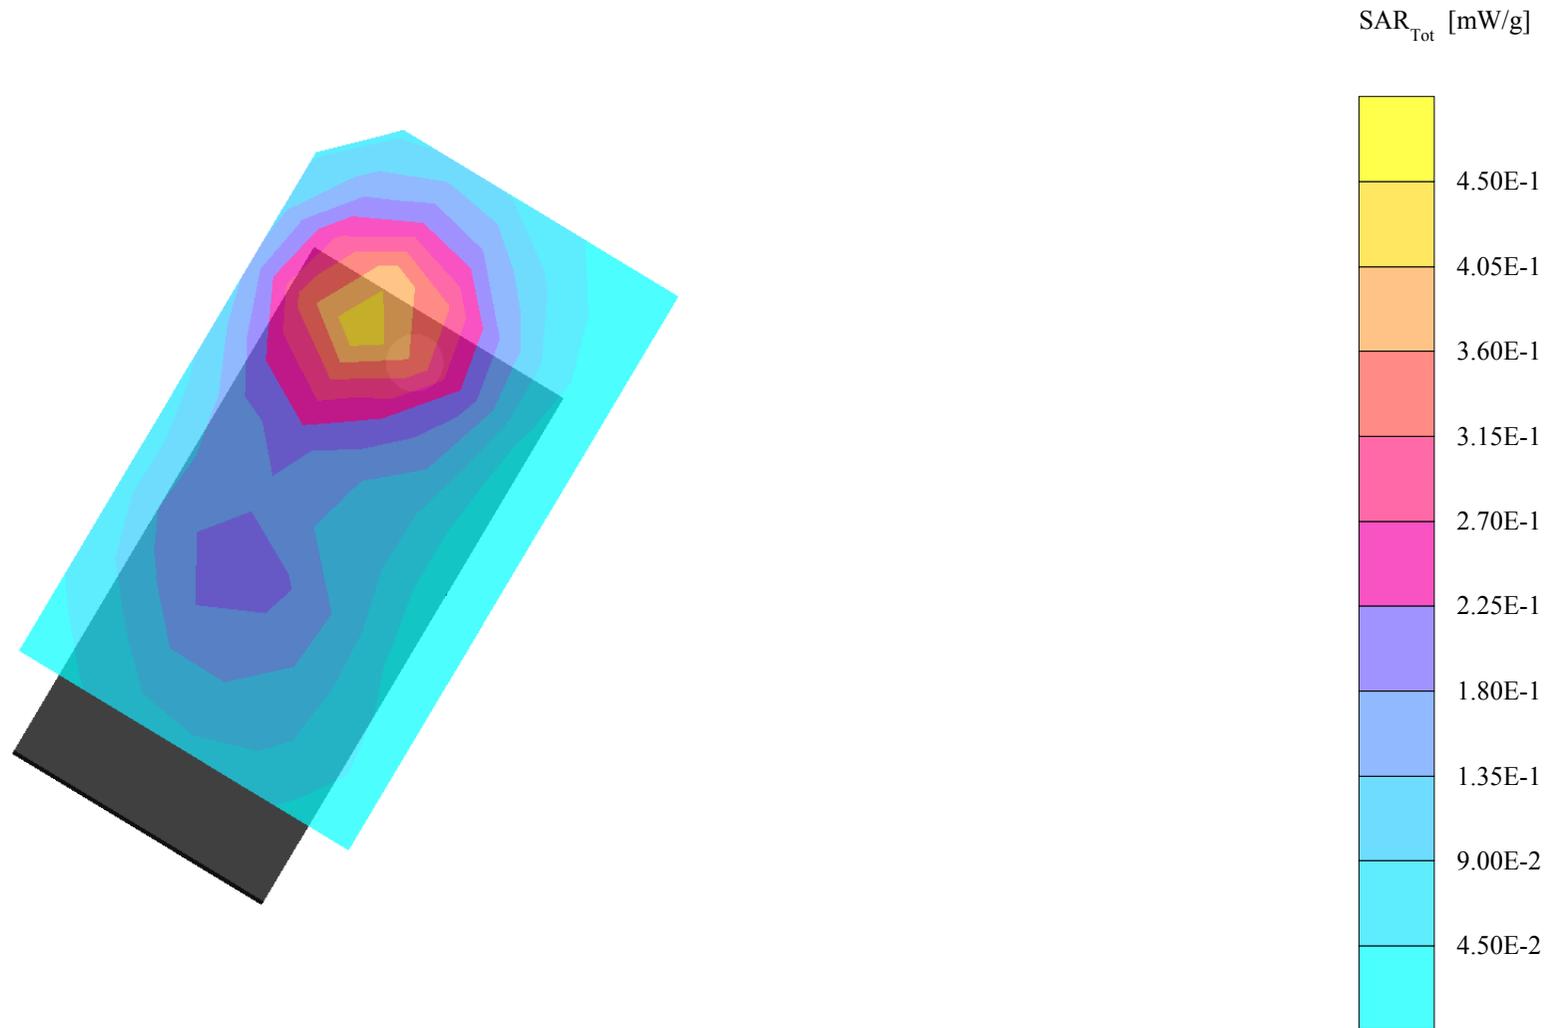

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1910 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 8.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.112 mW/g, SAR (10g): 0.0675 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.15 dB

PY7A1022012,IMEI:692360-0 ;1910MHz(ch810),Flat Hand Side phantom,Front+15mm Phone

Position, meas. Power=30.2dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%

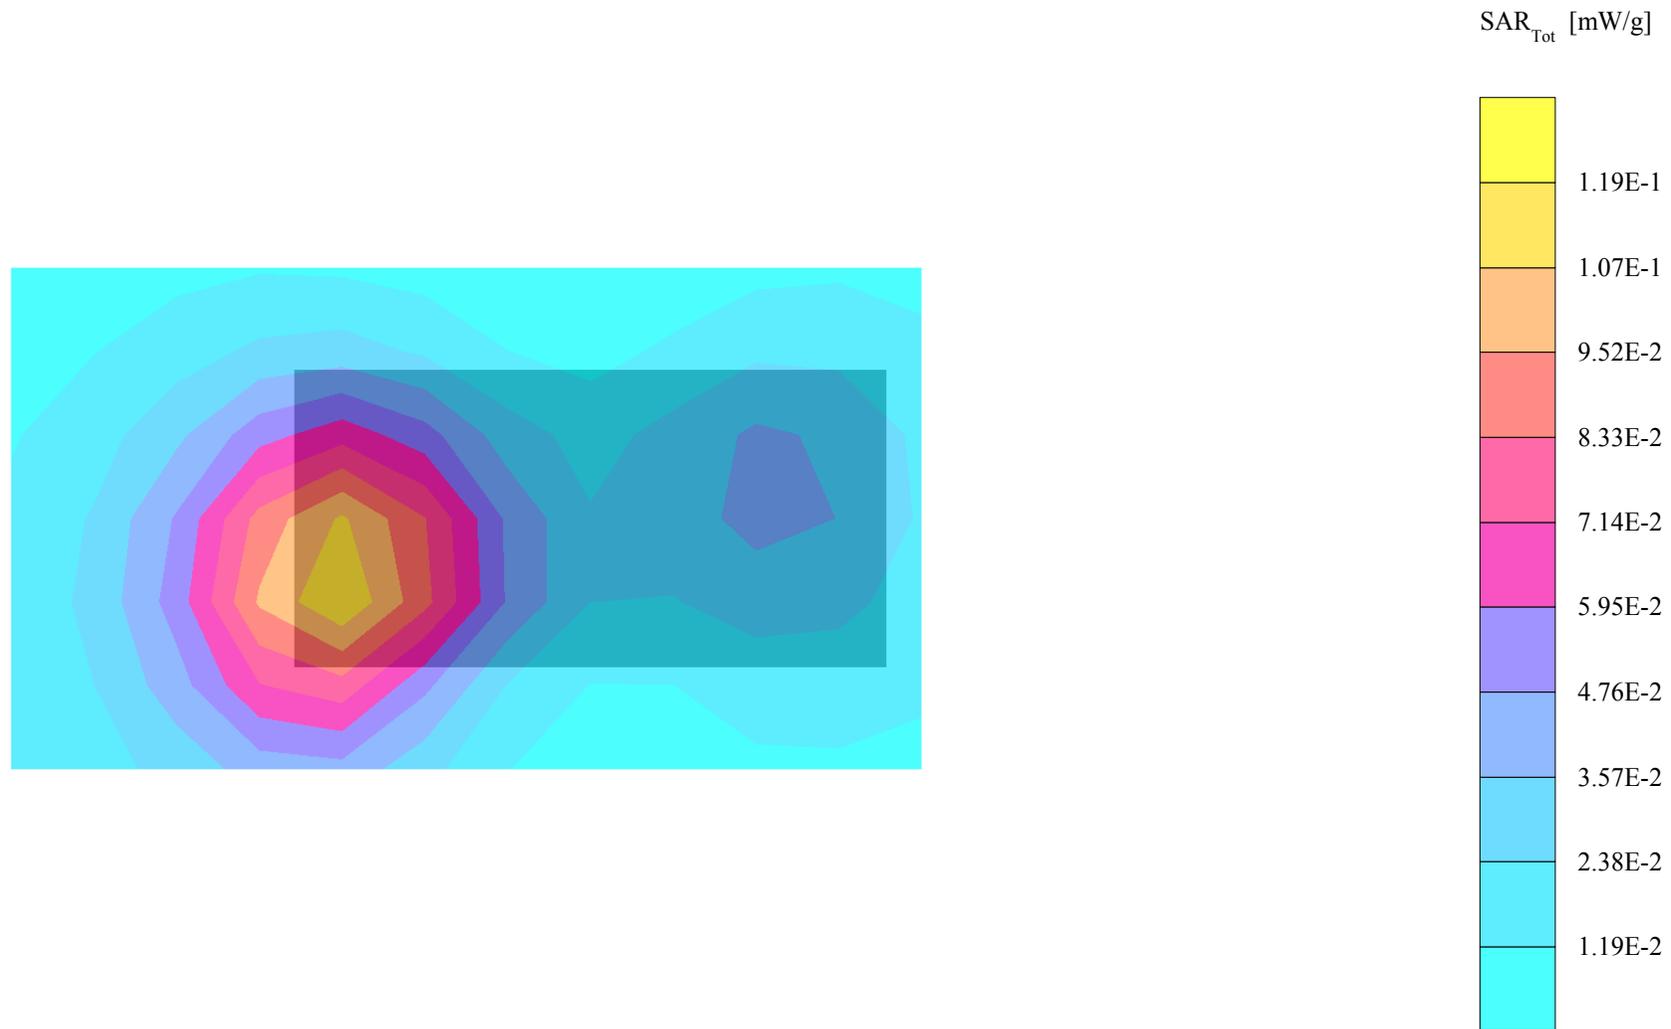

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1910 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 4.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.900 mW/g, SAR (10g): 0.492 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.18 dB

PY7A1022012,IMEI:692360-0 ;1910MHz(ch810),Flat Hand Side phantom,Back+15mm Phone

Position, meas. Power=30.2dBm, Nom.Power=30.5dBm;liquid's temprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%; Measurement of 2 GPRS 2TX

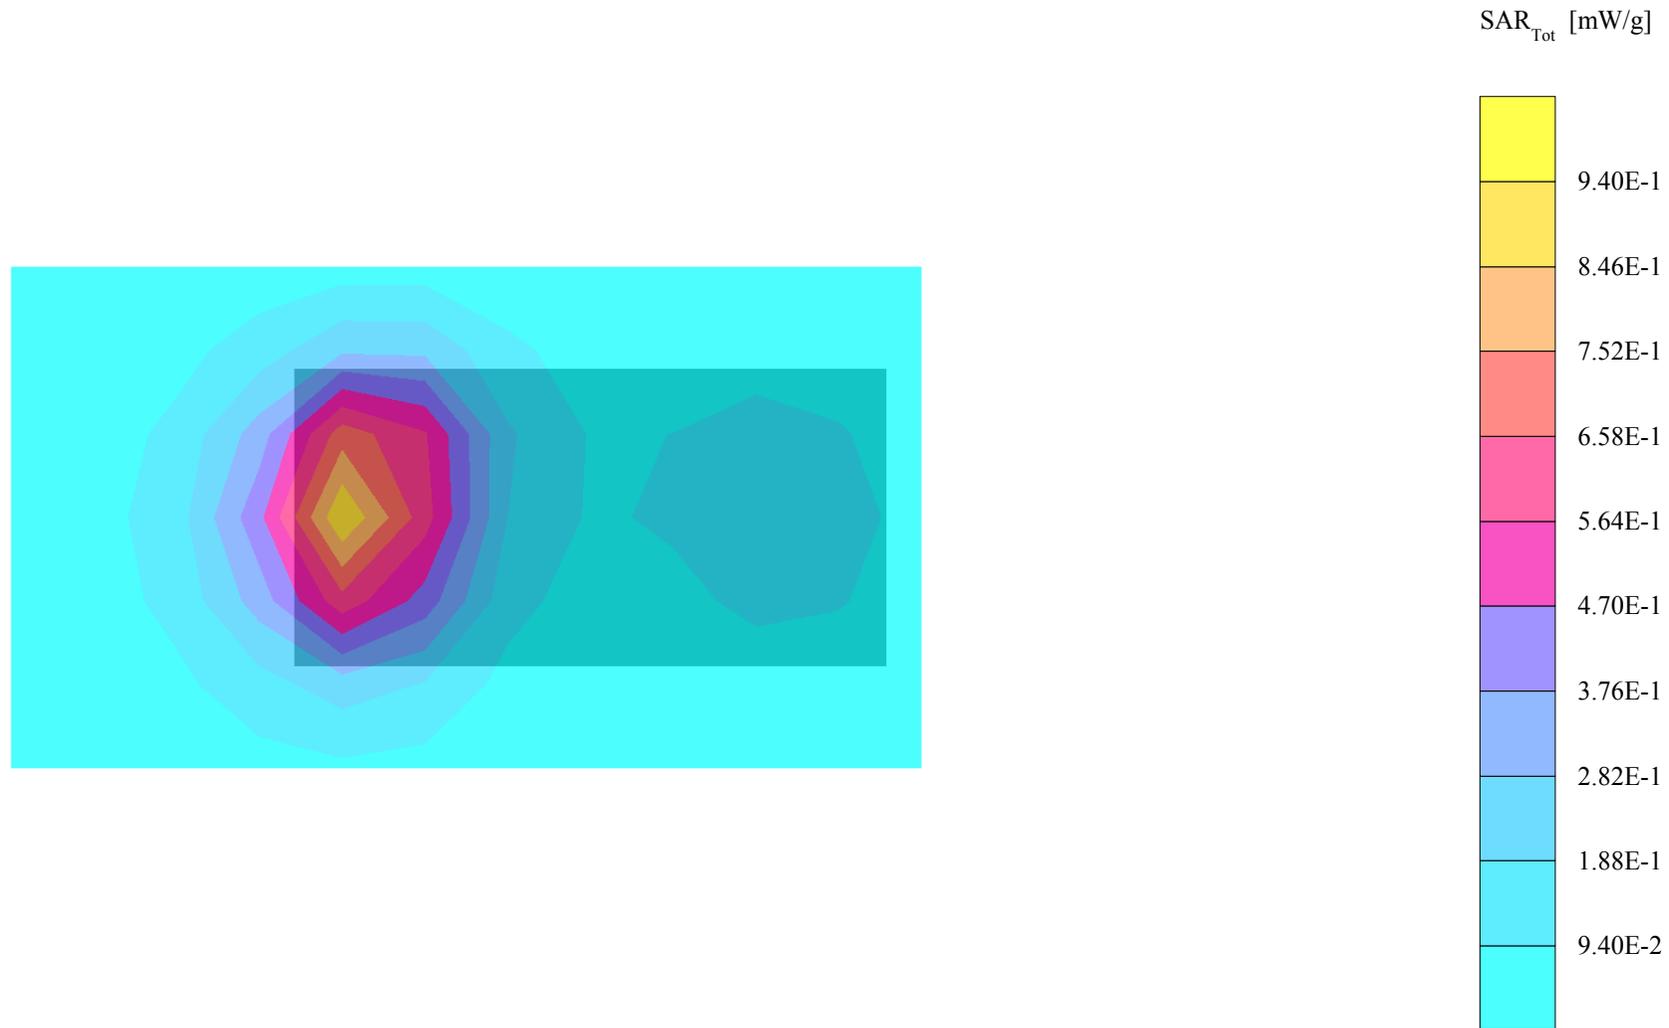

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1910 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 8.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.524 mW/g, SAR (10g): 0.289 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.16 dB

PY7A1022012,IMEI:692360-0 ;1910MHz(ch810),Flat Hand Side phantom,Back+15mm Phone

Position, meas. Power=30.2dBm, Nom.Power=30.5dBm;liquid's temprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%; Measurement of Blue Tooth.

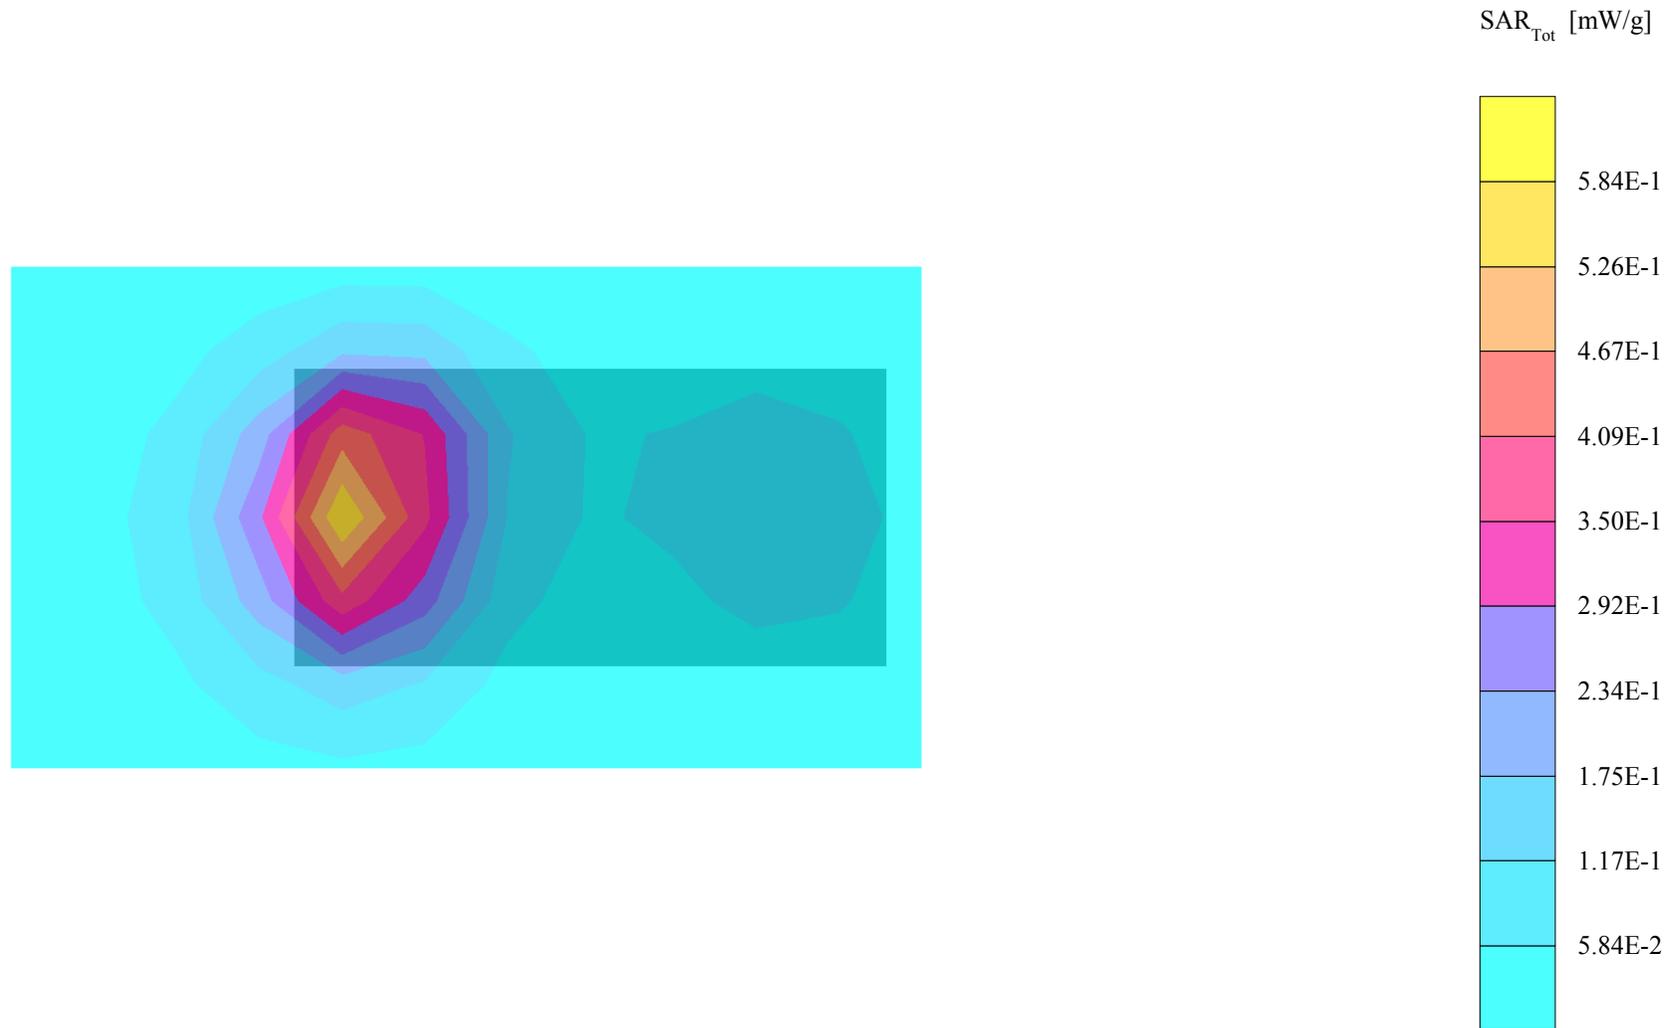

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1910 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 8.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 0.572 mW/g, SAR (10g): 0.313 mW/g, (Worst-case extrapolation)


Coarse: Dx = 14.0, Dy = 14.0, Dz = 10.0

Powerdrift: -0.15 dB

PY7A1022012,IMEI:692360-0 ;1910MHz(ch810),Flat Hand Side phantom,Back+15mm Phone


Position, meas. Power=30.2dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%

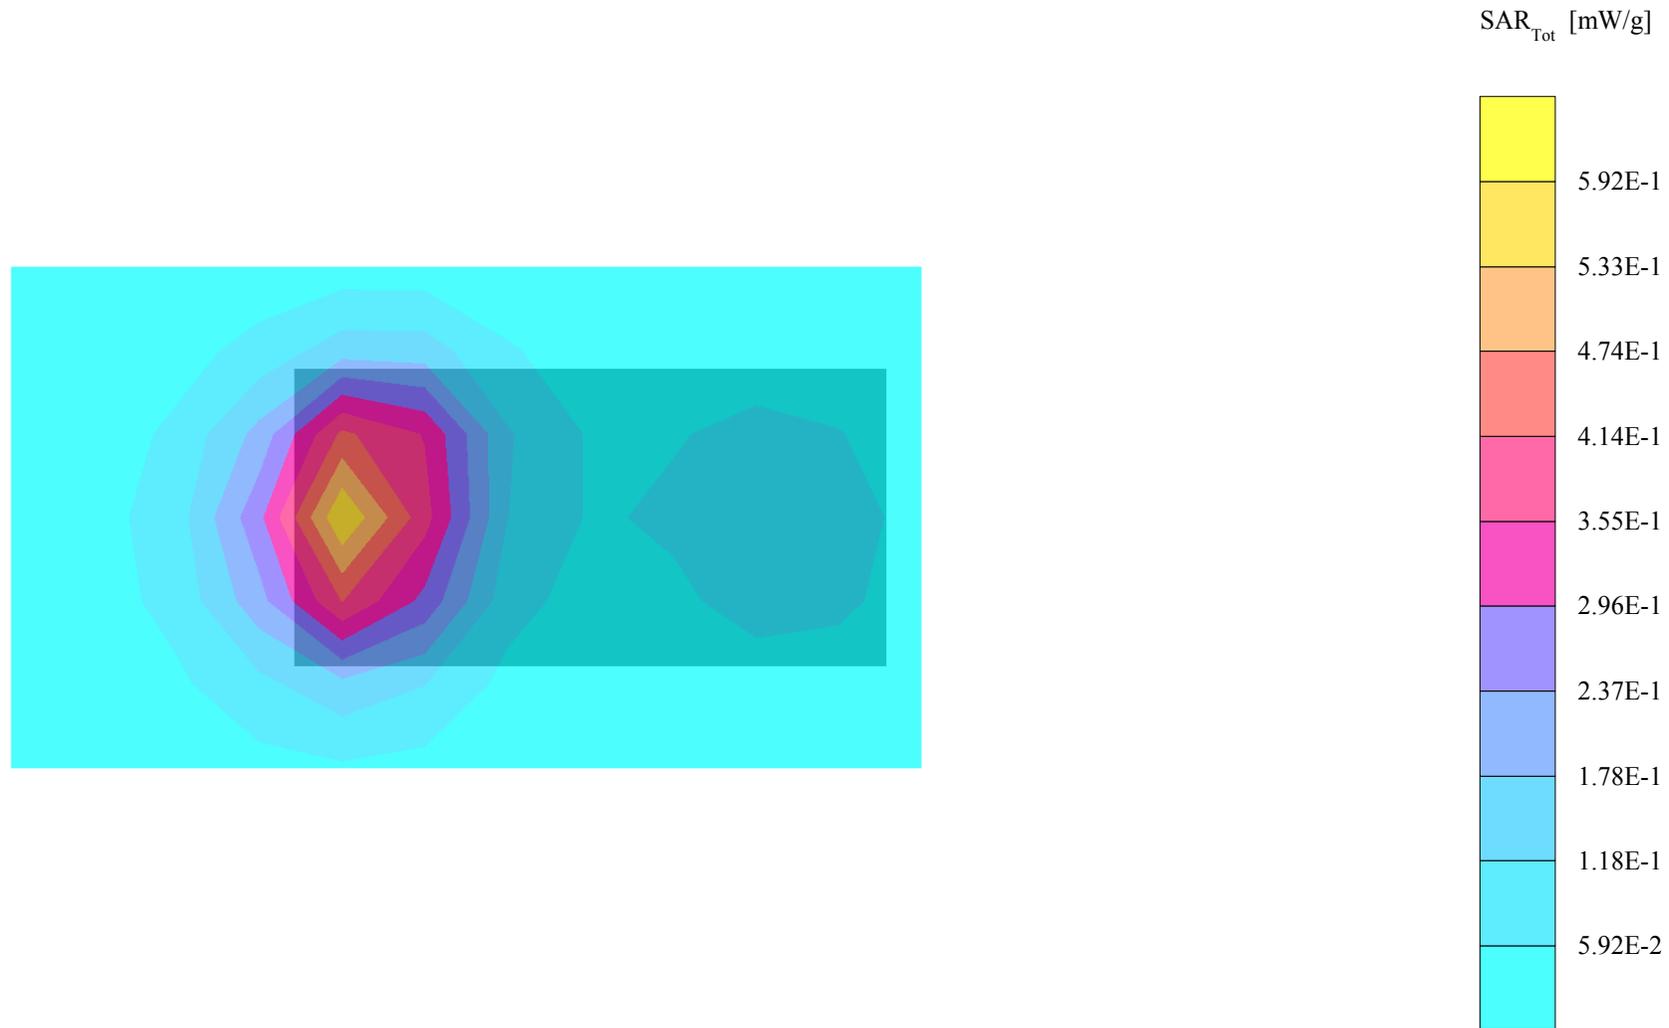


PY7A1022012

SAM 4 Phantom; Righ Hand Section; Position: (103°,301°); Frequency: 1880 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.745 mW/g, SAR (10g): 0.400 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: -0.13 dB
PY7A1022012,IMEI:692360-0 ;1880MHz(ch661), Right Hand Side,Tilt(103°) Phone
Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050426
Room's temprature=22(C-degree);Humidity=22% Blue tooth Measurement

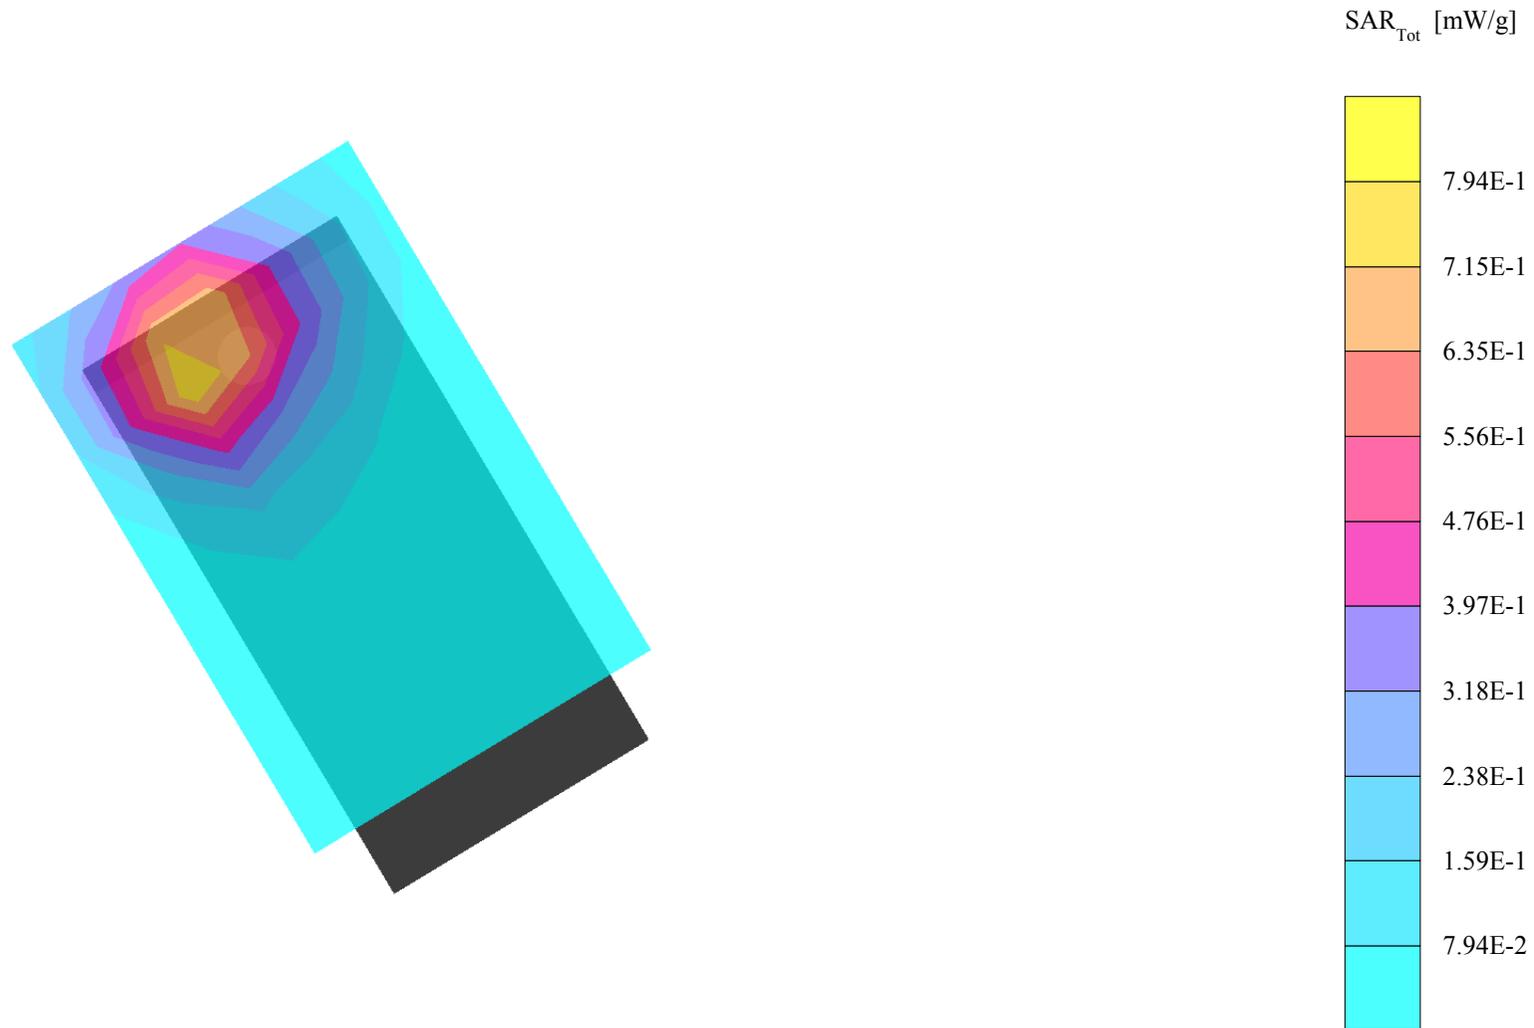

PY7A1022012

SAM 4 Phantom; Righ Hand Section; Position: (103°,301°); Frequency: 1910 MHz
Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³
Cube 5x5x7: SAR (1g): 0.548 mW/g, SAR (10g): 0.294 mW/g, (Worst-case extrapolation)
Coarse: Dx = 11.0, Dy = 11.0, Dz = 10.0
Powerdrift: 0.02 dB
PY7A1022012,IMEI:692360-0 ;1910MHz(ch810), Right Hand Side,Tilt(103°) Phone
Position, meas. Power=30.2dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050426
Room's temprature=22(C-degree);Humidity=22%

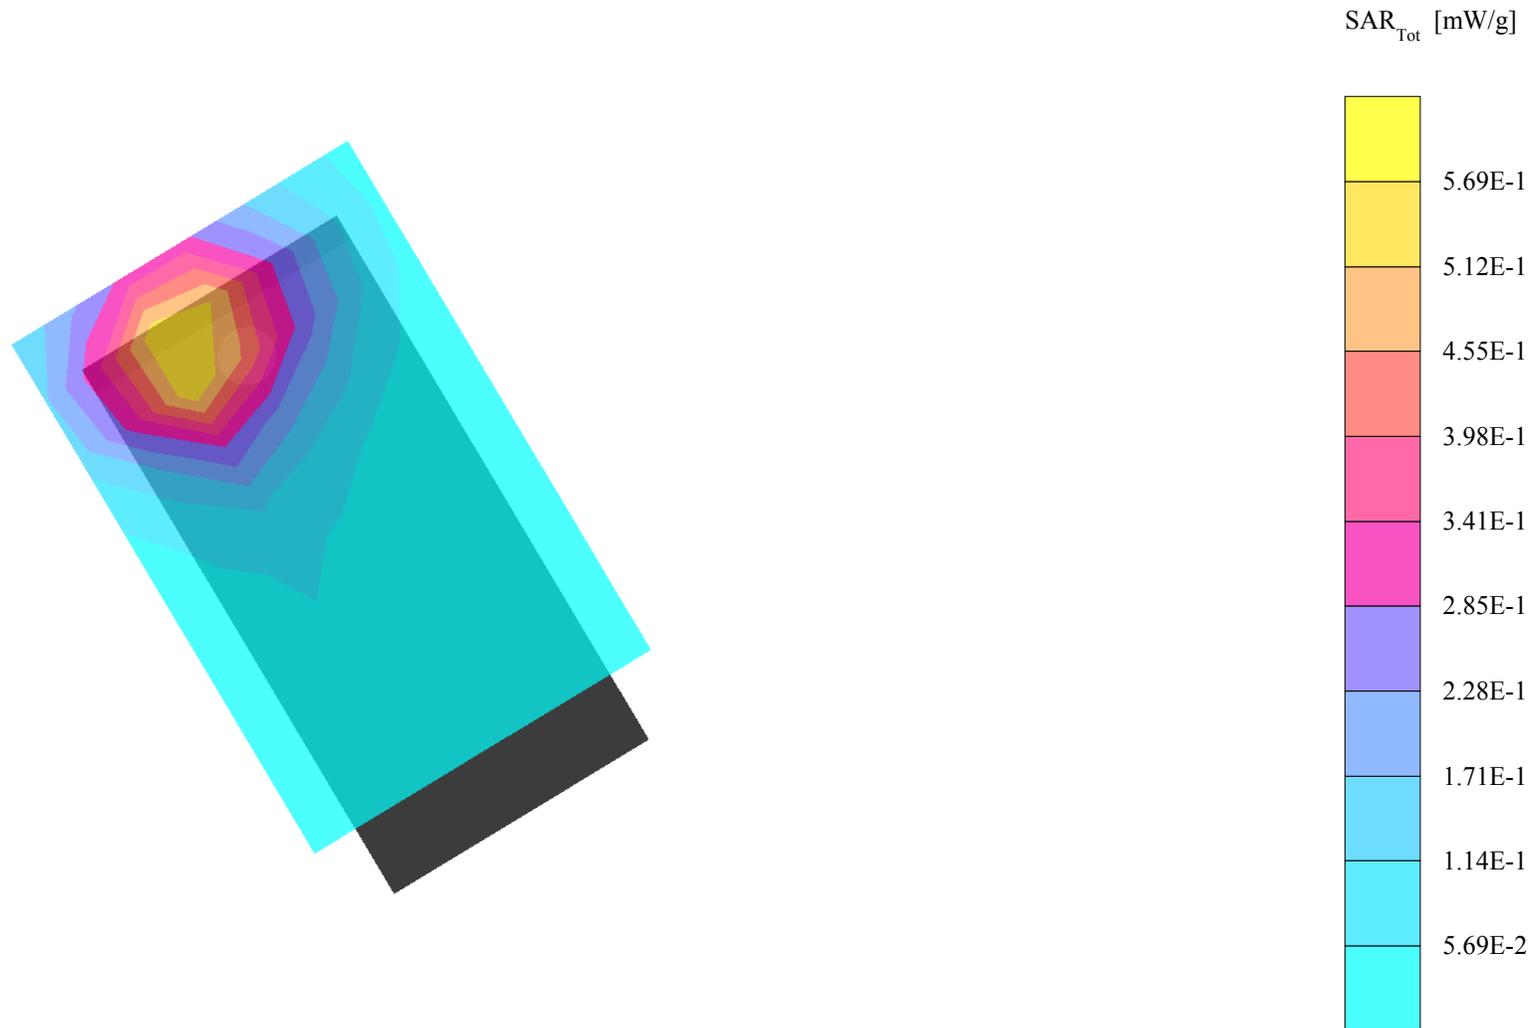

PY7A1022012

SAM 4 Phantom; Flat Section; Position: (270°,90°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 8.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³


Cube 5x5x7: SAR (1g): 0.674 mW/g, SAR (10g): 0.373 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

PY7A1022012,IMEI:692360-0 ;1880MHz(ch661),Flat Hand Side phantom,Back+15mm Phone

Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050427

Room's temprature=22(C-degree);Humidity=22%

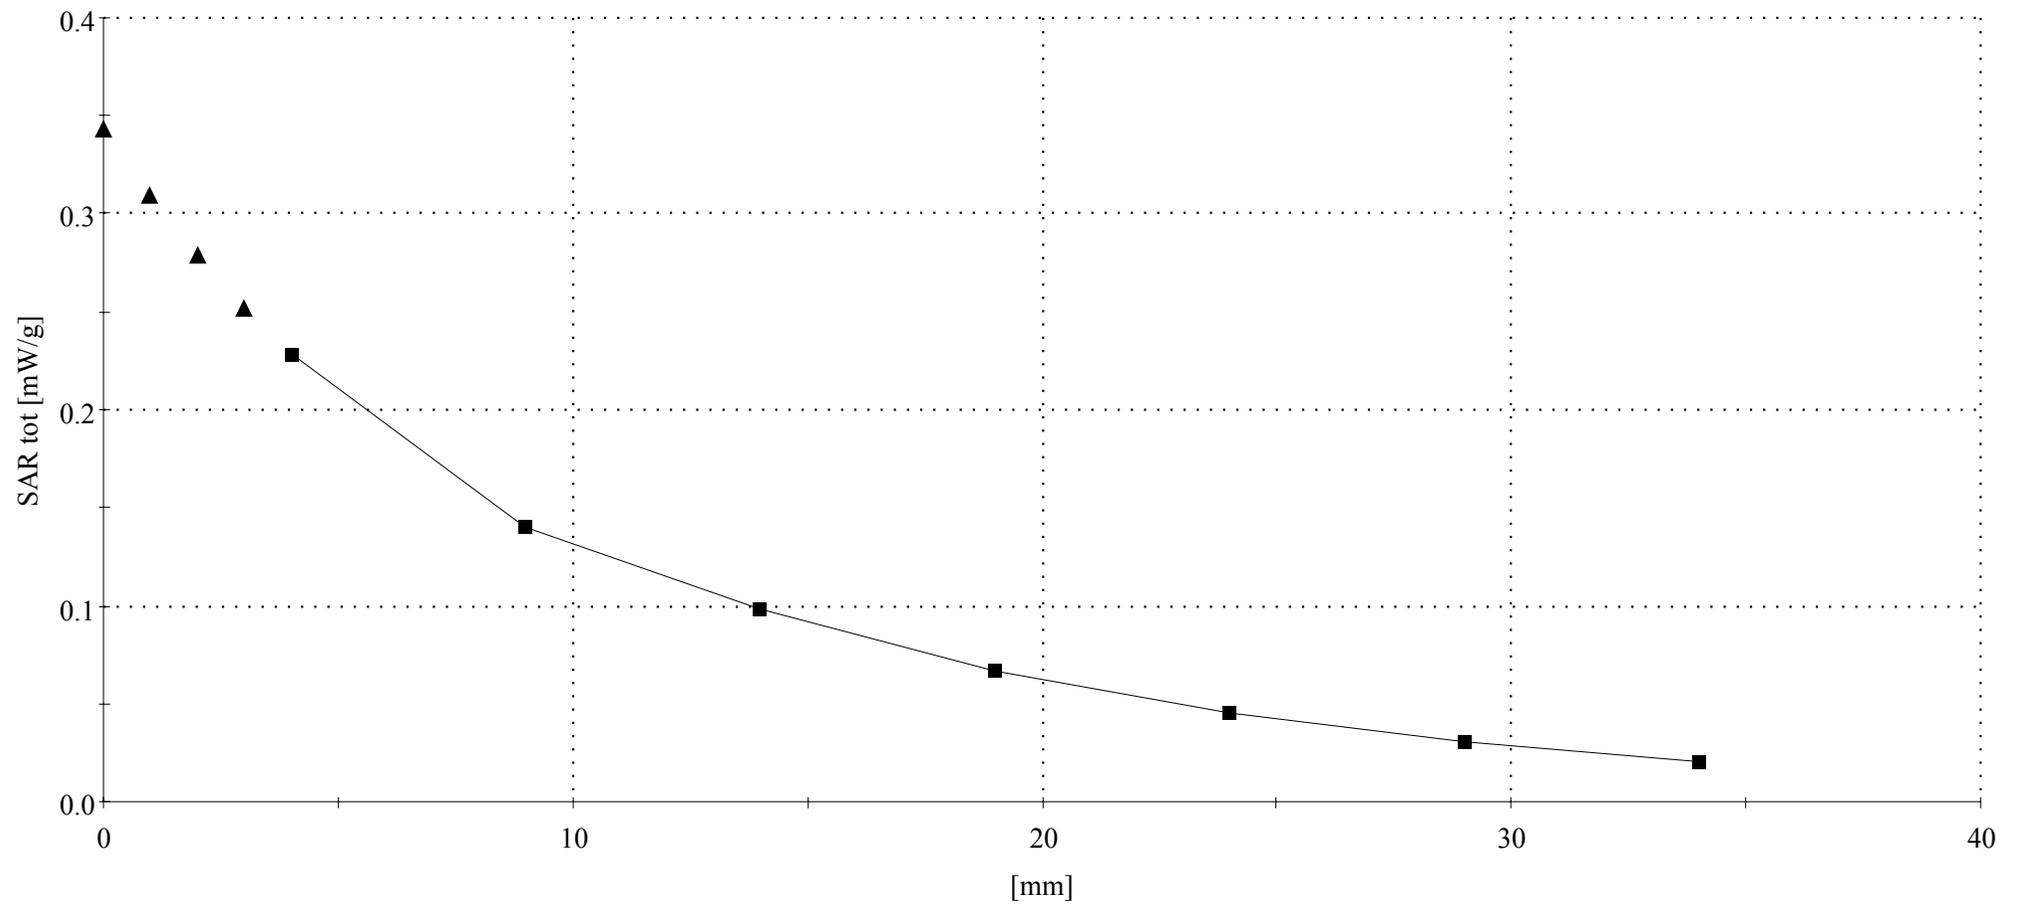

PY7A1022012

SAM 4 Phantom; Righ Hand Section; Position: (103°,301°); Frequency: 1880 MHz

Probe: ET3DV6 - SN1585; ConvF(5.03,5.03,5.03); Crest factor: 8.0; Head 1900MHz: $\sigma = 1.46$ mho/m $\epsilon_r = 38.4$ $\rho = 1.00$ g/cm³


Cube 5x5x7: SAR (1g): 0.772 mW/g, SAR (10g): 0.415 mW/g, (Worst-case extrapolation)

Cube 5x5x7: Dx = 8.0, Dy = 8.0, Dz = 5.0

PY7A1022012,IMEI:692360-0 ;1880MHz(ch661), Right Hand Side,Tilt(103°) Phone

Position, meas. Power=30.3dBm, Nom.Power=30.5dBm;liquid'stemprature=22c Date:050426

Room's temprature=22(C-degree);Humidity=22%

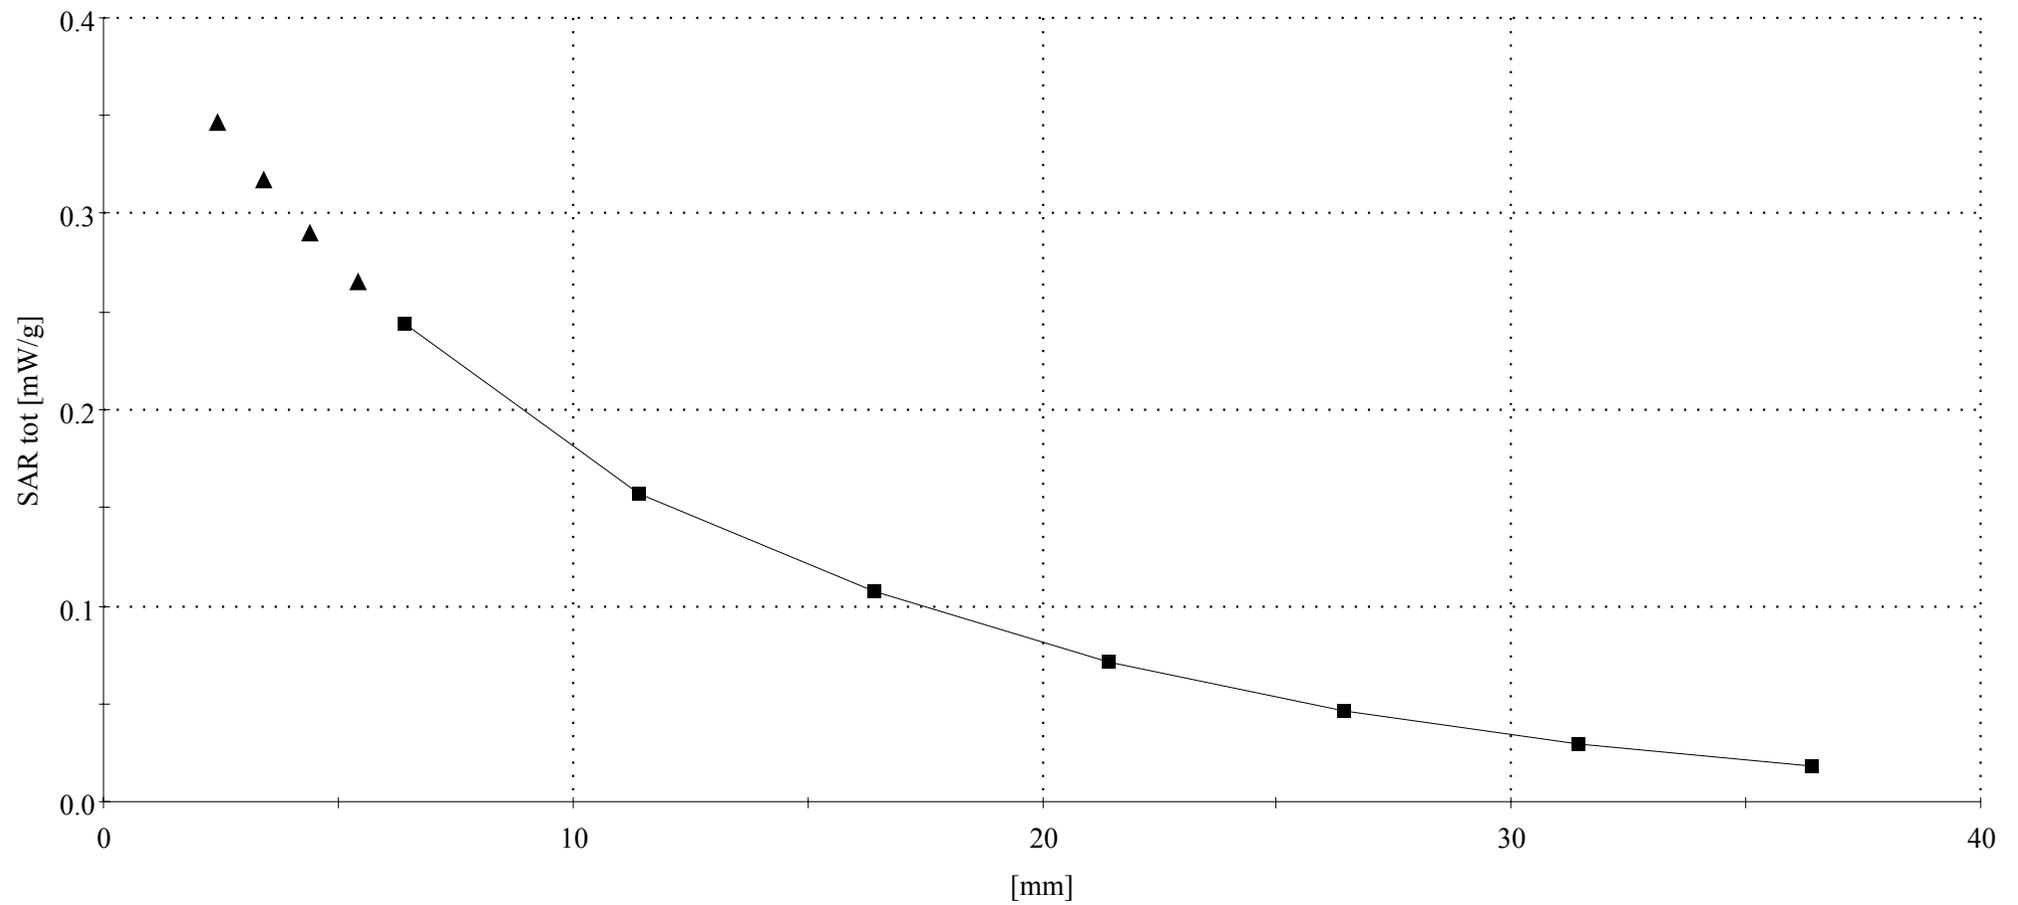

D1900 V2

SAM 4 Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 1.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 4.31 mW/g, SAR (10g): 2.21 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0


Powerdrift: -0.11 dB

P=100mW, d=10mm, 1900MHz dipol D1900V2 s/n 5d002

Target values: 1g mass 43.2mW/g, 10g mass 22.4 mW/g

Measured values: 1g mass 43.5mW/g(-0,2%), 10g mass 22.4 mW/g(-1.3%)

BODY LIQUID'S Temperature 23.5C ; Room's Temperature 27, Humidity 24%

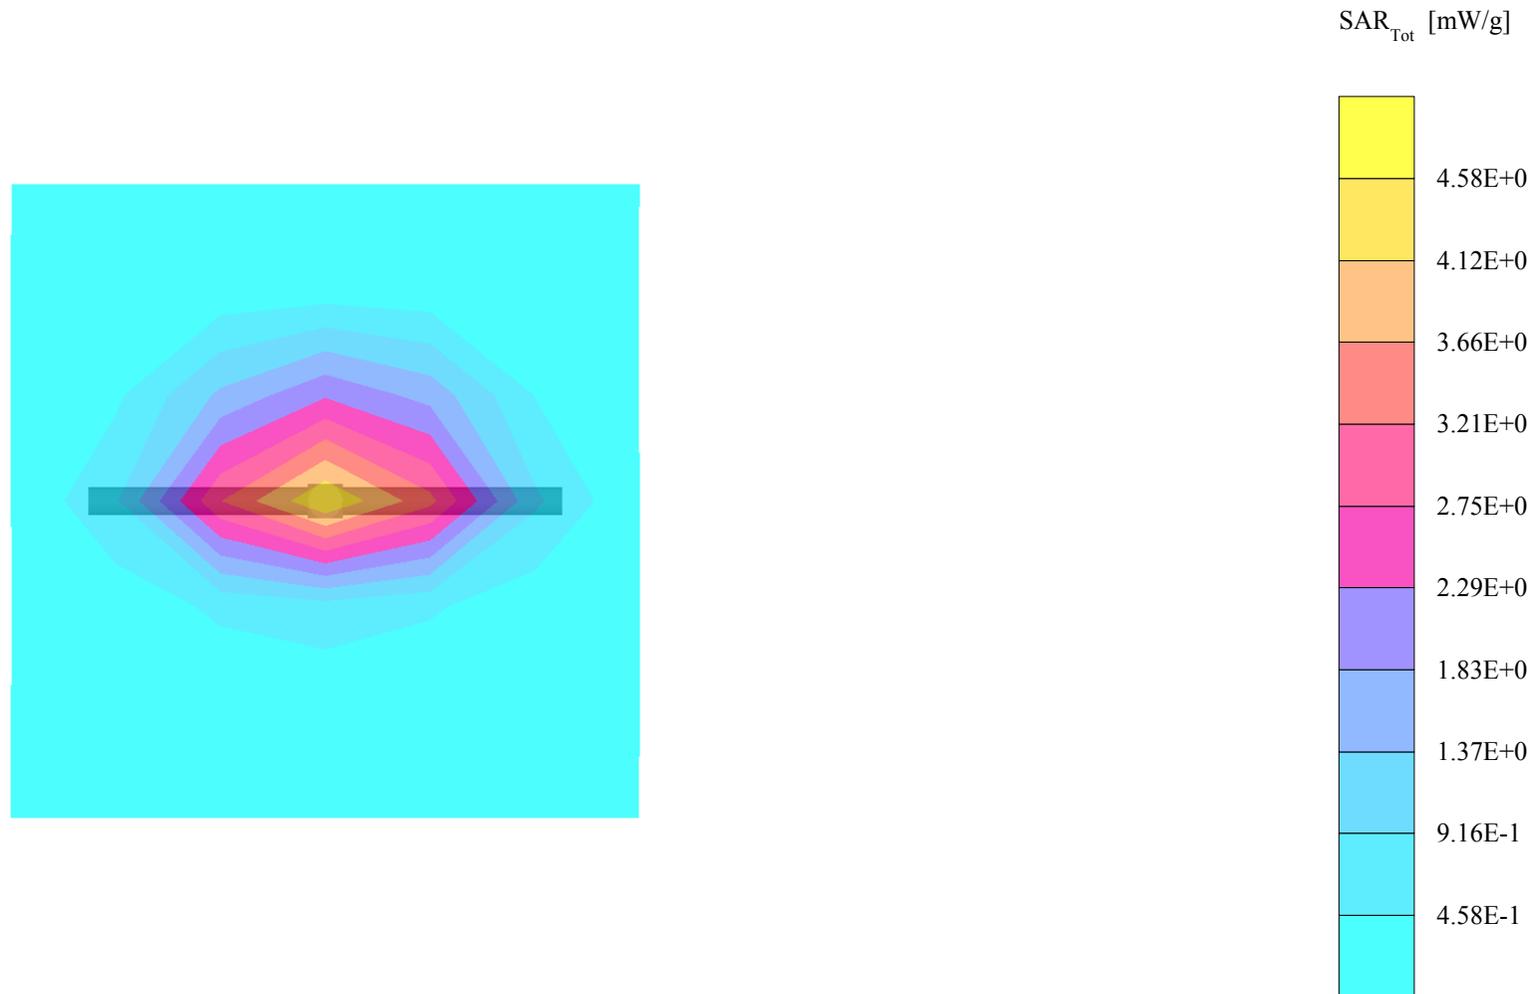

D1900 V2

SAM 4 Phantom; Flat Section; Position: (90°,90°); Frequency: 1900 MHz

Probe: ET3DV6 - SN1585; ConvF(4.62,4.62,4.62); Crest factor: 1.0; Muscle 1900: $\sigma = 1.52$ mho/m $\epsilon_r = 50.8$ $\rho = 1.00$ g/cm³

Cube 5x5x7: SAR (1g): 4.31 mW/g, SAR (10g): 2.21 mW/g, (Worst-case extrapolation)

Coarse: Dx = 15.0, Dy = 15.0, Dz = 15.0

Powerdrift: -0.11 dB

P=100mW, d=10mm, 1900MHz dipol D1900V2 s/n 5d002

Target values: 1g mass 43.2mW/g, 10g mass 22.4 mW/g

Measured values: 1g mass 43.5mW/g(-0,2%), 10g mass 22.4 mW/g(-1.3%)

BODY LIQUID'S Temperature 23.5C ; Room's Temperature 27, Humidity 24%

