



Accredited testing laboratory

DAR registration number: DAT-P-176/94-D1

Test report no. : 2-4883-68-08/08
Type identification : AAB-1880014-BV
Test specification : IEEE 1528-2003
FCC-ID : PY7A1880014
IC-ID : 4170B-A1880014

Table of Contents

1 General Information..... 3

1.1 Notes..... 3

1.1.1 Statement of Compliance 3

1.2 Testing laboratory..... 4

1.3 Details of applicant..... 4

1.4 Application details..... 4

1.5 Test item..... 5

1.6 Test specification(s) 6

1.6.1 RF exposure limits 6

2 Technical test..... 7

2.1 Summary of test results 7

2.2 Test environment..... 7

2.3 Measurement and test set-up 7

2.4 Measurement system 8

2.4.1 System Description 8

2.4.2 Test environment 9

2.4.3 Probe description 9

2.4.4 Phantom description..... 10

2.4.5 Device holder description 10

2.4.6 Scanning procedure..... 11

2.4.7 Spatial Peak SAR Evaluation..... 12

2.4.8 Data Storage and Evaluation..... 13

2.4.9 Test equipment utilized..... 15

2.4.10 Tissue simulating liquids: dielectric properties..... 16

2.4.11 Tissue simulating liquids: parameters 17

2.4.12 Measurement uncertainty evaluation for SAR test 18

2.4.13 Measurement uncertainty evaluation for system validation..... 19

2.4.14 System validation..... 20

2.4.15 Validation procedure..... 21

2.5 Test results (conducted power measurement)..... 22

2.5.1 Multiple Transmitter Information 22

2.6 Test results (Head and Body SAR)..... 23

2.6.1 General description of test procedures..... 25

Annex 1 System performance verification 26

Annex 2 Measurement results (printout from DASY TM) 31

Annex 2.1 PCS 850 MHz head..... 31

Annex 2.2 PCS 850 MHz body 55

Annex 2.3 PCS 1900 MHz head..... 63

Annex 2.4 PCS 1900 MHz body 87

Annex 2.5 Z-axis scans..... 95

Annex 3 Photo documentation 97

Annex 3.1 Liquid depth 115

Annex 4 RF Technical Brief Cover Sheet acc. to RSS-102 117

Annex 4.1 Declaration of RF Exposure Compliance..... 117

Annex 5 Calibration parameters..... 118

1 General Information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

1.1.1 Statement of Compliance

The SAR values found for the AAB-1880014-BV **GSM Mobile Phone** are below the maximum recommended levels of 1.6 W/Kg as averaged over any 1 g tissue according to the FCC rule §2.1093, the ANSI/IEEE C 95.1:1999, the NCRP Report Number 86 for uncontrolled environment, according to the Health Canada's Safety Code 6 and the Industry Canada Radio Standards Specification RSS-102 for General Population/Uncontrolled exposure.

For body worn operation, this device has been tested and meets FCC RF exposure guidelines when used with any accessory that contains no metal and that positions the handset a minimum of 15 mm from the body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines.

The measurement together with the test system set-up is described in chapter 2.3 of this test report. A detailed description of the equipment under test can be found in chapter 1.5.

Test engineer:

2009-01-07

Oleksandr Hnatovskiy



Date

Name

Signature

Technical responsibility for area of testing:

2009-01-07

Thomas Vogler



Date

Name

Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Straße 6-10,
66117 Saarbruecken
Germany
Telephone: + 49 681 598 - 0
Fax: + 49 681 598 - 8475

e-mail: info@ict.cetecom.de
Internet: <http://www.cetecom-ict.de>

State of accreditation: The Test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025. DAR registration number: DAT-P-176/94-D1

Test location, if different from CETECOM ICT Services GmbH

Name: ---
Street: ---
Town: ---
Country: ---
Phone: ---
Fax: ---

1.3 Details of applicant

Name: Sony Ericsson Mobile Communications AB
Street: Mobilvägen 10
Town: 22188 Lund
Country: Sweden
Contact: Mr. Peter Lindeborg
Telephone: +46-10-802-43 68

1.4 Application details

Date of receipt of application: 2008-12-22
Date of receipt of test item: 2008-12-23
Start/Date of test: 2008-12-30
End of test: 2009-01-06

Person(s) present during the test: ---

1.5 Test item

Description of the test item: GSM Mobile Phone
 Type identification: AAB-1880014-BV
 FCC-ID : PY7A1880014
 IC-ID : 4170B-A1880014
 Serial number: CB5A0YZRSL

Manufacturer:
 Name: Sony Ericsson Mobile Communications AB
 Street: Mobilvägen 10
 Town: 22188 Lund
 Country: Sweden

additional information on the DUT:		
device type :	portable device	
IMEI No :	0044017-696304-6	
exposure category:	uncontrolled environment / general population	
test device production information	production unit	
device operating configurations :		
operating mode(s)	GSM, DCS, PCS, Bluetooth	
modulation	GMSK, 8-PSK	
GPRS mobile station class :	B	
GPRS multislot class :	10	voice mode : ---
EGPRS multislot class	10	voice mode : ---
maximum no. of timeslots in uplink:	2	
operating frequency range(s)	transmitter frequency range	receiver frequency range
PCS 1900 (tested):	1850.2 MHz ~ 1909.8 MHz	1930.2 MHz ~ 1989.8 MHz
PCS 850 (tested):	824.2 MHz ~ 848.8 MHz	869.2 MHz ~ 893.8 MHz
DCS 1800	1710 MHz ~ 1785 MHz	1805 MHz ~ 1880 MHz
GSM 900	880 MHz ~ 915 MHz	925 MHz ~ 960 MHz
Power class :	1, tested with power level 0 (1900 MHz band) 4, tested with power level 5 (850 MHz band)	
measured peak output power (conducted):	850 MHz band: 33.5dBm (GMSK); 27.7dBm (8-PSK) 1900 MHz band: 30.3dBm (GMSK); 24.9dBm (8-PSK)	
test channels (low-mid-high) :	128-190-251 (850 MHz band) 512-661-810 (1900 MHz band)	
hardware version :	AP1	
software version :	R1CA015	
antenna type :	Integrated antenna	
accessories/body-worn configurations:	Stereo headset	
battery options :	Sony Ericsson Battery BST-33 Li-Polymer 3.6V 950mAh	

1.6 Test specification(s)

Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01)

IEEE 1528-2003 (April 21, 2003)

RSS-102: Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands (Issue 2 of November 2005))

Canada’s Safety Code 6: Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz (99-EHD-237)

IEEE Std C95.3 – 1991, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields – RF and Microwave.

IEEE Std C95.1 – 1999, IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.

1.6.1 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Table 1: RF exposure limits

The limit applied in this test report is shown in **bold** letters

Notes:

- * The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time
- ** The Spatial Average value of the SAR averaged over the whole body.
- *** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

2 Technical test

2.1 Summary of test results

No deviations from the technical specification(s) were ascertained in the course of the tests performed.	<input checked="" type="checkbox"/>
The deviations as specified in 2.5 were ascertained in the course of the tests performed.	<input type="checkbox"/>

2.2 Test environment

General Environment conditions in the test area are as follows:

Ambient temperature: 20°C – 24°C
 Tissue simulating liquid: 20°C – 24°C
 Humidity: 40% – 50%

Exact temperature values for each test are shown in the table(s) under 2.5. and/or on the measurement plots.

2.3 Measurement and test set-up


The measurement system is described in chapter 2.4.

The test setup for the system validation can be found in chapter 2.4.14.

A description of positioning and test signal control can be found in chapter 2.5 together with the test results.

2.4 Measurement system

2.4.1 System Description

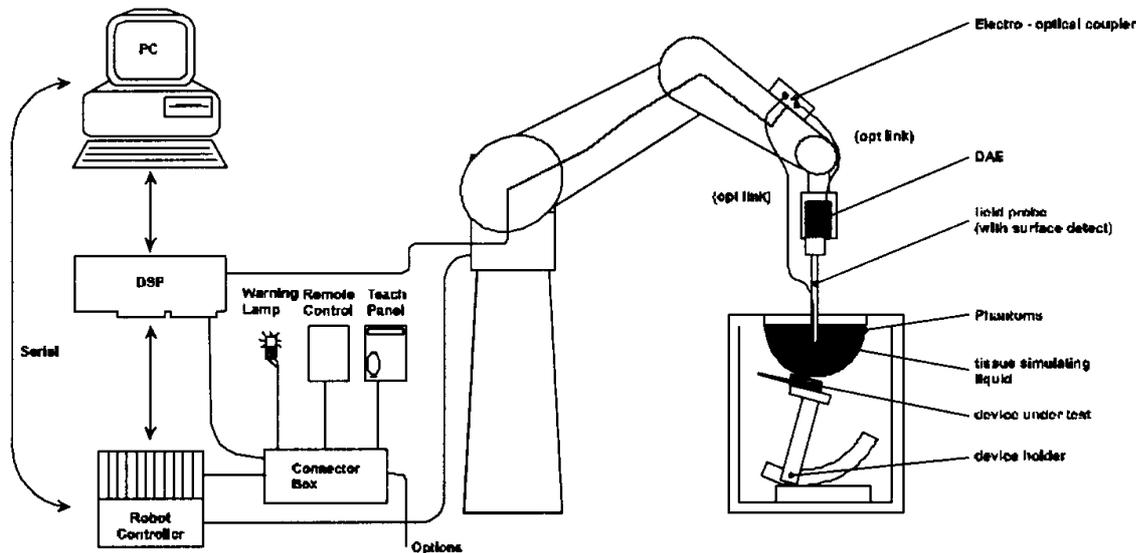

The DAS4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- A unit to operate the optical surface detector which is connected to the EOC.
- The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DAS4 measurement server.
- The DAS4 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2000
- DAS4 software and SEMCAD data evaluation software.
- Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
- The generic twin phantom enabling the testing of left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- System validation dipoles allowing to validate the proper functioning of the system.

2.4.2 Test environment

The DASY4 measurement system is placed at the head end of a room with dimensions: 5 x 2.5 x 3 m³, the SAM phantom is placed in a distance of 75 cm from the side walls and 1.1m from the rear wall. Above the test system a 1.5 x 1.5 m² array of pyramid absorbers is installed to reduce reflections from the ceiling.

Picture 1 of the photo documentation shows a complete view of the test environment.

The system allows the measurement of SAR values larger than 0.005 mW/g.

2.4.3 Probe description


Isotropic E-Field Probe ET3DV6 for Dosimetric Measurements

Technical data according to manufacturer information	
Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
Calibration	In air from 10 MHz to 2.5 GHz In head tissue simulating liquid (HSL) at 900 (800-1000) MHz and 1.8 GHz (1700-1910 MHz) (accuracy ± 9.5%; k=2) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to 3 GHz (dosimetry); Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)
Dynamic range	5 µW/g to > 100 mW/g; Linearity: ± 0.2 dB
Optical Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces (ET3DV6 only)
Dimensions	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (ET3DV6)

2.4.4 Phantom description

The used SAM Phantom meets the requirements specified in Edition 01-01 of Supplement C to OET Bulletin 65 for Specific Absorption Rate (SAR) measurements.

The phantom consists of a fibreglass shell integrated in a wooden table. It allows left-hand and right-hand head as well as body-worn measurements with a maximum liquid depth of 18 cm in head position and 22 cm in planar position (body measurements). The thickness of the Phantom shell is 2 mm +/- 0.1 mm.

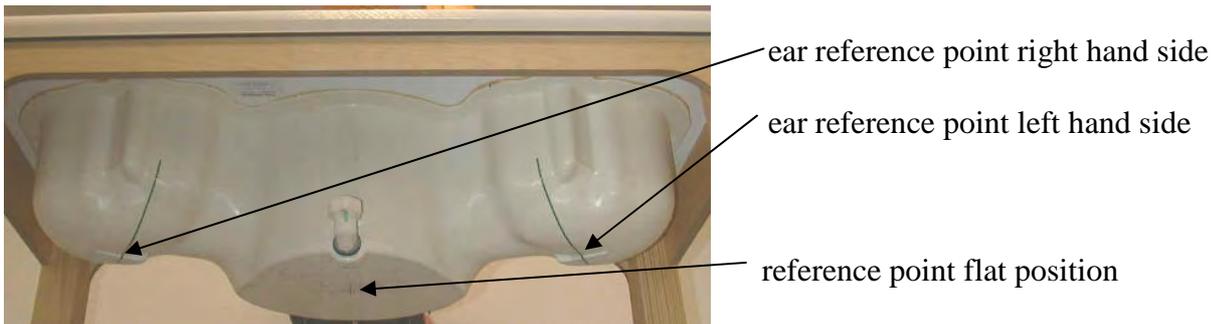

2.4.5 Device holder description

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used.



Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values.

Therefore those devices are normally only tested at the flat part of the SAM.

2.4.6 Scanning procedure

The DASY4 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

- The „reference“ and „drift“ measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. +/- 5 %.
- The „surface check“ measurement tests the optical surface detection system of the DASY4 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe. (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)
- The „area scan“ measures the SAR above the DUT or verification dipole on a parallel plane to the surface. It is used to locate the approximate location of the peak SAR with 2D spline interpolation. The robot performs a stepped movement along one grid axis while the local electrical field strength is measured by the probe. The probe is touching the surface of the SAM during acquisition of measurement values. The standard scan uses large grid spacing for faster measurement. Standard grid spacing for head measurements is 15 mm in x- and y- dimension. If a finer resolution is needed, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result. For special applications where the standard scan method does not find the peak SAR within the grid, e.g. mobile phones with flip cover, the grid can be adapted in orientation. Results of this coarse scan are shown in annex 2.
- A „7x7x7 zoom scan“ measures the field in a volume around the 2D peak SAR value acquired in the previous „coarse“ scan. This is a fine 7x7 grid where the robot additionally moves the probe in 7 steps along the z-axis away from the bottom of the Phantom. Grid spacing for the cube measurement is 5 mm in x and y-direction and 5 mm in z-direction. DASY4 is also able to perform repeated zoom scans if more than 1 peak is found during area scan. In this document, the evaluated peak 1g and 10g averaged SAR values are shown in the 2D-graphics in annex 2. Test results relevant for the specified standard (see chapter 1.6.) are shown in table form in chapter 2.5.
- A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x7 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 2mm steps. This measurement shows the continuity of the liquid and can - depending in the field strength – also show the liquid depth. A z-axis scan of the measurement with maximum SAR value is shown in annex 2.

2.4.7 Spatial Peak SAR Evaluation

The spatial peak SAR - value for 1 and 10 g is evaluated after the Cube measurements have been done. The basis of the evaluation are the SAR values measured at the points of the fine cube grid consisting of 7 x 7 x 7 points. The algorithm that finds the maximal averaged volume is separated into three different stages.

- The data between the dipole center of the probe and the surface of the phantom are extrapolated. This data cannot be measured since the center of the dipole is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is about 1 mm (see probe calibration sheet). The extrapolated data from a cube measurement can be visualized by selecting 'Graph Evaluated'.
- The maximum interpolated value is searched with a straight-forward algorithm. Around this maximum the SAR - values averaged over the spatial volumes (1g or 10 g) are computed using the 3d-spline interpolation algorithm. If the volume cannot be evaluated (i.e., if a part of the grid was cut off by the boundary of the measurement area) the evaluation will be started on the corners of the bottom plane of the cube.
- All neighboring volumes are evaluated until no neighboring volume with a higher average value is found.

Extrapolation

The extrapolation is based on a least square algorithm [W. Gander, Computermathematik, p.168-180]. Through the points in the first 3 cm along the z-axis, polynomials of order four are calculated. These polynomials are then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from each other.

Interpolation

The interpolation of the points is done with a 3d-Spline. The 3d-Spline is composed of three one-dimensional splines with the "Not a knot"-condition [W. Gander, Computermathematik, p.141-150] (x, y and z -direction) [Numerical Recipes in C, Second Edition, p.123ff].

Volume Averaging

At First the size of the cube is calculated. Then the volume is integrated with the trapezoidal algorithm. 8000 points (20x20x20) are interpolated to calculate the average.

Advanced Extrapolation

DASY4 uses the advanced extrapolation option which is able to compensate boundary effects on E-field probes.

2.4.8 Data Storage and Evaluation

Data Storage

The DASY4 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	Dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf/dcp_i$$

with V_i = compensated signal of channel i (i = x, y, z)
 U_i = input signal of channel i (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes: $E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$

H-field probes: $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 [mV/(V/m)²] for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\rho \cdot 1000)$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²
 E_{tot} = total electric field strength in V/m
 H_{tot} = total magnetic field strength in A/m

2.4.9 Test equipment utilized

This table gives a complete overview of the SAR measurement equipment

Devices used during the test described in chapter 2.5. are marked ☒

	Manufacturer	Device	Type	Serial number	Date of last calibration)*
☒	Schmid & Partner Engineering AG	Dosimetric E-Field Probe	ET3DV6	1558	August 15, 2008
☐	Schmid & Partner Engineering AG	Dosimetric E-Field Probe	ET3DV6	1559	January 23, 2008
☒	Schmid & Partner Engineering AG	900 MHz System Validation Dipole	D900V2	102	August 18, 2008
☐	Schmid & Partner Engineering AG	1800 MHz System Validation Dipole	D1800V2	287	August 19, 2008
☒	Schmid & Partner Engineering AG	1900 MHz System Validation Dipole	D1900V2	531	May 14, 2008
☐	Schmid & Partner Engineering AG	2450 MHz System Validation Dipole	D2450V2	710	August 20, 2008
☐	Schmid & Partner Engineering AG	Data acquisition electronics	DAE3V1	413	January 18, 2008
☒	Schmid & Partner Engineering AG	Data acquisition electronics	DAE3V1	477	May 14, 2008
☒	Schmid & Partner Engineering AG	Software	DASY 4 V4.5	---	N/A
☒	Schmid & Partner Engineering AG	Phantom	SAM	---	N/A
☒	Rohde & Schwarz	Universal Radio Communication Tester	CMU 200	832221/055	March 20, 2008
☒	Hewlett Packard)*	Network Analyser 300 kHz to 6 GHz	8753C	2937U00269	March 13, 2007
☒	Hewlett Packard)*	Network Analyser 300 kHz to 6 GHz	85047A	2936A00872	March 13, 2007
☒	Hewlett Packard	Dielectric Probe Kit	85070C	US99360146	N/A
☒	Hewlett Packard	Signal Generator	8665A	2833A00112	November 12, 2007
☒	Amplifier Reasearch	Amplifier	25S1G4 (25 Watt)	20452	N/A
☒	Rohde & Schwarz	Power Meter	NRP	101367	January 9, 2008
☒	Rohde & Schwarz	Power Meter Sensor	NRP Z22	100227	January 9, 2008
☒	Rohde & Schwarz	Power Meter Sensor	NRP Z22	100234	January 9, 2008

)* : Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

2.4.10 Tissue simulating liquids: dielectric properties

The following materials are used for producing the tissue-equivalent materials.

(liquids used for tests described in chapter 2.5. are marked with ☒) :

Ingredients (% of weight)	Frequency (MHz)					
	<input type="checkbox"/> 450	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 900	<input type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input type="checkbox"/> 2450
frequency band	<input type="checkbox"/> 450	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 900	<input type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input type="checkbox"/> 2450
Tissue Type	Head	Head	Head	Head	Head	Head
Water	38.56	41.45	40.92	52.64	54.9	62.7
Salt (NaCl)	3.95	1.45	1.48	0.36	0.18	0.5
Sugar	56.32	56.0	56.5	0.0	0.0	0.0
HEC	0.98	1.0	1.0	0.0	0.0	0.0
Bactericide	0.19	0.1	0.1	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	36.8
DGBE	0.0	0.0	0.0	47.0	44.92	0.0

Table 2: Head tissue dielectric properties

Ingredients (% of weight)	Frequency (MHz)					
	<input type="checkbox"/> 450	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 900	<input type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input type="checkbox"/> 2450
frequency band	<input type="checkbox"/> 450	<input checked="" type="checkbox"/> 835	<input type="checkbox"/> 900	<input type="checkbox"/> 1800	<input checked="" type="checkbox"/> 1900	<input type="checkbox"/> 2450
Tissue Type	Body	Body	Body	Body	Body	Body
Water	51.16	52.4	56.0	69.91	69.91	73.2
Salt (NaCl)	1.49	1.40	0.76	0.13	0.13	0.04
Sugar	46.78	45.0	41.76	0.0	0.0	0.0
HEC	0.52	1.0	1.21	0.0	0.0	0.0
Bactericide	0.05	0.1	0.27	0.0	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0
DGBE	0.0	0.0	0.0	29.96	29.96	26.7

Table 3: Body tissue dielectric properties

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16MΩ+ resistivity

HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100(ultra pure): Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

Note : Due to their availability body tissue simulating liquids as defined by FCC OET

Bulletin 65 Supplement C are generally used for body worn SAR testing according to European standards.

2.4.11 Tissue simulating liquids: parameters

Used Target Frequency [MHz]	Target Head Tissue		Measured Head Tissue		Measured Date
	Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	
835	41.5	0.90	40.7	0.90	2008-12-31
900	41.5	0.97	40.0	0.96	2008-12-31
1900	40.0	1.40	39.6	1.41	2009-01-06

Table 4: Parameter of the head tissue simulating liquid

Used Target Frequency [MHz]	Target Body Tissue		Measured Body Tissue		Measured Date
	Permittivity	Conductivity [S/m]	Permittivity	Conductivity [S/m]	
835	55.2	0.97	55.2	0.97	2009-01-03
900	55.0	1.05	54.6	1.04	2009-01-03
1900	53.3	1.52	52.4	1.50	2009-01-05

Table 5: Parameter of the body tissue simulating liquid

Note: The dielectric properties have been measured using the contact probe method at 22°C.

2.4.12 Measurement uncertainty evaluation for SAR test

The overall combined measurement uncertainty of the measurement system is $\pm 10,3\%$ ($K=1$).

The expanded uncertainty ($k=2$) is assessed to be $\pm 20.6\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i 1g	c_i 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 4.8\%$	Normal	1	1	1	$\pm 4.8\%$	$\pm 4.8\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
Hemispherical isotropy	$\pm 9.6\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 3.9\%$	$\pm 3.9\%$	∞
Spatial resolution	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Readout electronics	$\pm 1.0\%$	Normal	1	1	1	$\pm 1.0\%$	$\pm 1.0\%$	∞
Response time	$\pm 0.8\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.5\%$	$\pm 0.5\%$	∞
Integration time	$\pm 2.6\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.5\%$	$\pm 1.5\%$	∞
RF ambient conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Test Sample Related								
Device positioning	$\pm 2.9\%$	Normal	1	1	1	$\pm 2.9\%$	$\pm 2.9\%$	145
Device holder uncertainty	$\pm 3.6\%$	Normal	1	1	1	$\pm 3.6\%$	$\pm 3.6\%$	5
Power drift	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.9\%$	$\pm 2.9\%$	∞
Phantom and Set-up								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	∞
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	∞
Combined Uncertainty						$\pm 10.3\%$	$\pm 10.0\%$	330
Expanded Std. Uncertainty						$\pm 20.6\%$	$\pm 20.1\%$	

Table 6: Measurement uncertainties

2.4.13 Measurement uncertainty evaluation for system validation

The overall combined measurement uncertainty of the measurement system is $\pm 8.4\%$ ($K=1$).

The expanded uncertainty ($k=2$) is assessed to be $\pm 16.8\%$

This measurement uncertainty budget is suggested by IEEE P1528 and determined by Schmid & Partner Engineering AG. The breakdown of the individual uncertainties is as follows:

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c_i 1g	c_i 10g	Standard Uncertainty 1g	Standard Uncertainty 10g	v_i^2 or v_{eff}
Measurement System								
Probe calibration	$\pm 4.8\%$	Normal	1	1	1	$\pm 4.8\%$	$\pm 4.8\%$	∞
Axial isotropy	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 1.9\%$	$\pm 1.9\%$	∞
Hemispherical isotropy	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	0.7	0.7	$\pm 0.0\%$	$\pm 3.9\%$	∞
Boundary effects	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Probe linearity	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
System detection limits	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Readout electronics	$\pm 1.0\%$	Normal	1	1	1	$\pm 1.0\%$	$\pm 1.0\%$	∞
Response time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
Integration time	$\pm 0.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.0\%$	$\pm 0.0\%$	∞
RF ambient conditions	$\pm 3.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Probe positioner	$\pm 0.4\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.2\%$	$\pm 0.2\%$	∞
Probe positioning	$\pm 2.9\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 1.7\%$	$\pm 1.7\%$	∞
Max. SAR evaluation	$\pm 1.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 0.6\%$	$\pm 0.6\%$	∞
Test Sample Related								
Dipole axis to liquid distance	$\pm 2.0\%$	Normal	1	1	1	$\pm 1.2\%$	$\pm 1.2\%$	∞
Power drift	$\pm 4.7\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.7\%$	$\pm 2.7\%$	∞
Phantom and Set-up								
Phantom uncertainty	$\pm 4.0\%$	Rectangular	$\sqrt{3}$	1	1	$\pm 2.3\%$	$\pm 2.3\%$	∞
Liquid conductivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.64	0.43	$\pm 1.8\%$	$\pm 1.2\%$	∞
Liquid conductivity (meas.)	$\pm 2.5\%$	Normal	1	0.64	0.43	$\pm 1.6\%$	$\pm 1.1\%$	∞
Liquid permittivity (target)	$\pm 5.0\%$	Rectangular	$\sqrt{3}$	0.6	0.49	$\pm 1.7\%$	$\pm 1.4\%$	∞
Liquid permittivity (meas.)	$\pm 2.5\%$	Normal	1	0.6	0.49	$\pm 1.5\%$	$\pm 1.2\%$	∞
Combined Uncertainty						$\pm 8.4\%$	$\pm 8.1\%$	
Expanded Std. Uncertainty						$\pm 16.8\%$	$\pm 16.2\%$	

Table 7: Measurement uncertainties

2.4.14 System validation

The system validation is performed for verifying the accuracy of the complete measurement system and performance of the software. The system validation is performed with tissue equivalent material according to IEEE P1528 (described above). The following table shows validation results for all frequency bands and tissue liquids used during the tests of the test item described in chapter 1.5. (graphic plot(s) see annex 1).

Validation Kit	Frequency	Target Peak SAR (1000 mW) (+/- 10%)	Target SAR_{1g} (1000 mW) (+/- 10%)	Measured Peak SAR (1000 mW)	Measured SAR_{1g} (1000 mW)	Measured date
D900V2 S/N: 102	900 MHz head	15.4 mW/g	10.5 mW/g	15.2 mW/g	10.4 mW/g	2008-12-31
D900V2 S/N: 102	900 MHz head	15.4 mW/g	10.5 mW/g	14.8 mW/g	10.2 mW/g	2009-01-01
D900V2 S/N: 102	900 MHz body	16.4 mW/g	10.8 mW/g	15.4 mW/g	10.7 mW/g	2009-01-03
D1900V2 S/N: 531	1900 MHz head	71.6 mW/g	37.6 mW/g	71.3 mW/g	38.4 mW/g	2009-01-06
D1900V2 S/N: 531	1900 MHz body	69.6 mW/g	38.3 mW/g	76.3 mW/g	41.4 mW/g	2009-01-05


Table 8: Results system validation

Note : 900 MHz probe/dipole calibration is valid +/-100 MHz and fully covers the 850 MHz band.

2.4.15 Validation procedure

The validation is performed by using a validation dipole which is positioned parallel to the planar part of the SAM phantom at the reference point. The distance of the dipole to the SAM phantom is determined by a plexiglass spacer. The dipole is connected to the signal source consisting of signal generator and amplifier via a directional coupler, N-connector cable and adaption to SMA. It is fed with a power of 1000 mW. To adjust this power a power meter is used. The power sensor is connected to the cable before the validation to measure the power at this point and do adjustments at the signal generator. At the outputs of the directional coupler both return loss as well as forward power are controlled during the validation to make sure that emitted power at the dipole is kept constant. This can also be checked by the power drift measurement after the test (result on plot).

Validation results have to be equal or near the values determined during dipole calibration (target SAR in table above) with the relevant liquids and test system.

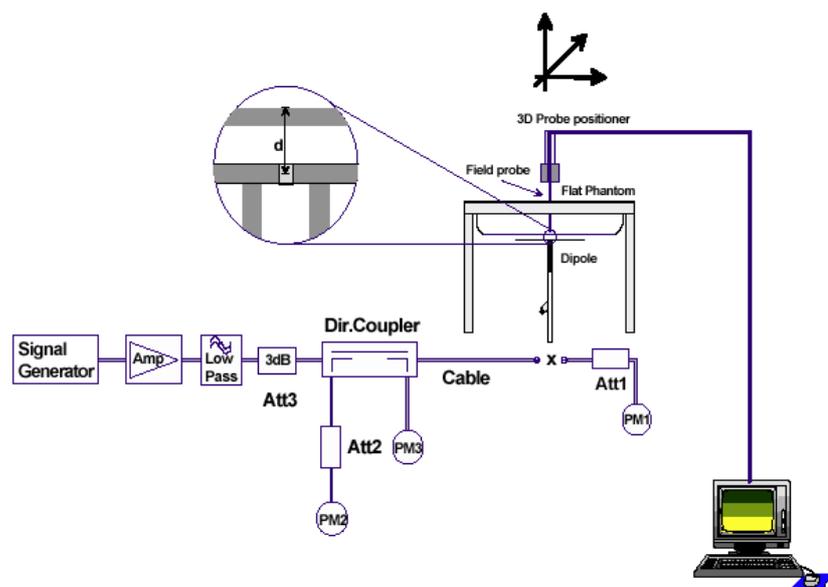

2.5 Test results (conducted power measurement)

For the measurements a Rohde & Schwarz Radio Communication Tester CMU 200 was used. The output power was measured using an integrated RF connector and attached RF cable. The conducted output power was measured before and after each SAR measurement. The resulting power values were within a 0.2 dB tolerance of the values shown below.

PCS 850		
Channel / frequency	GMSK	8-PSK
128 / 824.2 MHz	33.5 dBm	27.7 dBm
190 / 836.6 MHz	33.4 dBm	27.5 dBm
251 / 848.8 MHz	33.3 dBm	27.5 dBm
PCS 1900		
Channel / frequency	GMSK	8-PSK
512 / 1850.2 MHz	30.2 dBm	24.6 dBm
661 / 1880.0 MHz	30.2 dBm	24.9 dBm
810 / 1909.8 MHz	30.3 dBm	24.9 dBm

Table 9: Test results conducted average power measurement

2.5.1 Multiple Transmitter Information

Apart from the GSM transmitter the DUT incorporates a Bluetooth module. The GSM antenna is placed at the bottom edge of the device. The Bluetooth antenna (module output power < 5 mW) is placed at the top end of the device. So the antenna separation is > 5 cm therefore no additional measurement or simultaneous transmission was necessary for that configuration.

2.6 Test results (Head and Body SAR)

The table contains the measured SAR values averaged over a mass of 1 g					
Channel / frequency	Position	Left hand position	Right hand position	Limit	Liquid temperature
Slide-in					
128 / 824.2 MHz	cheek	1.270 W/kg	1.240 W/kg	1.6 W/kg	21.4/21.3 °C
190 / 836.6 MHz	cheek	1.150 W/kg	1.140 W/kg	1.6 W/kg	21.4/21.3 °C
251 / 848.8 MHz	cheek	0.953 W/kg	0.934 W/kg	1.6 W/kg	21.4/21.3 °C
128 / 824.2 MHz	tilted 15°	0.522 W/kg	0.613 W/kg	1.6 W/kg	21.4/21.3 °C
190 / 836.6 MHz	tilted 15°	0.514 W/kg	0.538 W/kg	1.6 W/kg	21.4/21.3 °C
251 / 848.8 MHz	tilted 15°	0.465 W/kg	0.483 W/kg	1.6 W/kg	21.4/21.3 °C
Slide opened					
128 / 824.2 MHz	cheek	0.644 W/kg	0.681 W/kg	1.6 W/kg	21.3/21.3 °C
190 / 836.6 MHz	cheek	0.745 W/kg	0.748 W/kg	1.6 W/kg	21.3/21.3 °C
251 / 848.8 MHz	cheek	0.748 W/kg	0.726 W/kg	1.6 W/kg	21.3/21.3 °C
128 / 824.2 MHz	tilted 15°	0.537 W/kg	0.542 W/kg	1.6 W/kg	21.3/21.3 °C
190 / 836.6 MHz	tilted 15°	0.566 W/kg	0.568 W/kg	1.6 W/kg	21.3/21.3 °C
251 / 848.8 MHz	tilted 15°	0.540 W/kg	0.547 W/kg	1.6 W/kg	21.3/21.3 °C

Table 10: Test results (Head SAR 850 MHz)

The table contains the measured SAR values averaged over a mass of 1 g				
Channel / frequency	Position	Body worn	Limit	Liquid temperature
128 / 824.2 MHz	front	0.580 W/kg	1.6 W/kg	21.9 °C
190 / 836.6 MHz	front	0.539 W/kg	1.6 W/kg	21.9 °C
251 / 848.8 MHz	front	0.454 W/kg	1.6 W/kg	21.9 °C
128 / 824.2 MHz	rear	0.914 W/kg	1.6 W/kg	22.0 °C
190 / 836.6 MHz	rear	0.834 W/kg	1.6 W/kg	22.0 °C
251 / 848.8 MHz	rear	0.686 W/kg	1.6 W/kg	22.0 °C
128 / 824.2 MHz	rear ITS	0.570 W/kg	1.6 W/kg	22.0 °C
128 / 824.2 MHz	rear EDGE	0.316 W/kg	1.6 W/kg	22.0 °C

Table 11: Test results (Body SAR 850 MHz)

Note: The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

Tests in body position were performed with 15 mm air gap between DUT and SAM to simulate the use of a non-metallic belt-clip or holster.

The table contains the measured SAR values averaged over a mass of 1 g					
Channel / frequency	Position	Left hand position	Right hand position	Limit	Liquid temperature
Slide-in					
512 / 1850.2 MHz	cheek	0.861 W/kg	0.897 W/kg	1.6 W/kg	21.6/21.1 °C
661 / 1880.0 MHz	cheek	0.907 W/kg	0.902 W/kg	1.6 W/kg	21.6/21.1 °C
810 / 1909.8 MHz	cheek	0.904 W/kg	0.913 W/kg	1.6 W/kg	21.6/21.1 °C
512 / 1850.2 MHz	tilted 15°	0.363 W/kg	0.358 W/kg	1.6 W/kg	21.4/21.1 °C
661 / 1880.0 MHz	tilted 15°	0.389 W/kg	0.372 W/kg	1.6 W/kg	21.5/21.1 °C
810 / 1909.8 MHz	tilted 15°	0.415 W/kg	0.376 W/kg	1.6 W/kg	21.5/21.1 °C
Slide opened					
512 / 1850.2 MHz	cheek	0.384 W/kg	0.569 W/kg	1.6 W/kg	21.2/21.3 °C
661 / 1880.0 MHz	cheek	0.396 W/kg	0.556 W/kg	1.6 W/kg	21.2/21.3 °C
810 / 1909.8 MHz	cheek	0.376 W/kg	0.513 W/kg	1.6 W/kg	21.2/21.3 °C
512 / 1850.2 MHz	tilted 15°	0.262 W/kg	0.321 W/kg	1.6 W/kg	21.3/21.1 °C
661 / 1880.0 MHz	tilted 15°	0.265 W/kg	0.336 W/kg	1.6 W/kg	21.3/21.1 °C
810 / 1909.8 MHz	tilted 15°	0.279 W/kg	0.321 W/kg	1.6 W/kg	21.3/21.1 °C

Table 12: Test results (Head SAR 1900 MHz)

The table contains the measured SAR values averaged over a mass of 1 g					
Channel / frequency	Position	Body worn		Limit	Liquid temperature
512 / 1850.2 MHz	front	0.189 W/kg		1.6 W/kg	22.5 °C
661 / 1880.0 MHz	front	0.200 W/kg		1.6 W/kg	22.5 °C
810 / 1909.8 MHz	front	0.227 W/kg		1.6 W/kg	22.5 °C
512 / 1850.2 MHz	rear	0.413 W/kg		1.6 W/kg	22.5 °C
661 / 1880.0 MHz	rear	0.468 W/kg		1.6 W/kg	22.5 °C
810 / 1909.8 MHz	rear	0.491 W/kg		1.6 W/kg	22.5 °C
810 / 1909.8 MHz	rear ITS	0.363 W/kg		1.6 W/kg	22.5 °C
810 / 1909.8 MHz	rear EDGE	0.281 W/kg		1.6 W/kg	22.5 °C

Table 13: Test results (Body SAR 1900 MHz)

Note: The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at mid-band channel for each test configuration is at least 3.0 dB lower than the SAR limit (< 0.8 W/kg), testing at the high and low channels is optional.

Tests in body position were performed with 15 mm air gap between DUT and SAM to simulate the use of a non-metallic belt-clip or holster.

SAR measurements were performed in GPRS mode with 2 active timeslots.

An additional delta measurement was performed with 1 timeslot. In EDGE mode a delta measurement was performed with MCS5 (8-PSK modulation).

2.6.1 General description of test procedures

The DUT is tested using a CMU 200 communications tester as controller unit to set test channels and maximum output power to the DUT, as well as for measuring the conducted peak power.

Test positions as described in the tables above are in accordance with the specified test standard.

Tests in body position are performed with the maximum number of timeslots in uplink.

Tests in head position are performed in voice mode with 1 timeslot unless GPRS/EGPRS function allows parallel voice and data traffic on 2 or more timeslots (see chapter 1.5 for details).

Conducted output power was measured using an integrated RF connector and attached RF cable.

Annex 1 System performance verification

Date/Time: 2008-12-31 10:17:42 Date/Time: 2008-12-31 10:21:26

System Performance Check-D900-850 head 2008-12-31

DUT: Dipole 900 MHz; Type: D900V2; Serial: 102

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL850 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.99, 5.99, 5.99); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

d=15mm, Pin=1000mW/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 11.1 mW/g

d=15mm, Pin=1000mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 112.0 V/m; Power Drift = -0.031 dB
 Peak SAR (extrapolated) = 15.2 W/kg
SAR(1 g) = 10.4 mW/g; SAR(10 g) = 6.76 mW/g
 Maximum value of SAR (measured) = 11.3 mW/g

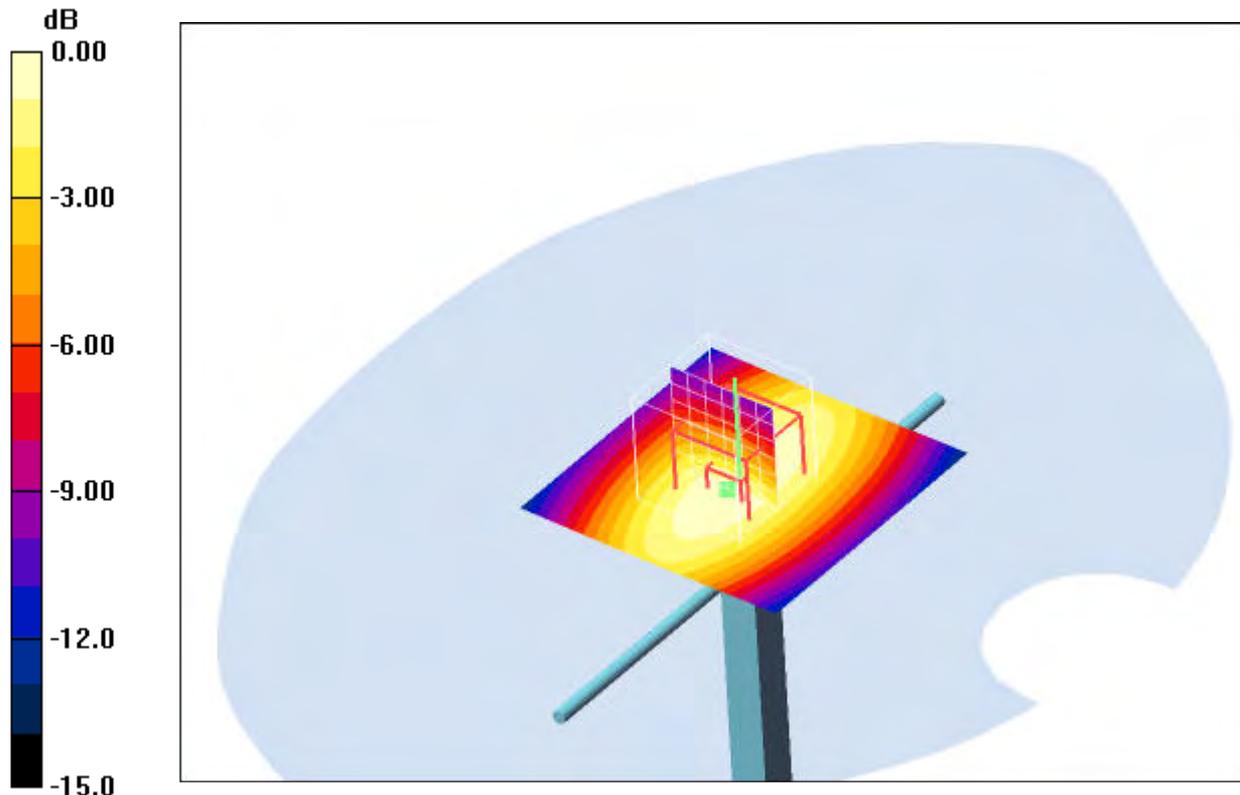

0 dB = 11.3mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.1°C; liquid temperature: 21.2°C

Date/Time: 2009-01-01 09:39:15 Date/Time: 2009-01-01 09:42:55

System Performance Check-D900-850 head

DUT: Dipole 900 MHz; Type: D900V2; Serial: 102

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL850 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 0.96 \text{ mho/m}$; $\epsilon_r = 40$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.99, 5.99, 5.99); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

d=15mm, Pin=1000mW/Area Scan (51x51x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 10.8 mW/g

d=15mm, Pin=1000mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 112.7 V/m; Power Drift = -0.060 dB

Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 10.2 mW/g; SAR(10 g) = 6.61 mW/g

Maximum value of SAR (measured) = 11.0 mW/g

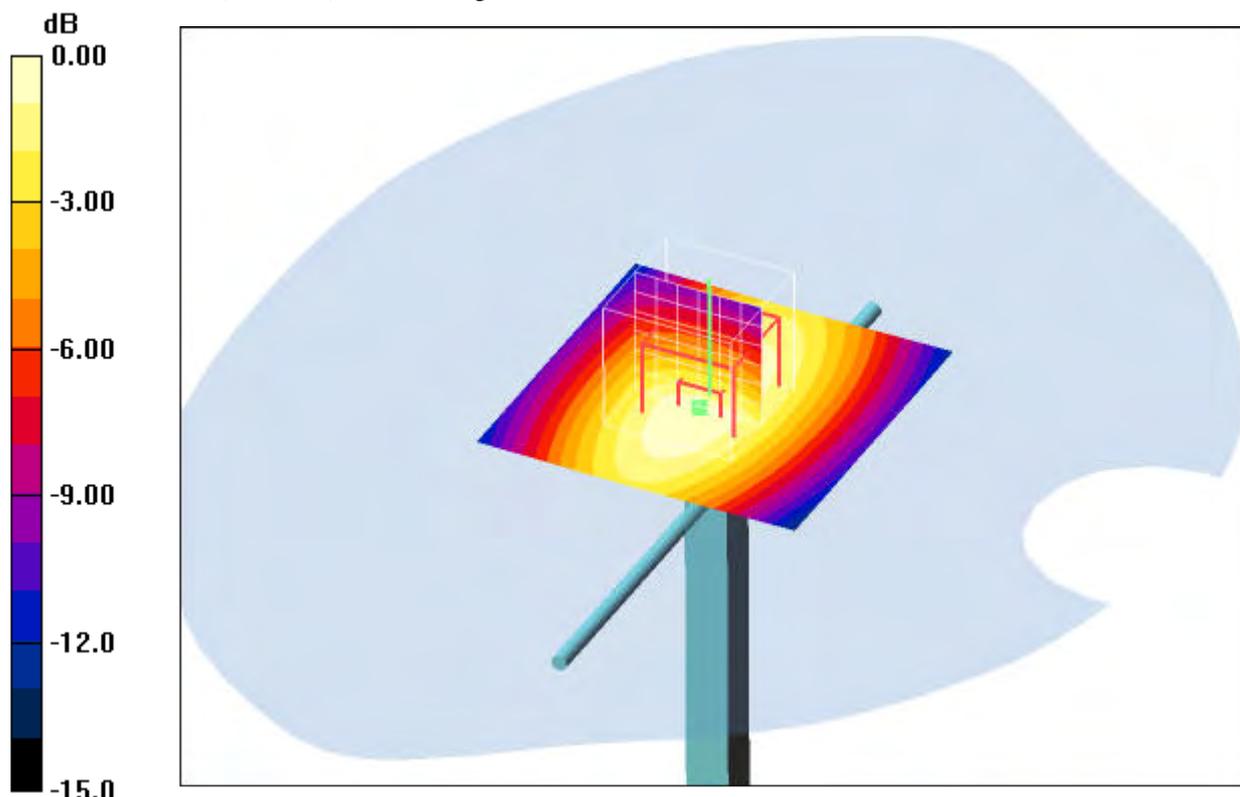

0 dB = 11.0mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.6°C; liquid temperature: 21.3°C

Date/Time: 2009-01-03 12:15:53 Date/Time: 2009-01-03 12:19:35

System Performance Check-D900-850 body-2009-01-03

DUT: Dipole 900 MHz; Type: D900V2; Serial: 102

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: M850 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.04 \text{ mho/m}$; $\epsilon_r = 54.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.8, 5.8, 5.8); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

d=15mm, Pin=1000mW/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 11.5 mW/g


d=15mm, Pin=1000mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 110.6 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 15.4 W/kg

SAR(1 g) = 10.7 mW/g; SAR(10 g) = 6.95 mW/g

Maximum value of SAR (measured) = 11.6 mW/g

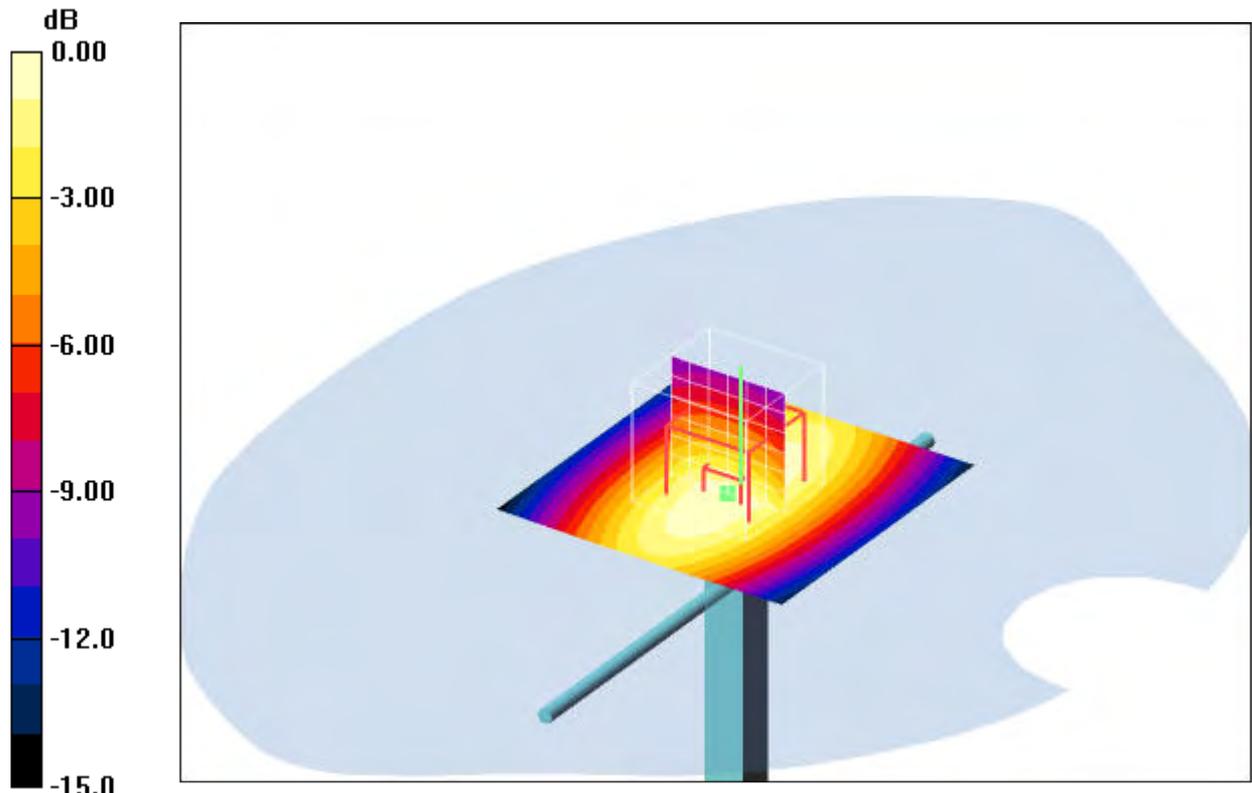

0 dB = 11.6mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.1°C; liquid temperature: 21.9°C

Date/Time: 2009-01-06 09:04:38 Date/Time: 2009-01-06 09:08:17

System Performance Check-D1900 head 2009-01-06

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:531

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL1900 Medium parameters used (interpolated): $f = 1900 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

d=10mm, Pin=1000mW/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 52.6 mW/g

d=10mm, Pin=1000mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 183.5 V/m; Power Drift = -0.075 dB
 Peak SAR (extrapolated) = 71.3 W/kg
SAR(1 g) = 38.4 mW/g; SAR(10 g) = 20 mW/g
 Maximum value of SAR (measured) = 43.0 mW/g

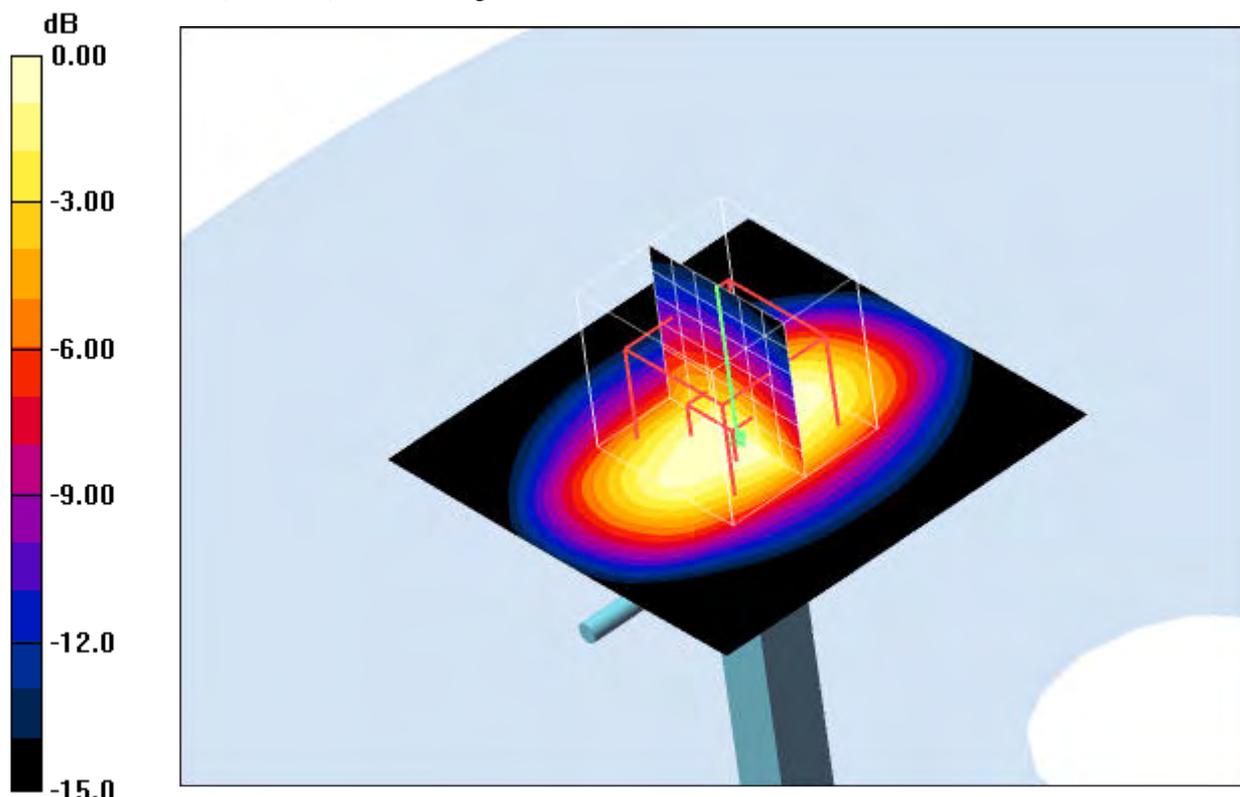

0 dB = 43.0mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :
 ambient temperature: 22.1°C; liquid temperature: 21.6°C

Date/Time: 2009-01-05 15:55:33 Date/Time: 2009-01-05 15:59:10

System Performance Check-D1900 body 2009-01-05

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:531

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: M1900 Medium parameters used (interpolated): $f = 1900 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

d=10mm, Pin=1000mW/Area Scan (51x51x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 56.8 mW/g


d=10mm, Pin=1000mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 181.4 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 76.3 W/kg

SAR(1 g) = 41.4 mW/g; SAR(10 g) = 21.8 mW/g

Maximum value of SAR (measured) = 45.8 mW/g

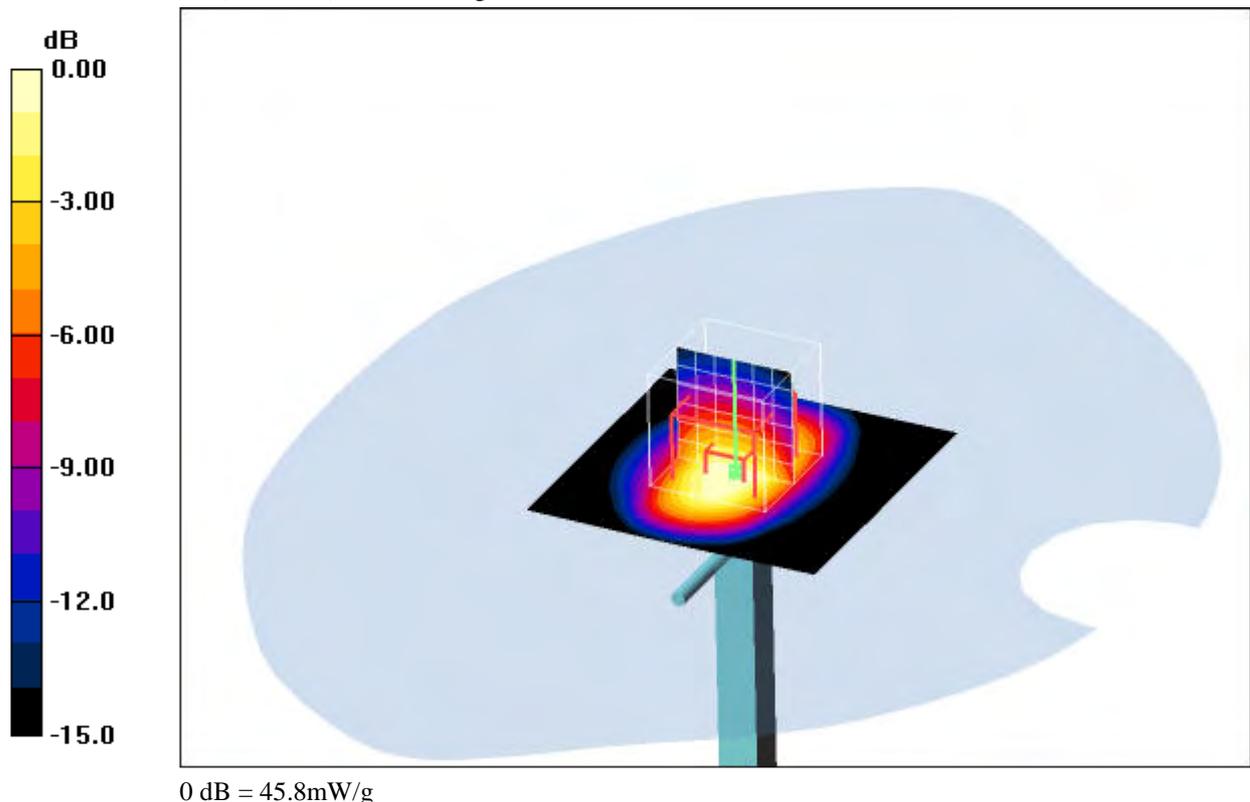

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.1°C; liquid temperature: 22.5°C

Annex 2 Measurement results (printout from DASY TM)

Remark: results of conducted power measurements: see chapter 2.5/2.6 (if applicable)

Annex 2.1 PCS 850 MHz head


Date/Time: 2009-01-01 15:29:44 Date/Time: 2009-01-01 15:36:34

P1528_OET65-LeftHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL
 Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8
 Medium: HSL850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Left Section
 DASY4 Configuration:
 - Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
 - Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
 - Electronics: DAE3 Sn477; Calibrated: 2008-05-14
 - Phantom: SAM 12; Type: SAM; Serial: 1043
 - Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.40 mW/g

Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 39.3 V/m; Power Drift = -0.121 dB
 Peak SAR (extrapolated) = 1.69 W/kg
SAR(1 g) = 1.27 mW/g; SAR(10 g) = 0.884 mW/g
 Maximum value of SAR (measured) = 1.34 mW/g

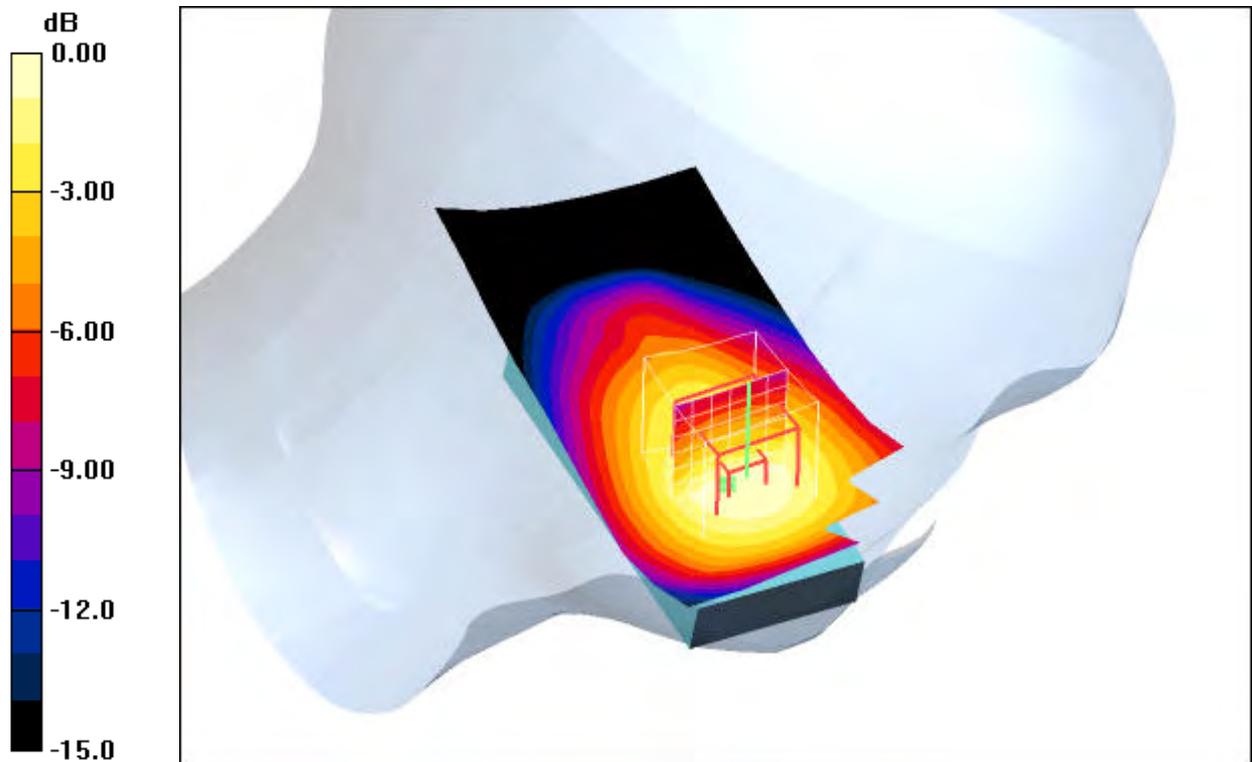

0 dB = 1.34mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :
 ambient temperature: 22.5°C; liquid temperature: 21.4°C

Date/Time: 2009-01-01 15:52:42 Date/Time: 2009-01-01 16:00:38

P1528_OET65-LeftHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.25 mW/g


Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 37.5 V/m; Power Drift = -0.093 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 1.15 mW/g; SAR(10 g) = 0.803 mW/g

Maximum value of SAR (measured) = 1.22 mW/g

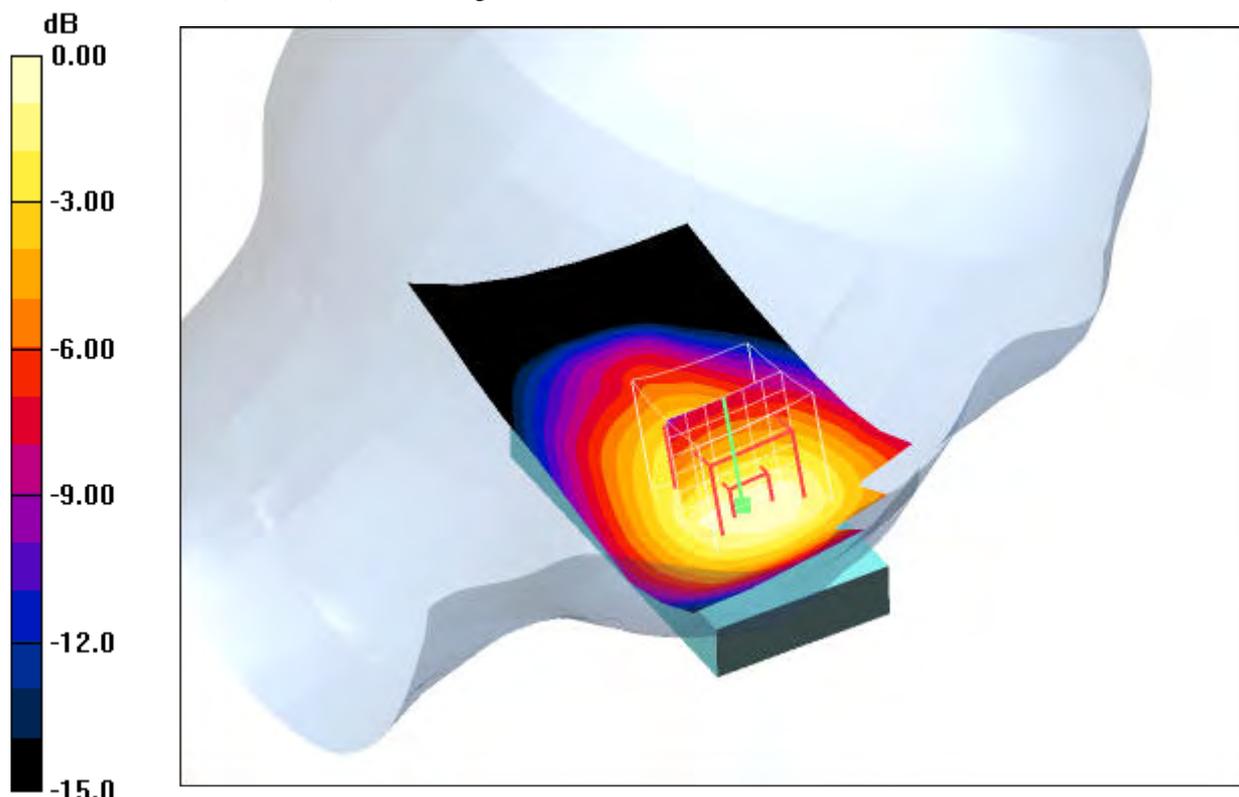

0 dB = 1.22mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.5°C; liquid temperature: 21.4°C

Date/Time: 2009-01-01 16:17:57 Date/Time: 2009-01-01 16:26:14

P1528_OET65-LeftHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.03 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 34.0 V/m; Power Drift = -0.044 dB

Peak SAR (extrapolated) = 1.26 W/kg

SAR(1 g) = 0.953 mW/g; SAR(10 g) = 0.661 mW/g

Maximum value of SAR (measured) = 1.01 mW/g

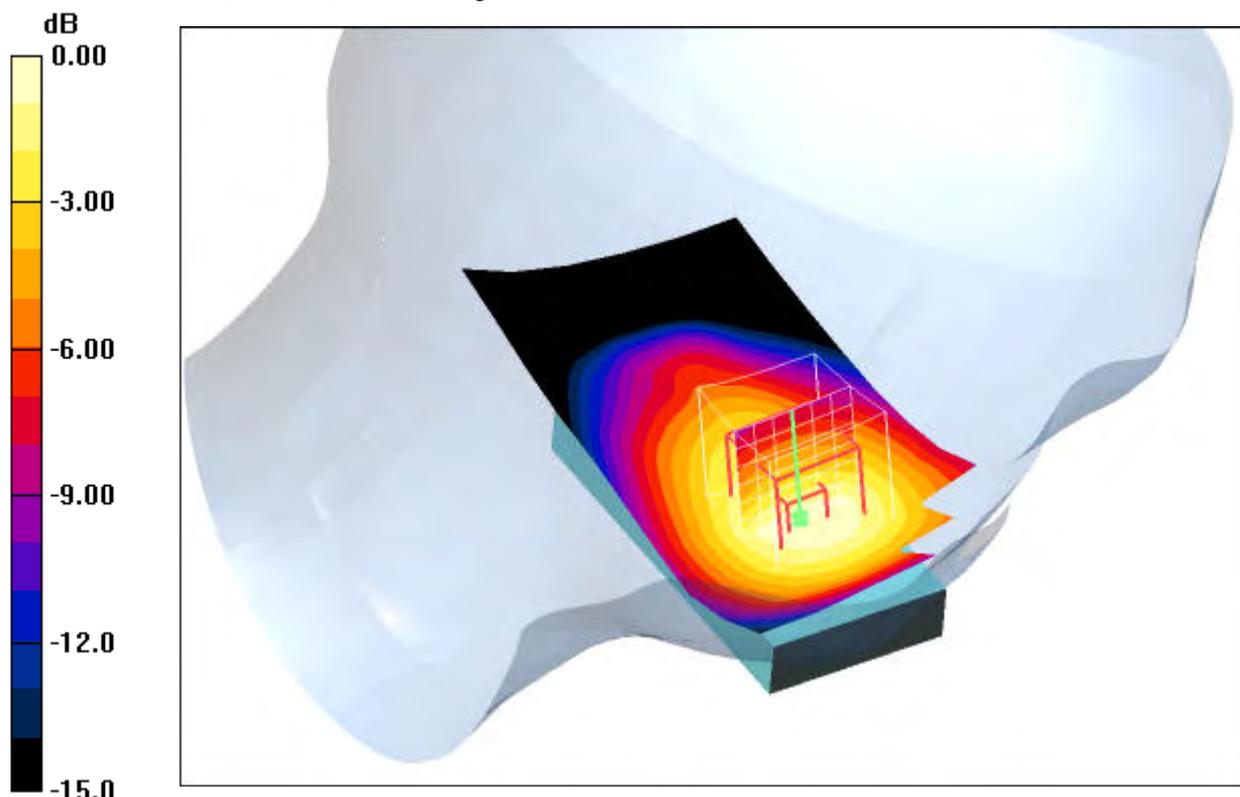

0 dB = 1.01mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.5°C; liquid temperature: 21.4°C

Date/Time: 2009-01-01 14:52:42 Date/Time: 2009-01-01 14:59:27 Date/Time: 2009-01-01 15:11:47

P1528_OET65-LeftHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.552 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.5 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.522 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.549 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.5 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.667 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.251 mW/g

Maximum value of SAR (measured) = 0.465 mW/g

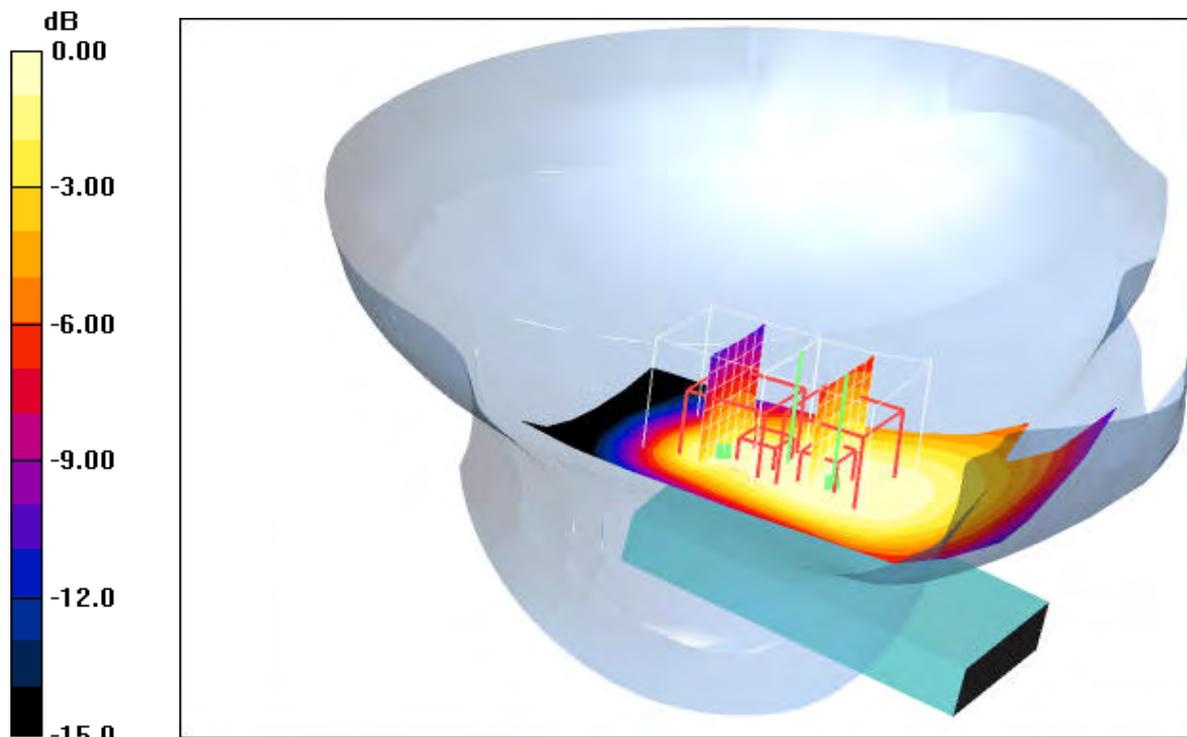

0 dB = 0.465mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.5°C; liquid temperature: 21.4°C

Date/Time: 2009-01-01 14:20:33 Date/Time: 2009-01-01 14:27:10 Date/Time: 2009-01-01 14:38:34

P1528_OET65-LeftHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.549 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.3 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.655 W/kg

SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.374 mW/g

Maximum value of SAR (measured) = 0.540 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.3 V/m; Power Drift = -0.071 dB

Peak SAR (extrapolated) = 0.642 W/kg

SAR(1 g) = 0.395 mW/g; SAR(10 g) = 0.250 mW/g

Maximum value of SAR (measured) = 0.470 mW/g

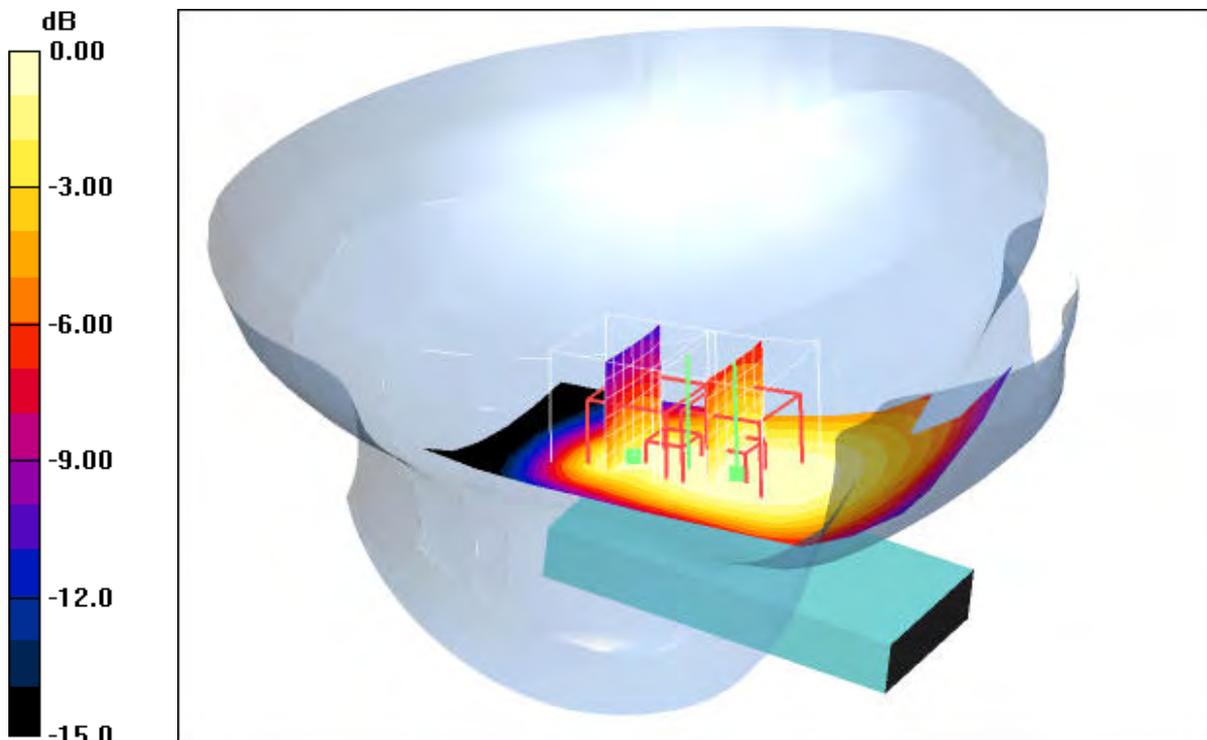

0 dB = 0.470mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.5°C; liquid temperature: 21.4°C

Date/Time: 2009-01-01 13:47:41 Date/Time: 2009-01-01 13:54:13 Date/Time: 2009-01-01 14:05:36

P1528_OET65-LeftHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.498 mW/g

Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.2 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.465 mW/g; SAR(10 g) = 0.337 mW/g

Maximum value of SAR (measured) = 0.489 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.2 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.227 mW/g

Maximum value of SAR (measured) = 0.422 mW/g

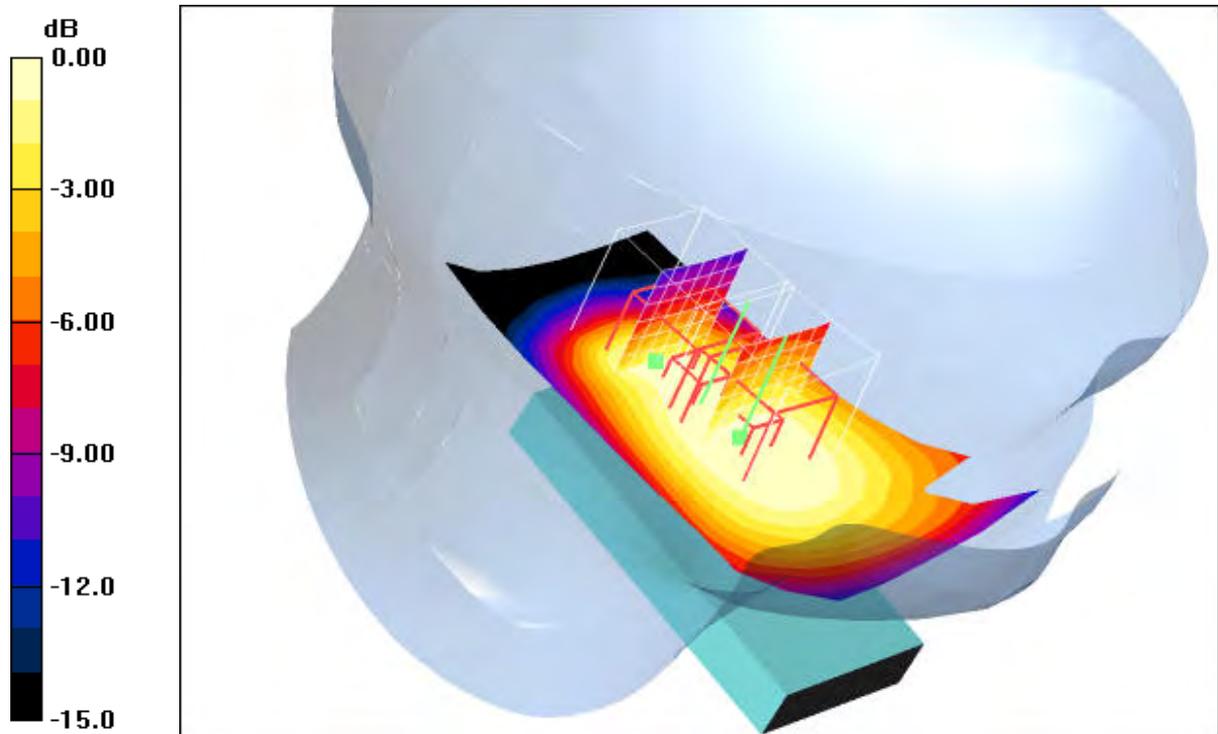

0 dB = 0.422mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.5°C; liquid temperature: 21.4°C

Date/Time: 2009-01-01 12:15:35 Date/Time: 2009-01-01 12:22:26

P1528_OET65-LeftHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.712 mW/g

Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 28.5 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 0.829 W/kg

SAR(1 g) = 0.644 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.673 mW/g

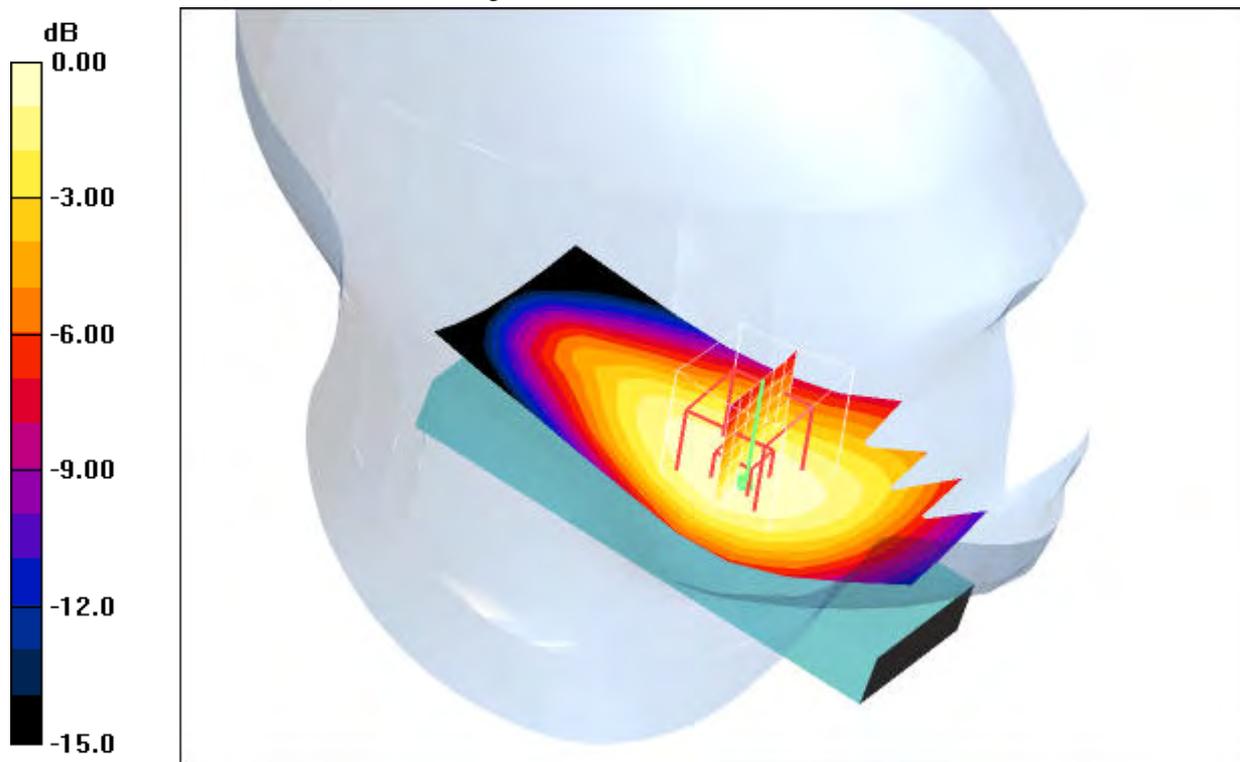

0 dB = 0.673mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-01 11:53:45 Date/Time: 2009-01-01 12:00:20

P1528_OET65-LeftHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.797 mW/g


Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.5 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 0.973 W/kg

SAR(1 g) = 0.745 mW/g; SAR(10 g) = 0.544 mW/g

Maximum value of SAR (measured) = 0.779 mW/g

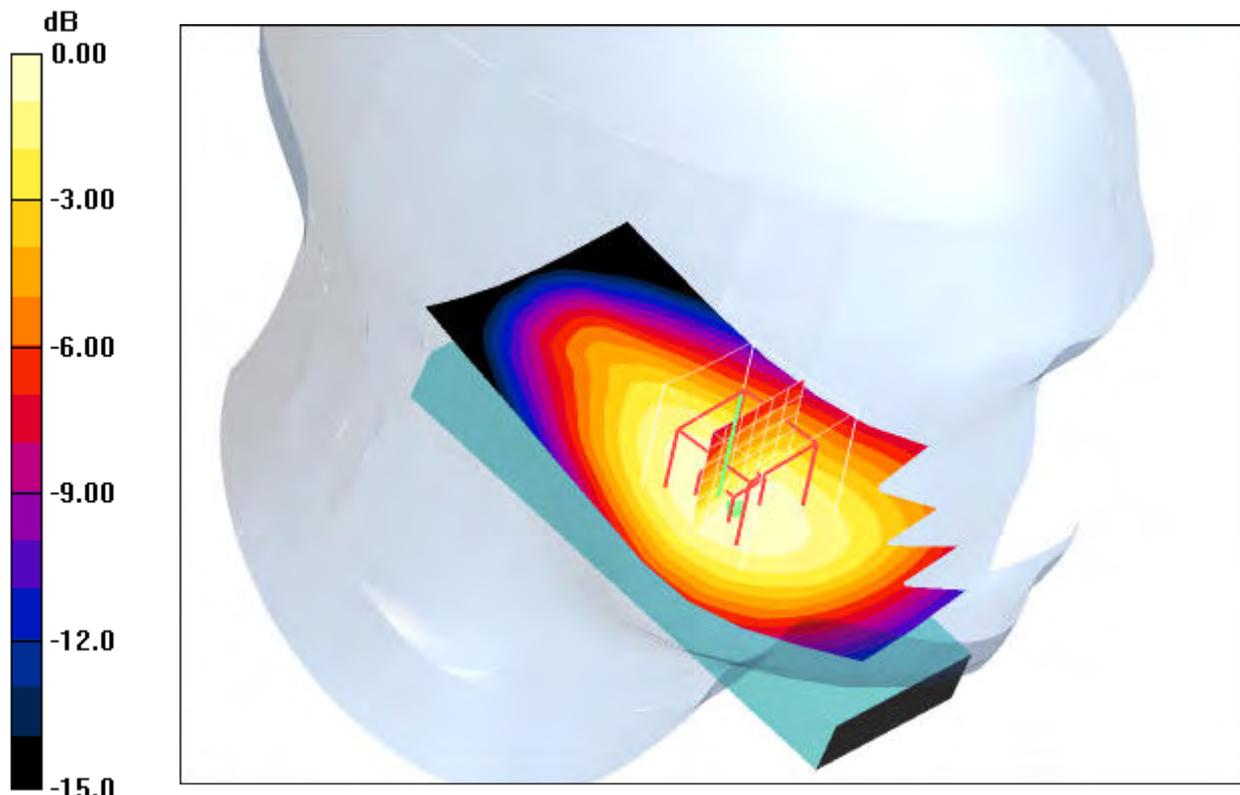

0 dB = 0.779mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-01 11:26:30 Date/Time: 2009-01-01 11:37:57

P1528_OET65-LeftHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.786 mW/g

Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 28.9 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.540 mW/g

Maximum value of SAR (measured) = 0.785 mW/g

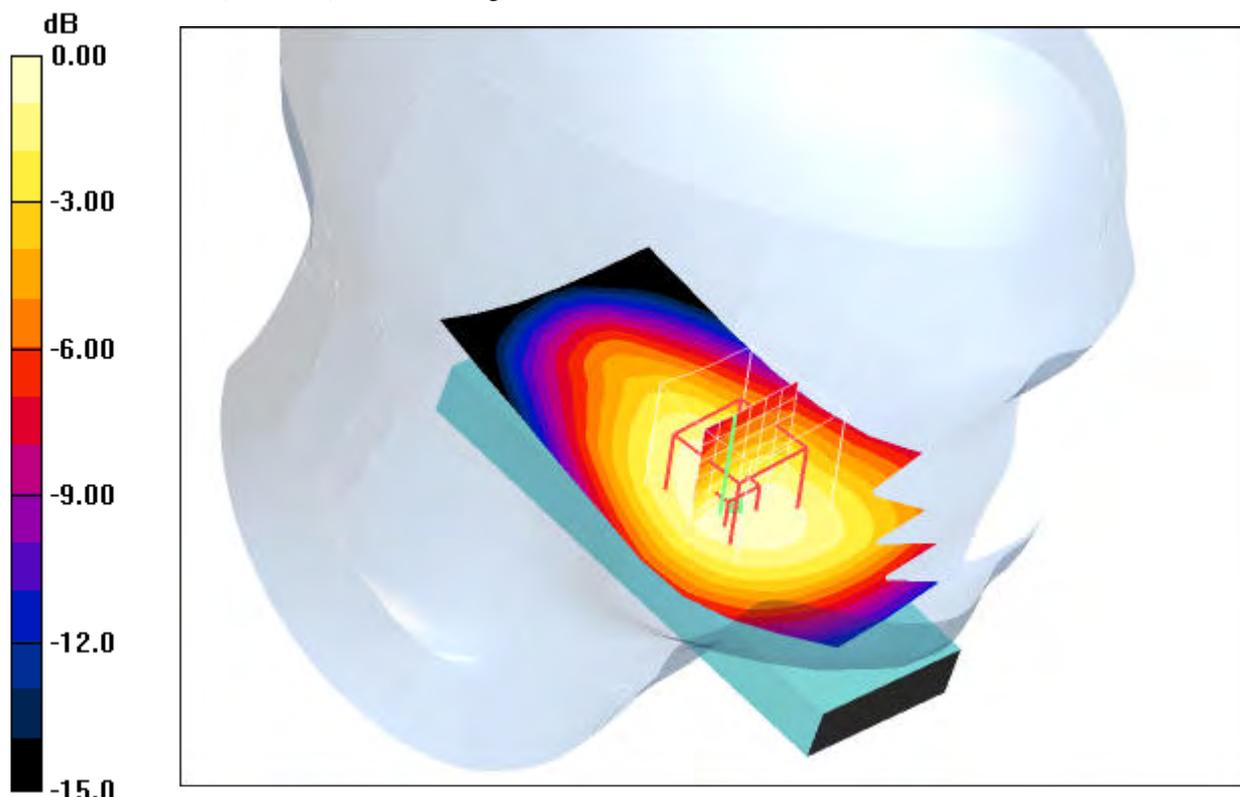

0 dB = 0.785mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-01 12:44:46 Date/Time: 2009-01-01 12:51:20

P1528_OET65-LeftHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.554 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 25.3 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.537 mW/g; SAR(10 g) = 0.391 mW/g

Maximum value of SAR (measured) = 0.564 mW/g

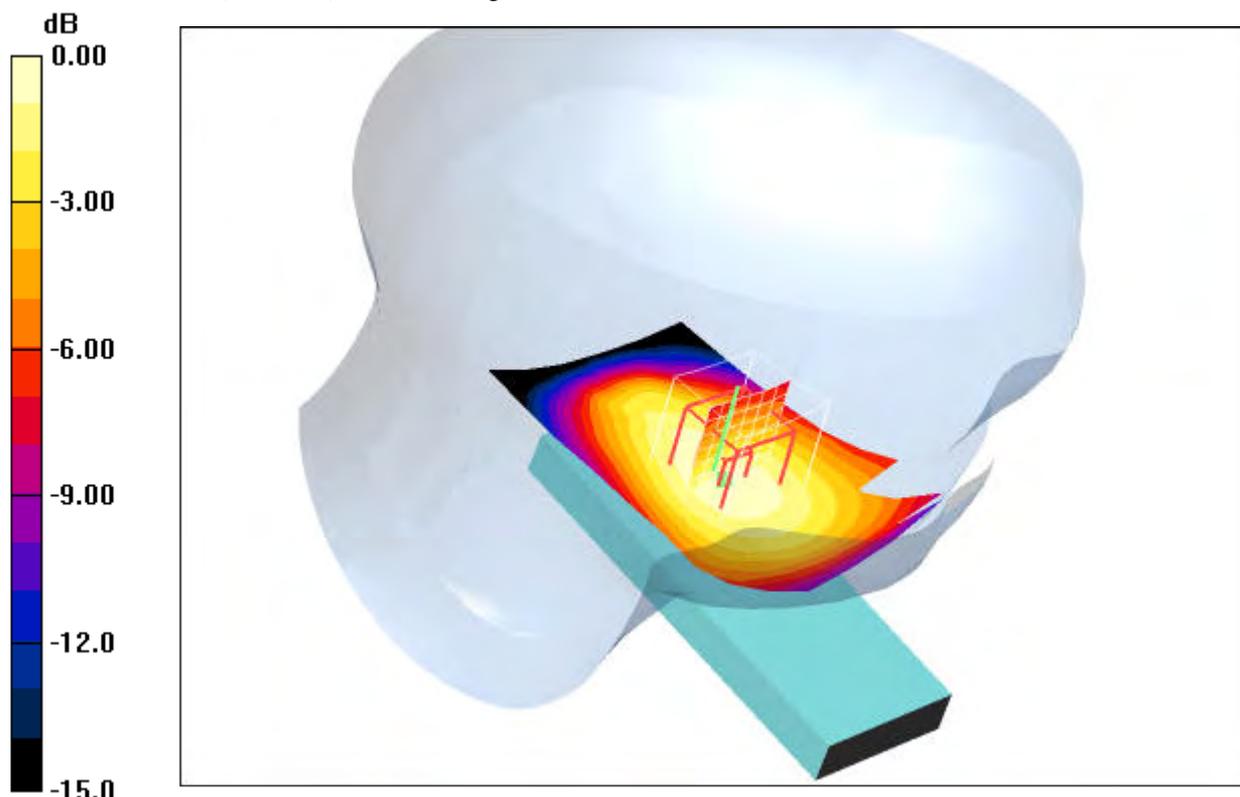

0 dB = 0.564mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-01 13:05:51 Date/Time: 2009-01-01 13:12:33

P1528_OET65-LeftHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.593 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 26.0 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.566 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.590 mW/g

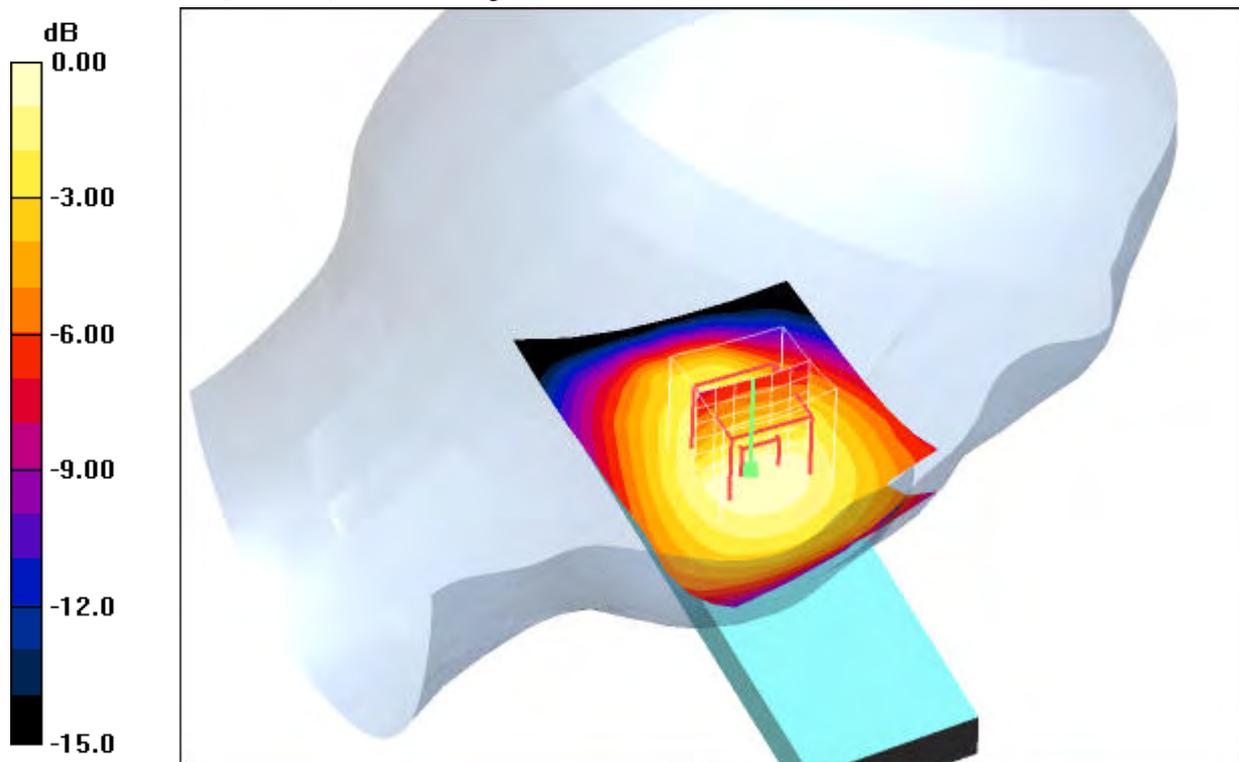

0 dB = 0.590mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-01 13:26:48 Date/Time: 2009-01-01 13:33:22

P1528_OET65-LeftHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.568 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.4 V/m; Power Drift = -0.107 dB

Peak SAR (extrapolated) = 0.689 W/kg

SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.569 mW/g

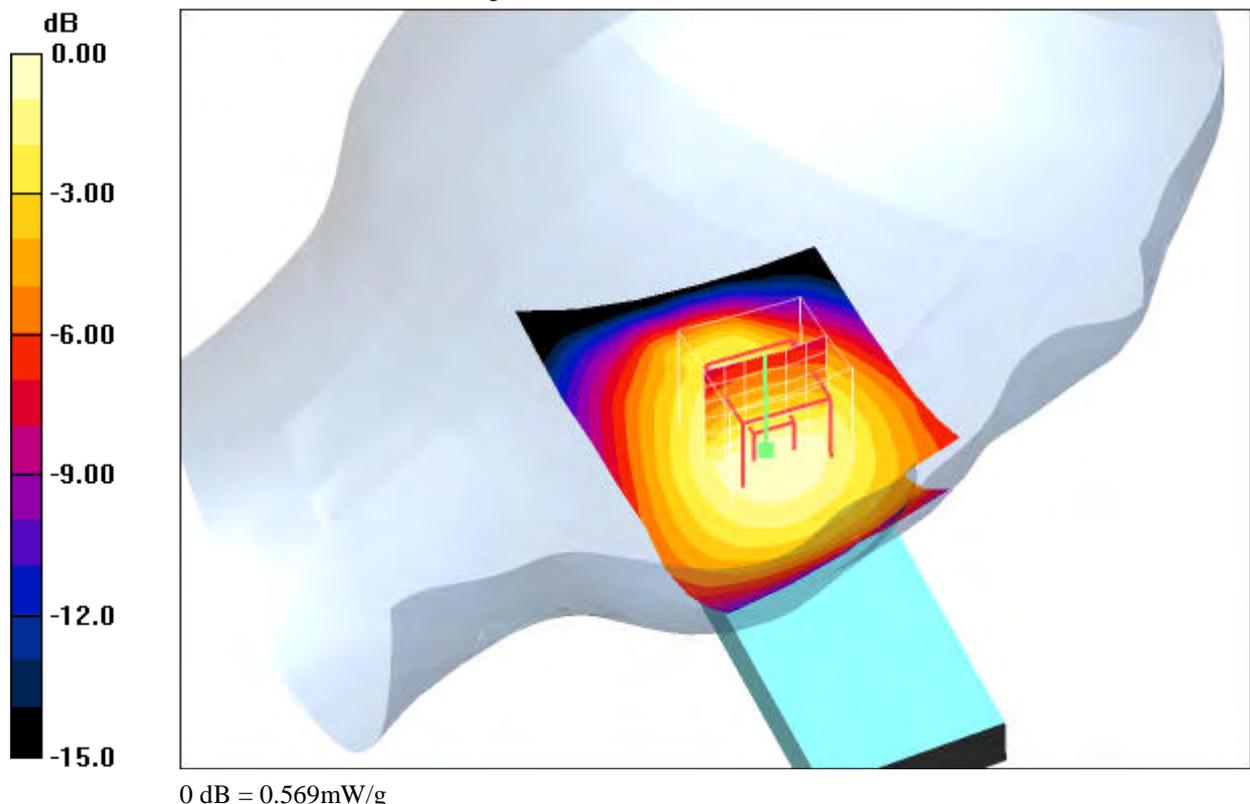

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

P1528_OET65-RightHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.38 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 40.3 V/m; Power Drift = -0.184 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.24 mW/g; SAR(10 g) = 0.844 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

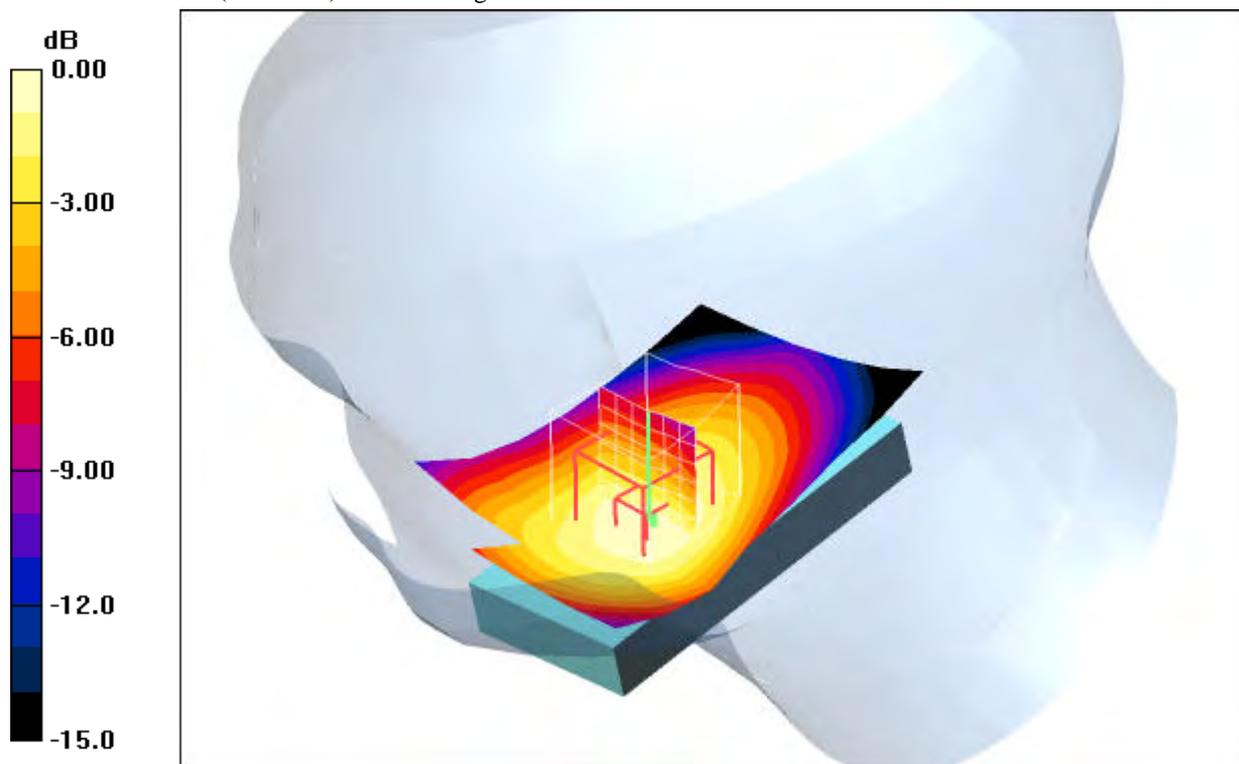

0 dB = 1.32mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

P1528_OET65-RightHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.24 mW/g

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 38.2 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.769 mW/g

Maximum value of SAR (measured) = 1.21 mW/g

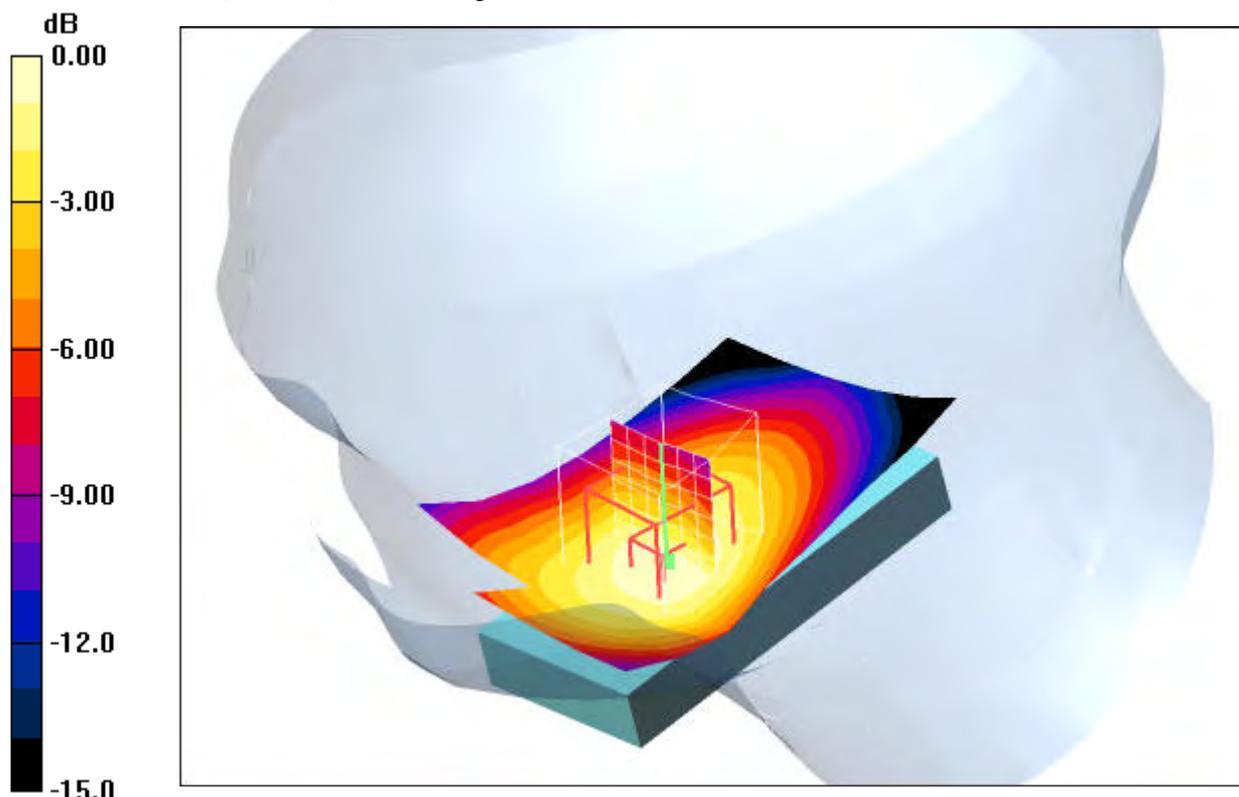

0 dB = 1.21mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2008-12-31 14:06:39 Date/Time: 2008-12-31 14:12:01

P1528_OET65-RightHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.02 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 34.7 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.934 mW/g; SAR(10 g) = 0.631 mW/g

Maximum value of SAR (measured) = 0.996 mW/g

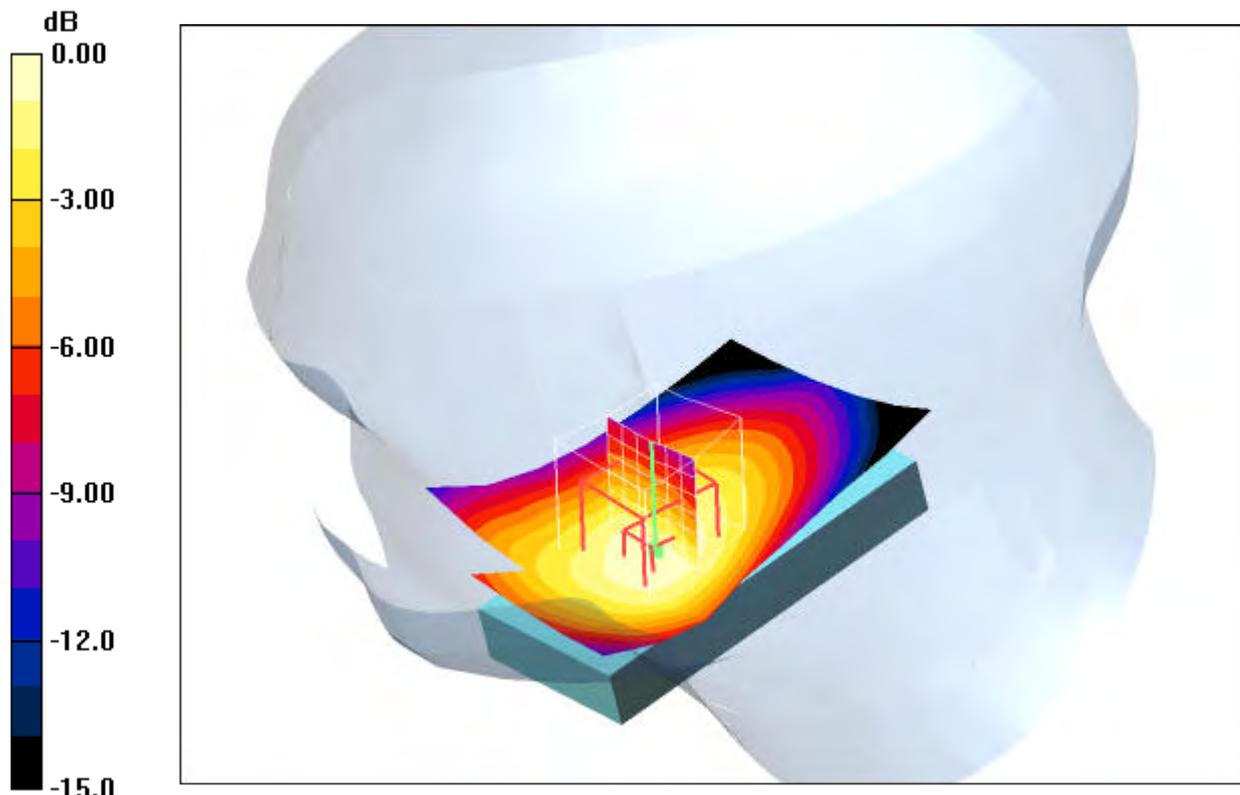

0 dB = 0.996mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2008-12-31 15:31:07 Date/Time: 2008-12-31 15:37:16 Date/Time: 2008-12-31 15:48:40

P1528_OET65-RightHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.649 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.797 W/kg

SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.441 mW/g

Maximum value of SAR (measured) = 0.650 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.0 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.784 W/kg

SAR(1 g) = 0.461 mW/g; SAR(10 g) = 0.296 mW/g

Maximum value of SAR (measured) = 0.550 mW/g

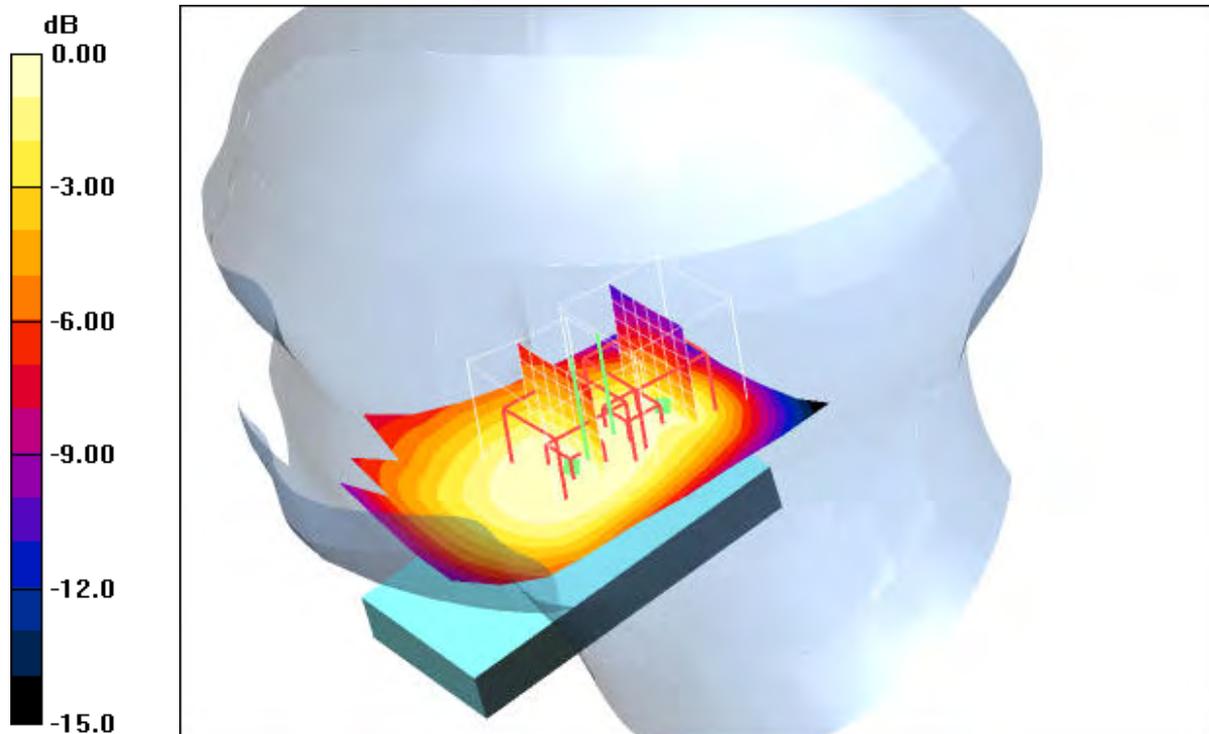

0 dB = 0.550mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2008-12-31 14:58:14 Date/Time: 2008-12-31 15:04:17 Date/Time: 2008-12-31 15:16:27

P1528_OET65-RightHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.569 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.4 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.538 mW/g; SAR(10 g) = 0.386 mW/g

Maximum value of SAR (measured) = 0.572 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.4 V/m; Power Drift = -0.021 dB

Peak SAR (extrapolated) = 0.785 W/kg

SAR(1 g) = 0.418 mW/g; SAR(10 g) = 0.271 mW/g

Maximum value of SAR (measured) = 0.493 mW/g

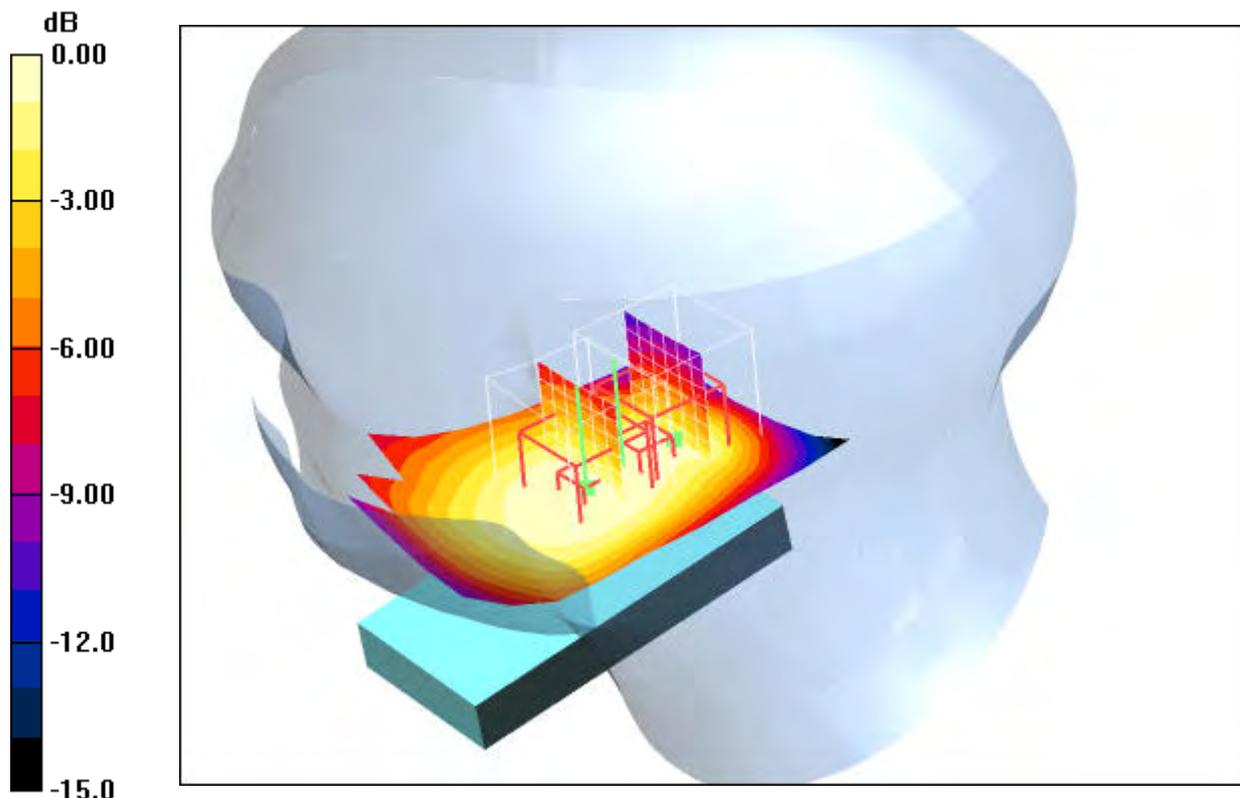

0 dB = 0.493mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2008-12-31 14:26:56 Date/Time: 2008-12-31 14:32:57 Date/Time: 2008-12-31 14:44:50

P1528_OET65-RightHandSide-GSM850

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.511 mW/g

Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.3 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.637 W/kg

SAR(1 g) = 0.483 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.516 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.3 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 0.703 W/kg

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.442 mW/g

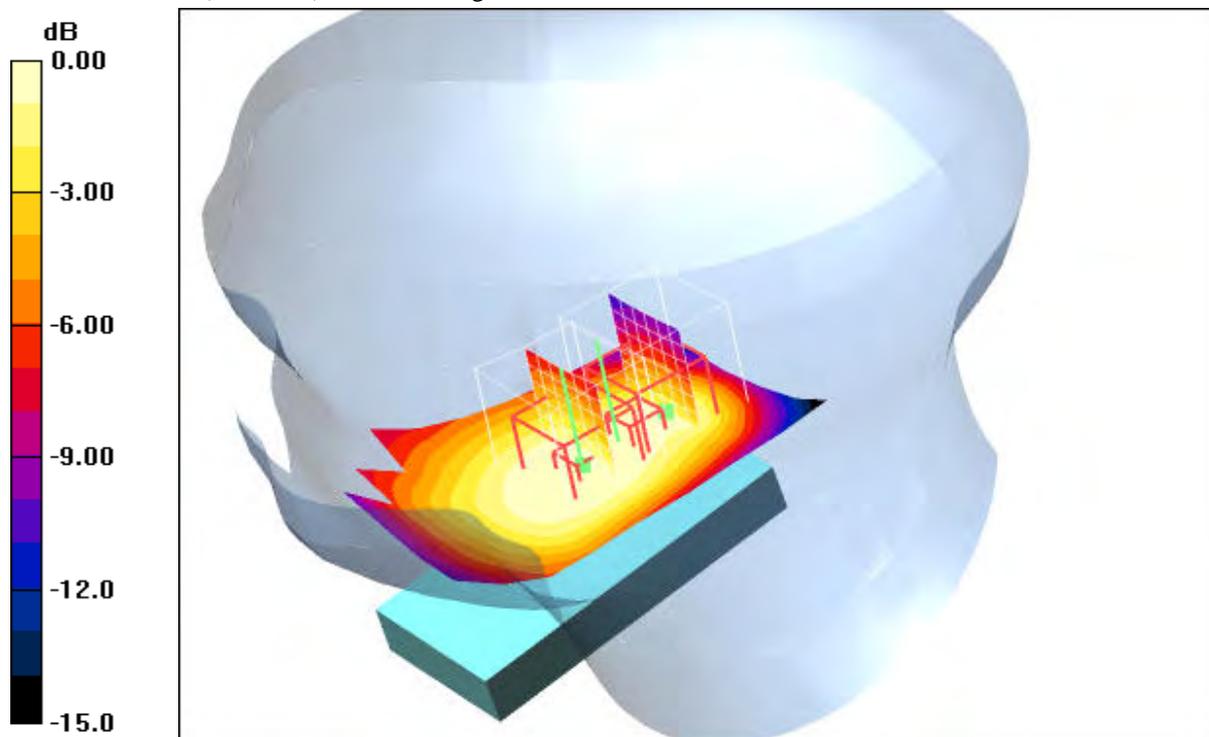

0 dB = 0.442mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-01 10:13:52 Date/Time: 2009-01-01 10:20:06

P1528_OET65-RightHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.762 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.0 V/m; Power Drift = -0.154 dB

Peak SAR (extrapolated) = 0.852 W/kg

SAR(1 g) = 0.681 mW/g; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 0.716 mW/g

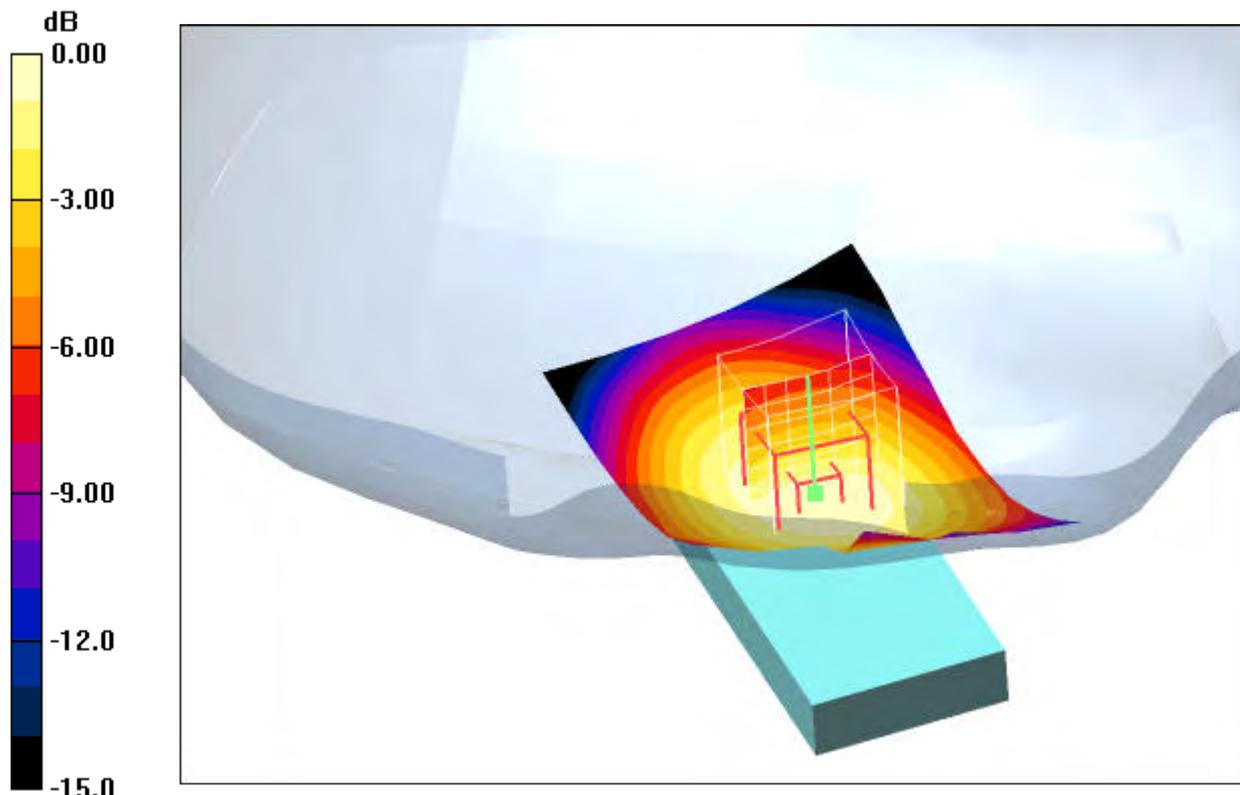

0 dB = 0.716mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-01 10:35:58 Date/Time: 2009-01-01 10:42:17

P1528_OET65-RightHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.829 mW/g


Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.2 V/m; Power Drift = -0.157 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.547 mW/g

Maximum value of SAR (measured) = 0.788 mW/g

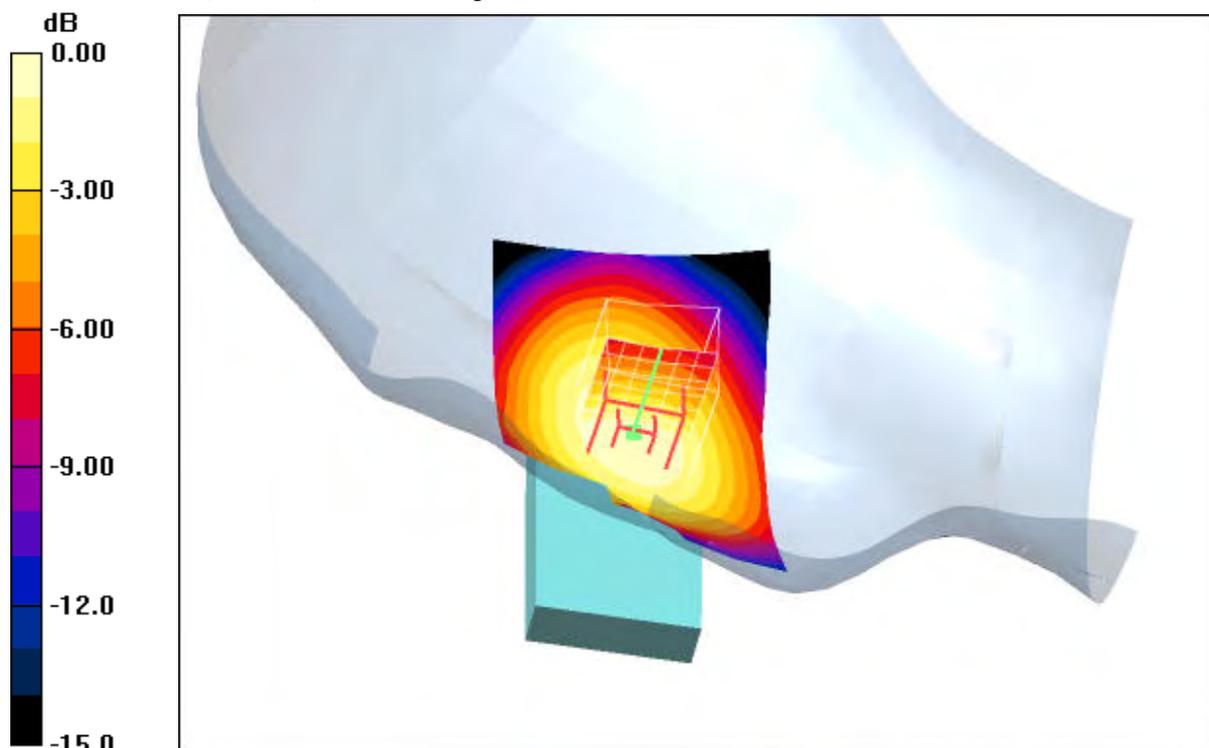

0 dB = 0.788mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-01 11:04:16 Date/Time: 2009-01-01 11:10:51

P1528_OET65-RightHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.806 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.8 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.958 W/kg

SAR(1 g) = 0.726 mW/g; SAR(10 g) = 0.525 mW/g

Maximum value of SAR (measured) = 0.764 mW/g

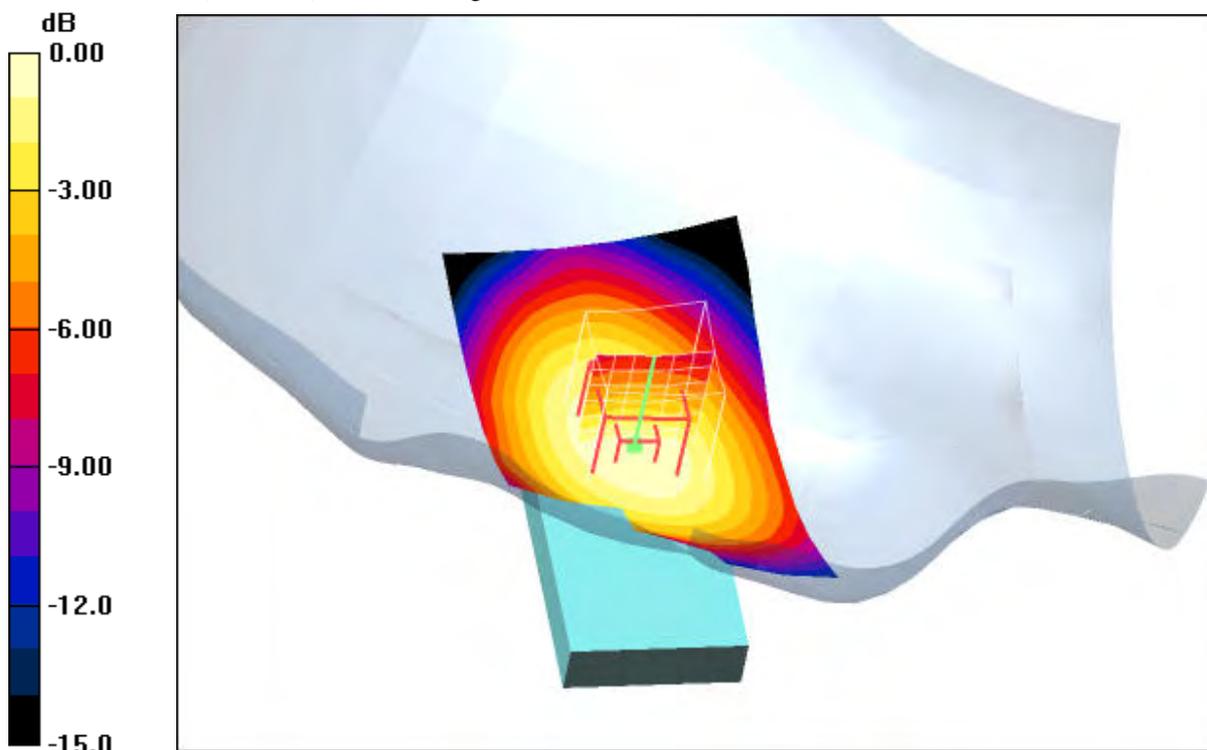

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2008-12-31 16:02:10 Date/Time: 2008-12-31 16:10:18 Date/Time: 2008-12-31 16:23:07

P1528_OET65-RightHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.582 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.4 V/m; Power Drift = -0.195 dB

Peak SAR (extrapolated) = 0.694 W/kg

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.395 mW/g

Maximum value of SAR (measured) = 0.570 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.4 V/m; Power Drift = -0.195 dB

Peak SAR (extrapolated) = 0.656 W/kg

SAR(1 g) = 0.371 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.450 mW/g

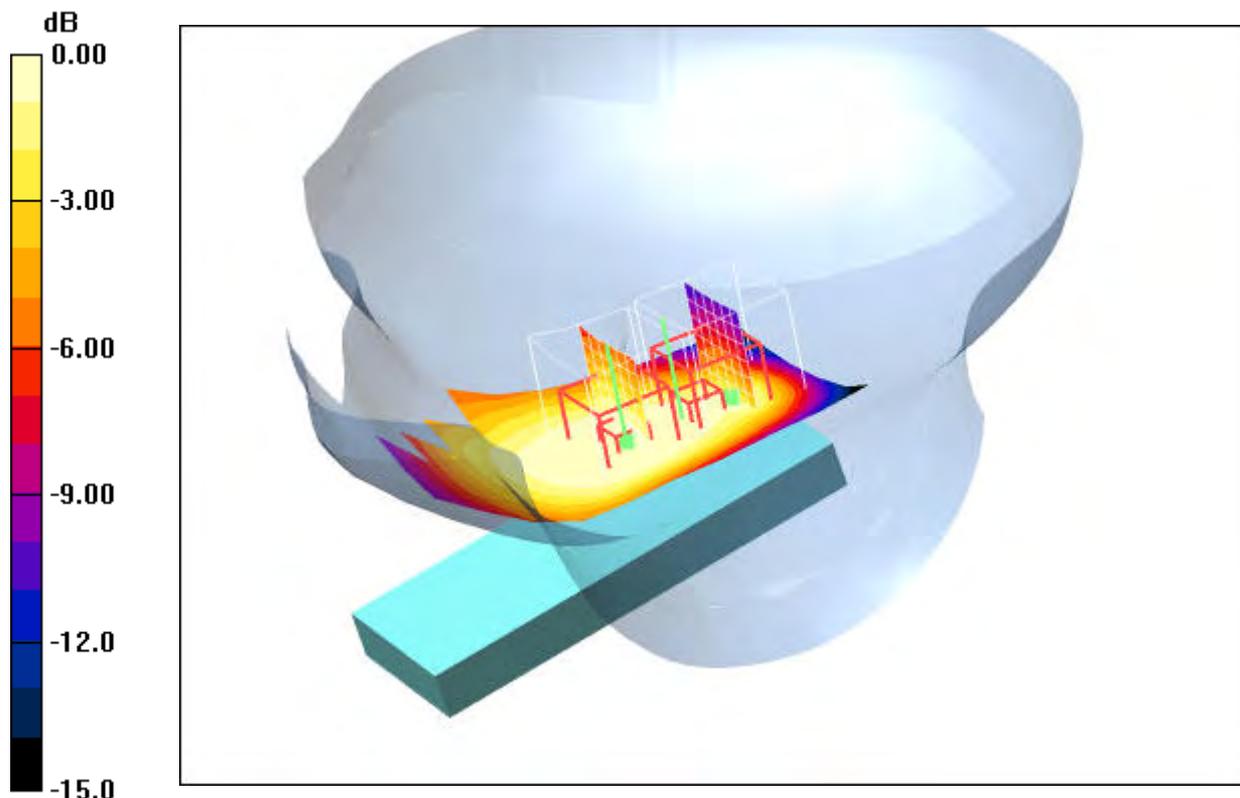

0 dB = 0.450mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2008-12-31 16:36:13 Date/Time: 2008-12-31 16:42:50 Date/Time: 2008-12-31 16:54:54

P1528_OET65-RightHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 836.6 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.608 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.9 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.732 W/kg

SAR(1 g) = 0.568 mW/g; SAR(10 g) = 0.411 mW/g

Maximum value of SAR (measured) = 0.602 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.9 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.473 mW/g

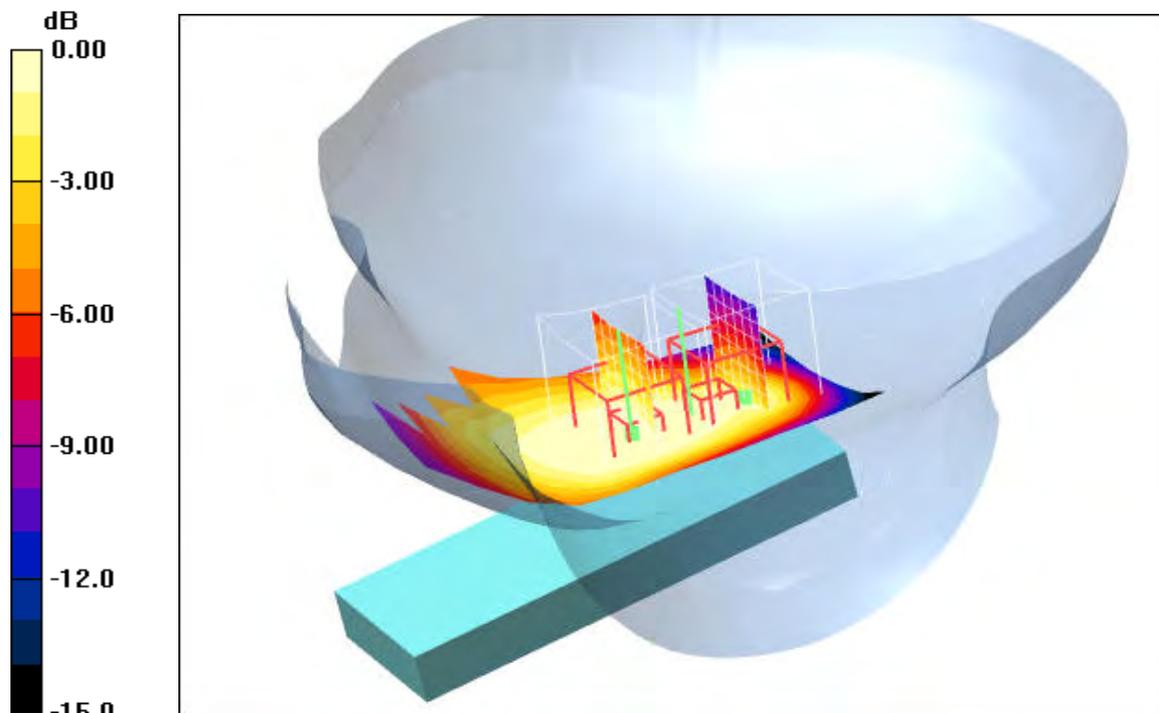

0 dB = 0.473mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2008-12-31 17:08:34 Date/Time: 2008-12-31 17:14:52 Date/Time: 2008-12-31 17:27:00

P1528_OET65-RightHandSide-GSM850 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium: HSL850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.9 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(6.19, 6.19, 6.19); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.580 mW/g

Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.2 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.713 W/kg

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.393 mW/g

Maximum value of SAR (measured) = 0.583 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.2 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.457 mW/g

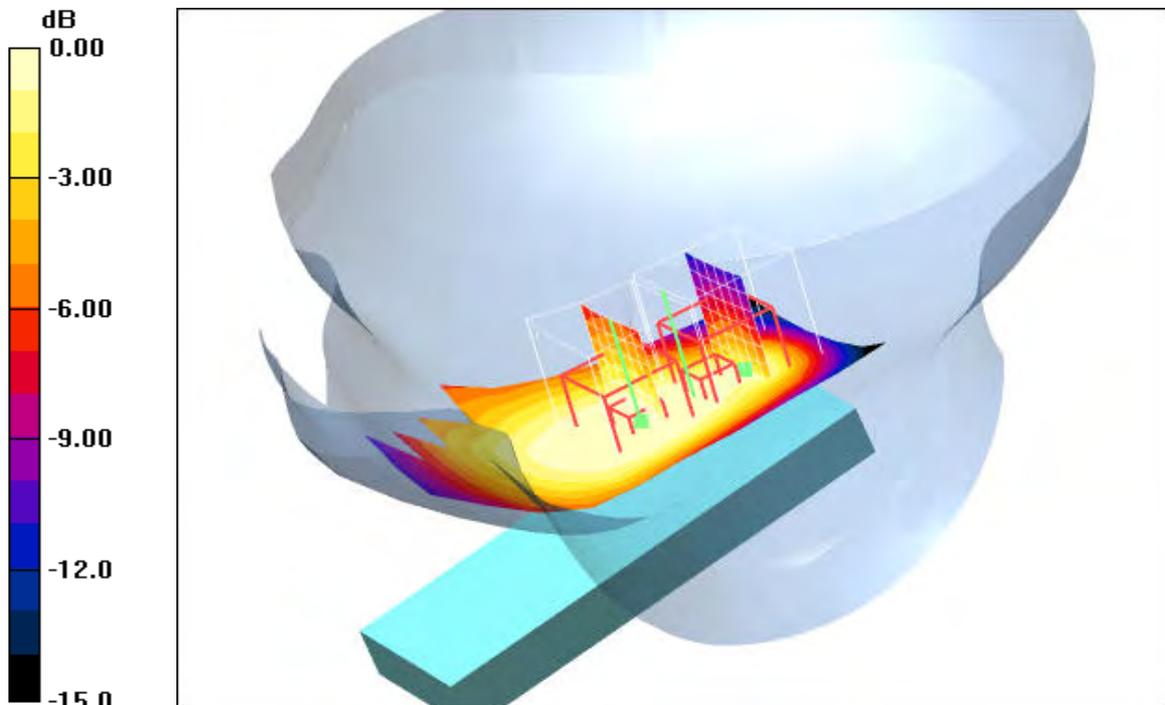

0 dB = 0.457mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Annex 2.2 PCS 850 MHz body

Date/Time: 2009-01-03 13:45:08 Date/Time: 2009-01-03 13:50:46

P1528_OET65-Body-GSM850 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850 GPRS 2TS; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: M850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.96, 5.96, 5.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Front position - Low/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.615 mW/g


Front position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.5 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.807 W/kg

SAR(1 g) = 0.580 mW/g; SAR(10 g) = 0.407 mW/g

Maximum value of SAR (measured) = 0.618 mW/g

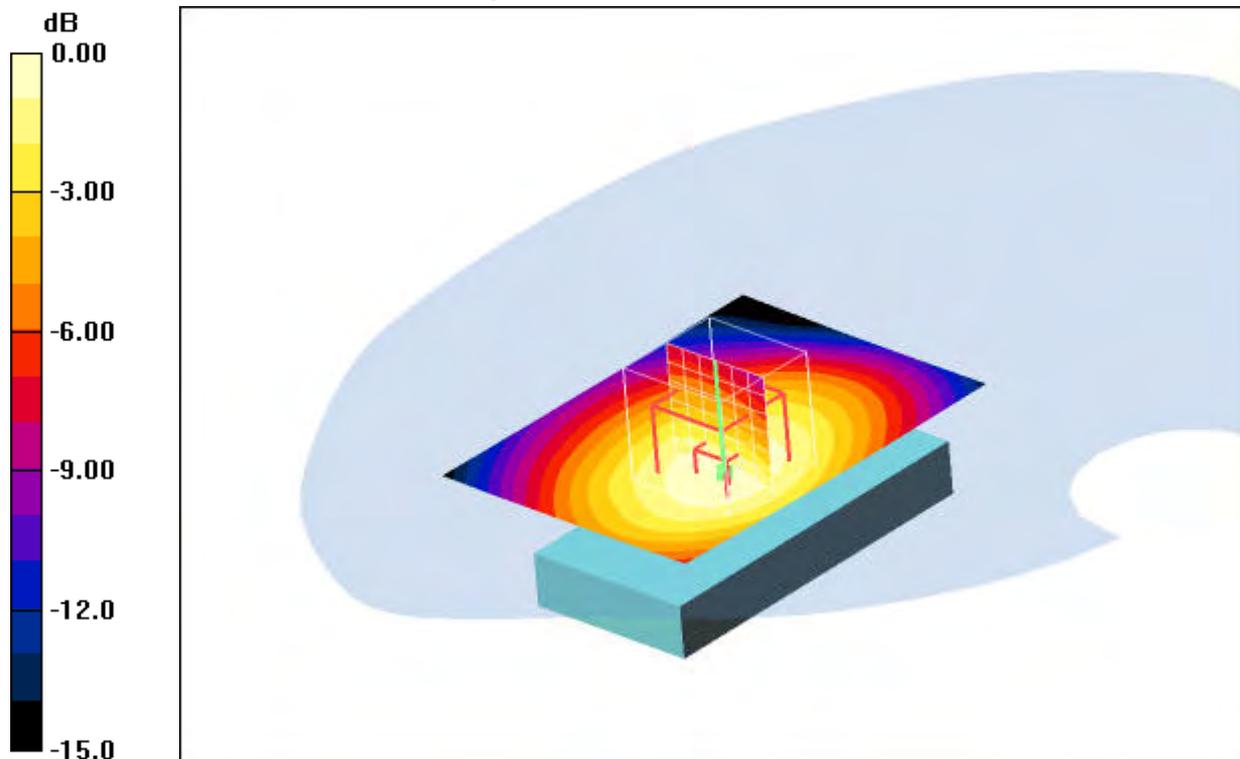

0 dB = 0.618mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.1°C; liquid temperature: 21.9°C

Date/Time: 2009-01-03 14:07:06 Date/Time: 2009-01-03 14:12:20

P1528_OET65-Body-GSM850 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850 GPRS 2TS; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: M850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.96, 5.96, 5.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Front position - Middle/Area Scan (51x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.563 mW/g


Front position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.5 V/m; Power Drift = 0.038 dB

Peak SAR (extrapolated) = 0.755 W/kg

SAR(1 g) = 0.539 mW/g; SAR(10 g) = 0.378 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

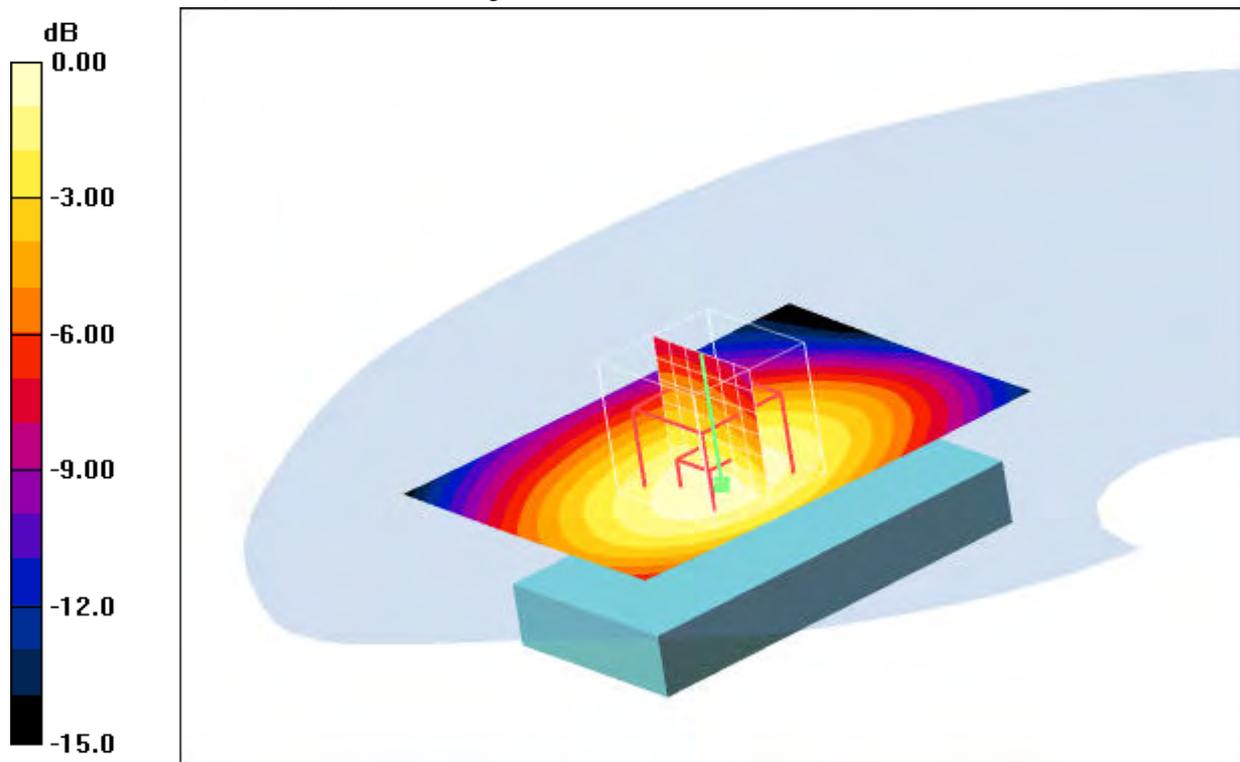

0 dB = 0.576mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.1°C; liquid temperature: 21.9°C

Date/Time: 2009-01-03 14:29:23 Date/Time: 2009-01-03 15:17:17

P1528_OET65-Body-GSM850 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850 GPRS 2TS; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: M850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.96, 5.96, 5.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Front position - High/Area Scan (51x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.460 mW/g


Front position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.2 V/m; Power Drift = -0.099 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.454 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.482 mW/g

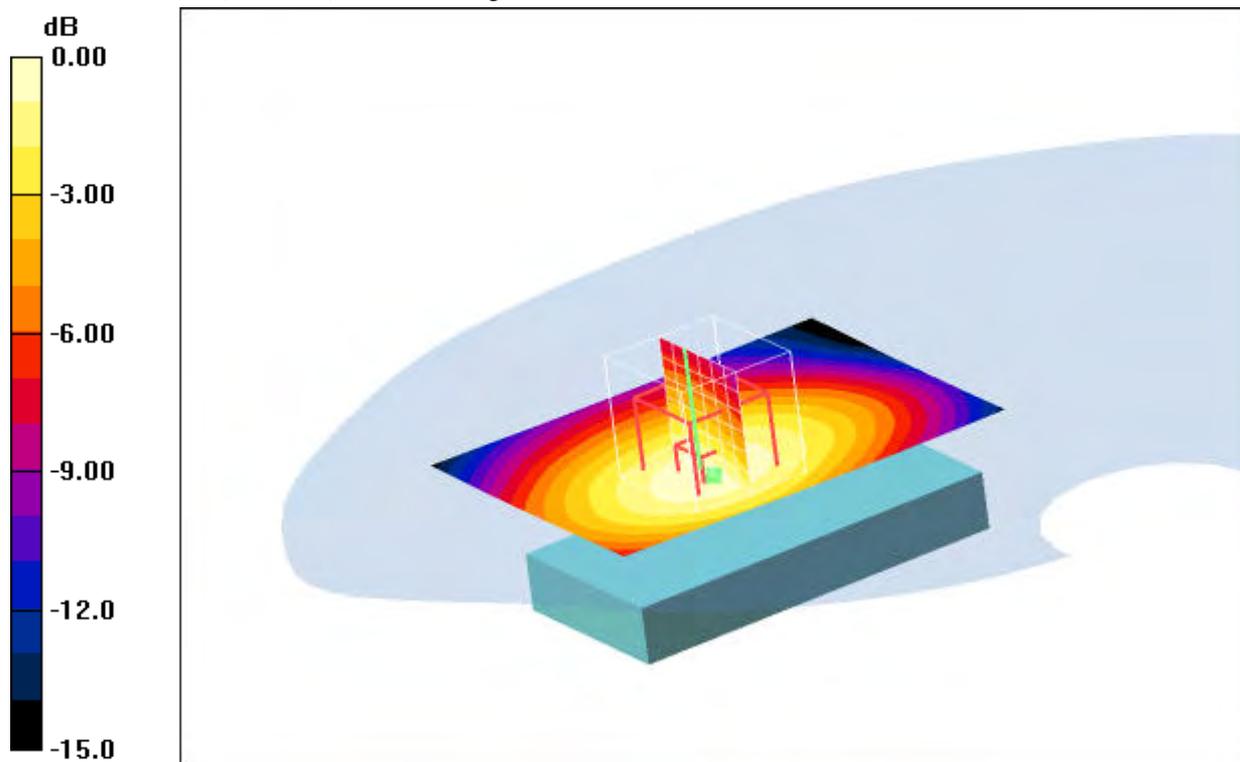

0 dB = 0.482mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.1°C; liquid temperature: 21.9°C

Date/Time: 2009-01-03 18:14:48 Date/Time: 2009-01-03 18:28:02

P1528_OET65-Body-GSM850 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850 GPRS 2TS; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: M850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.96, 5.96, 5.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position - Low/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.975 mW/g


Rear position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 32.9 V/m; Power Drift = -0.083 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.914 mW/g; SAR(10 g) = 0.620 mW/g

Maximum value of SAR (measured) = 0.975 mW/g

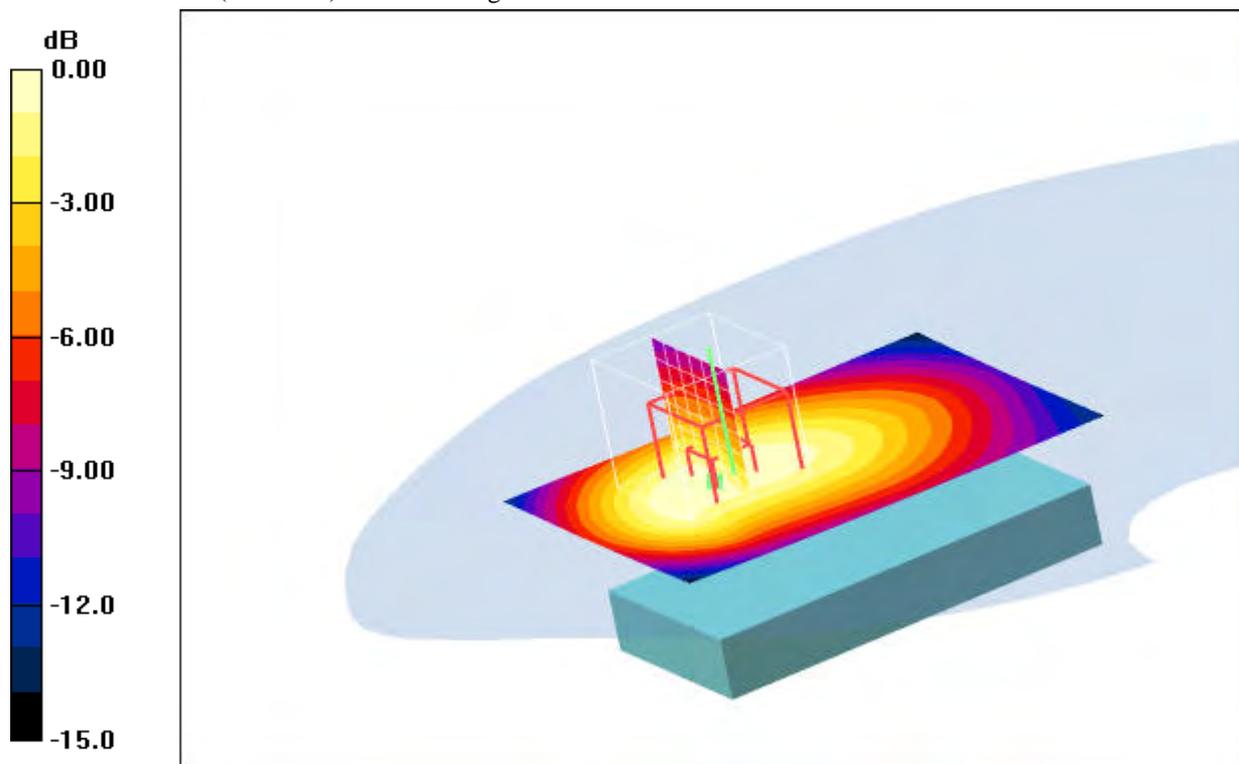

0 dB = 0.975mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.2°C; liquid temperature: 22.0°C

Date/Time: 2009-01-03 17:53:58 Date/Time: 2009-01-03 17:59:18

P1528_OET65-Body-GSM850 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850 GPRS 2TS; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium: M850 Medium parameters used: $f = 836.6 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.96, 5.96, 5.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position - Middle/Area Scan (51x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.904 mW/g


Rear position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.6 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.834 mW/g; SAR(10 g) = 0.566 mW/g

Maximum value of SAR (measured) = 0.887 mW/g

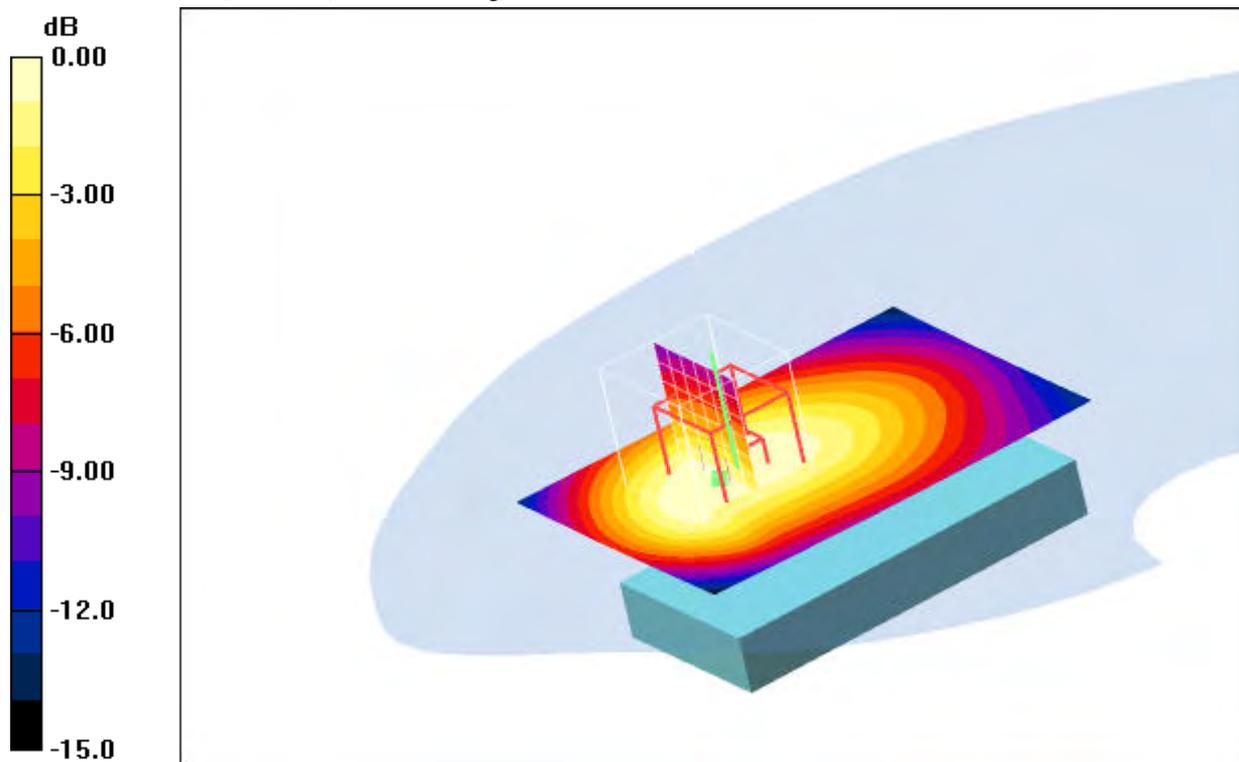

0 dB = 0.887mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.2°C; liquid temperature: 22.0°C

Date/Time: 2009-01-03 17:30:31 Date/Time: 2009-01-03 17:37:17

P1528_OET65-Body-GSM850 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850 GPRS 2TS; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: M850 Medium parameters used: $f = 848.8 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.96, 5.96, 5.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position - High/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.745 mW/g


Rear position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 28.4 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.991 W/kg

SAR(1 g) = 0.686 mW/g; SAR(10 g) = 0.463 mW/g

Maximum value of SAR (measured) = 0.734 mW/g

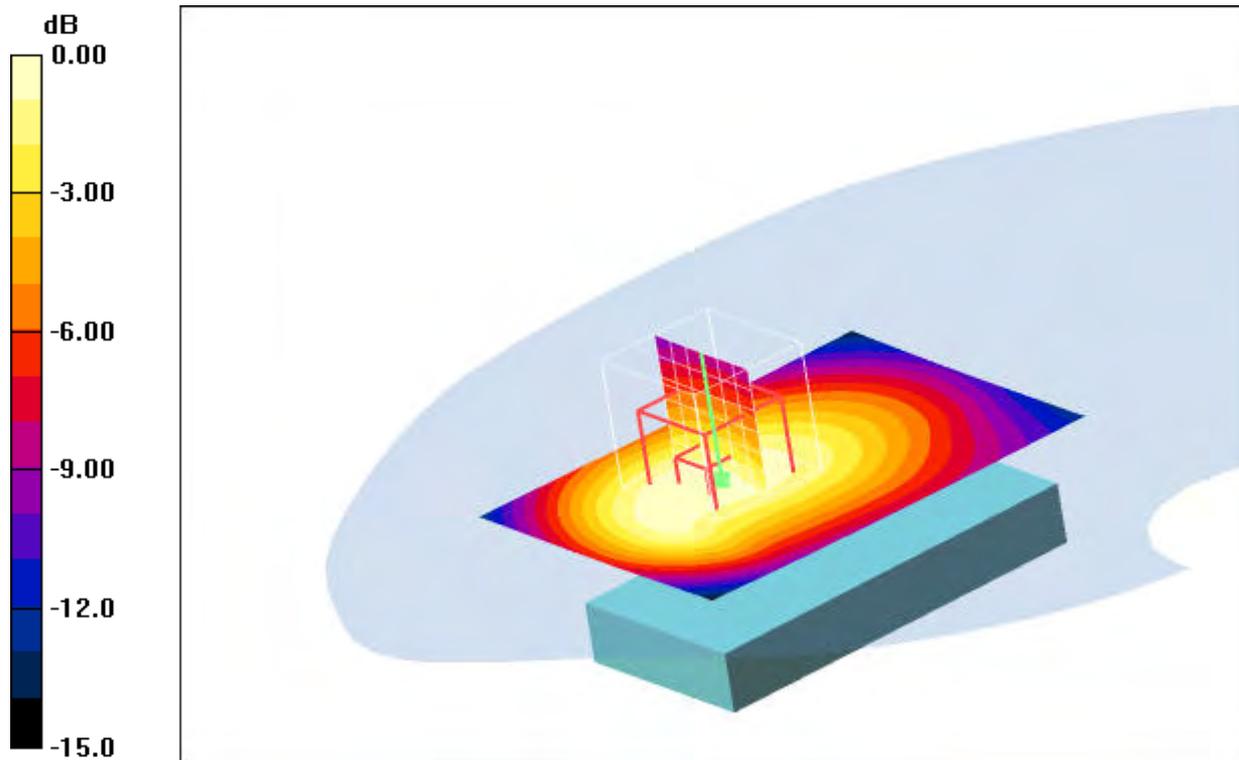

0 dB = 0.734mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.2°C; liquid temperature: 22.0°C

Date/Time: 2009-01-03 19:08:55 Date/Time: 2009-01-03 19:14:07

P1528_OET65-Body-GSM850 GPRS 1TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850; Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium: M850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.96, 5.96, 5.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position - Low/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.611 mW/g


Rear position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.5 V/m; Power Drift = -0.031 dB

Peak SAR (extrapolated) = 0.926 W/kg

SAR(1 g) = 0.570 mW/g; SAR(10 g) = 0.386 mW/g

Maximum value of SAR (measured) = 0.601 mW/g

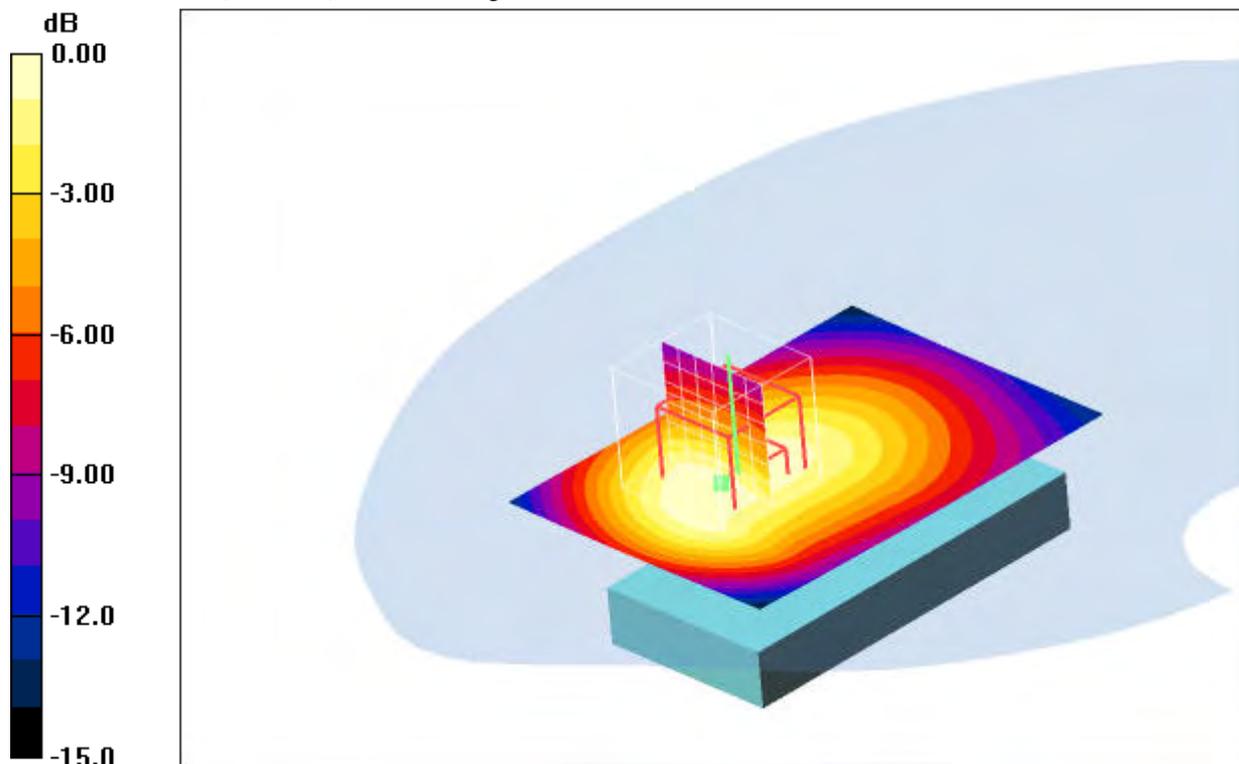

0 dB = 0.601mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.2°C; liquid temperature: 22.0°C

Date/Time: 2009-01-03 18:47:19 Date/Time: 2009-01-03 18:52:37

P1528_OET65-Body-GSM850 E-GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 850 EGPRS class 10; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: M850 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 55.2$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(5.96, 5.96, 5.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position - Low/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.340 mW/g


Rear position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.0 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.458 W/kg

SAR(1 g) = 0.316 mW/g; SAR(10 g) = 0.215 mW/g

Maximum value of SAR (measured) = 0.340 mW/g

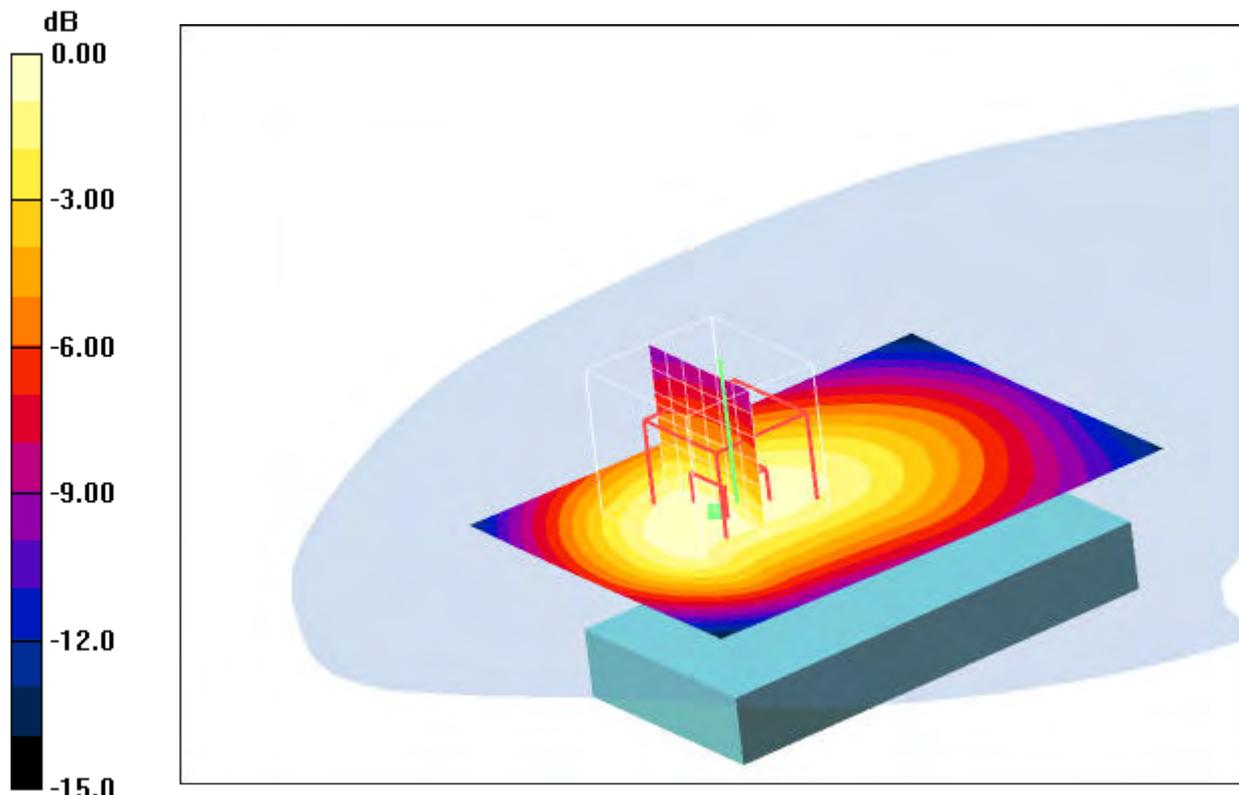

0 dB = 0.340mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.2°C; liquid temperature: 22.0°C

Annex 2.3 PCS 1900 MHz head

Date/Time: 2009-01-06 09:37:41 Date/Time: 2009-01-06 09:43:08 Date/Time: 2009-01-06 09:55:30

P1528_OET65-LeftHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.41$ mho/m; $\epsilon_r = 39.6$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (51x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.861 mW/g

Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.861 mW/g; SAR(10 g) = 0.490 mW/g

Maximum value of SAR (measured) = 0.916 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.5 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.596 W/kg

SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.283 mW/g

Maximum value of SAR (measured) = 0.468 mW/g

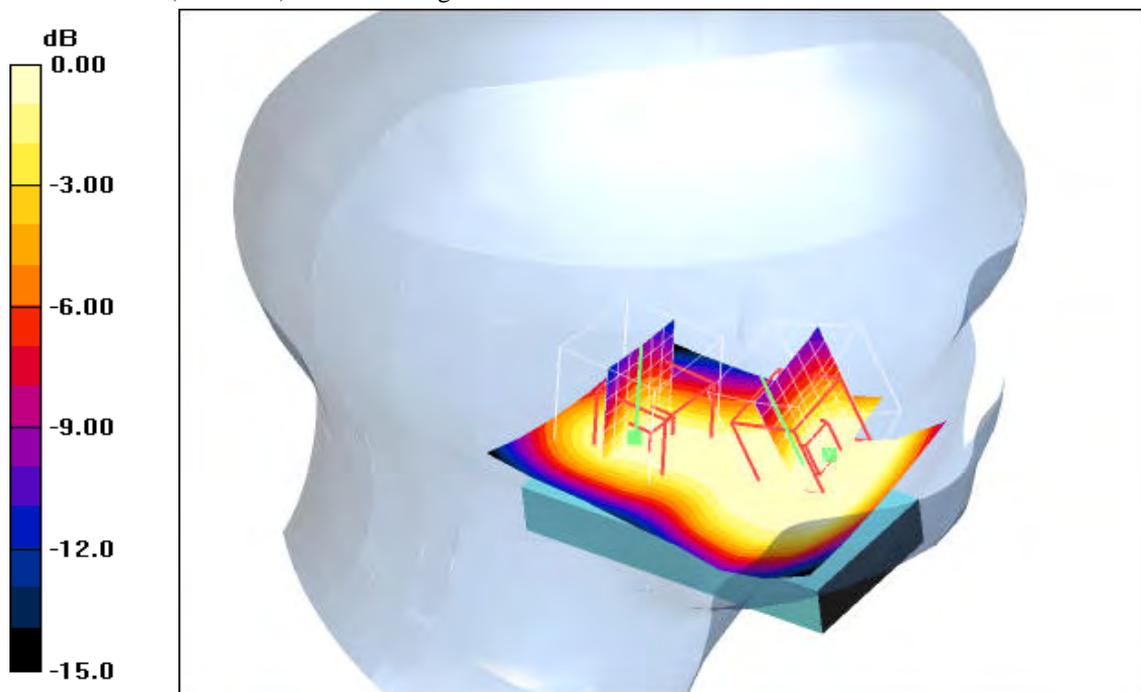

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.1°C; liquid temperature: 21.6°C

Date/Time: 2009-01-06 10:09:42 Date/Time: 2009-01-06 10:15:25

P1528_OET65-LeftHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.934 mW/g

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 24.2 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.907 mW/g; SAR(10 g) = 0.512 mW/g

Maximum value of SAR (measured) = 0.959 mW/g

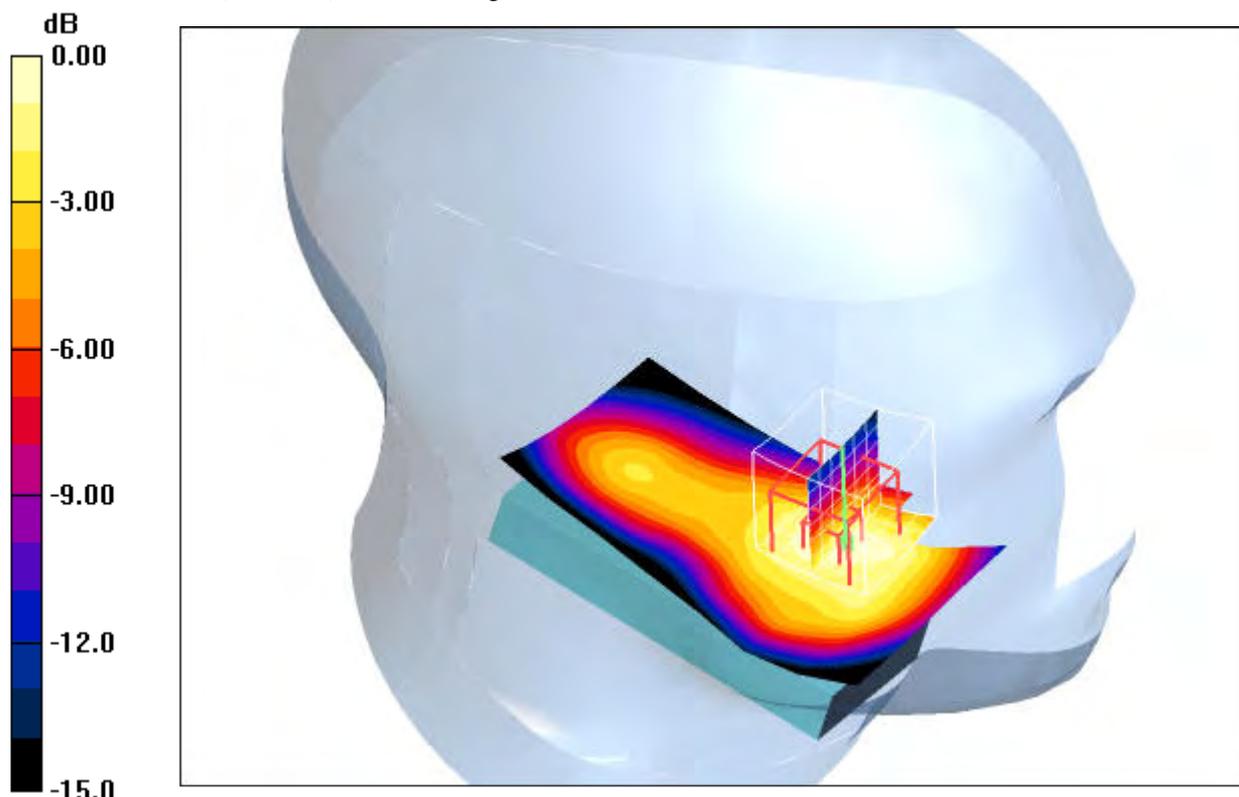

0 dB = 0.959mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.2°C; liquid temperature: 21.6°C

Date/Time: 2009-01-06 10:52:59 Date/Time: 2009-01-06 11:01:10

P1528_OET65-LeftHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.897 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.8 V/m; Power Drift = -0.059 dB

Peak SAR (extrapolated) = 1.52 W/kg

SAR(1 g) = 0.904 mW/g; SAR(10 g) = 0.503 mW/g

Maximum value of SAR (measured) = 0.963 mW/g

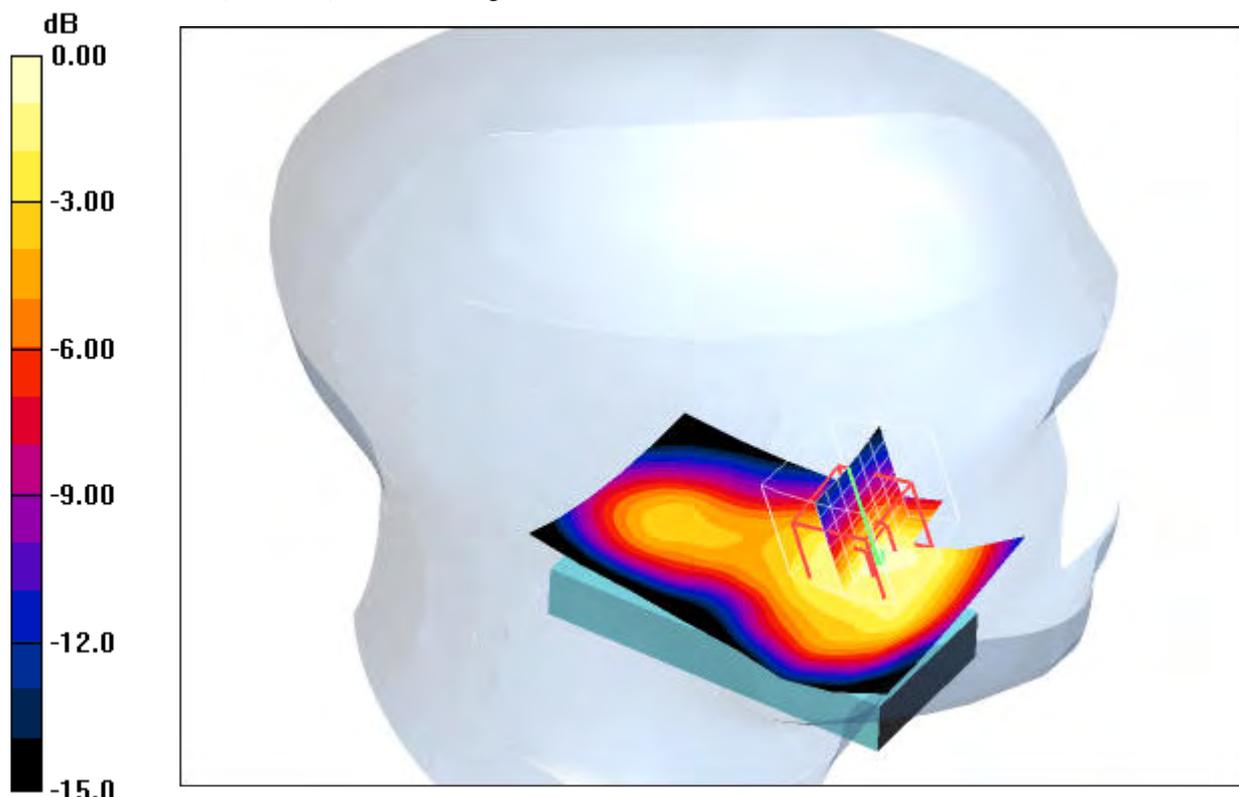

0 dB = 0.963mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.6°C; liquid temperature: 21.6°C

Date/Time: 2009-01-06 12:12:53 Date/Time: 2009-01-06 12:19:03

P1528_OET65-LeftHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.419 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.1 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.556 W/kg

SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.391 mW/g

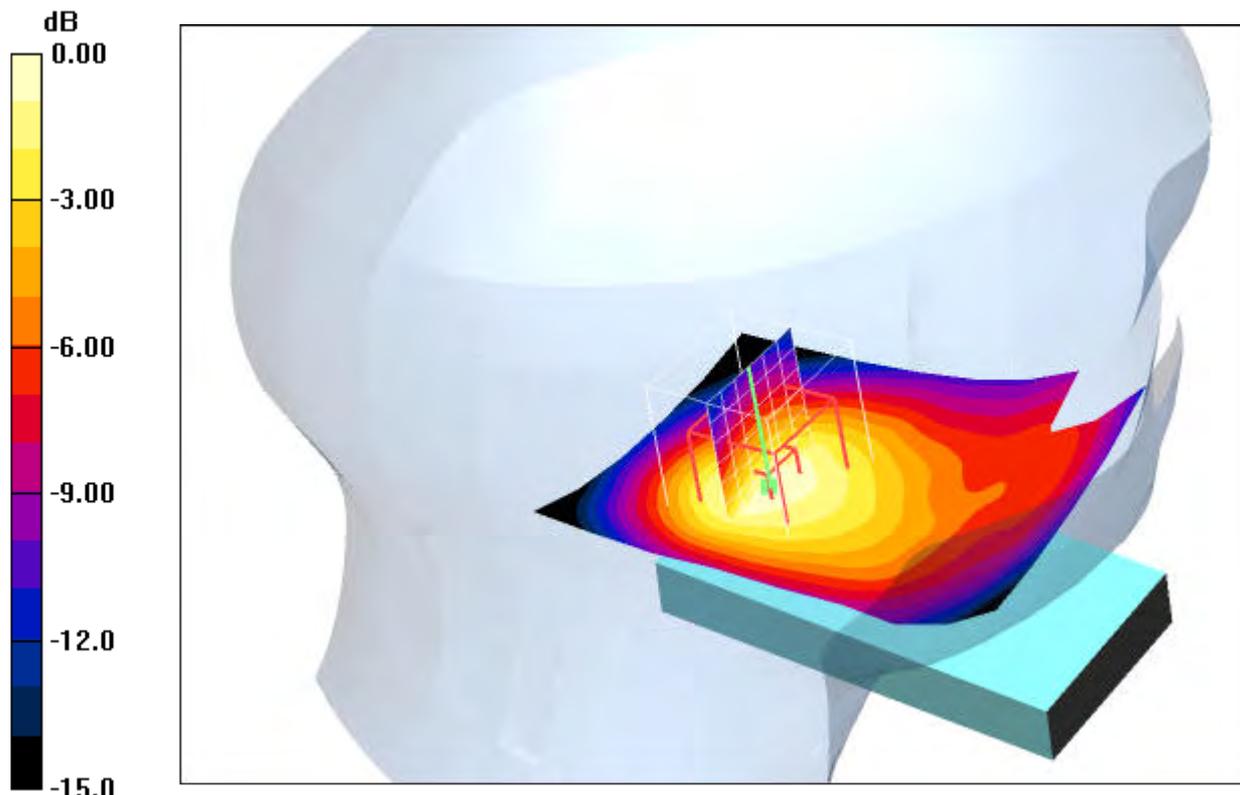

0 dB = 0.391mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.3°C; liquid temperature: 21.4°C

Date/Time: 2009-01-06 11:53:27 Date/Time: 2009-01-06 11:59:33

P1528_OET65-LeftHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.451 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.8 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.606 W/kg

SAR(1 g) = 0.389 mW/g; SAR(10 g) = 0.233 mW/g

Maximum value of SAR (measured) = 0.422 mW/g

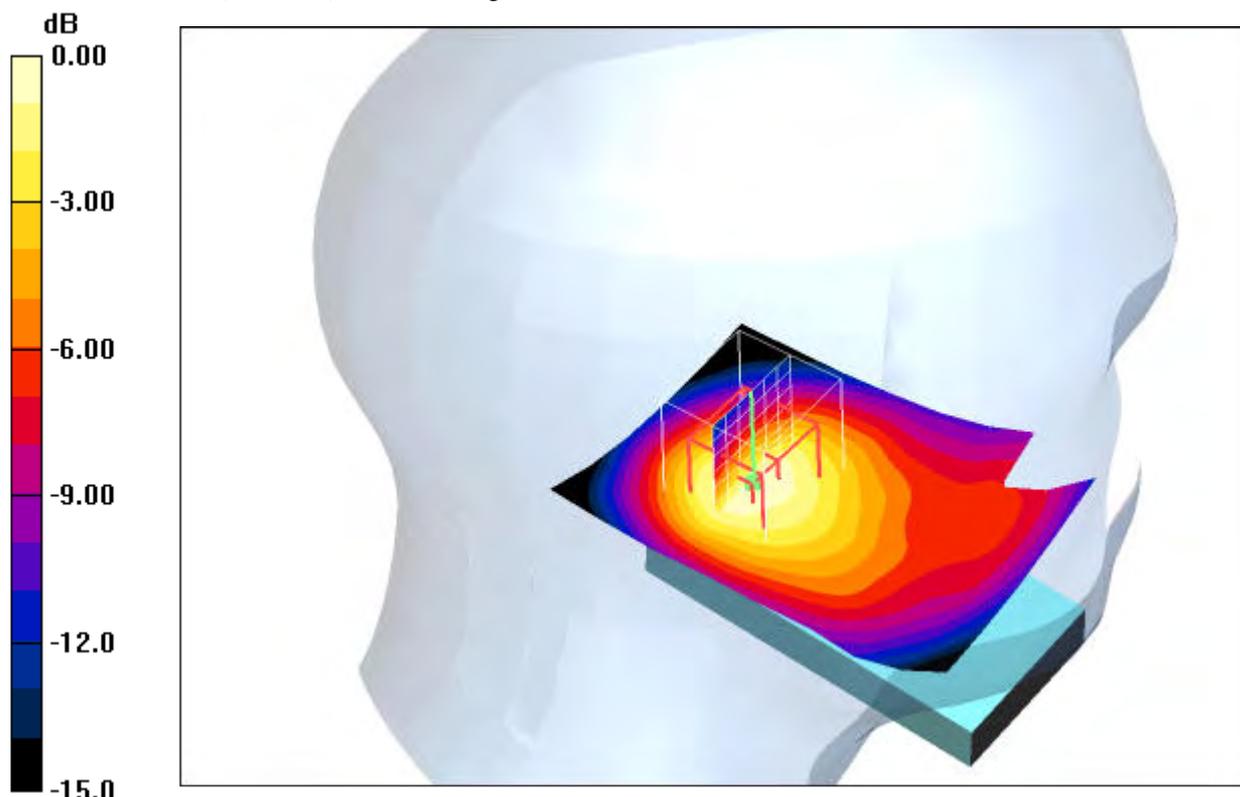

0 dB = 0.422mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.3°C; liquid temperature: 21.5°C

Date/Time: 2009-01-06 13:36:37 Date/Time: 2009-01-06 13:42:50

P1528_OET65-LeftHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High 2/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.481 mW/g


Tilt position - High 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.4 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.415 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 0.451 mW/g

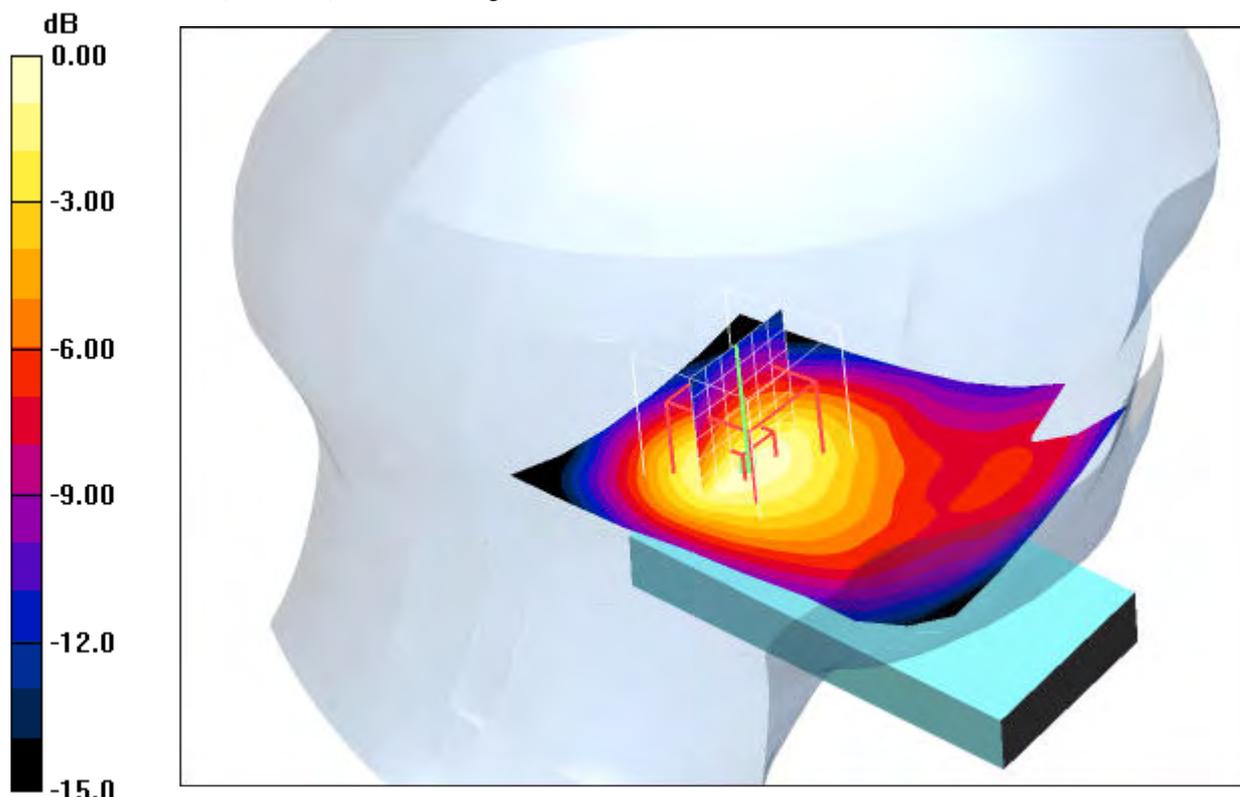

0 dB = 0.451mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.3°C; liquid temperature: 21.5°C

Date/Time: 2009-01-06 15:06:40 Date/Time: 2009-01-06 15:13:10 Date/Time: 2009-01-06 15:25:30

P1528_OET65-LeftHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.398 mW/g

Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.5 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.592 W/kg

SAR(1 g) = 0.384 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.416 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.5 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.481 W/kg

SAR(1 g) = 0.360 mW/g; SAR(10 g) = 0.236 mW/g

Maximum value of SAR (measured) = 0.380 mW/g

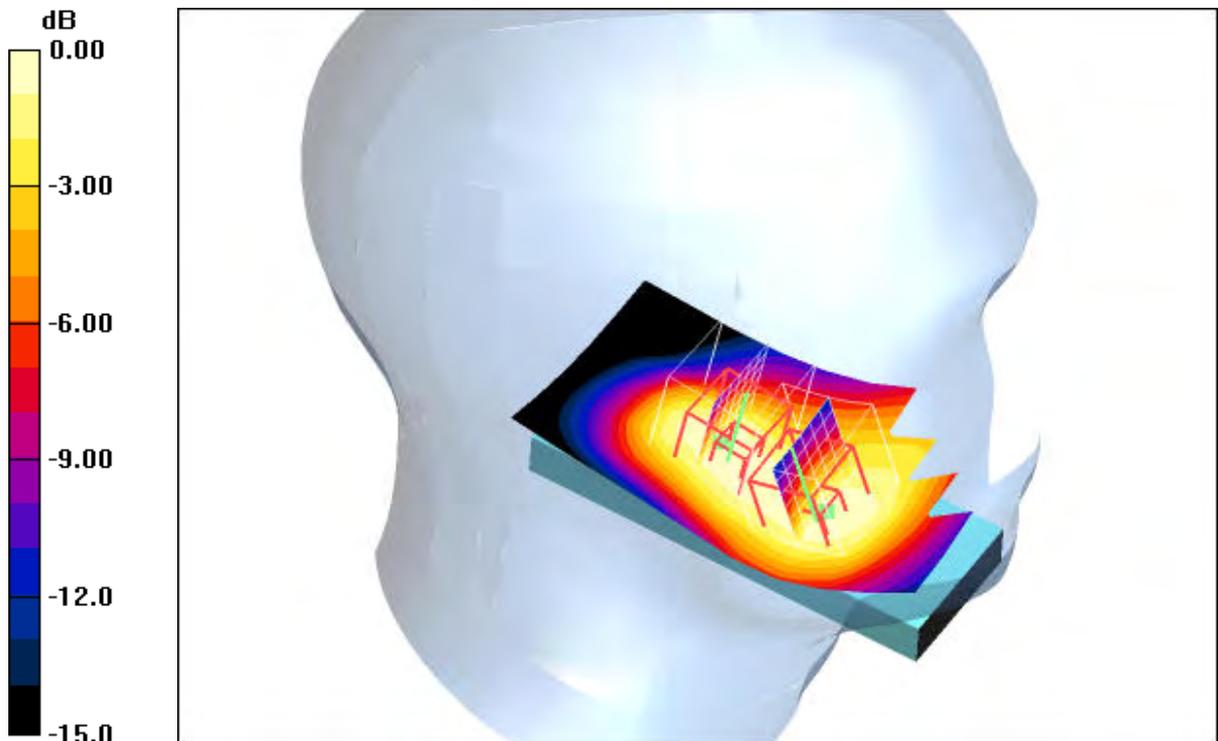

0 dB = 0.380mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.7°C; liquid temperature: 21.2°C

Date/Time: 2009-01-06 14:33:21 Date/Time: 2009-01-06 14:39:48 Date/Time: 2009-01-06 14:52:09

P1528_OET65-LeftHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.410 mW/g

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.7 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.396 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.431 mW/g


Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.7 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.539 W/kg

SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.235 mW/g

Maximum value of SAR (measured) = 0.383 mW/g

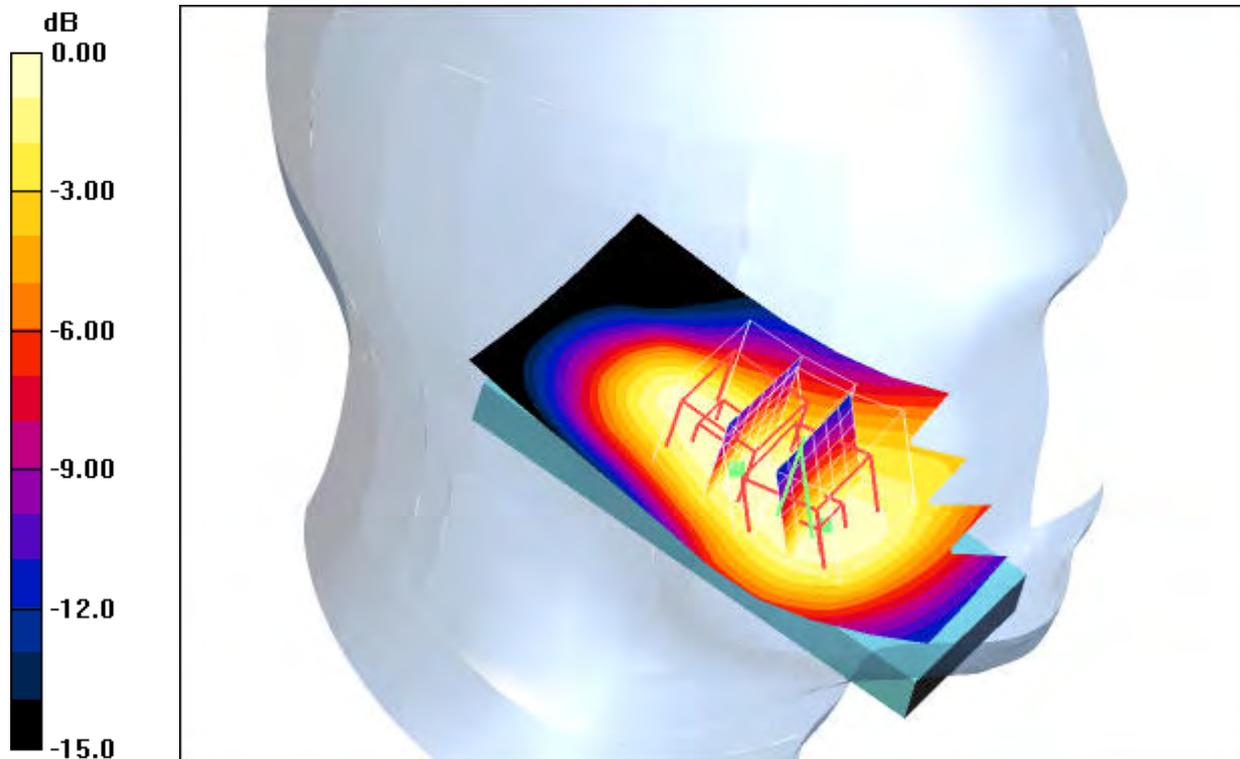

0 dB = 0.383mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.6°C; liquid temperature: 21.2°C

Date/Time: 2009-01-06 13:59:03 Date/Time: 2009-01-06 14:06:22 Date/Time: 2009-01-06 14:18:41

P1528_OET65-LeftHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.389 mW/g

Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.3 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.586 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.406 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.3 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.453 W/kg

SAR(1 g) = 0.325 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.345 mW/g

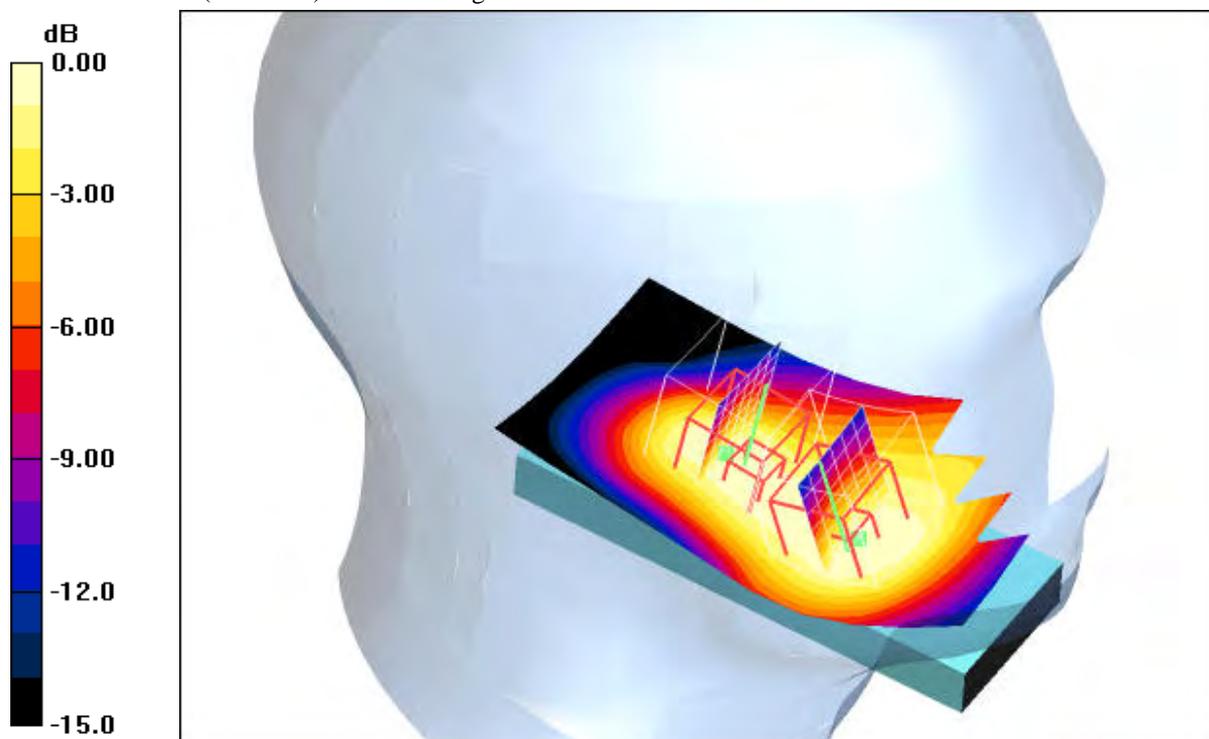

0 dB = 0.345mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.6°C; liquid temperature: 21.2°C

Date/Time: 2009-01-06 12:32:47 Date/Time: 2009-01-06 12:40:26

P1528_OET65-LeftHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.329 mW/g

Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 14.6 V/m; Power Drift = -0.026 dB

Peak SAR (extrapolated) = 0.402 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.278 mW/g

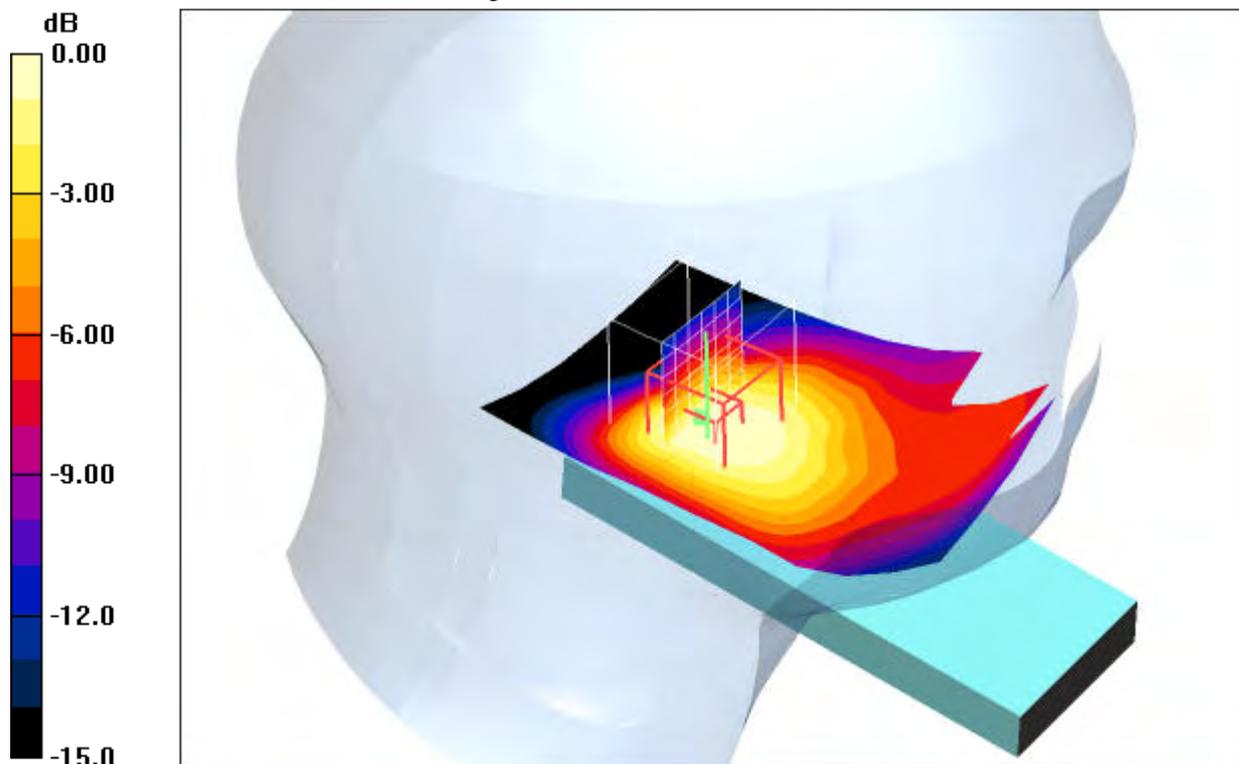

0 dB = 0.278mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.4°C; liquid temperature: 21.3°C

Date/Time: 2009-01-06 12:55:57 Date/Time: 2009-01-06 13:03:28

P1528_OET65-LeftHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.337 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.6 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.408 W/kg

SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.287 mW/g

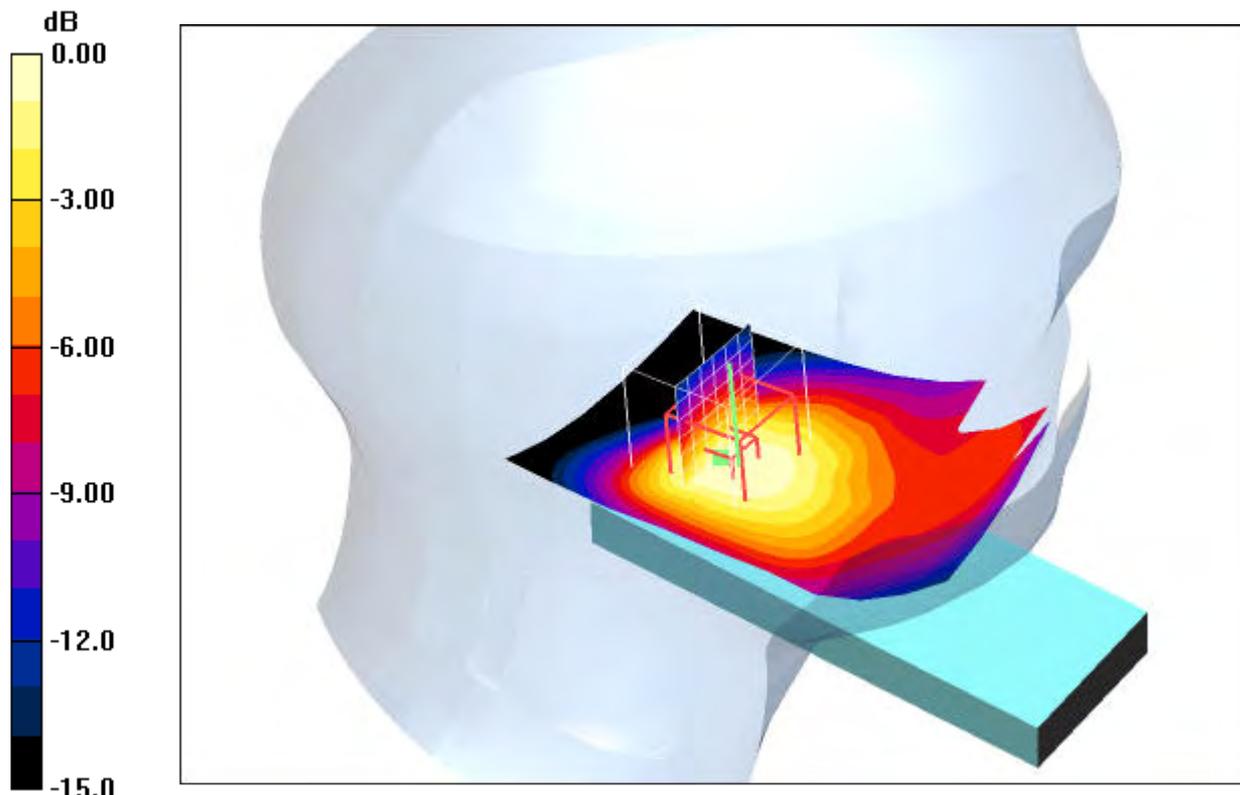

0 dB = 0.287mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.5°C; liquid temperature: 21.3°C

Date/Time: 2009-01-06 13:16:56 Date/Time: 2009-01-06 13:23:30

P1528_OET65-LeftHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.359 mW/g

Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 14.8 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.435 W/kg

SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.170 mW/g

Maximum value of SAR (measured) = 0.300 mW/g

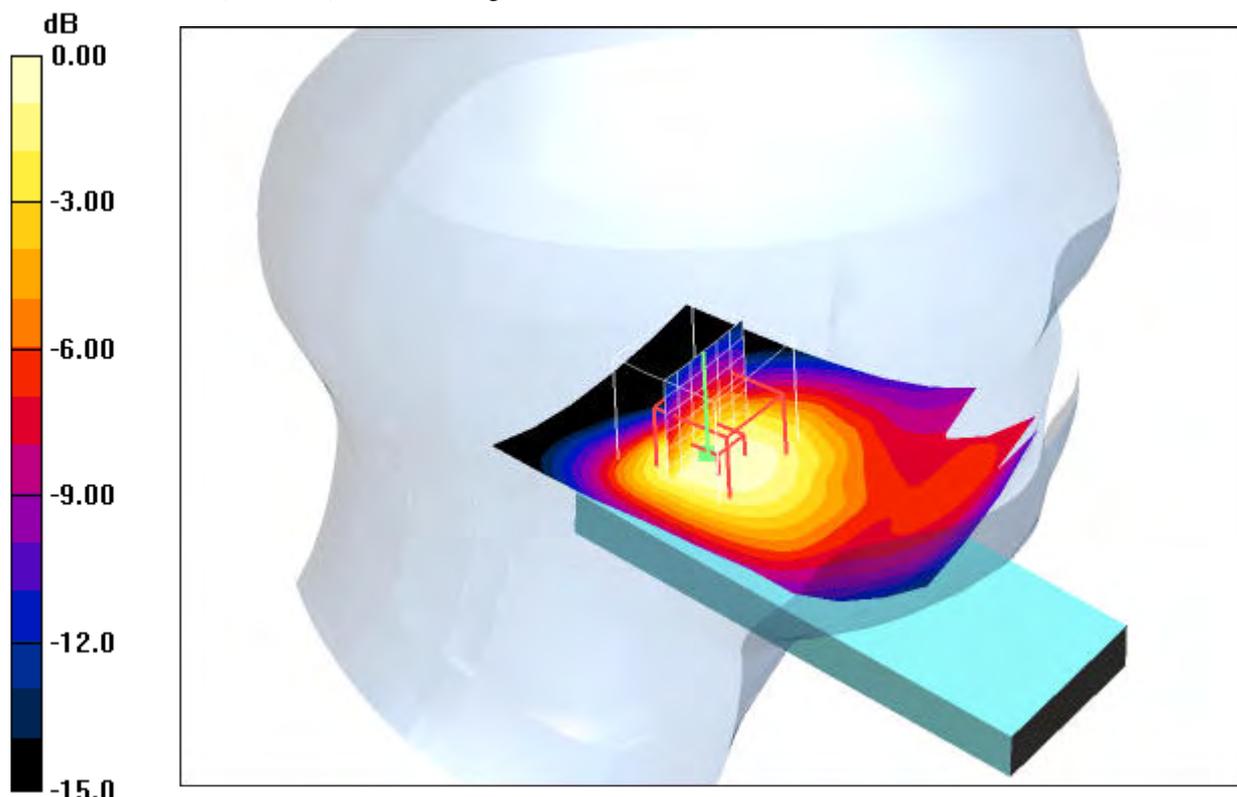

0 dB = 0.300mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.5°C; liquid temperature: 21.3°C

Date/Time: 2009-01-06 15:52:05 Date/Time: 2009-01-06 15:57:20

P1528_OET65-RightHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.922 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.2 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.897 mW/g; SAR(10 g) = 0.489 mW/g

Maximum value of SAR (measured) = 0.971 mW/g

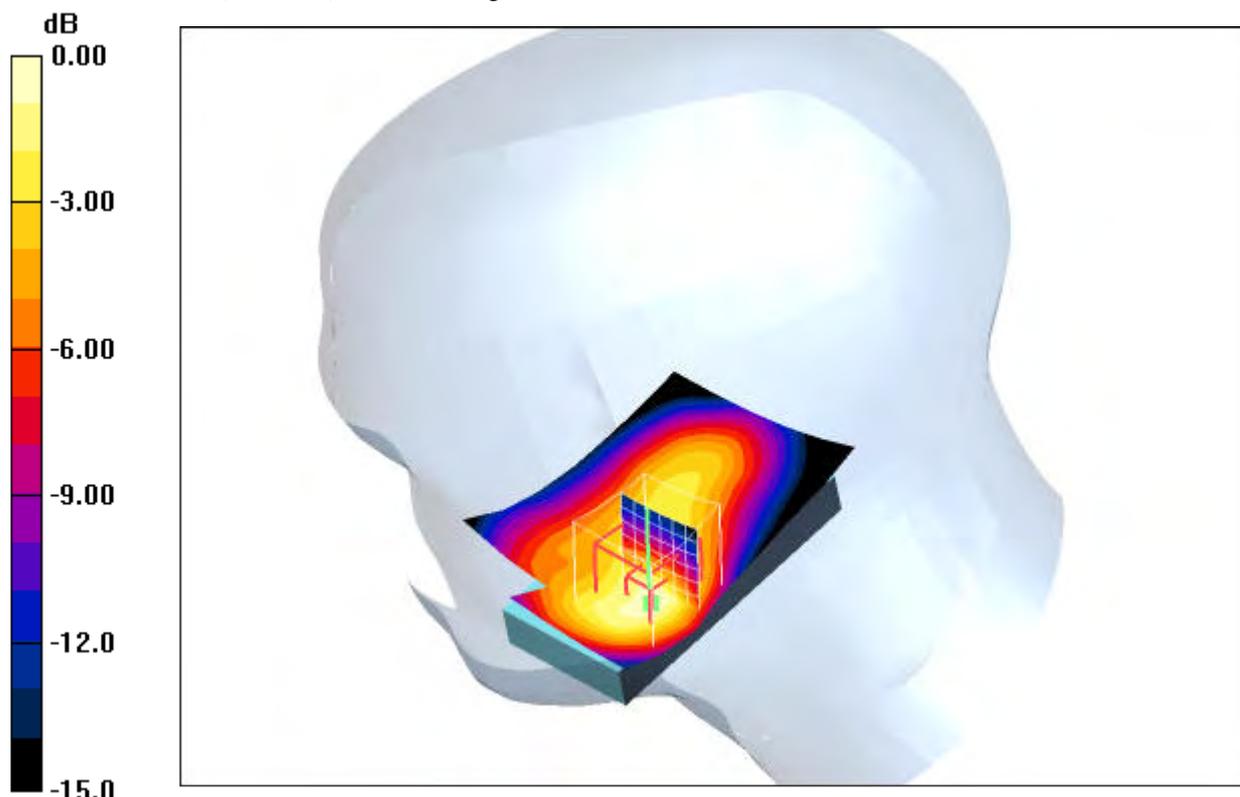

0 dB = 0.971mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 22.8 °C; liquid temperature: 21.1 °C

Date/Time: 2009-01-06 16:28:36 Date/Time: 2009-01-06 16:33:54

P1528_OET65-RightHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.979 mW/g

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$


Reference Value = 25.0 V/m; Power Drift = -0.00 dB

Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.495 mW/g

SAR(1 g) = 0.902 mW/g; SAR(10 g) = 0.495 mW/g

Maximum value of SAR (measured) = 0.974 mW/g

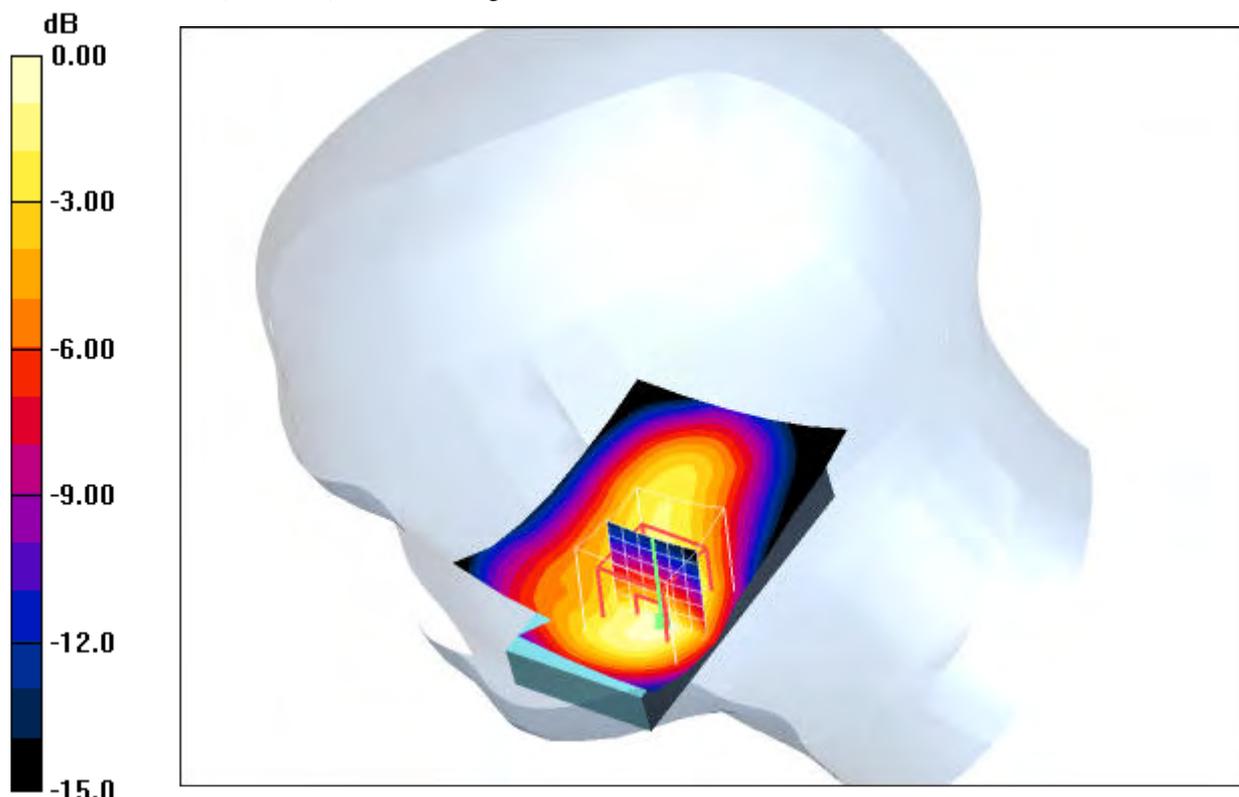

0 dB = 0.974mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.0 °C; liquid temperature: 21.1 °C

Date/Time: 2009-01-06 16:49:01 Date/Time: 2009-01-06 17:15:43 Date/Time: 2009-01-06 17:27:52

P1528_OET65-RightHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.937 mW/g

Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.6 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.913 mW/g; SAR(10 g) = 0.487 mW/g

Maximum value of SAR (measured) = 0.997 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.6 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.673 mW/g; SAR(10 g) = 0.361 mW/g

Maximum value of SAR (measured) = 0.928 mW/g

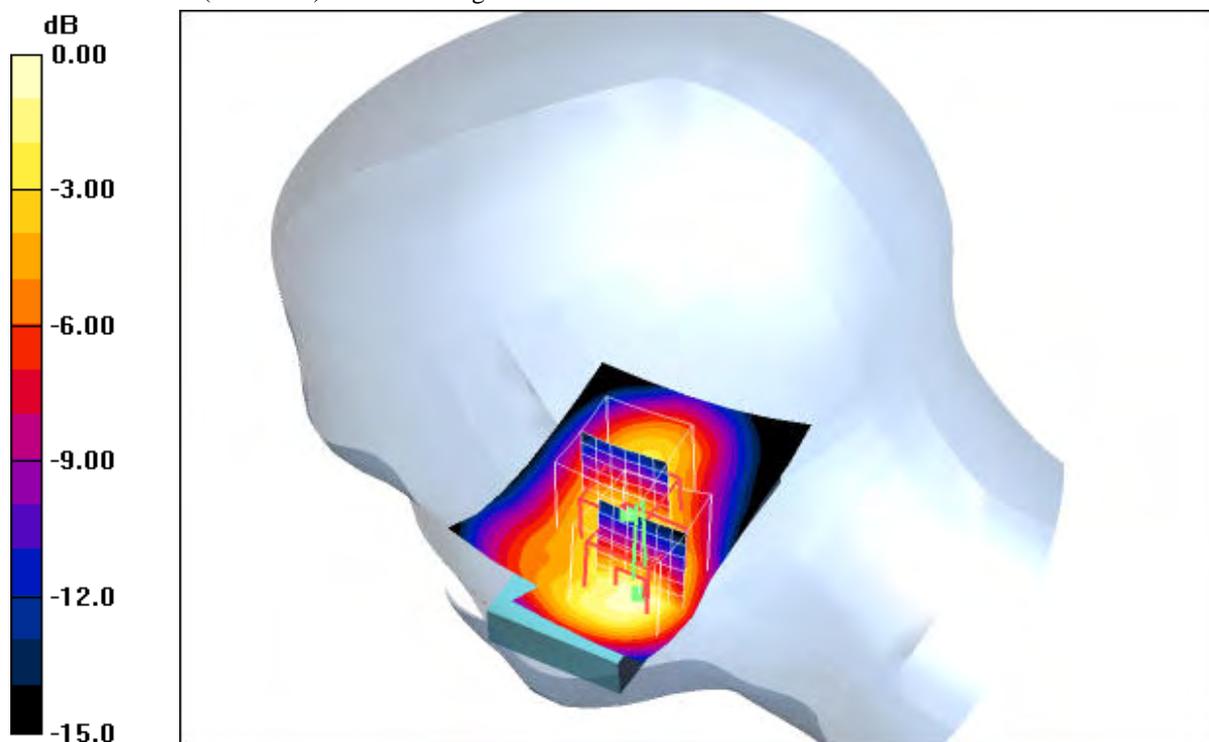

0 dB = 0.928mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.0 °C; liquid temperature: 21.1 °C

Date/Time: 2009-01-06 18:24:01 Date/Time: 2009-01-06 18:30:02

P1528_OET65-RightHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.433 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.5 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.582 W/kg

SAR(1 g) = 0.358 mW/g; SAR(10 g) = 0.216 mW/g

Maximum value of SAR (measured) = 0.390 mW/g

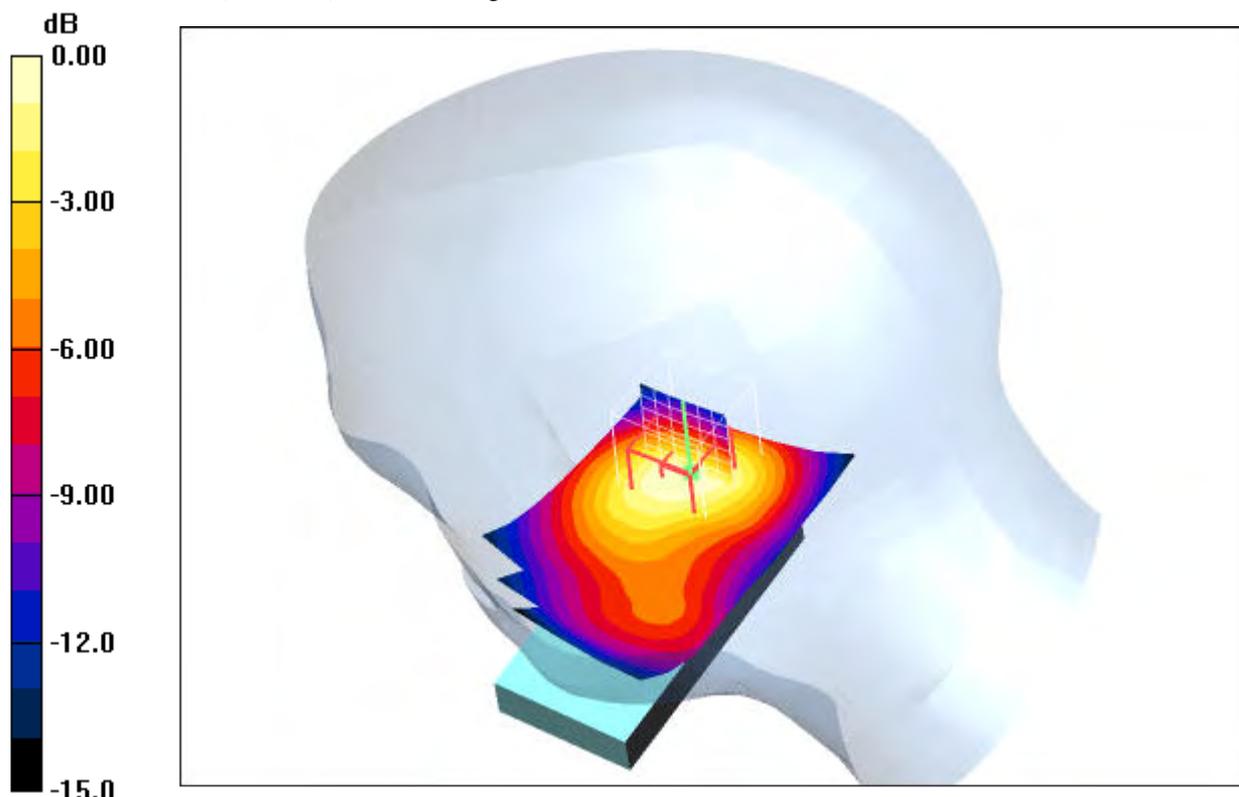

0 dB = 0.390mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.0 °C; liquid temperature: 21.1 °C

Date/Time: 2009-01-06 18:04:15 Date/Time: 2009-01-06 18:10:14

P1528_OET65-RightHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.454 mW/g

Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 16.8 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.400 mW/g

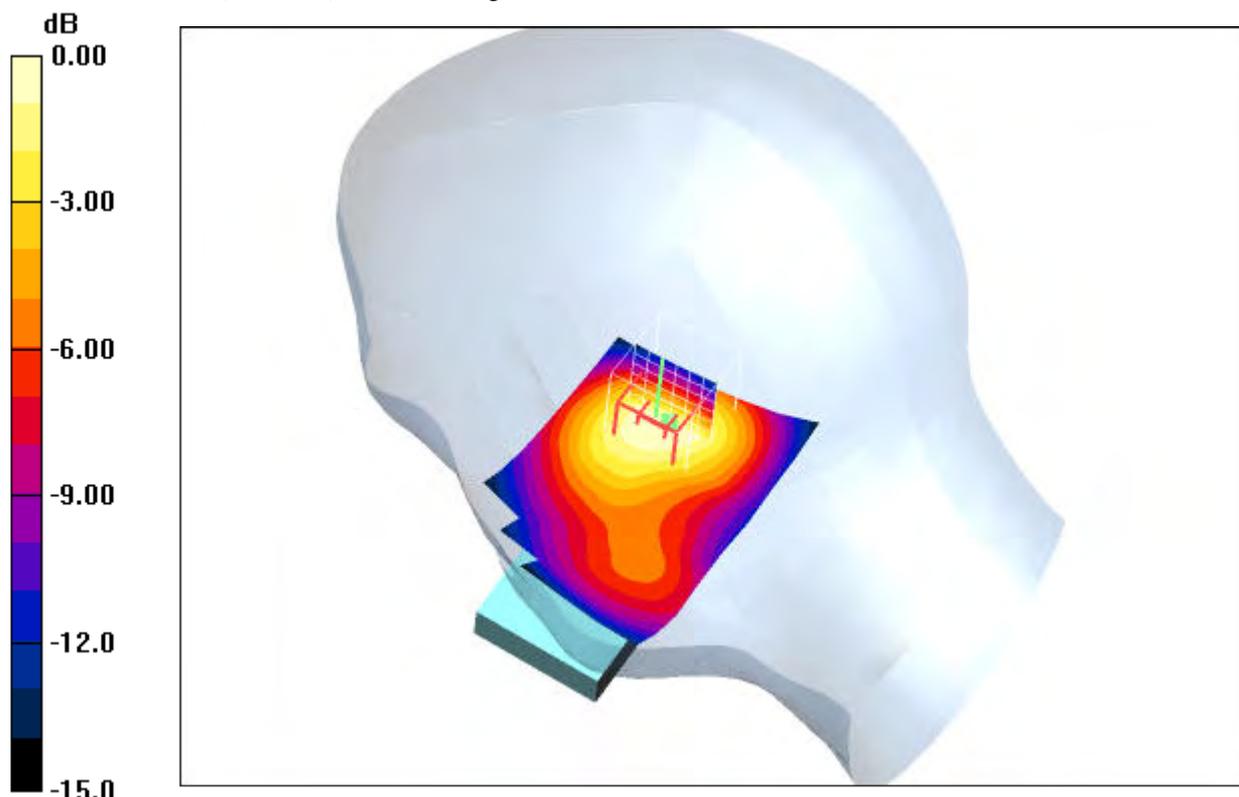

0 dB = 0.400mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.0 °C; liquid temperature: 21.1 °C

Date/Time: 2009-01-06 17:43:35 Date/Time: 2009-01-06 17:50:30

P1528_OET65-RightHandSide-GSM1900

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (51x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.462 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.0 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.616 W/kg

SAR(1 g) = 0.376 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.404 mW/g

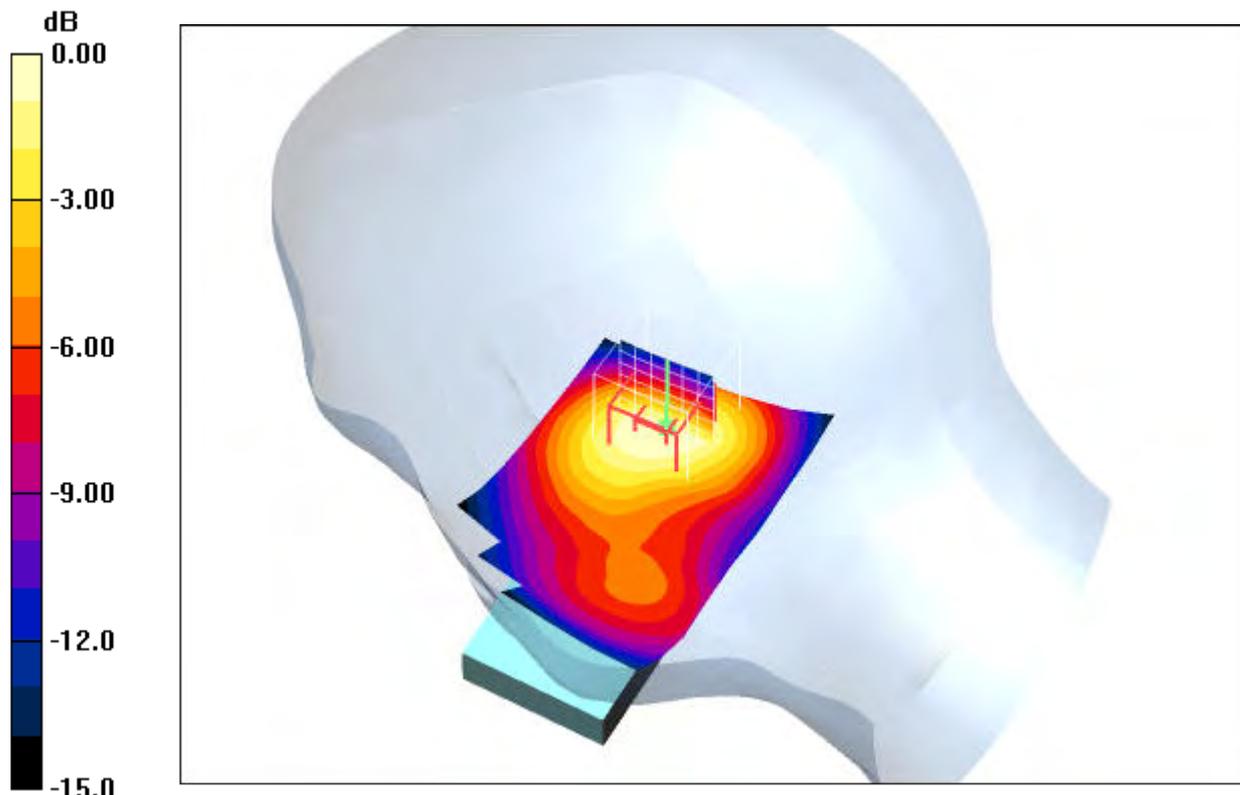

0 dB = 0.404mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.0 °C; liquid temperature: 21.1 °C

Date/Time: 2009-01-06 19:46:58 Date/Time: 2009-01-06 19:53:06

P1528_OET65-RightHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.553 mW/g


Touch position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.3 V/m; Power Drift = 0.047 dB

Peak SAR (extrapolated) = 1.00 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.344 mW/g

Maximum value of SAR (measured) = 0.627 mW/g

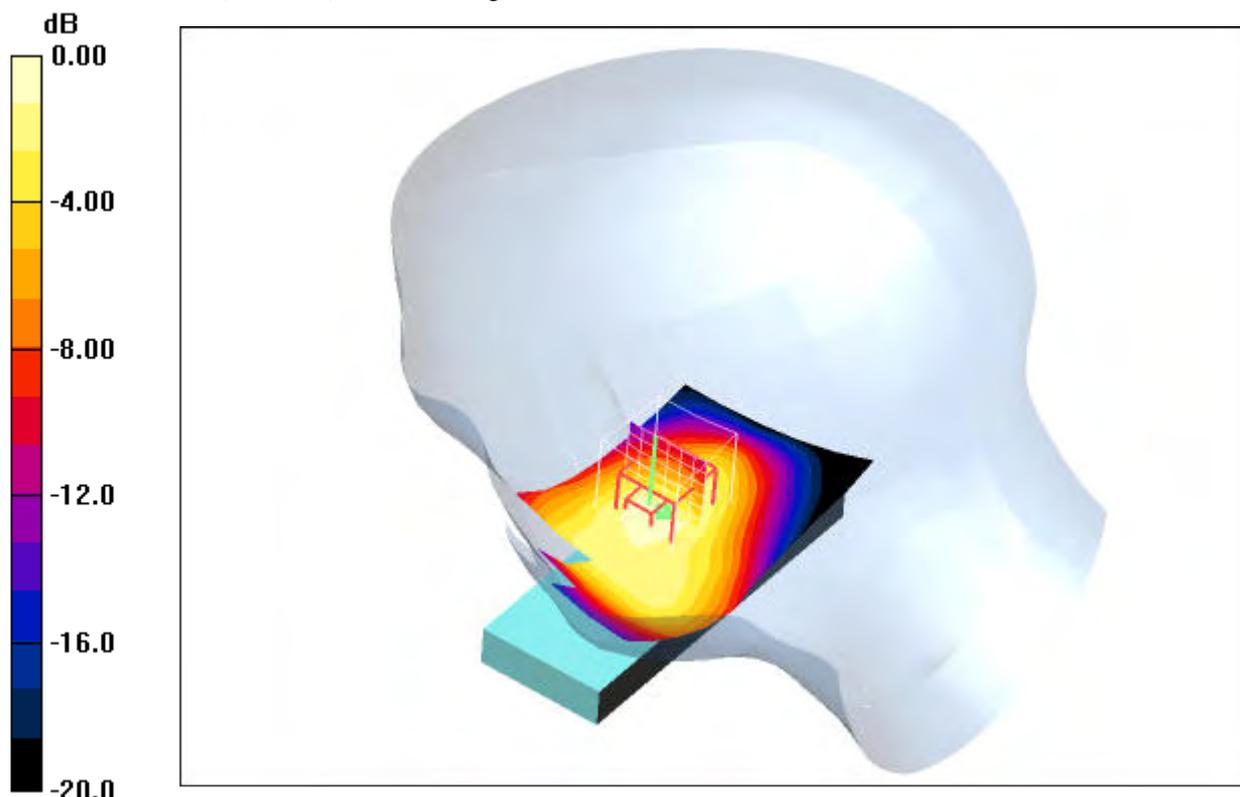

0 dB = 0.627mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.6 °C; liquid temperature: 21.3 °C

Date/Time: 2009-01-06 20:07:40 Date/Time: 2009-01-06 20:13:50

P1528_OET65-RightHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection) Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.573 mW/g

Touch position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$,


$dz=5\text{mm}$

Reference Value = 20.6 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.987 W/kg

SAR(1 g) = 0.556 mW/g; SAR(10 g) = 0.338 mW/g

Maximum value of SAR (measured) = 0.626 mW/g

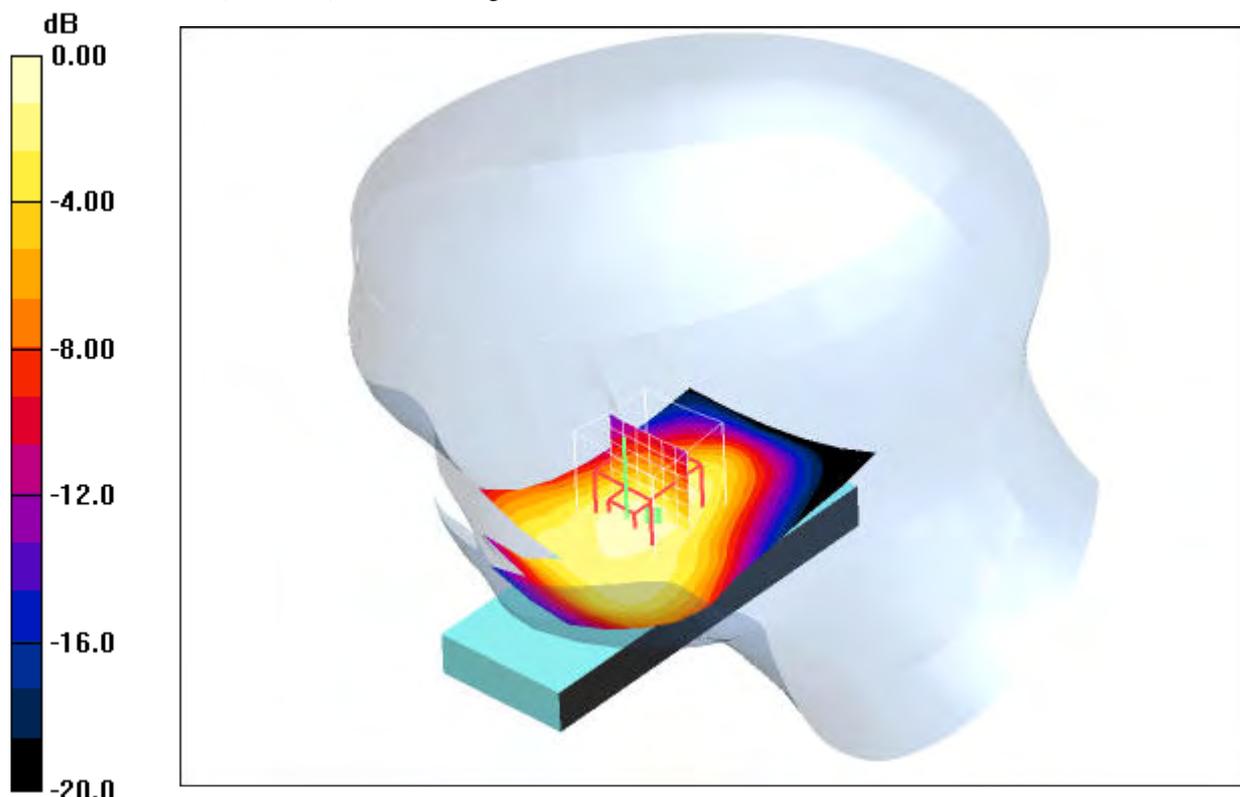

0 dB = 0.626mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.6 °C; liquid temperature: 21.3 °C

Date/Time: 2009-01-06 20:28:15 Date/Time: 2009-01-06 20:36:31

P1528_OET65-RightHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Touch position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.514 mW/g


Touch position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.5 V/m; Power Drift = 0.029 dB

Peak SAR (extrapolated) = 0.917 W/kg

SAR(1 g) = 0.513 mW/g; SAR(10 g) = 0.312 mW/g

Maximum value of SAR (measured) = 0.570 mW/g

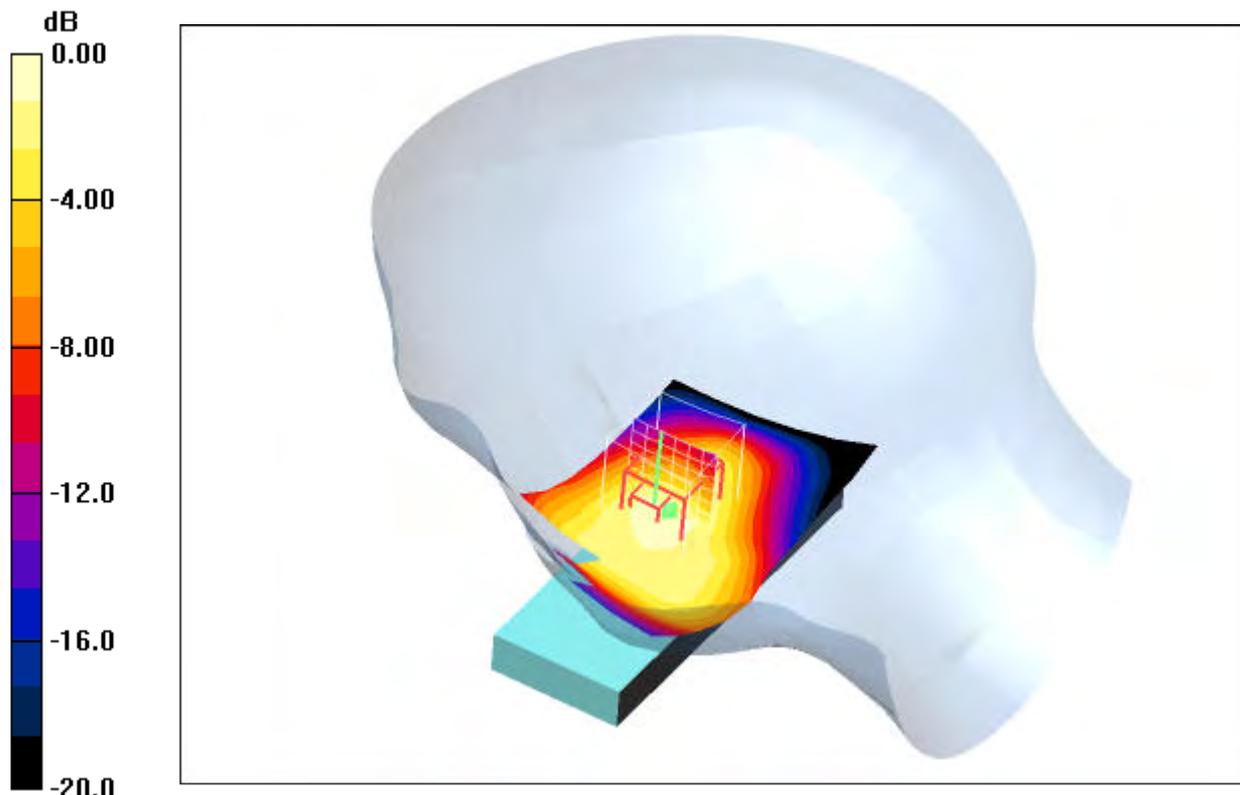

0 dB = 0.570mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.6 °C; liquid temperature: 21.3 °C

Date/Time: 2009-01-06 19:26:36 Date/Time: 2009-01-06 19:32:48

P1528_OET65-RightHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Low/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.386 mW/g


Tilt position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.2 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.491 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.345 mW/g

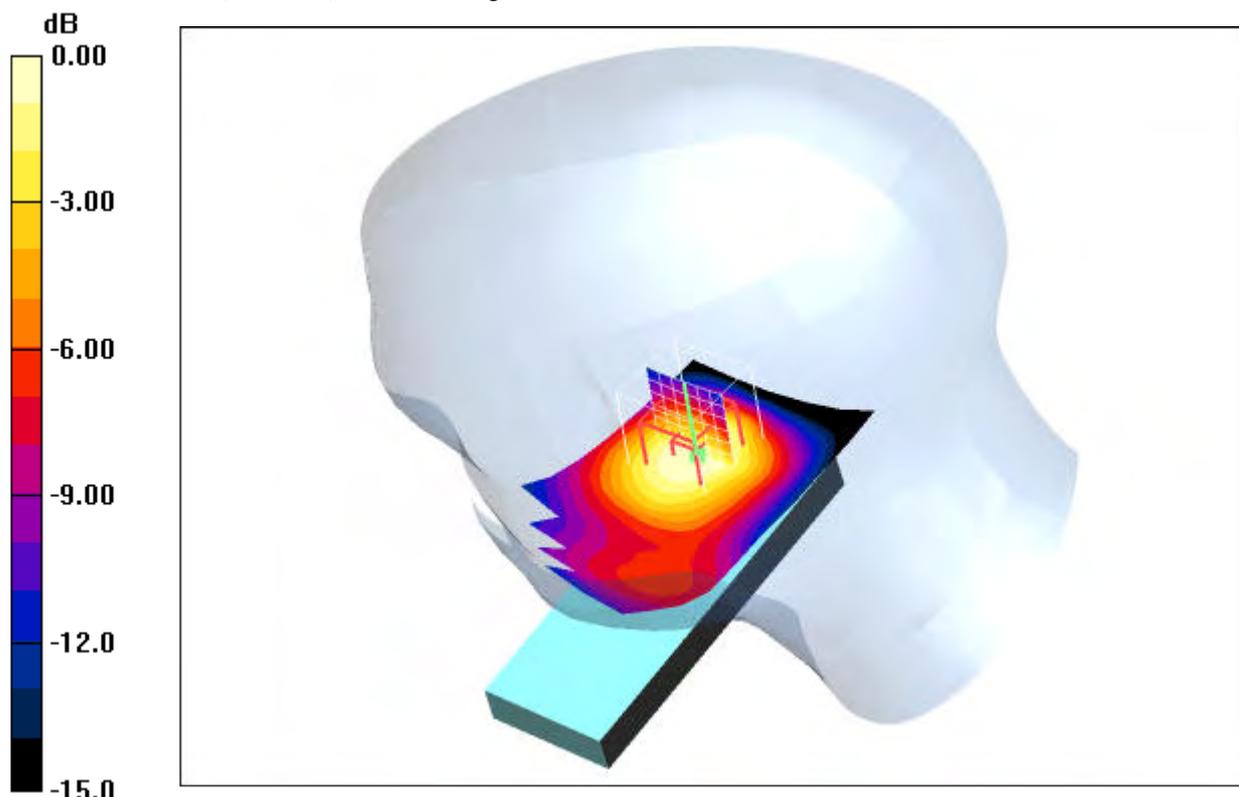

0 dB = 0.345mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.1 °C; liquid temperature: 21.1 °C

Date/Time: 2009-01-06 19:07:06 Date/Time: 2009-01-06 19:13:18

P1528_OET65-RightHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - Middle/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.397 mW/g


Tilt position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.5 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.528 W/kg

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.205 mW/g

Maximum value of SAR (measured) = 0.364 mW/g

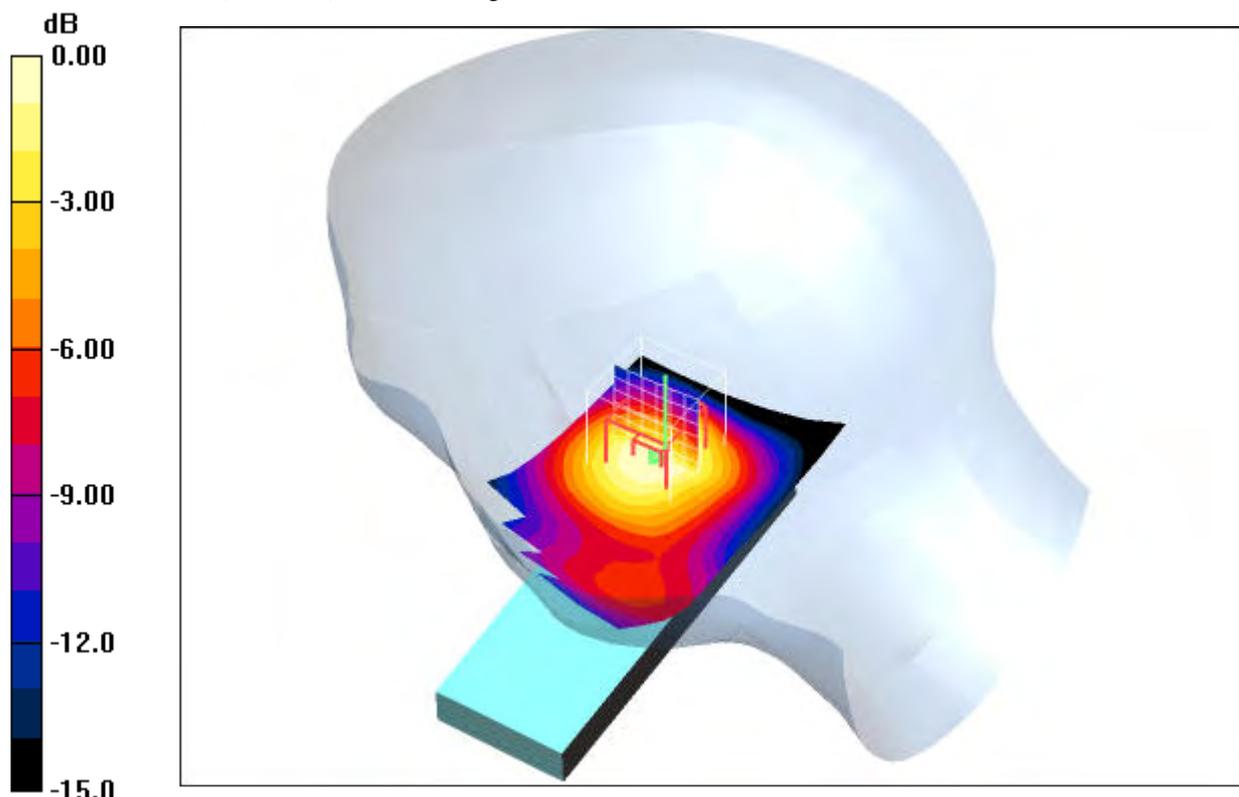

0 dB = 0.364mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.1 °C; liquid temperature: 21.1 °C

Date/Time: 2009-01-06 18:46:37 Date/Time: 2009-01-06 18:53:50

P1528_OET65-RightHandSide-GSM1900 open

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: HSL1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.41 \text{ mho/m}$; $\epsilon_r = 39.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.96, 4.96, 4.96); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Tilt position - High/Area Scan (51x91x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.377 mW/g


Tilt position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 16.2 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.514 W/kg

SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.193 mW/g

Maximum value of SAR (measured) = 0.345 mW/g

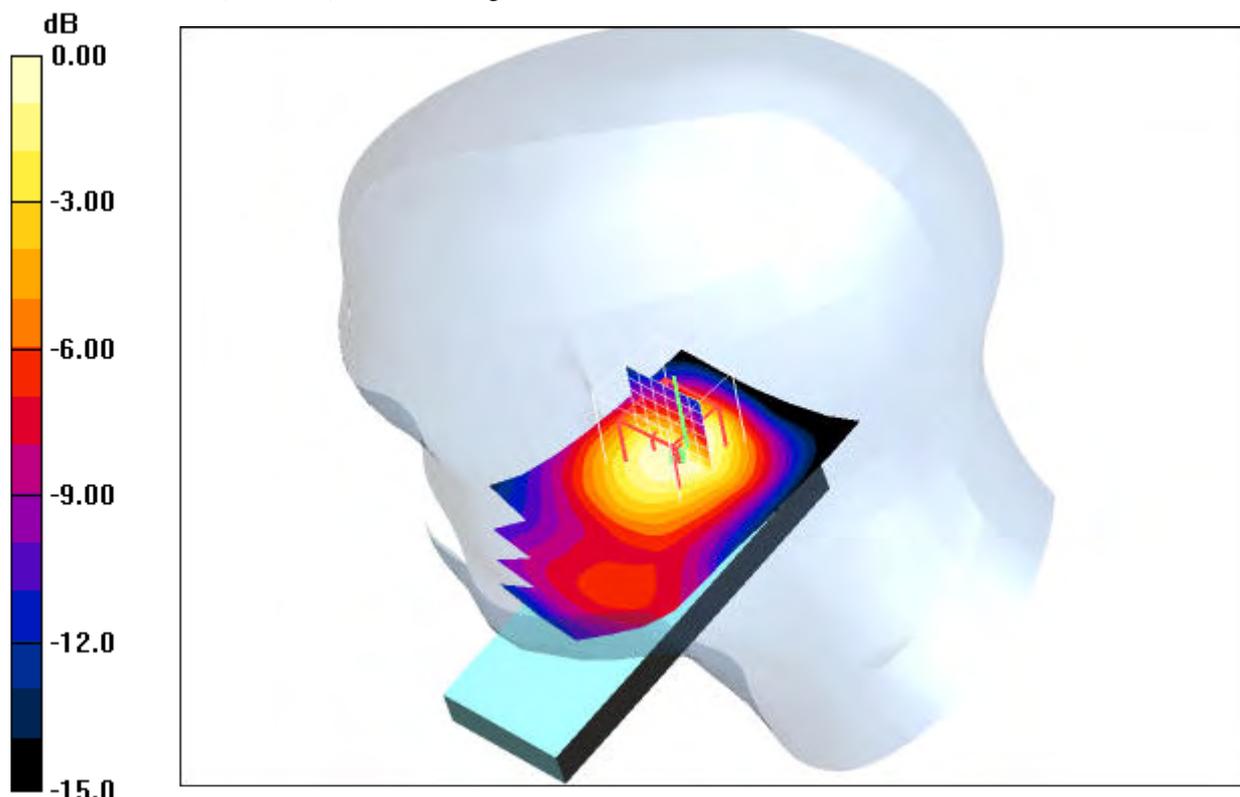

0 dB = 0.345mW/g

Additional information:

position or distance of DUT to SAM (if not standard head positions) :

ambient temperature: 23.1 °C; liquid temperature: 21.1 °C

Annex 2.4 PCS 1900 MHz body

Date/Time: 2009-01-05 16:39:28 Date/Time: 2009-01-05 16:44:34 Date/Time: 2009-01-05 16:57:04

P1528_OET65-Body-GSM1900 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900 GPRS 2TS; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1900 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.5$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Front position - Low/Area Scan (51x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.201 mW/g

Front position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.201 mW/g


Front position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.7 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.251 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.168 mW/g

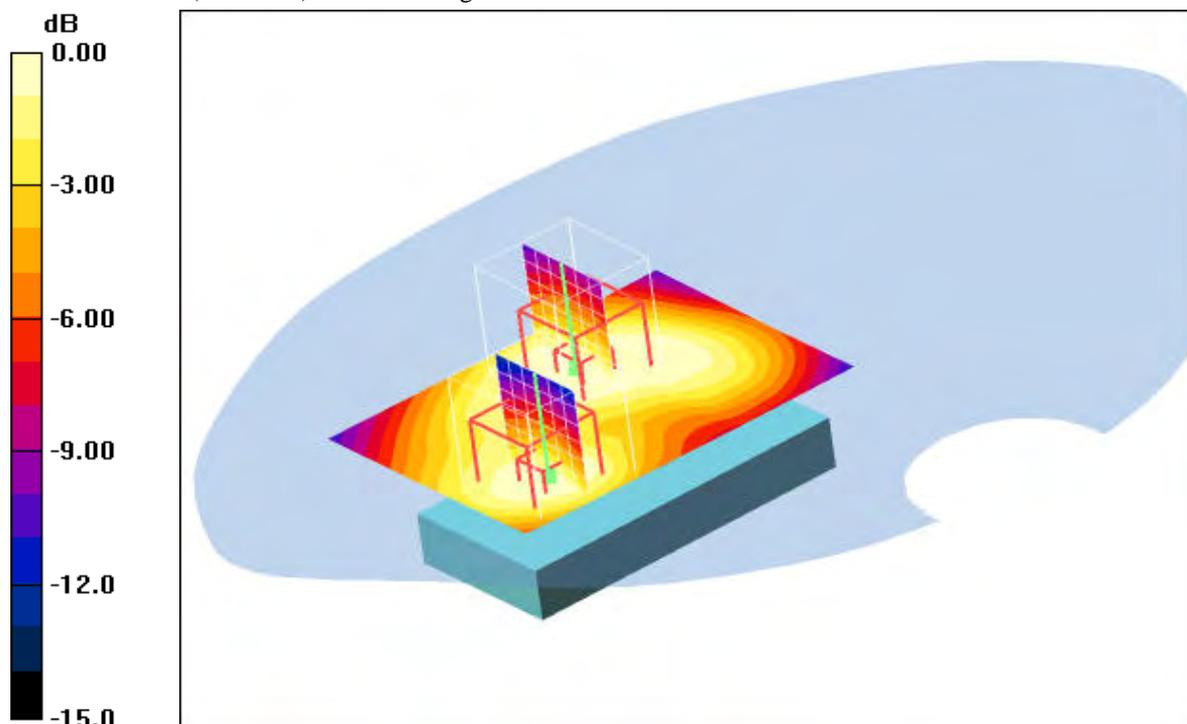

0 dB = 0.168mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 23.1°C; liquid temperature: 22.5°C

Date/Time: 2009-01-05 17:23:19 Date/Time: 2009-01-05 17:29:38 Date/Time: 2009-01-05 17:42:30

P1528_OET65-Body-GSM1900 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900 GPRS 2TS; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Front position - Middle/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.228 mW/g

Front position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.3 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.200 mW/g; SAR(10 g) = 0.122 mW/g

Maximum value of SAR (measured) = 0.214 mW/g


Front position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.3 V/m; Power Drift = -0.069 dB

Peak SAR (extrapolated) = 0.320 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.123 mW/g

Maximum value of SAR (measured) = 0.205 mW/g

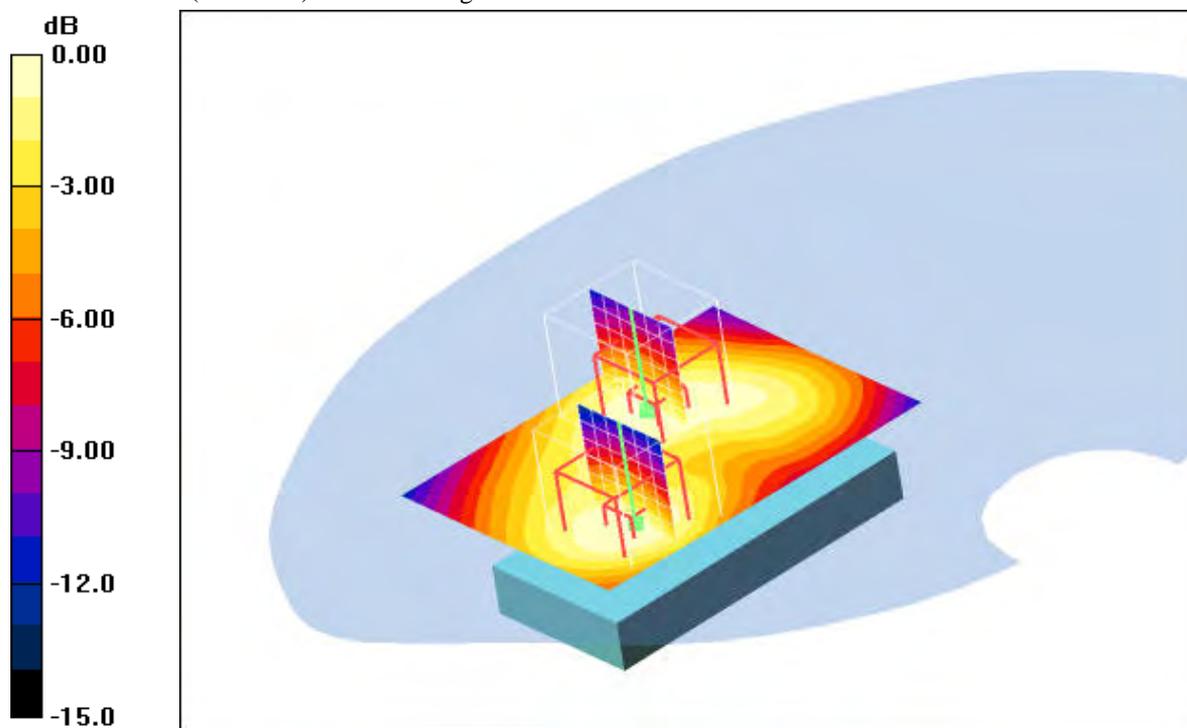

0 dB = 0.205mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 23.1°C; liquid temperature: 22.5°C

Date/Time: 2009-01-05 18:14:05 Date/Time: 2009-01-05 18:19:34 Date/Time: 2009-01-05 18:34:39

P1528_OET65-Body-GSM1900 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900 GPRS 2TS; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Front position - High/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.260 mW/g

Front position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.3 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.379 W/kg

SAR(1 g) = 0.227 mW/g; SAR(10 g) = 0.138 mW/g

Maximum value of SAR (measured) = 0.242 mW/g


Front position - High/Zoom Scan (7x7x7) (7x7x7)/Cube 1: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 13.3 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.212 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.225 mW/g

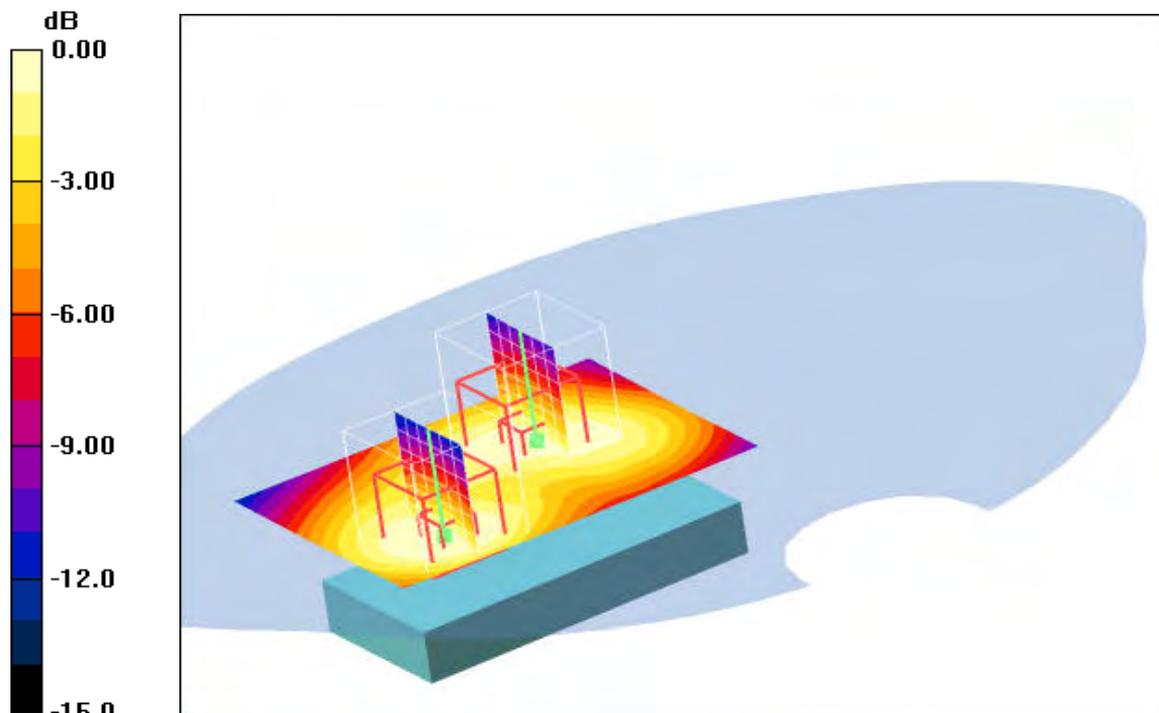

0 dB = 0.225mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 23.1°C; liquid temperature: 22.5°C

Date/Time: 2009-01-05 19:46:06 Date/Time: 2009-01-05 19:52:45

P1528_OET65-Body-GSM1900 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900 GPRS 2TS; Frequency: 1850.2 MHz; Duty Cycle: 1:4

Medium: M1900 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position - Low/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.443 mW/g


Rear position - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.2 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.757 W/kg

SAR(1 g) = 0.413 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.456 mW/g

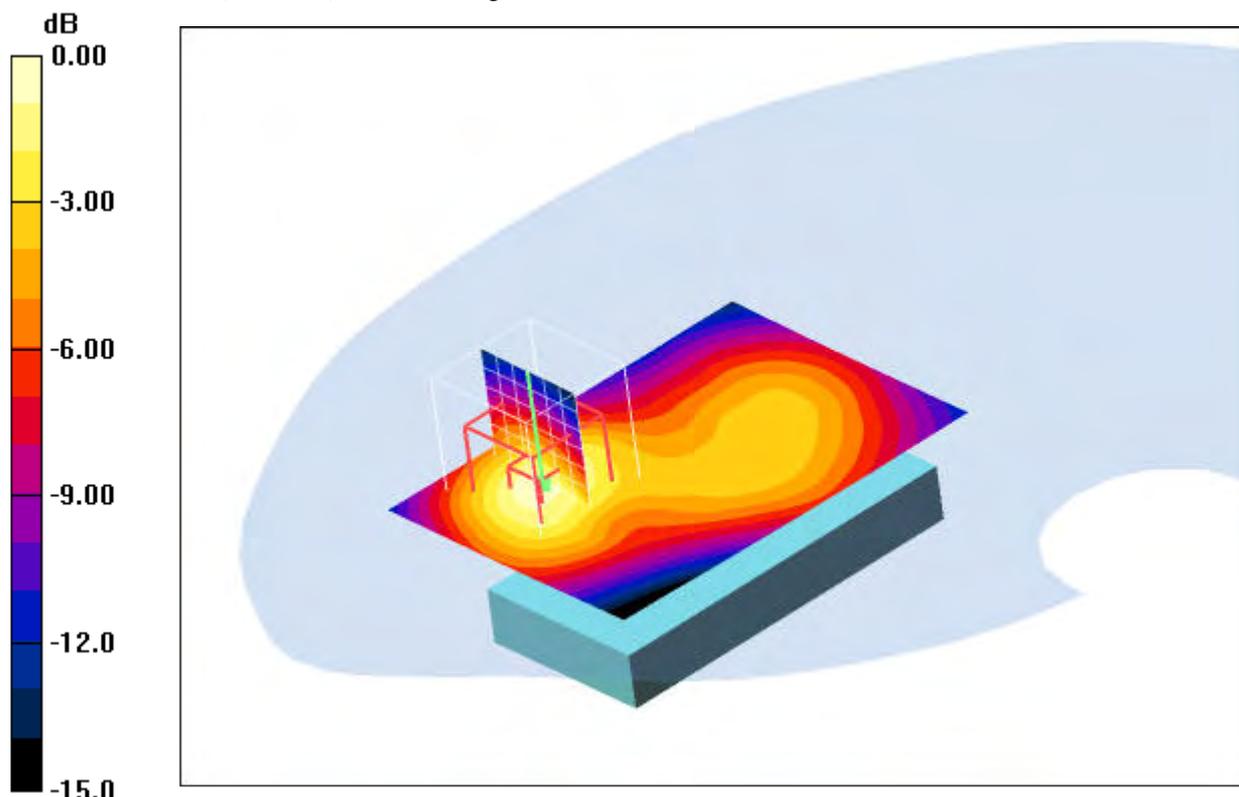

0 dB = 0.456mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.9°C; liquid temperature: 22.5°C

Date/Time: 2009-01-05 19:23:38 Date/Time: 2009-01-05 19:29:18

P1528_OET65-Body-GSM1900 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900 GPRS 2TS; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium: M1900 Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position - Middle/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.505 mW/g


Rear position - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.3 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.876 W/kg

SAR(1 g) = 0.468 mW/g; SAR(10 g) = 0.261 mW/g

Maximum value of SAR (measured) = 0.506 mW/g

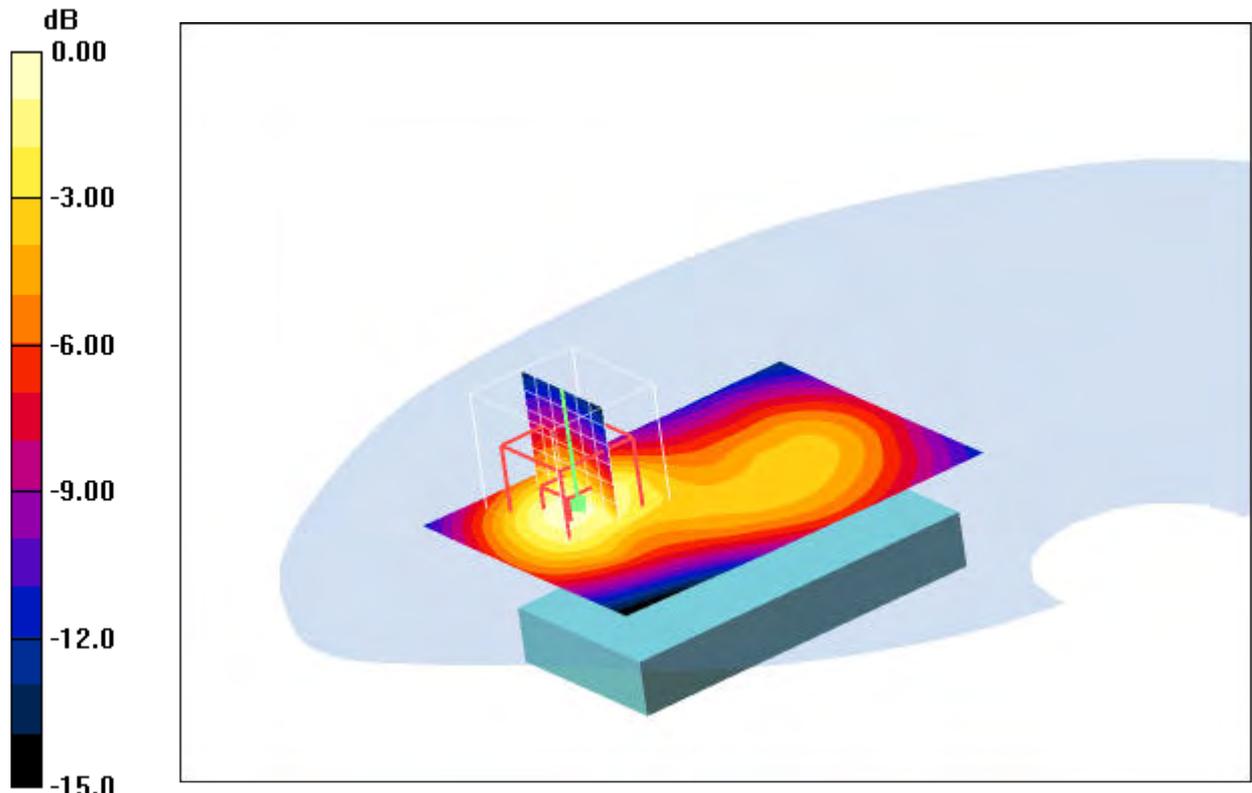

0 dB = 0.506mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.9°C; liquid temperature: 22.5°C

Date/Time: 2009-01-05 18:54:24 Date/Time: 2009-01-05 18:59:51

P1528_OET65-Body-GSM1900 GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900 GPRS 2TS; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position -High/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.541 mW/g


Rear position -High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.8 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.922 W/kg

SAR(1 g) = 0.491 mW/g; SAR(10 g) = 0.276 mW/g

Maximum value of SAR (measured) = 0.532 mW/g

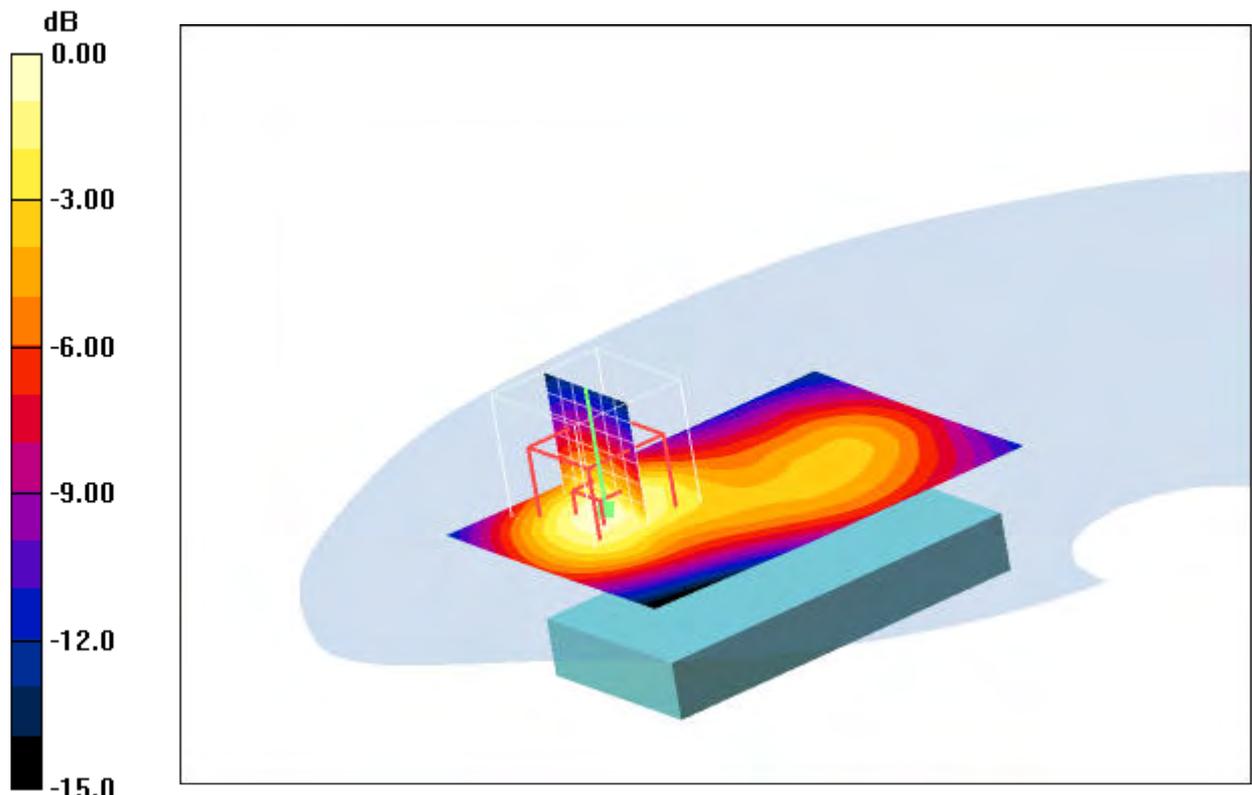

0 dB = 0.532mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.9°C; liquid temperature: 22.5°C

Date/Time: 2009-01-05 20:51:42 Date/Time: 2009-01-05 21:02:41

P1528_OET65-Body-GSM1900 GPRS 1TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900 GPRS 1TS; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: M1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position -High/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.337 mW/g


Rear position -High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.8 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.686 W/kg

SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.204 mW/g

Maximum value of SAR (measured) = 0.389 mW/g

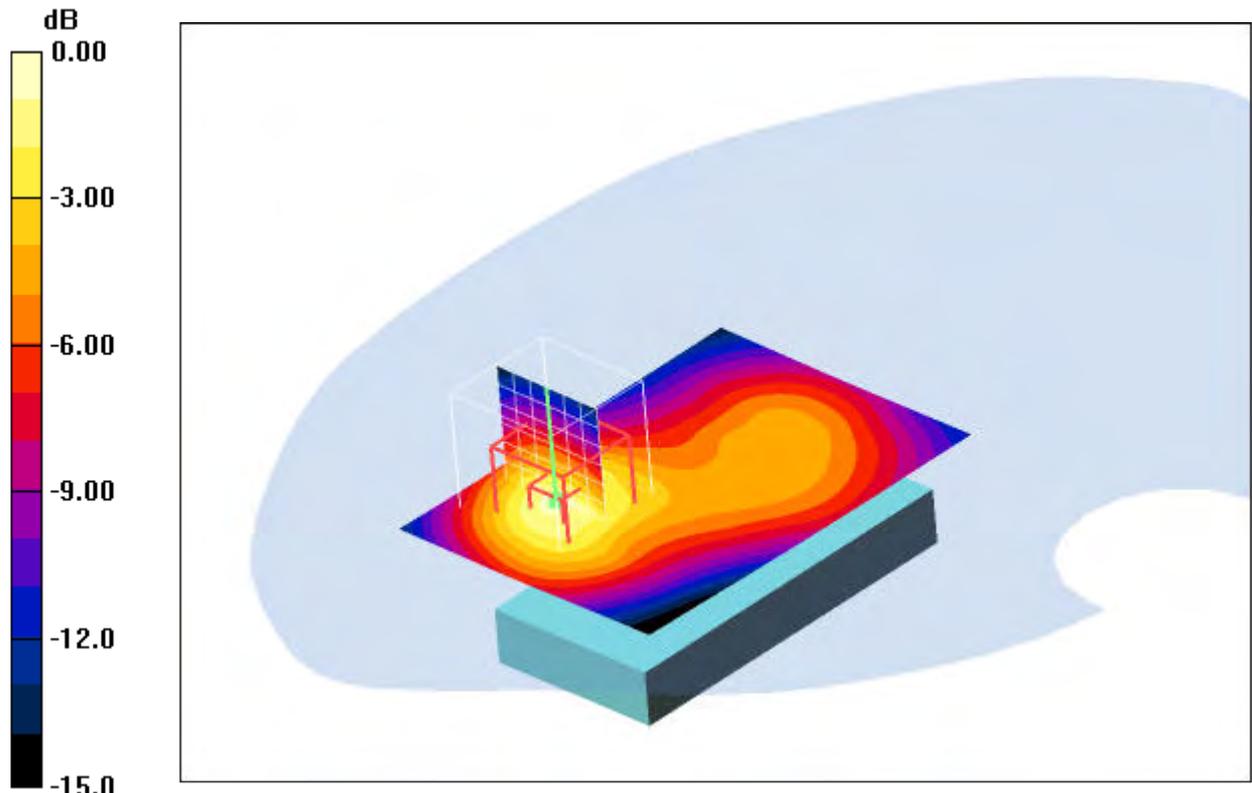

0 dB = 0.389mW/g

Additional information:

position or distance of DUT to SAM : 15 mm

ambient temperature: 22.9°C; liquid temperature: 22.5°C

Date/Time: 2009-01-05 20:30:32 Date/Time: 2009-01-05 20:36:06

P1528_OET65-Body-GSM1900 E-GPRS 2TS

DUT: Sony Ericsson; Type: AAB-1880014-BV; Serial: CB5A0YZRSL

Communication System: PCS 1900 EGPRS 2TS; Frequency: 1909.8 MHz; Duty Cycle: 1:4

Medium: M1900 Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.5 \text{ mho/m}$; $\epsilon_r = 52.4$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1558; ConvF(4.39, 4.39, 4.39); Calibrated: 2008-08-15
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn477; Calibrated: 2008-05-14
- Phantom: SAM 12; Type: SAM; Serial: 1043
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Rear position -High/Area Scan (51x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.309 mW/g


Rear position -High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 14.1 V/m; Power Drift = 0.022 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.157 mW/g

Maximum value of SAR (measured) = 0.304 mW/g

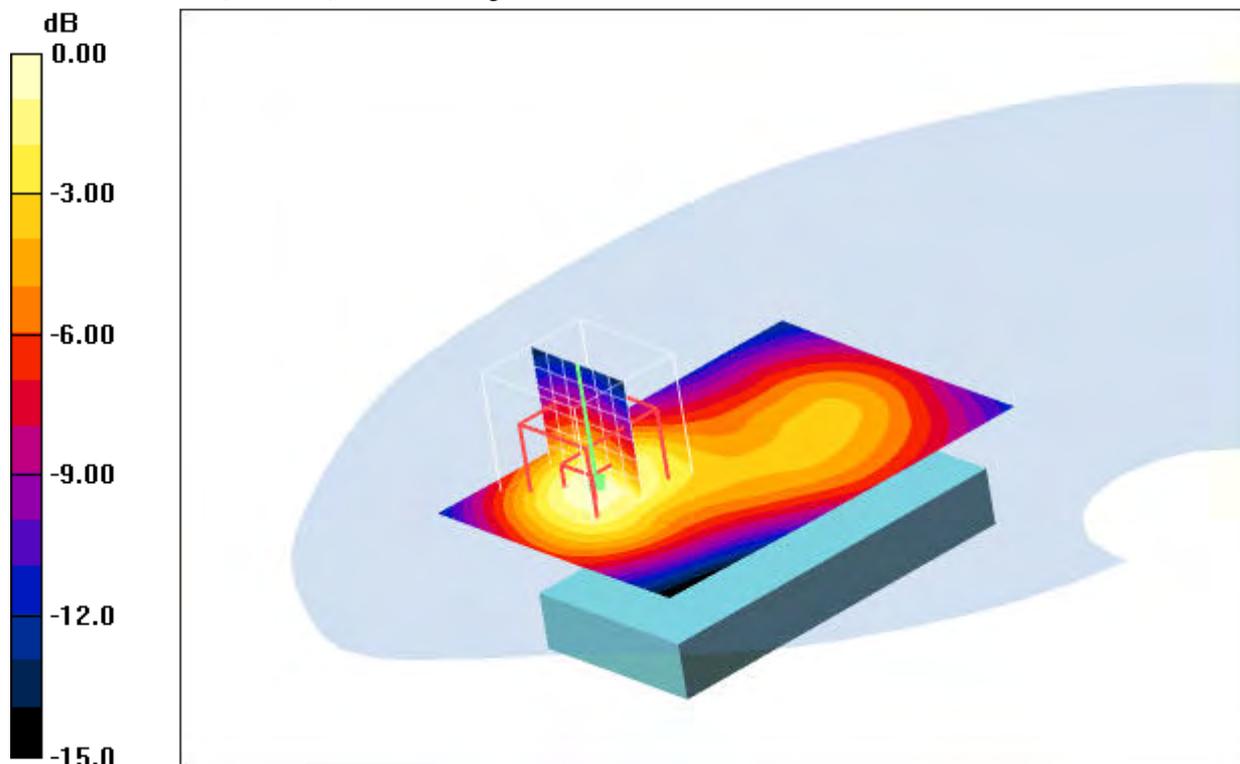


0 dB = 0.304mW/g

Additional information:


position or distance of DUT to SAM : 15 mm

ambient temperature: 22.9°C; liquid temperature: 22.5°C


Annex 2.5 Z-axis scans

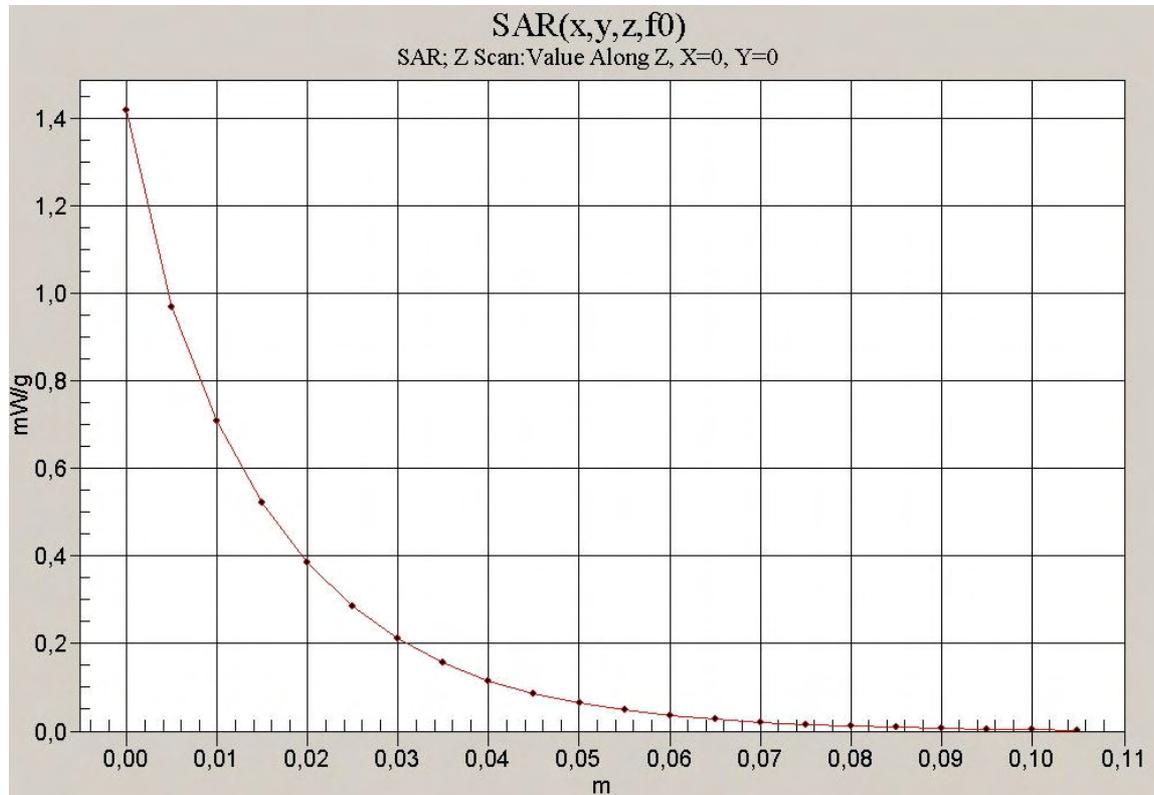


850 head

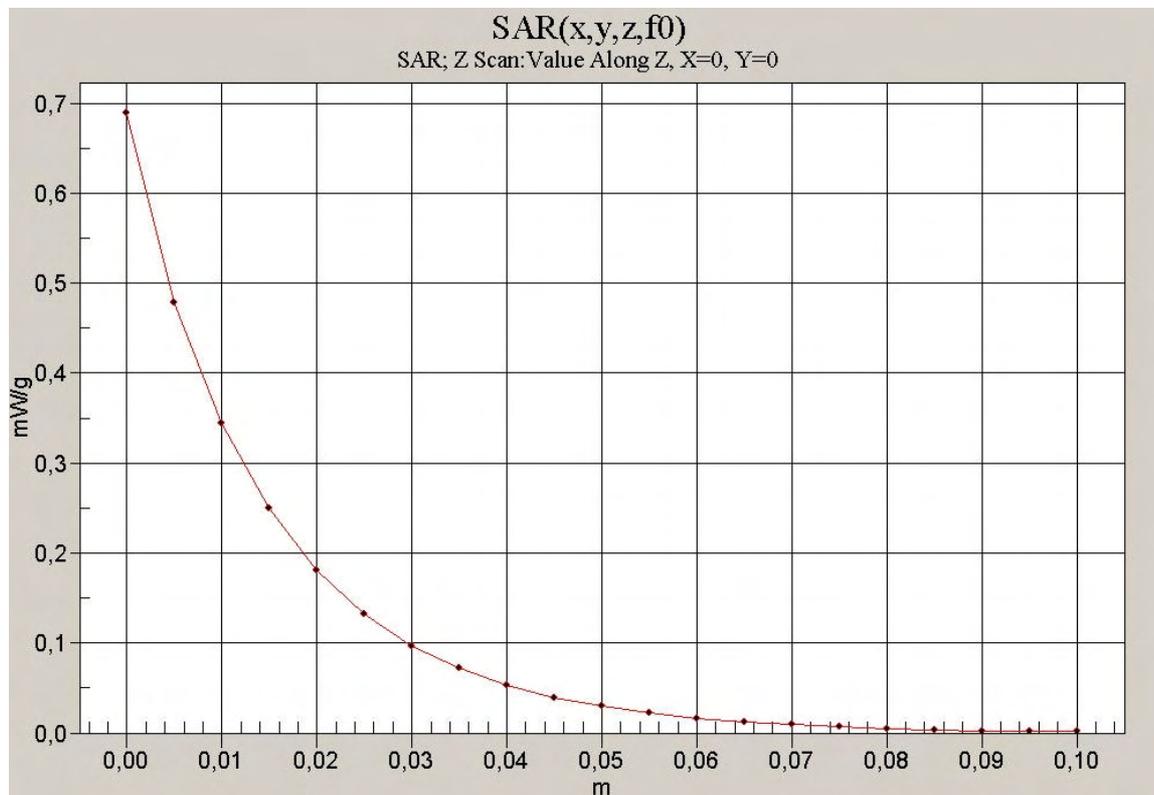

850 body

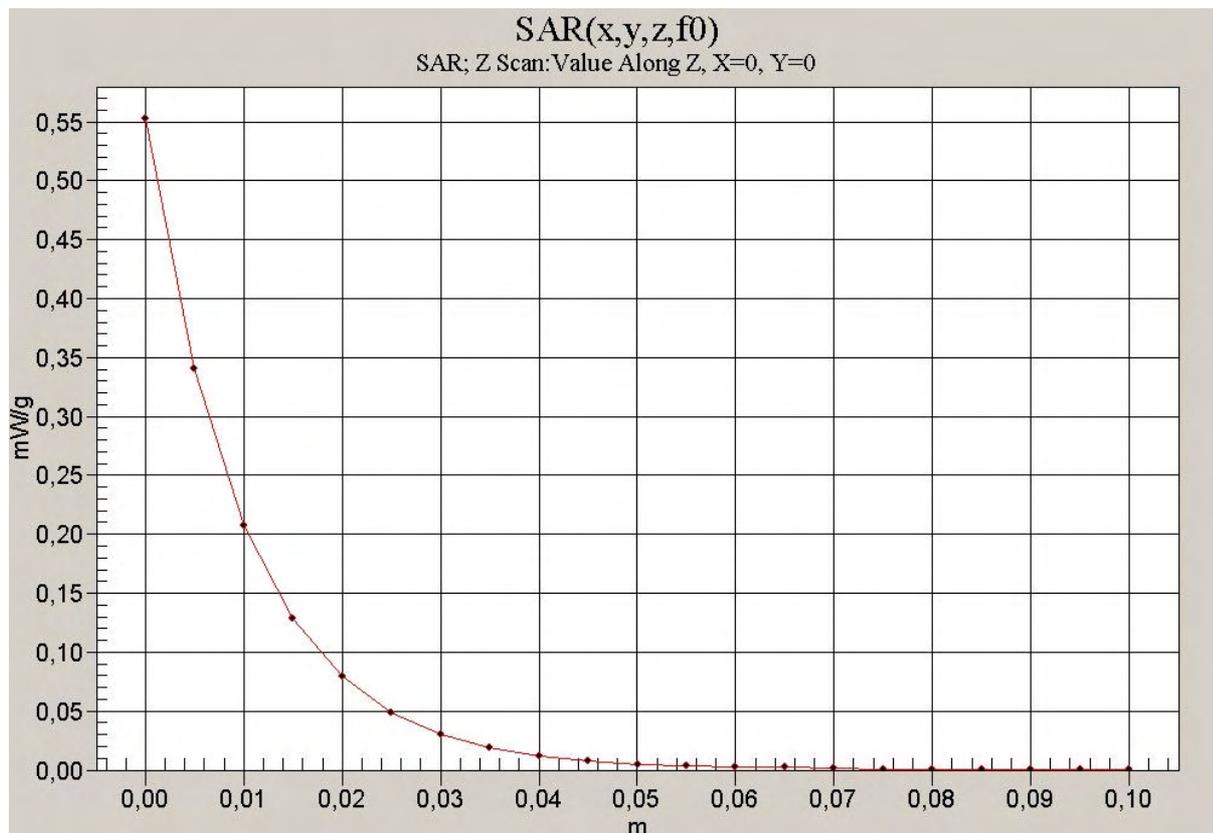

1900 head

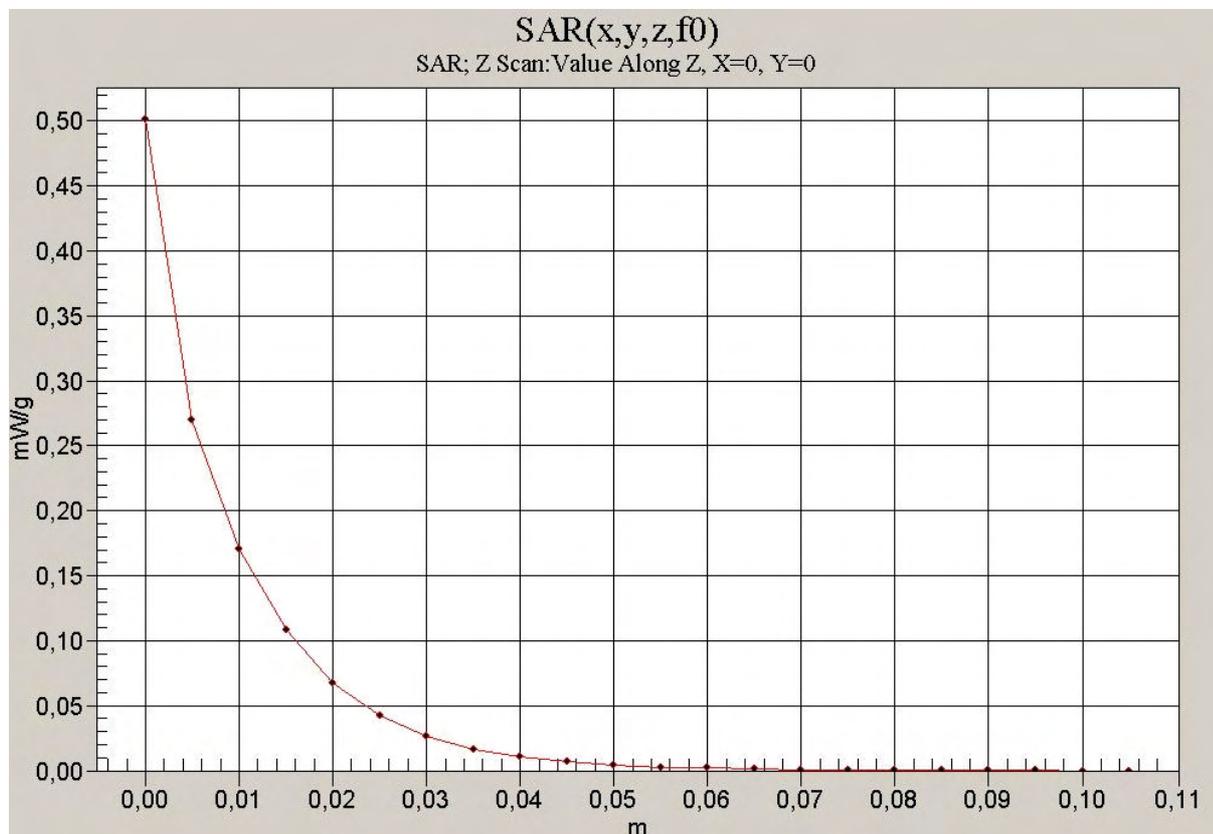

1900 body

Annex 3 Photo documentation

Photo 1: Measurement System DASY 4



Photo 2: DUT - front view



Photo 3: DUT - front view (slide opened)



Photo 4: DUT - rear view



Photo 5: DUT - rear view (slide opened)



Photo 6: DUT - side view (slide opened)



Photo 7: DUT - side view



Photo 8: DUT - rear view (open)



Photo 9: DUT - rear view (open) without battery



Photo 10: DUT - rear view (label)



Photo 11: The battery



Photo 12: Test position left hand touched (slide in)

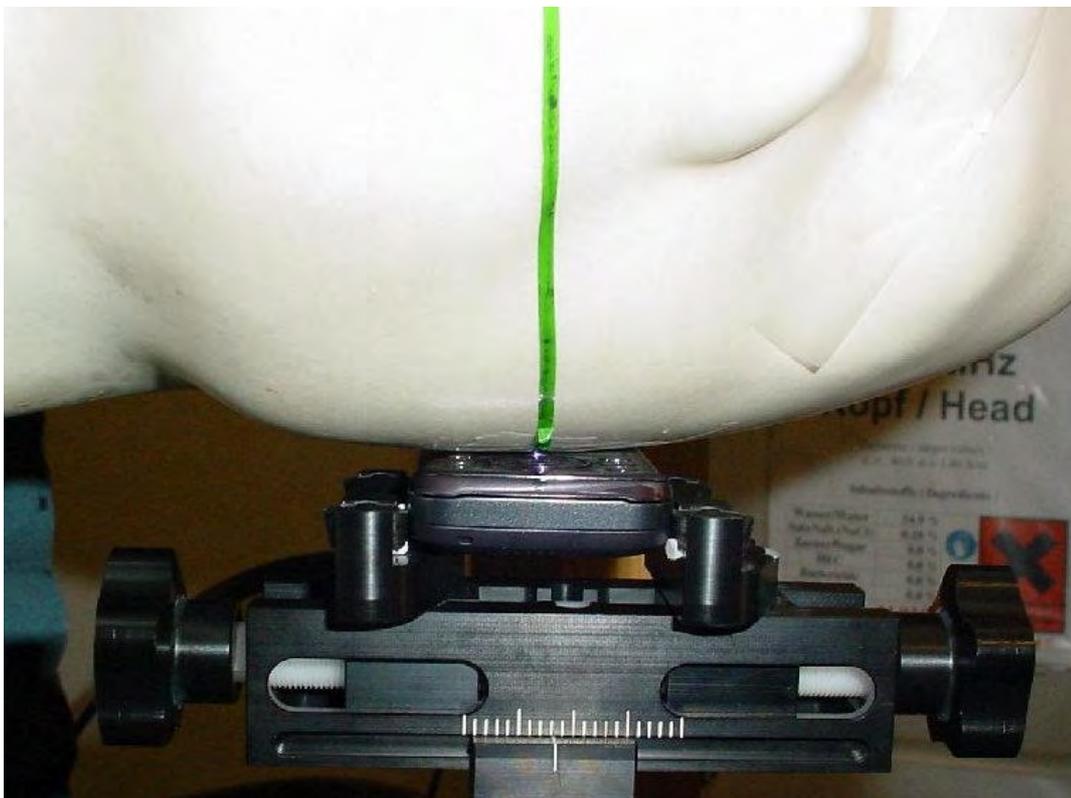


Photo 13: Test position left hand touched (slide in)



Photo 14: Test position left hand touched (slide in)



Photo 15: Test position left hand tilted 15° (slide in)



Photo 16: Test position left hand tilted 15° (slide in)



Photo 17: Test position left hand touched (slide opened)

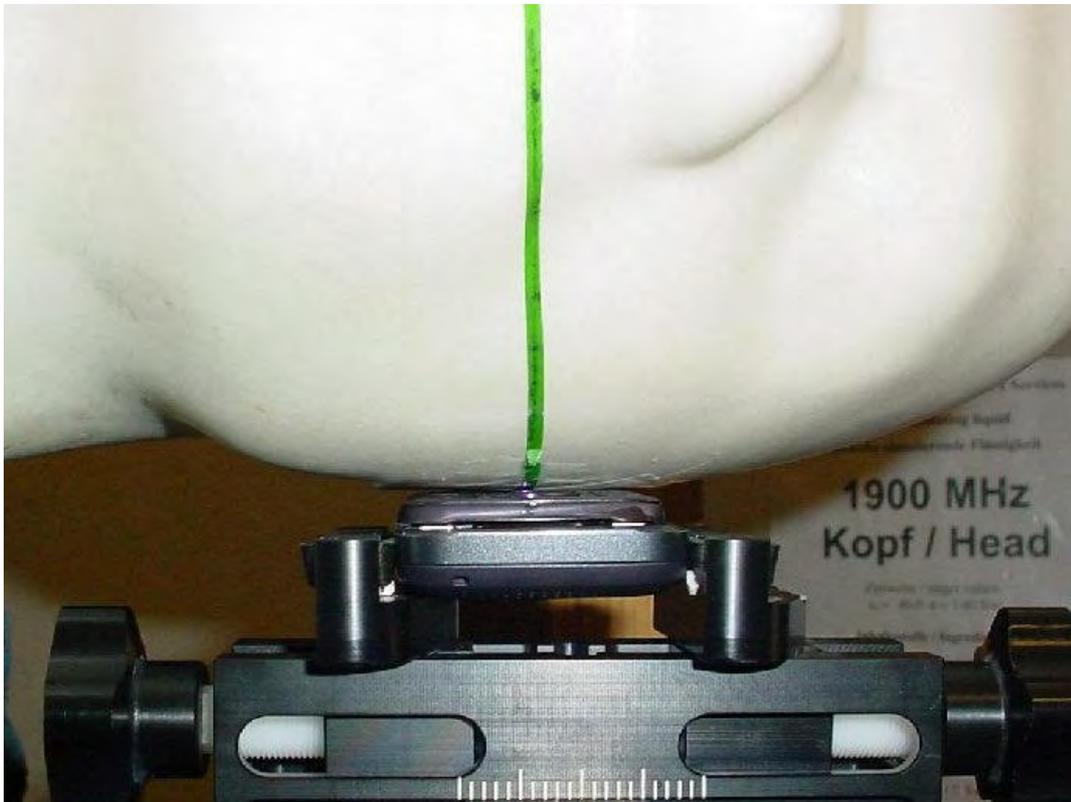


Photo 18: Test position left hand touched (slide opened)



Photo 19: Test position left hand touched (slide opened)



Photo 20: Test position left hand tilted 15° (slide opened)

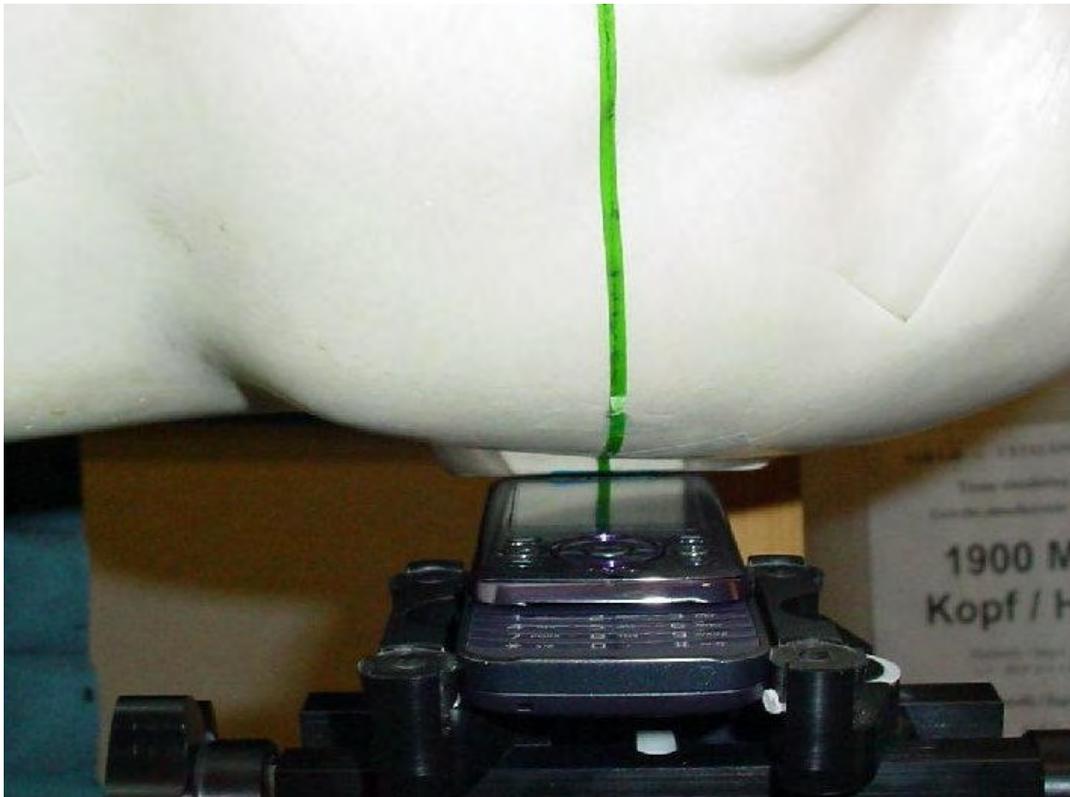


Photo 21: Test position left hand tilted 15° (slide opened)



Photo 22: Test position right hand touched (slide in)

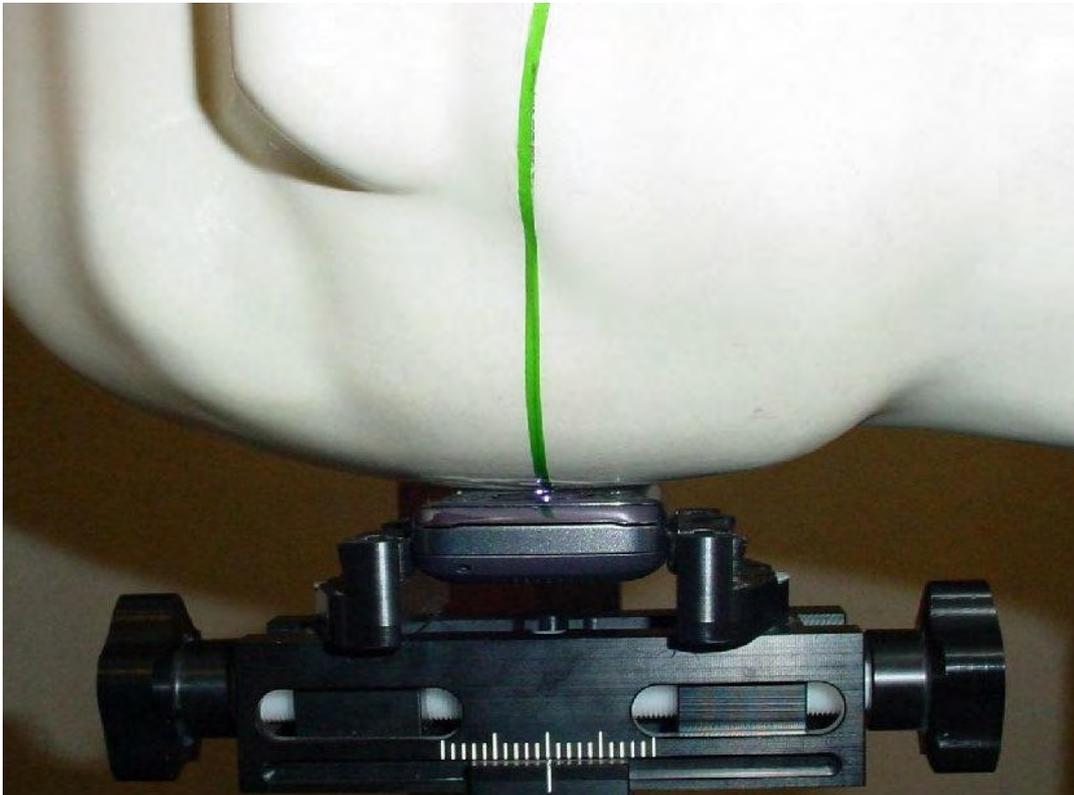


Photo 23: Test position right hand touched (slide in)



Photo 24: Test position right hand touched (slide in)



Photo 25: Test position right hand tilted 15° (slide in)



Photo 26: Test position right hand tilted 15° (slide in)



Photo 27: Test position right hand touched (slide opened)

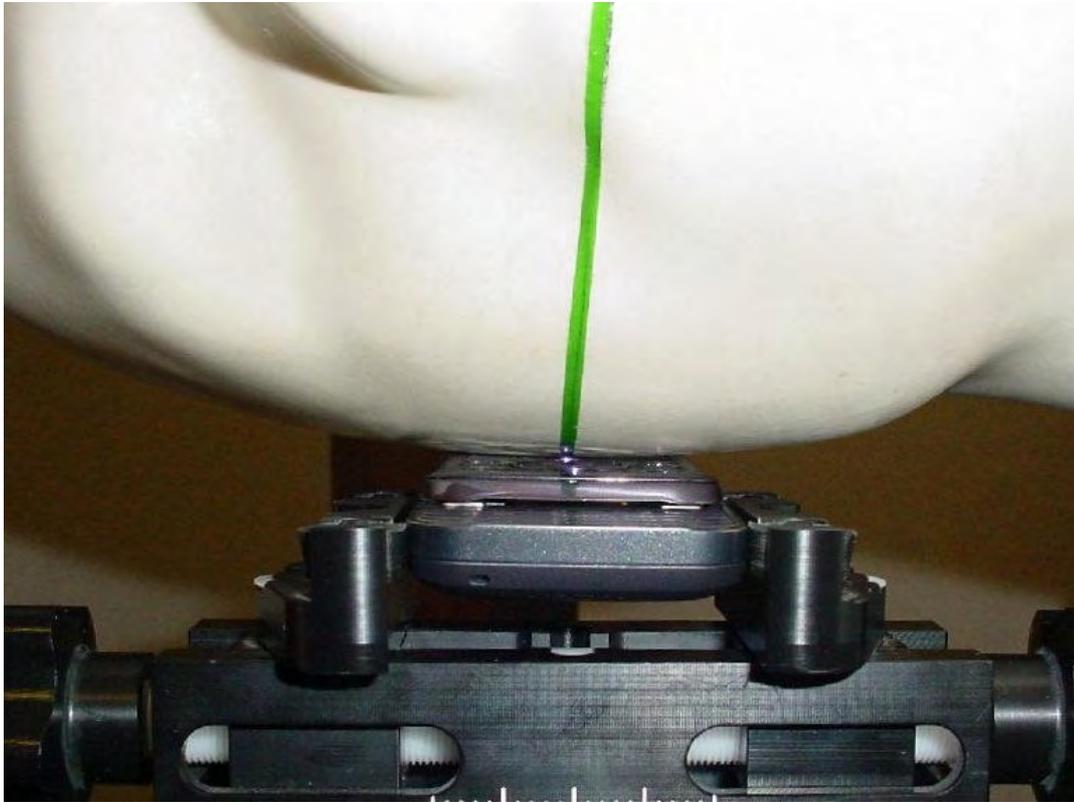


Photo 28: Test position right hand touched (slide opened)



Photo 29: Test position right hand touched (slide opened)



Photo 30: Test position right hand tilted 15° (slide opened)

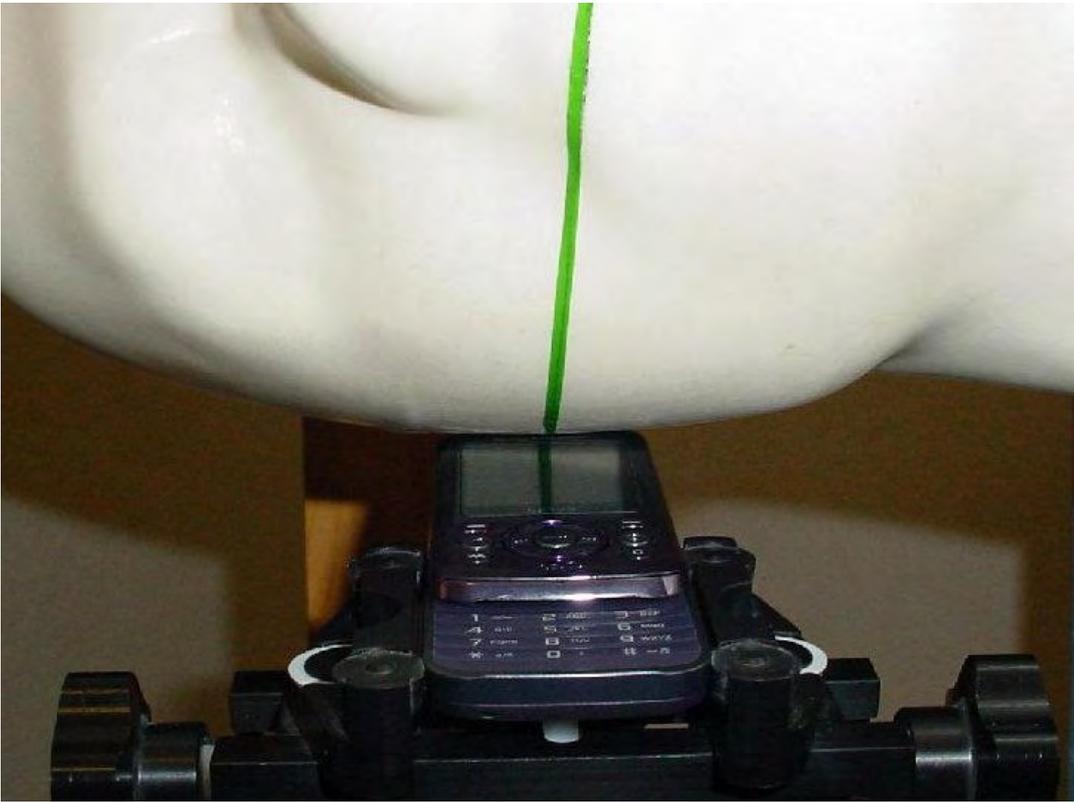


Photo 31: Test position right hand tilted 15° (slide opened)



Photo 32: Test position body worn front side with 15 mm distance



Photo 33: Test position body worn front side with 15 mm distance

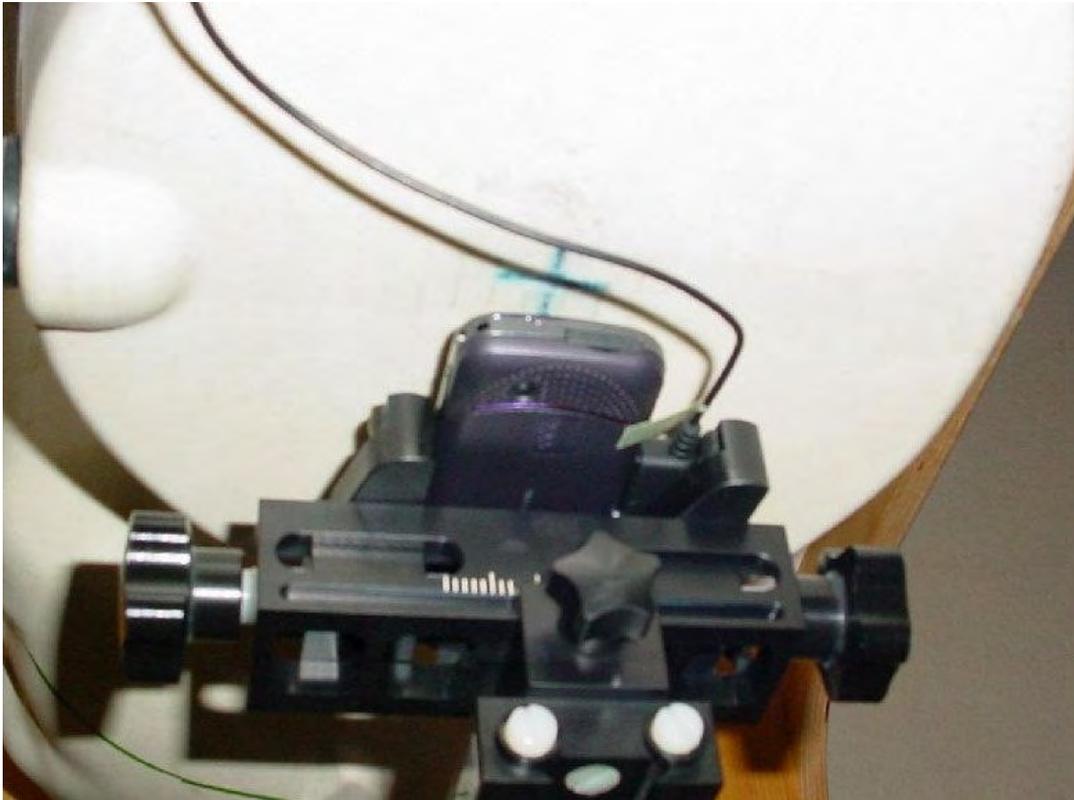


Photo 34: Test position body worn rear side with 15 mm distance



Photo 35: Test position body worn rear side with 15 mm distance



Annex 3.1 Liquid depth

Photo 36: Liquid depth 850 MHz head simulating liquid



Photo 37: Liquid depth 850 MHz body simulating liquid



Photo 38: Liquid depth 1900 MHz head simulating liquid


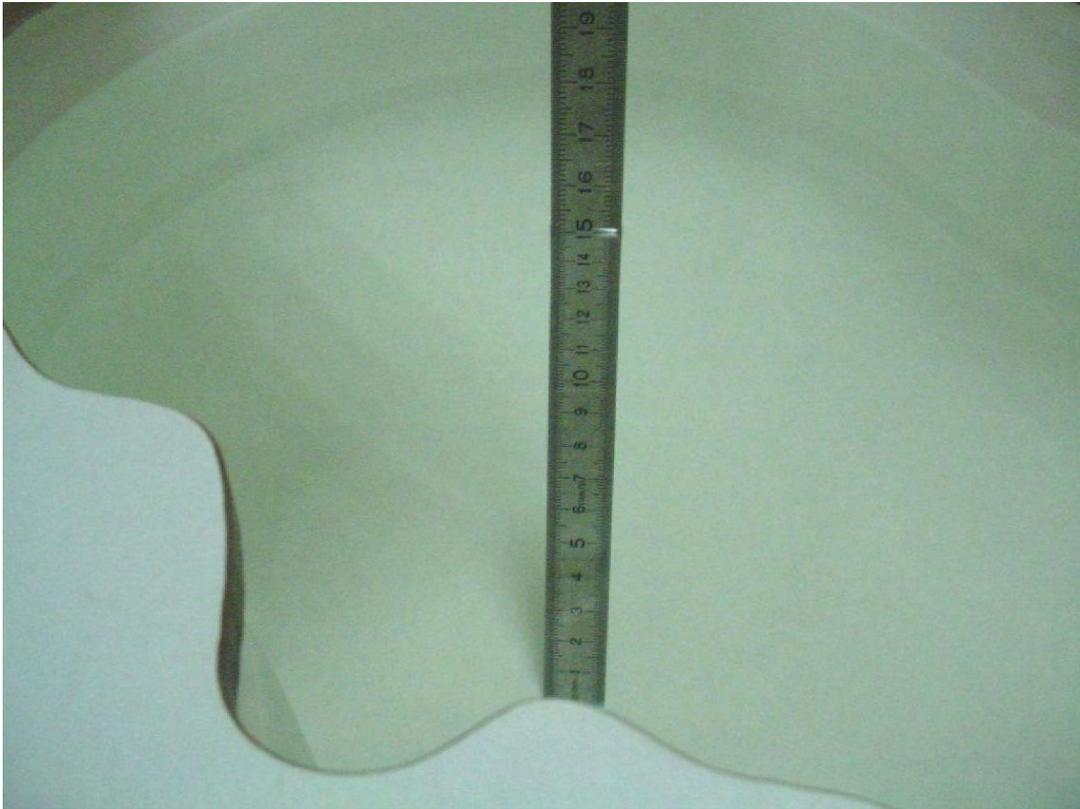


Photo 39: Liquid depth 1900 MHz body simulating liquid

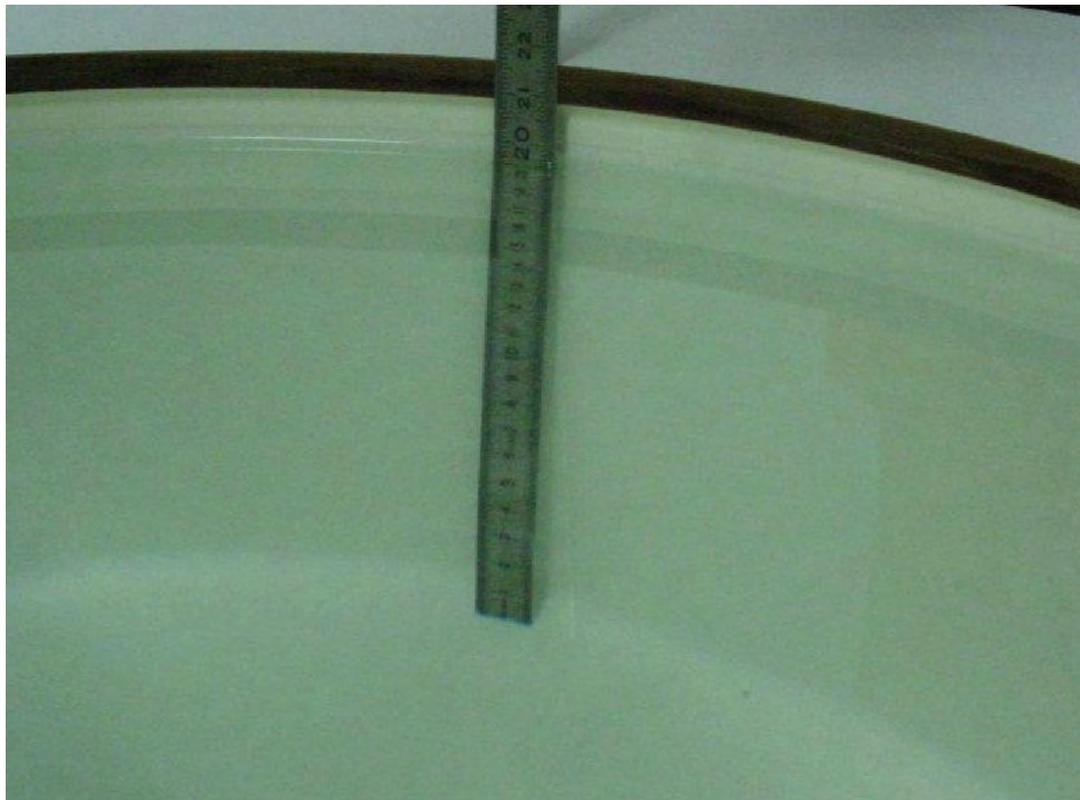

Annex 4 RF Technical Brief Cover Sheet acc. to RSS-102

1. COMPANY NUMBER: 4170B

2. MODEL NUMBER: A1880014

3. MANUFACTURER: Sony Ericsson Mobile Communications AB

4. TYPE OF EVALUATION:

(a) SAR Evaluation: Device used in the Vicinity of the Human Head

- **Multiple transmitters:** Yes No
- **Evaluated against exposure limits:** General Public Use Controlled Use
- **Duty cycle used in evaluation:** 12.5 %
- **Standard used for evaluation:** RSS-102 Issue 2 (2005-11)
- **SAR value:** 1.270 W/kg. Measured Computed Calculated

(b) SAR Evaluation: Body-worn Device

- **Multiple transmitters:** Yes No
- **Evaluated against exposure limits:** General Public Use Controlled Use
- **Duty cycle used in evaluation:** 25 %
- **Standard used for evaluation:** RSS-102 Issue 2 (2005-11)
- **SAR value:** 0.914 W/kg. Measured Computed Calculated

Annex 4.1 Declaration of RF Exposure Compliance

ATTESTATION: I attest that the information provided in Annex 4 is correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.

Signature: 

Date: 2009-01-07

NAME : Thomas Vogler

TITLE : Dipl.-Ing. (FH)

COMPANY : CETECOM ICT Services GmbH

Annex 5 Calibration parameters

Calibration parameters are described in the additional document :

**Appendix to test report no. 2-4883-68-08/08‘
Calibration data, Phantom certificate
and detail information of the DASY4 System**