**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Annex to Test Report No.: 1-2977-37-02/11



Testing Laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken/Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom-ict.de>
e-mail: info@ict.cetecom.de

Accredited Test Laboratory:

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025
DAkkS registration number: D-PL-12076-01-01

Area of Testing: Radio Satellite Communications

Applicant

Sony Ericsson Mobile Communications AB
Nya Vattentomet
22188 Lund/SWEDEN
Phone: +46 46 19 30 00
Fax: +46 46 19 32 95
Contact: Håkan Sjöberg
e-mail: hakan.sjoberg@sonyericsson.com
Phone: +46 46 19 35 59

Manufacturer

Sony Ericsson Mobile Communications AB
Nya Vattentomet
22188 Lund/SWEDEN

Test Standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I
Part 15 - Radio frequency devices
ICES-003 Issue 4 Spectrum Management and Telecommunications Policy
Interference-Causing Equipment Standard

For further applied test standards please refer to section 3 of this test report.

Test item

Kind of test item: GSM Mobile Phone 850/900/1800/1900; GPRS; EGPRS; BT+EDR; WLAN
Model name: AAB-1880032-BV
FCC ID: PY7A1880032
IC: 4170B-A1880032
Frequency: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz
Power supply: 3.70 V DC by Li-Polymer Battery (BST-43) and Power Supply
Temperature range: -30 °C to 60 °C

Test performed:

2011-06-07 Jakob Reschke

Test Report authorised:

2011-06-07 Stefan Bös

1 Table of contents

1	Table of contents	2
2	General Information	3
2.1	Notes	3
2.2	Application details	3
3	Test standard/s	3
4	Test Environment	3
5	Test item	4
6	Test Laboratories sub-contracted	4
7	Summary of Measurement Results	5
7.1	Receiver	5
8	Measurement Results	6
8.1	RX Spurious Emissions Conducted < 30 MHz	6
8.2	Spurious Emissions Radiated – Receiver Mode	9
9	Test equipment and ancillaries used for tests	14
Annex A	Photographs of the test setup	16
Annex B	External photographs of the EUT	18
Annex C	Internal photographs of the EUT	22
Annex D	Document history	26
Annex E	Further information	26

2 General Information

2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

2.2 Application details

Date of receipt of order:	2011-05-09
Date of receipt of test item:	2011-05-19
Start of test:	2011-05-19
End of test:	2011-06-06
Person(s) present during the test:	-/-

3 Test standard/s

Test Standard	Version	Test Standard Description
47 CFR Part 15	2009-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
ICES-003 Issue 4	2004-04	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

4 Test Environment

Temperature:	T_{nom}	25 °C during room temperature tests
	T_{max}	60 °C during high temperature test
	T_{min}	-30 °C during low temperature test
Relative humidity content:		39 %
Air pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.70 V DC by Li-Polymer Battery (BST-43) and Power Supply
	V_{max}	4.40 V
	V_{min}	3.30 V

5 Test item

Kind of test item	:	GSM Mobile Phone 850/900/1800/1900; GPRS; EGPRS; BT+EDR; WLAN
Type identification	:	AAB-1880032-BV
S/N serial number	:	Rad. WUJ0165176, WUJ0165177 Cond. WUJ0165178
HW hardware status	:	AP
SW software status	:	R3AD004 Generic FS_mtbcoff_traceon(TA)_Correct
Frequency band [MHz]	:	824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz
Type of modulation	:	GMSK; 8-PSK
Antenna	:	Integrated antenna
Power supply	:	3.70 V DC by Li-Polymer Battery (BST-43) and Power Supply
Temperature range	:	-30 °C to 60 °C

6 Test Laboratories sub-contracted

None

7 Summary of Measurement Results

- No deviations from the technical specifications were ascertained
 There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 15.107, 15.109 ICES-003, Issue 4	passed	2011-06-09	-/-

7.1 Receiver

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Results (max.)
RX-Spurious Emissions Conducted < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Note:

NA = Not applicable; NP = Not performed

8 Measurement Results

8.1 RX Spurious Emissions Conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to Idle mode. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.107(a)		ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	


*Decreases with the logarithm of the frequency

Result: Also see plots


RX Spurious Emissions Conducted < 30 MHz [dBμV/m]		
F [MHz]	Detector	Level [dBμV/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

Result: The result of the measurement is passed.

Plot 1: 9 kHz to 30 MHz / Phase Line

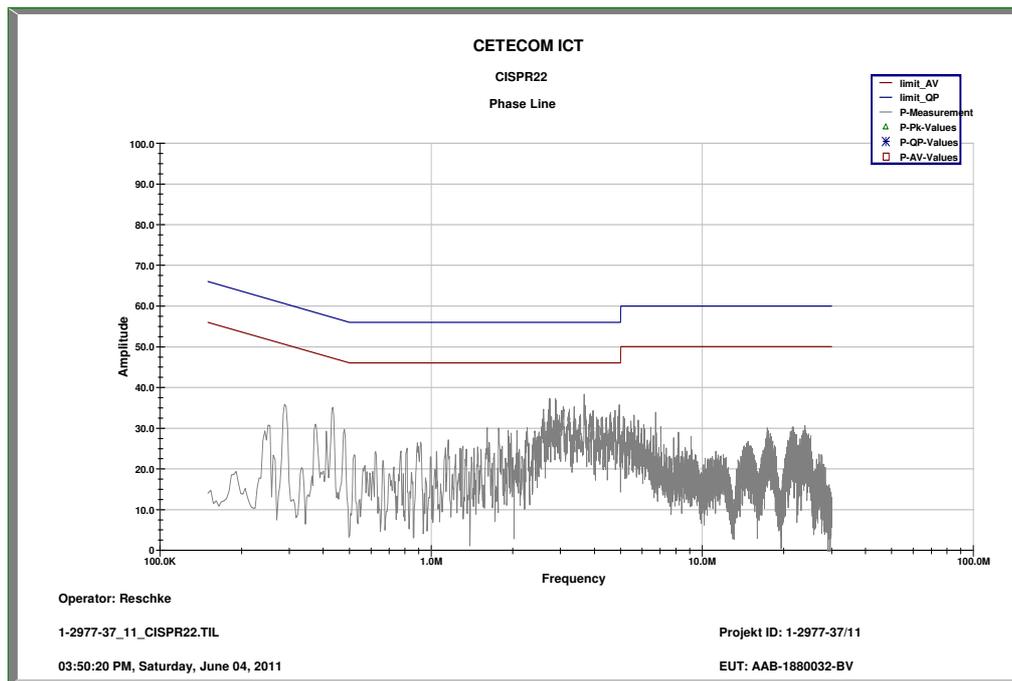

Plot 2: 9 kHz to 30 MHz / Neutral Line

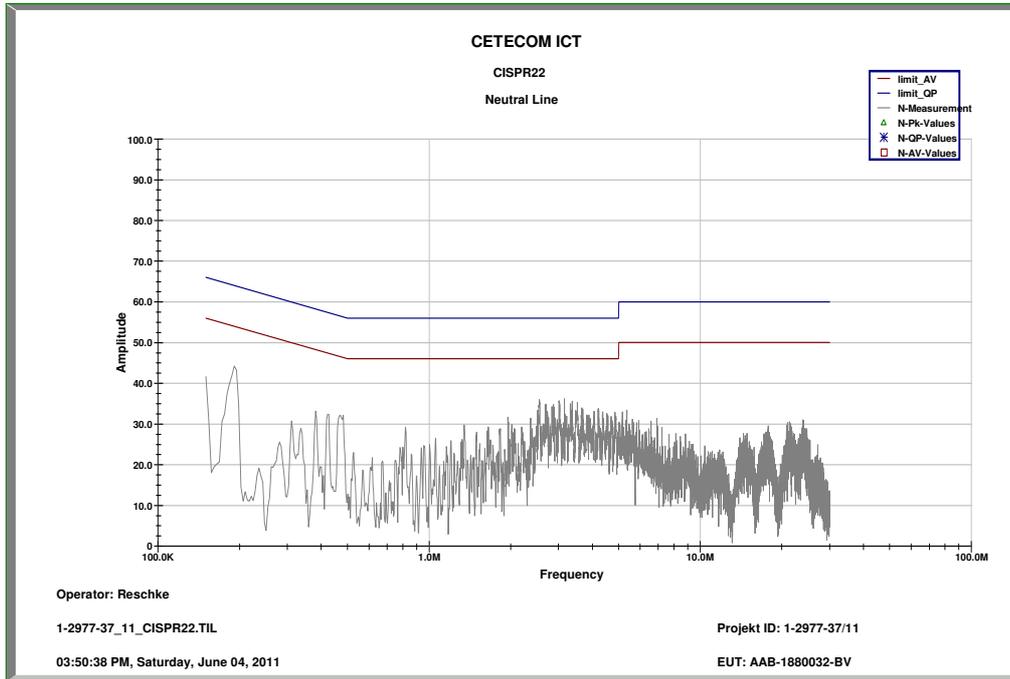

8.2 Spurious Emissions Radiated – Receiver Mode

Description:

The measurement was performed in worst case. The EUT was not connected to the CMU 200. So the EUT performs a network search. In this mode all oscillators are active.

Measurement:

Measurement parameters	
Detector:	Below 1 GHz Peak / QuasiPeak Above 1 GHz Peak / Average
Sweep time:	2 sec
Video bandwidth:	Below 1 GHz 100 kHz Above 1 GHz 1 MHz
Resolution bandwidth:	1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

Limits:


FCC		IC	
CFR Part 15.109 CFR Part 2.1053		RSS Gen, Issue 2, Section 4.10 ICES-003 Issue 4	
Spurious Emissions Radiated – Receiver Mode			
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance (m)	
30 – 88	30.0	10	
88 - 216	33.5	10	
216 – 960	36.0	10	
Above 960	54.0	3	

Results:

Spurious Emission Level (dB μ V/m)		
Frequency (MHz)	Detector	Level (dB μ V/m)
No critical peaks found		
Measurement uncertainty		± 3 dB

Result: [The result of the measurement is passed.](#)

Plot 1: Receiver mode up to 30 MHz

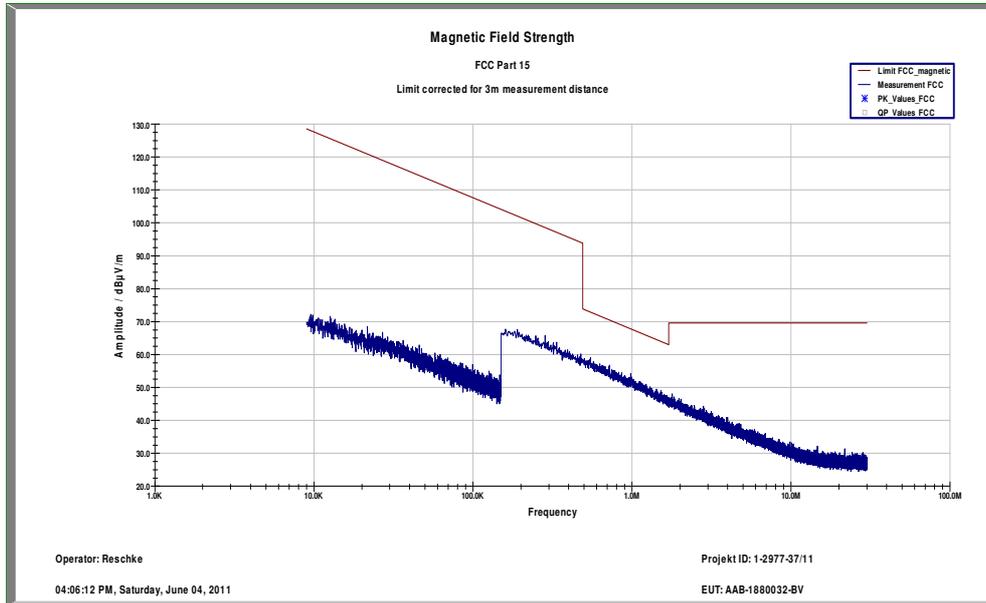

Plot 2: Receiver mode (30 MHz - 1 GHz)


Common Information

EUT: AAB-1880032-BV
 Serial Number: WUJ0165176 | IMEI: 00440214-165176-4
 Test Description: FCC part 15 B class B @ 10 m
 Operating Conditions: GSM idle + charging
 Operator Name: Hennemann
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dBµV/m


Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 2 GHz	QuasiPeak	120 kHz	15 s	Receiver

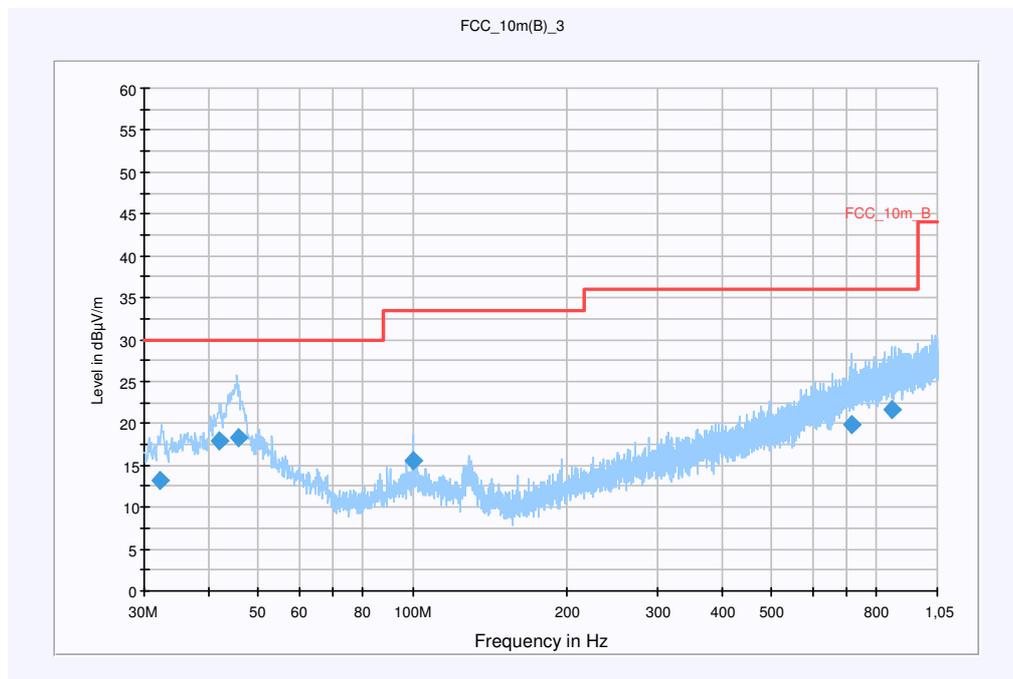


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
32.077950	13.1	15000.000	120.000	123.0	V	196.0	12.7	16.9	30.0	
41.895600	17.9	15000.000	120.000	98.0	V	176.0	13.4	12.1	30.0	
45.741300	18.2	15000.000	120.000	98.0	V	284.0	13.3	11.8	30.0	
100.003950	15.6	15000.000	120.000	106.0	V	283.0	11.9	17.9	33.5	
715.257600	19.9	15000.000	120.000	170.0	V	-7.0	22.9	16.1	36.0	
858.029400	21.7	15000.000	120.000	170.0	V	7.0	24.7	14.3	36.0	

Plot 3: Receiver mode (1 GHz – 12.75 GHz)

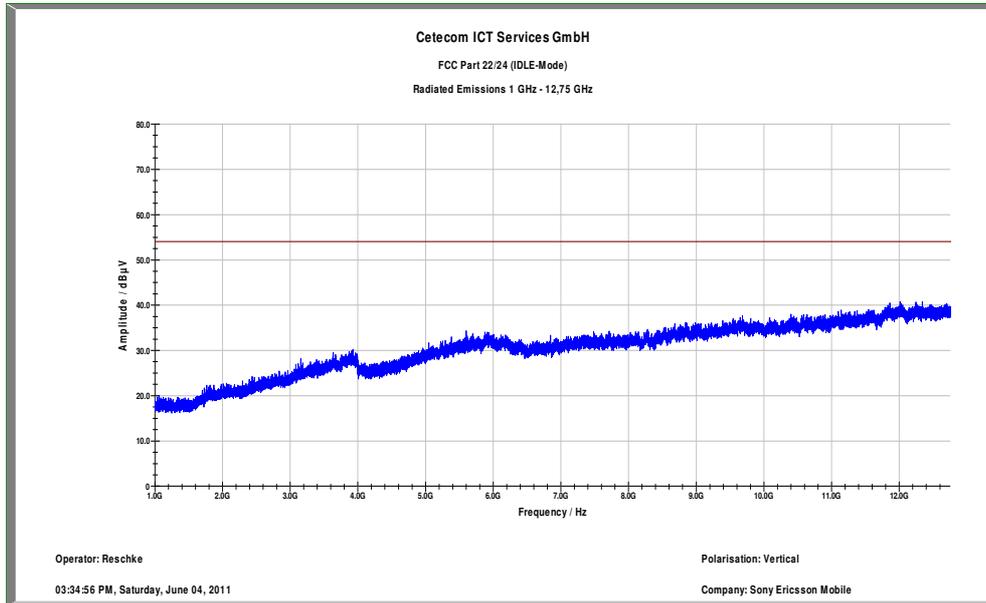

Plot 4: Receiver mode (12 GHz – 25 GHz)

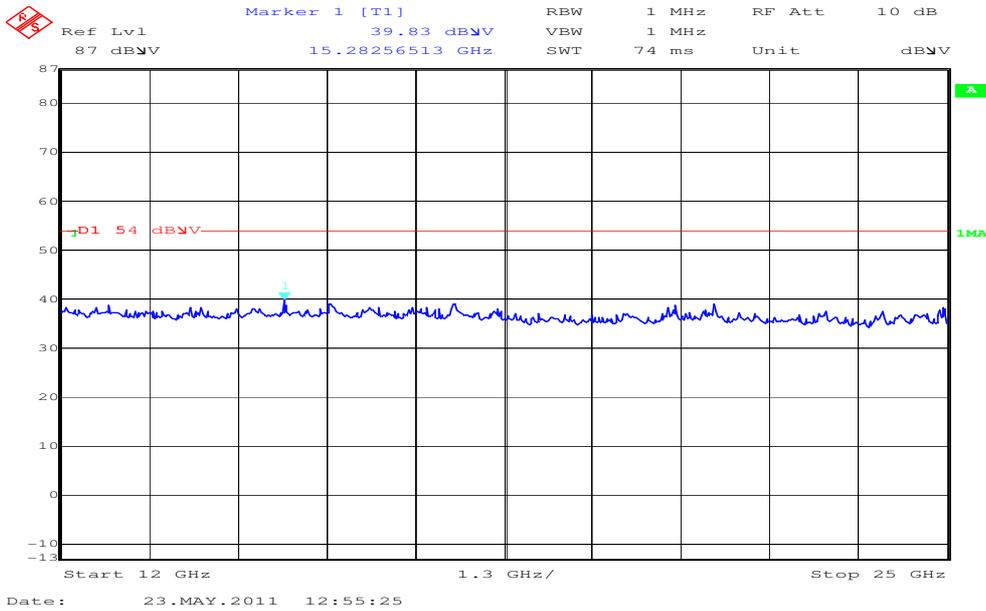

9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
2	n. a.	Band Reject filter	WRCG1855/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
3	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
4	n. a.	TILE -Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
5	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev		
6	n. a.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev		
7	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
8	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
9	n. a.	MXG Microwave Analog Signal Generator	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012
10	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vKI!	08.09.2010	08.09.2012
11	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vKI!	17.12.2008	17.12.2011
12	19	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	Ve	19.10.2010	19.10.2012
13	n. a.	Signal Analyzer 20Hz- 26,5GHz-150 to + 30 DBM	FSIQ26	R&S	835111/0004	300002678	Ve	04.11.2010	04.11.2012
14	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
15	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B5979	300000210	ne		
16	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
17	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
18	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
19	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
20	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
21	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012

22	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013
23	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
24	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
25	n. a.	Coaxial Attenuator 30dB/500W	8325	Bird	1530	300001595	ev		
26	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vlk!	05.03.2009	05.09.2011
27	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
28	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
29	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
30	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012
31	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
32	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
33	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
34	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
35	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		

Agenda: Kind of Calibration

- | | | | |
|------|--|-----|--|
| k | calibration / calibrated | EK | limited calibration |
| ne | not required (k, ev, izw, zw not required) | zw | cyclical maintenance (external cyclical maintenance) |
| ev | periodic self verification | izw | internal cyclical maintenance |
| Ve | long-term stability recognized | g | blocked for accredited testing |
| vlk! | Attention: extended calibration interval | * | next calibration ordered / currently in progress |
| NK! | Attention: not calibrated | | |