

Prepared (also subject responsible if other)

LD/SEMC/BGLIM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGLIMC *Peter Lindeborg*

Checked

071029

Company Internal  
REPORT

No.

BGLI07:576

Date

071029

Rev

A

Reference

File

**Report issued by Accredited SAR Laboratory****For***PY7A3052041 (W890i)***Date of test:** 17<sup>th</sup> to 23<sup>rd</sup> Oct. 2007**Laboratory:** SAR Test Laboratory  
Sony Ericsson Mobile Communications AB  
Nya Vattentornet  
SE-221 82 LUND, Sweden**Testing Engineer:** *Hamid Kami Shirazi*  
*kami.shirazi@sonyericsson.com*  
+46 46232644**Testing Approval** *Peter Lindeborg*  
*peter.lindeborg@sonyericsson.com*  
+46462126180**Statement of Compliance**

Sony Ericsson Mobile Communications AB declares under its sole responsibility that the product

***Sony Ericsson Type AAD-3052041-BV; FCC ID: PY7A3052041; IC:4170B-A3052041***

to which this declaration relates, is in conformity with the appropriate RF exposure standards recommendations and guidelines. It also declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices. Any deviations from these standards, guidelines and recommended practices are noted below:

(None)

This laboratory is accredited to ISO/IEC 17025 (SWEDAC accreditation no. 1847).



Laboratories are accredited by the Swedish Board for Accreditation and Conformity Assessment (SWEDAC) under the terms of Swedish legislation. The accredited laboratory activities meet the requirements in SS-EN ISO/IEC 17025 (2005). This report may not be reproduced other than in full, except with the prior written approval of the issuing laboratory. The results and statements contained herein relate only to the items tested. The names of individuals involved may be mentioned only in connection with the statements or results from this report.

Sony Ericsson encourages all feedback, both positive and negative, on this report.

© Sony Ericsson Mobile Communication AB, 2007



Prepared (also subject responsible if other)

LD/SEMC/BGLIM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGLIMC *Peter Lindeborg*

Checked

071029

Company Internal  
REPORT

No.

*BGLI07:576*

Date

071029

Rev

A

Reference

File

## 1 Table of contents

|      |                                                             |    |
|------|-------------------------------------------------------------|----|
| 2    | INTRODUCTION.....                                           | 3  |
| 3    | DEVICE UNDER TEST.....                                      | 3  |
| 3.1  | ANTENNA DESCRIPTION .....                                   | 3  |
| 3.2  | DEVICE DESCRIPTION .....                                    | 3  |
| 4    | TEST EQUIPMENT.....                                         | 4  |
| 4.1  | DOSIMETRIC SYSTEM.....                                      | 4  |
| 4.2  | ADDITIONAL EQUIPMENT .....                                  | 4  |
| 5    | ELECTRICAL PARAMETERS ON THE TISSUE SIMULATING LIQUID ..... | 4  |
| 6    | SYSTEM ACCURACY VERIFICATION.....                           | 5  |
| 7    | SAR MEASUREMENT UNCERTAINTY .....                           | 6  |
| 8    | TEST RESULTS .....                                          | 7  |
| 9    | REFERENCES.....                                             | 8  |
| 10   | APPENDIX .....                                              | 9  |
| 10.1 | PHOTOGRAPHS OF THE DEVICE UNDER TEST .....                  | 9  |
| 10.2 | DEVICE POSITION ON SAM TWINS PHANTOM .....                  | 11 |
| 10.3 | ATTACHMENTS.....                                            | 12 |



Company Internal  
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Hamid Kami Shirazi

Approved

LD/SEMC/BGLIMC Peter Lindeborg

Checked

071029

No.

BGLI07:576

Date

071029

Rev

A

Reference

File

## 2 Introduction

In this test report, compliance of the Sony Ericsson PY7A3052041 (W890i) portable telephone with RF safety guidelines is demonstrated. The applicable RF safety guidelines and the SAR measurement specifications used for the test are described in the *SAR Measurement Specifications of Wireless Handsets* [1].

## 3 Device under Test

### 3.1 Antenna Description

|                      |                             |      |
|----------------------|-----------------------------|------|
| <b>Type</b>          | Internal antenna            |      |
| <b>Location</b>      | Inside, rear, at the bottom |      |
| <b>Dimensions</b>    | Max length                  | 32mm |
|                      | Max width                   | 22mm |
| <b>Configuration</b> | PIFA                        |      |

### 3.2 Device description

|                                    |                                                       |       |       |                          |       |       |
|------------------------------------|-------------------------------------------------------|-------|-------|--------------------------|-------|-------|
| Device model                       | PY7A3052041(W890i)                                    |       |       |                          |       |       |
| Serial number (EUT #)              | CB510SAK14#9265                                       |       |       |                          |       |       |
| Mode                               | GSM1900                                               |       |       | GSM850                   |       |       |
| Crest Factor                       | 8.3                                                   |       |       | 8.3                      |       |       |
| Multiple Access Scheme             | TDMA                                                  |       |       | TDMA                     |       |       |
| Maximum Output Power Setting (dBm) | Ch512                                                 | Ch661 | Ch810 | Ch128                    | Ch190 | Ch251 |
|                                    | 29.7                                                  | 29.5  | 29.3  | 32.7                     | 32.7  | 32.7  |
| Factory Tolerance in Power Setting | ±0.5dB                                                |       |       | ±0.5dB                   |       |       |
| Maximum Peak Output Power (dBm)    | 30.2                                                  | 30.0  | 29.8  | 33.2                     | 33.2  | 33.2  |
| Data and connectivity              | GPRS Class: 10 ;Crest Factor:4.16 Capability Class: B |       |       |                          |       |       |
| Maximum Output Power Setting (dBm) | Ch512                                                 | Ch661 | Ch810 | Ch128                    | Ch190 | Ch251 |
|                                    | 28.2                                                  | 28.2  | 28.2  | 31.2                     | 31.2  | 31.2  |
| Factory Tolerance in Power Setting | ±0.5dB                                                |       |       | ±0.5dB                   |       |       |
| Maximum Peak Output Power (dBm)    | 28.8                                                  | 28.6  | 28.8  | 31.7                     | 31.7  | 31.7  |
| Data and connectivity              | EGPRS Class: 10 ;Crest Factor:4.15                    |       |       |                          |       |       |
| Maximum Output Power Setting (dBm) | Ch512                                                 | Ch661 | Ch810 | Ch128                    | Ch190 | Ch251 |
|                                    | 26.5                                                  | 26.5  | 26.5  | 27.5                     | 27.5  | 27.5  |
| Factory Tolerance in Power Setting | ±0.5dB                                                |       |       | ±0.5dB                   |       |       |
| Maximum Peak Output Power (dBm)    | 27.0                                                  | 27.0  | 27.0  | 28.0                     | 28.0  | 28.0  |
| Transmitting Frequency Range(MHz)  | 1850.2 – 1909.8                                       |       |       | 824.2 – 848.8            |       |       |
| Prototype or Production Unit       | Preproduction (HW-FP1.1)                              |       |       | Preproduction (HW-FP1.1) |       |       |
| Device Category                    | Portable                                              |       |       |                          |       |       |
| RF exposure environment            | General population / uncontrolled                     |       |       |                          |       |       |



Company Internal  
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGLIMC *Peter Lindeborg*

Checked

071029

No.

*BGLI07:576*

Date

071029

Rev

A

Reference

File

## 4 Test equipment

### 4.1 Dosimetric system

SAR measurements were made using the DASY4 professional system (software version 4.7, Build 53) with SAM twin phantom, manufactured by Schmid & Partner Engineering AG (SPEAG). The list of calibrated equipment is given below.

| <i>Description</i>             | <i>Serial Number</i> | <i>Due Date</i> |
|--------------------------------|----------------------|-----------------|
| DASY DAE V1                    | 428                  | Jan 2008        |
| E-field probe ETDV6            | 1815                 | Jan 2008        |
| Dipole Validation Kit, D835V2  | 4d039                | May 2008        |
| Dipole Validation Kit, D1900V2 | 5d002                | Jan 2009        |

### 4.2 Additional equipment

| <i>Description</i>            | <i>Inventory Number</i> | <i>Due Date</i> |
|-------------------------------|-------------------------|-----------------|
| Signal generator R&S SML03    | INV 20007667            | March 2008      |
| Power meter R&S NRVZ          | INV 20007669            | March 2008      |
| Power sensor R&S NRV-Z5       | INV 20007672            | March 2008      |
| Power sensor R&S NRV-Z5       | INV 20007673            | March 2008      |
| Network analyzer HP8753C      | INV421671               | March 2008      |
| S-parameter test set HP85047A | INV 421670              | March 2008      |
| Dielectric probe kit HP8507D  | INV 200 000 53          | Self calibrated |
| CMU200                        | INV 20002149            | March 2008      |
| Thermometer Fluke 51          | INV 2071                | March 2008      |

Company Internal  
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Hamid Kami Shirazi

Approved

LD/SEMC/BGLIMC Peter Lindeborg

Checked

071029

No.

BGLI07:576

Date

071029

Rev

A

Reference

File

## 5 Electrical parameters on the tissue simulating liquid

Prior to conducting SAR measurements, the relative permittivity,  $\epsilon_r$ , and the conductivity,  $\sigma$ , of the tissue simulating liquids were measured with the dielectric probe kit. These values are shown in the table below. The mass density,  $\rho$ , entered into the DASY4 software is also given.

Recommended limits for permittivity  $\epsilon_r$ , conductivity  $\sigma$  and mass density  $\rho$  are also shown.

| f<br>(MHz) | Tissue<br>type | Limits / Measured    | Dielectric Parameters |                | Density                     |
|------------|----------------|----------------------|-----------------------|----------------|-----------------------------|
|            |                |                      | $\epsilon_r$          | $\sigma$ (S/m) | $\rho$ (g/cm <sup>3</sup> ) |
| 1900       | Head           | Measured, 22/10/2007 | 38.9                  | 1.47           | 1.00                        |
|            |                | Recommended          | 40.0                  | 1.40           | 1.00                        |
|            | Body           | Measured, 23/10/2007 | 51.3                  | 1.58           | 1.00                        |
|            |                | Recommended          | 53.3                  | 1.52           | 1.00                        |
| 850        | Head           | Measured, 17/10/2007 | 43.2                  | 0.90           | 1.00                        |
|            |                | Recommended          | 41.5                  | 0.90           | 1.00                        |
|            | Body           | Measured, 24/10/2007 | 52.4                  | 0.98           | 1.00                        |
|            |                | Recommended          | 55.2                  | 0.97           | 1.00                        |

## 6 System accuracy verification

A system accuracy verification of the DASY4 was performed using the dipole validation kit listed in section 4.1. Measurement made in ambient temperature 21-22 °C and humidity 40-55 %. The obtained results are displayed in the table below.

RF noise had been measured in liquid when all RF equipment in lab was set off. Measured value was 0.0002mW/g in 1g mass

| f<br>(MHz) | Tissue<br>type | Measured / Reference | SAR (W/kg)<br>1g/10g | Dielectric Parameters |                | Density                     | Liquid<br>T(°C) |
|------------|----------------|----------------------|----------------------|-----------------------|----------------|-----------------------------|-----------------|
|            |                |                      |                      | $\epsilon_r$          | $\sigma$ (S/m) | $\rho$ (g/cm <sup>3</sup> ) |                 |
| 1900       | Head           | Measured, 22/10/2007 | 38.3/19.8            | 38.9                  | 1.47           | 1.00                        | 20.7            |
|            |                | Reference            | 37.4/19.8            | 40.0                  | 1.40           | 1.00                        | 22              |
|            | Body           | Measured, 23/10/2007 | 40.1/21.0            | 51.3                  | 1.58           | 1.00                        | 20.1            |
|            |                | Reference            | 38.6/20.6            | 53.3                  | 1.52           | 1.00                        | 22              |
| 850        | Head           | Measured, 17/10/2007 | 9.66/6.31            | 43.2                  | 0.90           | 1.00                        | 21.0            |
|            |                | Reference            | 9.29/6.03            | 41.5                  | 0.90           | 1.00                        | 22              |
|            | Body           | Measured, 24/10/2007 | 9.67/6.34            | 52.4                  | 0.98           | 1.00                        | 21.2            |
|            |                | Reference            | 9.61/6.31            | 55.2                  | 0.97           | 1.00                        | 22              |



Company Internal  
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM Hamid Kami Shirazi

Approved

LD/SEMC/BGLIMC Peter Lindeborg

Checked

071029

No.

BGLI07:576

Date

071029

Rev

A

Reference

File

## 7 SAR measurement uncertainty

**SAR measurement uncertainty evaluation for Sonyericsson PY7A3052041 (W890i) phone  
According to IEEE 1528**

| Uncertainty Component                            | Uncer. (%) | Prob Dist. | Div. | C <sub>i</sub> | SAR 1g mass  |
|--------------------------------------------------|------------|------------|------|----------------|--------------|
| <b>Measurement System</b>                        |            |            |      |                |              |
| Probe Calibration                                | ±5.9       | N          | 1    | 1              | ±5.9         |
| Axial Isotropy                                   | ±4.7       | R          | √3   | 0.7            | ±1.9         |
| Spherical Isotropy                               | ±9.6       | R          | √3   | 0.7            | ±3.9         |
| Boundary effect                                  | ±1.0       | R          | √3   | 1              | ±0.6         |
| Probe linearity                                  | ±4.7       | R          | √3   | 1              | ±2.7         |
| Detection limit                                  | ±1.0       | R          | √3   | 1              | ±0.6         |
| Readout electronics                              | ±0.3       | N          | 1    | 1              | ±0.3         |
| Response time                                    | ±0.8       | R          | √3   | 1              | ±0.5         |
| Integration time                                 | ±2.6       | R          | √3   | 1              | ±1.5         |
| RF Ambient Conditions                            | ±3.0       | R          | √3   | 1              | ±1.7         |
| Mech. Constraints of robot                       | ±0.4       | R          | √3   | 1              | ±0.2         |
| Probe positioning                                | ±2.9       | R          | √3   | 1              | ±1.7         |
| Extrapolation, interpolation and integration     | ±1.0       | R          | √3   | 1              | ±0.6         |
| <b>Measurement System Uncertainty</b>            |            |            |      |                | <b>±8.4</b>  |
| <b>Test Sample Related</b>                       |            |            |      |                |              |
| Device positioning                               | ±3.5       | N          | 1    | 1              | ±3.5         |
| Device holder uncertainty                        | ±3.5       | N          | 1    | 1              | ±3.5         |
| Power drift                                      | ±5.0       | R          | √3   | 1              | ±2.9         |
| <b>Test Sample Related Uncertainty</b>           |            |            |      |                | <b>±5.5</b>  |
| <b>Phantom and Tissue Parameters</b>             |            |            |      |                |              |
| Phantom uncertainty                              | ±4.0       | R          | √3   | 1              | ±2.3         |
| Liquid conductivity (measurement)                | ±2.5       | R          | 1    | 0.64           | ±1.6         |
| Liquid conductivity (target)                     | ±5.0       | R          | √3   | 0.64           | ±1.8         |
| Liquid Permittivity (measurement)                | ±2.5       | R          | 1    | 0.6            | ±1.5         |
| Liquid Permittivity (target)                     | ±5.0       | R          | √3   | 0.6            | ±1.7         |
| <b>Phantom and Tissue Parameters Uncertainty</b> |            |            |      |                | <b>±4.0</b>  |
| <b>Combined standard uncertainty</b>             |            |            |      |                | <b>±10.8</b> |
| <b>Extended standard uncertainty (k=2)</b>       |            |            |      |                | <b>±21.6</b> |



## 8 Test results

The measured 1-gram averaged SAR values of the device towards head and body are provided in tables 1 and 2. The ambient humidity and temperature of test facility were 40%-55% and 21°C–22°C respectively. The depth of tissue simulating liquids for head and body are 15.2cm and 15.1cm for 1900 and 15.6 cm and 15cm for 850 bands. A base station simulator was used to control the device during the SAR measurement. The phone was supplied with fully charged battery for each measurement.

For head measurement, the device was tested on the right-hand side and the left-hand side of phantom in two phone positions, cheek (touch) and tilt (cheek + 15deg).

For body measurement phone was tested on the antenna (back) and front towards flat section of phantom with 15mm distance in both speech and data (GPRS and EGPRS) mode. For all modes, the device was tested at the lowest, middle and highest frequencies in the transmission band. For Hands free used Sony Ericsson head set (HPB-60) and for blue tooth phone was paired with Sony Ericsson HBH-610 Blue Tooth accessory and measured on worst case speech mode and for body.

| Mode          | Channel | Power (dB) | Phone Position | Liquid T (°C) | SAR (W/kg)         |                   |
|---------------|---------|------------|----------------|---------------|--------------------|-------------------|
|               |         |            |                |               | Right-hand 1g mass | Left-hand 1g mass |
| GSM 850 Head  | 128     | 33.2       | Cheek          | 21.2          | 0.27               | 0.24              |
|               |         |            | Tilt           | 21.2          | -                  | -                 |
|               | 190     | 33.1       | Cheek          | 21.2          | 0.39               | 0.41              |
|               |         |            | Tilt           | 21.2          | 0.23               | 0.23              |
|               | 251     | 33.3       | Cheek          | 21.2          | 0.47               | 0.43              |
|               |         |            | Tilt           | 21.2          | 0.28               | 0.23              |
| GSM 1900 Head | 512     | 30.1       | Cheek          | 20.7          | 1.34               | 0.70              |
|               |         |            | Tilt           | 20.7          | -                  | -                 |
|               | 661     | 29.9       | Cheek          | 20.7          | 1.22               | 0.72              |
|               |         |            | Tilt           | 20.7          | 0.27               | 0.28              |
|               | 810     | 29.8       | Cheek          | 20.7          | 1.16               | 0.70              |
|               |         |            | Tilt           | 20.7          | -                  | -                 |

Table1: SAR measurement result for Sony Ericsson PY7A3052041 (W890i) telephone at highest possible output power. The phone has measured towards head.

| Mode          | Channel | Power (dBm) | Phone Position              | Liquid T (°C) | SAR (W/kg) in 1 g mass |
|---------------|---------|-------------|-----------------------------|---------------|------------------------|
| GSM 850 Body  | 128     | 33.2        | Antenna to phantom BT       | 21.0          | 0.22                   |
|               |         | 31.6        | Antenna to phantom GPRS2TX  | 21.0          | 0.31                   |
|               | 190     | 33.1        | Antenna to phantom BT       | 21.0          | 0.36                   |
|               |         | 31.7        | Antenna to phantom GPRS2TX  | 21.0          | 0.42                   |
|               | 251     | 33.3        | Antenna to phantom BT       | 21.0          | 0.43                   |
|               |         | 33.3        | Antenna to phantom PHF      | 21.0          | 0.47                   |
|               |         | 31.6        | Antenna to phantom GPRS2TX  | 21.0          | 0.58                   |
|               |         | 31.6        | Front to phantom GPRS2TX    | 21.0          | 0.48                   |
| GSM 1900 Body | 512     | 28.5        | Antenna to phantom EGPRS2TX | 21.0          | 0.24                   |
|               |         | 30.1        | Antenna to phantom BT       | 20.1          | 0.39                   |
|               | 661     | 28.8        | Antenna to phantom GPRS2TX  | 20.1          | 0.66                   |
|               |         | 29.9        | Antenna to phantom BT       | 20.1          | 0.41                   |
|               | 810     | 28.8        | Antenna to phantom GPRS2TX  | 20.1          | 0.64                   |
|               |         | 29.8        | Antenna to phantom BT       | 20.1          | 0.44                   |
|               |         | 29.8        | Antenna to phantom PHF      | 20.1          | 0.47                   |
|               |         | 28.8        | Antenna to phantom GPRS2TX  | 20.1          | 0.77                   |
|               |         | 28.8        | Front to phantom GPRS2TX    | 20.1          | 0.61                   |
|               |         | 26.9        | Antenna to phantom EGPRS2TX | 20.1          | 0.49                   |

Table2: SAR measurement result for Sony Ericsson PY7A3052041 (W890i) telephone at highest possible output power. The phone has measured towards the Body.



Company Internal  
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGLIMC *Peter Lindeborg*

Checked

071029

No.

*BGLI07:576*

Date

071029

Rev

A

Reference

File

## 9

## References

[1] R.Plicanic, "SAR Measurement Specification of Wireless Handsets", Sony Ericsson SAR Test Laboratory internal document GUG/N 03:141

[2] FCC, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields: Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radio Frequency Emissions," Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01).

[3] IEEE, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques," STD 1528-2003, June, 2003.

[4] IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices in the frequency range of 300 MHz to 3 GHz", February 2005.



Company Internal  
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGLIMC *Peter Lindeborg*

Checked

071029

No.

*BGLI07:576*

Date

071029

Rev

A

Reference

File

## 10 Appendix

### 10.1 Photographs of the device under test



Front and rear



Rear with Battery



System connector



Sides



Company Internal  
REPORT

Prepared (also subject responsible if other)

LD/SEMC/BGLIM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGLIMC *Peter Lindeborg*

Checked

071029

No.

*BGLI07:576*

Date

071029

Rev

A

Reference

File



## 10.2 Device position on SAM Twins Phantom



Device position towards the head: Cheek (touch) phone position



Device position towards the head: Tilt (cheek+15deg) phone position

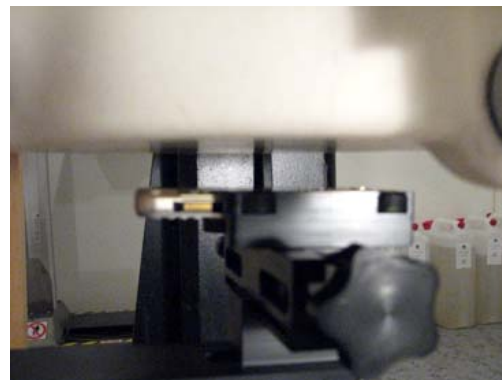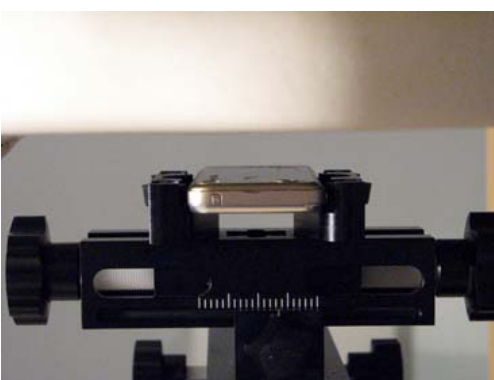

Device position towards the body: Phone on 15mm distance against Phantom



Prepared (also subject responsible if other)

LD/SEMC/BGLIM *Hamid Kami Shirazi*

Approved

LD/SEMC/BGLIMC *Peter Lindeborg*

Checked

071029

Company Internal  
REPORT

No.

*BGLI07:576*

Date

071029

Rev

A

Reference

File

### 10.3 Attachment

- Probe & Dipole Calibration
- Measurement plots and system validation

Date/Time: 2007-10-17 08:40:39

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemCheck-Head-D835.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d039**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.902 \text{ mho/m}$ ;  $\epsilon_r = 43.2$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.79, 6.79, 6.79); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm, Pin=100mW 2/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g


**d=15mm, Pin=100mW 2/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.8 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.43 W/kg

**SAR(1 g) = 0.966 mW/g; SAR(10 g) = 0.631 mW/g**

Maximum value of SAR (measured) = 1.04 mW/g

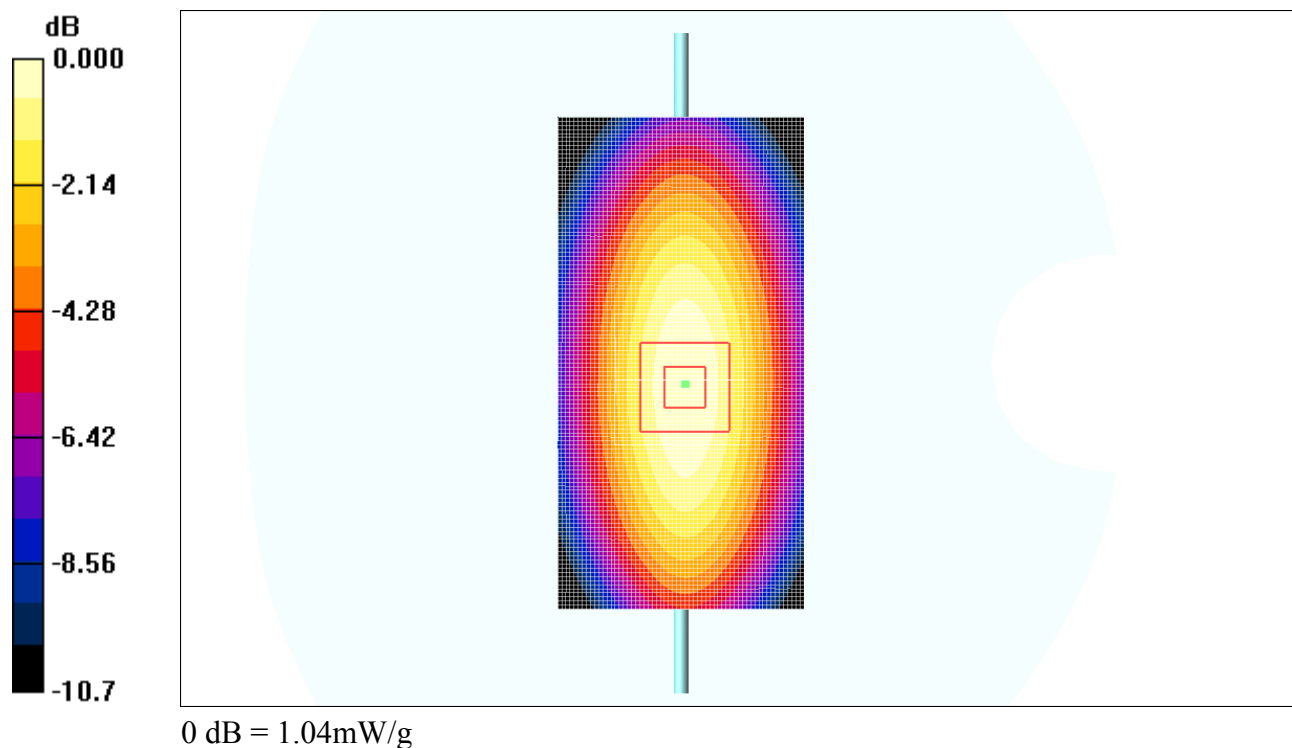

Date/Time: 2007-10-17 12:39:17

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Right.da4](#)**DUT: #9265; Type: PY7A3052041; Serial: CB510SAK14**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.904$  mho/m;  $\epsilon_r = 43.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.79, 6.79, 6.79); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Tilt position - Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.242 mW/g


**Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.4 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.303 W/kg

**SAR(1 g) = 0.231 mW/g; SAR(10 g) = 0.168 mW/g**

Maximum value of SAR (measured) = 0.243 mW/g

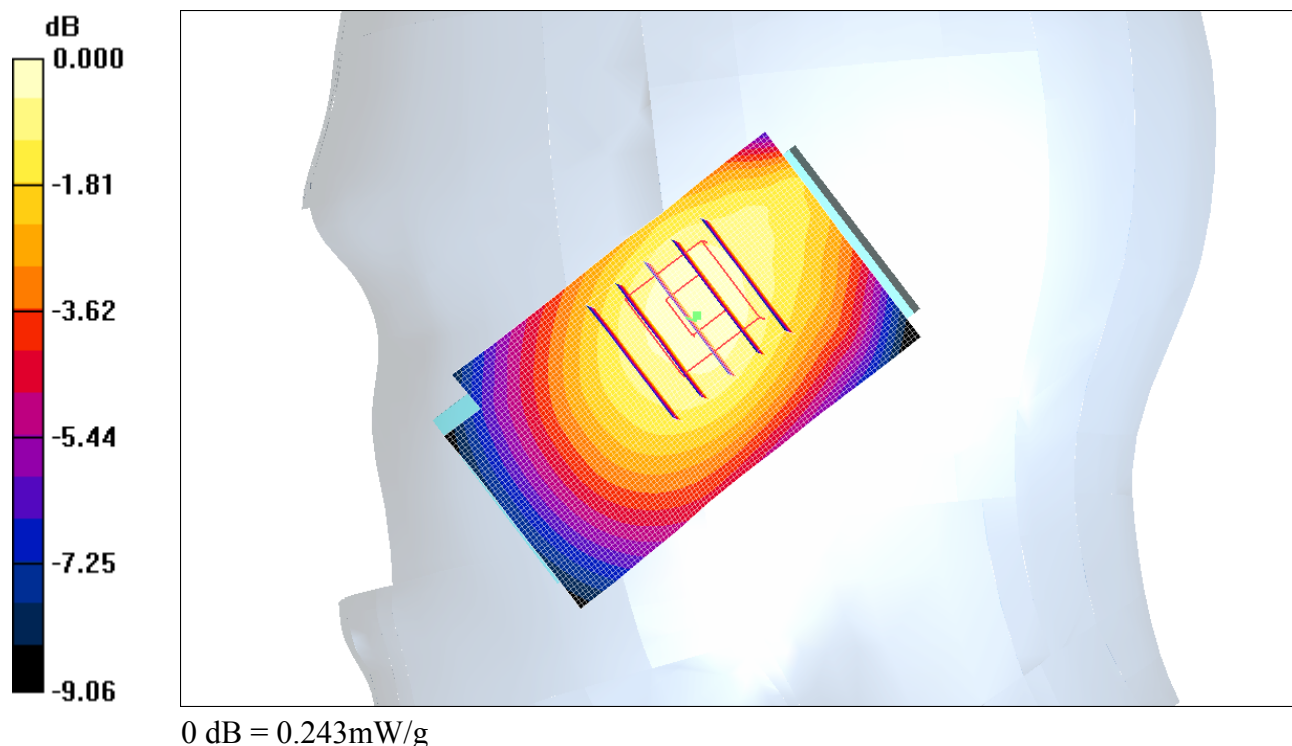

Date/Time: 2007-10-17 09:25:54

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Left.da4](#)**DUT: #9265; Type: AAD-3052041-BV; Serial: CB510SAK14**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 836.6$  MHz;  $\sigma = 0.904$  mho/m;  $\epsilon_r = 43.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.79, 6.79, 6.79); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Tilt position - Middle/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.242 mW/g


**Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 0.291 W/kg

**SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.166 mW/g**

Maximum value of SAR (measured) = 0.240 mW/g

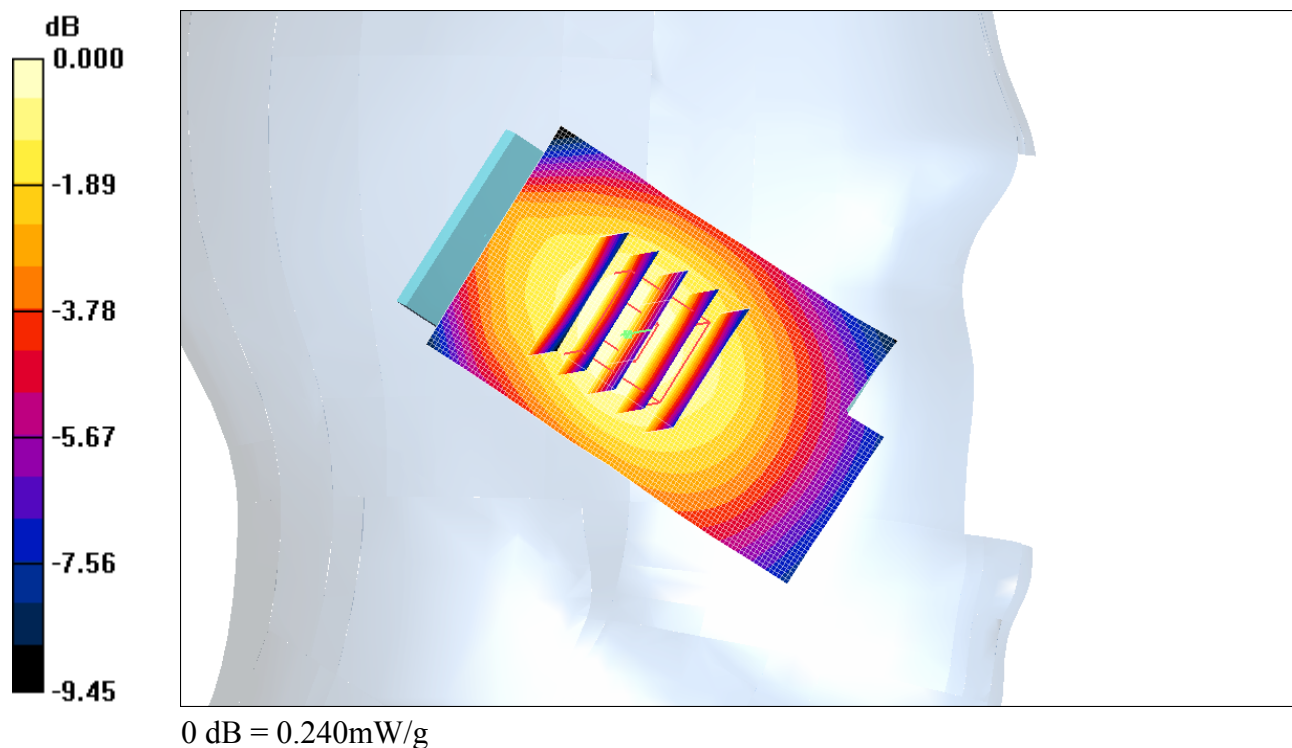

Date/Time: 2007-10-17 10:00:26

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Left.da4](#)**DUT: #9265; Type: AAD-3052041-BV; Serial: CB510SAK14**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.917$  mho/m;  $\epsilon_r = 43.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.79, 6.79, 6.79); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Touch position - High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.458 mW/g


**Touch position - High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.61 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.575 W/kg

**SAR(1 g) = 0.432 mW/g; SAR(10 g) = 0.305 mW/g**

Maximum value of SAR (measured) = 0.461 mW/g

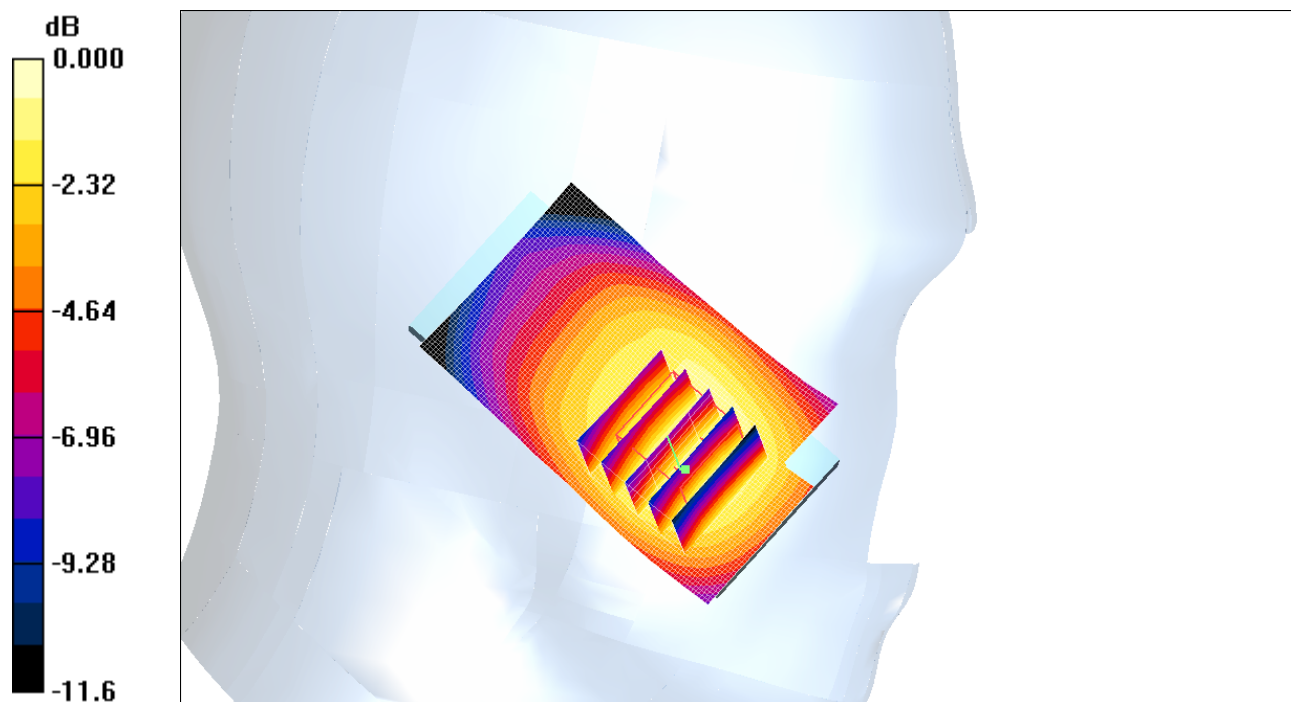

0 dB = 0.461mW/g

Date/Time: 2007-10-17 11:13:12

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Right.da4](#)**DUT: #9265; Type: PY7A3052041; Serial: CB510SAK14**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.917$  mho/m;  $\epsilon_r = 43.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.79, 6.79, 6.79); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Touch position - High/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.512 mW/g


**Touch position - High/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.97 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.695 W/kg

**SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.318 mW/g**

Maximum value of SAR (measured) = 0.510 mW/g

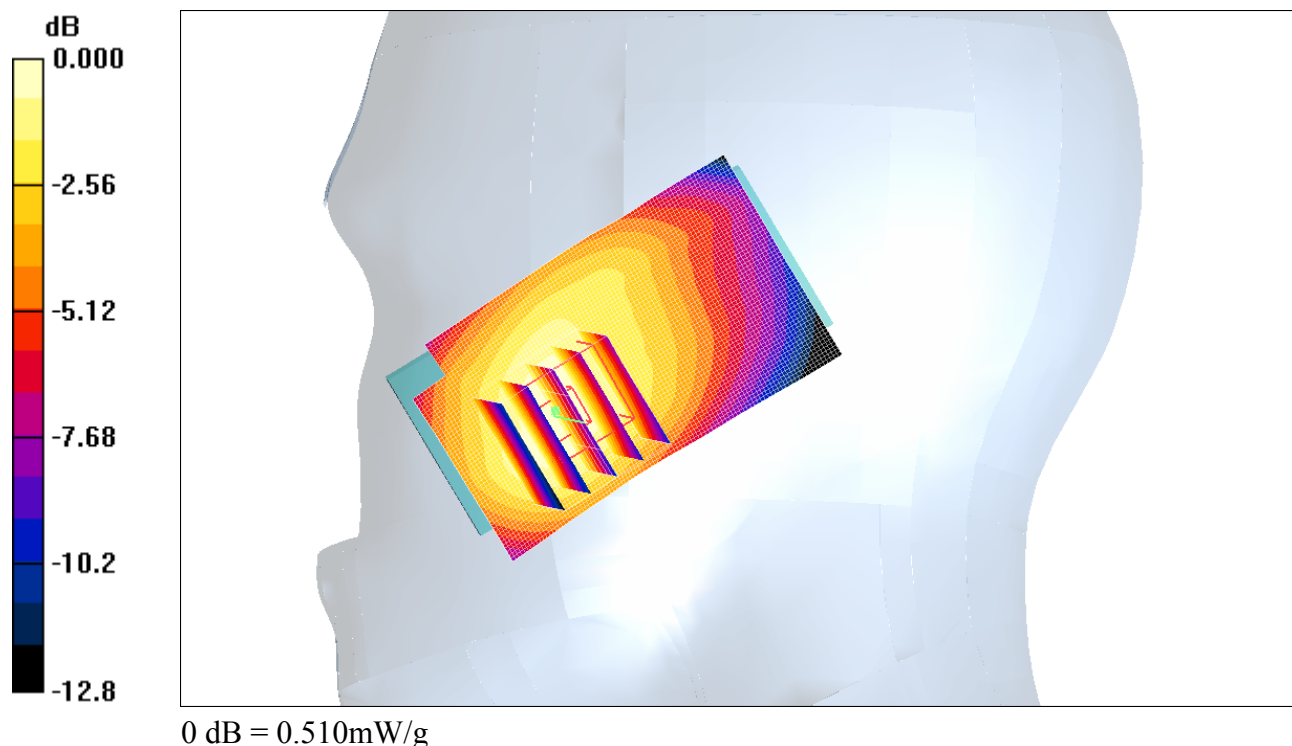

Date/Time: 2007-10-17 08:54:50

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemCheck-Head-D835.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d039**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $\sigma = 0.902$  mho/m,  $\epsilon_r = 43.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.79, 6.79, 6.79); Calibrated: 2007-01-16

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm, Pin=100mW 2/Z Scan (1x1x6):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of Total (measured) = 28.4 V/m

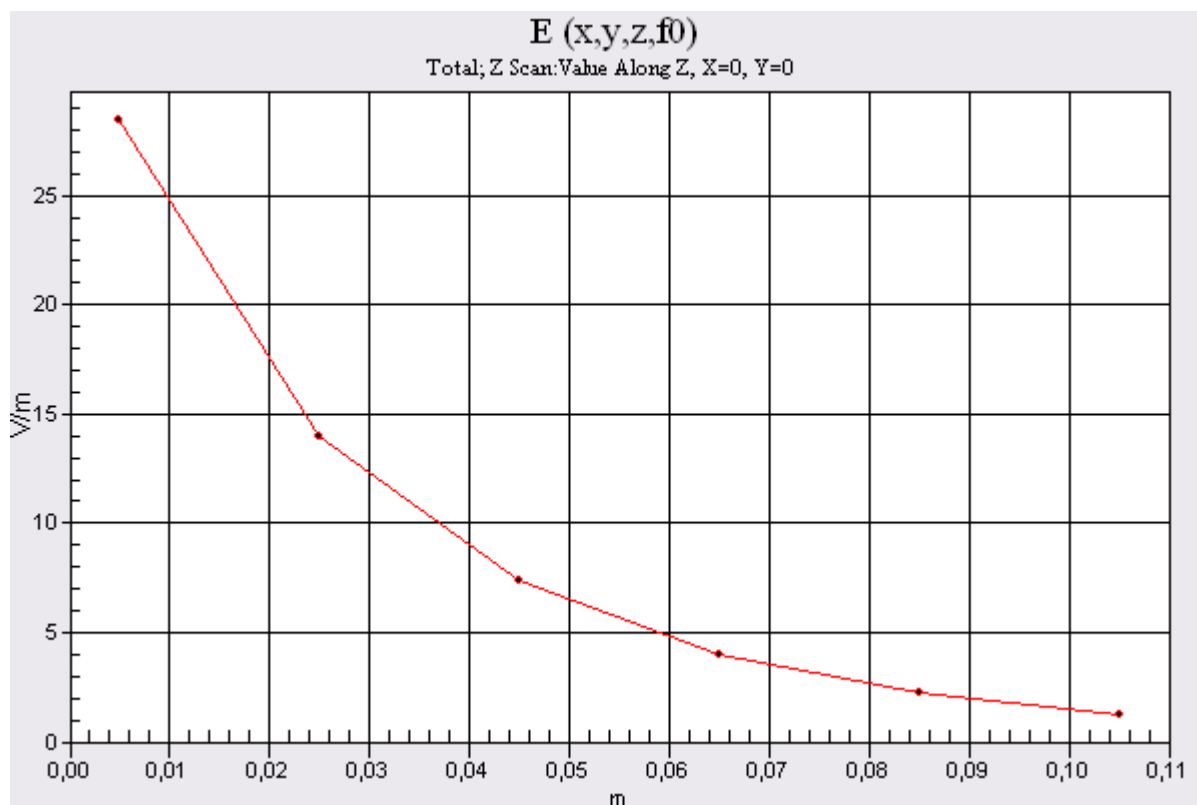

Date/Time: 2007-10-22 12:57:35

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemCheck-Head-D1900.da4](#)**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d002**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(5.21, 5.21, 5.21); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=10mm, Pin=100mW/Area Scan (61x101x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 4.37 mW/g


**d=10mm, Pin=100mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 55.9 V/m; Power Drift = 0.070 dB

Peak SAR (extrapolated) = 6.68 W/kg

**SAR(1 g) = 3.83 mW/g; SAR(10 g) = 1.98 mW/g**

Maximum value of SAR (measured) = 4.29 mW/g

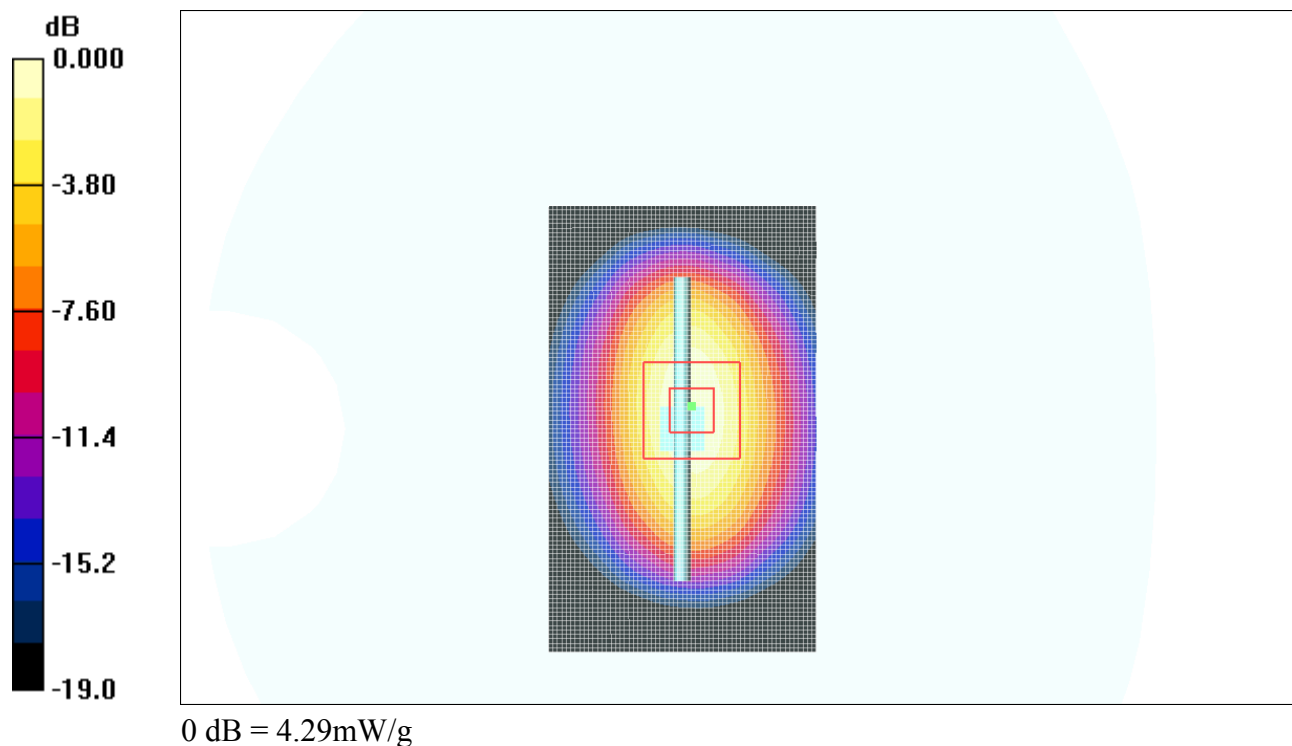

Date/Time: 2007-10-22 13:24:31

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Right.da4](#)**DUT: #9265; Type: PY7A3052041; Serial: CB510SAK14**

Communication System: DCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 1850.2$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 39.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(5.21, 5.21, 5.21); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Touch position - Low/Area Scan (61x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.47 mW/g


**Touch position - Low/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.54 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 2.18 W/kg

**SAR(1 g) = 1.34 mW/g; SAR(10 g) = 0.741 mW/g**

Maximum value of SAR (measured) = 1.47 mW/g

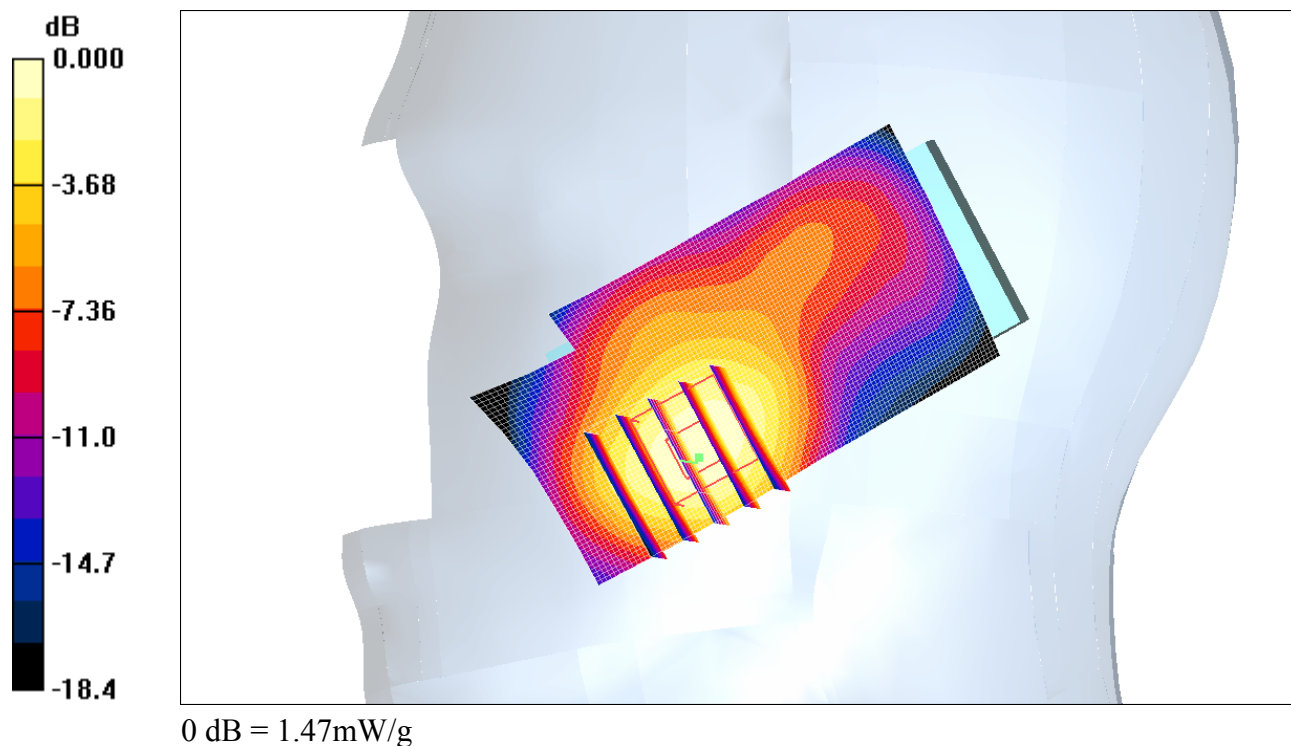

Date/Time: 2007-10-22 16:20:11

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Left.da4](#)**DUT: #9265; Type: AAD-3052041-BV; Serial: CB510SAK14**

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(5.21, 5.21, 5.21); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Tilt position - Middle/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.304 mW/g


**Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.1 V/m; Power Drift = -0.005 dB

Peak SAR (extrapolated) = 0.414 W/kg

**SAR(1 g) = 0.276 mW/g; SAR(10 g) = 0.171 mW/g**

Maximum value of SAR (measured) = 0.296 mW/g

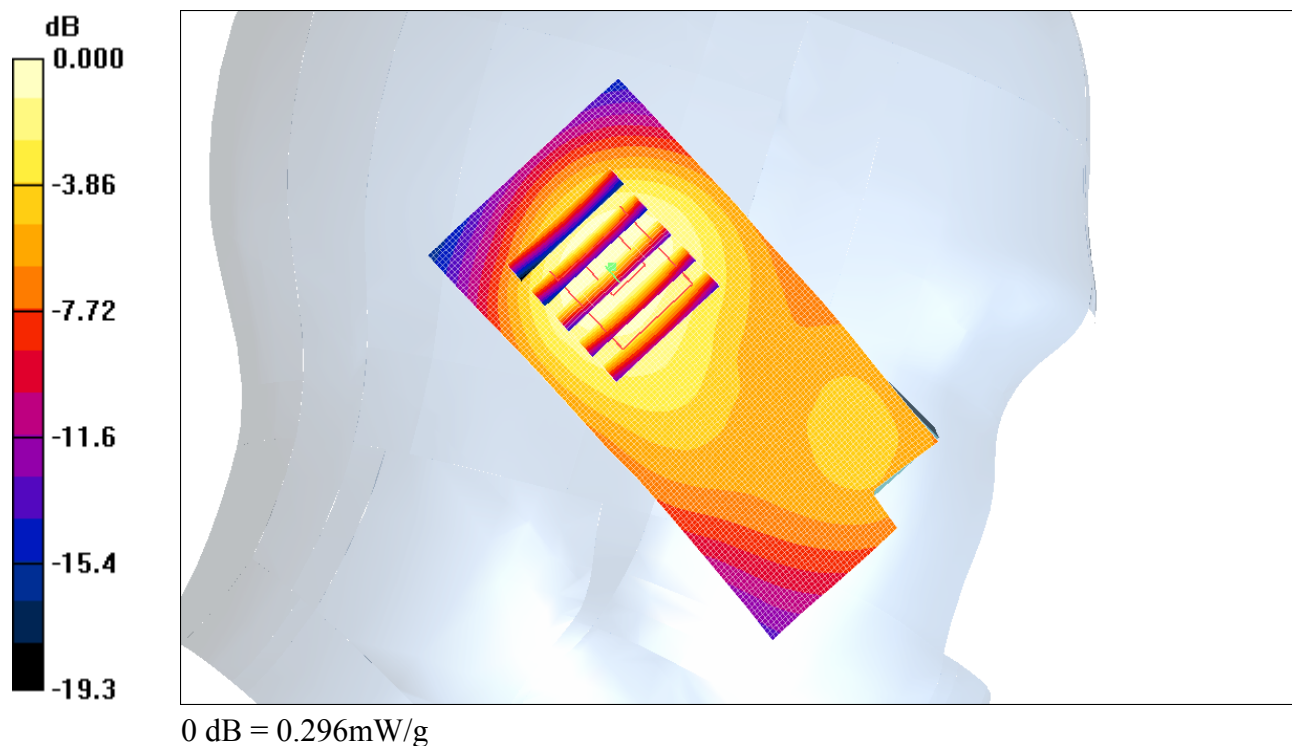

Date/Time: 2007-10-22 16:03:39

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Left.da4](#)**DUT: #9265; Type: AAD-3052041-BV; Serial: CB510SAK14**

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(5.21, 5.21, 5.21); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Touch position - Middle/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.781 mW/g


**Touch position - Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.87 V/m; Power Drift = -0.089 dB

Peak SAR (extrapolated) = 1.12 W/kg

**SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.436 mW/g**

Maximum value of SAR (measured) = 0.792 mW/g

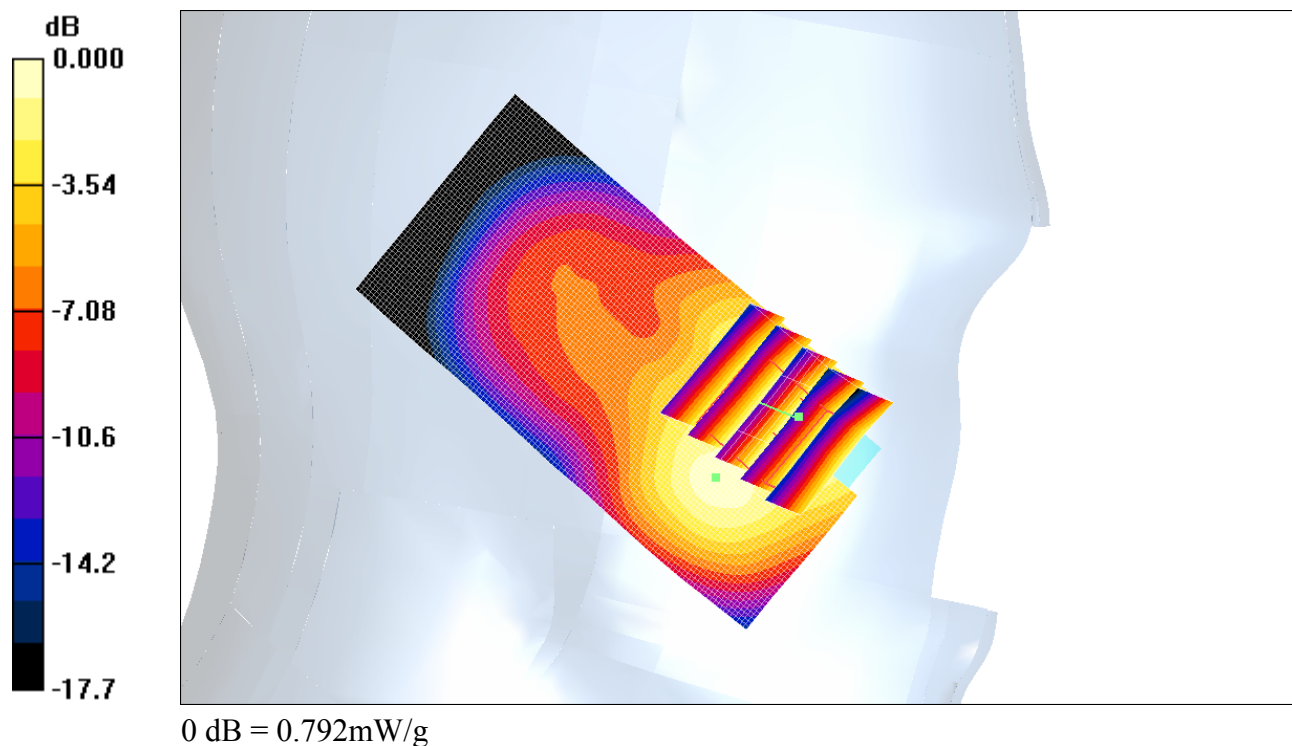

Date/Time: 2007-10-22 15:40:38

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Right.da4](#)**DUT: #9265; Type: PY7A3052041; Serial: CB510SAK14**

Communication System: DCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(5.21, 5.21, 5.21); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Tilt position - Middle/Area Scan (61x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.318 mW/g


**Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.451 W/kg

**SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.165 mW/g**

Maximum value of SAR (measured) = 0.281 mW/g

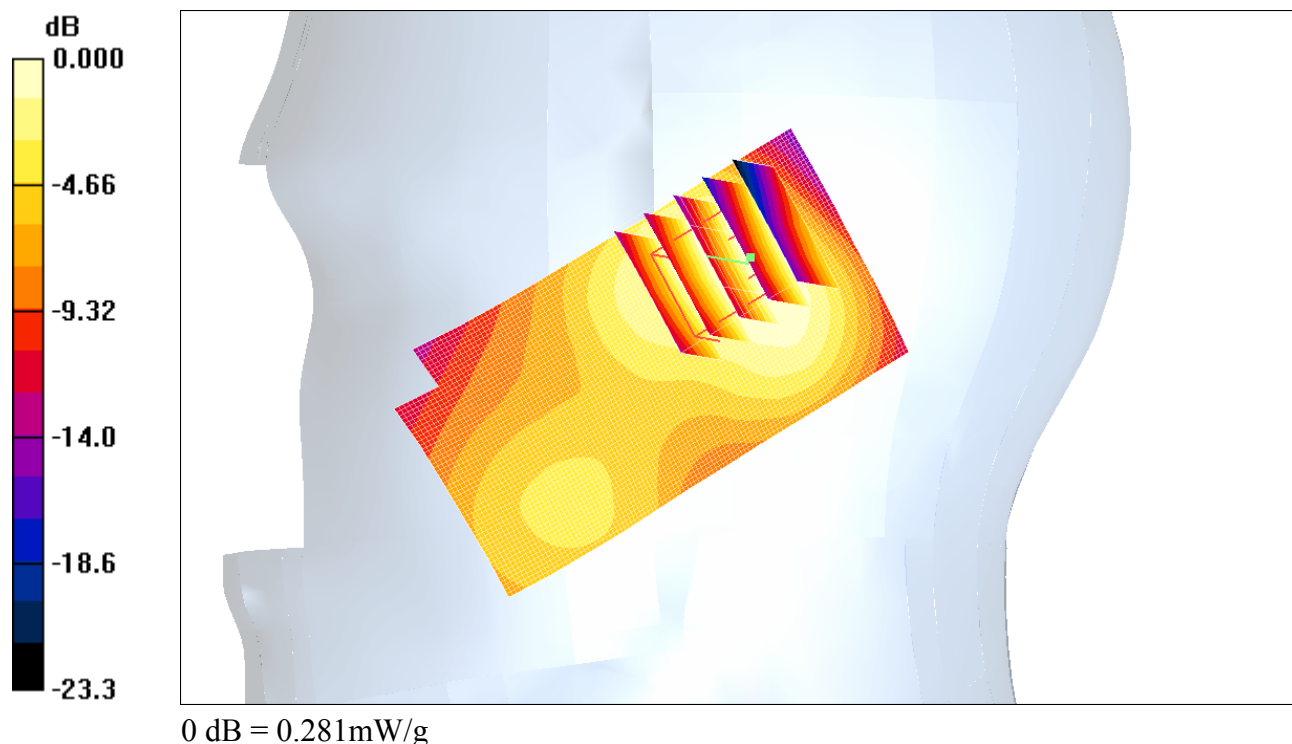

Date/Time: 2007-10-22 13:11:07

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemCheck-Head-D1900.da4](#)**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d002**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.47$  mho/m;  $\epsilon_r = 38.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(5.21, 5.21, 5.21); Calibrated: 2007-01-16

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=10mm, Pin=100mW/Z Scan (1x1x16):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 0.687 mW/g

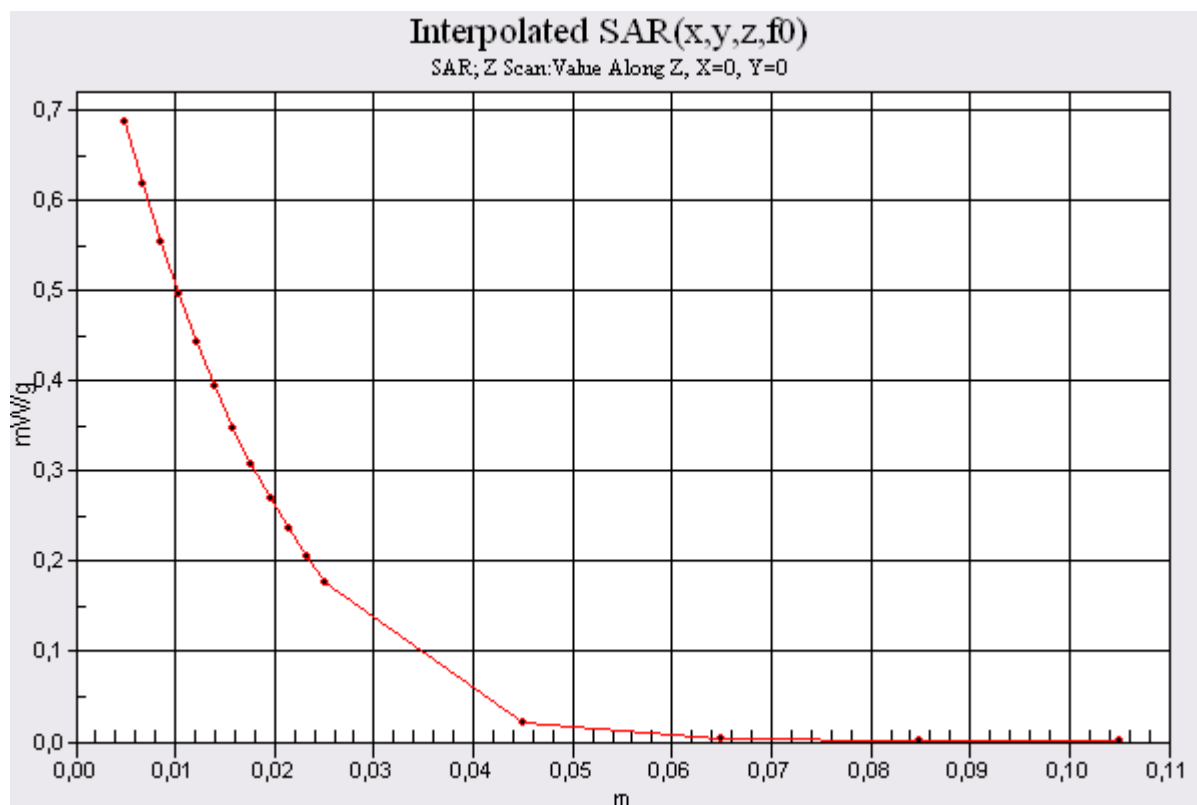

Date/Time: 2007-10-24 09:52:02

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemCheck-D835-Body.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d039**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.982 \text{ mho/m}$ ;  $\epsilon_r = 52.4$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.86, 6.86, 6.86); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm, Pin=100mW/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g


**d=15mm, Pin=100mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.9 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.961 mW/g; SAR(10 g) = 0.631 mW/g**

Maximum value of SAR (measured) = 1.03 mW/g

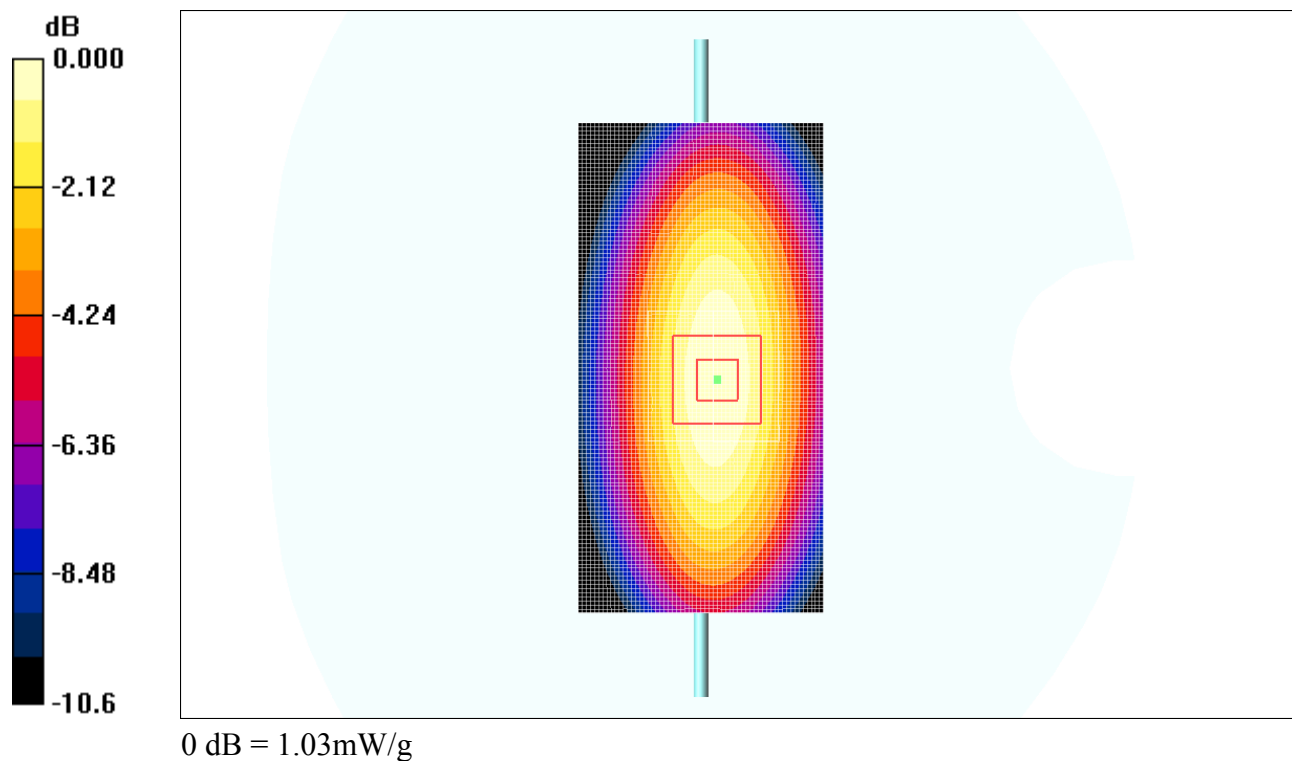

Date/Time: 2007-10-24 14:30:50

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body--Data.da4](#)**DUT: #9265; Type: AAD-3052041-BV; Serial: CB510SAK14**

Communication System: GSM850 GPRS2TX; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.86, 6.86, 6.86); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm,Front,High ,Data/Area Scan (61x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.502 mW/g


**d=15mm,Front,High ,Data/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = -0.039 dB

Peak SAR (extrapolated) = 0.623 W/kg

**SAR(1 g) = 0.475 mW/g; SAR(10 g) = 0.342 mW/g**

Maximum value of SAR (measured) = 0.502 mW/g

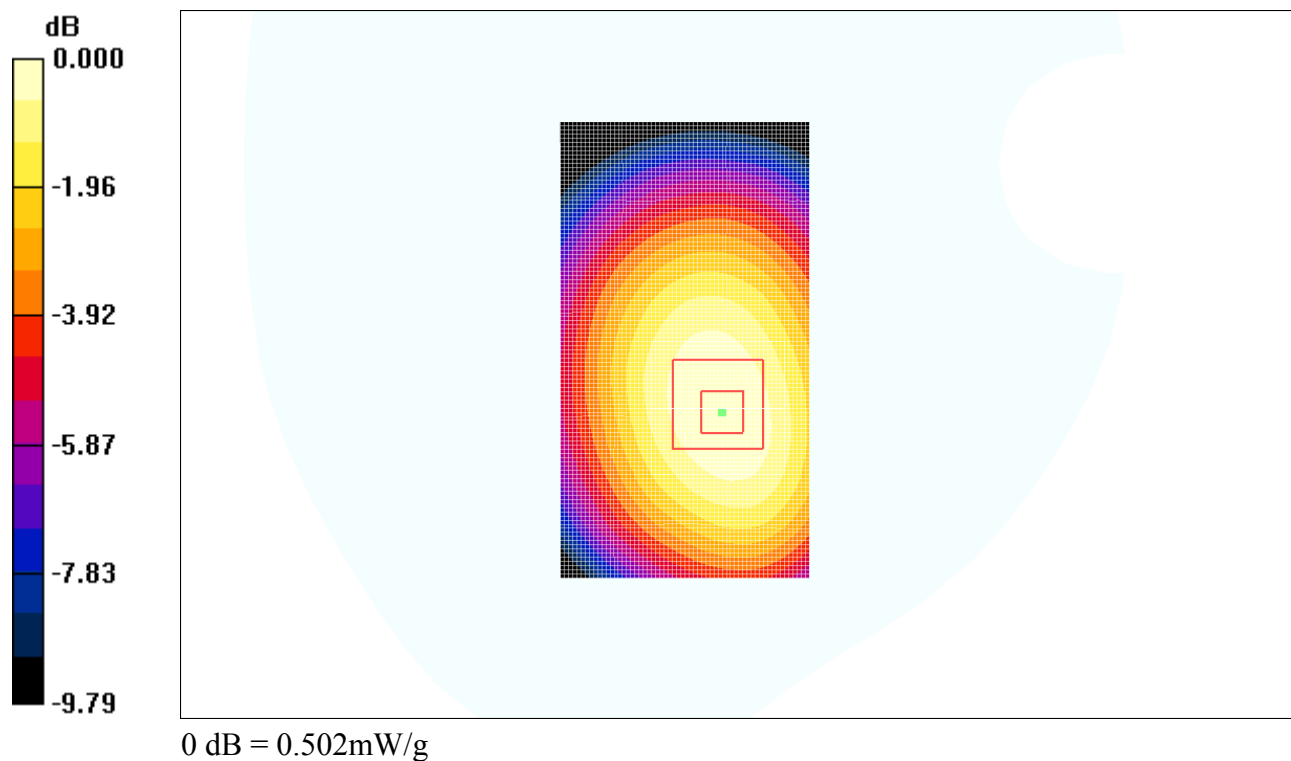

Date/Time: 2007-10-24 13:07:41

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body-Speech.da4](#)**DUT: #9265; Type: AAD-3052041-BV; Serial: CB510SAK14**

Communication System: GSM850 ; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.86, 6.86, 6.86); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm,Back,High ,Speech;PHF/Area Scan (61x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.500 mW/g


**d=15mm,Back,High ,Speech;PHF/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.98 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 0.647 W/kg

**SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.331 mW/g**

Maximum value of SAR (measured) = 0.502 mW/g

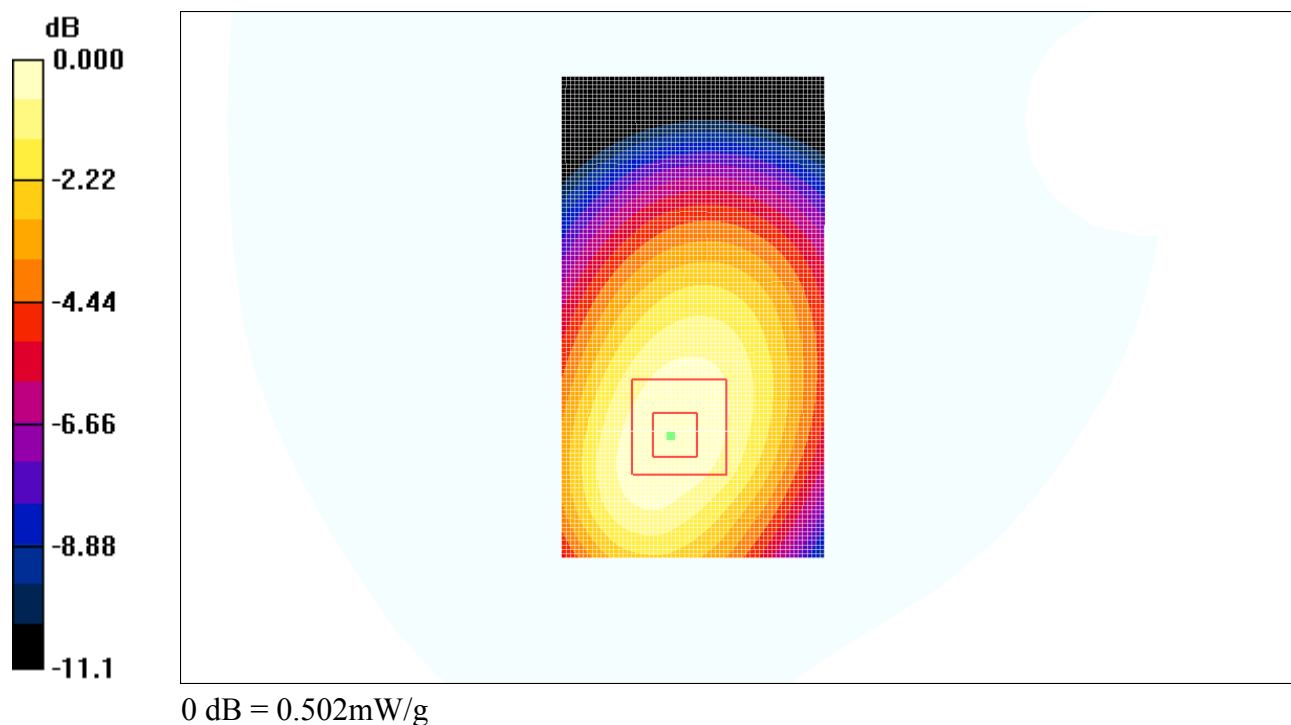

Date/Time: 2007-10-24 14:12:35

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body--Data.da4](#)**DUT: #9265; Type: AAD-3052041-BV; Serial: CB510SAK14**

Communication System: GSM850 GPRS2TX; Frequency: 848.8 MHz; Duty Cycle: 1:4.15

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.996$  mho/m;  $\epsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.86, 6.86, 6.86); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm,Back,High ,Data/Area Scan (61x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.614 mW/g


**d=15mm,Back,High ,Data/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.018 dB

Peak SAR (extrapolated) = 0.777 W/kg

**SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.407 mW/g**

Maximum value of SAR (measured) = 0.620 mW/g

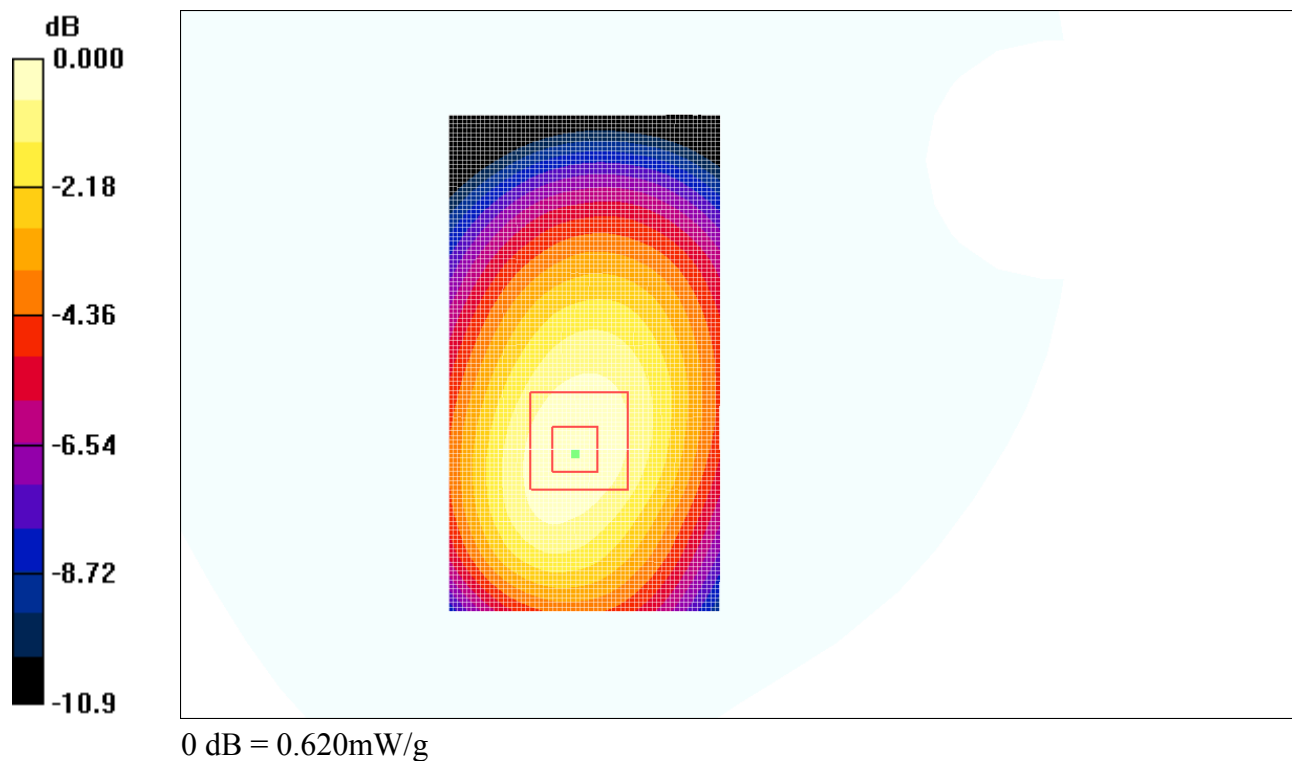

Date/Time: 2007-10-24 10:06:06

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemCheck-D835-Body.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d039**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.982 \text{ mho/m}$ ;  $\epsilon_r = 52.4$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.86, 6.86, 6.86); Calibrated: 2007-01-16

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm, Pin=100mW/Z Scan (1x1x16):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 0.519 mW/g

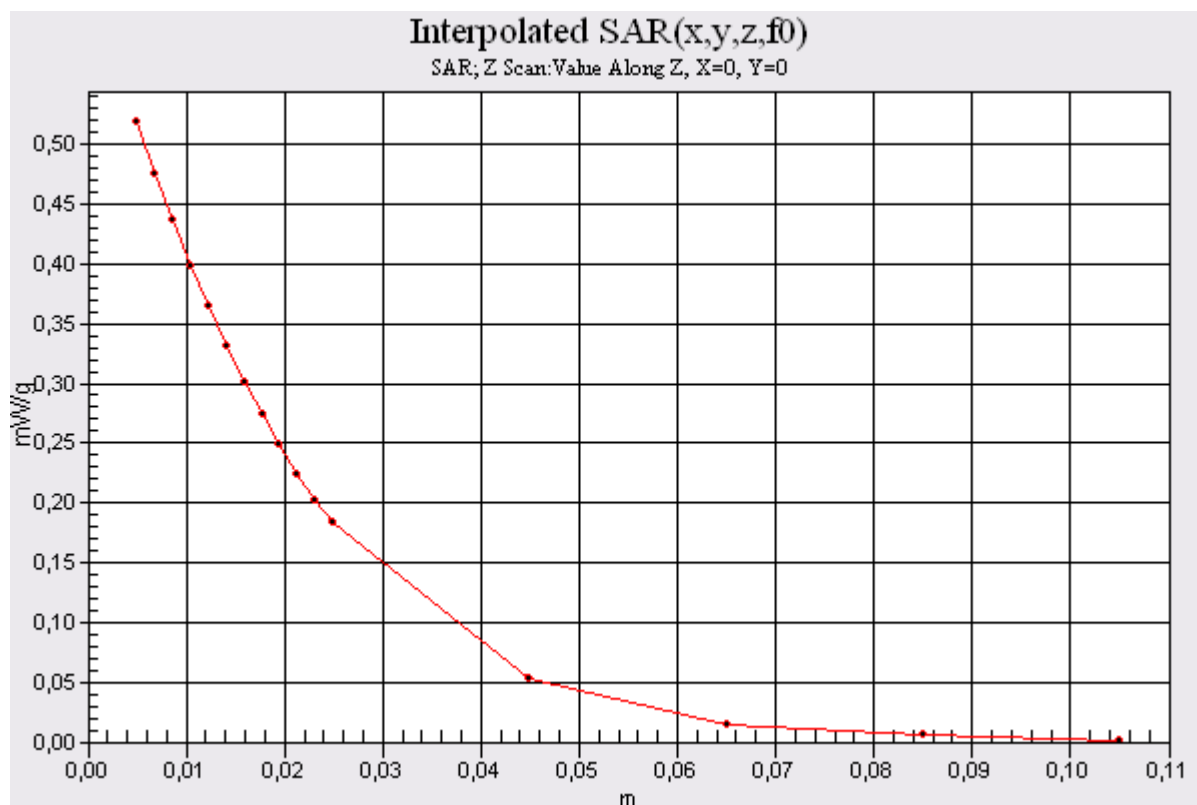

Date/Time: 2007-10-24 09:52:02

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemCheck-D835-Body.da4](#)**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d039**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.982 \text{ mho/m}$ ;  $\epsilon_r = 52.4$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(6.86, 6.86, 6.86); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 3; Type: SAM; Serial: 1137

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm, Pin=100mW/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.04 mW/g


**d=15mm, Pin=100mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.9 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.961 mW/g; SAR(10 g) = 0.631 mW/g**

Maximum value of SAR (measured) = 1.03 mW/g

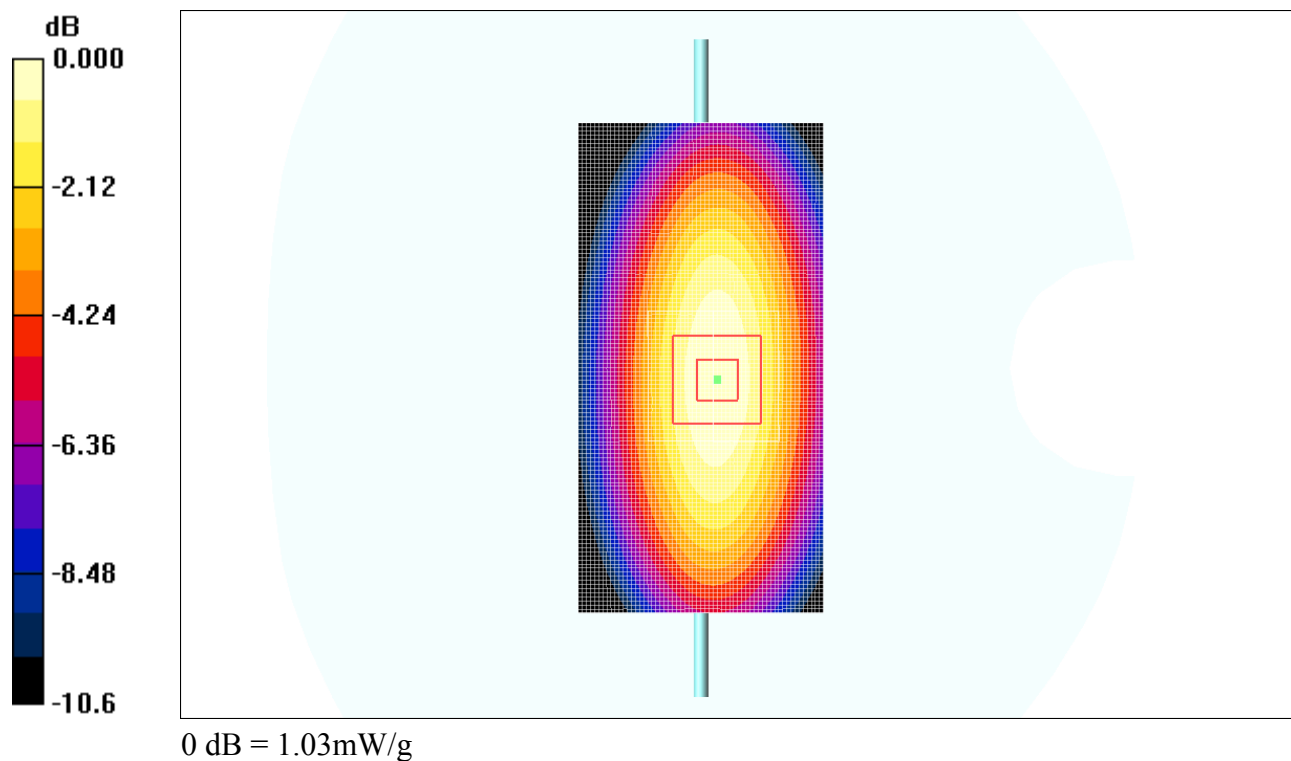

Date/Time: 2007-10-24 08:14:14

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body-Data.da4](#)**DUT: #9265; Type: PY7A3052041; Serial: CB510SAK14**

Communication System: GSM1900 GPRS2TX; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.6$  mho/m;  $\epsilon_r = 51.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(4.75, 4.75, 4.75); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm,Front,High;GPRS2TX/Area Scan (71x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.681 mW/g


**d=15mm,Front,High;GPRS2TX/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 0.997 W/kg

**SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.359 mW/g**

Maximum value of SAR (measured) = 0.666 mW/g

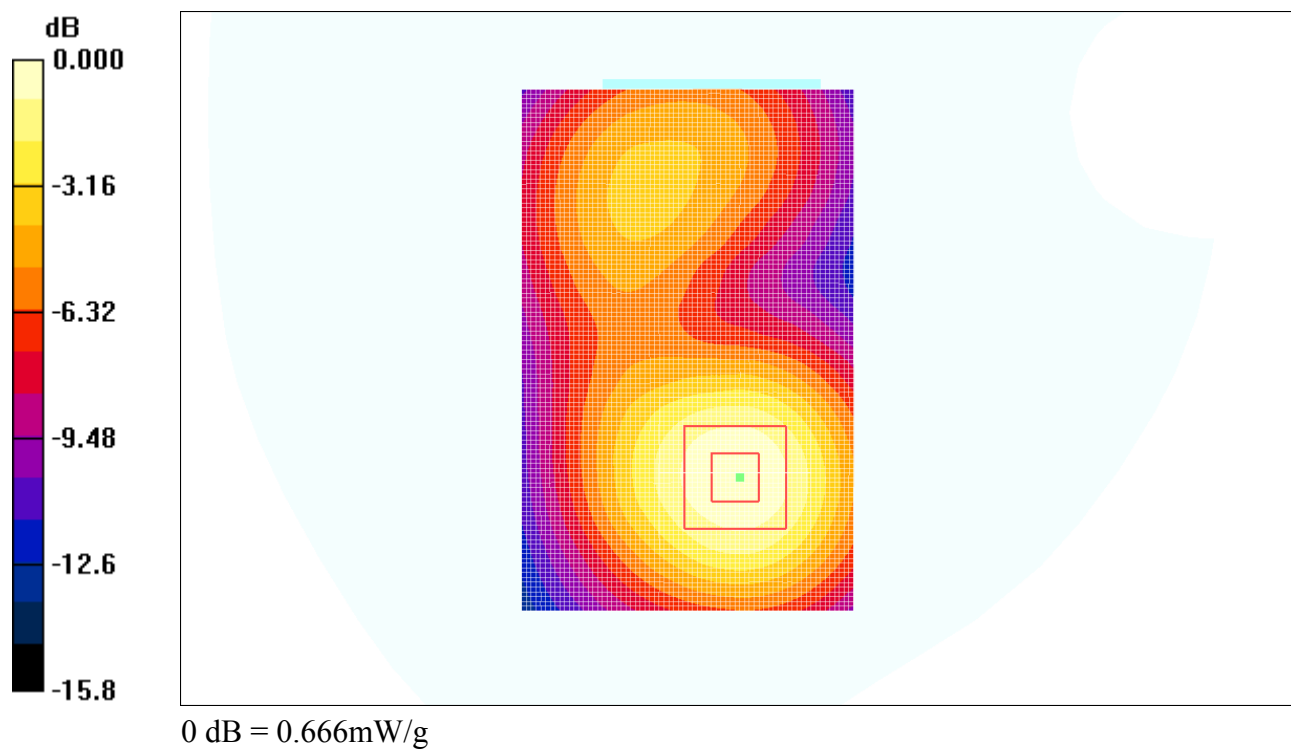

Date/Time: 2007-10-23 10:56:21

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body-Speech.da4](#)**DUT: #9265; Type: PY7A3052041; Serial: CB510SAK14**

Communication System: DCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.6$  mho/m;  $\epsilon_r = 51.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(4.75, 4.75, 4.75); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm,Back,High ,Speech;PHF/Area Scan (61x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.539 mW/g


**d=15mm,Back,High ,Speech;PHF/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.82 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 0.829 W/kg

**SAR(1 g) = 0.470 mW/g; SAR(10 g) = 0.257 mW/g**

Maximum value of SAR (measured) = 0.520 mW/g

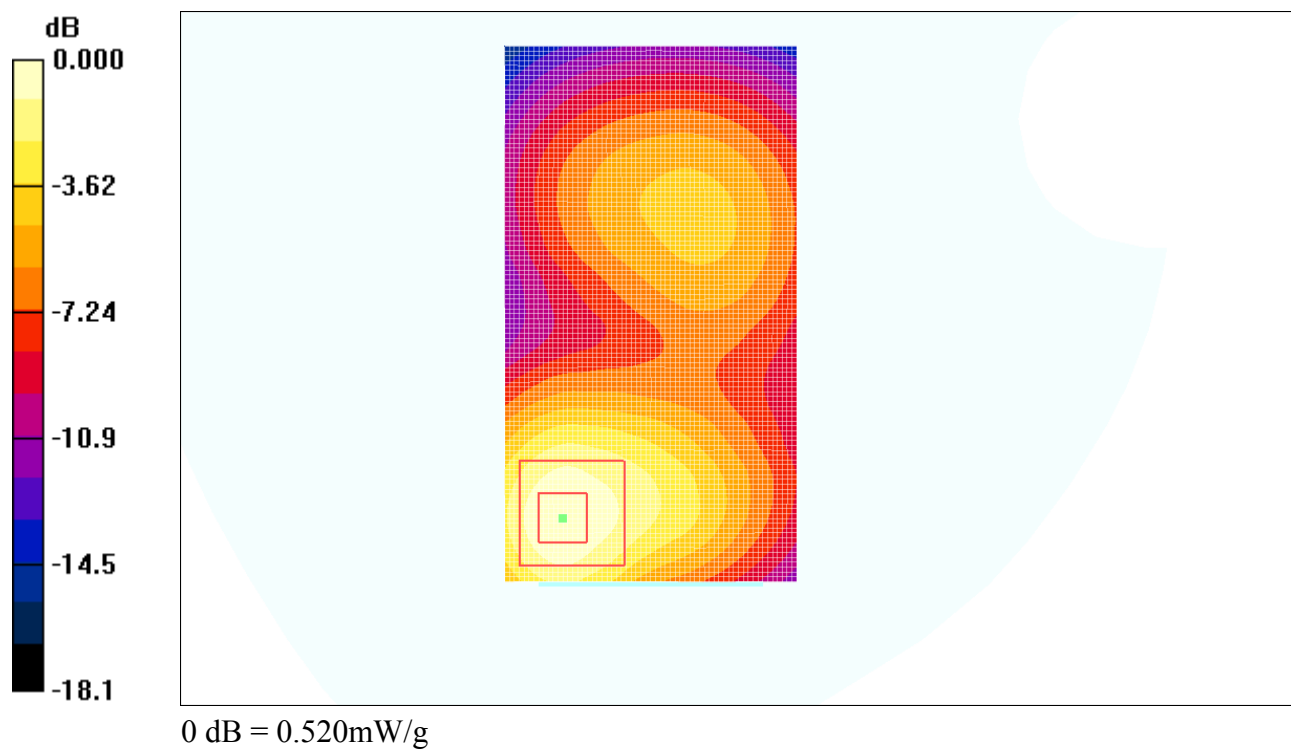

Date/Time: 2007-10-23 11:59:40

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [Body-Data.da4](#)**DUT: #9265; Type: PY7A3052041; Serial: CB510SAK14**

Communication System: GSM1900 GPRS2TX; Frequency: 1909.8 MHz; Duty Cycle: 1:4.15

Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.6$  mho/m;  $\epsilon_r = 51.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(4.75, 4.75, 4.75); Calibrated: 2007-01-16

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=15mm,Back,High;GPRS2TX/Area Scan (71x111x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.884 mW/g


**d=15mm,Back,High;GPRS2TX/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 1.34 W/kg

**SAR(1 g) = 0.772 mW/g; SAR(10 g) = 0.436 mW/g**

Maximum value of SAR (measured) = 0.856 mW/g

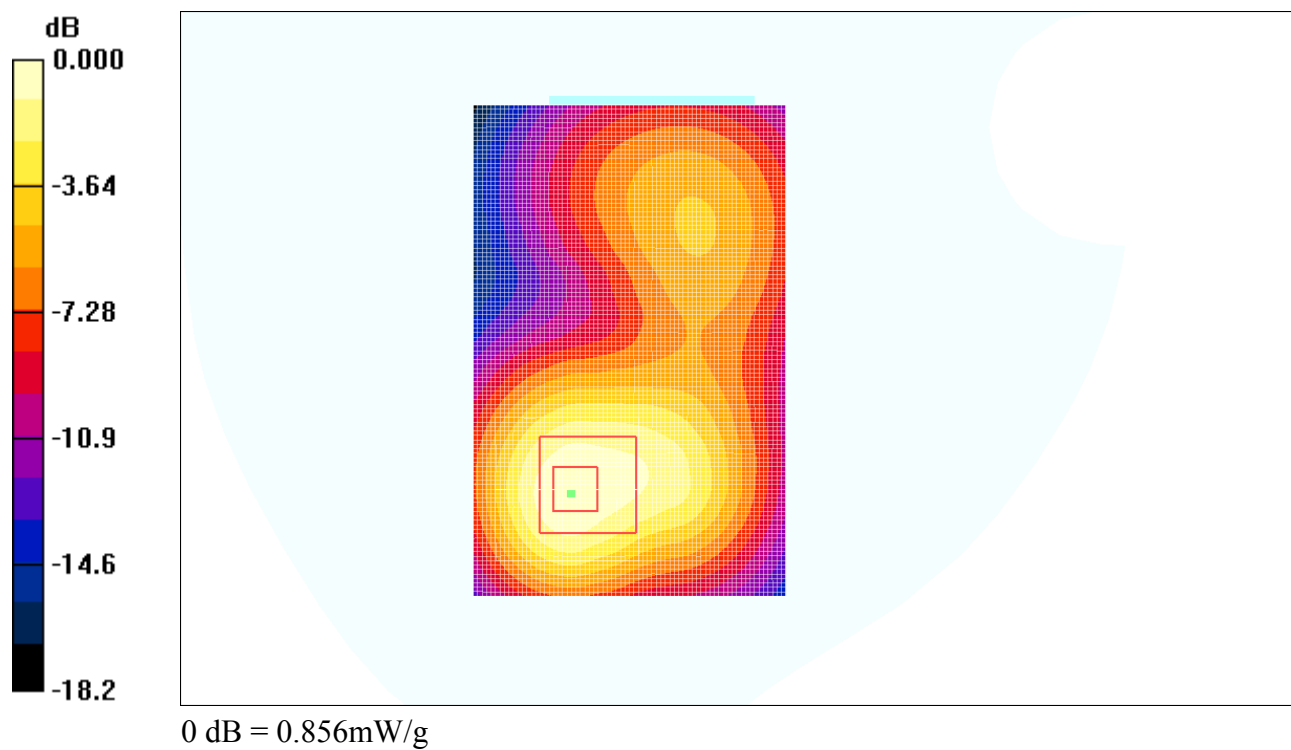

Date/Time: 2007-10-23 09:38:12

Test Laboratory: Sony Ericsson Mobile Communications AB

File Name: [SystemCheck-D1900.Body.da4](#)**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: SN:5d002**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.58$  mho/m;  $\epsilon_r = 51.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6 - SN1815; ConvF(4.75, 4.75, 4.75); Calibrated: 2007-01-16

- Sensor-Surface: 0mm (Fix Surface)


- Electronics: DAE3 Sn428; Calibrated: 2007-01-18

- Phantom: SAM 4; Type: SAM; Serial: 1053

- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**d=10mm, Pin=100mW/Z Scan (1x1x16):** Measurement grid: dx=20mm, dy=20mm, dz=20mm

Maximum value of SAR (interpolated) = 0.884 mW/g

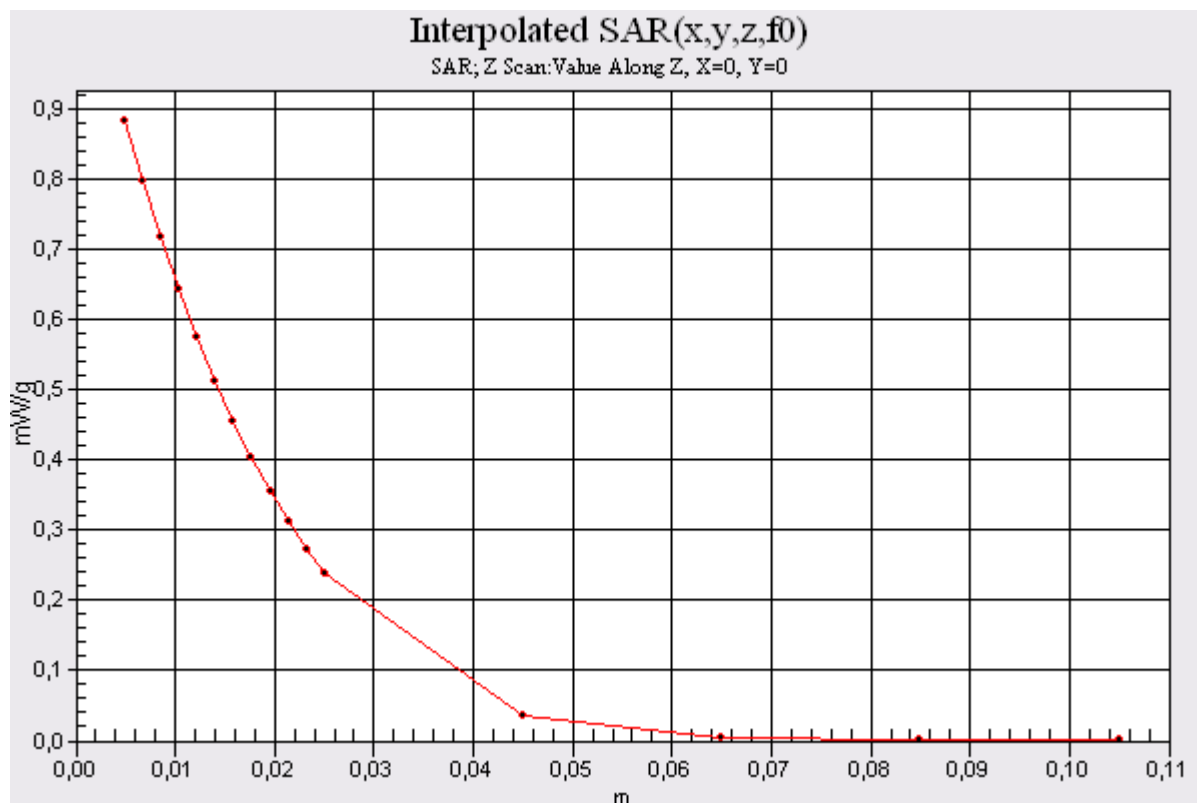



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sony Ericsson Lund**

Certificate No. **D1900V2-5d002\_Jan07**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d002**

Calibration procedure(s) **QA CAL-05.v6  
Calibration procedure for dipole validation kits**

Calibration date: **January 16, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #             | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration |
|----------------------------|------------------|-------------------------------------------|-----------------------|
| Power meter EPM-442A       | GB37480704       | 03-Oct-06 (METAS, No. 217-00608)          | Oct-07                |
| Power sensor HP 8481A      | US37292783       | 03-Oct-06 (METAS, No. 217-00608)          | Oct-07                |
| Reference 20 dB Attenuator | SN: 5086 (20g)   | 10-Aug-06 (METAS, No 217-00591)           | Aug-07                |
| Reference 10 dB Attenuator | SN: 5047.2 (10r) | 10-Aug-06 (METAS, No 217-00591)           | Aug-07                |
| Reference Probe ET3DV6     | SN: 1507         | 19-Oct-06 (SPEAG, No. ET3-1507_Oct06)     | Oct-07                |
| Reference Probe ES3DV3     | SN: 3025         | 19-Oct-06 (SPEAG, No. ES3-3025_Oct06)     | Oct-07                |
| DAE4                       | SN 907           | 20-Jul-06 (SPEAG, No. DAE4-907_Jul06)     | Jul-07                |

| Secondary Standards         | ID #             | Check Date (in house)                    | Scheduled Check        |
|-----------------------------|------------------|------------------------------------------|------------------------|
| Power sensor HP 8481A       | MY41092317       | 18-Oct-02 (SPEAG, in house check Oct-05) | In house check: Oct-07 |
| RF generator Agilent E4421B | MY41000675       | 11-May-05 (SPEAG, in house check Nov-05) | In house check: Nov-07 |
| Network Analyzer HP 8753E   | US37390585 S4206 | 18-Oct-01 (SPEAG, in house check Oct-06) | In house check: Oct-07 |

Calibrated by: **Name: Marcel Fahr, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Katja Pokovc, Function: Technical Manager, Signature: [Signature]**

Issued: January 17, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                           |             |
|-------------------------------------|---------------------------|-------------|
| <b>DASY Version</b>                 | DASY4                     | V4.7        |
| <b>Extrapolation</b>                | Advanced Extrapolation    |             |
| <b>Phantom</b>                      | Modular Flat Phantom V5.0 |             |
| <b>Distance Dipole Center - TSL</b> | 10 mm                     | with Spacer |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm         |             |
| <b>Frequency</b>                    | 1900 MHz $\pm$ 1 MHz      |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | Temperature         | Permittivity   | Conductivity         |
|-----------------------------------------|---------------------|----------------|----------------------|
| <b>Nominal Head TSL parameters</b>      | 22.0 °C             | 40.0           | 1.40 mho/m           |
| <b>Measured Head TSL parameters</b>     | (22.0 $\pm$ 0.2) °C | 38.8 $\pm$ 6 % | 1.43 mho/m $\pm$ 6 % |
| <b>Head TSL temperature during test</b> | (22.0 $\pm$ 0.2) °C | ---            | ---                  |

## SAR result with Head TSL

| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | condition          |                                                  |
|-------------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                                | 250 mW input power | 9.61 mW / g                                      |
| SAR normalized                                              | normalized to 1W   | 38.4 mW / g                                      |
| SAR for nominal Head TSL parameters <sup>1</sup>            | normalized to 1W   | <b>37.4 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | Condition          |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| SAR measured                                                  | 250 mW input power | 5.04 mW / g                                      |
| SAR normalized                                                | normalized to 1W   | 20.2 mW / g                                      |
| SAR for nominal Head TSL parameters <sup>1</sup>              | normalized to 1W   | <b>19.8 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

## Body TSL parameters

The following parameters and calculations were applied.

|                                  | Temperature     | Permittivity | Conductivity     |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters      | 22.0 °C         | 53.3         | 1.52 mho/m       |
| Measured Body TSL parameters     | (22.0 ± 0.2) °C | 51.9 ± 6 %   | 1.55 mho/m ± 6 % |
| Body TSL temperature during test | (21.1 ± 0.2) °C | ---          | ---              |

## SAR result with Body TSL

| SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL | Condition          |                                   |
|-------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                          | 250 mW input power | 9.94 mW / g                       |
| SAR normalized                                        | normalized to 1W   | 39.8 mW / g                       |
| SAR for nominal Body TSL parameters <sup>2</sup>      | normalized to 1W   | <b>38.6 mW / g ± 17.0 % (k=2)</b> |

| SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL | condition          |                                   |
|---------------------------------------------------------|--------------------|-----------------------------------|
| SAR measured                                            | 250 mW input power | 5.24 mW / g                       |
| SAR normalized                                          | normalized to 1W   | 21.0 mW / g                       |
| SAR for nominal Body TSL parameters <sup>2</sup>        | normalized to 1W   | <b>20.6 mW / g ± 16.5 % (k=2)</b> |

---

<sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

## Appendix

### Antenna Parameters with Head TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $51.8 \Omega - 0.3 j\Omega$ |
| Return Loss                          | - 34.9 dB                   |

### Antenna Parameters with Body TSL

|                                      |                             |
|--------------------------------------|-----------------------------|
| Impedance, transformed to feed point | $48.2 \Omega + 2.3 j\Omega$ |
| Return Loss                          | - 30.5 dB                   |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.177 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                   |
|-----------------|-------------------|
| Manufactured by | SPEAG             |
| Manufactured on | February 14, 2002 |

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;


Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.43 \text{ mho/m}$ ;  $\epsilon_r = 38.8$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.97, 4.97, 4.97); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 20.07.2006
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

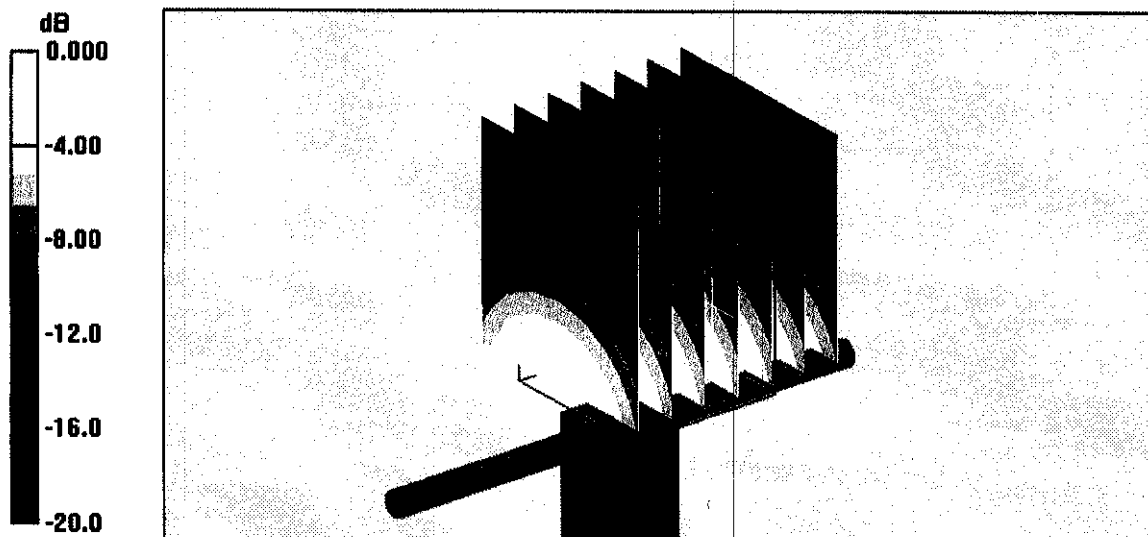**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ Reference Value =  $91.7 \text{ V/m}$ ; Power Drift =  $0.033 \text{ dB}$ Peak SAR (extrapolated) =  $17.0 \text{ W/kg}$ **SAR(1 g) =  $9.61 \text{ mW/g}$ ; SAR(10 g) =  $5.04 \text{ mW/g}$** Maximum value of SAR (measured) =  $11.0 \text{ mW/g}$ 0 dB =  $11.0 \text{ mW/g}$

# Impedance Measurement Plot for Head TSL


9 Jan 2007 11:53:45  
CH1 S11 1 U FS 1: 51.803  $\Omega$  -298.83 m $\Omega$  280.31 pF 1 900.000 000 MHz

\*  
De1

CA

Avg  
16

↑

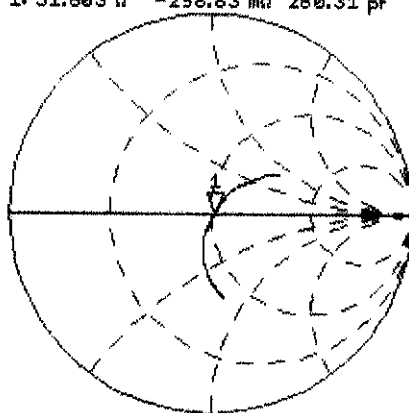


CH2 S11 LOG 4 dB/REF -20 dB 11-34.919 dB 1 900.000 000 MHz

CA

Avg  
16

↑

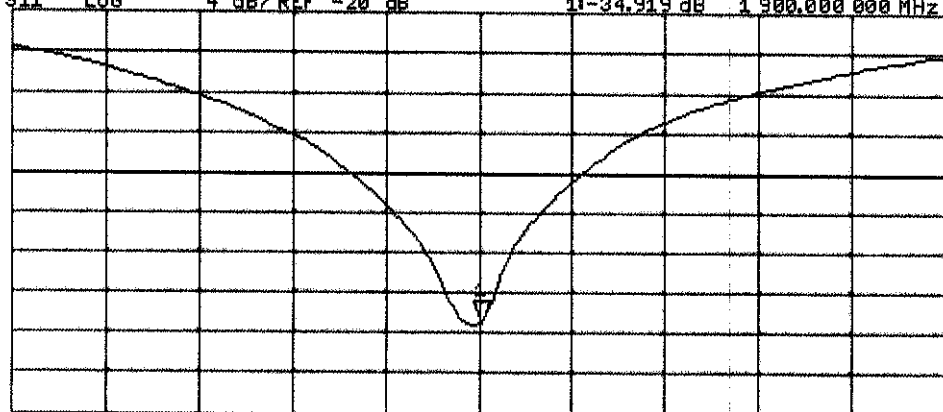

CENTER 1 900.000 000 MHz

SPAN 400.000 000 MHz

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d002**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.55 \text{ mho/m}$ ;  $\epsilon_r = 52.1$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

**DASY4 Configuration:**

- Probe: ET3DV6 - SN1507 (HF); ConvF(4.43, 4.43, 4.43); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn907; Calibrated: 20.07.2006
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; ;
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172


**Pin = 250 mW; d = 10 mm 2/Zoom Scan (7x7x7)/Cube 0:**Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 85.8 V/m; Power Drift = 0.053 dB

Peak SAR (extrapolated) = 17.0 W/kg

**SAR(1 g) = 9.94 mW/g; SAR(10 g) = 5.24 mW/g**



Maximum value of SAR (measured) = 11.3 mW/g

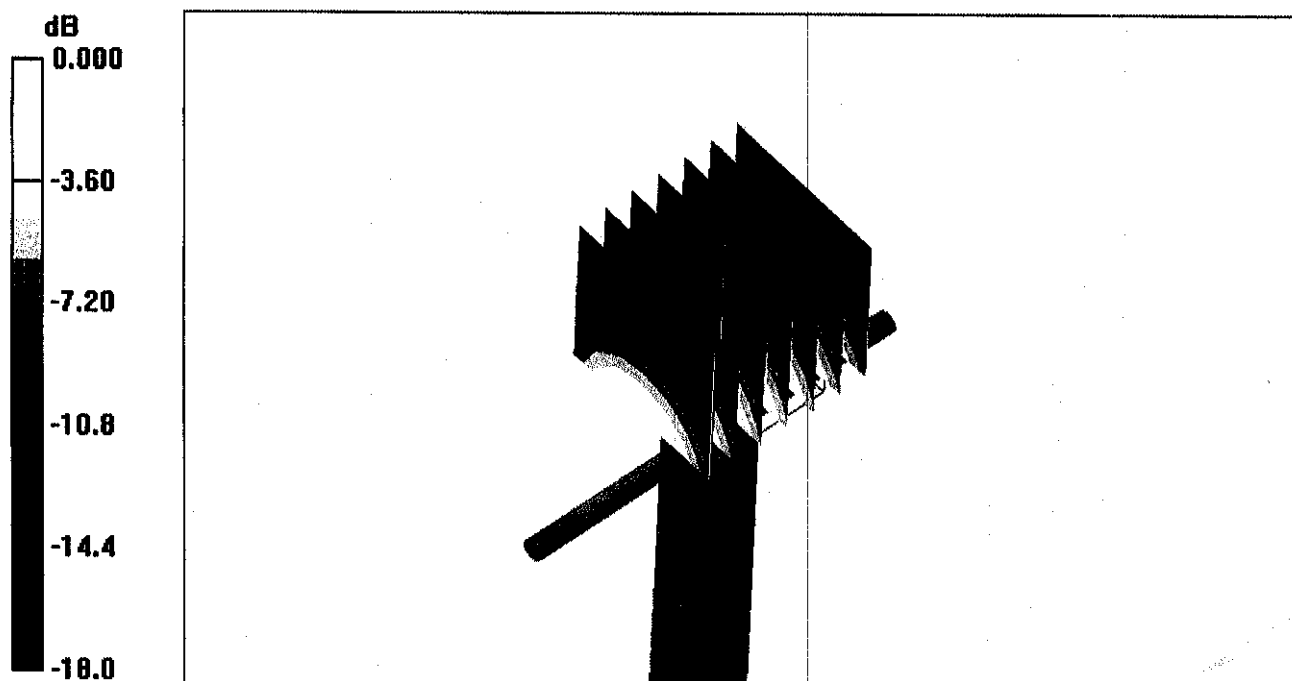

0 dB = 11.3mW/g

# Impedance Measurement Plot for Body TSL

16 Jan 2007 12:04:42  
 CH1 S11 1 U FS 2: 48.154  $\Omega$  2.2793  $\Omega$  190.93 pF 1 900.000 000 MHz

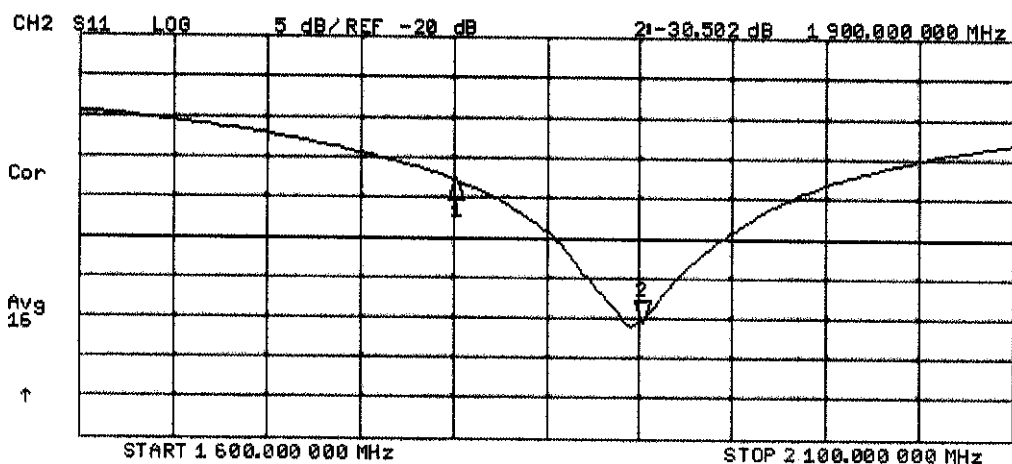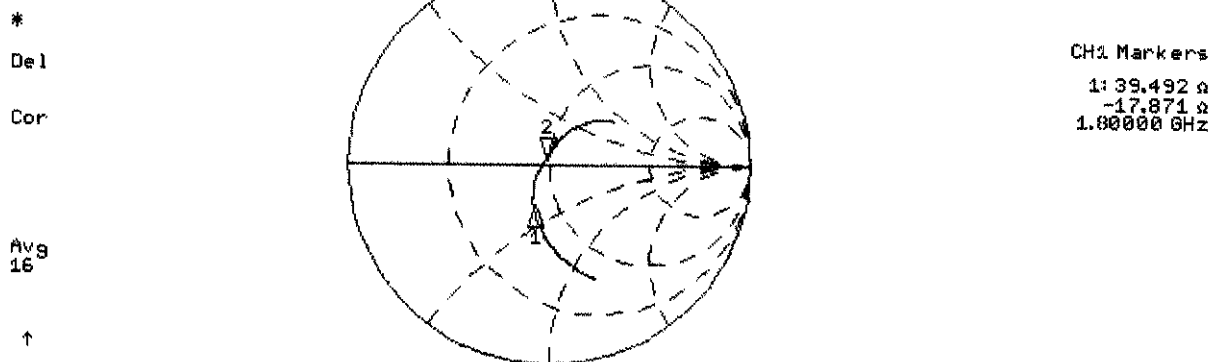



Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **Sony Ericsson Lund**

Certificate No: **D835V2-4d039\_May06**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d039**

Calibration procedure(s) **QA CAL-05.v6**  
**Calibration procedure for dipole validation kits**

Calibration date: **May 31, 2006**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^{\circ}\text{C}$  and humidity  $< 70\%$ .

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards           | ID #             | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|-----------------------------|------------------|-------------------------------------------|------------------------|
| Power meter EPM-442A        | GB37480704       | 04-Oct-05 (METAS, No. 251-00516)          | Oct-06                 |
| Power sensor HP 8481A       | US37292783       | 04-Oct-05 (METAS, No. 251-00516)          | Oct-06                 |
| Reference 20 dB Attenuator  | SN: 5086 (20g)   | 11-Aug-05 (METAS, No 251-00498)           | Aug-06                 |
| Reference 10 dB Attenuator  | SN: 5047.2 (10r) | 11-Aug-05 (METAS, No 251-00498)           | Aug-06                 |
| Reference Probe ET3DV6      | SN 1507          | 28-Oct-05 (SPEAG, No. ET3-1507_Oct05)     | Oct-06                 |
| DAE4                        | SN 601           | 15-Dec-05 (SPEAG, No. DAE4-601_Dec05)     | Dec-06                 |
| Secondary Standards         | ID #             | Check Date (in house)                     | Scheduled Check        |
| Power sensor HP 8481A       | MY41092317       | 18-Oct-02 (SPEAG, in house check Oct-05)  | In house check: Oct-07 |
| RF generator Agilent E4421B | MY41000675       | 11-May-05 (SPEAG, in house check Nov-05)  | In house check: Nov-07 |
| Network Analyzer HP 8753E   | US37390585 S4206 | 18-Oct-01 (SPEAG, in house check Nov-05)  | In house check: Nov-06 |

|                |                           |                                          |               |
|----------------|---------------------------|------------------------------------------|---------------|
| Calibrated by: | Name<br><b>Mike Meili</b> | Function<br><b>Laboratory Technician</b> | Signature<br> |
| Approved by:   | <b>Katja Pokovic</b>      | <b>Technical Manager</b>                 |               |

Issued: June 1, 2006

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

|       |                                 |
|-------|---------------------------------|
| TSL   | tissue simulating liquid        |
| ConvF | sensitivity in TSL / NORM x,y,z |
| N/A   | not applicable or not measured  |

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- d) DASY4 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

|                                     |                           |             |
|-------------------------------------|---------------------------|-------------|
| <b>DASY Version</b>                 | DASY4                     | V4.6        |
| <b>Extrapolation</b>                | Advanced Extrapolation    |             |
| <b>Phantom</b>                      | Modular Flat Phantom V4.9 |             |
| <b>Distance Dipole Center - TSL</b> | 15 mm                     | with Spacer |
| <b>Area Scan resolution</b>         | dx, dy = 15 mm            |             |
| <b>Zoom Scan Resolution</b>         | dx, dy, dz = 5 mm         |             |
| <b>Frequency</b>                    | 835 MHz $\pm$ 1 MHz       |             |

## Head TSL parameters

The following parameters and calculations were applied.

|                                         | <b>Temperature</b>  | <b>Permittivity</b> | <b>Conductivity</b>  |
|-----------------------------------------|---------------------|---------------------|----------------------|
| <b>Nominal Head TSL parameters</b>      | 22.0 °C             | 41.5                | 0.90 mho/m           |
| <b>Measured Head TSL parameters</b>     | (22.0 $\pm$ 0.2) °C | 41.9 $\pm$ 6 %      | 0.90 mho/m $\pm$ 6 % |
| <b>Head TSL temperature during test</b> | (23.0 $\pm$ 0.2) °C | ----                | ----                 |

## SAR result with Head TSL

|                                                             |                    |                                                  |
|-------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b> | condition          |                                                  |
| SAR measured                                                | 250 mW input power | 2.31 mW / g                                      |
| SAR normalized                                              | normalized to 1W   | 9.24 mW / g                                      |
| SAR for nominal Head TSL parameters <sup>1</sup>            | normalized to 1W   | <b>9.29 mW / g <math>\pm</math> 17.0 % (k=2)</b> |

|                                                               |                    |                                                  |
|---------------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b> | condition          |                                                  |
| SAR measured                                                  | 250 mW input power | 1.50 mW / g                                      |
| SAR normalized                                                | normalized to 1W   | 6.00 mW / g                                      |
| SAR for nominal Head TSL parameters <sup>1</sup>              | normalized to 1W   | <b>6.03 mW / g <math>\pm</math> 16.5 % (k=2)</b> |

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

## Body TSL parameters

The following parameters and calculations were applied.

|                                  | Temperature     | Permittivity | Conductivity     |
|----------------------------------|-----------------|--------------|------------------|
| Nominal Body TSL parameters      | 22.0 °C         | 55.2         | 0.97 mho/m       |
| Measured Body TSL parameters     | (22.0 ± 0.2) °C | 56.8 ± 6 %   | 0.98 mho/m ± 6 % |
| Body TSL temperature during test | (23.2 ± 0.2) °C | ----         | ----             |

## SAR result with Body TSL

|                                                             |                    |                                   |
|-------------------------------------------------------------|--------------------|-----------------------------------|
| <b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Body TSL</b> | condition          |                                   |
| SAR measured                                                | 250 mW input power | 2.39 mW / g                       |
| SAR normalized                                              | normalized to 1W   | 9.56 mW / g                       |
| SAR for nominal Body TSL parameters <sup>2</sup>            | normalized to 1W   | <b>9.66 mW / g ± 17.0 % (k=2)</b> |

|                                                               |                    |                                   |
|---------------------------------------------------------------|--------------------|-----------------------------------|
| <b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Body TSL</b> | condition          |                                   |
| SAR measured                                                  | 250 mW input power | 1.56 mW / g                       |
| SAR normalized                                                | normalized to 1W   | 6.24 mW / g                       |
| SAR for nominal Body TSL parameters <sup>2</sup>              | normalized to 1W   | <b>6.31 mW / g ± 16.5 % (k=2)</b> |

<sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"

## Appendix

### Antenna Parameters with Head TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 51.1 $\Omega$ - 2.1 j $\Omega$ |
| Return Loss                          | - 32.5 dB                      |

### Antenna Parameters with Body TSL

|                                      |                                |
|--------------------------------------|--------------------------------|
| Impedance, transformed to feed point | 47.9 $\Omega$ - 3.5 j $\Omega$ |
| Return Loss                          | - 27.6 dB                      |

### General Antenna Parameters and Design

|                                  |          |
|----------------------------------|----------|
| Electrical Delay (one direction) | 1.382 ns |
|----------------------------------|----------|

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

|                 |                    |
|-----------------|--------------------|
| Manufactured by | SPEAG              |
| Manufactured on | September 20, 2005 |

## DASY4 Validation Report for Head TSL

Date/Time: 31.05.2006 10:59:32

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d039**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB\_060425;

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.912 \text{ mho/m}$ ;  $\epsilon_r = 41.8$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(6.09, 6.09, 6.09); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

**Pin = 250 mW; d = 10 mm/Area Scan (71x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) =  $2.44 \text{ mW/g}$


**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $54.1 \text{ V/m}$ ; Power Drift =  $0.031 \text{ dB}$

Peak SAR (extrapolated) =  $3.48 \text{ W/kg}$


**SAR(1 g) =  $2.31 \text{ mW/g}$ ; SAR(10 g) =  $1.5 \text{ mW/g}$**

Maximum value of SAR (measured) =  $2.48 \text{ mW/g}$

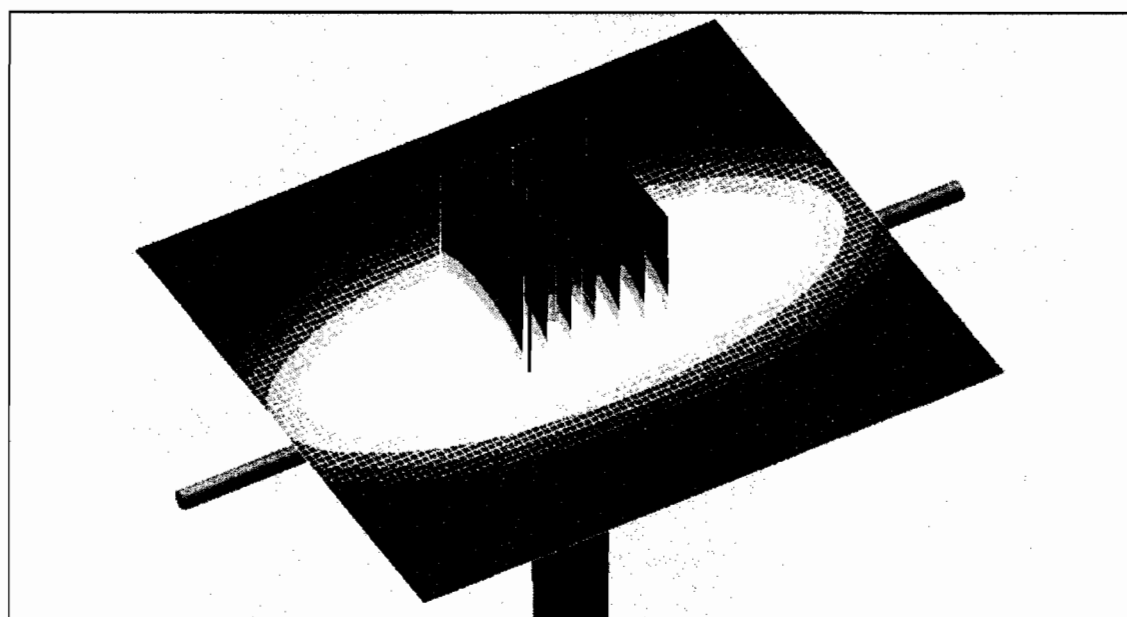

0 dB =  $2.48 \text{ mW/g}$

Impedance Measurement Plot for Head TSL

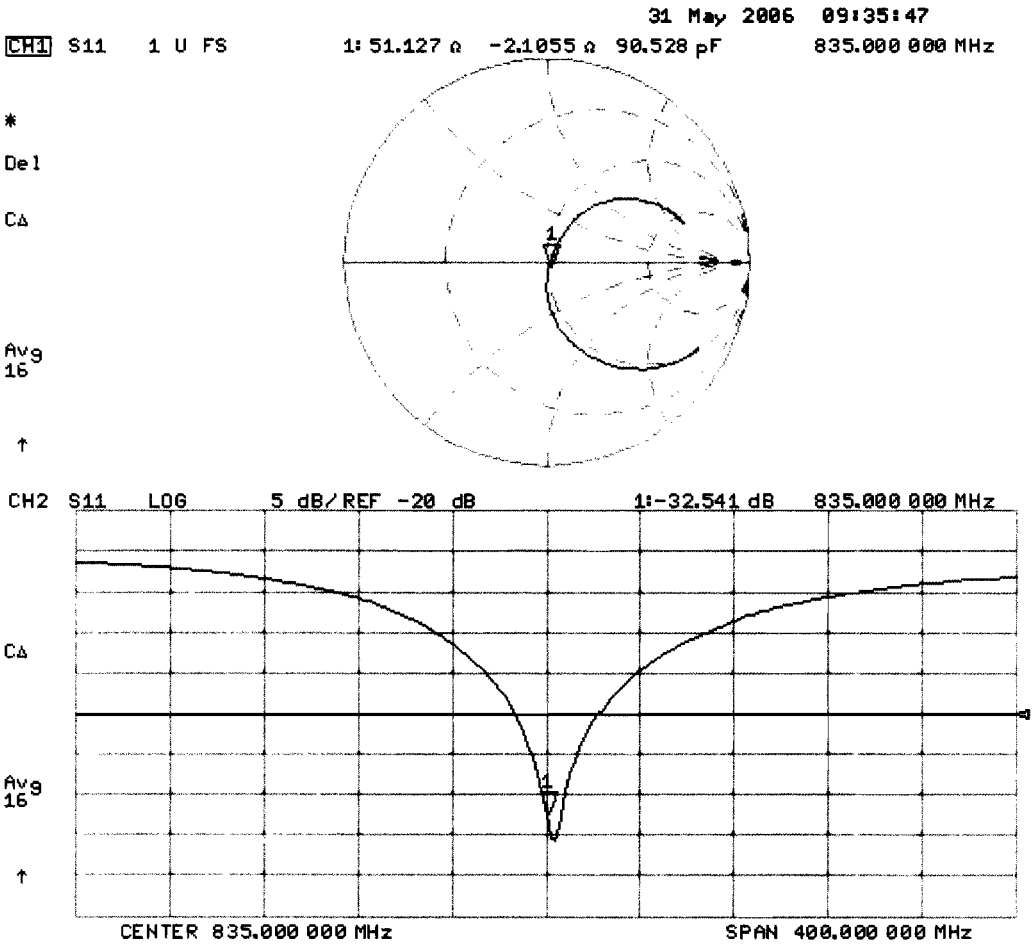

## DASY4 Validation Report for Body TSL

Date/Time: 31.05.2006 13:23:15

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d039**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.997 \text{ mho/m}$ ;  $\epsilon_r = 56.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

### DASY4 Configuration:

- Probe: ET3DV6 - SN1507 (HF); ConvF(5.84, 5.84, 5.84); Calibrated: 28.10.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 15.12.2005
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; ;
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

**Pin = 250 mW; d = 15 mm/Area Scan (81x81x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.59 mW/g


**Pin = 250 mW; d = 15 mm/Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 53.1 V/m; Power Drift = -0.014 dB

Peak SAR (extrapolated) = 3.45 W/kg

**SAR(1 g) = 2.39 mW/g; SAR(10 g) = 1.56 mW/g**

Maximum value of SAR (measured) = 2.58 mW/g

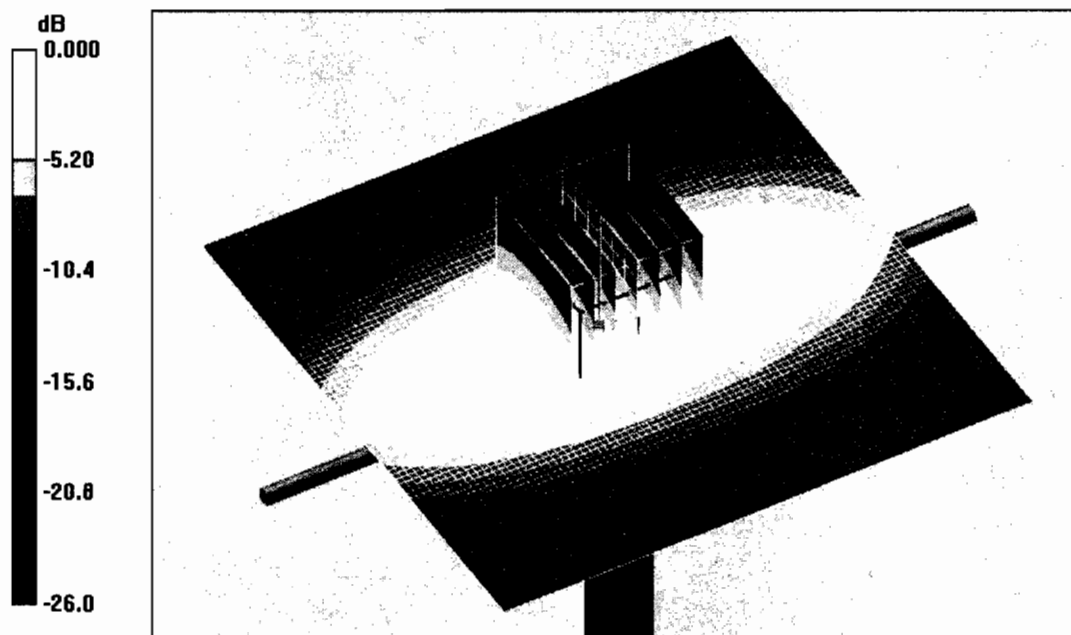


0 dB = 2.58mW/g

Impedance Measurement Plot Body TSL

31 May 2006 12:26:44  
CH1 S11 1 U FS 1: 47.943  $\Omega$  -3.5078  $\Omega$  54.337 pF 835.000 000 MHz

\*  
De1  
CA

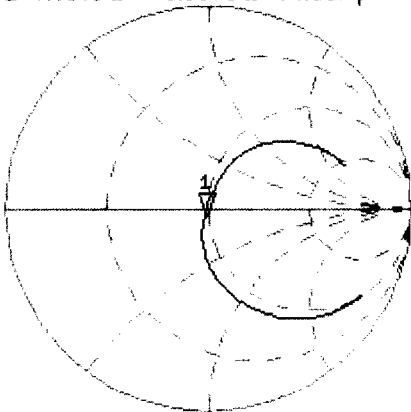

Avg  
16


↑

CH2 S11 LOG 5 dB/REF -20 dB 1:-27.644 dB 835.000 000 MHz

CA

Avg  
16

↑

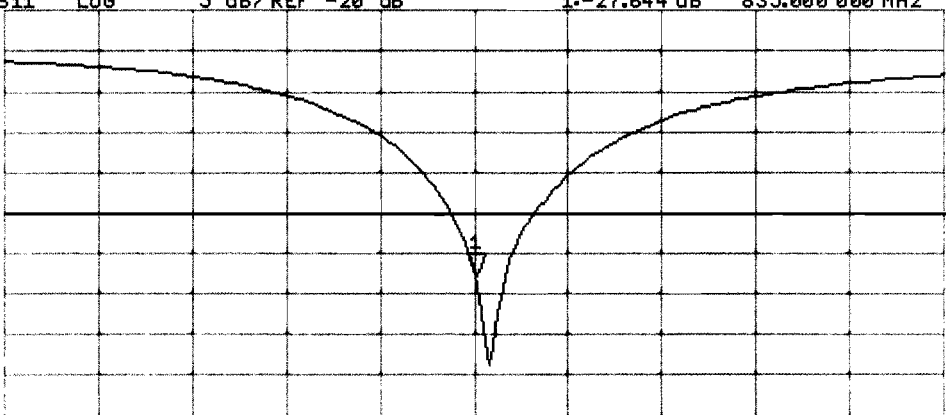

CENTER 835.000 000 MHz

SPAN 400.000 000 MHz



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client **Sony Ericsson Lund** Certificate No. **ET3-1815\_Jan07**

CALIBRATION CERTIFICATE

Object **ET3DV6 - SN: 1815**

Calibration procedure(s) **QA CAL-01 v5  
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 16, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID #            | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|----------------------------|-----------------|-------------------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 5-Apr-06 (METAS, No. 251-00557)           | Apr-07                 |
| Power sensor E4412A        | MY41495277      | 5-Apr-06 (METAS, No. 251-00557)           | Apr-07                 |
| Power sensor E4412A        | MY41498087      | 5-Apr-06 (METAS, No. 251-00557)           | Apr-07                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 10-Aug-06 (METAS, No. 217-00592)          | Aug-07                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 4-Apr-06 (METAS, No. 251-00558)           | Apr-07                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 10-Aug-06 (METAS, No. 217-00593)          | Aug-07                 |
| Reference Probe ES3DV2     | SN: 3013        | 4-Jan-07 (SPEAG, No. ES3-3013_Jan07)      | Jan-08                 |
| DAE4                       | SN: 654         | 21-Jun-06 (SPEAG, No. DAE4-654_Jun06)     | Jun-07                 |
| Secondary Standards        | ID #            | Check Date (in house)                     | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (SPEAG, in house check Nov-05)   | In house check: Nov-07 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (SPEAG, in house check Oct-06)  | In house check: Oct-07 |

|                |               |                   |           |
|----------------|---------------|-------------------|-----------|
|                | Name          | Function          | Signature |
| Calibrated by: | Karla Pokorny | Technical Manager |           |
| Approved by:   | Niels Kuster  | Quality Manager   |           |

Issued: January 16, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Federal Office of Metrology and Accreditation  
 The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary:

|                          |                                                                                                                                                      |
|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| TSL                      | tissue simulating liquid                                                                                                                             |
| NORM <sub>x,y,z</sub>    | sensitivity in free space                                                                                                                            |
| ConF                     | sensitivity in TSL / NORM <sub>x,y,z</sub>                                                                                                           |
| DCP                      | diode compression point                                                                                                                              |
| Polarization $\varphi$   | $\varphi$ rotation around probe axis                                                                                                                 |
| Polarization $\vartheta$ | $\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis |

## Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

## Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>:** Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the  $E^2$ -field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>:** DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters:** Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy):** in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:** The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe ET3DV6

## SN:1815

|                  |                   |
|------------------|-------------------|
| Manufactured:    | February 27, 2004 |
| Last calibrated: | January 20, 2006  |
| Recalibrated:    | January 16, 2007  |

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

## DASY - Parameters of Probe: ET3DV6 SN:1815

### Sensitivity in Free Space<sup>A</sup>

### Diode Compression<sup>B</sup>

|       |                     |                                     |       |              |
|-------|---------------------|-------------------------------------|-------|--------------|
| NormX | <b>1.93</b> ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP X | <b>90</b> mV |
| NormY | <b>1.97</b> ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Y | <b>93</b> mV |
| NormZ | <b>2.07</b> ± 10.1% | $\mu\text{V}/(\text{V}/\text{m})^2$ | DCP Z | <b>96</b> mV |

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

**TSL**                      **900 MHz**      **Typical SAR gradient: 5 % per mm**

|                                           |                              |               |               |
|-------------------------------------------|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance |                              | <b>3.7 mm</b> | <b>4.7 mm</b> |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 5.0           | 2.3           |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.0           | 0.0           |

**TSL**                      **1750 MHz**      **Typical SAR gradient: 10 % per mm**

|                                           |                              |               |               |
|-------------------------------------------|------------------------------|---------------|---------------|
| Sensor Center to Phantom Surface Distance |                              | <b>3.7 mm</b> | <b>4.7 mm</b> |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 6.8           | 3.9           |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.1           | 0.3           |

### Sensor Offset

Probe Tip to Sensor Center                      **2.7 mm**


The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the  $E^2$ -field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.




# Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

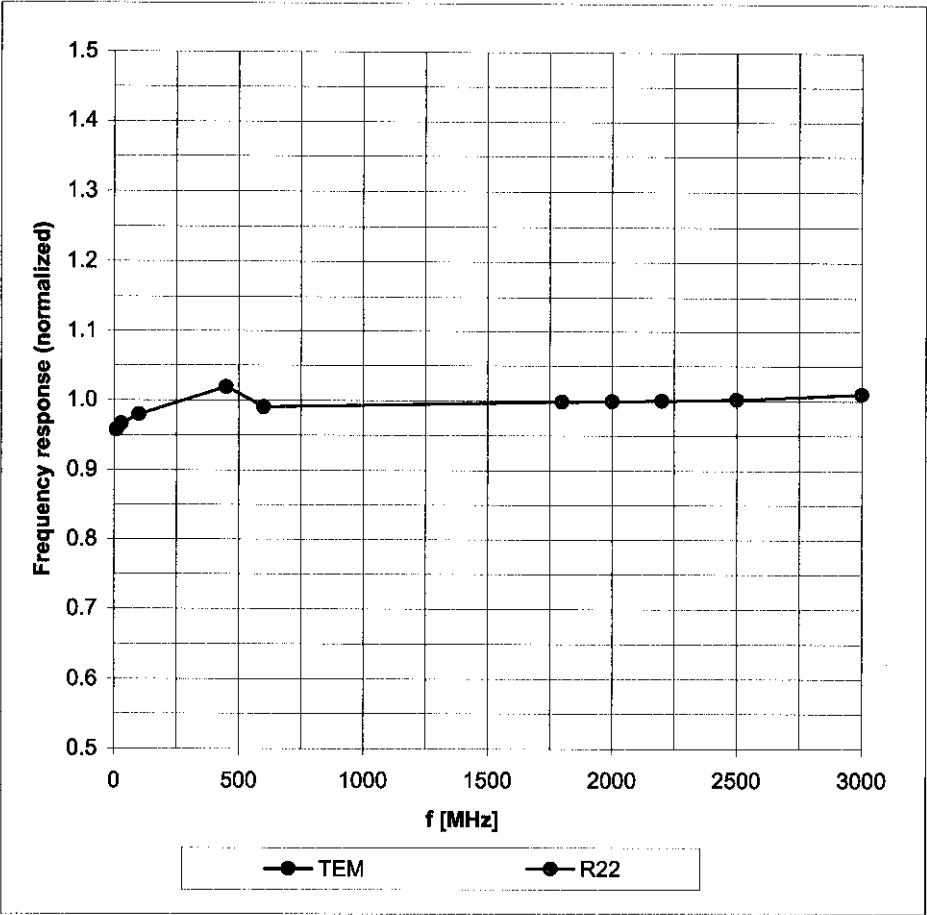


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )

Receiving Pattern ( $\phi$ ),  $\vartheta = 0^\circ$

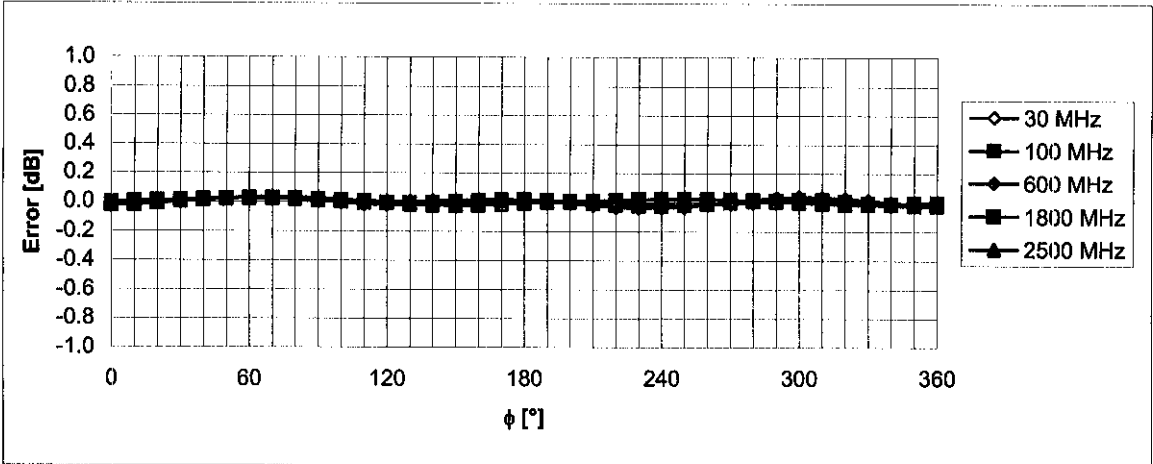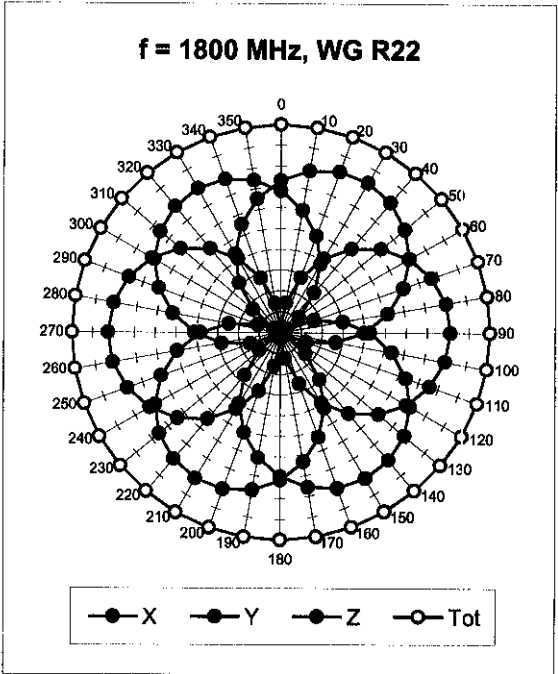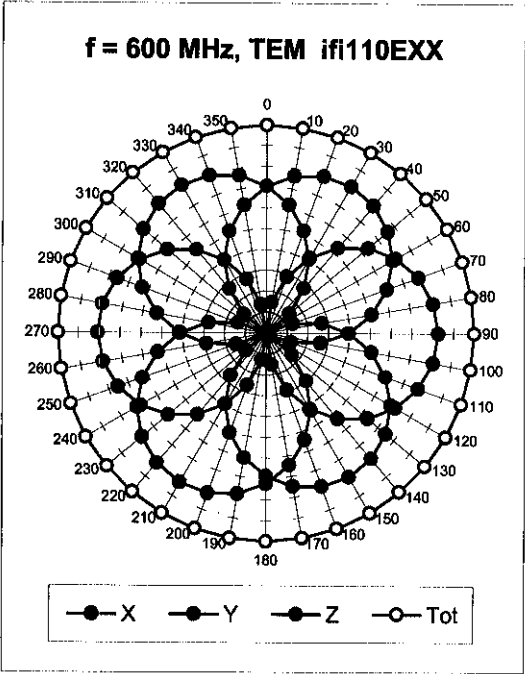


Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

**Dynamic Range  $f(\text{SAR}_{\text{head}})$**   
(Waveguide R22,  $f = 1800 \text{ MHz}$ )

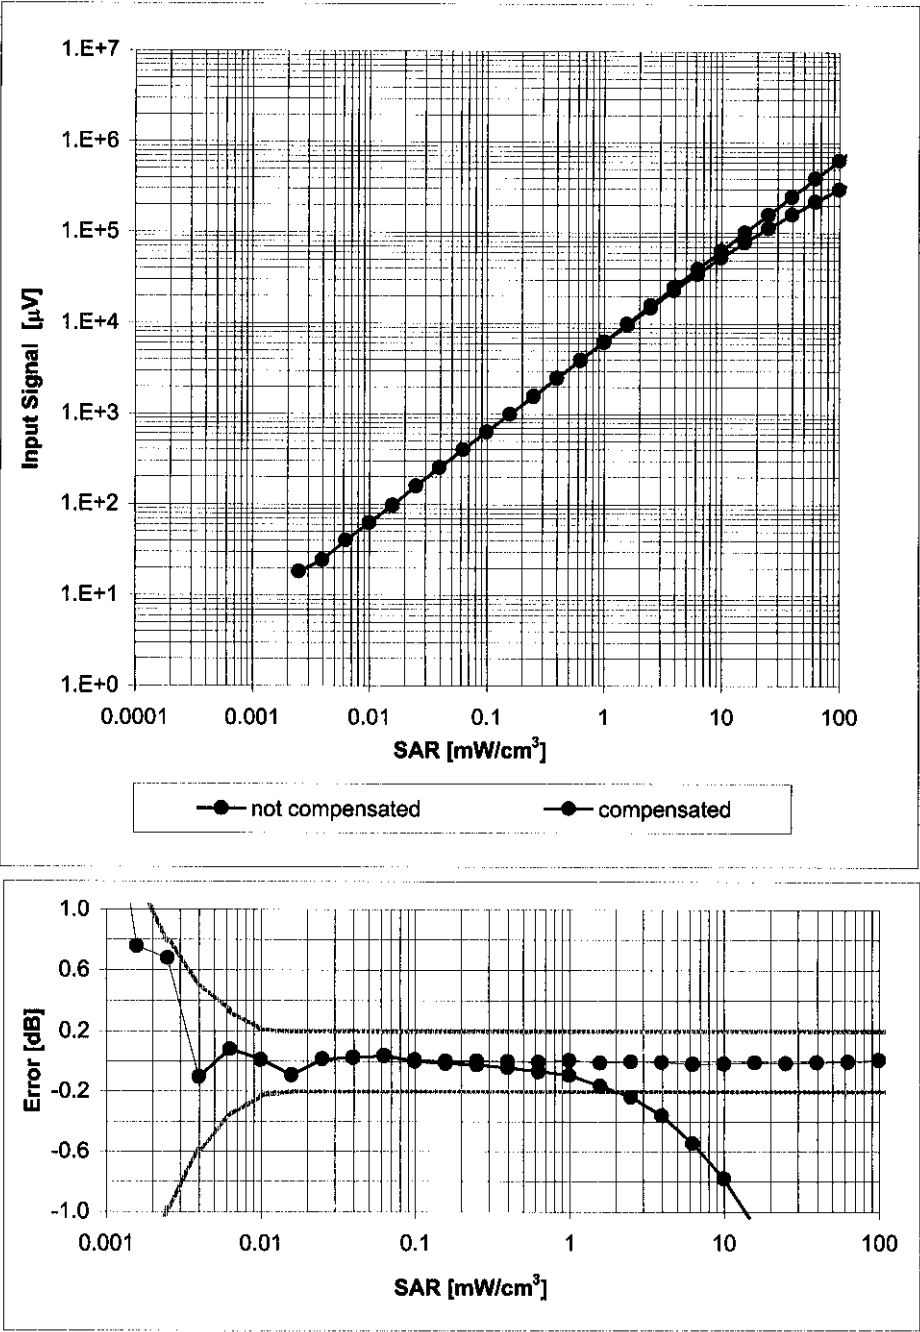

Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )


Conversion Factor Assessment

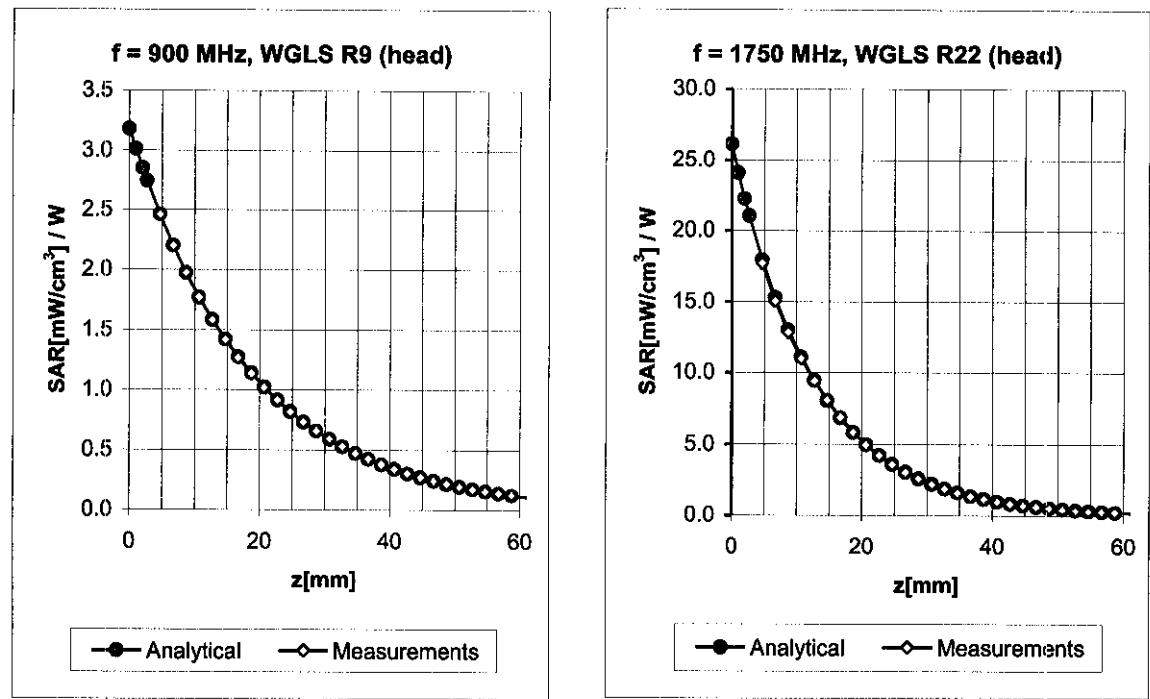

| f [MHz] | Validity [MHz] <sup>c</sup> | TSL  | Permittivity | Conductivity | Alpha | Depth | ConvF Uncertainty  |
|---------|-----------------------------|------|--------------|--------------|-------|-------|--------------------|
| 835     | ± 50 / ± 100                | Head | 41.5 ± 5%    | 0.90 ± 5%    | 0.27  | 2.57  | 6.79 ± 11.0% (k=2) |
| 900     | ± 50 / ± 100                | Head | 41.5 ± 5%    | 0.97 ± 5%    | 0.28  | 2.64  | 6.73 ± 11.0% (k=2) |
| 1750    | ± 50 / ± 100                | Head | 40.1 ± 5%    | 1.37 ± 5%    | 0.48  | 2.54  | 5.36 ± 11.0% (k=2) |
| 1900    | ± 50 / ± 100                | Head | 40.0 ± 5%    | 1.40 ± 5%    | 0.52  | 2.59  | 5.21 ± 11.0% (k=2) |
| 2450    | ± 50 / ± 100                | Head | 39.2 ± 5%    | 1.80 ± 5%    | 0.65  | 2.05  | 4.71 ± 11.8% (k=2) |
|         |                             |      |              |              |       |       |                    |
| 835     | ± 50 / ± 100                | Body | 55.2 ± 5%    | 0.97 ± 5%    | 0.25  | 2.85  | 6.86 ± 11.0% (k=2) |
| 900     | ± 50 / ± 100                | Body | 55.0 ± 5%    | 1.05 ± 5%    | 0.28  | 2.87  | 6.50 ± 11.0% (k=2) |
| 1750    | ± 50 / ± 100                | Body | 53.4 ± 5%    | 1.49 ± 5%    | 0.50  | 2.87  | 4.97 ± 11.0% (k=2) |
| 1900    | ± 50 / ± 100                | Body | 53.3 ± 5%    | 1.52 ± 5%    | 0.65  | 2.45  | 4.75 ± 11.0% (k=2) |
| 2450    | ± 50 / ± 100                | Body | 52.7 ± 5%    | 1.95 ± 5%    | 0.66  | 1.82  | 4.16 ± 11.8% (k=2) |

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

**Deviation from Isotropy in HSL**  
Error ( $\phi$ ,  $\vartheta$ ),  $f = 900 \text{ MHz}$

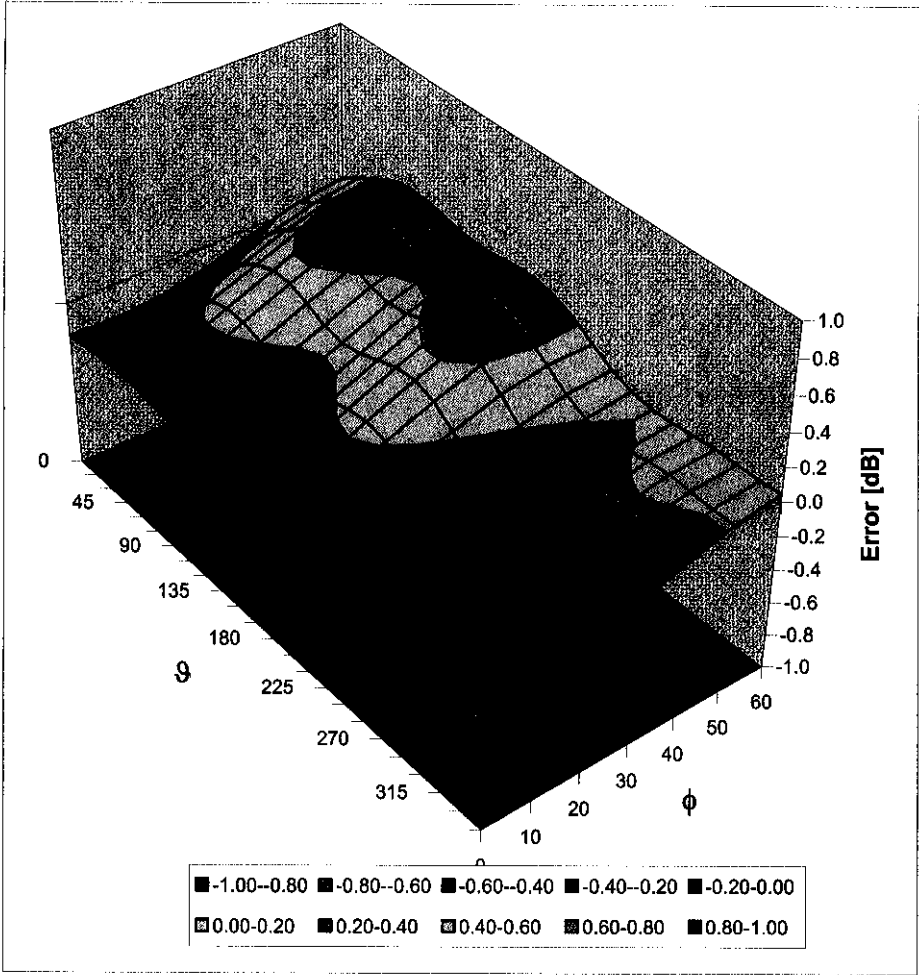

**Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )**