

Recognized by the  
Federal Communications Commission  
**Anechoic chamber registration no.: 90462 (FCC)**  
**Anechoic chamber registration no.: IC 3463A-1**  
TCB ID: DE 0001



Accredited by the  
German Accreditation Council  
DAR-Registration Number  
DAT-P-176/94-D1



Accredited Bluetooth<sup>®</sup> Test Facility (BQTF)

**Test report no.** : 2-4576-42-04/07  
**Applicant** : Sony Ericsson Mobile  
Communications AB  
**Type** : AAD-3624021-BV  
**Test Standard** : FCC Part 15.225  
RSS210 Issue 7  
**FCC ID** : PY7A3624021  
**Certification No. IC** : 4170B-A3624021

*The Bluetooth word mark and logos are owned by the Bluetooth SIG,  
Inc. and any use of such marks by Cetecom ICT is under license*

## **Table of contents**

<b>1</b>	<b>GENERAL INFORMATION.....</b>	<b>3</b>
1.1.	ADMINISTRATIVE DATA OF THE TEST FACILITY .....	3
1.1.1	<i>Identification of the testing laboratory</i> .....	3
1.2.	NOTES .....	3
1.3	DETAILS OF APPLICANT.....	4
1.4	APPLICATION DETAILS .....	4
1.5	DETAILS OF TEST ITEM AND ADDITIONAL EUT INFORMATION FOR IC CANADA (APPENDIX 2) .....	5
1.5.1	<i>Test conditions testing</i> .....	6
1.6	TEST SETUP .....	6
1.7	TEST SPECIFICATIONS.....	6
<b>2</b>	<b>STATEMENT OF COMPLIANCE.....</b>	<b>7</b>
2.1	SUMMARY OF MEASUREMENT RESULTS.....	7
2.1.1	<i>CFR 47 Part 15 Radio frequency devices</i> .....	7
<b>3</b>	<b>MEASUREMENTS AND RESULTS .....</b>	<b>8</b>
<b>4</b>	<b>FCC PART 15 SUBPART C.....</b>	<b>9</b>
4.1	<i>Timing of the transmitter</i> .....	9
4.2	<i>Field strength of the fundamental</i> .....	10
4.3	<i>Field strength of the harmonics and the spurious</i> .....	11
4.4	<i>Frequency tolerance</i> .....	16
4.5	<i>Conducted Limits</i> .....	17
<b>5</b>	<b>USED TESTEQUIPMENT.....</b>	<b>18</b>
<b>6</b>	<b>ANNEX B: PHOTOGRAPHS OF TEST SITE .....</b>	<b>21</b>
<b>6</b>	<b>ANNEX C: EXTERNAL PHOTOGRAPHS OF THE EQUIPMENT .....</b>	<b>24</b>
<b>7</b>	<b>ANNEX D: INTERNAL PHOTOGRAPHS OF THE EQUIPMENT.....</b>	<b>27</b>

## 1 General information

### 1.1 Administrative data of the test facility

#### 1.1.1 Identification of the testing laboratory

Company name:	Cetecom ICT Services GmbH
Address:	Untertürkheimerstr. 6-10 D-66117 Saarbruecken Germany
Laboratory accreditation:	DAR-Registration No. DAT-P-176/94-D1 Bluetooth Qualification Test Facility (BQTF) Federal Communications Commission (FCC)
Responsible for testing laboratory:	Identification/Registration No : 90462 Harro Ames Phone: +49 681 598 0 Fax: +49 681 598 9075 email: info@ict.cetecom.de

### 1.2 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.



.....  
Responsible for testing laboratory  
(Harro Ames)



.....  
Responsible for test report  
(Michael Berg)

## 1.3 Details of Applicant

Name:	Sony Ericsson Mobile Communications AB
Street:	Nya Vattentorget
Town:	22188 Lund
Country:	Sweden
Telephone:	+46-46-19-3000
Fax:	+46-46-19-3295
Contact:	Peter Lindeborg
E-mail:	peter.lindeborg@sonyericsson.com
Telephone:	+46-46-212-6180

## 1.4 Application Details

Date of receipt of application	: 2007-11-12
Date of receipt of test item	: 2007-11-12
Date(s) of test	: 2007-11-12 to 2007-11-13
Date of report	: 2007-11-19

## 1.5 Details of Test Item and Additional EUT information for IC Canada (appendix 2)

Type of equipment	:	Mobile phone with nearfield communication
Model name	:	AAD-3624021-BV
<b>Details of Manufacturer</b>		
Company	:	Sony Ericsson Mobile Communications AB
Address	:	Nya Vattentorget
City	:	22188 Lund
Country	:	Sweden
Tested to Radio Standards Specification(RSS) No.	:	210 Issue 7
Open Area Test Site Industry Canada Number	:	IC 3463A-1
Temperature Range	:	-20 °C to +55 °C
Frequency Range (or fixed frequency)	:	13.56 MHz
Field Strength (at what distance)	:	6.5 µV/m ( 16.3 dBµV/m) in 30m
Occupied Bandwidth (99% BW)	:	1 kHz
Type of Modulation	:	A1D
Antenna Information	:	build-in loop antenna
Emission Designator	:	1K00A1D
Transmitter Spurious (worst case)	:	-.-
IC Reg. no.	:	4170B-A3624021
FCC ID	:	PY7A3624021

### ATTESTATION:

**DECLARATION OF COMPLIANCE:** I declare that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

### Laboratory Manager :

2007-11-19 Harro Ames



Date

Name

Signature

## 1.5.1 Test conditions testing

Description	Shortcut	Unit	Value
Nominal Temperature / humidity	T <sub>nom</sub>	°C / %	+23 / 47
Low Temperature	T <sub>low</sub>	°C	-20
High Temperature	T <sub>high</sub>	°C	+55
Nominal Power Source	V <sub>nom</sub>	V	4.0

Type of powersource: V DC

## 1.6 Test Setup

Hardware	:	A
Software	:	
Serial number	:	

## 1.7 Test Specifications

<b>FCC:</b>	CFR Part 15 – Radio Frequency Devices CFR Part 15.209 – Radiated emission limits. CFR Part 15.207 – Conducted limits CFR Part 15.225
<b>IC:</b>	RSS 210, Issue 7 Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

## 2 Statement of Compliance

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

### 2.1 Summary of Measurement Results

#### 2.1.1 CFR 47 Part 15 Radio frequency devices

Section in this Report	Test Name / Section FCC Part 15	Test Name / Section RSS 210	applicable	Verdict
4.1	§ 15.35 (c) Timing of the transmitter (Duty cycle correction factor )	6.5 Pulsed Operation	NO	
4.2	§ 15.225 (a) FIELDSTRENGTH OF FUNDAMENTAL	Annex 2.6	YES	pass
4.3	§ 15.225 (b,c,d) FIELDSTRENGTH OF HARMONICS and SPURIOUS	Annex 2.6	YES	pass
4.4	§ 15.225 (e) Frequency tolerance	Annex 2.6	YES	pass
4.5	§ 15.107 / 15.207 Conducted Limits	Section 6.6 , 7.4	YES	pass

## 3 Measurements and results

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 1 GHz in semi-anechoic chambers or free field. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas conform with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas conform with ANSI C63.2-1996 item 15.

150 kHz - 30 MHz: Quasi Peak measurement, 9kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120KHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120KHz Bandwidth, log periodic antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.209 and 15.207

## 4 FCC Part 15 Subpart C

### 4.1 Timing of the transmitter

**Not applicable**

#### Reference

FCC:	CFR Part SUBCLAUSE § 15.35 (c)
IC:	RSS 210, ISSUE 7 Pulsed operation

#### Limits: § 15.35 (c)

<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>
---

## 4.2 Field strength of the fundamental

### Reference

FCC:	CFR Part SUBCLAUSE § 15.225 (a)
IC:	RSS 210, Annex 2.6

Maximum output power (quasi peak) - (radiated)

Measured at 30cm distance, recalculated to 30m according to FCC part15.31 ( f2) (80 dB)

TEST CONDITIONS		MAXIMUM POWER (dB $\mu$ V/m)	
Frequency		13.56 MHz	13.56 MHz
		@ 30cm	Calculated @ 30m
T <sub>nom</sub> +23 °C	84.0 dB $\mu$ V/m @ 30m	96.34	16.34
Measurement uncertainty		±3dB	

RBW/VBW : 200 Hz up to 150 kHz, 9 kHz up to 30 MHz, 120 kHz up to 1 GHz

### Limits

### SUBCLAUSE § 15.225 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental ( $\mu$ V/m)	Measurement Distance (meters)
13.553 to 13.567	15848 $\mu$ V/m (84 dB $\mu$ V/m)	30
	158489 $\mu$ V/m ( 164 dB $\mu$ V/m)	0.3
		Recalculated acc. to FCC part15.31 (f2)

## 4.3 Field strength of the harmonics and the spurious

### Reference

FCC:	CFR Part SUBCLAUSE § 15.209 (a)
IC:	RSS 210, Annex 2.6

EMISSION LIMITATIONS					
f (MHz)		amplitude of emission (dB $\mu$ V/m) Average/QP	limit max. allowed field strength		results
13.56		16.34 Peak	84.0 QP	Operating frequency	pass
no		other peaks	found		
Measurement uncertainty			± 3dB		

RBW/VBW : 200 Hz up to 150 kHz, 9 kHz up to 30 MHz, 120 kHz up to 1 GHz

### Limits


### SUBCLAUSE § 15.209 (a)

Fundamental Frequency (MHz)	Field strength of Fundamental ( $\mu$ V/m)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30 (29.5 dB $\mu$ V/m)	30
30.0 – 88.0	100 (40 dB $\mu$ v/m)	3
88 – 216	150 (43.5 dB $\mu$ V/m)	3
216 – 960	200 (46 dB $\mu$ V/m)	3

## Plots of measurements

Plot 1:

### Part 15.209 Magnetics

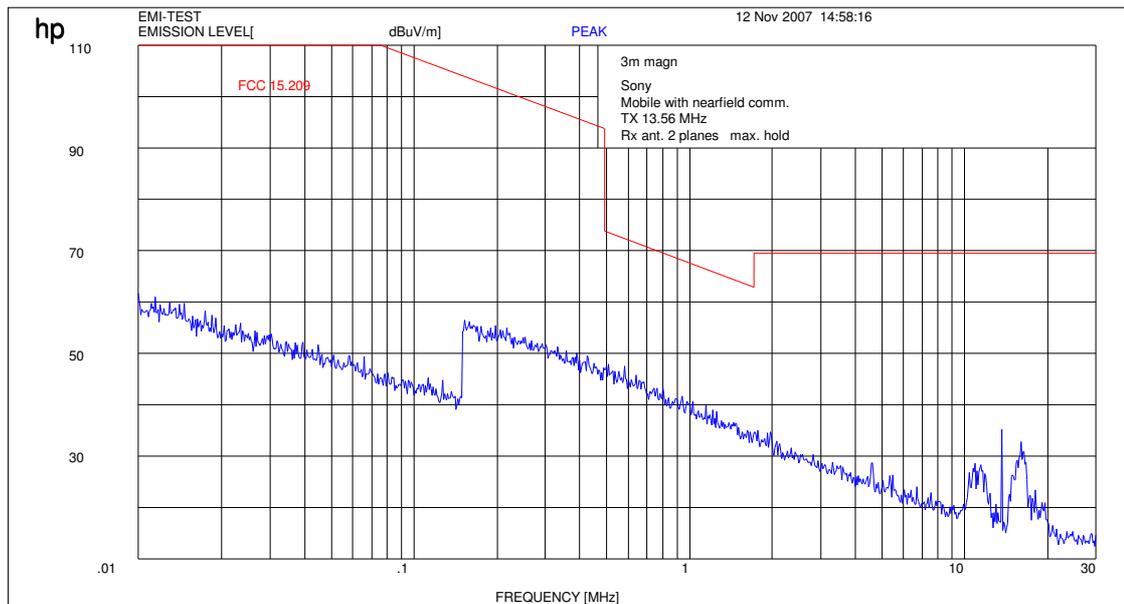

RBW/VBW : 200 Hz up to 150 kHz, 9 kHz up to 30 MHz, 120 kHz up to 1 GHz

**(to convert the measuring distance from 3m to 30m and 30 to 300m a correction factor from 40 dB/decade was used. Here we use 80 dB to recalculate from 3m to 300m)**

Measurement distance 3 m

This measurement was done in 3 planes, the plot shows the worst case


### Limits

### SUBCLAUSE § 15.209

Frequency (MHz)	Field strength ( $\mu\text{V/m}$ )	Measurement distance (m)
0.0009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 - 30	30 (29.5 dB $\mu\text{V/m}$ )	30
30 - 88	100 (40 dB $\mu\text{V/m}$ )	3
88 - 216	150 (43.5 dB $\mu\text{V/m}$ )	3
216 - 960	200 (46 dB $\mu\text{V/m}$ )	3

Plot 2:


TX (30 MHz to 1 GHz)

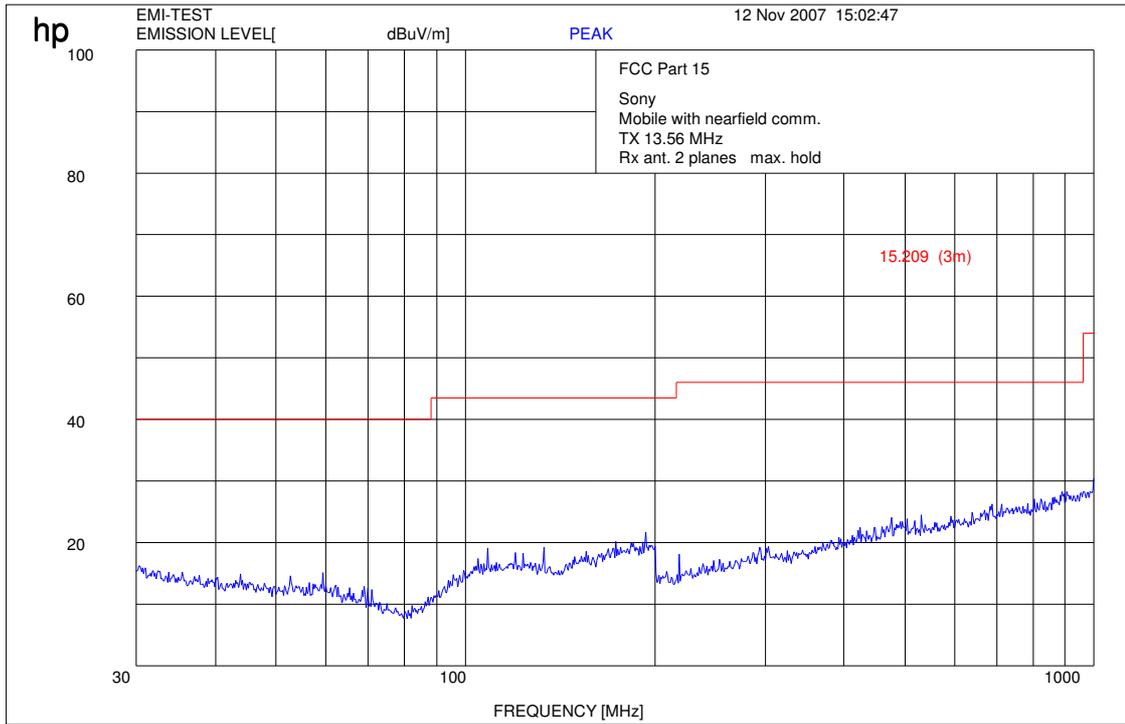

## Plot 3

### Spectrum mask part 15.225 (a,b,c,d)

Limits recalculated from 30cm to 30m with 40 dB/decade according to FCC 15.31 (f2)

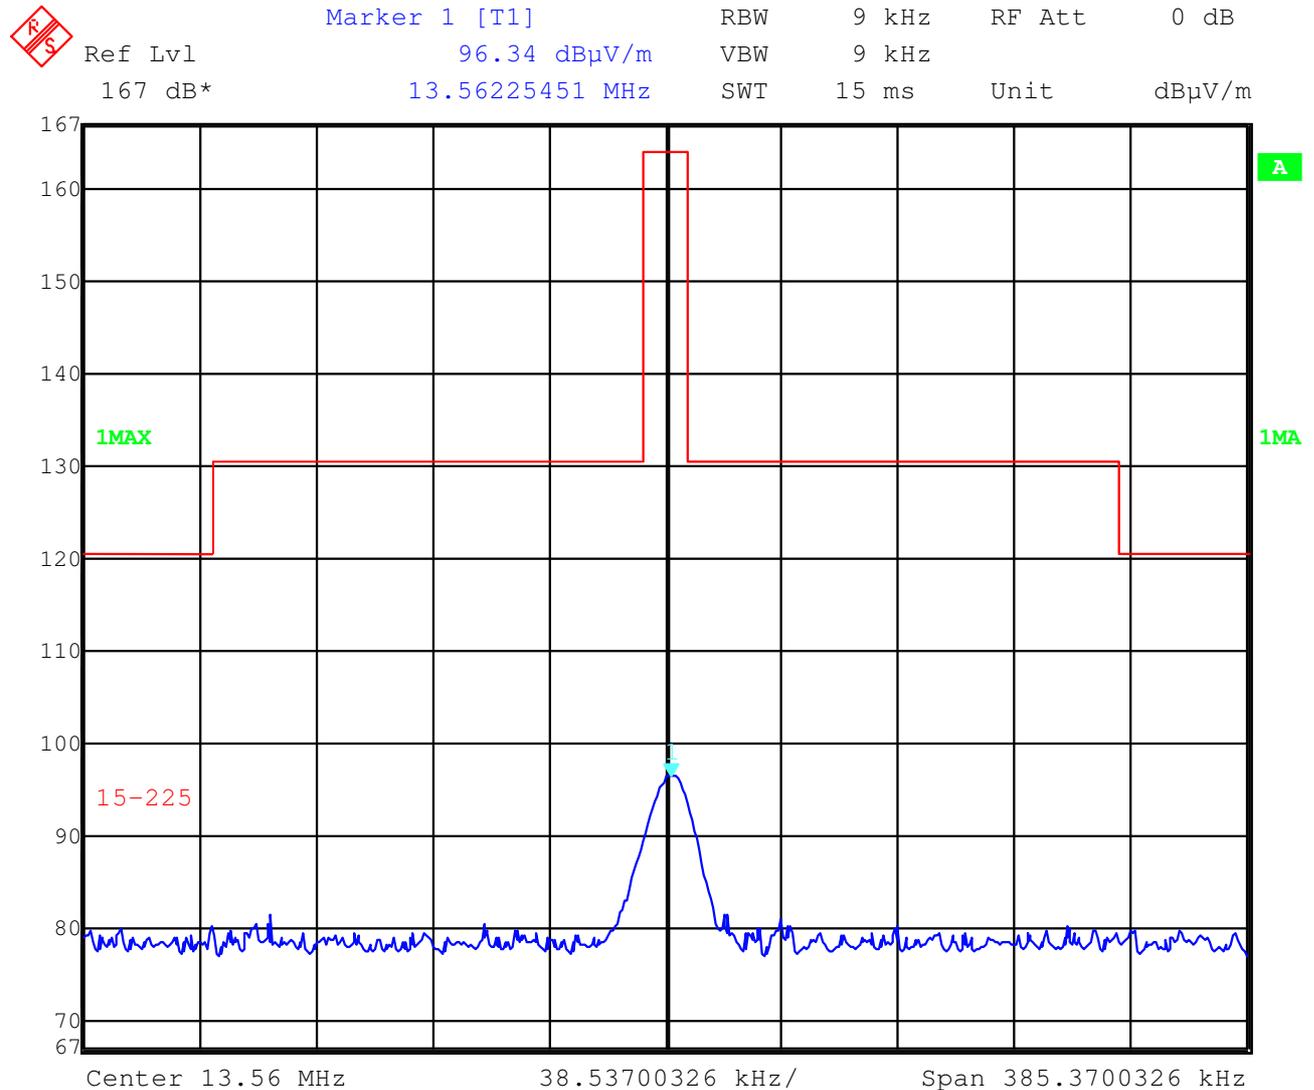


Date: 12.NOV.2007 13:19:29

RBW /VBW 9 kHz

The transmitter holds the requirements of FCC 15.225 (a,b,c and d)

## Spectrum mask part15.225 (a,b,c,d) , wider span

 Marker 1 [T1] RBW 9 kHz RF Att 0 dB  
Ref Lvl 96.33 dB $\mu$ V/m VBW 9 kHz  
167 dB\* 13.56279650 MHz SWT 70 ms Unit dB $\mu$ V/m

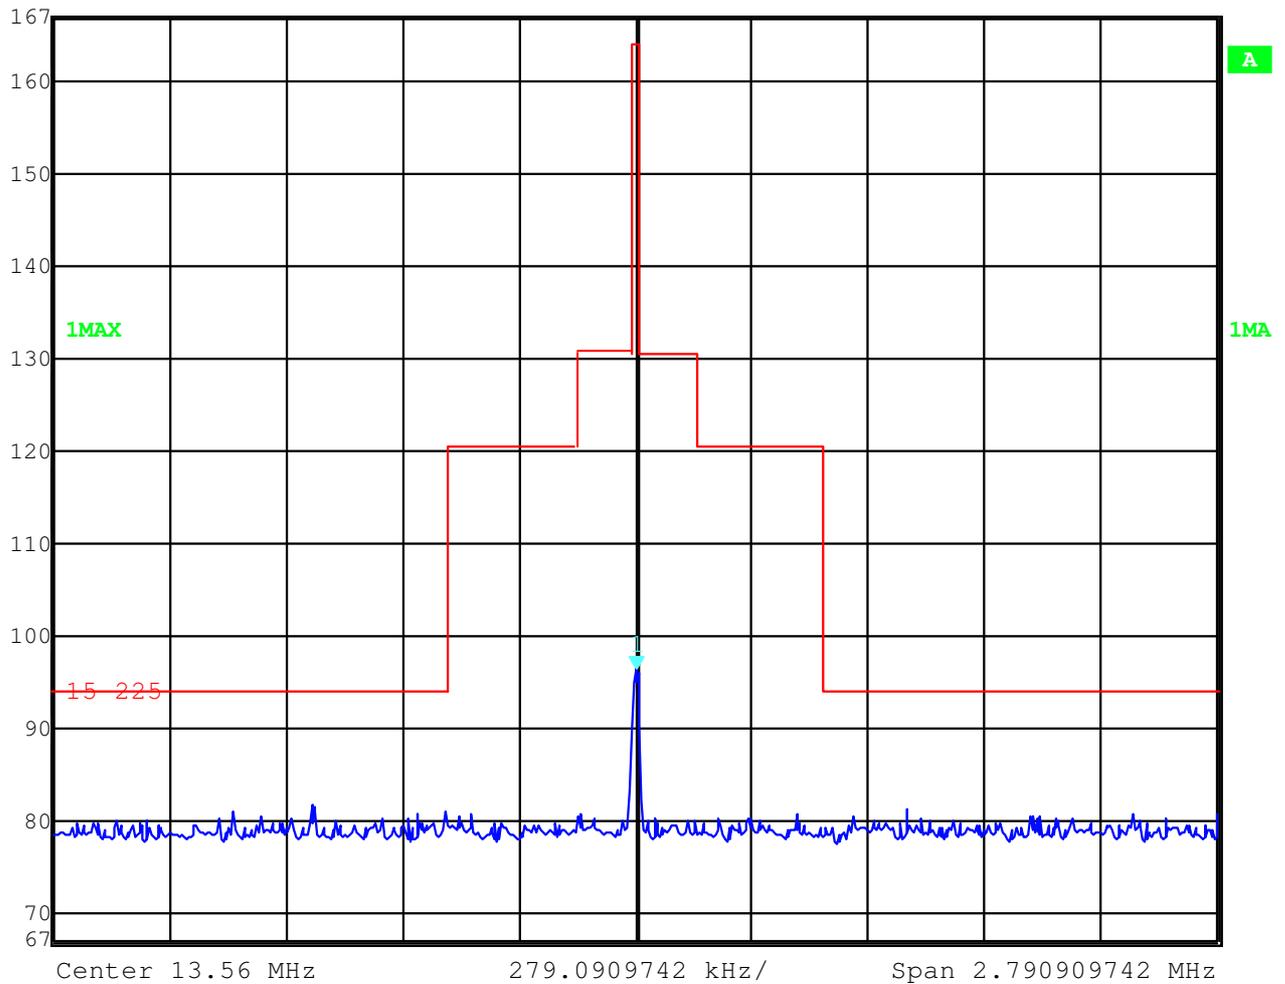

Date: 12.NOV.2007 13:20:48

## 4.4 Frequency tolerance

### Reference

FCC:	CFR Part SUBCLAUSE § 15.225 (e)
IC:	RSS 210, Annex 2.6

### measured with a dummy battery adapter

Frequency tolerance								
Over temperature variation			Over voltage variation			MHz		
Limit is +/- 1.356 kHz			Limit is +/- 1.356 kHz			MHz		
T (°C)	Frequency	result	Power voltage	Frequency	result	F [MHz]	Detector	Level [µV/m]
-20°	13.562 239	Pass	3.70	13.562 254	Pass			
-10°	13.562 244	Pass	3.75	13.562 254	Pass			
0°	13.562 252	Pass	3.80	13.562 254	Pass			
10°	13.562 254	Pass	3.85	13.562 254	Pass			
20°	13.562 254	Pass	3.90	13.562 254	Pass			
30°	13.562 254	Pass	3.95	13.562 254	Pass			
40°	13.562 257	Pass	4.00	13.562 254	Pass			
50°	13.562 266	Pass						
Measurement uncertainty			±100 Hz					

### Limits


### SUBCLAUSE § 15.225

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

## 4.5 Conducted Limits

### Reference

FCC:	CFR Part 15.207, 15.107
IC:	RSS 210, Issue 7, Section 6.6 , 7.4

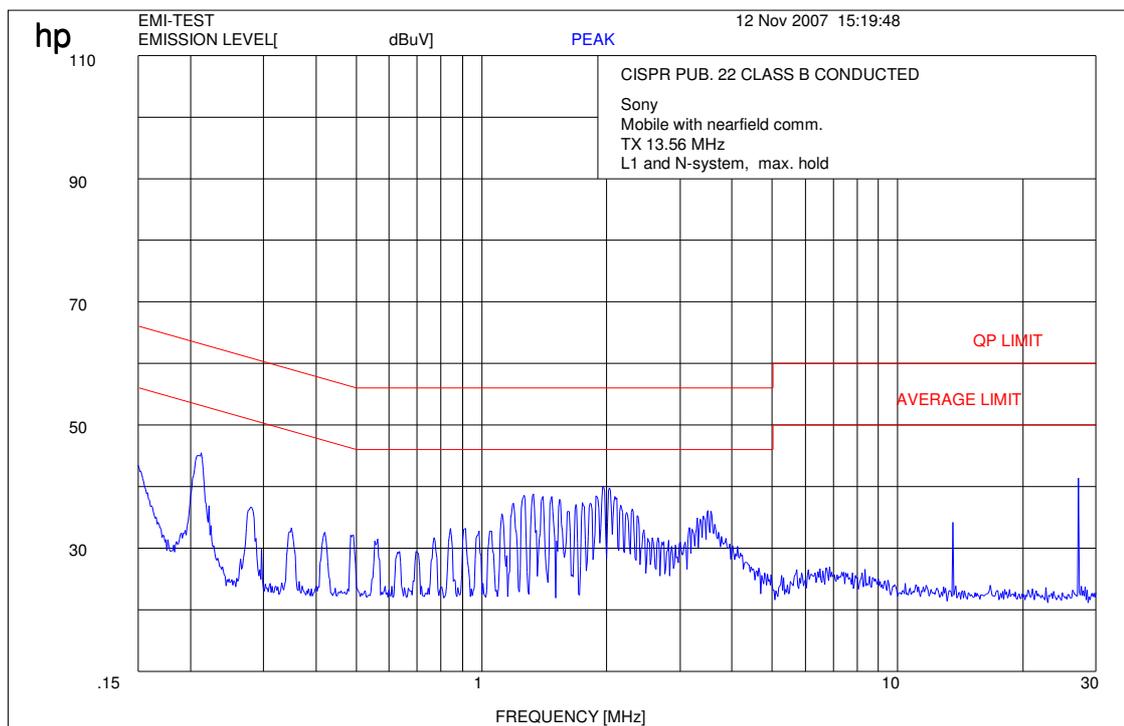

### Limits:

### Subclause § 15.107 / 15.207

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 - 30	60	50

\* Decreases with the logarithm of the frequency



**Signaling Units:**

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	CBT	R&S	100313	300003516	24.10.2006	24	24.10.2008
2	CBT	R&S	100185	300003416	21.02.2006	24	21.02.2008
3	CMU-200	R&S	103992	300003231	27.04.2007	12	27.04.2008
4	CMU-200	R&S	106240	300003321	02.05.2006	24	02.05.2008

**SRD Laboratory Room 002:**

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	System Controller PSM 12	R&S	835259/007	3000002681-00xx	n.a.		
2	Memory Extension PSM-K10	R&S	To 1	3000002681	n.a.		
3	Operating Software PSM-B2	R&S	To 1	3000002681	n.a.		
4	19" Monitor		22759020-ED	3000002681	n.a.		
5	Mouse		LZE 0095/6639	3000002681	n.a.		
6	Keyboard		G00013834L 461	3000002681	n.a.		
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681-0005	01.08.2006	24	01.08.2008
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681	s.No.7		
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681-0002	01.08.2006	36	01.08.2009
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681	s.No.10		
12	Data Generator SMIQ-B11	R&S	To 10	3000002681	s.No.10		
13	RF Rear Connection SMIQ-B19	R&S	To 10	3000002681	s.No.10		
14	Fast CPU SM-B50	R&S	To 10	3000002681	s.No.10		
15	FM Modulator SM-B5	R&S	835676/033	3000002681	s.No.10		
16	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681-0001	01.08.2006	36	01.08.2009
17	Modulation Coder SMIQ-B20	R&S	To 16	3000002681	s.No.16		
18	Data Generator SMIQ-B11	R&S	To 16	3000002681	s.No.16		
19	RF Rear Connection SMIQ-B19	R&S	To 16	3000002681	s.No.16		
20	Fast CPU SM-B50	R&S	To 16	3000002681	s.No.16		
21	FM Modulator SM-B5	R&S	836061/022	3000002681	s.No.16		
22	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681-0003	01.08.2006	36	01.08.2009
23	Attenuator SMP-B15	R&S	835136/014	3000002681	S.No.22		
24	RF Rear Connection SMP-B19	R&S	834745/007	3000002681	S.No.22		
25	Power Meter NRVD	R&S	835430/044	3000002681-0004	01.08.2006	24	01.08.2008
26	Power Sensor NRVD-Z1	R&S	833894/012	3000002681-0013	01.08.2006	24	01.08.2008
27	Power Sensor NRVD-Z1	R&S	833894/011	3000002681-0010	01.08.2006	24	01.08.2008

28	Rubidium Standard RUB	R&S		3000002681-0009	01.08.2006	24	01.08.2008
29	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681-0006	01.08.2006	24	01.08.2008
30	Laser Printer HP Deskjet 2100	HP	N/A	3000002681-0011	n.a.		
31	19" Rack	R&S	11138363000004	3000002681	n.a.		
32	RF-cable set	R&S	N/A	3000002681	n.a.		
33	IEEE-cables	R&S	N/A	3000002681	n.a.		
34	Sampling System FSIQ-B70	R&S	835355/009	3000002681	s.No.7		
35	RSP programmable attenuator	R&S	834500/010	3000002681-0007	01.08.2006	24	01.08.2008
36	Signalling Unit	R&S	838312/011	3000002681	n.a.		
37	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681			
38	Climatic box VT 4002	Heraeus Vötsch	58566046820010	300003019	11.05.2007	24	11.05.2009
39	Signaling Unit CMU200	R&S	832221/0055	300002862	12.01.2006	24	12.01.2008
40	Power Splitter 6005-3	Inmet Corp.	none	300002841	23.12.2006	24	23.12.2008
41	SMA Cables SPS-1151-985-SPS	Insulated Wire	different	different	n.a.		
42	CBT32 with EDR Signaling Unit	R&S					
43	Coupling unit	Narda	N/A	--	n.a.		
44	2xSwitch Matrix PSU	R&S	872584/021	300001329	n.a.		
45	RF-cable set	R&S	N/A	different	n.a.		
46	IEEE-cables	R&S	N/A	--	n.a.		

Anmerkung: 3000002681-00xx als Systeme inventarisiert

### ***SRD Laboratory Room 005:***

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Spektrum Analyzer 8566B	HP	2747A05275	300000219	08.11.2006	24	08.11.2008
2	Spektrum Analyzer Display 85662A	HP	2816A16497	300001690	08.11.2006	24	08.11.2008
3	Quasi-Peak-Adapter 85650A	HP	2811A01135	300000216	08.11.2006	24	08.11.2008
4	Power Supply	Heiden	003202	300001187	12.05.2007	36	12.05.2010
5	Power Supply	Heiden	1701	300001392	12.05.2007	36	12.05.2010