



Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

**Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97**

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC)

Anechoic chamber registration no.: 3462C-1 (IC)

Certification ID: DE 0001

Accreditation ID: DE 0002

Accredited Bluetooth® Test Facility (BQTF)

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Test report no. : 1-1065-22-06/09
Type identification : AAD-3880023-BV
Applicant : Sony Ericsson Mobile Communications AB
FCC ID : PY7A3880023
IC Certification No : 4170B-A3880023
Test standards : 47 CFR Part 15
RSS - 210 Issue 7

Table of contents

1	General information	3
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Application details	4
2	Test standard/s	5
3	Technical tests	6
3.1	Details of manufacturer.....	6
3.1.1	Test item.....	6
3.1.2	Additional EUT information For IC Canada (appendix 2).....	7
3.1.3	RF Technical Brief Cover Sheet acc. To RSS-102	8
3.1.4	EUT operating modes.....	9
3.1.5	Extreme conditions testing values	9
4	Summary of Measurement Results and list of all performed test cases	10
5	RF measurement testing	11
5.1	Description of test set-up.....	11
5.1.1	Radiated measurements.....	11
5.1.2	Conducted measurements.....	11
5.2	Referenced Documents	12
5.3	Additional comments	12
5.4	Antenna gain	12
5.5	Peak Power Spectral density (digitally modulated systems) §15.247(e).....	13
5.6	Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a)(2).....	17
5.7	Spectrum Bandwidth of a DSSS System / 20 dB Bandwidth.....	21
5.8	Maximum output power (conducted) §15.247 (b) (3).....	25
5.9	Max. peak output power (radiated) §15.247 (b)(3)	30
5.10	Band-edge compliance of conducted emissions §15.247 (d)	31
5.11	Band-edge compliance of radiated emissions §15.205	34
5.12	Spurious Emissions - conducted (Transmitter) §15.247 (c).....	36
5.13	Spurious Emissions - radiated (Transmitter) §15.209	46
5.14	Spurious Emissions - radiated (Receiver) §15.109 / 209	62
5.15	Spurious Emissions - radiated <30 MHz §15.209	65
5.16	Conducted Emissions <30 MHz §15.107/207.....	66
6	Test equipment and ancillaries used for tests	68
7	Photographs of the Test Set-up	71
8	Photographs of the EUT	72

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2009-03-26

Meheza K. Walla



Date

Name

Signature

2009-03-26

Daniel K. Muyunga



Date


Name

Signature

Technical responsibility for area of testing:

2009-03-26

Stefan Bös

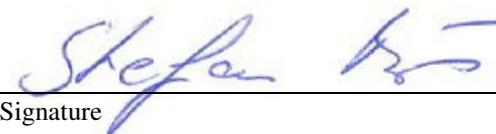

Date

Name

Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10
66117 Saarbrücken
Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to
DIN EN ISO/IEC 17025
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :
Street :
Town :
Country :
Phone :
Fax :

1.3 Details of applicant

Name:	Sony Ericsson Mobile Communications AB
Street:	Mobilvägen 10
Town:	22188 Lund
Country:	Sweden
Telephone:	+46-46-19-3000
Fax:	+46-10-800-2441
Contact:	Mr. Peter Lindeborg
E-mail:	peter.lindeborg@sonyericsson.com
Telephone:	+46-10-802-43 68

1.4 Application details

Date of receipt of order:	2009-03-11
Date of receipt of test item:	2009-03-11
Date of start test:	2009-03-16
Date of end test	2009-03-26
Persons(s) who have been present during the test:	-/-

2 Test standard/s

47 CFR Part 15	2008-07	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter A - general, Part 15-Radio frequency devices
RSS - 210 Issue 7	2007-06	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

3 Technical tests

3.1 Details of manufacturer

Name:	Sony Ericsson Mobile Communications AB
Street:	Mobilvägen 10
Town:	22188 Lund
Country:	Sweden

3.1.1 Test item

Kind of test item :	Mobile Phone GSM 850/900/1800/1900 / UMTS FDD 1/8, HSDPA, HSUPA / BT2.0+EDR / GPS / AGPS / WLAN / Flight Mode
Type identification :	AAD-3880023-BV
S/N serial number :	CB5A10TMRG (radiated sample 1) EUT CB5A10WU97 (radiated sample 2) EUT CB5A10TNM2 (conducted sample 1) EUT CB5A10WUP7 (conducted sample 2)
HW hardware status :	A
SW software status :	-/-
Frequency Band [MHz] :	ISM 2.400 - 2.483,5
Type of Modulation :	DSSS & OFDM
Number of channels :	11
Antenna :	Integrated antenna
Power Supply :	4.0 V from Power Supply or Charger/ Li-Ion Battery BST-38
Temperature Range :	-20°C to +55°C

Max. power radiated: 18.92 dBm (OFDM – Mode)
 Max. power conducted: 21.33 dBm (OFDM – Mode)

FCC ID: PY7A3880023
 IC: 4170B-A3880023

3.1.2 Additional EUT information For IC Canada (appendix 2)

IC Registration Number:	4170B-A3880023
Model Name:	AAD-3880023-BV
Manufacturer (complete Address):	Sony Ericsson Mobile Communications AB Mobilvägen 10 22188 Lund Sweden
Tested to Radio Standards Specification (RSS) No.:	RSS-210 Issue 7
Open Area Test Site Industry Canada Number:	IC 3462C-1
Frequency Range (or fixed frequency) [MHz]:	2400 – 2483.5 MHz
RF: Power [W] (max):	DSSS: Rad. EIRP: 43.85 mW Conducted : 71.78 mW OFDM: Rad. EIRP: 77.98 mW Conducted : 135.83 mW
Antenna Type:	Integrated antenna
Occupied Bandwidth (99% BW) [kHz]:	DSSS: 13.58 20 dB Bandwidth OFDM: 16.53 20 dB Bandwidth
Type of Modulation:	DSSS & OFDM
Emission Designator (TRC-43):	13M5G1D (DSSS) 16M5G1D (OFDM)
Transmitter Spurious (worst case) [dBµV/m in 3m]:	32.73
Receiver Spurious (worst case) [dBµV/m in 3m]:	45.29

ATTESTATION:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Test engineer: Meheza K. Walla Date: 2009-03-26

3.1.3 RF Technical Brief Cover Sheet acc. To RSS-102

All Fields must be completed with the requested information or the following codes: N/A for Not Applicable, N/P for Not Performed or N/V for Not Available. Where applicable, check appropriate box.

1. COMPANY NUMBER: **4170B**
2. MODEL NUMBER: **AAD-3880023-BV**
3. MANUFACTURER: **Sony Ericsson Mobile Communications AB**
4. TYPE OF EVALUATION: **© RF Evaluation**

© RF Evaluation

- Evaluated against exposure limits: General Public Use Controlled Use
- Duty cycle used in evaluation: 99 %
- Standard used for evaluation: RSS-102 Issue 2 (2005-11)
- Measurement distance: 0.20 m
- RF value: 0.15 V/m A/m W/m²
- Measured Computed Calculated

Declaration of RF Exposure Compliance

ATTESTATION:

I attest that the information provided in this test report is correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.

Name: Meheza K. Walla
Title: Dipl.-Ing. (FH)
Company: Cetecom ICT Services GmbH

3.1.4 EUT operating modes

EUT operating mode no.*)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the test plan

3.1.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature	T _{nom}	°C	23
Nominal Humidity	H _{nom}	%	50
Nominal Power Source	V _{nom}	V	4.0

Type of power source: DC from Power Supply or Charger/ Li-Ion Battery BST-38.

Deviations from these values are reported in chapter 2

4 Summary of Measurement Results and list of all performed test cases

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210	PASS	2009-03-26	-/-

Test Specification Clause	Test Case	Pass	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247 (e)	Peak power spectral density	Yes			
§15.247(a)(2)	Spectrum Bandwidth of a DSSS System / 6dB BW	Yes			
§15.247(a)(2)	Spectrum Bandwidth of a DSSS System / 20dB BW	Yes			
§ 15.247 (b)(3)	Maximum output power (conducted)	Yes			
§ 15.247 (b)(3)	Max. peak output power (radiated)	Yes			
§15.247 (d)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§15.247 (d)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.209	Spurious Emission -radiated (Transmitter)	Yes			
§ 15.109	Spurious Emissions-radiated (Receiver)	Yes			
§ 15.209	Spurious Emissions-radiated <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

5 RF measurement testing

5.1 Description of test set-up

5.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.


Antennas are confirmed with ANSI C63.2-1996 item 15.

- 9 kHz - 150 MHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.
- 150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.
- 30 MHz - 200 MHz: Quasi Peak measurement, 120 kHz Bandwidth, biconical antenna
- 200MHz - 1GHz: Quasi Peak measurement, 120 kHz Bandwidth, log periodic antenna
- >1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.209 and 15.207

5.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal path are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

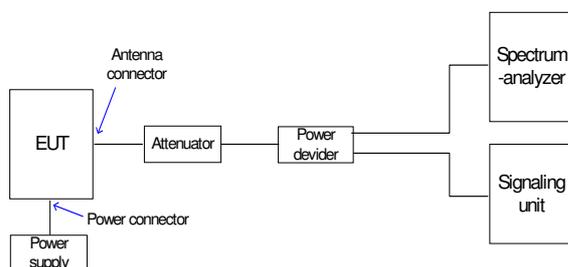

5.2 Referenced Documents

None

5.3 Additional comments

None


5.4 Antenna gain

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

DSSS – Mode (measured with power meter)			
	low channel 2412 MHz	middle channel 2437 MHz	high channel 2462 MHz
Conducted power [dBm] <i>(measured)</i>	16.90	16.96	16.49
Radiated power [dBm] <i>(measured)</i>	14.10	14.82	14.52
Gain [dBi] <i>(calculated)</i>	-2.80	-2.14	-1.97

OFDM – Mode (measured with power meter)			
	low channel 2412 MHz	middle channel 2437 MHz	high channel 2462 MHz
Conducted power [dBm] <i>(measured)</i>	13.36	13.42	13.68
Radiated power [dBm] <i>(measured)</i>	10.60	11.24	11.65
Gain [dBi] <i>(calculated)</i>	-2.76	-2.18	-2.03

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

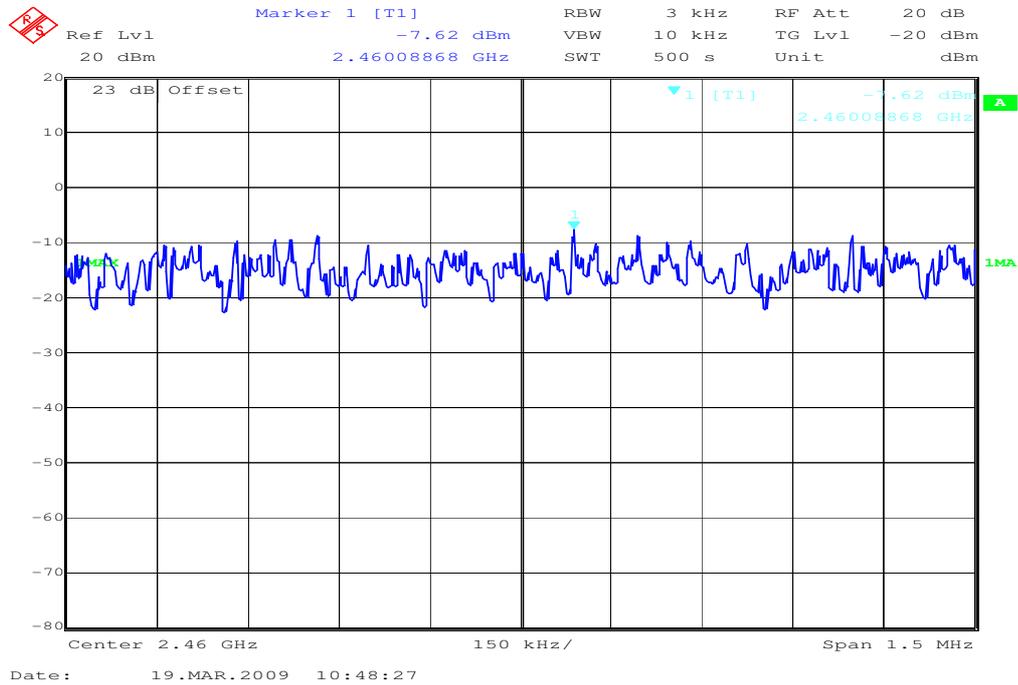

Results:

DSSS – Mode:


Plot 1: Power density: -9.51 dBm / 3 kHz
 Plot 2: Power density: -8.17 dBm / 3 kHz
 Plot 3: Power density: -7.62 dBm / 3 kHz

Limits:


Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission
-----------------------------------	---

OFDM – Mode:


Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

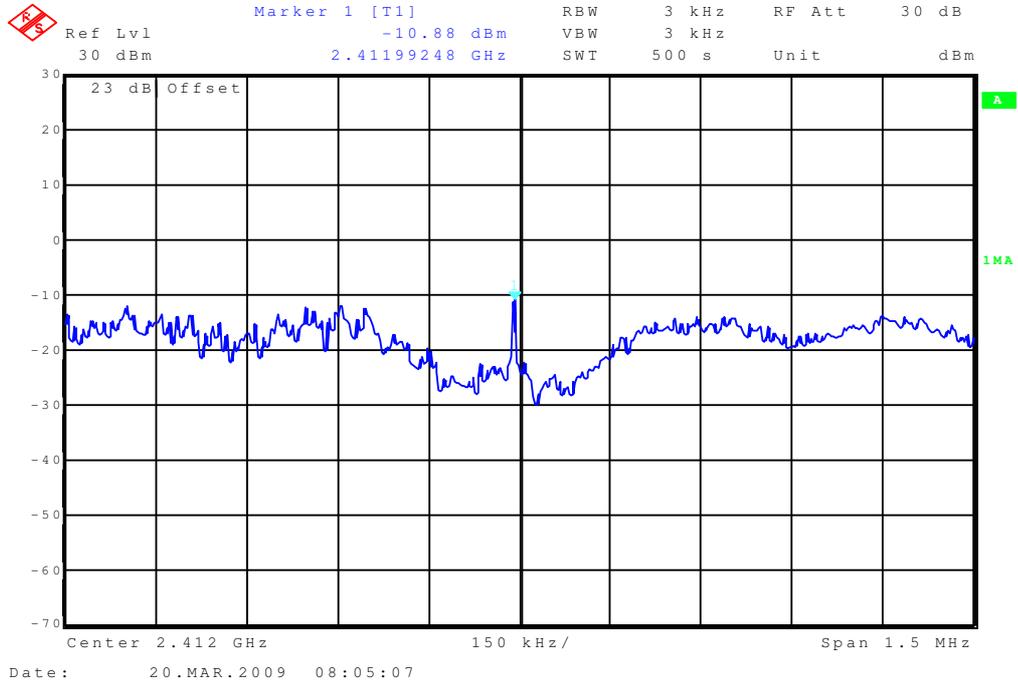

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

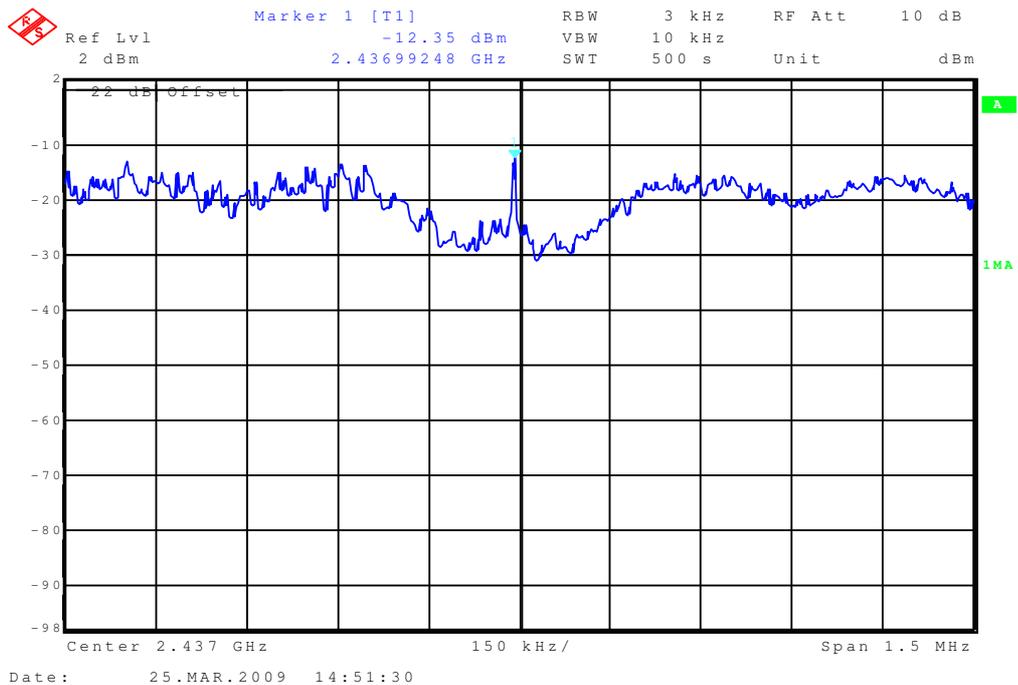

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

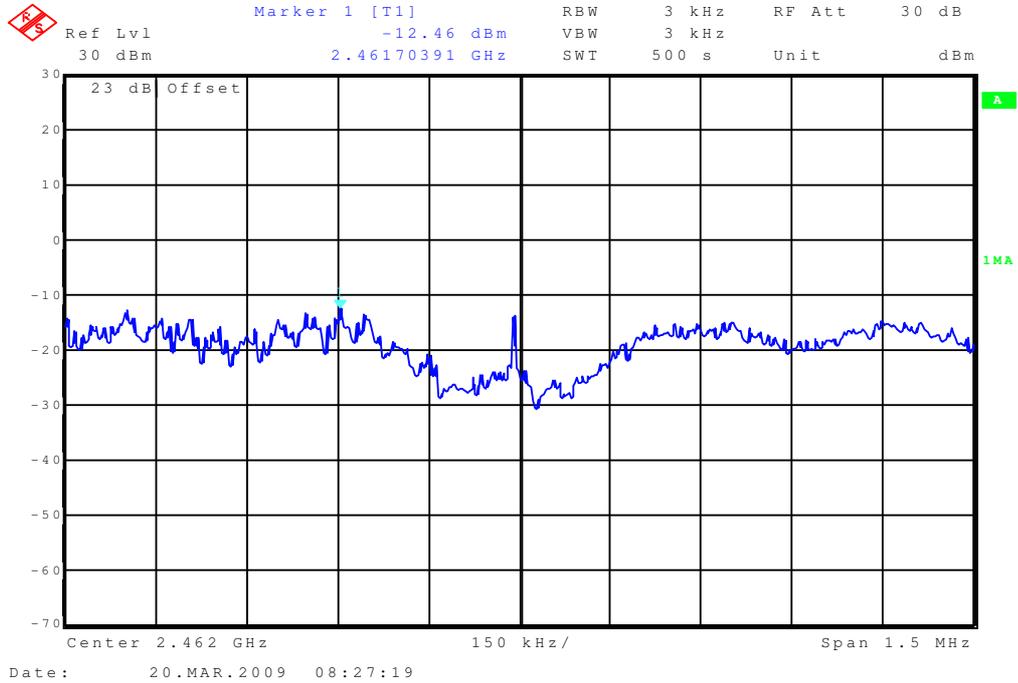

Results:

OFDM – Mode:

Plot 1: Power density: -10.88 dBm / 3 kHz
 Plot 2: Power density: -12.35 dBm / 3 kHz
 Plot 3: Power density: -12.46 dBm / 3 kHz


Limits:

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission
-----------------------------------	---


5.6 Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a)(2)

DSSS – Mode:


Plot 1:

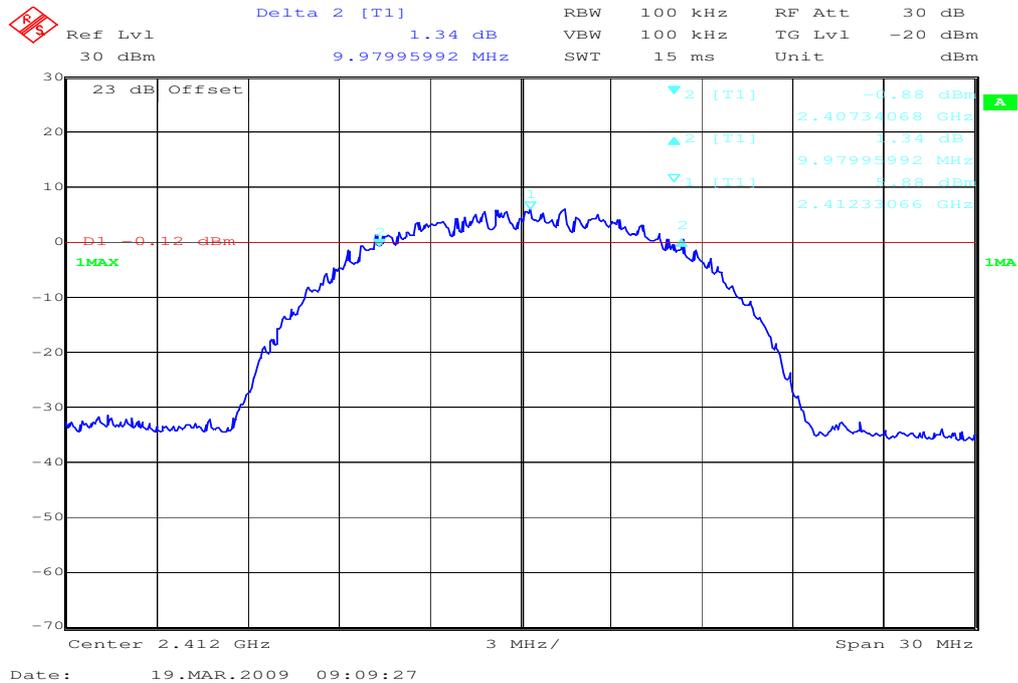

Plot 2:

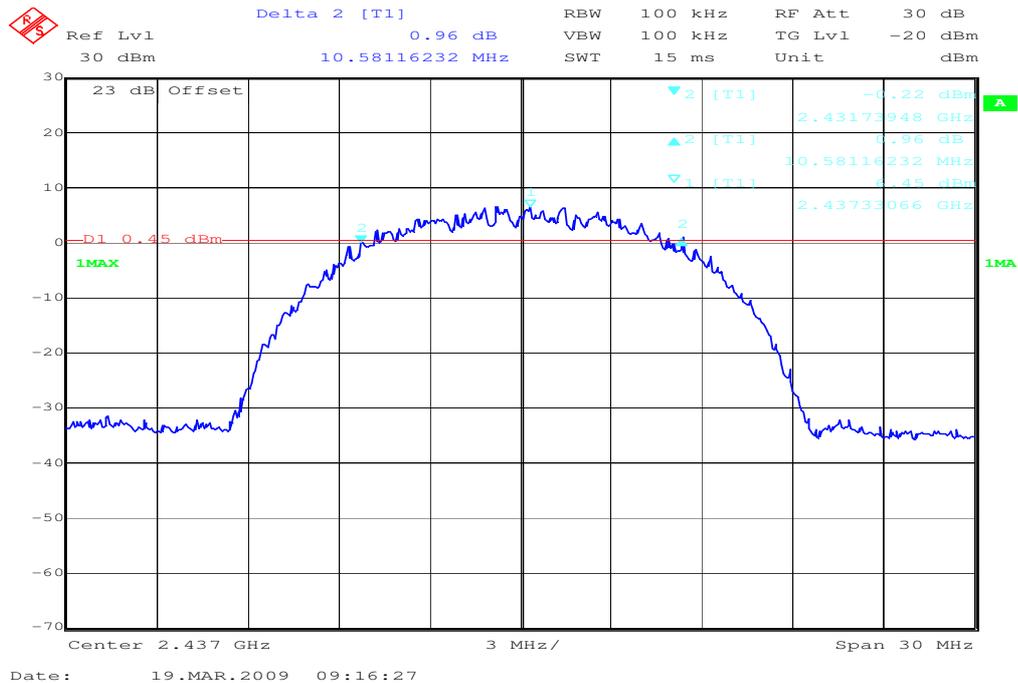

Plot 3:

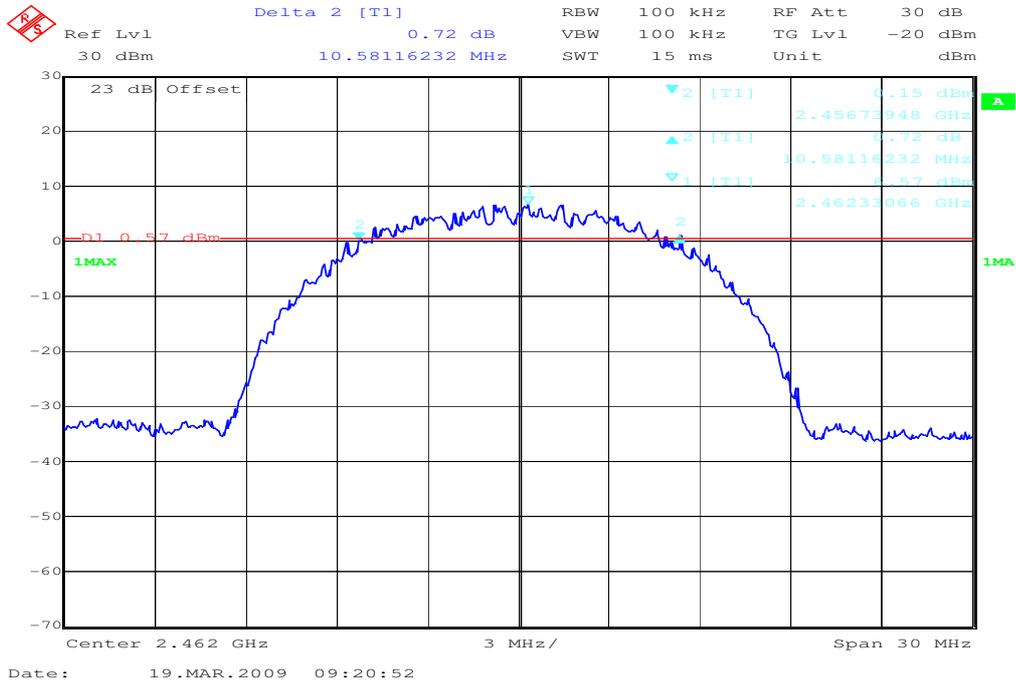


Results:

Test conditions		6 dB BANDWIDTH [MHz]		
		2412	2437	2462
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	9.97	10.58	10.58
Measurement uncertainty		±1kHz		


RBW: 100 kHz / VBW 100 kHz

OFDM – Mode:


Plot 1:

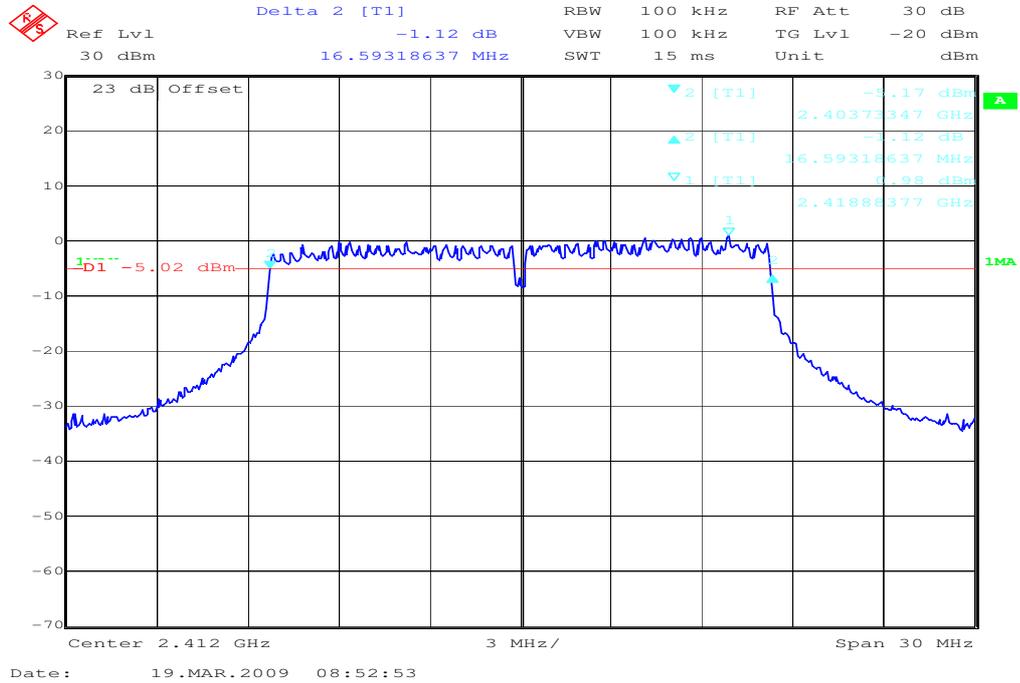

Plot 2:

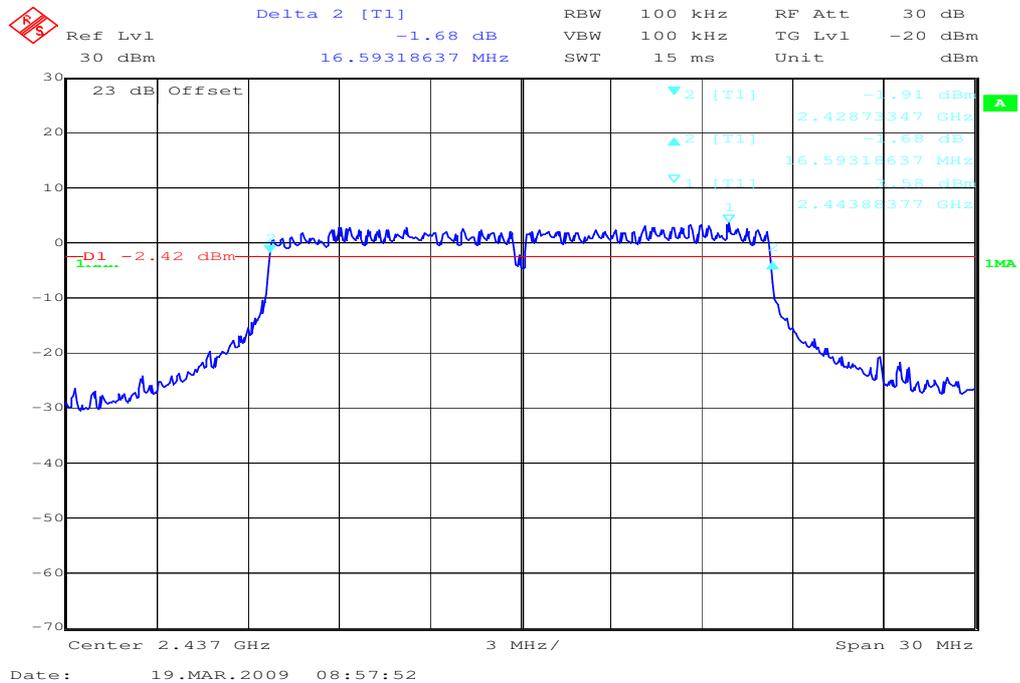

Plot 3:

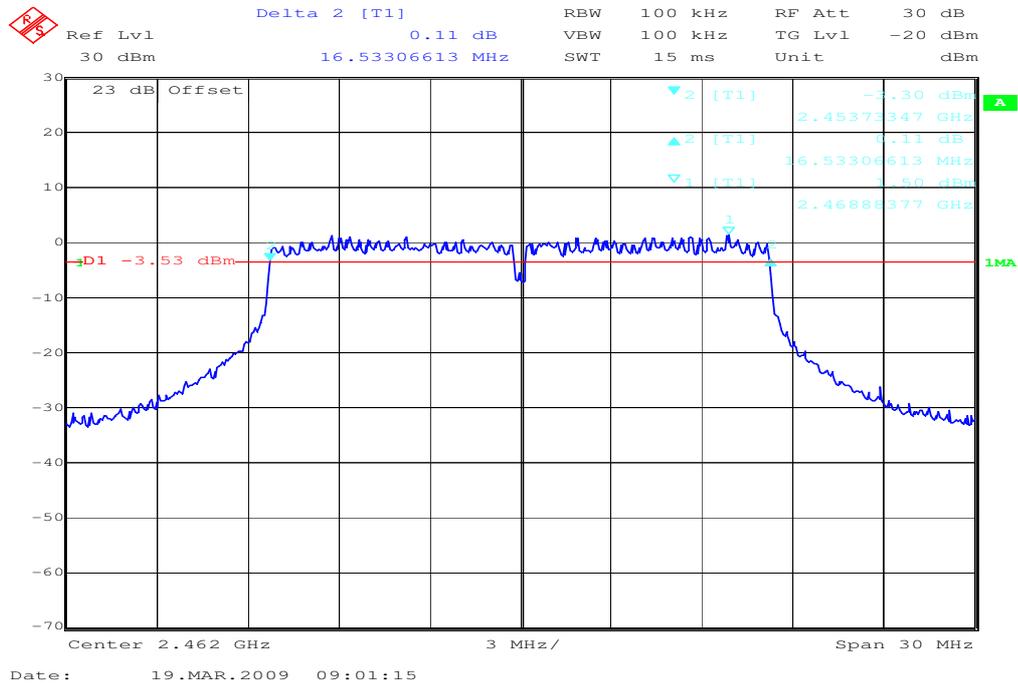

Results:

Test conditions		6 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	16.59	16.59	16.53
Measurement uncertainty		±1kHz		

RBW: 100 kHz / VBW 100 kHz


Limits:

Under normal test conditions only	> 500 kHz
-----------------------------------	-----------


5.7 Spectrum Bandwidth of a DSSS System / 20 dB Bandwidth

DSSS – Mode:


Plot 1:

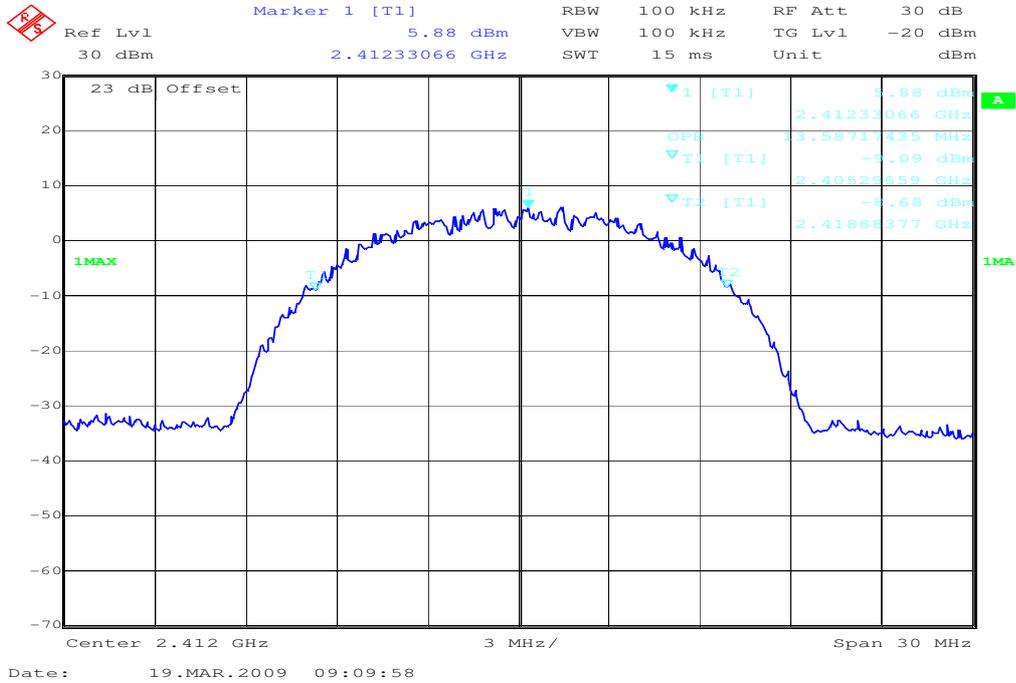

Plot 2:

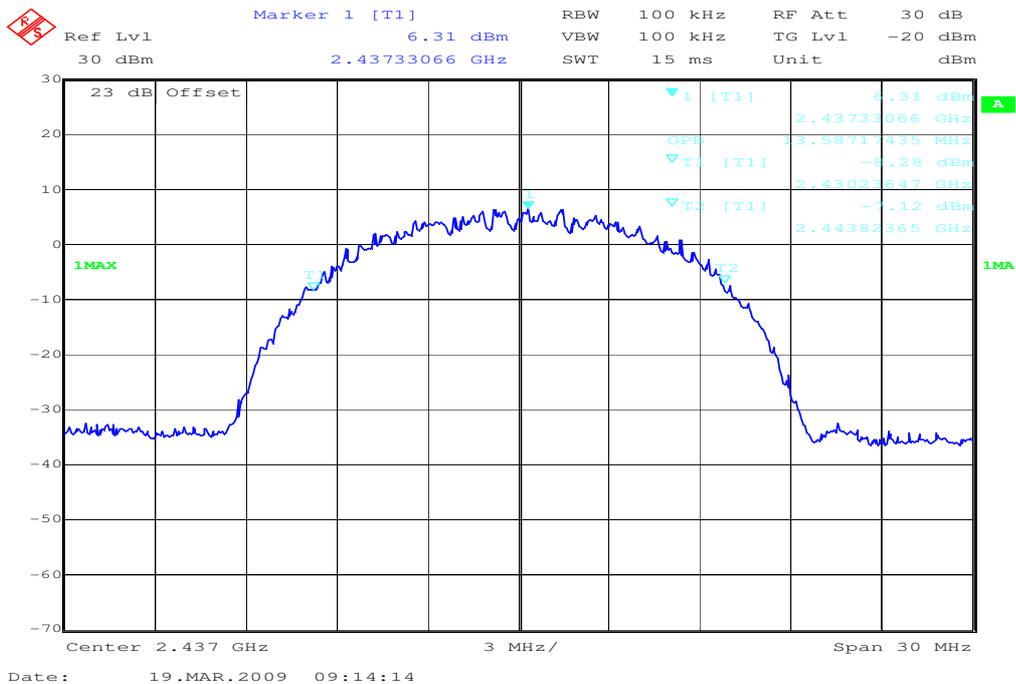

Plot 3:

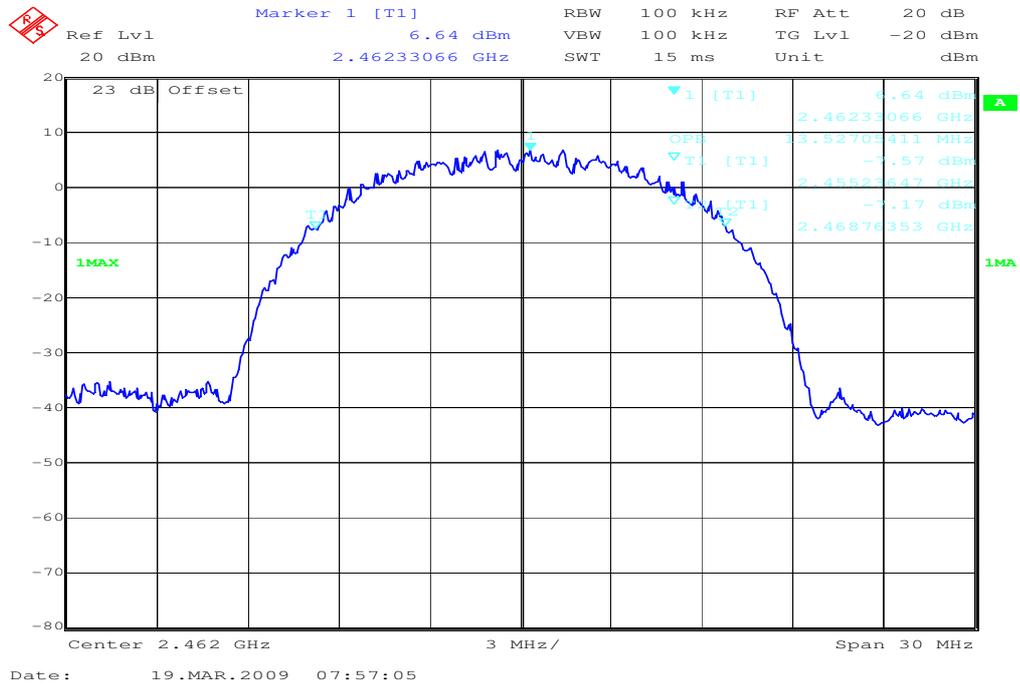


Results:

Test conditions		20 dB BANDWIDTH [MHz]		
		2412	2437	2462
Frequency [MHz]				
T _{nom}	V _{nom}	13.58	13.58	13.52
Measurement uncertainty		±1kHz		


RBW: 100 kHz / VBW 100 kHz

OFDM – Mode:


Plot 1:

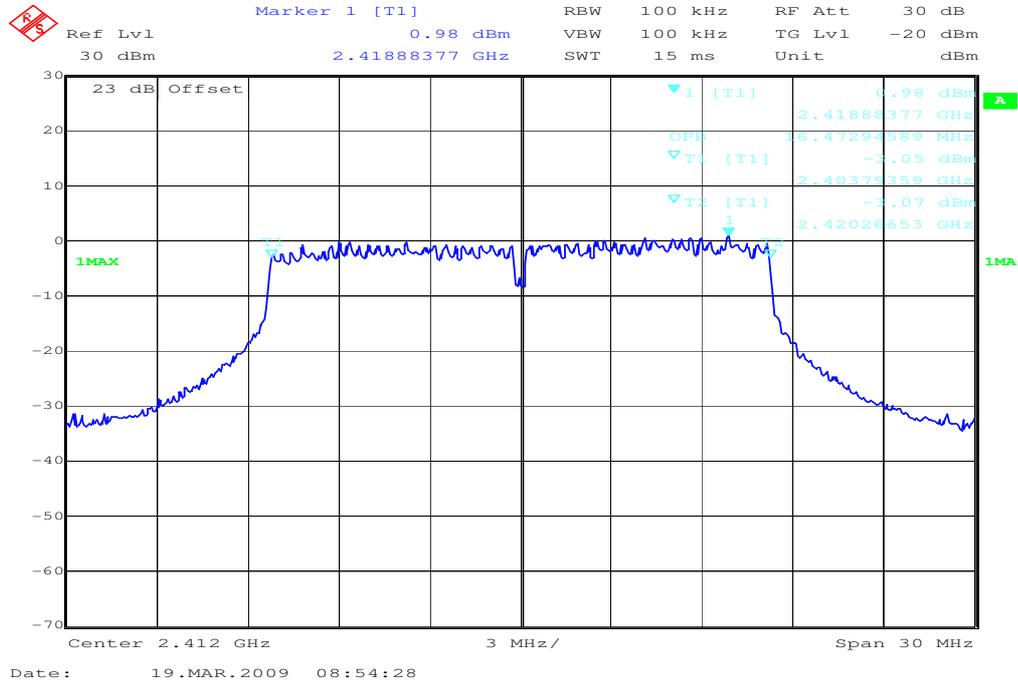

Plot 2:

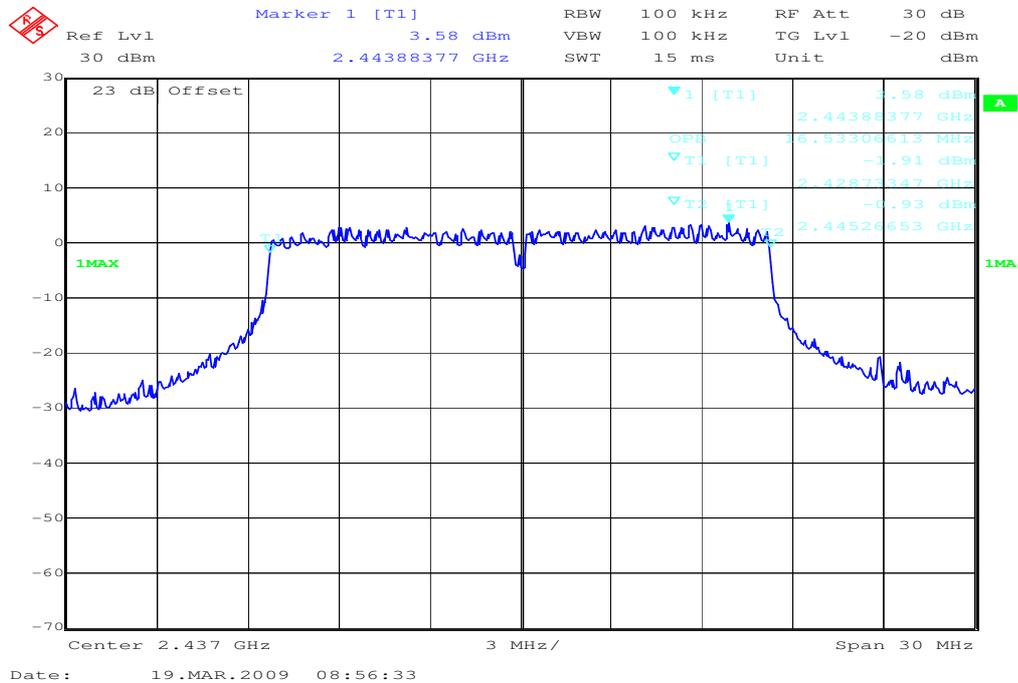

Plot 3:

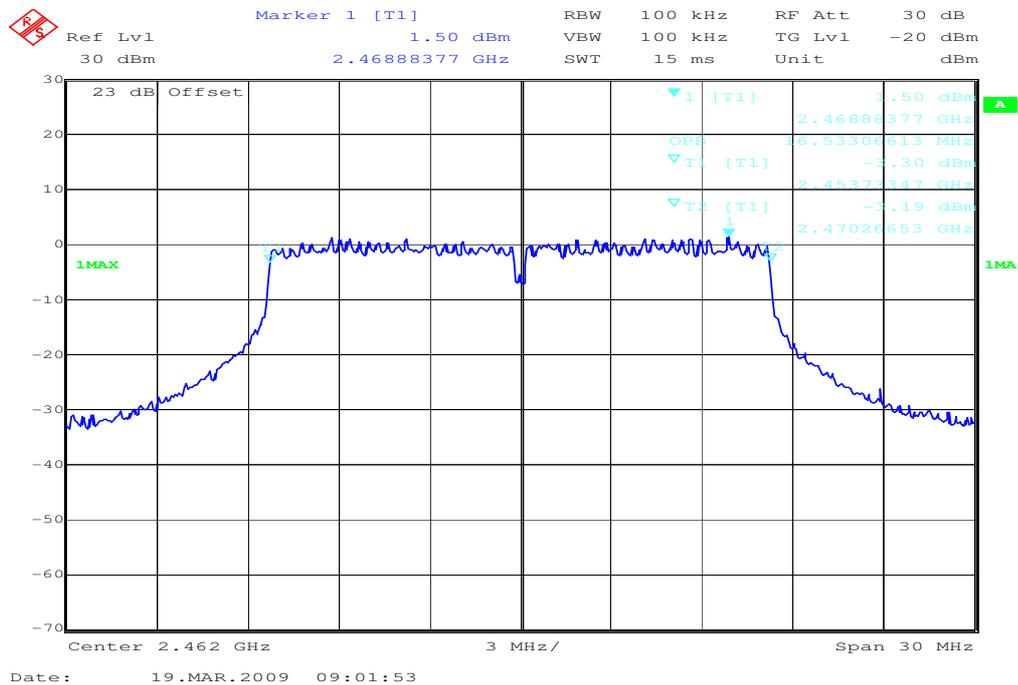

Results:


Test conditions		20 dB BANDWIDTH [MHz]		
		2412	2437	2462
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	16.47	16.53	16.53
Measurement uncertainty		±1kHz		

RBW: 100 kHz / VBW 100 kHz

5.8 Maximum output power (conducted) §15.247 (b) (3)


DSSS – Mode:

Plot 1:

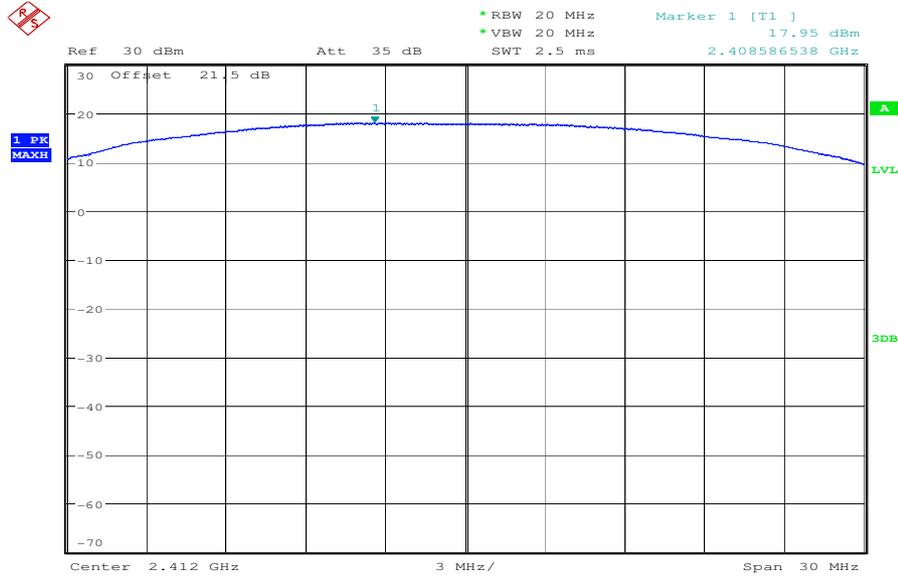


Date: 26.MAR.2009 11:11:06

Plot 2:

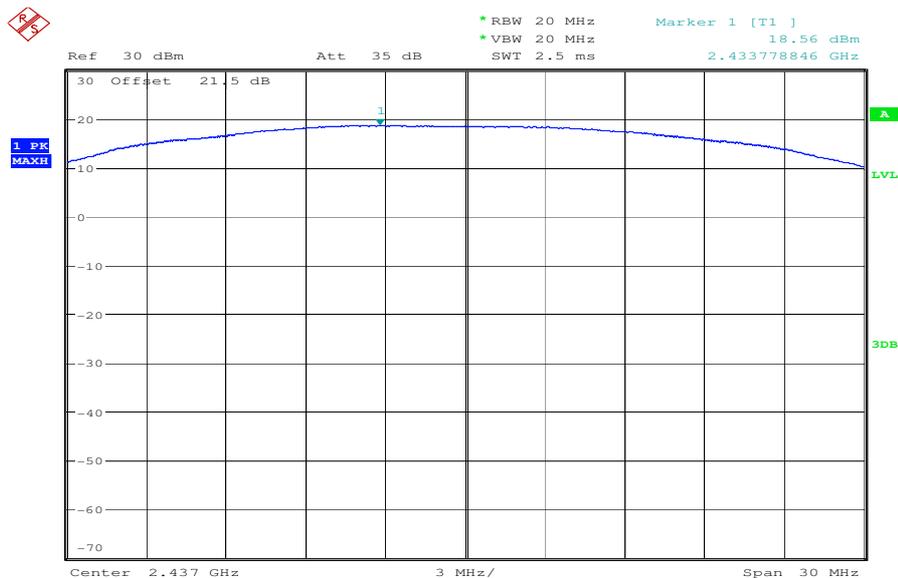

Date: 26.MAR.2009 11:12:48

Plot 3:

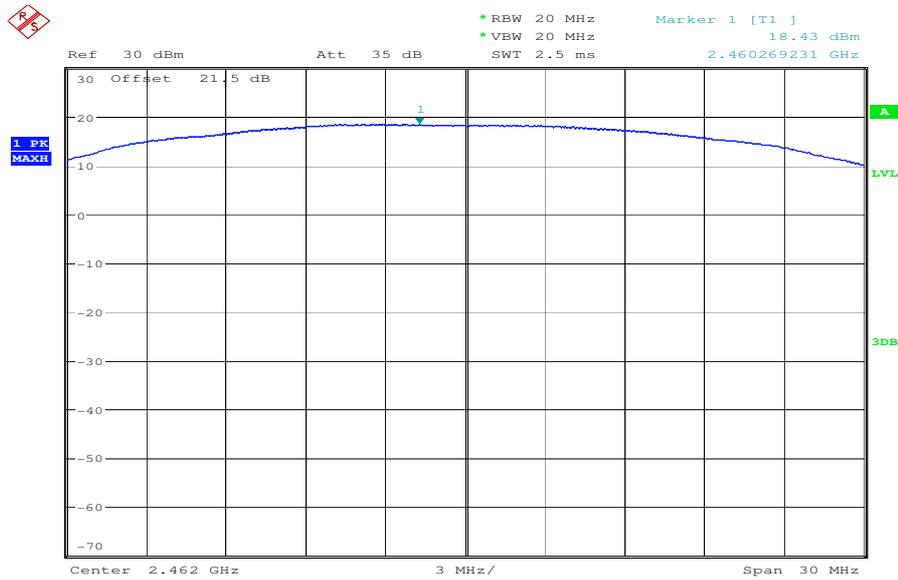

Date: 26.MAR.2009 11:13:45


Test conditions		Max. peak output power [dBm]		
		2412	2437	2462
Frequency [MHz]				
T _{nom}	V _{nom}	17.95	18.56	18.43
Measurement uncertainty		±3dB		

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------


OFDM – Mode:

Plot 1:

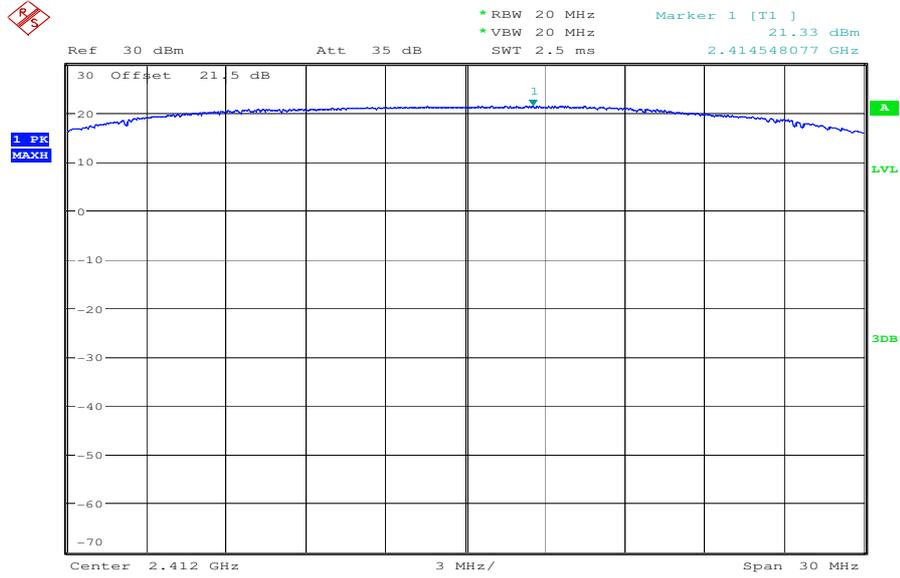


Date: 26.MAR.2009 11:09:54

Plot 2:

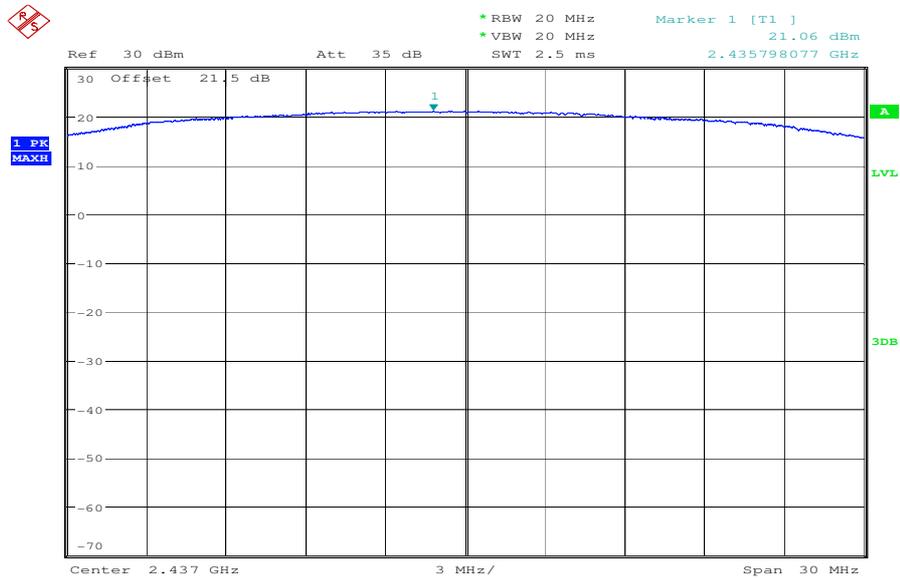

Date: 26.MAR.2009 11:08:54

Plot 3:

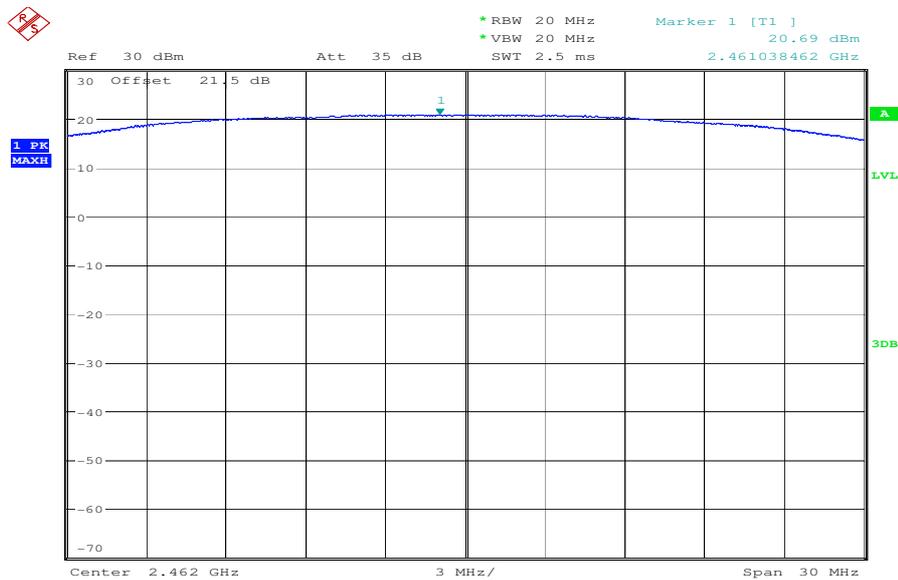

Date: 26.MAR.2009 11:07:23

Test conditions		Max. peak output power [dBm]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	21.33	21.06	20.69
Measurement uncertainty		±3dB		

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)
P = power input to the antenna (in appropriate units e.g. mW)
G = power gain of the antenna in the direction of interest relative to the isotropic radiator
R = distance to the centre of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = EIRP/4\pi R^2$$

where EIRP = equivalent isotropic radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 18.92 dBm (77.98 mW)

calculated at distance of 20 cm:

power density = $77.98 / 4\pi 20^2 = 0.015 \text{ mW/cm}^2$

Limit:

1mW/cm ² is the reference level for general public exposure according to the OET Bulletin 65, Edition 97-01 Table 1.
--

5.9 Max. peak output power (radiated) §15.247 (b)(3)

DSSS – Mode:

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	15.15	16.42	16.40
Measurement uncertainty		±3dB		

RBW / VBW: 10 MHz

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

OFDM – Mode:

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	18.53	18.92	18.66
Measurement uncertainty		±3dB		

RBW / VBW: 10 MHz


Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------


5.10 Band-edge compliance of conducted emissions §15.247 (d)

DSSS – Mode:

Plot 1: lowest channel

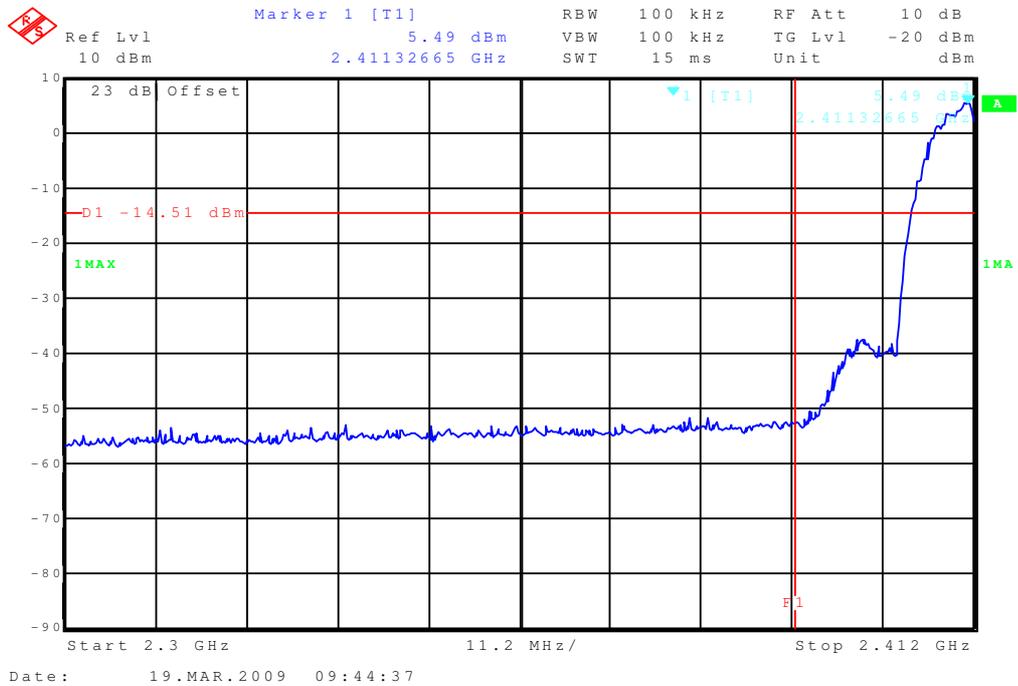

Plot 2: highest channel

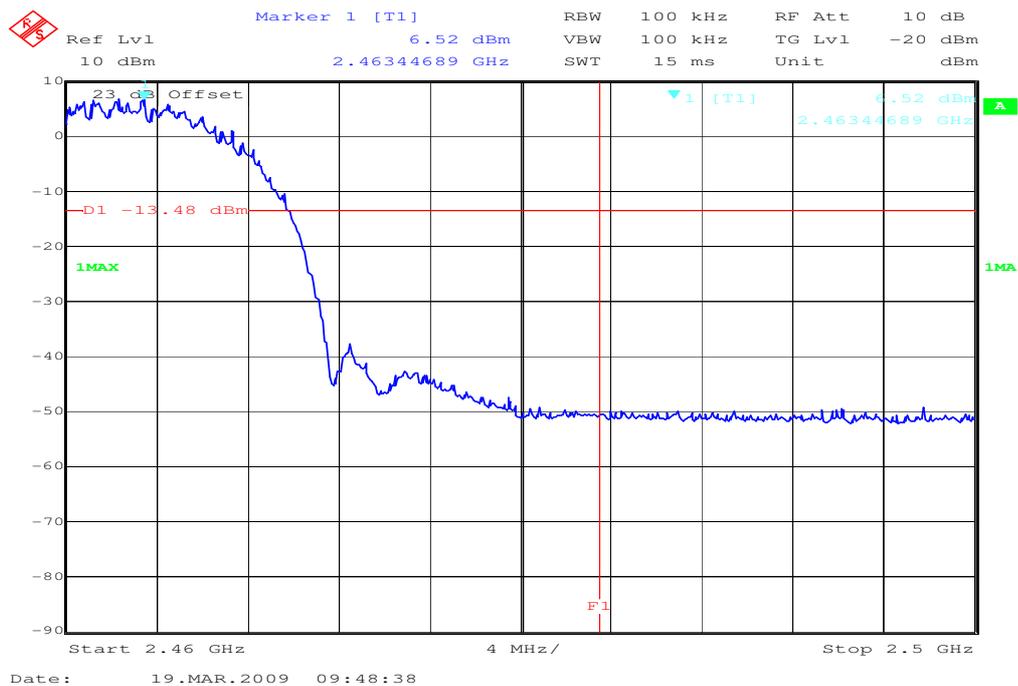


Limits:


Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

OFDM – Mode:

Plot 3: lowest channel

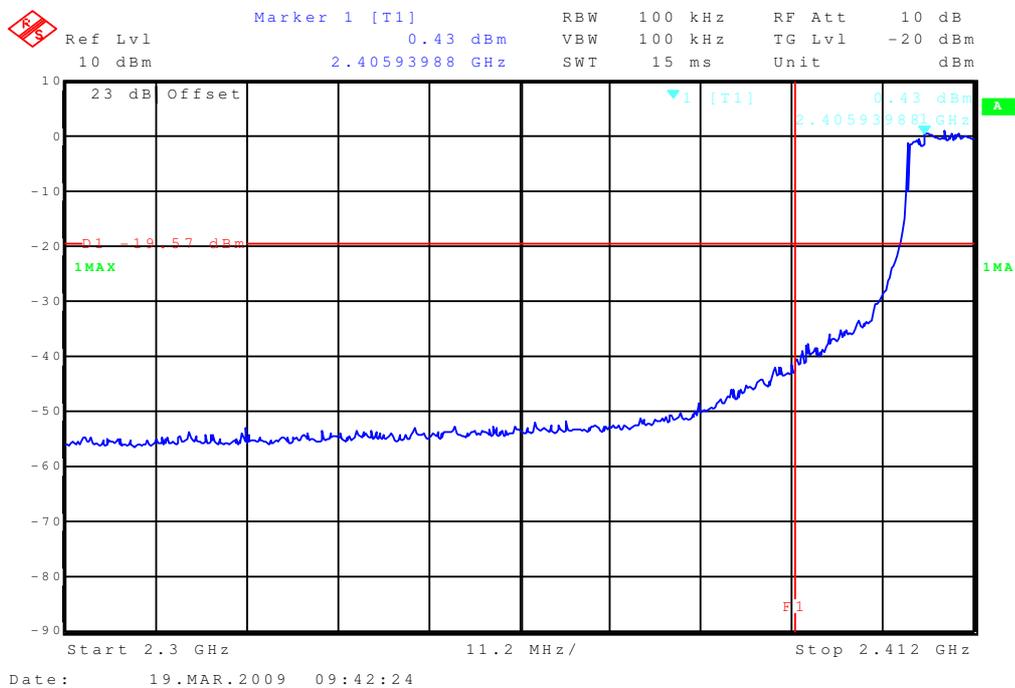

Plot 4: highest channel

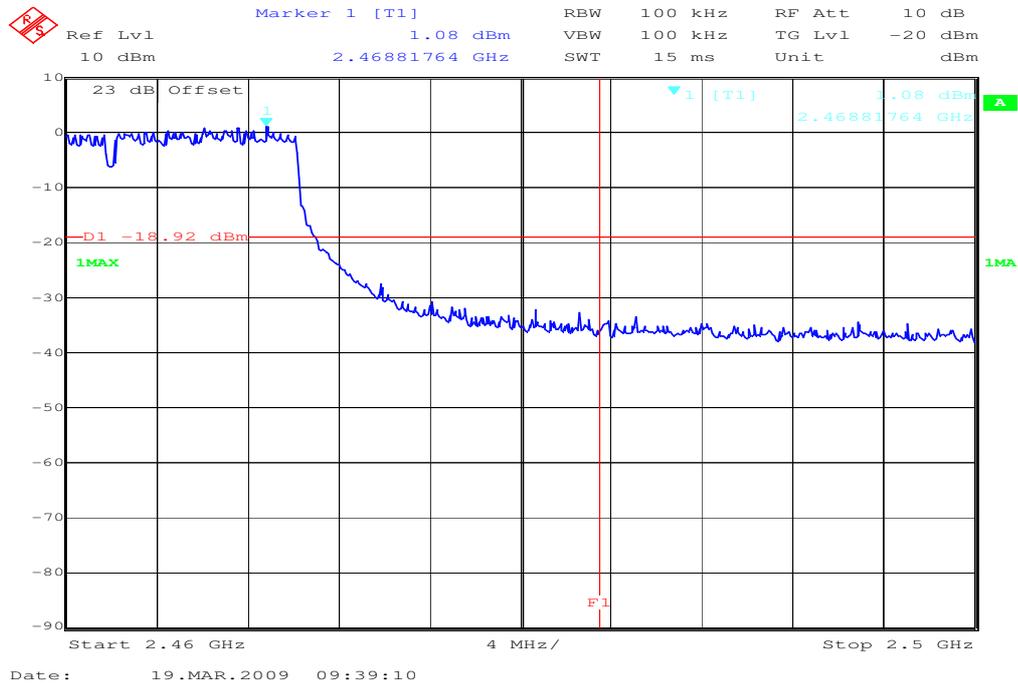


Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--

5.11 Band-edge compliance of radiated emissions §15.205


DSSS – Mode:

Plot 1: Restricted band low

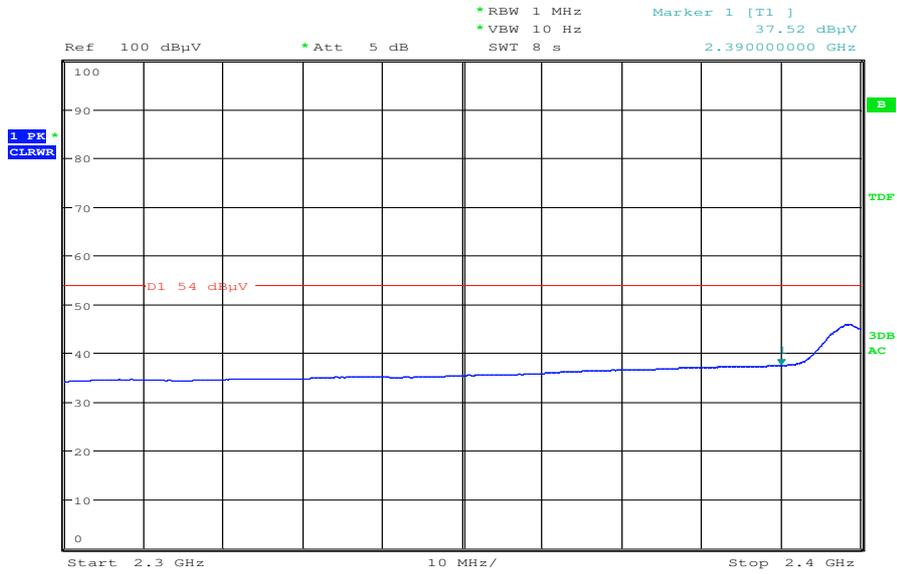

Date: 24.MAR.2009 16:18:46


Plot 2: Restricted band high

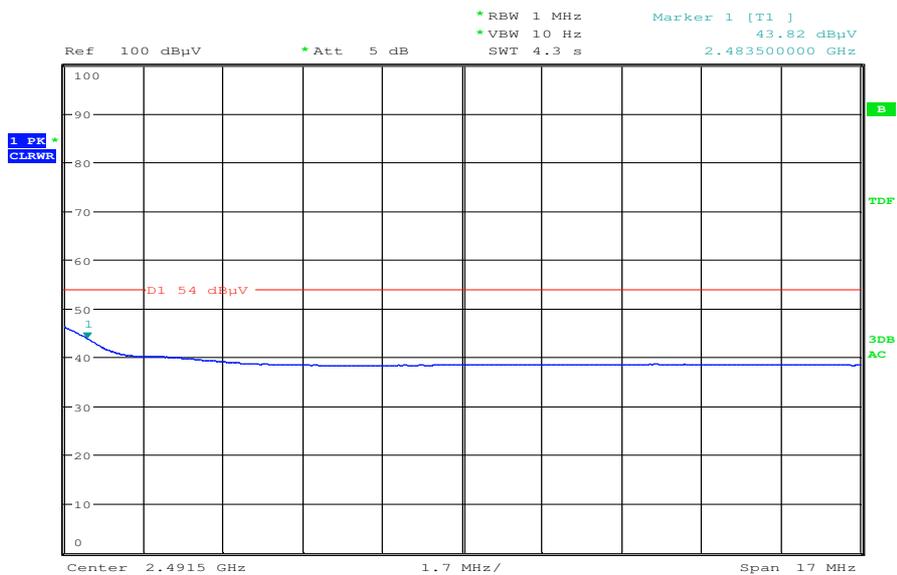

Date: 24.MAR.2009 16:27:45


OFDM – Mode:

Plot 1: Restricted band low

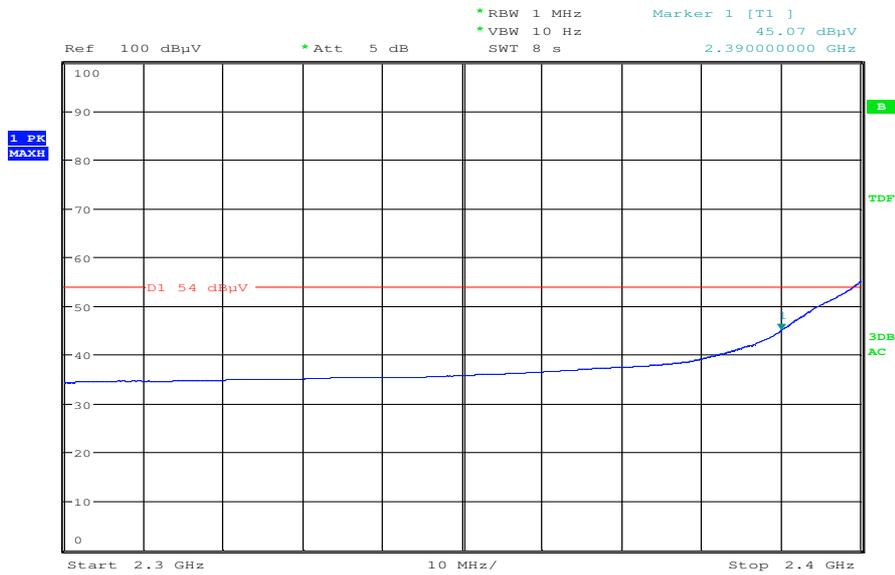

Date: 24.MAR.2009 16:21:04

Plot 2: Restricted band high

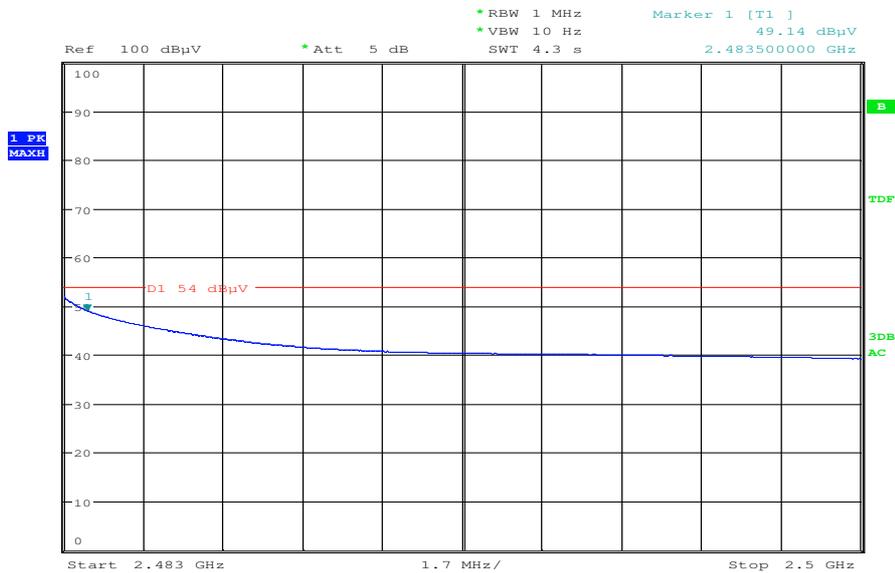


Date: 24.MAR.2009 16:23:12


5.12 Spurious Emissions - conducted (Transmitter) §15.247 (c)

DSSS – Mode:


Plot 1: Lowest Channel

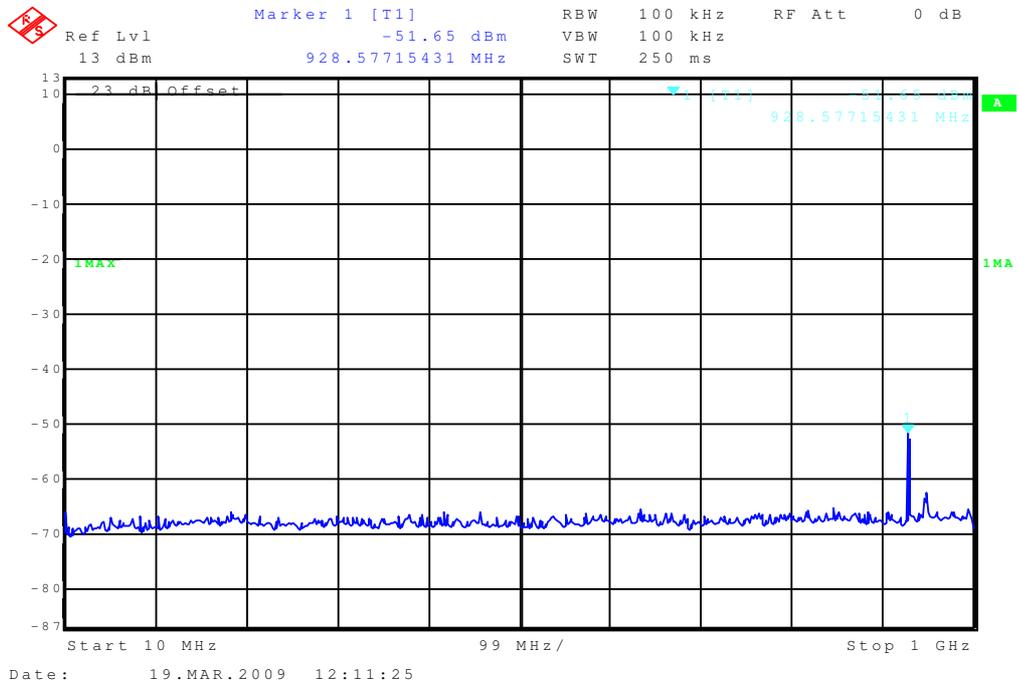


Plot 2: Lowest Channel

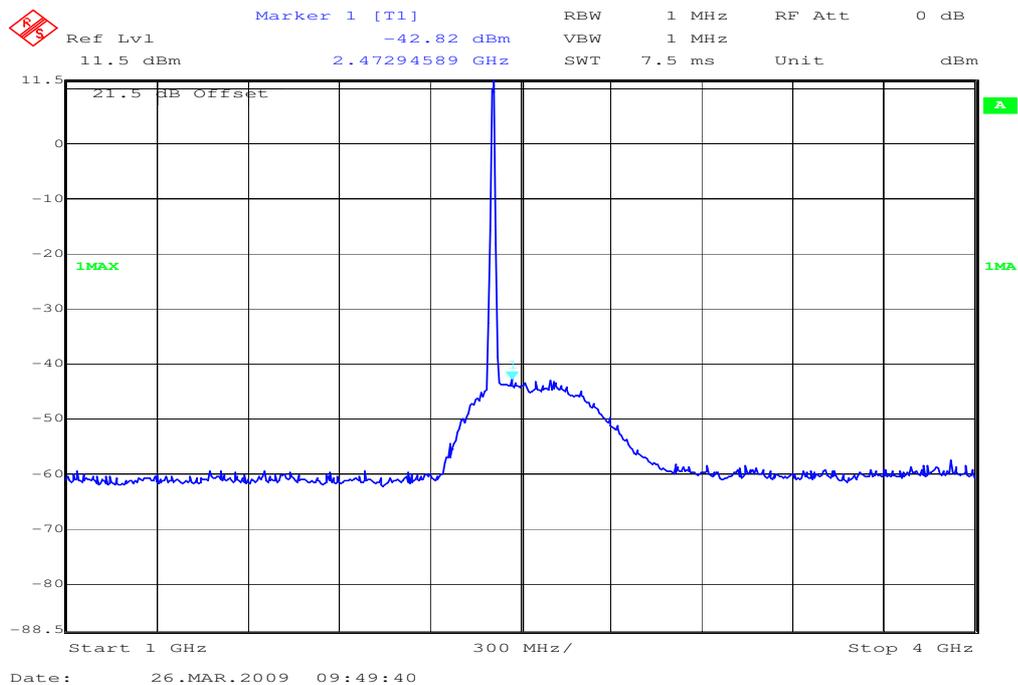


Plot 3: Lowest Channel

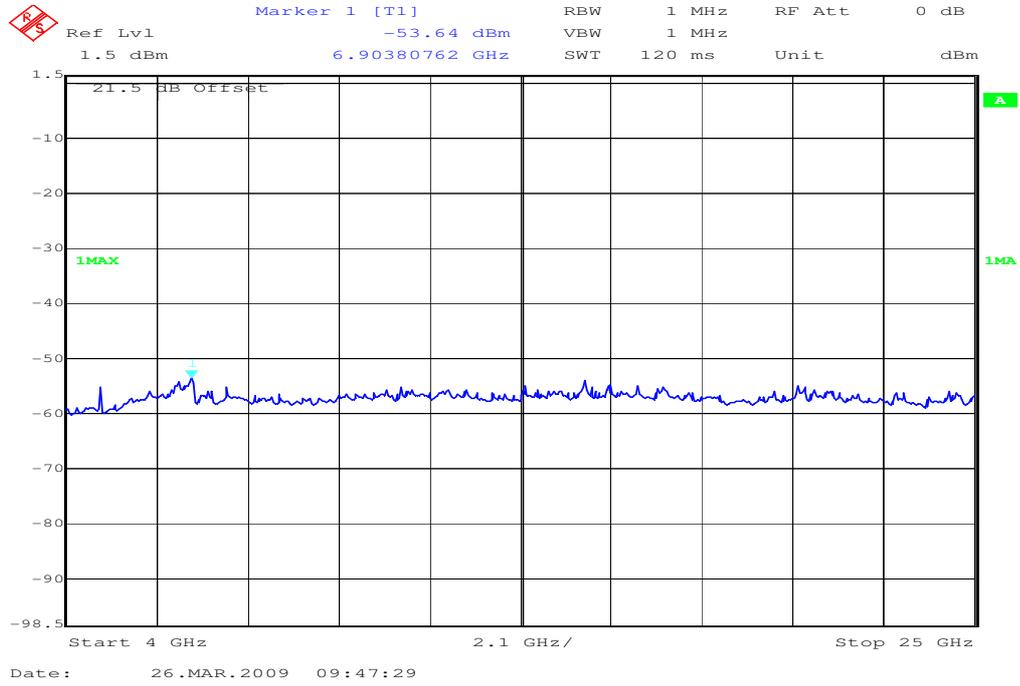


Plot 4: Middle Channel

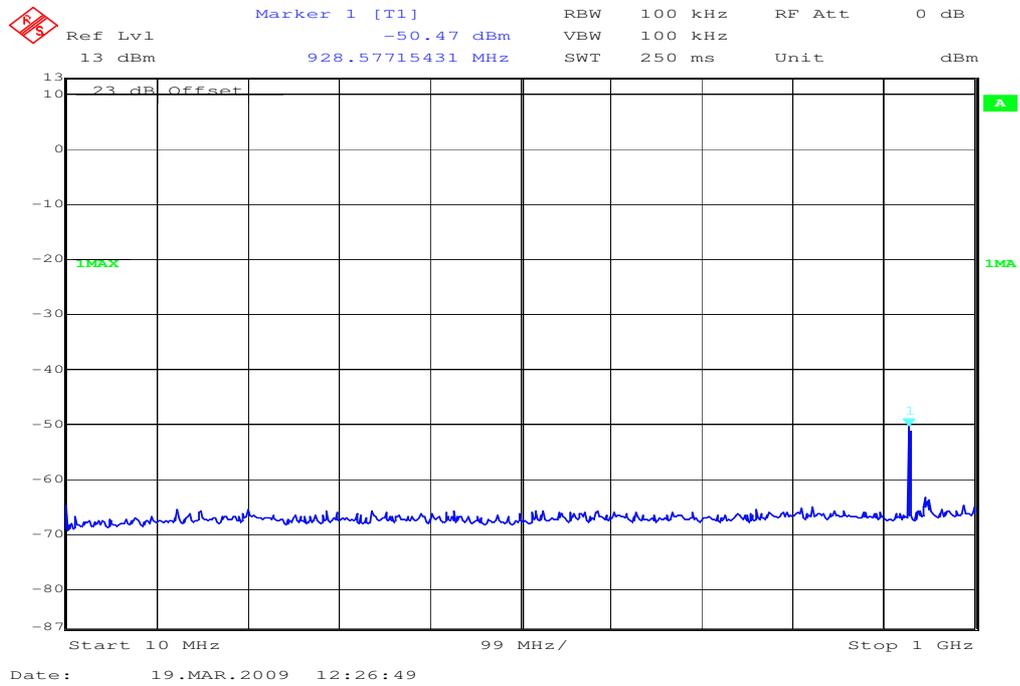


Plot 5: Middle Channel

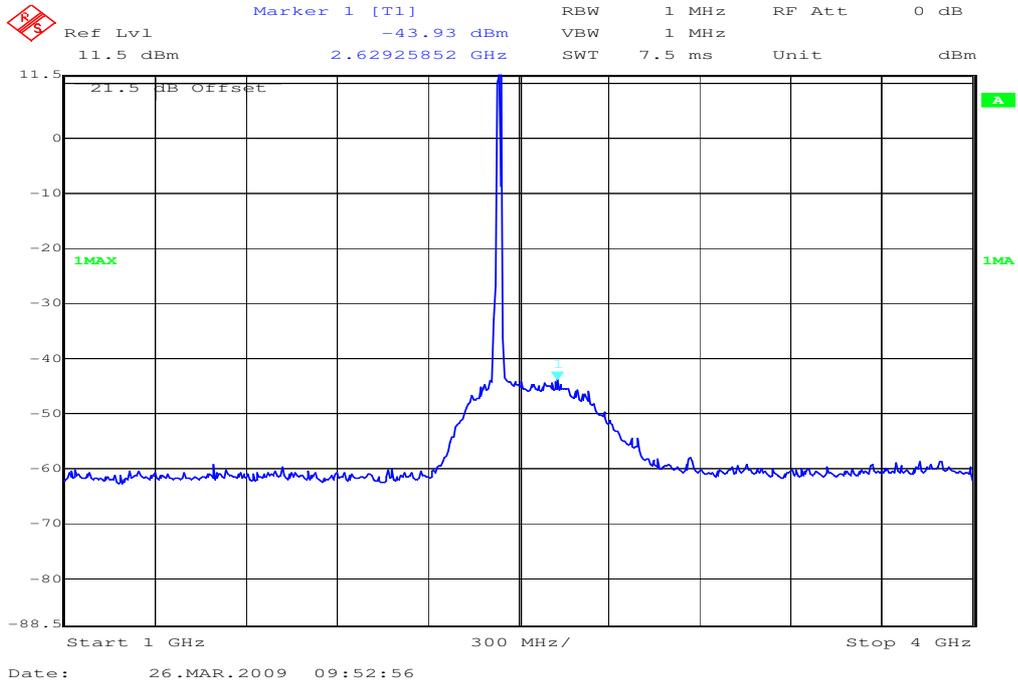

Plot 6: Middle Channel

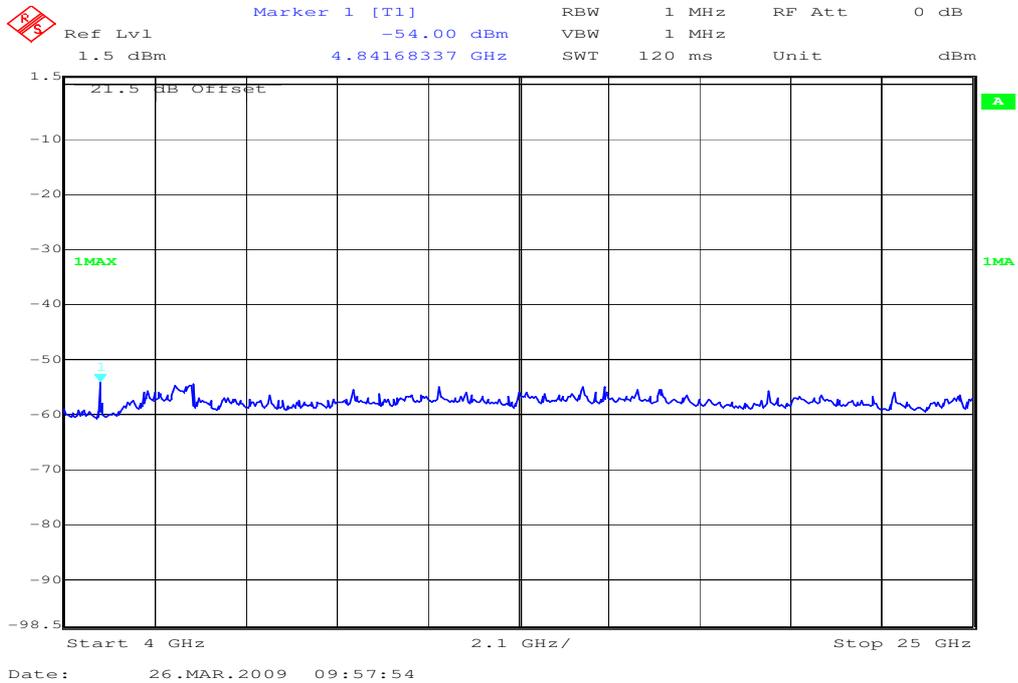

Plot 9: Highest Channel

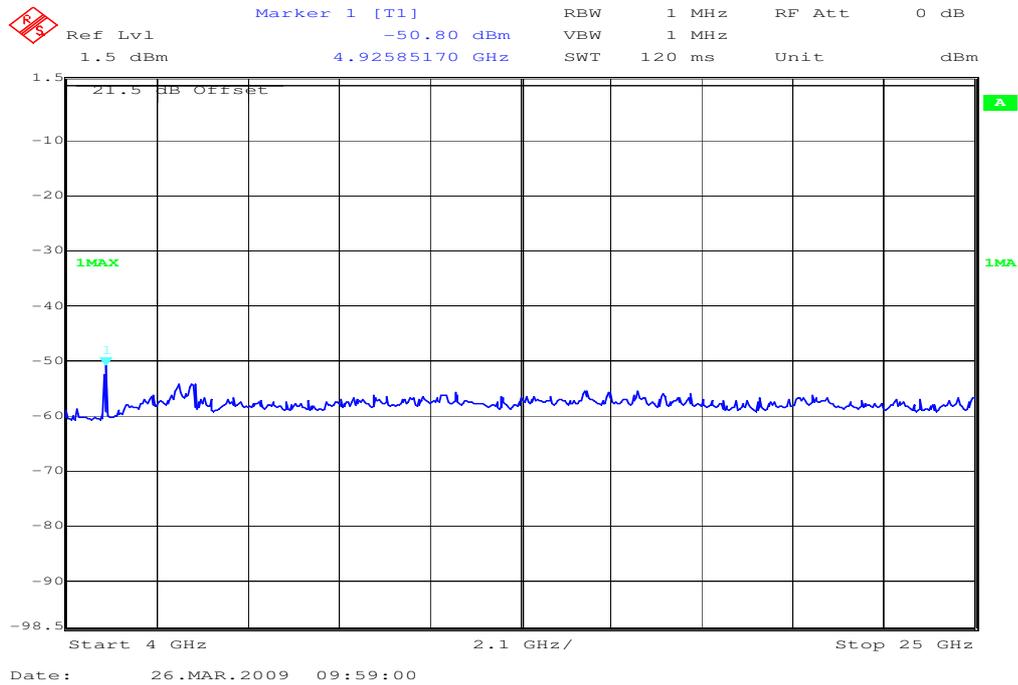

Result & Limits:

Emission Limitations					
Frequency [MHz]	Modulation (DSSS/OFDM)	amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412			30 dBm		Operating frequency
928.577	DSSS	-51.65	-20 dBc		
2472.945	DSSS	-42.82			
6903.807	DSSS	-53.64			
2437			30 dBm		Operating frequency
928.577	DSSS	-50.47	-20 dBc		
2629.258	DSSS	-43.93			
4841.683	DSSS	-54.00			
2462			30 dBm		Operating frequency
928.577	DSSS	-52.44	-20 dBc		
2629.258	DSSS	-43.66			
4925.851	DSSS	-50.80			
Measurement uncertainty			± 3dB		


RBW: 100 kHz VBW: 100 kHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--


Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

OFDM – Mode:


Plot 1: Lowest Channel

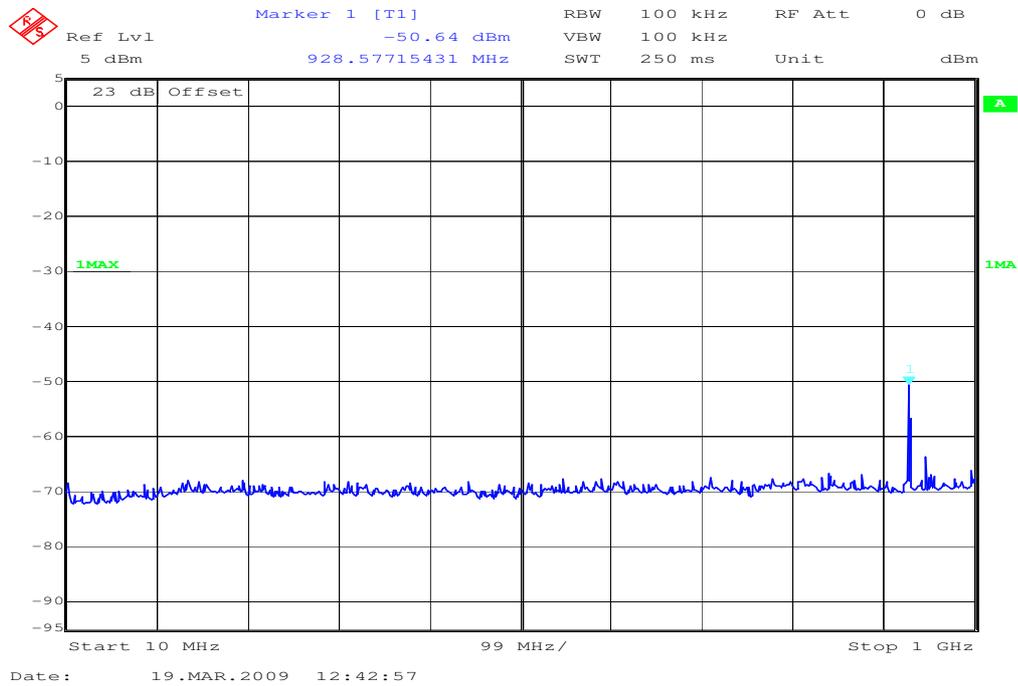


Plot 2: Lowest Channel

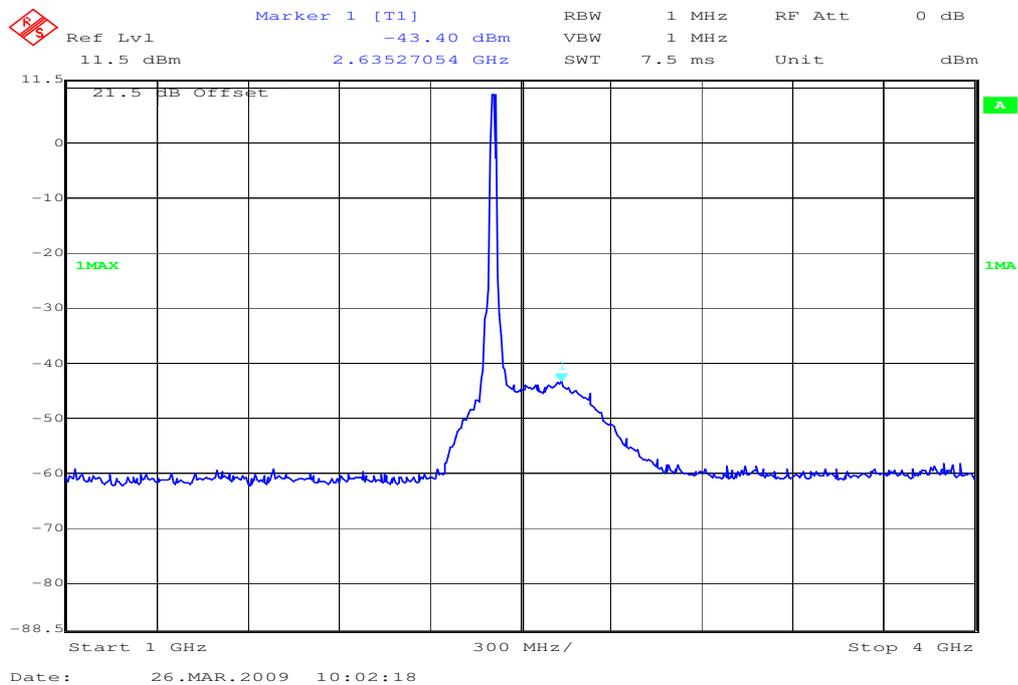


Plot 3: Lowest Channel

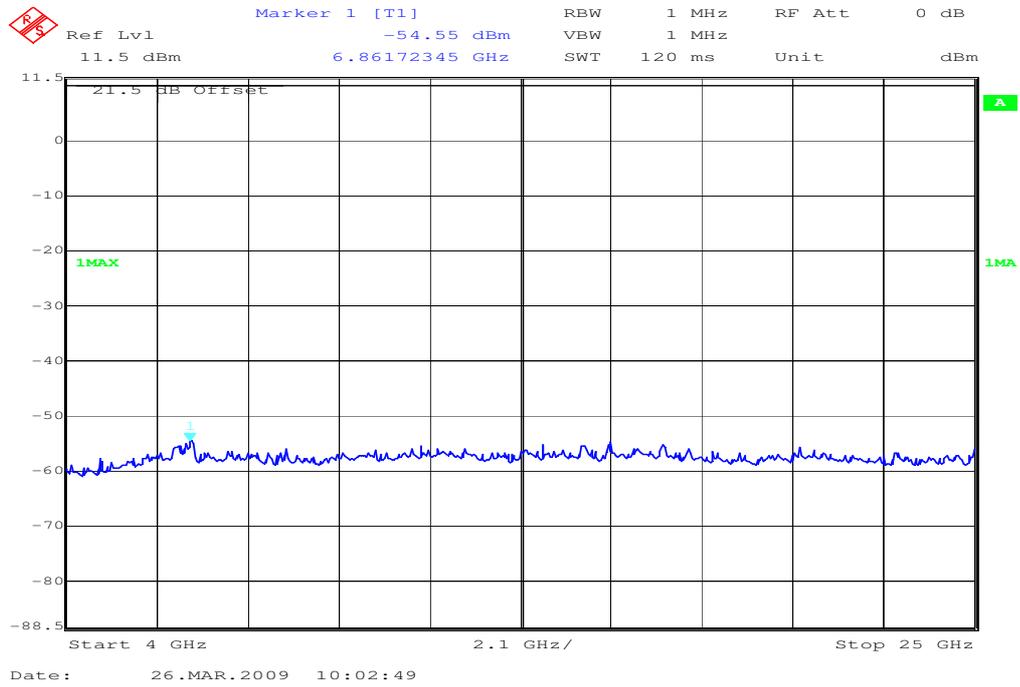


Plot 4: Middle Channel

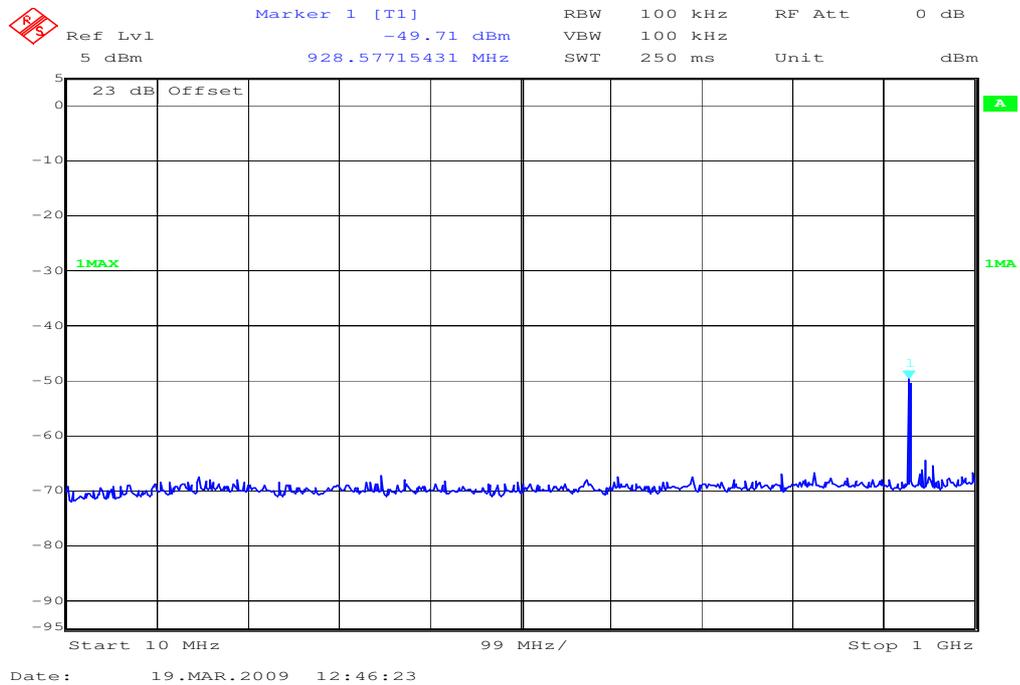


Plot 5: Middle Channel

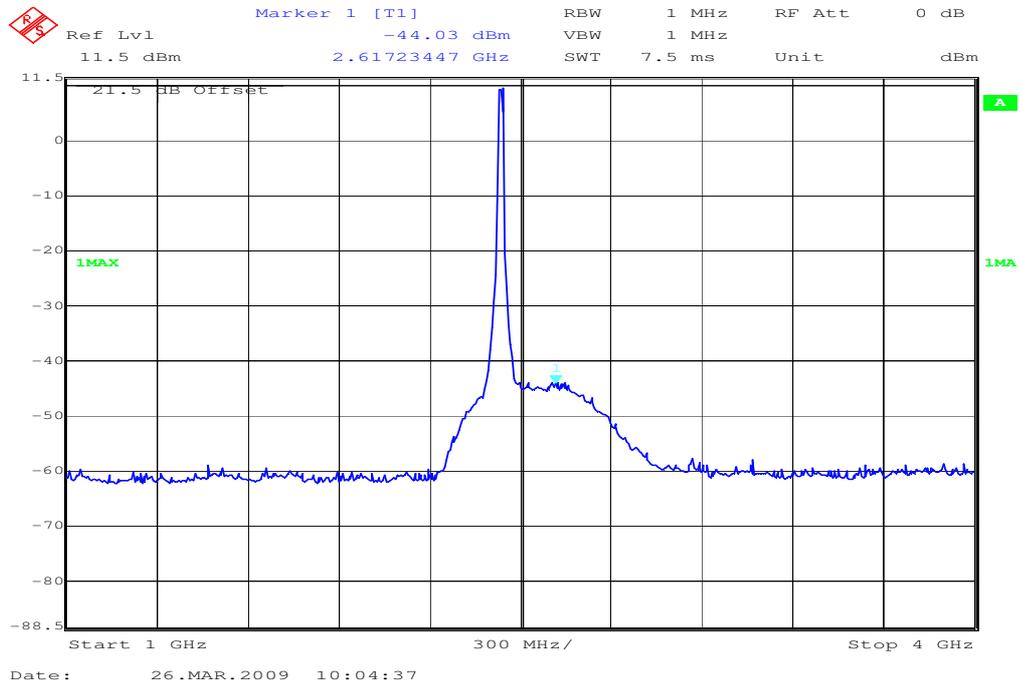

Plot 6: Middle Channel

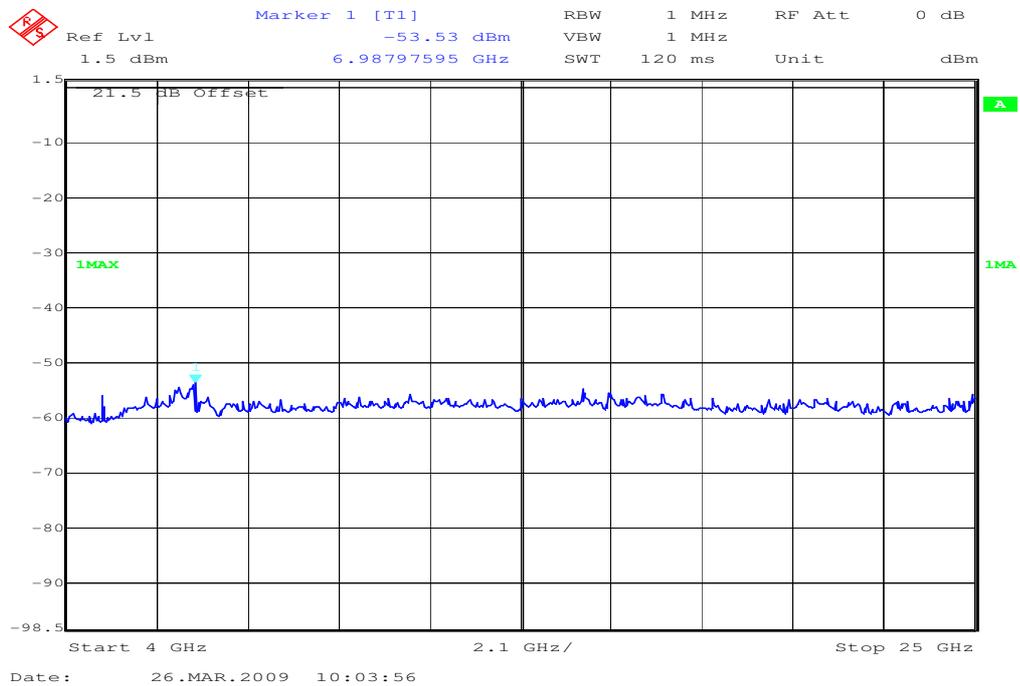

Plot 9: Highest Channel

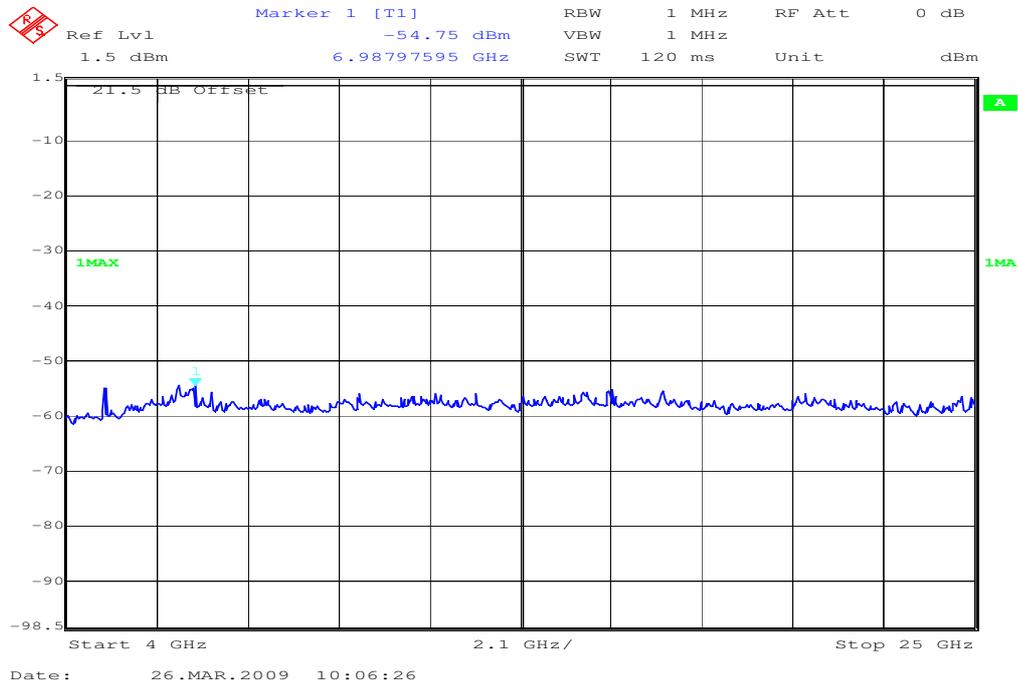

Result & Limits:

Emission Limitations					
Frequency [MHz]	Modulation (DSSS/OFDM)	amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412			30 dBm		Operating frequency
928.577	OFDM	-50.64	-20 dBc		
2635.270	OFDM	-43.40			
6861.723	OFDM	-54.55			
2437			30 dBm		Operating frequency
928.577	OFDM	-49.71	-20 dBc		
2617.234	OFDM	-44.03			
6987.975	OFDM	-53.53			
2462			30 dBm		Operating frequency
928.577	OFDM	-45.20	-20 dBc		
2623.246	OFDM	-43.48			
6987.975	OFDM	-54.75			
Measurement uncertainty		± 3dB			

RBW: 100 kHz VBW: 100 kHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

5.13 Spurious Emissions - radiated (Transmitter) §15.209

DSSS – Mode:

Plot 1: 0.03 - 1 GHz (lowest channel)


Information

EUT:	AAD-3880023-BV and AC/DC Adapter CAA-0002001-BV
Serial Number:	CB5A10WU97 and 14 08W 00503255
Test Description:	FCC part 15 B class B @ 10 m
Operating Conditions:	B-Mode, WLAN Testmode Ch. 1 and charging
Operator Name:	Hennemann
Comment:	AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

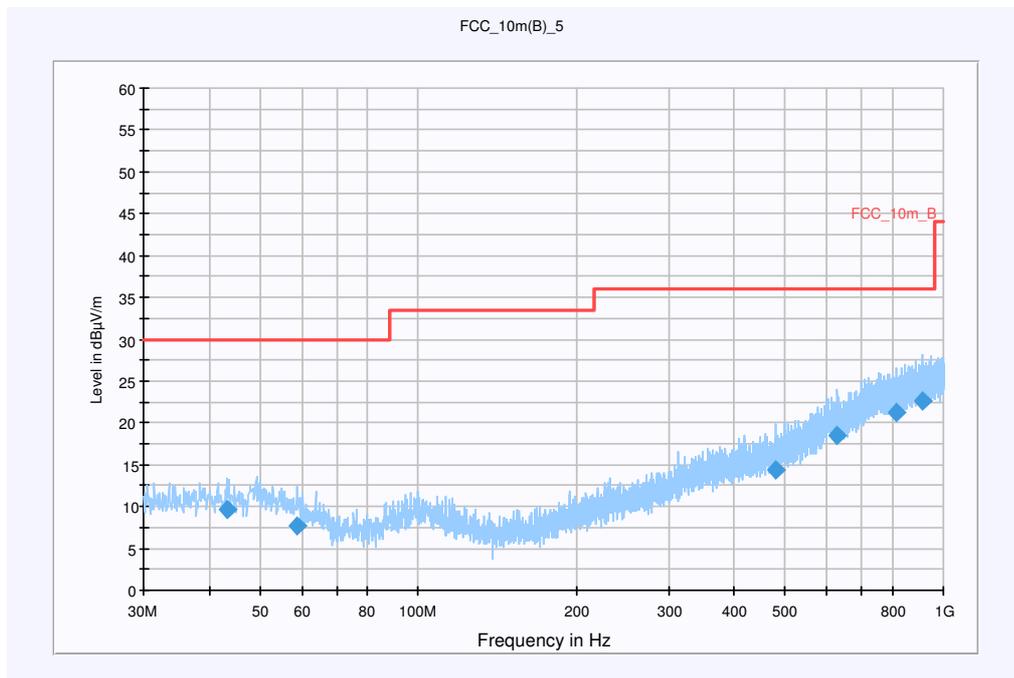


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
43.200000	9.6	15000.000	120.000	169.0	V	1.0	13.5	20.4	30.0
58.800000	7.6	15000.000	120.000	220.0	H	282.0	12.1	22.4	30.0
478.800000	14.4	15000.000	120.000	120.0	V	192.0	18.7	21.6	36.0
629.160000	18.4	15000.000	120.000	98.0	V	102.0	21.5	17.6	36.0
813.120000	21.2	15000.000	120.000	137.0	H	179.0	24.5	14.8	36.0
914.040000	22.7	15000.000	120.000	220.0	H	79.0	25.7	13.3	36.0

Plot 2: 1 - 12 GHz (lowest channel)

CETECOM ICT Services GmbH


Projekt- Nr.:1-1065-22_09

EUT:	AAD-3880023-BV	Polarisation:	Horizontal, Vertikal
Manufacturer:	Hikaru WLAN	Battery:	BST-38
IMEI:	Sony ericsson Mobile com.	HW:	A
Operator:	Traffic B-Mode Channel 1	SW:	-/-
Start of Test :	MUY	Vmin:	3.4 V DC
Standard:	18.03.2009 15:03:53	Vnom:	4.0 V DC
Signalling Unit:	FCC_15_407_2400	Vmax:	4.6 V DC
Start Freq. [MHz]:	CMU200	Stop Freq. [MHz]	12000
Transducer-File:	1000		
	C:\Spurious_neu\Messparameter\FCC_15_407_2400\Transducer_FCC_15_407_2400.xls		

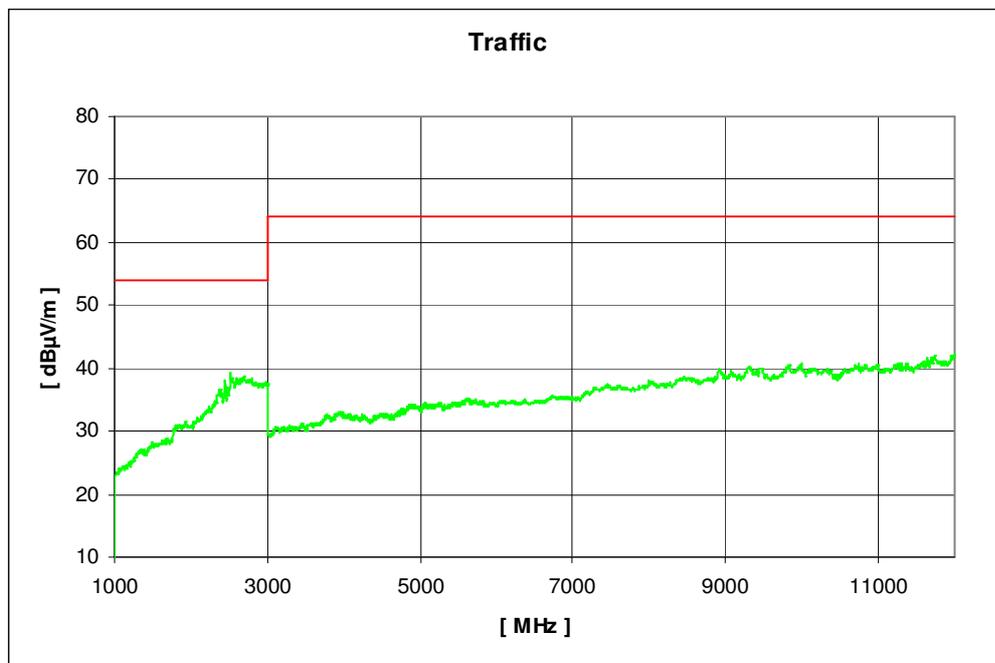

Spurious emissions above 3 GHz measured at 1 m distance.
Carrier suppressed with 2.4 GHz band rejection filter.

Plot 3: 12- 25 GHz (valid for all channels)

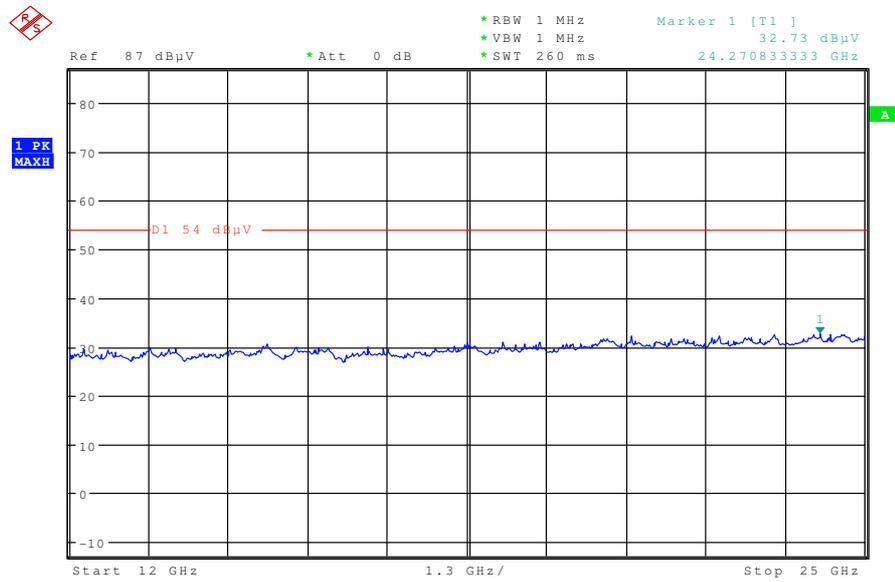

Plot 4: 0.03 - 1 GHz (middle channel)


Information

EUT:	AAD-3880023-BV and AC/DC Adapter CAA-0002001-BV
Serial Number:	CB5A10WU97 and 14 08W 00503255
Test Description:	FCC part 15 B class B @ 10 m
Operating Conditions:	B-Mode, WLAN Testmode Ch. 6 and charging
Operator Name:	Hennemann
Comment:	AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

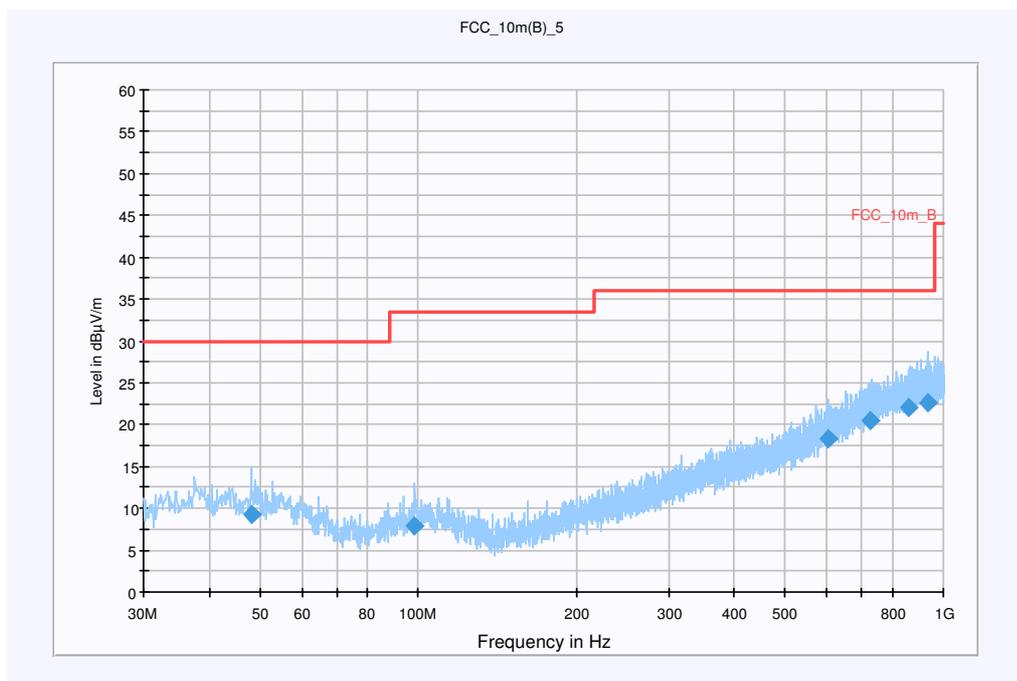


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
48.120000	9.2	15000.000	120.000	125.0	H	102.0	13.5	20.8	30.0
98.640000	8.0	15000.000	120.000	120.0	V	275.0	12.1	25.5	33.5
601.080000	18.3	15000.000	120.000	105.0	H	95.0	21.4	17.7	36.0
726.720000	20.4	15000.000	120.000	147.0	V	181.0	23.6	15.6	36.0
856.560000	22.0	15000.000	120.000	98.0	H	282.0	25.1	14.0	36.0
929.880000	22.7	15000.000	120.000	220.0	V	192.0	25.8	13.3	36.0

Plot 5: 1 - 12 GHz (middle channel)

CETECOM ICT Services GmbH

Projekt- Nr.:1-1065-22_09

<p>EUT: AAD-3880023-BV Hikaru WLAN Manufacturer: Sony ericsson Mobile com. IMEI: Traffic B-Mode Channel 6 Operator: MUY Start of Test : 18.03.2009 15:22:51 Standard: FCC_15_407_2400 Signalling Unit: CMU200 Start Freq. [MHz]: 1000 Transducer-File: C:\Spurious_neu\Messparameter\FCC_15_407_2400\Transducer_FCC_15_407_2400.xls</p>	<p>Polarisation: Horizontal, Vertikal Battery: BST-38 HW: A SW: -/ Vmin: 3.4 V DC Vnom: 4.0 V DC Vmax: 4.6 V DC Stop Freq. [MHz] 12000</p>
--	---

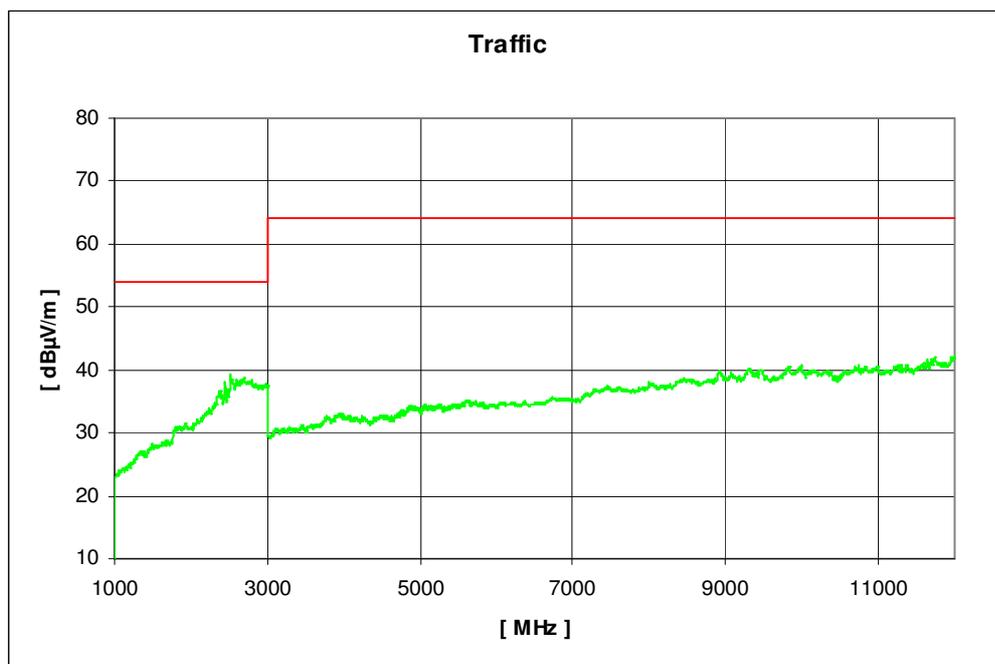

Spurious emissions above 3 GHz measured at 1 m distance.
 Carrier suppressed with 2.4 GHz band rejection filter.

Plot 8: 0.03 - 1 GHz (highest channel)


Information

EUT:	AAD-3880023-BV and AC/DC Adapter CAA-0002001-BV
Serial Number:	CB5A10WU97 and 14 08W 00503255
Test Description:	FCC part 15 B class B @ 10 m
Operating Conditions:	B-Mode, WLAN Testmode Ch. 11 and charging
Operator Name:	Hennemann
Comment:	AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

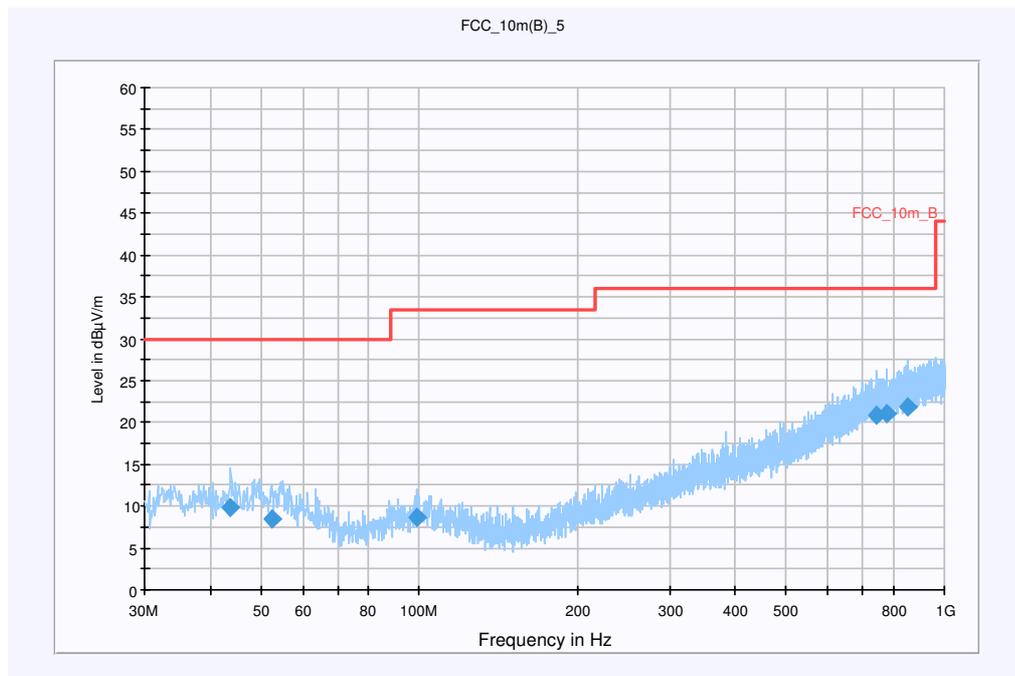


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
43.800000	9.8	15000.000	120.000	120.0	V	169.0	13.5	20.2	30.0
52.320000	8.5	15000.000	120.000	220.0	H	-1.0	13.3	21.5	30.0
99.000000	8.7	15000.000	120.000	134.0	V	192.0	12.2	24.8	33.5
744.480000	20.9	15000.000	120.000	202.0	H	102.0	24.0	15.1	36.0
777.480000	21.0	15000.000	120.000	220.0	H	192.0	24.2	15.0	36.0
851.280000	21.9	15000.000	120.000	220.0	H	-2.0	25.1	14.1	36.0

Plot 9: 1 - 12 GHz (highest channel)

CETECOM ICT Services GmbH

Projekt- Nr.:1-1065-22_09

EUT:	AAD-3880023-BV	Polarisation:	Horizontal, Vertikal
Manufacturer:	Hikaru WLAN	Battery:	BST-38
IMEI:	Sony ericsson Mobile com.	HW:	A
Operator:	Traffic B-Mode Channel 11	SW:	-/-
Start of Test :	MUY	Vmin:	3.4 V DC
Standard:	18.03.2009 15:37:59	Vnom:	4.0 V DC
Signalling Unit:	FCC_15_407_2400	Vmax:	4.6 V DC
Start Freq. [MHz]:	CMU200	Stop Freq. [MHz]	12000
Transducer-File:	1000		
	C:\Spurious_neu\Messparameter\FCC_15_407_2400\Transducer_FCC_15_407_2400.xls		

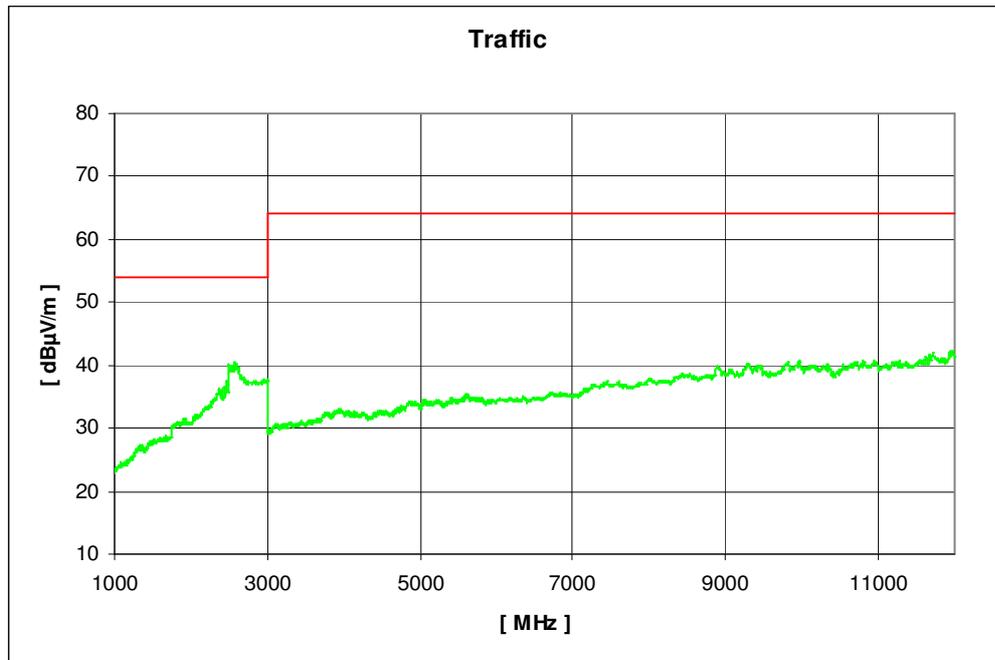

Spurious emissions above 3 GHz measured at 1 m distance.
Carrier suppressed with 2.4 GHz band rejection filter.

OFDM – Mode:

Plot 1: 0.03 - 1 GHz (lowest channel)


Information

EUT:	AAD-3880023-BV and AC/DC Adapter CAA-0002001-BV
Serial Number:	CB5A10WU97 and 14 08W 00503255
Test Description:	FCC part 15 B class B @ 10 m
Operating Conditions:	G-Mode, WLAN Testmode Ch. 1 and charging
Operator Name:	Hennemann
Comment:	AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

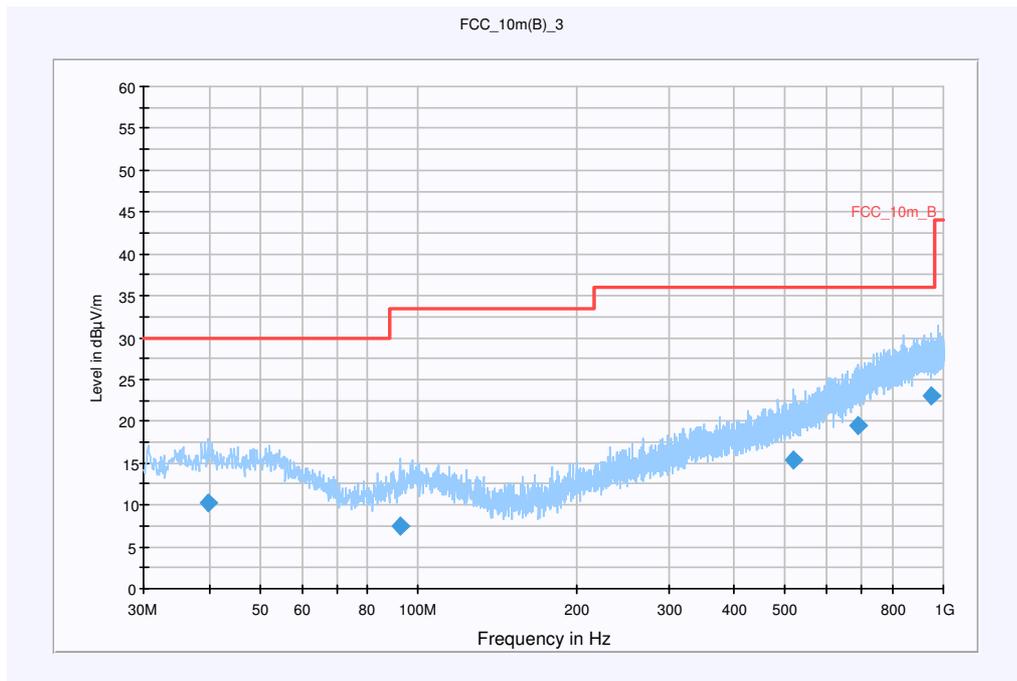


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
39.857900	10.2	15000.000	120.000	194.0	H	240.0	13.6	19.8	30.0
92.372100	7.5	15000.000	120.000	220.0	V	141.0	11.2	26.0	33.5
519.304600	15.3	15000.000	120.000	220.0	V	104.0	19.0	20.7	36.0
688.040200	19.5	15000.000	120.000	220.0	H	145.0	22.3	16.5	36.0
947.189850	23.1	15000.000	120.000	220.0	V	163.0	25.9	12.9	36.0

Plot 2: 1 - 12 GHz (lowest channel)

CETECOM ICT Services GmbH


Projekt- Nr.:1-1065-22_09

EUT:	AAD-3880023-BV	Polarisation:	Horizontal, Vertikal
Manufacturer:	Hikaru WLAN	Battery:	BST-38
IMEI:	Sony ericsson Mobile com.	HW:	A
Operator:	Traffic G-Mode Channel 1	SW:	-/-
Start of Test :	MUY	Vmin:	3.4 V DC
Standard:	18.03.2009 15:42:08	Vnom:	4.0 V DC
Signalling Unit:	FCC_15_407_2400	Vmax:	4.6 V DC
Start Freq. [MHz]:	CMU200	Stop Freq. [MHz]	12000
Transducer-File:	1000		
	C:\Spurious_neu\Messparameter\FCC_15_407_2400\Transducer_FCC_15_407_2400.xls		

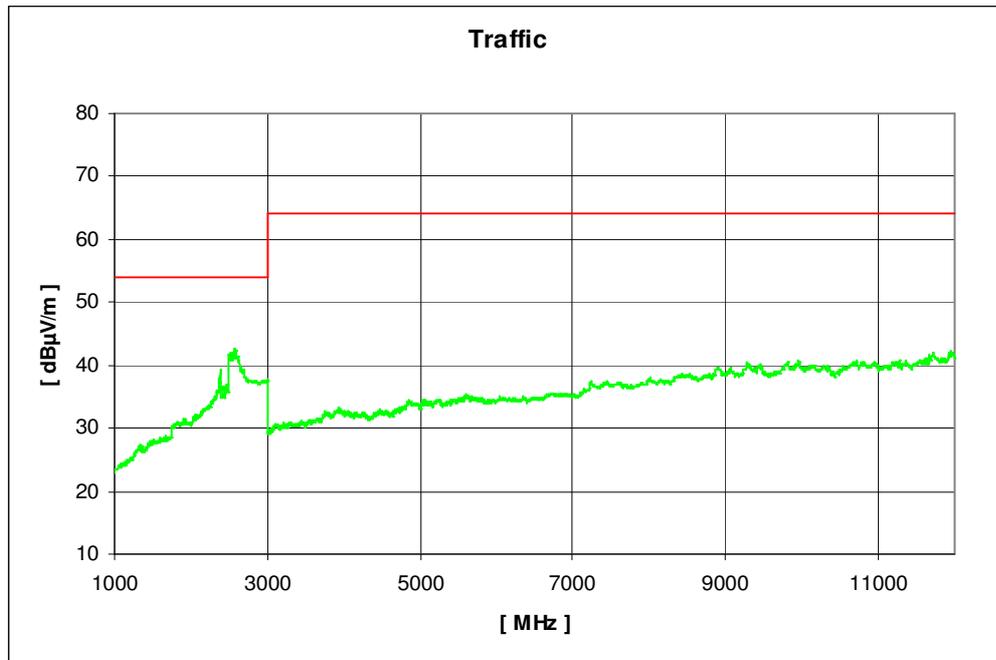

Spurious emissions above 3 GHz measured at 1 m distance.
Carrier suppressed with 2.4 GHz band rejection filter.

Plot 3: 12- 25 GHz (valid for all bands and all channels)

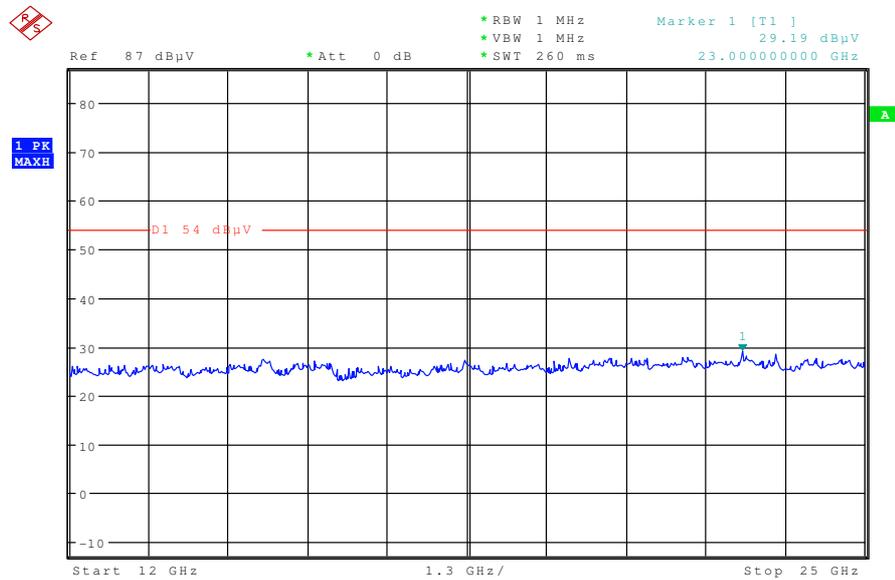

Plot 4: 0.03 - 1 GHz (middle channel)


Information

EUT:	AAD-3880023-BV and AC/DC Adapter CAA-0002001-BV
Serial Number:	CB5A10WU97 and 14 08W 00503255
Test Description:	FCC part 15 B class B @ 10 m
Operating Conditions:	G-Mode, WLAN Testmode Ch. 6 and charging
Operator Name:	Hennemann
Comment:	AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

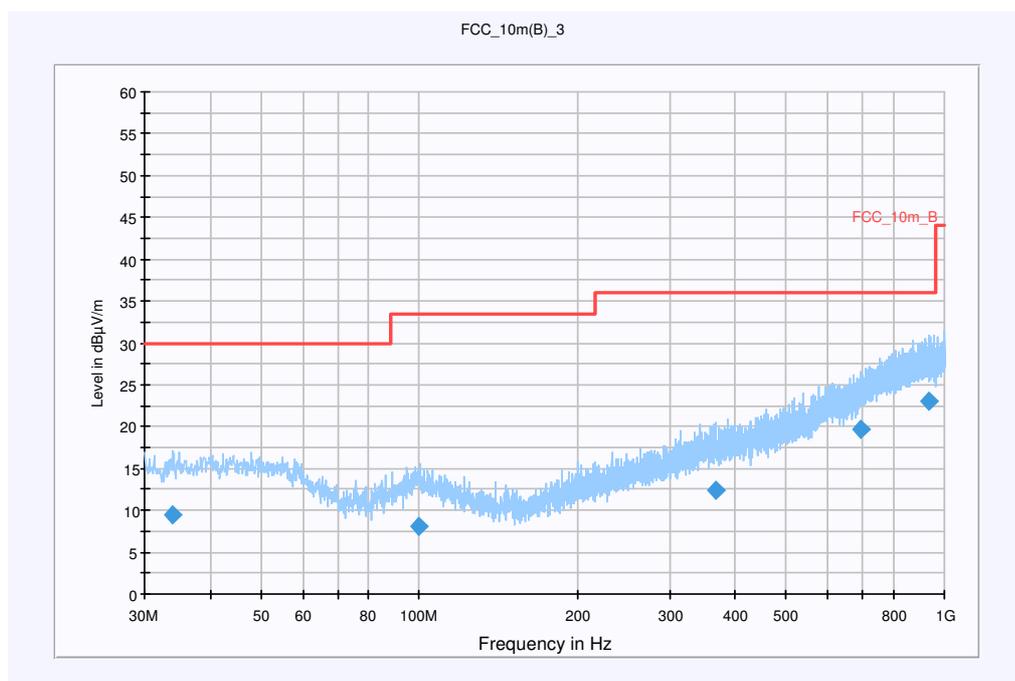


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
33.981150	9.4	15000.000	120.000	220.0	V	50.0	13.0	20.6	30.0
100.105100	8.0	15000.000	120.000	220.0	V	236.0	12.3	25.5	33.5
366.019250	12.4	15000.000	120.000	220.0	V	40.0	16.4	23.6	36.0
693.483300	19.7	15000.000	120.000	213.0	H	323.0	22.4	16.3	36.0
931.812600	23.1	15000.000	120.000	220.0	H	220.0	25.9	12.9	36.0

Plot 5: 1 - 12 GHz (middle channel)

CETECOM ICT Services GmbH

Projekt- Nr.:1-1065-22_09

EUT:	AAD-3880023-BV Hikaru WLAN	Polarisation:	Horizontal, Vertikal
Manufacturer:	Sony ericsson Mobile com.	Battery:	BST-38
IMEI:	Traffic G-Mode Channel 6	HW:	A
Operator:	MUY	SW:	-/-
Start of Test :	18.03.2009 15:46:24	Vmin:	3.4 V DC
Standard:	FCC_15_407_2400	Vnom:	4.0 V DC
Signalling Unit:	CMU200	Vmax:	4.6 V DC
Start Freq. [MHz]:	1000	Stop Freq. [MHz]	12000
Transducer-File:	C:\Spurious_neu\Messparameter\FCC_15_407_2400\Transducer_FCC_15_407_2400.xls		

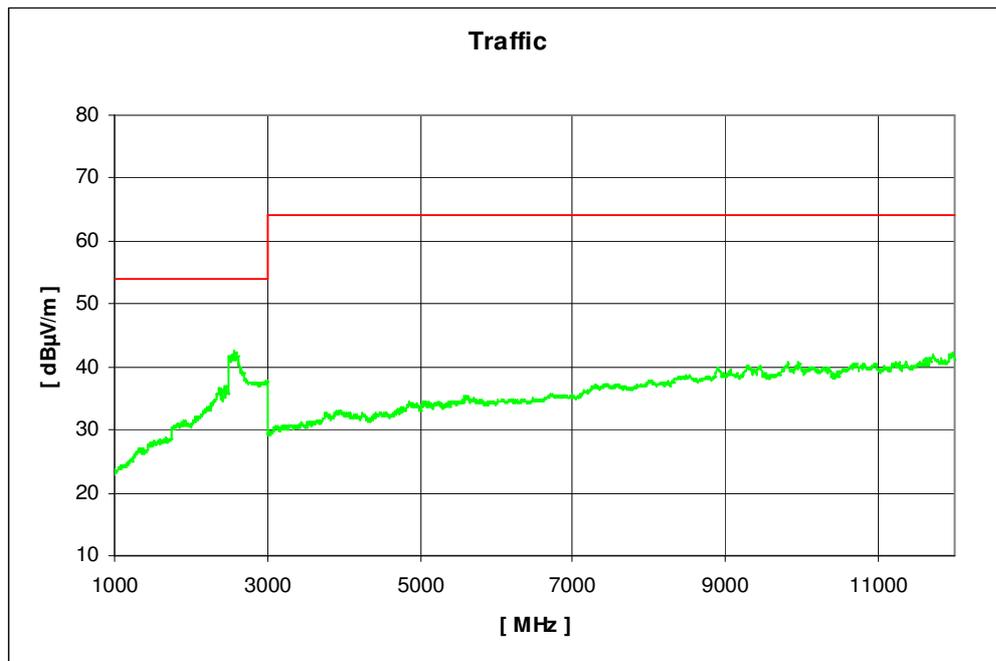

Spurious emissions above 3 GHz measured at 1 m distance.
Carrier suppressed with 2.4 GHz band rejection filter.

Plot 8: 0.03 - 1 GHz (highest channel)


Information

EUT:	AAD-3880023-BV and AC/DC Adapter CAA-0002001-BV
Serial Number:	CB5A10WU97 and 14 08W 00503255
Test Description:	FCC part 15 B class B @ 10 m
Operating Conditions:	G-Mode, WLAN Testmode Ch. 11 and charging
Operator Name:	Hennemann
Comment:	AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

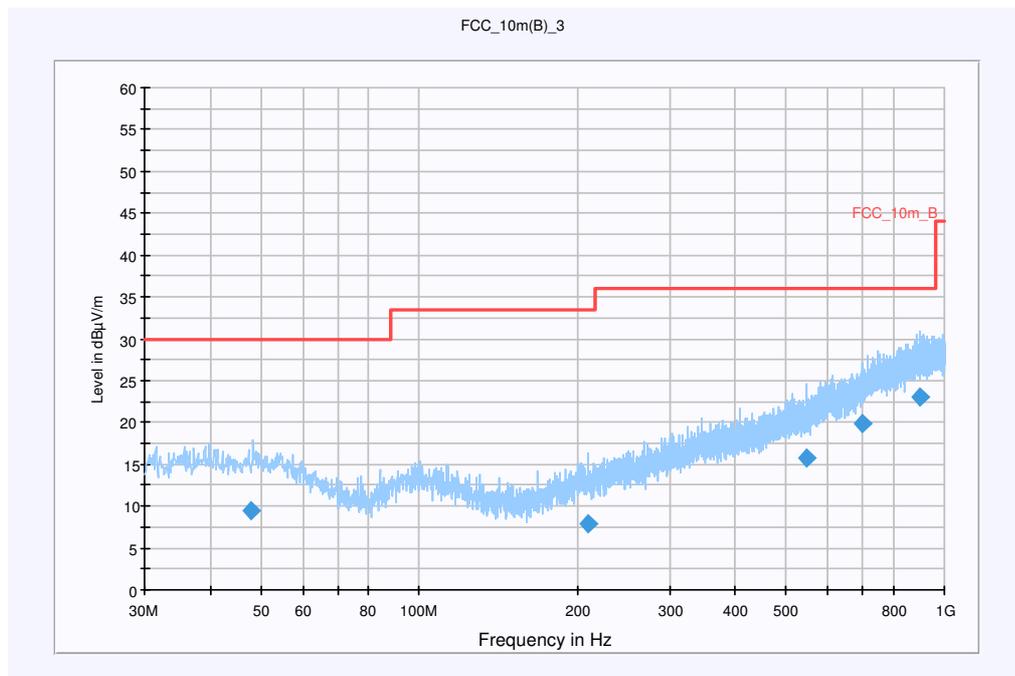


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
47.977700	9.4	15000.000	120.000	193.0	V	233.0	13.5	20.6	30.0
210.219450	7.8	15000.000	120.000	178.0	H	143.0	12.2	25.7	33.5
546.223950	15.8	15000.000	120.000	220.0	V	50.0	19.4	20.2	36.0
698.723650	19.9	15000.000	120.000	130.0	V	97.0	22.6	16.1	36.0
900.657350	23.1	15000.000	120.000	214.0	V	309.0	25.8	12.9	36.0

Plot 9: 1 - 12 GHz (highest channel)

CETECOM ICT Services GmbH

Projekt- Nr.:1-1065-22_09

EUT:	AAD-3880023-BV Hikaru WLAN	Polarisation:	Horizontal, Vertikal
Manufacturer:	Sony ericsson Mobile com.	Battery:	BST-38
IMEI:	Traffic G-Mode Channel 11	HW:	A
Operator:	MUY	SW:	-/-
Start of Test :	18.03.2009 15:50:06	Vmin:	3.4 V DC
Standard:	FCC_15_407_2400	Vnom:	4.0 V DC
Signalling Unit:	CMU200	Vmax:	4.6 V DC
Start Freq. [MHz]:	1000	Stop Freq. [MHz]	12000
Transducer-File:	C:\Spurious_neu\Messparameter\FCC_15_407_2400\Transducer_FCC_15_407_2400.xls		

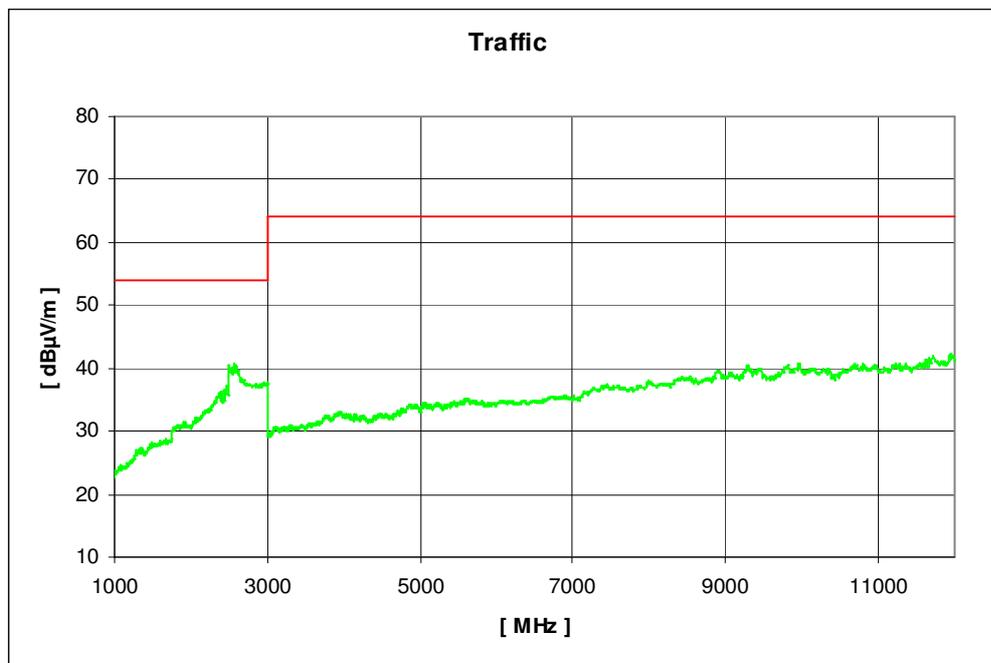

Spurious emissions above 3 GHz measured at 1 m distance.
Carrier suppressed with 2.4 GHz band rejection filter.

Results:

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
Frequency [MHz]	Detector	Level [dBµV/m]	Frequency [MHz]	Detector	Level [dBµV/m]	Frequency [MHz]	Detector	Level [dBµV/m]
No peak detected								
Measurement uncertainty					±3 dB			

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.109

Frequency (MHz)	Field strength (dBµV/m)	Measurement distance (m)
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
above 960	54.0	3

5.14 Spurious Emissions - radiated (Receiver) §15.109 / 209

DSSS & OFDM:

Plot 1: 0.03 - 1 GHz vertical / horizontal (receiver)


Information

EUT:	AAD-3880023-BV and AC/DC Adapter CAA-0002001-BV
Serial Number:	CB5A10WU97 and 14 08W 00503255
Test Description:	FCC part 15 B class B @ 10 m
Operating Conditions:	Idle Mode
Operator Name:	Hennemann
Comment:	AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dBµV/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

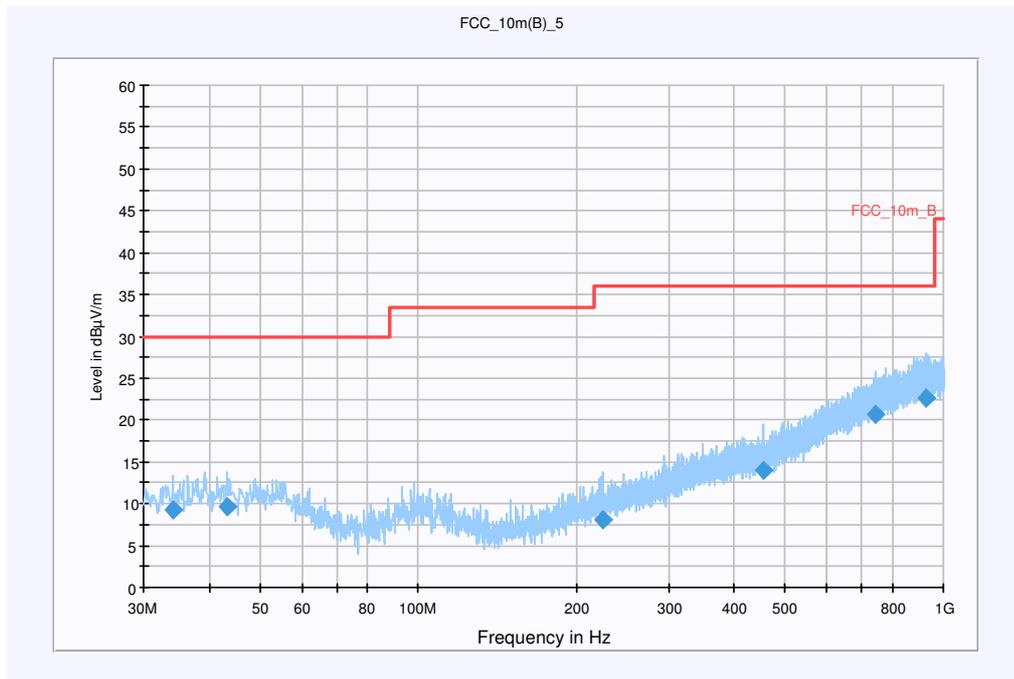


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
34.080000	9.3	15000.000	120.000	220.0	H	10.0	13.1	20.7	30.0
43.320000	9.6	15000.000	120.000	116.0	H	282.0	13.5	20.4	30.0
225.000000	8.1	15000.000	120.000	140.0	V	282.0	12.8	27.9	36.0
453.600000	13.9	15000.000	120.000	98.0	V	270.0	18.1	22.1	36.0
740.400000	20.8	15000.000	120.000	220.0	H	261.0	23.9	15.2	36.0
924.360000	22.7	15000.000	120.000	208.0	V	169.0	25.8	13.3	36.0

Plot 2: 1 - 12 GHz vertical / horizontal (receiver)

CETECOM ICT Services GmbH


Projekt- Nr.:1-1065-22_09

EUT:	AAD-3880023-BV	Polarisation:	Horizontal, Vertikal
Manufacturer:	Hikaru WLAN	Battery:	BST-38
IMEI:	Sony ericsson Mobile com.	HW:	A
Operator:	Idle Mode	SW:	-/-
Start of Test :	MUY	Vmin:	3.4 V DC
Standard:	18.03.2009 15:00:06	Vnom:	4.0 V DC
Signalling Unit:	FCC_15_407_2400	Vmax:	4.6 V DC
Start Freq. [MHz]:	CMU200	Stop Freq. [MHz]	12000
Transducer-File:	1000		
	C:\Spurious_neu\Messparameter\FCC_15_407_2400\Transducer_FCC_15_407_2400.xls		

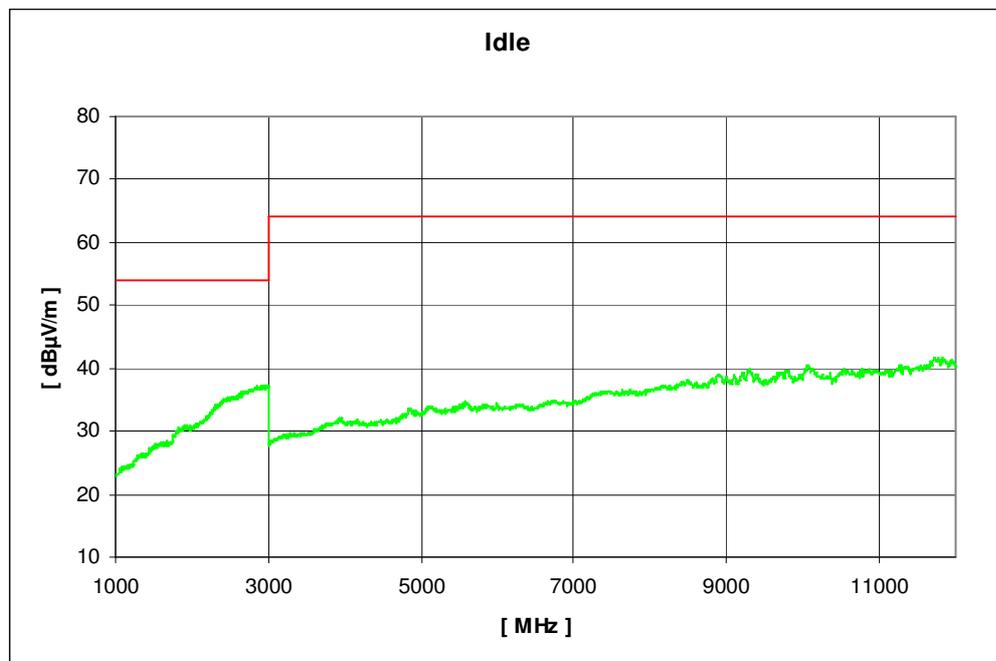

Spurious emissions above 3 GHz measured at 1 m distance.

Plot 2: 12 - 25 (receiver)

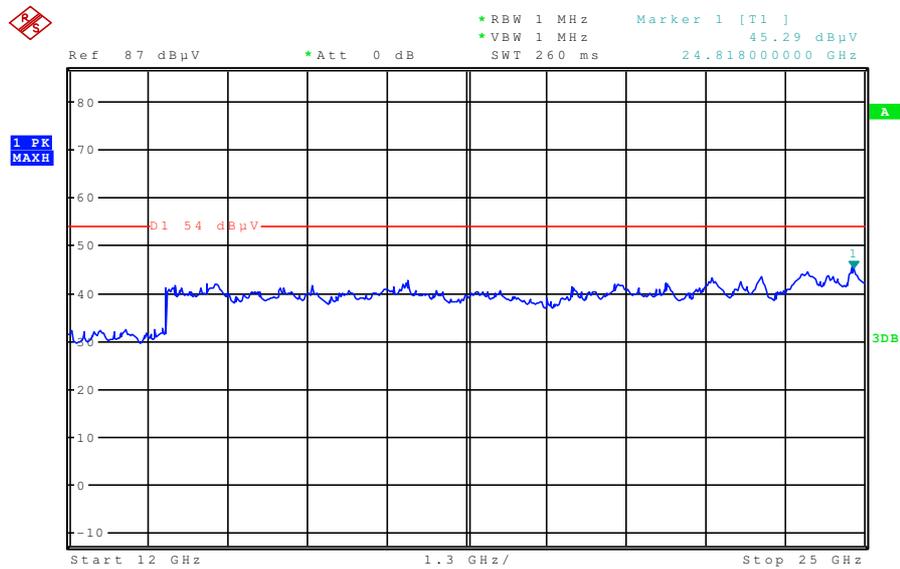

Results:

Spurious Emissions level [dBµV/m]		
Frequency [MHz]	Detector	Level [dBµV/m]
Measurement uncertainty		±3 dB

f < 1 GHz : RBW/VBW: 100 kHz f ≥ 1GHz : RBW/VBW: 1 MHz

See above plots

Measurement distance see table

Limits: § 15.109

Frequency (MHz)	Field strength (dBµV/m)	Measurement distance (m)
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
above 960	54.0	3


5.15 Spurious Emissions - radiated <30 MHz §15.209

DSSS & OFDM:

Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

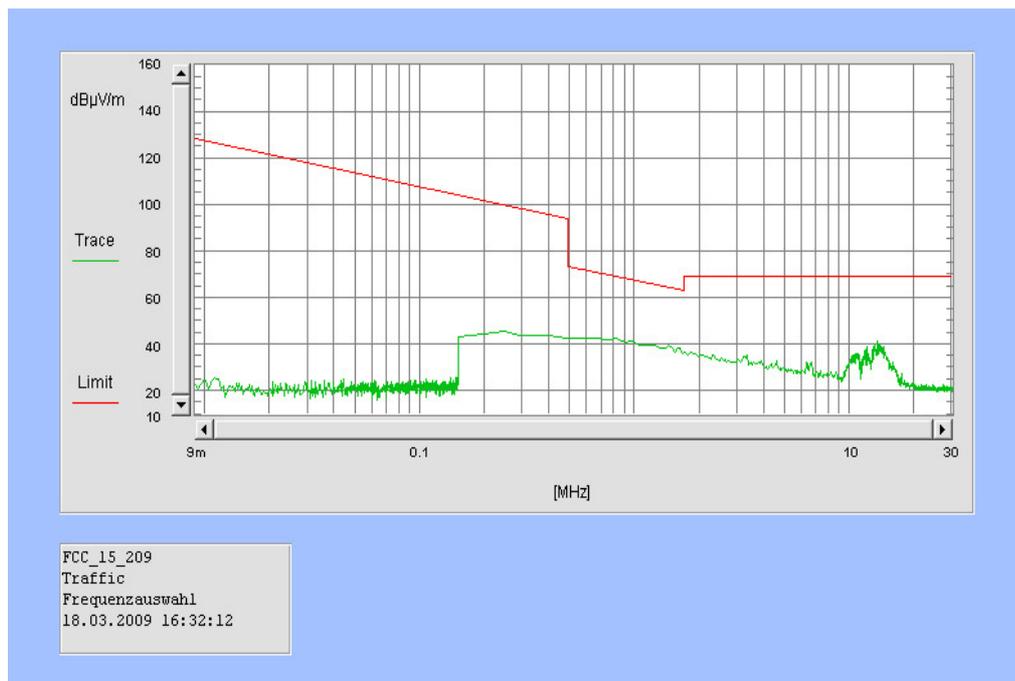

Limits:


Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30
30 - 88	100 / 40 dBµV/m	3
88 - 216	150 / 43.5 dBµV/m	3
216 - 960	200 / 46 dBµV/m	3
above 960	54 dBµV/m	3

5.16 Conducted Emissions <30 MHz §15.107/207


DSSS & OFDM:

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.


Plot 1: Traffic Mode (Neutral Line)

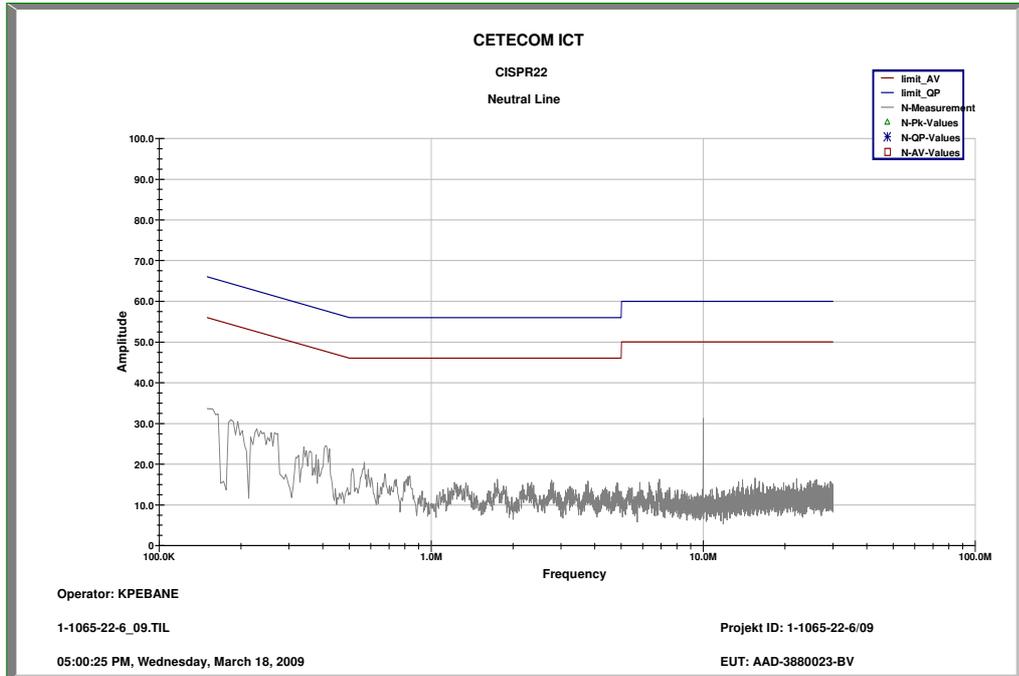


Plot 2: Traffic Mode (Phase Line)

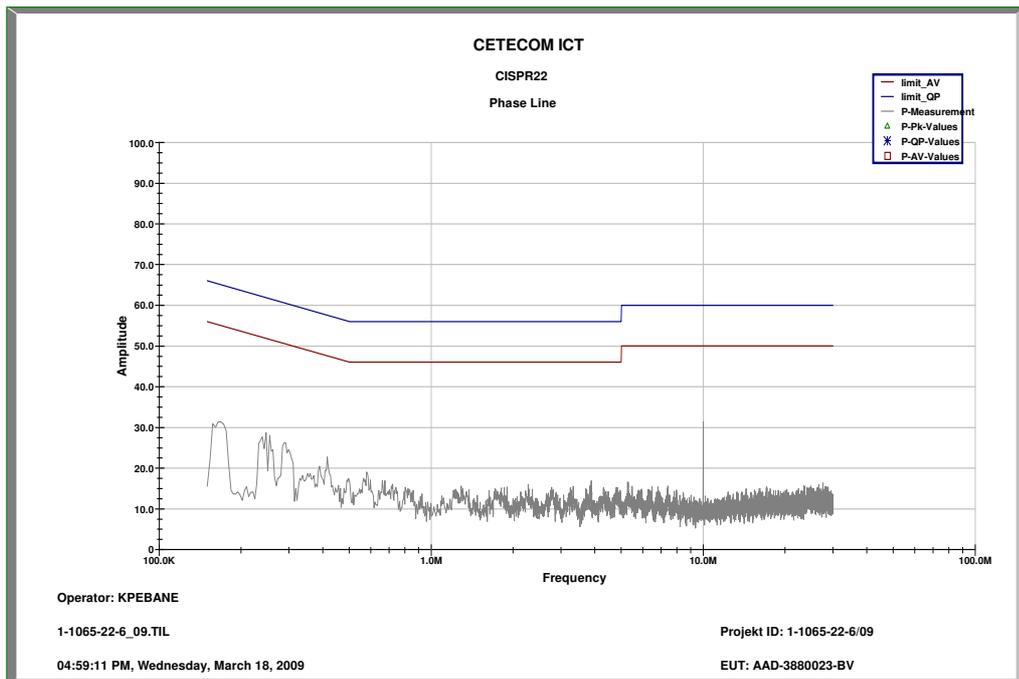

Plot 3: Idle Mode (Neutral Line)

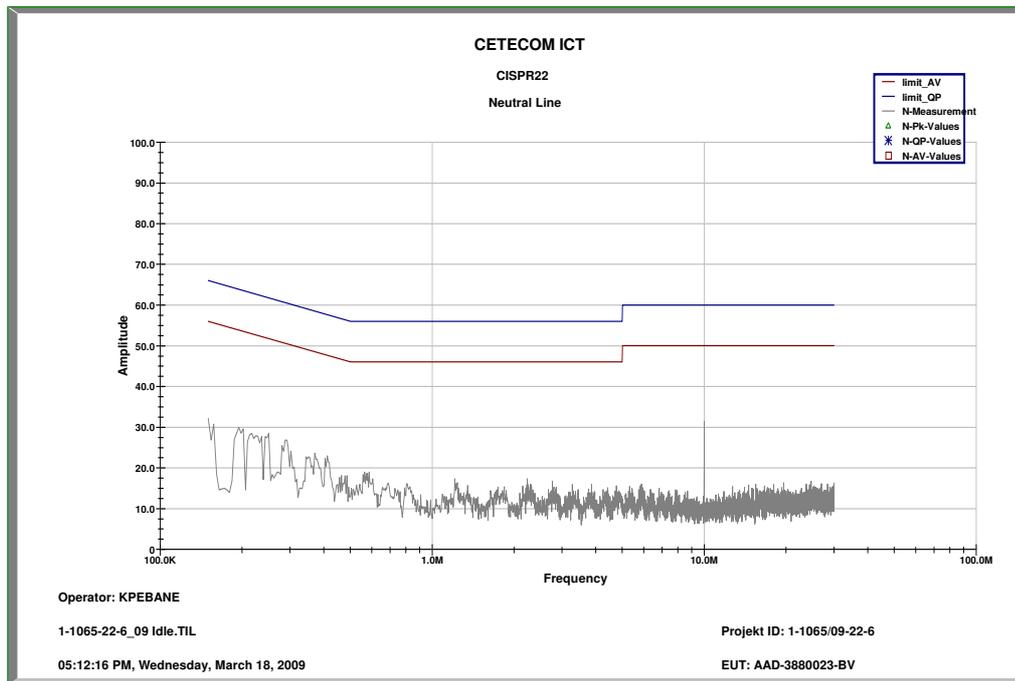

Plot 4: Idle Mode (Phase Line)

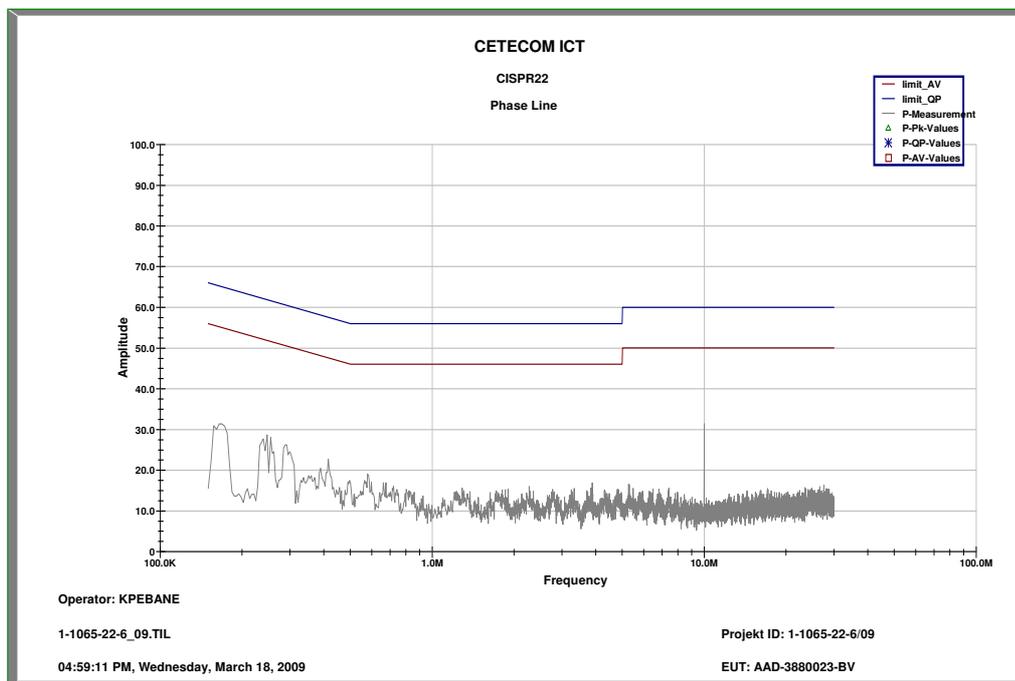

Limits:

Under normal test conditions only	See plots
-----------------------------------	-----------

6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

All reported calibration intervals are calibrations according to the EN/ISO/IEC 17025 standard. These calibrations were performed from an accredited external calibration laboratory.

Additional to these calibrations the laboratory performed comparison measurements with other calibrated systems and performed a weekly chamber inspection.

All used devices are connected with a 10 MHz external reference.

According to the manufacturers' instruction is it possible to establish a calibration interval for the FSP unit of 24 month, if the device has an external 10 MHz reference.

Anechoic chamber A:

No.	Instrument/Ancillary	Manufacturer	Type	Serial-No.	Internal identification
Radiated emission in chamber A					
A-1	Spectrum Analyzer	Rohde & Schwarz	ESU26	100037	300003555
A-2	Signal Generator	Rohde & Schwarz	SMR20B11	1104.0002.20	300003593
A-3	RF System Panel	Rohde & Schwarz	TS RSP	---	300003556
A-4	Relais Matrix	Rohde & Schwarz	PSN	860673/009	300001385
A-5	Horn Antenna	EMCO	3115	9709-5290	300000212
A-6	Bilog.-Log. Antenna	Schwarzbeck	VULB 9163	02/00	300003696
A-7	Notch Filter GSM 900	Wainwright	WRCD 901.9/903.1EE	9	---
A-8	Notch Filter GSM 1800	Wainwright	WRCD 1747/1748-5EE	1	---
A-9	Notch Filter GSM 1900	Wainwright	WRCB 1879.5/1880.5EE	9	---
A-10	Notch Filter GSM 850	Wainwright	WRCT 837-0.2/50-8EE	1	---
A-11	Notch Filter UMTS	Wainwright	WRCD 1800/2000-0.2/40-5EEK	2	---
A-12	Notch Filter ISM 2400	Wainwright	WRCG 2400/ 2483-2375/2505-50/10SS	26	---
A-13	High Pass Filter 1.1 GHz	Wainwright	WHK 1.1/15G-10SS	---	---
A-14	High Pass Filter 2.6 GHz	Wainwright	WHKX 2.6/18G-12SS	---	---
A-15	High Pass Filter 7 GHz	Wainwright	WHKX 7.0/18G-8SS	---	---
A-14	Amplifier	Miteq	AFS4-00201800-15-10P-6	US42-0050 2650-28-5A	300003204
A-16	Controller	Inn co	CO 2000	2020507	---
A-17	DC Power Supply	Hewlet Packard	HP6632A	---	300000924
A-18	Computer	F+W	---	---	300003303

SRD Laboratory Room 002:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	System Controller PSM 12	R&S	835259/007	3000002681-00xx	n.a.		
2	Memory Extension PSM-K10	R&S	To 1	3000002681	n.a.		
3	Operating Software PSM-B2	R&S	To 1	3000002681	n.a.		
4	19" Monitor		22759020-ED	3000002681	n.a.		
5	Mouse		LZE 0095/6639	3000002681	n.a.		
6	Keyboard		G00013834L461	3000002681	n.a.		
7	Spectrum Analyser FSIQ 26	R&S	835540/018	3000002681-0005	10.01.2008	24	10.01.2010
8	Tracking Generator FSIQ-B10	R&S	835107/015	3000002681	s.No.7		
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	3000002681-0002	26.08.2008	36	26.08.2011
11	Modulation Coder SMIQ-B20	R&S	To 10	3000002681	s.No.10		
12	Data Generator SMIQ-B11	R&S	To 10	3000002681	s.No.10		
13	RF Rear Connection SMIQ-B19	R&S	To 10	3000002681	s.No.10		
14	Broadband horn antenna (1-18 GHz)	EMCO	9107-3696	300001604	16.04.2008	24	16.04.2010
15	Broadband horn antenna (1-18 GHz)	EMCO	9107-3697	300001605	21.08.2008	24	21.08.2010
16	Std gain horn antenna (18-26.5 GHz)	Narda	Model no. 638	3000000486	n.a.		
17	Std gain horn antenna (18-26.5 GHz)	Narda	Model no. 638	3000000487	n.a.		
18	Sleeve dipole antenna Model 3126-880	ETS-Lindgren	00040887	3000000	n.a.		
19	Fast CPU SM-B50	R&S	To 10	3000002681	s.No.10		
20	FM Modulator SM-B5	R&S	835676/033	3000002681	s.No.10		
21	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	3000002681-0001	25.08.2008	36	25.08.2011
22	Modulation Coder SMIQ-B20	R&S	To 16	3000002681	s.No.16		
23	Data Generator SMIQ-B11	R&S	To 16	3000002681	s.No.16		
24	RF Rear Connection SMIQ-B19	R&S	To 16	3000002681	s.No.16		
25	Fast CPU SM-B50	R&S	To 16	3000002681	s.No.16		
26	FM Modulator SM-B5	R&S	836061/022	3000002681	s.No.16		
27	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	3000002681-0003	26.08.2008	36	26.08.2011
28	Attenuator SMP-B15	R&S	835136/014	3000002681	S.No.22		
29	RF Rear Connection SMP-B19	R&S	834745/007	3000002681	S.No.22		
30	Power Meter NRVD	R&S	835430/044	3000002681-0004	26.08.2008	24	26.08.2010
31	Power Sensor NRVD-Z1	R&S	833894/012	3000002681-0013	26.08.2008	24	26.08.2010
32	Power Sensor NRVD-Z1	R&S	833894/011	3000002681-0010	26.08.2008	24	26.08.2010
33	Rubidium Standard RUB	R&S		3000002681-0009	27.08.2008	24	27.08.2010
34	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	3000002681-0006	Verified with path compensation		
35	Laser Printer HP Deskjet 2100	HP	N/A	3000002681-0011	n.a.		
36	19" Rack	R&S	11138363000004	3000002681	n.a.		
37	RF-cable set	R&S	N/A	3000002681	n.a.		
39	IEEE-cables	R&S	N/A	3000002681	n.a.		
40	Sampling System FSIQ-B70	R&S	835355/009	3000002681	s.No.7		
41	RSP programmable attenuator	R&S	834500/010	3000002681-0007	26.08.2008	24	26.08.2010
42	Signalling Unit	R&S	838312/011	3000002681	n.a.		
43	NGPE programmable Power Supply for EUT	R&S	192.033.41	3000002681			
44	Power Splitter 6005-3	Inmet Corp.	none	300002841	23.12.2006	24	23.12.2008
45	SMA Cables SPS-1151-985-SPS	Insulated Wire	different	different	n.a.		
46	CBT32 with EDR Signaling Unit	R&S					

47	Coupling unit	Narda	N/A	--	n.a.		
48	2xSwitch Matrix PSU	R&S	872584/021	300001329	n.a.		
49	RF-cable set	R&S	N/A	different	n.a.		
50	IEEE-cables	R&S	N/A	--	n.a.		

Note: 3000002681-00xx inventoried as a system

SRD Laboratory Room 005:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Spektrum Analyzer 8566B	HP	2747A05275	300000219	18.01.2008	24	18.01.2010
2	Spektrum Analyzer Display 85662A	HP	2816A16497	300001690	23.01.2008	24	23.01.2010
3	Quasi-Peak-Adapter 85650A	HP	2811A01135	300000216	23.01.2008	24	23.01.2010
4	Power Supply	Heiden	003202	300001187	12.05.2007	36	12.05.2010
5	Power Supply	Heiden	1701	300001392	12.05.2007	36	12.05.2010

SRD Laboratory Room 011:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	NRP Power Meter	R&S	100212	300003780	27.02.2008	24	27.02.2010

Anechoic chamber F:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Control Computer	F+W	FW0502032	300003303	-/-	-/-	-/-
2	Trilog Antenna VULB 9163	Schwarzbeck	295	300003787	01.04.2008	24	01.04.2010
3	Amplifier - 0518C-138	Veritech Micro-wave Inc.	-/-	-/-	-/-	-/-	-/-
4	Switch - 3488A	HP		300000368	-/-	-/-	-/-
5	EMI Test receiver - ESCI	R&S	100083	300003312	31.01.2007	24	31.01.2009
6	Turntable Controller - 1061 3M	EMCO	1218	300000661	-/-	-/-	-/-
7	Tower Controller 1051 Controller	EMCO	1262	300000625	-/-	-/-	-/-
8	Tower - 1051	EMCO	1262	300000625	-/-	-/-	-/-
10	Ultra Notch-Filter Rejected band Ch. 62	WRCD	9	-/-	-/-	-/-	-/-