



Accredited testing-laboratory

DAR registration number: DAT-P-176/94-D1

Federal Motor Transport Authority (KBA)

DAR registration number: KBA-P 00070-97

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC)

Anechoic chamber registration no.: 3462C-1 (IC)

Certification ID: DE 0001

Accreditation ID: DE 0002

Accredited Bluetooth® Test Facility (BQTF)

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Test report no. : 1-1065-37-06/09
Type identification : AAD-3880020-BV
Applicant : Sony Ericsson Mobile Communications AB
FCC ID : PY7A3880020
IC Certification No : 4170B-A3880020
Test standards : 47 CFR Part 15
RSS - 210 Issue 7

Table of contents

1	General information.....	3
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Application details	4
2	Test standard/s	5
3	Technical tests.....	6
3.1	Details of manufacturer.....	6
3.1.1	Test item.....	6
3.1.2	Additional EUT information For IC Canada (appendix 2).....	7
3.1.3	RF Technical Brief Cover Sheet acc. To RSS-102	8
3.1.4	EUT operating modes.....	9
3.1.5	Extreme conditions testing values	9
4	Summary of Measurement Results and list of all performed test cases	10
5	RF measurement testing	11
5.1	Description of test set-up	11
5.1.1	Radiated measurements.....	11
5.1.2	Conducted measurements.....	11
5.2	Referenced Documents	12
5.3	Additional comments	12
5.4	Antenna gain	12
5.5	Peak Power Spectral density (digitally modulated systems) §15.247(e).....	13
5.6	Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a)(2).....	17
5.7	Spectrum Bandwidth of a DSSS System / 20 dB Bandwidth.....	21
5.8	Maximum output power (conducted) §15.247 (b)(3).....	25
5.9	Max. peak output power (radiated) §15.247 (b)(3)	30
5.10	Band-edge compliance of conducted emissions §15.247 (d)	31
5.11	Band-edge compliance of radiated emissions §15.205	34
5.12	Spurious Emissions - conducted (Transmitter) §15.247 (c).....	38
5.13	Spurious Emissions - radiated (Transmitter) §15.209	48
5.14	Spurious Emissions - radiated (Receiver) §15.109 / 209	70
5.15	Spurious Emissions - radiated <30 MHz §15.209	75
5.16	Conducted Emissions <30 MHz §15.107/207.....	77
6	Test equipment and ancillaries used for tests	80
7	Photographs of the Test Set-up.....	84
8	Photographs of the EUT	86

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2009-07-10

Date

Marco Bertolino

Name



Signature


Technical responsibility for area of testing:

2009-07-10

Date

Stefan Bös

Name



Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to
DIN EN ISO/IEC 17025
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :
Street :
Town :
Country :
Phone :
Fax :

1.3 Details of applicant

Name:	Sony Ericsson Mobile Communications AB
Street:	Mobilvägen 10
Town:	22188 Lund
Country:	Sweden
Telephone:	+46-46-19-3000
Fax:	+46-10-800-2441
Contact:	Peter Lindeborg
E-mail:	peter.lindeborg@sonyericsson.com
Telephone:	+46-10-802-43 68

1.4 Application details

Date of receipt of order:	2009-06-17
Date of receipt of test item:	2009-07-01
Date of start test:	2009-07-01
Date of end test:	2009-07-10
Persons(s) who have been present during the test:	-/-

2 Test standard/s

47 CFR Part 15	2008-07	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter A - general, Part 15-Radio frequency devices
RSS - 210 Issue 7	2007-06	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

3 Technical tests

3.1 Details of manufacturer

Name:	Sony Ericsson Mobile Communications AB
Street:	Mobilvägen 10
Town:	22188 Lund
Country:	Sweden

3.1.1 Test item

Kind of test item	:	Mobile Phone 850/900/1800/1900/UMTS/HSDPA/HSUPA/ BT2.0+EDR, GPS, FM Rx, WLAN
Type identification	:	AAD-3880020-BV
S/N serial number	:	Radiated: CB5A13VHG0 CB5A13VH4Q Conducted: CB5A13VH3T CB5A13VH4S
HW hardware status	:	AP1.2
SW software status	:	No information available.
Frequency Band [MHz]	:	ISM band 2.400 - 2.483,5
Type of Modulation	:	DSSS & OFDM
Number of channels	:	11
Antenna	:	Integrated PCB antenna (please see sub clause 8 – Photos of the EUT)
Power Supply	:	4 V DC by power supply / Li-Polymer battery BST-33
Temperature Range	:	-20 °C to +55 °C

Max. power radiated: 18.50 dBm DSSS
Max. power conducted: 20.96 dBm DSSS

Max. power radiated: 20.76 dBm OFDM
Max. power conducted: 23.21 dBm OFDM

FCC ID: PY7A3880020
IC: 4170B-A3880020

3.1.2 Additional EUT information For IC Canada (appendix 2)

IC Registration Number:	4170B-A3880020
Model Name:	AAD-3880020-BV
Manufacturer (complete Address):	Sony Ericsson Mobile Communications AB Mobilvägen 10 22188 Lund Sweden
Tested to Radio Standards Specification (RSS) No.:	RSS-210 Issue 7
Open Area Test Site Industry Canada Number:	IC 3462C-1
Frequency Range (or fixed frequency) [MHz]:	ISM band 2400 – 2483.5
RF: Power [W] (max):	DSSS: Rad. EIRP: 70.79 mW Conducted : 124.74 mW OFDM: Rad. EIRP: 119.12 mW Conducted : 209.41 mW
Antenna Type:	Integrated PCB antenna (please see sub clause 8 – Photos of the EUT)
Occupied Bandwidth (99% BW):	DSSS: 16.63 MHz OFDM: 17.67 MHz
Type of Modulation:	DSSS & OFDM
Emission Designator (TRC-43):	16M6G1D (DSSS) 17M7G1D (OFDM)
Transmitter Spurious (worst case) [dBμV/m in 3m]:	DSSS mode: 30.09 OFDM mode: 29.67
Receiver Spurious (worst case) [dBμV/m in 3m]:	29.55

ATTESTATION:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Test engineer: Marco Bertolino Date: 2009-07-10

3.1.3 RF Technical Brief Cover Sheet acc. To RSS-102

All Fields must be completed with the requested information or the following codes: N/A for Not Applicable, N/P for Not Performed or N/V for Not Available. Where applicable, check appropriate box.

1. COMPANY NUMBER: **4170B**
2. MODEL NUMBER: **AAD-3880020-BV**
3. MANUFACTURER: **Sony Ericsson Mobile Communications AB**
4. TYPE OF EVALUATION: **(c) RF Evaluation**

- Evaluated against exposure limits: General Public Use ☒ Controlled Use ☐
- Duty cycle used in evaluation: 99.7 %
- Standard used for evaluation: RSS-102 Issue 2 (2005-11)
- Measurement distance: 0.20 m
- RF value: 0.42 V/m ☐ A/m ☐ W/m² ☒
- Measured ☐ Computed ☐ Calculated ☒

Declaration of RF Exposure Compliance

ATTESTATION:

I attest that the information provided in this test report is correct; that a Technical Brief was prepared and the information it contains is correct; that the device evaluation was performed or supervised by me; that applicable measurement methods and evaluation methodologies have been followed and that the device meets the SAR and/or RF exposure limits of RSS-102.

Name: Dipl.-Ing. (FH) Marco Bertolino
Title: Engineer
Company: Cetecom ICT Services GmbH

Signature:



Date: 2009-07-10

3.1.4 EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
Op. 0	normal mode	normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the test plan

3.1.5 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature	T _{nom}	°C	20
Nominal Humidity	H _{nom}	%	48
Nominal Power Source	V _{nom}	V	4

Type of power source: DC by power supply / Li-Polymer battery BST-33

Deviations from these values are reported in chapter 2

4 Summary of Measurement Results and list of all performed test cases

- ☒ No deviations from the technical specifications were ascertained
☐ There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210	PASSED	2009-07-10	-/-

Test Specification Clause	Test Case	Passed	Fail	Not applicable	Not performed
None	Antenna Gain	Yes			
§15.247 (e)	Peak power spectral density	Yes			
§15.247(a)(2)	Spectrum Bandwidth of a DSSS System / 6dB BW	Yes			
§15.247(a)(2)	Spectrum Bandwidth of a DSSS System / 20dB BW	Yes			
§ 15.247 (b)(3)	Maximum output power (conducted)	Yes			
§ 15.247 (b)(3)	Max. peak output power (radiated)	Yes			
§15.247 (d)	Band-edge compliance of conducted emissions	Yes			
§15.205	Band-edge compliance of radiated emissions	Yes			
§15.247 (d)	Spurious Emission - conducted (Transmitter)	Yes			
§ 15.209	Spurious Emission -radiated (Transmitter)	Yes			
§ 15.109	Spurious Emissions-radiated (Receiver)	Yes			
§ 15.209	Spurious Emissions-radiated <30 MHz	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	Yes			

5 RF measurement testing

5.1 Description of test set-up

5.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 20 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber.

The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test set-ups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received.

The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.4-2003 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

9 kHz - 150 MHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120 kHz Bandwidth, trilob antenna


200MHz - 1GHz: Quasi Peak measurement, 120 kHz Bandwidth, trilob antenna

>1GHz: Average, RBW 1MHz, VBW 10 Hz, wave guide horn

All measurement settings are according to FCC 15.209 and 15.207

5.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is connected to the spectrum analyzer. The specific losses for signal path are first checked within a calibration. The measurement readings on the spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

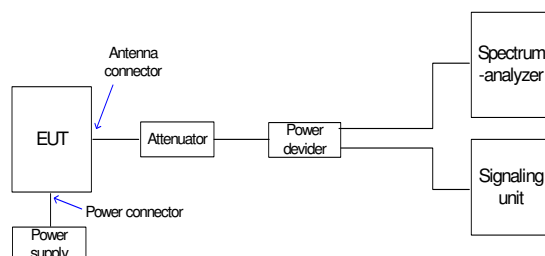

5.2 Referenced Documents

None

5.3 Additional comments

mode	CH	Power(dBm)	rate(Mbps)
802.11b	1 / 6 / 11	17	1
802.11g	1 / 6 / 11	13	54

5.4 Antenna gain

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.


Results:

DSSS	lowest frequency 2412 MHz	middle frequency 2437 MHz	highest frequency 2462 MHz
Conducted power [dBm] (measured)	20.94	20.96	20.75
Radiated power [dBm] (measured)	18.50	17.94	17.58
Gain [dBi] (calculated)	-2.44	-3.02	-3.17

5.5 Peak Power Spectral density (digitally modulated systems) §15.247(e)


DSSS

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

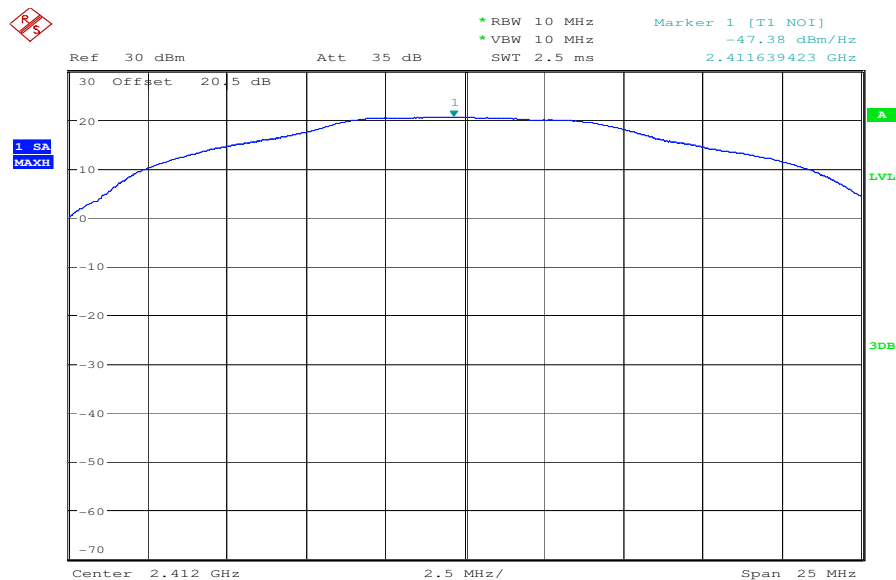


Date: 6.JUL.2009 09:20:07

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

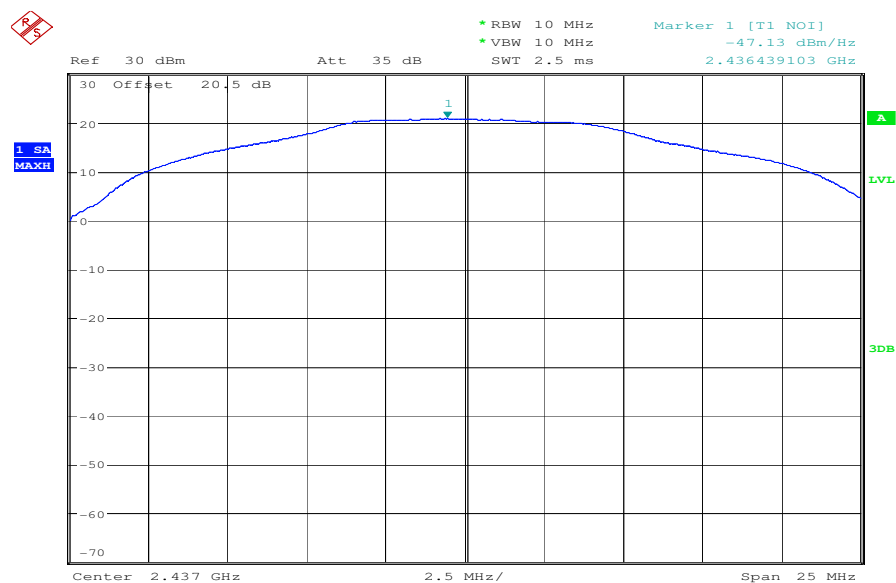

Date: 6.JUL.2009 09:23:47

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

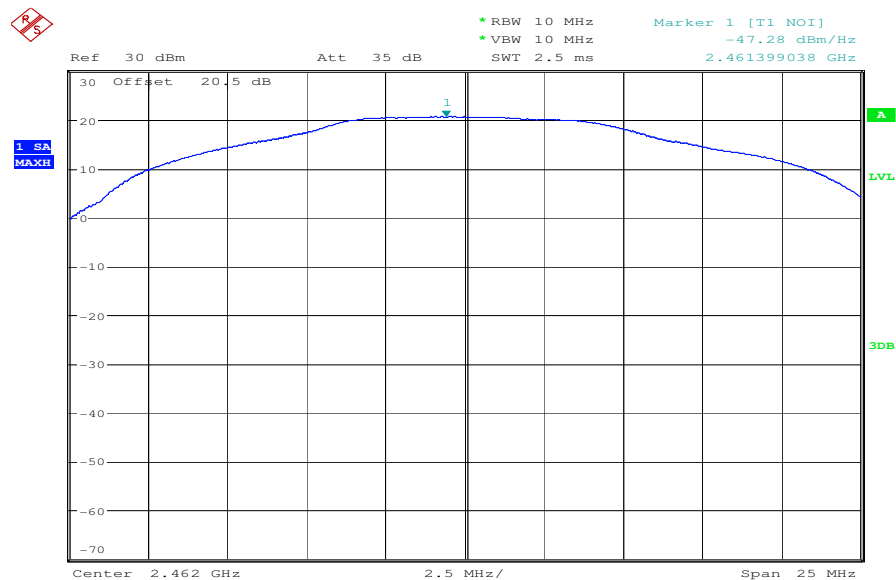

Date: 6.JUL.2009 09:25:56


Results:

- Plot 1: Power density: - 47.38 dBm/Hz = - 12.58 dBm / 3 kHz
- Plot 2: Power density: - 47.13 dBm/Hz = - 12.33 dBm / 3 kHz
- Plot 3: Power density: - 47.28 dBm/Hz = - 12.48 dBm / 3 kHz

Correction factor from dBm/Hz to dBm/3 kHz is +34.8 dB


OFDM

Plot 1: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

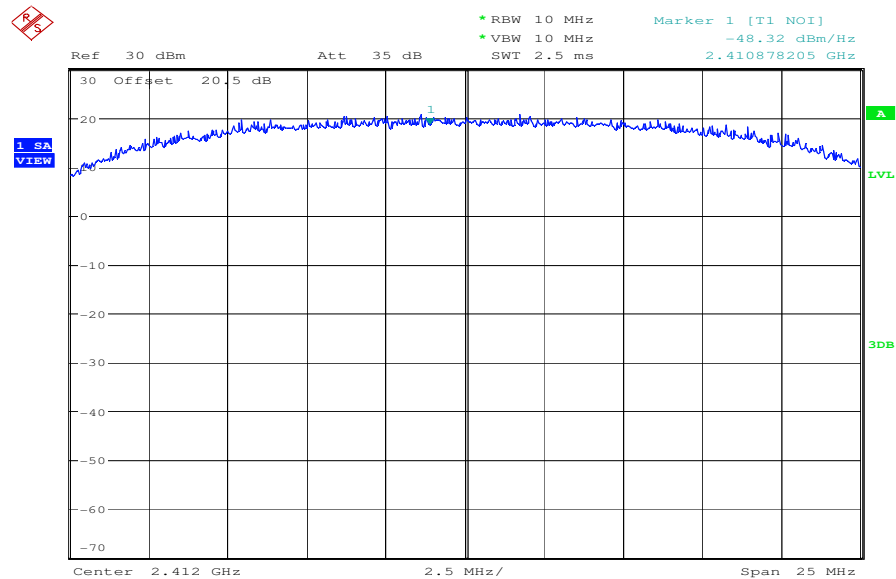


Date: 9.JUL.2009 08:18:41

Plot 2: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

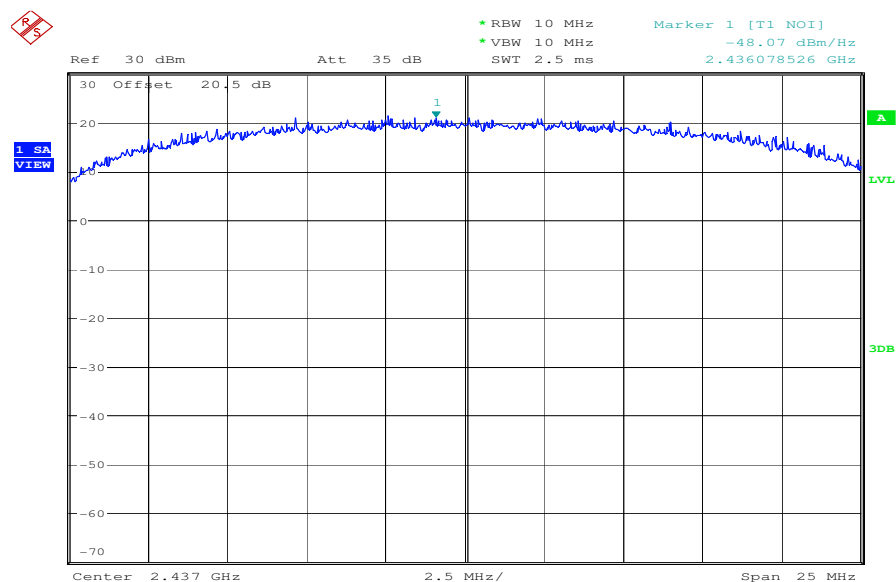

Date: 9.JUL.2009 08:23:53

Plot 3: (result calculated by the Signal analyzer FSIQ 26 from Rohde & Schwarz)

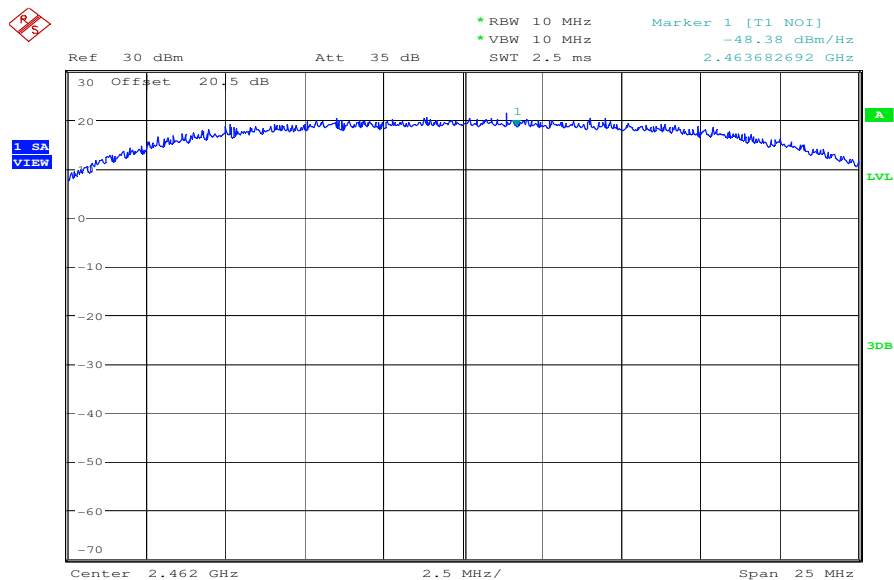

Date: 9.JUL.2009 08:27:50

Results: Plot 1: Power density: - 48.32 dBm/Hz = - 13.52 dBm / 3 kHz
Plot 2: Power density: - 48.07 dBm/Hz = - 13.27 dBm / 3 kHz
Plot 3: Power density: - 48.38 dBm/Hz = - 13.58 dBm / 3 kHz

Correction factor from dBm/Hz to dBm/3 kHz is +34.8 dB


Limits:

Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission
-----------------------------------	---

5.6 Spectrum Bandwidth of a DSSS System / 6 dB Bandwidth §15.247(a)(2)


DSSS

Plot 1:

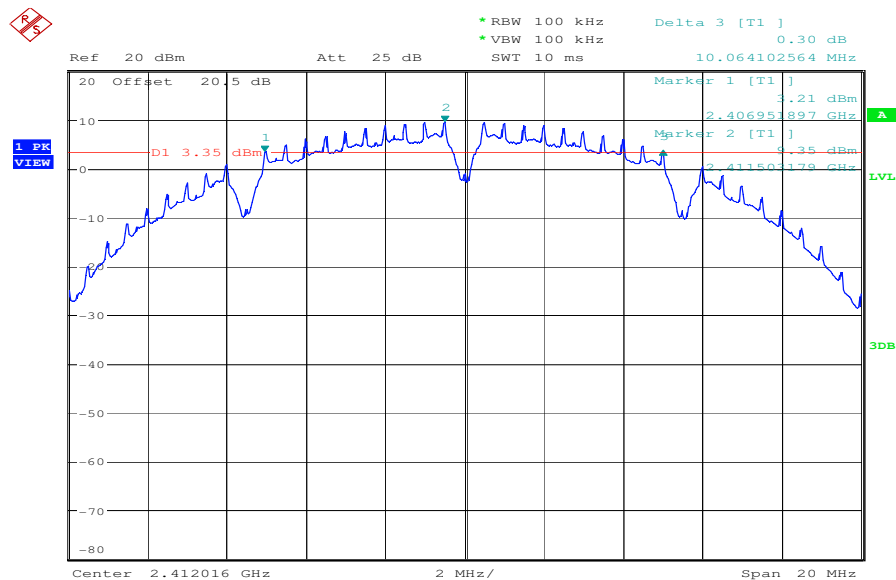


Date: 6.JUL.2009 10:21:06

Plot 2:

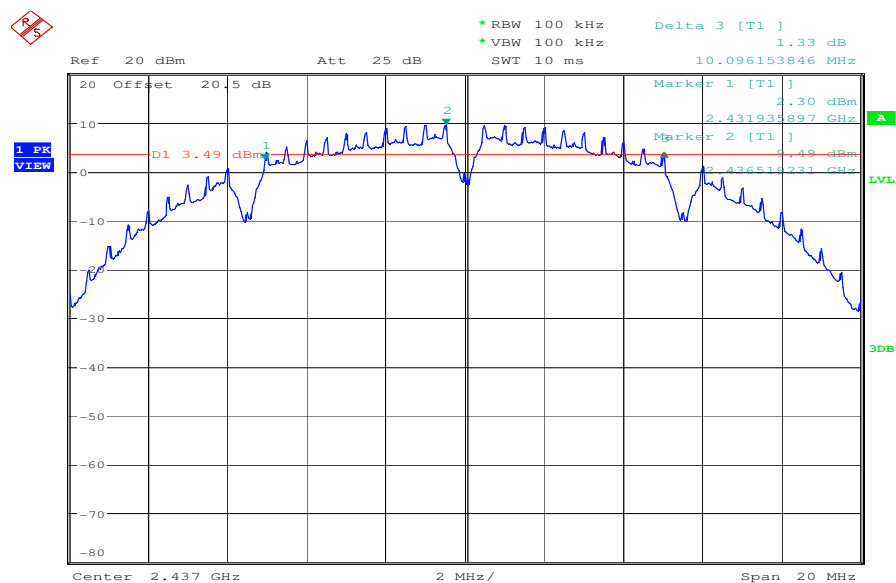

Date: 6.JUL.2009 10:30:30

Plot 3:

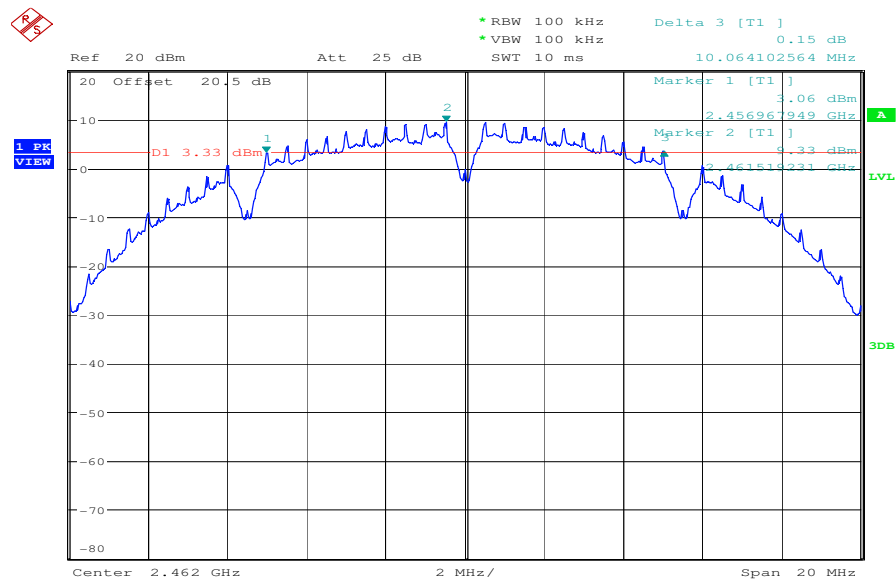

Date: 6.JUL.2009 10:40:21


Results:

Test conditions		6 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	10.06	10.10	10.06
Measurement uncertainty		± 100 kHz		

RBW: 100 kHz / VBW 100 kHz


OFDM

Plot 1:

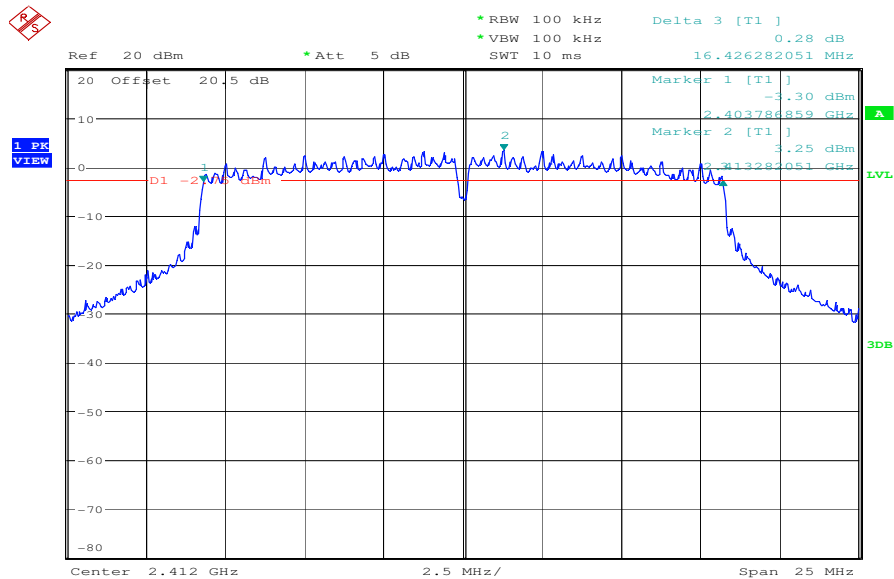


Date: 9.JUL.2009 08:55:45

Plot 2:

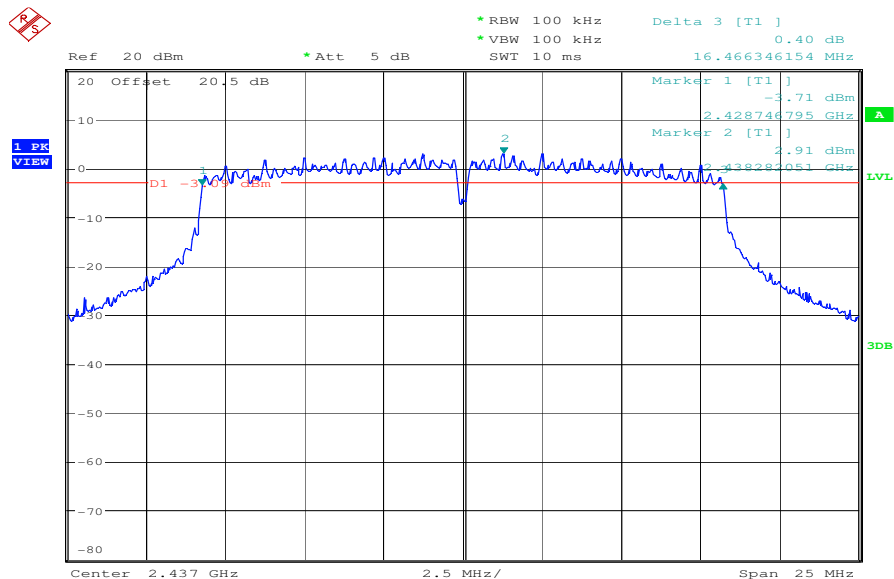

Date: 9.JUL.2009 08:50:30

Plot 3:

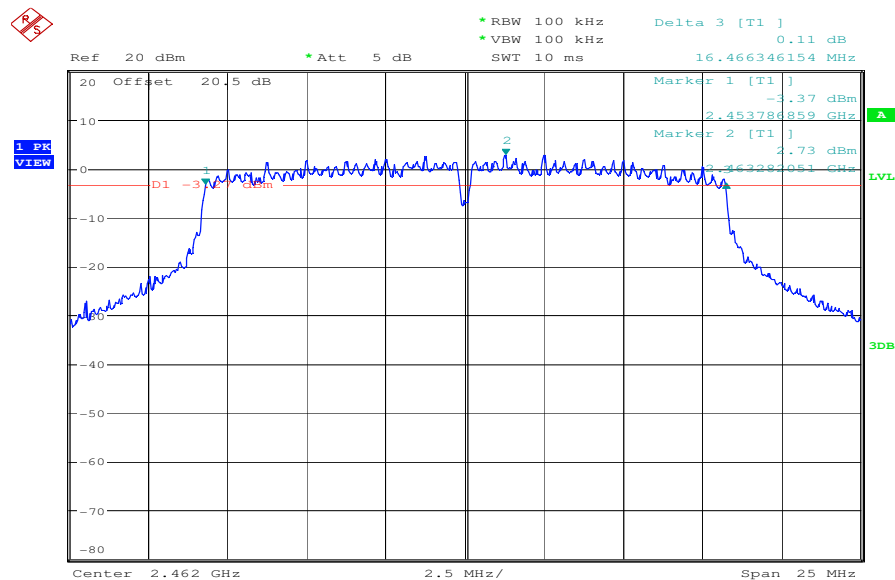

Date: 9.JUL.2009 08:31:38

Results:

Test conditions		6 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
T_{nom}	V_{nom}	16.43	16.47	16.47
Measurement uncertainty		± 100 kHz		

RBW: 100 kHz / VBW 100 kHz


Limits:

Under normal test conditions only	> 500 kHz
-----------------------------------	-----------

5.7 Spectrum Bandwidth of a DSSS System / 20 dB Bandwidth


DSSS

Plot 1:

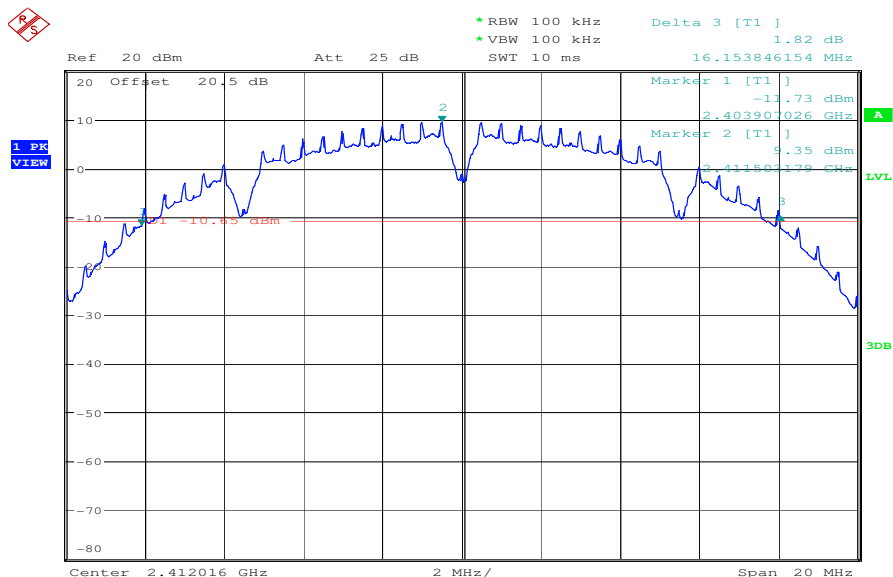


Date: 6.JUL.2009 10:23:09

Plot 2:

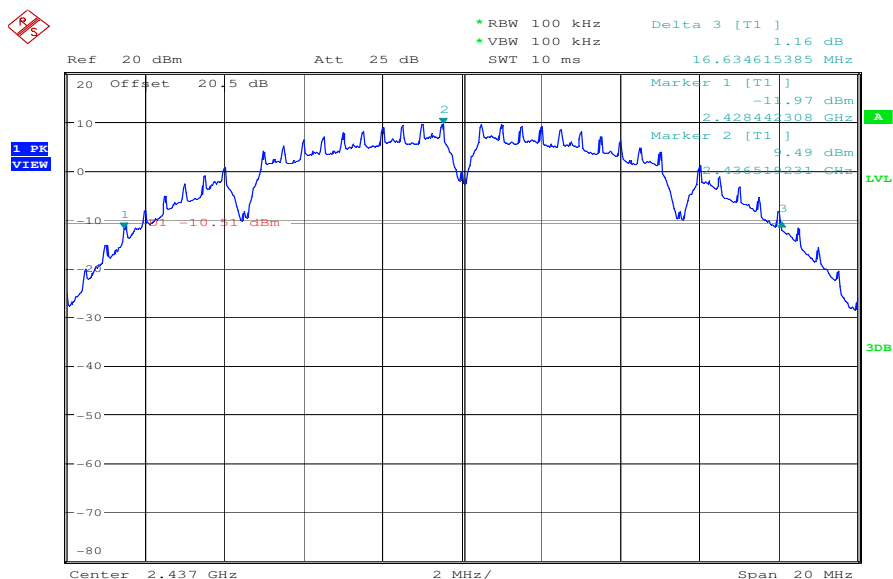

Date: 6.JUL.2009 10:32:53

Plot 3:

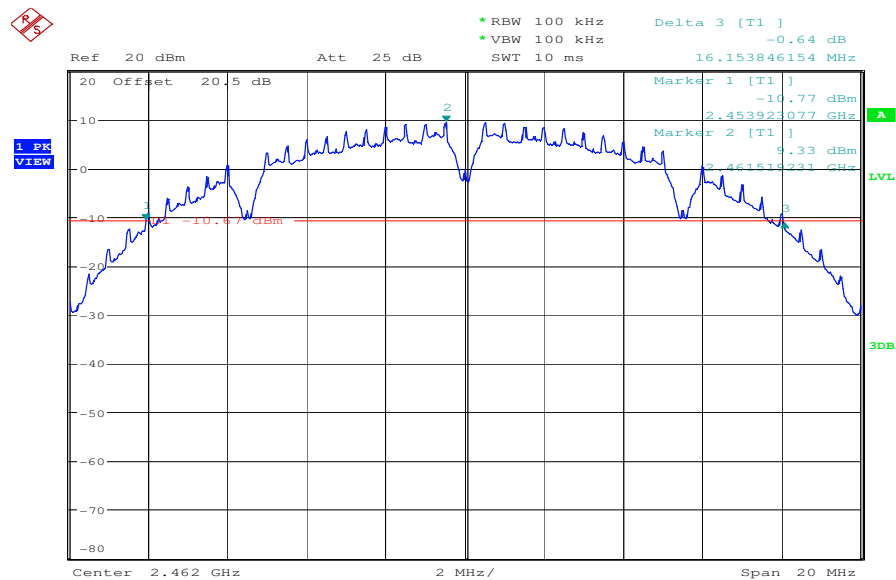

Date: 6.JUL.2009 10:41:16


Results:

Test conditions		20 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	16.15	16.63	16.15
Measurement uncertainty		± 100 kHz		

RBW: 100 kHz / VBW 100 kHz


OFDM

Plot 1:

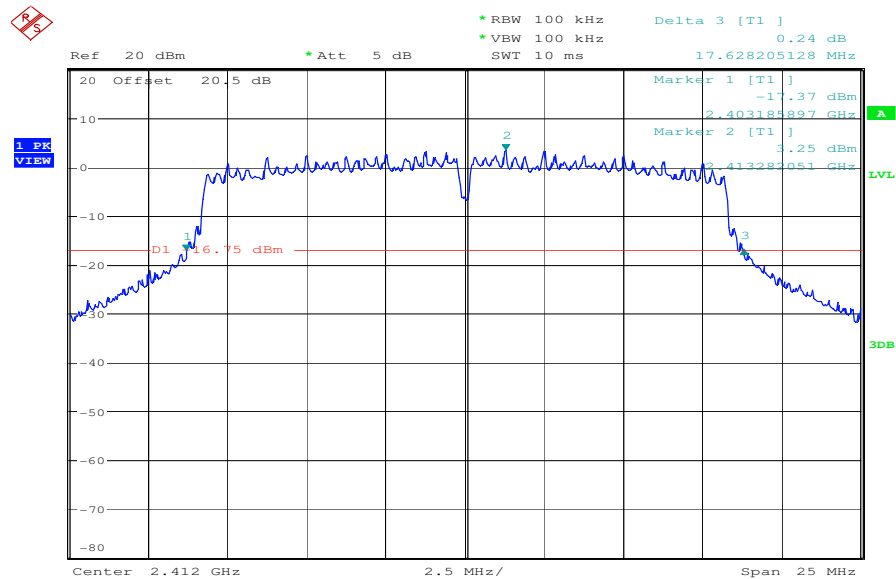


Date: 9.JUL.2009 08:56:36

Plot 2:

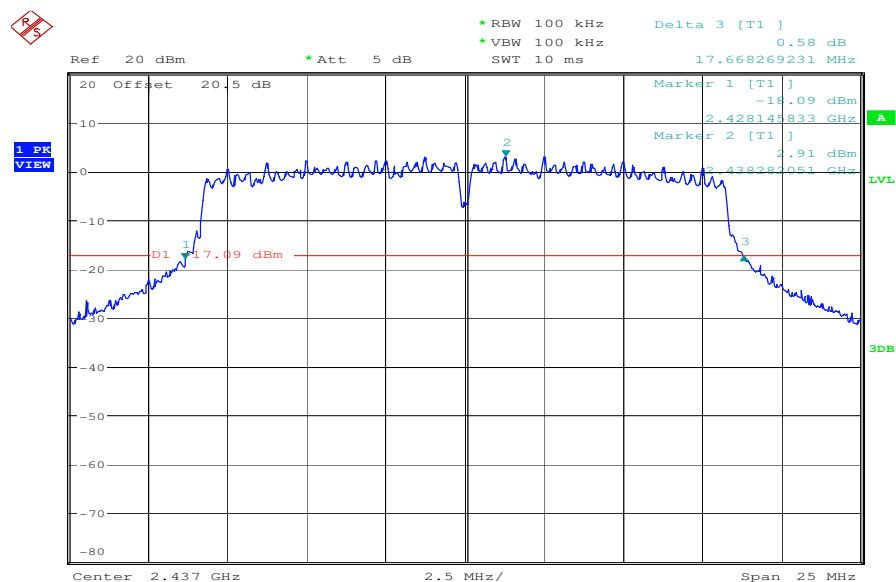

Date: 9.JUL.2009 08:51:16

Plot 3:

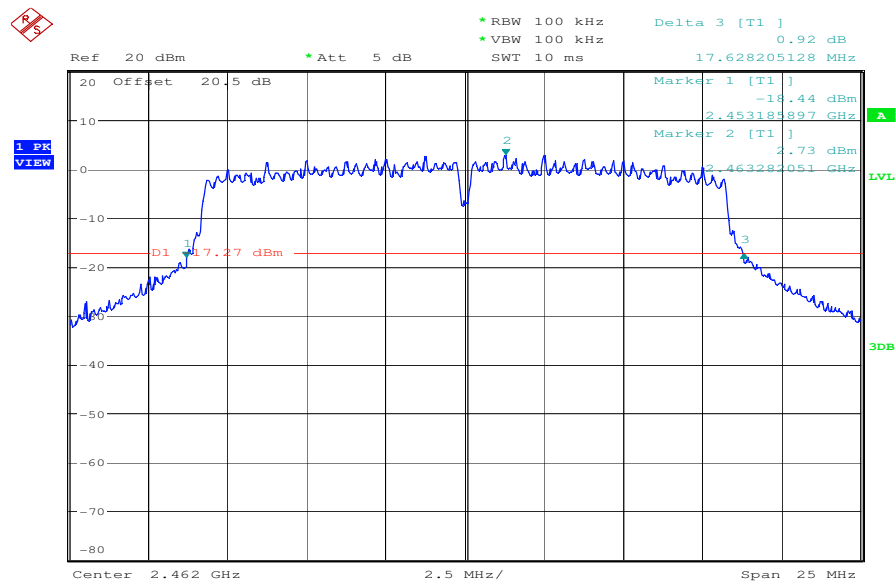

Date: 9.JUL.2009 08:32:36

Results:


Test conditions		20 dB BANDWIDTH [MHz]		
Frequency [MHz]		2412	2437	2462
T_{nom}	V_{nom}	17.63	17.67	17.63
Measurement uncertainty		± 100 kHz		

RBW: 100 kHz / VBW 100 kHz

5.8 Maximum output power (conducted) §15.247 (b)(3)


DSSS

Plot 1:

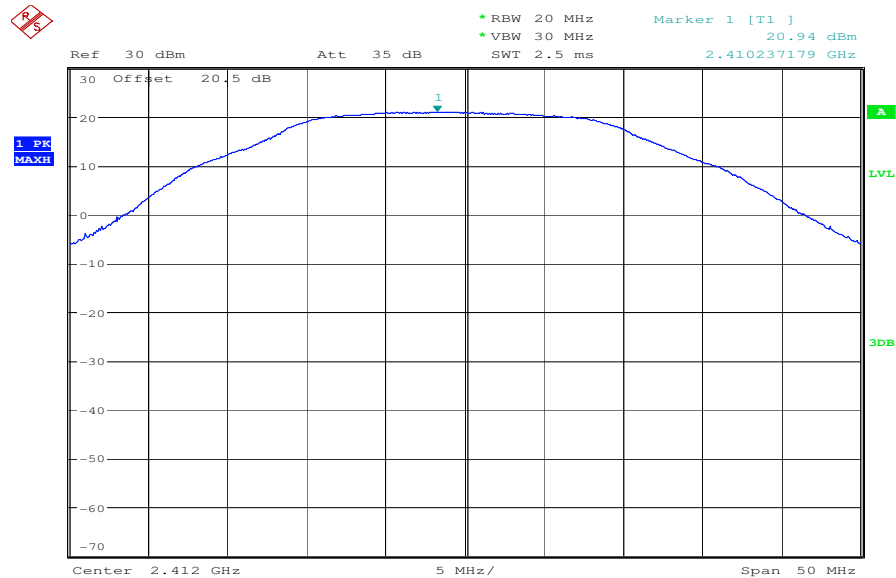


Date: 6.JUL.2009 10:49:20

Plot 2:

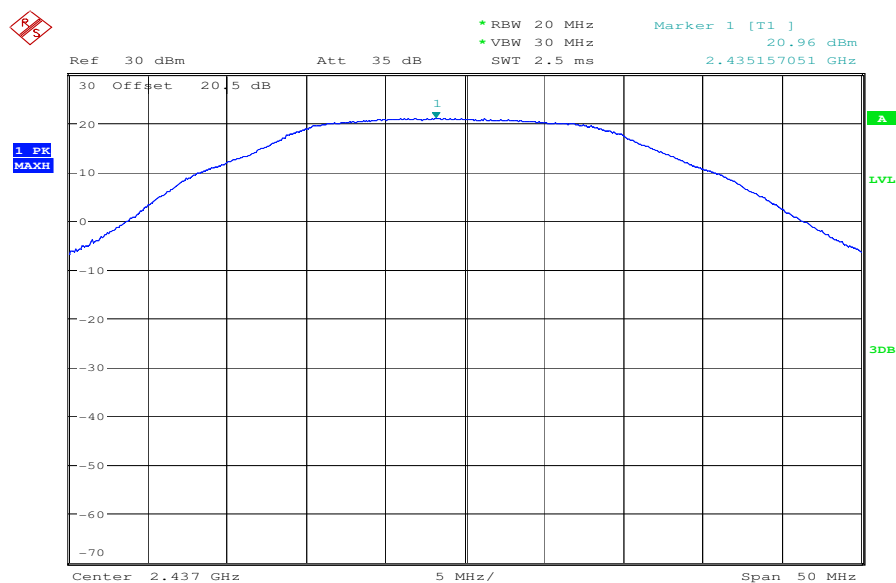

Date: 6.JUL.2009 10:48:06

Plot 3:

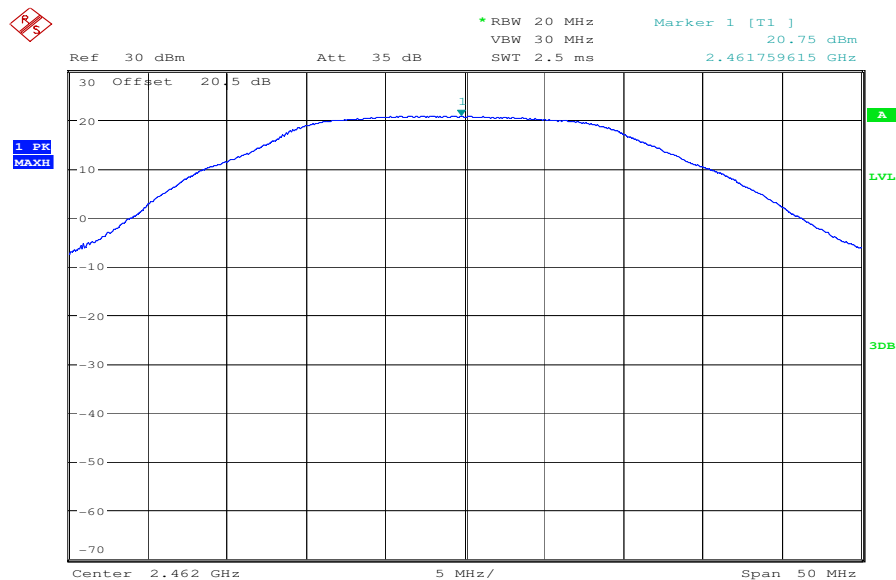

Date: 6.JUL.2009 10:44:23


Results:

Test conditions		Max. peak output power [dBm]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	20.94	20.96	20.75
Measurement uncertainty		± 3 dB		

RBW / VBW: 20 MHz / 30 MHz


OFDM

Plot 1:

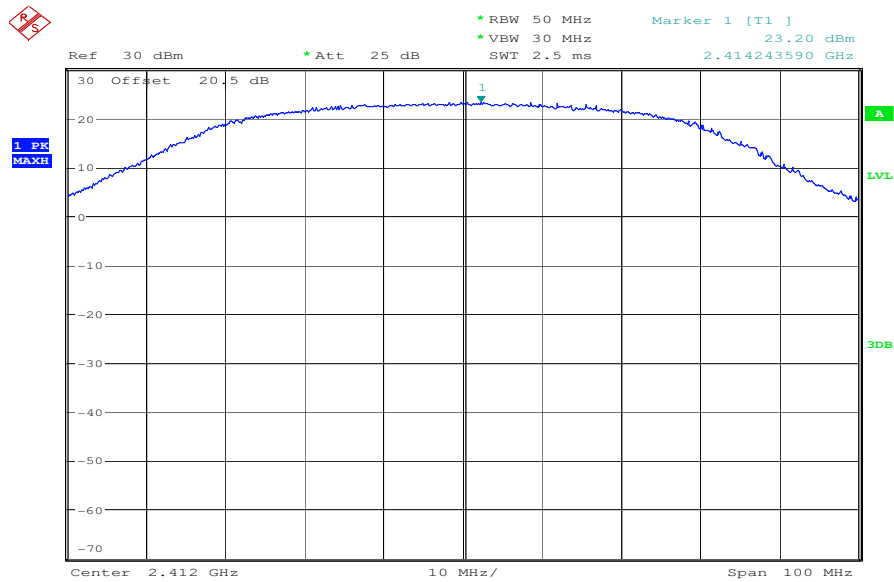


Date: 9.JUL.2009 09:00:24

Plot 2:

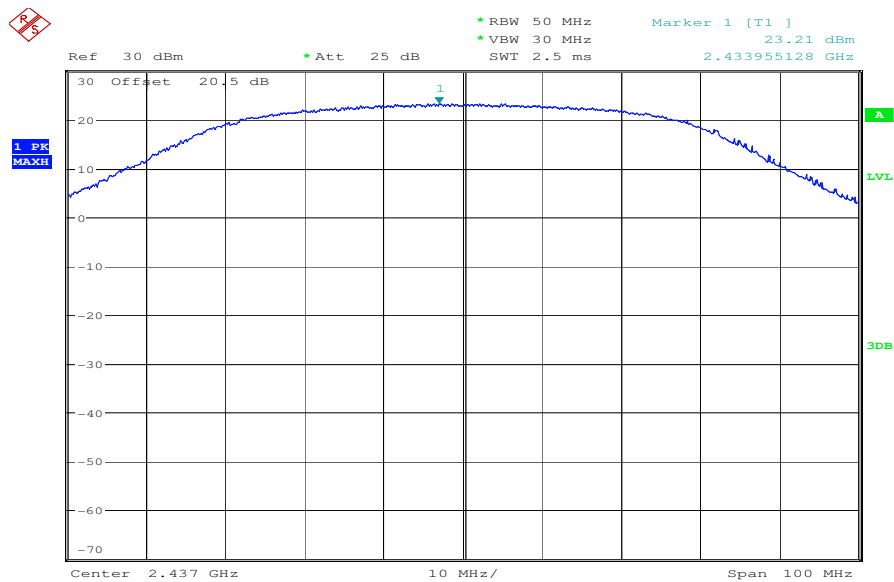

Date: 9.JUL.2009 09:02:22

Plot 3:

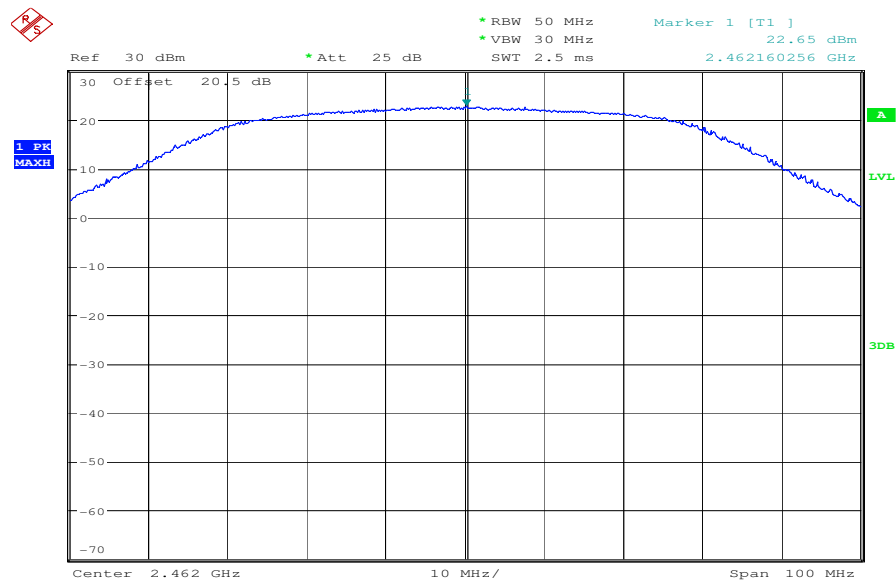

Date: 9.JUL.2009 09:04:28

Results:

Test conditions		Max. peak output power [dBm]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	23.20	23.21	22.65
Measurement uncertainty		± 3 dB		

RBW / VBW: 50 MHz / 30 MHz

Remark:

The correction factor is calculated by $10 \times \log(\text{measured BW} / \text{used BW})$ [dB]

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt / 30 dBm
--	------------------------

MPE calculation

These equations are generally accurate in the far field of an antenna but will over predict power density in the near field, where they could be used for making a “worst case” prediction.

$$S = PG/4\pi R^2$$

where S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units e.g. mW)

G = power gain of the antenna in the direction of interest relative to the isotropic radiator

R = distance to the centre of radiation of the antenna (appropriate units e.g. cm)

Or

$$S = \text{EIRP}/4\pi R^2$$

where EIRP = equivalent isotropically radiated power

Calculation:

(Calculated for max. EIRP)

EIRP: 23.21 dBm (209.41mW)

calculated at distance of 20 cm:

$$\text{power density} = 209.41 / 4\pi 20^2 = 0.042 \text{ mW/ cm}^2$$

Limit:

1mW/ cm² is the reference level for general public exposure according to the OET Bulletin 65,
Edition 97-01 Table 1.

5.9 Max. peak output power (radiated) §15.247 (b)(3)

DSSS

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	18.50	17.94	17.58
Measurement uncertainty		± 3 dB		

RBW / VBW: 20 MHz / 30 MHz

Measured at a distance of 3m

OFDM

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2412	2437	2462
T _{nom}	V _{nom}	20.76*	20.19*	19.48*
Measurement uncertainty		± 3 dB		

* Note: Calculated with antenna gain in b – mode.


Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

5.10 Band-edge compliance of conducted emissions §15.247 (d)


DSSS:

Plot 1: lowest channel

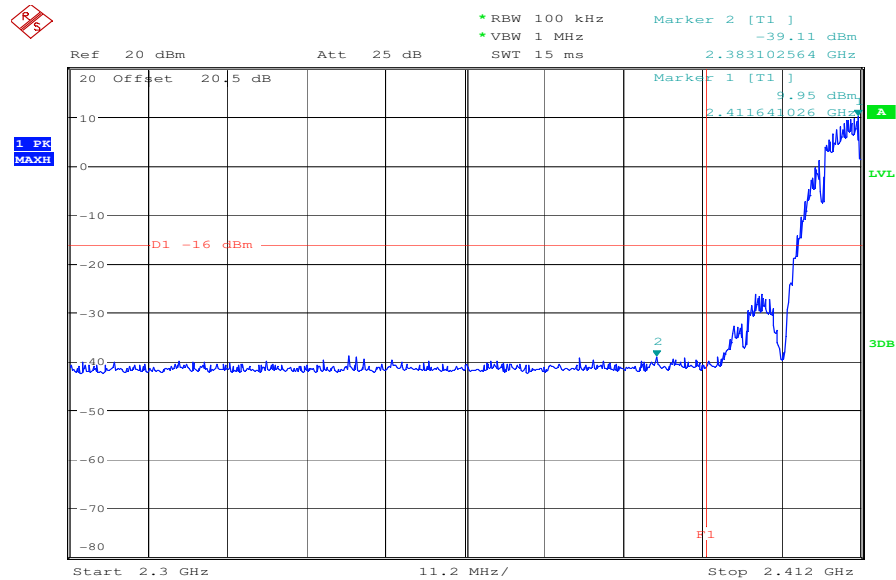

Date: 6.JUL.2009 10:52:35


Plot 2: highest channel

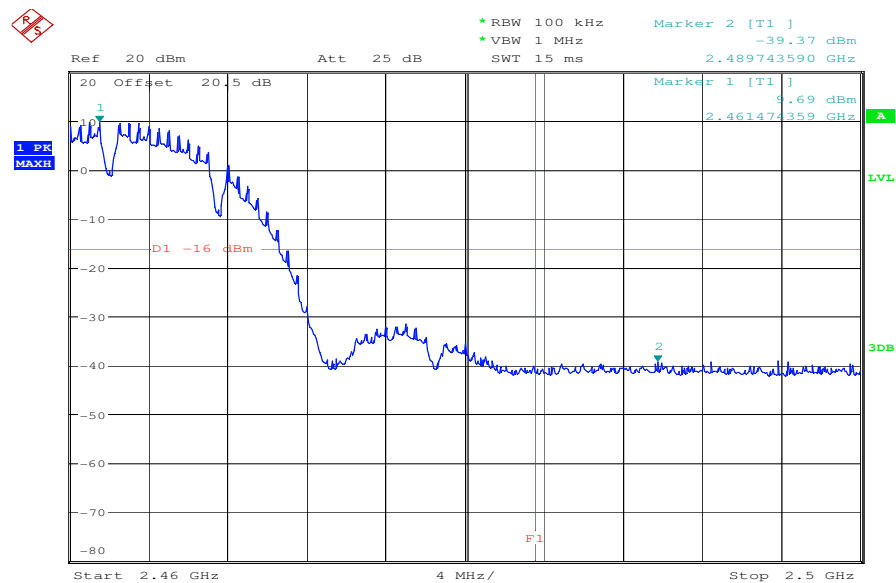

Date: 6.JUL.2009 10:55:17


OFDM:

Plot 1: lowest channel

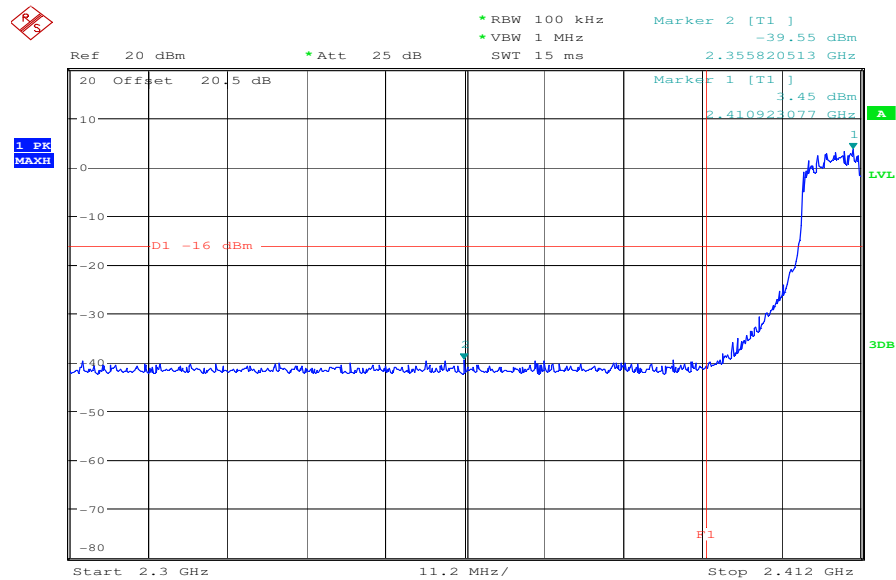

Date: 9.JUL.2009 09:09:33

Plot 2: highest channel

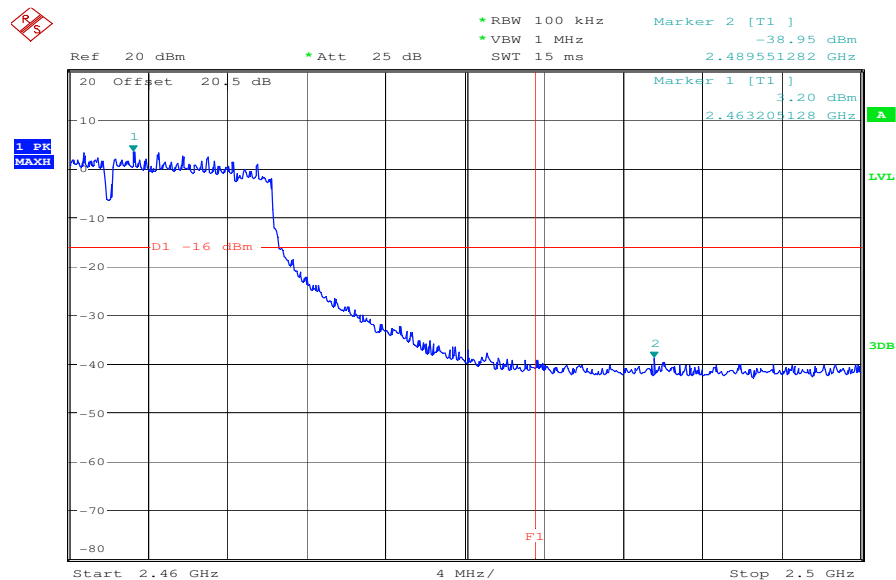

Date: 9.JUL.2009 09:06:41


Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--


5.11 Band-edge compliance of radiated emissions §15.205

DSSS


Plot 1: Restricted band low, vertical

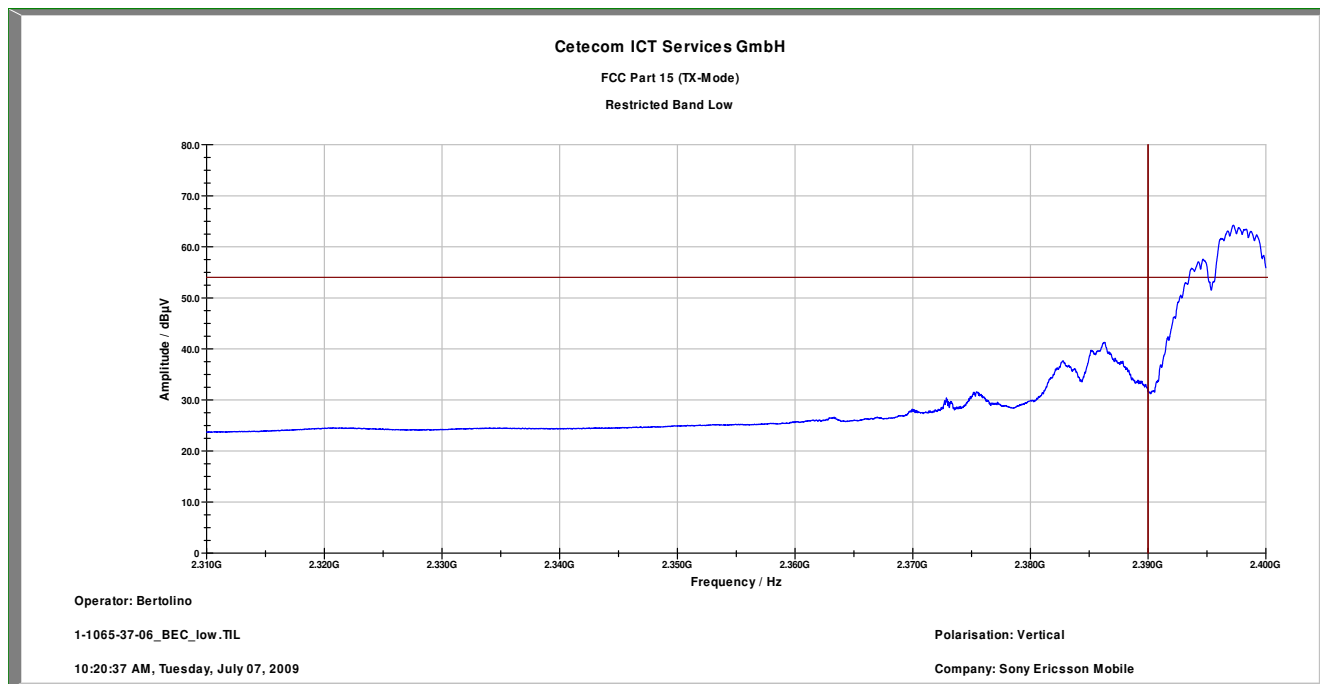


Plot 2: Restricted band high, vertical

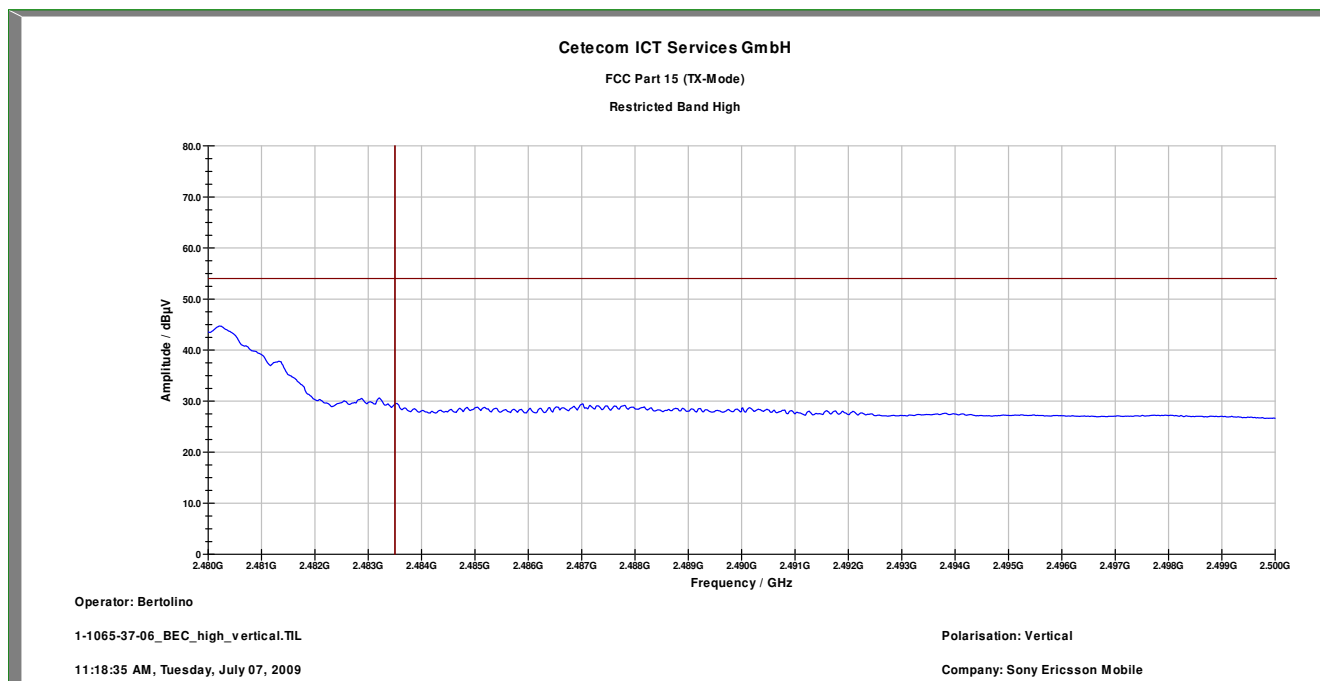

Plot 3: Restricted band low, horizontal

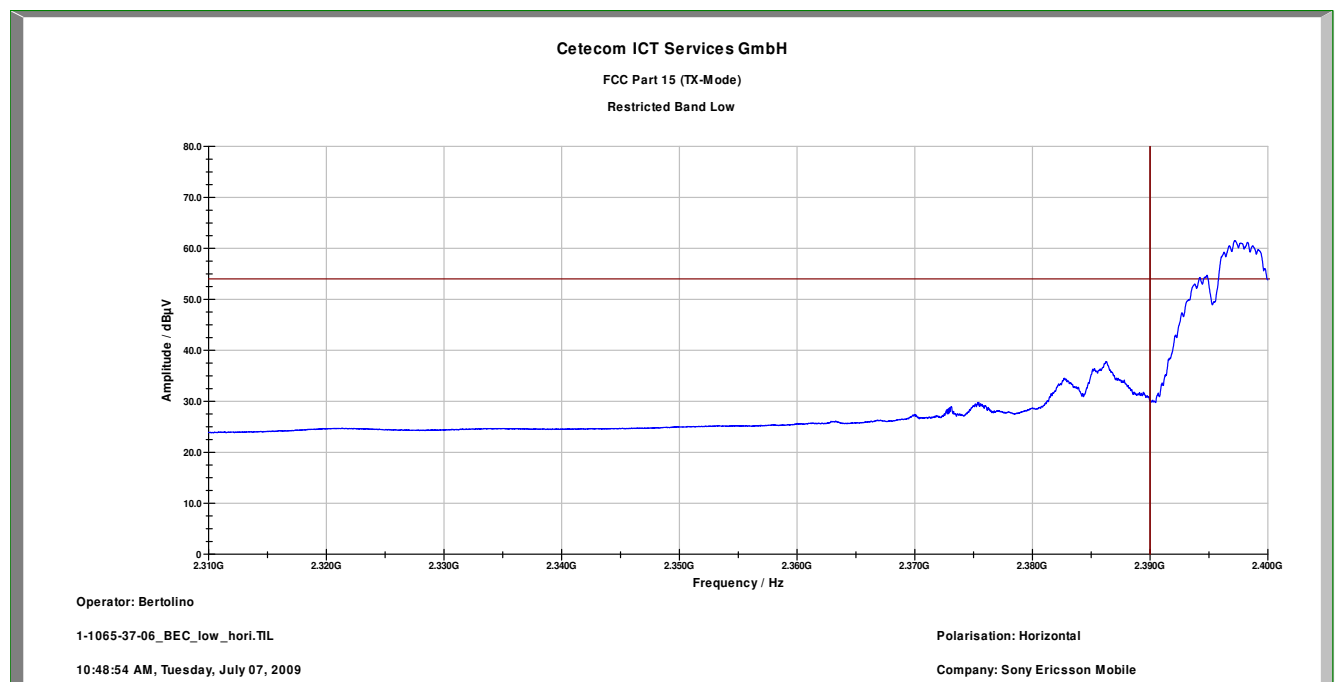


Plot 4: Restricted band high, horizontal

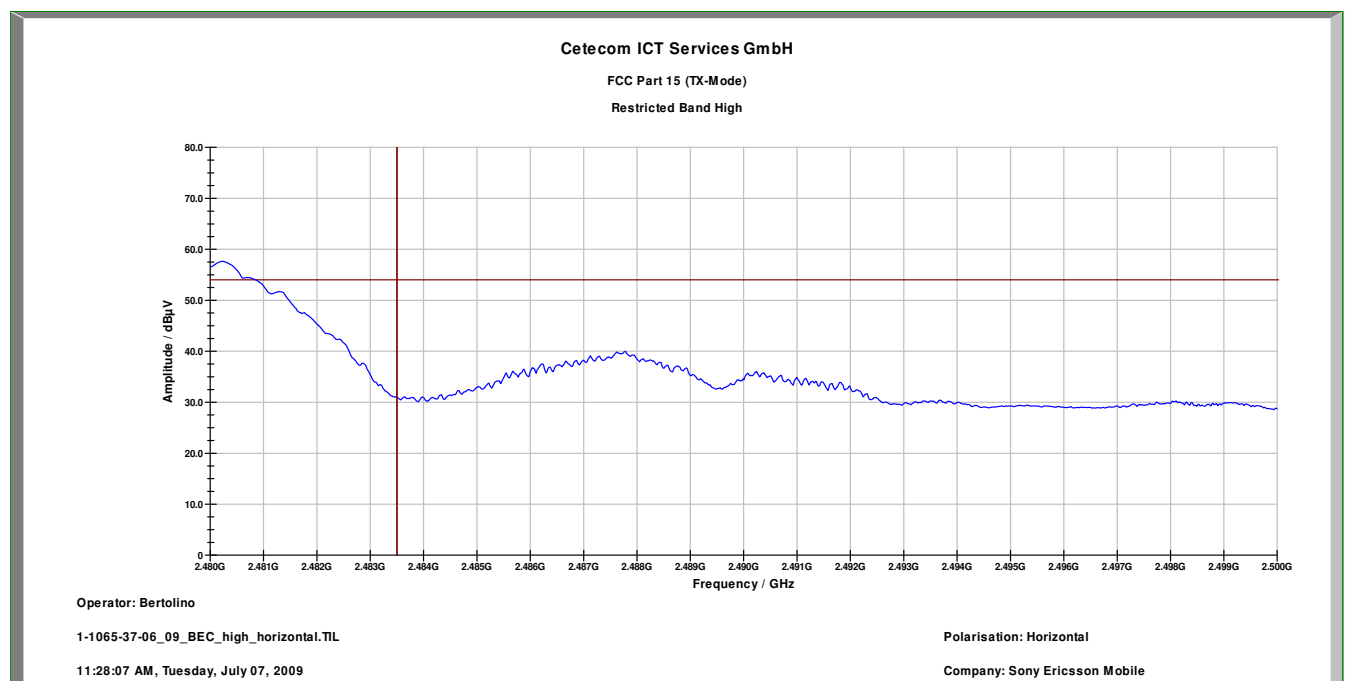


OFDM


Plot 1: Restricted band low, vertical

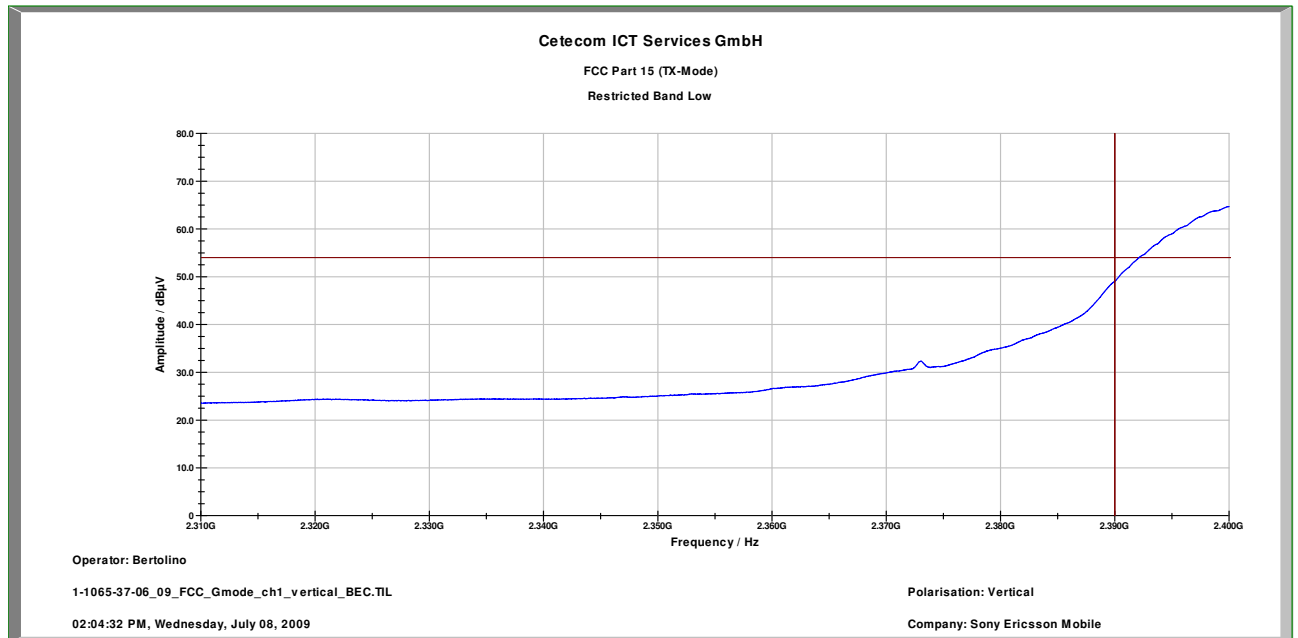


Plot 2: Restricted band high, vertical

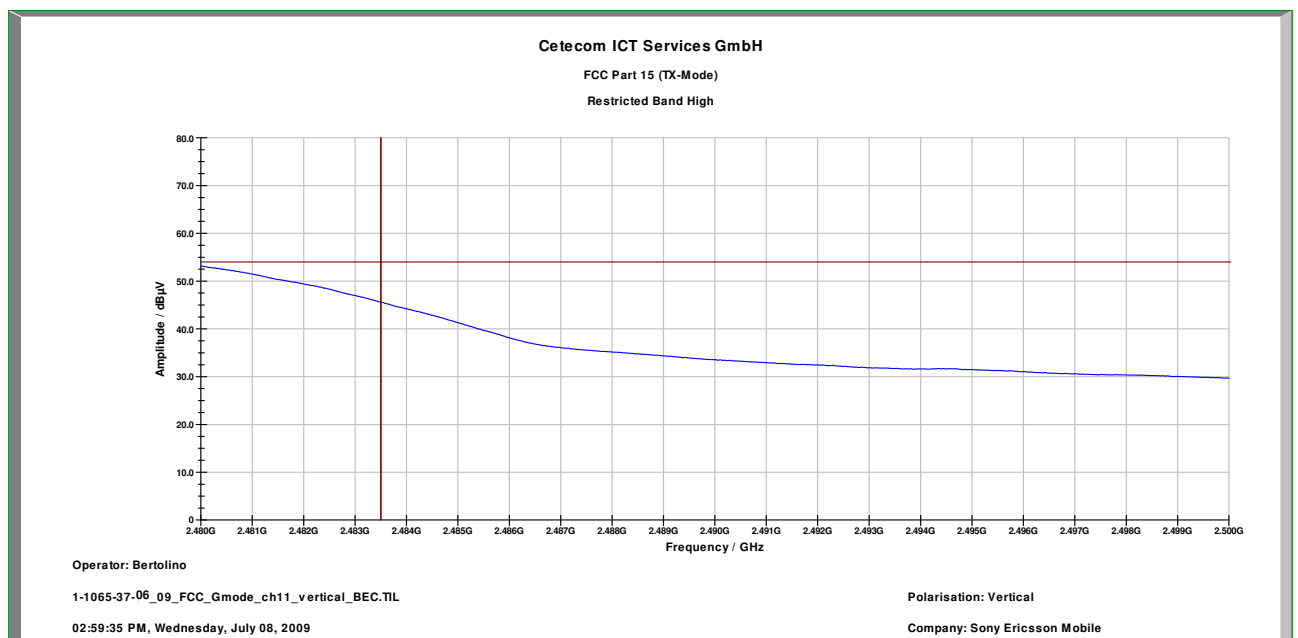

Plot 3: Restricted band low, horizontal

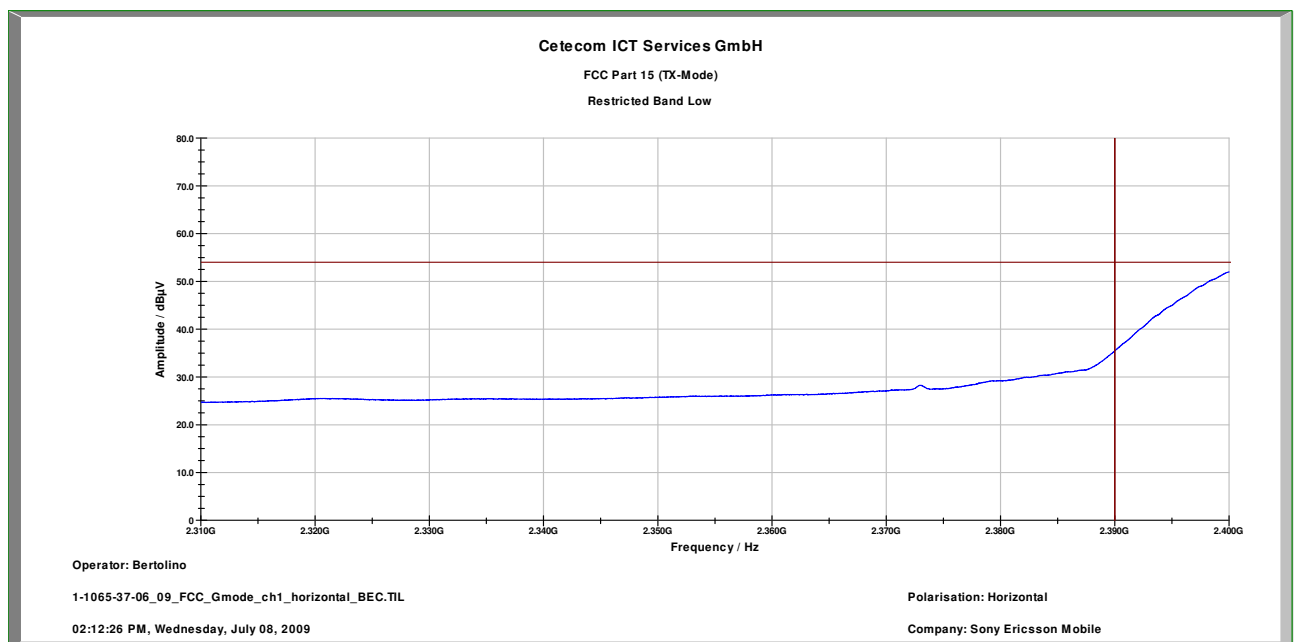


Plot 4: Restricted band high, horizontal

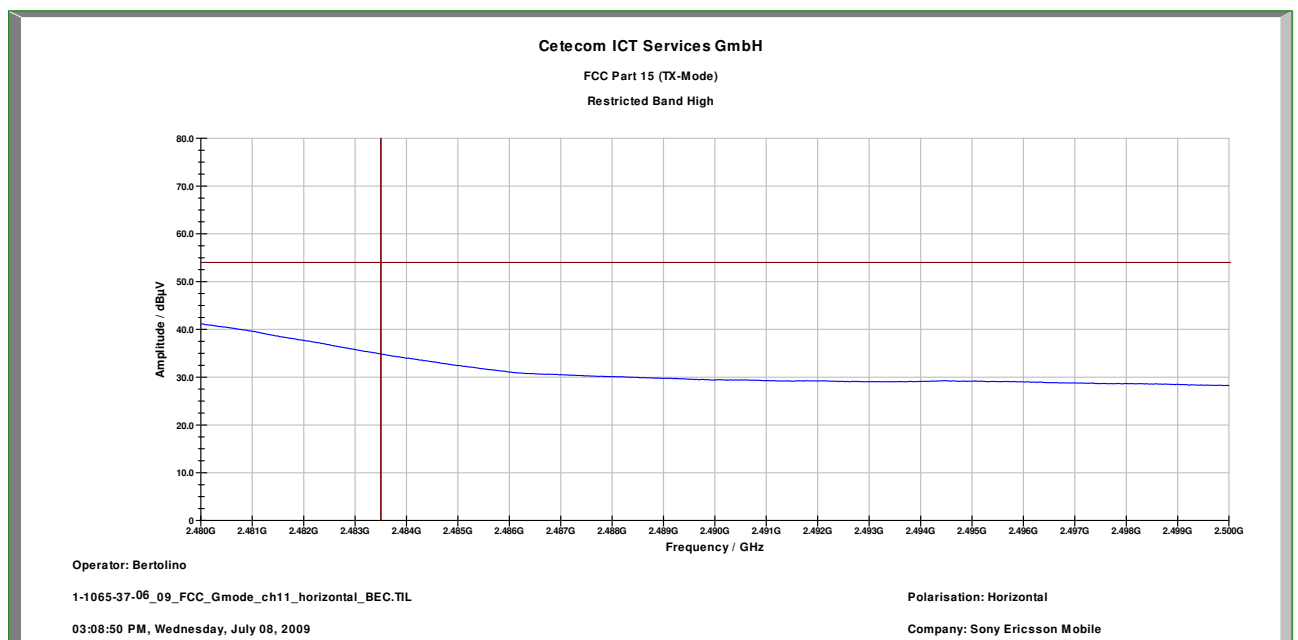

5.12 Spurious Emissions - conducted (Transmitter) §15.247 (c)


DSSS

Plot 1: Lowest Channel

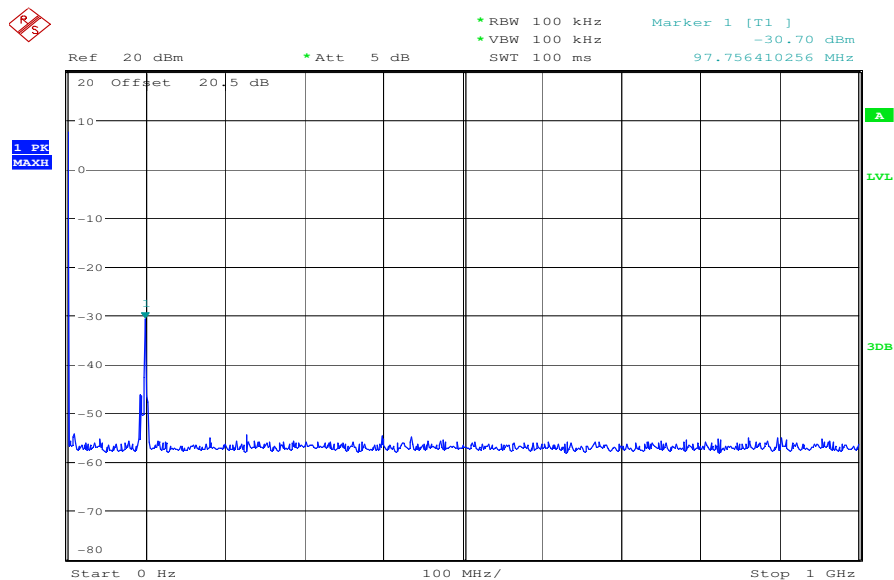


Date: 6.JUL.2009 11:19:18

Plot 2: Lowest Channel

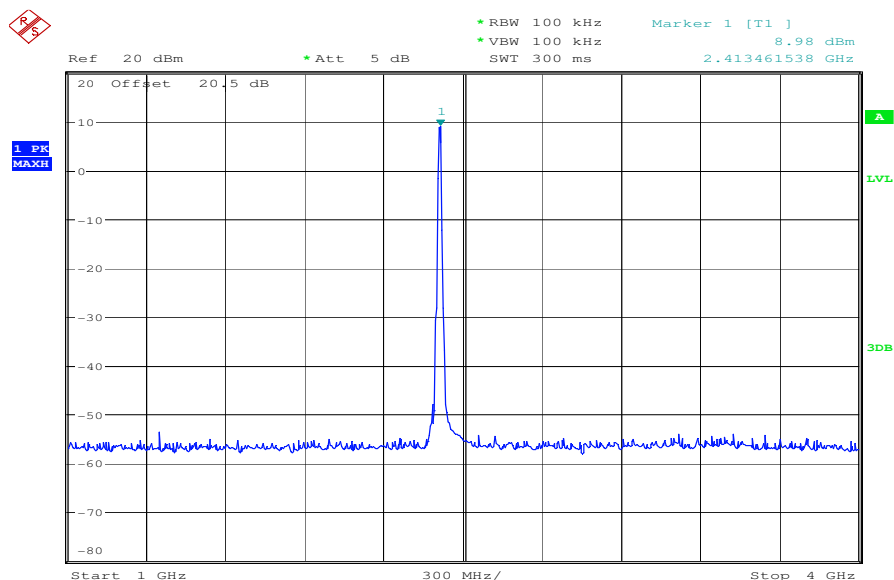


Date: 6.JUL.2009 11:20:16

Plot 3: Lowest Channel

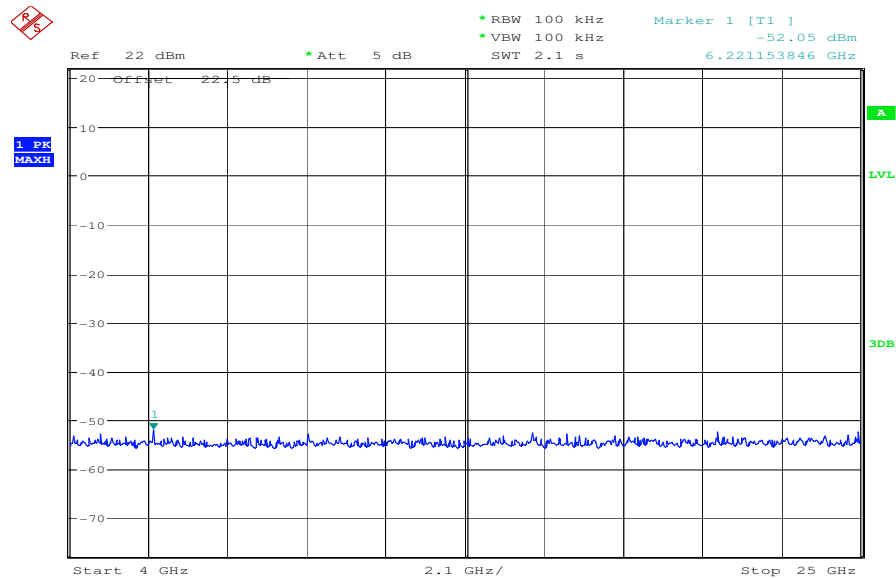


Date: 6.JUL.2009 11:20:48

Plot 4: Middle Channel

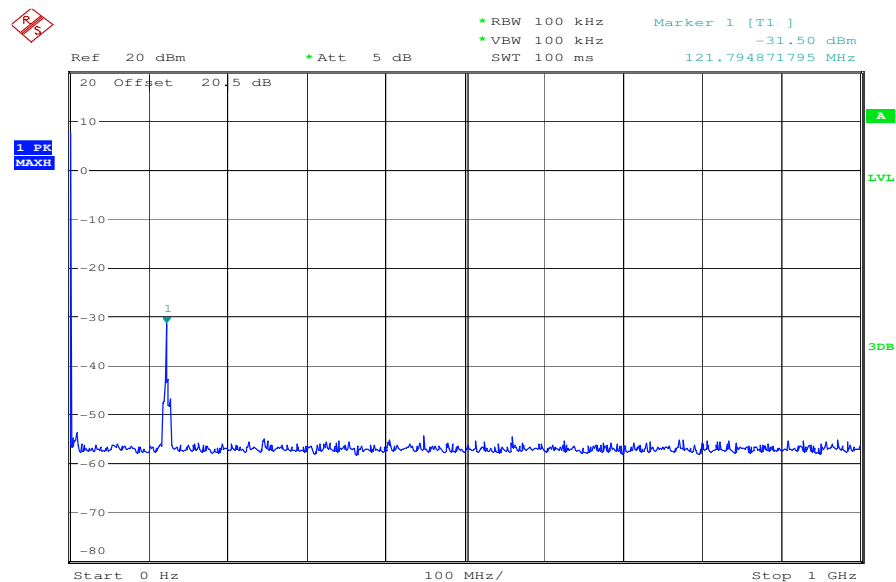


Date: 6.JUL.2009 11:18:10

Plot 5: Middle Channel

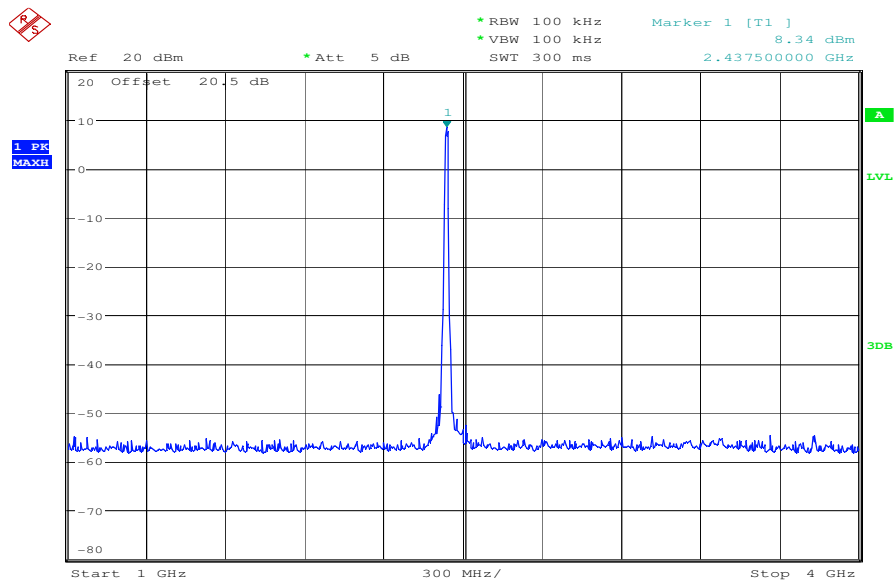


Date: 6.JUL.2009 11:17:38

Plot 6: Middle Channel

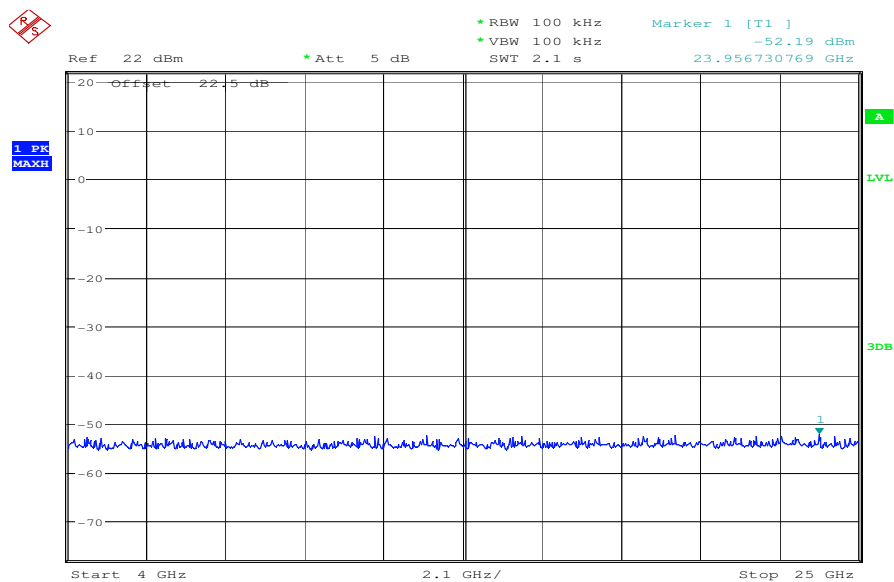


Date: 6.JUL.2009 11:12:42

Plot 7: Highest Channel

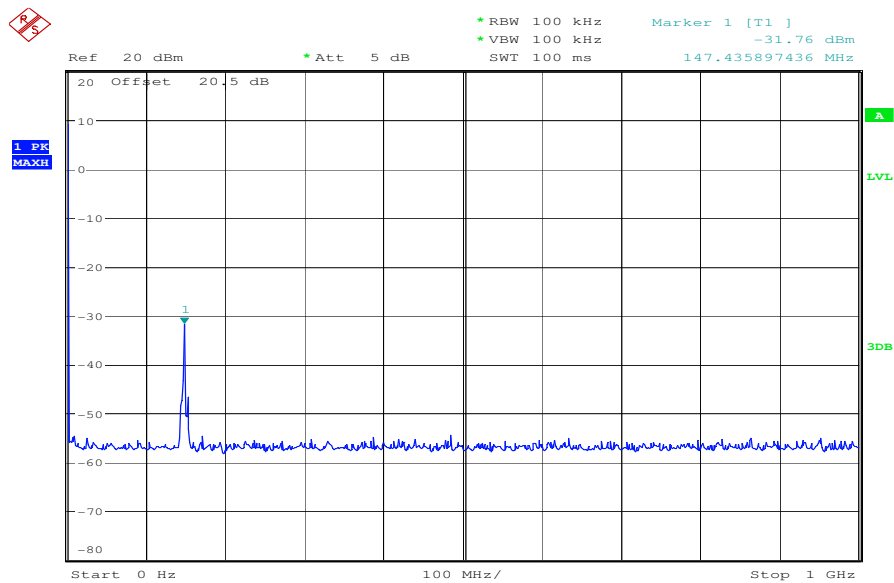


Date: 6.JUL.2009 11:01:42

Plot 8: Highest Channel

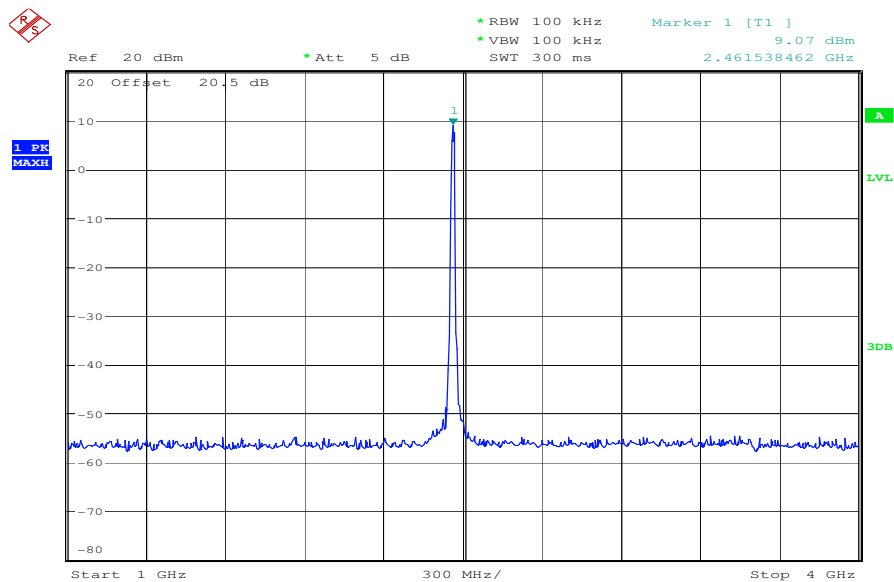

Date: 6.JUL.2009 11:02:37

Plot 9: Highest Channel

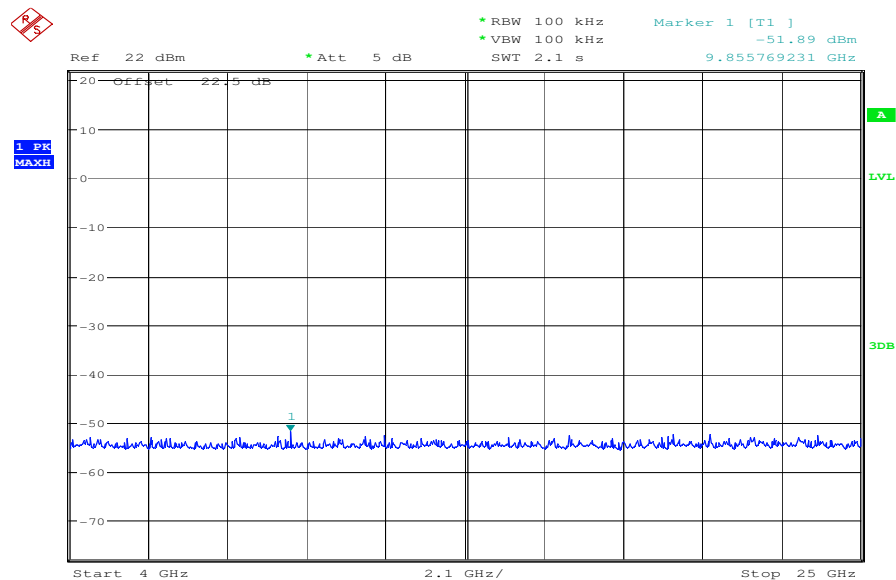

Date: 6.JUL.2009 11:04:11


Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		8.98	30 dBm		Operating frequency
97.76		-30.70	-20 dBc		complies
2437		8.34	30 dBm		Operating frequency
121.79		-31.51	-20 dBc		complies
2462		9.07	30 dBm		Operating frequency
147.44		-31.76	-20 dBc		complies
Measurement uncertainty		± 3dB			

F < 1 GHz: RBW: 100 kHz VBW: 100 kHz
 F > 1 GHz: RBW: 100 kHz VBW: 100 kHz


OFDM

Plot 1: Lowest Channel

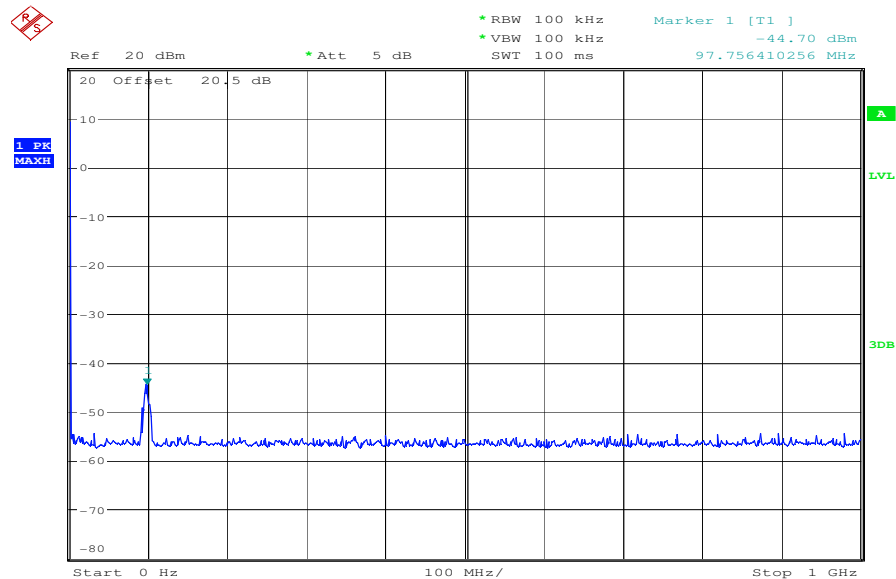


Date: 9.JUL.2009 09:11:49

Plot 2: Lowest Channel

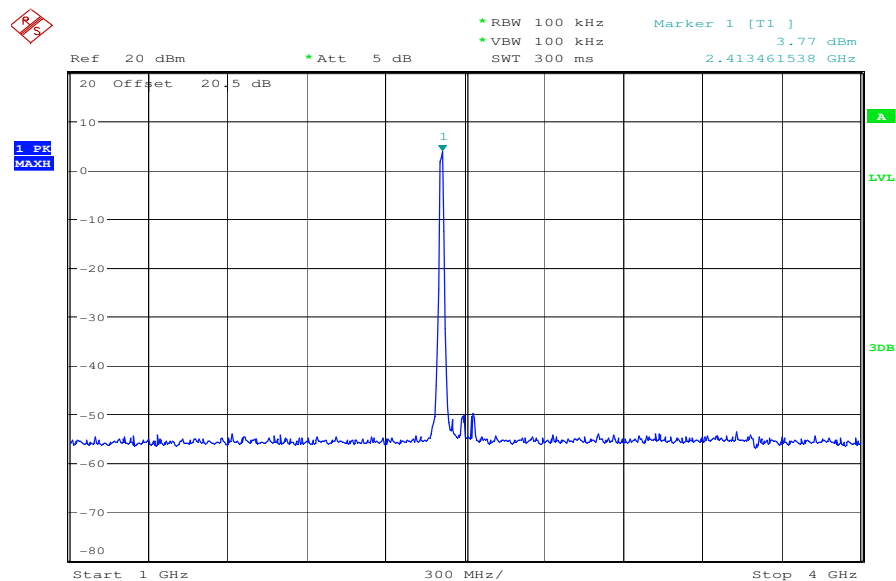


Date: 9.JUL.2009 09:59:16

Plot 3: Lowest Channel

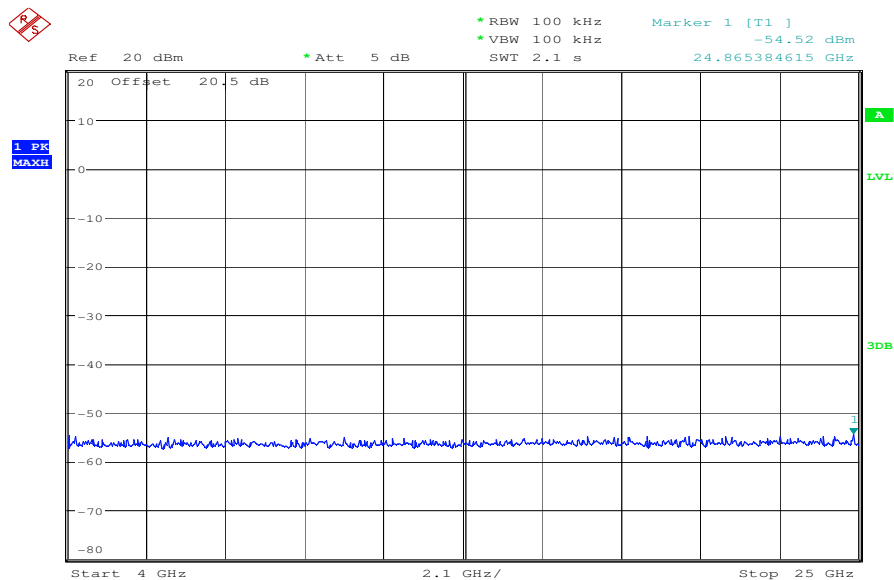


Date: 9.JUL.2009 10:01:14

Plot 4: Middle Channel

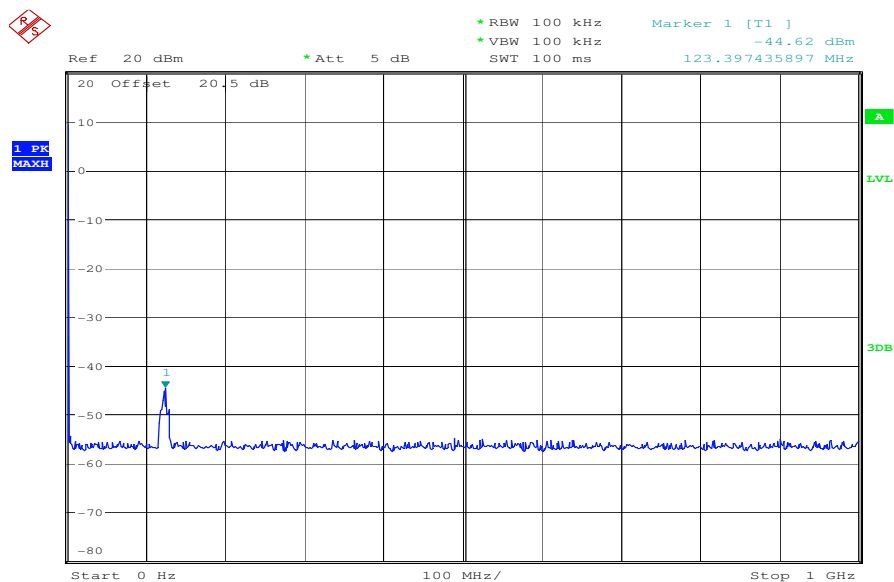


Date: 9.JUL.2009 09:13:34

Plot 5: Middle Channel

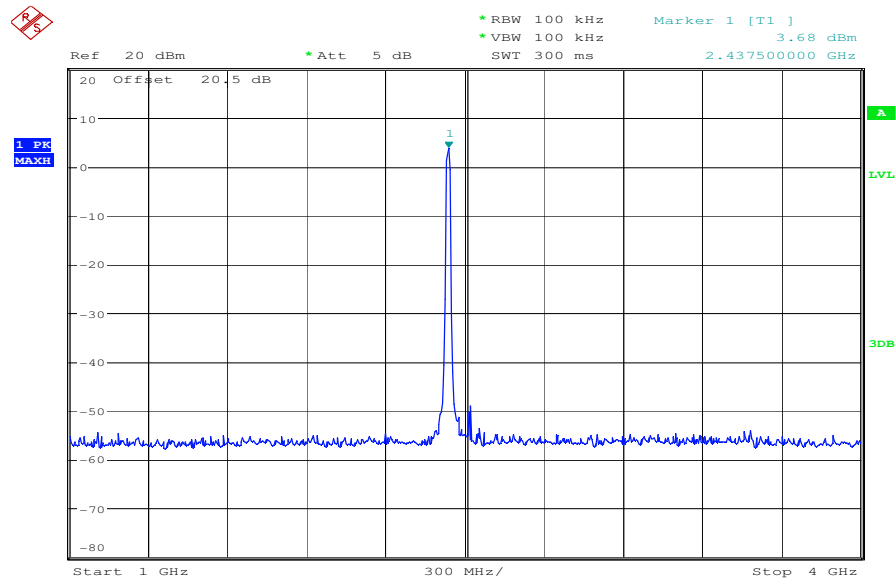


Date: 9.JUL.2009 09:50:16

Plot 6: Middle Channel

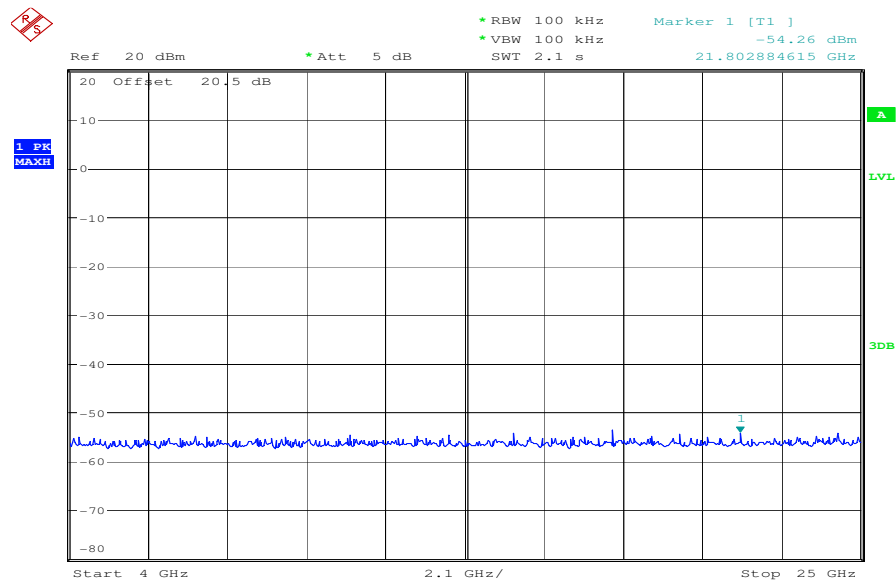


Date: 9.JUL.2009 10:02:53

Plot 7: Highest Channel

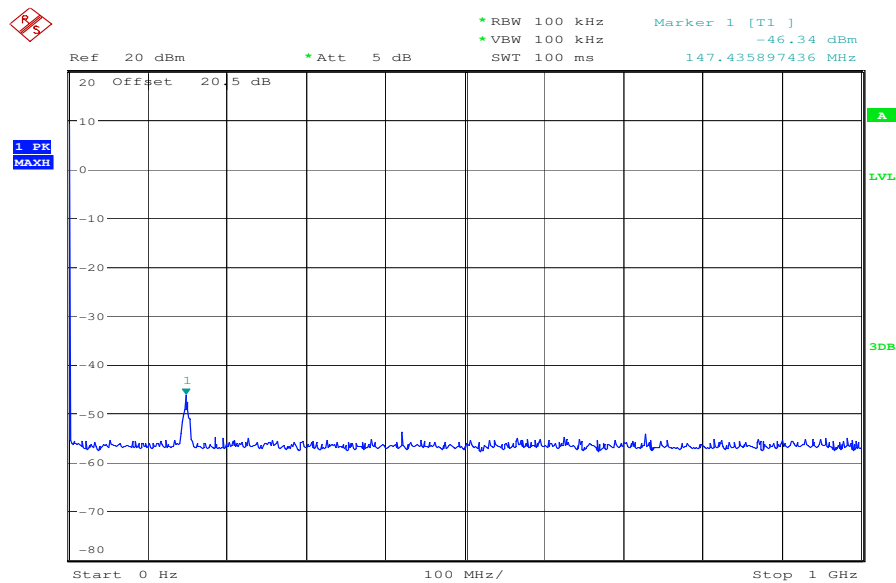


Date: 9.JUL.2009 09:47:32

Plot 8: Highest Channel

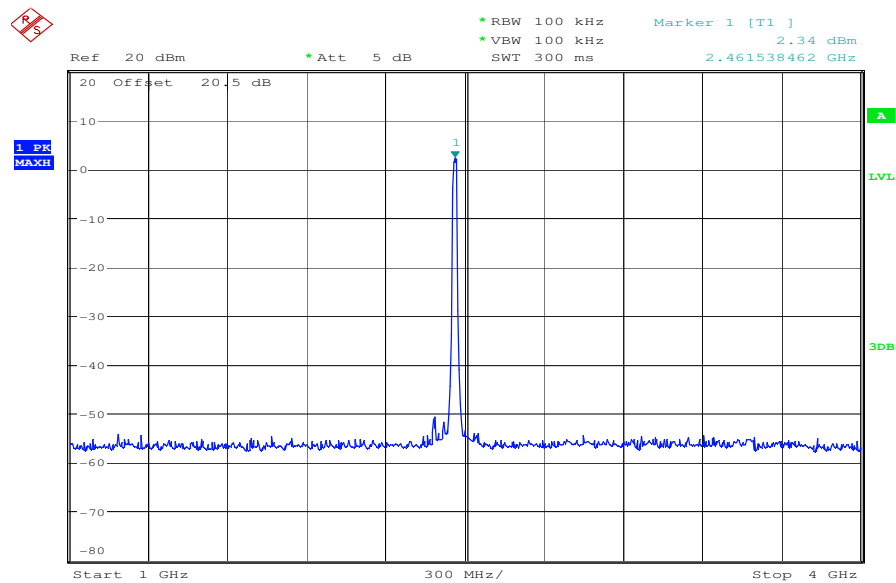

Date: 9.JUL.2009 09:48:40

Plot 9: Highest Channel

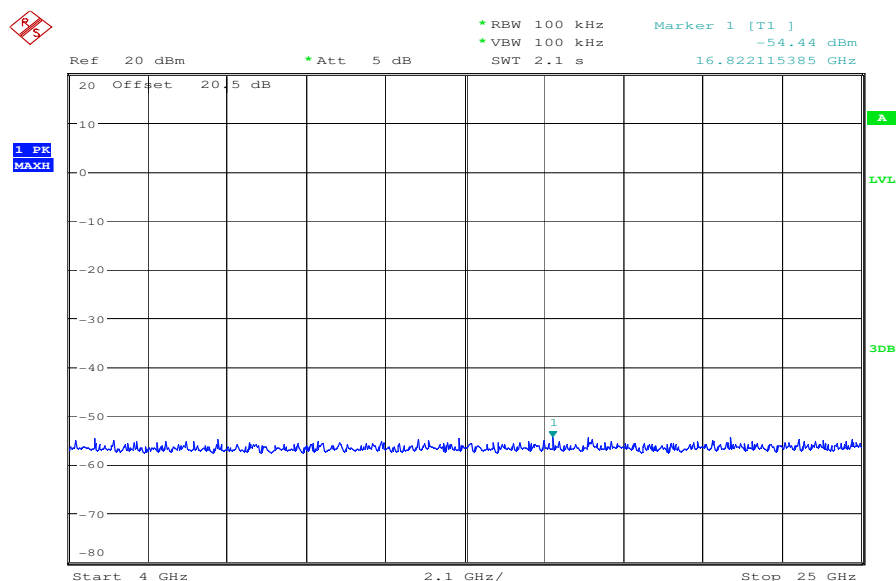

Date: 9.JUL.2009 10:03:59

Result & Limits:

Emission Limitations					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		3.77	30 dBm		Operating frequency
97.76		-44.70	-20 dBc		complies
2437		3.68	30 dBm		Operating frequency
123.40		-44.62	-20 dBc		complies
2462		2.34	30 dBm		Operating frequency
147.44		-46.34	-20 dBc		complies
Measurement uncertainty		± 3dB			

F < 1 GHz: RBW: 100 kHz VBW: 100 kHz
F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

5.13 Spurious Emissions - radiated (Transmitter) §15.209

DSSS:


Plot 1: 0.03 - 1 GHz (lowest channel), vertical & horizontal

Common Information

EUT: AAD-3880020-BV
 Serial Number: SN: CB5A13VH4Q IMEI: 00440107-804548-7
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN TX CH 1 + charging
 Operator Name: Klos
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dBμV/m
Subrange **Detectors** **IF Bandwidth** **Meas. Time** **Receiver**
 30 MHz - 1 GHz QuasiPeak 120 kHz 15 s Receiver

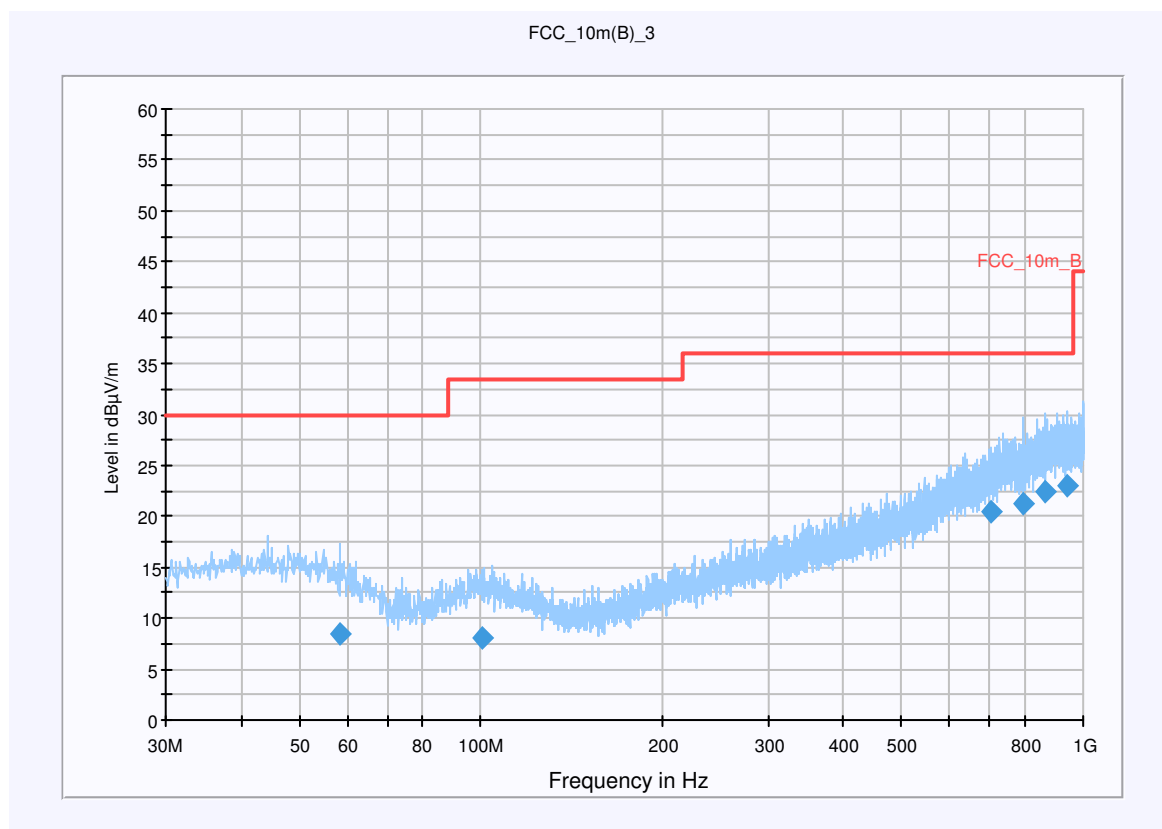

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
58.332300	8.5	15000.000	120.000	225.0	V	7.0	12.2	21.5	30.0	
100.804600	8.1	15000.000	120.000	98.0	H	229.0	12.2	25.4	33.5	
704.393350	20.4	15000.000	120.000	197.0	H	25.0	23.1	15.6	36.0	
792.211250	21.3	15000.000	120.000	225.0	V	161.0	24.3	14.7	36.0	
864.919650	22.5	15000.000	120.000	225.0	H	312.0	25.2	13.5	36.0	
939.575350	23.0	15000.000	120.000	165.0	V	133.0	25.8	13.0	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/0033, FW 4.32
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (0109)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00


Plot 2: 1 GHz – 12.75 GHz (lowest channel), vertical

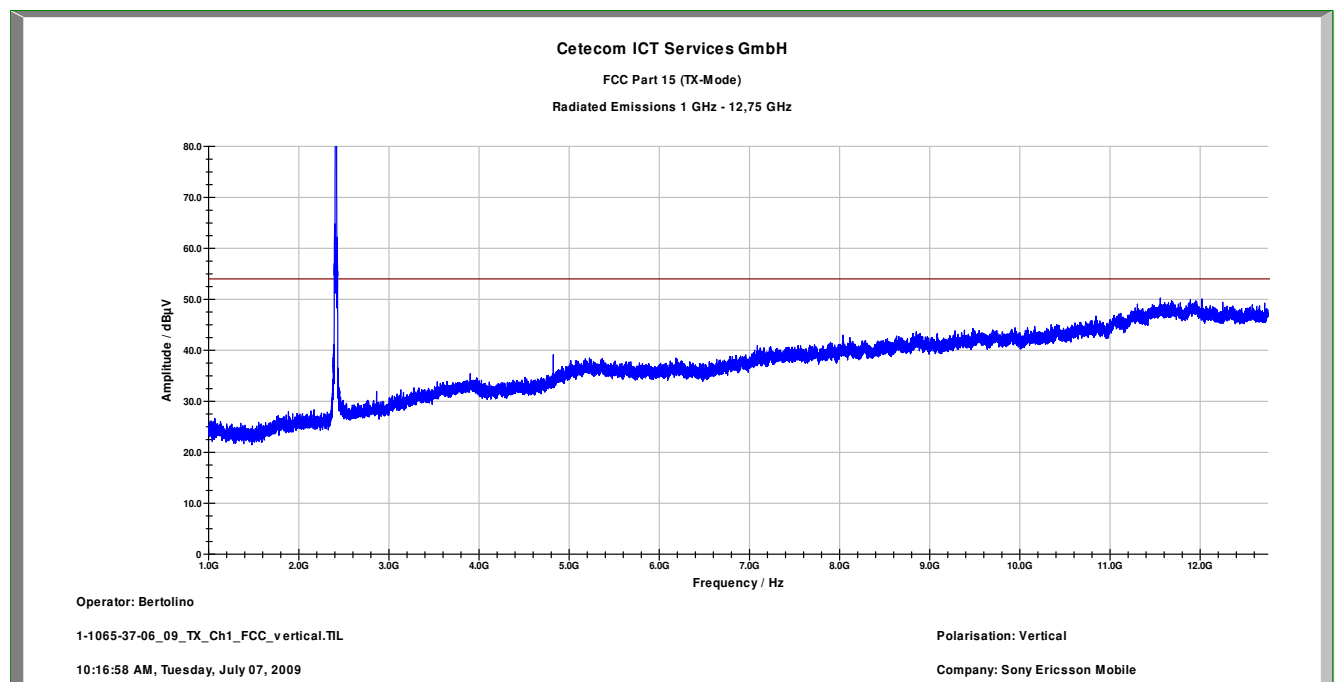

Plot 3: 1 – 12.75 GHz (lowest channel), horizontal

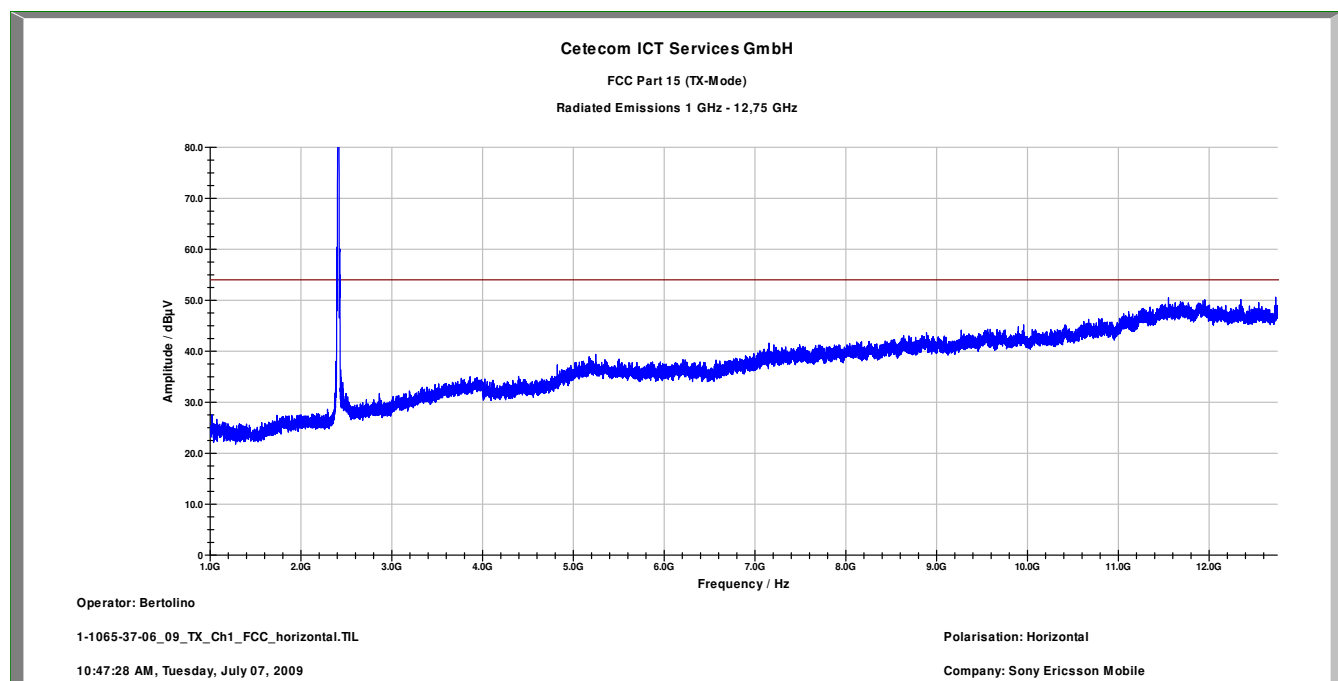

Plot 4: 12 - 25 GHz (valid for all channels), vertical & horizontal

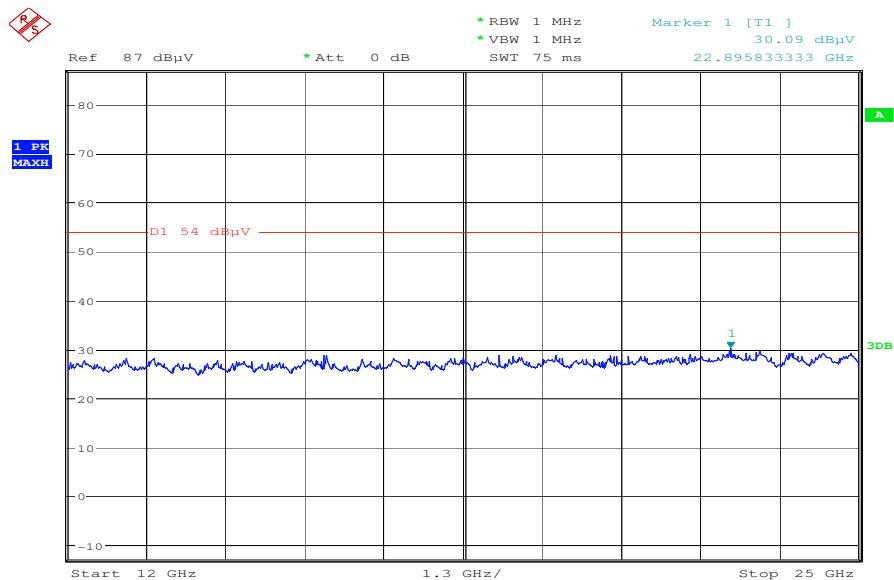

Date: 9.JUL.2009 10:15:03

Plot 5: 0.03 - 1 GHz (middle channel), vertical & horizontal


Common Information

EUT: AAD-3880020-BV
 Serial Number: SN: CB5A13VH4Q IMEI: 00440107-804548-7
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN TX CH 6 + charging
 Operator Name: Klos
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

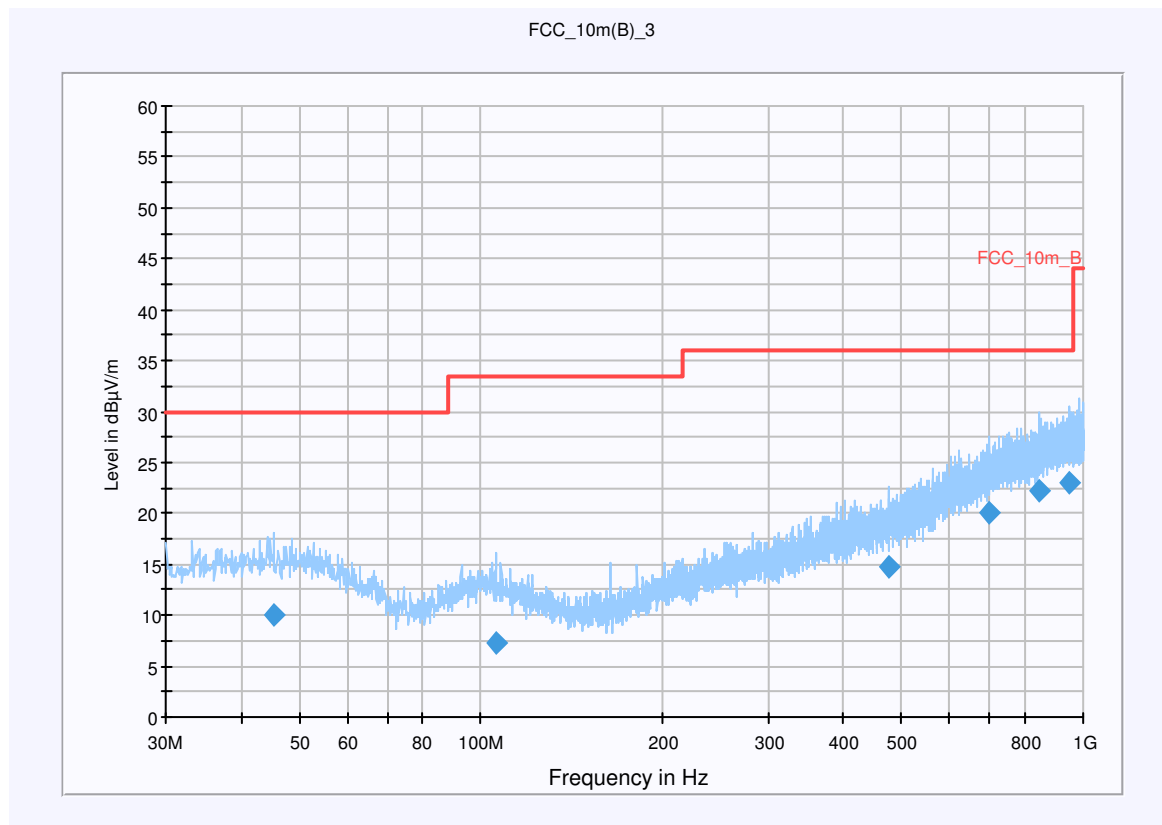**Final Result 1**


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
45.424250	10.0	15000.000	120.000	220.0	V	169.0	13.4	20.0	30.0	
106.368100	7.3	15000.000	120.000	220.0	H	157.0	11.7	26.2	33.5	
474.214600	14.8	15000.000	120.000	199.0	V	20.0	18.6	21.2	36.0	
695.853200	20.1	15000.000	120.000	220.0	H	144.0	22.9	15.9	36.0	
846.265000	22.1	15000.000	120.000	220.0	V	-2.0	25.0	13.9	36.0	
946.545950	23.1	15000.000	120.000	220.0	V	8.0	25.8	12.9	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/0033, FW 4.32
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (0109)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 6: 1 GHz – 12.75 GHz (middle channel), vertical

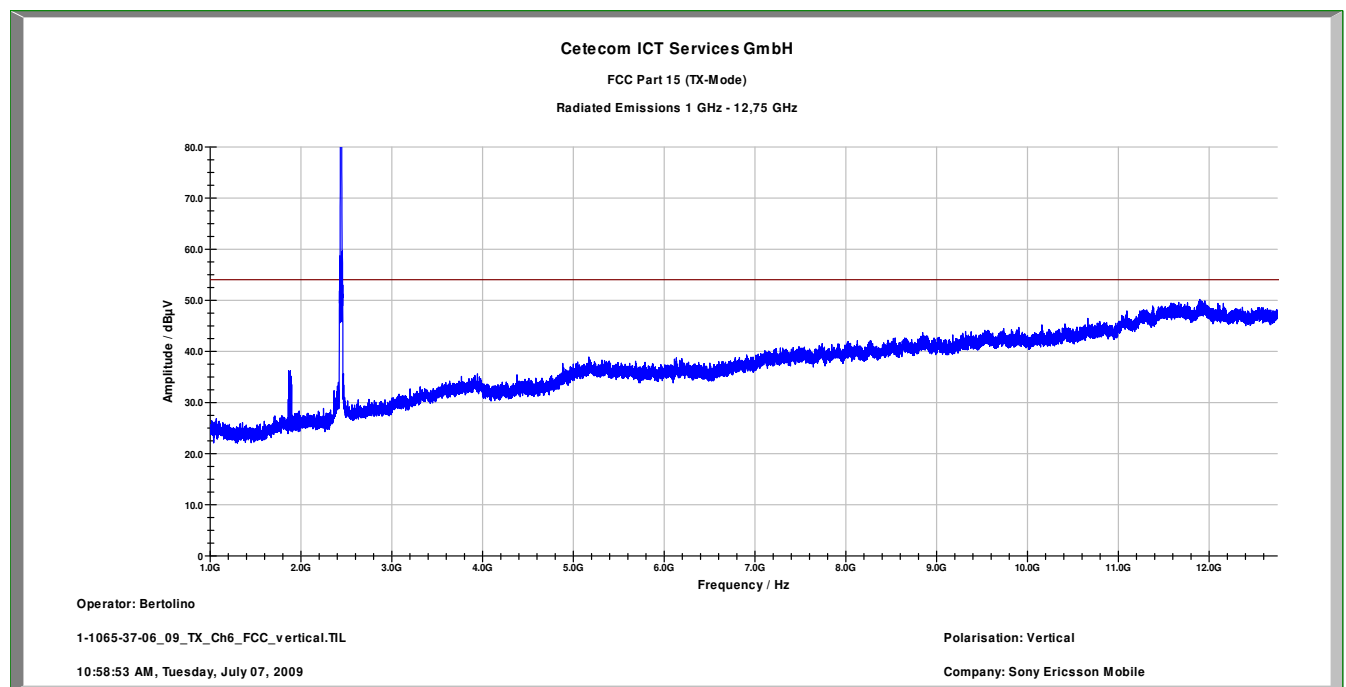

Plot 7: 1 – 12.75 GHz (middle channel), horizontal

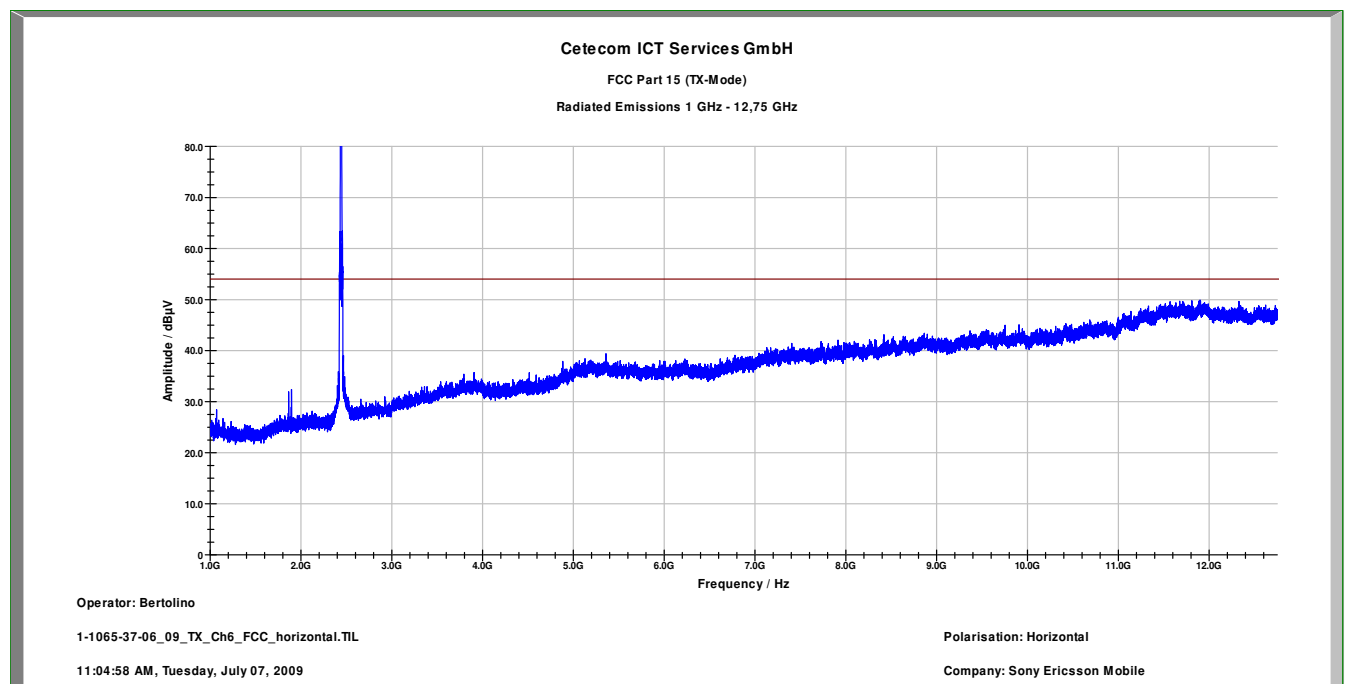


Plot 8: 0.03 - 1 GHz (highest channel), vertical & horizontal

Common Information

EUT: AAD-3880020-BV
 Serial Number: SN: CB5A13VH4Q IMEI: 00440107-804548-7
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN TX CH 11 + charging
 Operator Name: Klos
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m
Subrange **Detectors** **IF Bandwidth** **Meas. Time** **Receiver**
 30 MHz - 1 GHz QuasiPeak 120 kHz 15 s Receiver

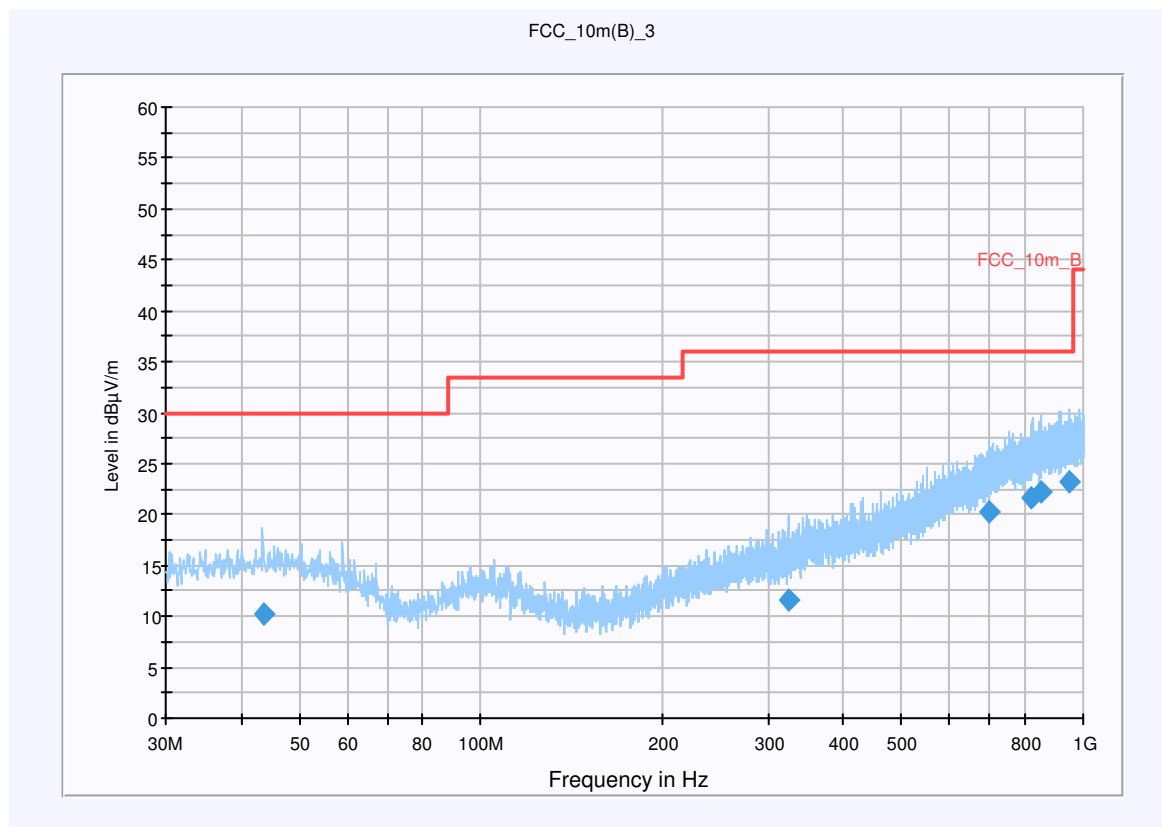**Final Result 1**


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
43.726500	10.1	15000.000	120.000	112.0	V	277.0	13.5	19.9	30.0	
324.988200	11.7	15000.000	120.000	220.0	H	84.0	15.6	24.3	36.0	
699.154100	20.2	15000.000	120.000	220.0	V	138.0	23.0	15.8	36.0	
822.265100	21.7	15000.000	120.000	171.0	V	39.0	24.6	14.3	36.0	
851.218100	22.2	15000.000	120.000	104.0	V	177.0	25.1	13.8	36.0	
945.546400	23.2	15000.000	120.000	220.0	H	311.0	25.8	12.8	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/0033, FW 4.32
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (0109)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 9: 1 GHz – 12.75 GHz (highest channel), vertical

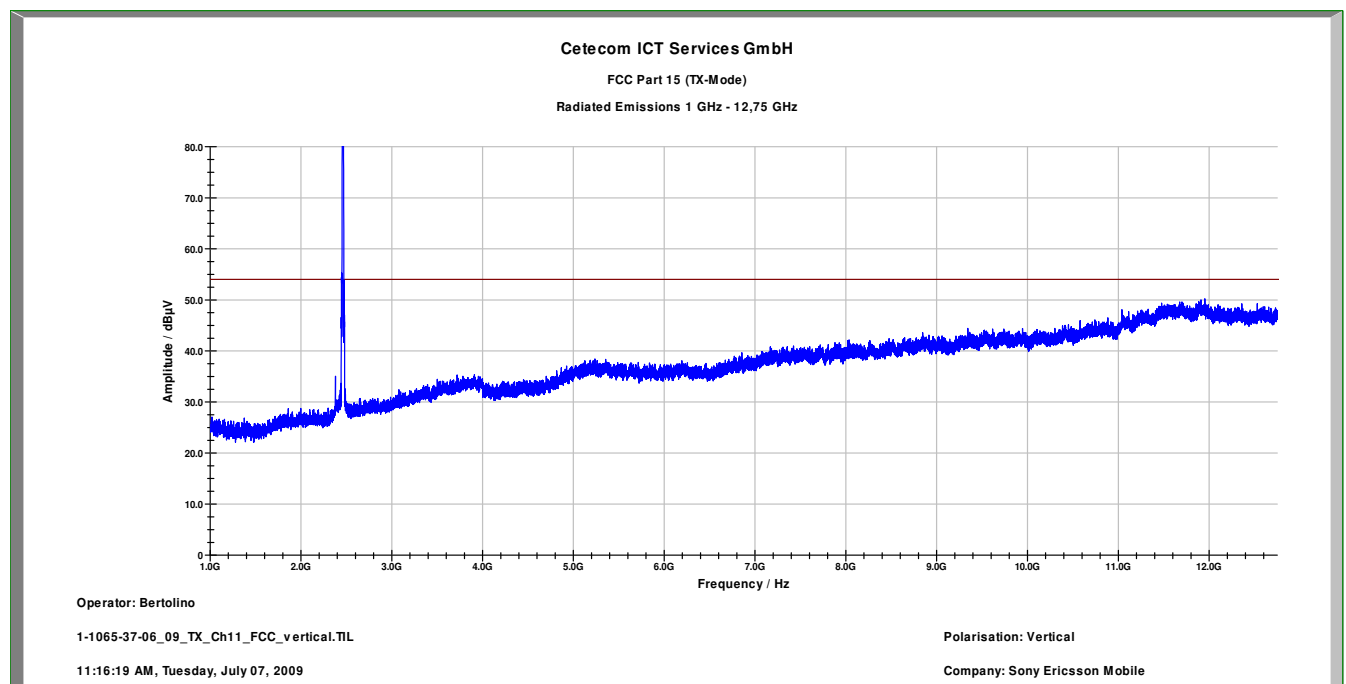

Plot 10: 1 – 12.75 GHz (highest channel), horizontal

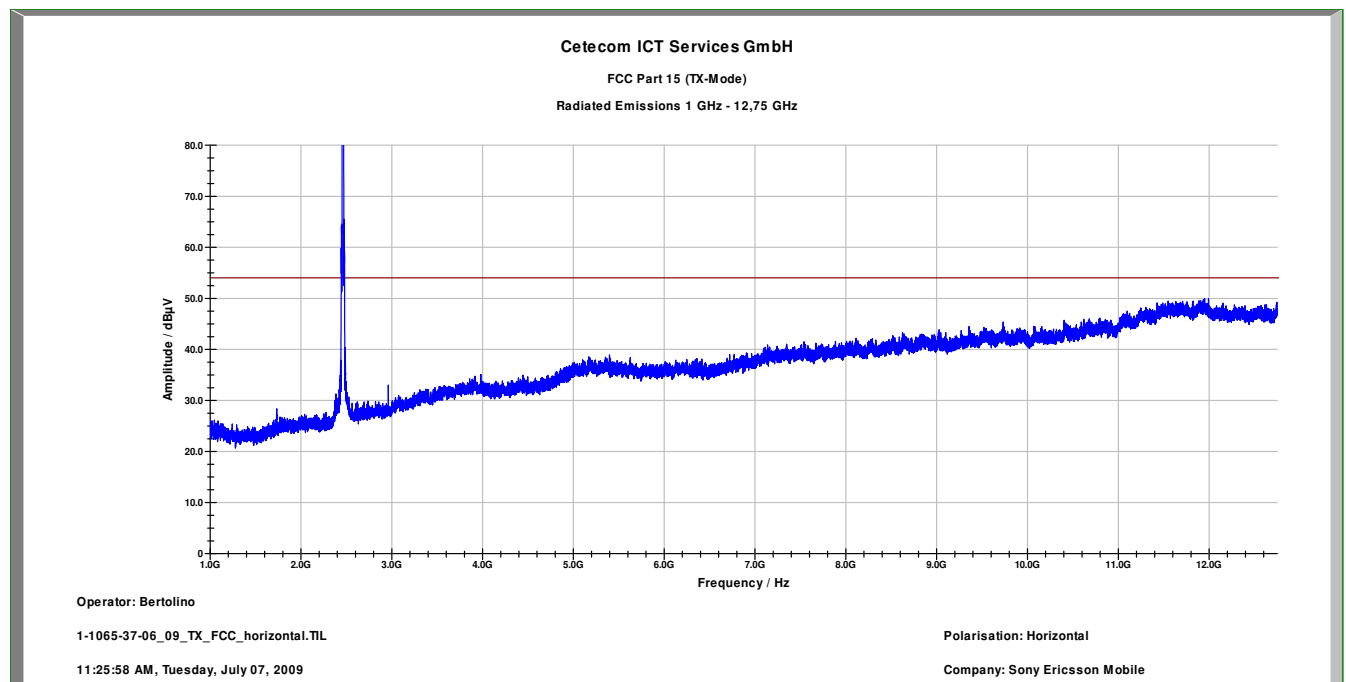

Results:

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
No critical peaks detected.			No critical peaks detected.			No critical peaks detected.		
Measurement uncertainty			± 3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f $\geq$ 1GHz : RBW/VBW: 1 MHz**Limits:** § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.109

Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
above 960	54.0	3

OFDM:

Plot 1: 0.03 - 1 GHz (lowest channel), vertical & horizontal


Common Information

EUT: AAD-3880020-BV
 Serial Number: SN: CB5A13VH4Q IMEI: 00440107-804548-7
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN TX CH 1 + charging
 Operator Name: Klos
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

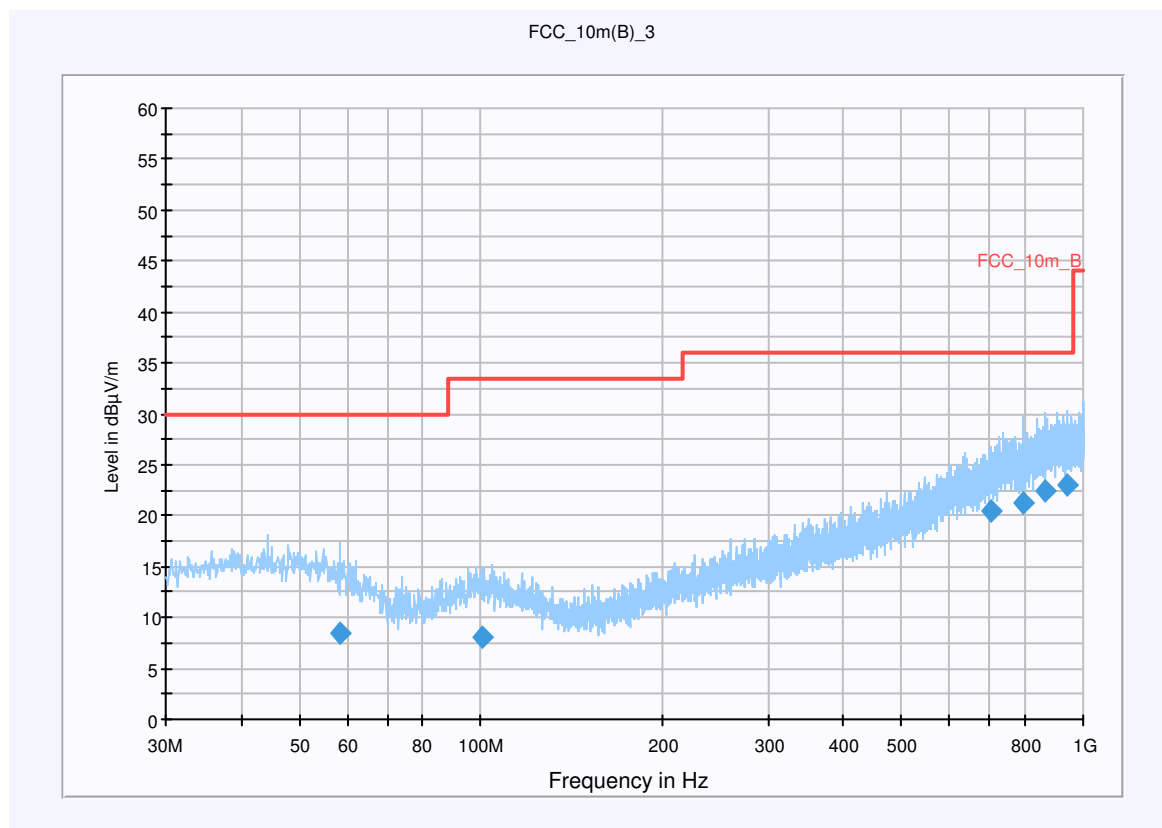**Final Result 1**


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
58.332300	8.4	15000.000	120.000	225.0	V	7.0	12.2	21.6	30.0	
100.804600	8.0	15000.000	120.000	98.0	H	229.0	12.2	25.5	33.5	
704.393350	20.4	15000.000	120.000	197.0	H	25.0	23.1	15.6	36.0	
792.211250	21.1	15000.000	120.000	225.0	V	161.0	24.3	14.9	36.0	
864.919650	22.0	15000.000	120.000	225.0	H	312.0	25.2	14.0	36.0	
939.575350	23.1	15000.000	120.000	165.0	V	133.0	25.8	12.9	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/0033, FW 4.32
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (0109)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00


Plot 2: 1 GHz – 12.75 GHz (lowest channel), vertical

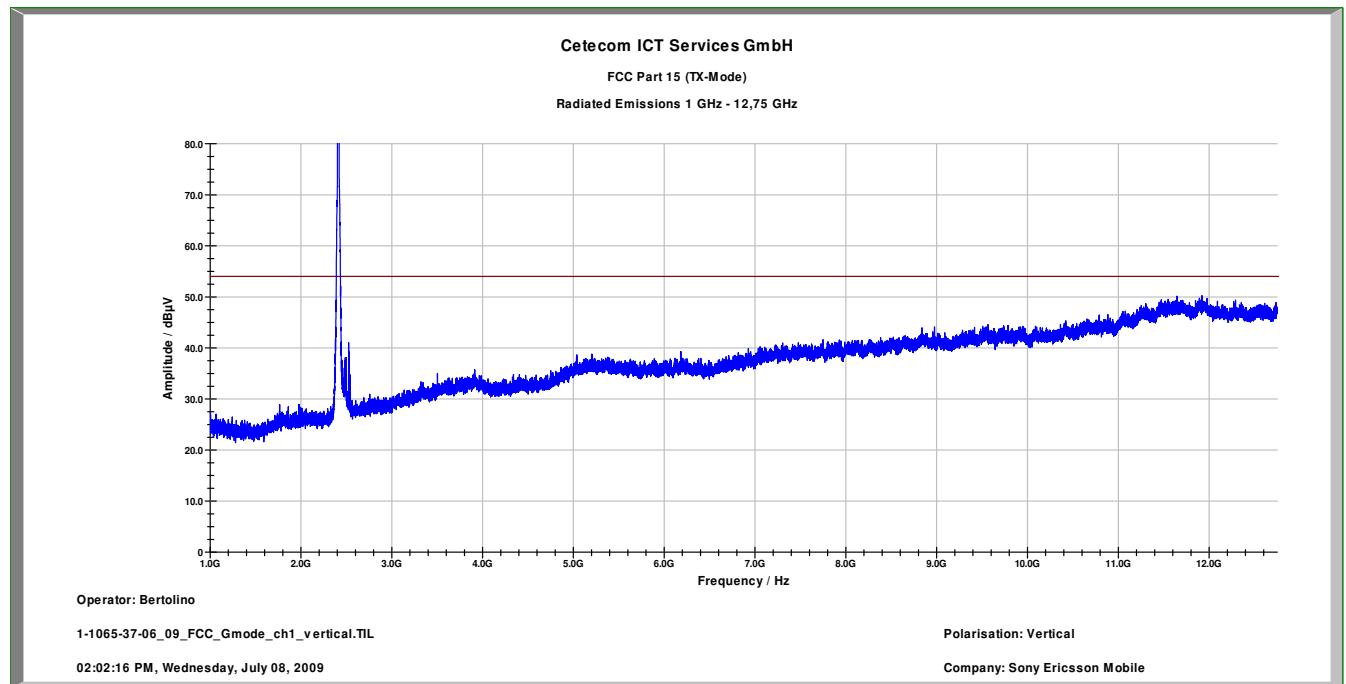

Plot 3: 1 – 12.75 GHz (lowest channel), horizontal

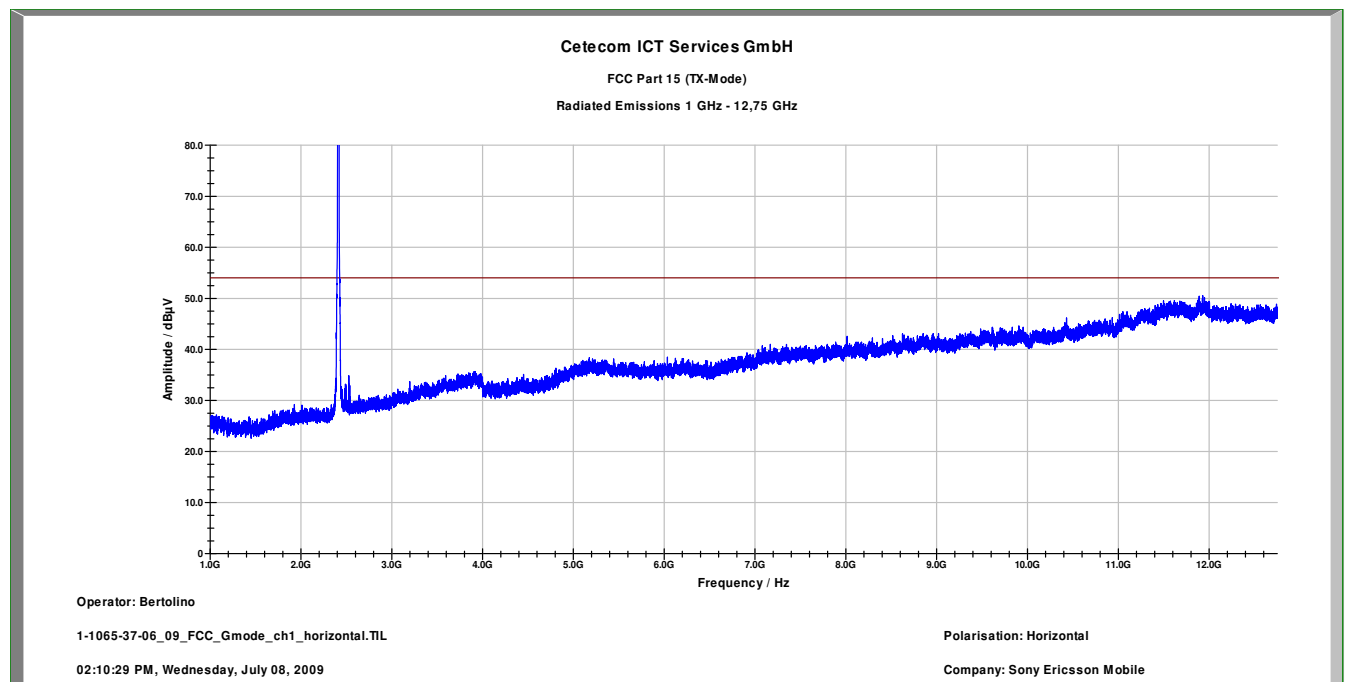

Plot 4: 12 - 25 GHz (valid for all channels), vertical & horizontal

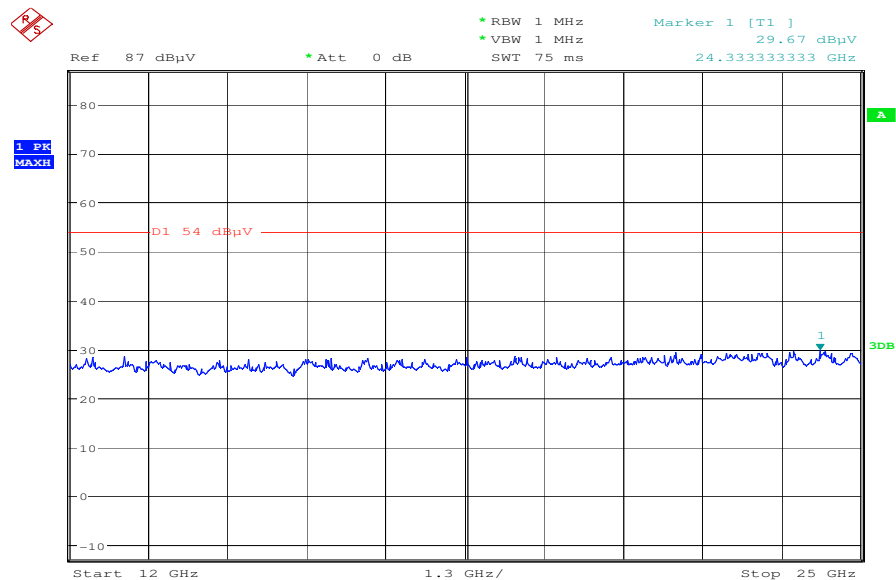

Date: 9.JUL.2009 10:17:38

Plot 5: 0.03 - 1 GHz (middle channel), vertical & horizontal


Common Information

EUT: AAD-3880020-BV
 Serial Number: SN: CB5A13VH4Q IMEI: 00440107-804548-7
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN TX CH 6 + charging
 Operator Name: Klos
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m

Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1 GHz	QuasiPeak	120 kHz	15 s	Receiver

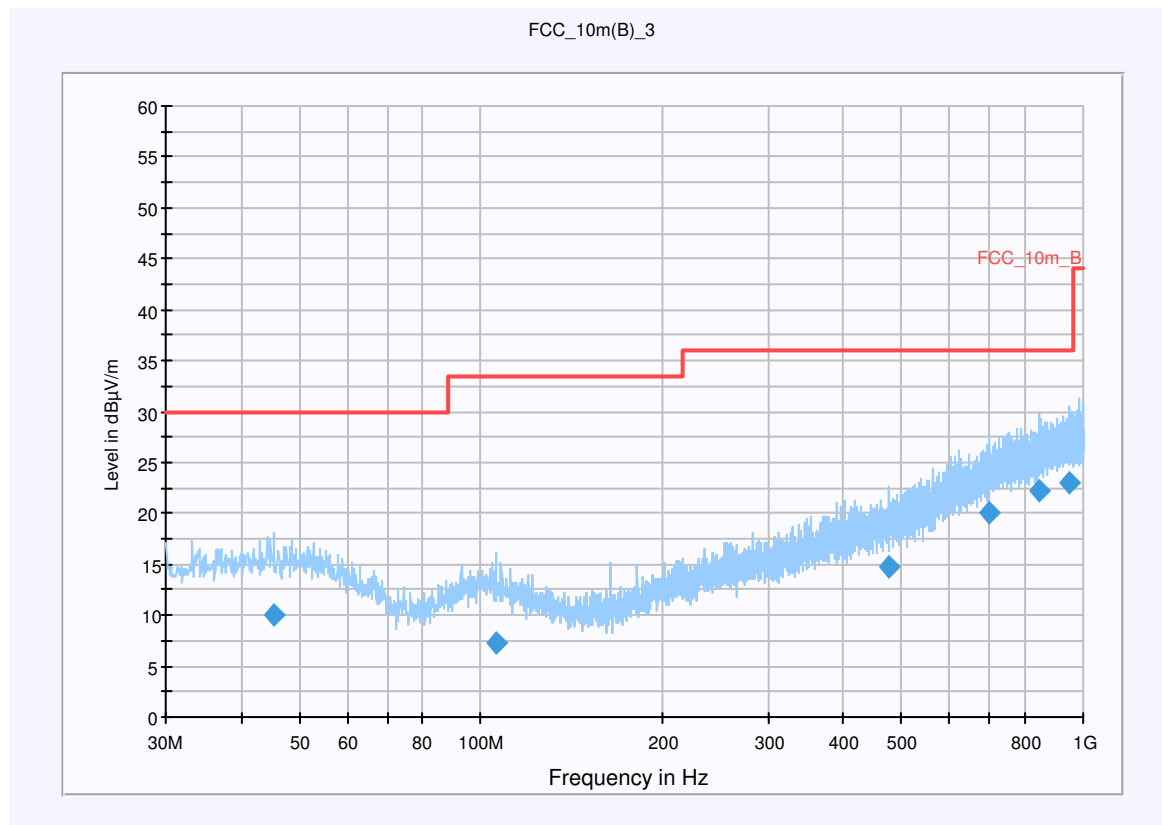**Final Result 1**


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
45.424250	10.7	15000.000	120.000	220.0	V	169.0	13.4	19.3	30.0	
106.378100	7.3	15000.000	120.000	220.0	H	157.0	11.7	26.2	33.5	
474.214600	14.9	15000.000	120.000	199.0	V	20.0	18.6	21.1	36.0	
695.853200	20.1	15000.000	120.000	220.0	H	144.0	22.9	15.9	36.0	
846.265000	22.1	15000.000	120.000	220.0	V	-2.0	25.0	13.9	36.0	
946.555950	23.0	15000.000	120.000	220.0	V	8.0	25.8	13.0	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/0033, FW 4.32
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (0109)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 6: 1 GHz – 12.75 GHz (middle channel), vertical

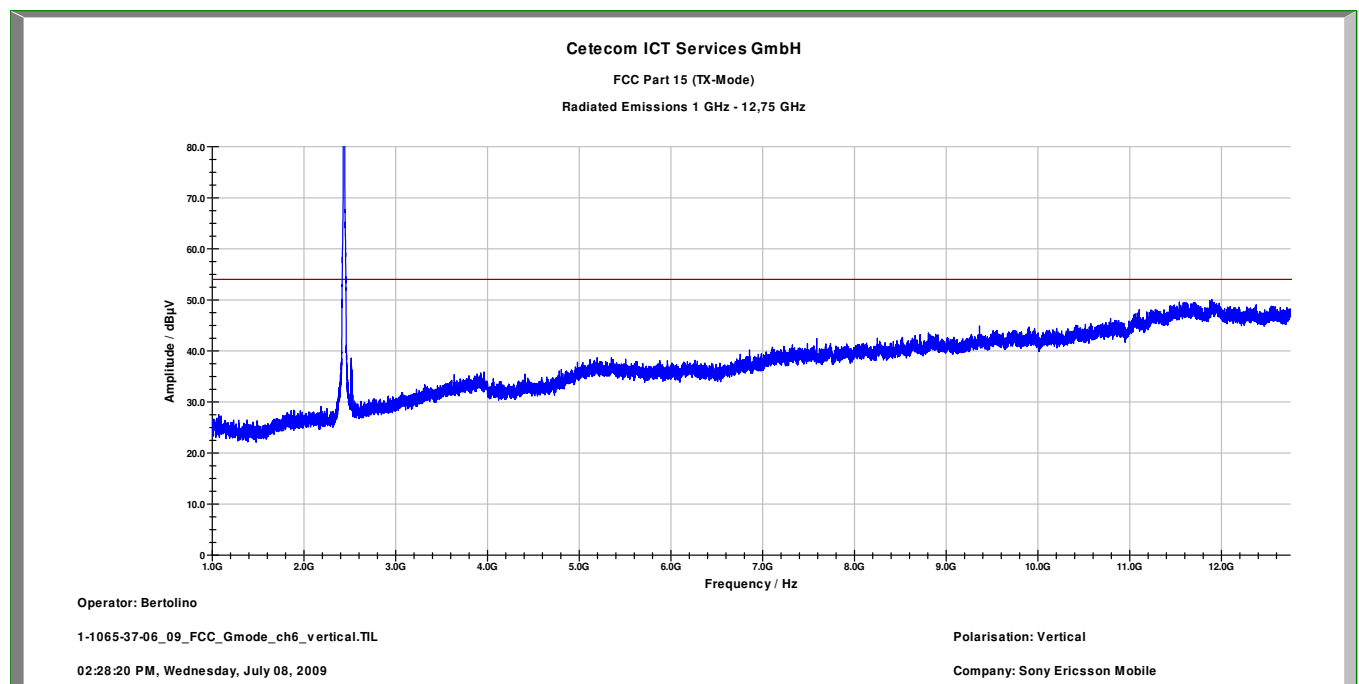

Plot 7: 1 – 12.75 GHz (middle channel), horizontal

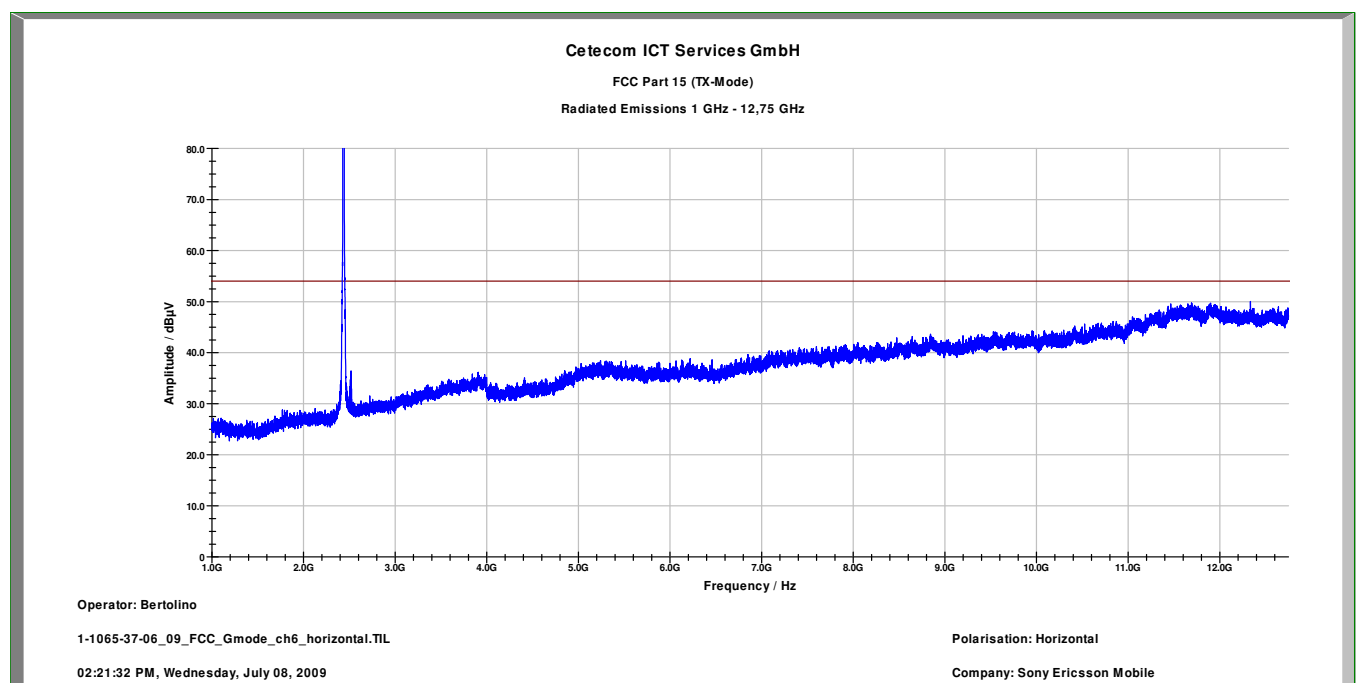


Plot 8: 0.03 - 1 GHz (highest channel), vertical & horizontal

Common Information

EUT: AAD-3880020-BV
 Serial Number: SN: CB5A13VH4Q IMEI: 00440107-804548-7
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN TX CH 11 + charging
 Operator Name: Klos
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dB μ V/m
Subrange **Detectors** **IF Bandwidth** **Meas. Time** **Receiver**
 30 MHz - 1 GHz QuasiPeak 120 kHz 15 s Receiver

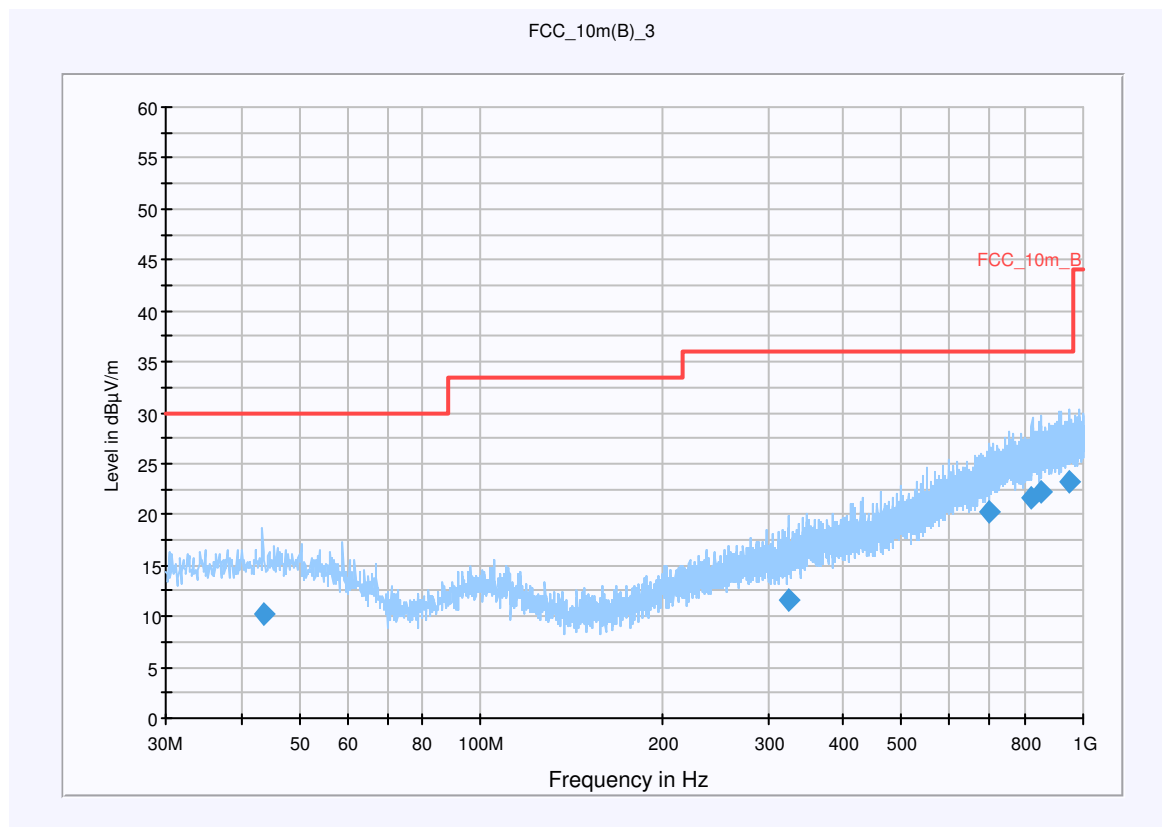**Final Result 1**


Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)	Comment
43.726500	10.1	15000.000	120.000	112.0	V	277.0	13.5	19.9	30.0	
324.988200	11.7	15000.000	120.000	220.0	H	84.0	15.6	24.3	36.0	
699.154100	20.2	15000.000	120.000	220.0	V	138.0	23.0	15.8	36.0	
822.265100	21.7	15000.000	120.000	171.0	V	39.0	24.6	14.3	36.0	
851.218100	22.2	15000.000	120.000	104.0	V	177.0	25.1	13.8	36.0	
945.546400	23.2	15000.000	120.000	220.0	H	311.0	25.8	12.8	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/0033, FW 4.32
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (0109)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 9: 1 GHz – 12.75 GHz (highest channel), vertical

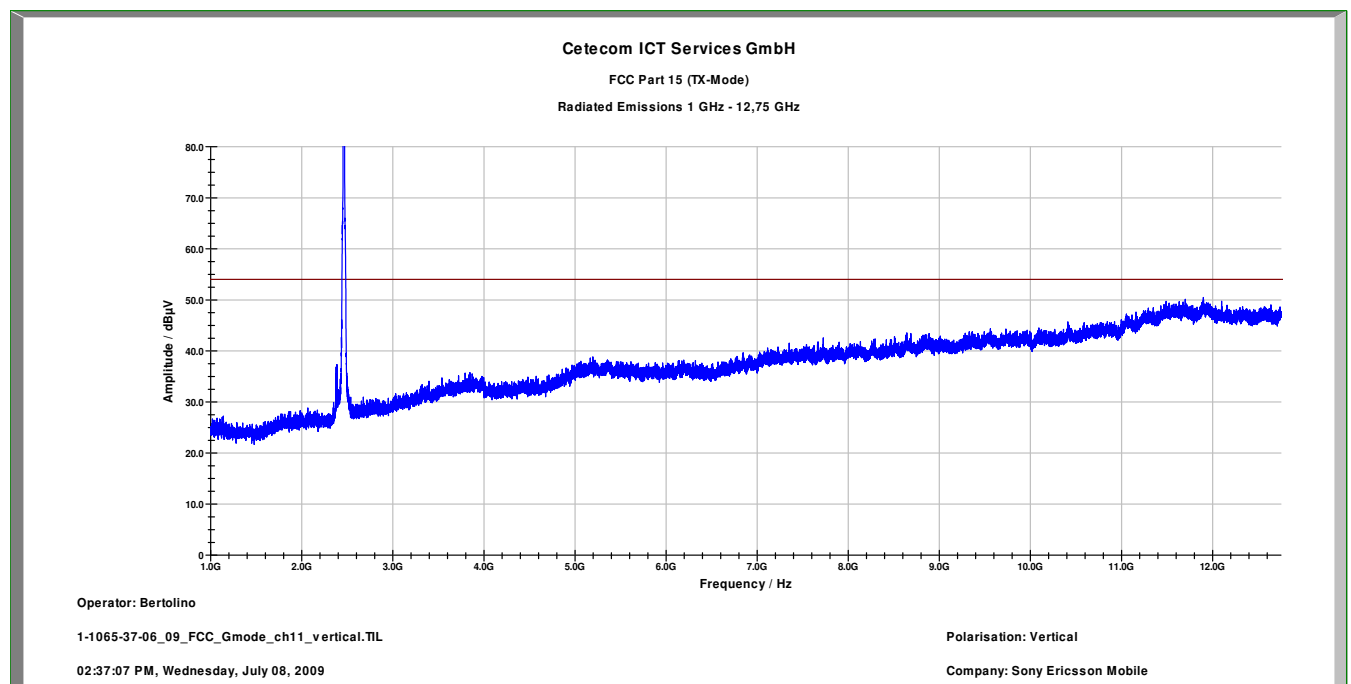

Plot 10: 1 – 12.75 GHz (highest channel), horizontal

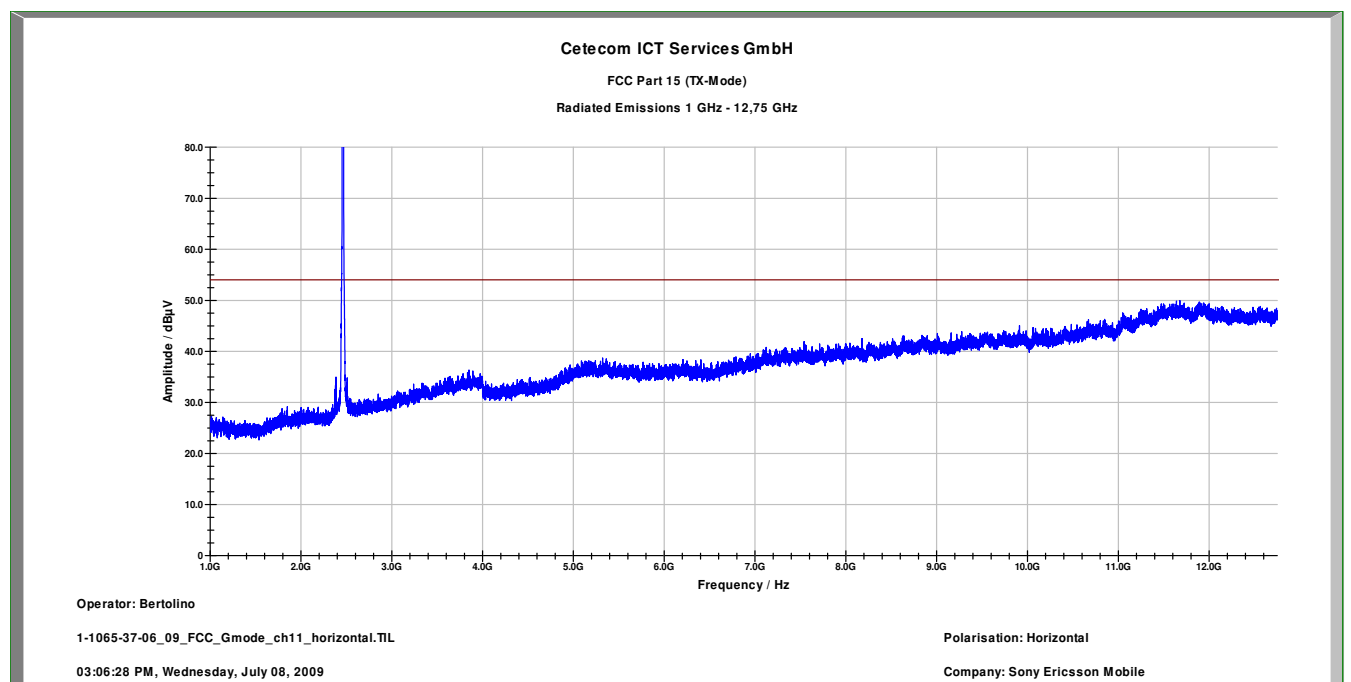

Results:

SPURIOUS EMISSIONS LEVEL §15.209								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
No critical peaks detected.			No critical peaks detected.			No critical peaks detected.		
Measurement uncertainty			± 3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f $\geq$ 1GHz : RBW/VBW: 1 MHz**Limits:** § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.109

Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
above 960	54.0	3

5.14 Spurious Emissions - radiated (Receiver) §15.109 / 209


Plot 1: 0.03 - 1 GHz, vertical & horizontal (receiver)

Common Information

EUT: AAD-3880020-BV
 Serial Number: SN: CB5A13VH4Q IMEI: 00440107-804548-7
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: WLAN RX + charging
 Operator Name: Klos
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Level Unit: dBμV/m
Subrange **Detectors** **IF Bandwidth** **Meas. Time** **Receiver**
 30 MHz - 1 GHz QuasiPeak 120 kHz 15 s Receiver

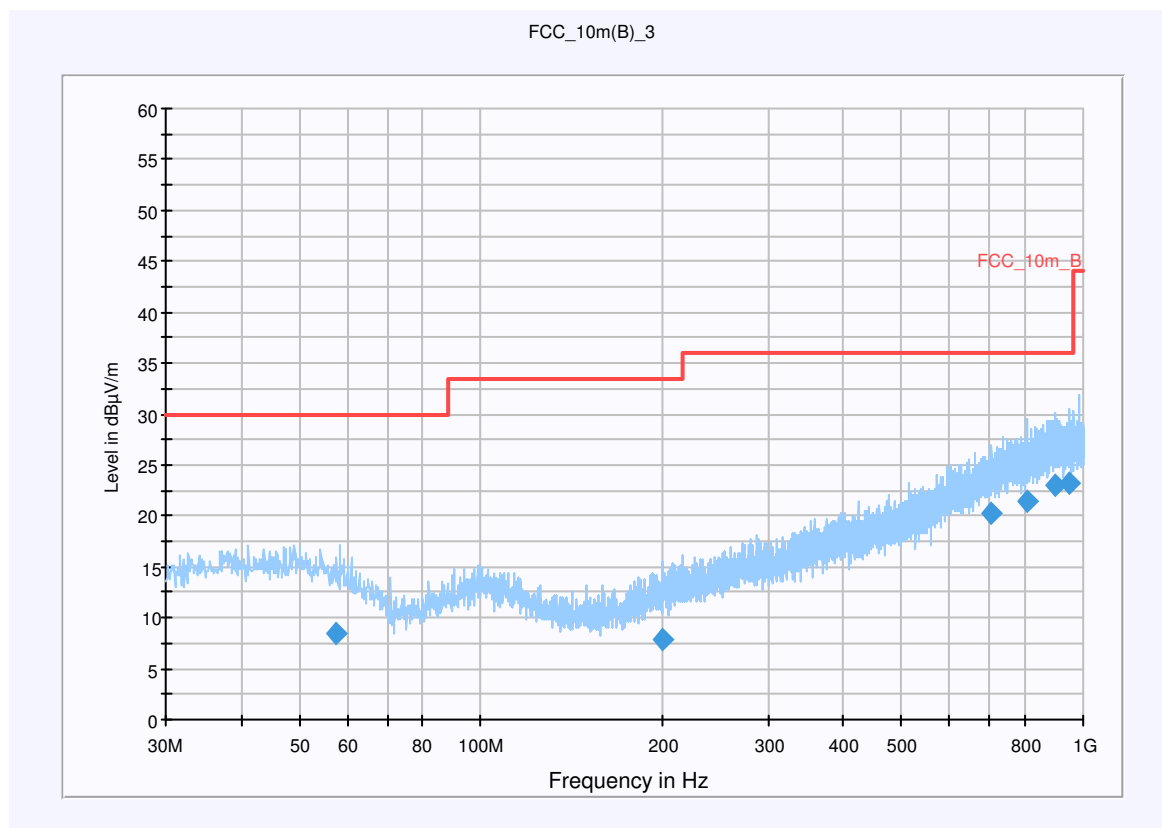

Final Result 1


Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBμV/m)	Comment
57.507000	8.5	15000.000	120.000	220.0	V	97.0	12.4	21.5	30.0	
200.024400	7.8	15000.000	120.000	202.0	V	129.0	12.0	25.7	33.5	
701.570600	20.3	15000.000	120.000	123.0	H	7.0	23.0	15.7	36.0	
808.175850	21.5	15000.000	120.000	220.0	V	234.0	24.4	14.5	36.0	
901.058650	23.1	15000.000	120.000	127.0	V	14.0	25.7	12.9	36.0	
944.888700	23.2	15000.000	120.000	199.0	H	3.0	25.8	12.8	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/0033, FW 4.32
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table: Cable_EN_1GHz (0109)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00


Plot 2: 1 GHz – 12.75 GHz, vertical, (receiver)

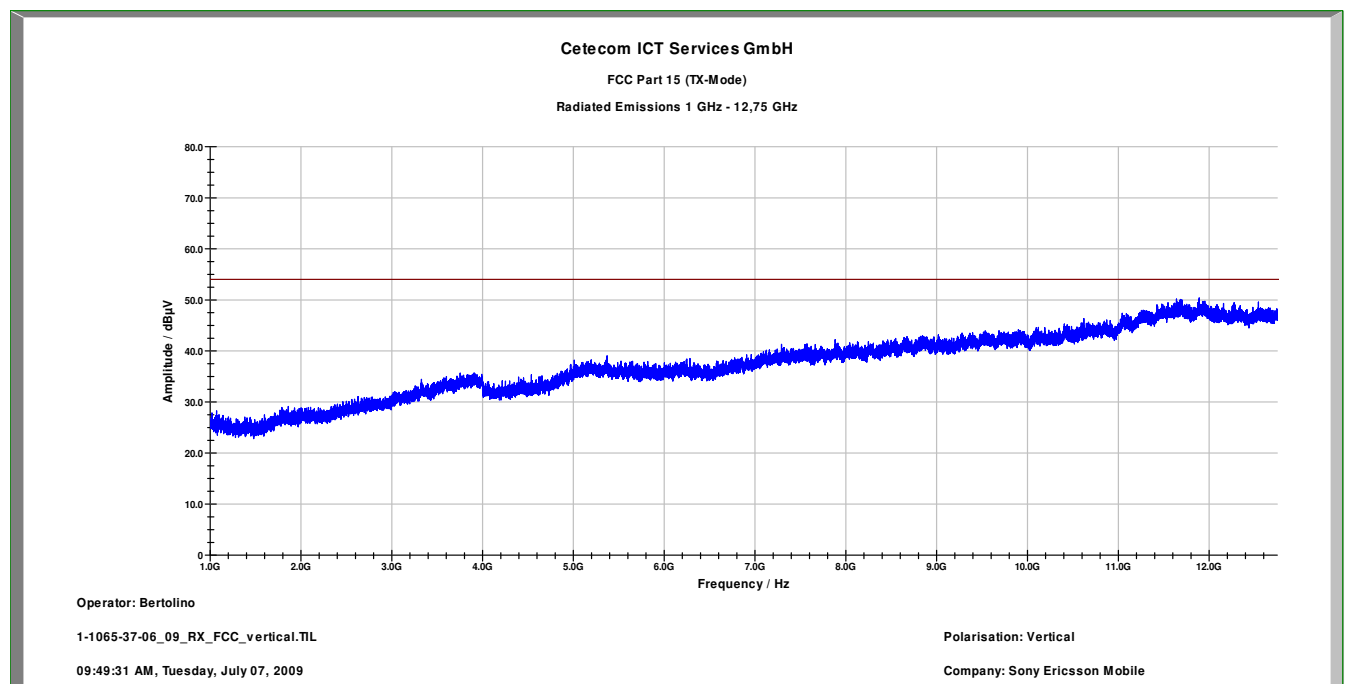

Plot 3: 1 – 12.75 GHz, horizontal, (receiver)

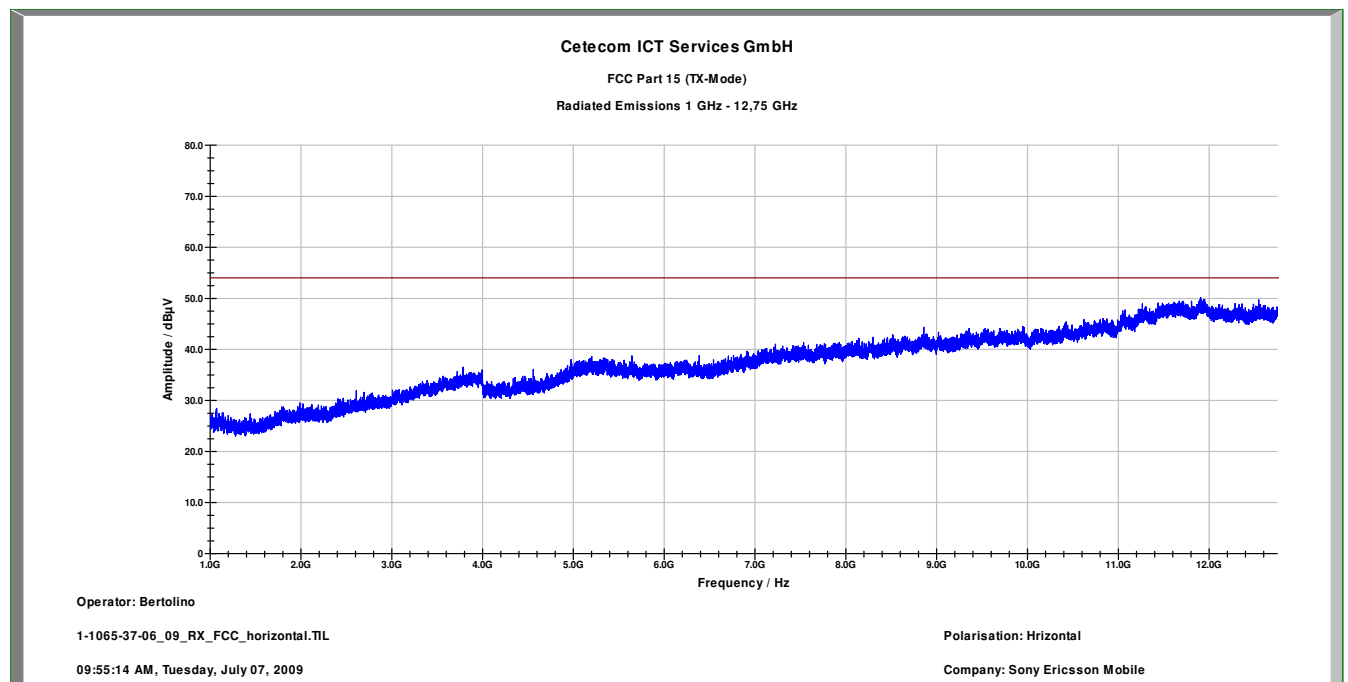

Plot 4: 12 - 25 GHz (receiver)

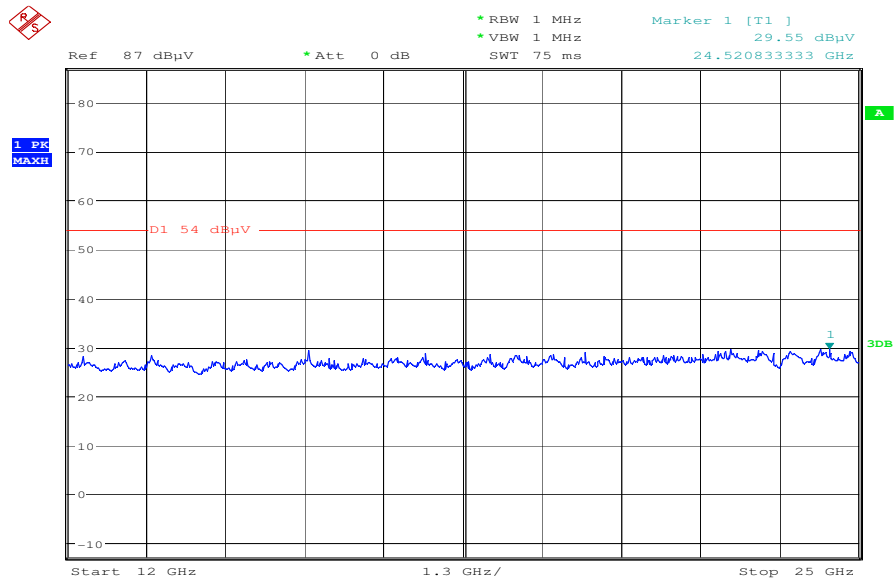

Date: 9.JUL.2009 10:18:39

Results:

Spurious Emissions level [dB μ V/m]		
f[MHz]	Detector	Level [dB μ V/m]
No critical peaks detected.		
Measurement uncertainty		± 3 dB

f < 1 GHz : RBW/VBW: 100 kHz

f $\geq$ 1GHz : RBW/VBW: 1 MHz

See above plots

Measurement distance see table

Limits: § 15.109


Frequency (MHz)	Field strength (dB μ V/m)	Measurement distance (m)
30 - 88	30.0	10
88 - 216	33.5	10
216 - 960	36.0	10
above 960	54.0	3

5.15 Spurious Emissions - radiated <30 MHz §15.209


Measured at 3 m distance.

Values recalculated with 40 dB/decade according to FCC rules.


Plot 1: Transmitter mode, DSSS

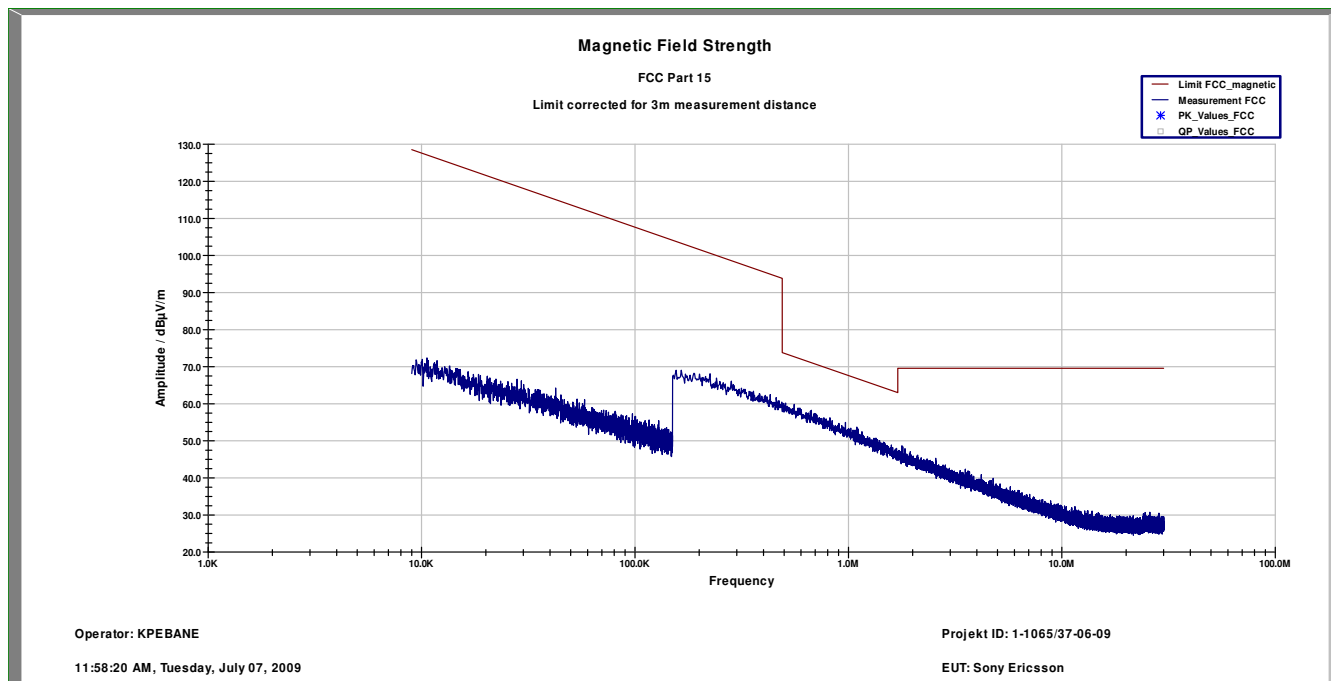

Plot 2: Transmitter mode, OFDM

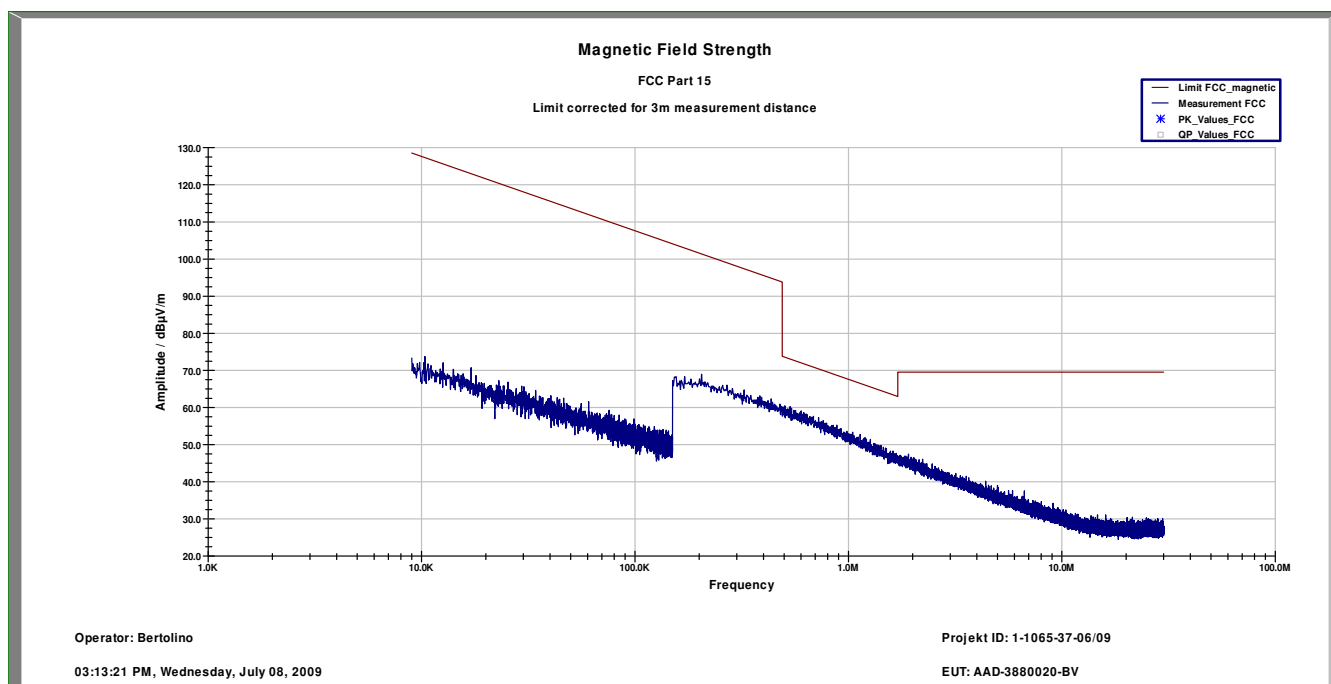

Plot 3: Receiver mode

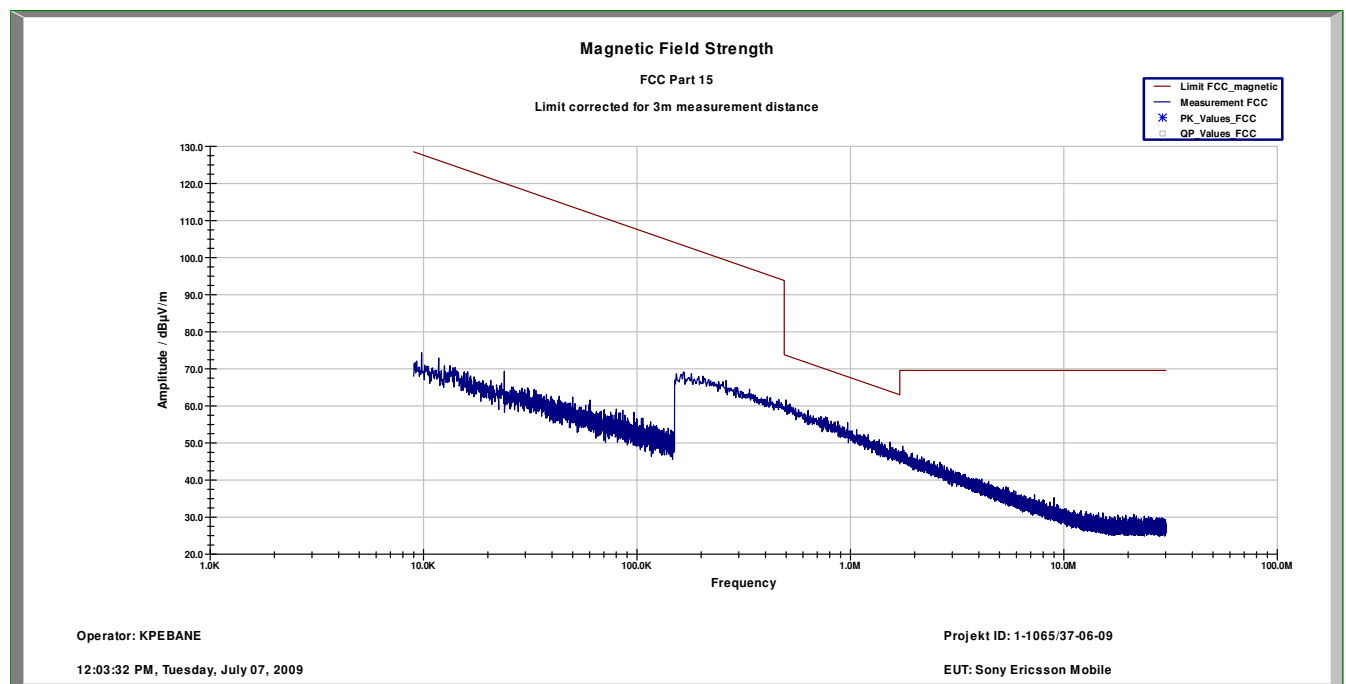


Limits:


Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30
30 - 88	100 / 40 dBµV/m	3
88 - 216	150 / 43.5 dBµV/m	3
216 - 960	200 / 46 dBµV/m	3
above 960	54 dBµV/m	3

5.16 Conducted Emissions <30 MHz §15.107/207


Plot 1: Phase line, TX mode, DSSS

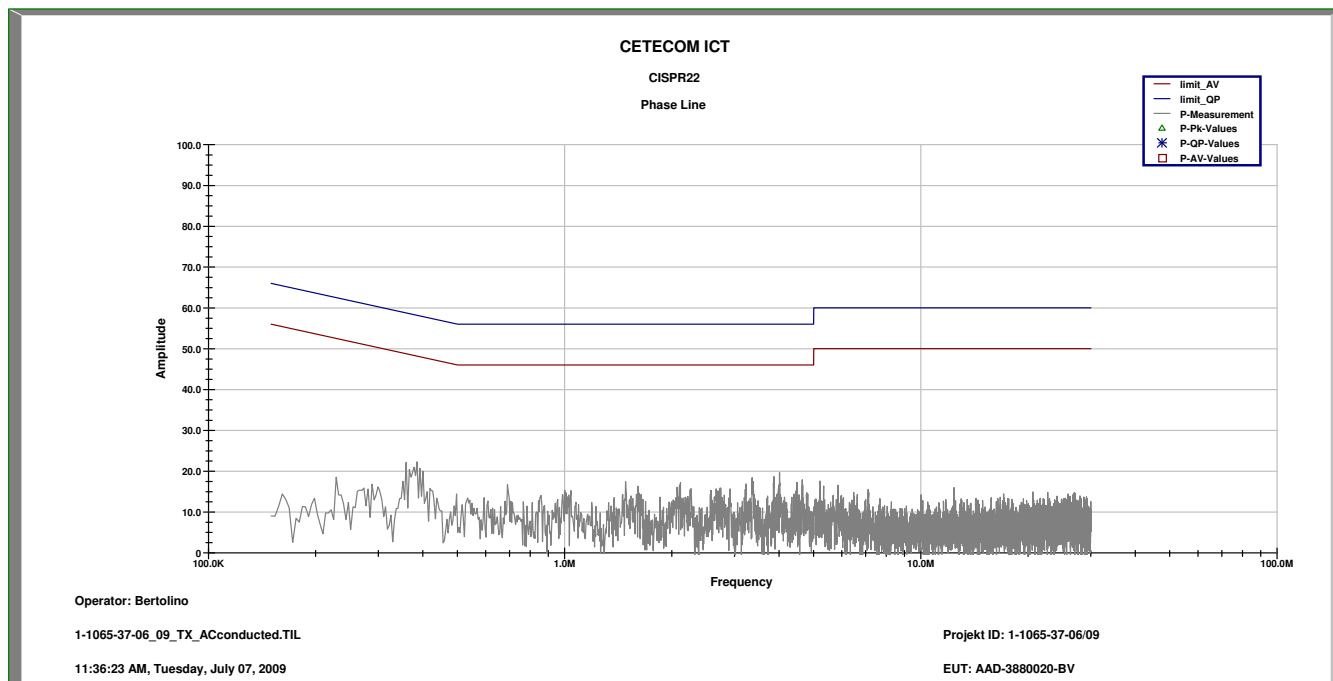


Plot 2: Neutral line, TX mode, DSSS

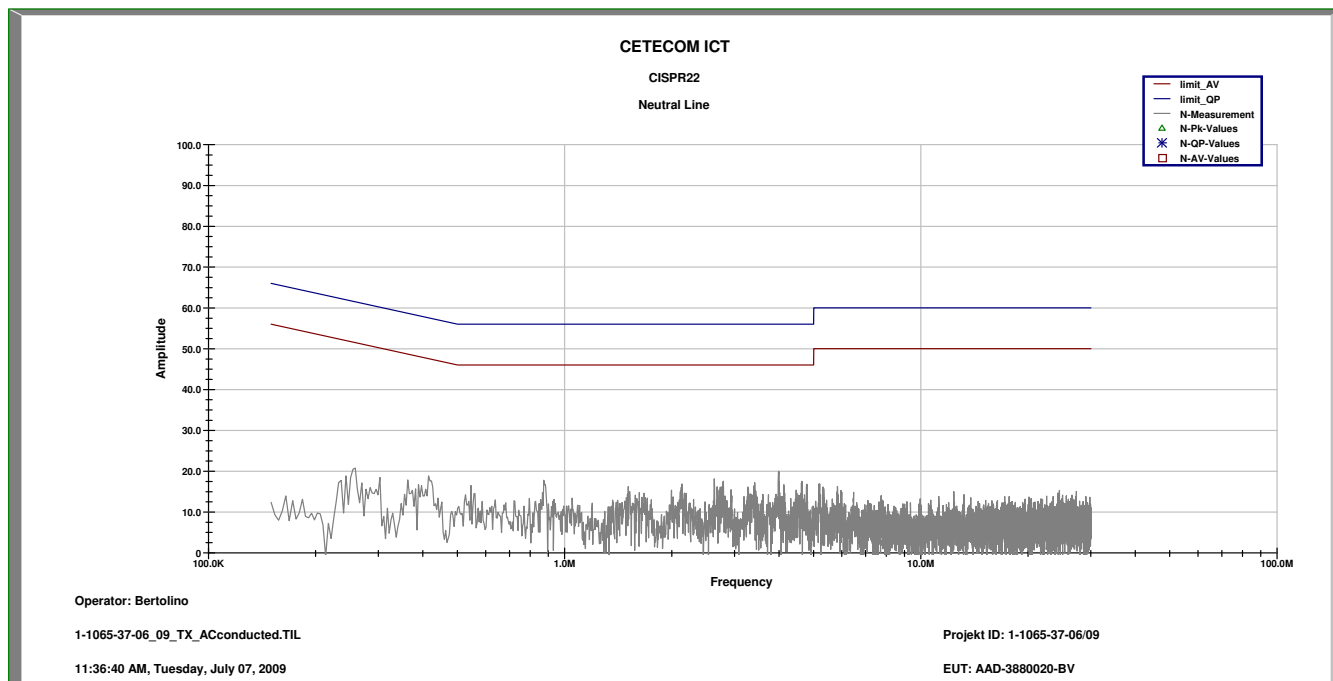


Plot 3: Phase line, TX mode, OFDM

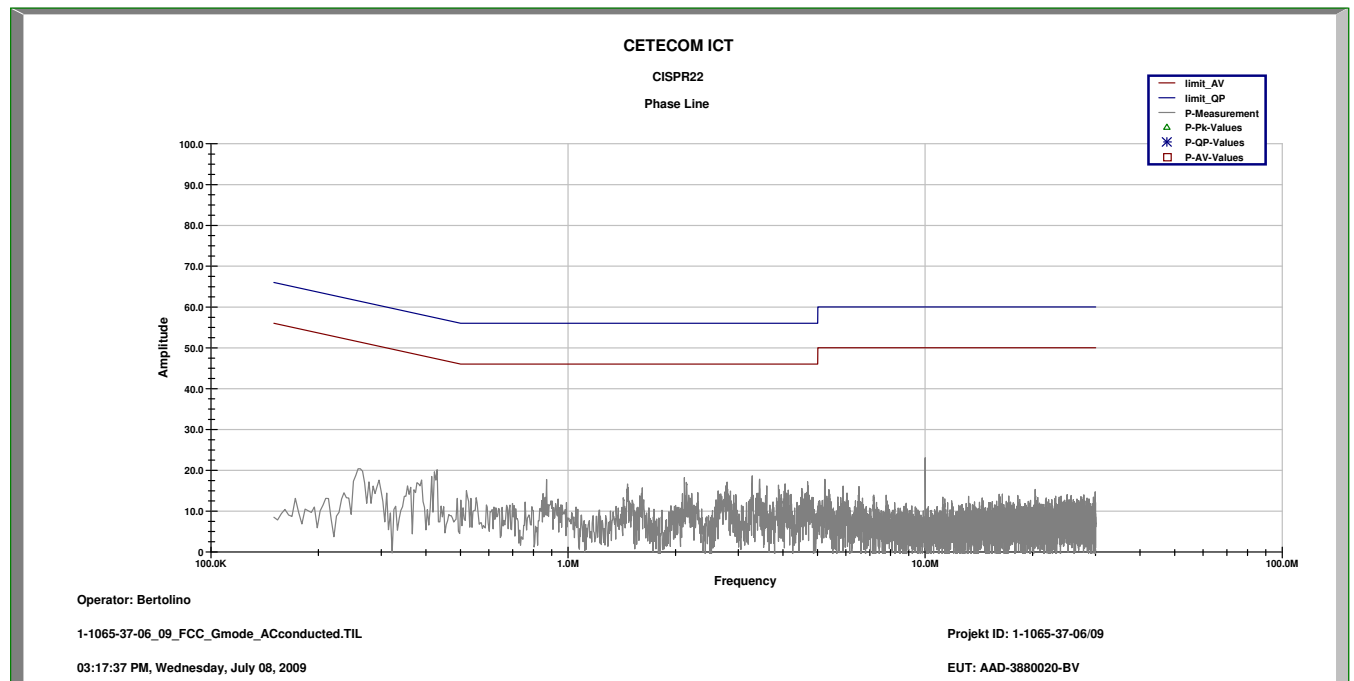


Plot 4: Neutral line, TX mode, OFDM

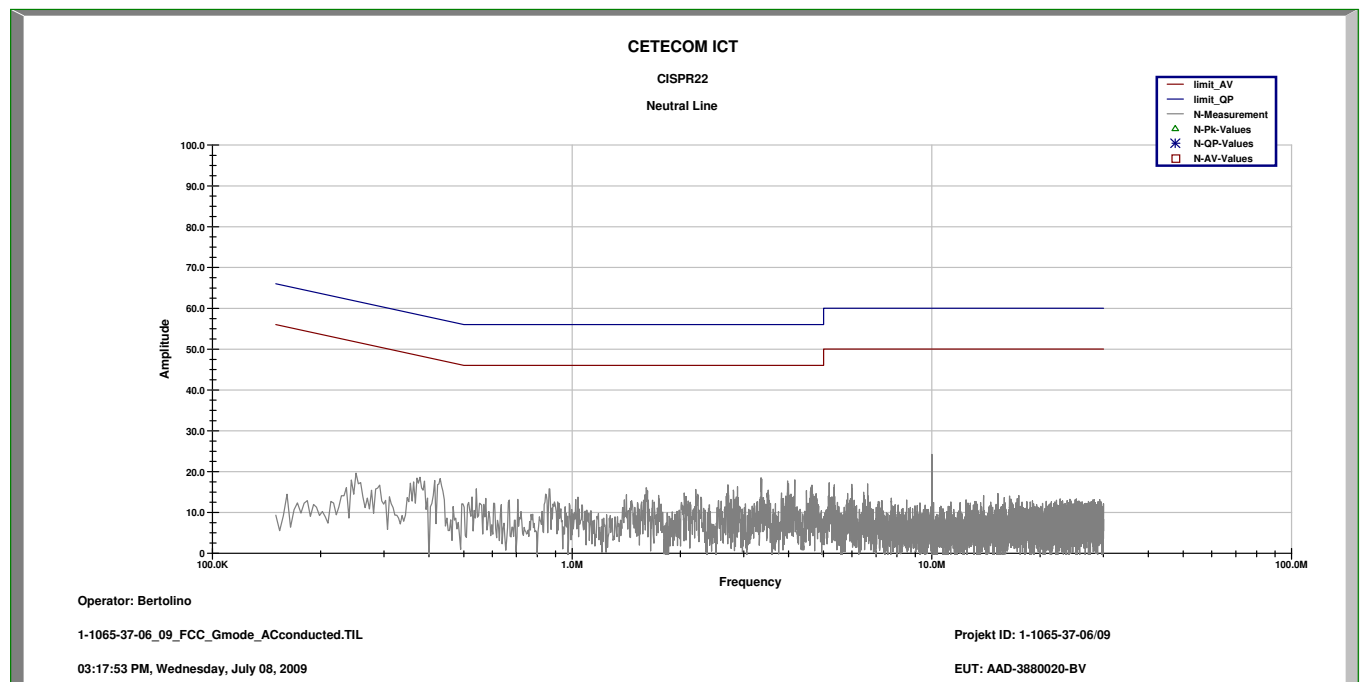

Plot 5: Phase line, RX mode

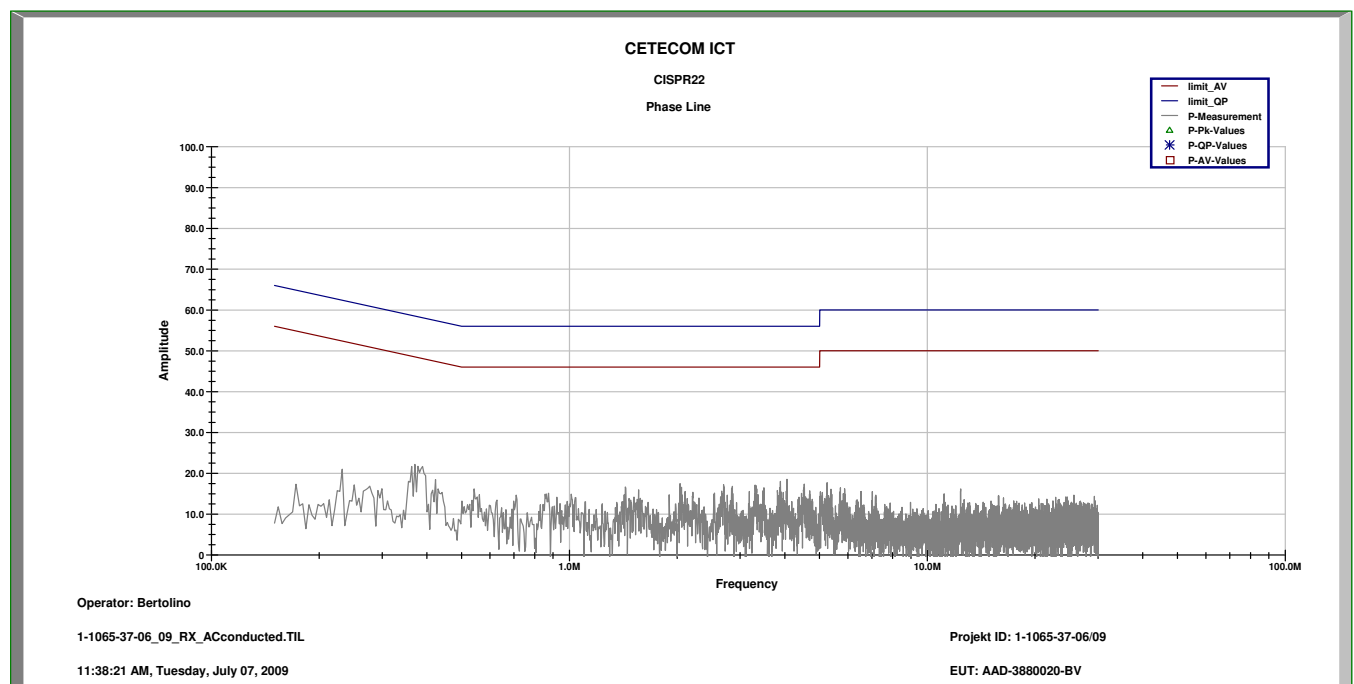

Plot 6: Neutral line, RX mode

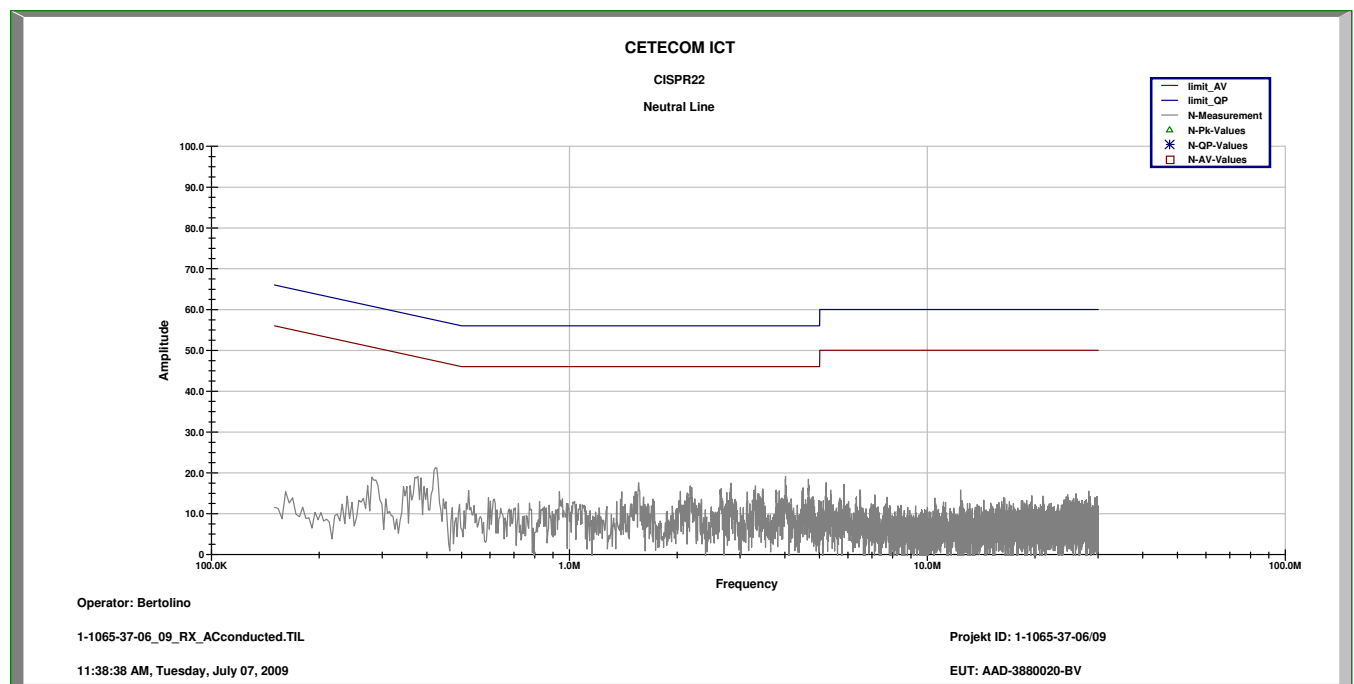

We measured in TX and RX mode, L1 and N floating and grounded, max value was hold.

Limits:

Under normal test conditions only	See plots
-----------------------------------	-----------

6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

All reported calibration intervals are calibrations according to the EN/ISO/IEC 17025 standard. These calibrations were performed from an accredited external calibration laboratory.

Additional to these calibrations the laboratory performed comparison measurements with other calibrated systems and performed a weekly chamber inspection.

All used devices are connected with a 10 MHz external reference.

According to the manufacturers' instruction is it possible to establish a calibration interval for the FSP unit of 24 month, if the device has an external 10 MHz reference.

Anechoic chamber C:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Anechoic chamber	MWB	87400/02	300000996	Monthly verification		
2	System-Rack 85900	HP I.V.	*	300000222	n.a.		
3	Measurement System 1						
4	PSA-Spektrumanalysator 3 Hz - 26.5 GHz (E4440A)	Agilent	MY48250080	300003812	05.08.2008	24	05.08.2010
5	EMI Preselector 9 kHz - 1 GHz (N9039A)	Agilent	MY48260003	300003825	19.08.2008	24	19.08.2010
6	Microwave Analog Signal Generator (N5183A)	Agilent	MY47420220	300003813	06.08.2008	24	06.08.2010
7	PC	F+W			n.a.		
8	TILE	TILE			n.a.		
9	TRILOG Super Broadband Antenna (VULB9163)	Schwarzbeck	371	300003854	Monthly verification (System cal.)		
10	Double Ridged Antenna 3115	EMCO	3088	300001032	Monthly verification (System cal.)		
11	Active Loop Antenna 6502	EMCO	2210	300001015	Monthly verification (System cal.)		
12	Switch / Control Unit 3488A	HP	2719A15013	300001156	n.a.		
13	Power Supply 6032A	HP	2818A03450	300001040	08.01.2009	36	08.01.2012
14	Busisolator	Kontron		300001056	n.a.		
15	Leitungsteiler 11850C	HP		300000997	Monthly verification (System cal.)		
16	Power attenuator 8325	Byrd	1530	300001595	Monthly verification (System cal.)		
17	Band reject filter WRCG1855/1910	Wainwright	7	300003350	Monthly verification (System cal.)		
18	Band reject filter WRCG2400/2483	Wainwright	11	300003351	Monthly verification (System cal.)		
19	Hochpassfilter WHK1.1/15G-10SS	Wainwright	3	300003255	Monthly verification (System cal.)		
20	Hochpassfilter WHKX2.9/18G-12SS	Wainwright	1	300003492	Monthly verification (System cal.)		
21	Hochpassfilter WHKX7.0/18G-8SS	Wainwright	18	300003789	Monthly verification (System cal.)		
22	Switch / Control Unit 3488A	HP	2605e08770	300001443	n.a.		
23	Trenntrafo RT5A	Grundig	9242	300001263	n.a.		
24	Relais Matrix PSU	R&S	890167/024	300001168	n.a.		
25	Netznachbildung ESH3-Z5	R&S	828576/020	300001210	n.a.		

System Rack Room 005:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	FSP 30	R&S	100886	300003575	25.08.2008	24	25.08.2010
2	CBT	R&S	100313	300003516	03.09.2008	24	03.09.2010
3	Switch Matrix	HP		300000929	n.a.		
4	Power Supply 6625A	HP	3041A00544	300002270	13.05.2007	36	13.05.2010
5	Signal Generator SMIQ03B	R&S	836206/0092	300002680	30.05.2007	36	30.05.2010

Signalling Units:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	CBT	R&S	100313	300003516	03.09.2008	24	03.09.2010
2	CBT	R&S	100185	300003416	27.08.2008	24	27.08.2010
3	CMU-200	R&S	103992	300003231	04.06.2008	12	04.06.2009
4	CMU-200	R&S	106240	300003321	27.08.2008	24	27.08.2010
5	CMU-200	R&S	832221/0055	300002862	20.03.2008	24	20.03.2010

Climatic Box:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Climatic box VT 4002	Heraeus Vötsch	58566046820010	300003019	28.05.2009	24	28.05.2011
2	Climatic box CTS T-40/50	CTS	064023	300003540	04.06.2009	24	04.06.2011

Test laboratory 011:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Climatic box VUK 04/500	Heraeus Vötsch	32678	300000297	29.07.2008	24	27.07.2010
2	Spectrum Analyser 8565E	HP	3738A00773	300001665	08.01.2008	24	08.01.2010
3	Spectrum Analyser FSU 50	R&S	200012	300003443	05.06.2008	24	05.06.2010
4	SGH 12 ... 18 GHz	narda	01005	300000787	cyclic verification		
5	SGH 18 ... 27 GHz	narda	01005	300000487	cyclic verification		
6	SGH 27 ... 40 GHz	narda	82016	300000510	cyclic verification		
7	SGH 33 ... 50 GHz	Thomson		300000812	cyclic verification		
8	Adapter WG/SMA	narda	64088	-/-	cyclic verification		
9	Adapter WG/SMA	flann	213	-/-	cyclic verification		
10	Adapter WG/SMA	HP	00231	-/-	cyclic verification		
11	SGH 50 ... 75GHz	Thomson	-/-	300000813	cyclic verification		
12	Mixer 50 ... 75 GHz 11970V	HP	-/-	30000781i	07.08.2007	36	07.08.2010
13	SGH 75 ... 110 GHz	Thomson	-/-	30000798b	cyclic verification		
14	Mixer 75 ... 110 GHz 11970W	HP	-/-	30000781e	07.08.2007	36	07.08.2010
15	SGH 110 ... 170 GHz	Flann	-/-	300001999	cyclic verification		
16	Mixer 110 ... 170 GHz	Tektronix	B010186	300001685d	cyclic verification		
17	SGH 170 ... 325 GHz	Flann	-/-	300002000	cyclic verification		
18	Mixer 170 ... 325 GHz	Tektronix	B010241	300001685j	cyclic verification		

SRD Laboratory Room 002:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	System Controller PSM 12	R&S	835259/007	300002681-00xx	n.a.		
2	Memory Extension PSM-K10	R&S	To 1	300002681	n.a.		
3	Operating Software PSM-B2	R&S	To 1	300002681	n.a.		
4	19" Monitor		22759020-ED	300002681	n.a.		
5	Mouse		LZE 0095/6639	300002681	n.a.		
6	Keyboard		G00013834L461	300002681	n.a.		
7	Spectrum Analyser FSIQ 26	R&S	835540/018	300002681-0005	10.01.2008	24	10.01.2010
8	Tracking Generator FSIQ-B10	R&S	835107/015	300002681	s.No.7		
10	RF-Generator SMIQ03 (B1 Signal)	R&S	835541/056	300002681-0002	26.08.2008	36	26.08.2011
11	Modulation Coder SMIQ-B20	R&S	To 10	300002681	s.No.10		
12	Data Generator SMIQ-B11	R&S	To 10	300002681	s.No.10		
13	RF Rear Connection SMIQ-B19	R&S	To 10	300002681	s.No.10		
14	Broadband horn antenna (1-18 GHz)	EMCO	9107-3696	300001604	16.04.2008	24	16.04.2010
15	Broadband horn antenna (1-18 GHz)	EMCO	9107-3697	300001605	21.08.2008	24	21.08.2010
16	Std gain horn antenna (18-26.5 GHz)	Narda	Model no. 638	300000486	n.a.		
17	Std gain horn antenna (18-26.5 GHz)	Narda	Model no. 638	300000487	n.a.		
18	Sleeve dipole antenna Model 3126-880	ETS-Lindgren	00040887	30000000	n.a.		
19	Fast CPU SM-B50	R&S	To 10	300002681	s.No.10		
20	FM Modulator SM-B5	R&S	835676/033	300002681	s.No.10		
21	RF-Generator SMIQ03 (B2 Signal)	R&S	835541/055	300002681-0001	25.08.2008	36	25.08.2011
22	Modulation Coder SMIQ-B20	R&S	To 21	300002681	s.No.21		
23	Data Generator SMIQ-B11	R&S	To 21	300002681	s.No.21		
24	RF Rear Connection SMIQ-B19	R&S	To 21	300002681	s.No.21		
25	Fast CPU SM-B50	R&S	To 21	300002681	s.No.21		
26	FM Modulator SM-B5	R&S	836061/022	300002681	s.No.21		
27	RF-Generator SMP03 (B3 Signal)	R&S	835133/011	300002681-0003	26.08.2008	36	26.08.2011
28	Attenuator SMP-B15	R&S	835136/014	300002681	S.No.27		
29	RF Rear Connection SMP-B19	R&S	834745/007	300002681	S.No.27		
30	Power Meter NRVD	R&S	835430/044	300002681-0004	26.08.2008	24	26.08.2010
31	Power Sensor NRVD-Z1	R&S	833894/012	300002681-0013	26.08.2008	24	26.08.2010
32	Power Sensor NRVD-Z1	R&S	833894/011	300002681-0010	26.08.2008	24	26.08.2010
33	Rubidium Standard RUB	R&S		300002681-0009	27.08.2008	24	27.08.2010
34	Switching and Signal Conditioning Unit SSCU	R&S	338864/003	300002681-0006	Verified with path compensation		
35	Laser Printer HP Deskjet 2100	HP	N/A	300002681-0011	n.a.		
36	19" Rack	R&S	11138363000004	300002681	n.a.		
37	RF-cable set	R&S	N/A	300002681	n.a.		
39	IEEE-cables	R&S	N/A	300002681	n.a.		
40	Sampling System FSIQ-B70	R&S	835355/009	300002681	s.No.7		
41	RSP programmable attenuator	R&S	834500/010	300002681-0007	26.08.2008	24	26.08.2010
42	Signalling Unit	R&S	838312/011	300002681	n.a.		
43	NGPE programmable Power Supply for EUT	R&S	192.033.41	300002681			
44	Power Splitter 6005-3	Inmet Corp.	none	300002841	n.a.		
45	SMA Cables SPS-1151-985-SPS	Insulated Wire	different	different	n.a.		
46	CBT32 with EDR Signaling Unit	R&S					

47	Coupling unit	Narda	N/A	--	n.a.		
48	2xSwitch Matrix PSU	R&S	872584/021	300001329	n.a.		
49	RF-cable set	R&S	N/A	different	n.a.		
50	IEEE-cables	R&S	N/A	--	n.a.		

Note: 3000002681-00xx inventoried as a system

SRD Laboratory Room 005:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Spektrum Analyzer 8566B	HP	2747A05275	300000219	18.01.2008	24	18.01.2010
2	Spektrum Analyzer Display 85662A	HP	2816A16497	300001690	23.01.2008	24	23.01.2010
3	Quasi-Peak-Adapter 85650A	HP	2811A01135	300000216	23.01.2008	24	23.01.2010
4	Power Supply	Heiden	003202	300001187	12.05.2007	36	12.05.2010
5	Power Supply	Heiden	1701	300001392	12.05.2007	36	12.05.2010

SRD Laboratory Room 011:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	NRP Power Meter	R&S	100212	300003780	27.02.2008	24	27.02.2010

Anechoic chamber F:

No	Equipment/Type	Manuf.	Serial Nr.	Inv. No. Cetecom	Last Calibration	Frequency (months)	Next Calibration
1	Control Computer	F+W	FW0502032	300003303	-/-	-/-	-/-
2	Trilog Antenna VULB 9163	Schwarzbeck	295	300003787	01.04.2008	24	01.04.2010
3	Amplifier - 0518C-138	Veritech Micro-wave Inc.	-/-	-/-	-/-	-/-	-/-
4	Switch - 3488A	HP		300000368	-/-	-/-	-/-
5	EMI Test receiver - ESCI	R&S	100083	300003312	31.01.2007	24	31.01.2009
6	Turntable Controller - 1061 3M	EMCO	1218	300000661	-/-	-/-	-/-
7	Tower Controller 1051 Controller	EMCO	1262	300000625	-/-	-/-	-/-
8	Tower - 1051	EMCO	1262	300000625	-/-	-/-	-/-
10	Ultra Notch-Filter Rejected band Ch. 62	WRCD	9	-/-	-/-	-/-	-/-