



Accredited testing-laboratory

DAR registration number: DGA-PL-176/94-D1

**Federal Motor Transport Authority (KBA)
DAR registration number: KBA-P 00070-97**

Recognized by the Federal Communications Commission

Anechoic chamber registration no.: 90462 (FCC)

Anechoic chamber registration no.: 3462C-1 (IC)

Certification ID: DE 0001

Accreditation ID: DE 0002

Accredited Bluetooth® Test Facility (BQTF)

The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license

Test report no. : 1-1954-10-04/10
Type identification : AAD-3880069-BV
Applicant : Sony Ericsson Mobile Communications AB
FCC ID : PY7A3880069
IC Certification No : 4170B-A3880069
Test standards : 47 CFR Part 15
RSS - 210 Issue 7

Table of contents

1	General information	3
1.1	Notes	3
1.2	Testing laboratory	4
1.3	Details of applicant	4
1.4	Application details	4
2	Test standard/s	5
3	Technical tests	6
3.1	Details of manufacturer	6
3.1.1	Test item	6
3.1.2	Additional EUT information For IC Canada (appendix 2)	7
3.1.3	EUT operating modes	8
3.1.4	Extreme conditions testing values	8
4	Summary of Measurement Results and list of all performed test cases	9
5	RF measurement testing	10
5.1	Description of test set-up	10
5.1.1	Radiated measurements	10
5.1.2	Conducted measurements	10
5.2	Referenced documents	11
5.3	Additional comments	11
5.4	Antenna gain	11
5.5	Carrier frequency separation §15.247(a)(1)	12
5.6	Number of hopping channels §15.247(a)(1)	13
5.7	Time of occupancy (dwell time) §15.247(a)(1)(iii)	14
5.8	Power Spectral density (Hybrid system in Inquiry mode/Page scan) §15.247(e)	15
5.9	Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a)(1)	16
5.10	Maximum output power (conducted) § 15.247 (b)(1)	21
5.11	Max. peak output power (radiated) § 15.247 (b)(1)	26
5.12	Band-edge compliance of conducted emissions §15.247 (d)	27
5.13	Band-edge compliance of radiated emissions §15.205	34
5.14	Spurious Emissions - conducted (Transmitter) § 15.247 (c)(1)	37
5.15	Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c)(1)	43
5.16	Spurious Emissions - radiated (Receiver) § 15.109	49
5.17	Spurious Emissions < 30 MHz - Transmitter radiated § 15.209	52
5.18	Conducted Emissions <30 MHz § 15.107/207	53
6	Test equipment and ancillaries used for tests	54
7	Photographs of the Test Set-up	56
8	Photographs of the EUT	58

1 General information

1.1 Notes


The test results of this test report relate exclusively to the test item specified in 3.1.1. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

Test laboratory manager:

2010-03-12 **Daniel Muyunga**

Date

Name




Signature

2010-03-12 **Joerg Warken**

Date

Name



Signature

Technical responsibility for area of testing:

2010-03-12 **Michael Berg**

Date

Name



Signature

1.2 Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to
 DIN EN ISO/IEC 17025
 DAR registration number: DGA-PL-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)
 DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :
Street :
Town :
Country :
Phone :
Fax :

1.3 Details of applicant

Name:	Sony Ericsson Mobile Communications AB
Street:	Nya Vattentornet
Town:	22188 Lund
Country:	Sweden
Telephone:	+46 (0) 46 19 30 00
Fax:	+46 (0) 46 19 32 95
Contact:	Johan Wedin
E-mail:	johan.wedin@sonyericsson.com
Telephone:	+46 (0) 707 19 57 36

1.4 Application details

Date of receipt of order:	2010-02-19
Date of receipt of test item:	2010-03-09
Date of start test:	2010-03-09
Date of end test	2010-03-12
Persons(s) who have been present during the test:	-/-

2 Test standard/s

47 CFR Part 15	2008-07	Title 47 of the Code of Federal Regulations; Chapter I- Federal Communications Commission subchapter A - general, Part 15-Radio frequency devices
RSS - 210 Issue 7	2007-06	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

3 Technical tests

3.1 Details of manufacturer

Name:	Sony Ericsson Mobile Communications AB
Street:	Nya Vattentorget
Town:	22188 Lund
Country:	Sweden

3.1.1 Test item

Kind of test item	: Mobile Phone GSM 850/900/1800/1900, UMTS FDD1/FDD8, HSDPA / HSUPA, BT2.0+EDR, A-GPS, FM-Rx, WLAN
Type identification	: AAD-3880069-BV
S/N serial number	: Rad. CB511G3KZX Cond. CB511G29ZA
HW hardware status	: AP1.1
SW software status	: 100114-0113 ATP
Frequency Band [MHz]	: ISM 2.400 - 2.483,5
Type of Modulation	: FHSS (GFSK, Pi/4 DQPSK, 8DPSK)
Number of channels	: 79
Antenna	: Internal PCB Antenna Please also see EUT pictures
Power Supply	: 3.90 V DC by Li-Polymer Battery (AP1Vesper)
Temperature Range	: -20 °C to +55 °C

GFSK

Max. power radiated: 8.62 dBm

Max. power conducted: 7.12 dBm

Pi/4 DQPSK

Max. power radiated: 10.03 dBm

Max. power conducted: 8.49 dBm

8DPSK

Max. power radiated: 10.72 dBm

Max. power conducted: 9.18 dBm

FCC ID: PY7A3880069

IC: 4170B-A3880069

3.1.2 Additional EUT information For IC Canada (appendix 2)

IC Registration Number:	4170B-A3880069
Model Name:	AAD-3880069-BV
Manufacturer (complete Address):	Sony Ericsson Mobile Communications AB Nya Vattentorget 22188 Lund Sweden
Tested to Radio Standards Specification (RSS) No.:	RSS-210 Issue 7
Open Area Test Site Industry Canada Number:	IC 3462C-1
Frequency Range (or fixed frequency) [MHz]:	2400 – 2483.5 MHz
RF: Power [W] (max):	<u>GFSK</u> Rad. EIRP: 7.28 mW Conducted : 5.15 mW <u>Pi/4 DQPSK</u> Rad. EIRP: 10.07 mW Conducted : 7.06 mW <u>8DPSK</u> Rad. EIRP: 11.80 mW Conducted : 8.28 mW
Antenna Type:	Internal PCB Antenna Please also see EUT pictures
Occupied Bandwidth (99% BW) [kHz]:	GFSK: 920 Pi/4 DQPSK: 1317 8DPSK: 1269
Type of Modulation:	GFSK, Pi/4 DQPSK, 8 DPSK
Emission Designator (TRC-43):	GFSK: 920KFXD Pi/4 DQPSK: 1M32GXD 8DPSK: 1M27GXD
Transmitter Spurious (worst case) [dB μ V/m in 10m]:	17.5 (CH 78 8DPSK)
Receiver Spurious (worst case) [μ V/m in 3m]:	355.2

ATTESTATION:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Test engineer: Dipl.-Ing. Daniel Muyunga

Date: 2010-03-12

3.1.3 EUT operating modes

EUT operating mode no. *)	Description of operating modes	Additional information
Op. 0	Normal mode	Normal temperature and power source conditions
Op. 1		low temperature, low power source conditions
Op. 2		low temperature, high power source conditions
Op. 3		high temperature, low power source conditions
Op. 4		high temperature, high power source conditions

*) EUT operating mode no. is used to simplify the test plan

3.1.4 Extreme conditions testing values

Description	Shortcut	Unit	Value
Nominal Temperature	T _{nom}	°C	22
Nominal Humidity	H _{nom}	%	50
Nominal Power Source	V _{nom}	V	3.90

Type of power source: **DC by Li-Polymer Battery (AP1Vesper)**

4 Summary of Measurement Results and list of all performed test cases

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC Part 15 §15.247 - CANADA RSS-210	PASS	2010-03-12	-/-

Test Specification Clause	Test Case	Modulation	Pass	Fail	N/A	Not performed
None	Antenna Gain	GFSK	Yes			
§15.247(a1)	Carrier frequency separation	GFSK	Yes			
§15.247(a1)	Number of hopping channels	GFSK	Yes			
§15.247(a)(1)(iii)	Time of occupancy (dwell time)	--	Yes			
§15.247(e)	Power Spectral density (Hybrid system in Inquiry mode/Page scan)	--			Yes	
§15.247(a)(1)	Spectrum Bandwidth of a FHSS System / 20dB Bandwith	GFSK Pi/4 DQPSK 8 DPSK	Yes Yes Yes			
§ 15.247 (b)(1)	Maximum output power (conducted)	GFSK Pi/4 DQPSK 8 DPSK	Yes Yes Yes			
§ 15.247 (b)(1)	Max. peak output power (radiated)	GFSK Pi/4 DQPSK 8 DPSK	Yes Yes Yes			
§ 15.247 (d)	Band-edge compliance of conducted emissions	GFSK Pi/4 DQPSK 8 DPSK	Yes Yes Yes			
§ 15.205	Band-edge compliance of radiated emissions	GFSK Pi/4 DQPSK 8 DPSK	Yes Yes Yes			
§ 15.247 (d)	Spurious Emission - conducted (Transmitter)	GFSK Pi/4 DQPSK 8 DPSK	Yes Yes Yes			
§ 15.247 (d)	Spurious Emission - radiated (Transmitter) >30 MHz	8 DPSK	Yes			
§ 15.109	Spurious Emissions - radiated (Receiver)	GFSK	Yes			
§ 15.209	Spurious Emissions - radiated (Transmitter) <30 MHz	8 DPSK	Yes			
§ 15.107/207	Conducted Emissions <30 MHz	8 DPSK	Yes			

5 RF measurement testing

5.1 Description of test set-up

5.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2. Antennas are confirmed with ANSI C63.2-1996 item 15.


- 9 kHz - 150 kHz: Quasi Peak measurement, 200 Hz Bandwidth, active loop antenna.
- 150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, active loop antenna.
- 30 MHz - 1GHz: Quasi Peak measurement, 120 kHz Bandwidth, Trilog antenna
- >1GHz: Average, RBW 1MHz, VBW 10 Hz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A “BLUETOOTH APPROVALS”

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

5.1.2 Conducted measurements

The EUT’s RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

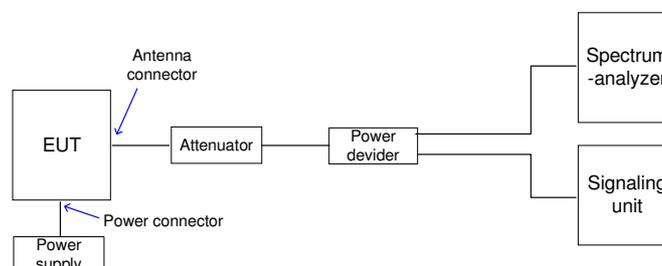

5.2 Referenced documents

None

5.3 Additional comments

None

5.4 Antenna gain


The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

	low channel 2402 MHz	mid channel 2441 MHz	high channel 2480 MHz
Conducted power [dBm] Measured, GFSK modulation	6.91	7.08	7.12
Radiated power [dBm] Measured, GFSK modulation	8.53	8.62	8.47
Gain [dBi] Calculated	1.62	1.54	1.35

5.5 Carrier frequency separation §15.247(a)(1)

Modulation: GFSK

Plot 1 of 1:

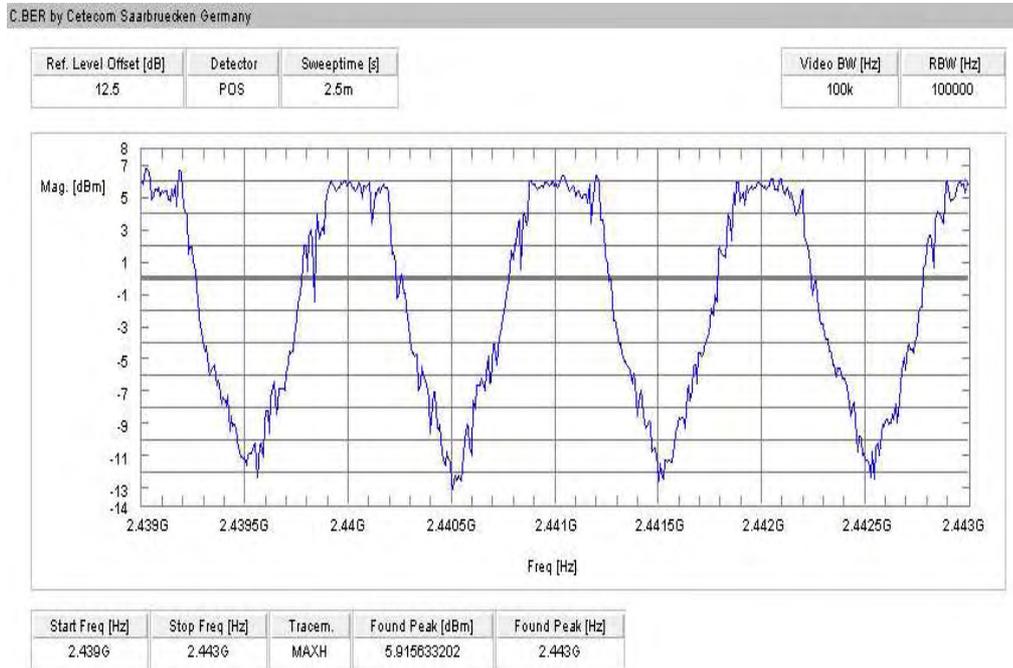

Result: Channel separation is: ~ 1 MHz


Limits:

Under normal test conditions only	Minimum 25 kHz or 20 dB Bandwidth of the hopping system
-----------------------------------	---


5.6 Number of hopping channels §15.247(a)(1)

Modulation: GFSK

Plot 1 of 2:

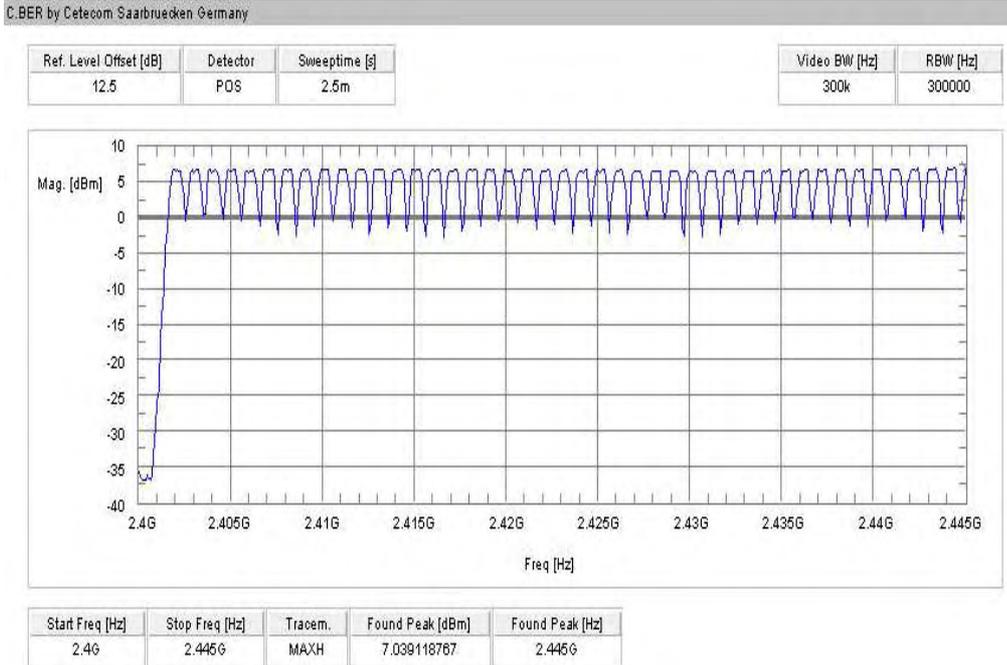

Plot 2 of 2:

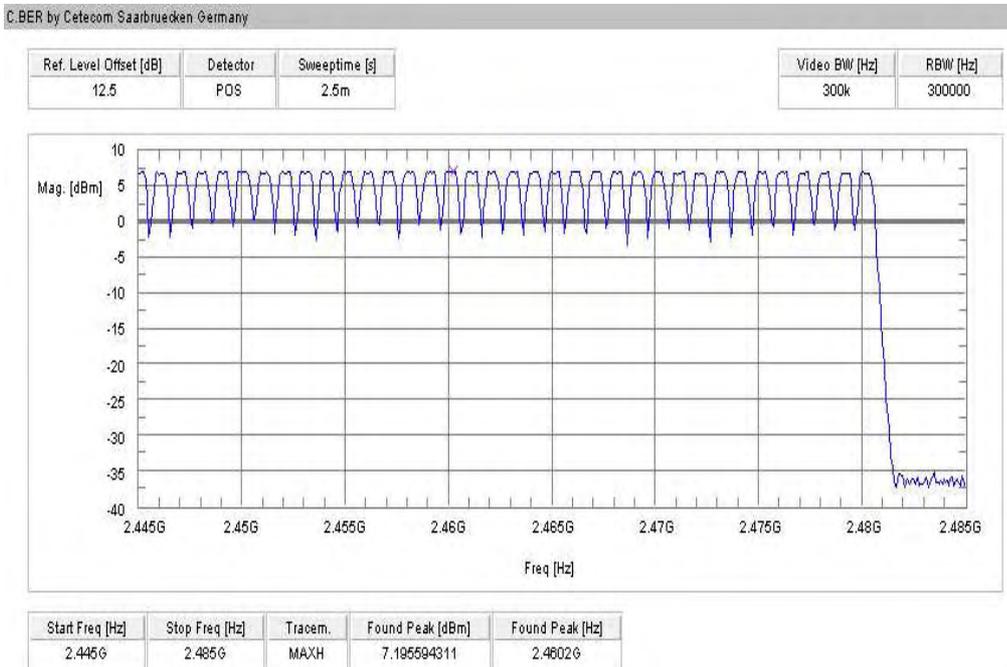

Result: The number of hopping channels is: 79

Limits:

Under normal test conditions only	at least 15 non-overlapping channels
-----------------------------------	--------------------------------------

5.7 Time of occupancy (dwell time) §15.247(a)(1)(iii)

For Bluetooth devices:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length). The calculation for a 31.6 second period is as follows:

Dwell time = time slot length * hop rate / number of hopping channels * 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time = $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time = $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 31.6 \text{ s} = 0.4 \text{ s}$ (in a 31.6 s period)

This is according to the Bluetooth Core Specification V 1.1 & V 1.2 & V2.0 (+ critical errata) for all Bluetooth devices. Therefore, all Bluetooth devices comply with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 ms (in a 12.8s period)

**5.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan)
§15.247(e)**

Plot 1 of 1:

Not applicable


Result: Power density: - dBm/Hz = - dBm / 3 kHz
Correction factor from dBm/Hz to dBm / 3 kHz is +34,8 dB

Limits:


Under normal test conditions only	For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission
-----------------------------------	---

5.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a)(1)


Plot 1: GFSK

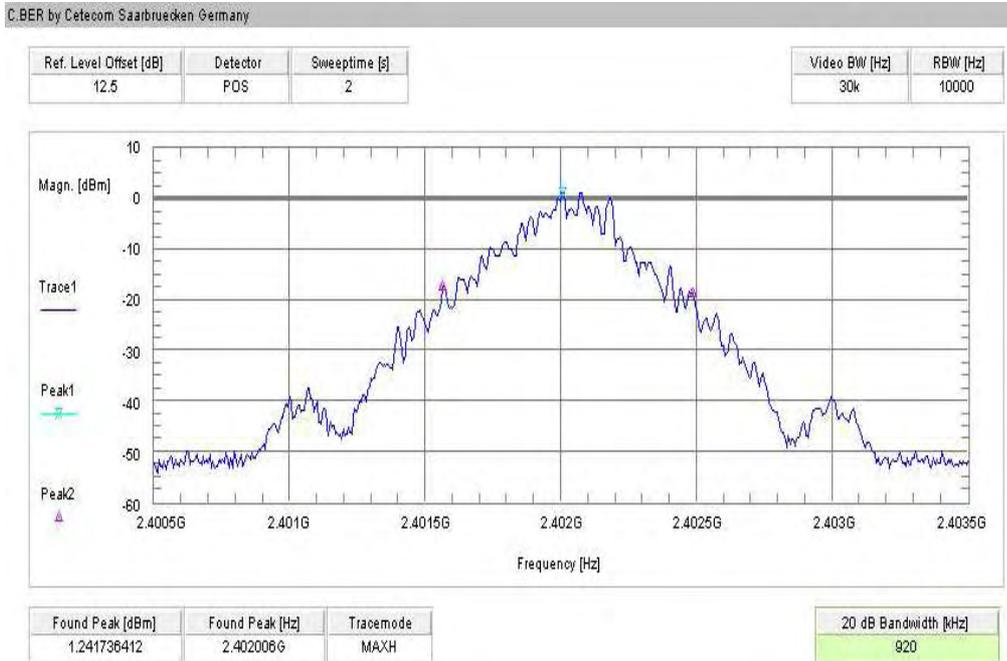


Plot 2: GFSK

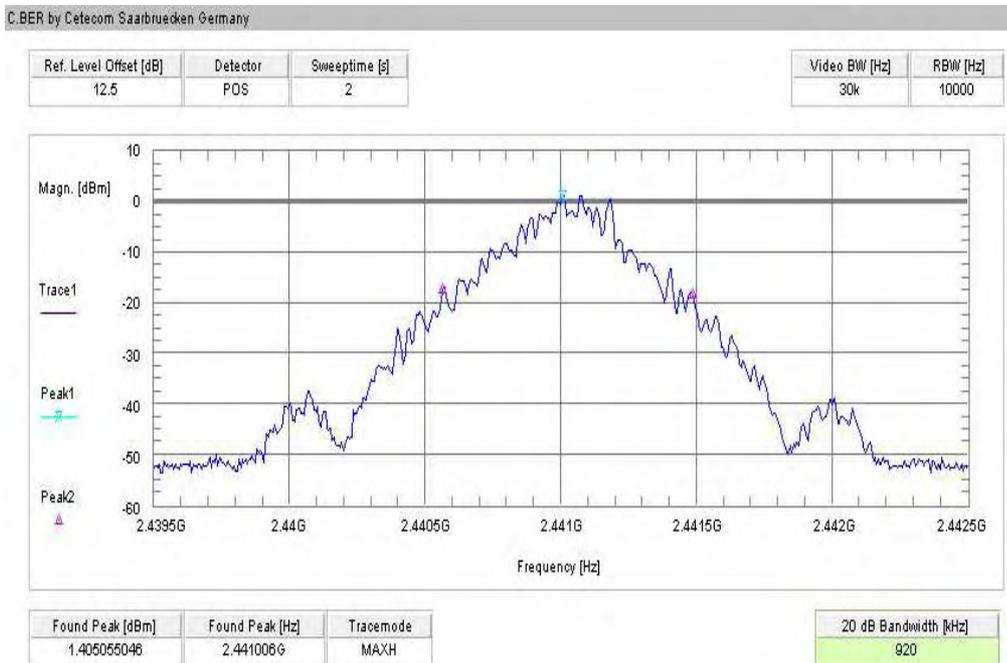


Plot 3: GFSK

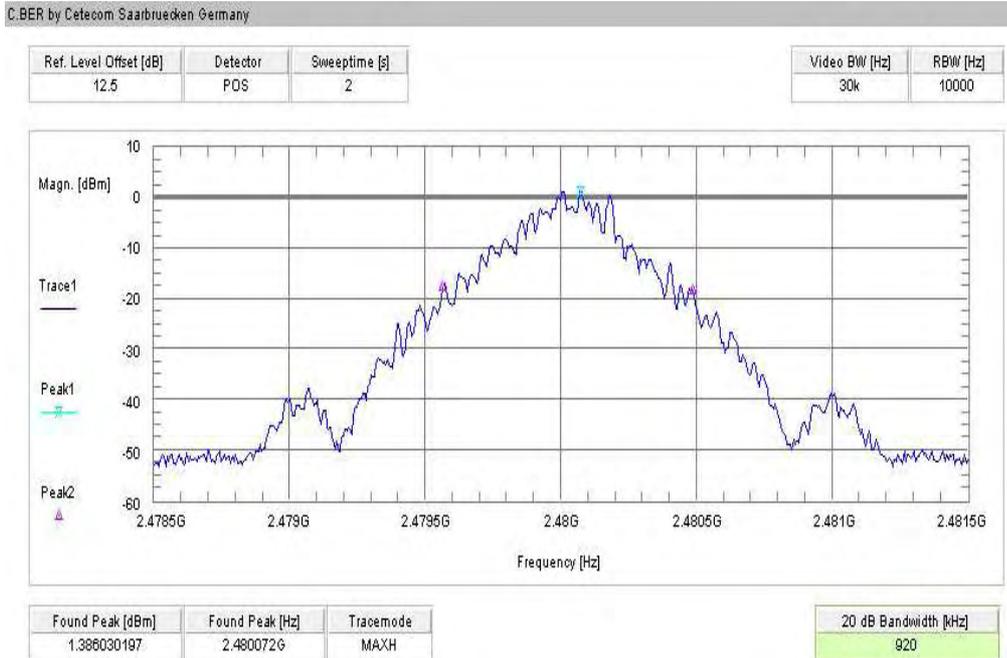


Plot 4: Pi/4 DQPSK

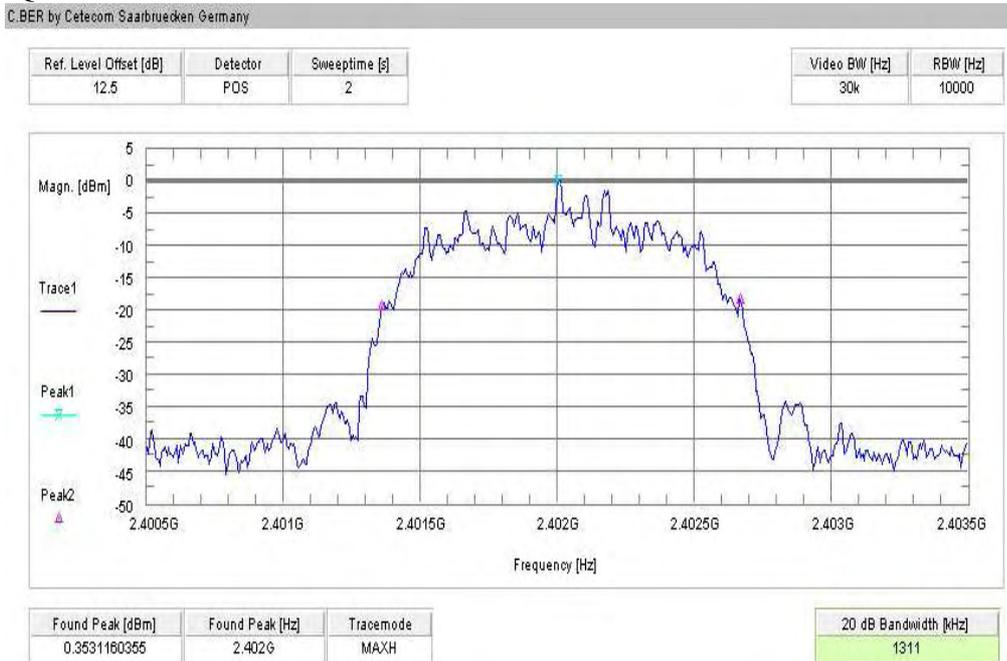


Plot 5: Pi/4 DQPSK

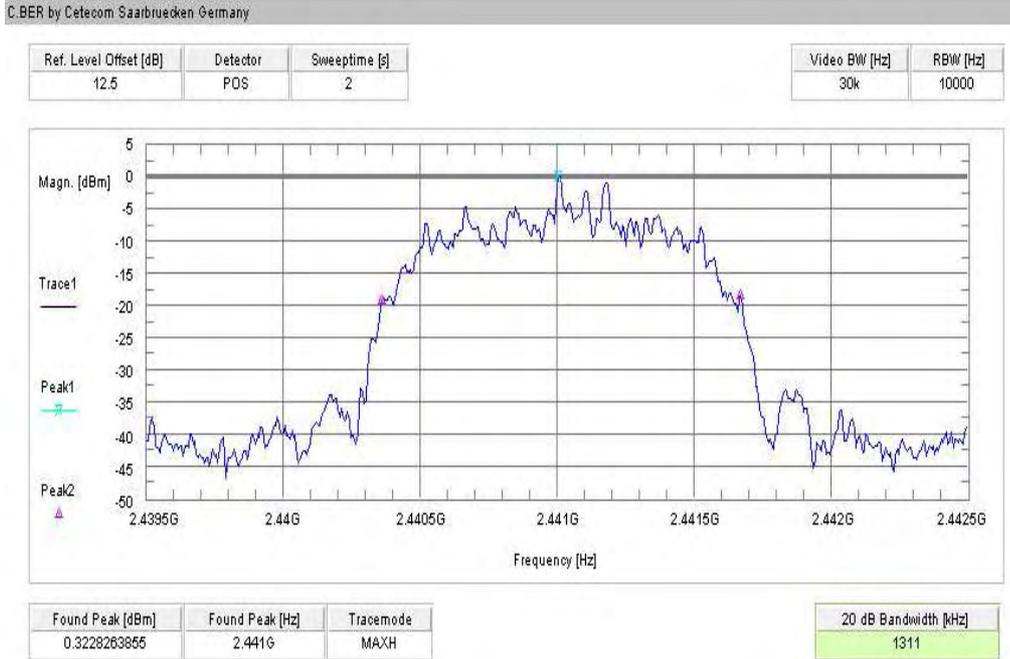


Plot 6: Pi/4 DQPSK

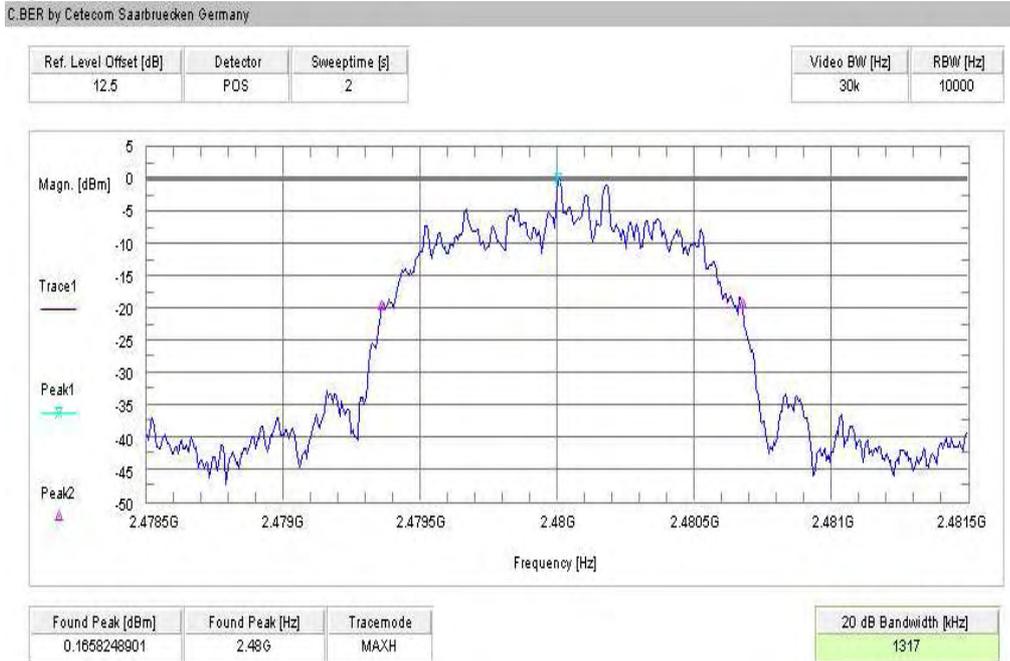


Plot 7: 8DPSK

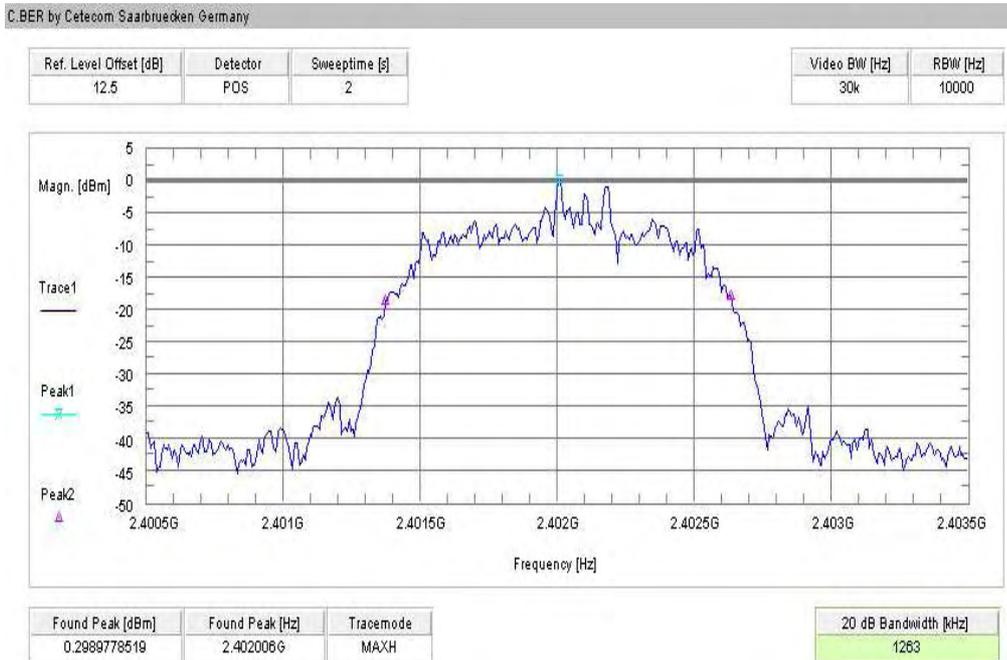

Plot 8: 8DPSK

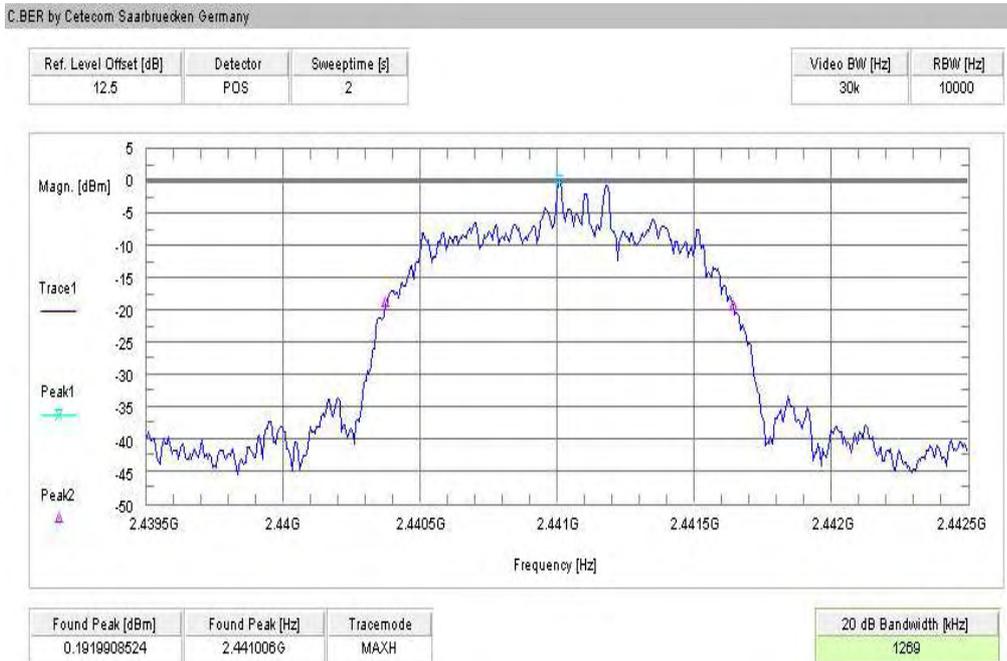

Plot 9: 8DPSK

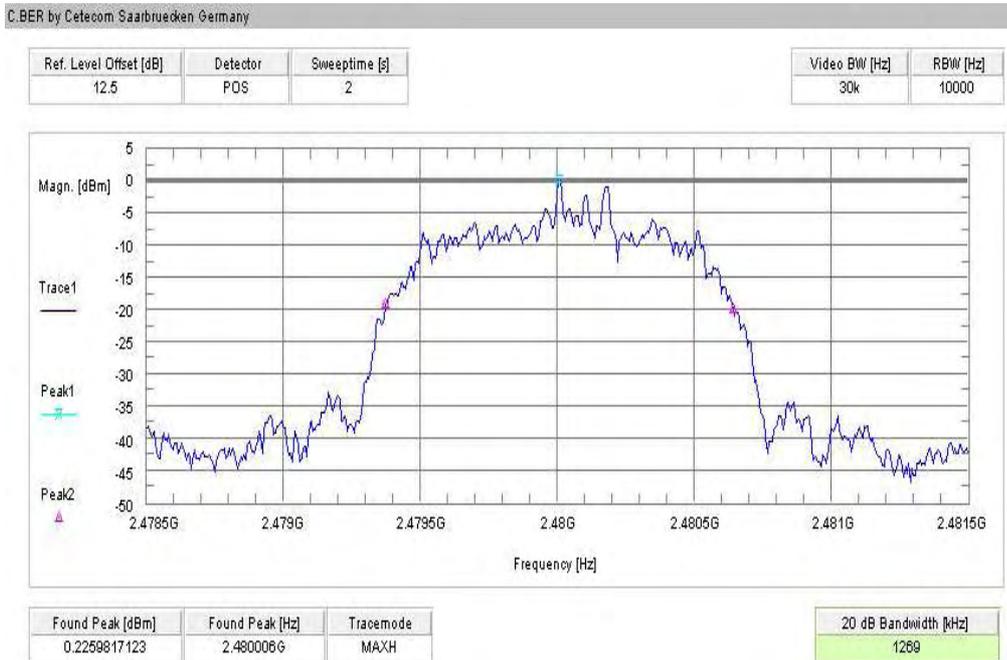

Result:

Modulation	20 dB BANDWIDTH [kHz]		
	2402	2441	2480
Frequency [MHz]			
<i>GFSK</i>	920	920	920
<i>Pi/4 DQPSK</i>	1311	1311	1317
<i>8DPSK</i>	1263	1269	1269
Measurement uncertainty	±10 kHz		


RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)
 RBW: 10 kHz / VBW 10 kHz

Limits:


Under normal test conditions only	GFSK < 1000 kHz Pi/4 DQPSK < 1500 kHz 8DPSK < 1500 kHz
-----------------------------------	--

5.10 Maximum output power (conducted) § 15.247 (b)(1)


Plot 1: GFSK

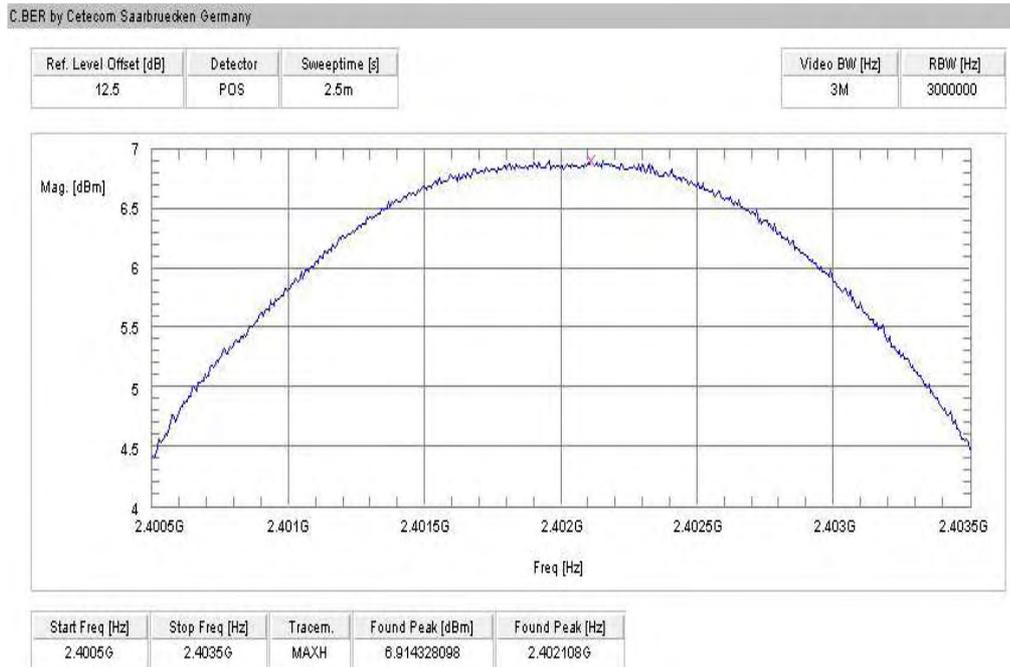


Plot 2: GFSK

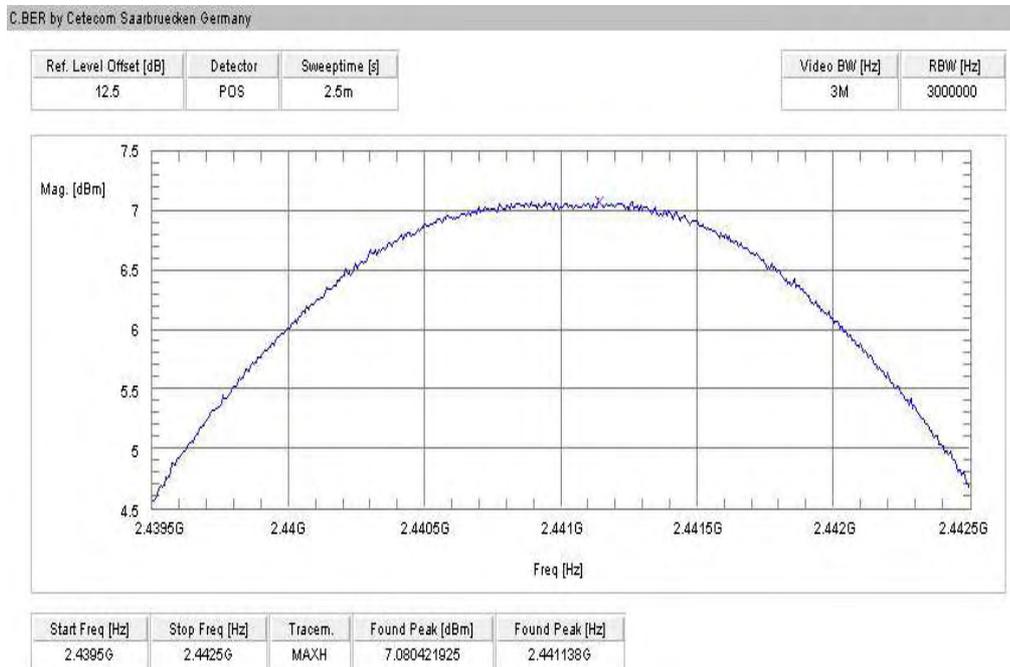


Plot 3: GFSK

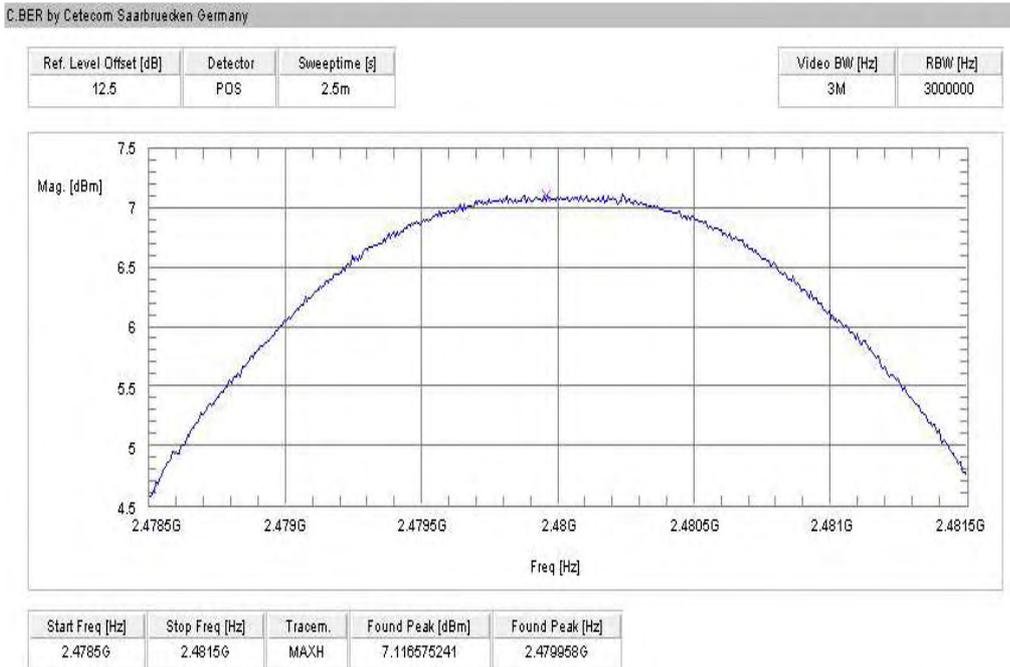


Plot 4: Pi/4 DQPSK

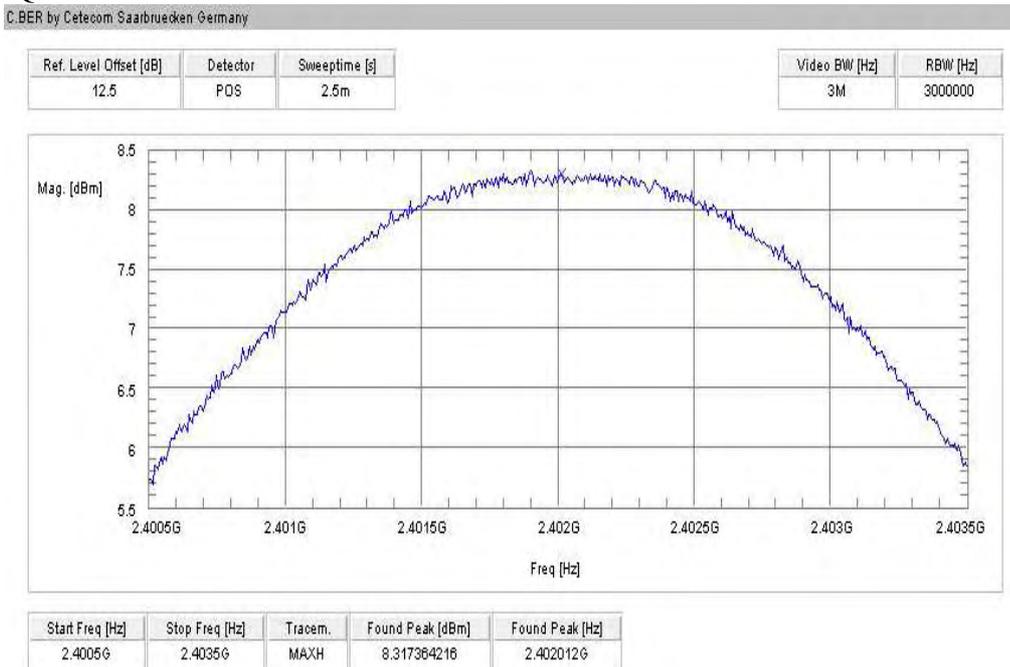


Plot 5: Pi/4 DQPSK

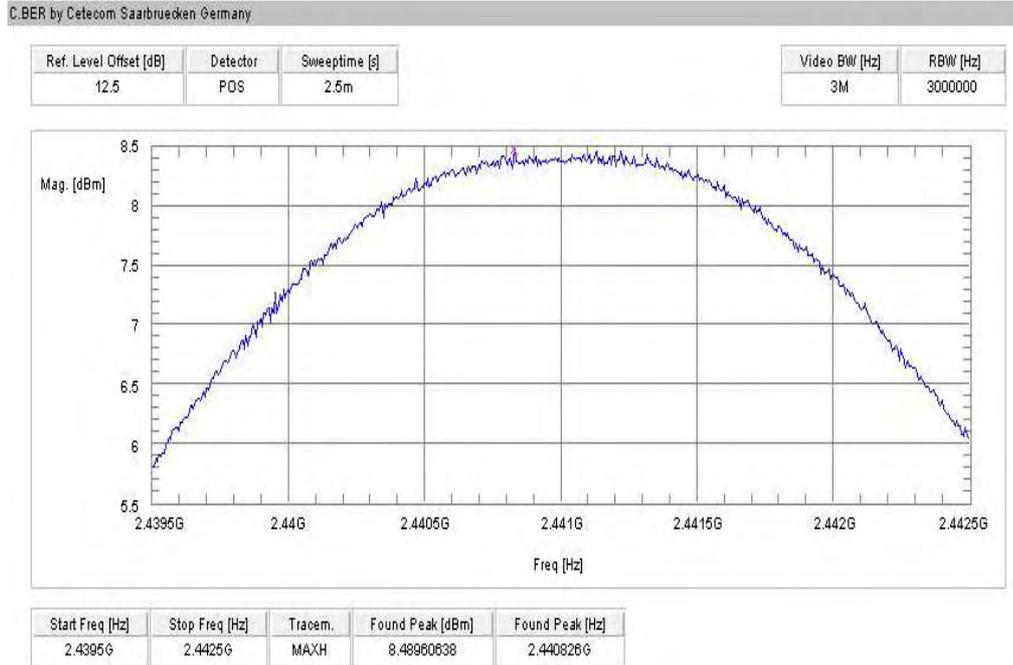


Plot 6: Pi/4 DQPSK

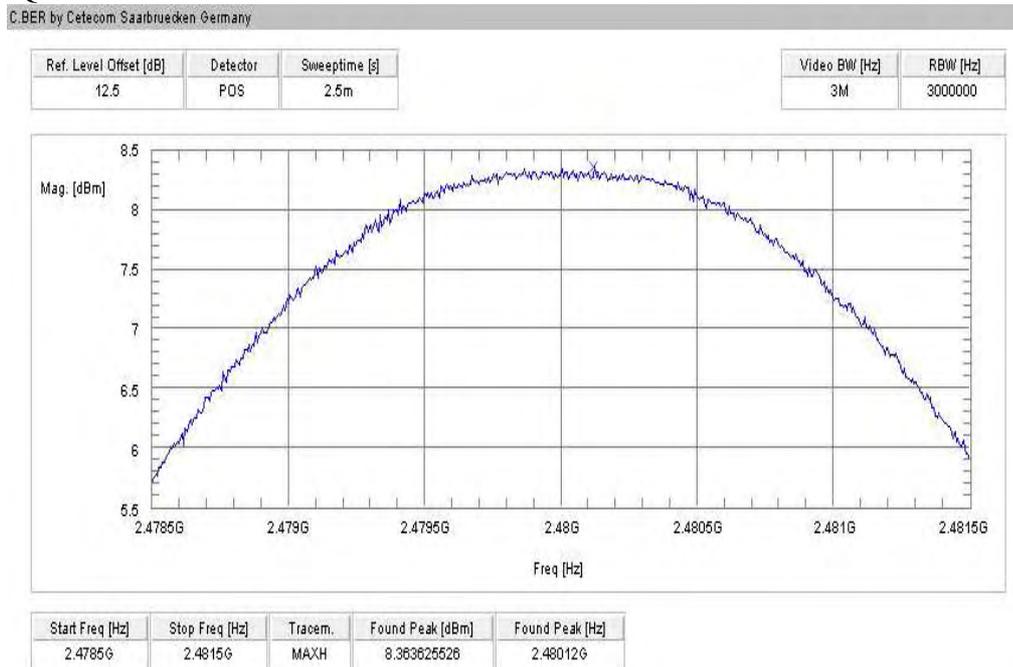


Plot 7: 8DPSK

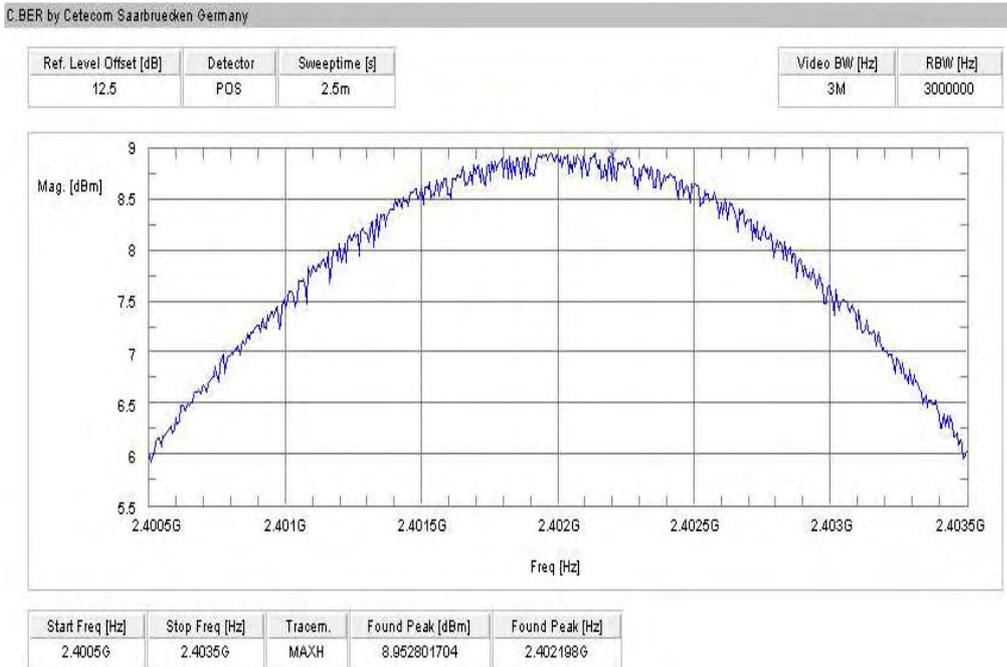

Plot 8: 8DPSK

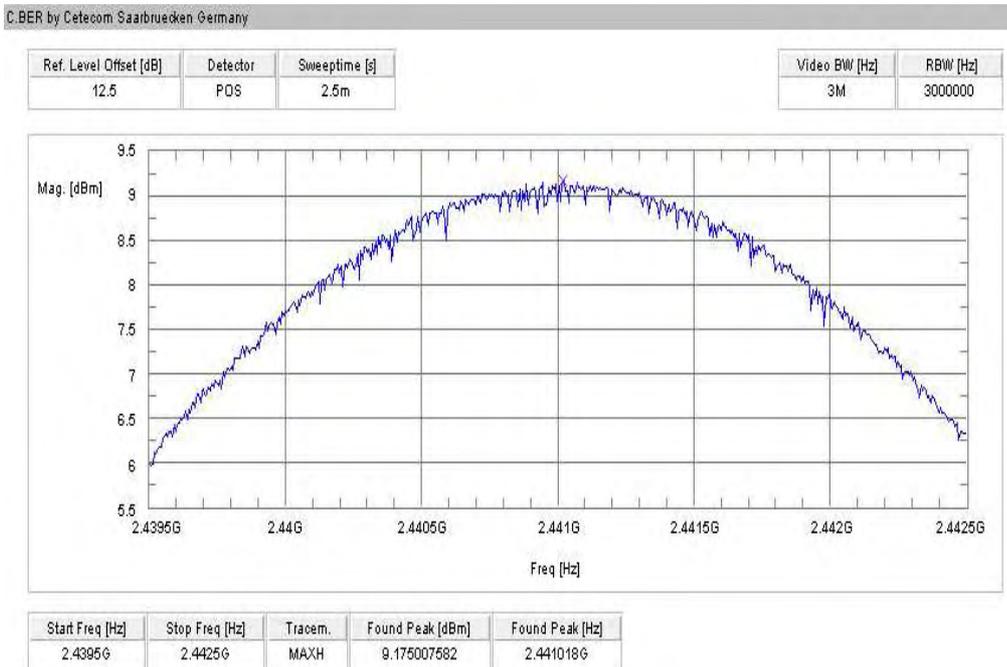

Plot 9: 8DPSK

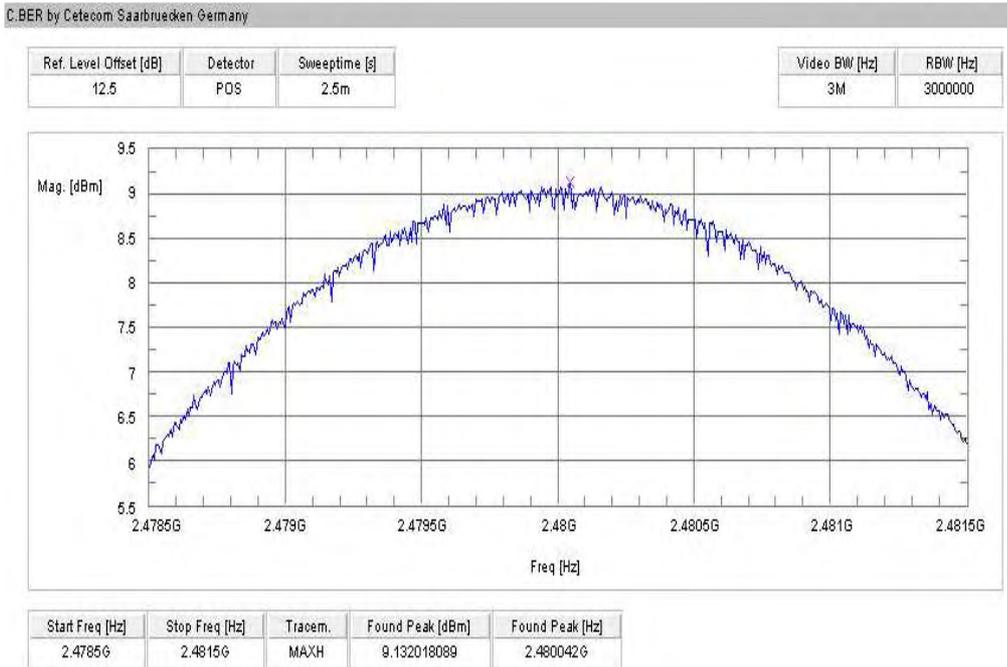

Results:

Modulation	Max. peak output power [dBm]		
	2402	2441	2480
Frequency [MHz]			
<i>GFSK</i>	6.91	7.08	7.12
<i>Pi/4 DQPSK</i>	8.32	8.49	8.36
<i>8DPSK</i>	8.95	9.18	9.13
Measurement uncertainty	±2dB		

RBW / VBW: 3 MHz

Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------

5.11 Max. peak output power (radiated) § 15.247 (b)(1)

Modulation: GFSK

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2402	2442	2480
T _{nom}	V _{nom}	8.53	8.62	8.47
Measurement uncertainty		±3dB		

Modulation: Pi/4 DQPSK

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2402	2442	2480
T _{nom}	V _{nom}	9.94*	10.03*	9.71*
Measurement uncertainty		±3dB		

Modulation: 8DPSK

Results:

Test conditions		Max. peak output power EIRP [dBm]		
Frequency [MHz]		2402	2442	2480
T _{nom}	V _{nom}	10.57*	10.72*	10.48*
Measurement uncertainty		±3dB		

RBW / VBW: 3 MHz

Measured at a distance of 3m

*: Values calculated with the antenna gain (GFSK modulation)


Limits:

Under normal test conditions only, for frequency range 2400-2483.5 MHz	Max. 1.0 Watt
--	---------------


5.12 Band-edge compliance of conducted emissions §15.247 (d)

Modulation: GFSK


Plot 1 of 4 (hopping off, lowest frequency):

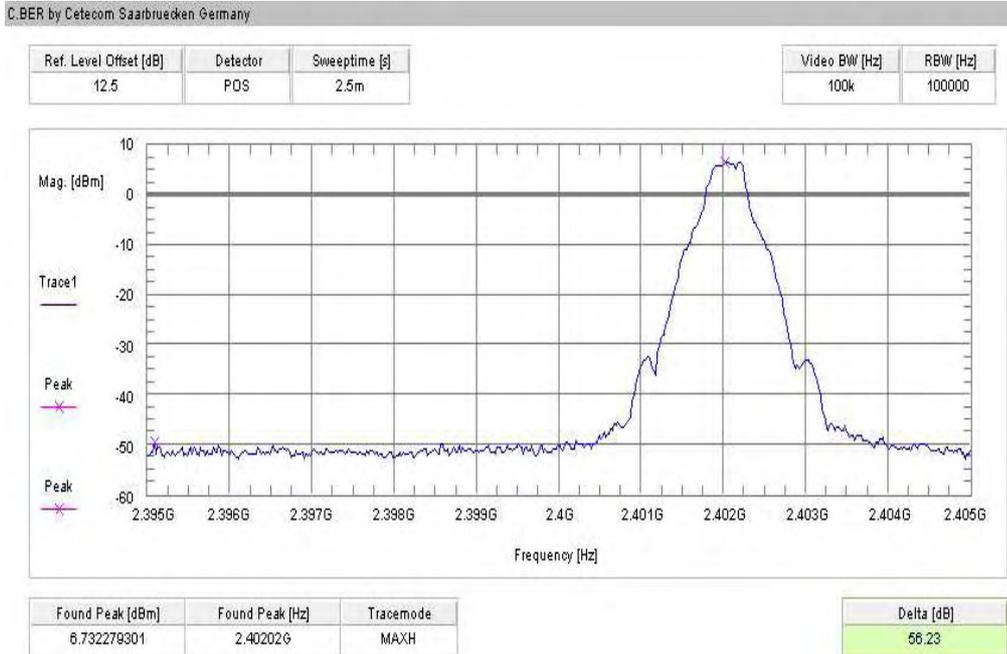


Plot 2 of 4 (hopping on, lowest frequency):

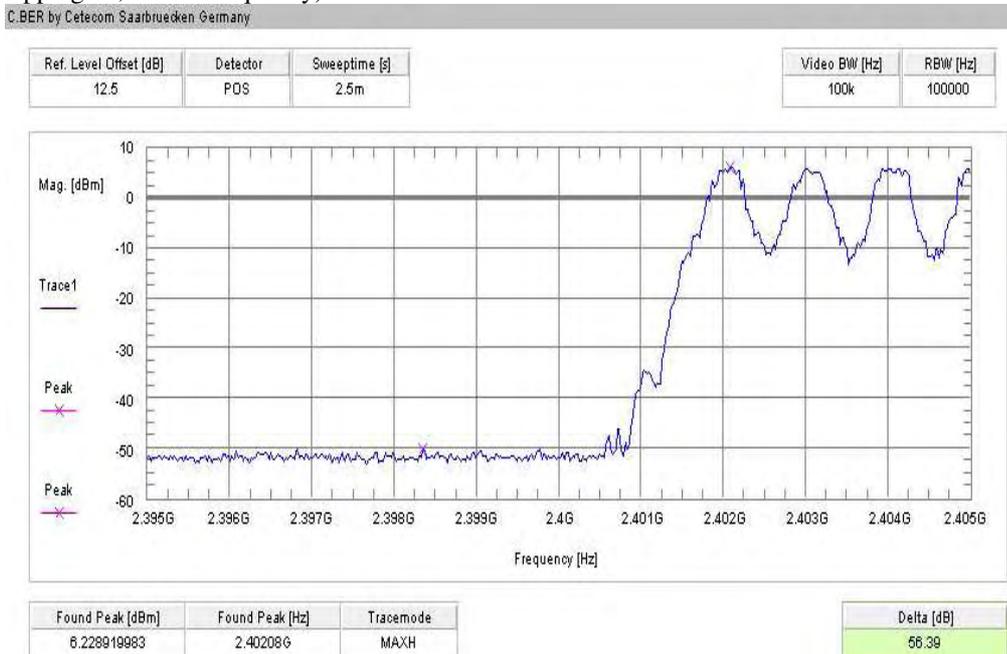

Plot 3 of 4 (hopping off, highest frequency):

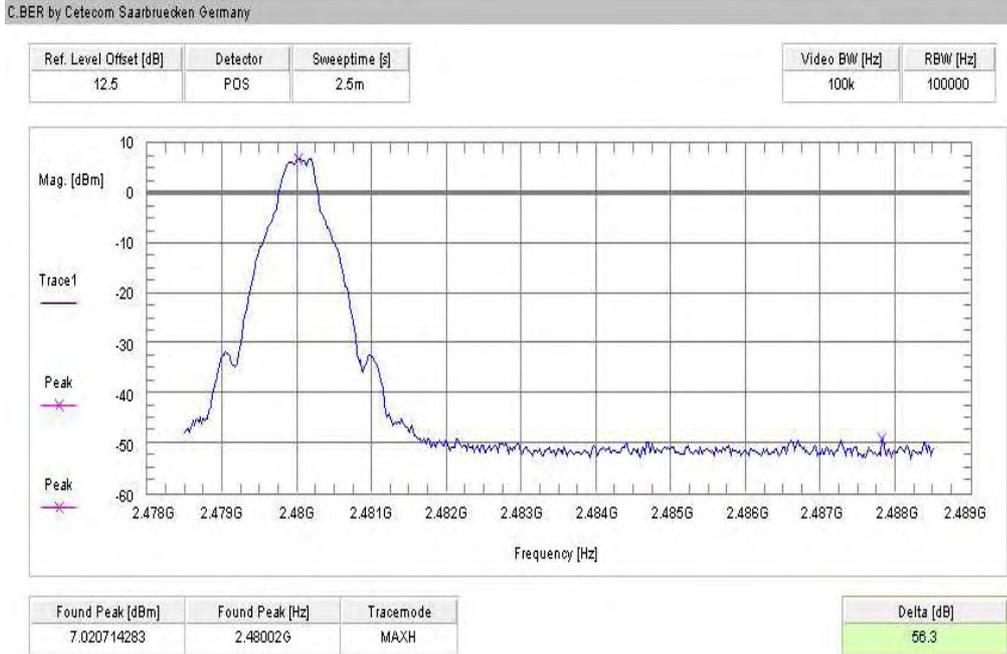

Plot 4 of 4 (hopping on, highest frequency):

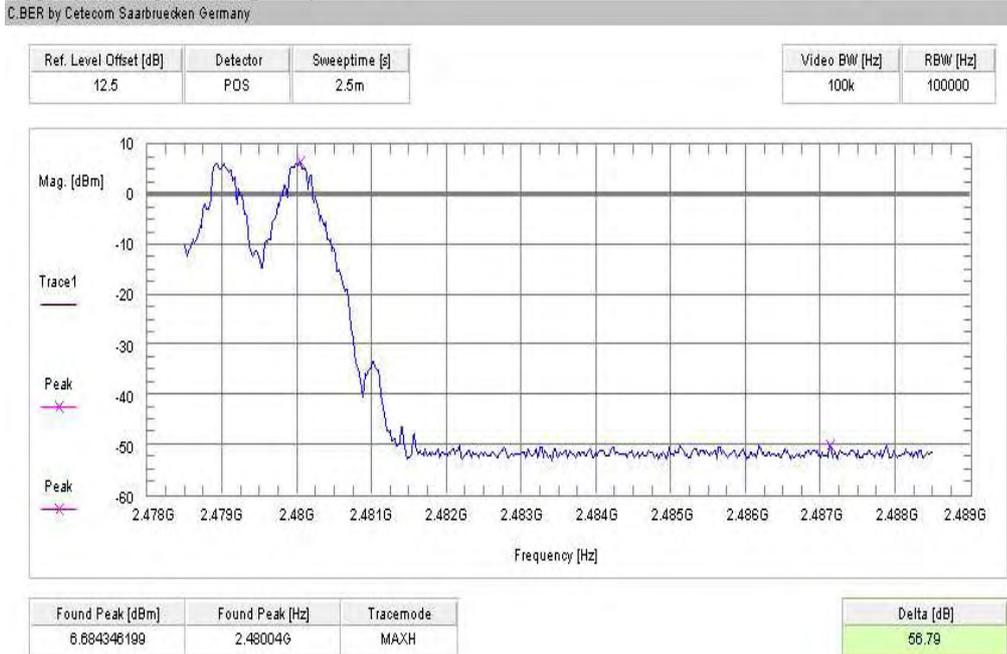


Results:


SZENARIO	DELTA VALUE [DB]
hopping off, lowest frequency	> 20 dB
hopping on, lowest frequency	> 20 dB
hopping off, highest frequency	> 20 dB
hopping on, highest frequency	> 20 dB
Measurement uncertainty	±1,5dB

Modulation: Pi/4 DQPSK


Plot 1 of 4 (hopping off, lowest frequency):

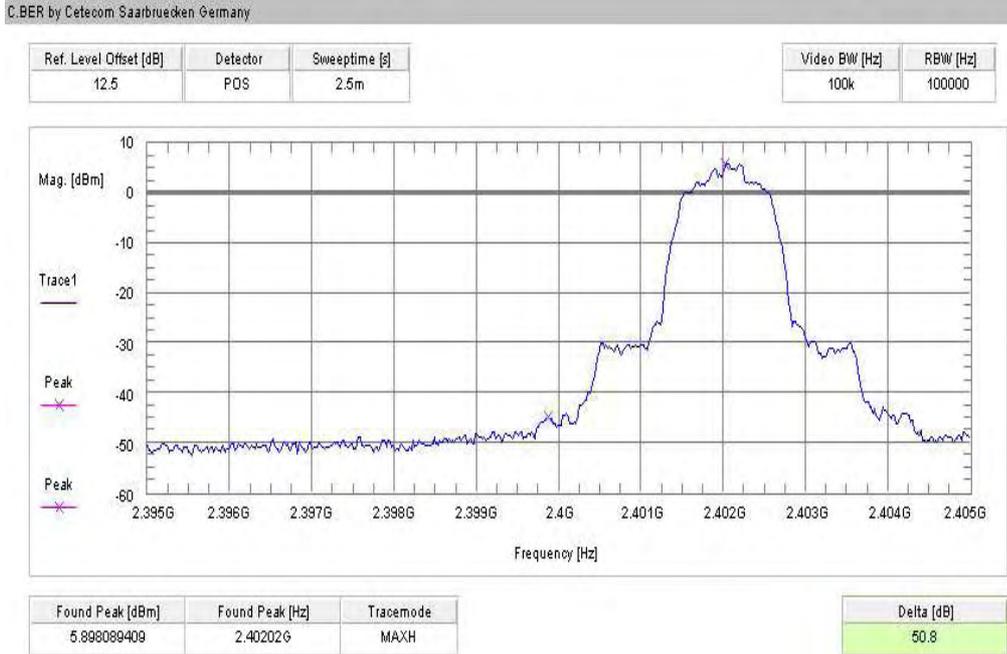


Plot 2 of 4 (hopping on, lowest frequency):

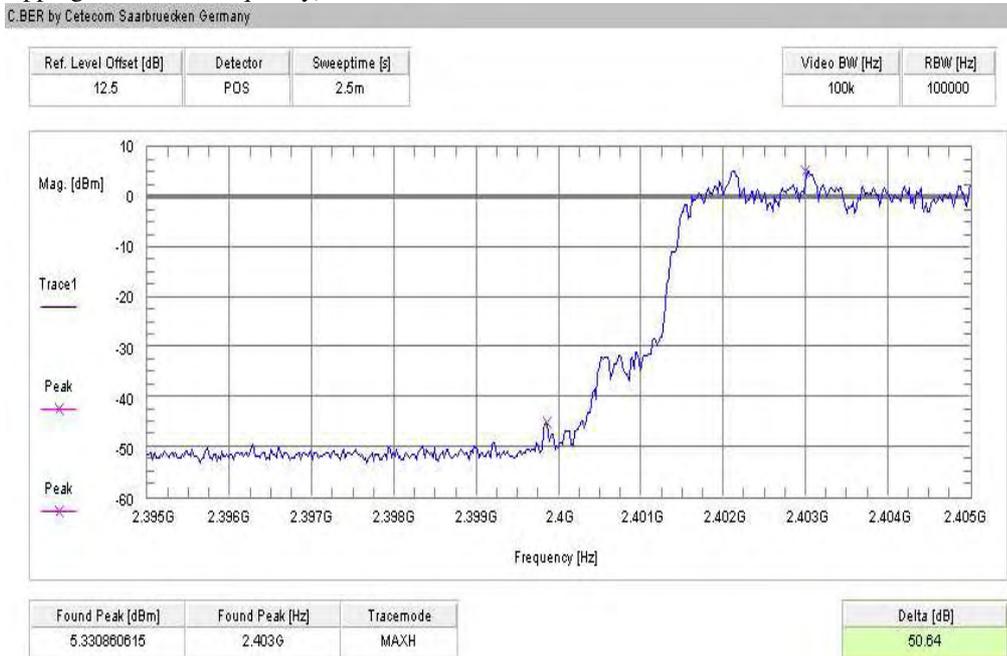

Plot 3 of 4 (hopping off, highest frequency):

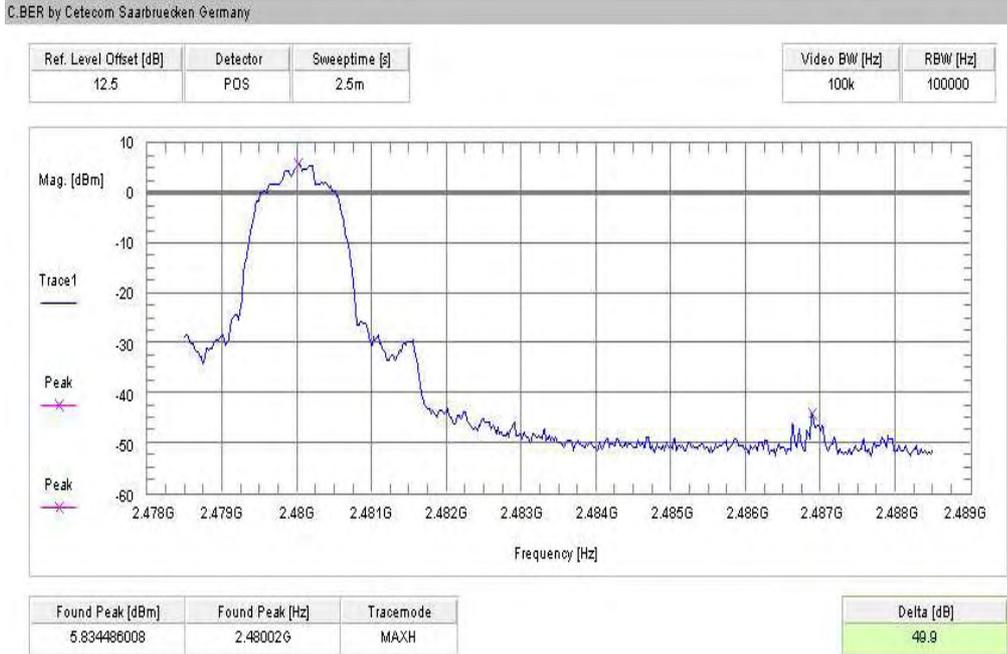

Plot 4 of 4 (hopping on, highest frequency):

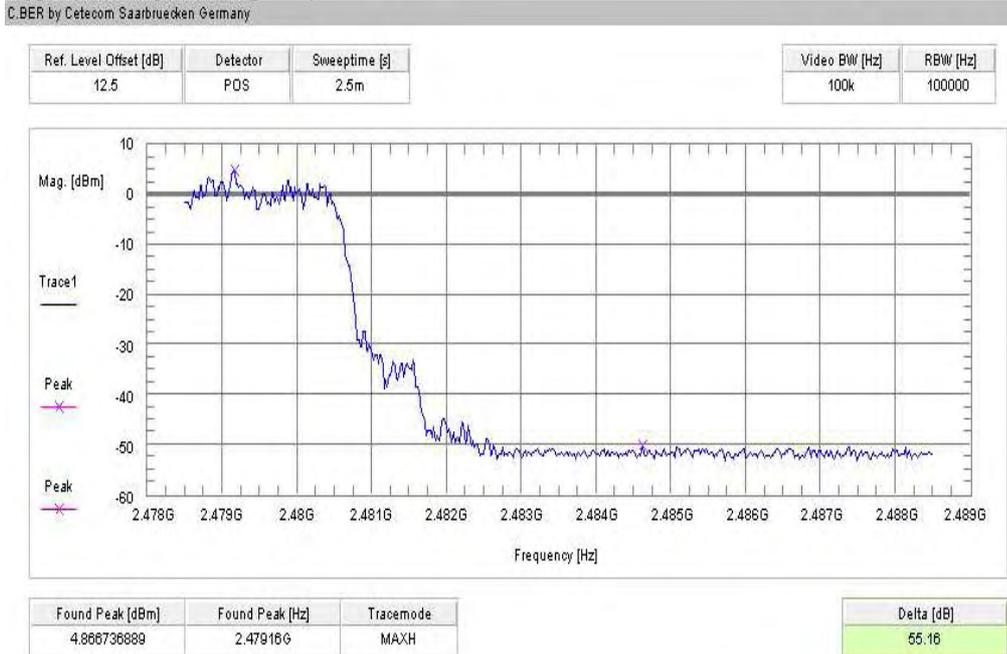


Results:


SZENARIO	DELTA VALUE [DB]
hopping off, lowest frequency	> 20 dB
hopping on, lowest frequency	> 20 dB
hopping off, highest frequency	> 20 dB
hopping on, highest frequency	> 20 dB
Measurement uncertainty	±1,5dB

Modulation: 8 DPSK


Plot 1 of 4 (hopping off, lowest frequency):

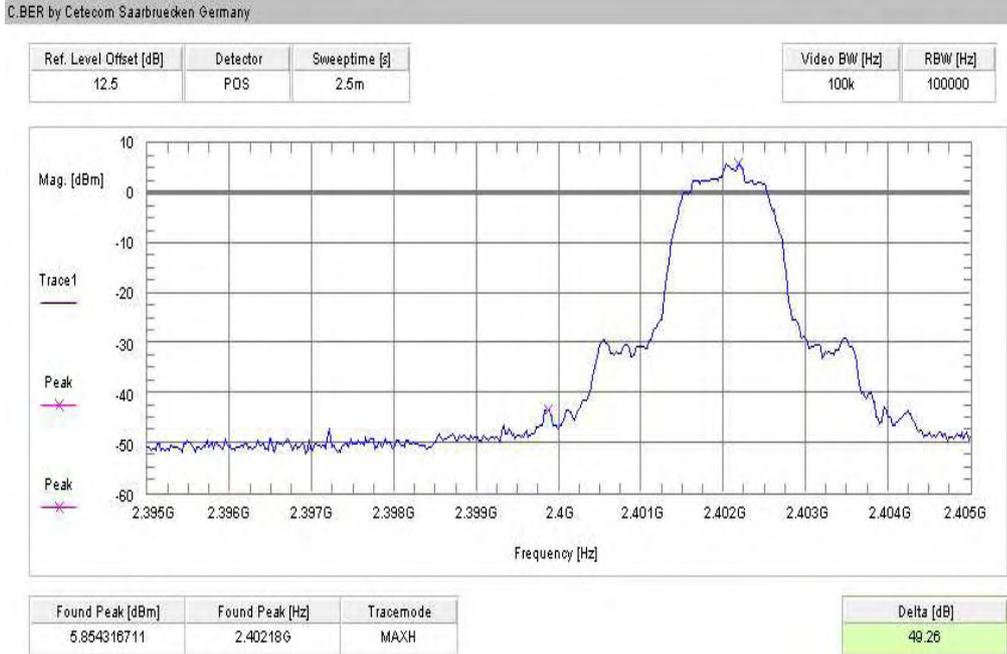


Plot 2 of 4 (hopping on, lowest frequency):

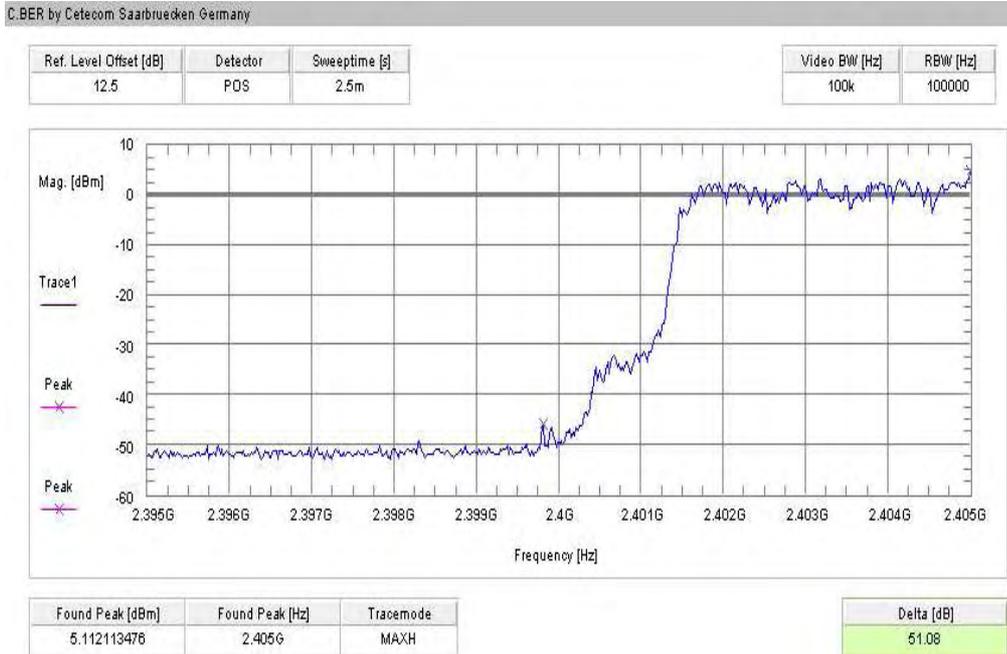

Plot 3 of 4 (hopping off, highest frequency):

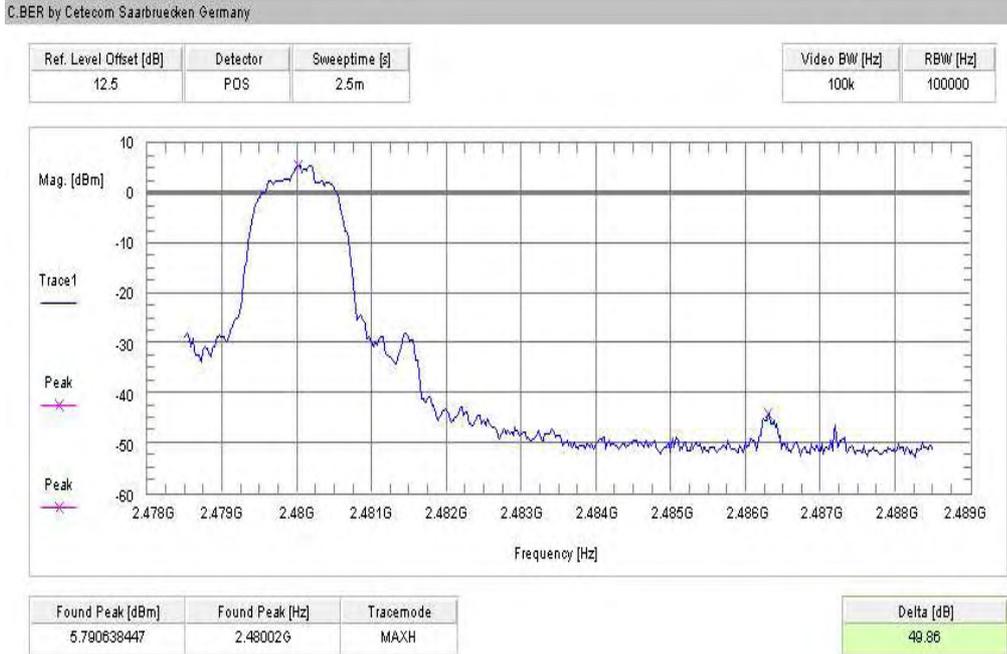

Plot 4 of 4 (hopping on, highest frequency):

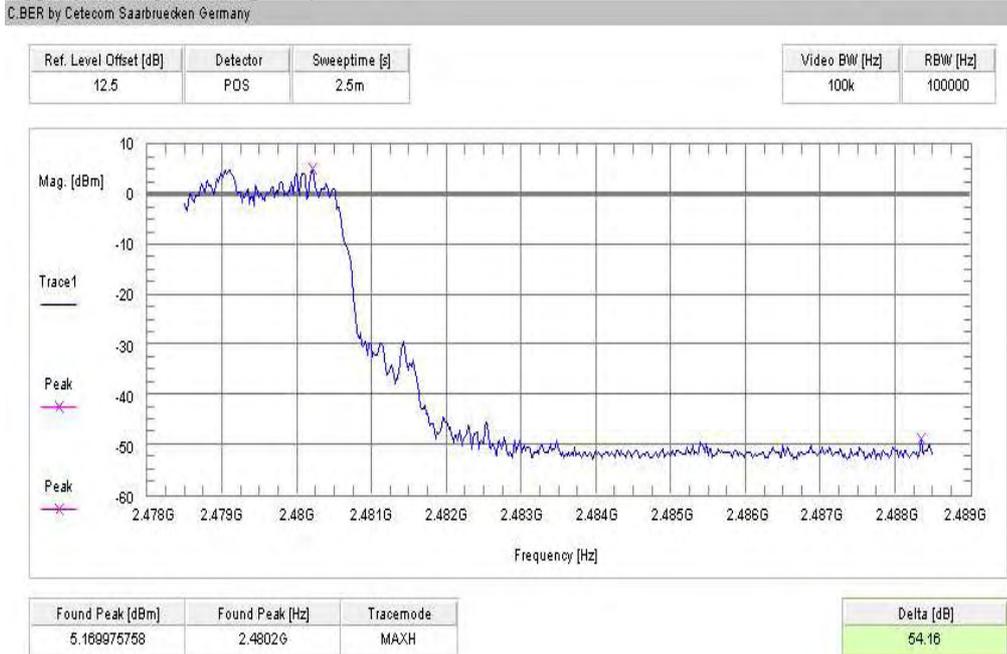

Results:

SZENARIO	DELTA VALUE [DB]
hopping off, lowest frequency	> 20 dB
hopping on, lowest frequency	> 20 dB
hopping off, highest frequency	> 20 dB
hopping on, highest frequency	> 20 dB
Measurement uncertainty	±1,5dB




Limits:

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).
-----------------------------------	--


5.13 Band-edge compliance of radiated emissions §15.205

Modulation: GFSK

Plot 1: Restricted Band low

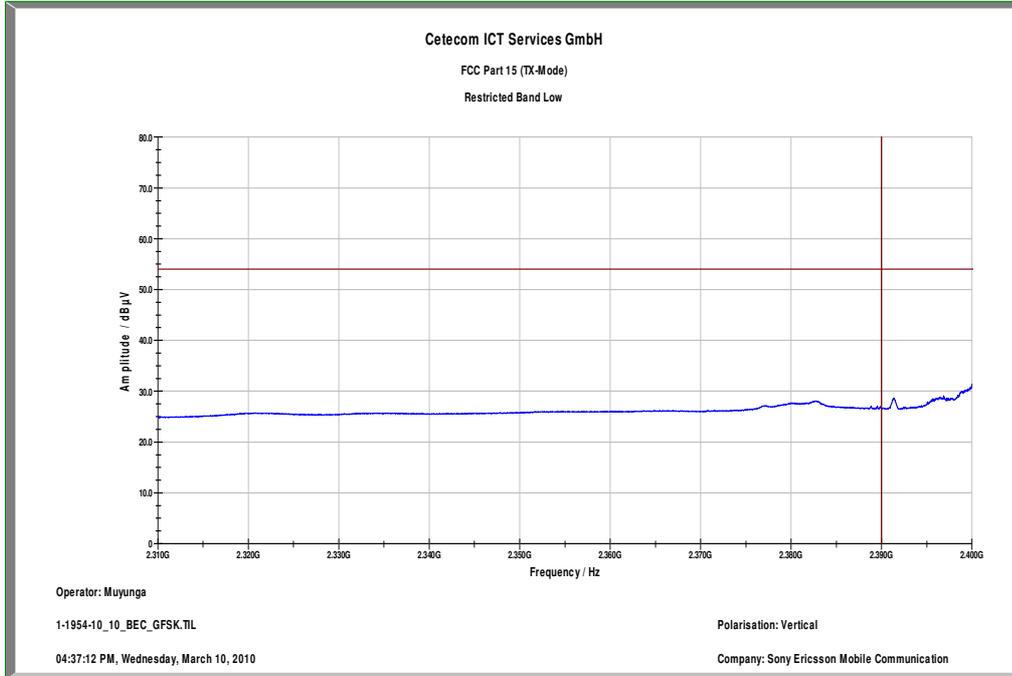

Plot 2: Restricted Band high

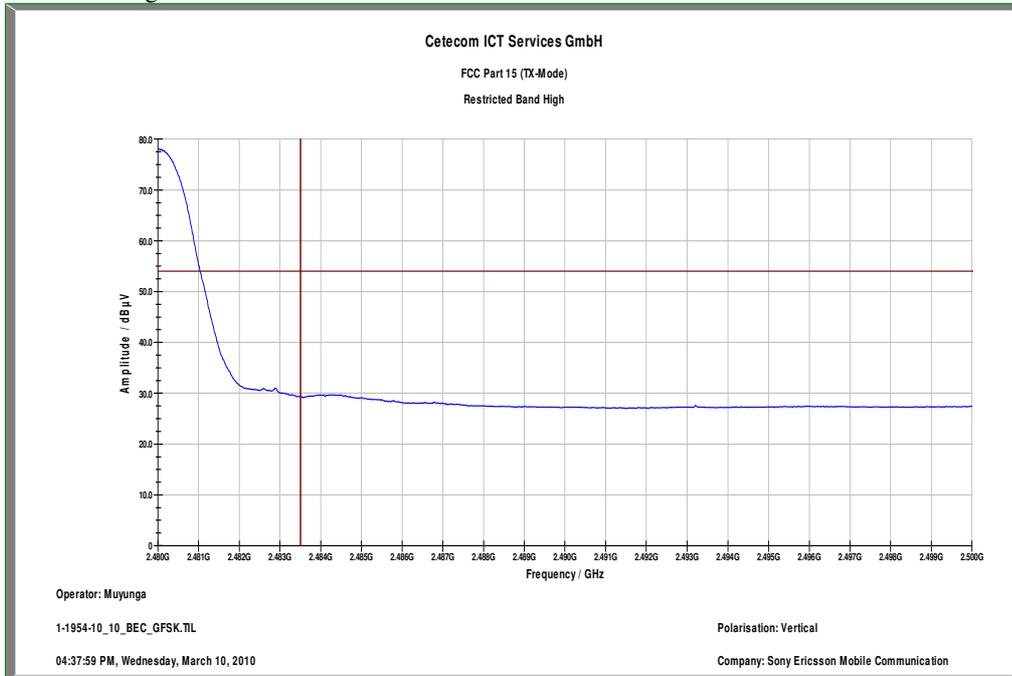


Limit: 54 dBµV/m at 3m


Result: Pass

Modulation: Pi/4 DQPSK

Plot 1: Restricted Band low

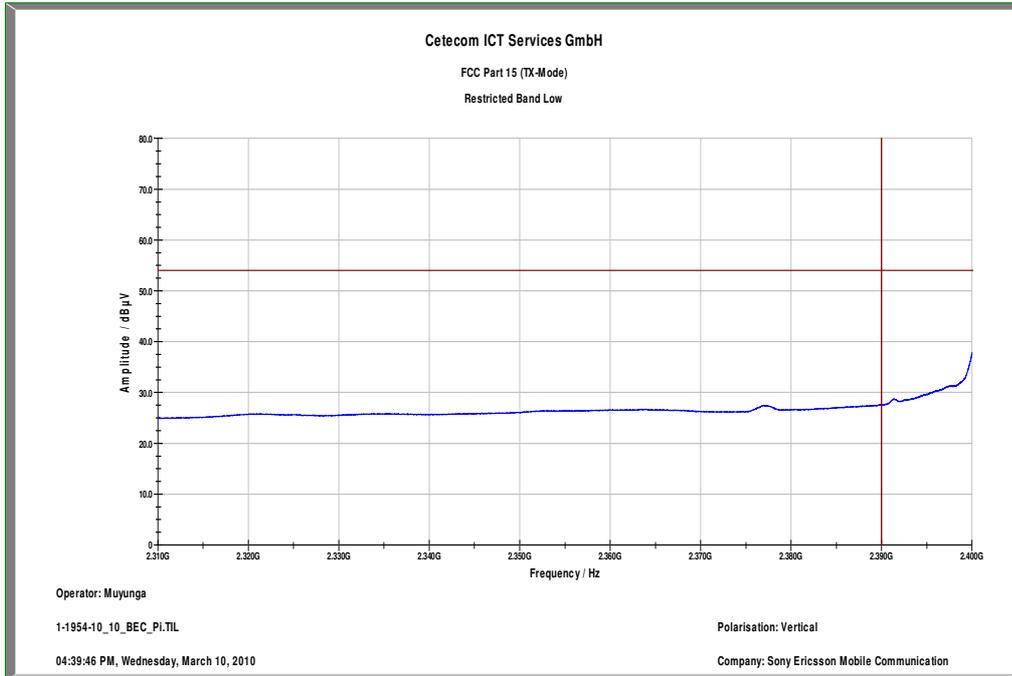

Plot 2: Restricted Band high

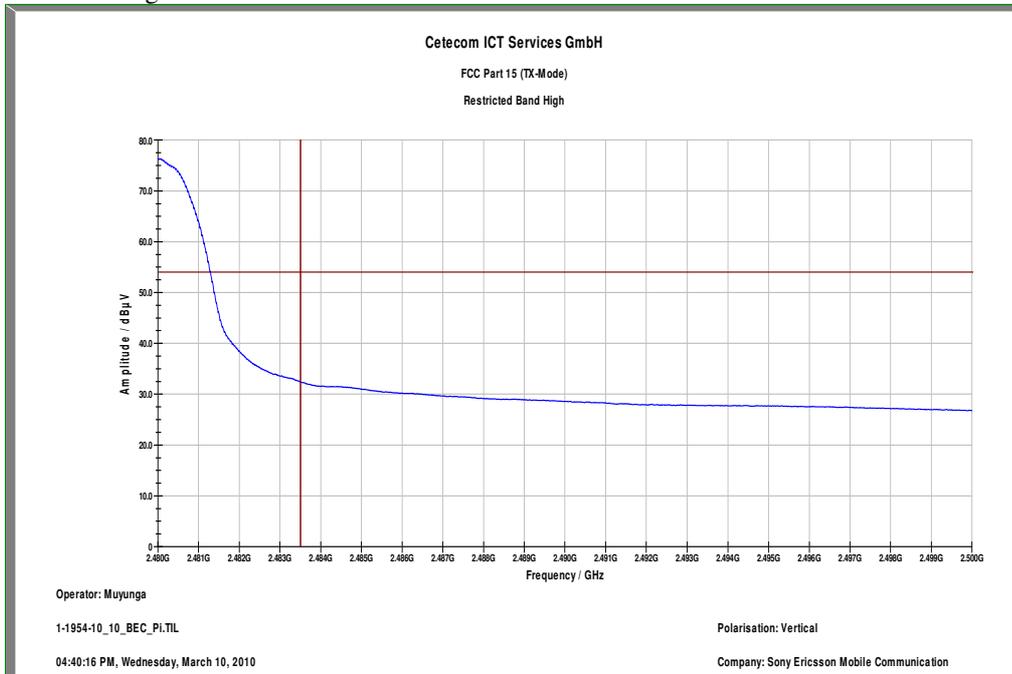


Limit: 54 dBµV/m at 3m


Result: Pass

Modulation: 8DPSK

Plot 1: Restricted Band low

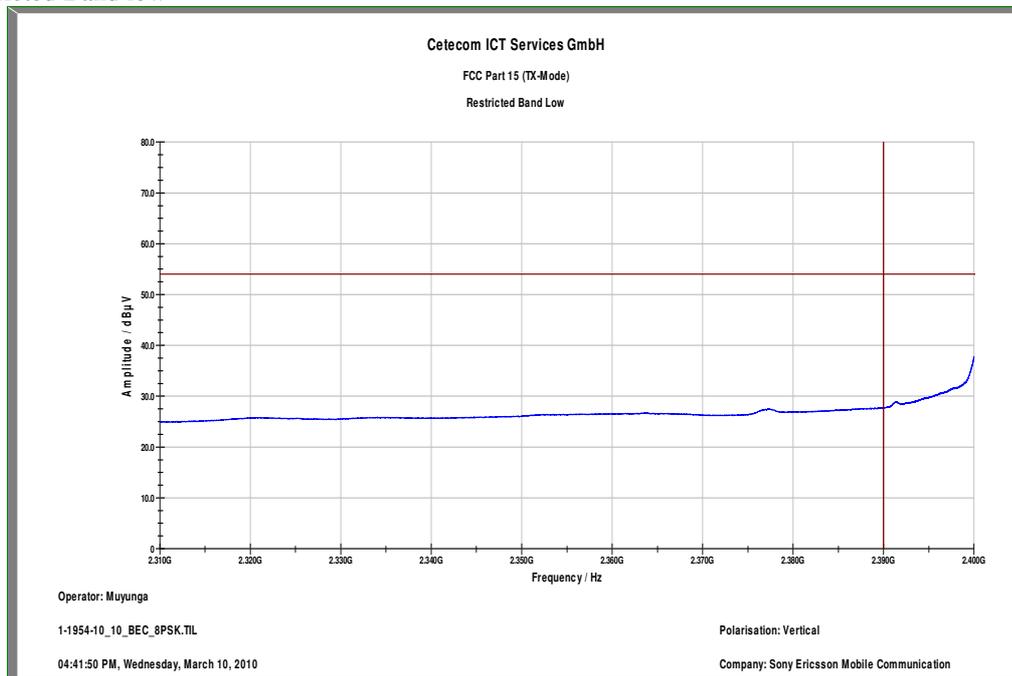

Plot 2: Restricted Band high

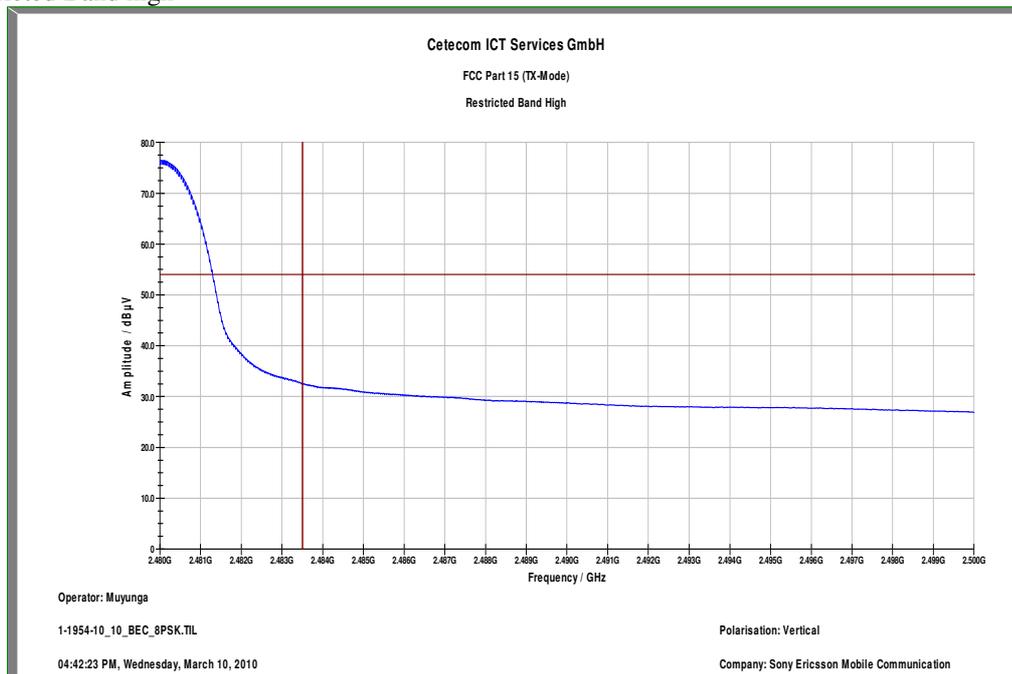


Limit: 54 dBµV/m at 3m

Result: Pass


5.14 Spurious Emissions - conducted (Transmitter) § 15.247 (c)(1)

Modulation: GFSK


Plot 1 of 3: lowest channel

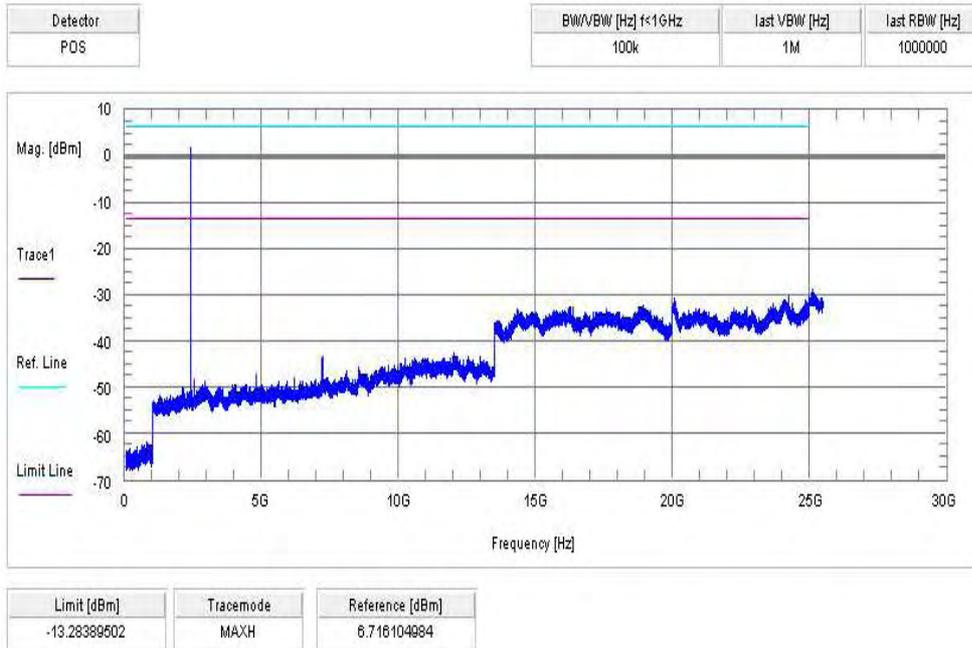

Plot 2 of 3: middle channel

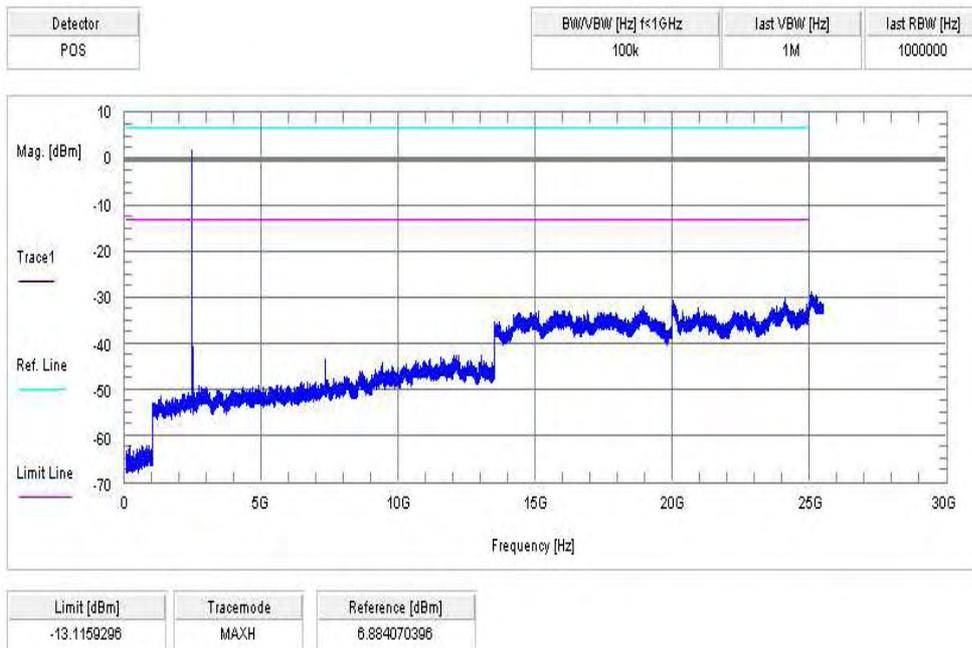

Plot 3 of 3: highest channel

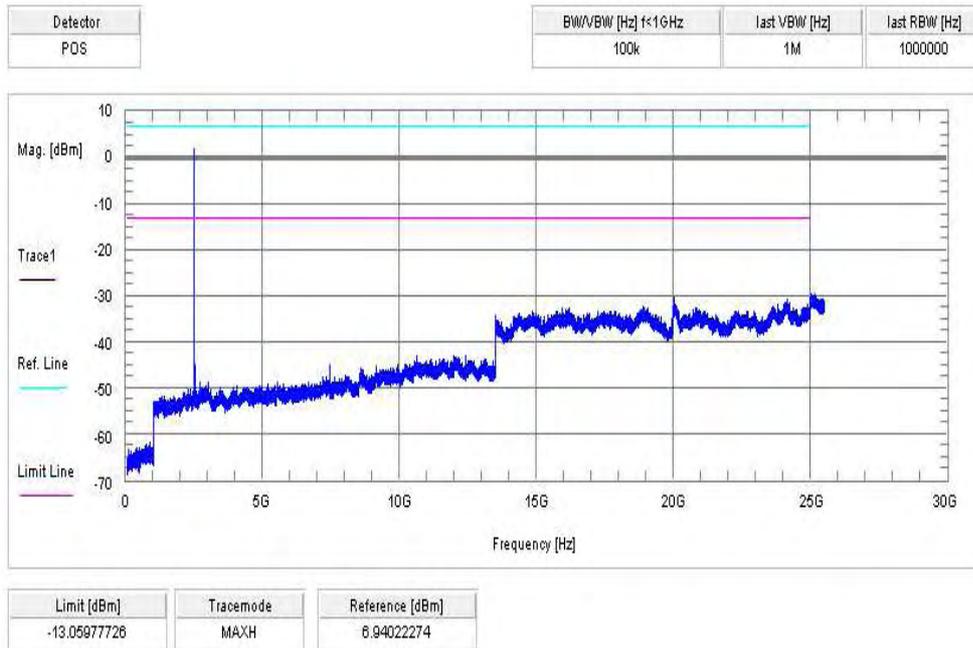


Result & Limits:

Emission Limitation					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		6.72	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
2441		6.88	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
2480		6.94	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
Measurement uncertainty			± 3dB		


F < 1 GHz: RBW: 100 kHz VBW: 100 kHz
 F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

Modulation: Pi/4 DQPSK


Plot 1 of 3: lowest channel

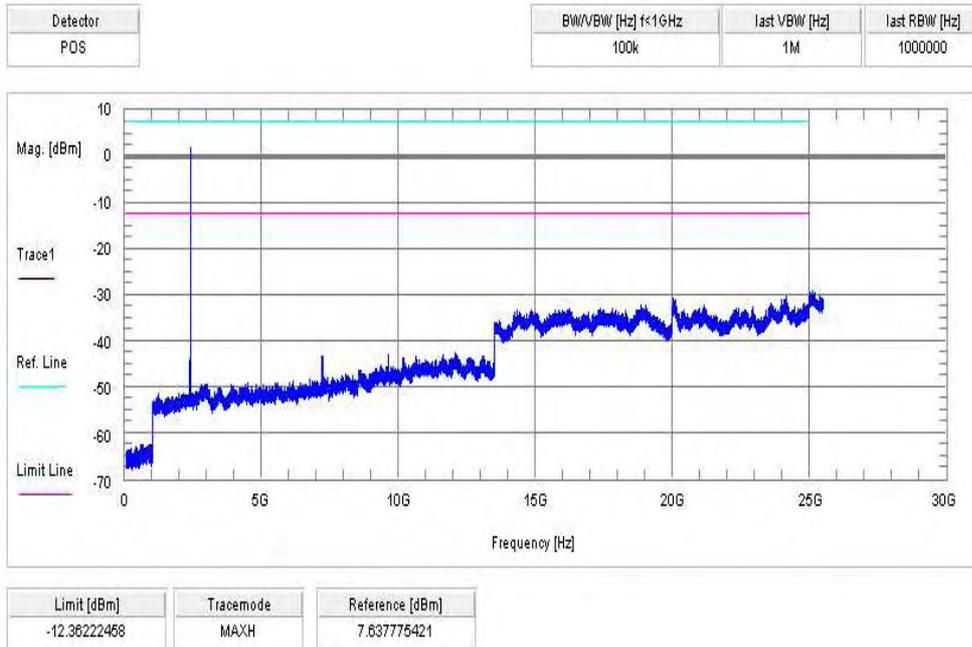

Plot 2 of 3: middle channel

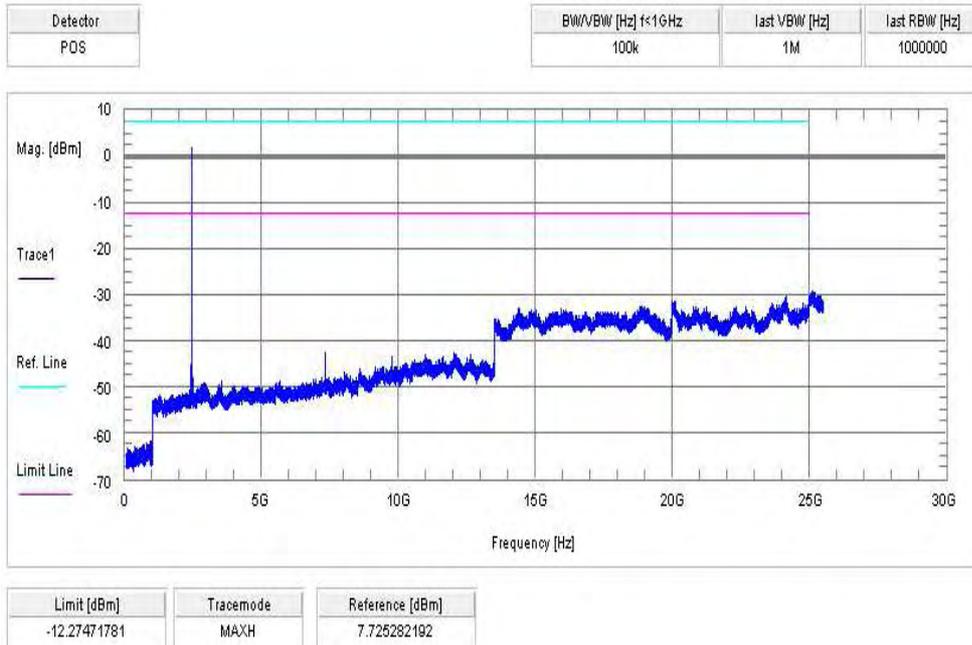

Plot 3 of 3: highest channel

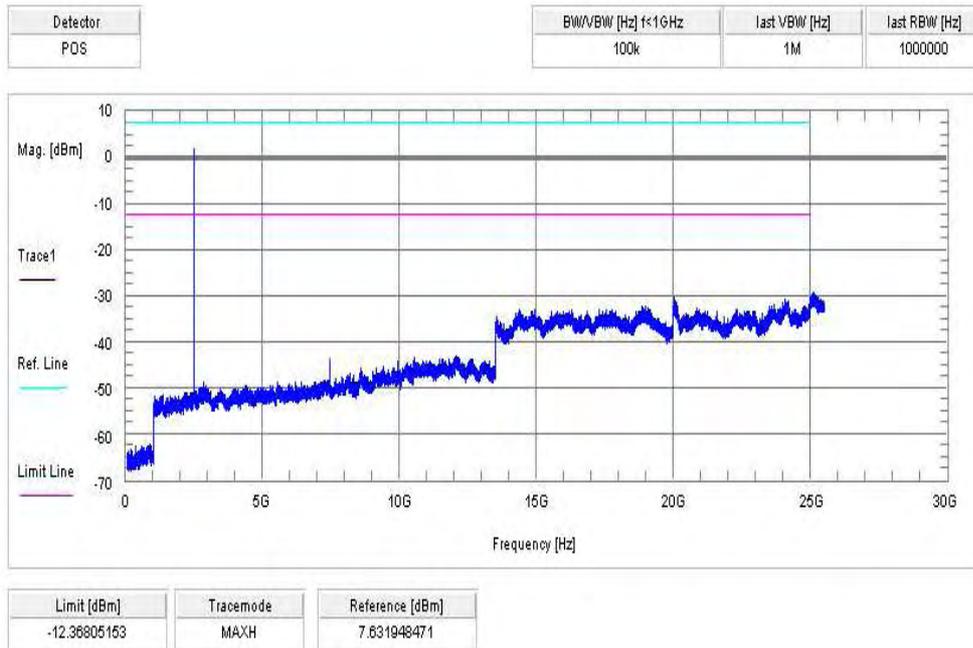


Result & Limits:

Emission Limitation					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		7.64	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
2441		7.73	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
2480		7.63	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
Measurement uncertainty			± 3dB		


F < 1 GHz: RBW: 100 kHz VBW: 100 kHz
 F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

Modulation: 8 DPSK


Plot 1 of 3: lowest channel

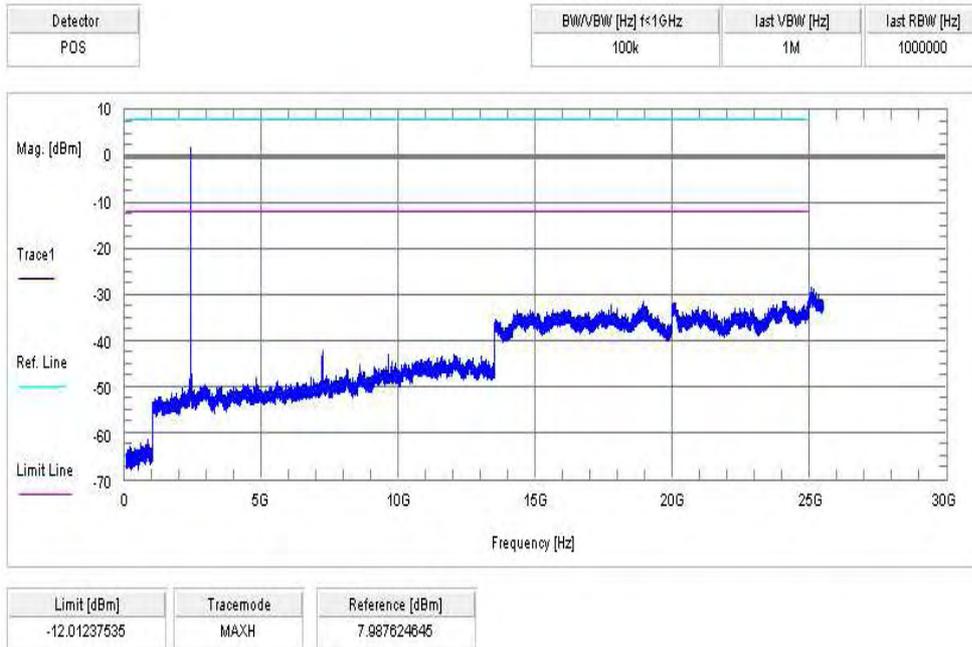

Plot 2 of 3: middle channel

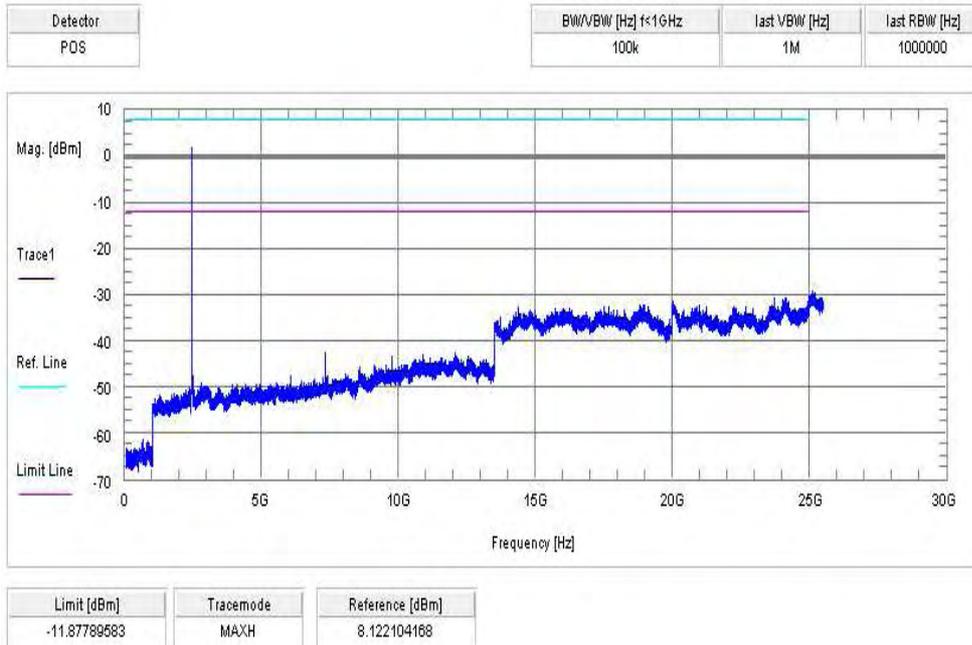

Plot 3 of 3: highest channel

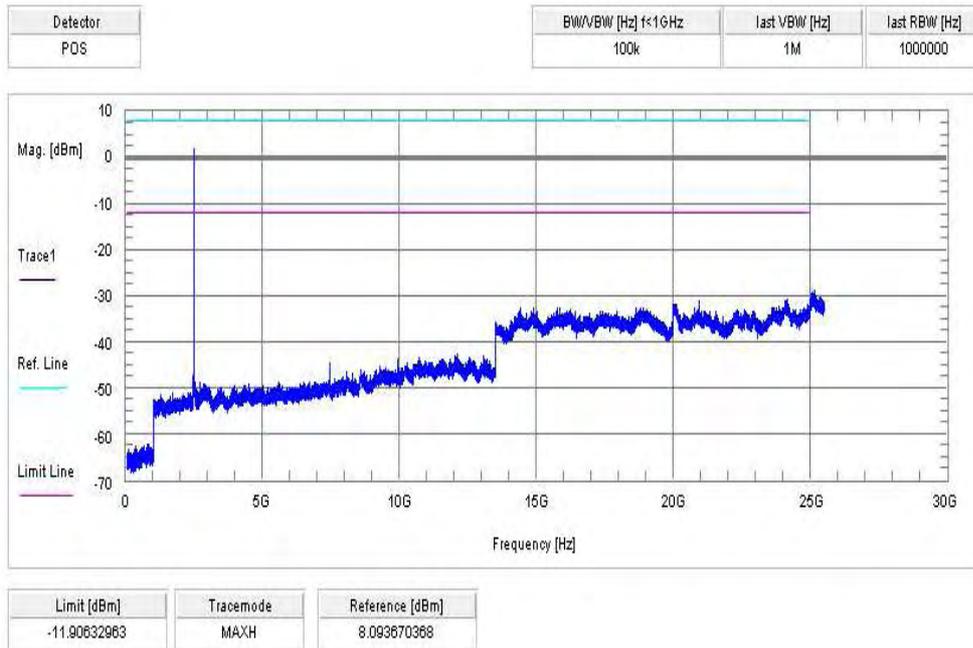

Result & Limits:

Emission Limitation					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2402		7.99	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
2441		8.12	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
2480		8.09	30 dBm		Operating frequency
	<i>No critical peaks found</i>		-20 dBc		complies
					complies
Measurement uncertainty			± 3dB		

F < 1 GHz: RBW: 100 kHz VBW: 100 kHz
 F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

Under normal test conditions only	In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
-----------------------------------	--

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

5.15 Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c)(1)

The transmitter radiated spurious tests were performed for all modulations but only data plots for 8DPSK radiated spurious evaluations are documented in this sub-clause, as 8DPSK represents the worst-case scenario in terms of emission bandwidth and output power.

Modulation: 8DPSK

Plot 1: 0.03 - 1 GHz vertical/horizontal (lowest channel)


Common Information

EUT:	AAD-3880069-BV
Serial Number:	CB511G3KZX (IMEI: 00440214-000645-7)
Test Description:	FCC part 15 class B @ 10 m
Operating Conditions:	BT TX Ch: 00 (8DPSK)
Operator Name:	Lang
Comment:	AC 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dBµV/m


Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1,05 GHz	QuasiPeak	120 kHz	15 s	Receiver

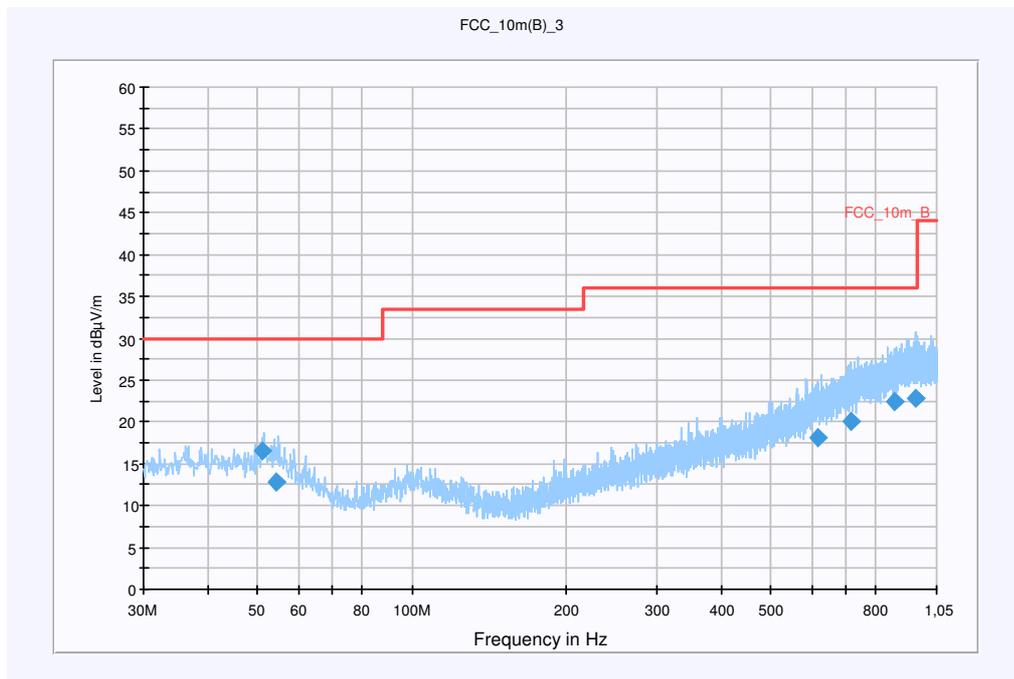


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
50.971650	16.5	15000.000	120.000	108.0	V	146.0	13.3	13.5	30.0
54.449700	12.7	15000.000	120.000	220.0	V	233.0	12.9	17.3	30.0
617.843100	18.2	15000.000	120.000	98.0	V	109.0	20.9	17.8	36.0
713.850750	20.1	15000.000	120.000	220.0	V	9.0	22.7	15.9	36.0
871.158600	22.4	15000.000	120.000	220.0	V	62.0	24.8	13.6	36.0
956.011950	22.8	15000.000	120.000	207.0	V	200.0	25.4	13.2	36.0

Plot 2: 1 - 12 GHz vertical/horizontal (lowest channel)

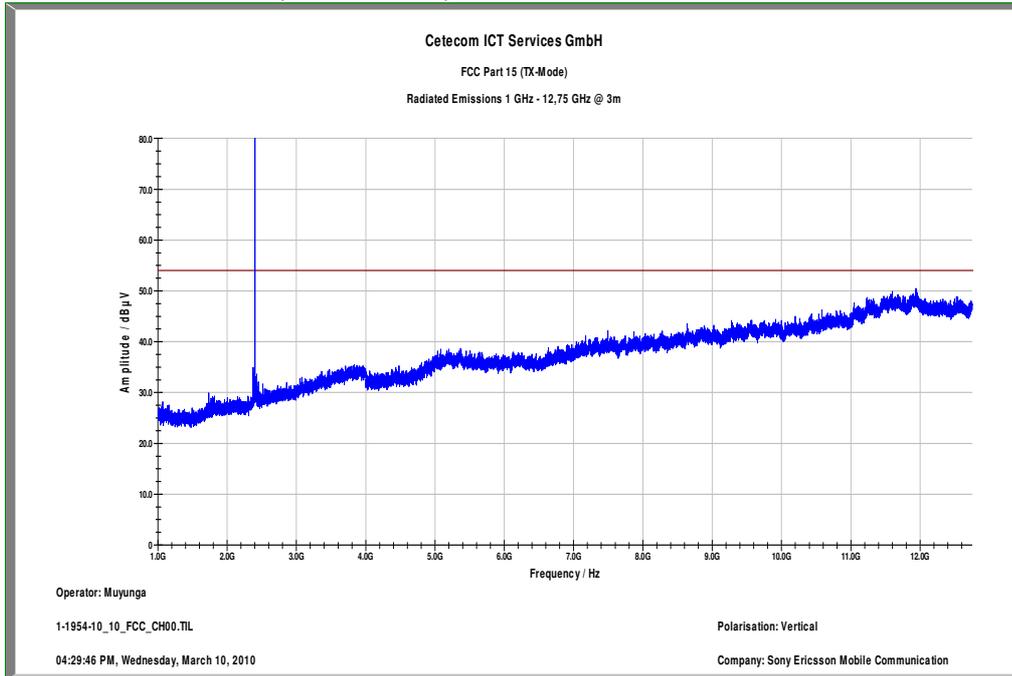

Plot 3: 12 - 25 GHz vertical/horizontal (valid for all channels)

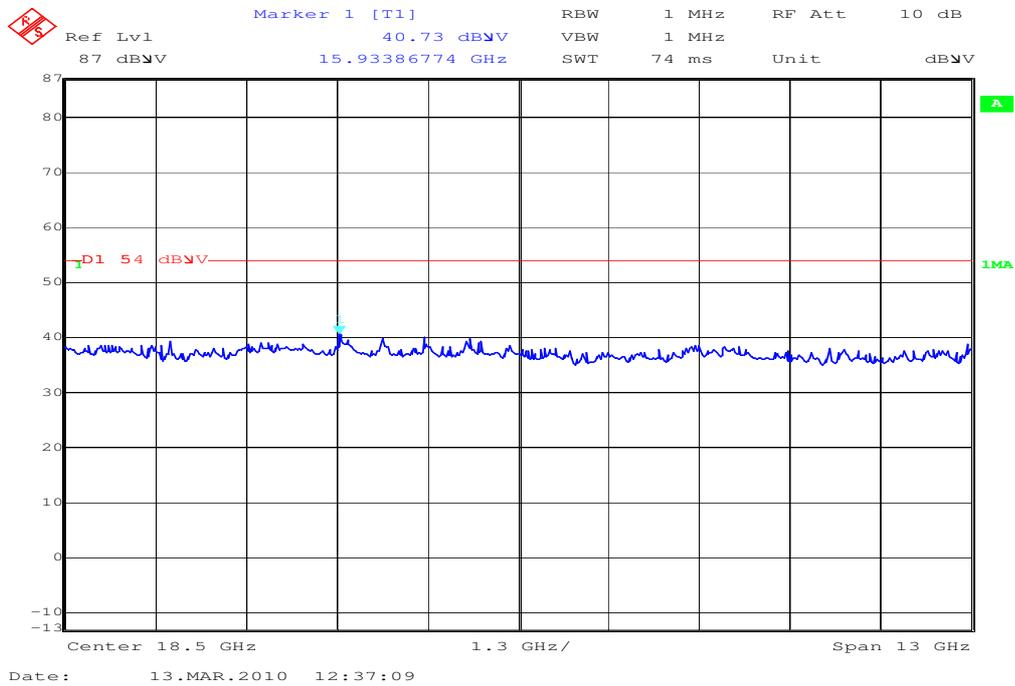

Plot 4: 0.03 - 1 GHz vertical/horizontal (middle channel)


Common Information

EUT:	AAD-3880069-BV
Serial Number:	CB511G3KZX (IMEI: 00440214-000645-7)
Test Description:	FCC part 15 class B @ 10 m
Operating Conditions:	BT TX Ch: 39 (8DPSK)
Operator Name:	Lang
Comment:	AC 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dB μ V/m


Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1,05 GHz	QuasiPeak	120 kHz	15 s	Receiver

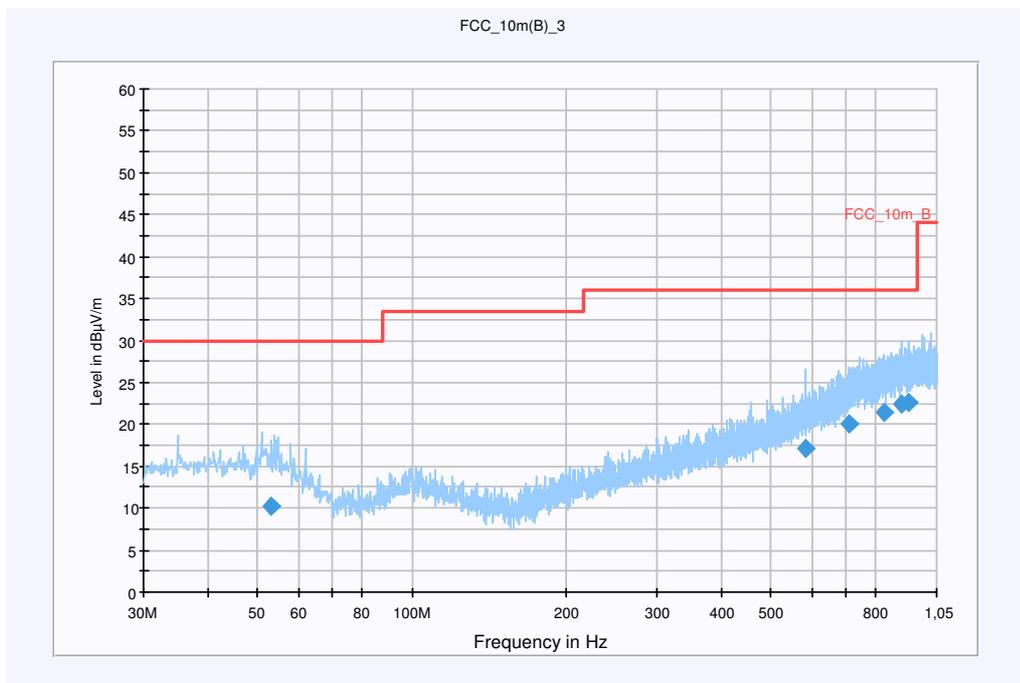

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
53.294100	10.2	15000.000	120.000	131.0	V	246.0	13.0	19.8	30.0
582.169650	17.1	15000.000	120.000	120.0	H	205.0	20.3	18.9	36.0
711.306150	20.1	15000.000	120.000	157.0	H	175.0	22.7	15.9	36.0
829.505550	21.4	15000.000	120.000	108.0	V	52.0	24.2	14.6	36.0
896.381250	22.4	15000.000	120.000	141.0	H	7.0	25.2	13.6	36.0
929.256300	22.6	15000.000	120.000	120.0	H	151.0	25.3	13.4	36.0

Plot 5: 1 - 12 GHz vertical/horizontal (middle channel)

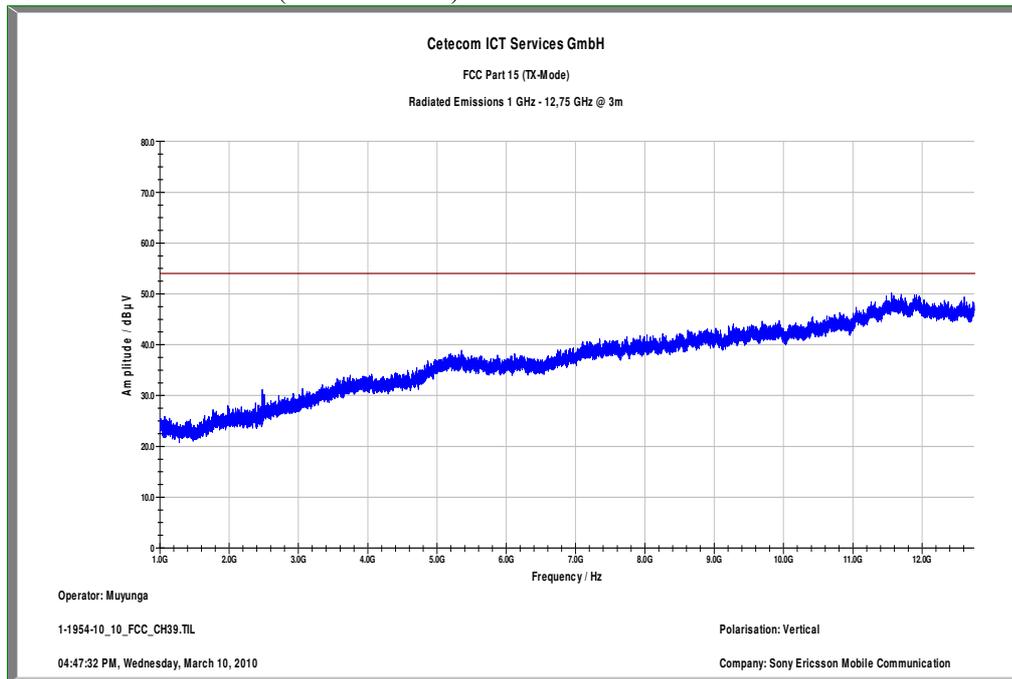

Carrier suppressed with a 2.4 GHz band-reject filter

Plot 6: 0.03 - 1 GHz vertical/horizontal (highest channel)


Common Information

EUT:	AAD-3880069-BV
Serial Number:	CB511G3KZX (IMEI: 00440214-000645-7)
Test Description:	FCC part 15 class B @ 10 m
Operating Conditions:	BT TX Ch: 78 (8DPSK)
Operator Name:	Lang
Comment:	AC 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dB μ V/m


Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1,05 GHz	QuasiPeak	120 kHz	15 s	Receiver

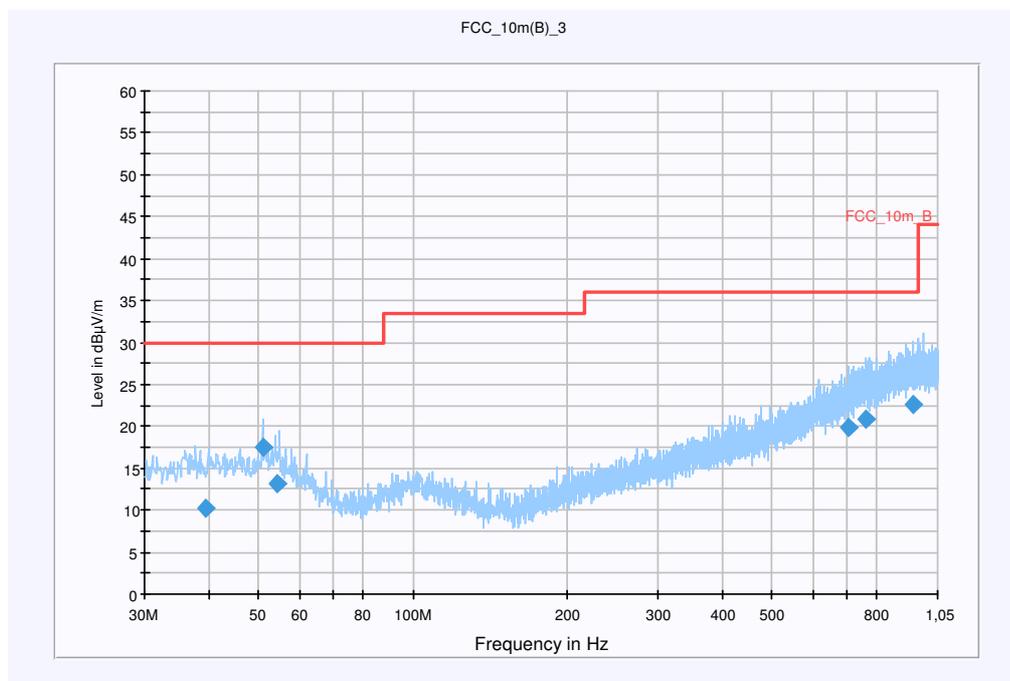

Final Result 1

Frequency (MHz)	QuasiPeak (dB μ V/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dB μ V/m)
39.435000	10.2	15000.000	120.000	98.0	V	260.0	13.4	19.8	30.0
51.011250	17.5	15000.000	120.000	98.0	V	242.0	13.3	12.5	30.0
54.432000	13.2	15000.000	120.000	220.0	V	164.0	12.9	16.8	30.0
702.476250	19.9	15000.000	120.000	220.0	V	155.0	22.5	16.1	36.0
759.971550	20.9	15000.000	120.000	173.0	H	168.0	23.6	15.1	36.0
940.974300	22.6	15000.000	120.000	220.0	V	221.0	25.3	13.4	36.0

Plot 7: 1 - 12 GHz vertical/horizontal (highest channel)

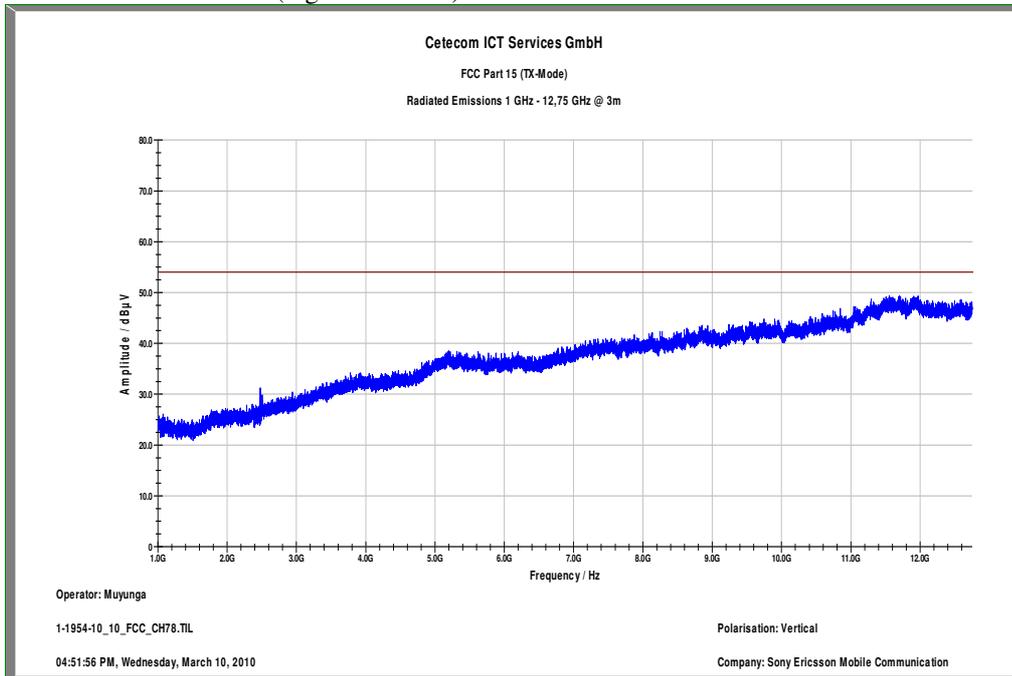

Carrier suppressed with a 2.4 GHz band-reject filter

Results:

SPURIOUS EMISSIONS LEVEL (dBµV/m)								
2402 MHz			2441 MHz			2480 MHz		
F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]	F [MHz]	Detector	Level [dBµV/m]
No peak detected			No peak detected			No peak detected		
Measurement uncertainty			±3 dB					

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209

Frequency [MHz]	Field strength [µV/m]	Measurement distance (m)
30 - 88	100 (40 dBµV/m)	3
88 - 216	150 (43.5 dBµV/m)	3
216 - 960	200 (46 dBµV/m)	3
above 960	500 (54 dBµV/m)	3

5.16 Spurious Emissions - radiated (Receiver) § 15.109

Plot 1: 0.03 - 1 GHz vertical/horizontal (receiver)


Common Information

EUT:	AAD-3880069-BV
Serial Number:	CB511G3KZX (IMEI: 00440214-000645-7)
Test Description:	FCC part 15 class B @ 10 m
Operating Conditions:	BT RX Mode
Operator Name:	Lang
Comment:	AC 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Level Unit:	dBµV/m


Subrange	Detectors	IF Bandwidth	Meas. Time	Receiver
30 MHz - 1,05 GHz	QuasiPeak	120 kHz	15 s	Receiver

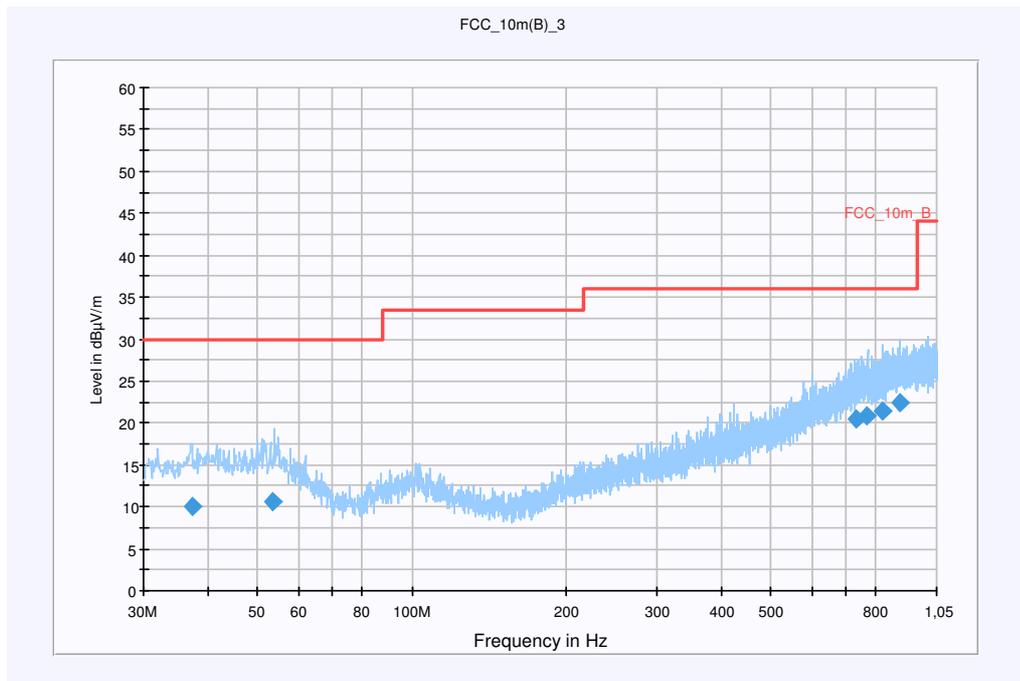


Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
37.213950	10.0	15000.000	120.000	220.0	V	163.0	13.2	20.0	30.0
53.758350	10.6	15000.000	120.000	220.0	V	52.0	13.0	19.4	30.0
729.878100	20.4	15000.000	120.000	98.0	H	70.0	23.1	15.6	36.0
770.075100	20.8	15000.000	120.000	220.0	V	312.0	23.7	15.2	36.0
825.850350	21.4	15000.000	120.000	139.0	H	323.0	24.2	14.6	36.0
892.864800	22.5	15000.000	120.000	140.0	H	146.0	25.1	13.5	36.0

Plot 2: 1 - 12 GHz vertical/horizontal (receiver)

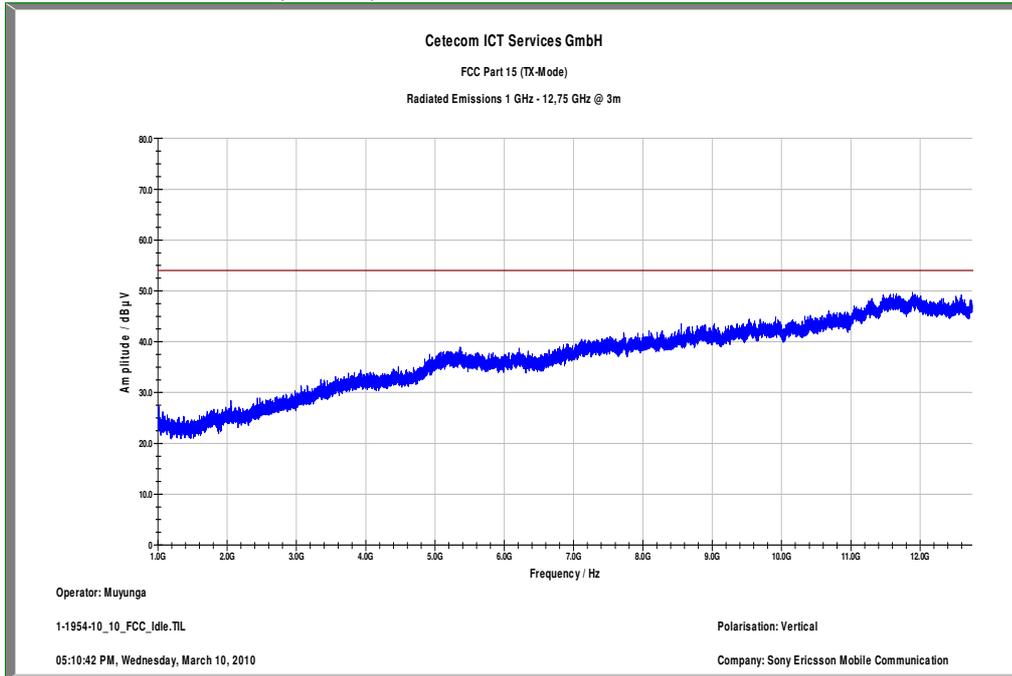

Plot 3: 12 - 25 GHz vertical/horizontal (receiver)

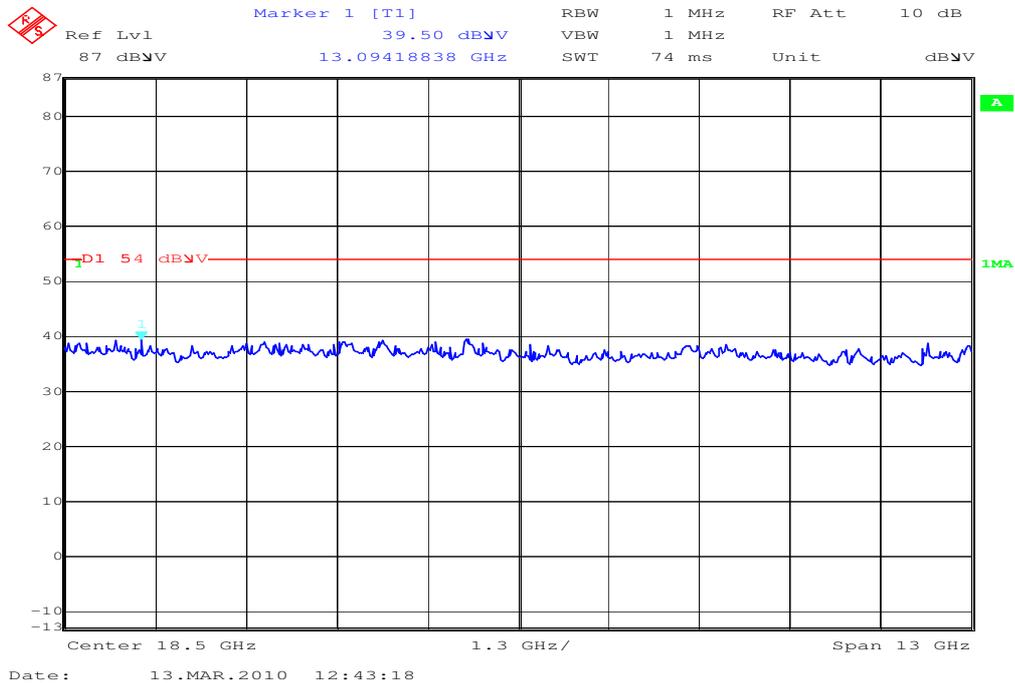

Results:

Spurious Emissions level [dB μ V/m]		
f[MHz]	Detector	Level [dB μ V/m]
No peak detected		
Measurement uncertainty		±3 dB

f < 1 GHz: RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

See above plots

Measurement distance see table

Limits: § 15.109


Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
30 - 88	100 (40 dB μ V/m)	3
88 - 216	150 (43.5 dB μ V/m)	3
216 - 960	200 (46 dB μ V/m)	3
above 960	500 (54 dB μ V/m)	3

5.17 Spurious Emissions < 30 MHz - Transmitter radiated § 15.209

Modulation: 8DPSK

Measured at 3 m distance.
 Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

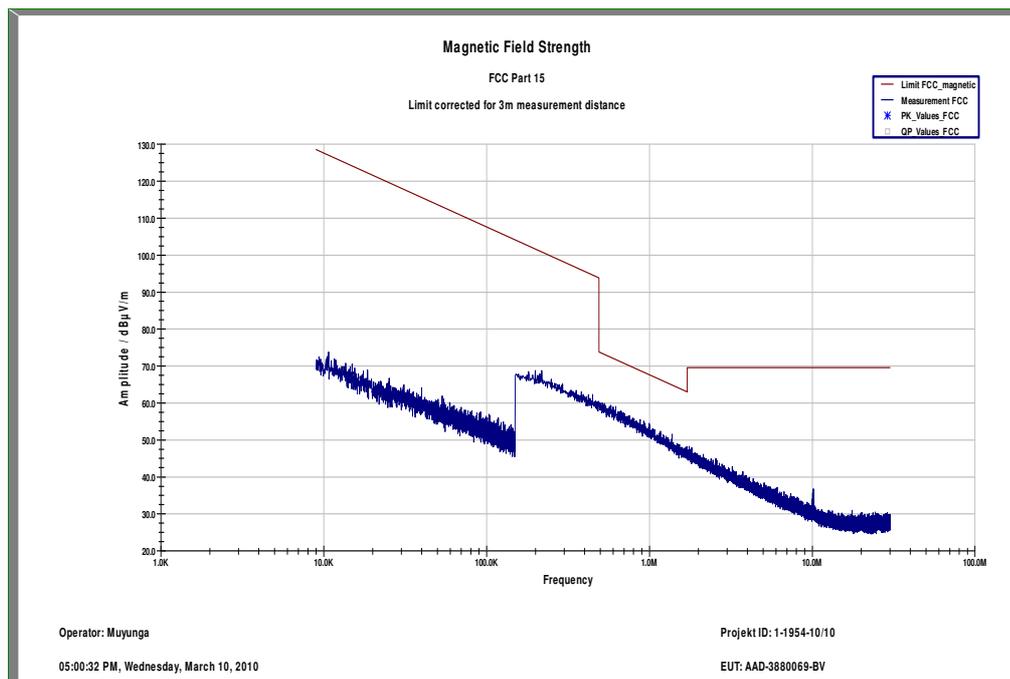


Limits:

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30 / 29.5 dBµV/m	30


5.18 Conducted Emissions <30 MHz § 15.107/207

Modulation: 8DPSK

Plot 1: Phase Line

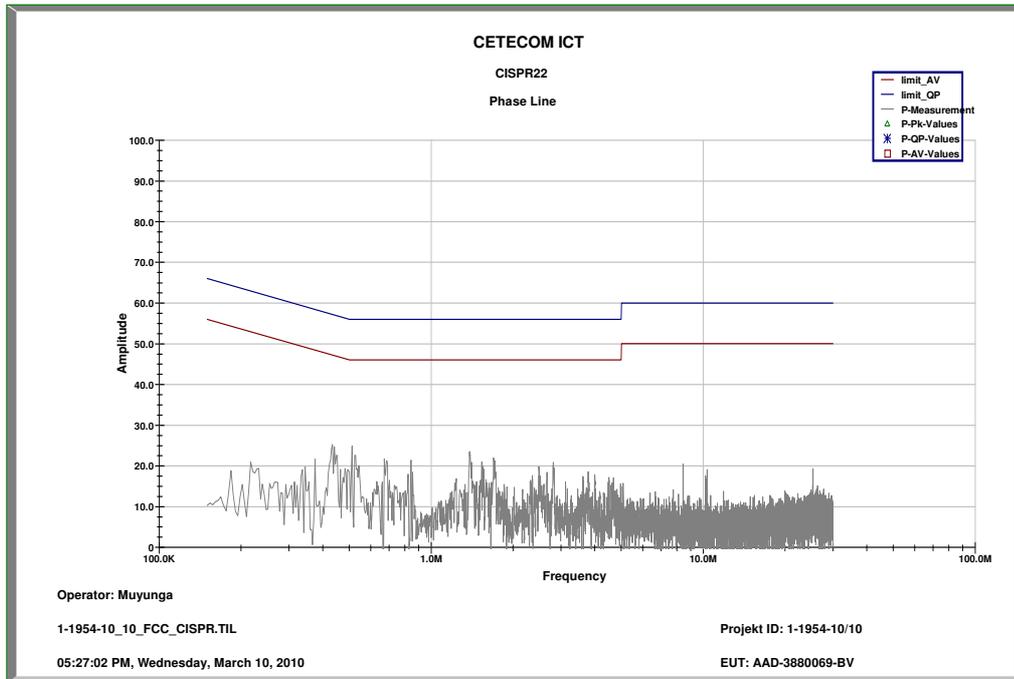

Plot 2: Neutral Line

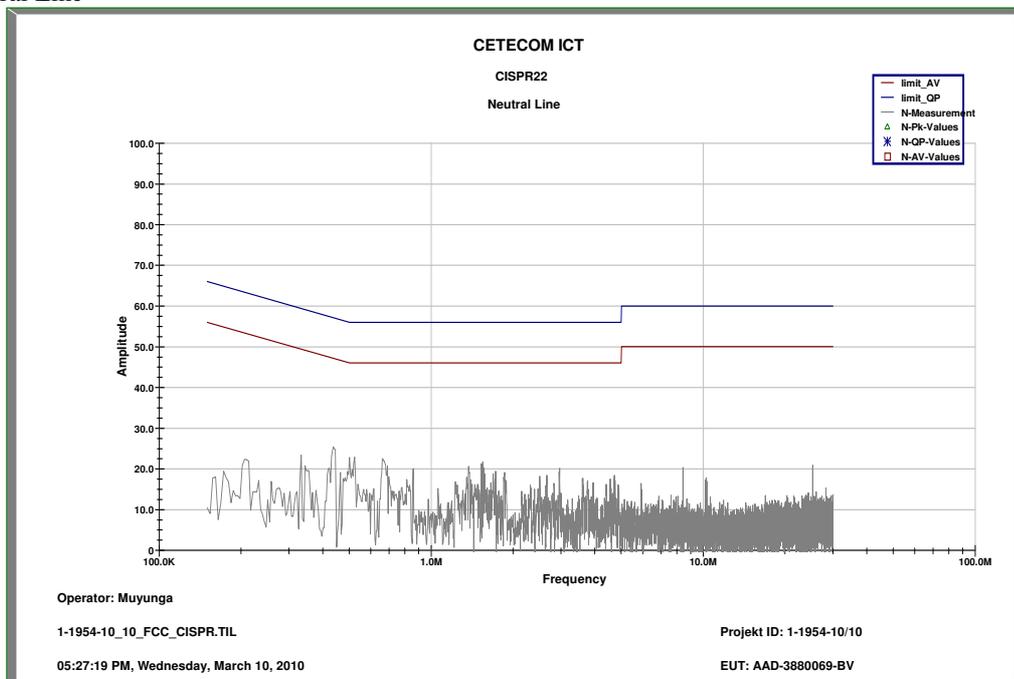

Limits:

Under normal test conditions only	See plots
-----------------------------------	-----------

6 Test equipment and ancillaries used for tests

In order to simplify the identification of the equipment used at each specific test, each item of test equipment and ancillaries are provided with an identifier or number in the equipment list below.

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

No.	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kal. Art	Last Calibration	Next Calibration
1	Netzgerät	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
2	Power Dämpfungsglied	8325	Byrd	1530	300001595			
3	Horn Antenne 1- 26.5GHz	3115	EMCO	8812-3088	300001032	vIKI!	05.03.2009	05.03.2011
4	Active Loop Antenne	6502	EMCO	2210	300001015	ne		
5	Busisolator		Kontron		300001056	g		
6	Absorberhalle		MWB	87400/02	300000996			
7	System-Rack	85900	HP I.V.	*	300000222	ne		
8	Netznachbildung Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012
9	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
10	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
11	Trenntrafo	RT5A	Grundig	9242	300001263	ne		
12	Leitungsteiler	11850C	HP Meßtechnik		300000997	ne		
13	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
14	Band Reject filter	WRCG1855/1910- 1835/1925-40/8SS	Wainwright	7	300003350	ev		
15	Band Reject filter	WRCG2400/2483- 2375/2505- 50/10SS	Wainwright	11	300003351	ev		
16	TILE-Software Emission	Quantum Change, Modell TILE- ICS/FULL	EMCO	none	300003451	ne		
17	Hochpassfilter	WHKX2.9/18G- 12SS	Wainwright	1	300003492	ev		
18	Hochpassfilter	WHK1.1/15G- 10SS	Wainwright	3	300003255	ev		
19	Hochpassfilter	WHKX7.0/18G- 8SS	Wainwright	18	300003789	ne		
20	PSA- Spektrumanalysator 3 Hz - 26,5 GHz	E4440A	Agilent Vertr. Bad Hom	MY48250080	300003812	k	05.08.2008	05.08.2010
21	Microwave Analog Signal Generator	N5183A	Agilent Vertr. Bad Hom	MY47420220	300003813	k	06.08.2008	06.08.2010
22	EMI Preselector 9kHz - 1 GHz	N9039A	Agilent Vertr. Bad Hom	MY48260003	300003825	vIKI!	19.08.2008	19.08.2010
23	TRILOG Super	VULB9163	Schwarzbeck	371	300003854	vIKI!	17.12.2008	17.12.2010

	Breitband Antenne							
24	Switch / Control Unit	3488A	HP Meßtechnik		300001691	ne		
25	Powersupply DC	NGPE 40/40	R&S	388	400000078	vIKI!	27.08.2008	27.08.2010
26	Leistungsmeßkopf	NRV-Z1	R&S	833894/011	300002681-0010	k	26.08.2008	26.08.2010
27	Hygro-Thermometer	-/-, 5-45°C, 20-100%rF	Thies Clima	-/-	400000080	k	08.04.2009	08.04.2010
28	Signalgenerator	SMIQ03B	R&S	835541/055	300002681-0001	k	25.08.2008	25.08.2011
29	Signalgenerator	SMIQ03B	R&S	835541/056	300002681-0002	k	26.08.2008	26.08.2011
30	Signalgenerator	SMP02	R&S	835133/011	300002681-0003	k	26.08.2008	26.08.2011
31	Powermeter	NRVD	R&S	835430/044	300002681-0004	k	26.08.2008	26.08.2010
32	Switch / Control Unit	SSCU	R&S	338864/003	300002681-0006	ne		
33	Attenuator-Step	RSP	R&S	834500/010	300002681-0007	k	26.08.2008	26.08.2010
34	Frequenznormal (Rubidium Frequency Standard)	MFS (Rubidium)	R&S (Datum)	002	300002681-0009	Ve	27.08.2008	27.08.2010
35	Leistungsmeßkopf	NRV-Z1	R&S	833894/012	300002681-0013	k	26.08.2008	26.08.2010
36	Directional Coupler	101020010	Krytar	70215	300002840	ev		
37	DC-Blocker	8143	Inmet Corp.	none	300002842	ne		
38	Powersplitter	6005-3	Inmet Corp.		300002841	ev		
39	Klimaschrank	VT 4002	Heraeus Voetsch	58566046820010	300003019	Ve	28.05.2009	28.05.2011
40	CBT (Bluetooth EDR Signalisierung)	CBT 1153.9000K35	R&S	100185	300003416	vIKI!	27.08.2008	27.08.2010
41	Spectrum-Analyzer	FSP30	R&S	100886	300003575	k	25.08.2008	25.08.2010
42	CBT-K57 Software-Option für CBT/CBT32	CBT-K57	R&S	101051	300003910	ne		
43	Software Bluetooth-Protokoll Tester PTW 60	Software PTW 60	R&S		300002853-0002	ne		