



# TEST REPORT

No. 2010TAR197

for

**Sony Ericsson Mobile Communications AB**

**GSM 850/900/1800/1900 quad bands and**

**UMTS FDD 1/8 mobile phone**

**Type: AAD-3880083-BV**

**FCC ID: PY7A3880083**

**IC Certification No.: 4170B-A3880083**

with

**Hardware Version: A**

**Software Version: R7BA084**

**Issued Date: Jun 11<sup>th</sup>, 2010**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of TMC Beijing.

**Test Laboratory:**

***DAR accreditation (DIN EN ISO/IEC 17025): No. DGA-PL-114/01-02***

***FCC 2.948 Listed: No.733176***

***IC O.A.T.S listed: No.6629A-1***

TMC Beijing, Telecommunication Metrology Center of Ministry of Industry and Information Technology

No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China 100083.

Tel:+86(0) 10-62304633-2675, Fax:+86(0)10-62304793 Email:welcome@emcite.com. www.emcite.com

## **CONTENTS**

<b>1. TEST LABORATORY.....</b>	<b>3</b>
1.1. TESTING LOCATION.....	3
1.2. TESTING ENVIRONMENT.....	3
1.3. PROJECT DATA.....	3
1.4. SIGNATURE.....	3
<b>2. CLIENT INFORMATION.....</b>	<b>4</b>
2.1. APPLICANT INFORMATION.....	4
2.2. MANUFACTURER INFORMATION.....	4
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>4</b>
3.1. ABOUT EUT.....	4
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	5
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	5
3.4. GENERAL DESCRIPTION.....	5
<b>4. REFERENCE DOCUMENTS .....</b>	<b>6</b>
4.1. REFERENCE DOCUMENTS FOR TESTING.....	6
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>7</b>
<b>6. SUMMARY OF TEST RESULTS.....</b>	<b>8</b>
<b>7. TEST EQUIPMENTS UTILIZED.....</b>	<b>9</b>
<b>ANNEX A: EUT PHOTOGRAPH.....</b>	<b>10</b>
<b>ANNEX B: MEASUREMENT RESULTS.....</b>	<b>18</b>
B.1 OUTPUT POWER.....	18
B.2 EMISSION LIMIT.....	23
B.3 CONDUCTED EMISSION.....	39
B.4 FREQUENCY STABILITY.....	41
B.5 OCCUPIED BANDWIDTH.....	44
B.6 EMISSION BANDWIDTH.....	56
B.7 BAND EDGE COMPLIANCE.....	68
B.8 CONDUCTED SPURIOUS EMISSION.....	75
B.9 RECEIVER RADIATION EMISSION.....	85
<b>ANNEX C: TEST LAYOUT.....</b>	<b>88</b>

## 1. Test Laboratory

### 1.1. Testing Location

Company Name: TMC Beijing, Telecommunication Metrology Center of MIIT  
Address: No 52, Huayuan beilu, Haidian District, Beijing,P.R.China  
Postal Code: 100191  
Telephone: +86-10-62304633  
Fax: +86-10-62304793

### 1.2. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%  
Air pressure 990 - 1040 hPa

The climatic requirements above are general exclude the special requirements for dedicated test environments listed in section 5 and some specific test cases in other parts of this report.

### 1.3. Project data


Testing Start Date: May 17<sup>th</sup>, 2010  
Testing End Date: Jun 11<sup>th</sup>, 2010

### 1.4. Signature




---

**Qu Pengfei**  
**(Prepared this test report)**



---

**Sun Xiangqian**  
**(Reviewed this test report)**



---

**Lu Bingsong**  
**Deputy Director of the laboratory**  
**(Approved this test report)**

## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Sony Ericsson Mobile Communications(China) Co., Ltd.  
Address /Post: 1/F, China Digital Kingdom Building, No.1 North Road,  
Wangjing, Chaoyang District, Beijing, China  
City: Beijing  
Postal Code: 100102  
Country: China  
Contact Person: Ma, Gang  
Telephone: +86-10-58656312  
Fax: +86-10-58656750

### **2.2. Manufacturer Information**

Company Name: Sony Ericsson Mobile Communications AB  
Address /Post: Nya Vattentorget, 22188 Lund, Sweden  
City: Lund  
Postal Code: 22188  
Country: Sweden  
Contact Person: Nordlof, Anders  
Telephone: +46-46-193919  
Fax: +46-46-193295

## **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

### **3.1. About EUT**

Description	GSM850/900/1800/1900, GPRS EDGE, UMTS FDD 1/8, BT EDR2.0, FM-receiver mobile phone
Model Name	AAD-3880083-BV
FCC ID	PY7A3880083
IC Certification No	4170B-A3880083
Frequency range	GSM 850: 824.2MHz-848.8MHz PCS 1900: 1850.2MHz-1909.8MHz
Antenna	Internal
Power supply	Battery or Charger (AC Adaptor)
Output power	30.66 dBm maximum ERP measured for GSM850 29.07 dBm maximum EIRP measured for PCS1900
Extreme vol. Limits	3.4VDC to 4.2VDC (nominal: 3.6VDC)
Extreme temp. Tolerance	-30°C to +50°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Telecommunication Metrology Center of MII of People's Republic of China.

### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>SN</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>
N14	BX901EU3H2	004401079888877	A	R7BA084

\*EUT ID: is used to identify the test sample in the lab internally.

### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>	<b>Revision</b>
AE1	Battery	400098ISMENX	Rev.1
17927	Travel Charger	5810W11300040	AP

AE1

Type Number	CBA-0002010
Manufacturer	Sony Ericsson
Capacitance	920mAh
Nominal Voltage	3.6V

17927

Type Number	CAA-0002020-BV
Manufacturer	Salcomp
Length of DC line	142cm

### **3.4. General Description**

Equipment Under Test (EUT) is a model of GSM 850/900/1800/1900 quad bands and UMTS FDD 1/8 mobile phone with integrated antenna. It has MP3, Camera, FM radio, USB memory and Bluetooth functions. It also supports GPRS function with multi-slots class 10 and EGPRS function with multi-slots class 10 too.

It consists of normal options: Lithium Battery and Travel Charger. Since subscribers often use MS during charging, EUT is to be test in accordance with "Base Station and ancillary equipment for fixed use" besides in accordance with "Portable and ancillary equipment for portable use".

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the Client.

## 4. Reference Documents

### 4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	V 10.1.09
FCC Part 22	PUBLIC MOBILE SERVICES	V 10.1.09
RSS-132	Cellular Telephones Employing New Technologies Operating in the Bands 824-849 MHz and 869-894 MHz	Issue 2, 2005
RSS-133	2 GHz Personal Communications Services	Issue 5, 2009
ANSI/TIA-603-C	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2004
ANSI C63.4	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2009

## 5. LABORATORY ENVIRONMENT

**Semi-anechoic chamber** (23 meters×17meters×10meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Normalised site attenuation (NSA)	< ±3.2 dB, 10 m distance, from 30 to 1000 MHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 2000 MHz

**Control room** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. =30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

**Fully-anechoic chamber 1** (6.8 meters×3.08 meters×3.53 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

**Fully-anechoic chamber 2** (6.8 meters×4.0 meters×3.67 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
Uniformity of field strength	Between 0 and 6 dB, from 80 to 3000 MHz

## 6. SUMMARY OF TEST RESULTS

### GSM 850

Items	Test Name	Clause in FCC rules	Clause in IC rules	Section in this report	Verdict
1	Output Power	22.913(a)	4.4	B.1	P
2	Emission Limit	22.917, 2.1051	4.4	B.2	P
3	Conducted Emission	15.107/207	/	B.3	P
4	Frequency Stability	22.235, 2.1055	4.3	B.4	P
5	Occupied Bandwidth	2.1049(h)(i)	4.1.1	B.5	P
6	Emission Bandwidth	22.917(b)	4.1.1	B.6	P
7	Band Edge Compliance	22.917(b)	4.5	B.7	P
8	Conducted Spurious Emission	22.917, 2.1057	4.5	B.8	P

### PCS 1900

Items	Test Name	Clause in FCC rules	Clause in IC rules	Section in this report	Verdict
1	Output Power	24.232(b)	6.2	B.1	P
2	Emission Limit	24.238, 2.1051	6.2	B.2	P
3	Conducted Emission	15.107/207	/	B.3	P
4	Frequency Stability	24.235, 2.1055	6.3	B.4	P
5	Occupied Bandwidth	2.1049(h)(i)	5.6	B.5	P
6	Emission Bandwidth	24.238(b)	5.6	B.6	P
7	Band Edge Compliance	24.238(b)	6.3	B.7	P
8	Conducted Spurious Emission	24.238, 2.1057	6.5	B.8	P

### Receiver Radiated Emission

Items	Test Name	Clause in FCC rules	Clause in IC rules	Section in this report	Verdict
1	Receiver Radiated Emissions	15.109 , 2.1053	4.6, 6.6	B.9	P

## 7. Test Equipments Utilized

NO.	NAME	TYPE	SERIES NUMBER	PRODUCER	CAL DUE DATE
1.	Test Receiver	ESCI	100344	R&S	2011-03-11
2	Test Receiver	ESI40	831564/002	R&S	2011-02-12
4	BiLog Antenna	VULB 9163	9163 301	Schwarzbeck	2011-04-29
5	BiLog Antenna	VULB 9163	9163 235	Schwarzbeck	2010-09-19
6	Signal Generator	SMP04	100070	R&S	2011-04-19
7	LISN	ESH2-Z5	829991/012	R&S	2011-04-20
8	Spectrum Analyzer	FSU26	200030	R&S	2010-06-18
9	Universal Radio Communication Tester	CMU200	100680	R&S	2010-08-23
10	Dual-Ridge Waveguide Horn Antenna	3115	9906-5827	EMCO	2010-08-14
11	Dual-Ridge Waveguide Horn Antenna	3115	9906-5831	EMCO	2011-03-01
12	Dual-Ridge Waveguide Horn Antenna	3116	2663	EMCO	2011-03-01
13	Dual-Ridge Waveguide Horn Antenna	3116	2661	EMCO	2011-03-01
14	Climatic chamber	PL-2G	343074	ESPEC	2011-05-13



Label of Travel Charger

## **ANNEX B: MEASUREMENT RESULTS**

### **B.1 OUTPUT POWER**

#### **Reference**

FCC: CFR Part 22.913(a), 24.232(b)

IC: RSS 132, Issue 2, Section 4.4. RSS 133, Issue 5, Section 6.2

#### **B.1.1 Summary**

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains peak output power and EIRP measurements for the EUT.

In all cases, output power is within the specified limits.

#### **B.1.2 Conducted**

##### **B.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

The power was measured with Rohde & Schwarz Spectrum Analyzer FSU (peak)

These measurements were done at 3 frequencies, 1850.2 MHz, 1880.0MHz and 1909.8MHz for PCS1900 band;824.4MHz, 836.6MHz and 848.8MHz for GSM850 band. (bottom, middle and top of operational frequency range).

#### **GSM850**

##### **Limit**

	Power step	Nominal Peak output power (dBm)	Tolerance (dB)	Target (dBm)
GSM	5	33dBm(2W)	± 2	33±1
GPRS	3	33dBm(2W)	± 2	33±1
EGPRS(GMSK)	6	33dBm(2W)	± 2	33±1

#### **Measurement result**

##### **GSM**

Frequency(MHz)	Power Step	Peak output power(dBm)
824.2	5	33.56
836.6	5	<b>33.61</b>
848.8	5	33.50

##### **GPRS**

Frequency(MHz)	Power Step	Peak output power(dBm)
824.2	3	33.41
836.6	3	<b>33.46</b>
848.8	3	33.35

### EGPRS

Frequency(MHz)	Power Step	Peak output power(dBm)
824.2	6	27.93
836.6	6	27.91
848.8	6	27.90

Note: Expanded measurement uncertainty for GSM850 is  $U = 0.52\text{dB}$ ,  $k=2$ .

### PCS1900

#### Limit

	Power step	Nominal Peak output power (dBm)	Tolerance (dB)	Target (dBm)
GSM	0	30dBm(1W)	$\pm 2$	$30\pm 1$
GPRS	3	30dBm(1W)	$\pm 2$	$30\pm 1$
EGPRS(GMSK)	5	30dBm(1W)	$\pm 2$	$30\pm 1$

### Measurement result

#### GSM

Frequency(MHz)	Power Step	Peak output power(dBm)
1850.2	0	30.00
1880.0	0	30.12
1909.8	0	29.95

#### GPRS

Frequency(MHz)	Power Step	Peak output power(dBm)
1850.2	3	29.85
1880.0	3	29.91
1909.8	3	29.66

#### EGPRS

Frequency(MHz)	Power Step	Peak output power(dBm)
1850.2	5	26.97
1880.0	5	27.05
1909.8	5	26.83

Note: Expanded measurement uncertainty for PCS1900 is  $U = 0.83\text{dB}$ ,  $k=2$ .

### **B.1.3 Radiated**

#### **B.1.3.1 Description**

This is the test for the maximum radiated power from the EUT.

Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage."

Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

#### **B.1.3.2 Method of Measurement**

The measurement is performed in an anechoic antenna test chamber. A spectrum analyzer is used. The peak detector of spectrum analyzer is used and the mode is positive. The bandwidth setting of spectrum analyzer is 3 MHz for both RBW and VBW.

The measurements procedures in TIA-603C-2004 are used.

1. In fully-anechoic chamber 2, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
2. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $A_{Rpl}=Pin - Pr$ . The  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss.

The measurement results are obtained as described below:

$$\text{Power(EIRP)}=P_{\text{Mea}}+A_{\text{Rpl}}$$

3. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
4. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
5. The EUT is then put into continuously transmitting mode at its maximum power level.
6. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
7. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
8. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .
9. The test system should be checked before test by a standard comb signal source. The signal source put on the position, instead of the EUT. The test result should be compared with the test result before. If the test result is similar with the initial one, then the test system can work stably.

For test layout photo, please refer to Pic.1 in Annex C.

**GSM 850-ERP 22.913(a)**

**Limits**

	Power Step	Burst Peak ERP (dBm)
GSM	5	≤38.45dBm (7W)
GPRS	3	≤38.45dBm (7W)
EGPRS	6	≤38.45dBm (7W)

**Measurement result**

**GSM**

Frequency(MHz)	Power Step	Peak ERP(dBm)	A <sub>Rpl</sub> (dB)	Correction (dB)	P <sub>Mea</sub> (dBm)	Polarization
824.2	5	28.72	45.95	2.15	-15.08	Horizontal
836.6	5	29.59	45.98	2.15	-14.24	Horizontal
848.8	5	<b>30.66</b>	45.82	2.15	-13.01	Horizontal

**GPRS**

Frequency(MHz)	Power Step	Peak ERP(dBm)	A <sub>Rpl</sub> (dB)	Correction (dB)	P <sub>Mea</sub> (dBm)	Polarization
824.2	3	25.90	45.95	2.15	-17.90	Horizontal
836.6	3	26.69	45.98	2.15	-17.14	Horizontal
848.8	3	<b>27.69</b>	45.82	2.15	-15.98	Horizontal

**EGPRS**

Frequency(MHz)	Power Step	Peak ERP(dBm)	A <sub>Rpl</sub> (dB)	Correction (dB)	P <sub>Mea</sub> (dBm)	Polarization
824.2	6	23.09	45.95	2.15	-20.71	Horizontal
836.6	6	23.86	45.98	2.15	-19.97	Horizontal
848.8	6	<b>24.54</b>	45.82	2.15	-19.13	Horizontal

Frequency: 848.8MHz

Peak ERP(dBm)= P<sub>Mea</sub>(-13.01dBm)+ A<sub>Rpl</sub>(45.82dB)-2.15dB= 30.66 dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

Note: Expanded measurement uncertainty for PCS1900 is  $U = 0.96\text{dB}$ ,  $k=2$ .

**PCS1900-EIRP 24.232(b)**

**Limits**

	Power Step	Burst Peak EIRP (dBm)
GSM	0	≤33dBm (2W)
GPRS	3	≤33dBm (2W)
EGPRS	5	≤33dBm (2W)

**Measurement result**

**GSM**

Frequency(MHz)	Power Step	Peak EIRP(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Polarization
1850.2	0	27.43	47.11	-19.68	Vertical
1880.0	0	28.71	47.37	-18.66	Vertical
1909.8	0	<b>29.07</b>	47.54	-18.47	Vertical

**GPRS**

Frequency(MHz)	Power Step	Peak EIRP(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Polarization
1850.2	3	24.62	47.11	-22.49	Vertical
1880.0	3	25.84	47.37	-21.53	Vertical
1909.8	3	<b>26.32</b>	47.54	-21.22	Vertical

**EGPRS**

Frequency(MHz)	Power Step	Peak EIRP(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Polarization
1850.2	5	23.65	47.11	-23.46	Vertical
1880.0	5	24.81	47.37	-22.56	Vertical
1909.8	5	<b>24.81</b>	47.54	-22.73	Vertical

Frequency: 1909.8MHz

Peak EIRP(dBm)= P<sub>Mea</sub>(-18.47dBm)+ A<sub>Rpl</sub>(47.54dB) = 29.07 dBm

**ANALYZER SETTINGS: RBW = VBW = 3MHz**

Note: Expanded measurement uncertainty for PCS1900 is  $U = 1.07\text{dB}$ ,  $k=2$ .

## **B.2 EMISSION LIMIT**

### **Reference**

FCC: CFR Part 22.917(a), 2.1051, 24.238(b)

IC: RSS 132, Issue 2, Section 4.4. RSS 133, Issue 5, Section 6.2

### **B.2.1 Measurement Method**

The measurements procedures in TIA-603C-2004 are used. This measurement is carried out in both fully-anechoic chamber 1 and fully-anechoic chamber 2.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier that can be as high as 1910 MHz. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of the PCS1900 band, GSM850 band.

### **The procedure of radiated spurious emissions is as follows:**

#### a) Pre-calibration

With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  
 $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$

The SA is calibrated using following setup.

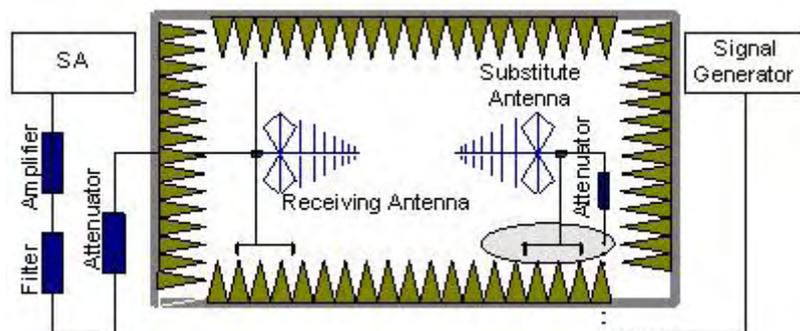


#### b) System check

The test system was checked before test by a standard comb signal source. The signal source put on the position, instead of the EUT. The test result should be compared with the test result before. If the test result is similar with the initial one, then the test system can work stably.

#### c) EUT test

EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

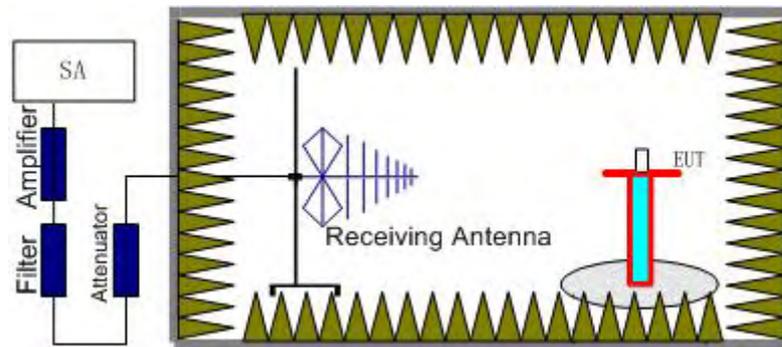

### B.2.2 Measurement Limit

Sec. 24.238 Emission Limits.

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### B.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz), GSM850 band (824.2MHz, 836.6MHz, 848.8MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900, GSM850 into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss.

The measurement results are obtained as described below:

$$\text{Power} = P_{\text{Mea}} + A_{\text{Rpl}}$$

**GSM Mode Channel 128/824.2MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1293.4	-58.57	0.52	-59.09	-13	Horizontal
2472.6	-39.19	3.10	-42.29	-13	Vertical
4120.8	-49.16	4.85	-54.01	-13	Horizontal
8024.8	-47.83	12.41	-60.24	-13	Horizontal
9924.1	-45.30	14.76	-60.06	-13	Vertical

**GSM Mode Channel 190/836.6MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1294.7	-57.91	0.39	-58.30	-13	Vertical
1673.1	-56.01	0.23	-56.24	-13	Vertical
2509.8	-46.00	3.21	-49.21	-13	Vertical
4183.2	-50.34	5.04	-55.38	-13	Horizontal
7933.6	-47.50	11.95	-59.45	-13	Horizontal
9777.1	-45.44	14.93	-60.37	-13	Vertical

**GSM Mode Channel 251/848.8MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1349.85	-58.47	0.80	-59.27	-13	Horizontal
1697.7	-55.85	0.18	-56.03	-13	Horizontal
2545.5	-47.02	3.32	-50.34	-13	Vertical
8054.2	-47.81	12.43	-60.24	-13	Horizontal
9778.0	-45.12	14.93	-60.05	-13	Vertical

**GSM Mode Channel 512/1850.2MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
2000.8	-47.17	12.71	-59.88	-13	Horizontal
8068.4	-46.03	14.50	-60.53	-13	Horizontal
17543.2	-29.83	32.85	-62.68	-13	Horizontal

**GSM Mode Channel 661/1880.0MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
2001.1	-46.89	13.13	-60.02	-13	Vertical
3760.4	-47.87	6.86	-54.73	-13	Horizontal
8075.3	-45.52	14.48	-60.00	-13	Horizontal
9689.3	-44.84	15.34	-60.18	-13	Vertical
17516.4	-30.19	32.38	-62.57	-13	Horizontal

**GSM Mode Channel 810/1909.8MHz**

Frequency(MHz)	Power(dBm)	A <sub>Rpl</sub> (dB)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
2003.7	-46.85	12.57	-59.42	-13	Vertical
3819.0	-48.60	6.75	-55.35	-13	Horizontal
5410.4	-48.33	9.01	-57.34	-13	Vertical
8077.4	-45.84	14.47	-60.31	-13	Horizontal
17532.0	-30.52	32.65	-63.17	-13	Horizontal


Note: Expanded measurement uncertainty for this test item is  $U = 4.21\text{dB}$ ,  $k=2$ .

**GSM 850**

**B.2.3.1 RADIATED SPURIOUS EMISSIONS-Channel 128: 30MHz –1GHz**

Radiated spurious emission limit :-13dBm.

**NOTE: peak above the limit line is the Carrier frequency @ ch-128**

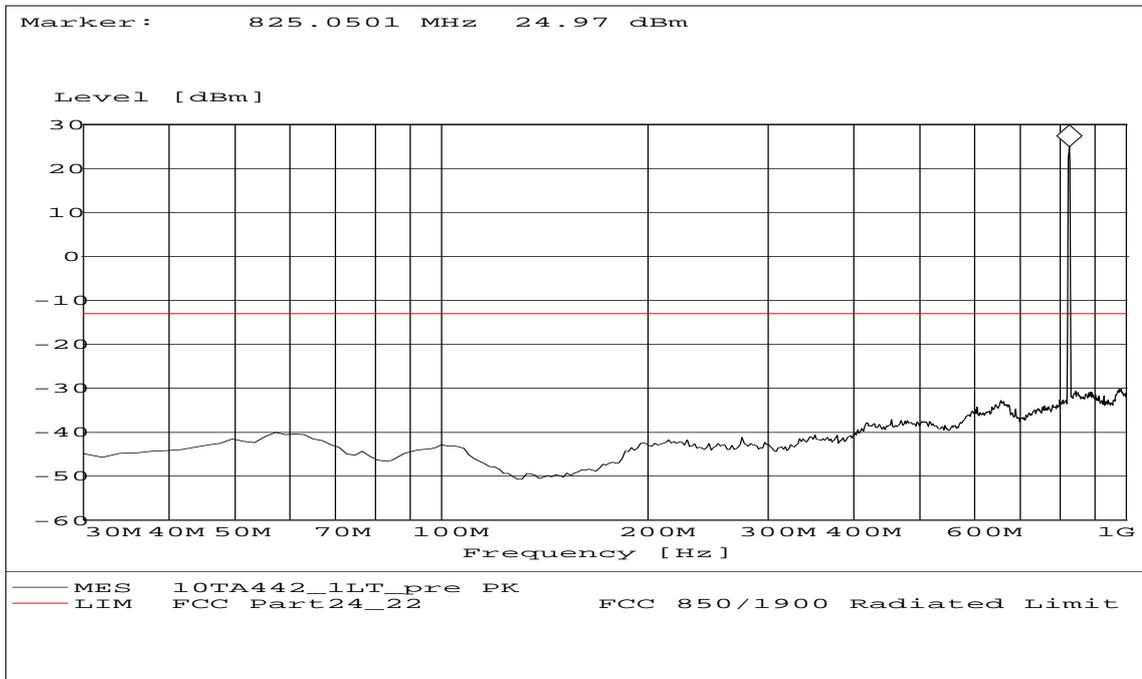


RBW / VBW 1MHz

**B.2.3.2 RADIATED SPURIOUS EMISSIONS-Channel 190: 30MHz – 1GHz**

Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-190

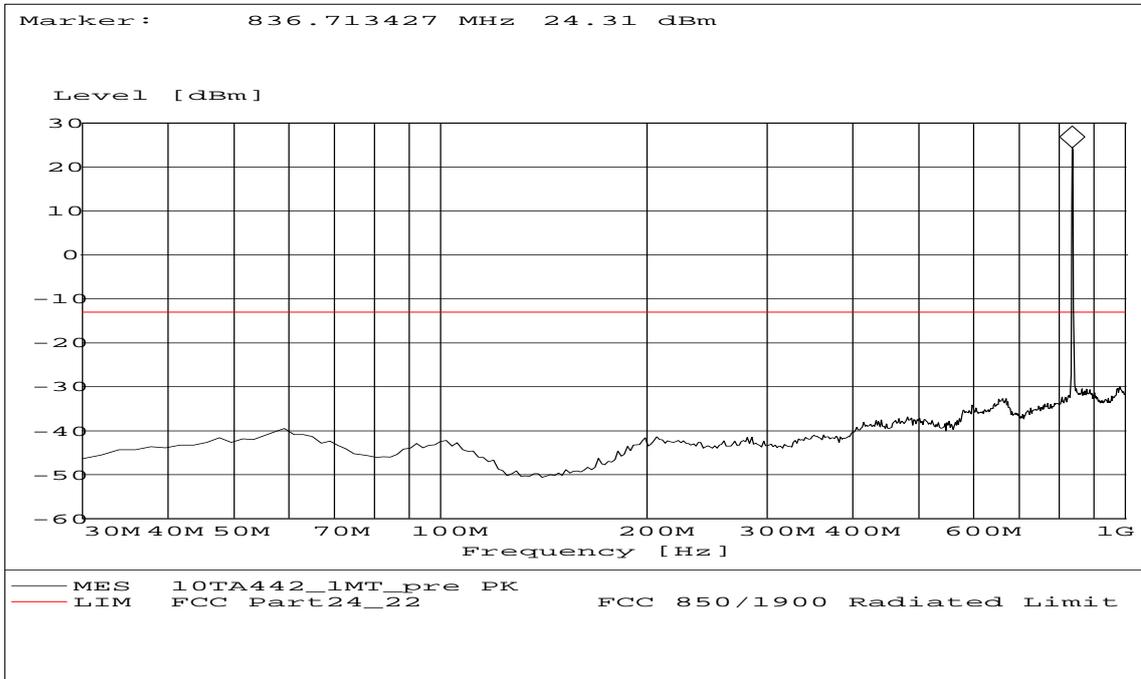


RBW / VBW 1MHz

**B.2.3.3 RADIATED SPURIOUS EMISSIONS-Channel 251: 30MHz – 1GHz**


Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-251

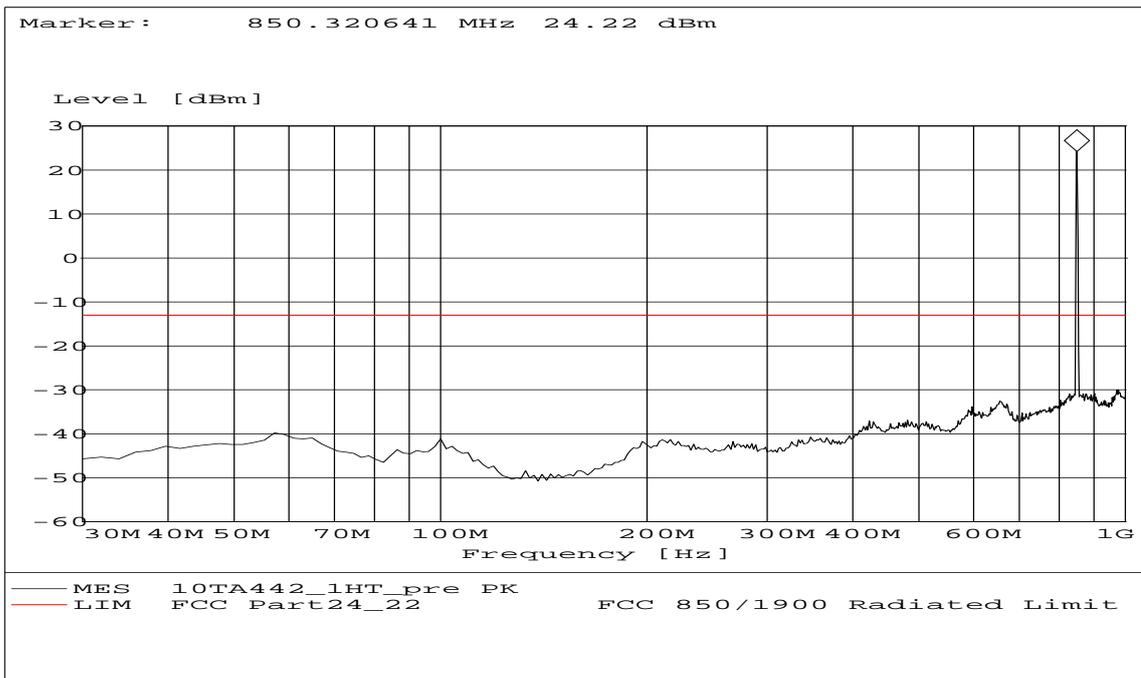


RBW / VBW 1MHz

**B.2.3.4 RADIATED SPURIOUS EMISSIONS-Channel 128: 1GHz – 10GHz**  
Radiated spurious emission limit :-13dBm.

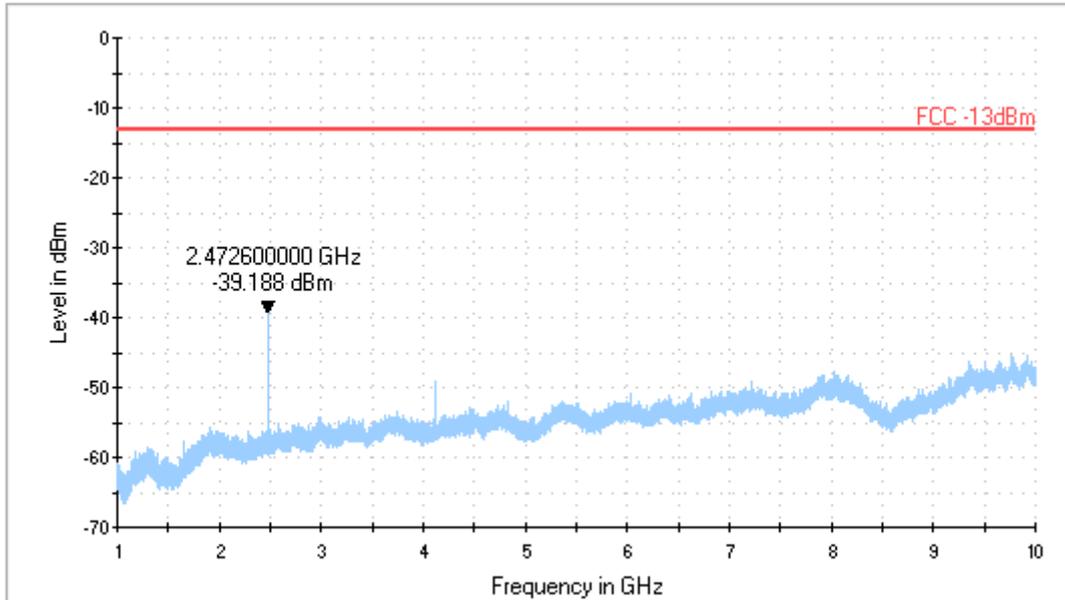

RBW / VBW 1 MHz


**B.2.3.5 RADIATED SPURIOUS EMISSIONS-Channel 190: 1GHz – 10GHz**  
Radiated spurious emission limit :-13dBm.

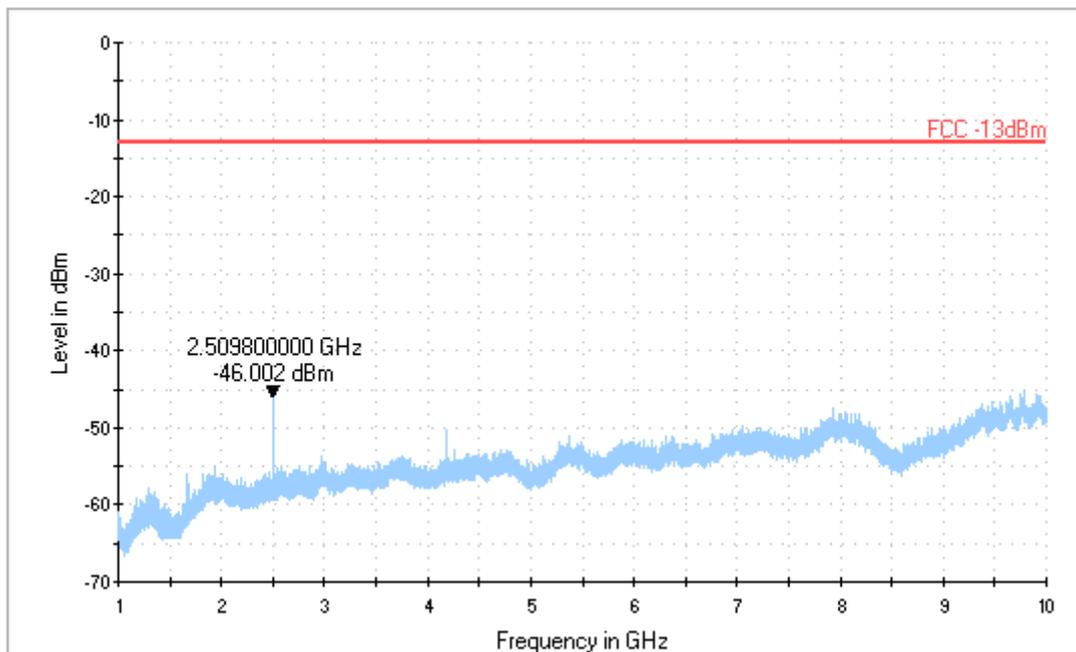

RBW / VBW 1 MHz

**B.2.3.6 RADIATED SPURIOUS EMISSIONS-Channel 251: 1GHz – 10GHz**


Radiated spurious emission limit :-13dBm.

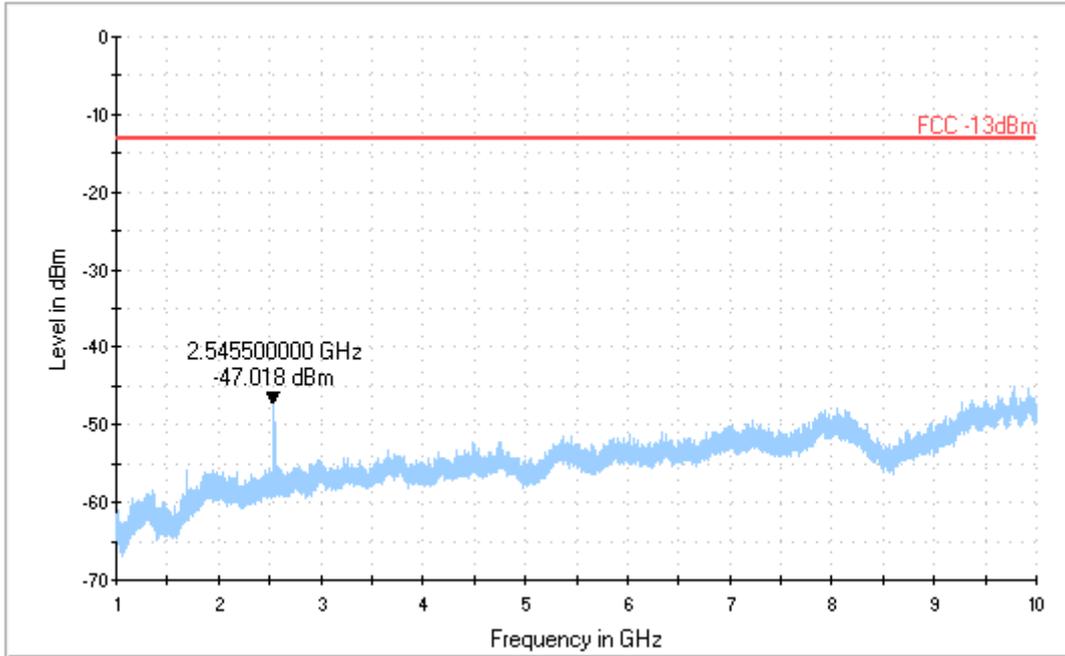

RBW / VBW 1 MHz


**B.2.3.7 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 1GHz**

Radiated spurious emission limit :-13dBm.

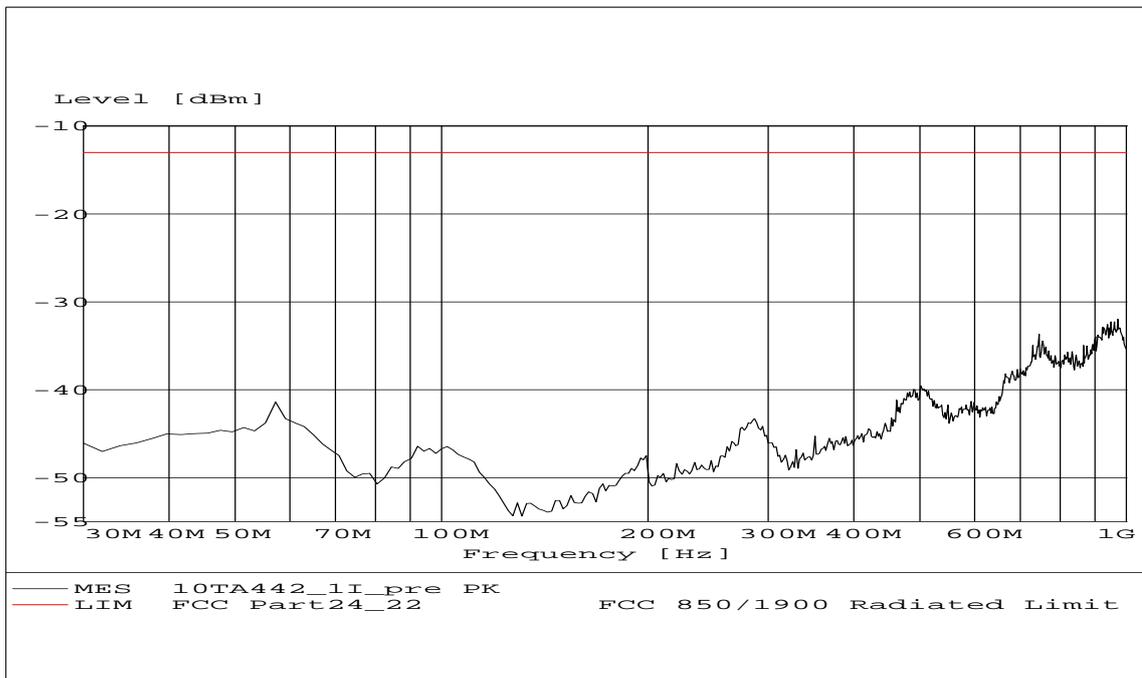


RBW / VBW 1MHz

**B.2.3.8 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 1GHz – 10GHz**  
Radiated spurious emission limit :-13dBm.

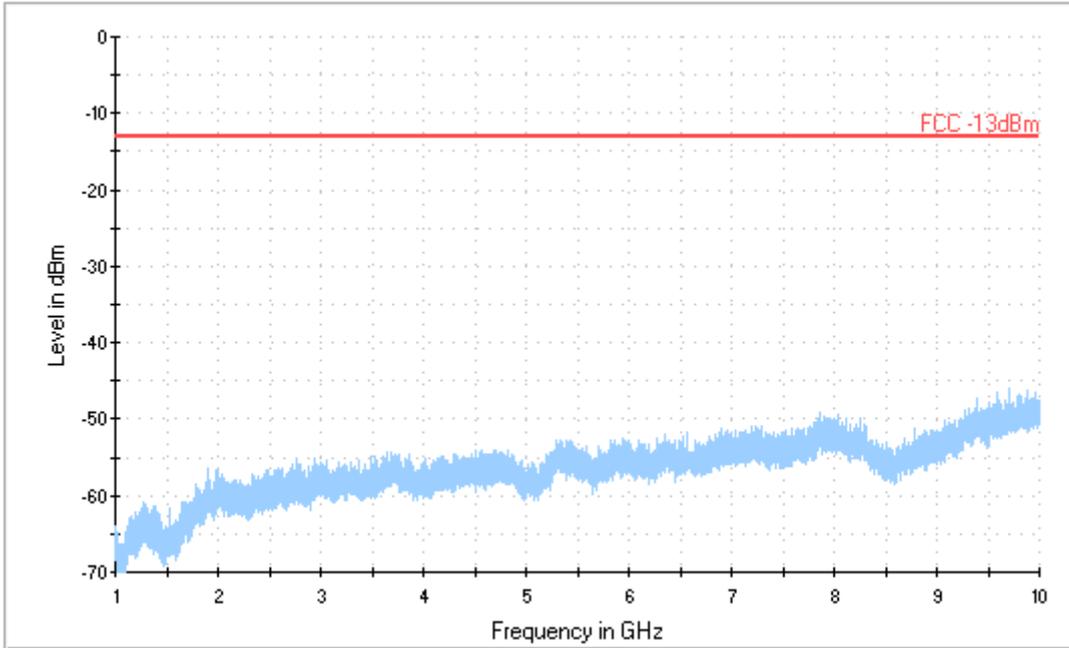


RBW / VBW 1 MHz

**B.2.3.9 RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9 kHz – 30 MHz (Valid for 3 channels)**

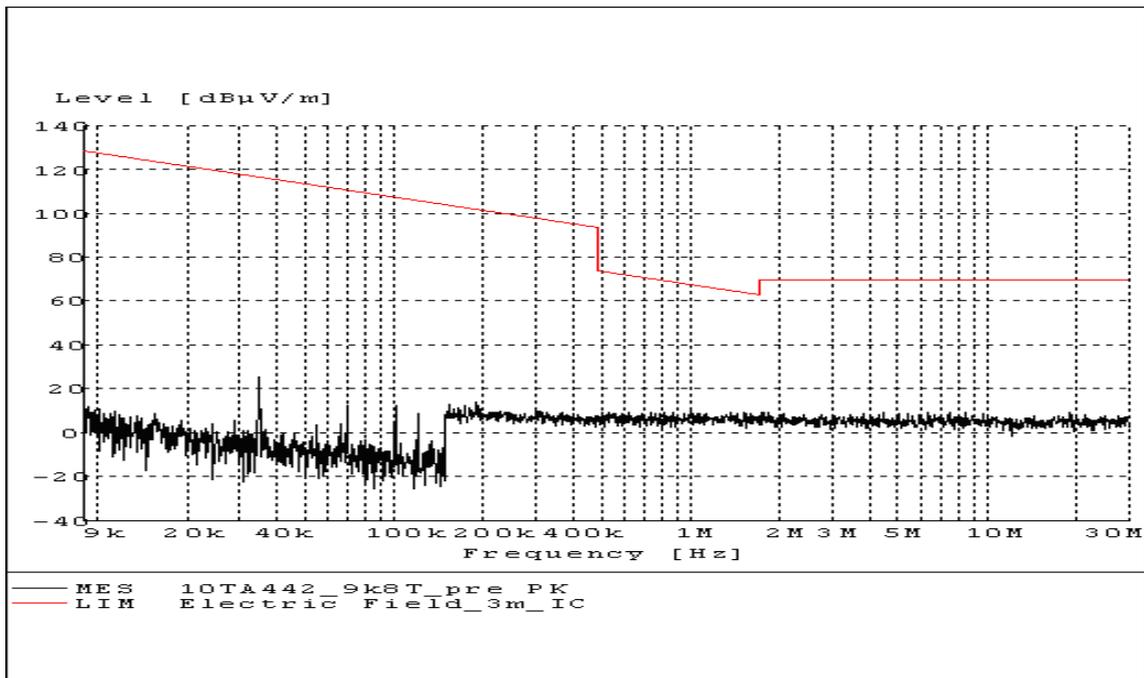

**B.2.3.10 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 9 kHz – 30 MHz (Valid for 3 channels)**

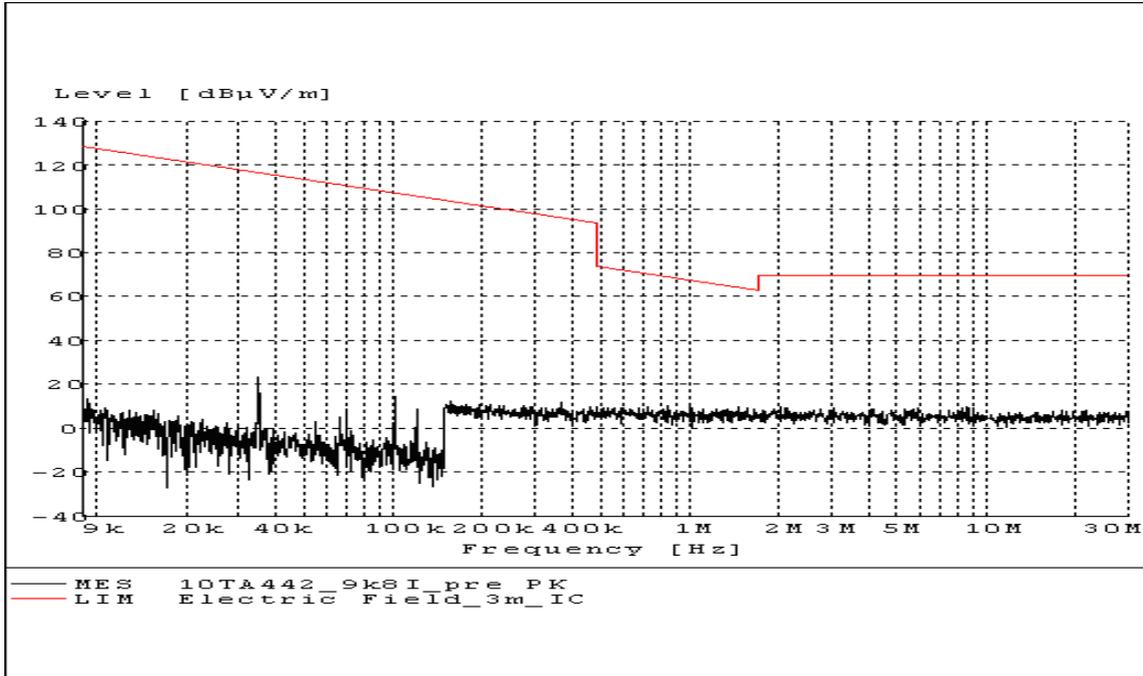


**PCS 1900**

**B.2.3.11 RADIATED SPURIOUS EMISSIONS-Channel 512: 30MHz – 2GHz**

Radiated spurious emission limit :-13dBm.

**NOTE: peak above the limit line is the Carrier frequency @ ch-512**

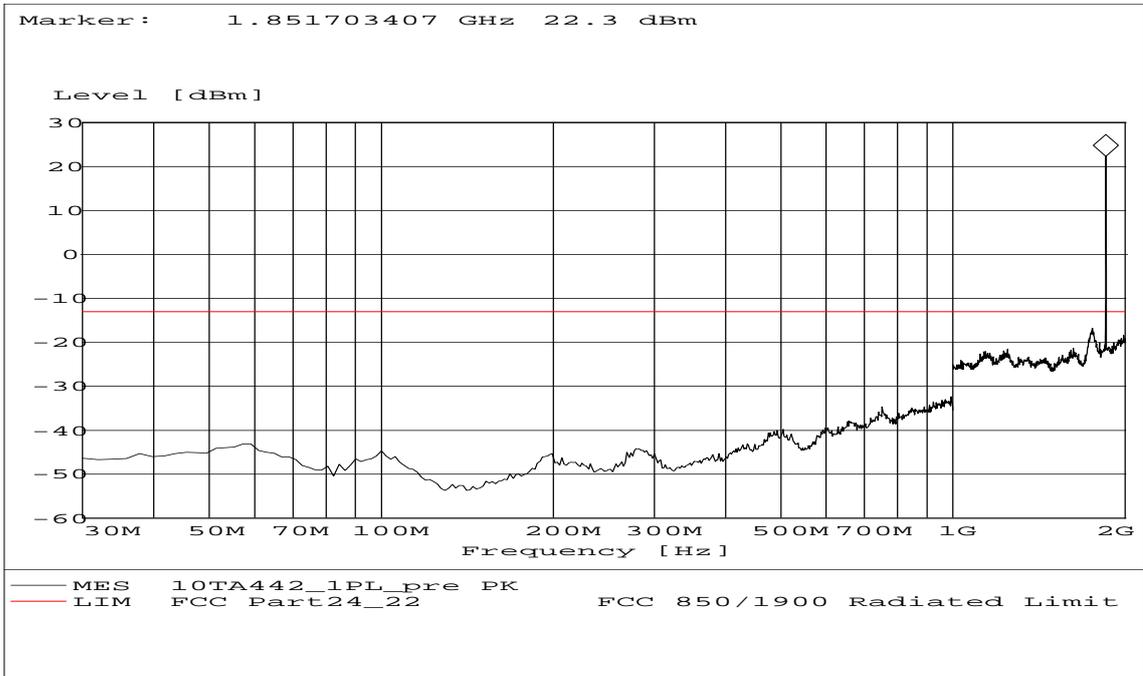


RBW / VBW 1MHz

**B.2.3.12 RADIATED SPURIOUS EMISSIONS-Channel 661: 30MHz – 2GHz**

Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-661

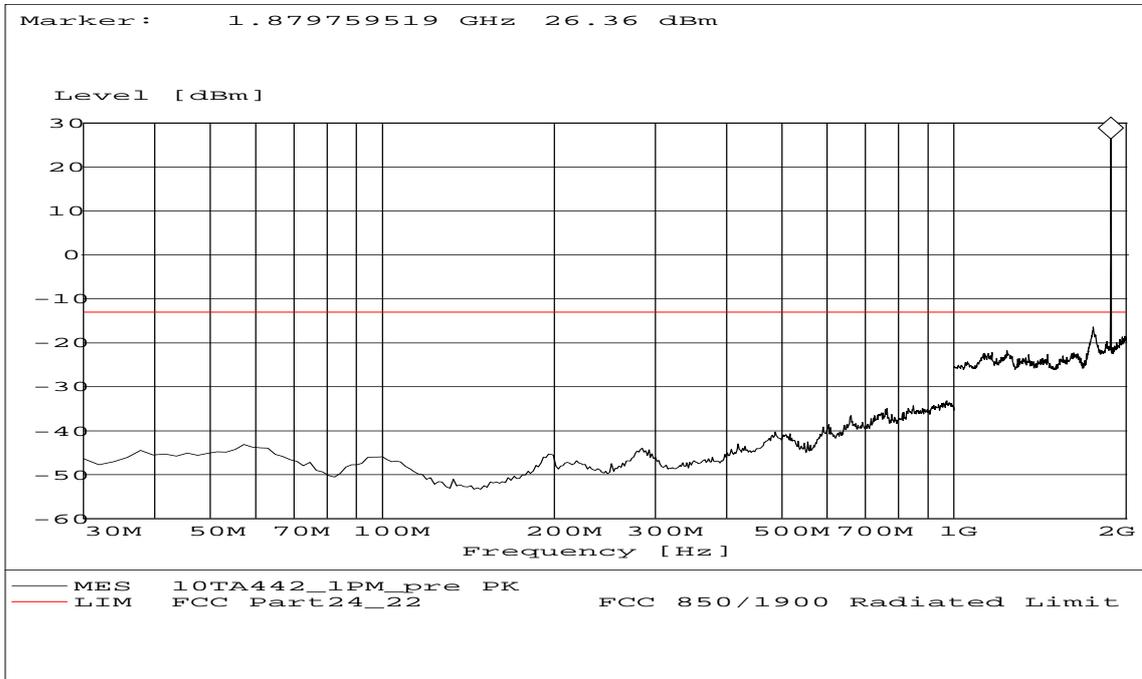


RBW / VBW 1MHz

**B.2.3.13 RADIATED SPURIOUS EMISSIONS-Channel 810: 30MHz – 2GHz**


Radiated spurious emission limit :-13dBm.

NOTE: peak above the limit line is the Carrier frequency @ ch-810

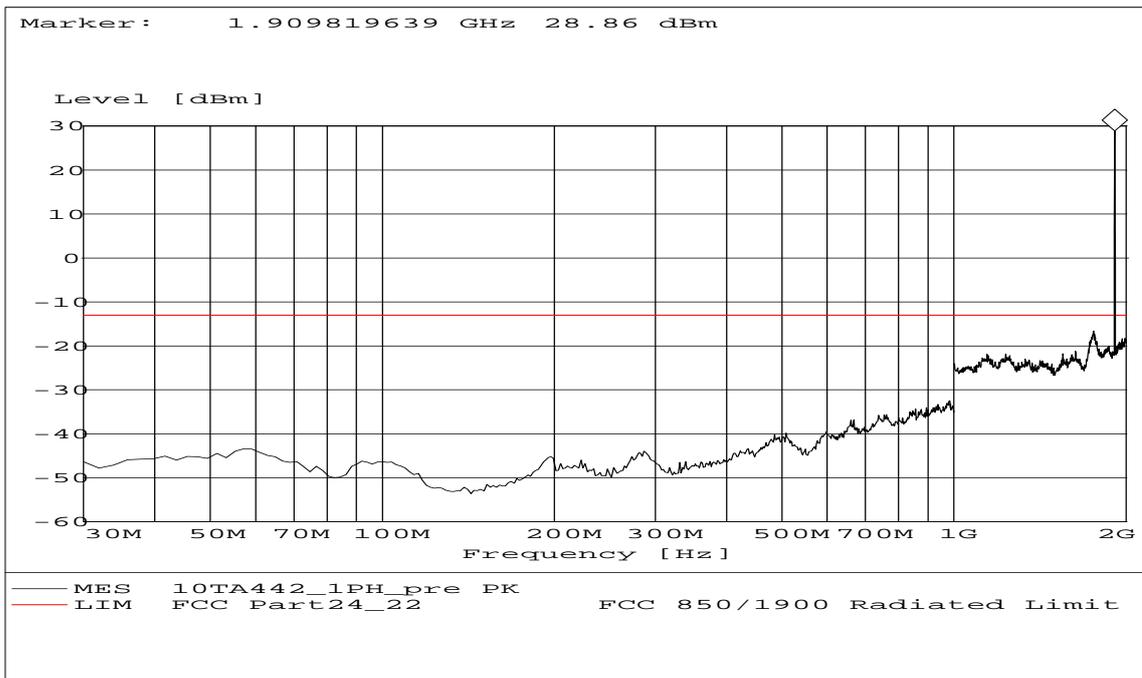


RBW / VBW 1MHz

**B.2.3.14 RADIATED SPURIOUS EMISSIONS-Channel 512: 2GHz – 18GHz**  
Radiated spurious emission limit :-13dBm.

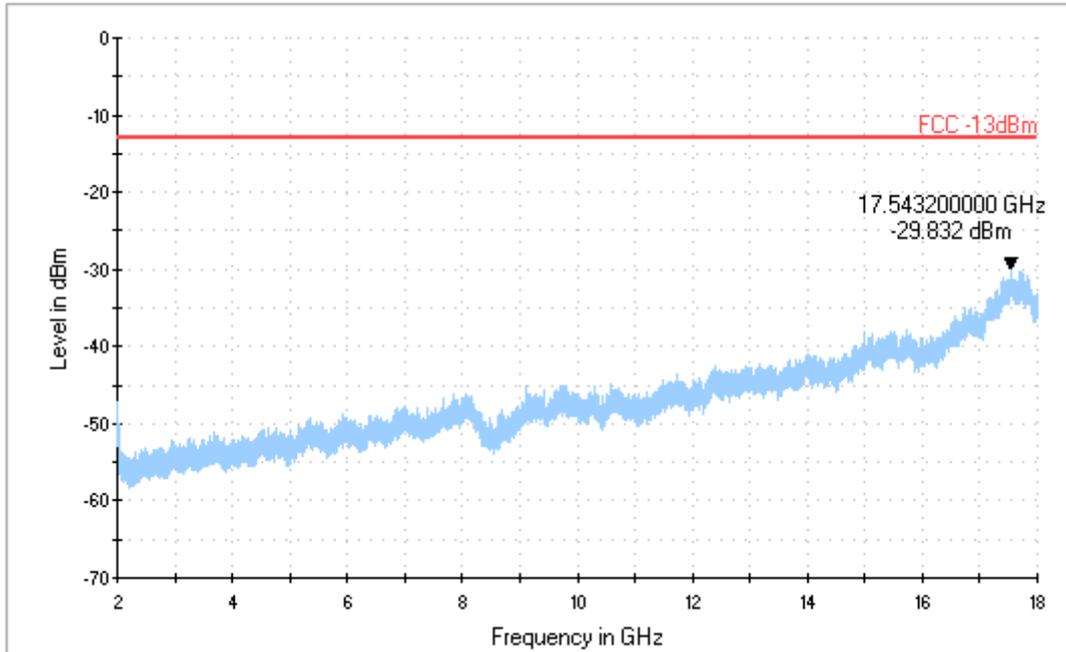

RBW / VBW 1 MHz


**B.2.3.15 RADIATED SPURIOUS EMISSIONS-Channel 661: 2GHz – 18GHz**  
Radiated spurious emission limit :-13dBm.

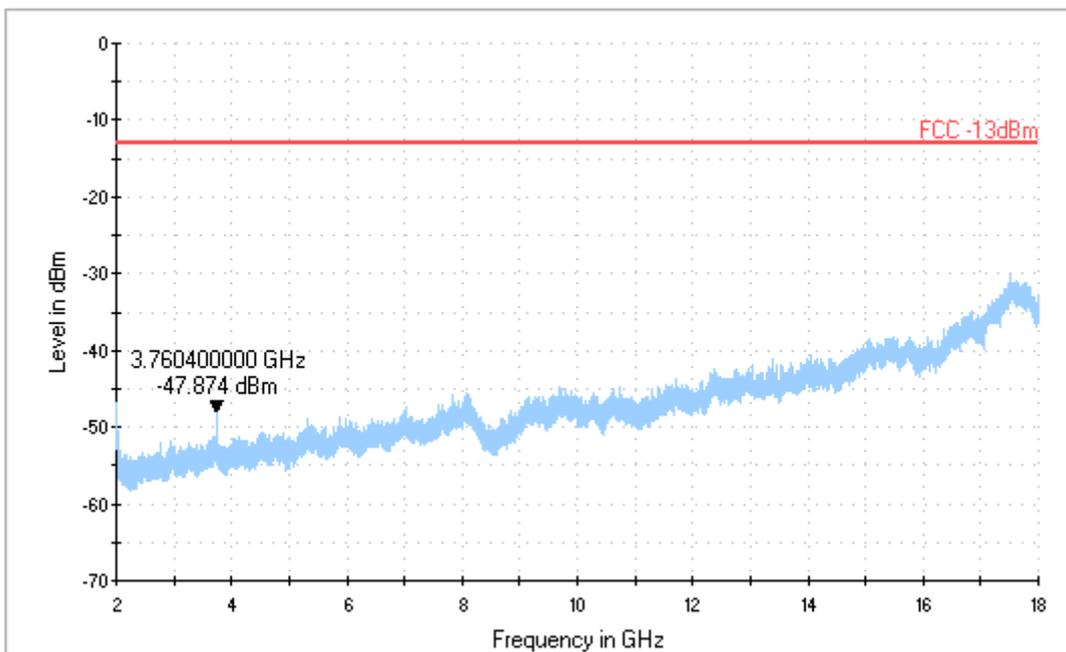

RBW / VBW 1 MHz

**B.2.3.16 RADIATED SPURIOUS EMISSIONS-Channel 810: 2GHz – 18GHz**

Radiated spurious emission limit :-13dBm.

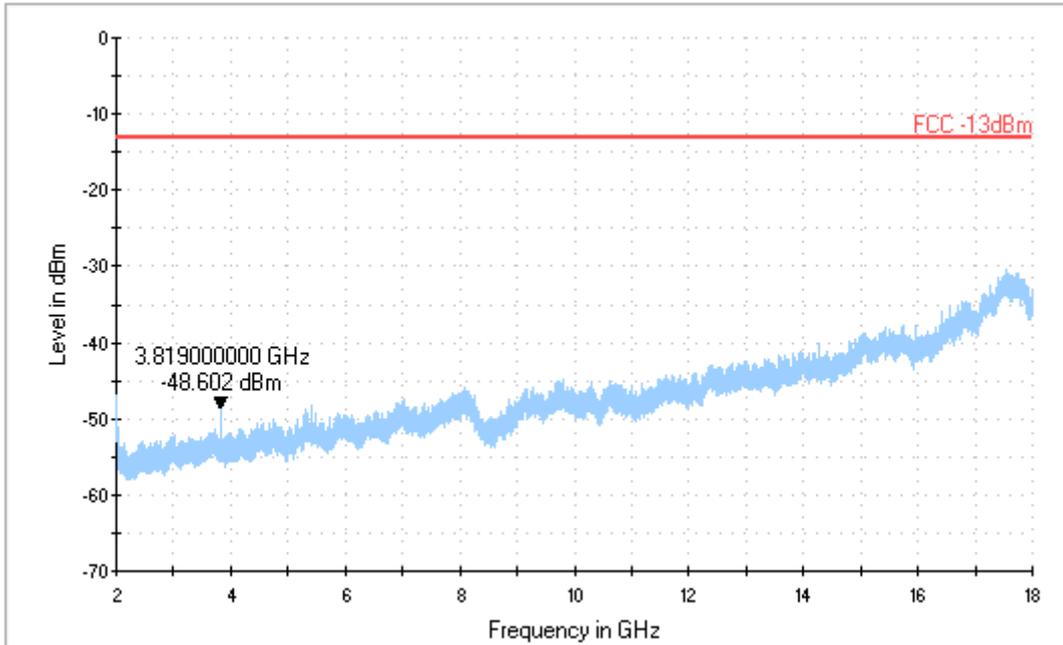


RBW / VBW 1 MHz


**B.2.3.17 Radiated spurious emission (18GHz-20GHz)**

Radiated spurious emission limit :-13dBm.

Note: This plot is valid for low, mid & high channels. It is same as the noise floor.

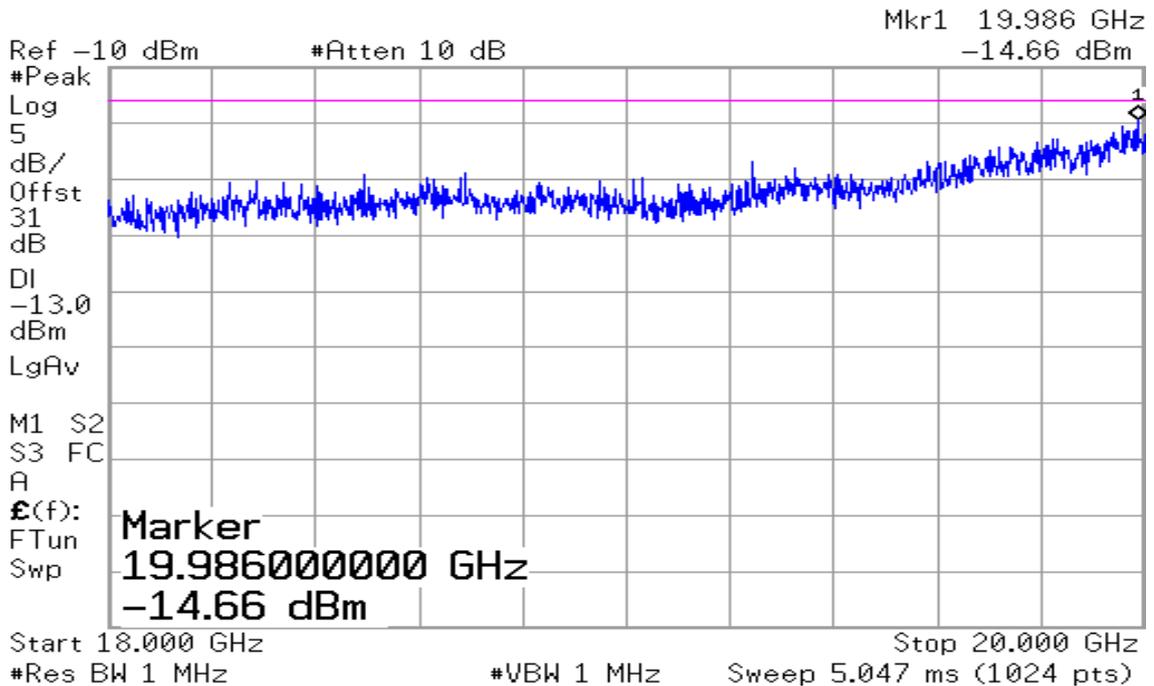


**B.2.3.18 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 30MHz – 2GHz**  
Radiated spurious emission limit :-13dBm.

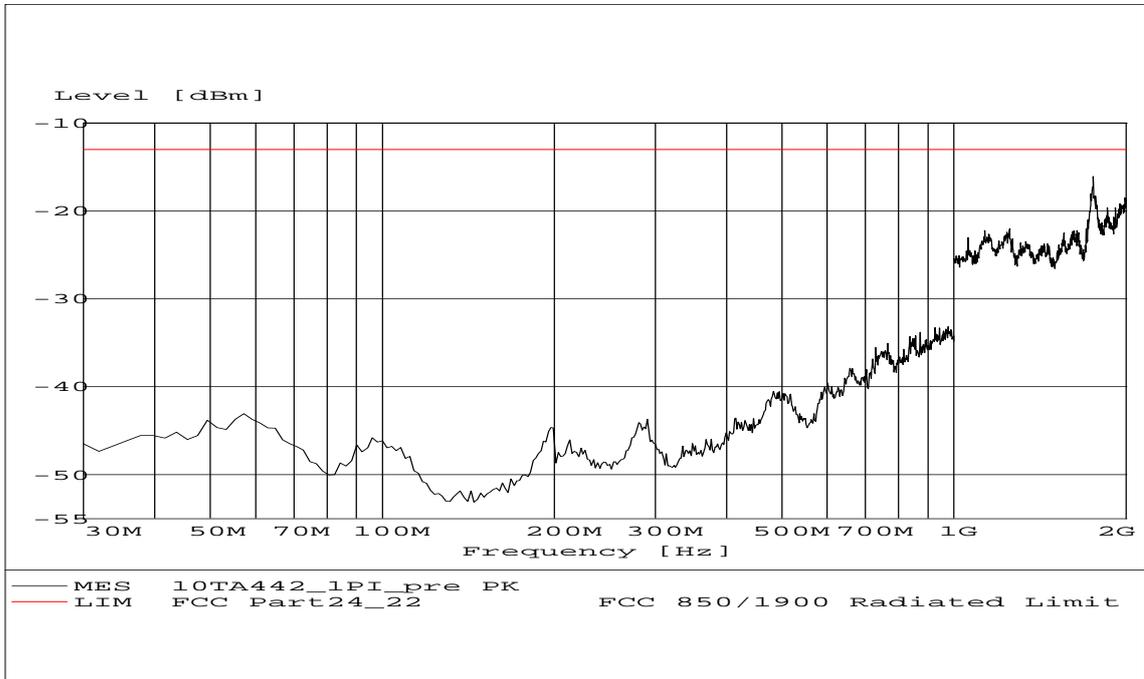

RBW / VBW 1MHz

**B.2.3.19 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 2GHz – 18GHz**  
Radiated spurious emission limit :-13dBm.

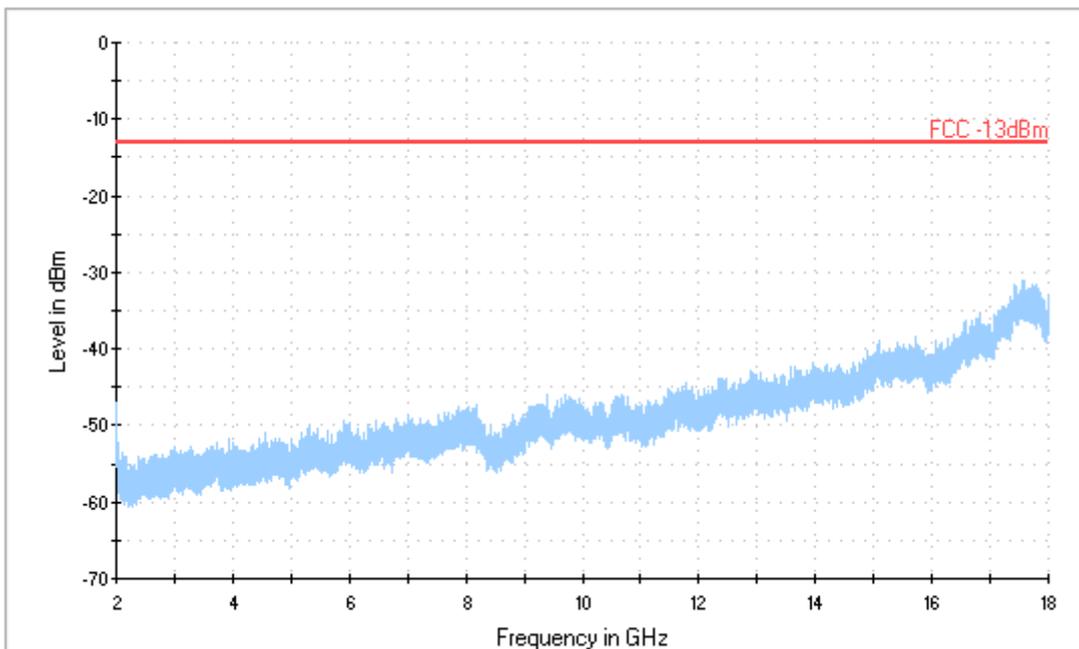


RBW / VBW 1 MHz


**B.2.3.20 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 18GHz – 20GHz**

Radiated spurious emission limit :-13dBm.


Note: It is same as the noise floor.

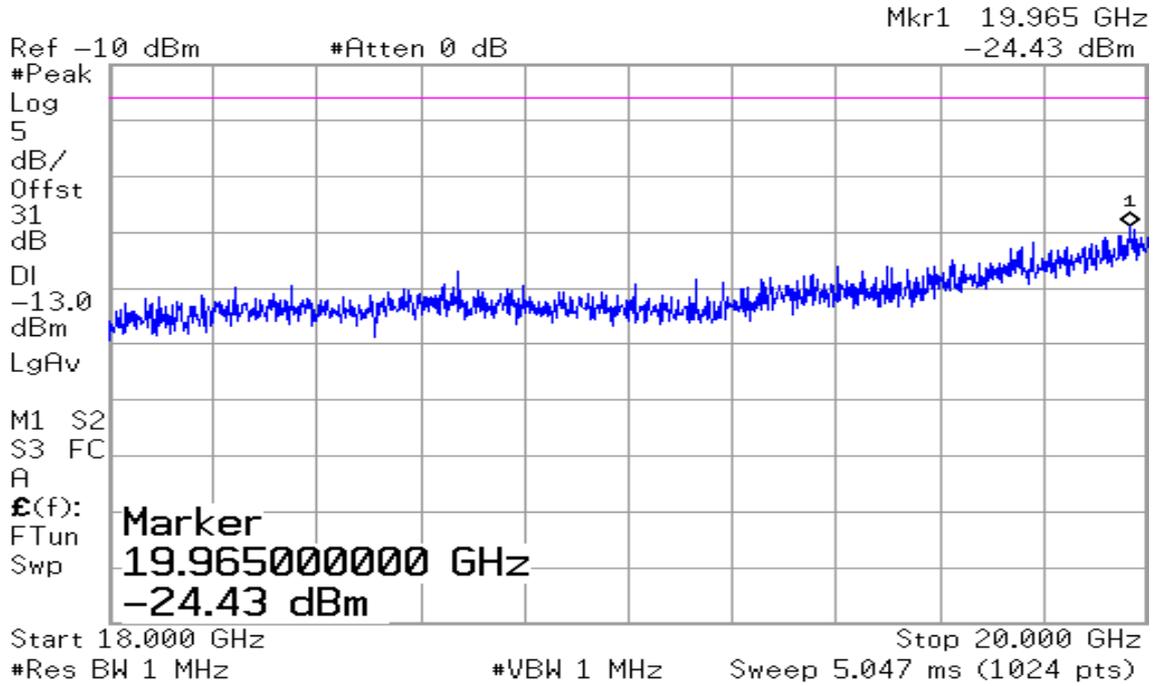

**B.2.3.21 RADIATED SPURIOUS EMISSIONS-EUT in Traffic Mode: 9 kHz – 30 MHz (Valid for 3 channels)**

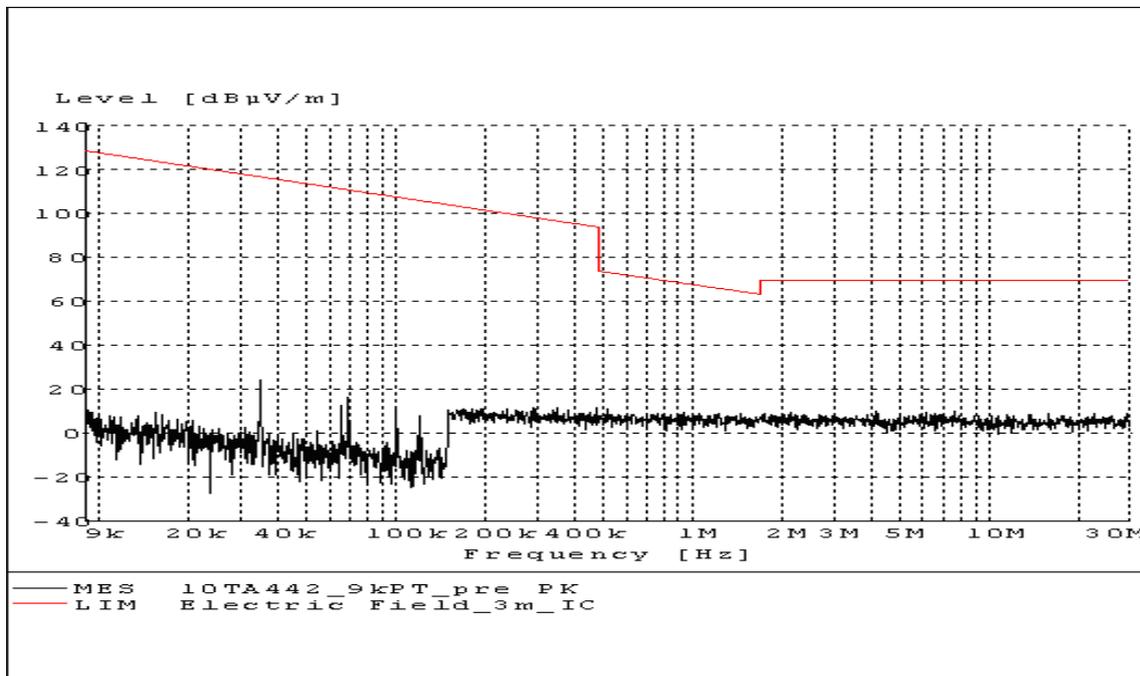

**B.2.3.22 RADIATED SPURIOUS EMISSIONS-EUT in Idle Mode: 9 kHz – 30 MHz(Valid for 3 channels)**

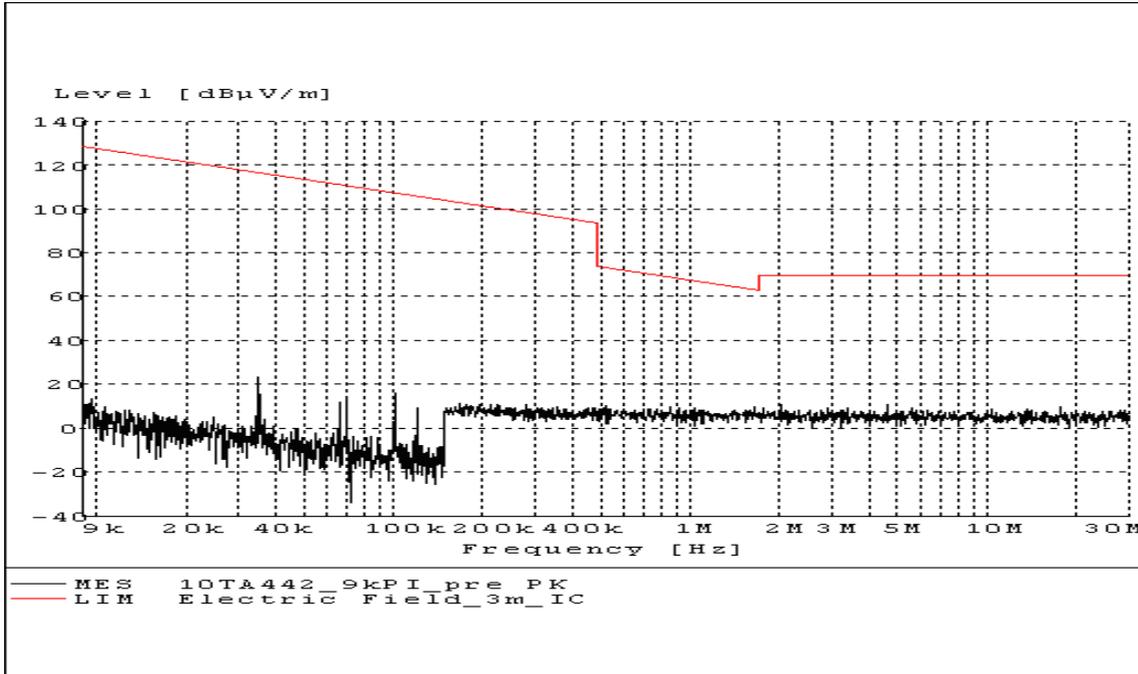

### **B.3 CONDUCTED EMISSION**

#### **Reference**

FCC: CFR Part 15.107/207

The measurement procedure in ANSI C63.4-2003 is used. Conducted Emission is measured with travel charger. For test layout photo, please refer to Pic.2 in Annex C.


#### **B.3.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi -Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

#### **B.3.2 Measurement result**

##### **GSM850MHz**

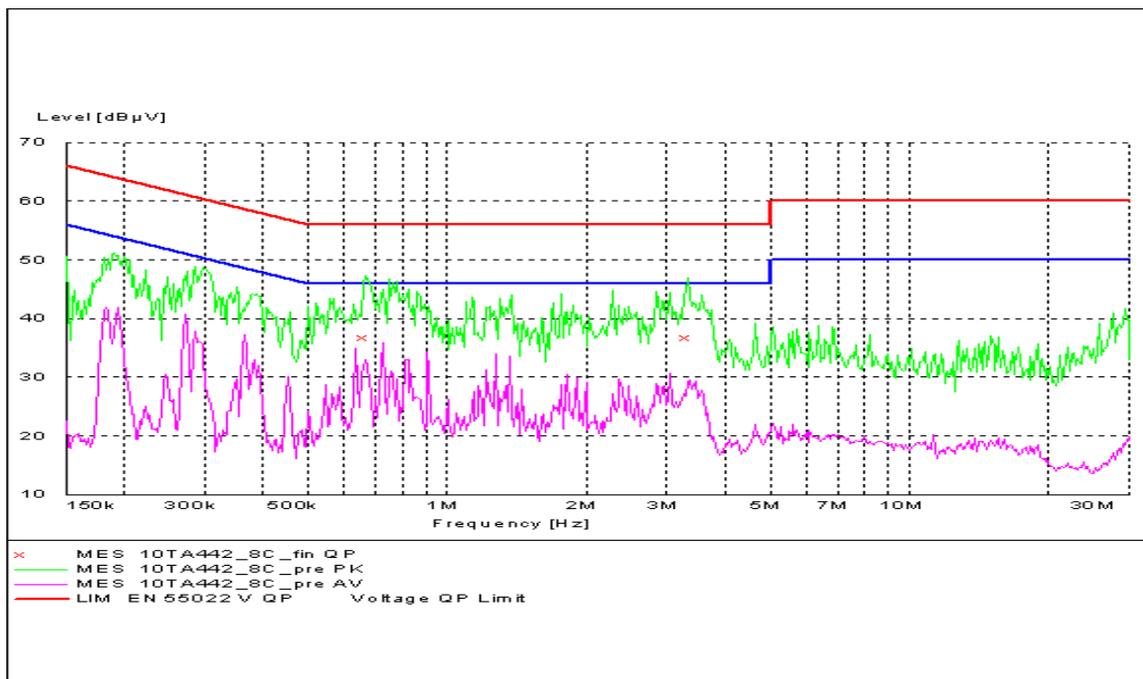


IF bandwidth 9 kHz

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

#### **MEASUREMENT RESULT: "10TA442\_8C\_fin QP"**

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Line	PE
0.667263	36.70	10.1	56	19.3	L1	FLO
3.322156	36.70	10.1	56	19.3	L1	FLO

PCS 1900MHz

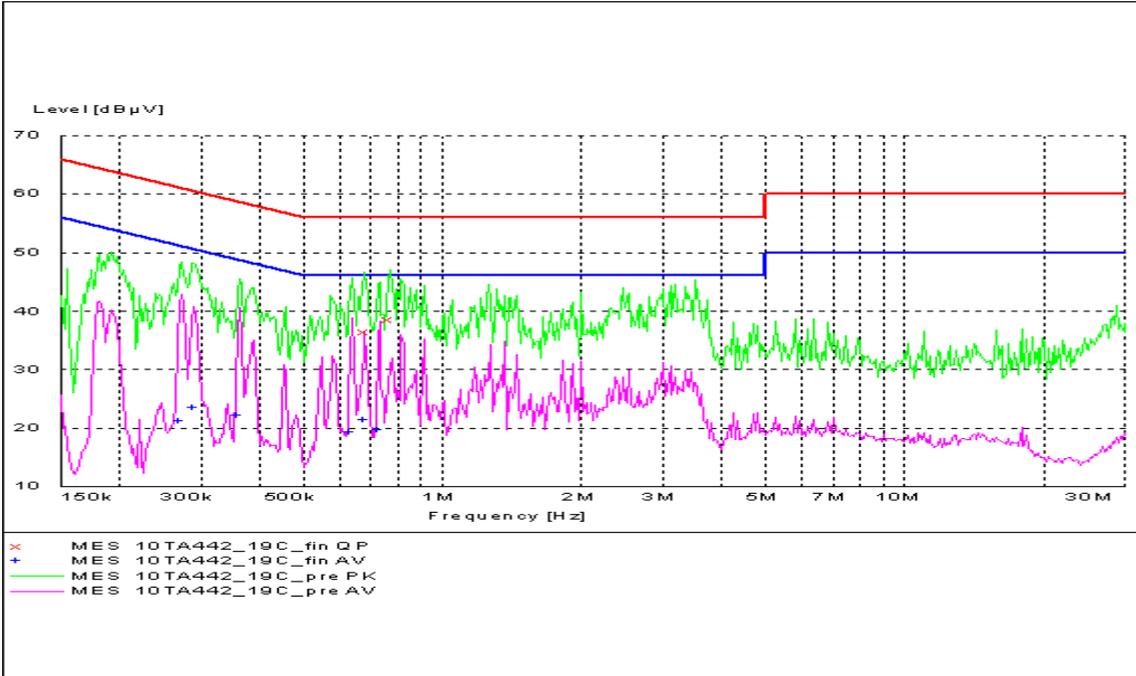

IF bandwidth 9 kHz

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**MEASUREMENT RESULT: "10TA442\_19C\_fin QP"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.680675	36.50	10.1	56	19.5	N	FLO
0.767002	38.60	10.1	56	17.4	L1	GND

**MEASUREMENT RESULT: "10TA442\_19C\_fin AV"**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.272505	21.20	10.1	51	29.8	L1	FLO
0.289269	23.40	10.1	51	27.2	L1	FLO
0.363658	22.10	10.1	49	26.6	N	FLO
0.634878	19.20	10.1	46	26.8	N	FLO
0.680675	21.30	10.1	46	24.7	L1	GND
0.729776	19.60	10.1	46	26.4	N	FLO

## **B.4 FREQUENCY STABILITY**

### **Reference**

FCC: CFR Part 22.235, 2.1055, 24.235

IC: RSS 132, Issue 2, Section 4.3. RSS 133, Issue 5, Section 6.3

### **B.4.1 Method of Measurement**

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900, channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### **B.4.2 Measurement Limit**

#### **B.4.2.1 For Hand carried battery powered equipment**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

**B.4.2.2 For equipment powered by primary supply voltage**

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

**B.4.3 Measurement results**

**GSM 850**

**Frequency Error vs Voltage**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	-14	0.017
3.8	-13	0.016
4.2	-14	0.017

**Frequency Error vs Temperature**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-15	0.018
-20	-14	0.017
-10	-14	0.017
0	-13	0.016
10	-13	0.016
20	-13	0.016
30	-14	0.017
40	-13	0.016
50	-15	0.047

Expanded measurement uncertainty for this test item is 10Hz, k=2

**PCS 1900**

**Frequency Error vs Voltage**

Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.4	-41	0.022
3.8	-38	0.020
4.2	-40	0.021

**Frequency Error vs Temperature**

temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	-42	0.022
-20	-41	0.022
-10	-41	0.022
0	-40	0.021
10	-39	0.021
20	-38	0.020
30	-39	0.021
40	-40	0.021
50	-41	0.022

Expanded measurement uncertainty for this test item is 10Hz, k=2

## **B.5 OCCUPIED BANDWIDTH**

### **Reference**

FCC: CFR Part 2.1049(h)(i)

IC: RSS 132, Issue 2, Section 4.1.1. RSS 133, Issue 5, Section 5.6.

### **B.5.1 Occupied Bandwidth Results**

Similar to conducted emissions; occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the US PCS frequency band. The table below lists the measured -20dBc BW (99%). Spectrum analyzer plots are included on the following pages.


#### **GSM 850(99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
824.2	243.589
836.6	245.192
848.8	245.192

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2


#### **GSM 850**

#### **Channel 128-Occupied Bandwidth (99%)**

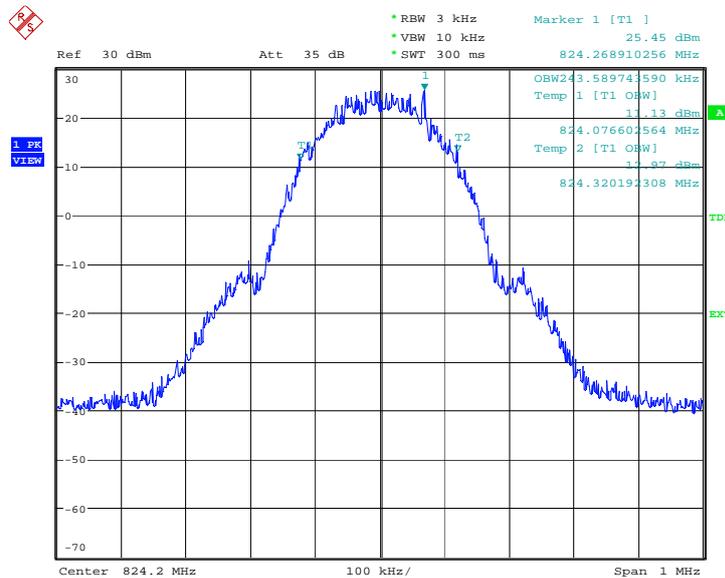


Date: 21.MAY.2010 01:18:06

### Channel 190-Occupied Bandwidth (99%)

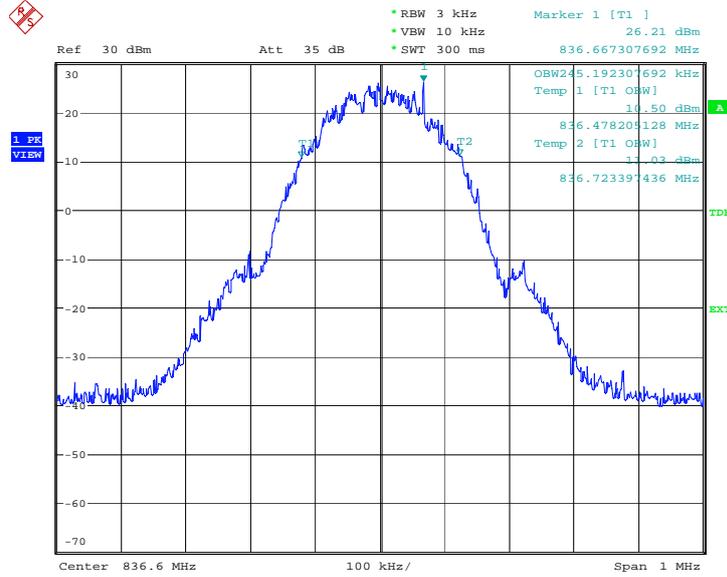

Date: 21.MAY.2010 01:18:34


### Channel 251-Occupied Bandwidth (99%)

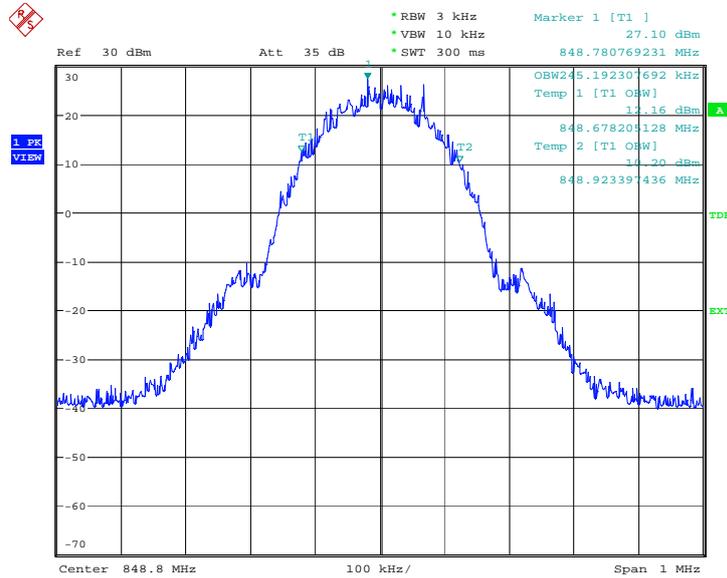

Date: 21.MAY.2010 01:19:01




### Channel 190-Occupied Bandwidth (99%)

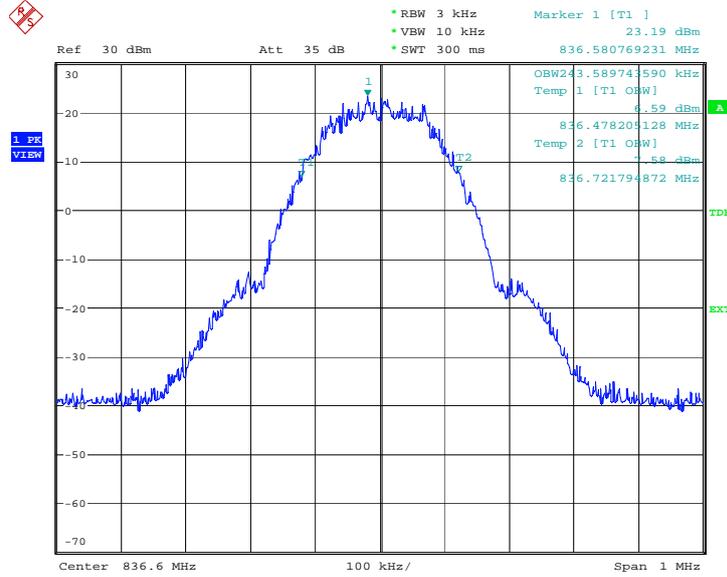

Date: 21.MAY.2010 01:53:08

### Channel 251-Occupied Bandwidth (99%)

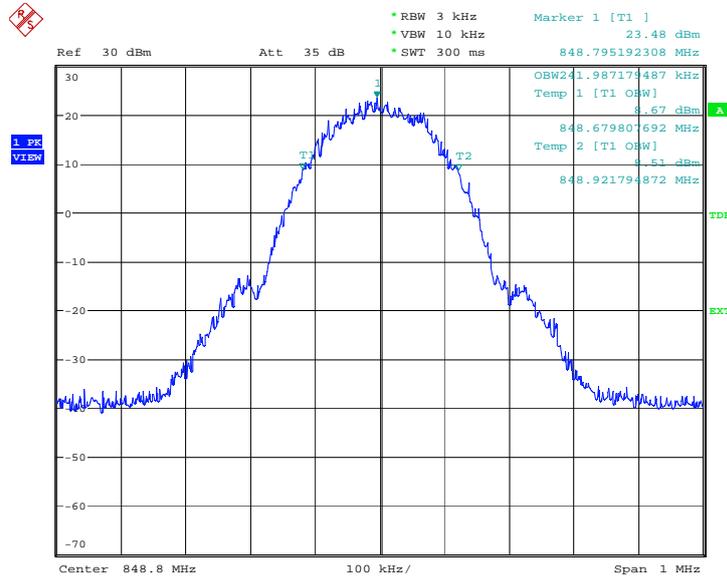

Date: 21.MAY.2010 01:53:35


**EGPRS 850(99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
824.2	241.987
836.6	241.987
848.8	241.987

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2


**EGPRS 850**

**Channel 128-Occupied Bandwidth (99%)**

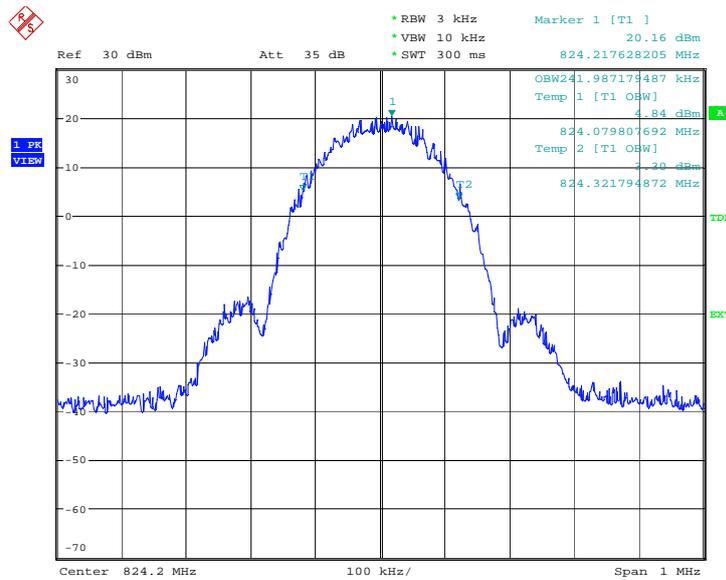


Date: 21.MAY.2010 02:05:11

### Channel 190-Occupied Bandwidth (99%)

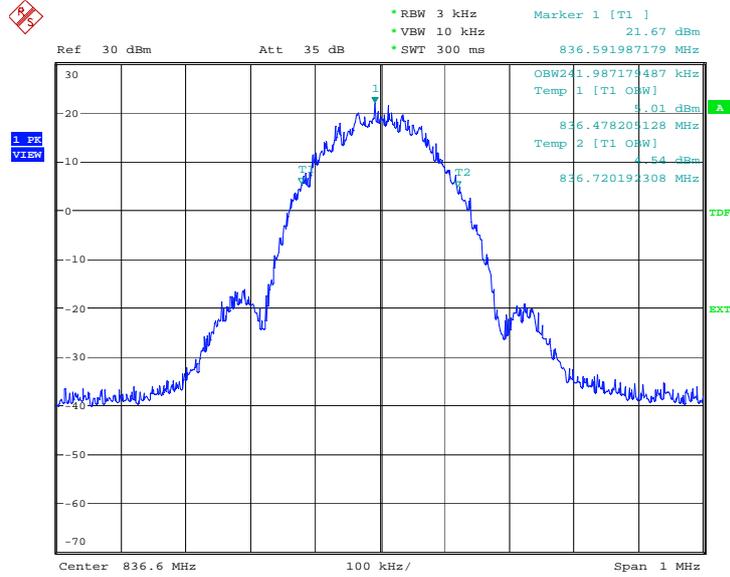

Date: 21.MAY.2010 02:05:38

### Channel 251-Occupied Bandwidth (99%)

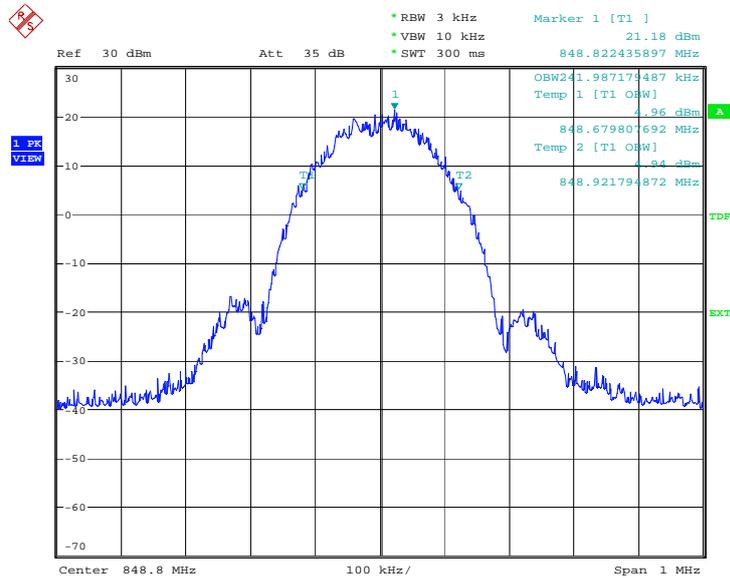

Date: 21.MAY.2010 02:06:05


**PCS 1900(99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
1850.2	243.589
1880.0	243.589
1909.8	245.192

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2


**PCS 1900**

**Channel 512-Occupied Bandwidth (99%)**

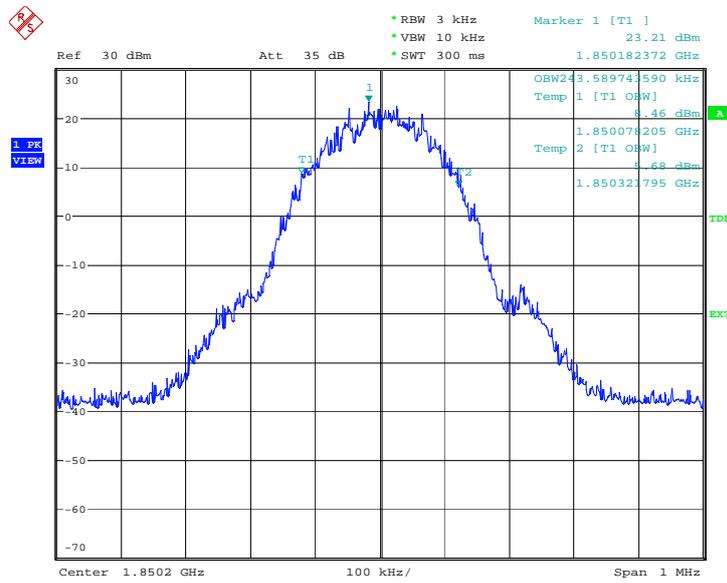


Date: 21.MAY.2010 01:29:52

### Channel 661-Occupied Bandwidth (99%)

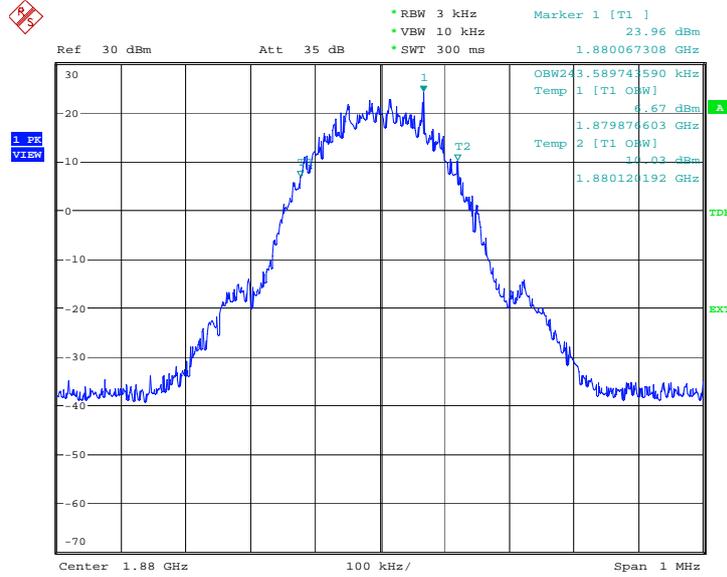

Date: 21.MAY.2010 01:30:19

### Channel 810-Occupied Bandwidth (99%)

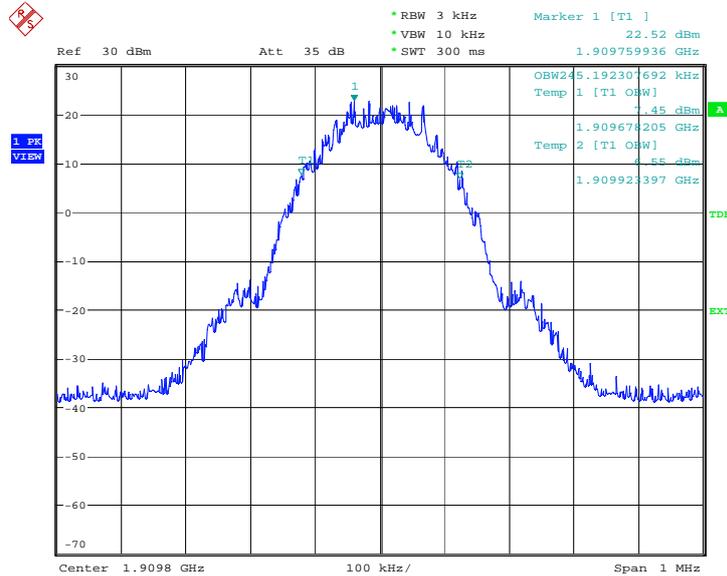


Date: 21.MAY.2010 01:30:46

**GPRS 1900(99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
1850.2	241.987
1880.0	243.589
1909.8	245.192


Expanded measurement uncertainty for this test item is 1.1 kHz, k=2

**GPRS 1900  
Channel 512-Occupied Bandwidth (99%)**

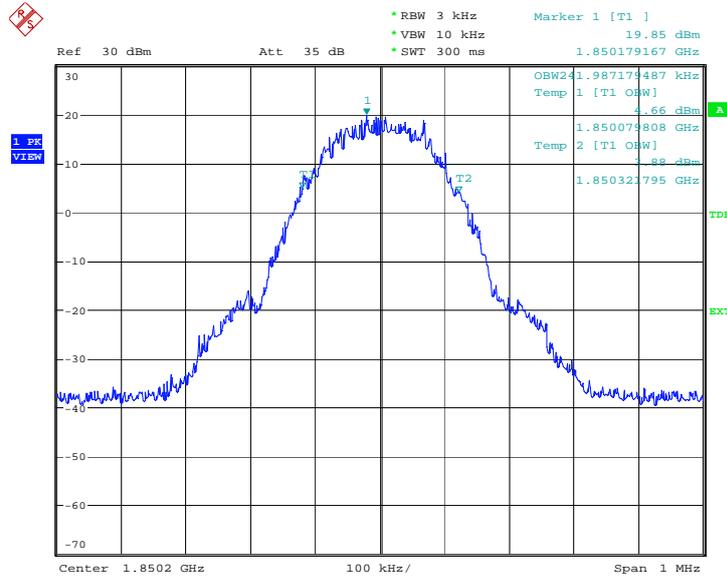


Date: 21.MAY.2010 02:01:30

### Channel 661-Occupied Bandwidth (99%)

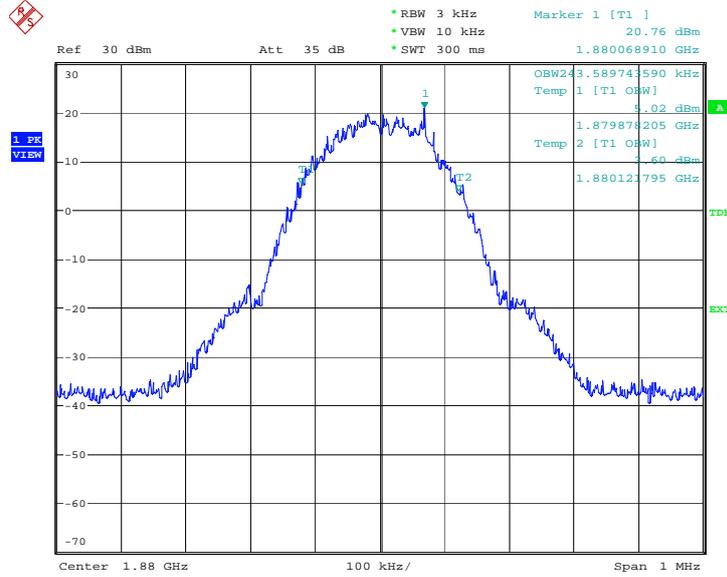

Date: 21.MAY.2010 01:43:23

### Channel 810-Occupied Bandwidth (99%)

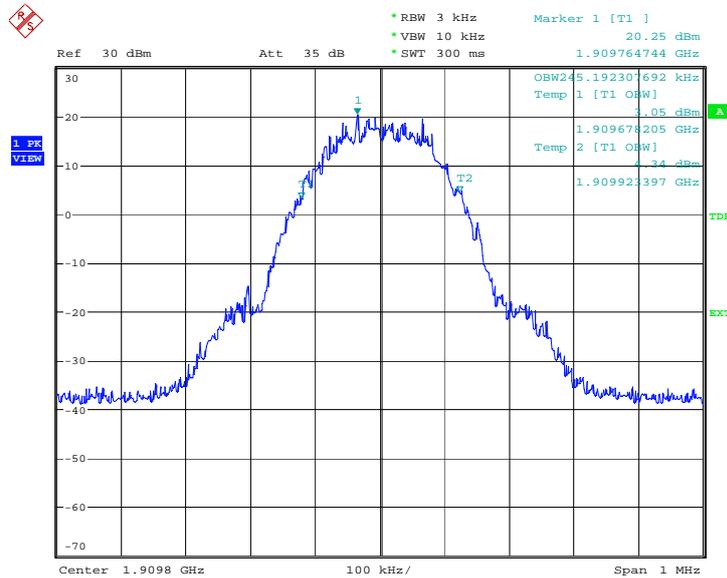

Date: 21.MAY.2010 01:43:50


**EGPRS 1900(99%)**

Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
1850.2	241.987
1880.0	243.589
1909.8	250.000

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2


**EGPRS 1900**

**Channel 512-Occupied Bandwidth (99%)**

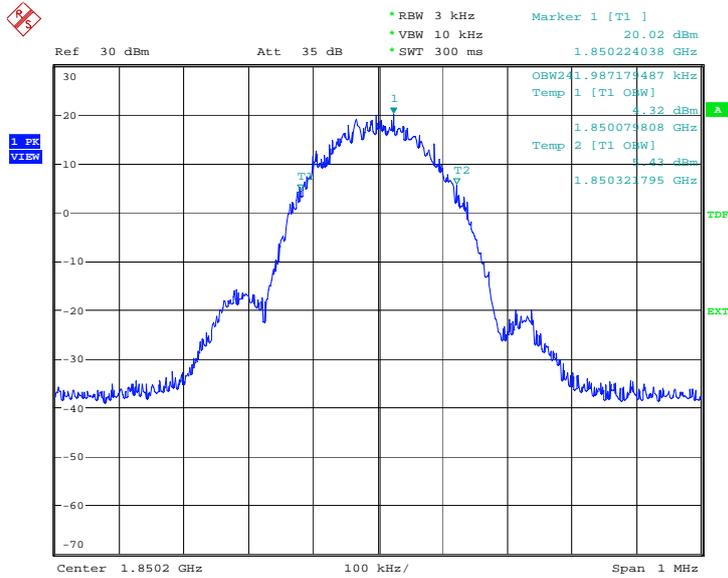


Date: 21.MAY.2010 02:19:14

### Channel 661-Occupied Bandwidth (99%)

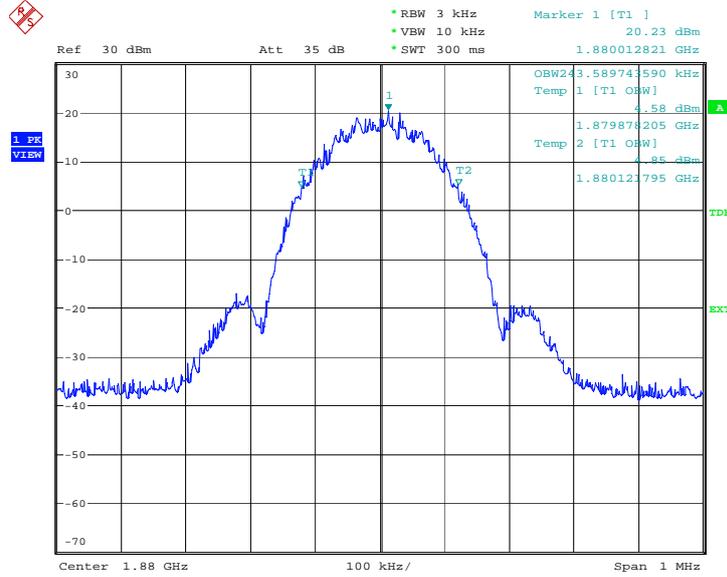

Date: 21.MAY.2010 02:19:41

### Channel 810-Occupied Bandwidth (99%)

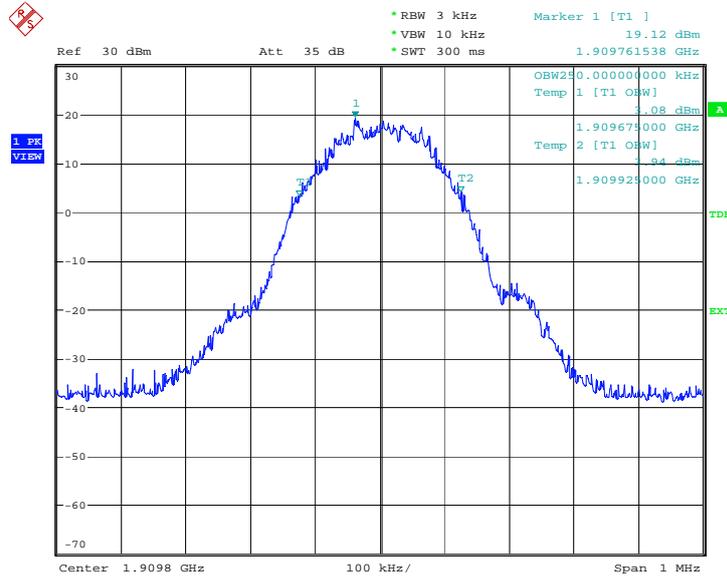

Date: 21.MAY.2010 02:20:08

## B.6 EMISSION BANDWIDTH

### Reference

FCC: CFR Part 22.917(b), 24.238(b)

IC: RSS 132, Issue 2, Section 4.1.1. RSS 133, Issue 5, Section 5.6

### B.6.1 Emission Bandwidth Results

Similar to conducted emissions; Emission bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the PCS1900 band and GSM850 band. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


#### GSM 850(-26dBc)

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
824.2	314.102
836.6	312.500
848.8	310.897

Expanded measurement uncertainty for this test item is 1.1 kHz, k=2


#### GSM 850

#### Channel 128-Occupied Bandwidth (-26dBc BW)

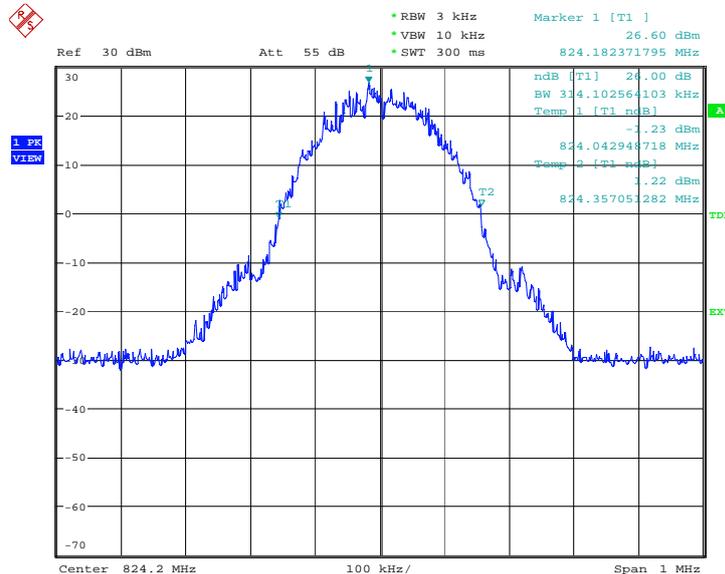


Date: 21.MAY.2010 01:21:18

### Channel 190-Occupied Bandwidth (-26dBc BW)

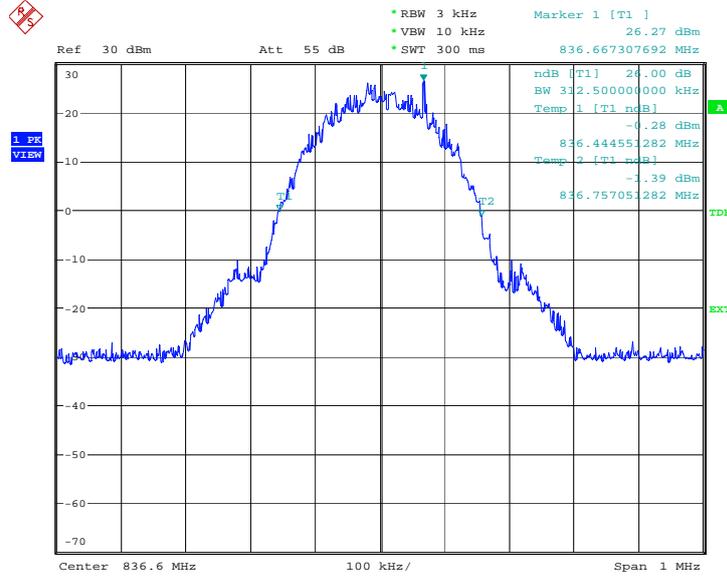

Date: 21.MAY.2010 01:22:12

### Channel 251-Occupied Bandwidth (-26dBc BW)

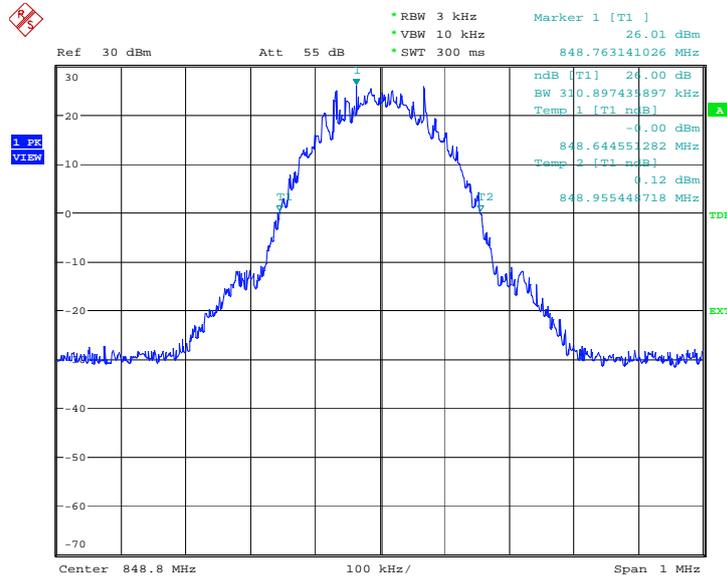


Date: 21.MAY.2010 01:23:06

**GPRS 850(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
824.2	317.307
836.6	314.102
848.8	312.500


**GPRS 850**

**Channel 128-Occupied Bandwidth (-26dBc BW)**

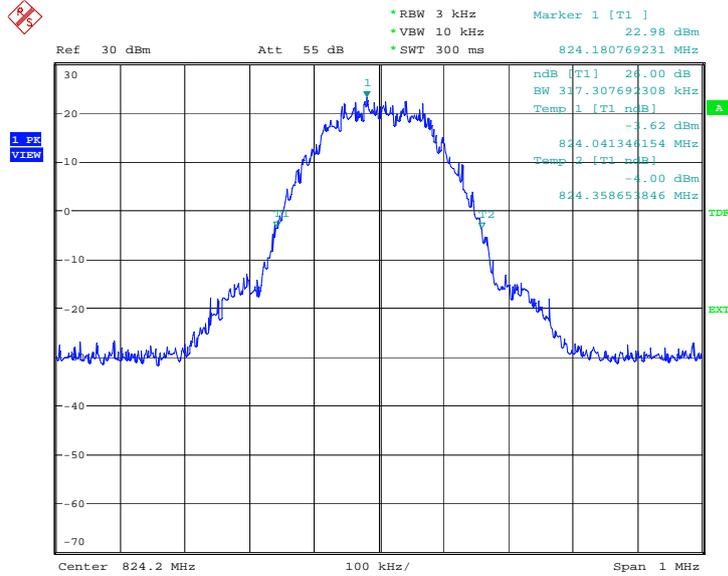


Date: 21.MAY.2010 01:55:52

### Channel 190-Occupied Bandwidth (-26dBc BW)

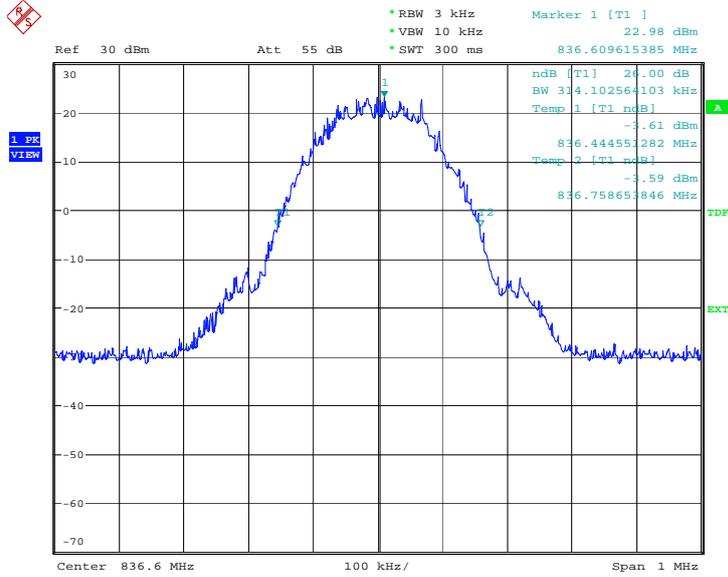

Date: 21.MAY.2010 01:56:46

### Channel 251-Occupied Bandwidth (-26dBc BW)

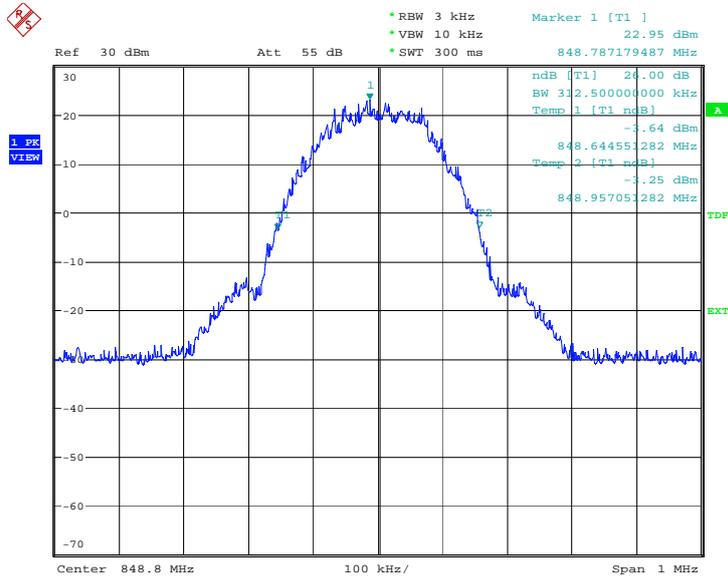


Date: 21.MAY.2010 01:57:39

**EGPRS 850(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
824.2	307.692
836.6	307.692
848.8	301.282


**EGPRS 850**

**Channel 128-Occupied Bandwidth (-26dBc BW)**

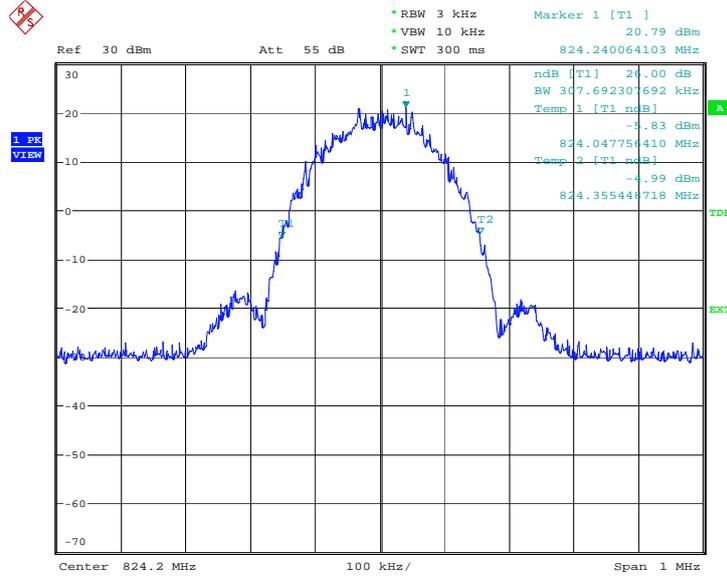


Date: 21.MAY.2010 02:08:23

### Channel 190-Occupied Bandwidth (-26dBc BW)

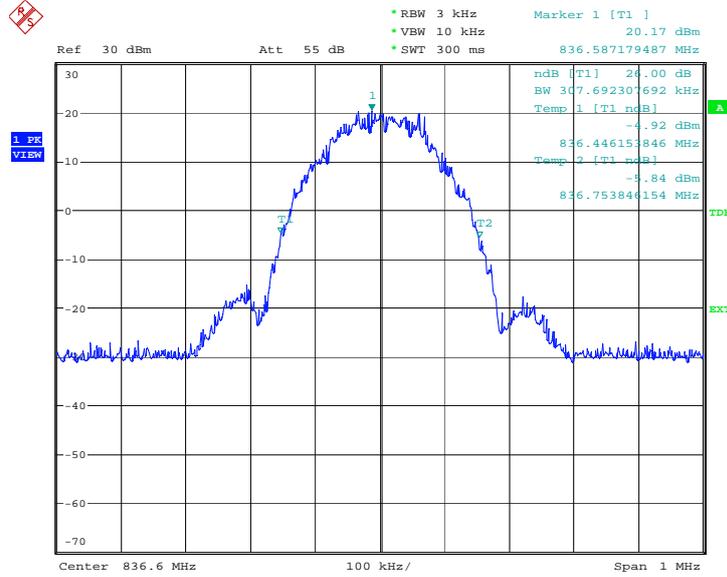

Date: 21.MAY.2010 02:09:16

### Channel 251-Occupied Bandwidth (-26dBc BW)

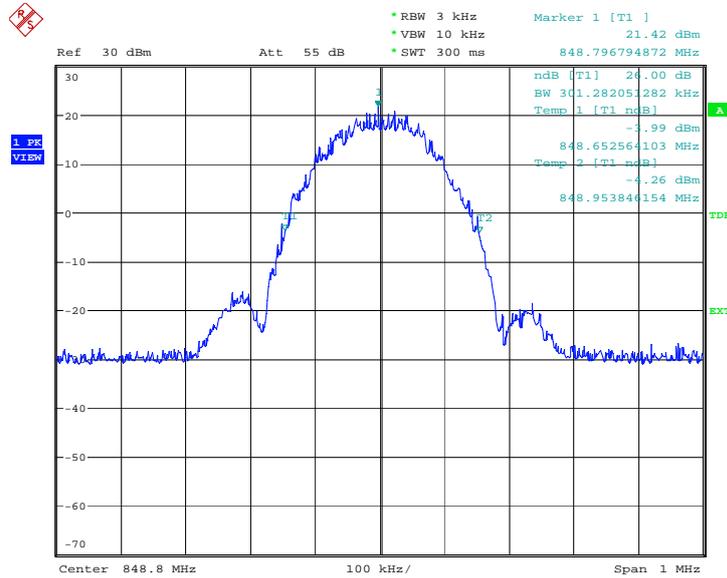


Date: 21.MAY.2010 02:10:10

**PCS 1900(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
1850.2	310,897
1880.0	315,705
1909.8	301,282


**PCS 1900**

**Channel 512-Occupied Bandwidth (-26dBc BW)**

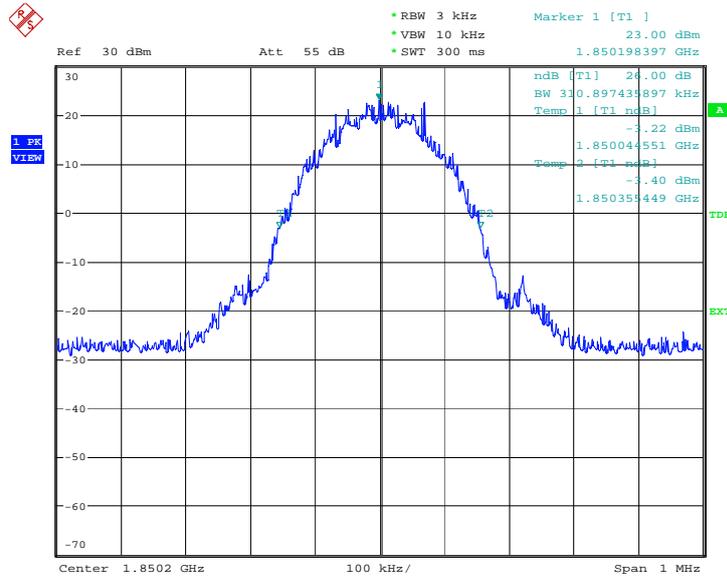


Date: 21.MAY.2010 01:33:03

### Channel 661-Occupied Bandwidth (-26dBc BW)

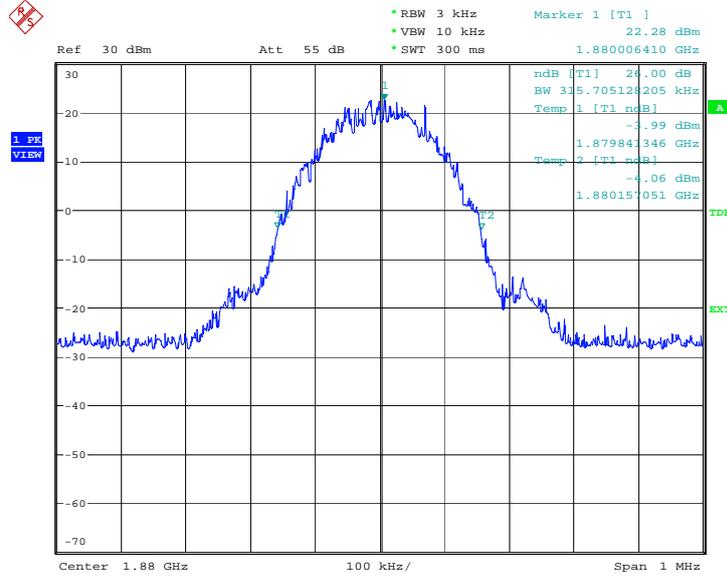

Date: 21.MAY.2010 01:33:57

### Channel 810-Occupied Bandwidth (-26dBc BW)

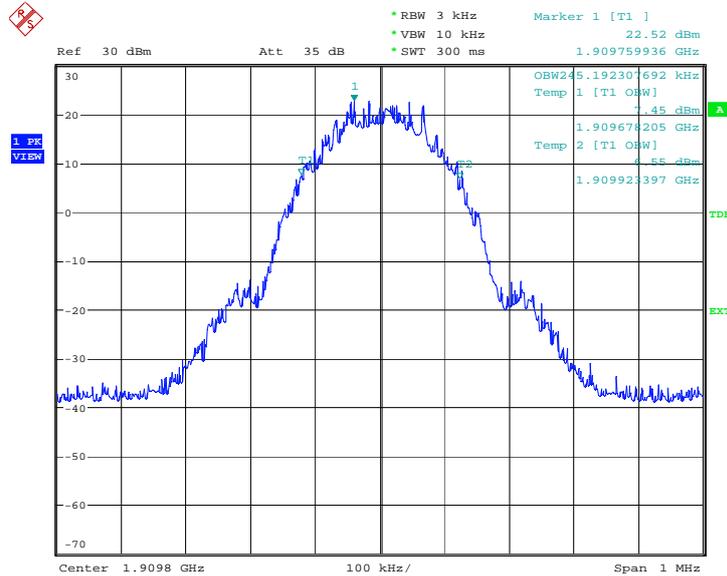


Date: 21.MAY.2010 01:30:46

**GPRS 1900(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
1850.2	310.897
1880.0	309.294
1909.8	309.294


**GPRS 1900**

**Channel 512-Occupied Bandwidth (-26dBc BW)**

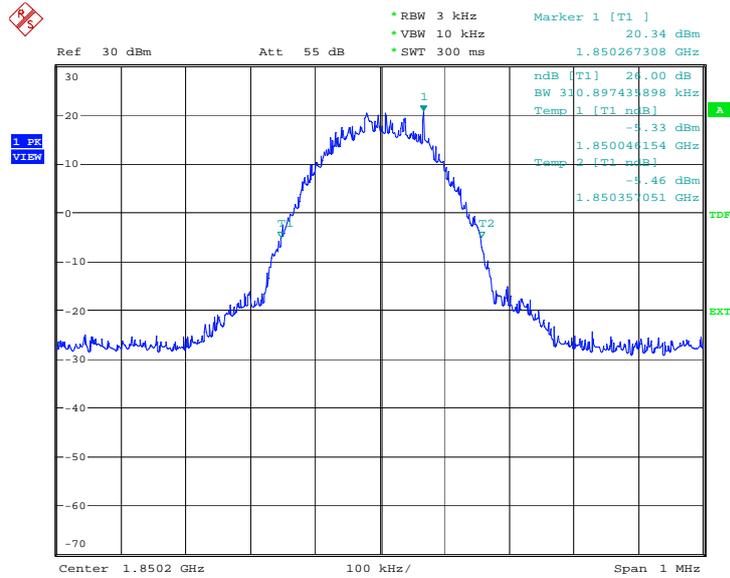


Date: 21.MAY.2010 01:46:08

### Channel 661-Occupied Bandwidth (-26dBc BW)

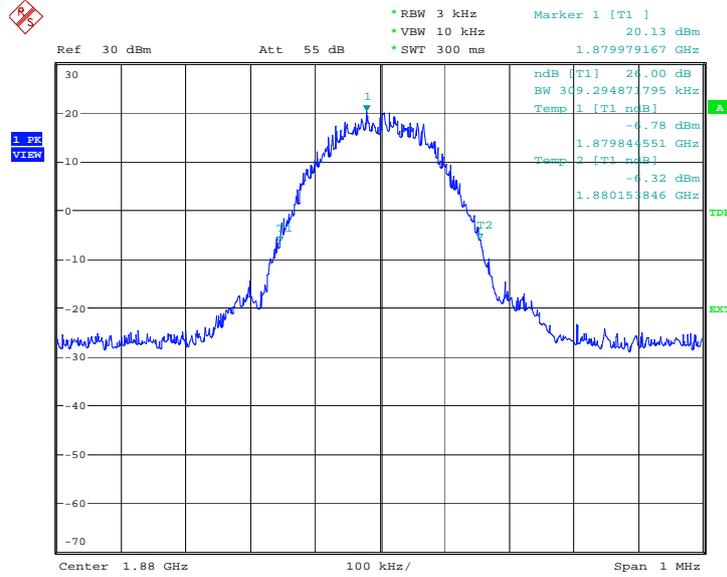

Date: 21.MAY.2010 01:47:01

### Channel 810-Occupied Bandwidth (-26dBc BW)

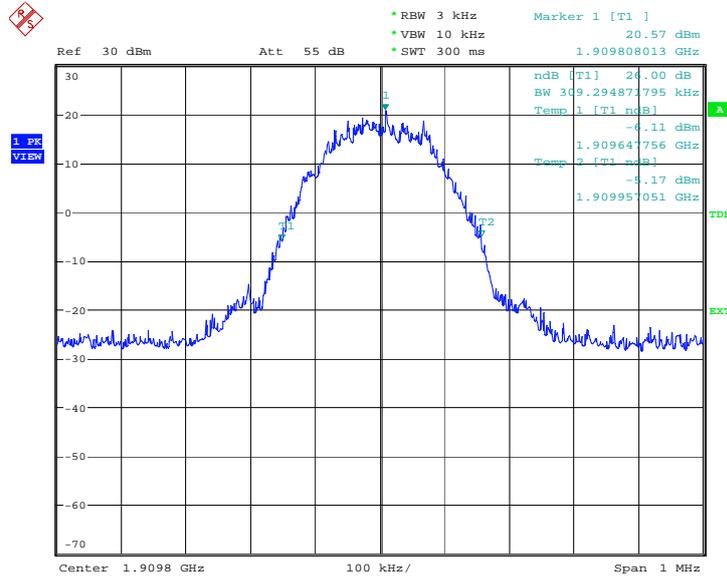


Date: 21.MAY.2010 01:47:55

**EGPRS 1900(-26dBc)**

Frequency(MHz)	Occupied Bandwidth (-26dBc BW)( kHz)
1850.2	302.884
1880.0	304.487
1909.8	298.076


**EGPRS 1900**

**Channel 512-Occupied Bandwidth (-26dBc BW)**

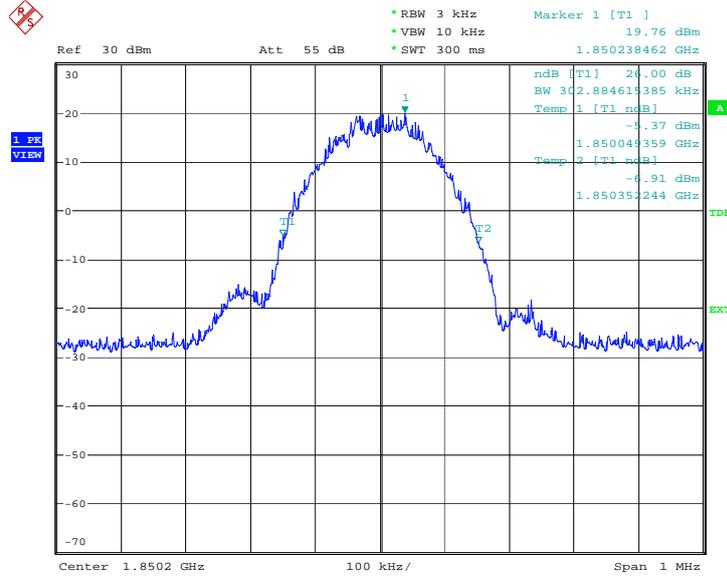


Date: 21.MAY.2010 02:22:28

### Channel 661-Occupied Bandwidth (-26dBc BW)

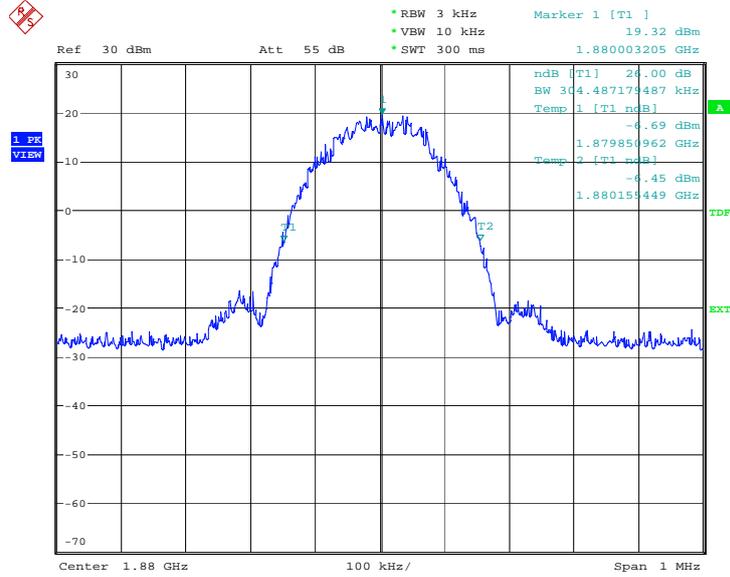

Date: 21.MAY.2010 02:23:21


### Channel 810-Occupied Bandwidth (-26dBc BW)

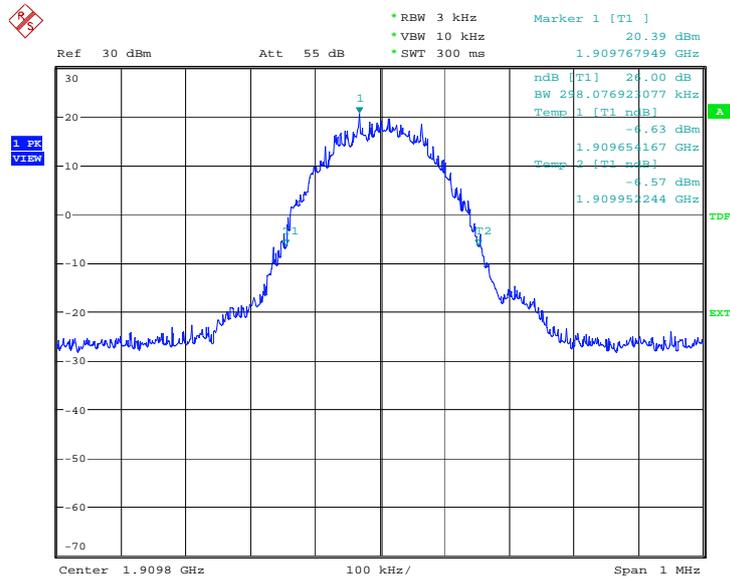

Date: 21.MAY.2010 02:24:15




### HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251

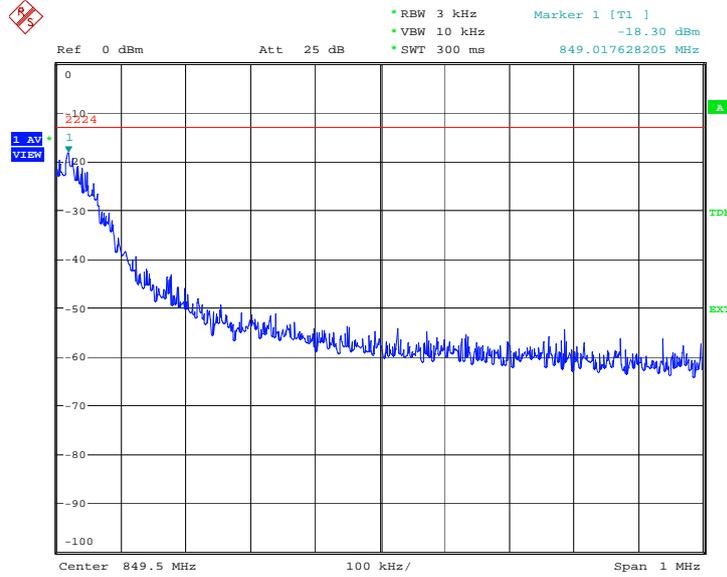


Date: 11.JUN.2010 12:10:43

**GPRS 850**  
**LOW BAND EDGE BLOCK-A (GSM850)-Channel 128**

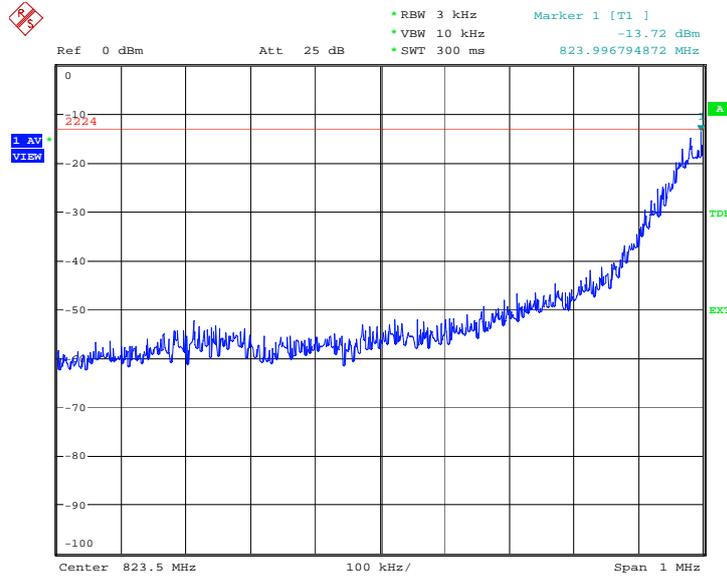


Date: 11.JUN.2010 12:02:13

**HIGH BAND EDGE BLOCK-C (GSM850) -Channel 251**

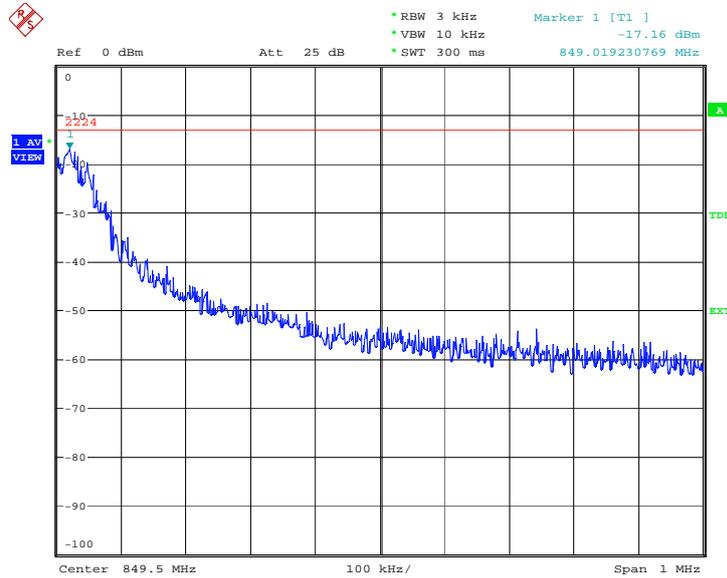


Date: 11.JUN.2010 12:02:41

**EGPRS 850**  
**LOW BAND EDGE BLOCK-A (GSM850)-Channel 128**

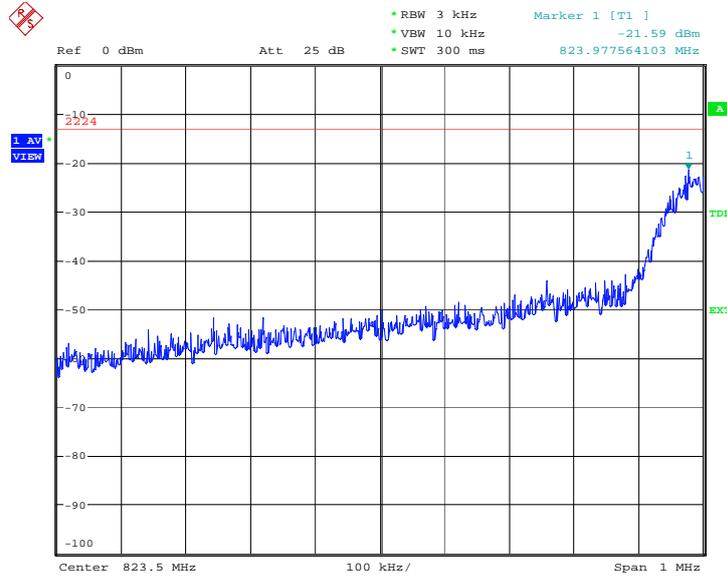


Date: 11.JUN.2010 12:05:03

**HIGH BAND EDGE BLOCK-C (GSM850) –Channel 251**

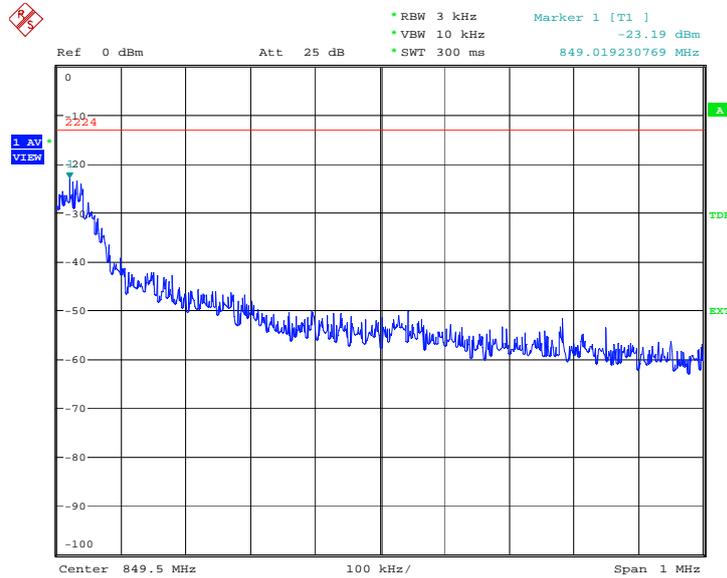


Date: 11.JUN.2010 12:05:31

**PCS 1900**  
**LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512**

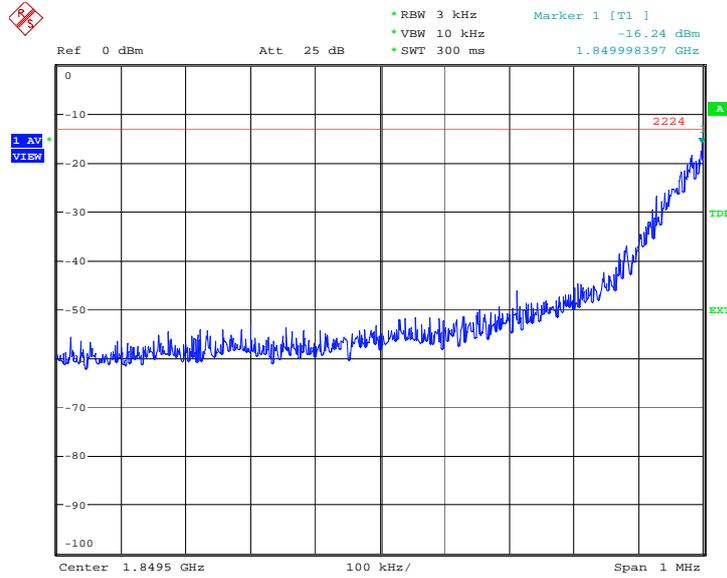


Date: 11.JUN.2010 11:53:22

**HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810**

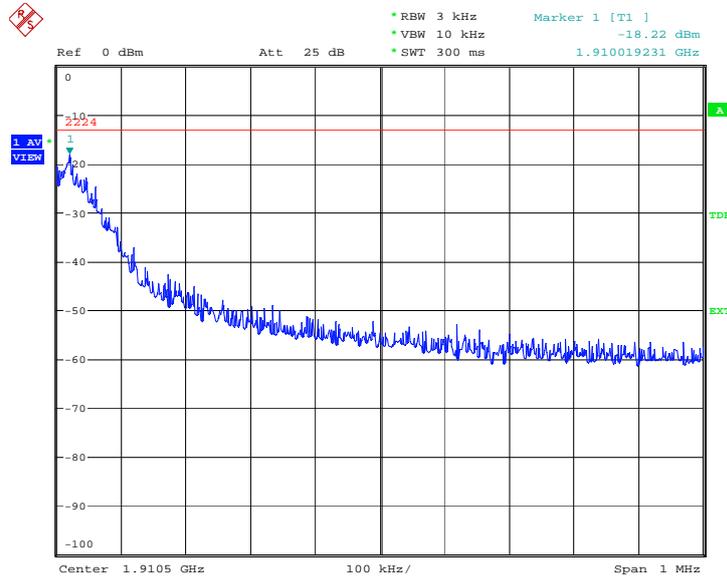


Date: 11.JUN.2010 11:53:51

**GPRS 1900**  
**LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512**

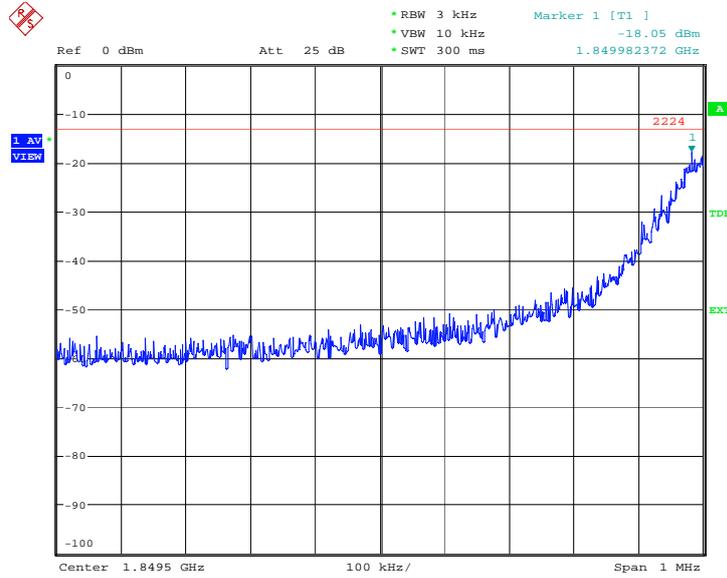


Date: 11.JUN.2010 11:58:59

**HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810**

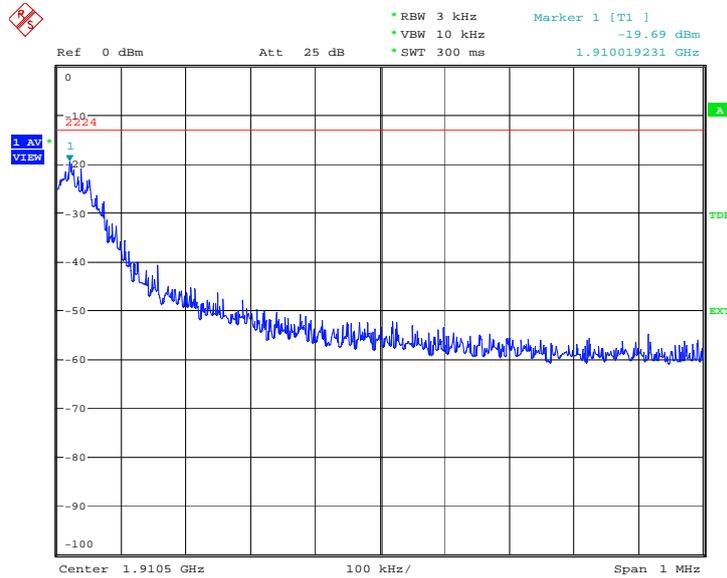


Date: 11.JUN.2010 11:59:27

**EGPRS 1900**  
**LOW BAND EDGE BLOCK-A (PCS-1900)-Channel 512**

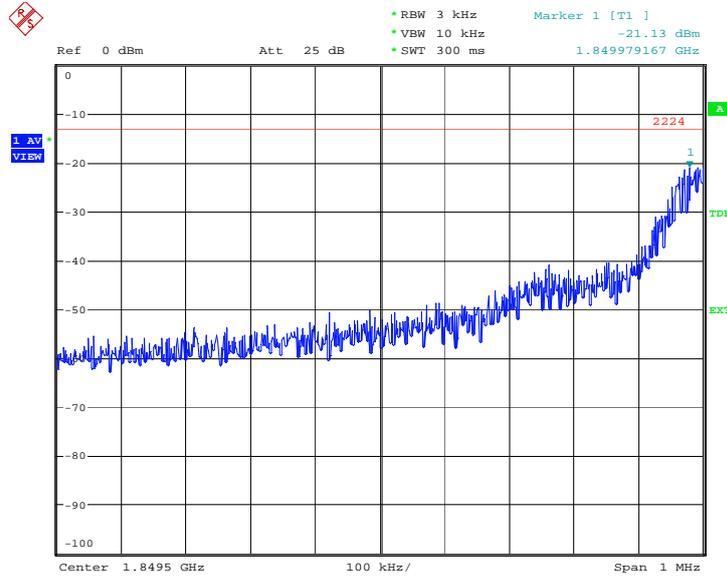

Date: 11.JUN.2010 12:07:40

**HIGH BAND EDGE BLOCK-C (PCS-1900) -Channel 810**

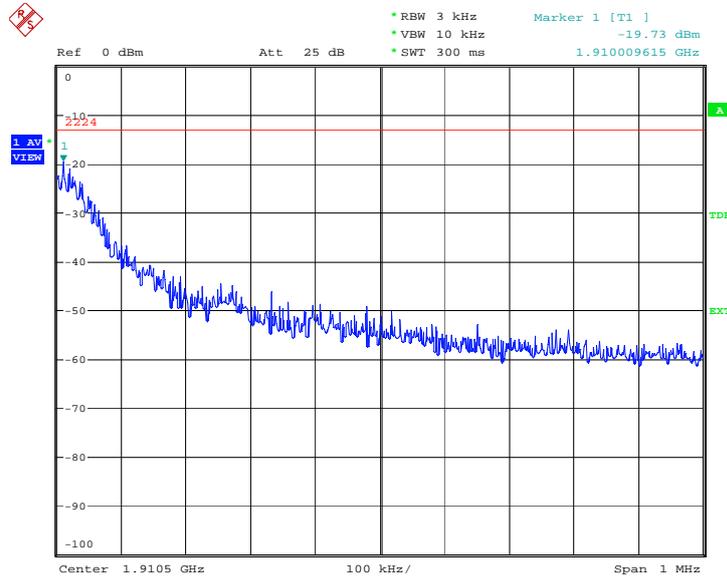

Date: 11.JUN.2010 12:08:09

## **B.8 CONDUCTED SPURIOUS EMISSION**

### **Reference**

FCC: CFR Part 22.917, 2.1057, 24.238

IC: RSS 132, Issue 2, Section 4.5. RSS 133, Issue 5, Section 6.5

### **B.8.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

#### **GSM850 Transmitter**

Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

#### **PCS1900 Transmitter**

Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

### **B. 8.2 Measurement Limit**

Sec. 24.238 Emission Limits.

(a) On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

**B. 8.3 Measurement result**  
**GSM850**


Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)
2	1648.4	nf	1673.2	nf	1697.6	nf
3	2472.6	nf	2509.8	nf	2546.4	nf
4	3296.8	nf	3346.4	nf	3395.2	nf
5	4121	nf	4183	nf	4244	nf
6	4945.2	nf	5019.6	nf	5092.8	nf
7	5769.4	nf	5856.2	nf	5941.6	nf
8	6593.6	nf	6692.8	nf	6790.4	nf
9	7417.8	nf	7529.4	nf	7639.2	nf
10	8242	nf	8366	nf	8488	nf

nf: Noise floor

**B.8.3.1 Channel 128: 30MHz – 4GHz**


Spurious emission limit -13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

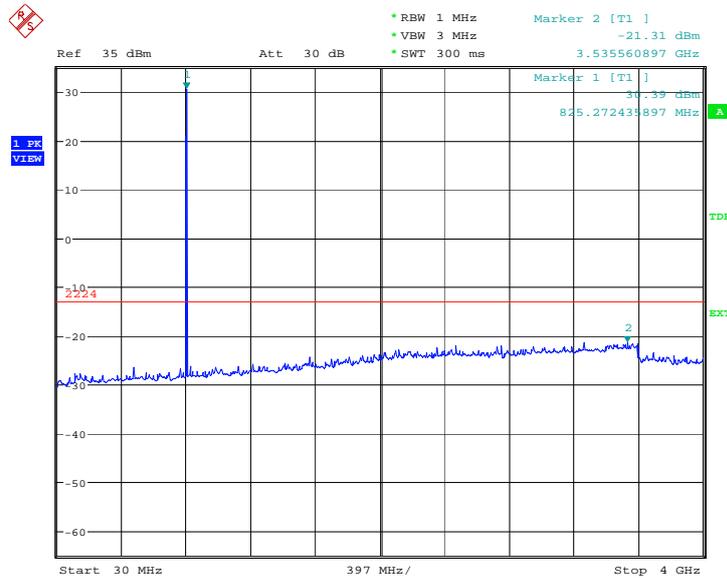

Date: 21.MAY.2010 01:23:35


**B.8.3.2 Channel 128: 4GHz – 10GHz**  
Spurious emission limit –13dBm.

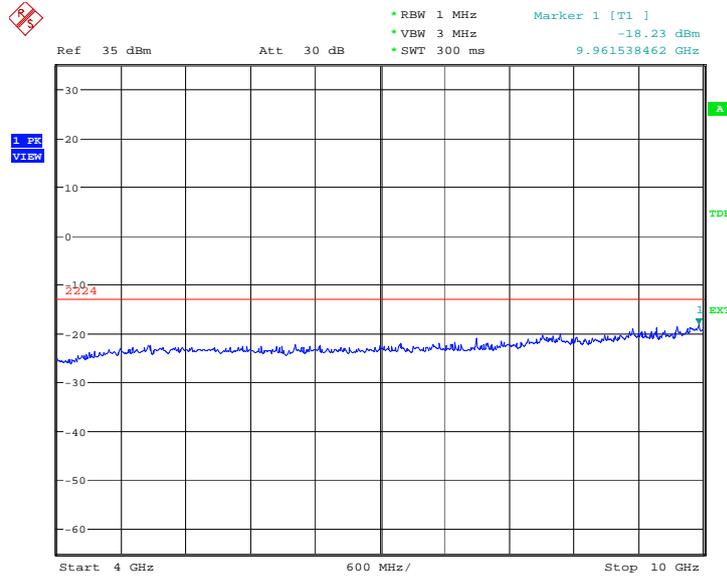

Date: 21.MAY.2010 01:24:03


**B.8.3.3 Channel 190: 30MHz – 4GHz**  
Spurious emission limit –13dBm

**NOTE: peak above the limit line is the carrier frequency.**

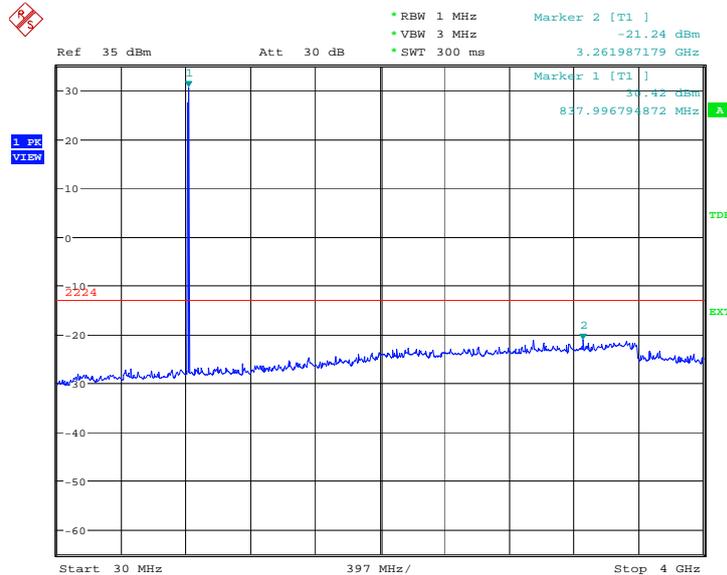

Date: 21.MAY.2010 01:24:31


**B.8.3.4 Channel 190: 4GHz –10GHz**  
Spurious emission limit –13dBm

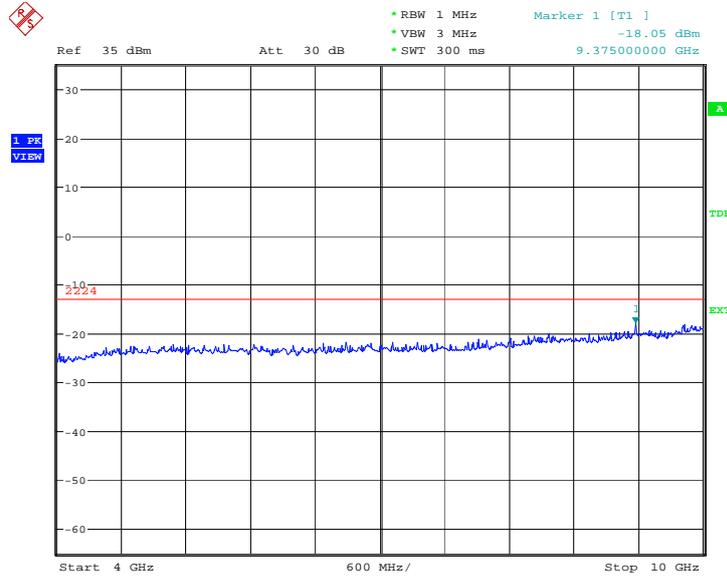

Date: 7.MAY.2010 04:17:08


**B.8.3.5 Channel 251: 30MHz – 4GHz**  
Spurious emission limit –13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

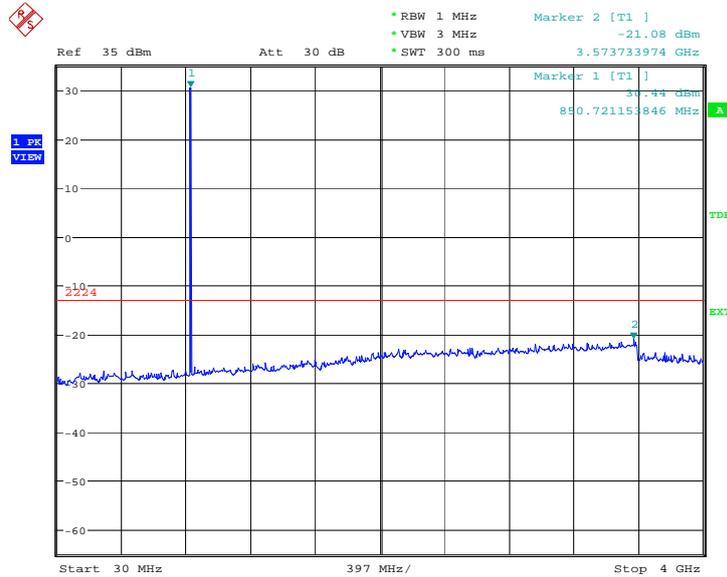


Date: 21.MAY.2010 01:25:27

**B.8.3.6 Channel 251: 4GHz – 10GHz**  
Spurious emission limit –13dBm.

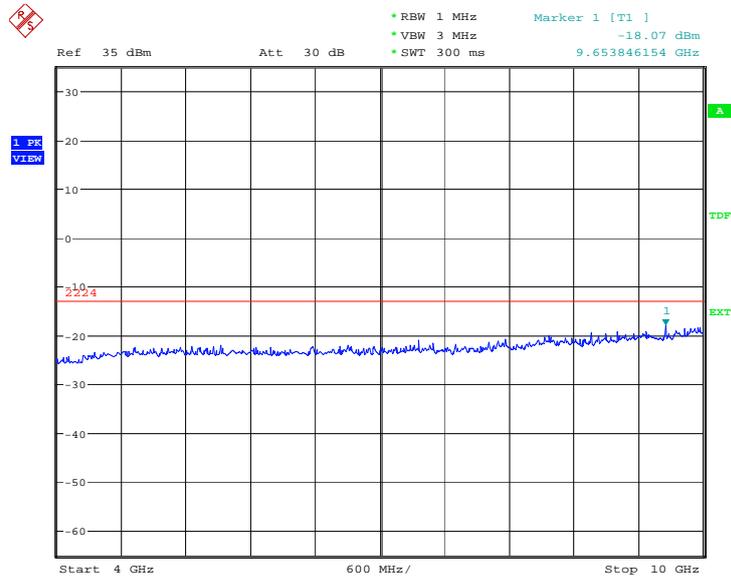

Date: 7.MAY.2010 04:18:05


**B.8.3.7 Idle mode: 30MHz – 4GHz**  
Spurious emission limit –13dBm.

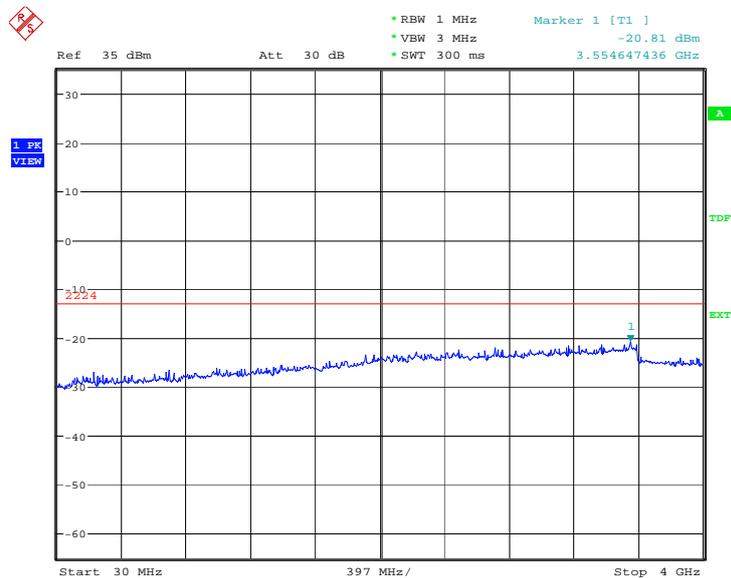

Date: 21.MAY.2010 01:27:21

### B.8.3.8 Idle mode: 4GHz – 10GHz

Spurious emission limit –13dBm.

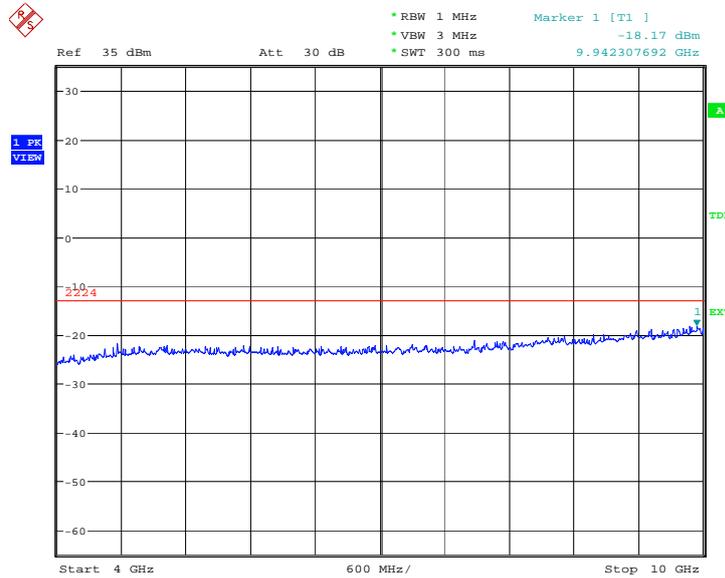

Date: 21.MAY.2010 01:27:49


### PCS1900

Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	nf	3760	nf	3819.6	nf
3	5550.6	nf	5640	nf	5729.4	nf
4	7400.8	nf	7520	nf	7639.2	nf
5	9251.0	nf	9400	nf	9549.0	nf
6	11101.2	nf	11280	nf	11458.8	nf
7	12951.4	nf	13160	nf	13368.6	nf
8	14801.6	nf	15040	nf	15278.4	nf
9	16651.8	nf	16920	nf	17188.2	nf
10	18502.0	nf	18800	nf	19098.0	nf
nf: Noise floor						

**B. 8.3.9 Channel 512: 30MHz – 4GHz**


Spurious emission limit –13dBm.

**NOTE: peak above the limit line is the carrier frequency.**

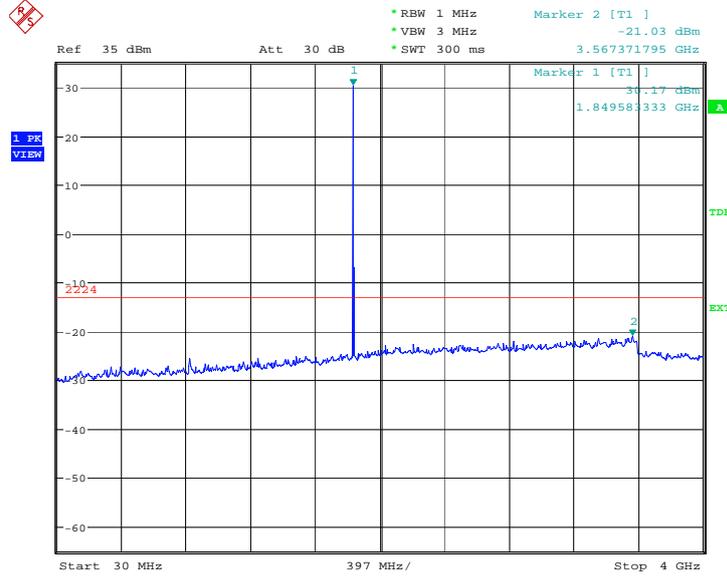

**B. 8.3.10 Channel 512: 4GHz – 20GHz**


Spurious emission limit –13dBm.

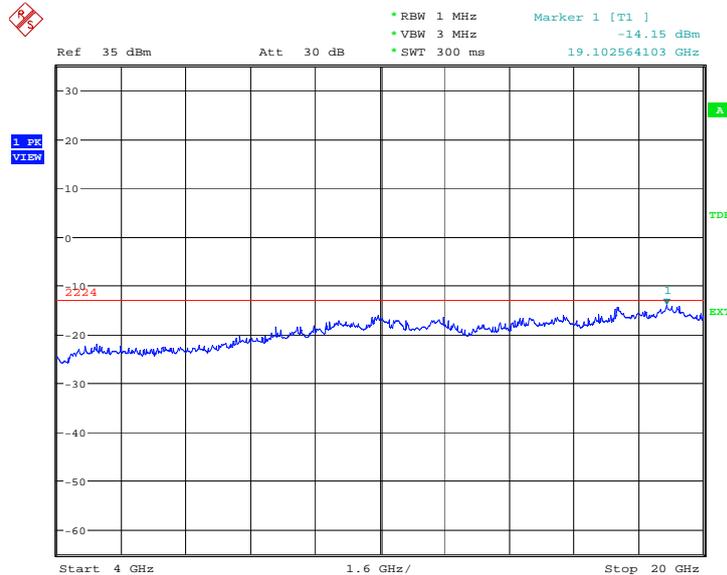

**B. 8.3.11 Channel 661: 30MHz – 4GHz**

Spurious emission limit –13dBm


**NOTE: peak above the limit line is the carrier frequency.**

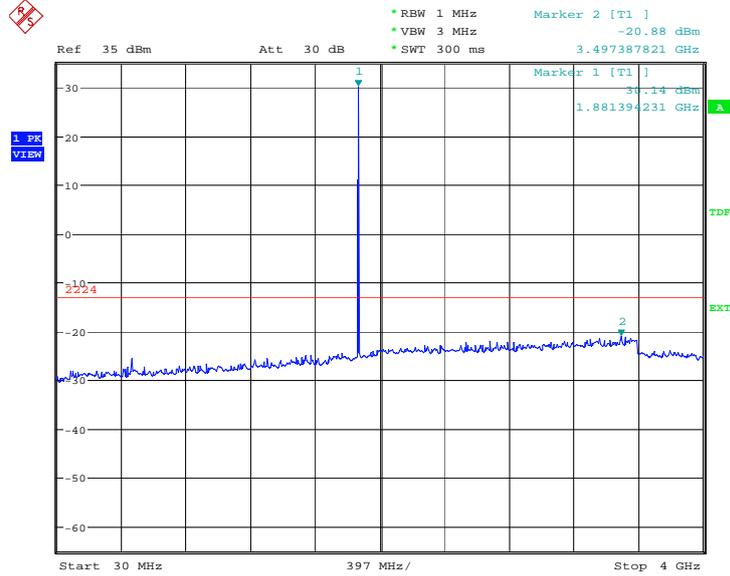

Date: 7.MAY.2010 04:43:29

**B. 8.3.12 Channel 661: 4GHz –20GHz**

Spurious emission limit –13dBm

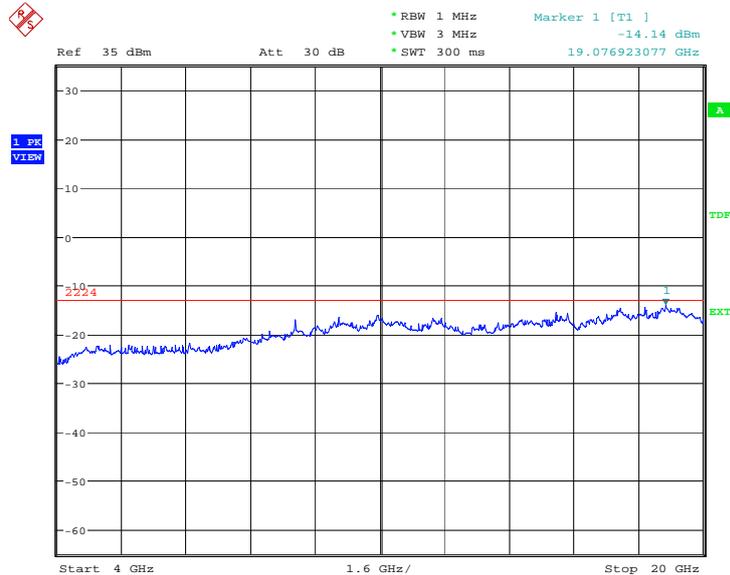


Date: 21.MAY.2010 01:36:44

**B. 8.3.13 Channel 810: 30MHz – 4GHz**

Spurious emission limit -13dBm.


**NOTE: peak above the limit line is the carrier frequency.**

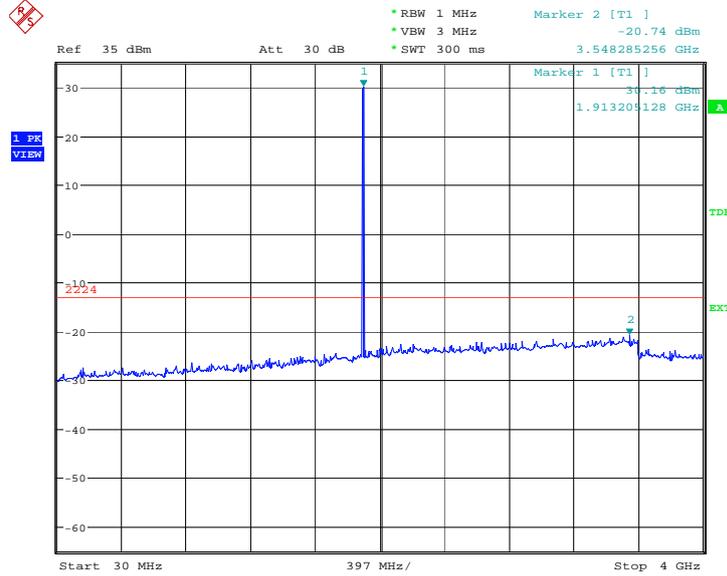

Date: 21.MAY.2010 01:37:12


**B. 8.3.14 Channel 810: 4GHz – 20GHz**

Spurious emission limit -13dBm.

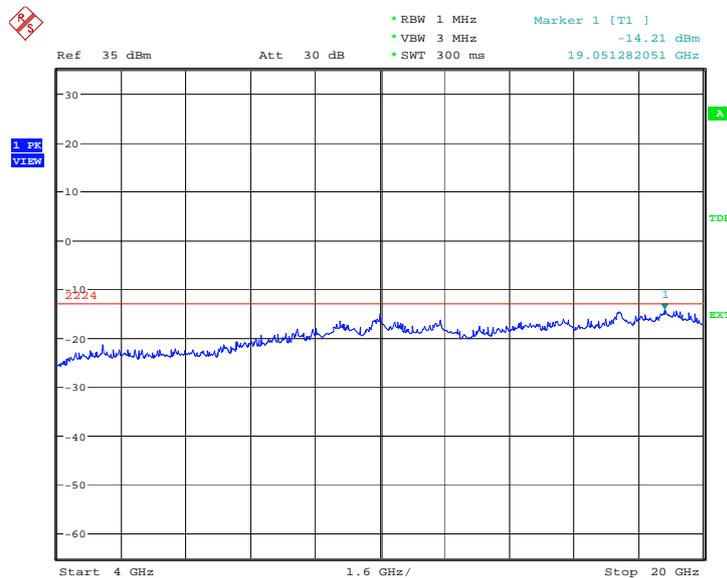


Date: 21.MAY.2010 01:37:40

**B. 8.3.15 Idle mode: 30MHz – 4GHz**  
Spurious emission limit -13dBm.

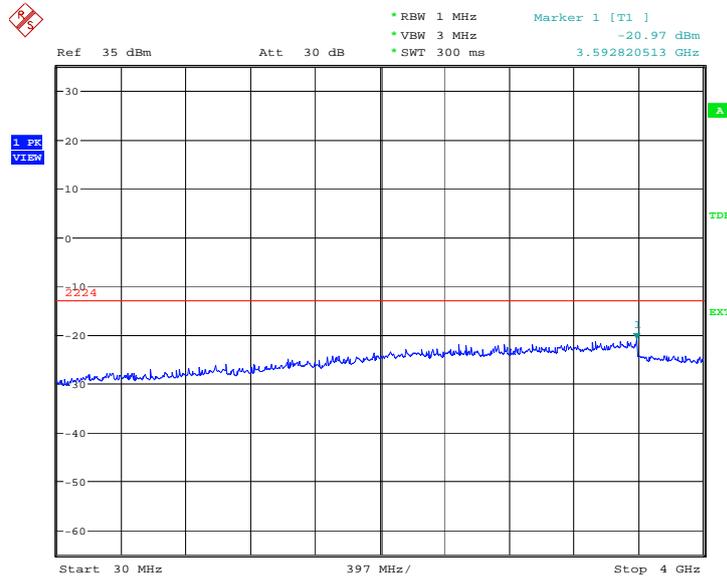

Date: 21.MAY.2010 01:39:06

**B. 8.3.16 Idle mode: 4GHz – 20GHz**  
Spurious emission limit -13dBm.

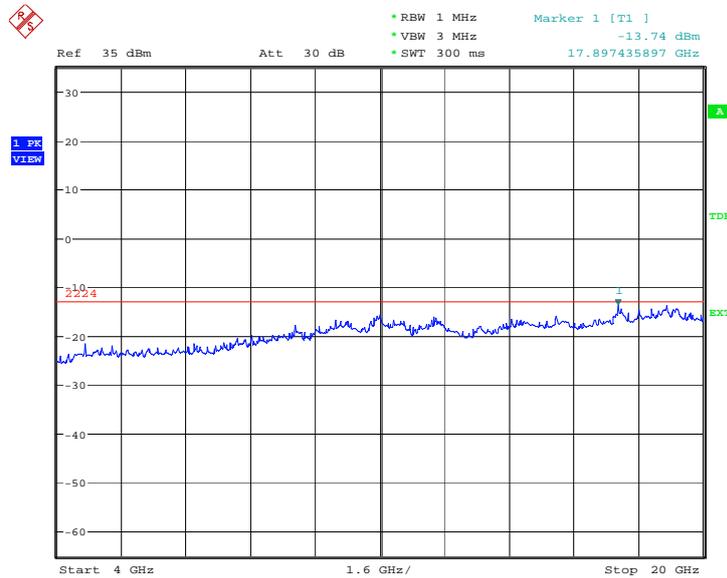

Date: 21.MAY.2010 01:39:34

## **B.9 RECEIVER RADIATION EMISSION**

### **Reference**

FCC: CFR Part 15.109, 2.1053

IC: RSS 132, Issue 2, Section 4.6. RSS 133, Issue 5, Section 6.6

### **B.9.1 Method of Measurement**


The measurement procedure in ANSI C64.4-2003 is used. The EUT is placed on a 80cm height non-conductive table locating on the center of turntable. From 30MHz-1GHz, the measurement distance is 10m. For frequency range above 1GHz, the measurement distance is 3m.

The EUT is measured with travel charger and the operating mode is idle without with CMU200's signaling.

### **B.9.2 Method of Measurement**


Frequency of Emission (MHz)	Limit (dB $\mu$ V/m)	Measurement Distance (m)
30-88	30	10
88-216	33.5	10
216-960	36	10
960-1000	44	10
>1000	54	3

### **B. 9.3 Measurement results**

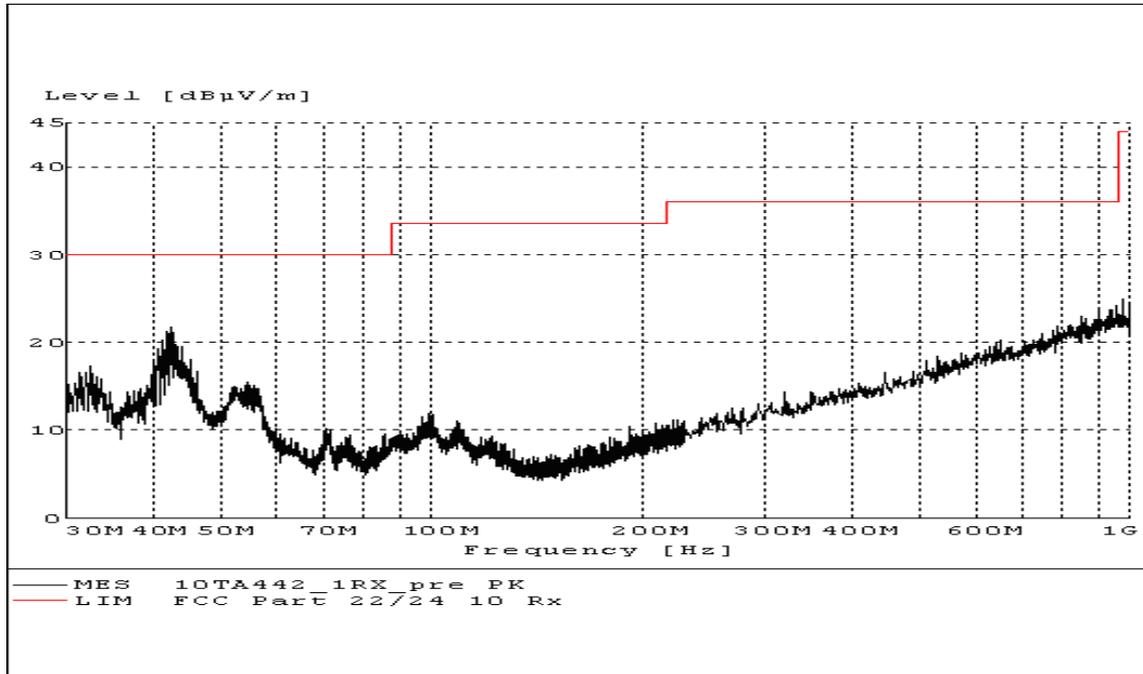

IF bandwidth: 120 kHz


Idle Mode: 30MHz-1GHz

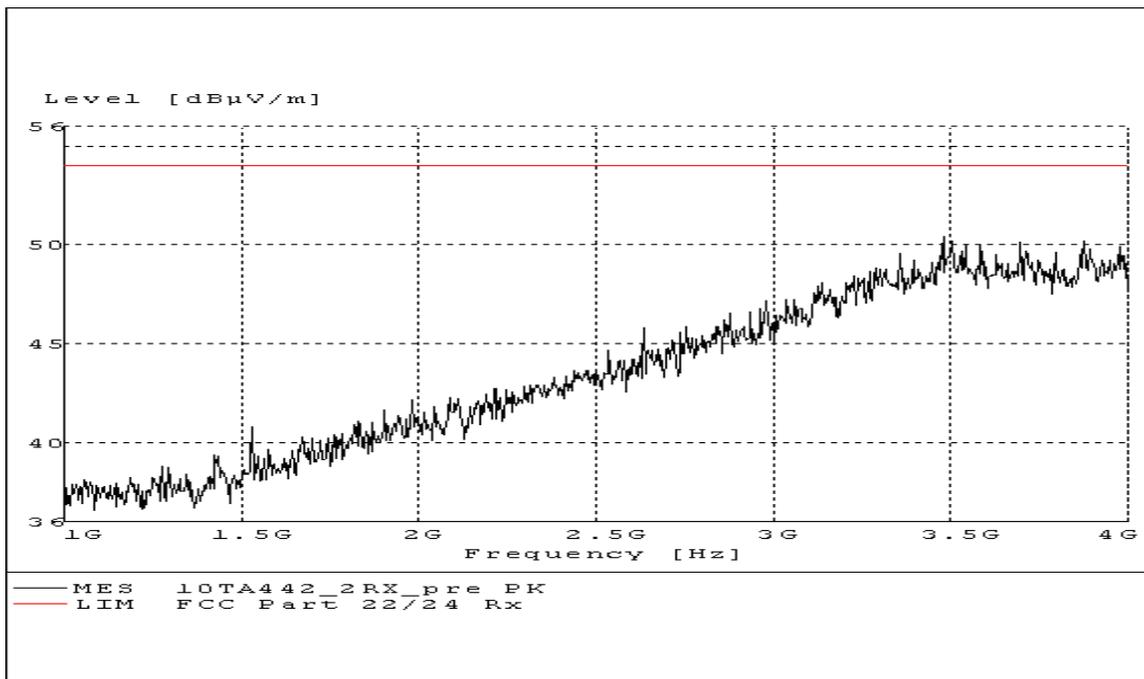

RBW / VBW 1 MHz

Idle Mode: 1GHz-4GHz


FCC 4-18G

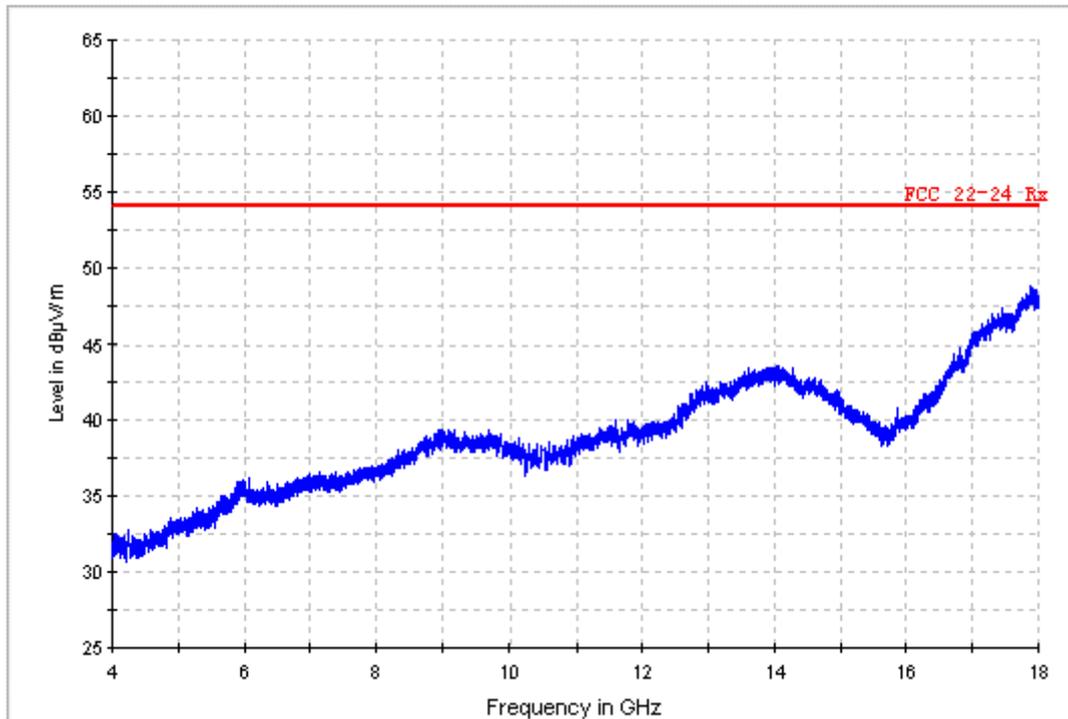

RBW / VBW 1 MHz

Idle Mode: 4GHz-18GHz

FCC 18-26.5G

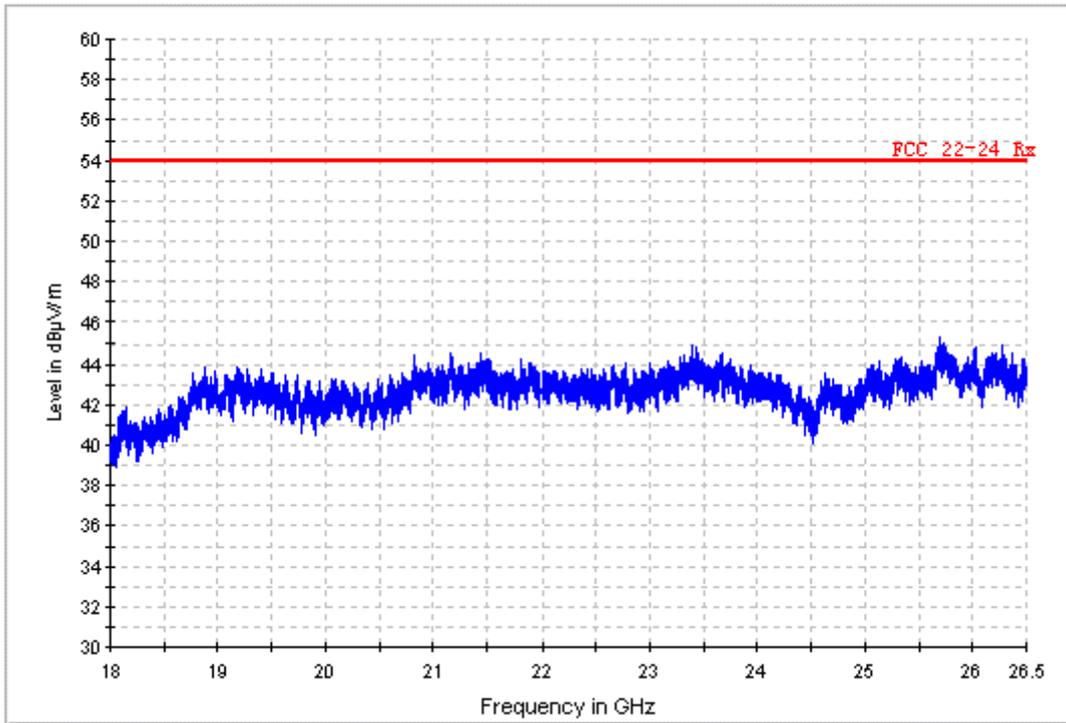

RBW / VBW 1 MHz

**Idle Mode: 18GHz-26.5GHz**