

Date/Time: 7/23/2010 1:56:18 PM

Test Laboratory: Sony Ericsson Mobile Communications

Hong125-Body-Flat15mm-UMTS5-HSDPA-High**DUT: Hong; Type:DUT; Serial:#18761**

Communication System: WCDMA Band V; Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 846.629$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1583; ConvF(6.27, 6.27, 6.27); Calibrated: 11/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 5/18/2010
- Phantom: SAM with CRP (Low Band Body); Type: SAM; Serial: TP: 1031
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 172

Body 3/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.530 mW/g


Body 3/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.5 V/m; Power Drift = 0.027 dB

Peak SAR (extrapolated) = 0.652 W/kg

SAR(1 g) = 0.501 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.532 mW/g

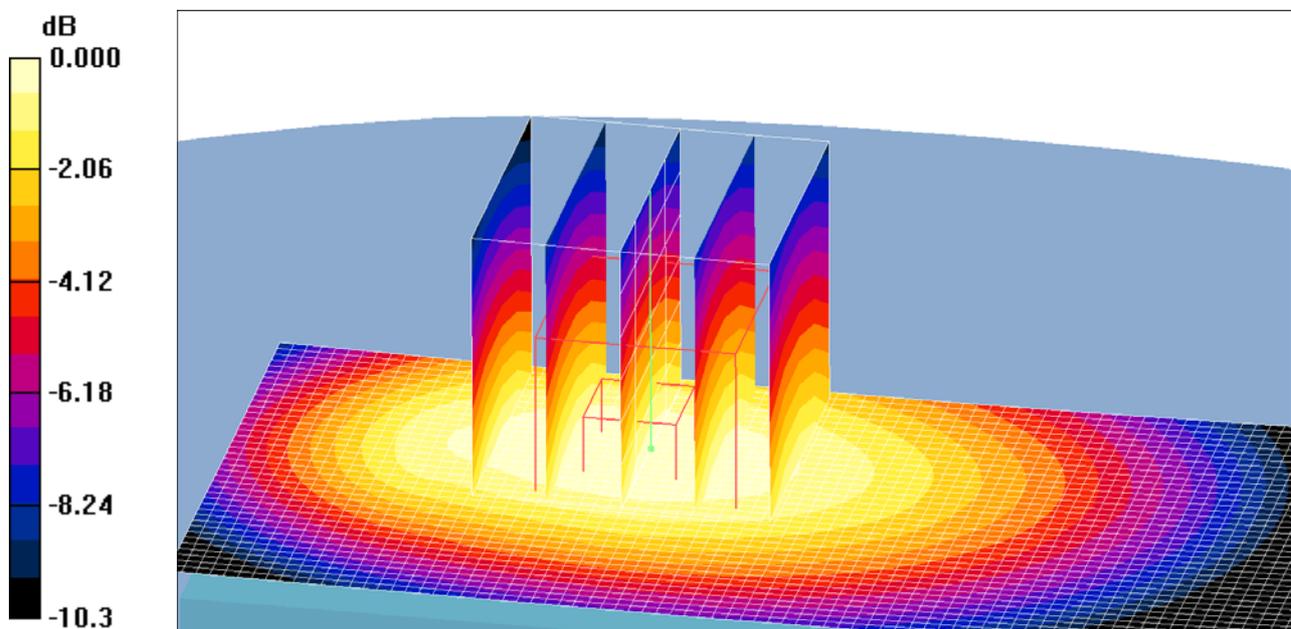

0 dB = 0.532mW/g

Date/Time: 7/23/2010 12:29:00 PM

Test Laboratory: Sony Ericsson Mobile Communications

Hong125-Body-Flat15mm-UMTS5-Speech-high**DUT: Hong; Type:DUT; Serial:#18761**

Communication System: WCDMA Band V; Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 846.629$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 52.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1583; ConvF(6.27, 6.27, 6.27); Calibrated: 11/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 5/18/2010
- Phantom: SAM with CRP (Low Band Body); Type: SAM; Serial: TP: 1031
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 172

Body 3/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.575 mW/g


Body 3/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.7 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.546 mW/g; SAR(10 g) = 0.390 mW/g

Maximum value of SAR (measured) = 0.582 mW/g

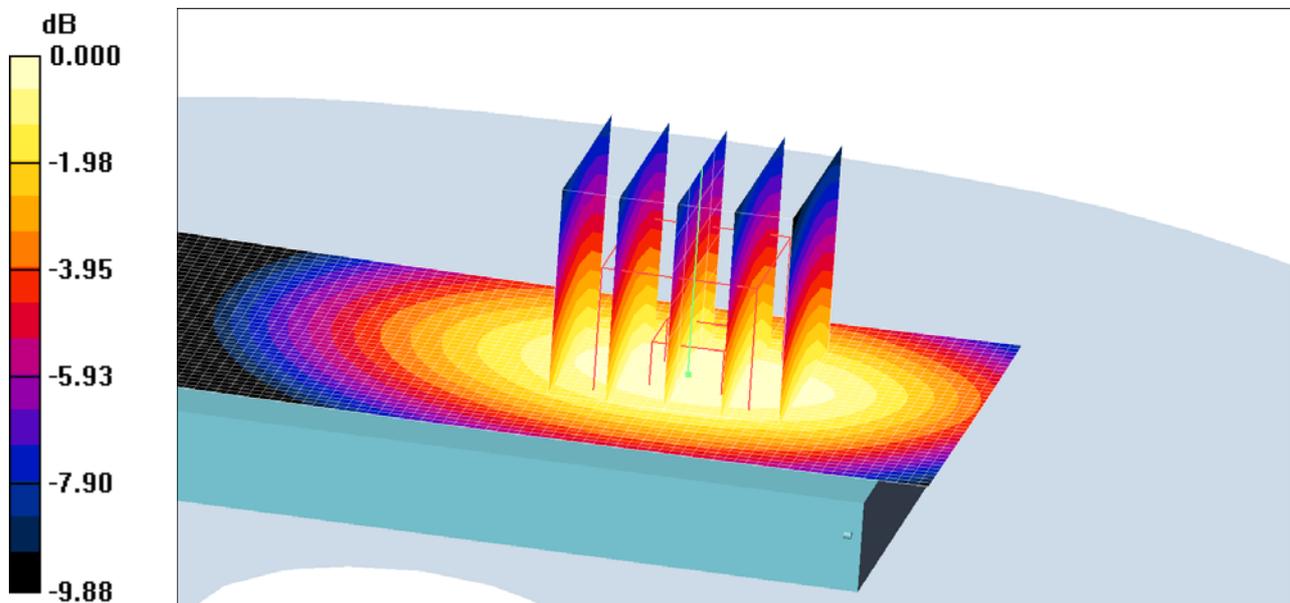

Date/Time: 7/23/2010 12:04:38 PM

Test Laboratory: Sony Ericsson Mobile Communications

Hong125-Body-Flat15mm-UMTS5-Speech-Low**DUT: Hong; Type:DUT; Serial:#18761**

Communication System: WCDMA Band V; Frequency: 826.4 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.948$ mho/m; $\epsilon_r = 52.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1583; ConvF(6.27, 6.27, 6.27); Calibrated: 11/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 5/18/2010
- Phantom: SAM with CRP (Low Band Body); Type: SAM; Serial: TP: 1031
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 172

Body/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.508 mW/g


Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.3 V/m; Power Drift = -0.160 dB

Peak SAR (extrapolated) = 0.621 W/kg

SAR(1 g) = 0.477 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.510 mW/g

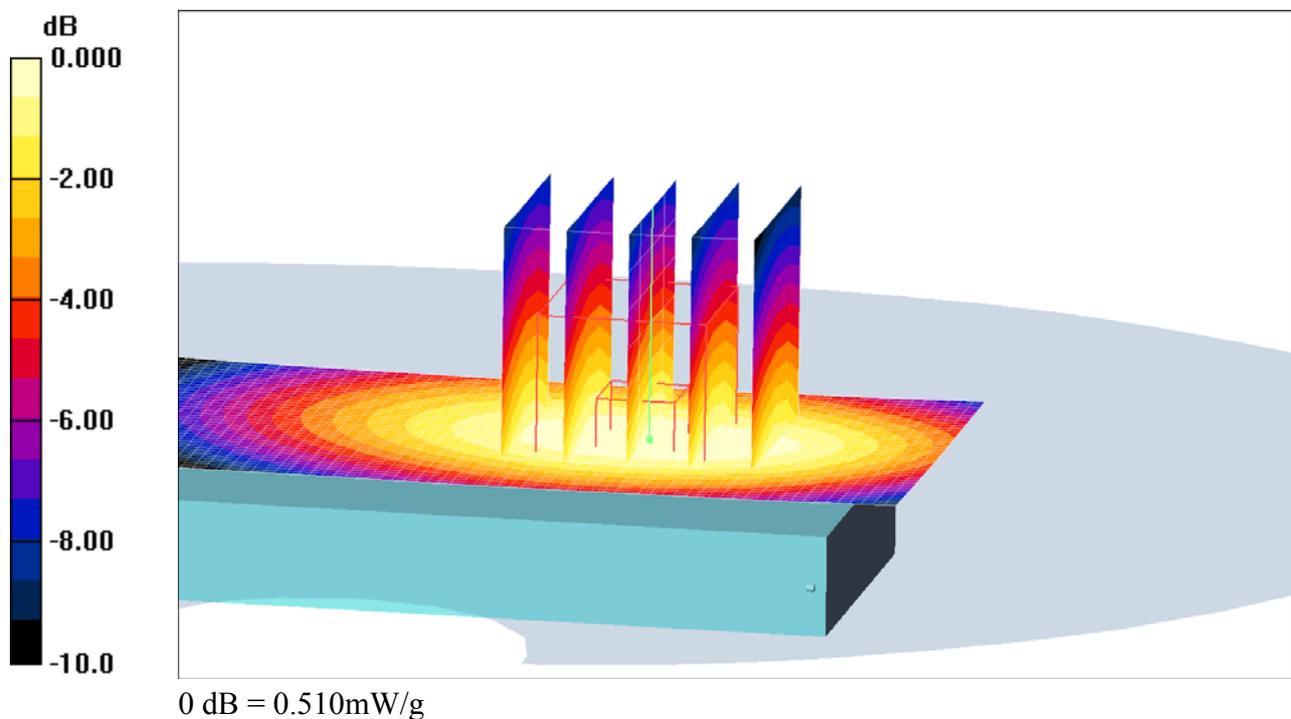

Date/Time: 7/23/2010 12:16:33 PM

Test Laboratory: Sony Ericsson Mobile Communications

Hong125-Body-Flat15mm-UMTS5-Speech-Middle**DUT: Hong; Type:DUT; Serial:#18761**

Communication System: WCDMA Band V; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.958$ mho/m; $\epsilon_r = 52.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1583; ConvF(6.27, 6.27, 6.27); Calibrated: 11/18/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 5/18/2010
- Phantom: SAM with CRP (Low Band Body); Type: SAM; Serial: TP: 1031
- Measurement SW: DASYS4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 172

Body 2/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.569 mW/g


Body 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = 0.009 dB

Peak SAR (extrapolated) = 0.702 W/kg

SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.388 mW/g

Maximum value of SAR (measured) = 0.575 mW/g

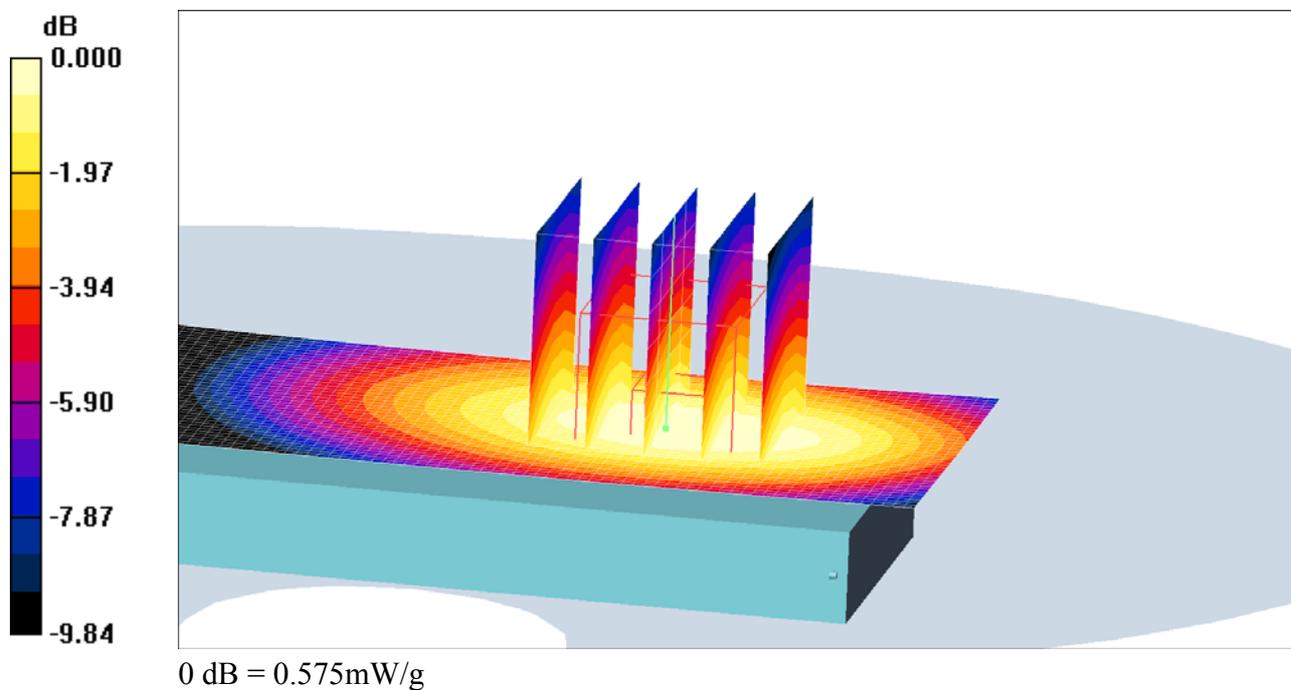

Date/Time: 7/30/2010 9:11:26 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-LeftHandSide-GSM1900-Tilt-Middle**DUT: Hong; Type:DUT ; Serial:#18760**

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(5.18, 5.18, 5.18); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-1; Type: SAM; Serial: 1437
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.158 mW/g


Tilt position/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.46 V/m; Power Drift = -0.121 dB

Peak SAR (extrapolated) = 0.211 W/kg

SAR(1 g) = 0.142 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.151 mW/g

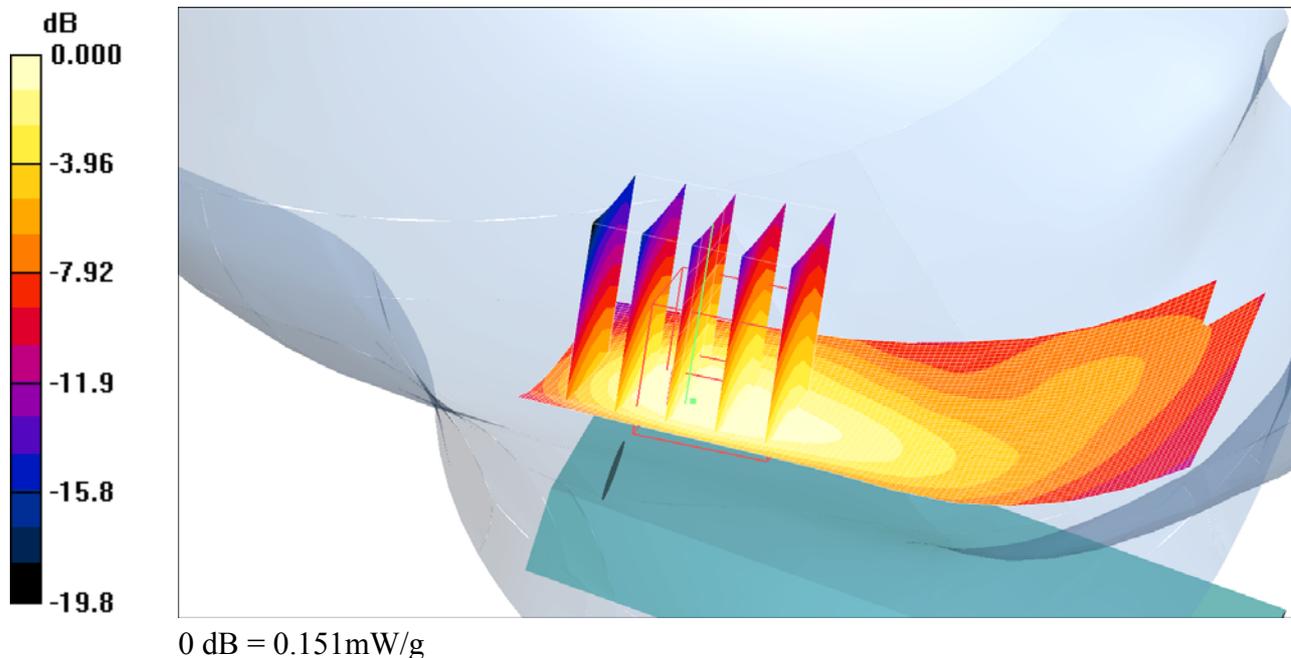

Date/Time: 7/30/2010 9:42:50 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-LeftHandSide-GSM1900-Touch-High**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(5.18, 5.18, 5.18); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-1; Type: SAM; Serial: 1437
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position 3/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.957 mW/g


Touch position 3/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.40 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 1.24 W/kg

SAR(1 g) = 0.832 mW/g; SAR(10 g) = 0.471 mW/g

Maximum value of SAR (measured) = 0.924 mW/g

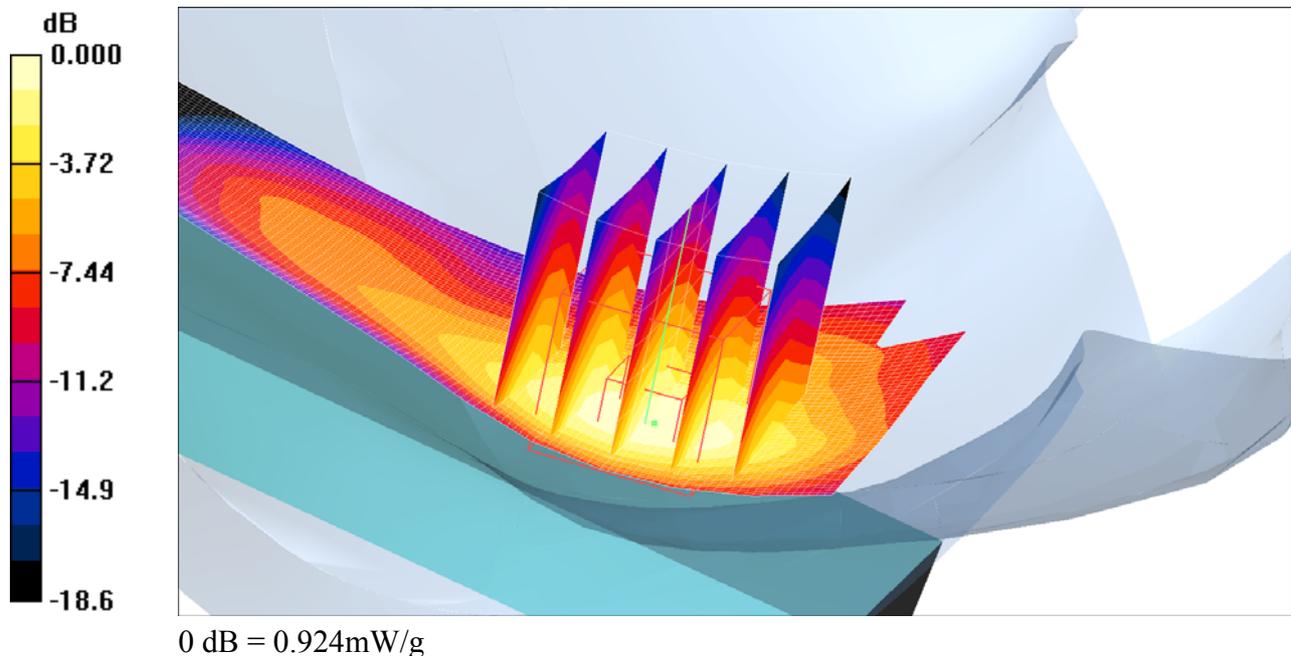

Date/Time: 7/27/2010 9:50:10 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-LeftHandSide-GSM850-Tilt-Middle**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASy4 (High Precision Assessment)

DASy4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(6.58, 6.58, 6.58); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-2; Type: SAM; Serial: 1025
- Measurement SW: DASy4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.271 mW/g


Tilt position/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.323 W/kg

SAR(1 g) = 0.257 mW/g; SAR(10 g) = 0.190 mW/g

Maximum value of SAR (measured) = 0.273 mW/g

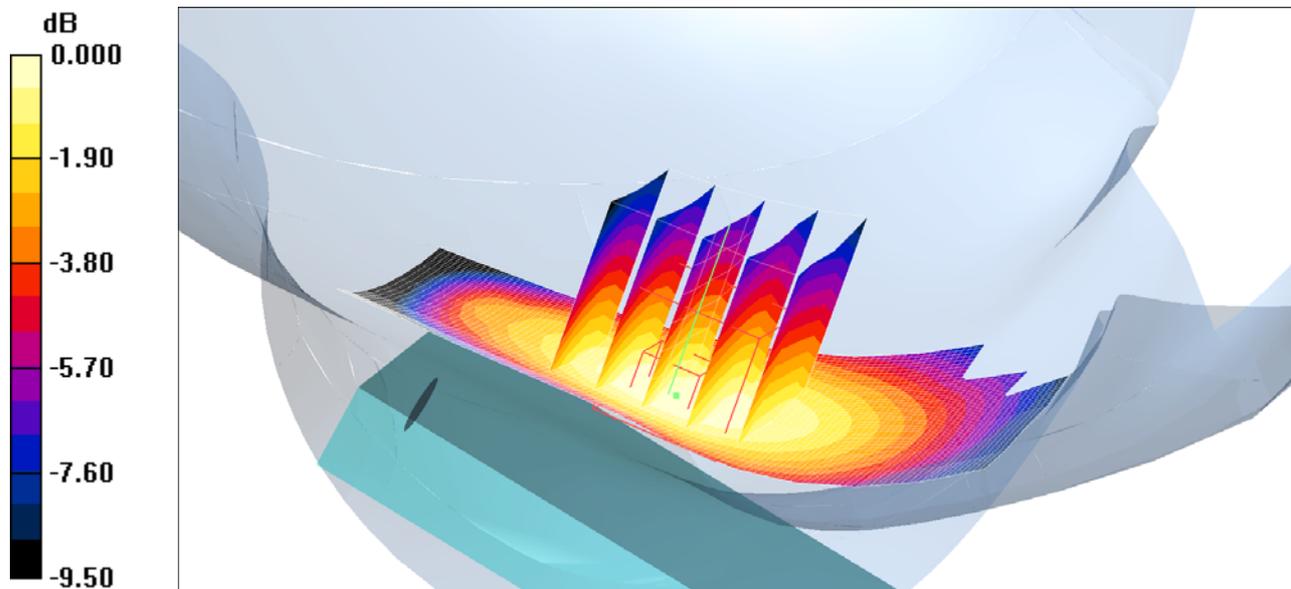

0 dB = 0.273mW/g

Date/Time: 7/27/2010 10:26:14 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-LeftHandSide-GSM850-Touch-High**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(6.58, 6.58, 6.58); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-2; Type: SAM; Serial: 1025
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position 3/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.742 mW/g


Touch position 3/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.00 V/m; Power Drift = -0.097 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.693 mW/g; SAR(10 g) = 0.492 mW/g

Maximum value of SAR (measured) = 0.749 mW/g

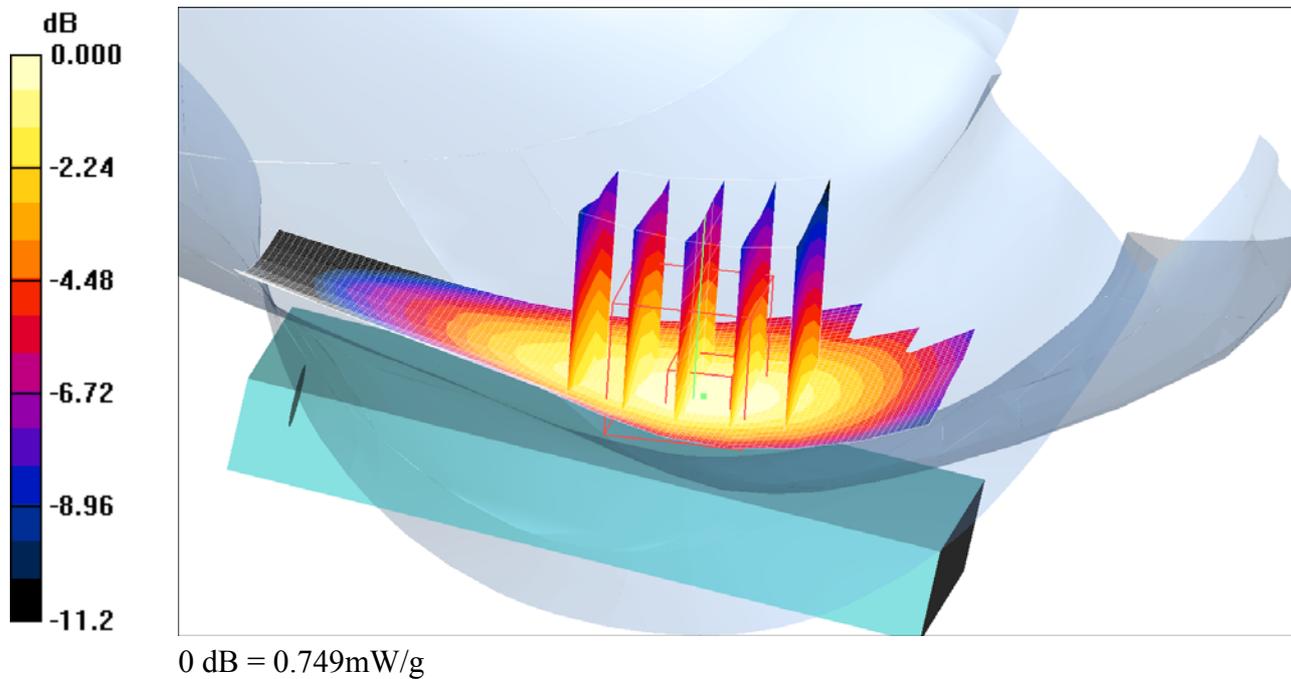

Date/Time: 8/2/2010 10:23:59 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-LeftHandSide-UMTS2-Tilt-Middle**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(5.18, 5.18, 5.18); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-1; Type: SAM; Serial: 1437
- Measurement SW: DASYS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.278 mW/g


Tilt position/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = -0.048 dB

Peak SAR (extrapolated) = 0.366 W/kg

SAR(1 g) = 0.250 mW/g; SAR(10 g) = 0.158 mW/g

Maximum value of SAR (measured) = 0.267 mW/g

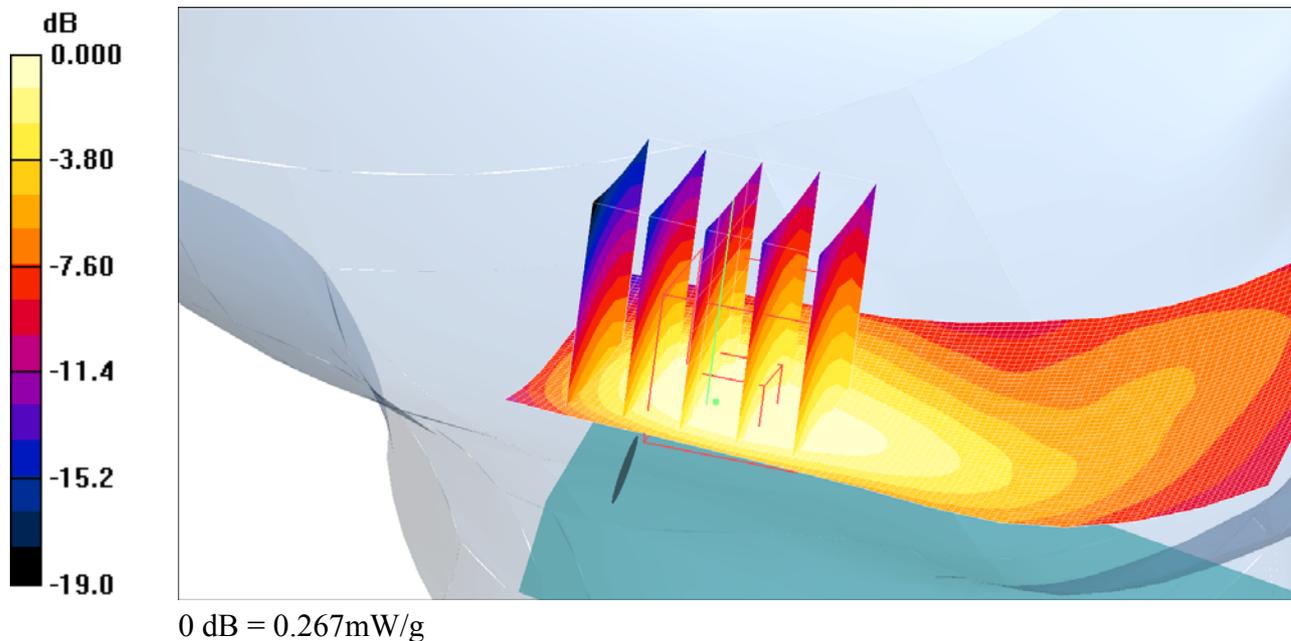

Date/Time: 8/2/2010 10:07:14 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-LeftHandSide-UMTS2-Touch-Middle**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(5.18, 5.18, 5.18); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-1; Type: SAM; Serial: 1437
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 1.20 mW/g


Touch position/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.09 V/m; Power Drift = -0.343 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.619 mW/g

Maximum value of SAR (measured) = 1.20 mW/g

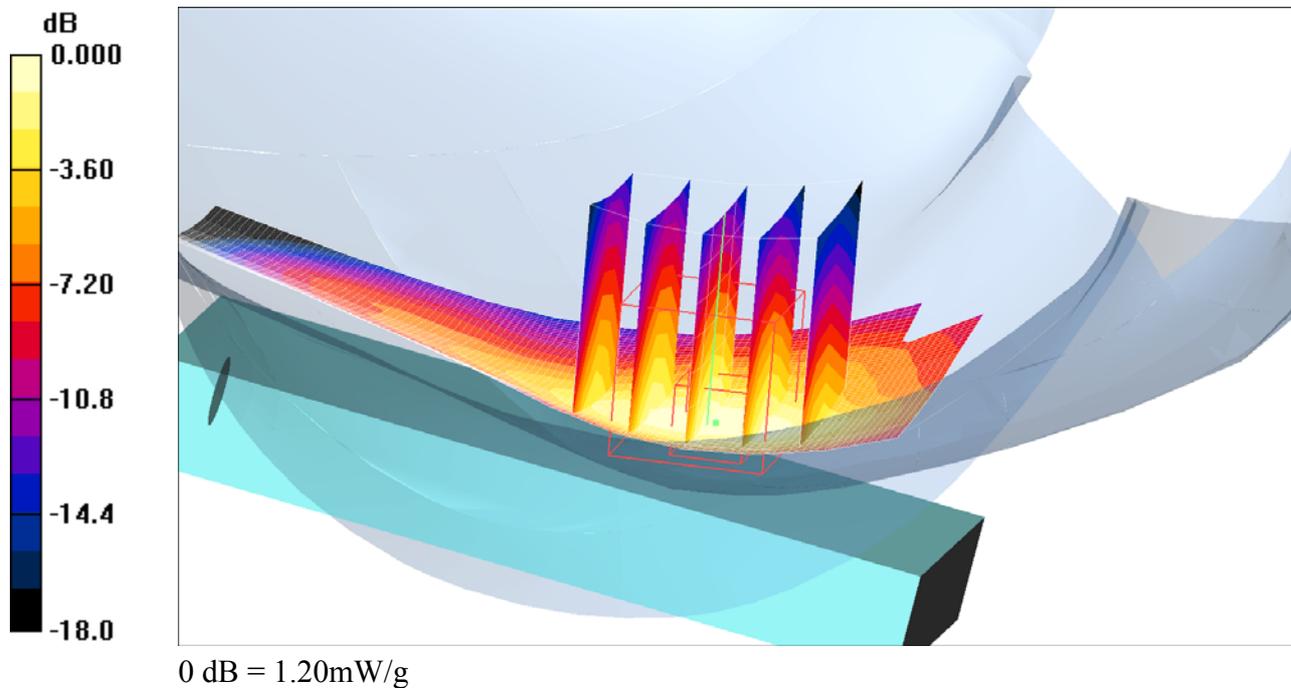

Date/Time: 7/27/2010 2:48:38 PM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-LeftHandSide-UMTS5-Tilt-Middle**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: WCDMA Band5; Frequency: 836.6 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(6.58, 6.58, 6.58); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-2; Type: SAM; Serial: 1025
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.345 mW/g


Tilt position/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.019 dB

Peak SAR (extrapolated) = 0.411 W/kg

SAR(1 g) = 0.328 mW/g; SAR(10 g) = 0.242 mW/g

Maximum value of SAR (measured) = 0.349 mW/g

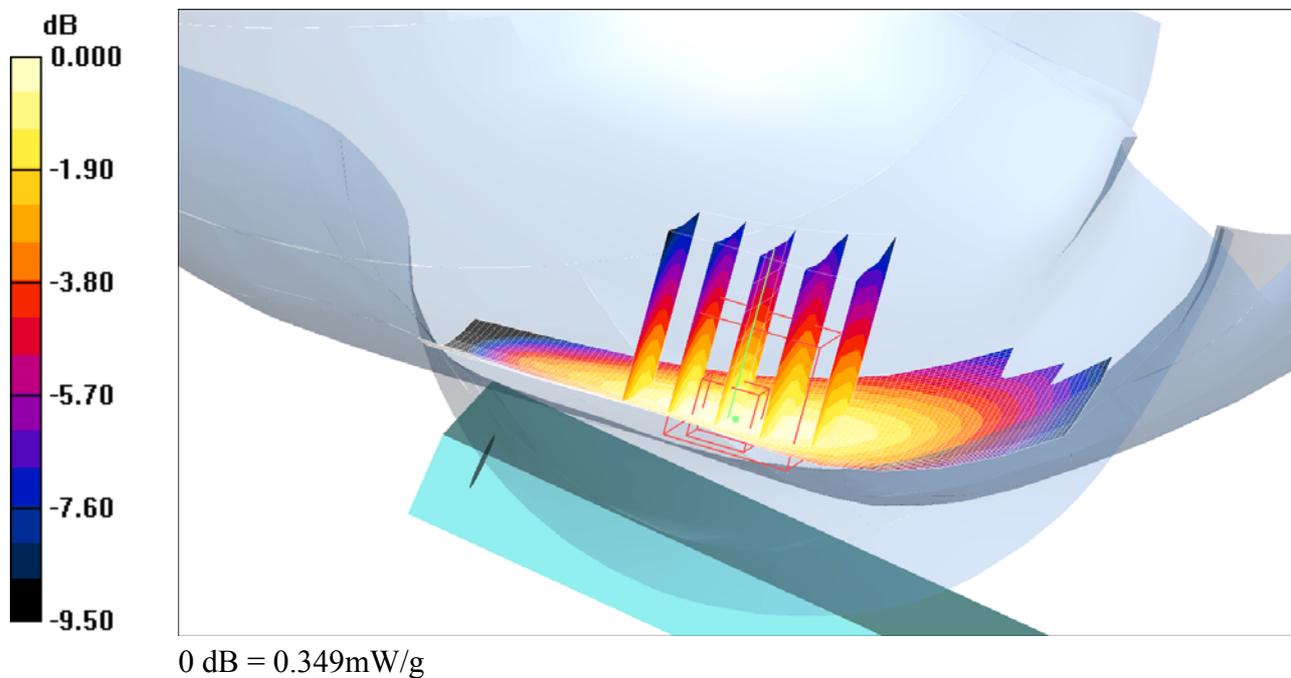

Date/Time: 7/27/2010 3:20:24 PM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-LeftHandSide-UMTS5-Touch-High**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: WCDMA Band5; Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 846.629$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(6.58, 6.58, 6.58); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-2; Type: SAM; Serial: 1025
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position 3/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.660 mW/g


Touch position 3/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.32 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.811 W/kg

SAR(1 g) = 0.619 mW/g; SAR(10 g) = 0.441 mW/g

Maximum value of SAR (measured) = 0.670 mW/g

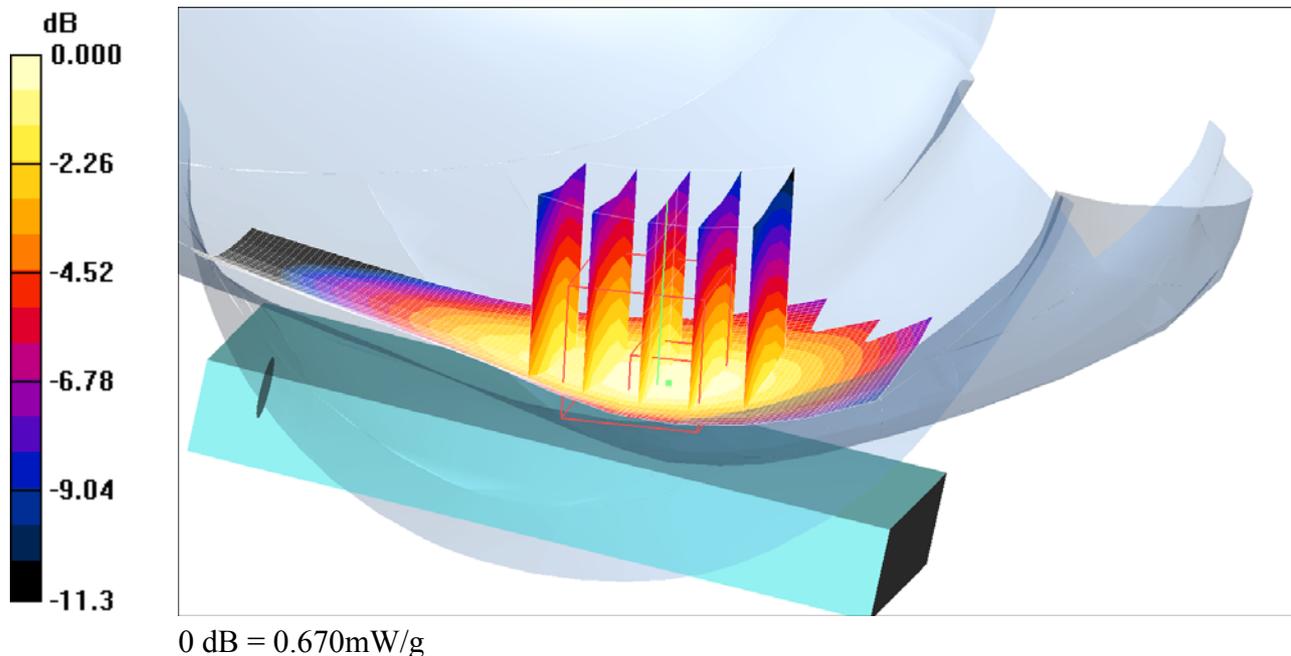

Date/Time: 7/30/2010 10:37:20 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-RightHandSide-GSM1900-Tilt-Middle**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: GSM 1900; Frequency: 1880 MHz;Duty Cycle: 1:8.3


Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(5.18, 5.18, 5.18); Calibrated: 12/8/2009
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn448; Calibrated: 11/10/2009
 - Phantom: SAM-1; Type: SAM; Serial: 1437
 - Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172
- Tilt position - Middle/Area Scan (61x111x1):** Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.234 mW/g
- Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm
Reference Value = 8.57 V/m; Power Drift = 0.037 dB
Peak SAR (extrapolated) = 0.325 W/kg
SAR(1 g) = 0.211 mW/g; SAR(10 g) = 0.125 mW/g
Maximum value of SAR (measured) = 0.225 mW/g

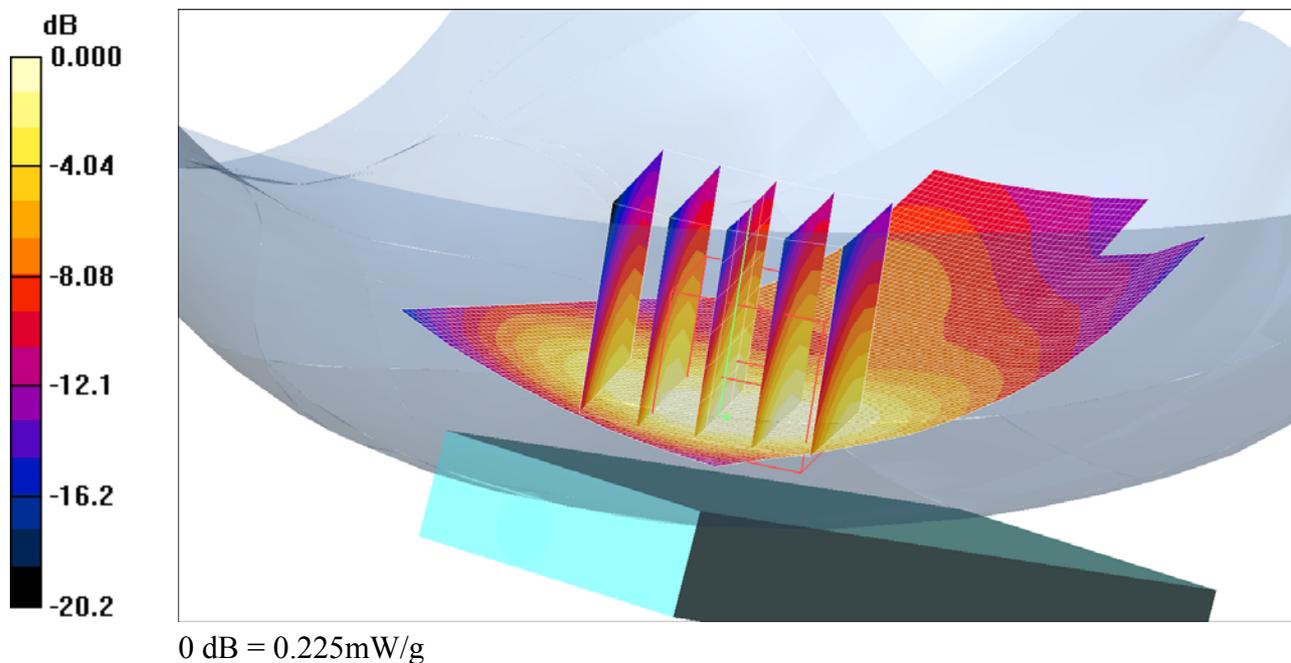

Date/Time: 7/30/2010 11:09:10 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-RightHandSide-GSM1900-Touch-High**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.48$ mho/m; $\epsilon_r = 38.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(5.18, 5.18, 5.18); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-1; Type: SAM; Serial: 1437
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.660 mW/g


Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.53 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.870 W/kg

SAR(1 g) = 0.597 mW/g; SAR(10 g) = 0.360 mW/g

Maximum value of SAR (measured) = 0.657 mW/g

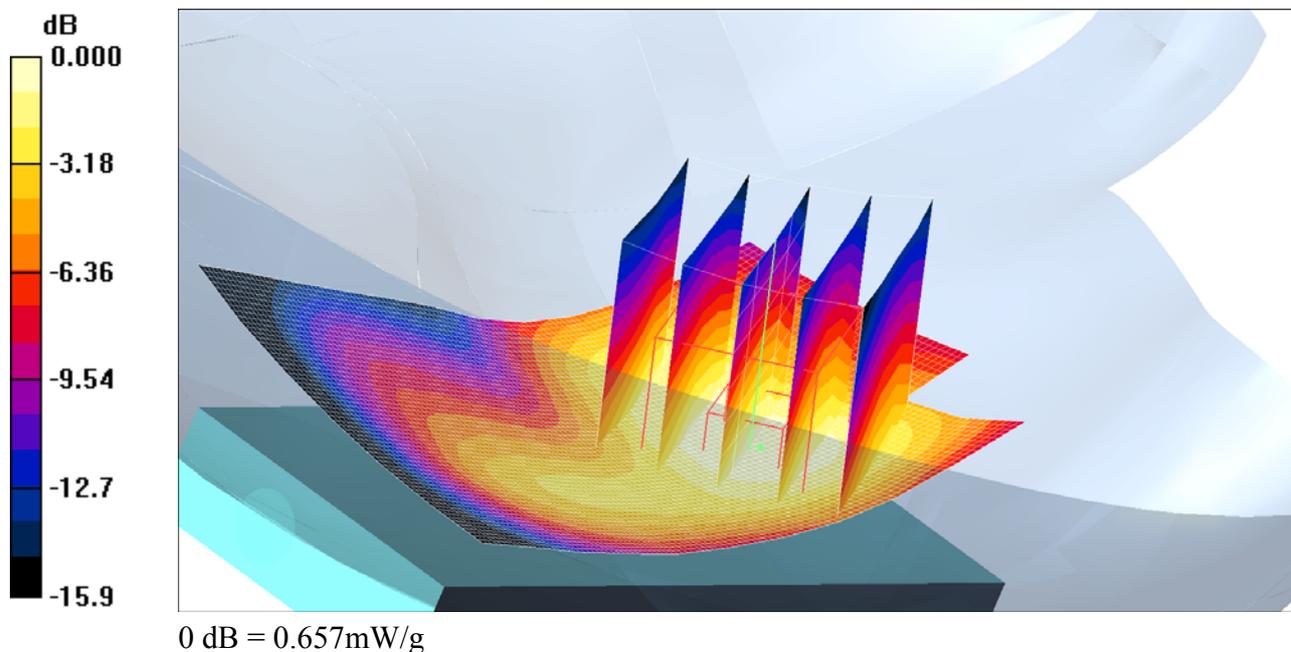

Date/Time: 7/27/2010 11:22:12 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-RightHandSide-GSM850-Tilt-Middle**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(6.58, 6.58, 6.58); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-2; Type: SAM; Serial: 1025
- Measurement SW: DASYS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Tilt position - Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.304 mW/g


Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.4 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.355 W/kg

SAR(1 g) = 0.282 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.301 mW/g

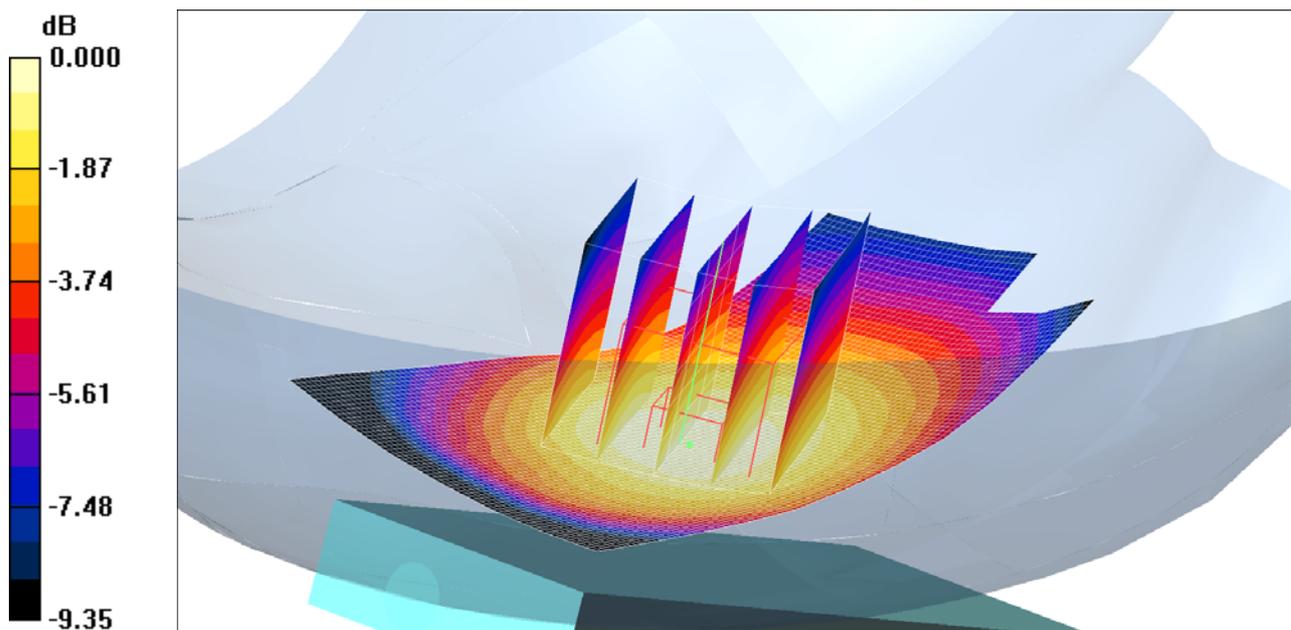

0 dB = 0.301mW/g

Date/Time: 7/27/2010 11:58:11 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-RightHandSide-GSM850-Touch-High**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.895$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(6.58, 6.58, 6.58); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-2; Type: SAM; Serial: 1025
- Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.614 mW/g


Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.06 V/m; Power Drift = -0.040 dB

Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.579 mW/g; SAR(10 g) = 0.415 mW/g

Maximum value of SAR (measured) = 0.619 mW/g

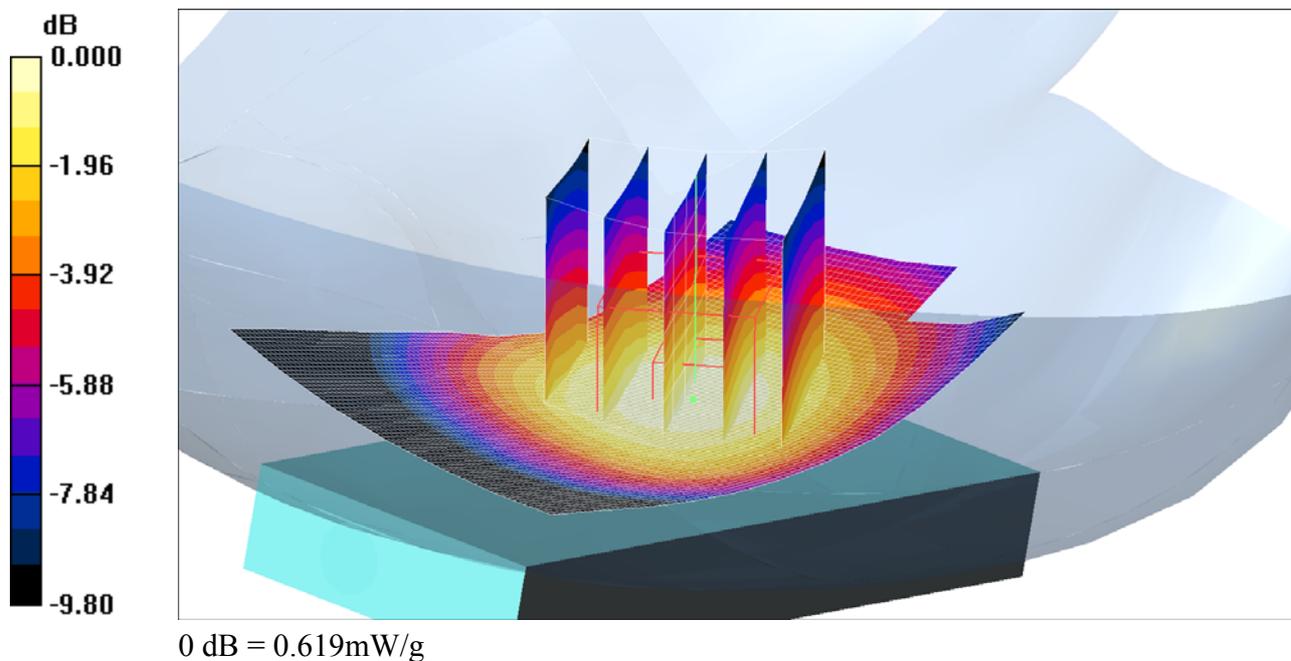

Date/Time: 8/2/2010 11:42:19 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-RightHandSide-UMTS2-Tilt-Middle**DUT: Hong; Type:DUT; Serial:#18760**


Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DAS4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(5.18, 5.18, 5.18); Calibrated: 12/8/2009
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn448; Calibrated: 11/10/2009
 - Phantom: SAM-1; Type: SAM; Serial: 1437
 - Measurement SW: DAS4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172
- Tilt position - Middle/Area Scan (61x111x1):** Measurement grid: dx=10mm, dy=10mm
 Maximum value of SAR (interpolated) = 0.434 mW/g
- Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
 dx=8mm, dy=8mm, dz=5mm
 Reference Value = 12.2 V/m; Power Drift = -0.022 dB
 Peak SAR (extrapolated) = 0.587 W/kg
SAR(1 g) = 0.385 mW/g; SAR(10 g) = 0.230 mW/g
 Maximum value of SAR (measured) = 0.410 mW/g

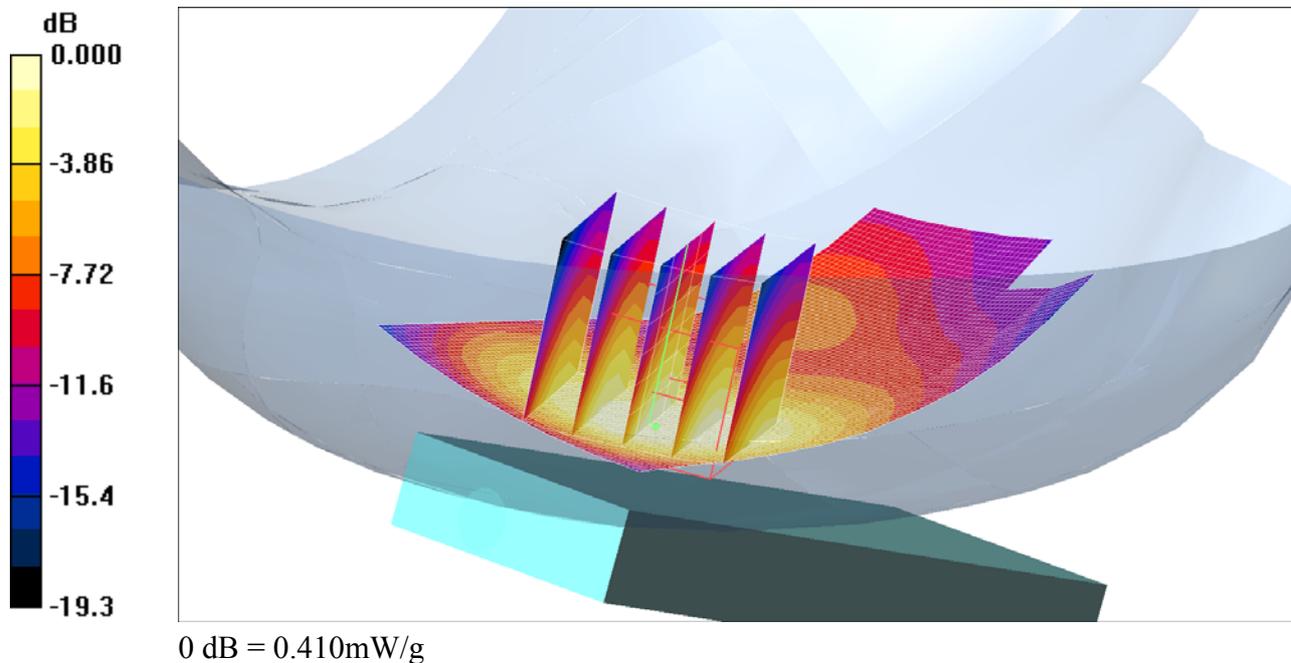

Date/Time: 8/2/2010 11:25:52 AM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-RightHandSide-UMTS2-Touch-Middle**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: WCDMA Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 38.4$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(5.18, 5.18, 5.18); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-1; Type: SAM; Serial: 1437
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - Middle/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.878 mW/g


Touch position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.70 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.789 mW/g; SAR(10 g) = 0.485 mW/g

Maximum value of SAR (measured) = 0.856 mW/g

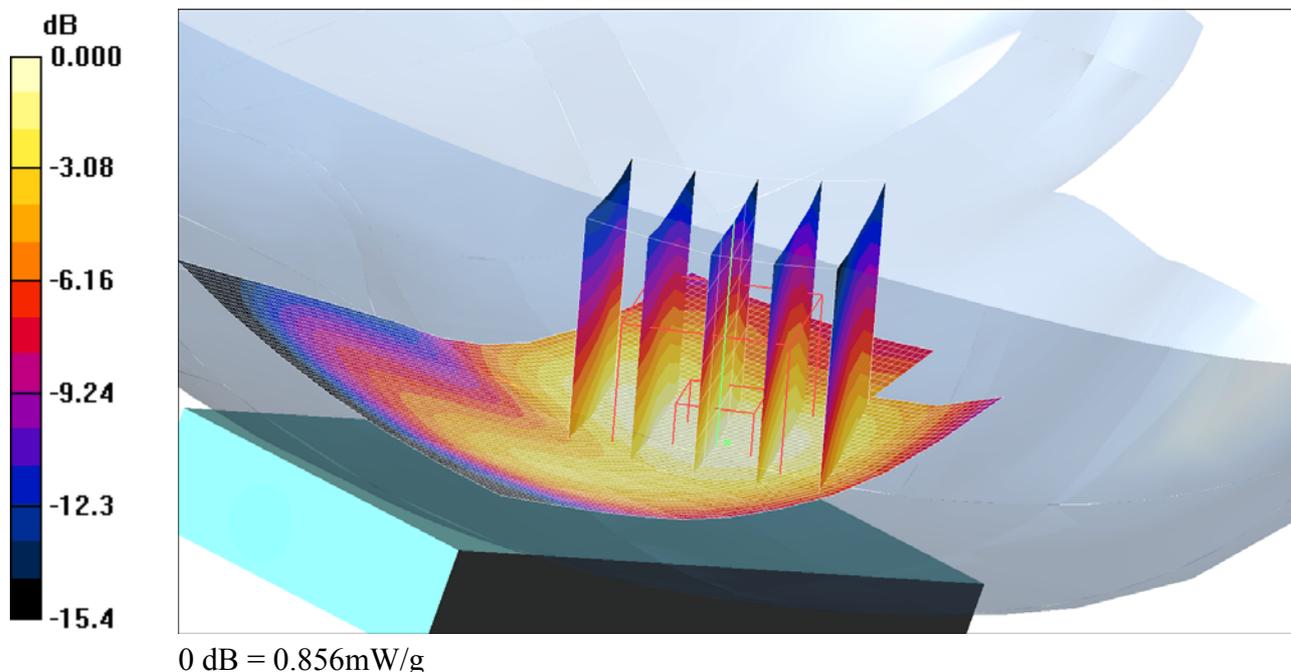

Date/Time: 7/27/2010 1:36:15 PM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-RightHandSide-UMTS5-Tilt-Middle**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: WCDMA Band5; Frequency: 836.6 MHz;Duty Cycle: 1:1


Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.883$ mho/m; $\epsilon_r = 41.5$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASy4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(6.58, 6.58, 6.58); Calibrated: 12/8/2009
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE3 Sn448; Calibrated: 11/10/2009
 - Phantom: SAM-2; Type: SAM; Serial: 1025
 - Measurement SW: DASy4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172
- Tilt position - Middle/Area Scan (61x11x1):** Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (interpolated) = 0.389 mW/g
- Tilt position - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0:** Measurement grid:
dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.8 V/m; Power Drift = -0.104 dB
Peak SAR (extrapolated) = 0.467 W/kg
SAR(1 g) = 0.370 mW/g; SAR(10 g) = 0.272 mW/g
Maximum value of SAR (measured) = 0.396 mW/g

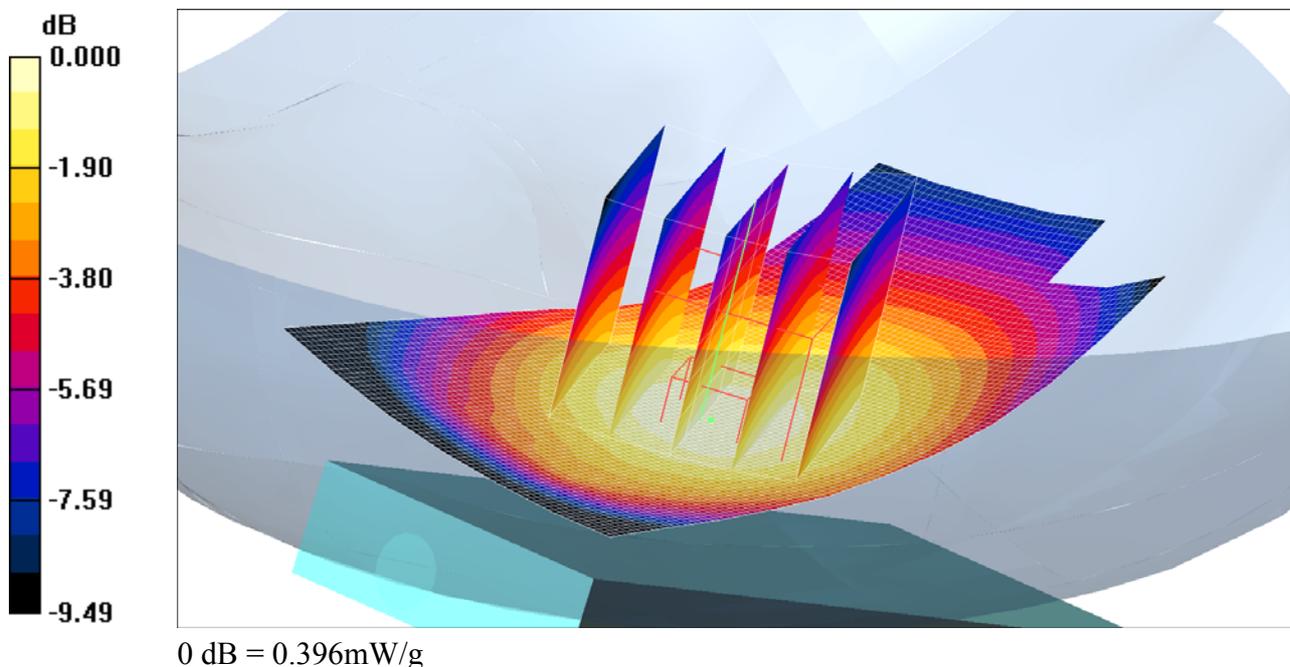

Date/Time: 7/27/2010 2:10:55 PM

Test Laboratory: Sony Ericsson Mobile Communications International AB

Hong125-RightHandSide-UMTS5-Touch-High**DUT: Hong; Type:DUT; Serial:#18760**

Communication System: WCDMA Band5; Frequency: 846.6 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 846.629$ MHz; $\sigma = 0.892$ mho/m; $\epsilon_r = 41.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ET3DV6 - SN1611; ConvF(6.58, 6.58, 6.58); Calibrated: 12/8/2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn448; Calibrated: 11/10/2009
- Phantom: SAM-2; Type: SAM; Serial: 1025
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

Touch position - High/Area Scan (61x111x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.606 mW/g


Touch position - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.83 V/m; Power Drift = 0.037 dB

Peak SAR (extrapolated) = 0.758 W/kg

SAR(1 g) = 0.569 mW/g; SAR(10 g) = 0.409 mW/g

Maximum value of SAR (measured) = 0.601 mW/g

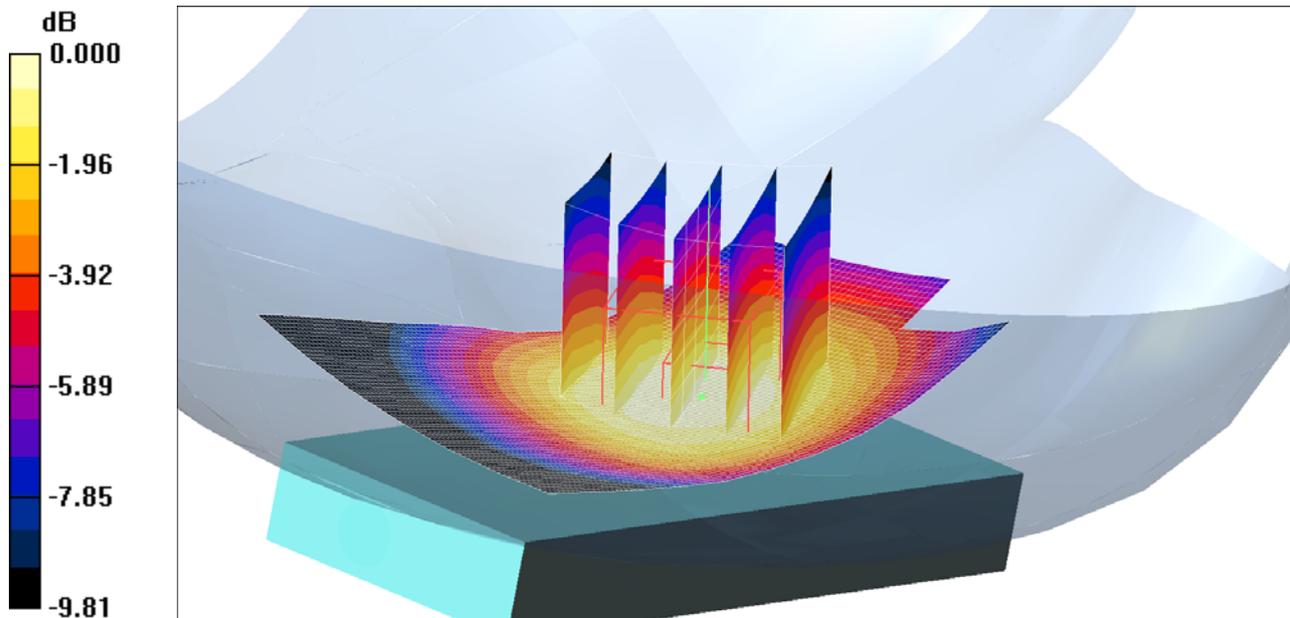

0 dB = 0.601mW/g