



## TEST REPORT

Annex to Test Report No.: 1-2977-35-02/11-A



### Testing Laboratory

**CETECOM ICT Services GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken/Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom-ict.de>  
e-mail: [info@ict.cetecom.de](mailto:info@ict.cetecom.de)

#### Accredited Test Laboratory:

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025  
DAR registration number: D-PL-12076-01-01

Area of Testing: Radio Satellite Communications

### Applicant

**Sony Ericsson Mobile Communications AB**  
Nya Vattentornet  
22188 Lund/Sweden  
Phone: +46 46 19 30 00  
Fax: +46 46 19 32 95  
Contact: Håkan Sjöberg  
e-mail: [hakan.sjoberg@sonyericsson.com](mailto:hakan.sjoberg@sonyericsson.com)  
Phone: +46 46 19 35 59

### Manufacturer

**Sony Ericsson Mobile Communications AB**  
Nya Vattentornet  
22188 Lund/Sweden

### Test Standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
ICES-003 Issue 4	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

For further applied test standards please refer to section 3 of this test report.

### Test Item

Kind of test item:	GSM Mobile Phone (GPRS/EGPRS) 850/900/1800/1900; UMTS FDD1/FDD8 (HSUPA/HSDPA); BT+EDR; WLAN+Hotspot; A-GPS; ANTplus
Model name:	AAD-3880104-BV
FCC ID:	PY7A3880104
IC:	4170B-A3880104
Frequency :	824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz
Power supply:	3.70 V DC by Li-Polymer Battery (EP500) and Power Supply
Temperature range:	-30 °C to 60 °C

Test performed:

2011-05-18 Jakob Reschke

Test Report authorised:

2011-05-18 Stefan Bös

## 1 Table of contents

1	Table of contents .....	2
2	General Information .....	3
2.1	Notes .....	3
2.2	Application details .....	3
3	Test standard/s .....	3
4	Test Environment .....	3
5	Test item .....	4
6	Test Laboratories sub-contracted .....	4
7	Summary of Measurement Results .....	5
7.1	Receiver .....	5
8	Measurement Results .....	6
8.1	RX Spurious Emissions Conducted < 30 MHz .....	6
8.2	Spurious Emissions Radiated – Receiver Mode .....	9
9	Test equipment and ancillaries used for tests .....	14
Annex A	Photographs of the test setup .....	16
Annex B	External photographs of the EUT .....	18
Annex C	Internal photographs of the EUT .....	23
Annex D	Document history .....	27
Annex E	Further information .....	27

## 2 General Information

### 2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

### 2.2 Application details

Date of receipt of order:	2011-05-03
Date of receipt of test item:	2011-05-09
Start of test:	2011-05-09
End of test:	2011-05-13
Person(s) present during the test:	-/-

## 3 Test standard/s

Test Standard	Version	Test Standard Description
47 CFR Part 15	2009-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
ICES-003 Issue 4	2004-04	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

## 4 Test Environment

Temperature:	$T_{nom}$	25 °C during room temperature tests
	$T_{max}$	60 °C during high temperature test
	$T_{min}$	-30 °C during low temperature test
Relative humidity content:		33 %
Air pressure:		not relevant for this kind of testing
Power supply:	$V_{nom}$	3.70 V DC by Li-Polymer Battery (EP500) and Power Supply
	$V_{max}$	4.40 V
	$V_{min}$	3.30 V

## 5 Test item

Kind of test item	:	<b>GSM Mobile Phone (GPRS/EGPRS) 850/900/1800/1900; UMTS FDD1/FDD8 (HSUPA/HSDPA); BT+EDR; WLAN+Hotspot; A-GPS; ANTplus</b>
Type identification	:	<b>AAD-3880104-BV</b>
S/N serial number	:	<b>Rad. BX902C6RU1, BX902C78Q0 Cond. BX902C78U2</b>
HW hardware status	:	<b>AP</b>
SW software status	:	<b>4.0.A.0.195 ATP R1A034</b>
Frequency band [MHz]	:	<b>824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz</b>
Type of modulation	:	<b>GMSK; 8-PSK</b>
Antenna	:	<b>Integrated antenna</b>
Power supply	:	<b>3.70 V DC by Li-Polymer Battery (EP500) and Power Supply</b>
Temperature range	:	<b>-30°C to 60 °C</b>

## 6 Test Laboratories sub-contracted

None

## 7 Summary of Measurement Results

- No deviations from the technical specifications were ascertained  
 There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 15.107, 15.109 ICES-003, Issue 4	passed	2011-05-18	-/-

### 7.1 Receiver

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Results (max.)
RX-Spurious Emissions Conducted < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

**Note:**

NA = Not applicable; NP = Not performed

## 8 Measurement Results

### 8.1 RX Spurious Emissions Conducted < 30 MHz

**Description:**

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to Idle mode. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

**Measurement:**

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

**Limits:**

FCC		IC	
CFR Part 15.107(a)		ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	


\*Decreases with the logarithm of the frequency

**Result:** Also see plots


RX Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No critical peaks found		
Measurement uncertainty	± 3 dB	

**Result:** The result of the measurement is passed.

Plot 1: 9 kHz to 30 MHz / Phase Line

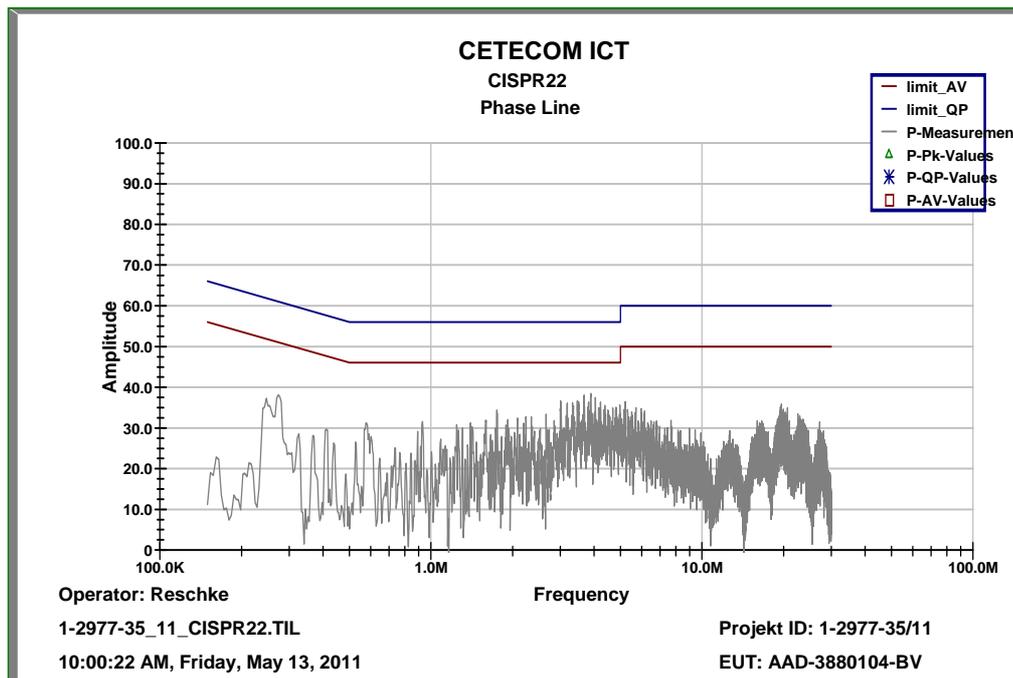

Plot 2: 9 kHz to 30 MHz / Neutral Line

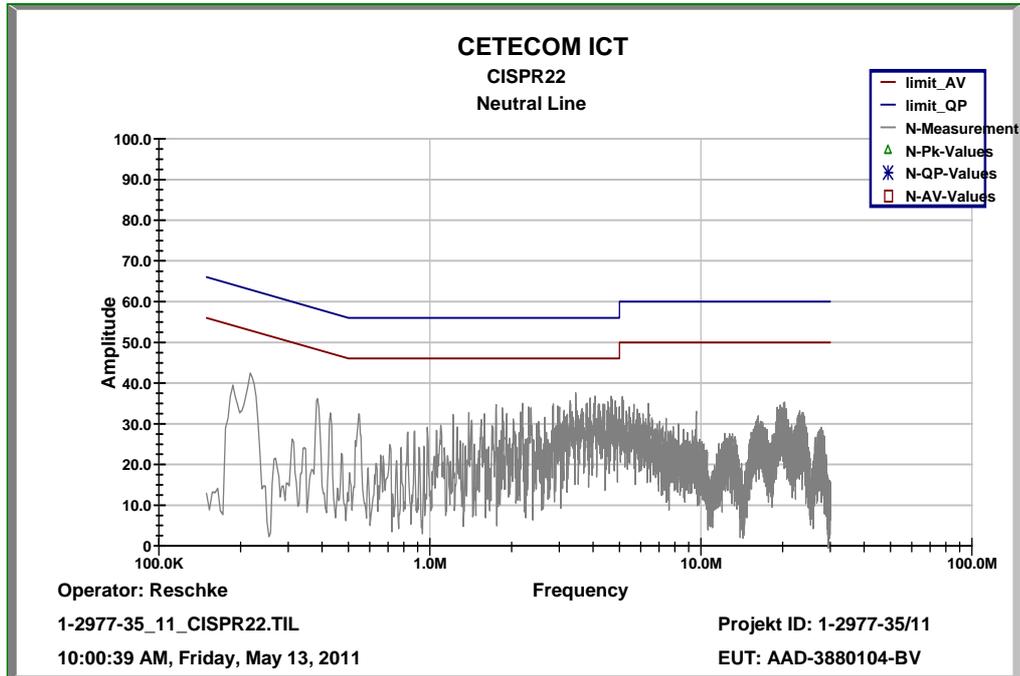

## 8.2 Spurious Emissions Radiated – Receiver Mode

### Description:

The measurement was performed in worst case. The EUT was not connected to the CMU 200. So the EUT performs a network search. In this mode all oscillators are active.

### Measurement:

Measurement parameters	
Detector:	Below 1 GHz Peak / QuasiPeak Above 1 GHz Peak / Average
Sweep time:	2 sec
Video bandwidth:	Below 1 GHz 100 kHz Above 1 GHz 1 MHz
Resolution bandwidth:	1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

### Limits:


FCC		IC	
CFR Part 15.109 CFR Part 2.1053		RSS Gen, Issue 2, Section 4.10 ICES-003 Issue 4	
Spurious Emissions Radiated – Receiver Mode			
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance (m)	
30 – 88	30.0	10	
88 - 216	33.5	10	
216 – 960	36.0	10	
Above 960	54.0	3	

**Results:**

Spurious Emission Level (dB $\mu$ V/m)		
Frequency (MHz)	Detector	Level (dB $\mu$ V/m)
No critical peaks found		
Measurement uncertainty		$\pm 3$ dB

**Result:** [The result of the measurement is passed.](#)

Plot 1: Receiver mode up to 30 MHz

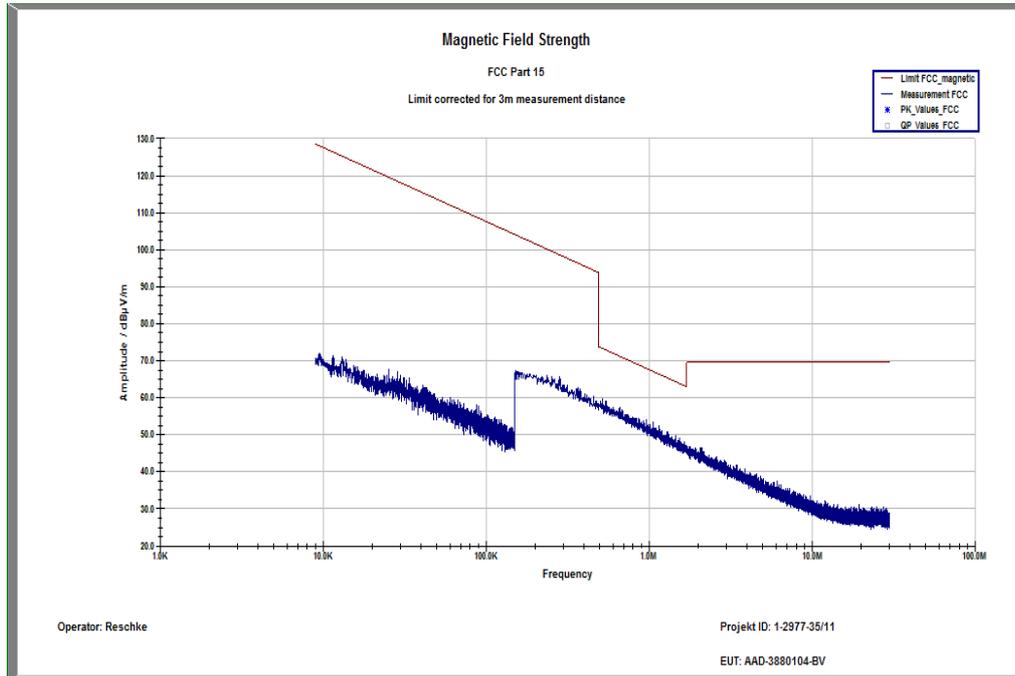


**Plot 2: Receiver mode (30 MHz - 1 GHz)**

**Common Information**

EUT: AAD-3880104-BV + CAA-0002016-BV  
 Serial Number: BX902C6RUI| IMEI: 00440214-117234-0  
 Test Description: FCC Part 15 B < 1GHz @ 10m  
 Operating Conditions: GSM idle + GPS receiving + charging  
 Operator Name: Langer  
 Comment: AC 115V / 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**


Hardware Setup: Electric Field (NOS)  
 Level Unit: dBµV/m  
**Subrange**                      **Detectors**                      **IF Bandwidth**                      **Meas. Time**                      **Receiver**  
 30 MHz - 2 GHz                      QuasiPeak                      120 kHz                      15 s                      Receiver

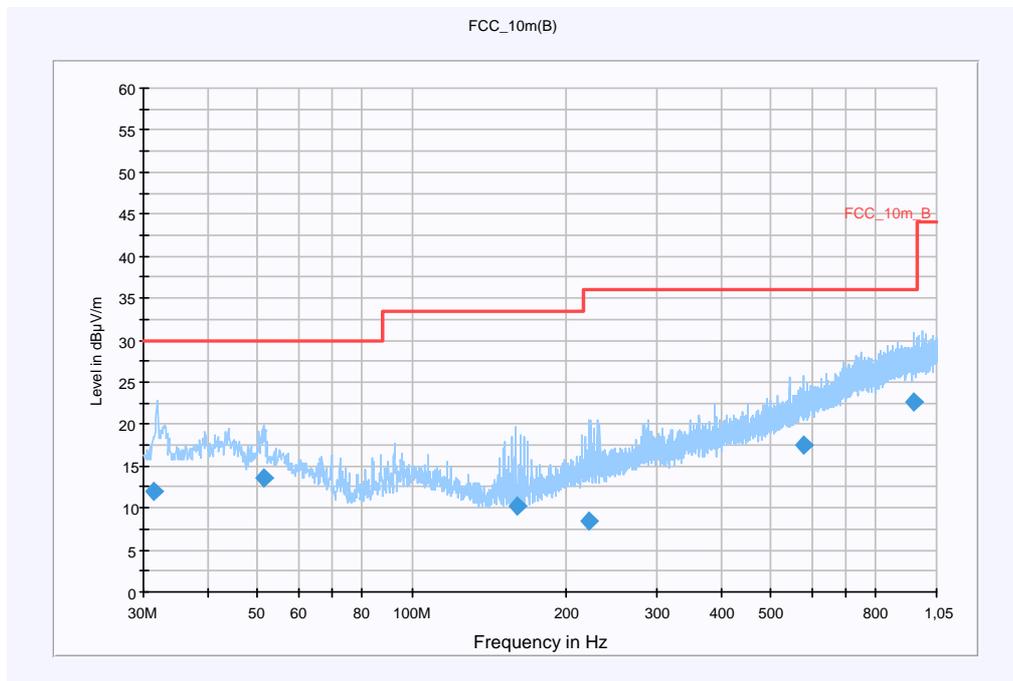


**Final Result 1**

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Antenna height (cm)	Polarity	Turntable position (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
31.493100	12.1	15000.000	120.000	111.0	V	48.0	12.7	17.9	30.0	
51.362250	13.6	15000.000	120.000	98.0	V	-3.0	13.2	16.4	30.0	
159.898050	10.2	15000.000	120.000	107.0	V	66.0	9.2	23.3	33.5	
220.799700	8.4	15000.000	120.000	198.0	V	47.0	12.4	27.6	36.0	
579.866550	17.5	15000.000	120.000	285.0	H	343.0	20.2	18.5	36.0	
946.832850	22.6	15000.000	120.000	400.0	H	109.0	25.3	13.4	36.0	

Plot 3: Receiver mode (1 GHz – 12.75 GHz) (horizontal / vertical – max hold)

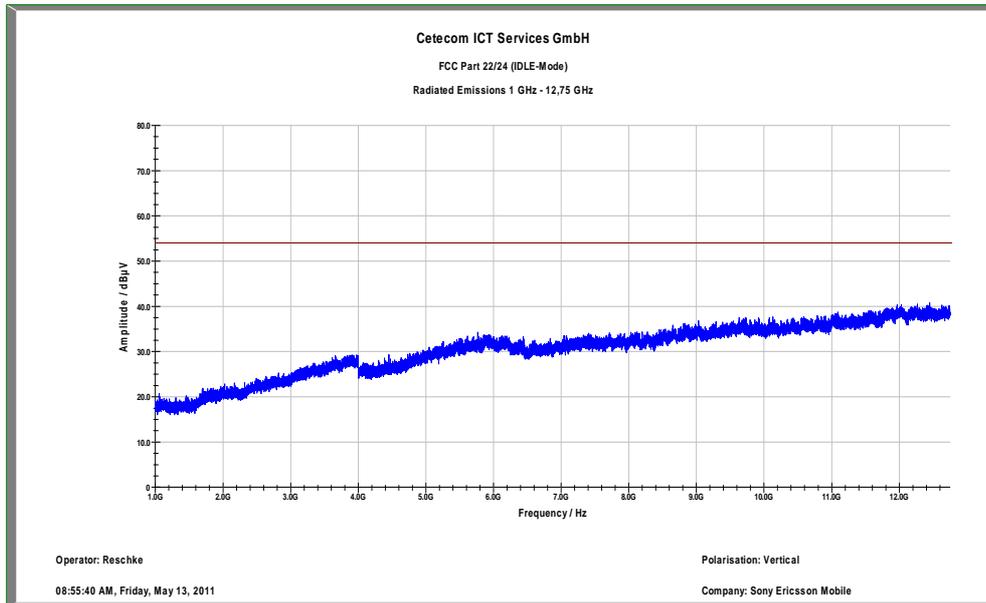

Plot 4: Receiver mode (12 GHz – 25 GHz) (horizontal / vertical – max hold)

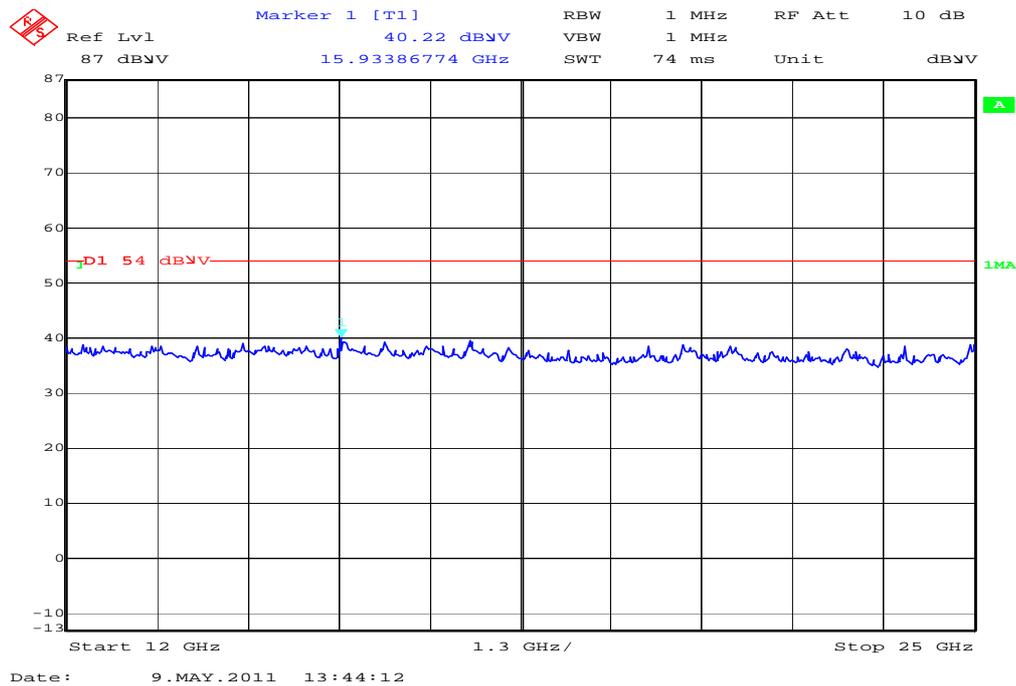

## 9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	k	06.01.2009	06.01.2011
3	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B5979	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
5	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	01.06.2009	01.06.2011
6	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
11	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013
12	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
13	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
14	n. a.	Coaxial Attenuator 30dB/500W	8325	Bird	1530	300001595	ev		
15	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	viKI!	05.03.2009	05.09.2011
16	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
17	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
18	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
19	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012
20	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
21	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
22	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
23	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
24	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		

25	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
26	n. a.	Band Reject filter	WRCG1855/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
27	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
28	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
29	n. a.	Highpass Filter	WHKX2.9/18G-12SS	Wainwright	1	300003492	ev		
30	n. a.	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev		
31	n. a.	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	300003789	ne		
32	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
33	n. a.	MXG Microwave Analog Signal Generator	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012
34	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	vKI!	08.09.2010	08.09.2012
35	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vKI!	17.12.2008	17.12.2011

Agenda: Kind of Calibration

k calibration / calibrated  
 ne not required (k, ev, izw, zw not required)  
 ev periodic self verification  
 Ve long-term stability recognized  
 vKI! Attention: extended calibration interval  
 NK! Attention: not calibrated

EK limited calibration  
 zw cyclical maintenance (external cyclical maintenance)  
 izw internal cyclical maintenance  
 g blocked for accredited testing  
 \*) next calibration ordered / currently in progress