

## TEST REPORT

Annex to Test Report No.: 1-2977-82-02/11



### Testing laboratory

**CETECOM ICT Services GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom.com>  
e-mail: [ict@cetecom.com](mailto:ict@cetecom.com)

#### Accredited test laboratory:

The test laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025  
DAkKS registration number: D-PL-12076-01-01

Area of Testing: Radio/Satellite Communications

### Applicant

**Sony Ericsson Mobile Communications AB**  
Nya Vattentornet  
22188 Lund / SWEDEN  
Phone: +46 46 19 30 00  
Fax: +46 46 19 32 95  
Contact: Håkan Sjöberg  
e-mail: [hakan.sjoberg@sonyericsson.com](mailto:hakan.sjoberg@sonyericsson.com)  
Phone: +46 46 19 35 59

### Manufacturer

**Sony Ericsson Mobile Communications AB**  
Nya Vattentornet  
22188 Lund / SWEDEN

### Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
ICES-003 Issue 4	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

For further applied test standards please refer to section 3 of this test report.

### Test item

Kind of test item:	Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSDPA/HSUPA FDDI/FDDII/FDDV; BT+EDR; WLAN; A-GPS; FM-Rx; ANT+
Model name:	AAD-3880124-BV
FCC ID:	PY7A3880124
IC:	4170B-A3880124
Frequency:	GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz UMTS: 826.4 – 848.6 MHz, 1852.4 – 1907.6 MHz
Power supply:	3.7 V DC by Lithium Ion battery or power supply
Temperature range:	-30 °C to +60 °C

### Test performed:

  
2011-08-25 Stefan Bös

### Test report authorised:

  
2011-08-25 Marco Bertolino

## 1 Table of contents

1	Table of contents .....	2
2	General Information .....	3
2.1	Notes .....	3
2.2	Application details .....	3
3	Test standard/s .....	3
4	Test Environment .....	3
5	Test item .....	4
6	Test Laboratories sub-contracted .....	4
7	Summary of Measurement Results .....	5
7.1	Receiver .....	5
8	Measurement Results .....	6
8.1	RX Spurious Emissions Conducted < 30 MHz .....	6
8.2	Spurious Emissions Radiated – Receiver Mode .....	9
9	Test equipment and ancillaries used for tests .....	15
Annex A	Photographs of the test setup .....	17
Annex B	External photographs of the EUT .....	18
Annex C	Internal photographs of the EUT .....	26
Annex D	Document history .....	39
Annex E	Further information .....	39

## 2 General Information

### 2.1 Notes

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

### 2.2 Application details

Date of receipt of order:	2011-08-09
Date of receipt of test item:	2011-08-01
Start of test:	2011-08-01
End of test:	2011-08-24
Person(s) present during the test:	-/-

## 3 Test standard/s

Test Standard	Date	Test Standard Description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
ICES-003 Issue 4	2004-04	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard

## 4 Test Environment

Temperature:	$T_{nom}$	+20 °C during room temperature tests
	$T_{max}$	+60 °C during high temperature tests
	$T_{min}$	-30 °C during low temperature tests
Relative humidity:		53 %
Air pressure:		not relevant for this kind of testing
Power supply:	$V_{nom}$	3.7 V DC by Lithium Ion battery or power supply
	$V_{max}$	4.1 V
	$V_{min}$	3.3 V

## 5 Test item

Kind of test item	:	Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS HSDPA/HSUPA FDDI/FDDII/FDDV; BT+EDR; WLAN; A-GPS; FM-Rx; ANT+
Type identification	:	AAD-3880124-BV
S/N serial number	:	Rad. BX902GHYNZ, BX902GQPFZ Cond. BX902GHYK5, BX902GHYMW
HW hardware status	:	AP2
SW software status	:	4.0.1.A.0.99
Frequency band [MHz]	:	GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz UMTS: 826.4 – 848.6 MHz, 1852.4 – 1907.6 MHz
Type of modulation	:	GMSK; 8-PSK; QPSK; 16QAM
Antenna	:	Integrated antenna
Power supply	:	3.7 V DC by Lithium Ion battery or power supply
Temperature range	:	-30°C to +60 °C

## 6 Test Laboratories sub-contracted

None

## 7 Summary of Measurement Results

- No deviations from the technical specifications were ascertained  
 There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 15.107, 15.109 ICES-003, Issue 4	passed	2011-08-25	-/-

### 7.1 Receiver

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Results (max.)
RX-Spurious Emissions Conducted < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

**Note:**

NA = Not applicable; NP = Not performed

## 8 Measurement Results

### 8.1 RX Spurious Emissions Conducted < 30 MHz

**Description:**

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to Idle mode. Both power lines, phase and neutral line, are measured. Found peaks are remeasured with average and quasi peak detection to show compliance to the limits.

**Measurement:**

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

**Limits:**

FCC		IC	
CFR Part 15.107(a)		ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	


\*Decreases with the logarithm of the frequency

**Result:** Also see plots


RX Spurious Emissions Conducted < 30 MHz [dB $\mu$ V/m]		
F [MHz]	Detector	Level [dB $\mu$ V/m]
No critical peaks found		
Measurement uncertainty	$\pm 3$ dB	

**Result:** The result of the measurement is passed.

**Plot 1: 9 kHz to 30 MHz / Phase Line**

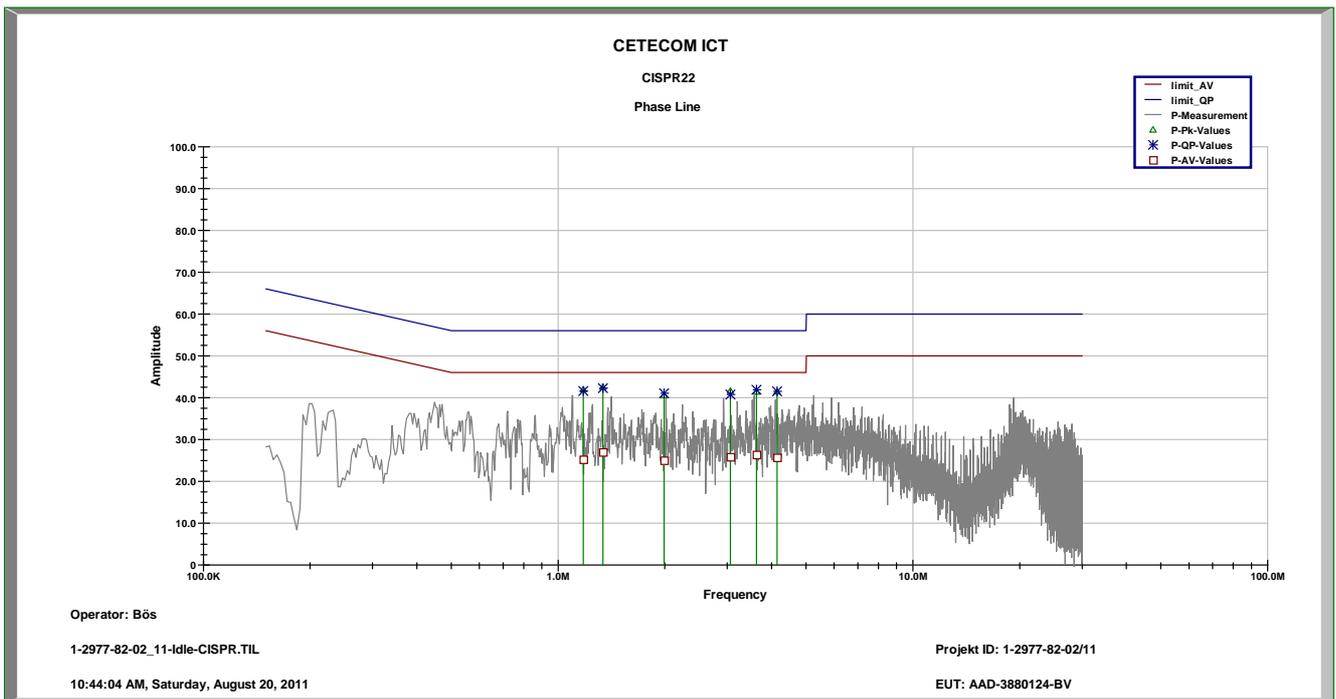

Plot 2: 9 kHz to 30 MHz / Neutral Line

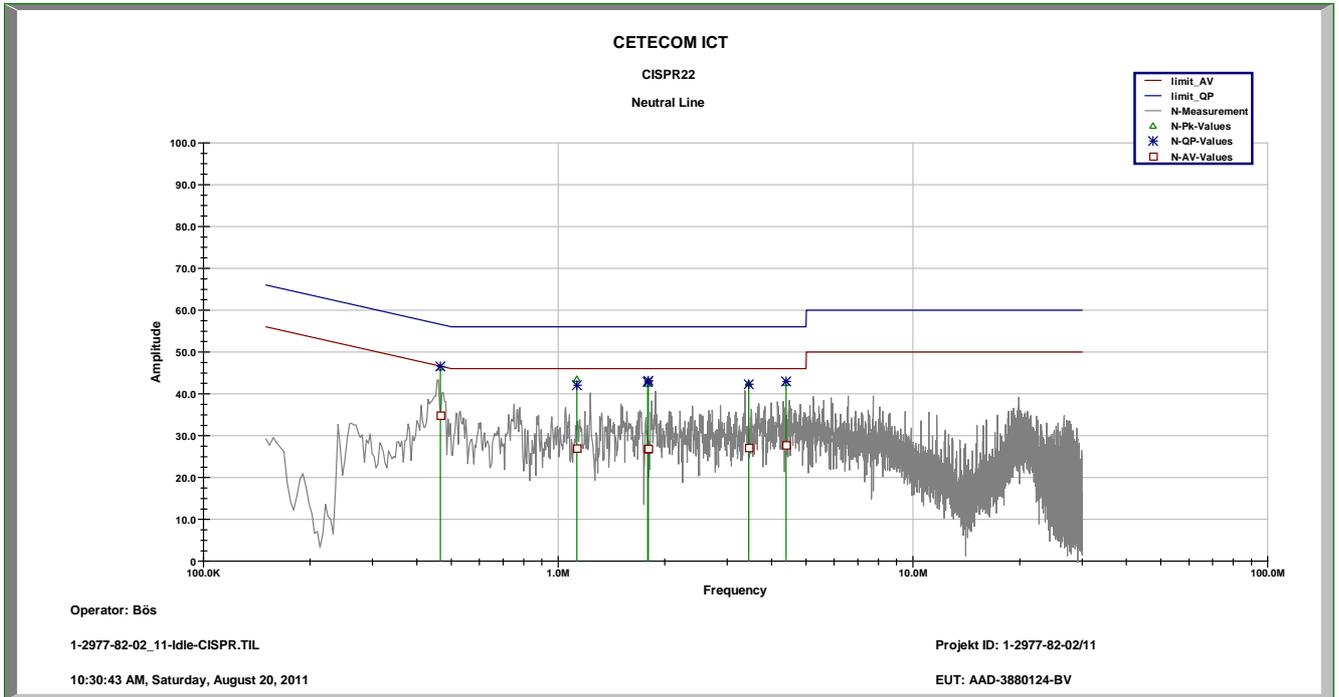

## 8.2 Spurious Emissions Radiated – Receiver Mode

### Description:

The measurement was performed in worst case. The EUT was not connected to the CMU 200. So the EUT performs a network search. In this mode all oscillators are active.

### Measurement:

Measurement parameters	
Detector:	Below 1 GHz Peak / QuasiPeak Above 1 GHz Peak / Average
Sweep time:	2 sec
Video bandwidth:	Below 1 GHz 100 kHz Above 1 GHz 1 MHz
Resolution bandwidth:	1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

### Limits:


FCC		IC	
CFR Part 15.109 CFR Part 2.1053		RSS Gen, Issue 2, Section 4.10	
Spurious Emissions Radiated – Receiver Mode			
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance (m)	
30 – 88	30.0	10	
88 - 216	33.5	10	
216 – 960	36.0	10	
Above 960	54.0	3	

**Results:**

Spurious Emission Level (dB $\mu$ V/m)		
Frequency (MHz)	Detector	Level (dB $\mu$ V/m)
No critical peaks found – Also see plots		
Measurement uncertainty		± 3dB

**Result:** [The result of the measurement is passed.](#)

Plot 1: Receiver mode up to 30 MHz

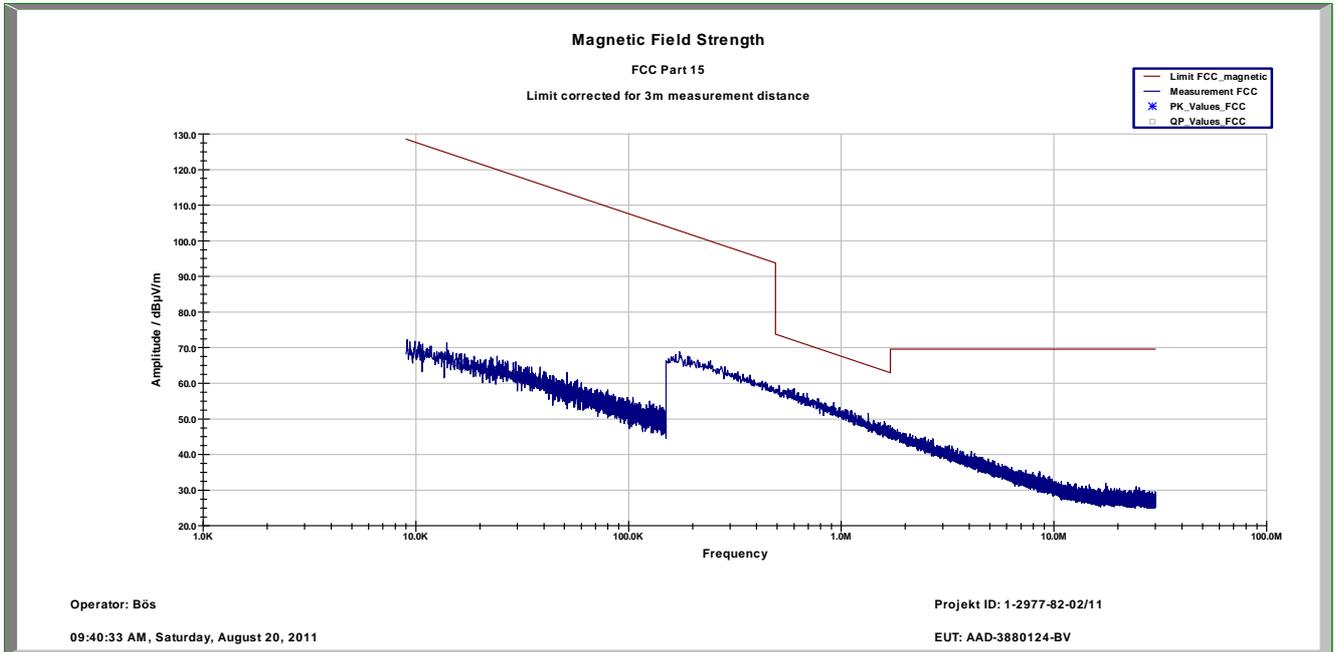

**Plot 2: Receiver mode (30 MHz - 1 GHz)**

Common Information


EUT: AAD-3880124-BV  
 Serial Number: BX902GHYNZ (IMEI: 00440214-313207-8)  
 Test Description: FCC part 15 B class B @ 10 m  
 Operating Conditions: GSM idle + GPS idle + charging  
 Operator Name: Hennemann  
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC\_10m(B)\_3

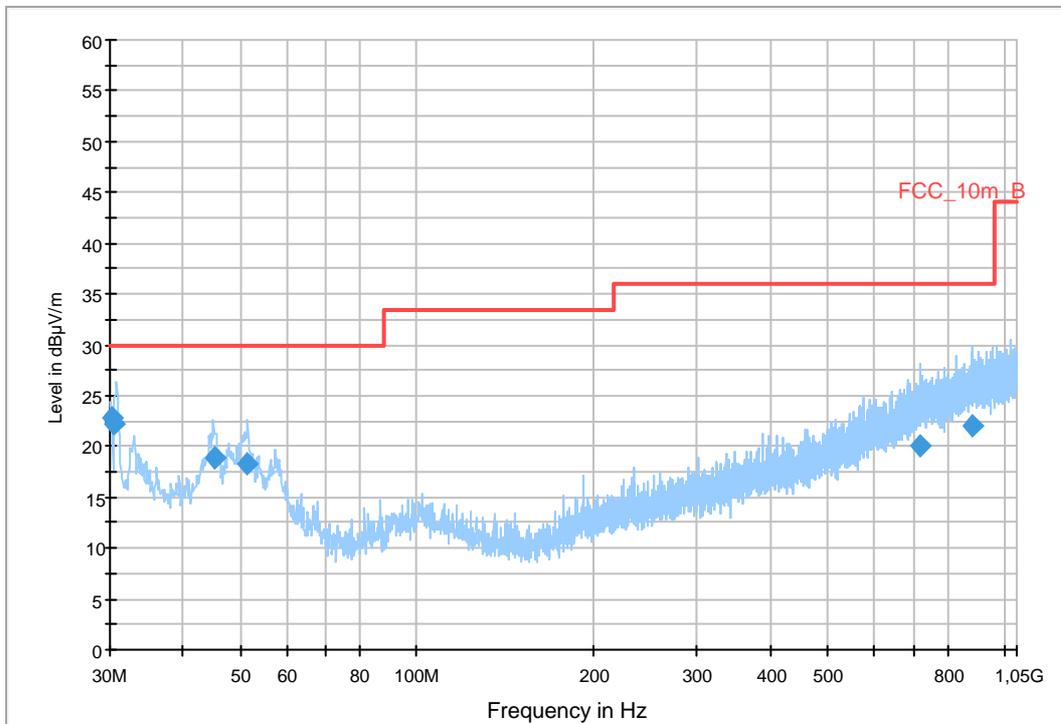

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
30.296775	22.9	1000.0	120.000	98.0	V	184.0	12.5	7.1	30.0	
30.437550	22.3	1000.0	120.000	120.0	V	258.0	12.5	7.7	30.0	
45.064650	18.9	1000.0	120.000	98.0	V	283.0	13.3	11.1	30.0	
51.199350	18.2	1000.0	120.000	98.0	V	185.0	13.3	11.8	30.0	
716.870250	20.0	1000.0	120.000	160.0	V	264.0	22.9	16.0	36.0	
881.341650	22.1	1000.0	120.000	170.0	H	77.0	25.0	13.9	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]  
@ GPIB0 (ADR 20), SN 100083/003, FW 4.42

Signal Path: without Notch  
FW 1.0


Antenna: VULB 9163  
SN 9163-295, FW ---  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table (vertical): Cable\_EN\_1GHz (1005)  
Correction Table (horizontal): Cable\_EN\_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12


Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00

Plot 3: Receiver mode (1 GHz – 12.75 GHz)

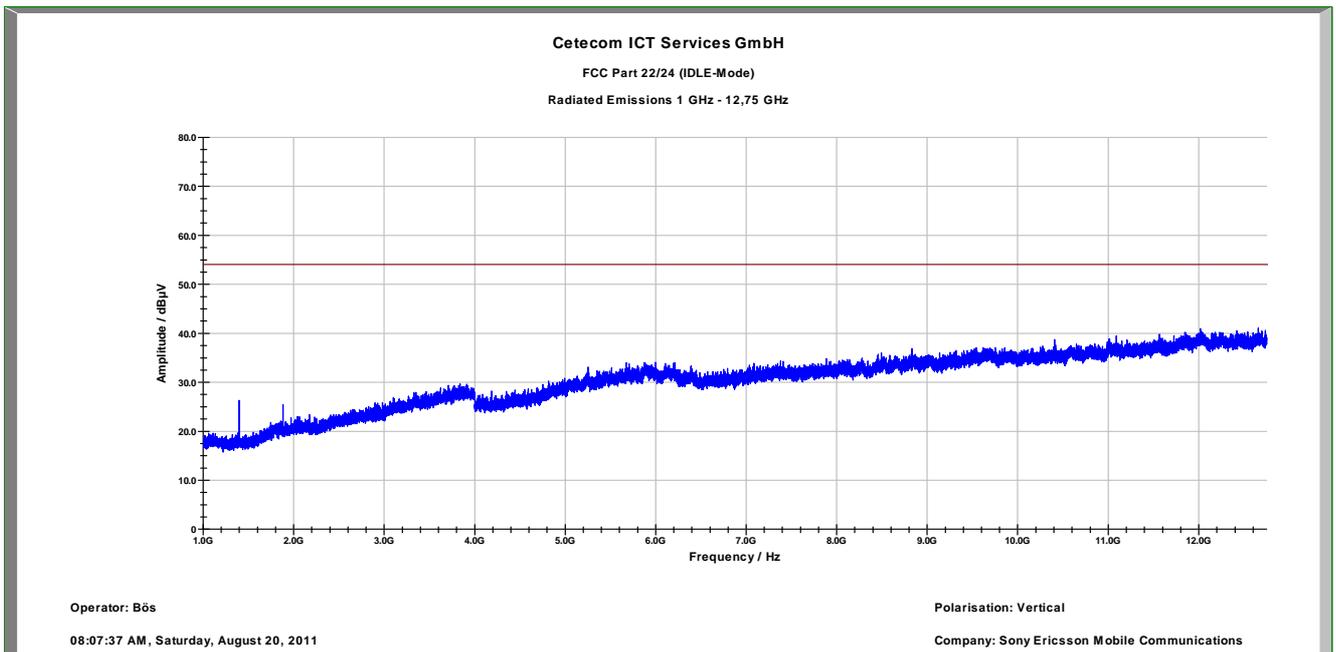


Plot 4: Receiver mode (12 GHz – 18 GHz)

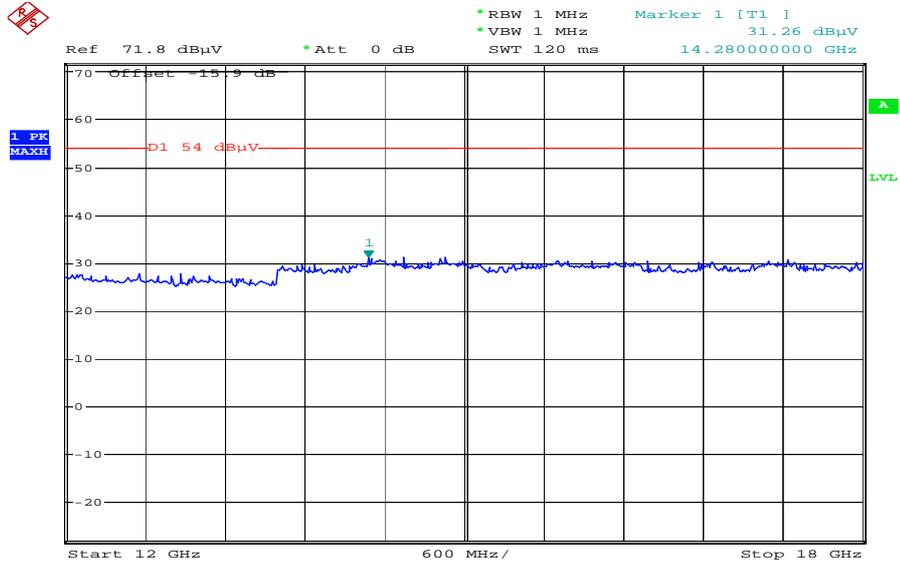

Date: 23.AUG.2011 09:13:19

Plot 5: Receiver mode (18 GHz – 26 GHz)

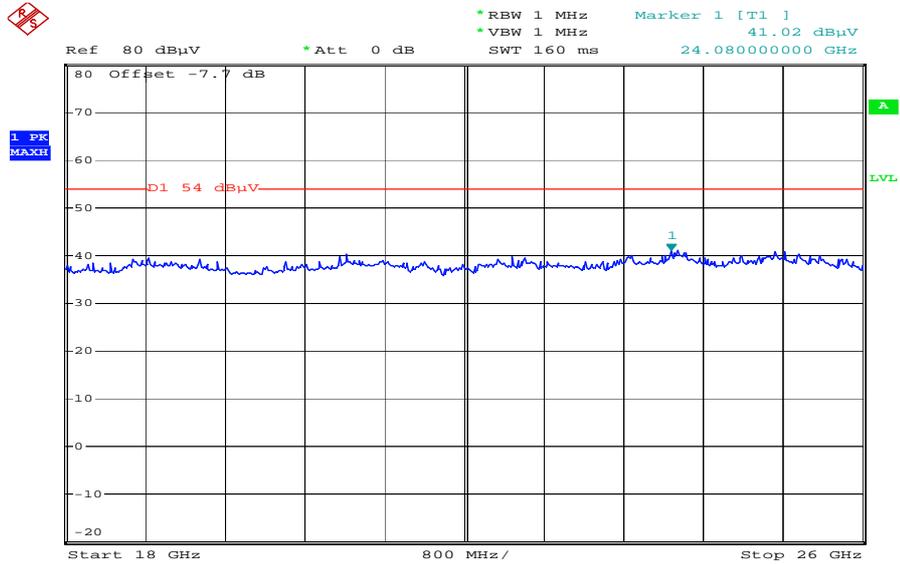

Date: 23.AUG.2011 09:15:33

## 9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	viKI!	08.09.2010	08.09.2012
2	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	viKI!	17.12.2008	17.12.2011
3	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
4	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
5	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B5979	300000210	ne		
6	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
7	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
8	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
9	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
10	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
11	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
12	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
13	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013
14	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
15	n. a.	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2818A03450	300001040	Ve	08.01.2009	08.01.2012
16	n. a.	Coaxial Attenuator 30dB/500W	8325	Bird	1530	300001595	ev		
17	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	viKI!	11.05.2011	11.05.2013
18	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
19	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
20	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
21	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2010	06.01.2012

22	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
23	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
24	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
25	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
26	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
27	n. a.	Amplifier	js42-00502650- 28-5a	Parzich GMBH	928979	300003143	ne		
28	n. a.	Band Reject filter	WRCG1855/1910- 1835/1925- 40/8SS	Wainwright	7	300003350	ev		
29	n. a.	Band Reject filter	WRCG2400/2483- 2375/2505- 50/10SS	Wainwright	11	300003351	ev		
30	n. a.	TILE -Software Emission	Quantum Change, Modell TILE- ICS/FULL	EMCO	none	300003451	ne		
31	n. a.	Highpass Filter	WHKX2.9/18G- 12SS	Wainwright	1	300003492	ev		
32	n. a.	Highpass Filter	WHK1.1/15G- 10SS	Wainwright	3	300003255	ev		
33	n. a.	Highpass Filter	WHKX7.0/18G- 8SS	Wainwright	18	300003789	ne		
34	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
35	n. a.	MXG Microwave Analog Signal Generator	N5183A	Agilent Technologies	MY47420220	300003813	k	13.09.2010	13.09.2012

**Agenda:** Kind of Calibration

k calibration / calibrated  
 ne not required (k, ev, izw, zw not required)  
 ev periodic self verification  
 Ve long-term stability recognized  
 vlk! Attention: extended calibration interval  
 NK! Attention: not calibrated

EK limited calibration  
 zw cyclical maintenance (external cyclical maintenance)  
 izw internal cyclical maintenance  
 g blocked for accredited testing  
 \*) next calibration ordered / currently in progress