

**CETECOM™****CETECOM ICT Services**
consulting - testing - certification >>>

TEST REPORT

Test report no.: 1-4254/12-10-06

Deutsche
Akkreditierungsstelle
D-PL-12076-01-01

Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Ericsson Mobile Communications AB
Nya Vattentorget
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 46 19 32 95
Contact: Håkan Sjöberg
e-mail: hakan.sjoberg@sonyericsson.com
Phone: +46 46 19 35 59

Manufacturer

Sony Ericsson Mobile Communications AB
Nya Vattentorget
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 15

Title 47 of the Code of Federal Regulations; Chapter I
Part 15 - Radio frequency devices

RSS - 210 Issue 8

Spectrum Management and Telecommunications - Radio Standards Specification
Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands):
Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDII/FDDV/FDDVIII; HSPA; BT2.1+EDR; WLAN b/g/n; GPS; RFID, FM Rx
Model name: AAD-3880134-BV
FCC ID: PY7A3880134
IC: 4170B-A3880134
Frequency: ISM band 2400 MHz to 2483.5 MHz
(lowest channel 01 – 2412 MHz, highest channel 11 – 2462 MHz)
Technology tested: WLAN
Antenna: Integrated PCB antenna
Power Supply: 3.7 V DC by Li - polymer battery
Temperature Range: -20°C to +55 °C

Test report authorised:


2012-02-27 Stefan Bös
Senior Testing Manager

Test performed:


2012-02-27 Marco Bertolino
Testing Manager

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	4
5	Test item	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
8	RF measurements	6
8.1	Description of test setup	6
8.1.1	Radiated measurements	6
8.1.2	Conducted measurements	7
8.2	Additional comments	7
8.3	RSP100 test report cover sheet / performance test data	8
9	Measurement results	9
9.1	Maximum output power (conducted)	9
9.2	Antenna gain	20
9.3	Maximum output power	23
9.4	Power spectral density	30
9.5	Spectrum bandwidth of a FHSS system – 6 dB bandwidth	36
9.6	Spectrum bandwidth of a FHSS system – 20 dB bandwidth	42
9.7	Band edge compliance conducted	48
9.8	Band edge compliance radiated	52
9.9	TX spurious emissions conducted	59
9.10	TX spurious emissions radiated	68
9.11	RX spurious emissions radiated	100
9.12	TX spurious emissions radiated < 30 MHz	105
9.13	TX spurious emissions conducted < 30 MHz	107
10	Test equipment and ancillaries used for tests	110
11	Observations	111
Annex A	Photographs of the test setup	112
Annex B	External photographs of the EUT	115
Annex C	Internal photographs of the EUT	117
Annex D	Document history	127
Annex E	Further information	127
Annex F	Accreditation Certificate	128

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

2.2 Application details

Date of receipt of order:	2012-02-13
Date of receipt of test item:	2012-02-20
Start of test:	2012-02-20
End of test:	2012-02-27
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		43 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - polymer battery
	V_{max}	4.1 V
	V_{min}	3.5 V

5 Test item

Kind of test item	:	GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDII/FDDV/FDDVIII; HSPA; BT2.1+EDR; WLAN b/g/n; GPS; RFID, FM Rx
Type identification	:	AAD-3880134-BV
S/N serial number	:	Radiated unit: CB511VNPVU, CB511VNP8W Conducted unit: CB511VNP98, CB511VNP9V
HW hardware status	:	AP1.3
SW software status	:	6.0.B.1.274, 6.0.B.1.227 s_atp_pepper_0_0_95_3_c
Frequency band [MHz]	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz, highest channel 11 – 2462 MHz)
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Channel access method	:	FDMA
Type of modulation	:	BPSK, QPSK, 16 – & 64 – QAM
Number of channels	:	11
Antenna	:	Integrated PCB antenna
Power supply	:	3.7 V DC by Li - polymer battery
Temperature range	:	-20 °C to +55 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results



No deviations from the technical specifications were ascertained



There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2012-02-27	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	DSSS	☒	☐	☐	☐	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 6dB bandwidth	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 20dB bandwidth	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.109 RSS-Gen.	RX spurious emissions radiated	Nominal	Nominal	-/-	☒	☐	☐	☐	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies
§15.107(a)	Conducted emissions < 30 MHz	Nominal	Nominal	DSSS OFDM g & n	☒ ☒	☐ ☐	☐ ☐	☐ ☐	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements

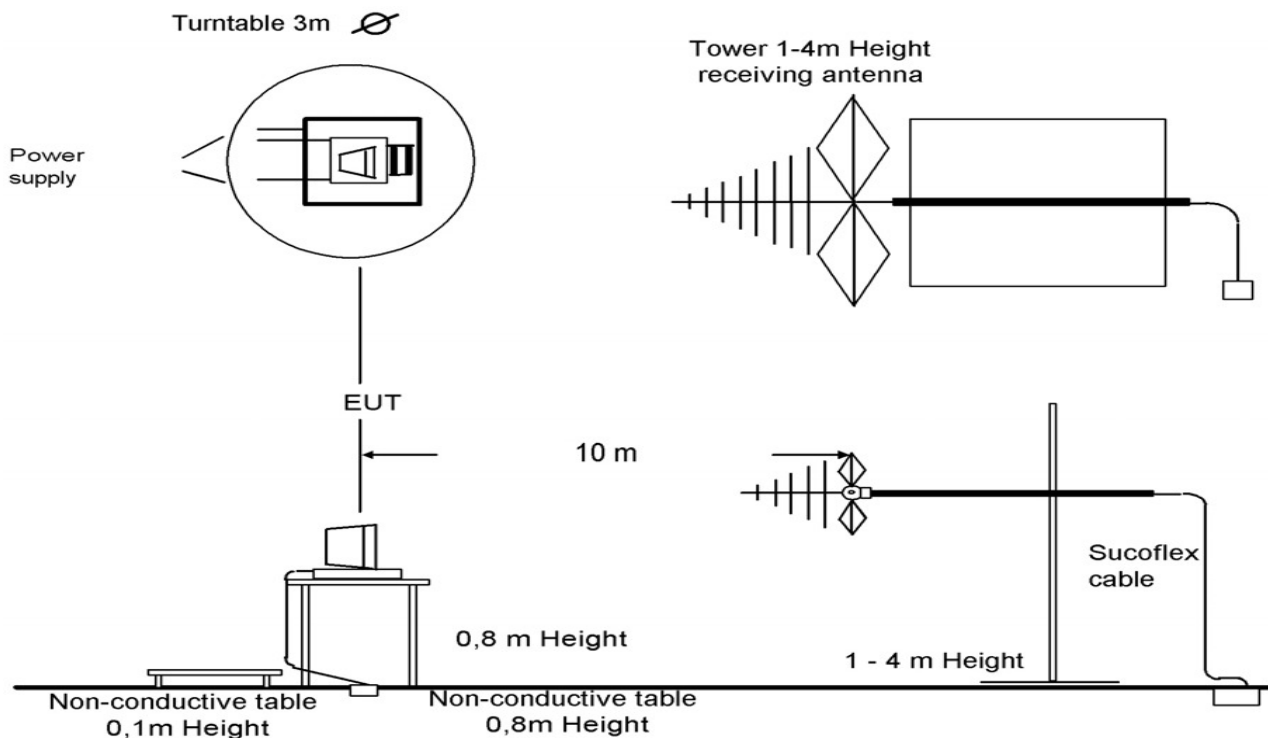
8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber



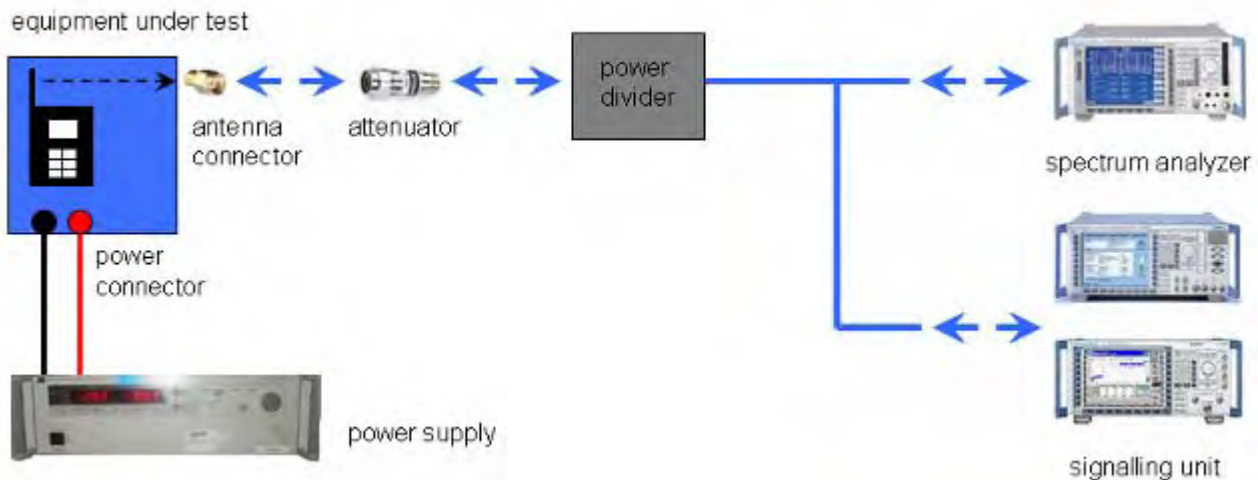
Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.



Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: The radiated measurements were performed by Mr Harro Ames!

Configuration descriptions: None

Test mode:

- ☐ No test mode available.
Iperf was used to ping another device with the largest support packet size
- ☒ Special software is used.
EUT is transmitting pseudo random data by itself

8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-4254/12-10-06
Equipment model number	:	AAD-3880134-BV
Certification number	:	4170B-A3880134
Manufacturer (complete address)	:	Sony Ericsson Mobile Communications AB Nya Vattentorget 22188 Lund / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz, highest channel 11 – 2462 MHz)
RF-power [W] (max.)	:	cond.: 83.56 mW (DSSS / b – mode) 151.01 mW (OFDM / g – mode) 157.04 mW (OFDM / n – mode) EIRP: 70.31 mW (DSSS / b – mode) 136.14 mW (OFDM / g – mode) 141.58 mW (OFDM / n – mode)
Occupied bandwidth (99%-BW) [kHz]	:	DSSS / b – mode: 17.09 MHz OFDM / g – mode: 17.55 MHz OFDM / n – mode: 18.45 MHz
Type of modulation	:	DSSS & OFDM technology with BPSK, QPSK, 16- and 64 QAM modulation.
Emission designator (TRC-43)	:	17M1G1D (DSSS / b – mode) 17M6G7D (OFDM / g – mode) 18M5G7D (OFDM / n – mode)
Antenna information	:	Integrated PCB antenna
Transmitter spurious (worst case) [dBμV/m @ 3m]:		43 @ 12 GHz Peak (noise floor)
Receiver spurious (worst case) [dBμV/m @ 3m]:		43 @ 12 GHz Peak (noise floor)

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2012-02-27
Date

Stefan Bös
Name


Signature

9 Measurement results

9.1 Maximum output power (conducted)

Description:

Measurement of the maximum output power conducted. This measurement is performed only at the middle channel in both modes and all data rates to determine the data rate per mode which results in the highest output power. This mode will be selected for all further measurements.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	30 MHz
Resolution bandwidth:	50 MHz
Span:	30 MHz
Trace-Mode:	Max Hold

Results:

DSSS / b – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]			
	1	2	5.5	11
Ch 6 - 2437 MHz	19.97	19.95	18.36	18.42
Measurement uncertainty	± 0.5 dB			

OFDM / g – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	6	9	12	18	24	36	48	54
Ch 6 - 2437 MHz	21.46	21.21	21.41	21.31	21.67	21.54	21.62	21.73
Measurement uncertainty	± 0.5 dB							

OFDM / n – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 6 - 2437 MHz	21.37	21.38	21.47	21.80	21.58	21.78	21.79	21.20
Measurement uncertainty	± 0.5 dB							

Result: Selected data rate for all measurements:

DSSS / b – mode:

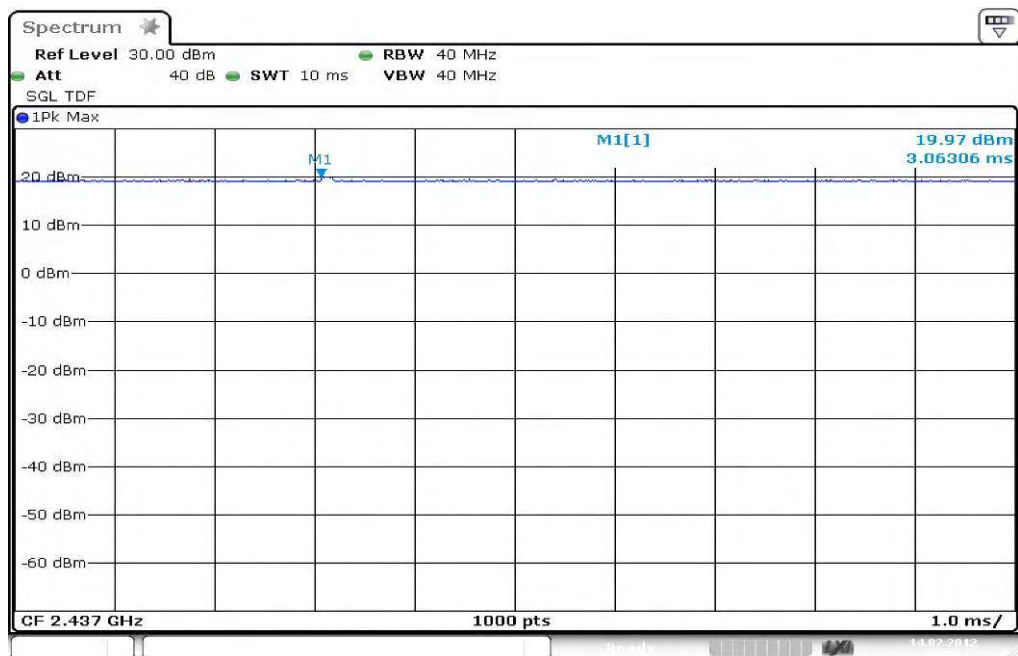
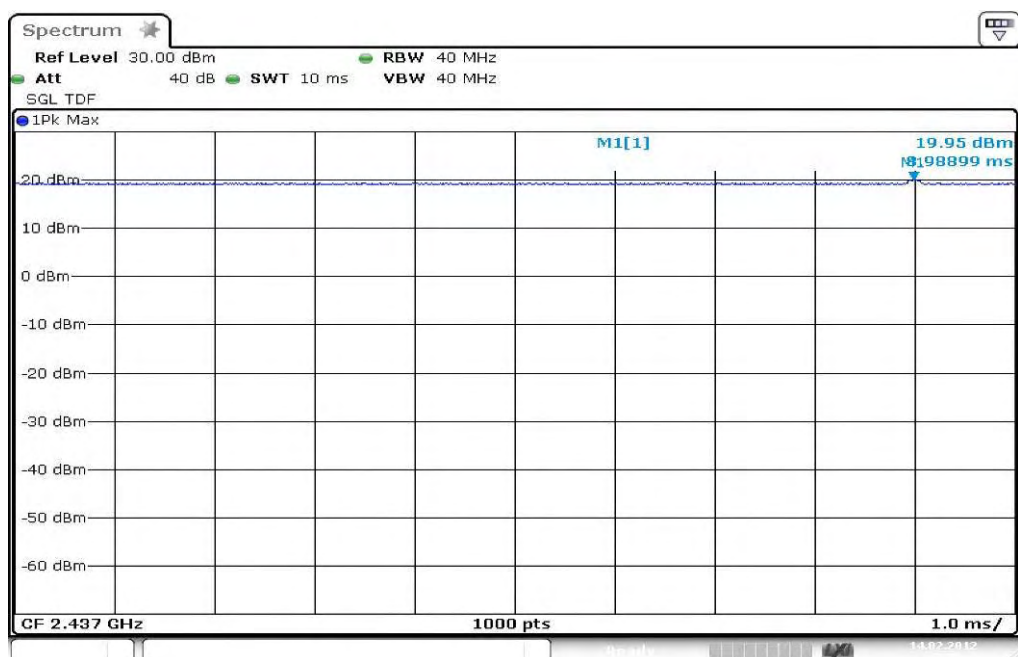
OFDM / g – mode:

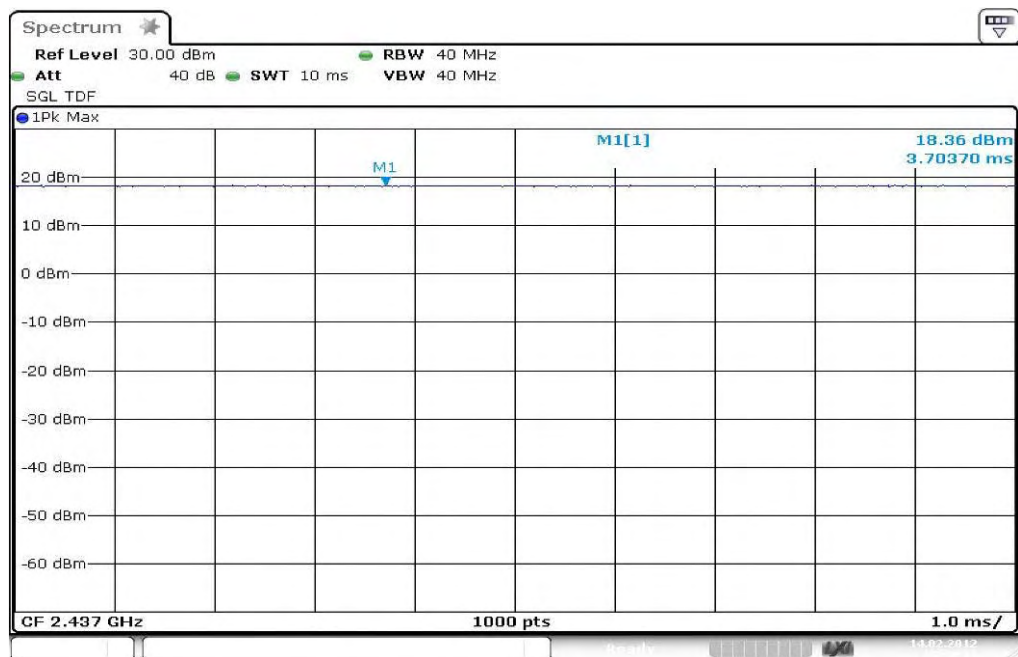
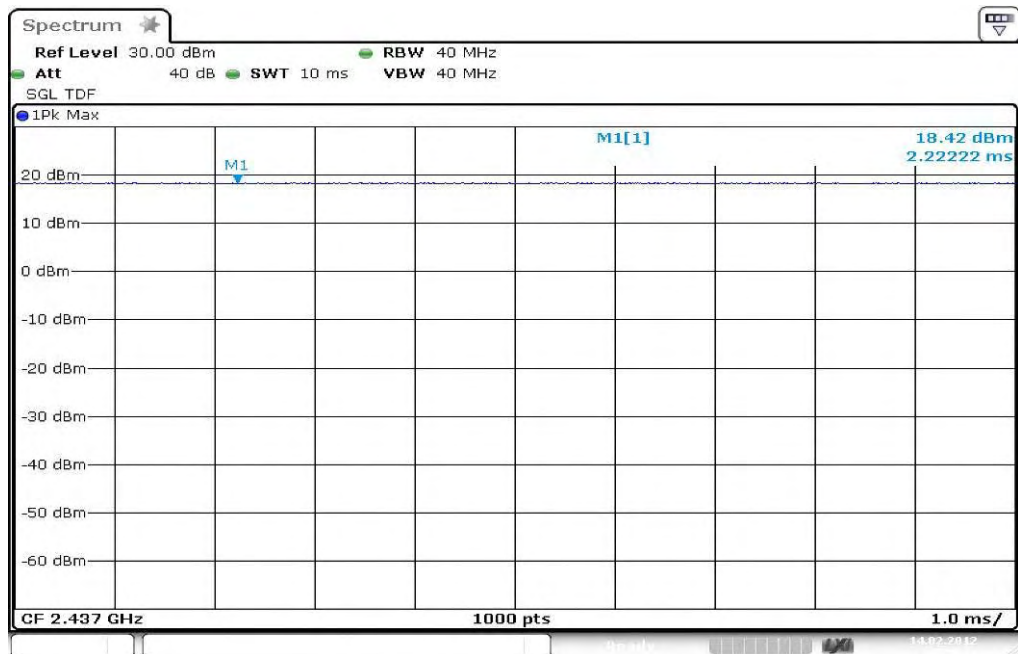
OFDM / n – mode:

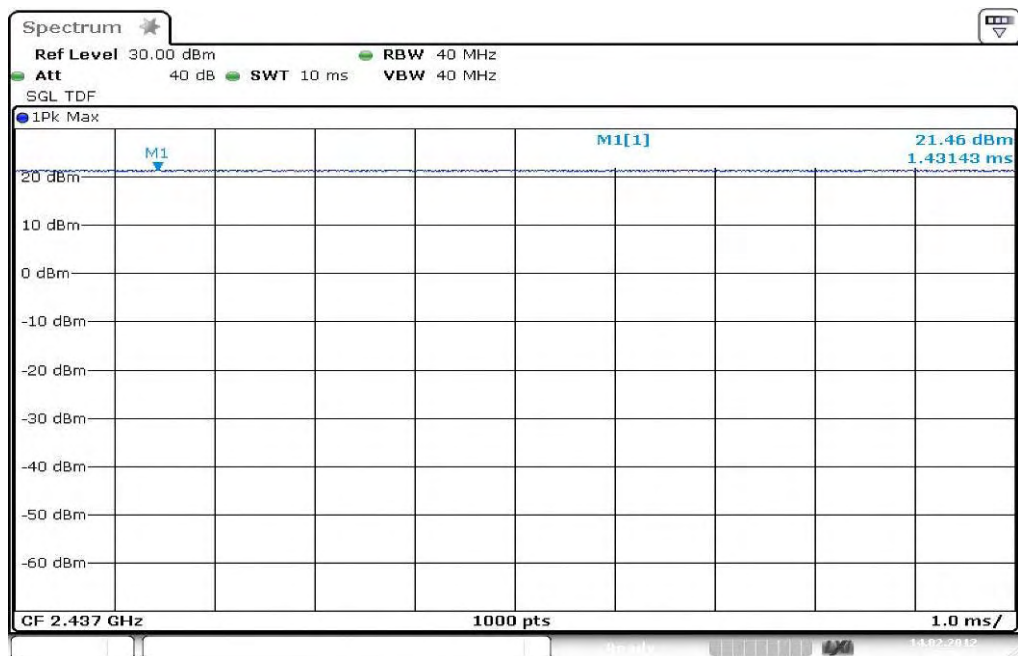
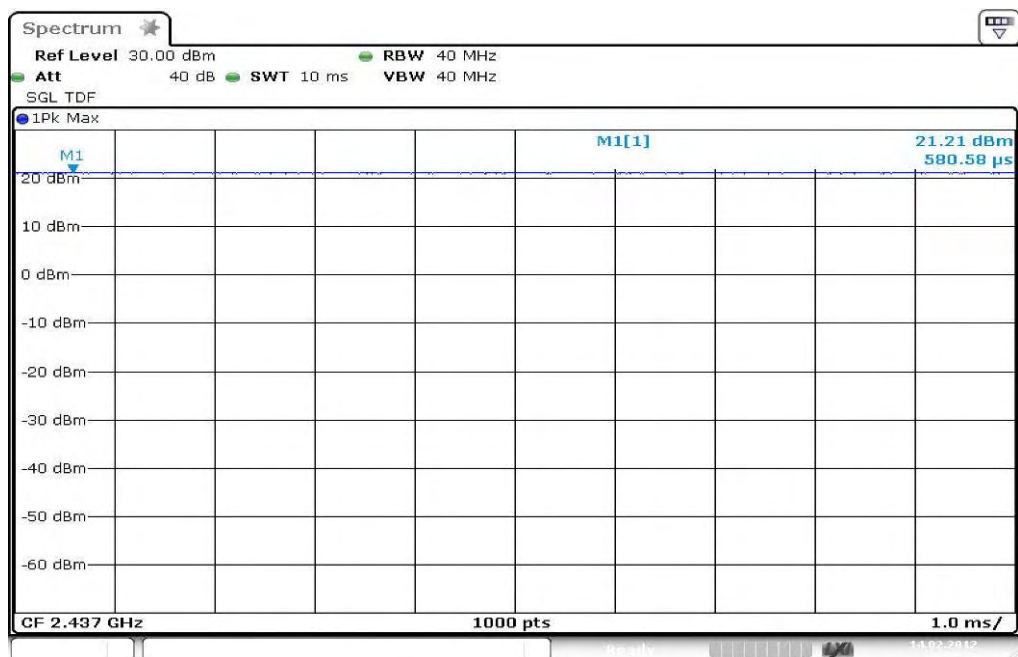
1 MBit/s

54 MBit/s

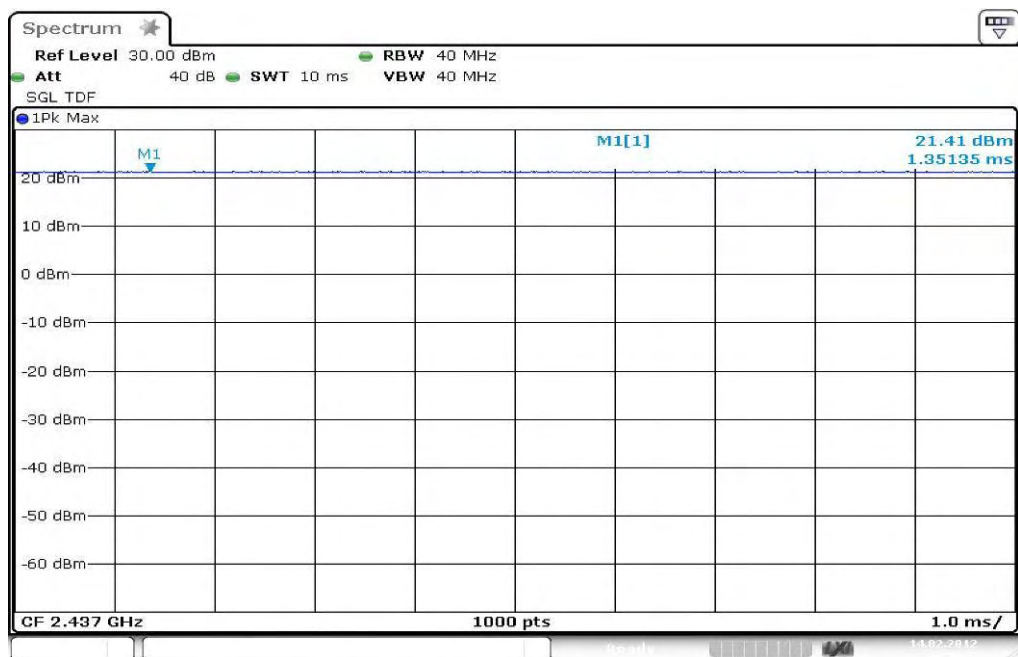
MCS3

Plots: DSSS / b - mode**Plot 1: TX mode, middle channel, 1 MBit/s****Plot 2: TX mode, middle channel, 2 MBit/s**

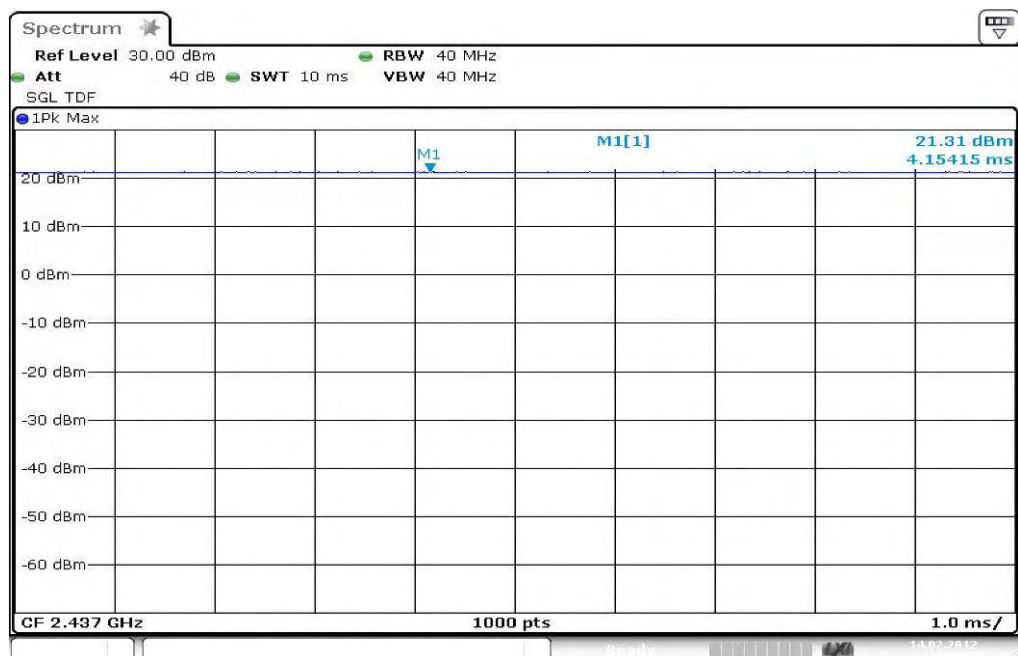
Plot 3: TX mode, middle channel, 5.5 MBit/s**Plot 4:** TX mode, middle channel, 11 MBit/s

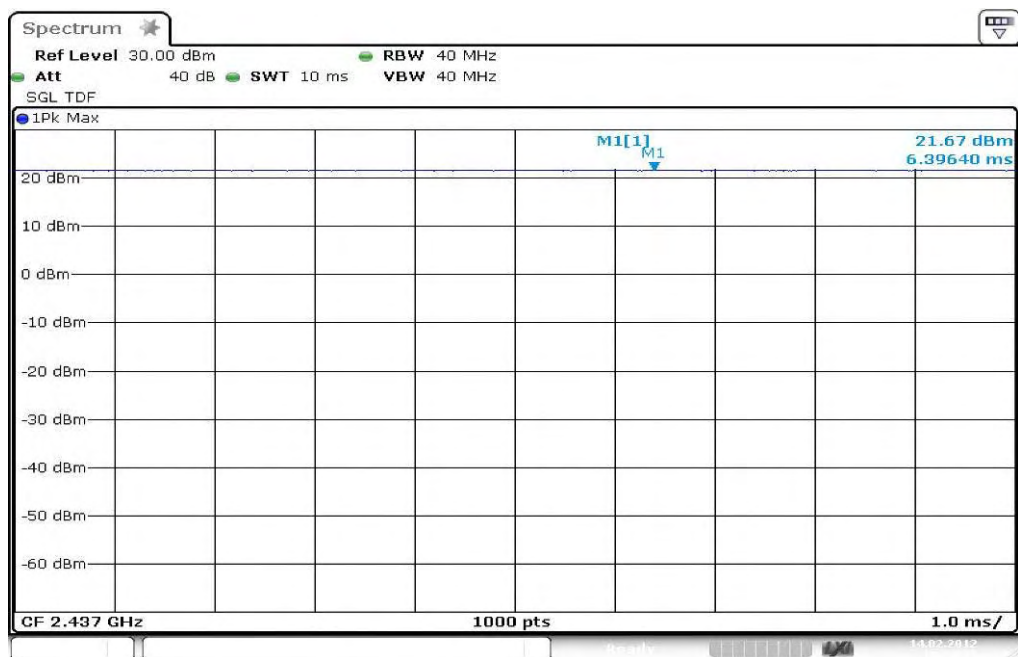
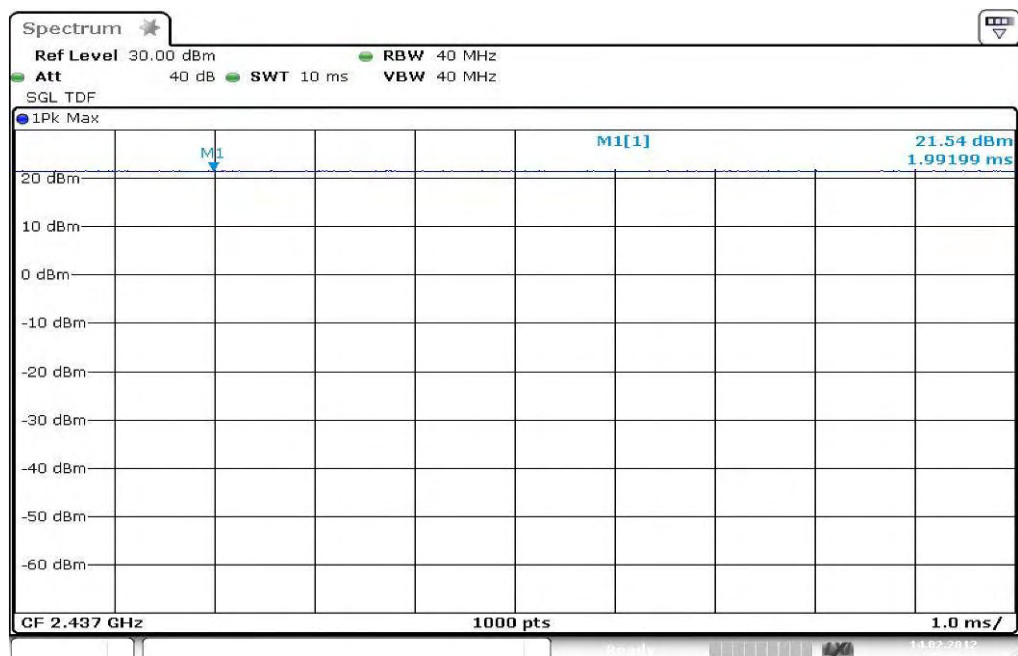
Plots: OFDM / g - mode**Plot 1: TX mode, middle channel, 6 MBit/s****Plot 2: TX mode, middle channel, 9 MBit/s**

Plot 3: TX mode, middle channel, 12 MBit/s

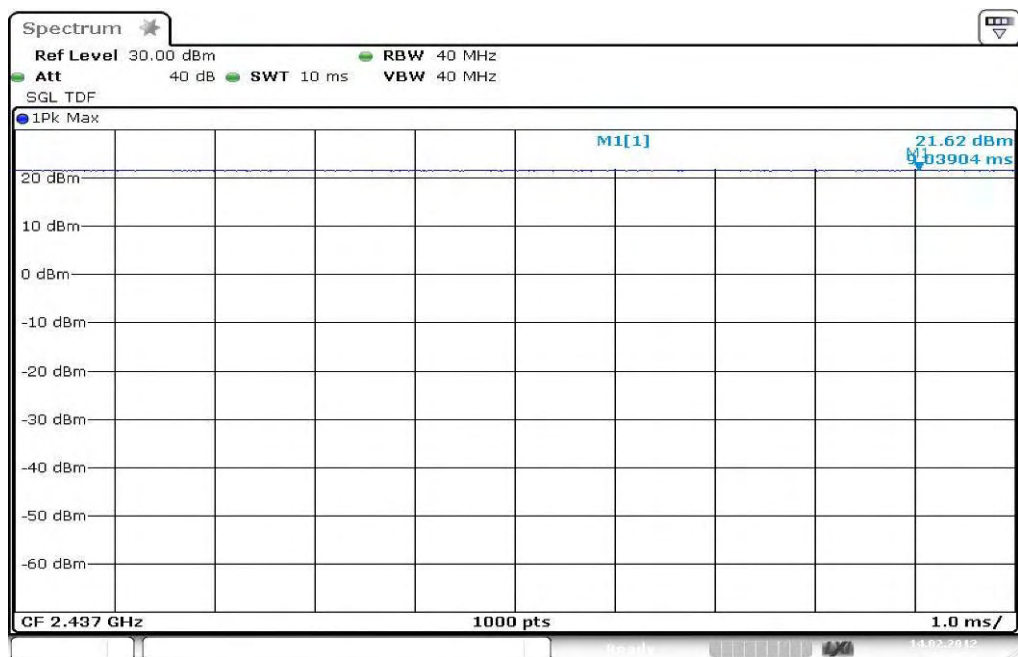


Plot 4: TX mode, middle channel, 18 MBit/s

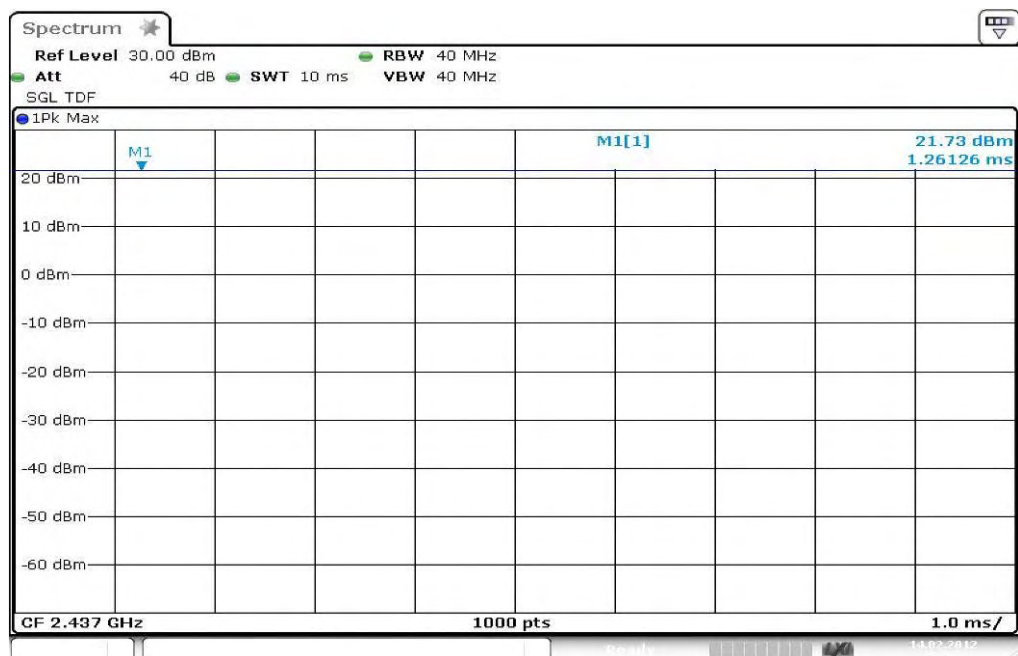


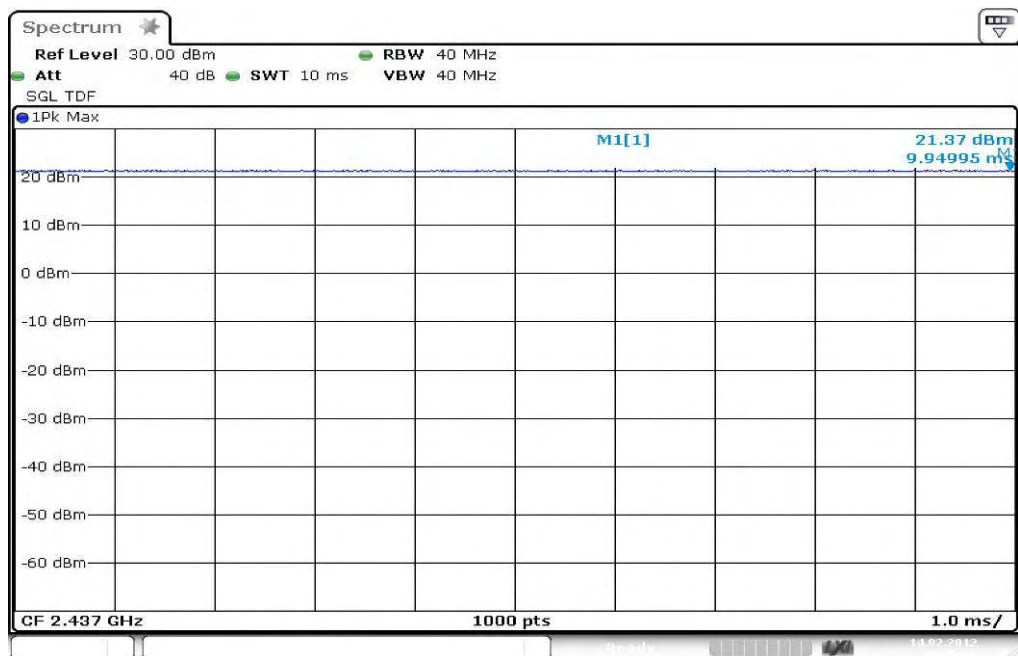
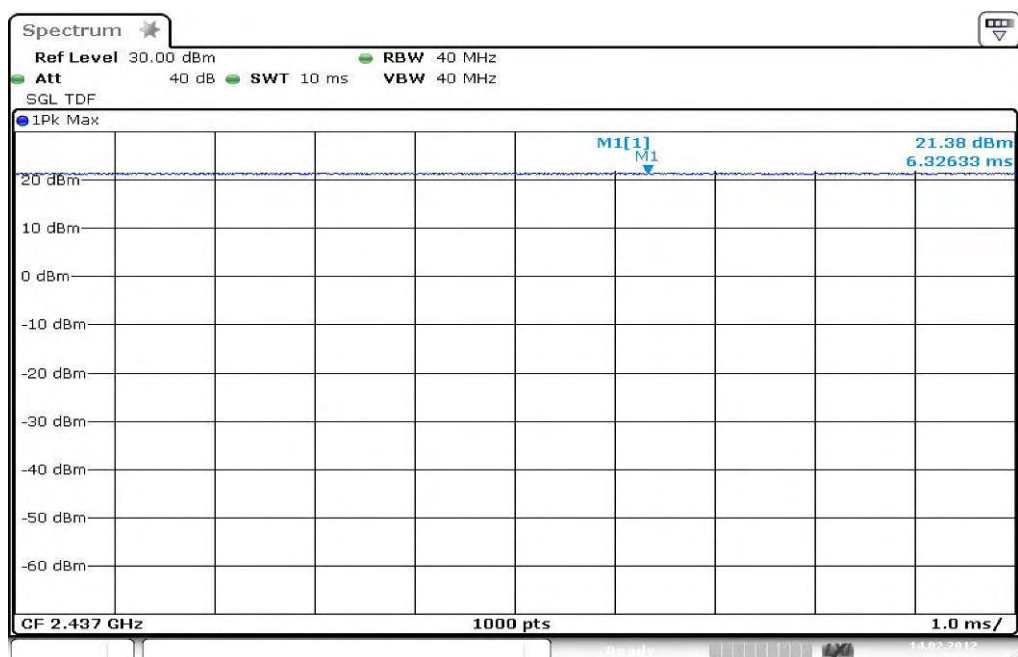
Plot 5: TX mode, middle channel, 24 MBit/s**Plot 6:** TX mode, middle channel, 36 MBit/s

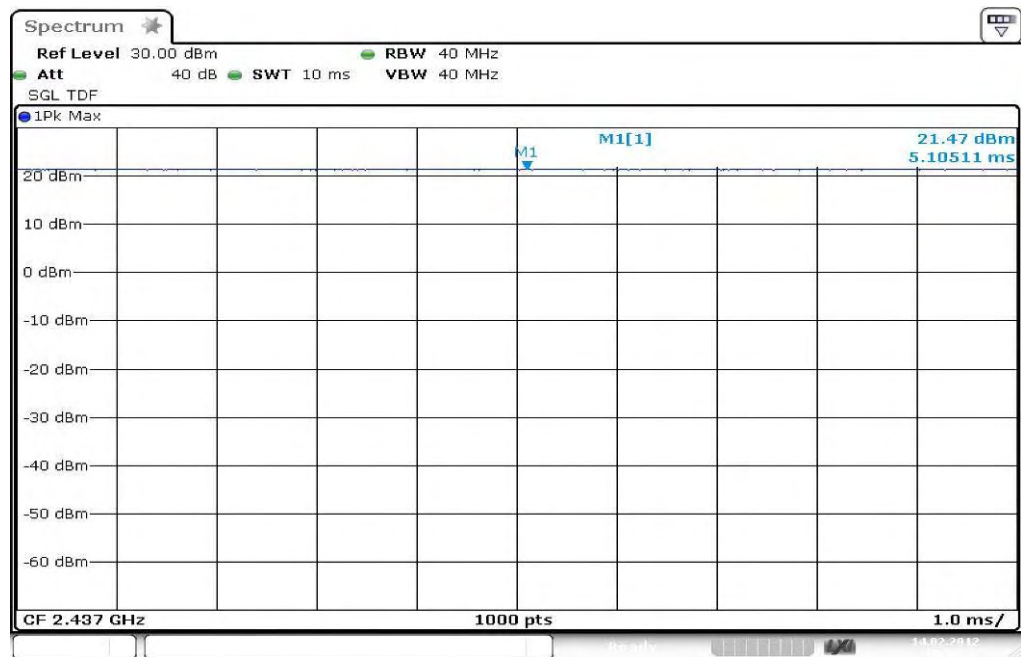
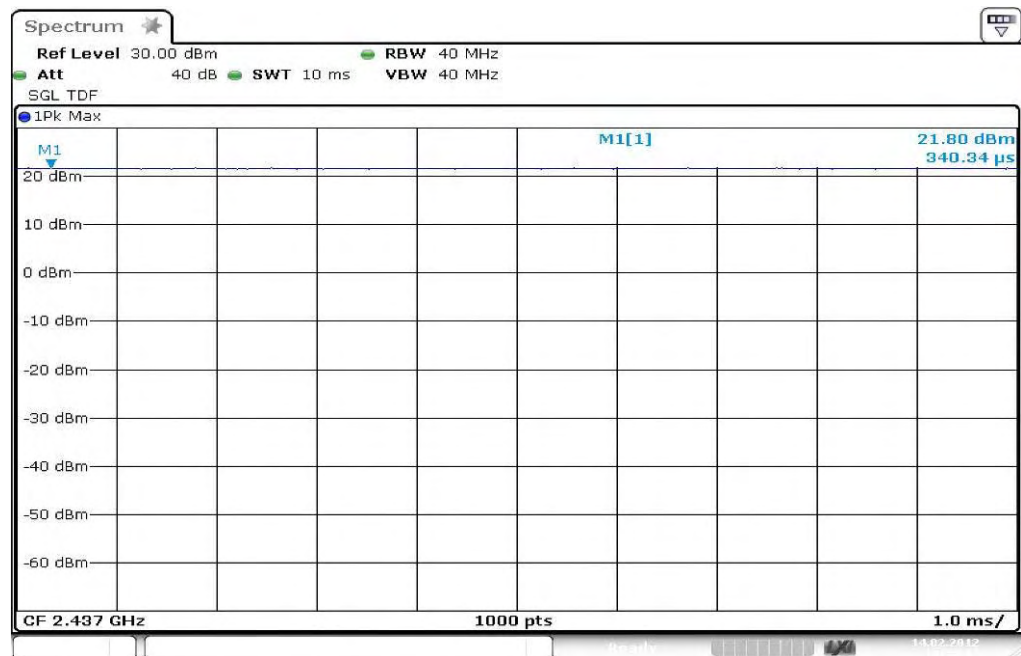
Plot 7: TX mode, middle channel, 48 MBit/s

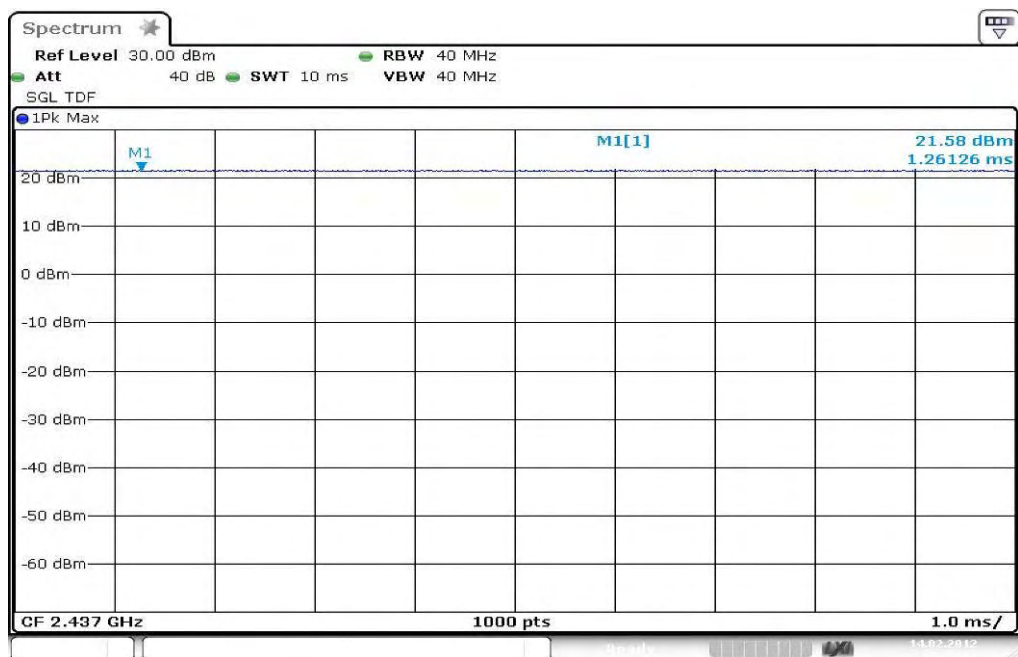
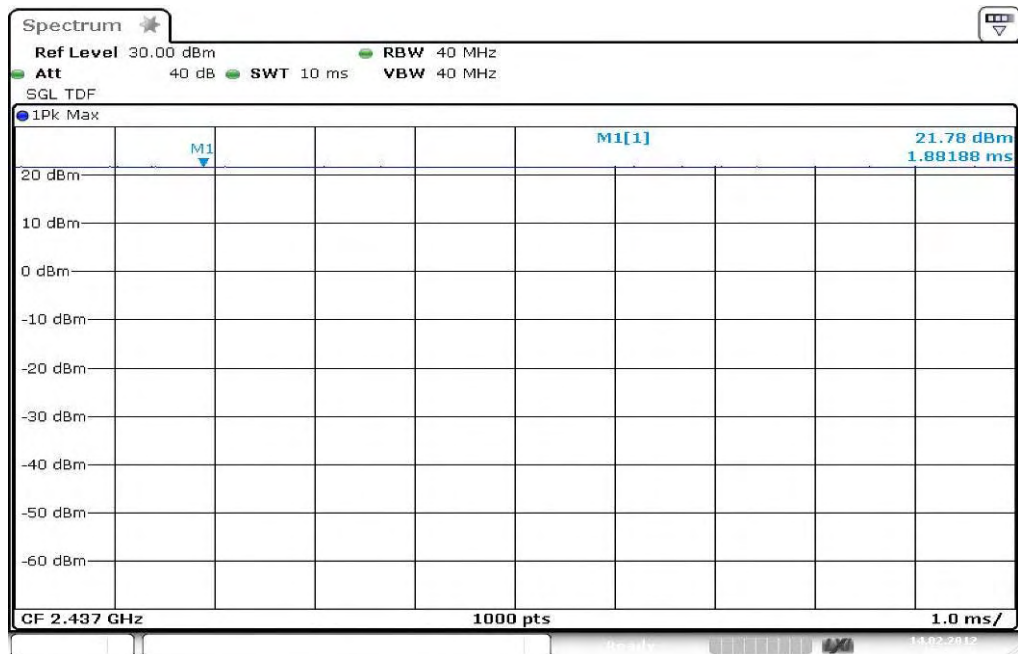


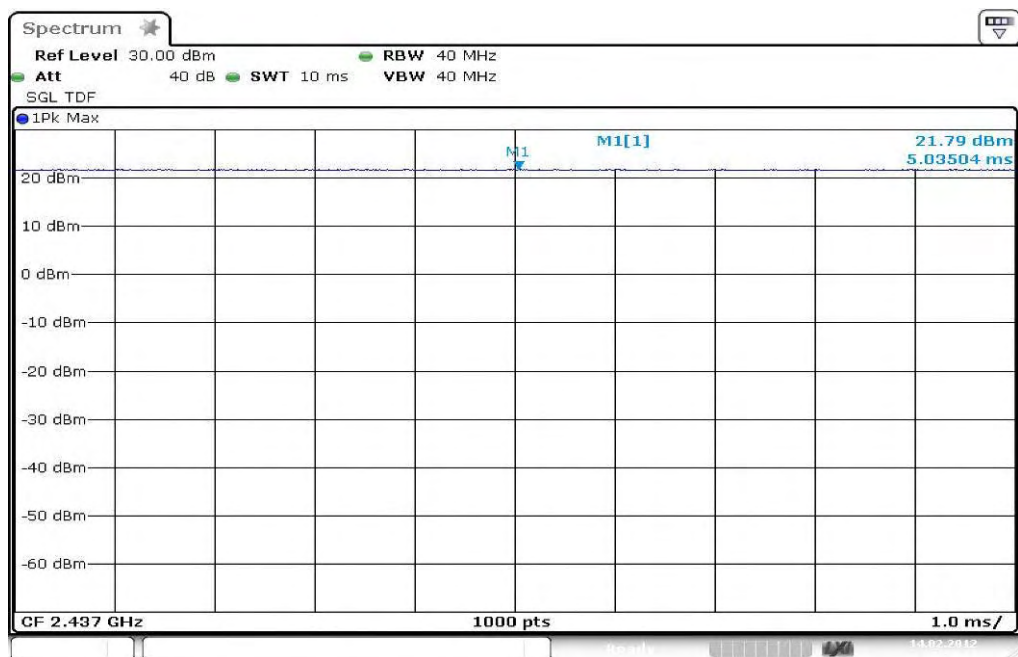
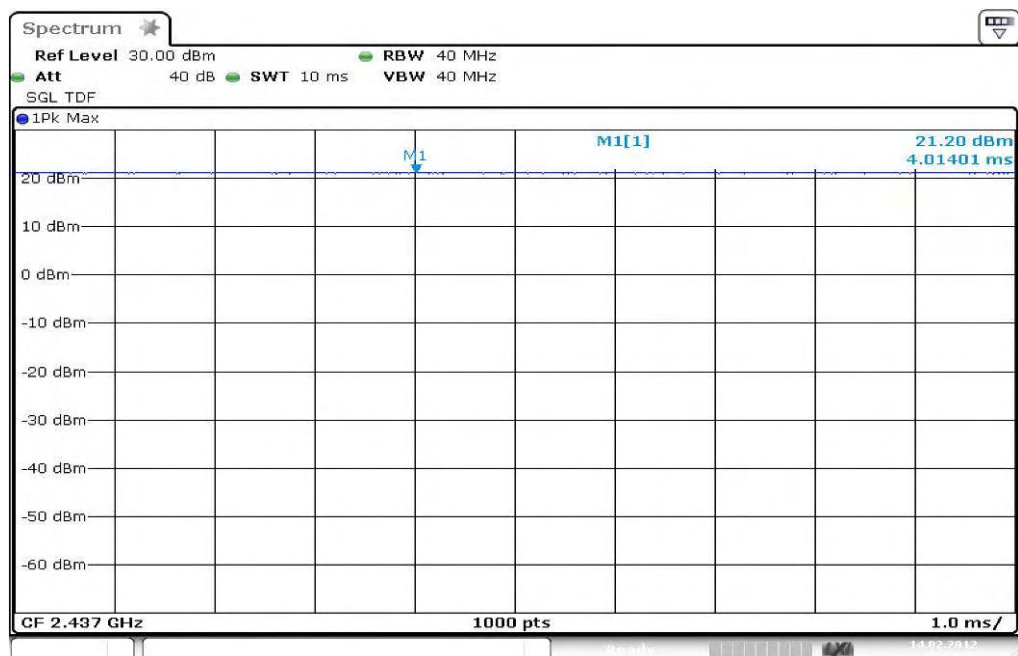
Plot 8: TX mode, middle channel, 54 MBit/s



Plots: OFDM / n - mode**Plot 1: TX mode, middle channel, MCS0****Plot 2: TX mode, middle channel, MCS1**

Plot 3: TX mode, middle channel, MCS2**Plot 4:** TX mode, middle channel, MCS3

Plot 5: TX mode, middle channel, MCS4**Plot 6:** TX mode, middle channel, MCS5

Plot 7: TX mode, middle channel, MCS6**Plot 8:** TX mode, middle channel, MCS7

9.2 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	3 MHz
Trace-Mode:	Max hold

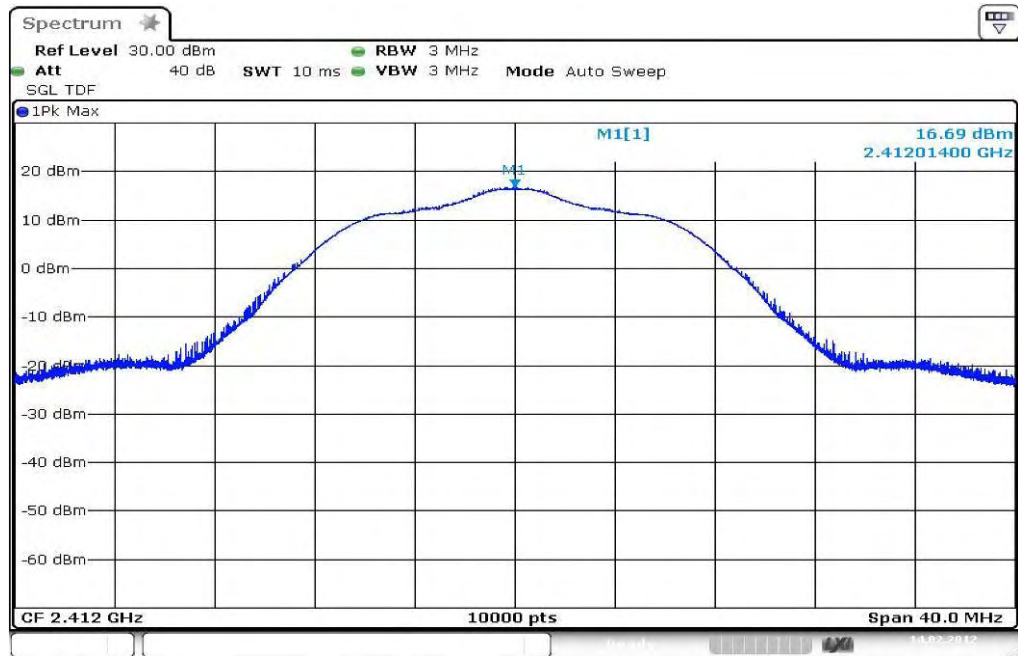
Limits:

FCC	IC
CFR Part 15.247 (b)(4)	RSS 210, Issue 8, A 8.4(2)
Antenna Gain	
6 dBi	

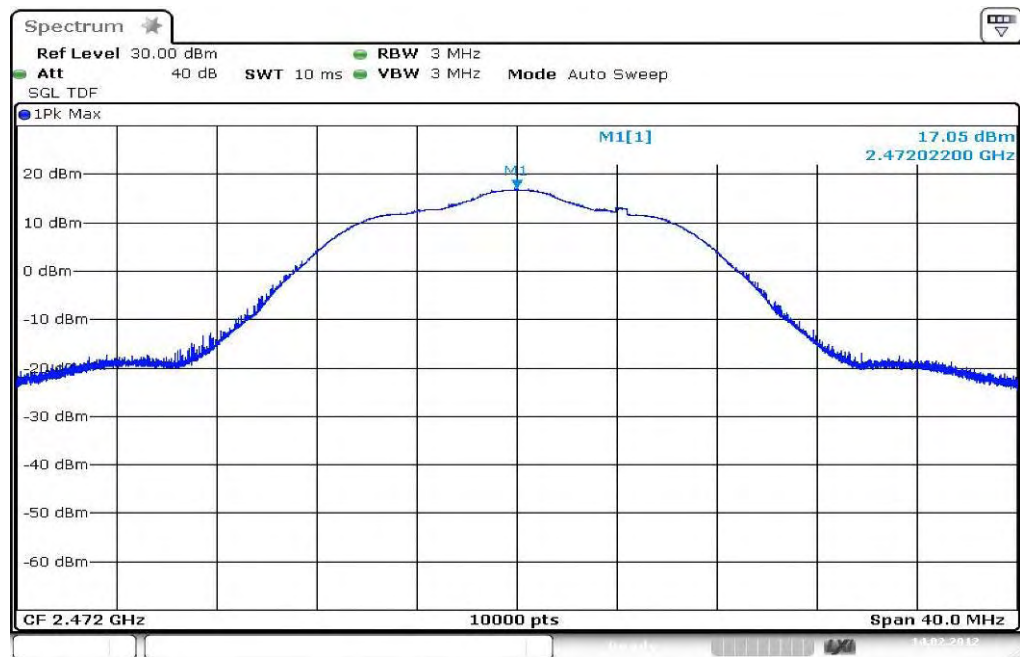
Results:

T _{nom}	V _{nom}	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		16.69	16.95	17.05
Radiated power [dBm] Measured with DSSS modulation		16.24	16.05	15.62
Gain [dBi] Calculated		-0.45	-0.90	-1.43
Measurement uncertainty			± 1.5 dB (cond.) / ± 3 dB (rad.)	

Result: The result of the measurement is passed.

Plots:**Plot 1: lowest channel, conducted****Plot 2: middle channel, conducted**

Plot 3: highest channel, conducted



9.3 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power. The determination of these data rates was performed at the beginning of the tests.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	30 MHz
Resolution bandwidth:	50 MHz
Span:	30 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (b)(3)	RSS 210, Issue 8, A 8.4(4)
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

Results: DSSS / b – mode

DSSS / b – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	18.92	19.22	19.20
Output Power Radiated – EIRP*)	18.47	18.32	17.77
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: The result of the measurement is passed.

Results: OFDM / g – mode

OFDM / g – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	21.79	21.71	21.53
Output Power Radiated – EIRP*)	21.34	20.81	20.10
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

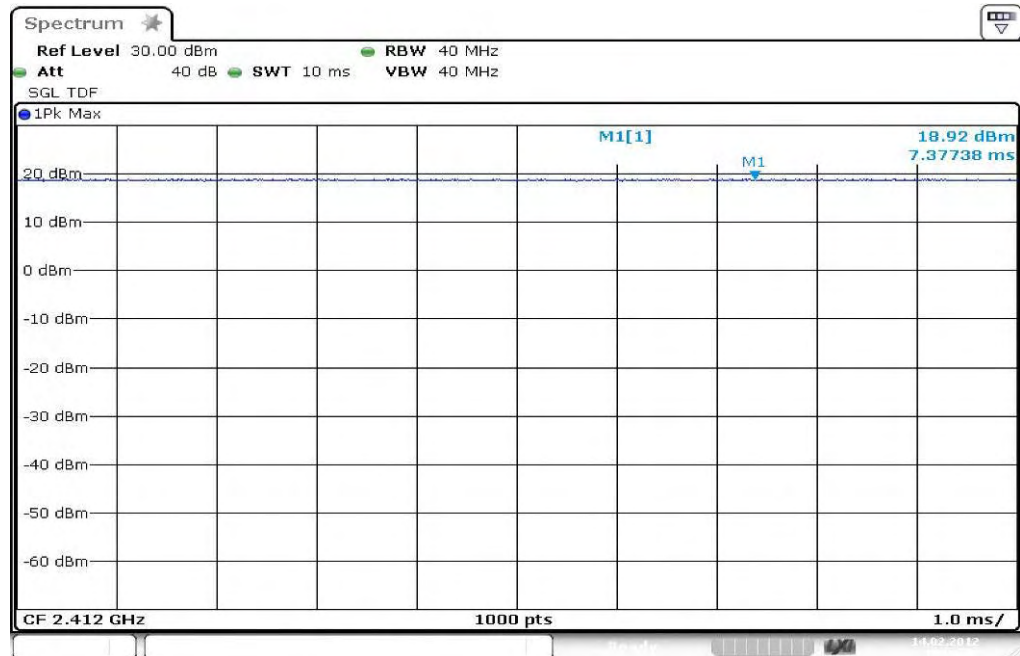
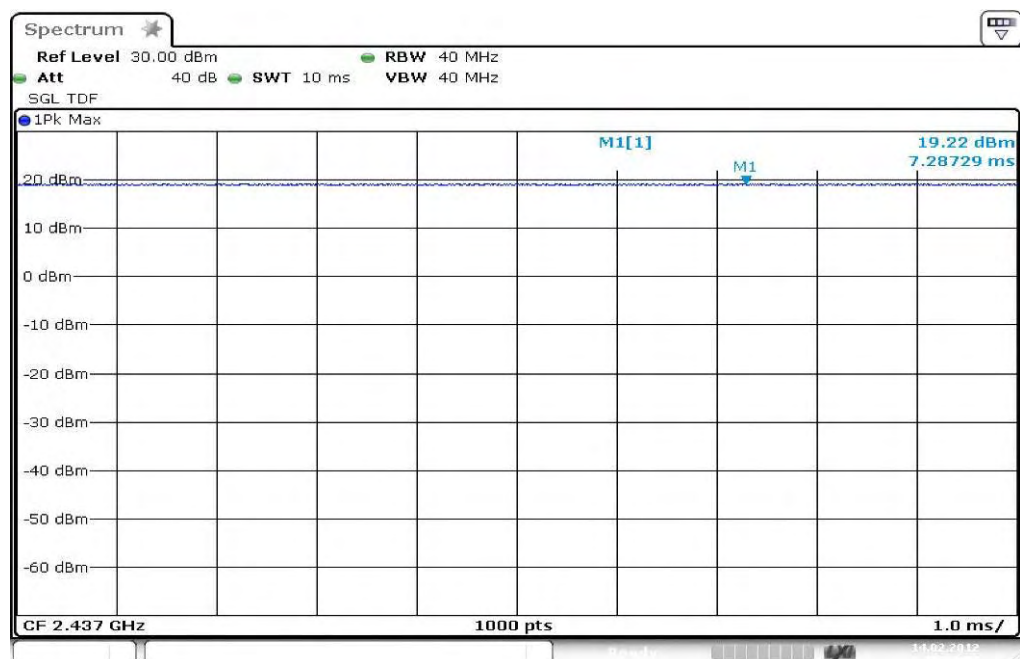
*) calculated with Antenna gain

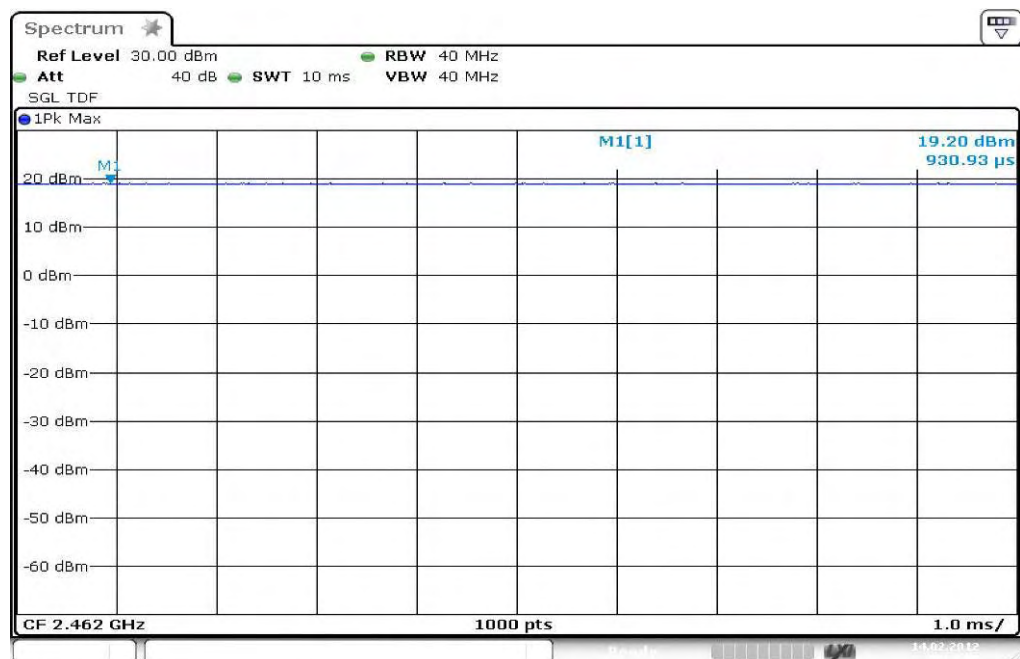
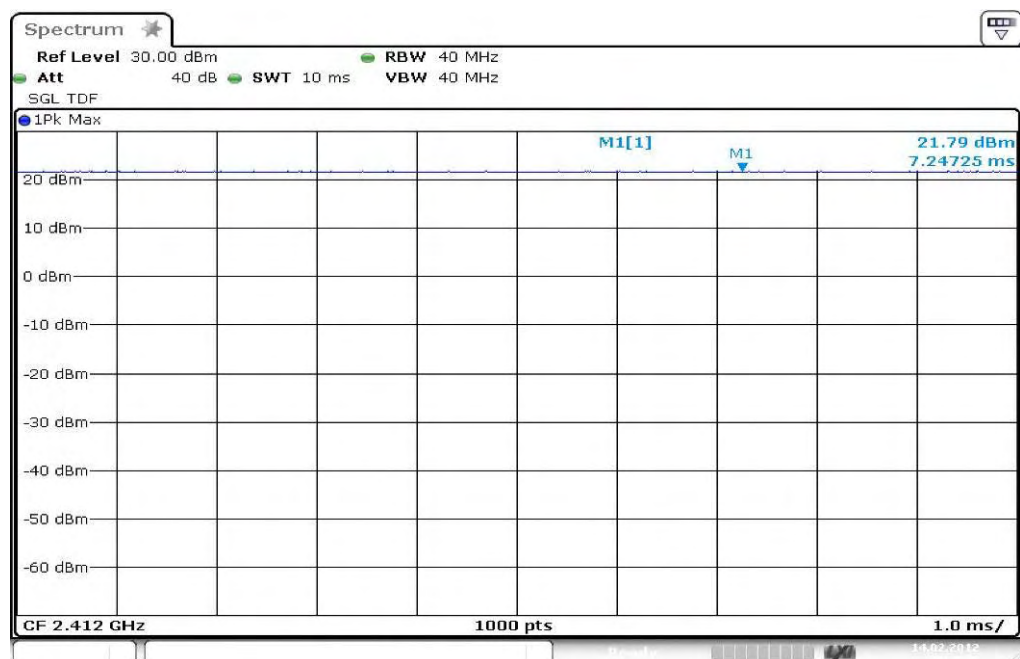
Result: The result of the measurement is passed.**Results: OFDM / n – mode**

OFDM / n – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	21.96	21.76	21.55
Output Power Radiated – EIRP*)	21.51	20.86	20.12
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

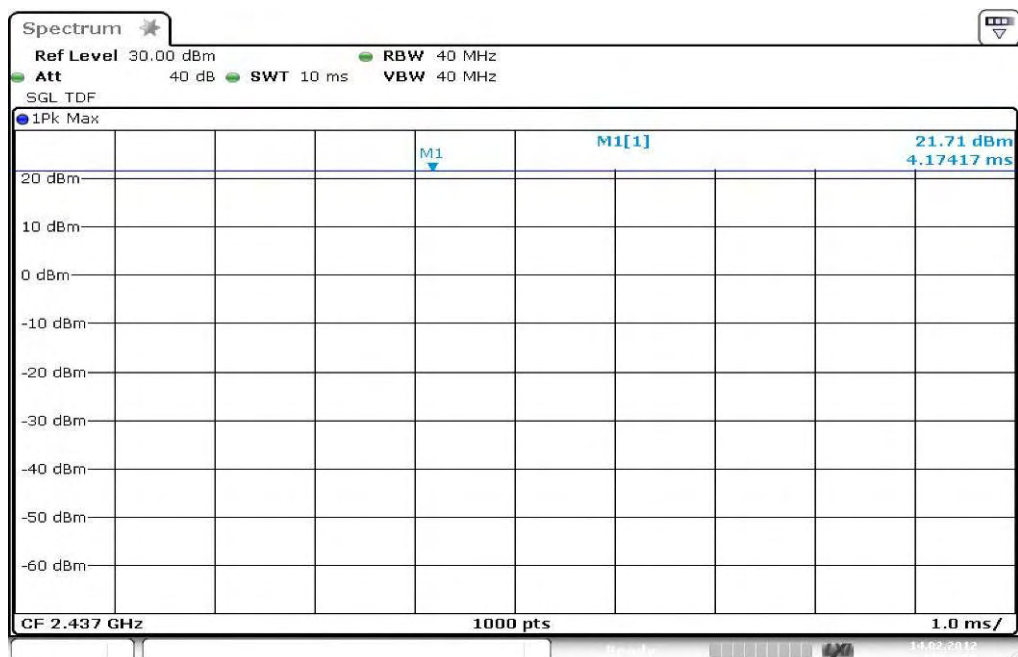
*) calculated with Antenna gain

Result: The result of the measurement is passed.

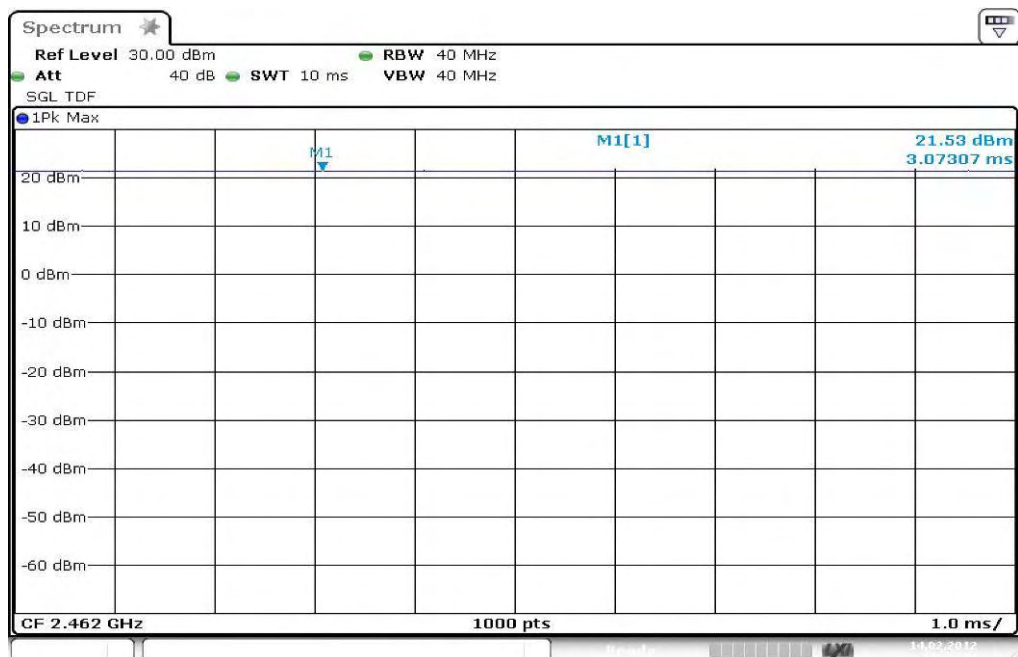
Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

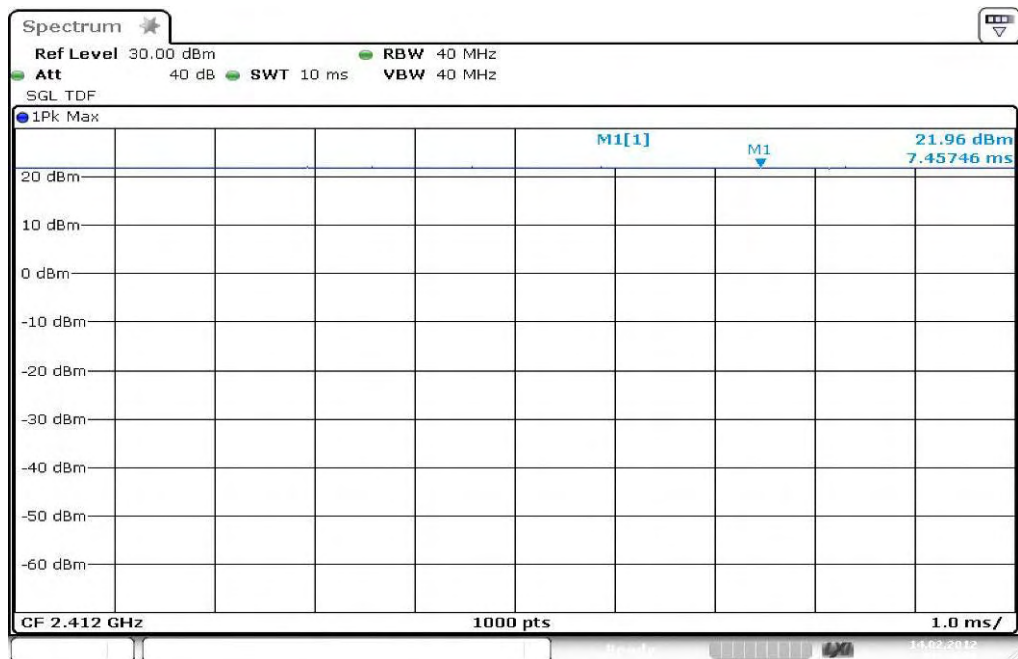
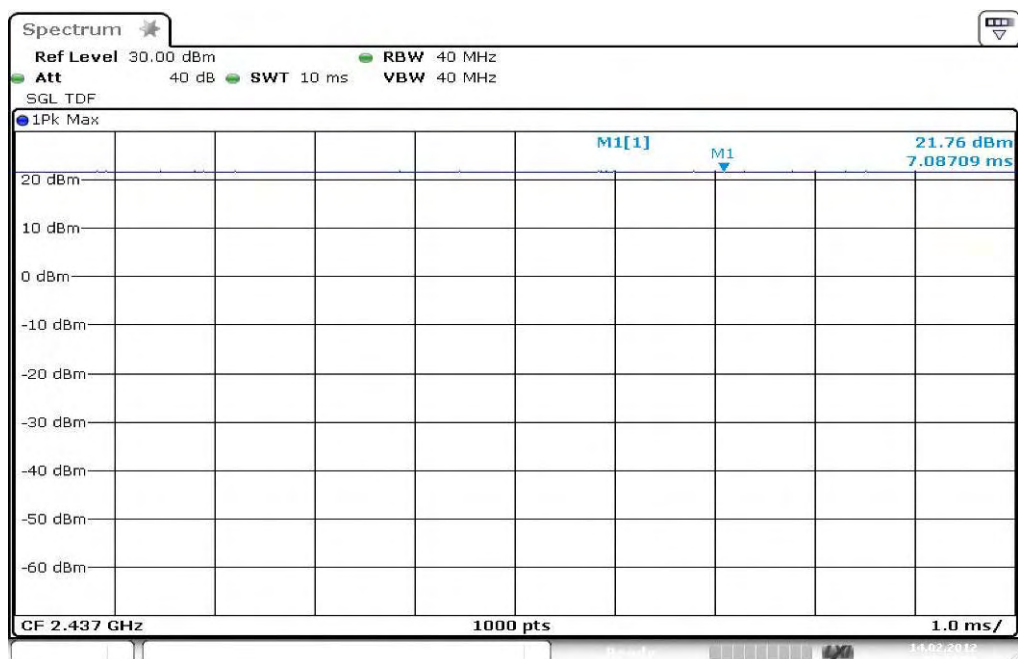
Plot 3: TX mode, highest channel**Plots: OFDM / g – mode****Plot 1: TX mode, lowest channel**

Plot 2: TX mode, middle channel

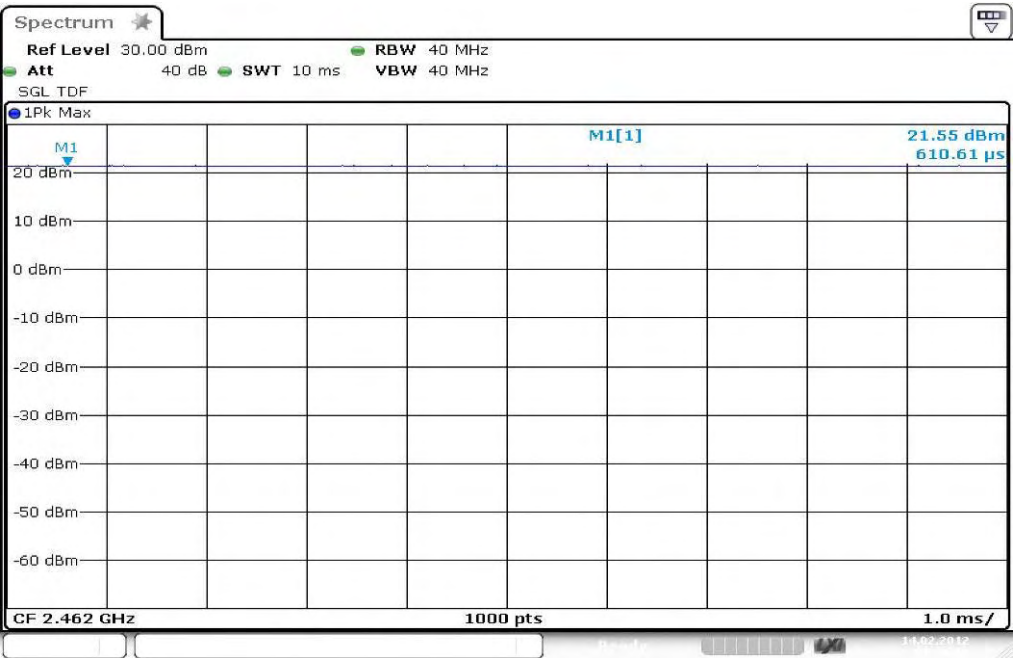


Plot 3: TX mode, highest channel



Plots: OFDM / n – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel



9.4 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	500 s
Video bandwidth:	3 kHz
Resolution bandwidth:	3 kHz
Span:	1.5 MHz
Trace-Mode:	Max Hold

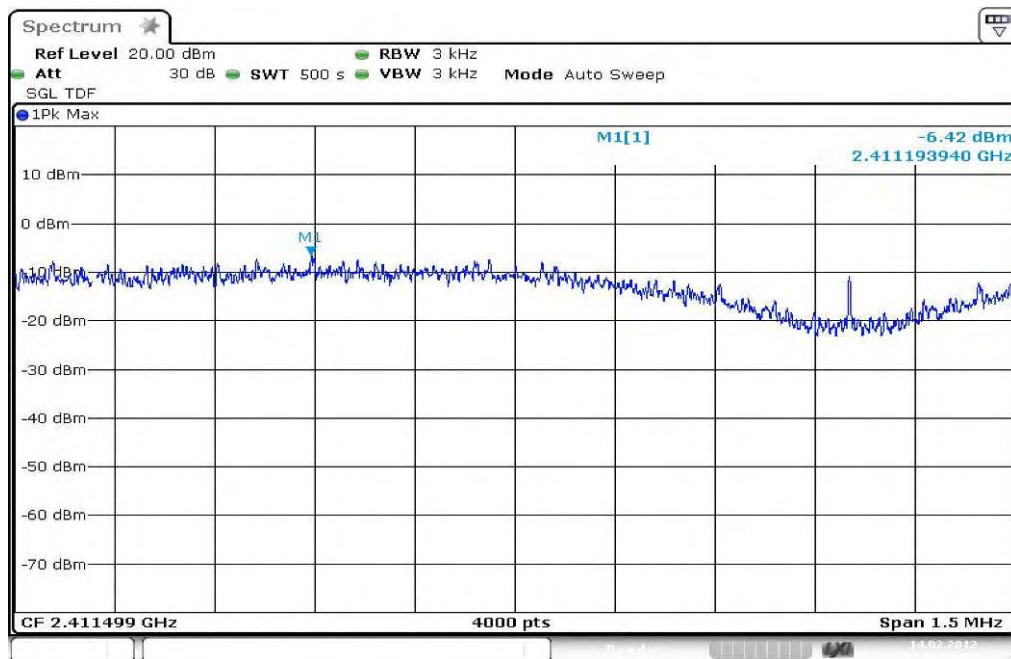
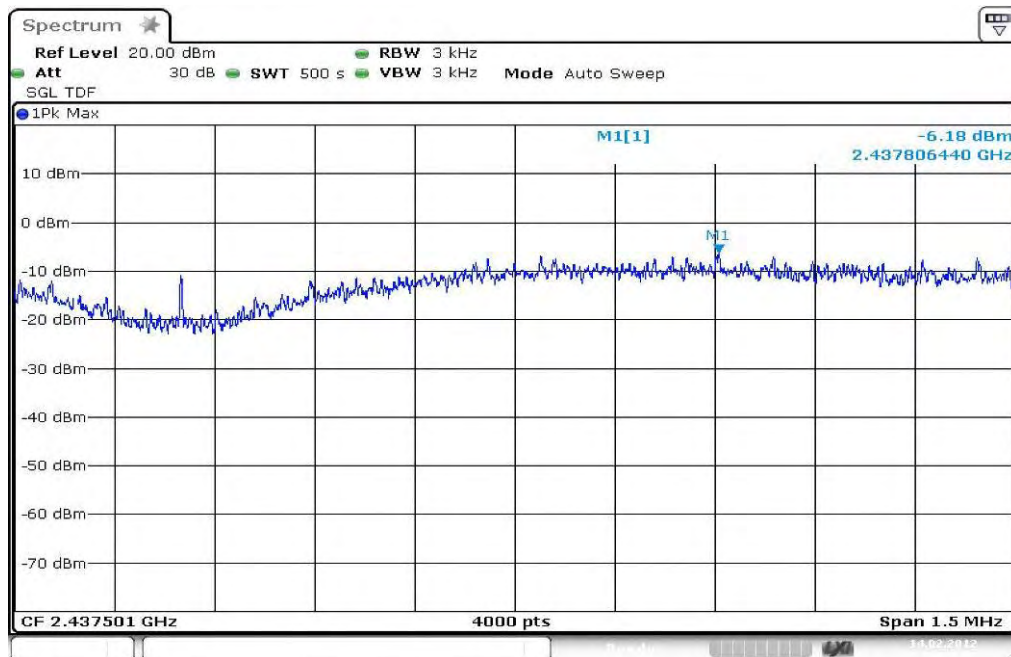
Limits:

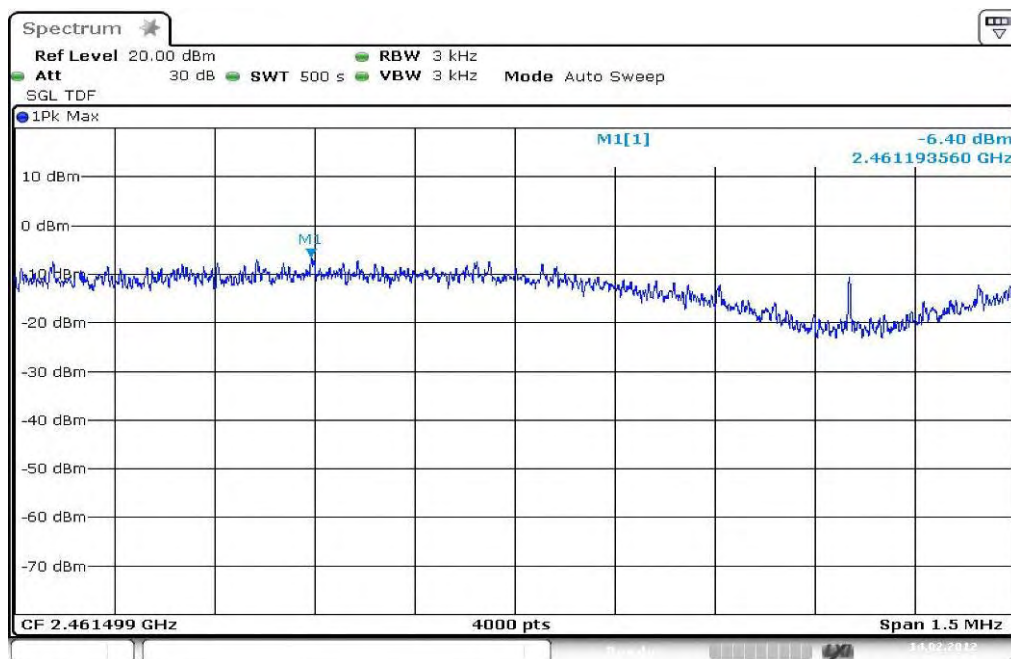
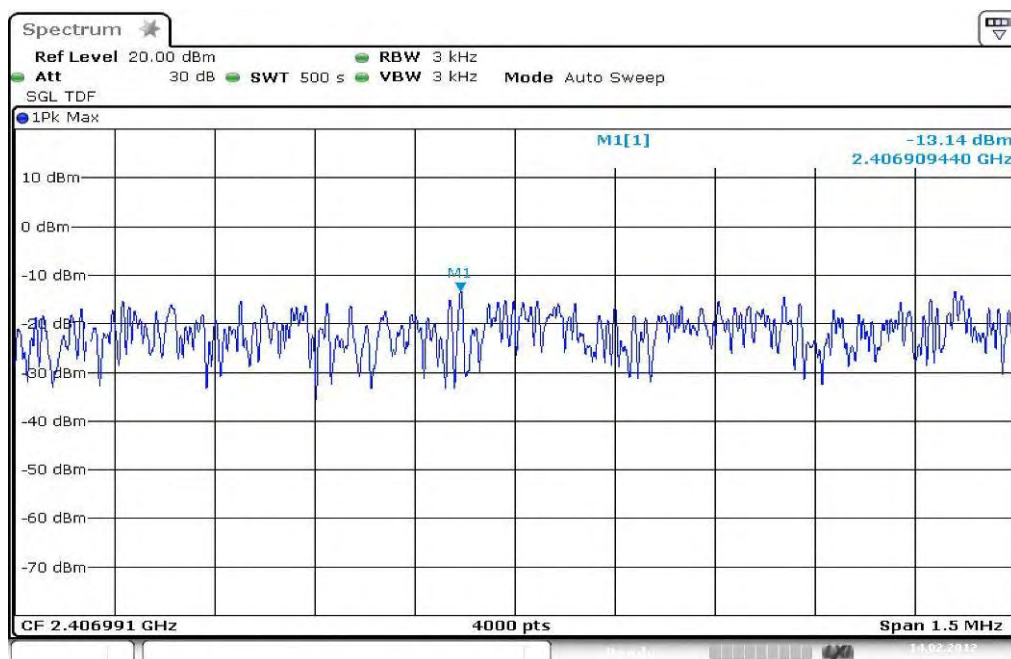
FCC	IC
CFR Part 15.247 (e)	RSS 210, Issue 8, A 8.2(b)
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	

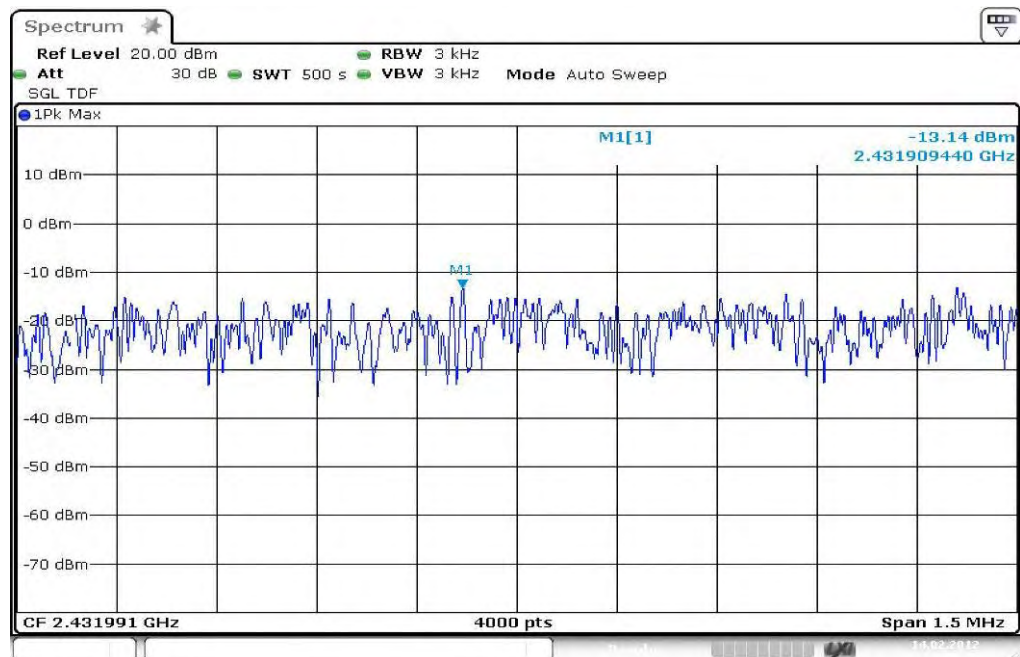
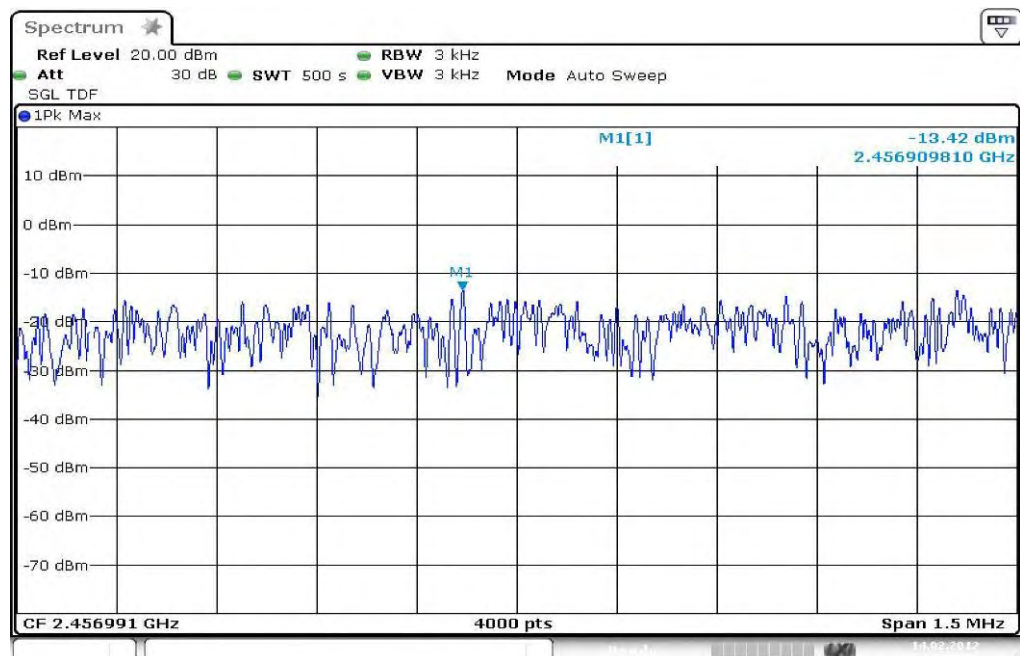
Results:

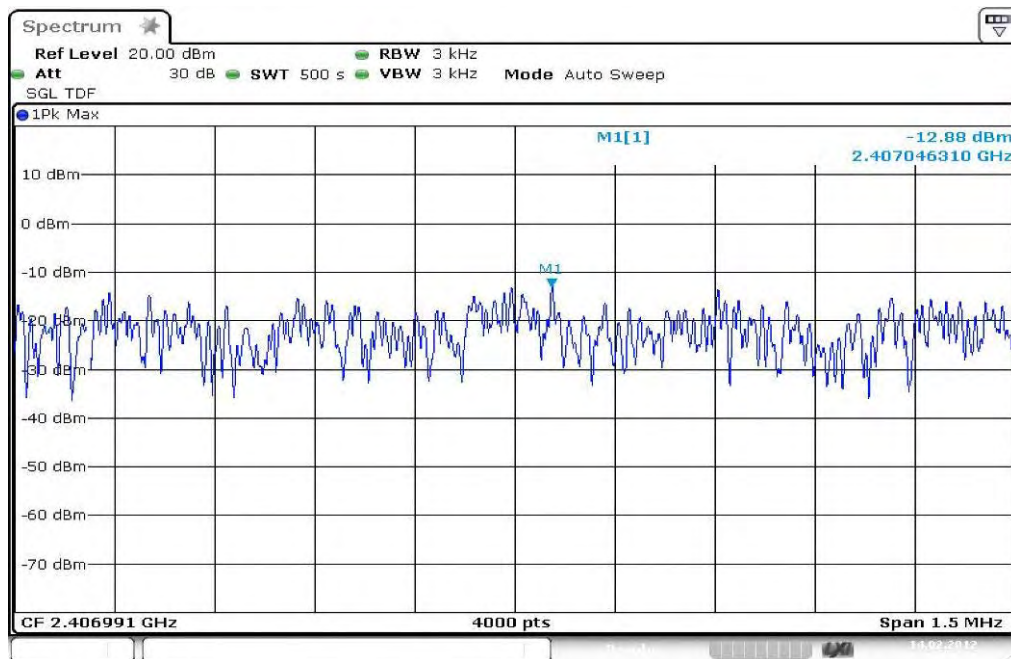
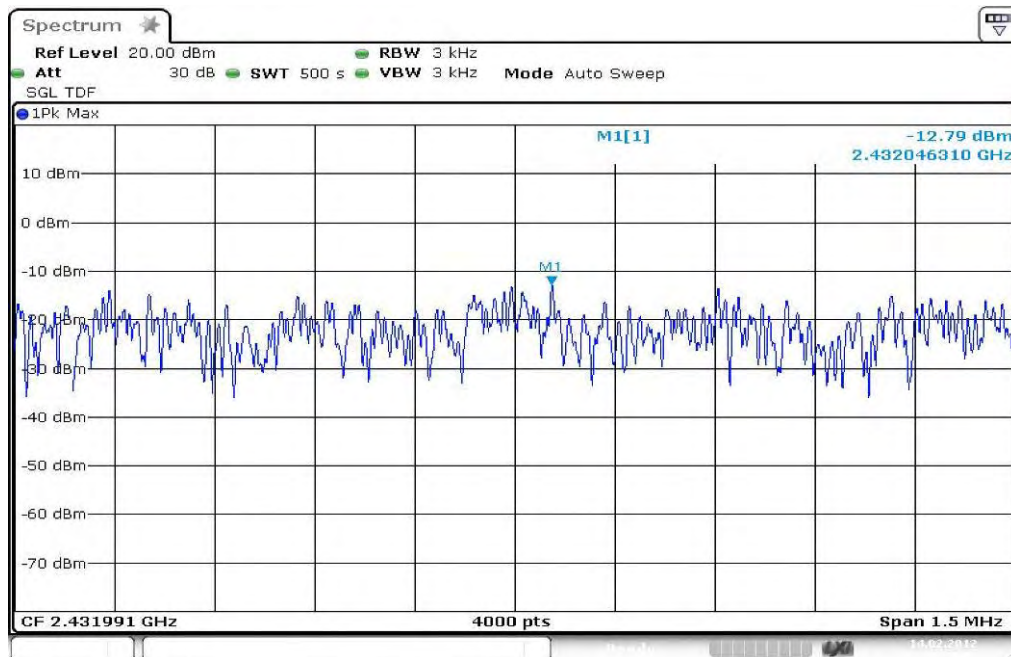
Modulation Frequency	Power Spectral density [dBm/3kHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	-6.42	-6.18	-6.40
OFDM / g – mode	-13.14	-13.14	-13.42
OFDM / n – mode	-12.88	-12.79	-13.10
Measurement uncertainty	± 1.5 dB		

Result: The result of the measurement is passed.

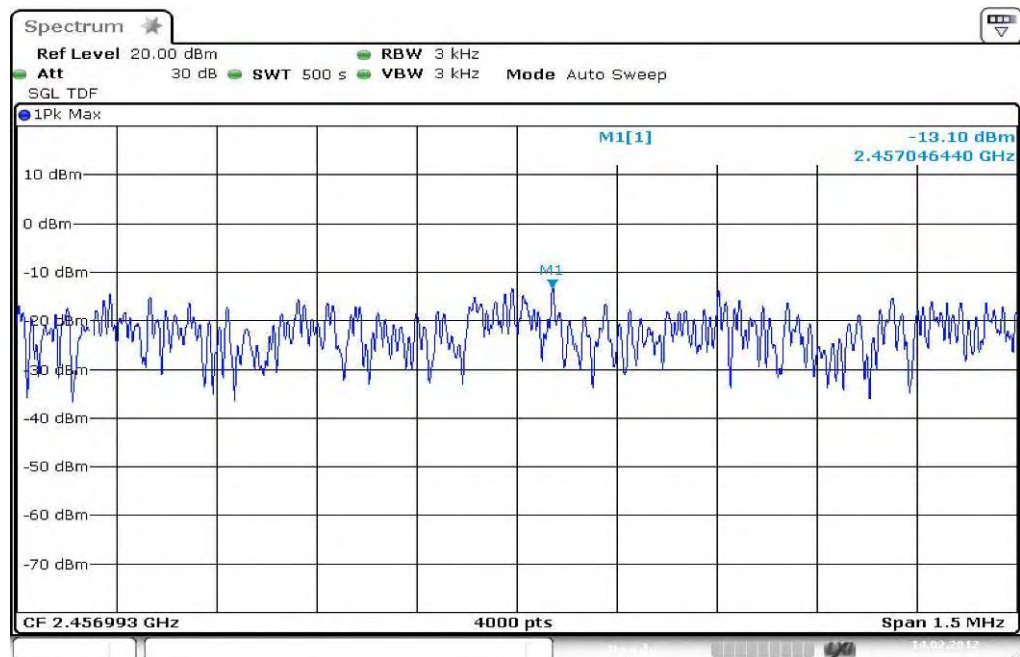
Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel**Plots: OFDM / g – mode****Plot 1: TX mode, lowest channel**

Plot 2: TX mode, middle channel**Plot 3: TX mode, highest channel**

Plots: OFDM / n – mode**Plot 1: TX mode, lowest channel****Plot 2: TX mode, middle channel**

Plot 3: TX mode, highest channel



9.5 Spectrum bandwidth of a FHSS system – 6 dB bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold

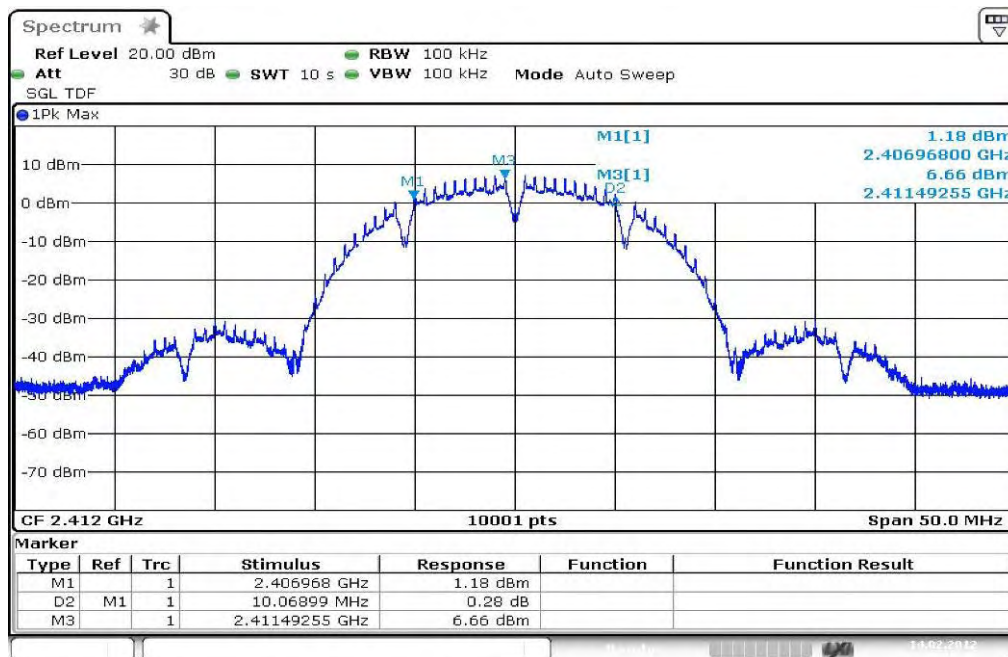
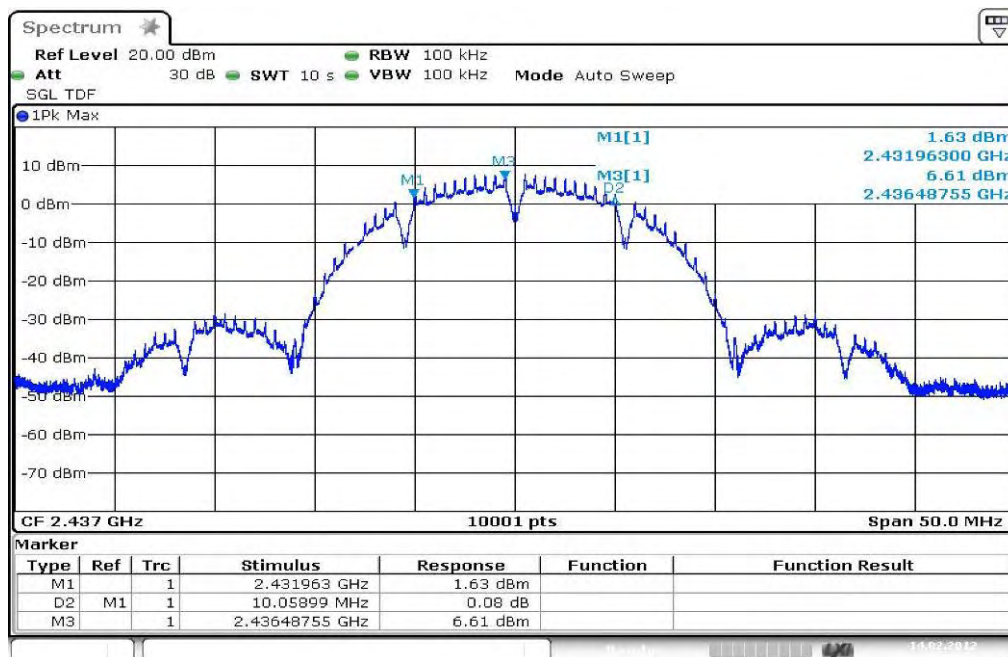
Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a FHSS System – 6 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

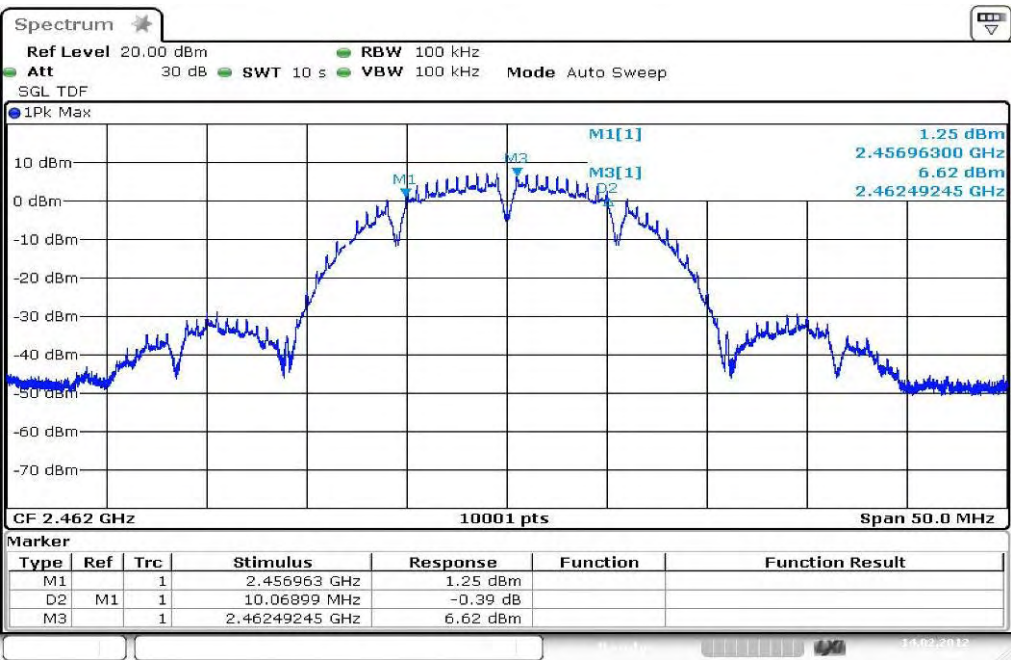
Results:

Modulation Frequency	6 dB BANDWIDTH [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	10.07	10.06	10.07
OFDM / g – mode	16.42	16.42	16.42
OFDM / n – mode	17.55	17.54	17.55
Measurement uncertainty	± 100 kHz		

Result: The result of the measurement is passed.

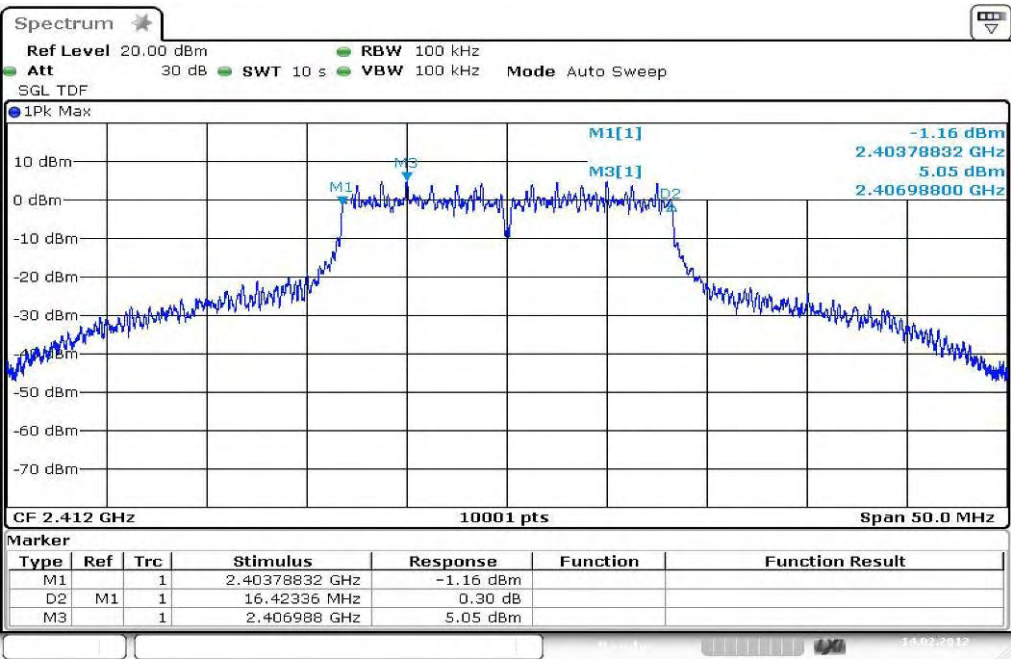
Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel, 6 dB bandwidth****Plot 2: TX mode, middle channel, 6 dB bandwidth**

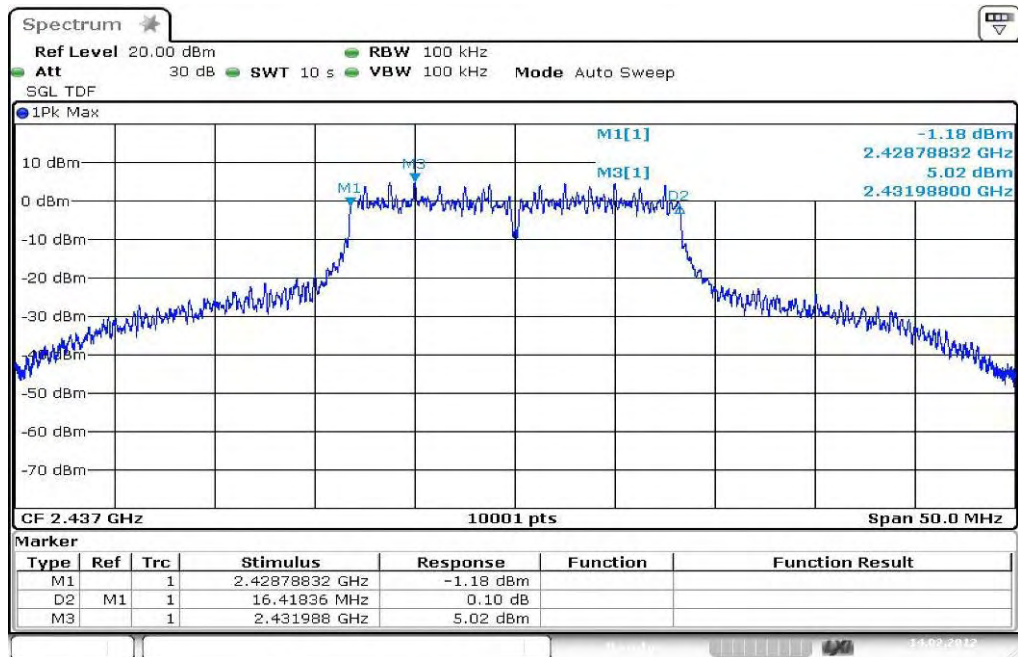
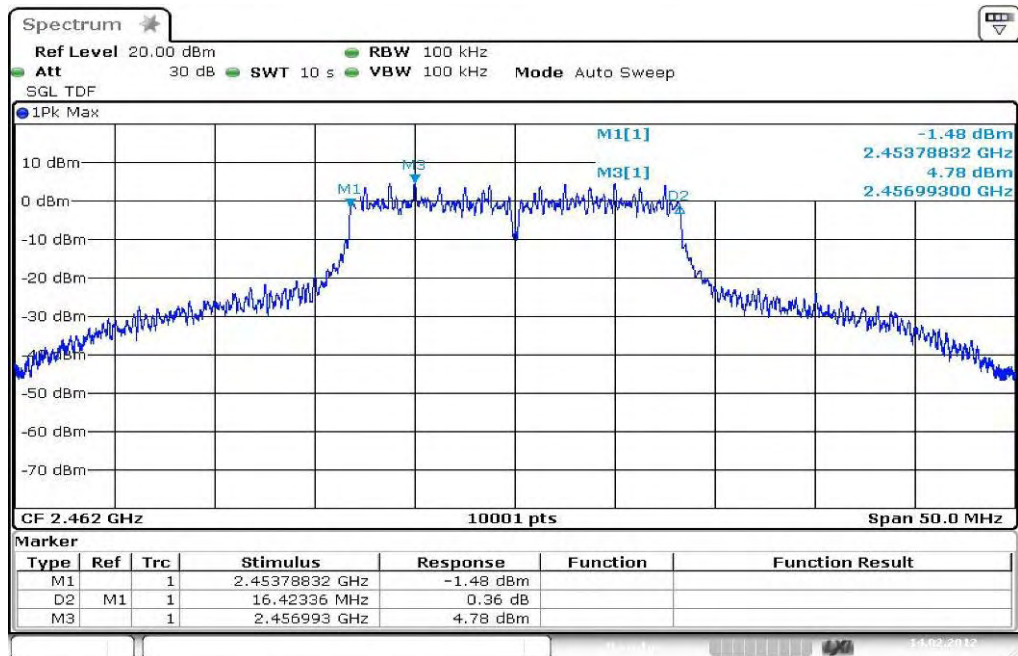
Plot 3: TX mode, highest channel, 6 dB bandwidth

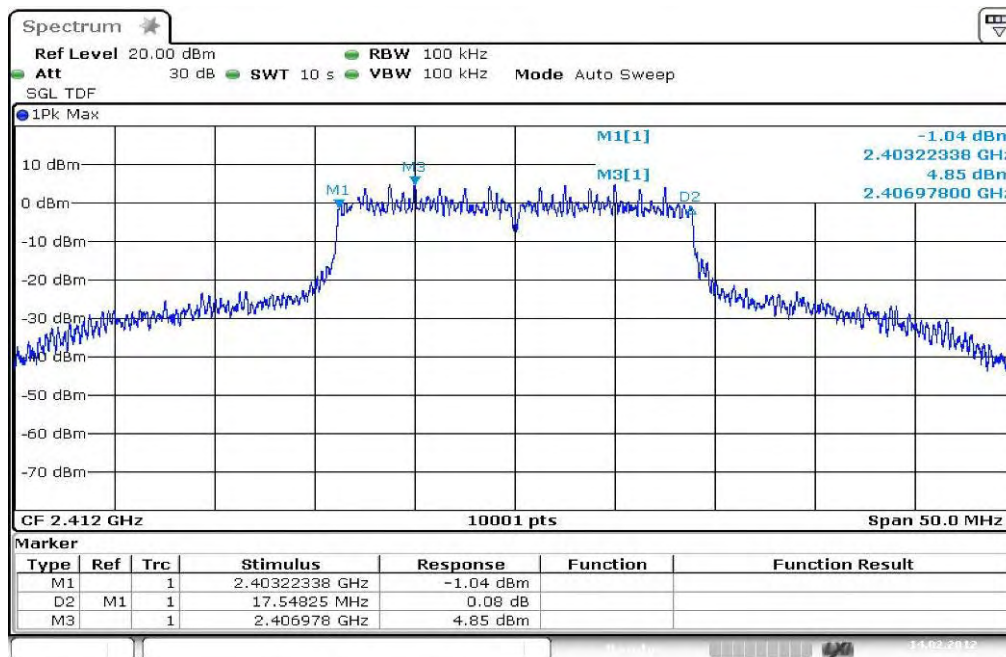
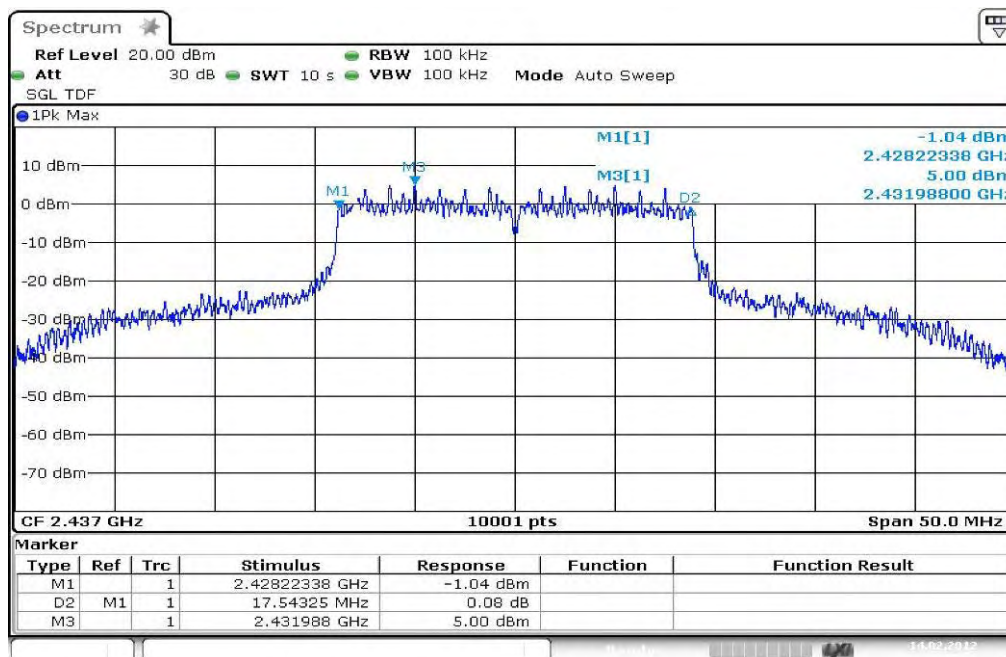


Plots: OFDM / g – mode

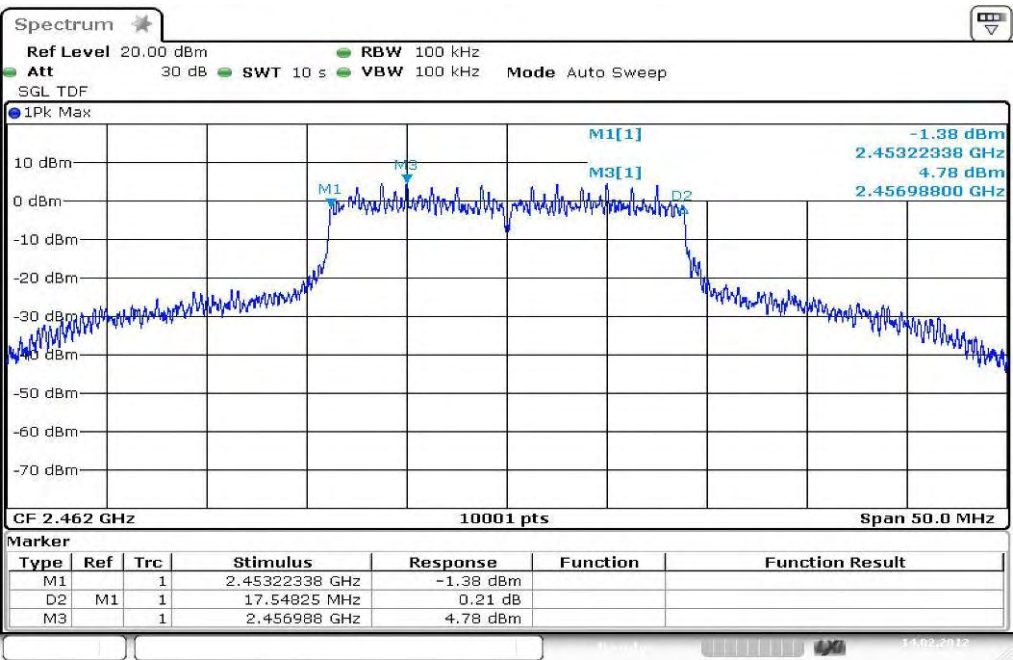
Plot 1: TX mode, lowest channel, 6 dB bandwidth



Plot 2: TX mode, middle channel, 6 dB bandwidth**Plot 3:** TX mode, highest channel, 6 dB bandwidth

Plots: OFDM / n – mode**Plot 1: TX mode, lowest channel, 6 dB bandwidth****Plot 2: TX mode, middle channel, 6 dB bandwidth**

Plot 3: TX mode, highest channel, 6 dB bandwidth



9.6 Spectrum bandwidth of a FHSS system – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold

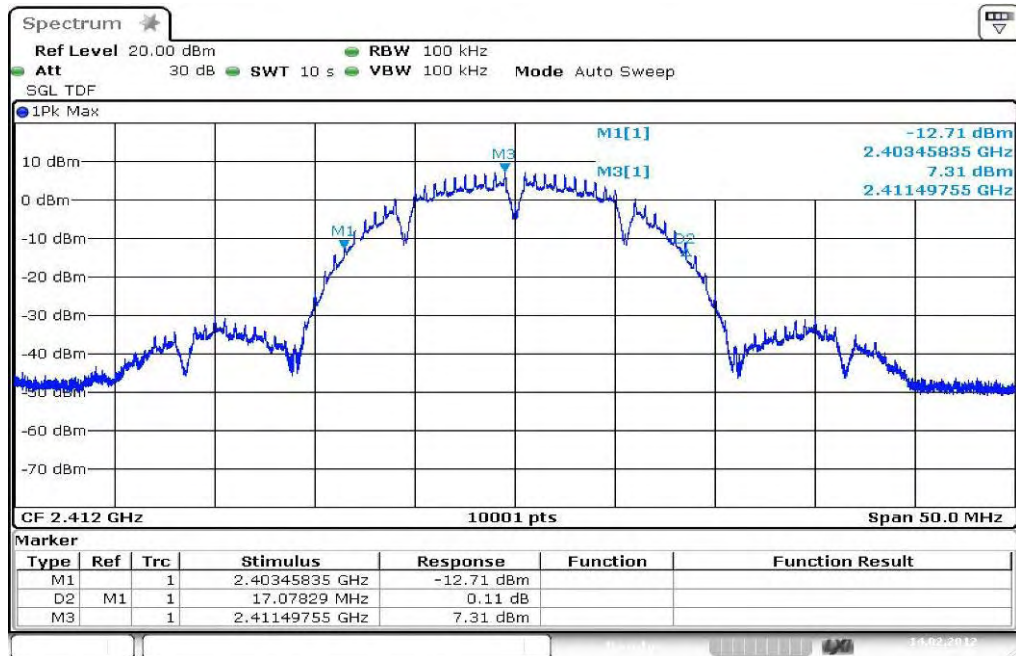
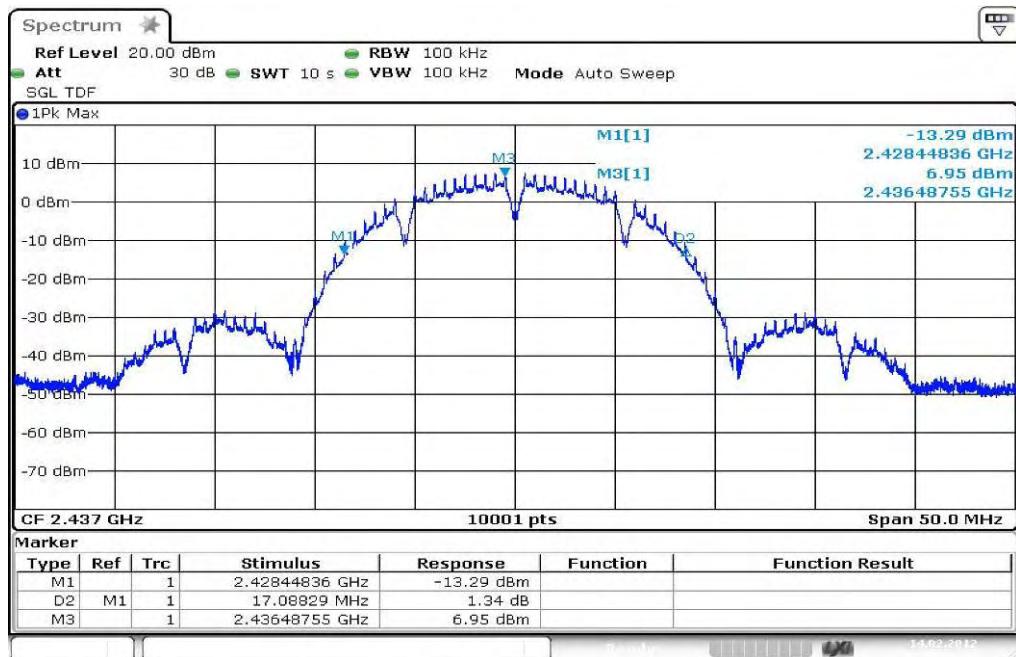
Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a FHSS System – 20 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

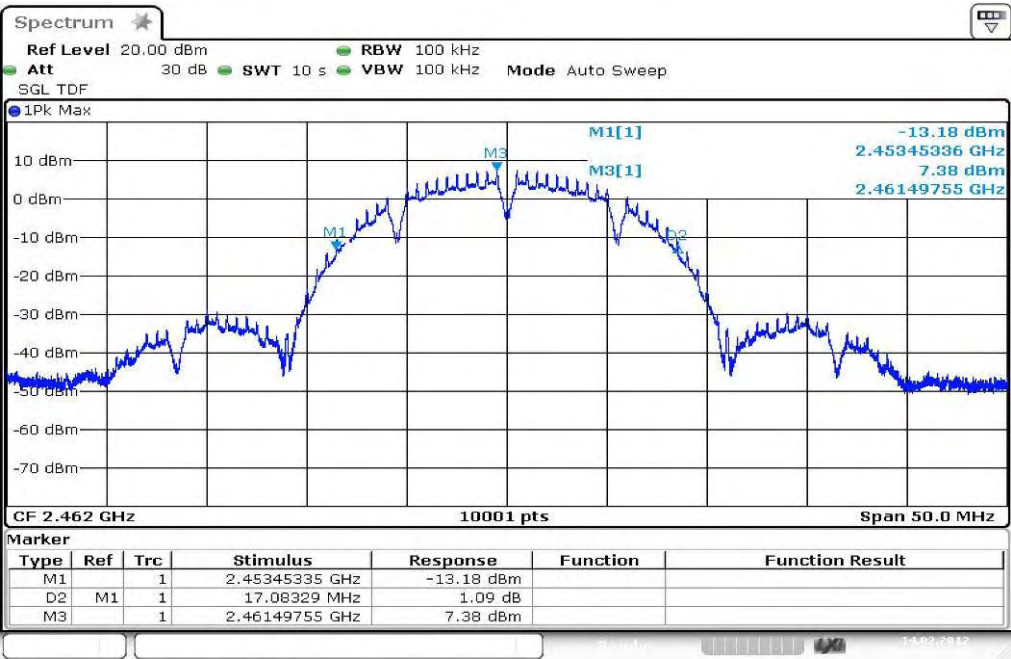
Results:

Modulation Frequency	20 dB BANDWIDTH [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	17.08	17.09	17.08
OFDM / g – mode	17.55	17.55	17.55
OFDM / n – mode	18.45	18.44	18.45
Measurement uncertainty	± 100 kHz		

Result: The result of the measurement is passed.

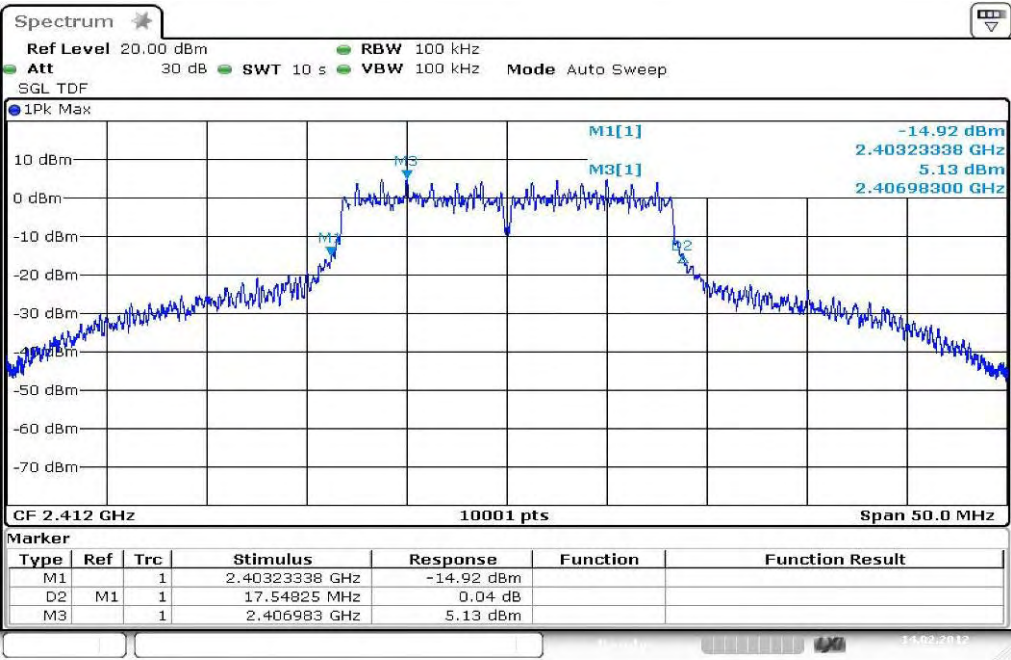
Plots: DSSS / b – mode**Plot 1: TX mode, lowest channel, 20 dB bandwidth****Plot 2: TX mode, middle channel, 20 dB bandwidth**

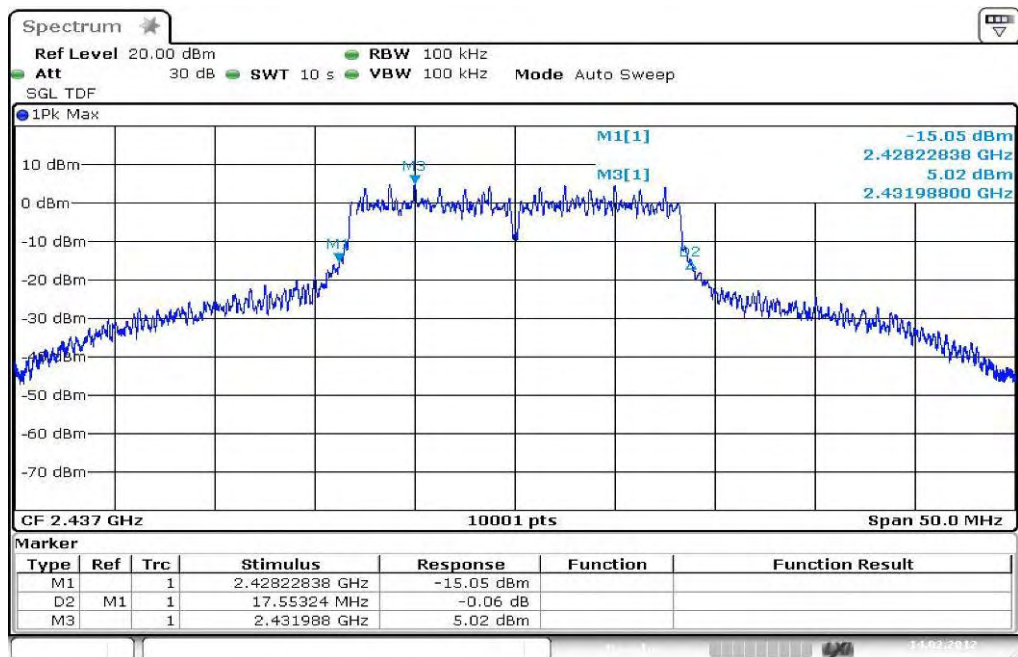
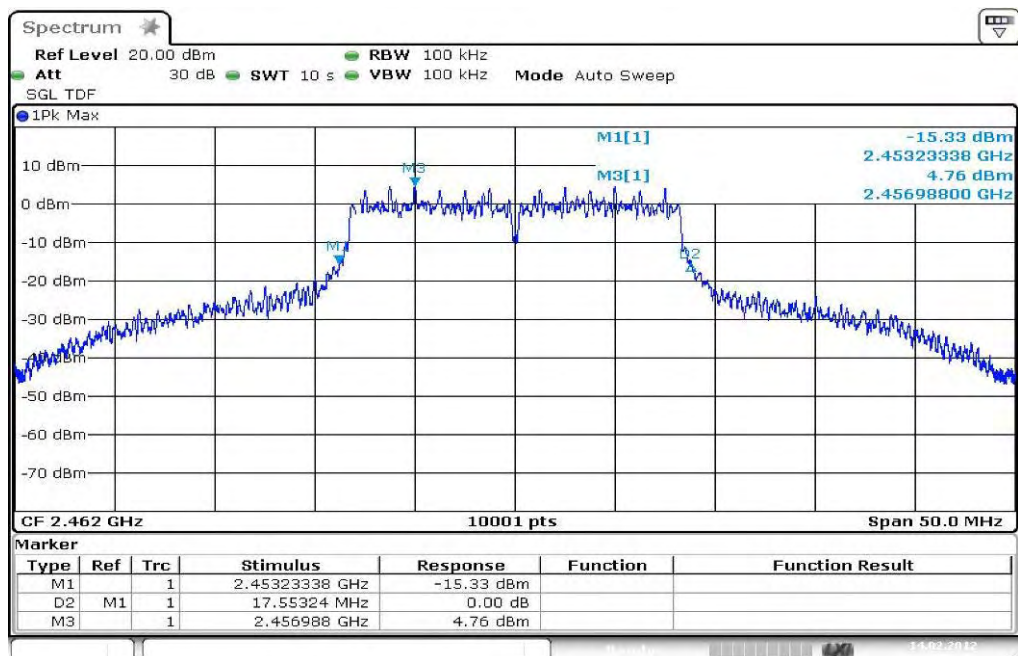
Plot 3: TX mode, highest channel, 20 dB bandwidth

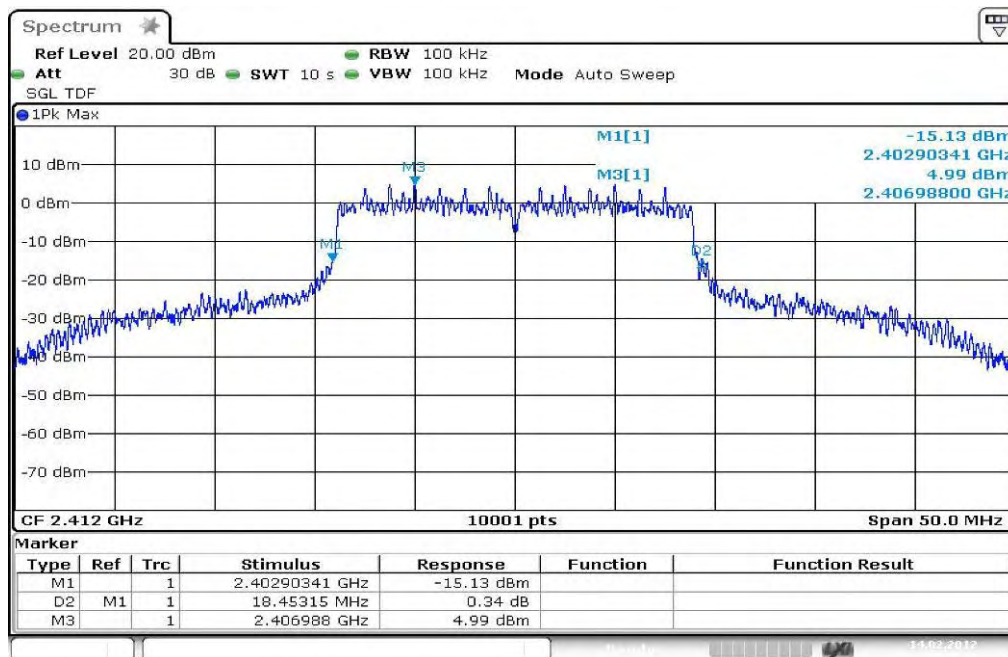
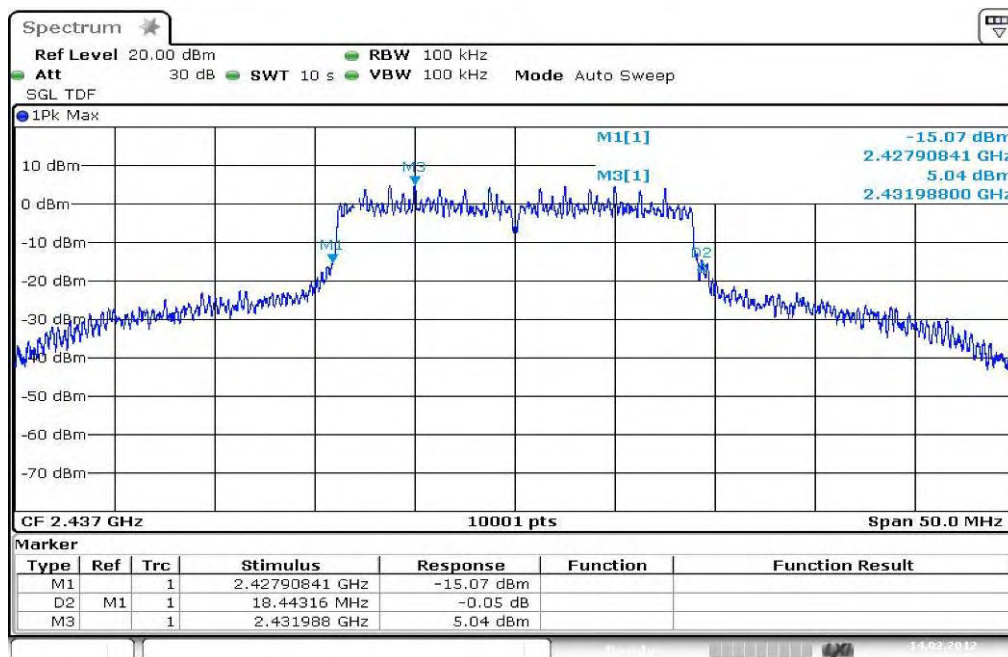


Plots: OFDM / g – mode

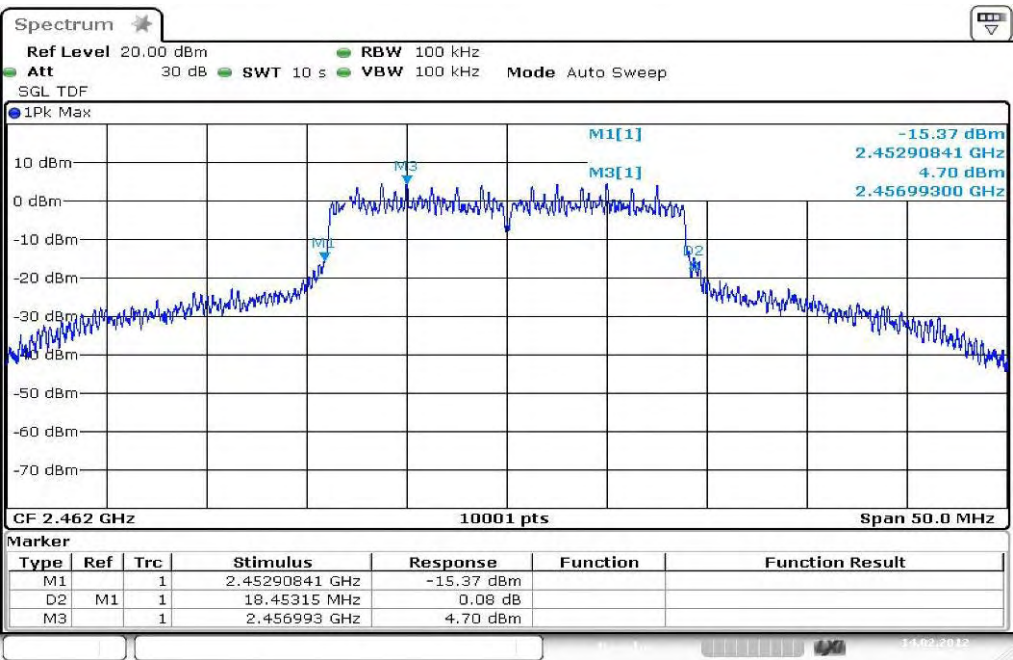
Plot 1: TX mode, lowest channel, 20 dB bandwidth



Plot 2: TX mode, middle channel, 20 dB bandwidth**Plot 3:** TX mode, highest channel, 20 dB bandwidth

Plots: OFDM / n – mode**Plot 1: TX mode, lowest channel, 20 dB bandwidth****Plot 2: TX mode, middle channel, 20 dB bandwidth**

Plot 3: TX mode, highest channel, 20 dB bandwidth



9.7 Band edge compliance conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in both modes.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	500 kHz
Resolution bandwidth:	100 kHz
Span:	Lower Band Edge: 2300 – 2425 MHz Upper Band Edge: 2450 – 2500 MHz
Trace-Mode:	Max Hold

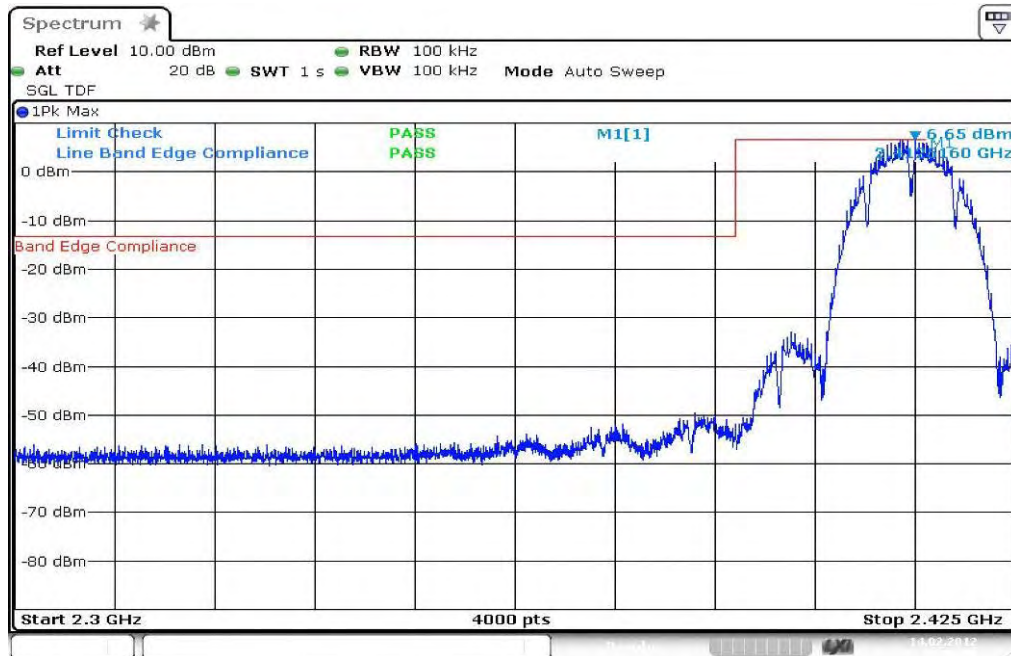
Limits:

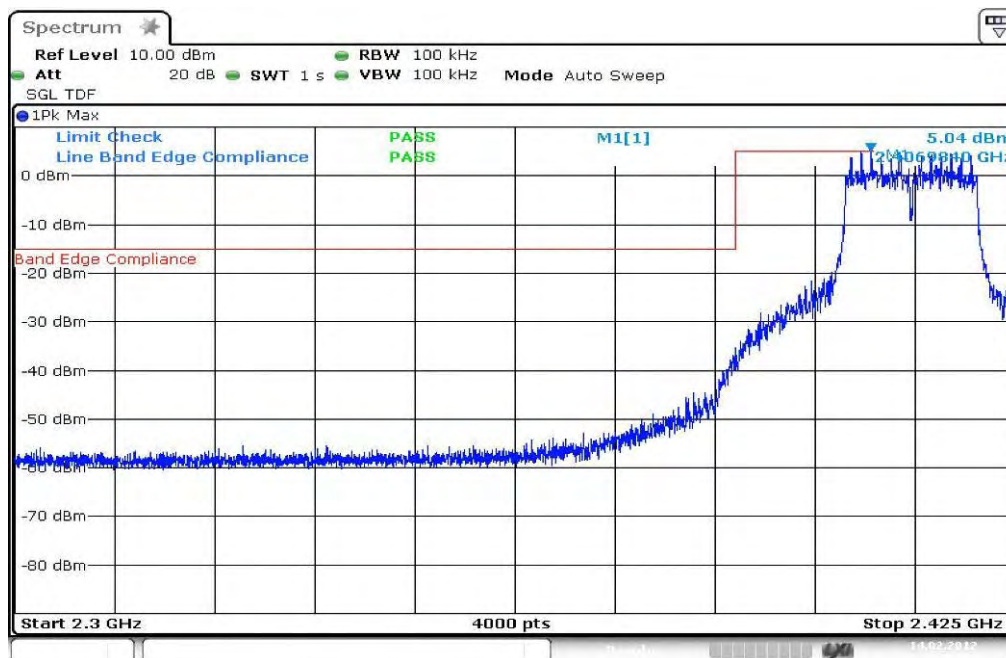
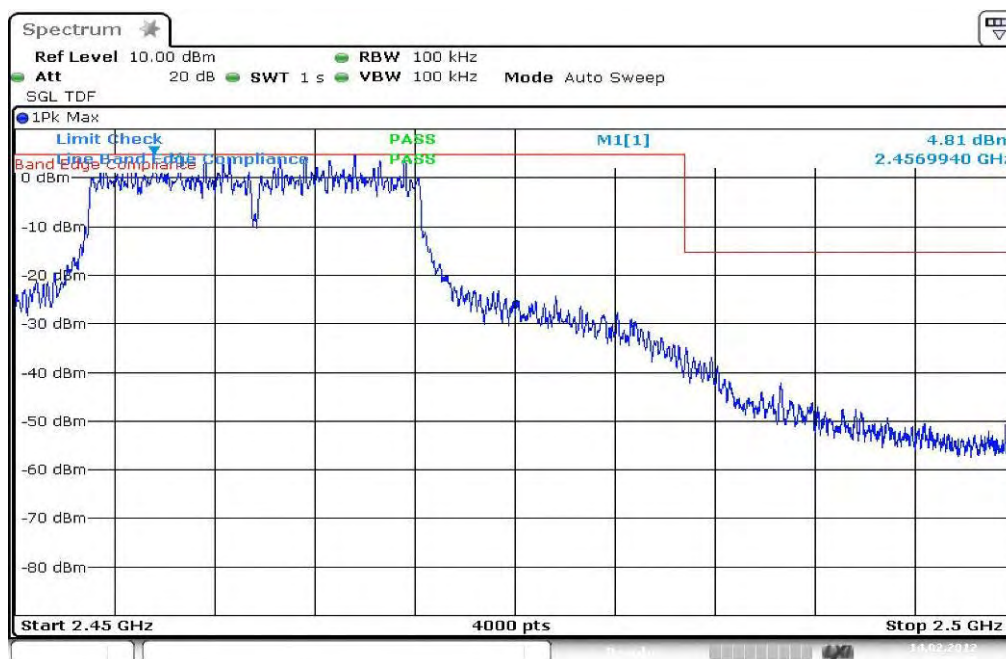
FCC	IC
CFR Part 15.247 (d)	RSS 210, Issue 8, A 8.5
Band Edge Compliance Conducted	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.	

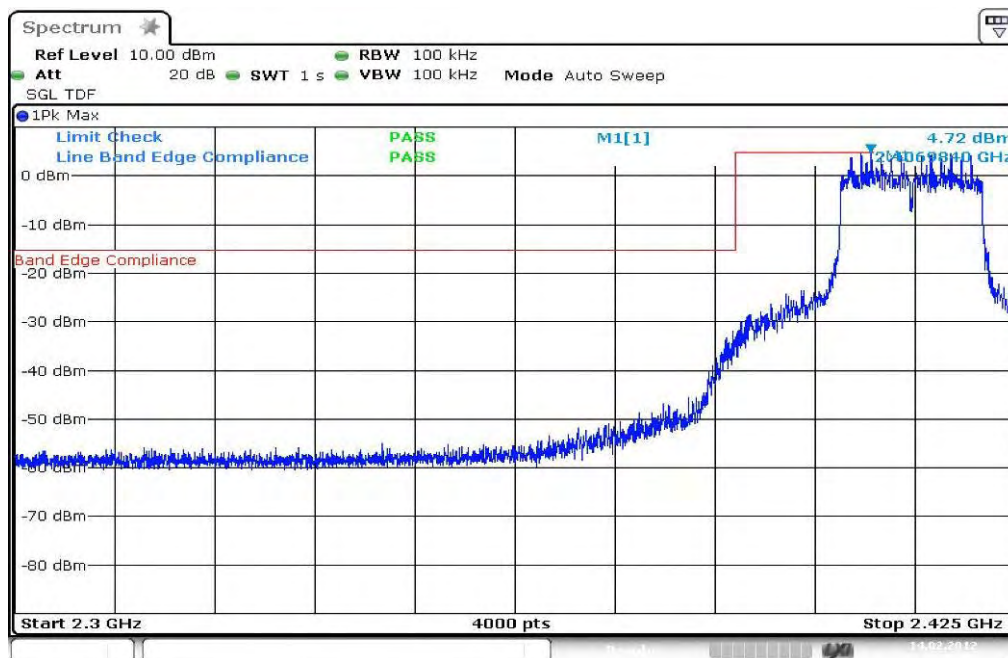
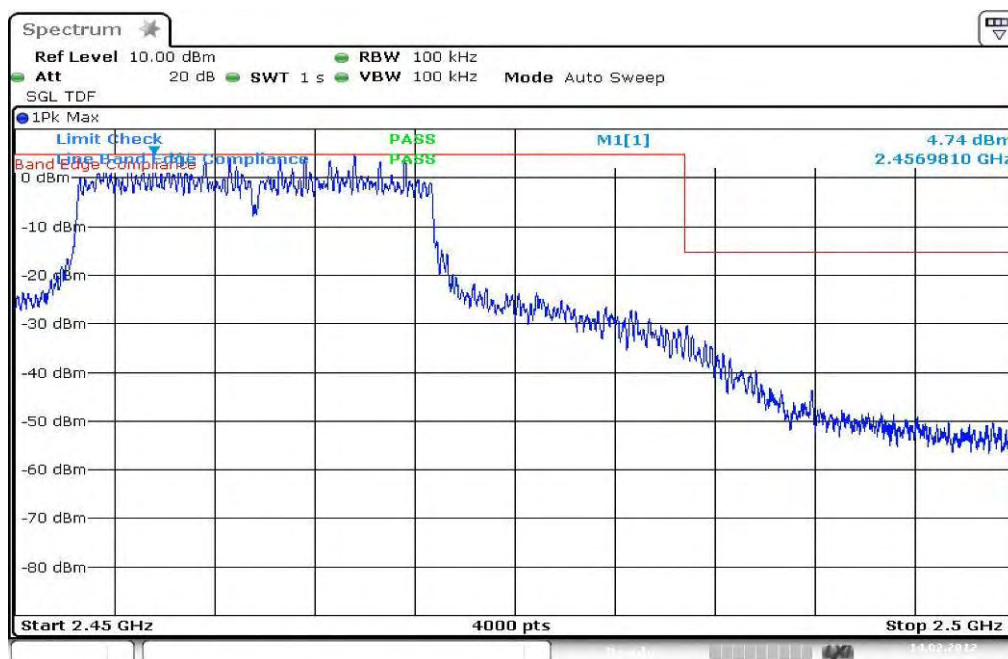
Results:

Szenario Modulation	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB (see plot 1)	> 20 dB (see plot 3)	> 20 dB (see plot 5)
Upper Band Edge – Channel 11	> 20 dB (see plot 2)	> 20 dB (see plot 4)	> 20 dB (see plot 6)
Measurement uncertainty	± 1.5 dB		

Result: The result of the measurement is passed.

Plots: DSSS / b – mode**Plot 1: TX mode, lower band edge****Plot 2: TX mode, upper band edge**

Plots: OFDM / g – mode**Plot 1: TX mode, lower band edge****Plot 2: TX mode, upper band edge**

Plots: OFDM / n – mode**Plot 1: TX mode, lower band edge****Plot 2: TX mode, upper band edge**

9.8 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	10 Hz
Resolution bandwidth:	1 MHz
Span:	Lower Band: 2300 – 2400 MHz higher Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.205	RSS 210, Issue 8, A 8.5
Band Edge Compliance Radiated	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).	
54 dBμV/m AVG	

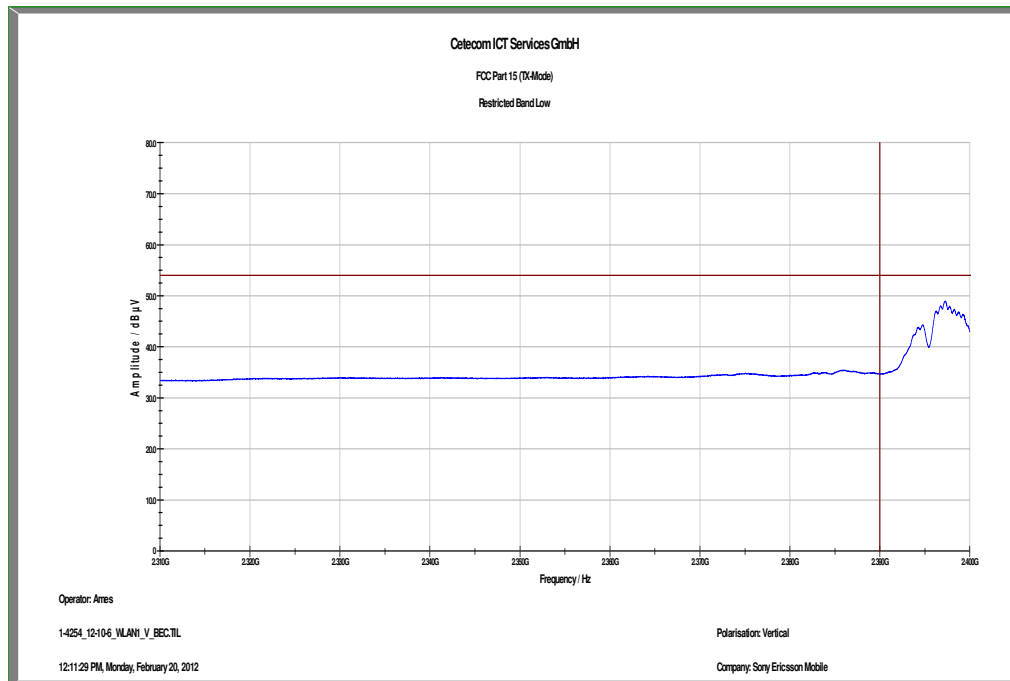
Results:

Szenario Modulation	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB	> 20 dB	> 20 dB
Upper Band Edge – Channel 11	> 20 dB	> 20 dB	> 20 dB
Measurement uncertainty	± 3 dB		

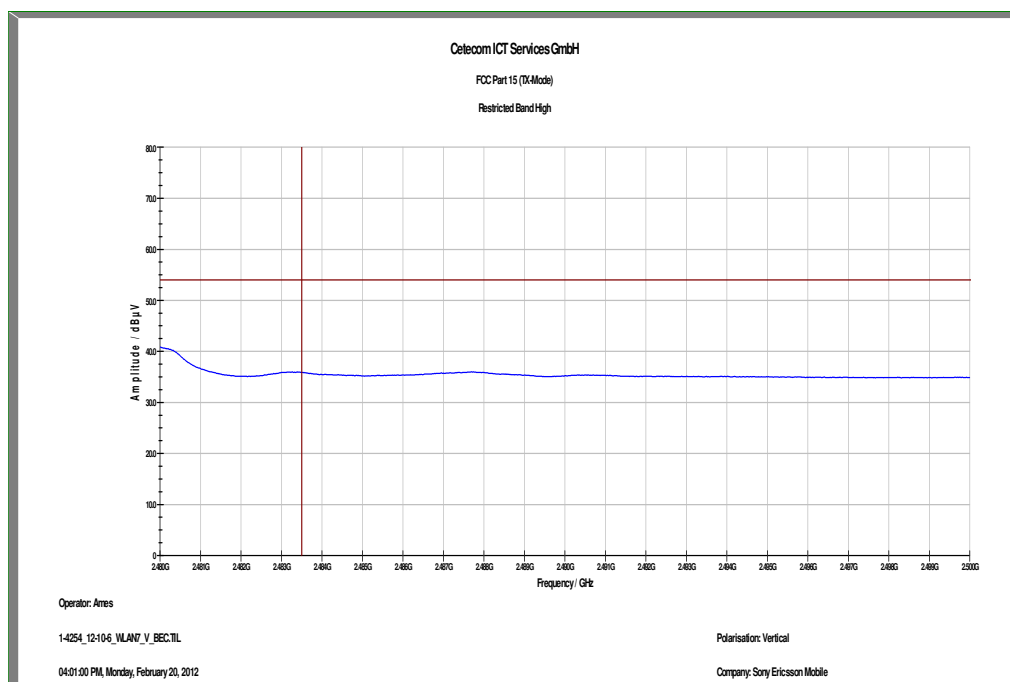
Result: The result of the measurement is passed.

Plots: DSSS / b – mode

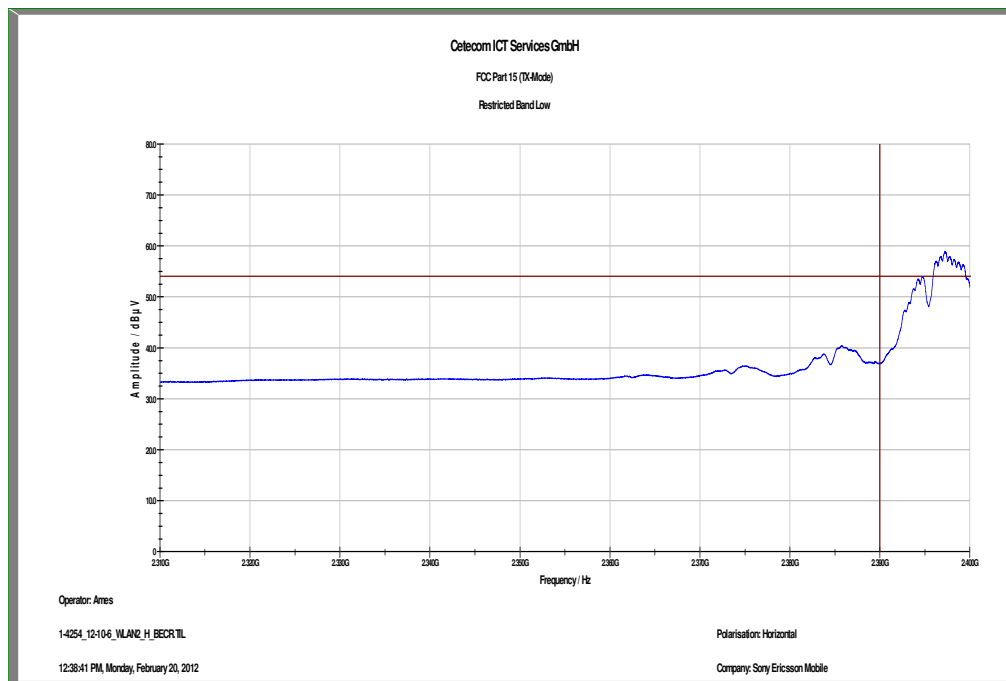
Plot 1: TX mode, lower band edge, vertical polarization



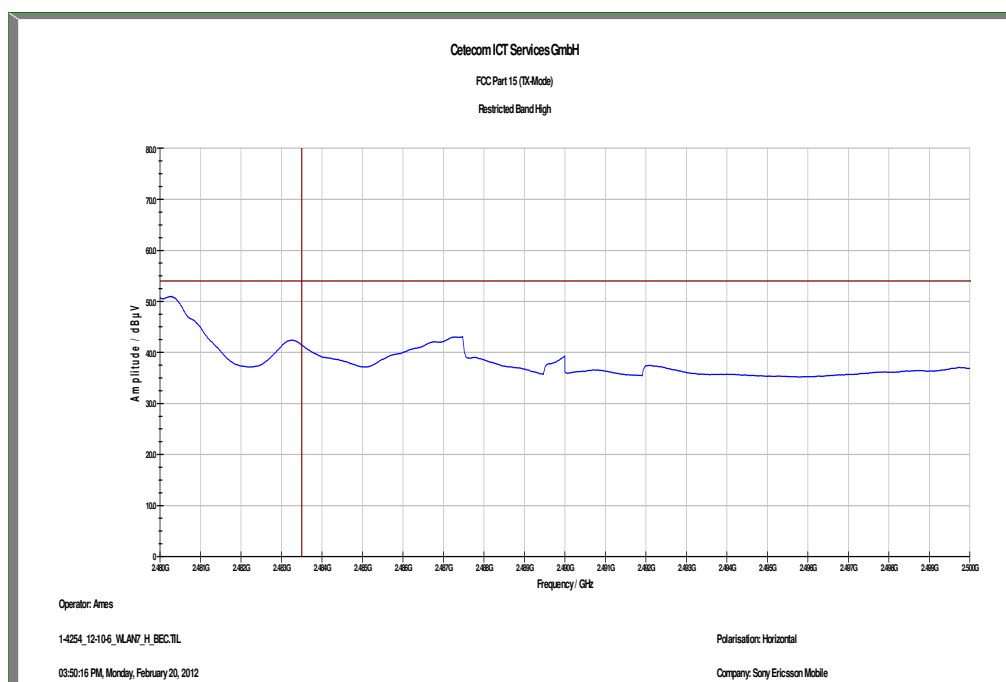
Plot 2: TX mode, upper band edge, vertical polarization



Plot 3: TX mode, lower band edge, horizontal polarization

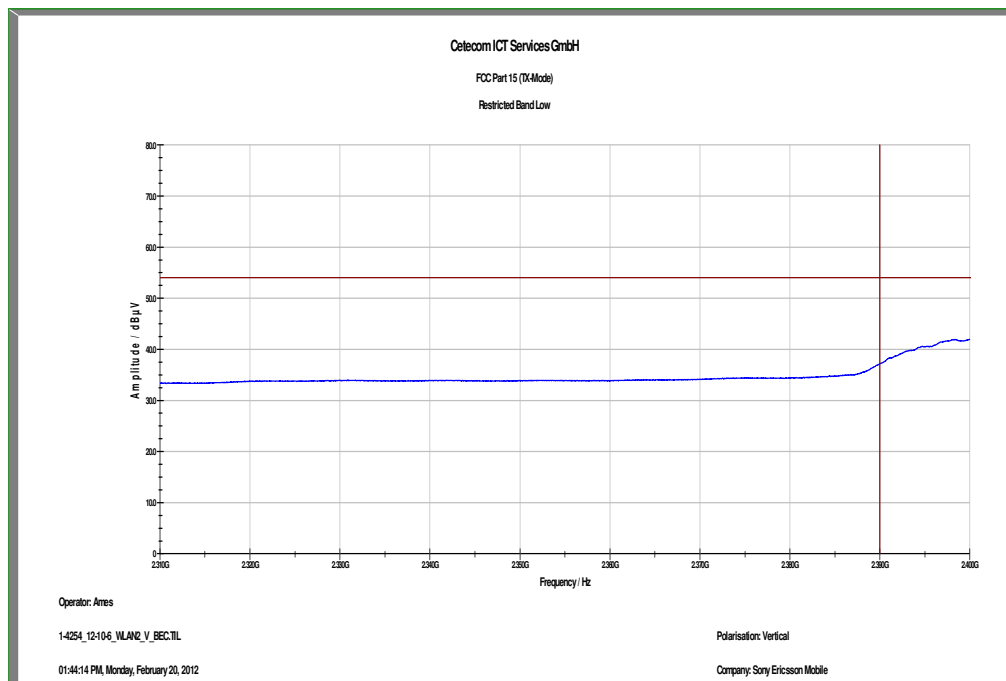


Plot 4: TX mode, upper band edge, horizontal polarization



Plots: OFDM / g – mode

Plot 1: TX mode, lower band edge, vertical polarization



Plot 2: TX mode, upper band edge, vertical polarization

