

TEST REPORT

Test report no.: 1-2977/11-95-08



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Sony Ericsson Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN
Phone: +46 46 19 30 00
Fax: +46 46 19 32 95
Contact: Håkan Sjöberg
e-mail: hakan.sjoberg@sonyericsson.com
Phone: +46 46 19 35 59

Manufacturer

Sony Ericsson Mobile Communications AB
Nya Vattentornet
22188 Lund / SWEDEN

Test standard/s

47 CFR Part 15 Title 47 of the Code of Federal Regulations; Chapter I
Part 15 - Radio frequency devices
RSS - 210 Issue 8 Spectrum Management and Telecommunications - Radio Standards Specification
Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands):
Category I Equipment

For further applied test standards please refer to section 3 of this test report.

Test item

Kind of test item: GSM Mobile Phone 850/900/1800/1900; GPRS/EGPRS; UMTS FDDI/FDDII/FDDV/FDDVIII;
HSPA; RFID; BT EDR; WLAN b/g/n; ANT+; GPS
Model name: AAD-3880120-AV
FCC ID: PY7A3880120
IC: 4170B-A3880120
Frequency [MHz]: ISM band 2400 MHz to 2483.5 MHz
(lowest channel 01 – 2412 MHz, highest channel 11 – 2462 MHz)
Technology tested: WLAN
Antenna: Integrated PCB antenna
Power Supply: 3.7 V DC by Li - polymer battery
Temperature Range: -20°C to +55 °C

Test report authorised:

2011-12-16 Andreas Keller
Testing Manager

Test performed:

2011-12-16 Marco Bertolino
Testing Manager

1 Table of contents

1 Table of contents2

2 General information3

 2.1 Notes and disclaimer3

 2.2 Application details.....3

3 Test standard/s3

4 Test environment.....4

5 Test item.....4

6 Test laboratories sub-contracted4

7 Summary of measurement results5

8 RF measurements6

 8.1 Description of test setup6

 8.1.1 Radiated measurements.....6

 8.1.2 Conducted measurements.....7

 8.2 Additional comments7

 8.3 RSP100 test report cover sheet / performance test data8

9 Measurement results.....9

 9.1 Maximum output power (conducted)9

 9.2 Antenna gain.....20

 9.3 Maximum output power23

 9.4 Power spectral density30

 9.5 Spectrum bandwidth of a FHSS system – 6 dB bandwidth36

 9.6 Spectrum bandwidth of a FHSS system – 20 dB bandwidth42

 9.7 Band edge compliance conducted48

 9.8 Band edge compliance radiated52

 9.9 TX spurious emissions conducted.....59

 9.10 TX spurious emissions radiated67

 9.11 RX spurious emissions radiated106

 9.12 TX spurious emissions radiated < 30 MHz.....111

 9.13 TX spurious emissions conducted < 30 MHz.....117

10 Test equipment and ancillaries used for tests.....122

11 Observations123

Annex A Photographs of the test setup.....124

Annex B External photographs of the EUT.....129

Annex C Internal photographs of the EUT134

Annex D Document history146

Annex E Further information.....146

Annex F Accreditation Certificate147

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2011-10-19
Date of receipt of test item:	2011-12-02
Start of test:	2011-12-02
End of test:	2011-12-12
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+55 °C during high temperature tests
	T_{min}	-20 °C during low temperature tests
Relative humidity content:		42 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.7 V DC by Li - polymer battery
	V_{max}	4.1 V
	V_{min}	3.3 V

5 Test item

Kind of test item	:	GSM Mobile Phone 850/900/1800/1900; GPRS/EGPRS; UMTS FDDI/FDDII/FDDV/FDDVIII; HSPA; RFID; BT EDR; WLAN b/g/n; ANT+; GPS
Type identification	:	AAD-3880120-AV
S/N serial number	:	Radiated units: CB511VCDAY; CB511VCCZW Conducted units: CB511VCE11; CB511VCE1X
HW hardware status	:	AP1
SW software status	:	6.0.A.0.448 ATP R1A034
Frequency band [MHz]	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 01 – 2412 MHz, highest channel 11 – 2462 MHz)
Type of radio transmission	:	DSSS and OFDM
Use of frequency spectrum	:	
Channel access method	:	FDMA
Type of modulation	:	BPSK, QPSK, 16 – and 64 – QAM
Number of channels	:	11
Antenna	:	Integrated PCB antenna → for more information, please take a look at the annex – internal photos of the EUT.
Power supply	:	3.7 V DC by Li - polymer battery
Temperature range	:	-20°C to +55 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8, Annex 8	Passed	2011-12-16	-/-

Test specification clause	Test case	Temperature conditions	Power source voltages	Mode	Pass	Fail	NA	NP	Remark
§15.247(b)(4) RSS 210 / A8.4(2)	Antenna gain	Nominal	Nominal	DSSS	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.247(e) RSS 210 / A8.2(b)	Power spectral density	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 6dB bandwidth	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(a)(2) RSS 210 / A8.2(a)	Spectrum bandwidth of a FHSS system 20dB bandwidth	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(b)(3) RSS-210 / A8.4(4)	Maximum output power	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	Band edge compliance conducted	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.205 RSS-210 / A8.5	Band edge compliance radiated	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions conducted	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.247(d) RSS-210 / A8.5	TX spurious emissions radiated	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.109 RSS-Gen.	RX spurious emissions radiated	Nominal	Nominal	-/-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§15.209(a) RSS-Gen	TX spurious emissions radiated < 30 MHz	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies
§15.207(a)	Conducted emissions < 30 MHz	Nominal	Nominal	DSSS OFDM g & n	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed

8 RF measurements


8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2009 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2009 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

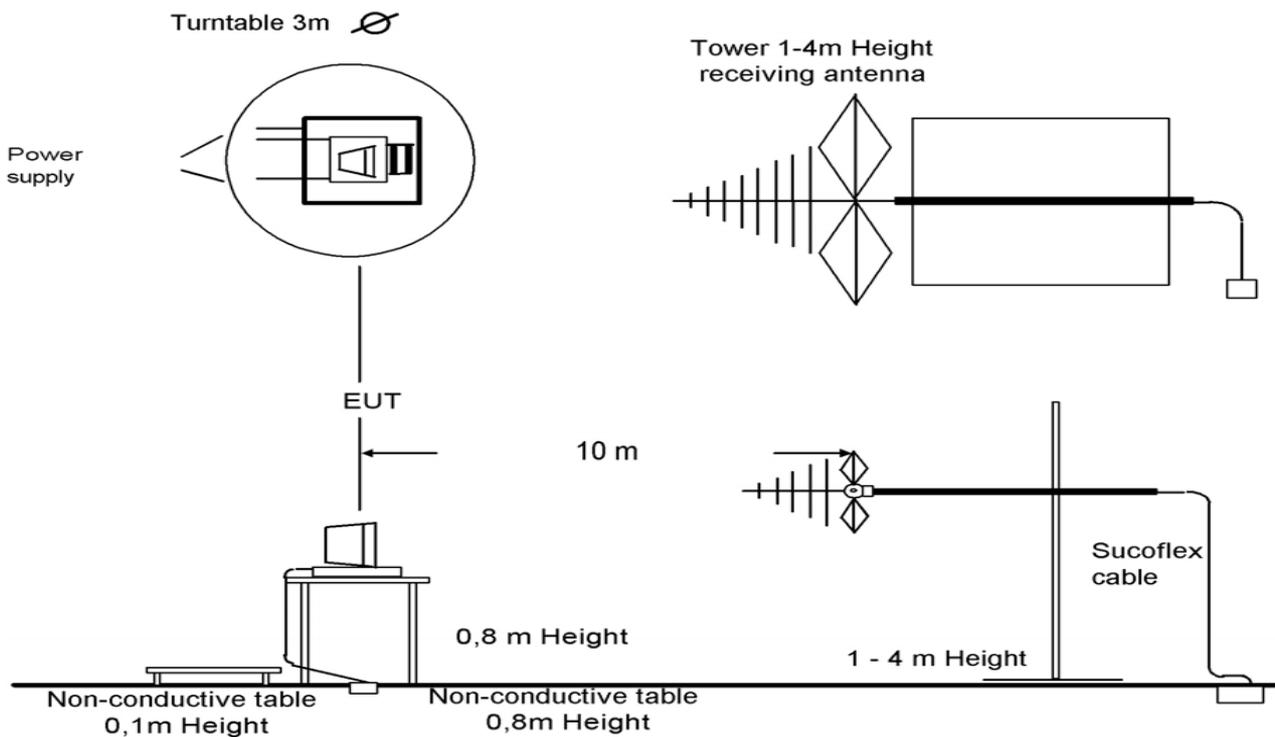


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signaling is performed from outside the chamber with a signaling unit (CMU200 or other) by air link using signaling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal paths is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signaling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signaling unit and the spectrum analyzer are impedance matched on 50 Ohm.

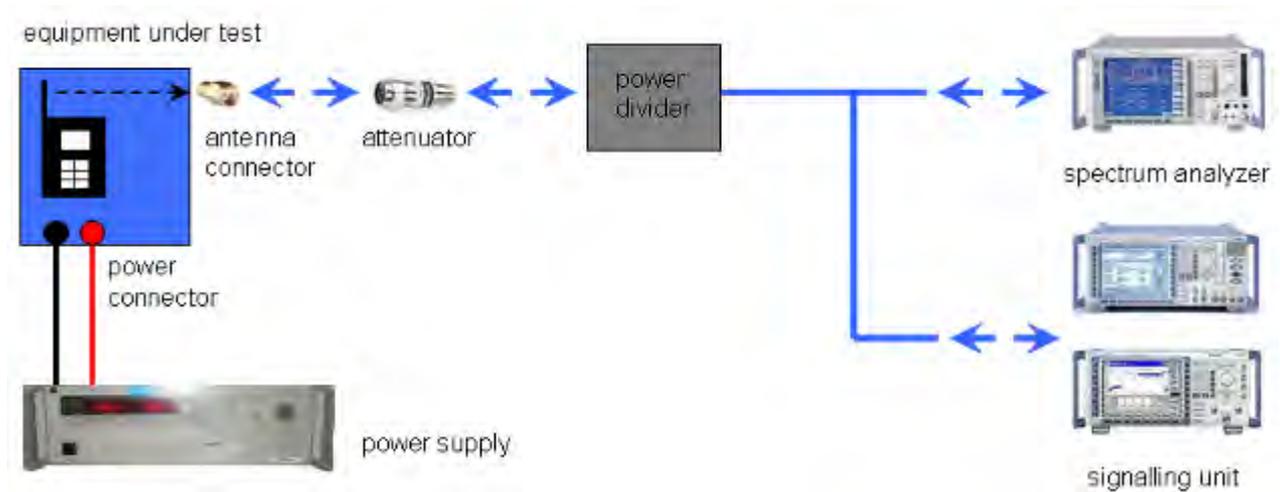

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: None

Special test descriptions: None

Configuration descriptions: None

- Test mode:
- No test mode available.
lperf was used to ping another device with the largest support packet size
 - Special software is used.
EUT is transmitting pseudo random data by itself

8.3 RSP100 test report cover sheet / performance test data

Test report number	:	1-2977/11-95-08
Equipment model number	:	AAD-3880120-AV
Certification number	:	4170B-A3880120
Manufacturer (complete address)	:	Sony Ericsson Mobile Communications AB Nya Vattentornet 22188 Lund / SWEDEN
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 8
Open area test site IC No.	:	IC 3462C-1
Frequency range	:	ISM band 2400 MHz to 2483.5 MHz (lowest channel 2412 MHz, highest channel 2462 MHz)
RF-power [W] (max.)	:	cond.: 62.95 mW (DSSS / b – mode) 237.14 mW (OFDM / g – mode) 225.94 mW (OFDM / n – mode) EIRP: 26.24 mW (DSSS / b – mode) 98.86 mW (OFDM / g – mode) 94.19 mW (OFDM / n – mode)
Occupied bandwidth (99%-BW)	:	DSSS / b – mode: 13.95 MHz OFDM / g – mode: 17.58 MHz OFDM / n – mode: 18.31 MHz
Type of modulation	:	DSSS & OFDM technology with BPSK, QPSK, 16- and 64 QAM modulation.
Emission designator (TRC-43)	:	14M0G1D (DSSS / b – mode) 17M6G7D (OFDM / g – mode) 18M3G7D (OFDM / n – mode)
Antenna information	:	Integrated PCB antenna → for more information, please take a look at the annex – internal photos of the EUT.
Transmitter spurious (worst case) [dB μ V/m @ 3m]:	:	49.29 AVG @ 7386 MHz DSSS / b – mode 45.84 AVG @ 7236 MHz OFDM / g – mode 46.65 AVG @ 7386 MHz OFDM / n – mode
Receiver spurious (worst case) [dB μ V/m @ 3m]:	:	44.00 PP @ 12 GHz (noise floor)

ATTESTATION:


DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory manager:

2011-12-16
Date

Marco Bertolino
Name

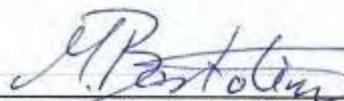

Signature

9 Measurement results

9.1 Maximum output power (conducted)

Description:

Measurement of the maximum output power conducted. This measurement is performed only at the middle channel in both modes and all data rates to determine the data rate per mode which results in the highest output power. This mode will be selected for all further measurements.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	40 MHz
Resolution bandwidth:	40 MHz
Span:	Zero span
Trace-Mode:	Max Hold

Results:

DSSS / b – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]			
	1	2	5.5	11
Ch 6 - 2437 MHz	17.66	17.64	17.61	17.71
Measurement uncertainty	± 1.5 dB			

OFDM / g – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	6	9	12	18	24	36	48	54
Ch 6 - 2437 MHz	23.17	23.01	22.81	22.80	22.88	22.92	22.59	22.76
Measurement uncertainty	± 1.5 dB							

OFDM / n – mode Data Rate [MBit/s]	Maximum Output Power Conducted [dBm]							
	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
Ch 6 - 2437 MHz	22.80	22.77	22.55	22.61	22.58	22.34	22.70	22.62
Measurement uncertainty	± 1.5 dB							

Result: Selected data rate for all measurements:

DSSS / b – mode:

11 MBit/s

OFDM / g – mode:


6 MBit/s

OFDM / n – mode:


MCS0

Plots: DSSS / b – mode


Plot 1: TX mode, middle channel, 1 MBit/s

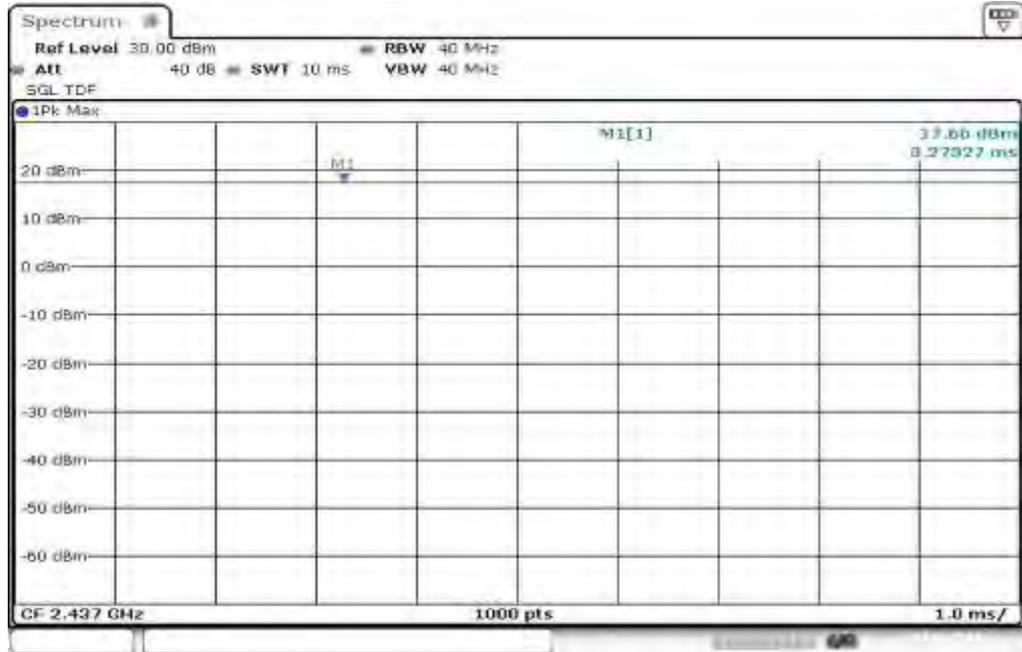


Plot 2: TX mode, middle channel, 2 MBit/s

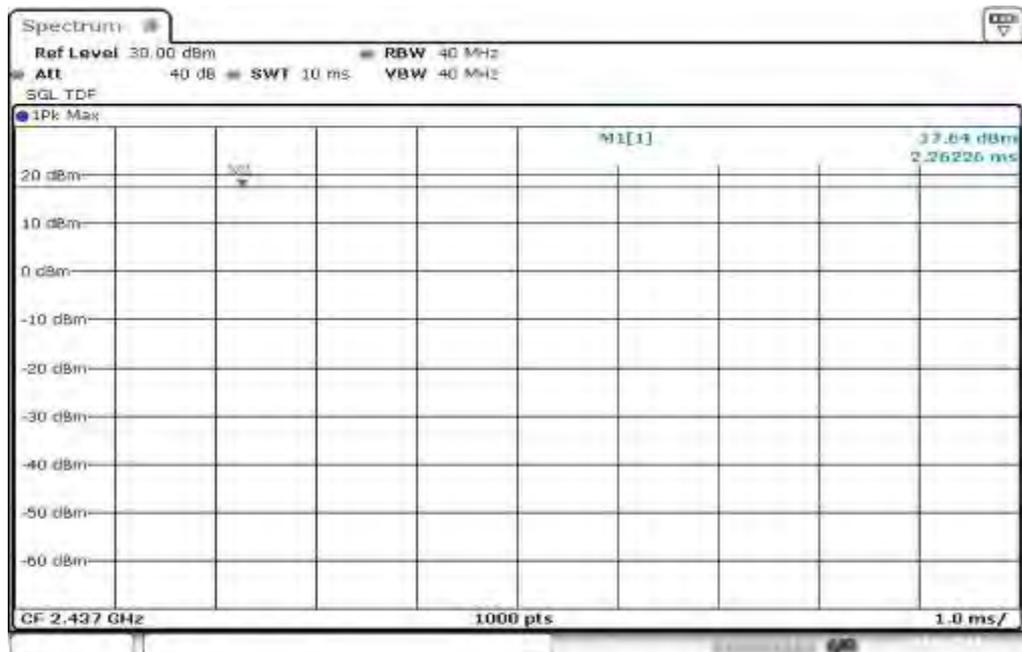

Plot 3: TX mode, middle channel, 5.5 MBit/s

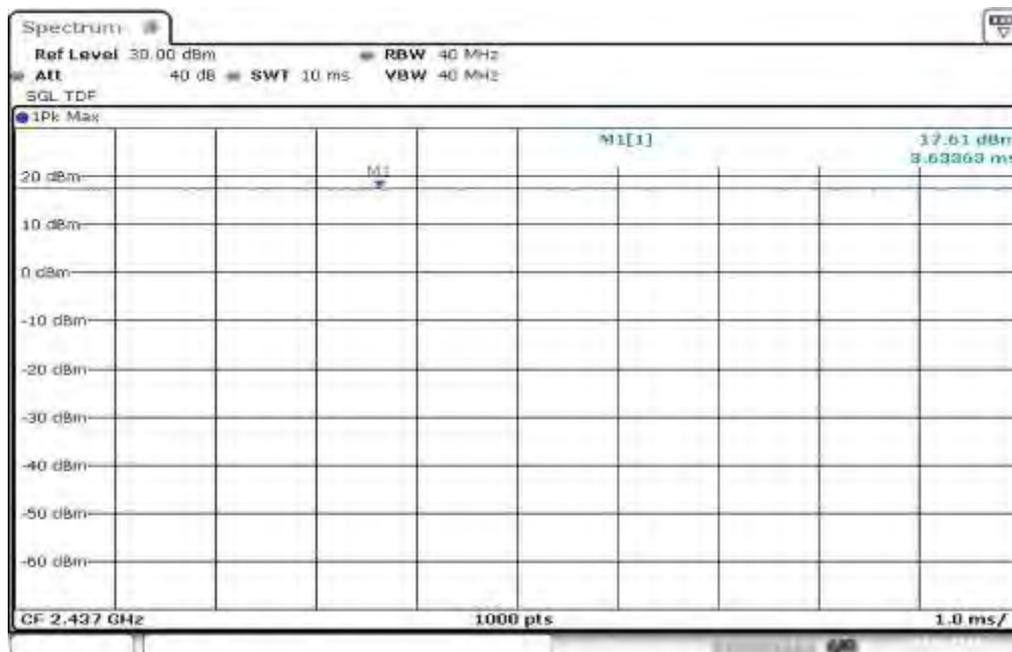


Plot 4: TX mode, middle channel, 11 MBit/s

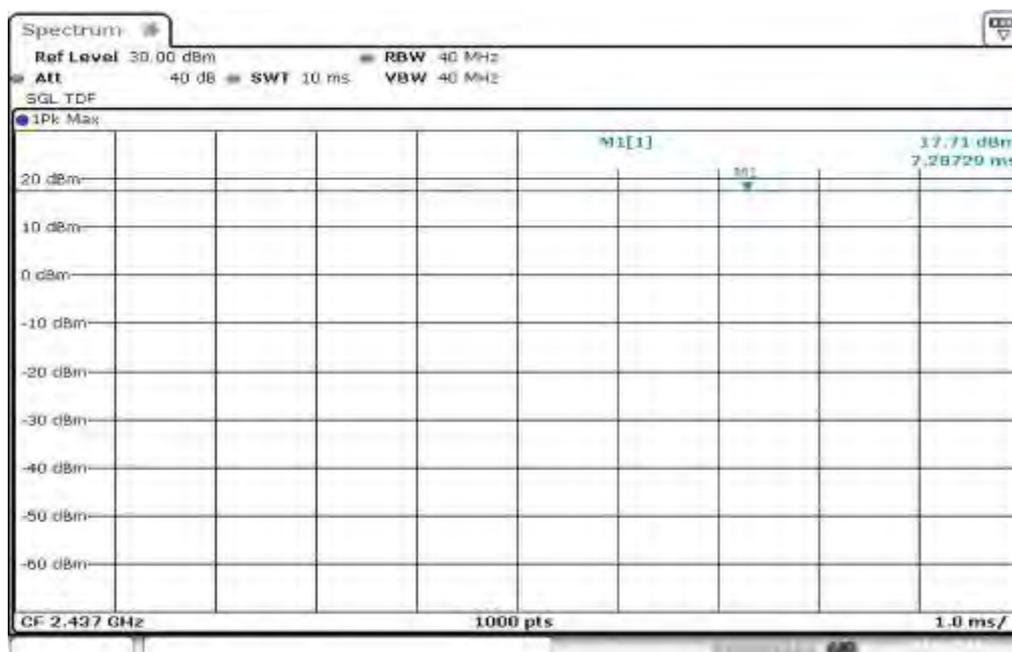


Plots: OFDM / g – mode


Plot 1: TX mode, middle channel, 6 MBit/s

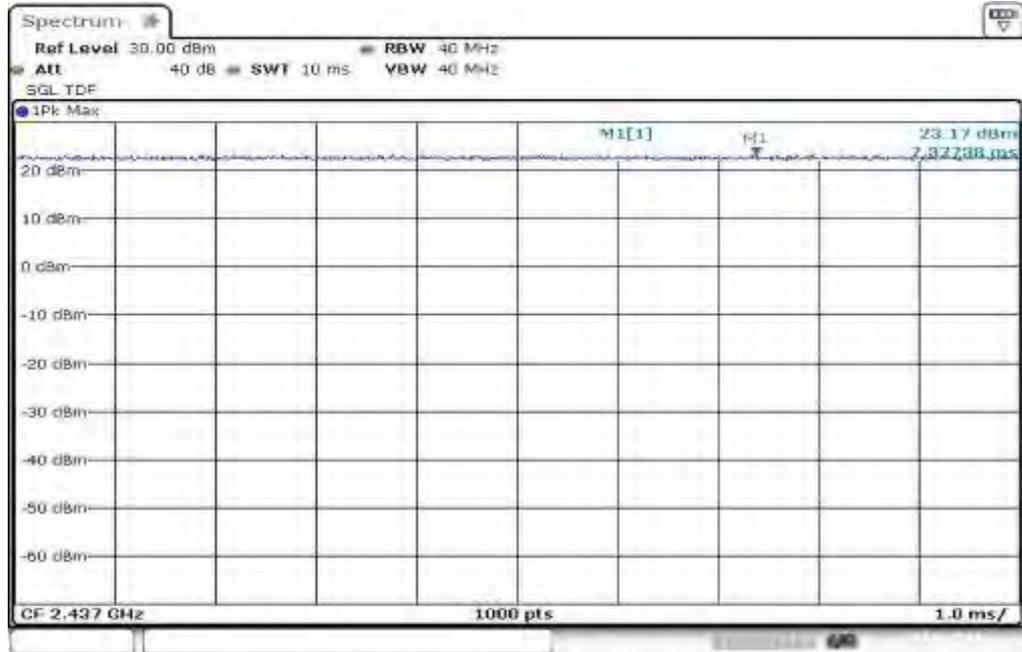


Plot 2: TX mode, middle channel, 9 MBit/s

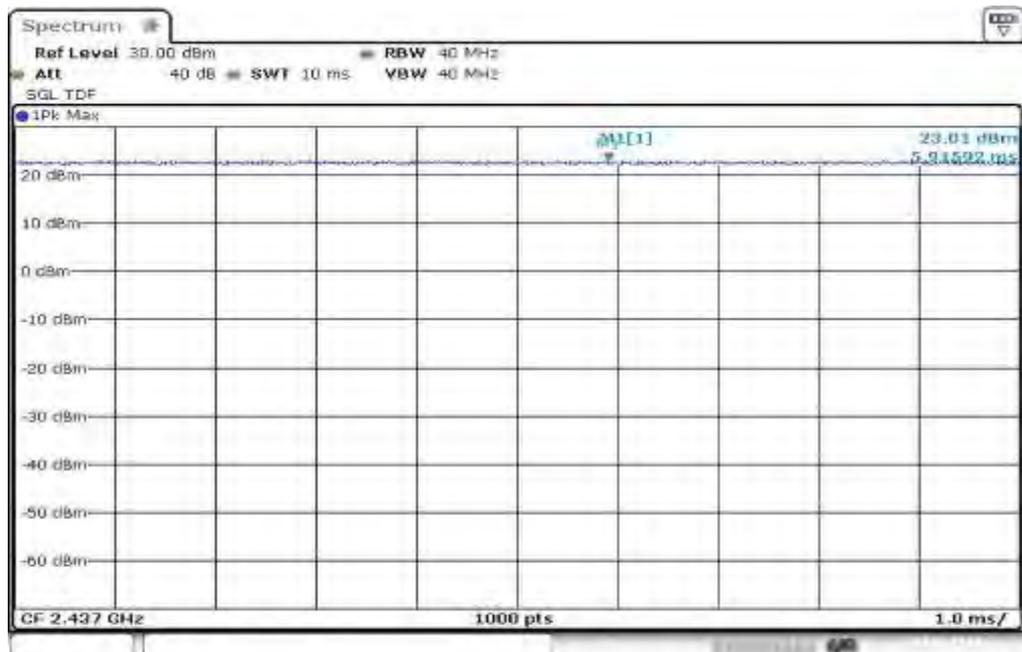


Plot 3: TX mode, middle channel, 12 MBit/s

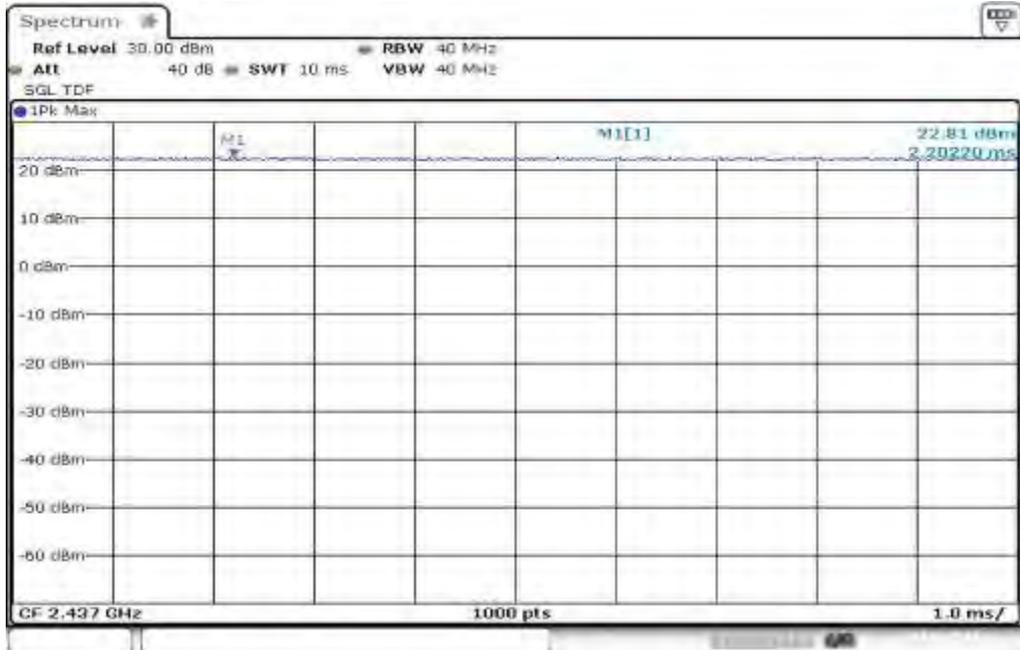


Plot 4: TX mode, middle channel, 18 MBit/s

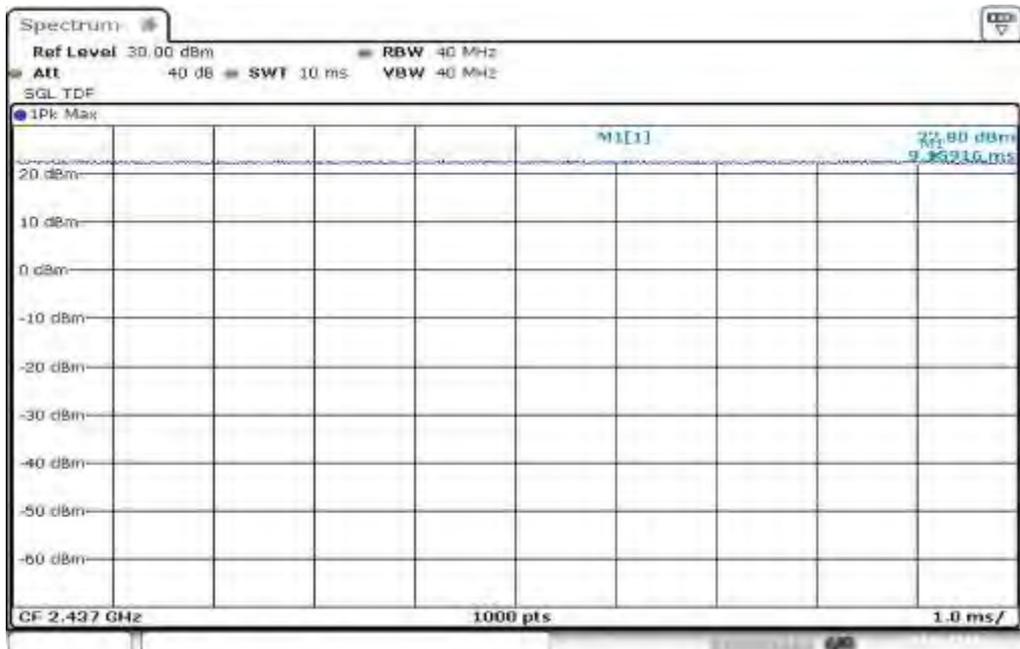


Plot 5: TX mode, middle channel, 24 MBit/s

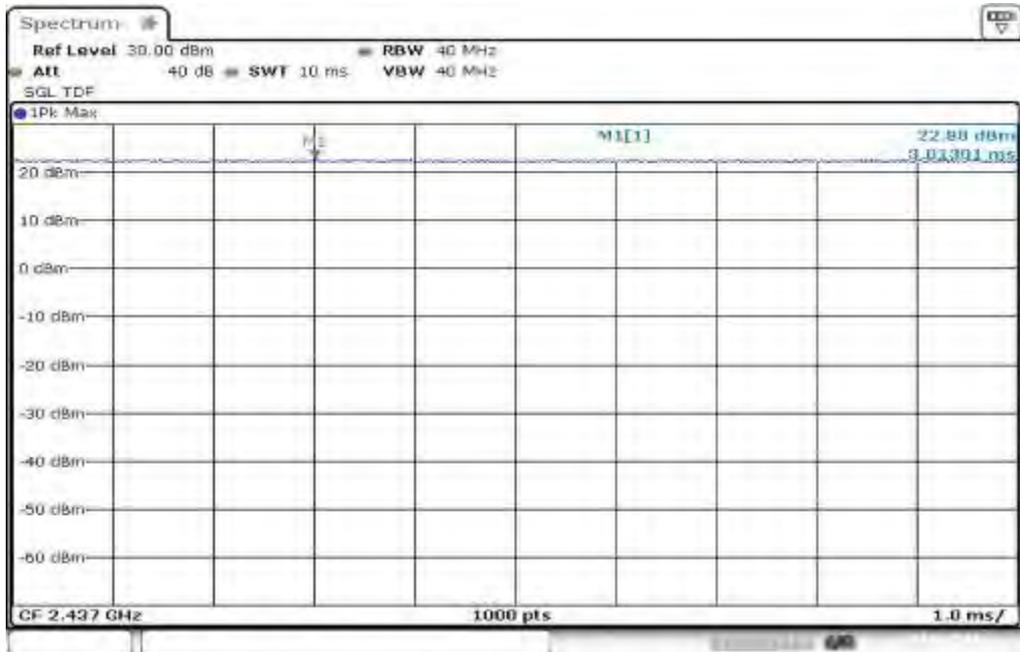


Plot 6: TX mode, middle channel, 36 MBit/s

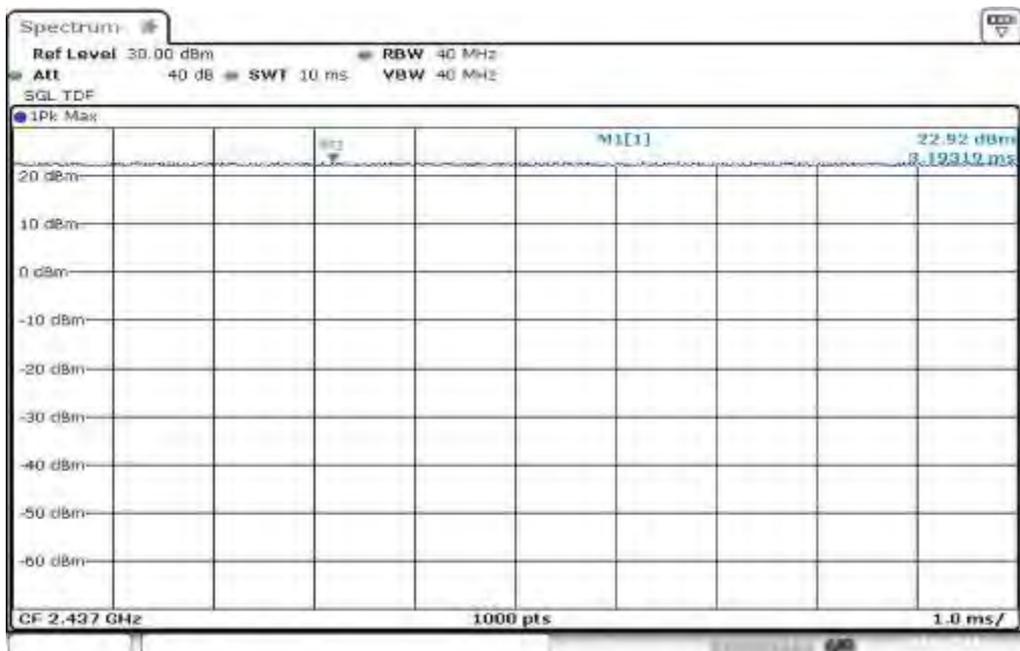


Plot 7: TX mode, middle channel, 48 MBit/s

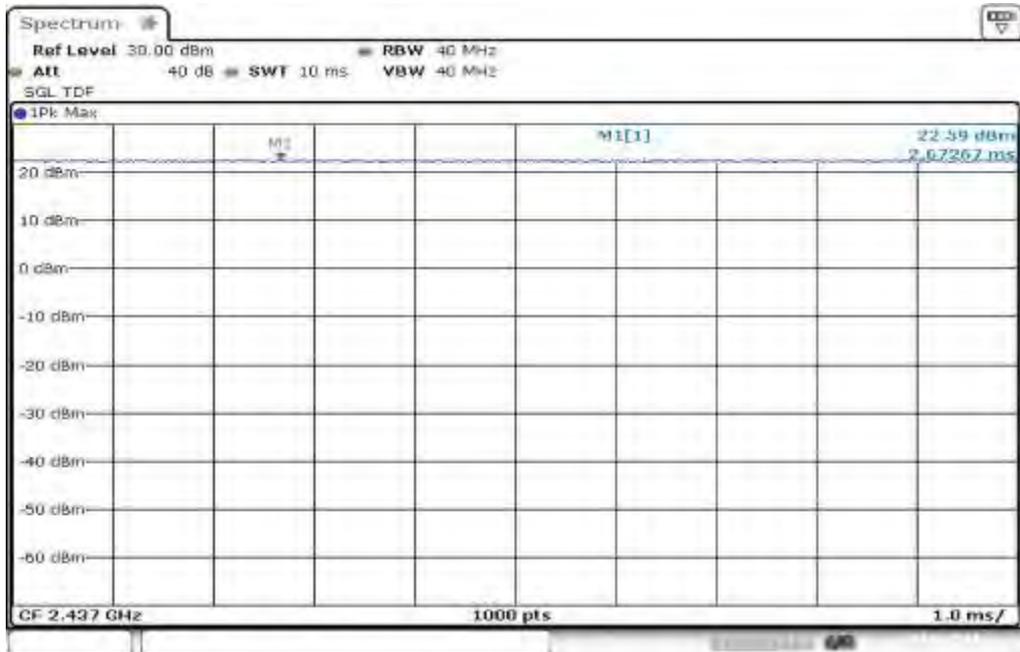


Plot 8: TX mode, middle channel, 54 MBit/s

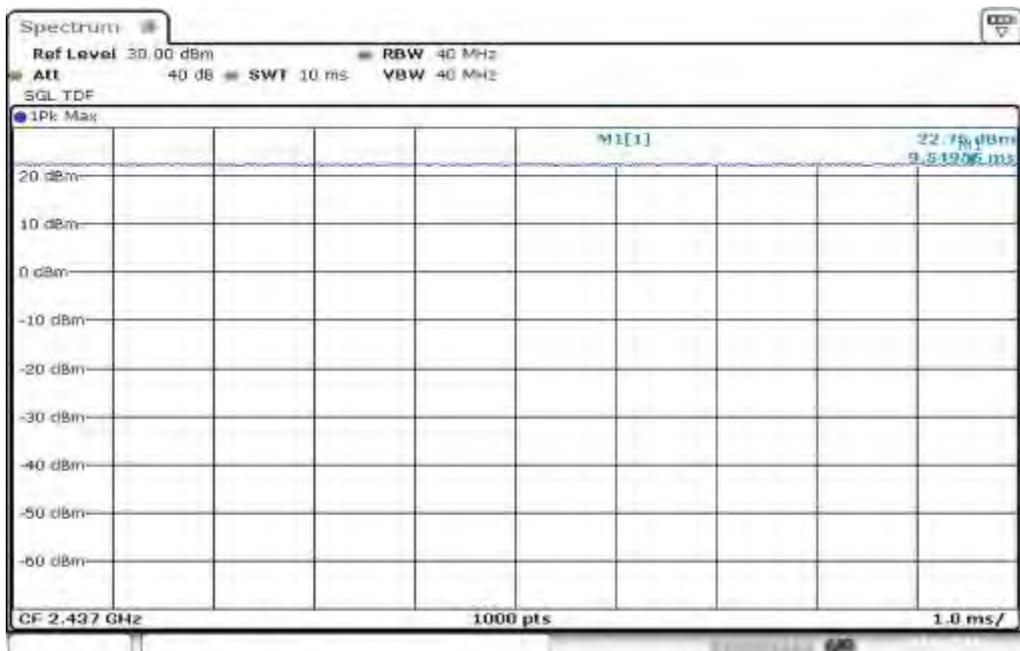


Plot 3: TX mode, middle channel, MCS2

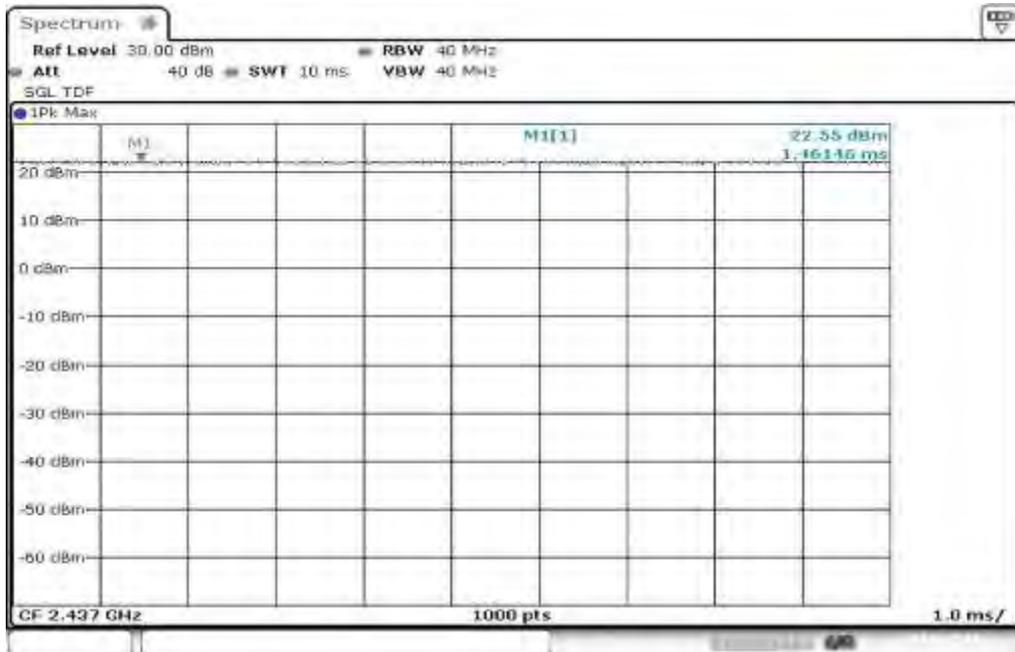


Plot 4: TX mode, middle channel, MCS3

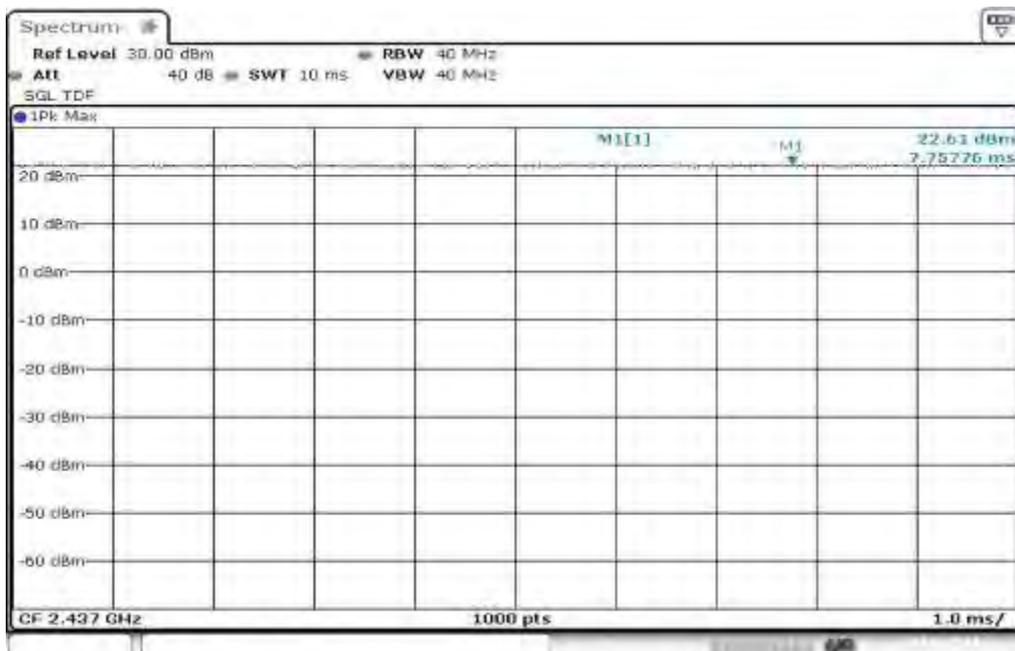


Plot 5: TX mode, middle channel, MCS4

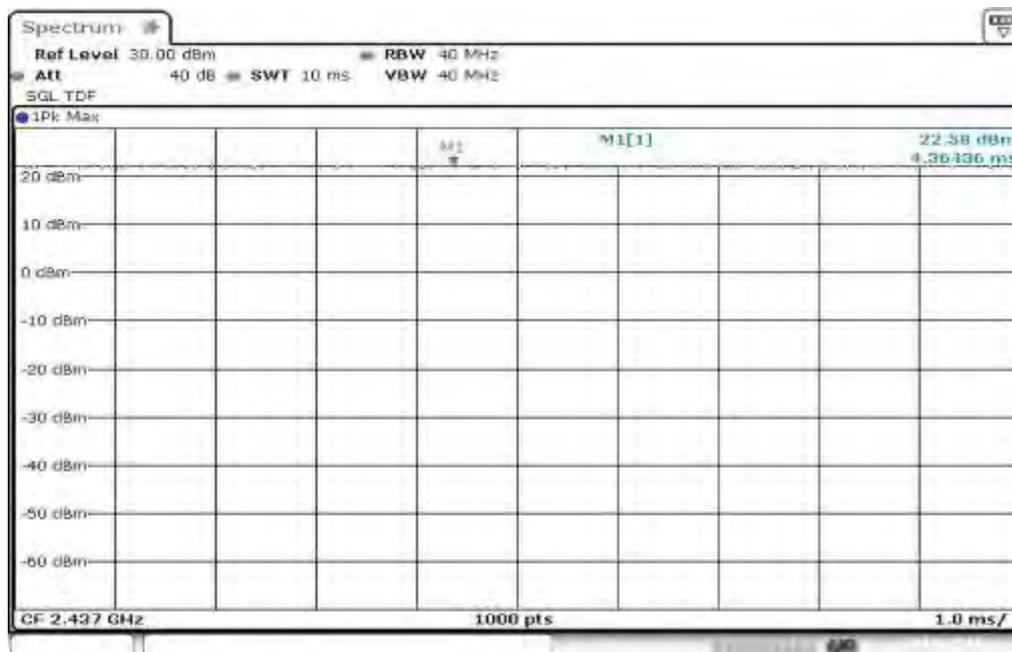


Plot 6: TX mode, middle channel, MCS5

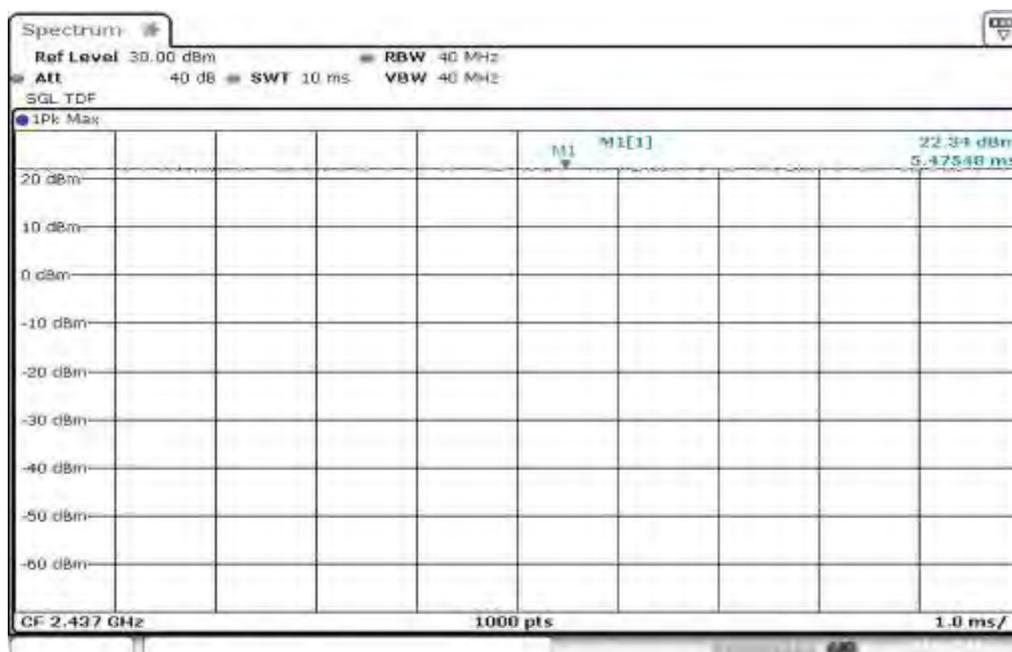

Plot 7: TX mode, middle channel, MCS6

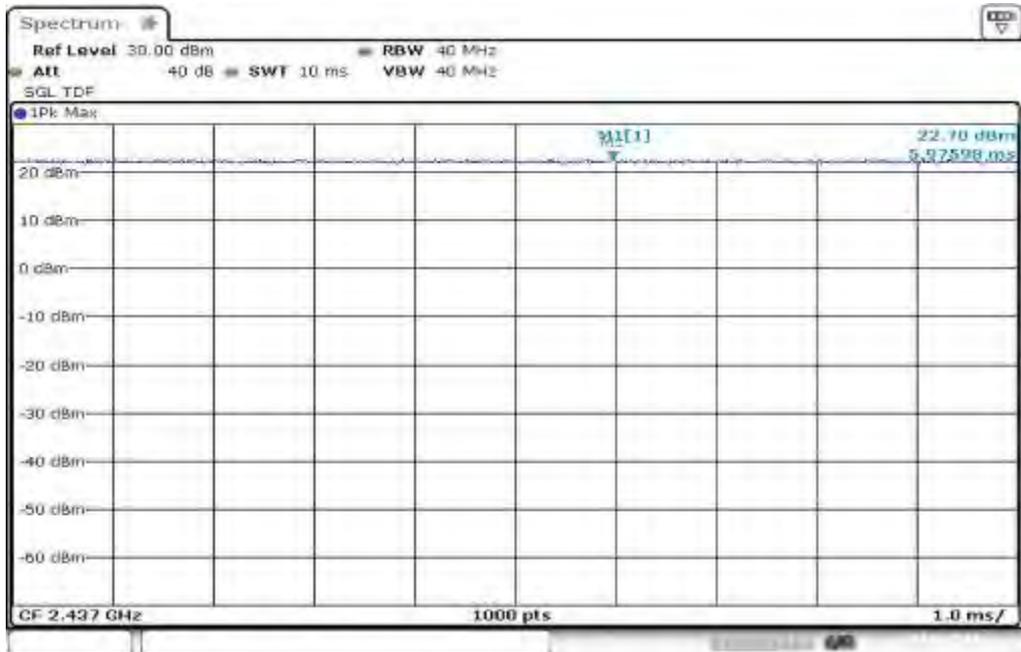

Plot 8: TX mode, middle channel, MCS7

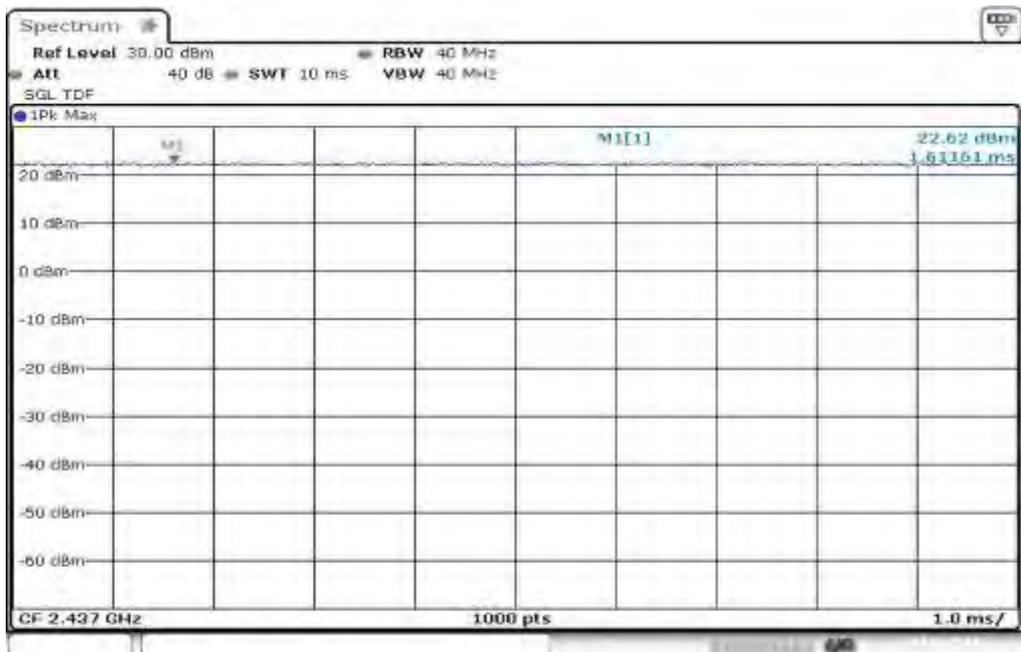

9.2 Antenna gain

Measurement:

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	3 MHz
Trace-Mode:	Max hold

Limits:

FCC	IC
CFR Part 15.247 (b)(4)	RSS 210, Issue 8, A 8.4(2)
Antenna Gain	
6 dBi	

Results:

T _{nom}	V _{nom}	lowest channel 2412 MHz	middle channel 2437 MHz	highest channel 2462 MHz
Conducted power [dBm] Measured with DSSS modulation		17.08	17.00	17.38
Radiated power [dBm] Measured with DSSS modulation		9.09	10.97	13.58
Gain [dBi] Calculated		-7.99	-6.03	-3.80
Measurement uncertainty			± 1.5 dB (cond.) / ± 3 dB (rad.)	

Result: [The measurement is passed.](#)

Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel



Plot 2: TX mode, middle channel



Plot 3: TX mode, highest channel

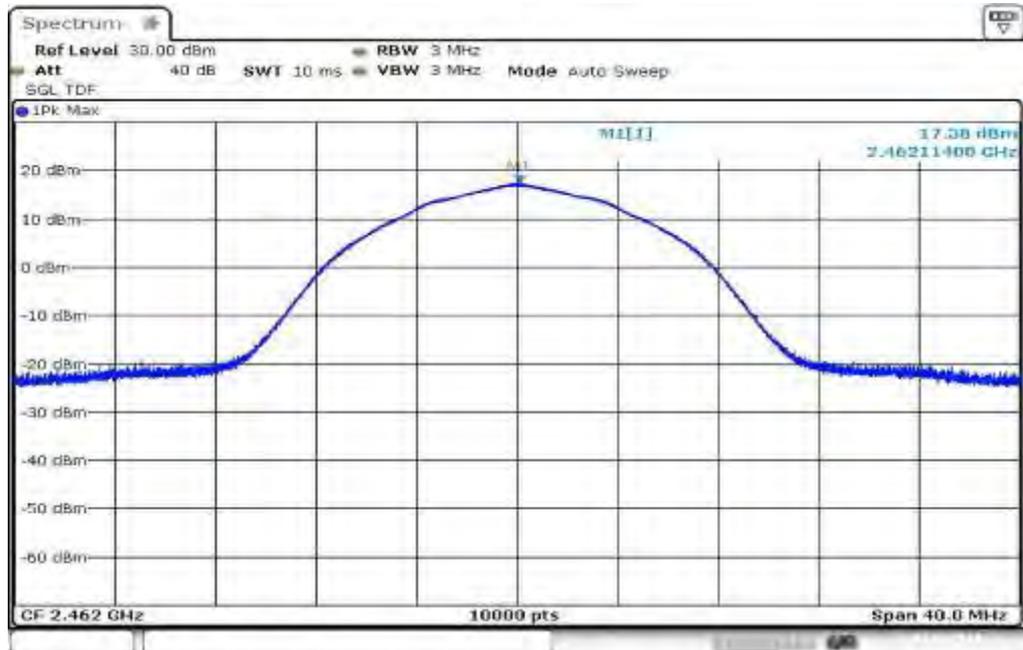

9.3 Maximum output power

Description:

Measurement of the maximum output power conducted and radiated. The measurements are performed using the data rate producing the highest conducted output power. The determination of these data rates was performed at the beginning of the tests.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	30 MHz
Resolution bandwidth:	50 MHz
Span:	30 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (b)(3)	RSS 210, Issue 8, A 8.4(4)
Maximum Output Power	
Conducted: 1.0 W – Antenna Gain max. 6 dBi	

Results: DSSS / b – mode

DSSS / b – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	17.76	17.71	17.99
Output Power Radiated – EIRP*)	9.77	11.68	14.19
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*) calculated with Antenna gain

Result: The measurement is passed.

Results: OFDM / g – mode

OFDM / g – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	23.00	23.17	23.75
Output Power Radiated – EIRP*	15.01	17.14	19.95
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*)calculated with Antenna gain

Result: The measurement is passed.**Results: OFDM / n – mode**

OFDM / n – mode Frequency	Maximum Output Power [dBm]		
	2412 MHz	2437 MHz	2462 MHz
Peak Output Power Conducted	22.66	22.80	23.54
Output Power Radiated – EIRP*	14.67	16.77	19.74
Measurement uncertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

*)calculated with Antenna gain


Result: The measurement is passed.

Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel



Plot 2: TX mode, middle channel

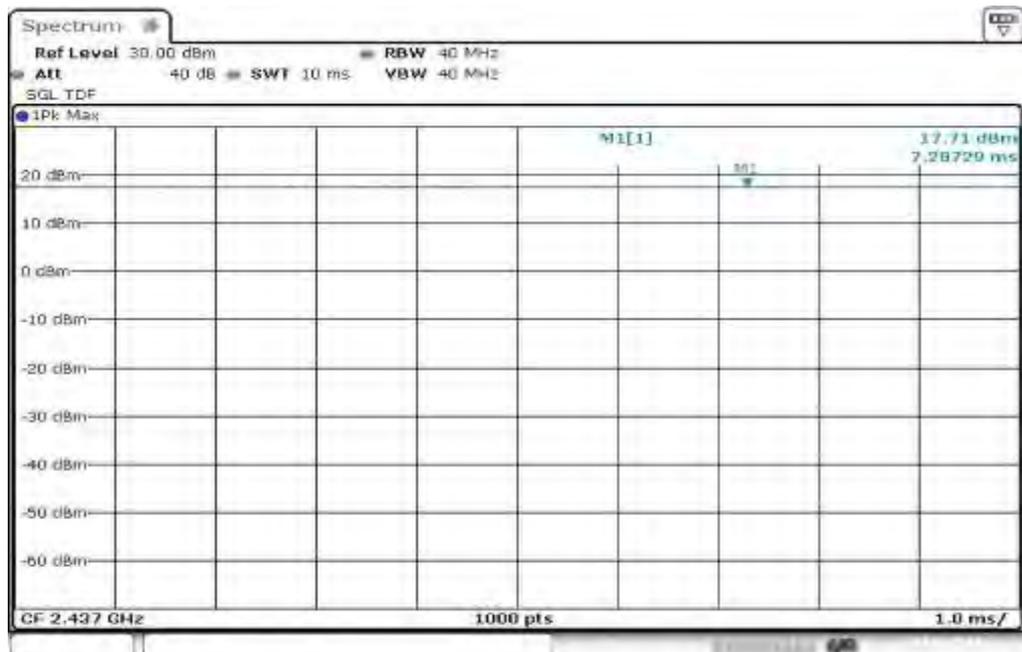


Plot 3: TX mode, highest channel

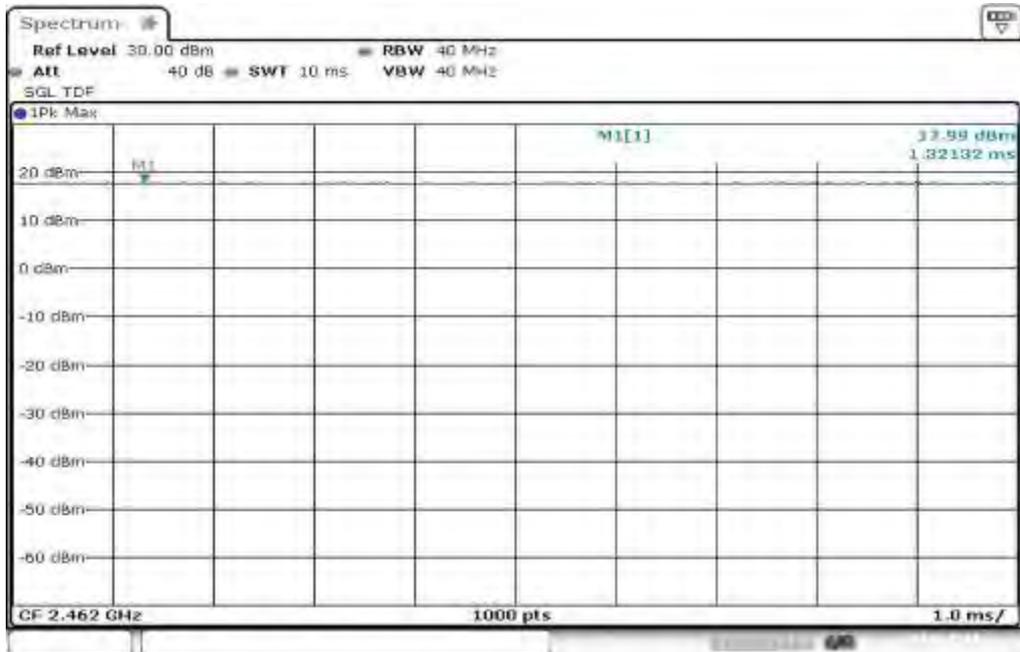


Plots: OFDM / g – mode


Plot 1: TX mode, lowest channel

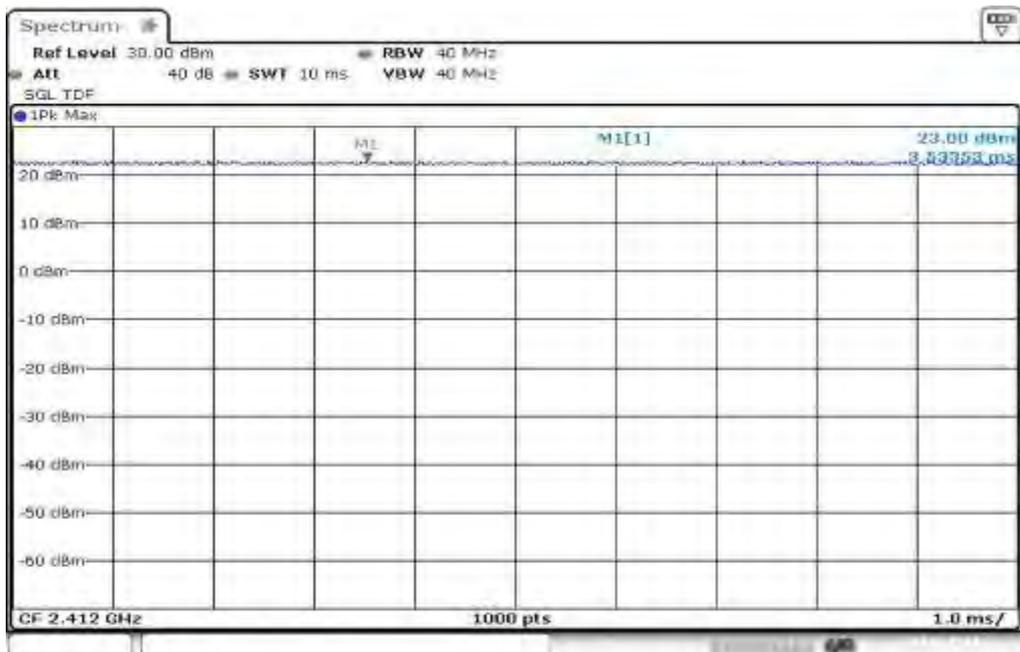

Plot 2: TX mode, middle channel

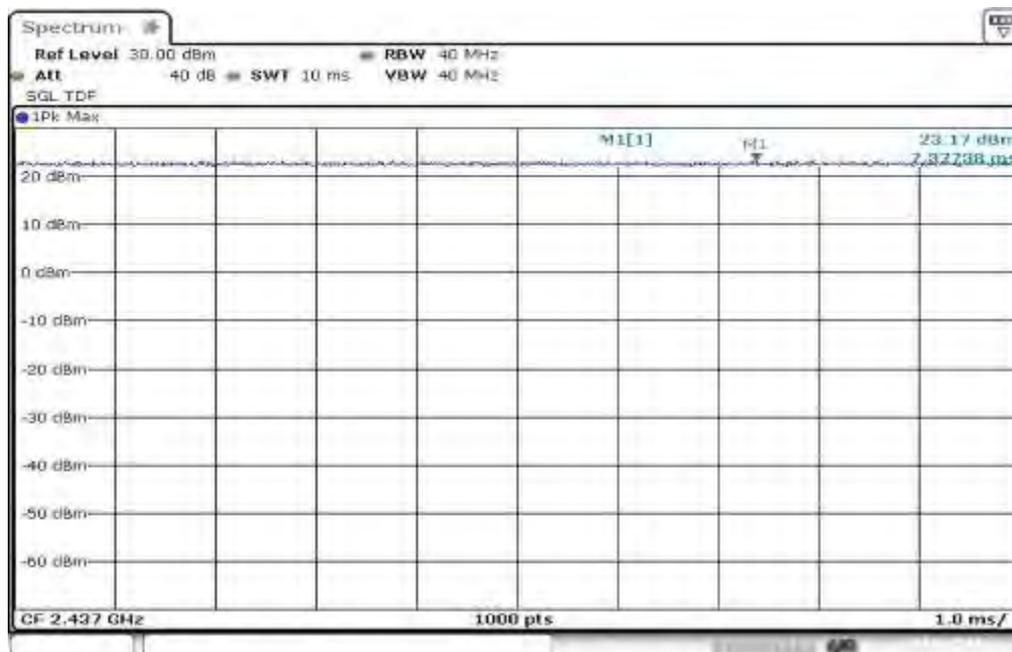


Plot 3: TX mode, highest channel

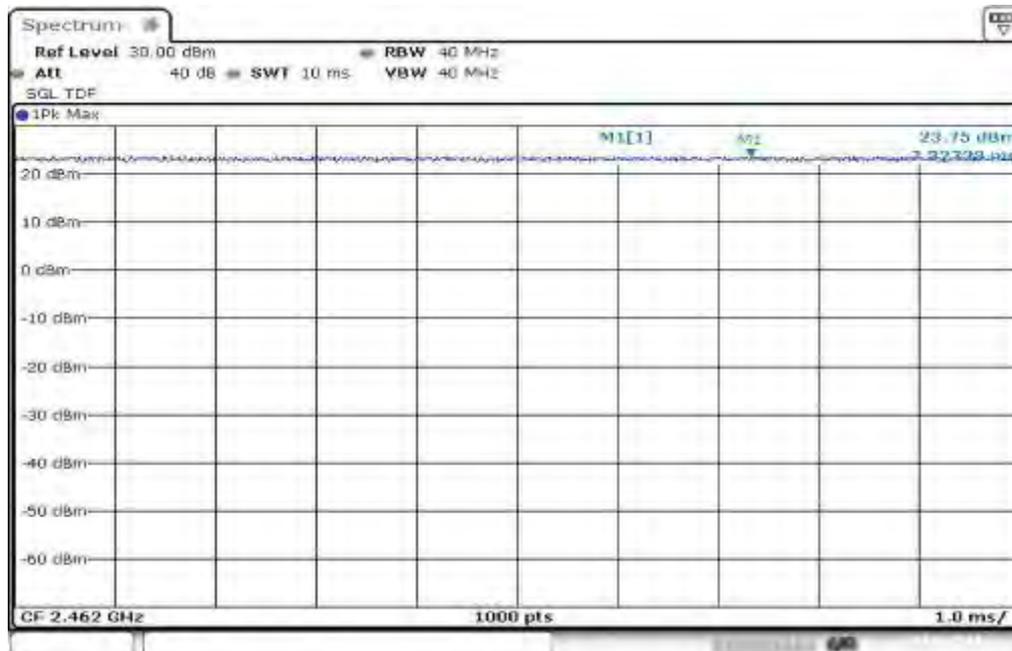


Plots: OFDM / n – mode


Plot 1: TX mode, lowest channel

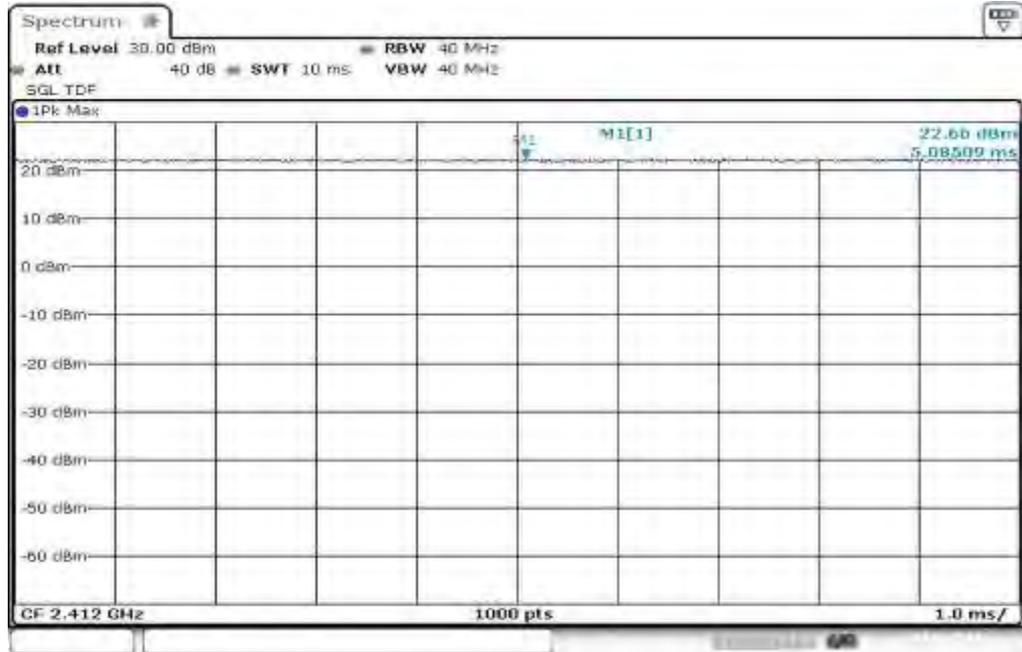

Plot 2: TX mode, middle channel

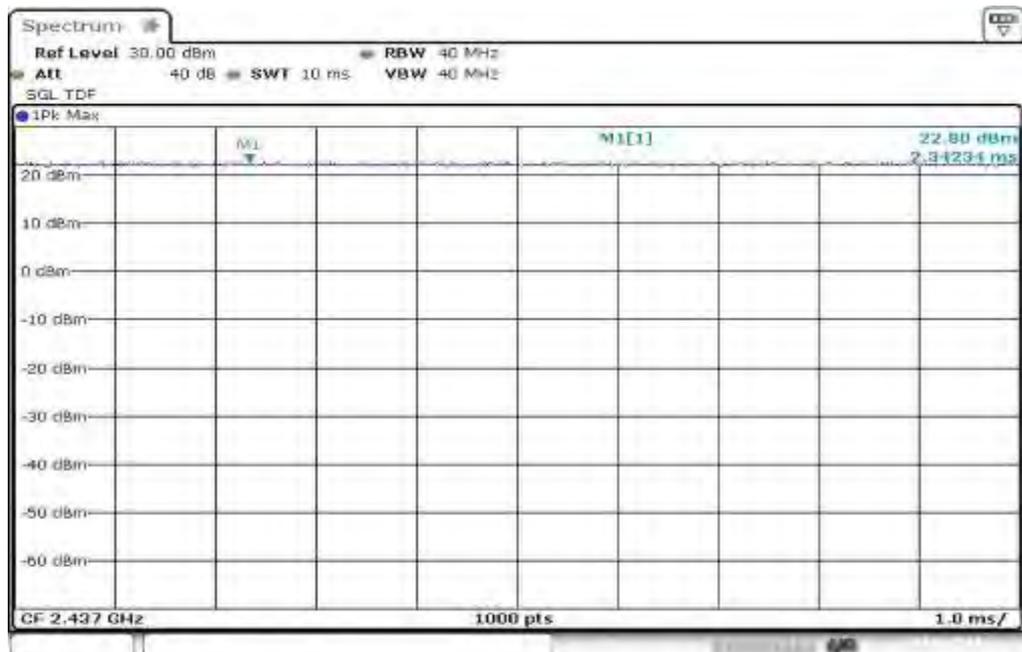

Plot 3: TX mode, highest channel

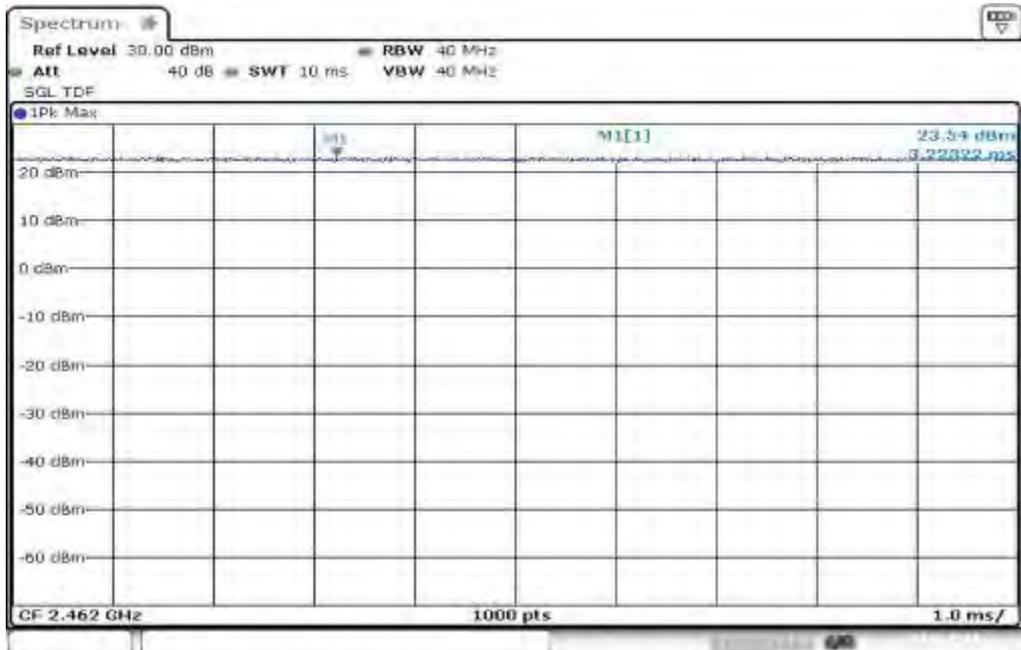

9.4 Power spectral density

Description:

Measurement of the power spectral density of a digital modulated system. The measurement is repeated for both modulations at the lowest, middle and highest channel.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	500 s
Video bandwidth:	3 kHz
Resolution bandwidth:	3 kHz
Span:	1.5 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (e)	RSS 210, Issue 8, A 8.2(b)
Power Spectral Density	
The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0-second duration.	


Results:

Modulation Frequency	Power Spectral density [dBm/3kHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	-6.84	-6.50	-6.33
OFDM / g – mode	-10.06	-9.77	-9.51
OFDM / n – mode	-10.01	-9.33	-10.80
Measurement uncertainty	± 1.5 dB		


Result: The measurement is passed.

Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel

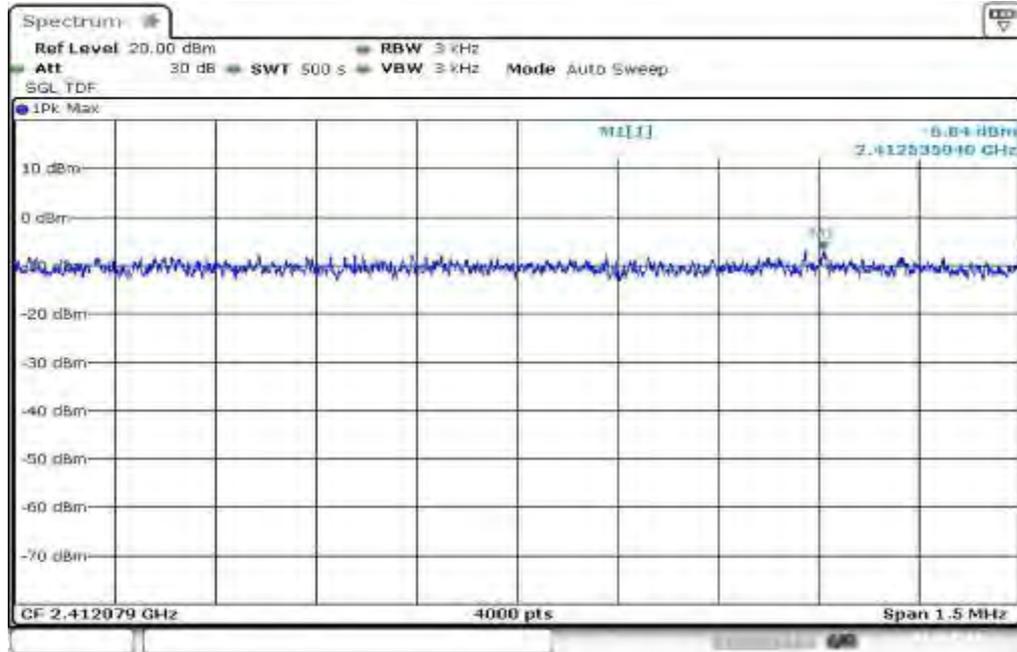

Plot 2: TX mode, middle channel

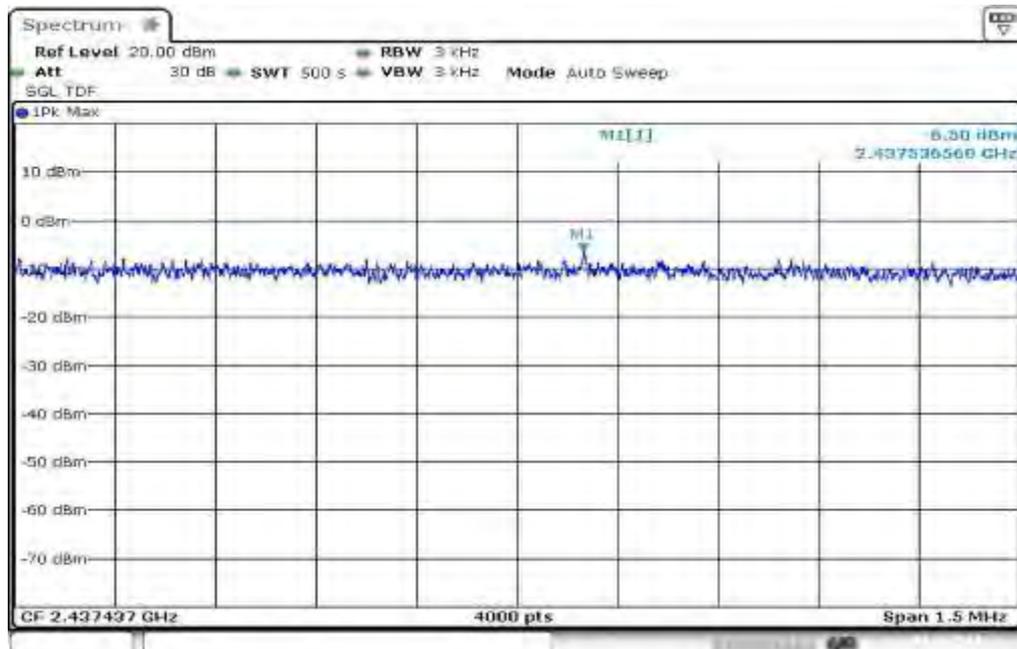


Plot 3: TX mode, highest channel

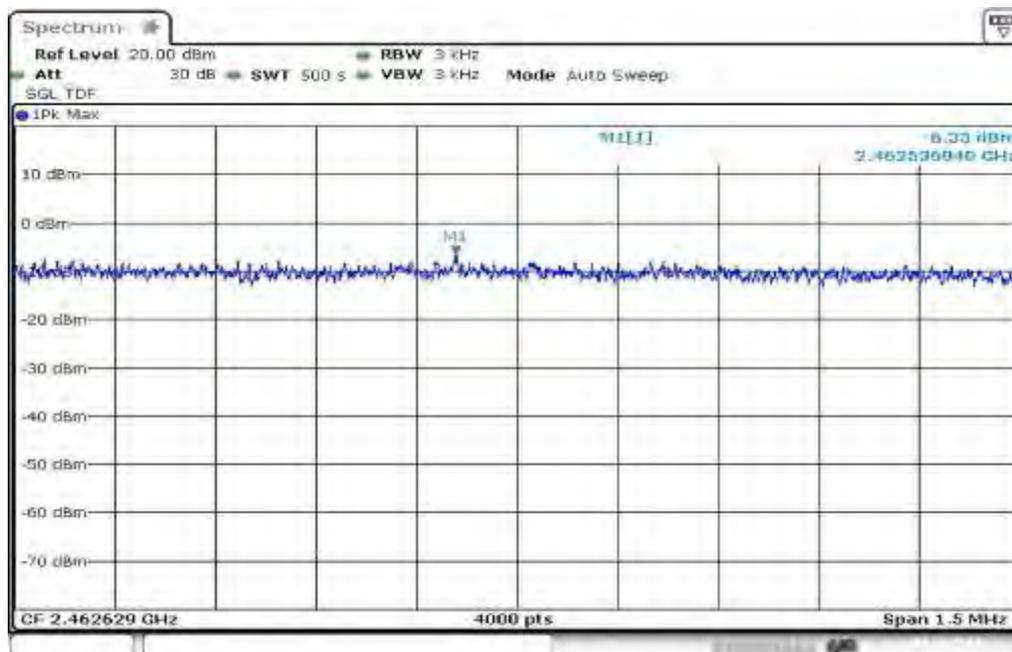


Plots: OFDM / g – mode


Plot 1: TX mode, lowest channel

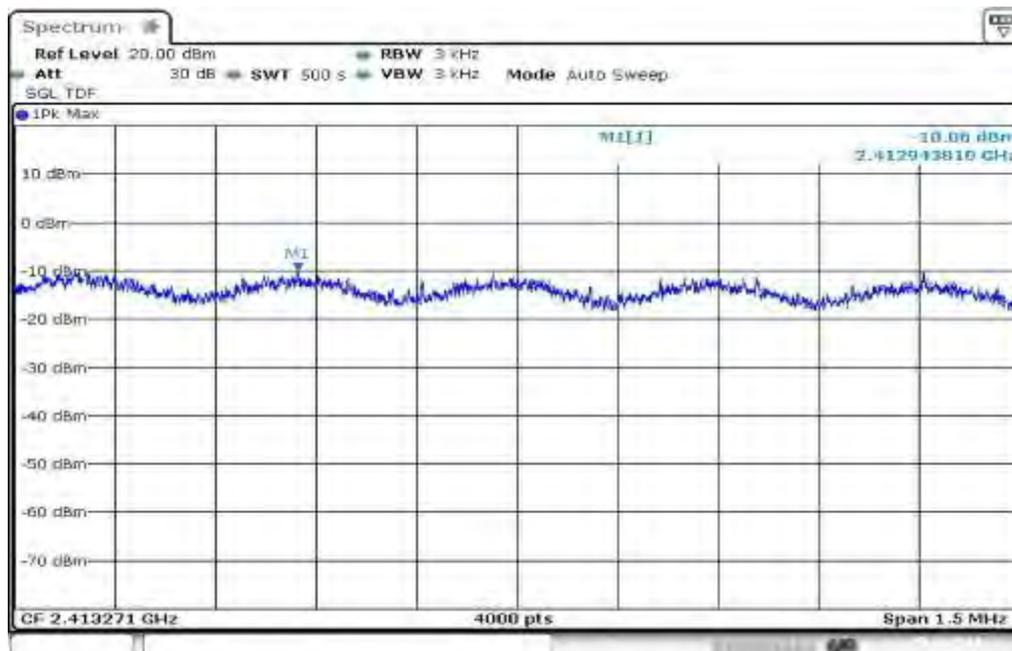


Plot 2: TX mode, middle channel

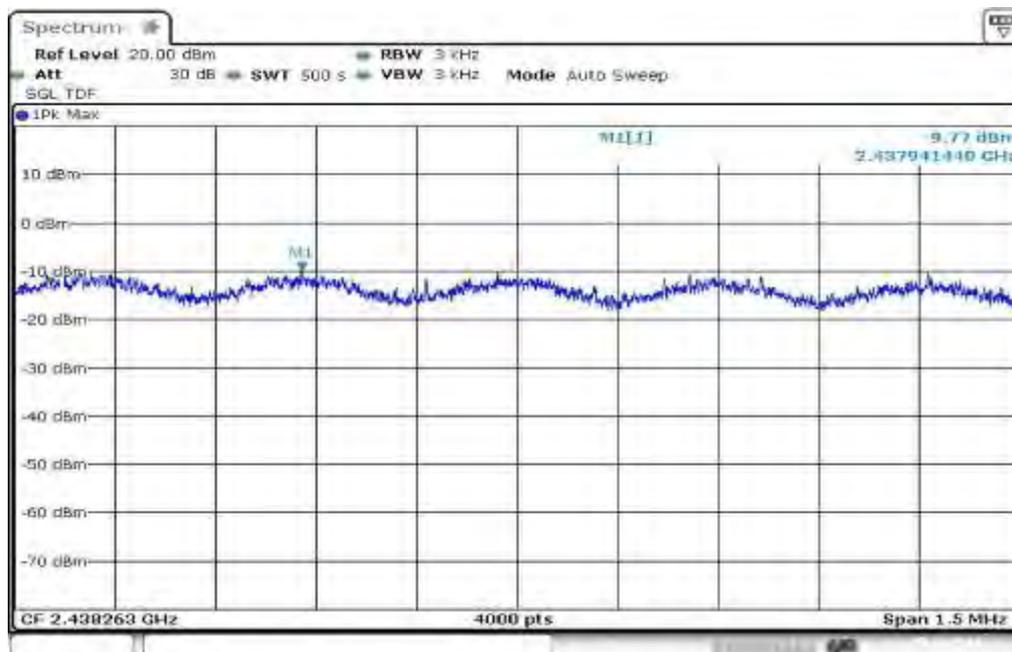

Plot 3: TX mode, highest channel

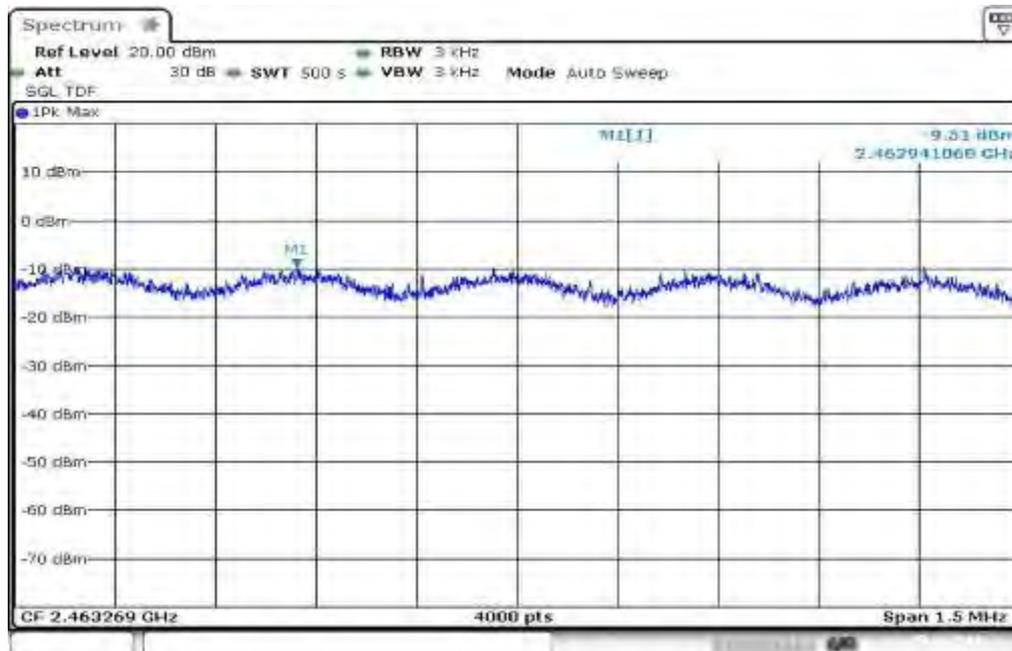

Plot 3: TX mode, highest channel

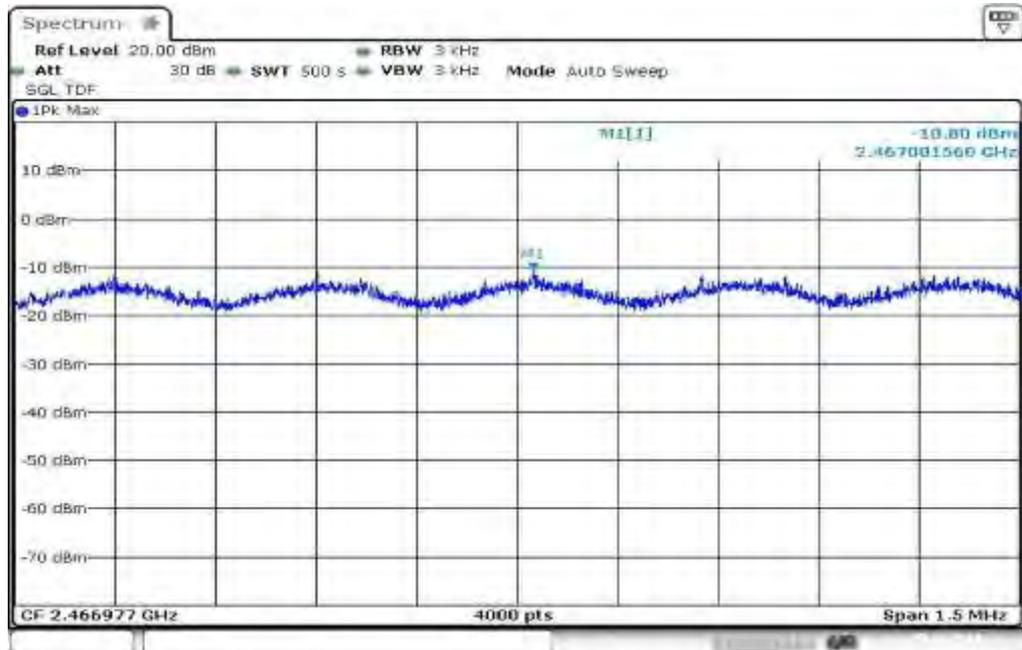

9.5 Spectrum bandwidth of a FHSS system – 6 dB bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	10s
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots!
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a FHSS System – 6 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Frequency	6 dB BANDWIDTH [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	7.61	7.18	7.28
OFDM / g – mode	15.41	15.44	15.10
OFDM / n – mode	16.06	17.14	17.13
Measurement uncertainty	± 100 kHz		


Result: The measurement is passed.

Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel, 6 dB bandwidth

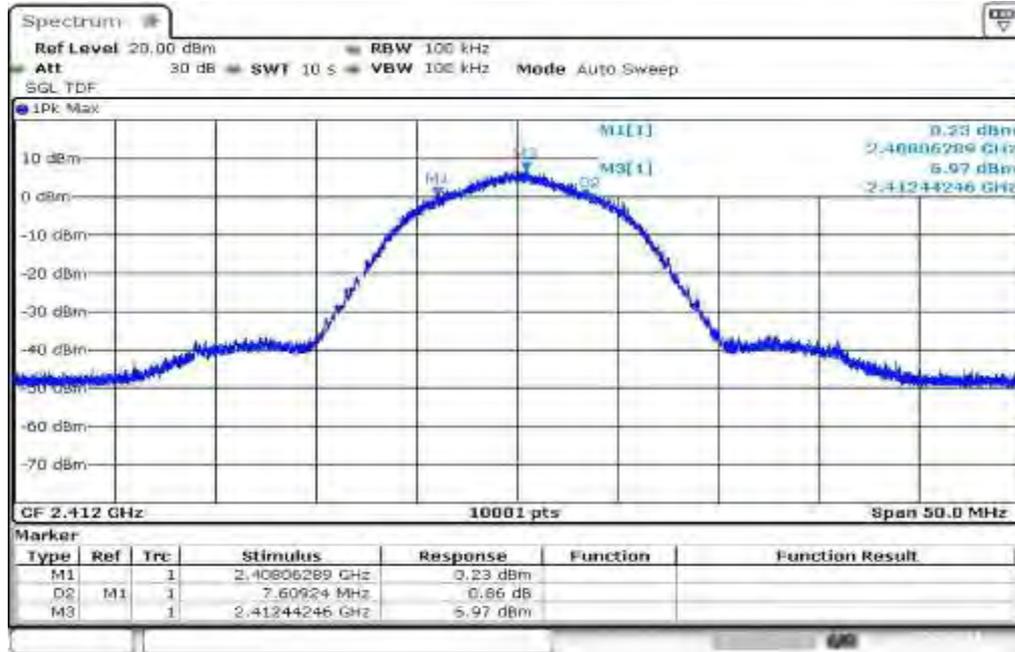

Plot 2: TX mode, middle channel, 6 dB bandwidth

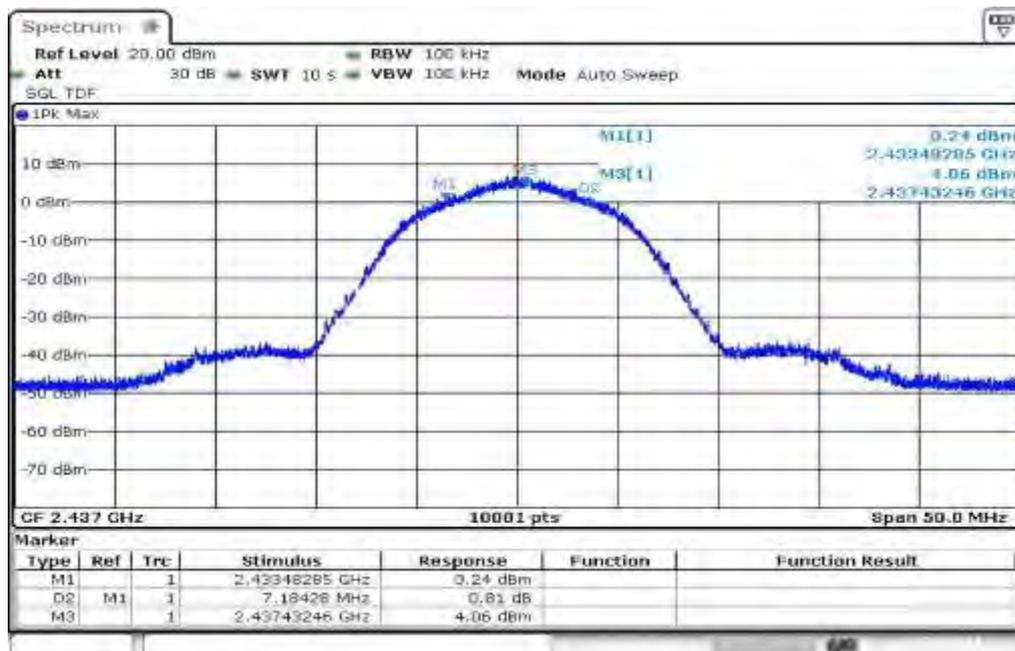


Plot 3: TX mode, highest channel, 6 dB bandwidth

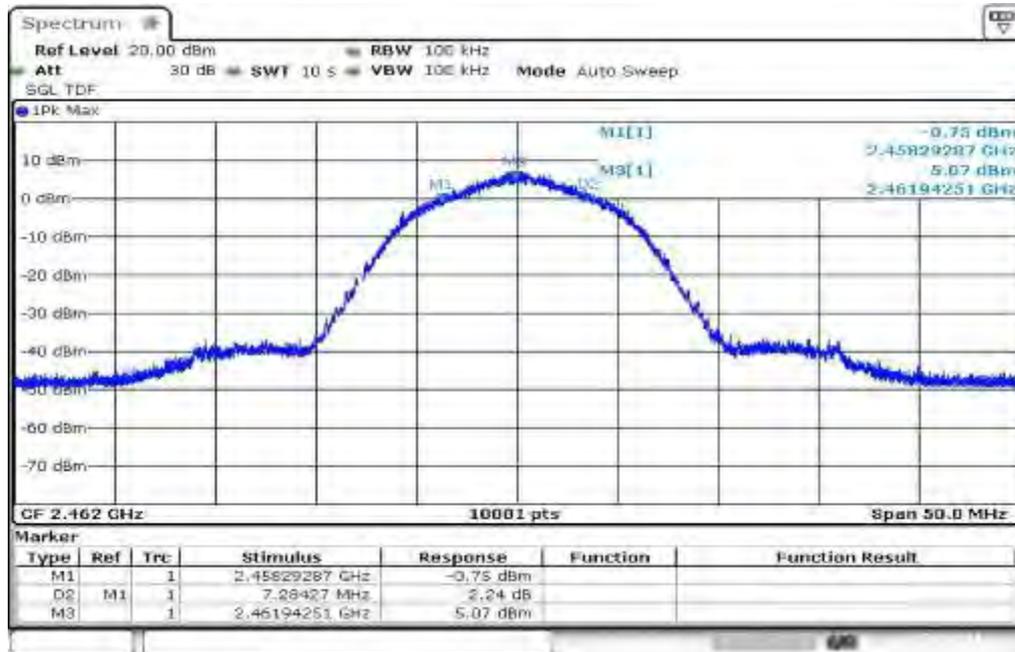


Plots: OFDM / g – mode


Plot 1: TX mode, lowest channel, 6 dB bandwidth

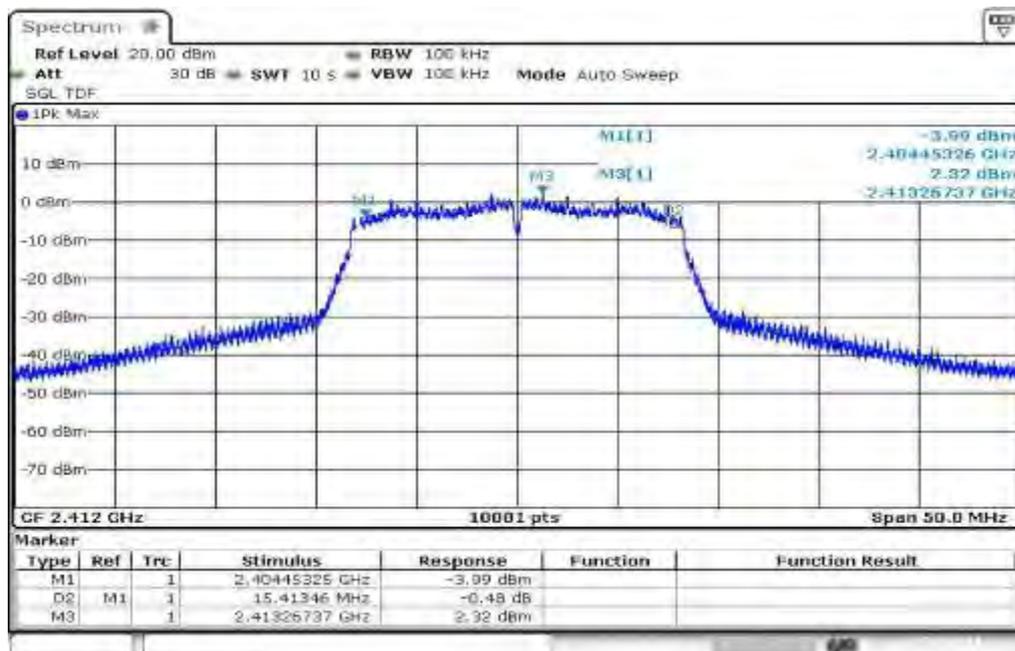

Plot 2: TX mode, middle channel, 6 dB bandwidth

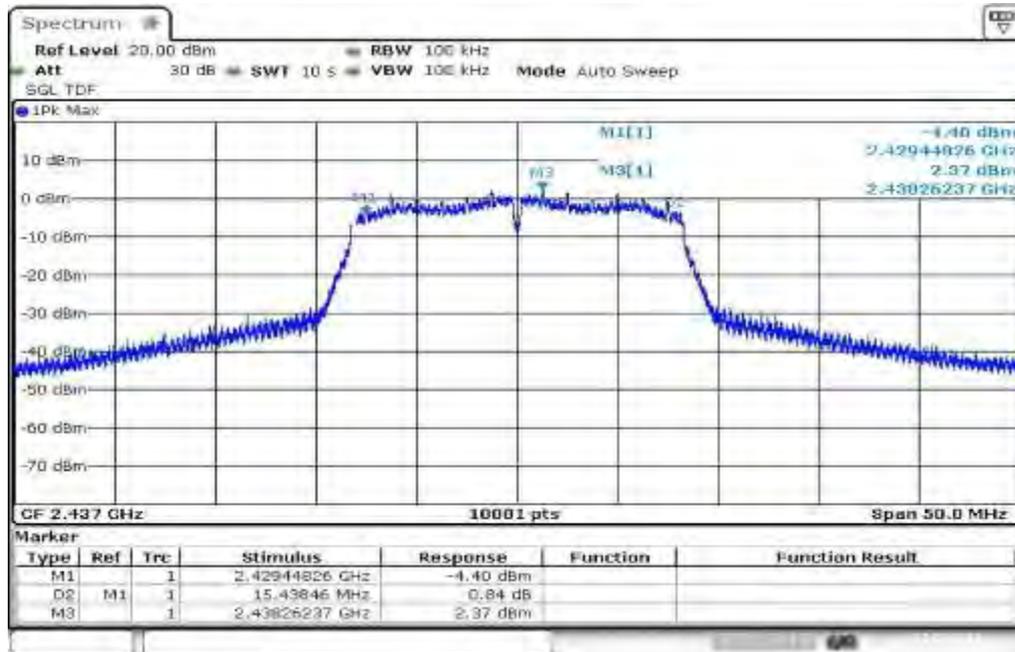


Plot 3: TX mode, highest channel, 6 dB bandwidth

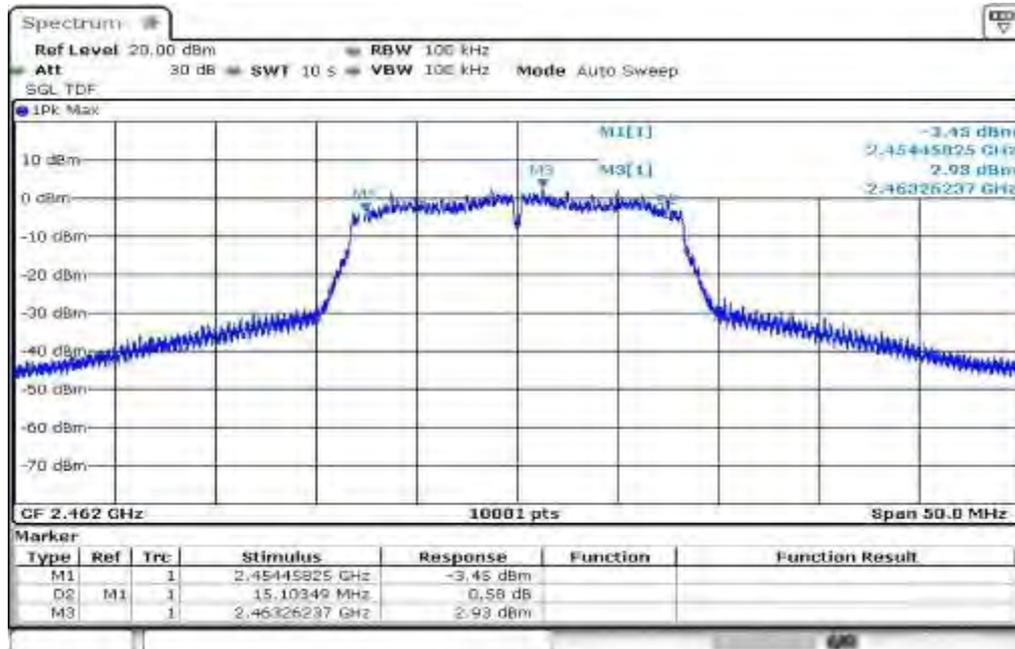


Plots: OFDM / n – mode


Plot 1: TX mode, lowest channel, 6 dB bandwidth

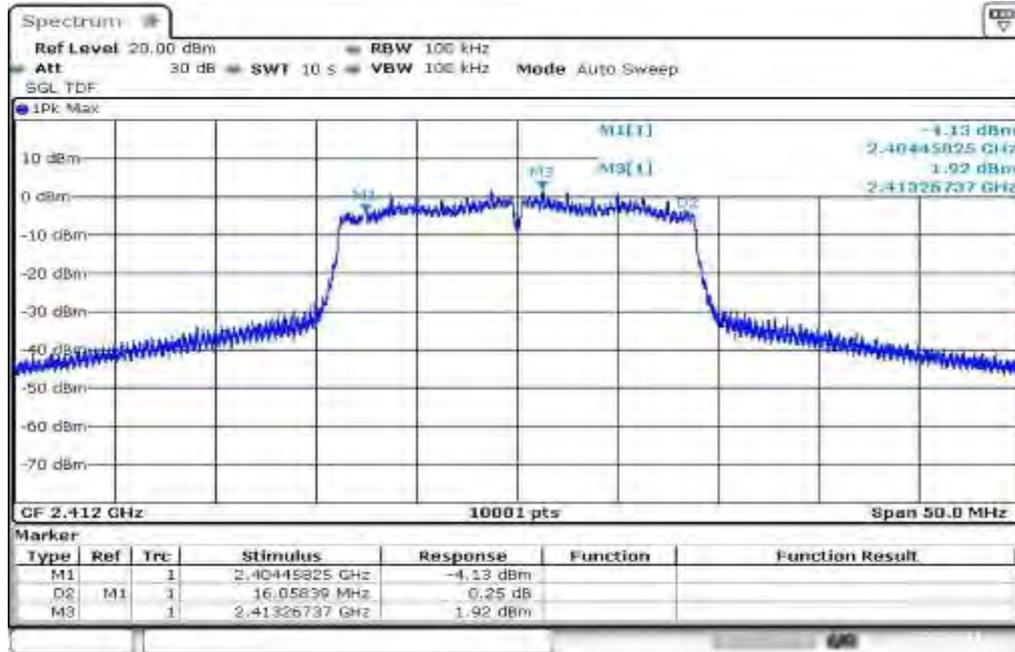

Plot 2: TX mode, middle channel, 6 dB bandwidth

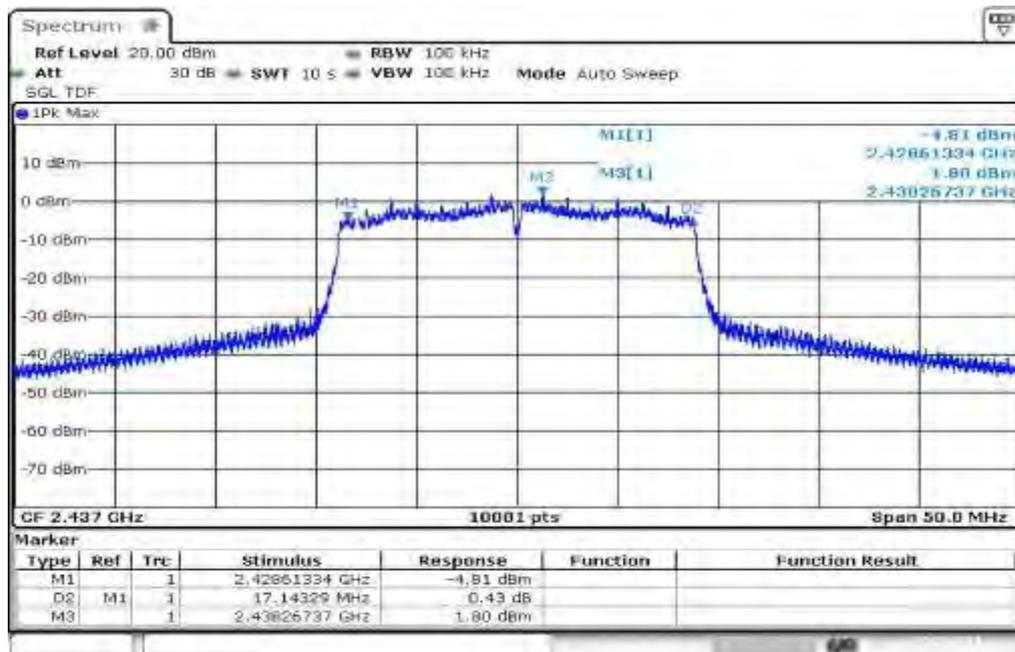

Plot 3: TX mode, highest channel, 6 dB bandwidth

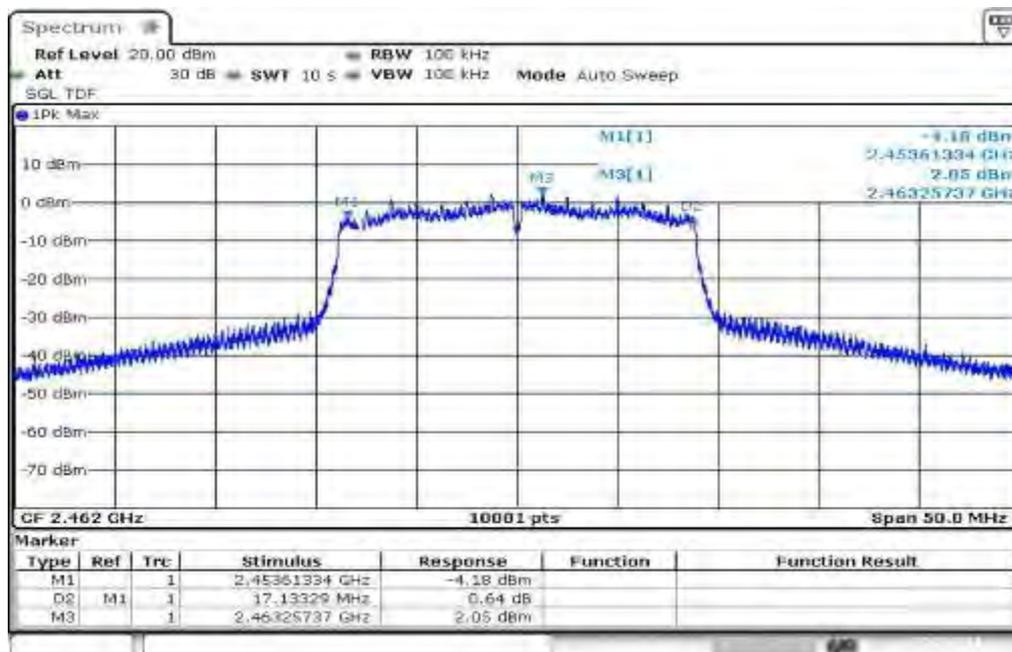

9.6 Spectrum bandwidth of a FHSS system – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	100 kHz
Resolution bandwidth:	100 kHz
Span:	See plots
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (a)(2)	RSS 210, Issue 8, A 8.2(a)
Spectrum Bandwidth of a FHSS System – 20 dB Bandwidth	
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	


Results:

Modulation Frequency	20 dB BANDWIDTH [MHz]		
	2412 MHz	2437 MHz	2462 MHz
DSSS / b – mode	13.70	13.95	13.84
OFDM / g – mode	17.58	17.58	17.58
OFDM / n – mode	18.31	18.31	18.30
Measurement uncertainty	± 100 kHz		


Result: The measurement is passed.

Plots: DSSS / b – mode

Plot 1: TX mode, lowest channel, 20 dB bandwidth

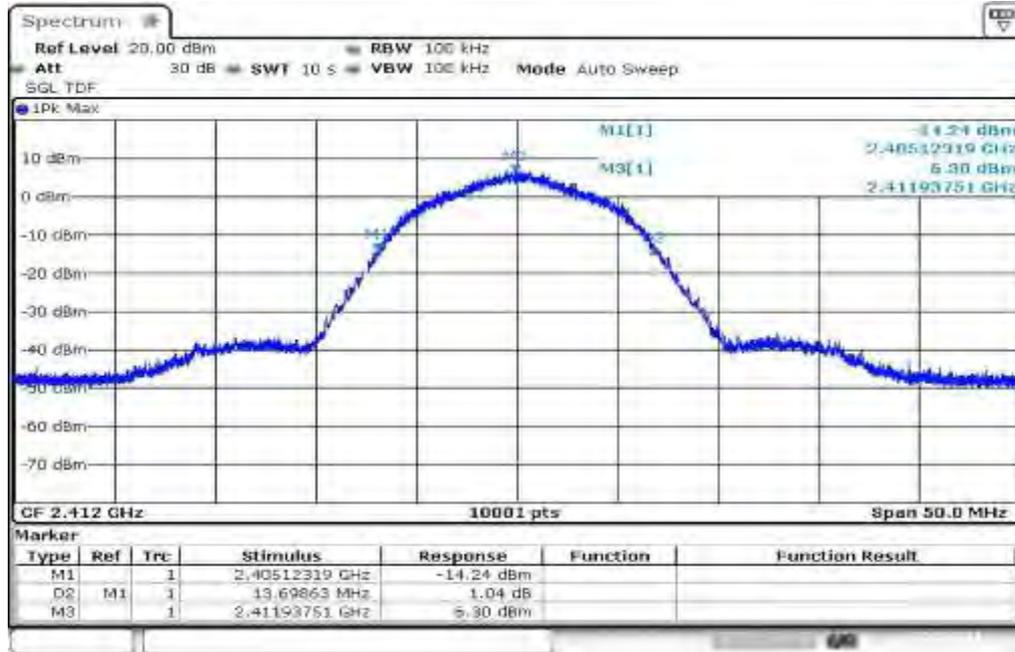

Plot 2: TX mode, middle channel, 20 dB bandwidth

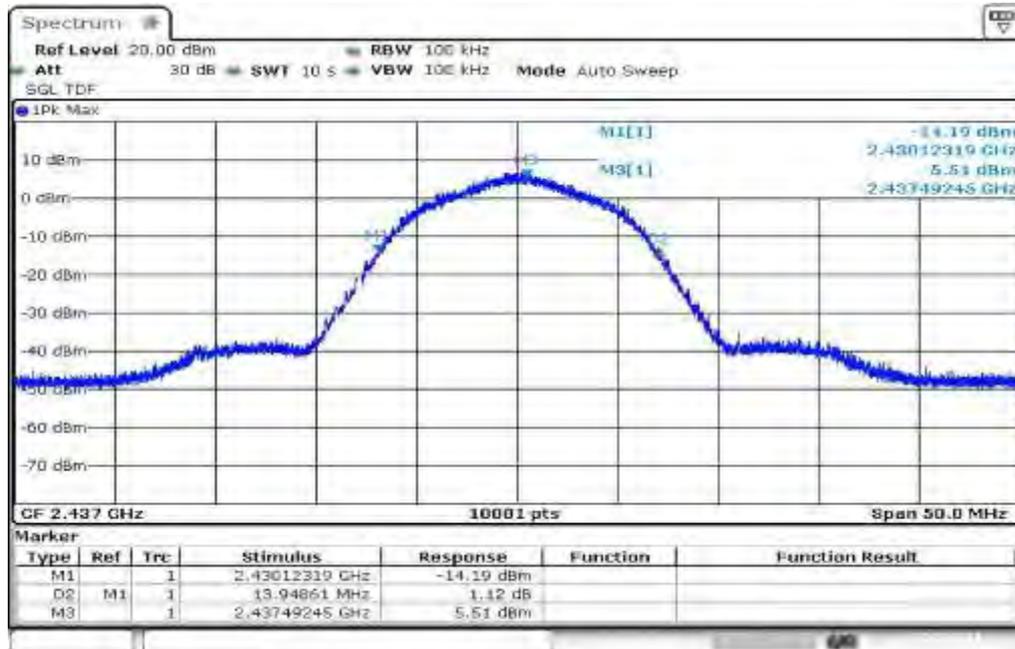


Plot 3: TX mode, highest channel, 20 dB bandwidth




Plots: OFDM / g – mode


Plot 1: TX mode, lowest channel, 20 dB bandwidth

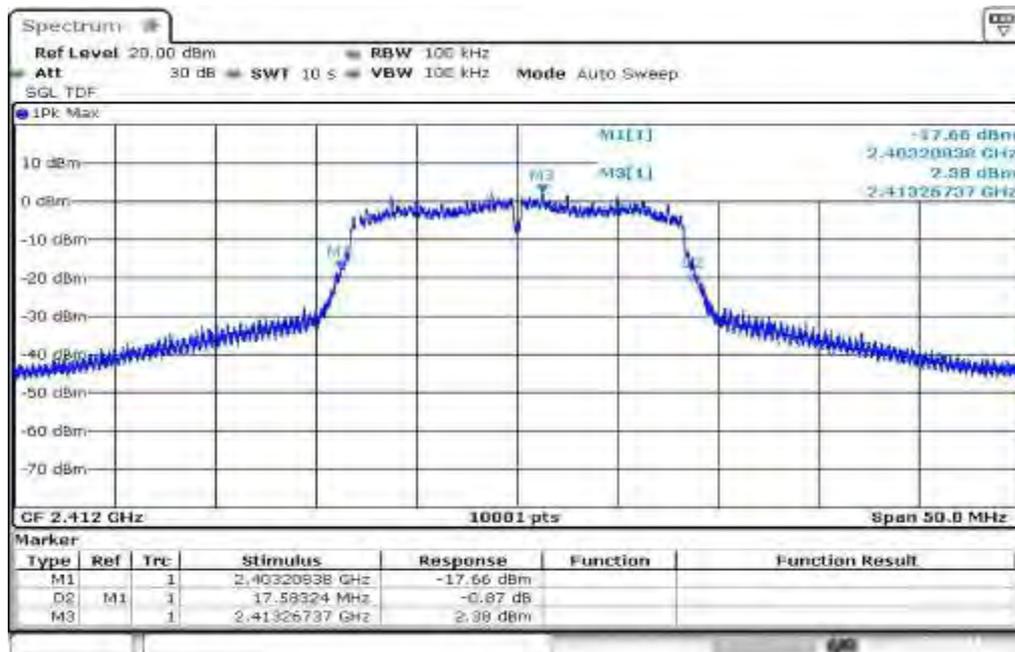

Plot 2: TX mode, middle channel, 20 dB bandwidth

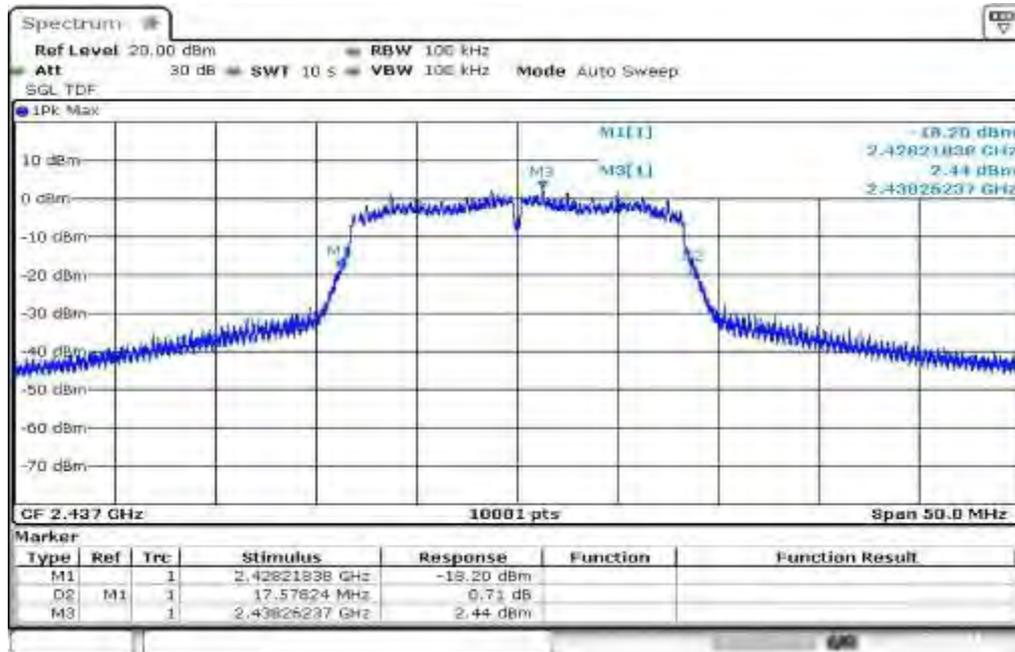


Plot 3: TX mode, highest channel, 20 dB bandwidth

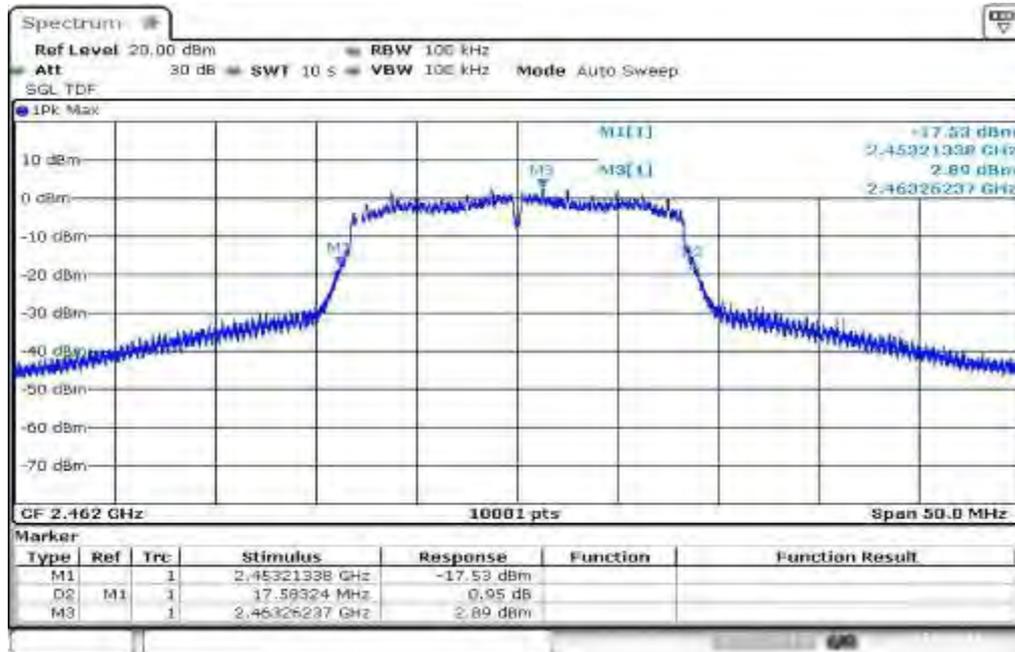


Plots: OFDM / n – mode


Plot 1: TX mode, lowest channel, 20 dB bandwidth

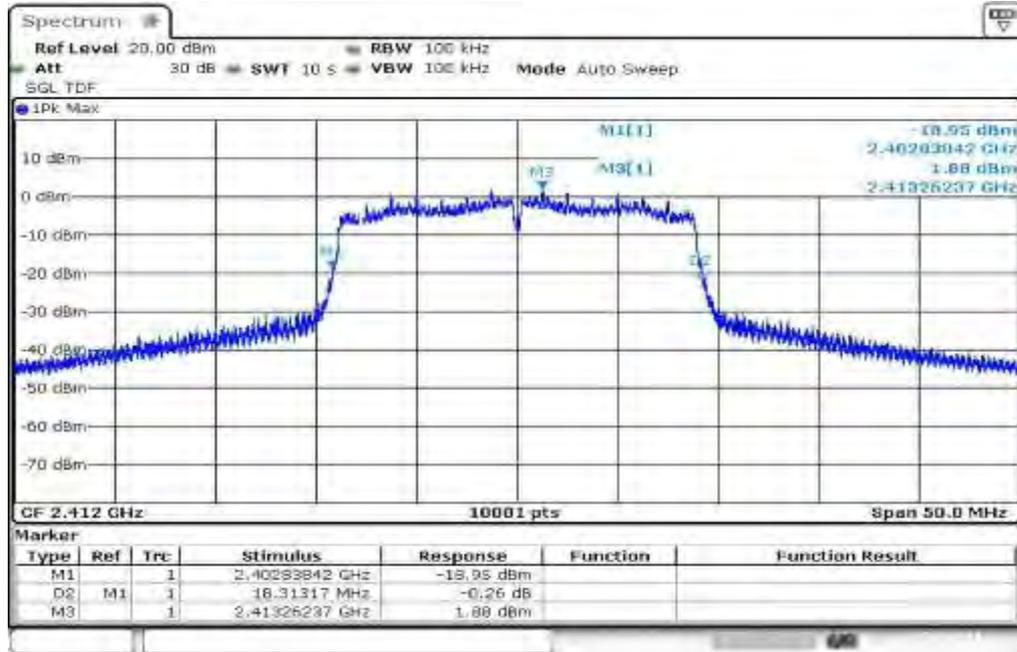

Plot 2: TX mode, middle channel, 20 dB bandwidth

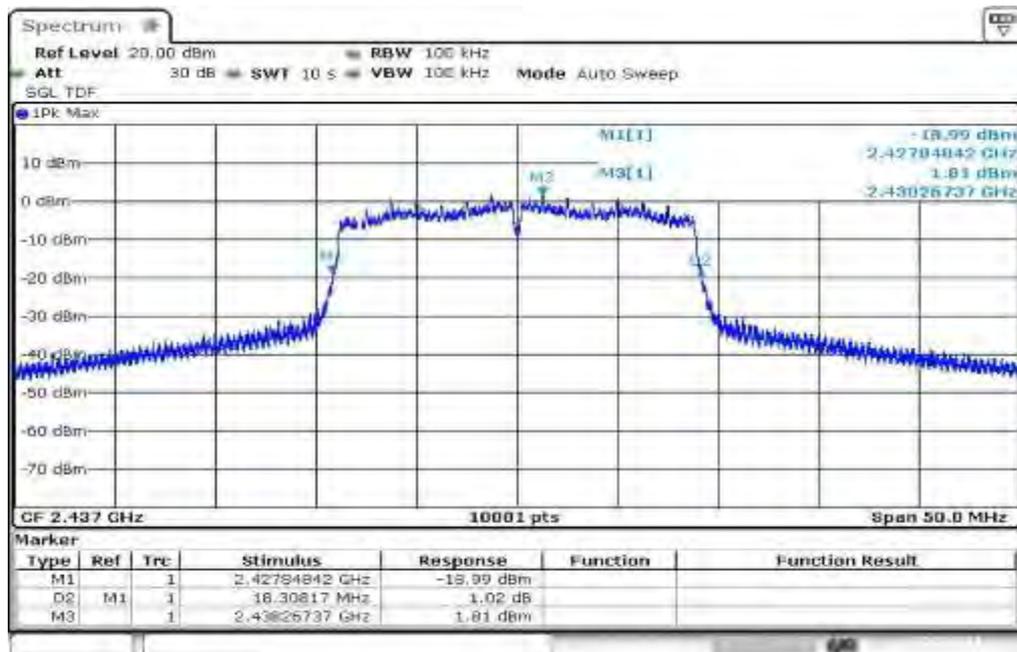

Plot 3: TX mode, highest channel, 20 dB bandwidth

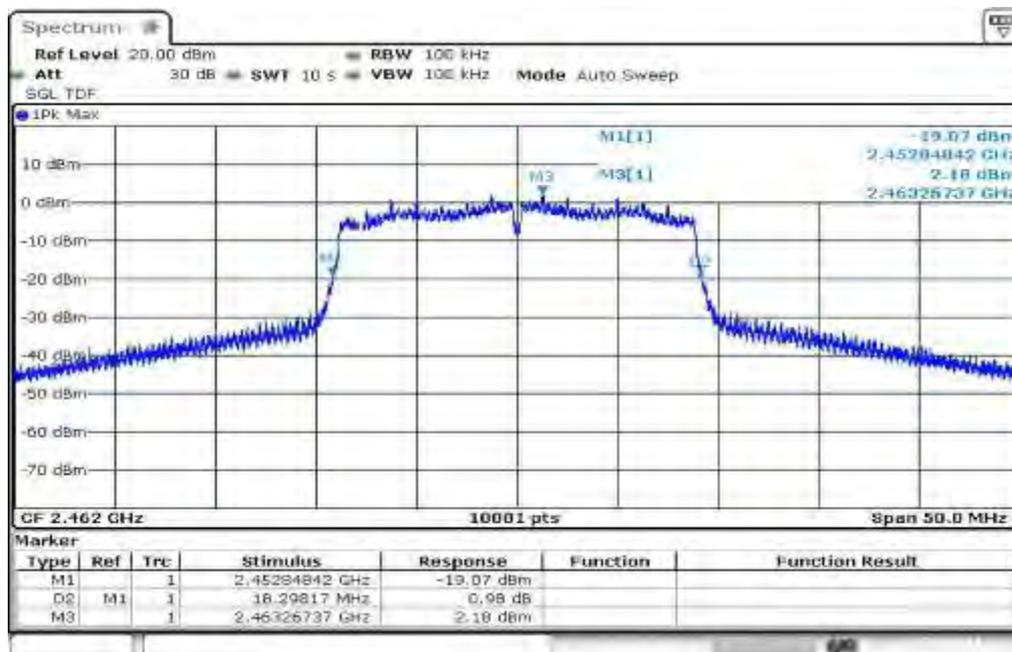

9.7 Band edge compliance conducted

Description:

Measurement of the conducted band edge compliance. EUT is measured at the lower and upper band edge in both modes.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	500 kHz
Resolution bandwidth:	100 kHz
Span:	Lower Band Edge: 2300 – 2425 MHz Upper Band Edge: 2450 – 2500 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247 (d)	RSS 210, Issue 8, A 8.5
Band Edge Compliance Conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.</p>	


Results:

Scenario Modulation	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB (see plot 1)	> 20 dB (see plot 3)	> 20 dB (see plot 5)
Upper Band Edge – Channel 11	> 20 dB (see plot 2)	> 20 dB (see plot 4)	> 20 dB (see plot 6)
Measurement uncertainty	± 1.5 dB		


Result: The measurement is passed.

Plots: DSSS / b – mode

Plot 1: TX mode, lower band edge

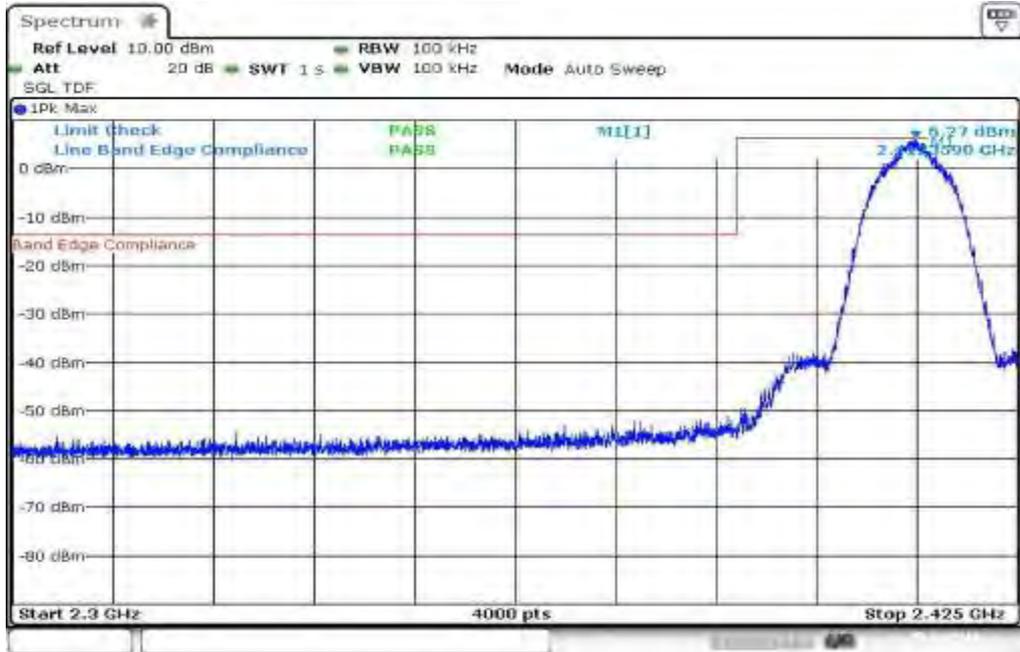


Plot 2: TX mode, upper band edge

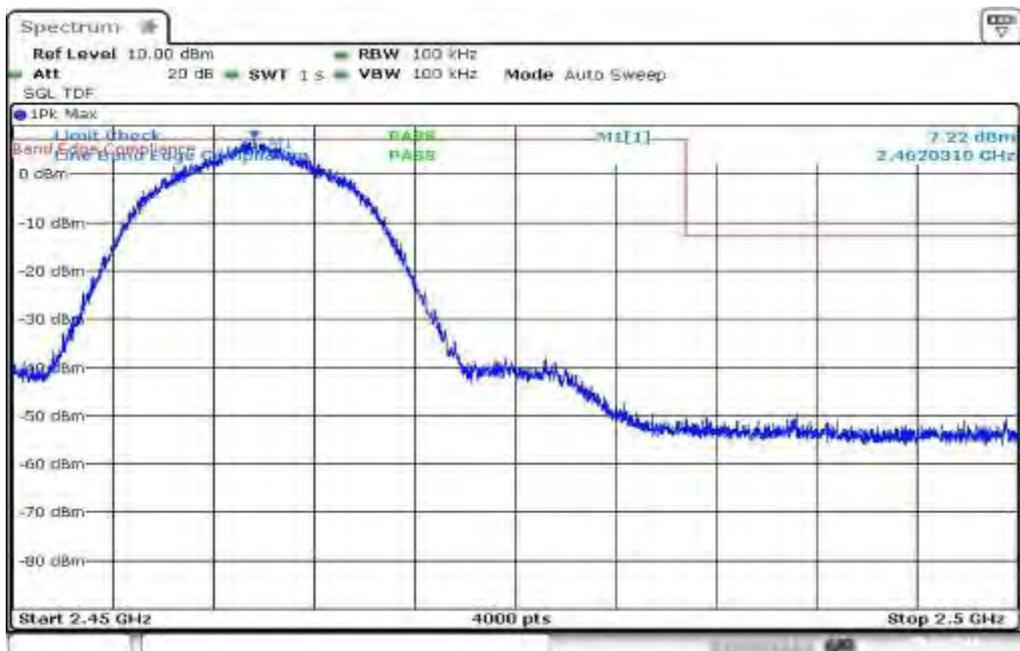


Plots: OFDM / g – mode

Plot 1: TX mode, lower band edge

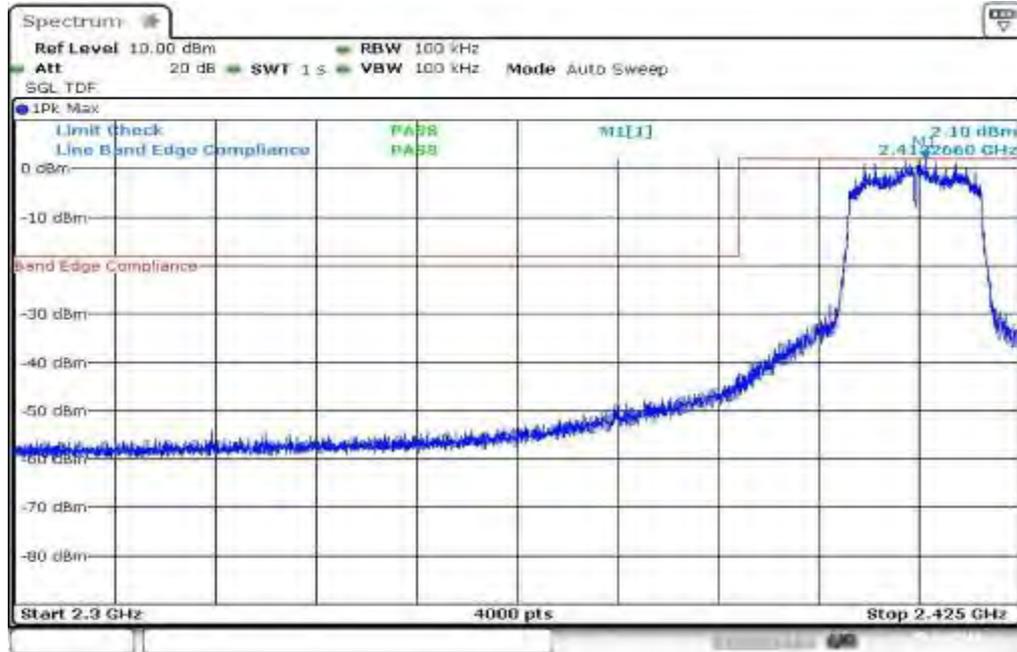


Plot 2: TX mode, upper band edge

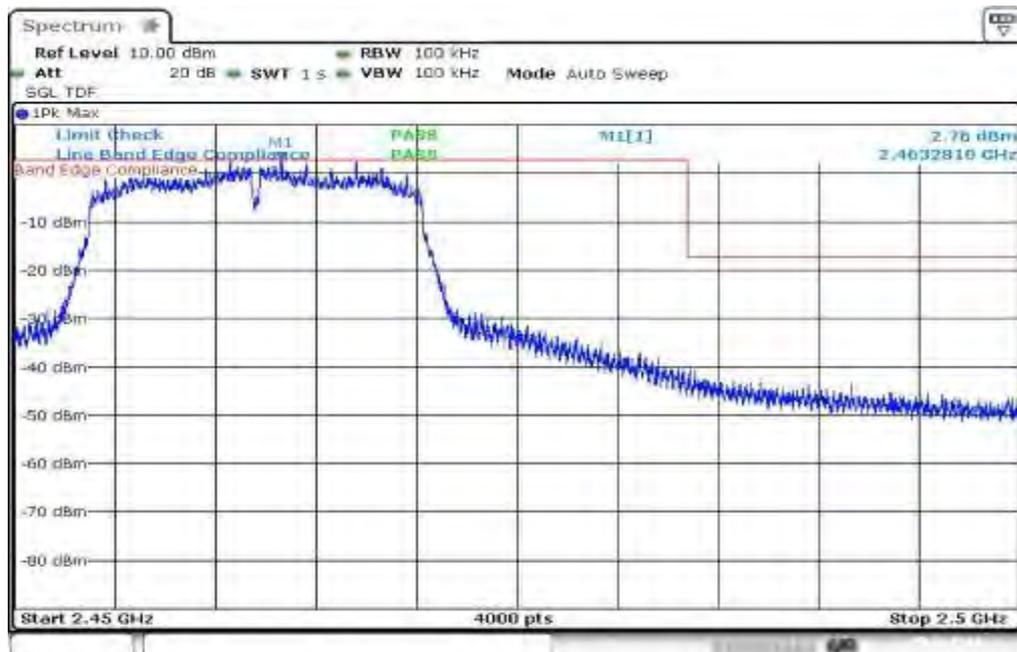


Plots: OFDM / n – mode

Plot 1: TX mode, lower band edge

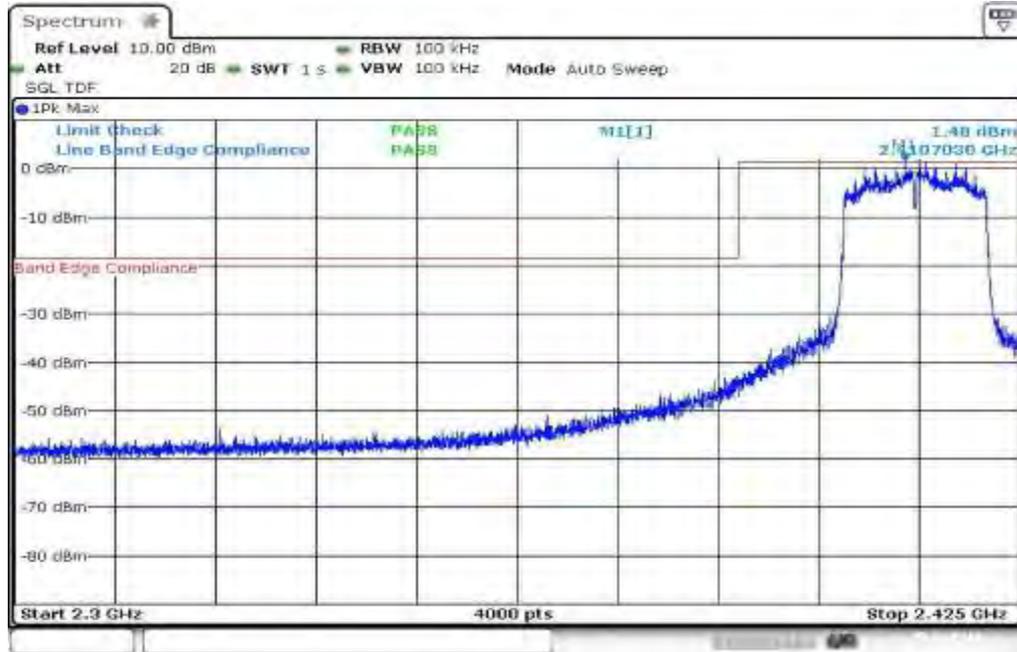

Plot 2: TX mode, upper band edge

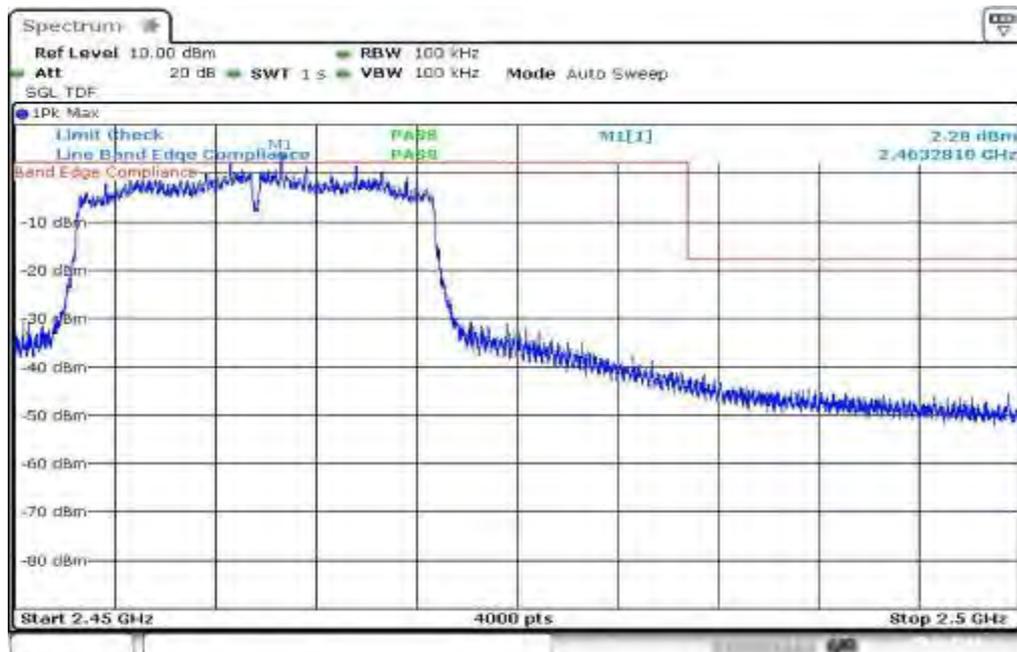

9.8 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to channel 1 for the lower restricted band and to channel 11 for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3m.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	10 Hz
Resolution bandwidth:	1 MHz
Span:	Lower Band: 2300 – 2400 MHz higher Band: 2480 – 2500 MHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.205	RSS 210, Issue 8, A 8.5
Band Edge Compliance Radiated	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)).</p>	
54 dB μ V/m AVG	


Results:

Szenario Modulation	Band Edge Compliance Conducted [dB]		
	DSSS / b – mode	OFDM / g – mode	OFDM / n – mode
Lower Band Edge – Channel 1	> 20 dB	> 20 dB	> 20 dB
Upper Band Edge – Channel 11	> 20 dB	> 20 dB	> 20 dB
Measurement uncertainty	± 3 dB		


Result: The measurement is passed.

Plots: DSSS / b – mode


Plot 1: TX mode, lower band edge, vertical polarization

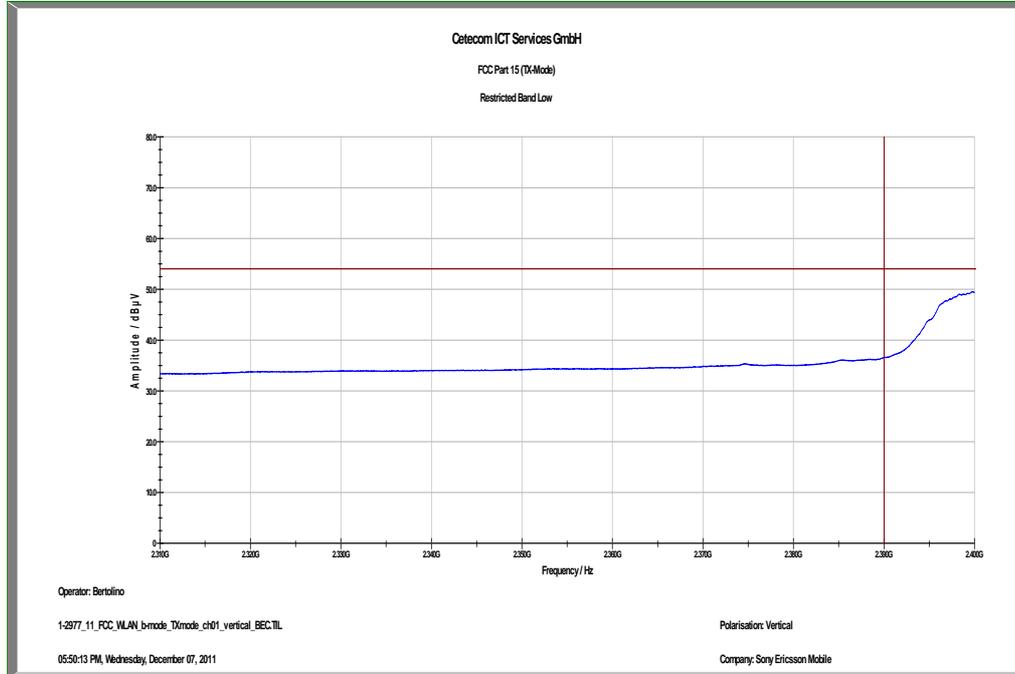


Plot 2: TX mode, upper band edge, vertical polarization

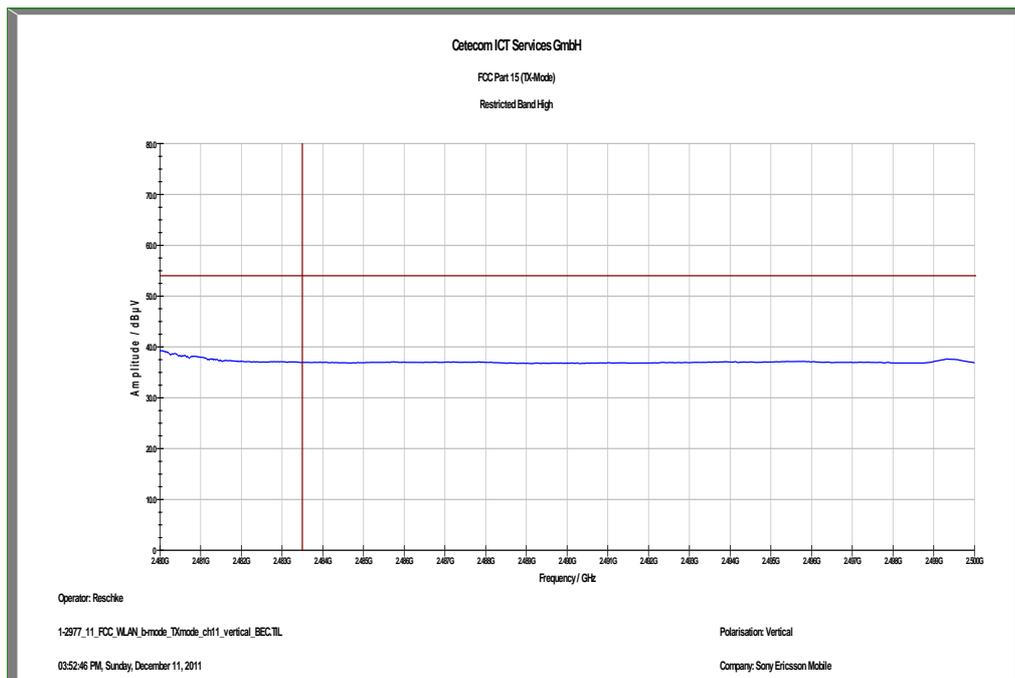

Plot 3: TX mode, lower band edge, horizontal polarization

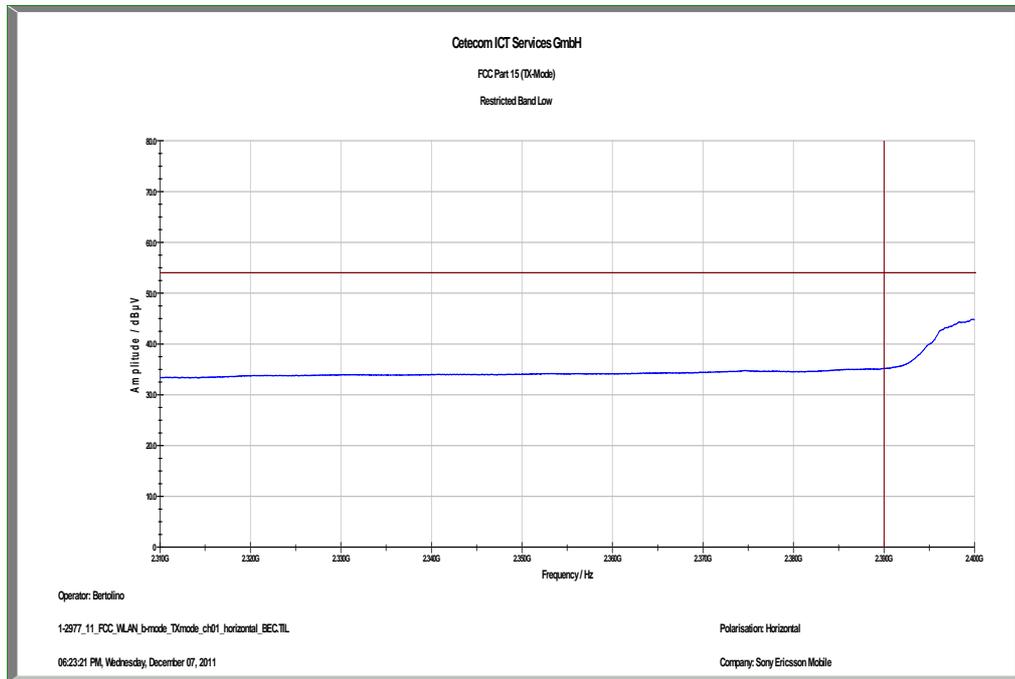


Plot 4: TX mode, upper band edge, horizontal polarization

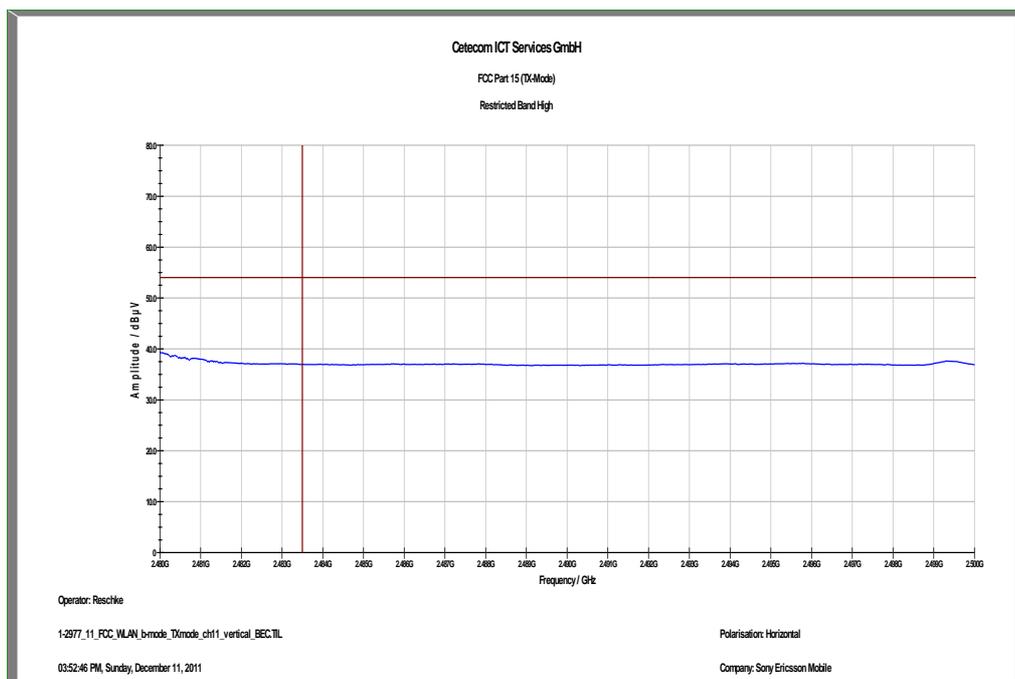


Plots: OFDM / g – mode


Plot 1: TX mode, lower band edge, vertical polarization

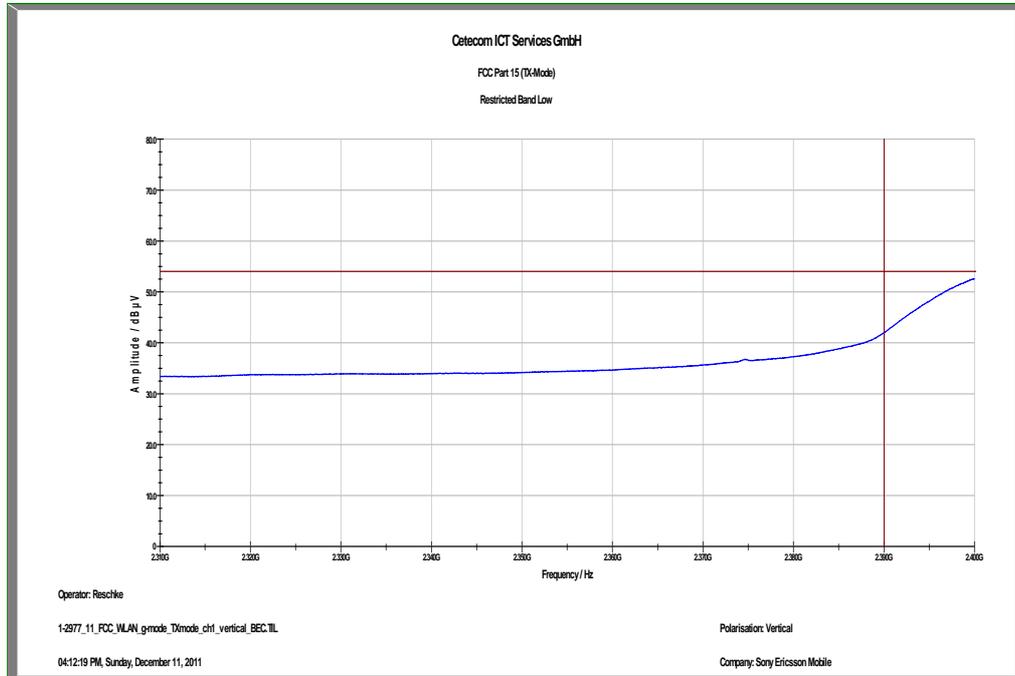


Plot 2: TX mode, upper band edge, vertical polarization

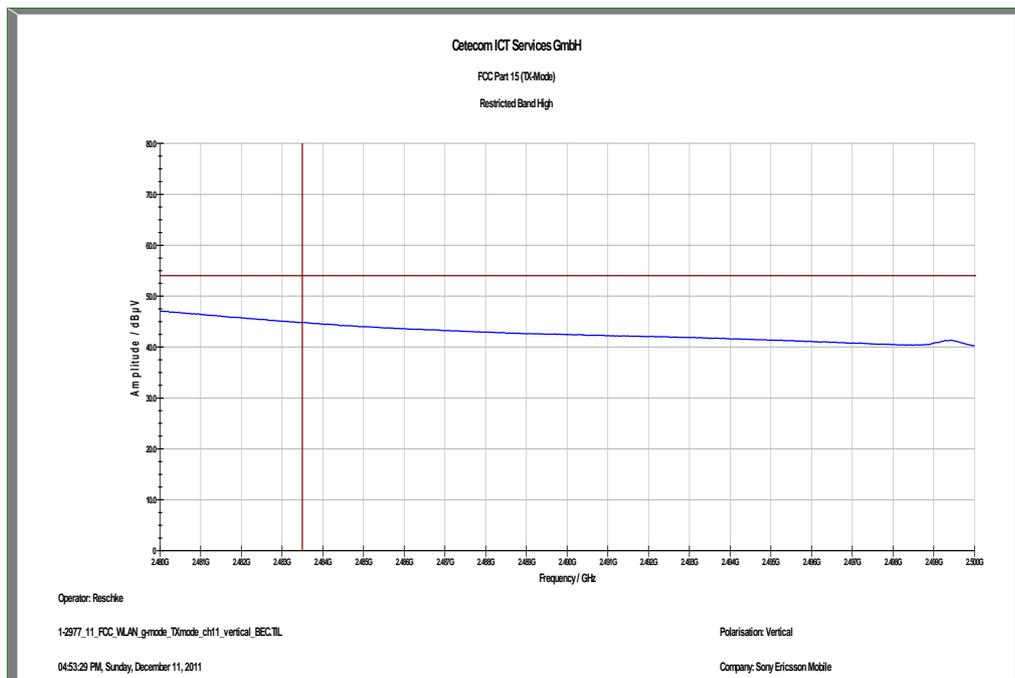

Plot 3: TX mode, lower band edge, horizontal polarization

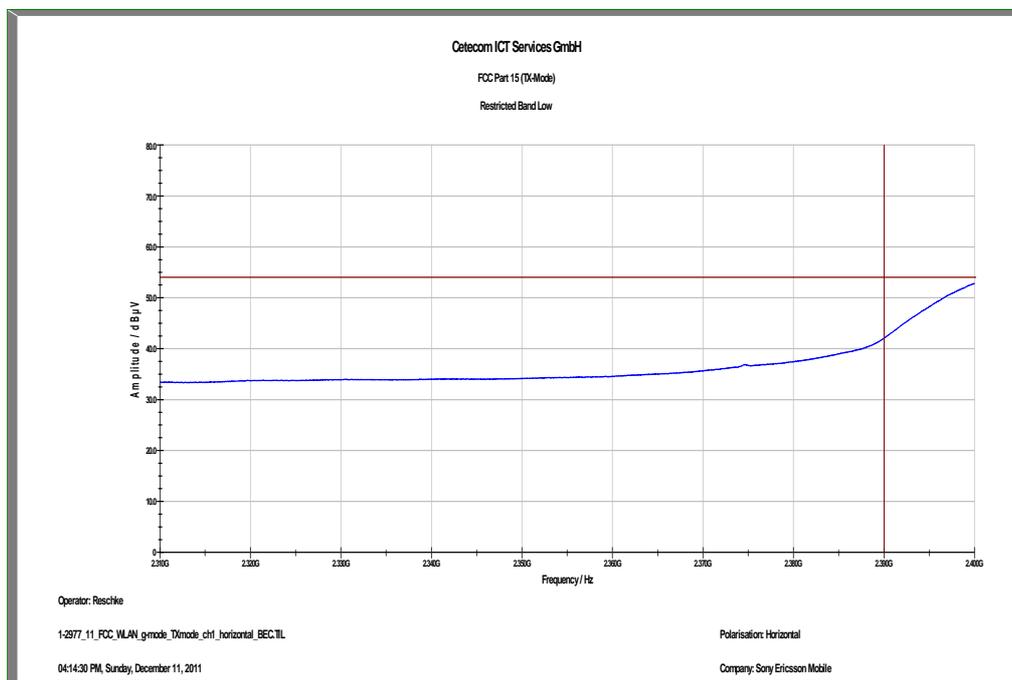


Plot 4: TX mode, upper band edge, horizontal polarization

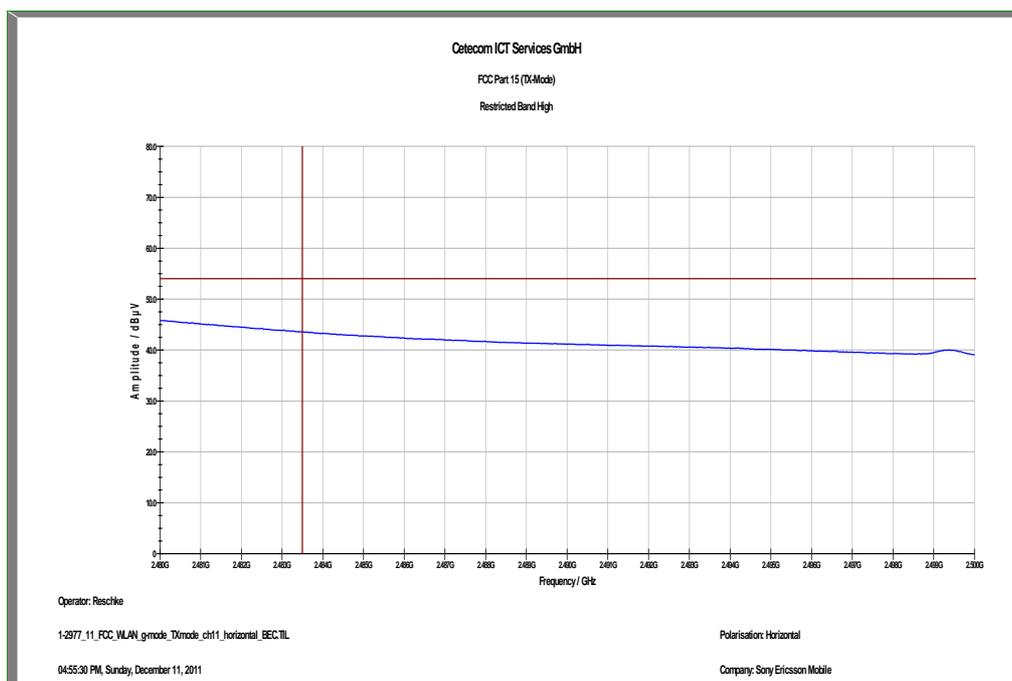


Plots: OFDM / n – mode


Plot 1: TX mode, lower band edge, vertical polarization

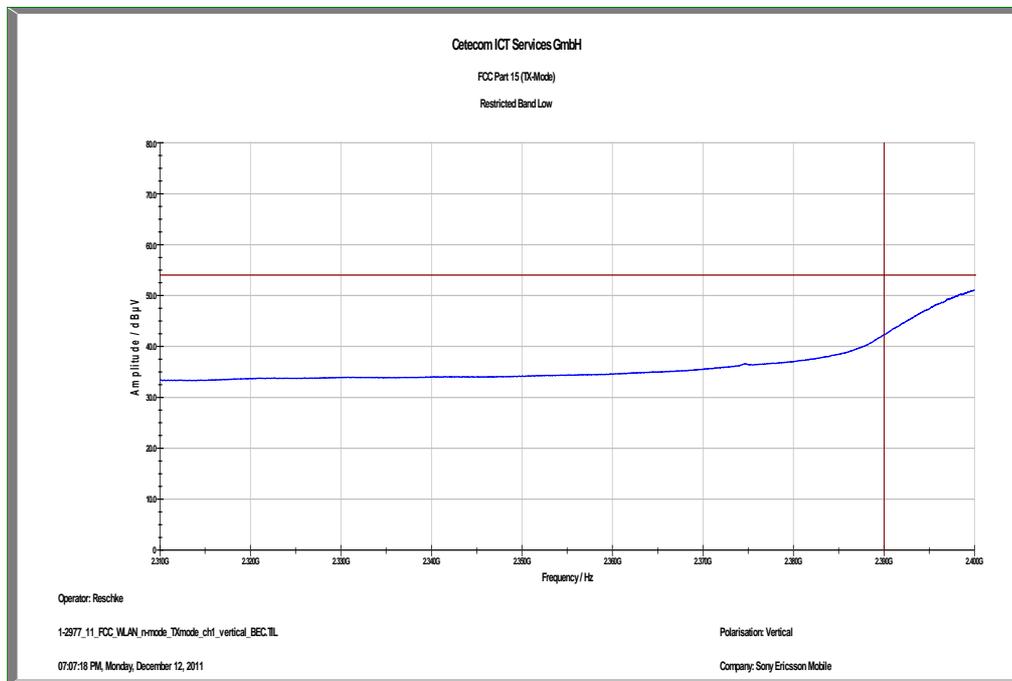


Plot 2: TX mode, upper band edge, vertical polarization

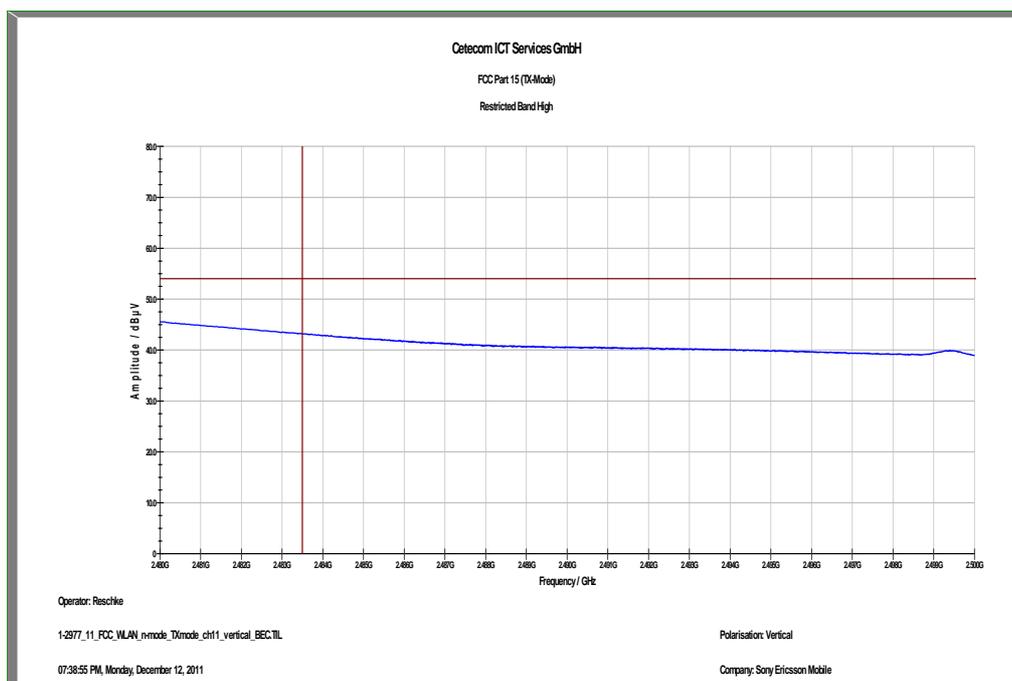

Plot 3: TX mode, lower band edge, horizontal polarization

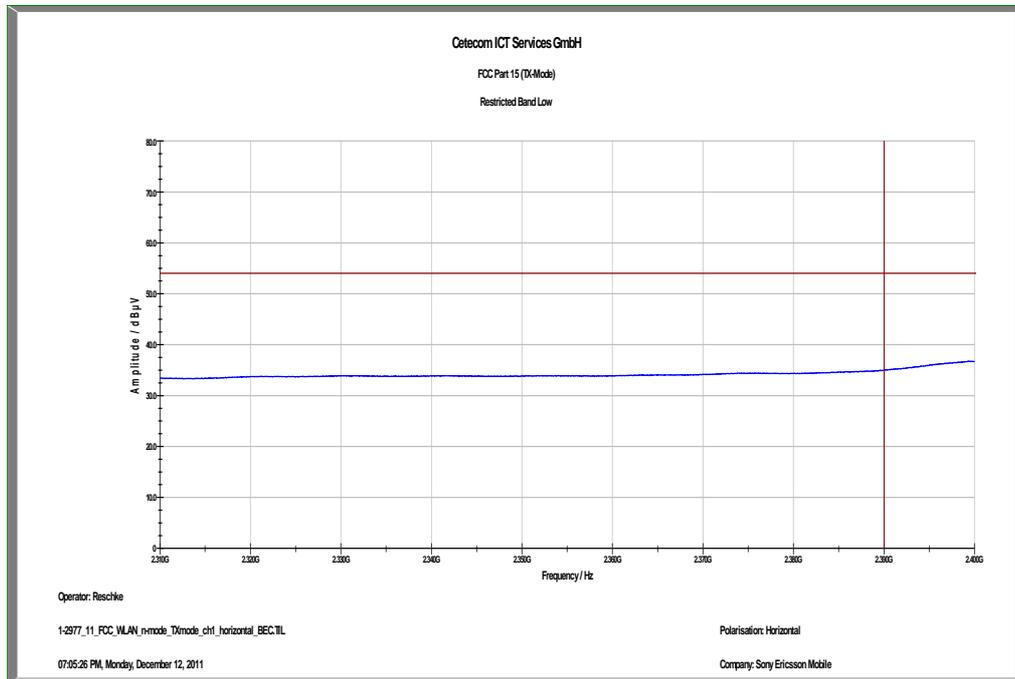

Plot 4: TX mode, upper band edge, horizontal polarization

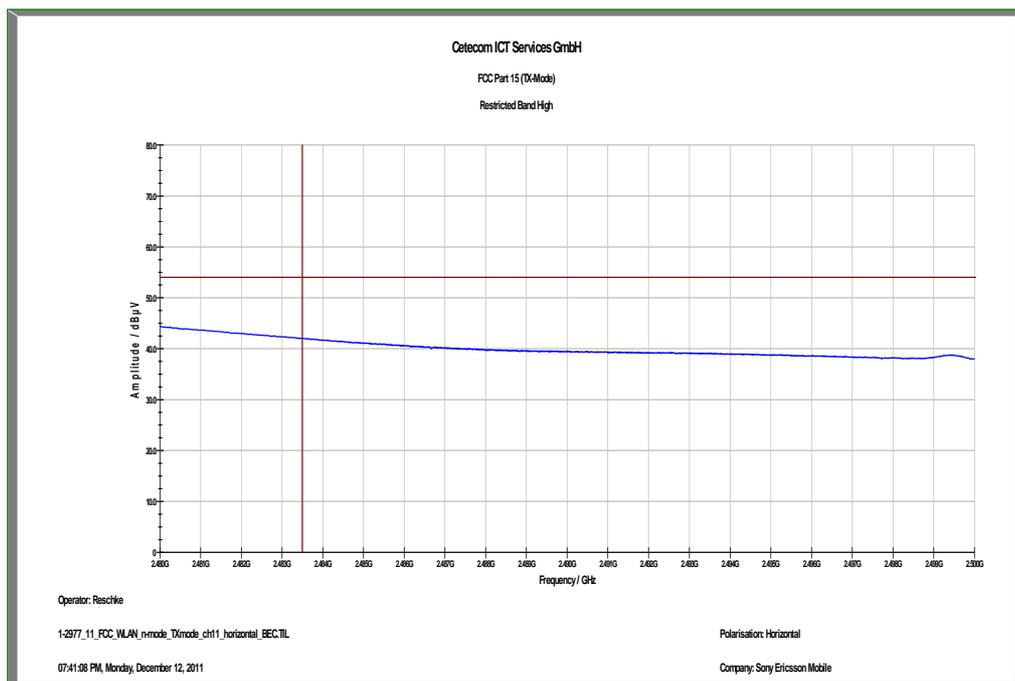

9.9 TX spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 100 kHz
Span:	9 kHz to 25 GHz
Trace-Mode:	Max Hold

Limits:

FCC	IC
CFR Part 15.247(d)	RSS 210, Issue 8, A 8.5
TX Spurious Emissions Conducted	
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required</p>	

Results: DSSS / b – mode

TX Spurious Emissions Conducted					
DSSS - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		7.47	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
2437		7.36	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
2462		7.59	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
Measurement uncertainty		± 3 dB			

Result: The measurement is passed.

Results: OFDM / g – mode

TX Spurious Emissions Conducted					
OFDM - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		2.96	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
2437		2.61	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
2462		3.20	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
Measurement uncertainty		± 3 dB			

Result: The measurement is passed.


Results: OFDM / n – mode

TX Spurious Emissions Conducted					
OFDM - mode					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
2412		2.28	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
2437		2.54	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
2462		2.92	30 dBm		Operating frequency
No critical peaks detected. All detected emissions are below the 20 dBc criteria.			-20 dBc		complies
Measurement uncertainty		± 3 dB			


Result: [The measurement is passed.](#)

Plots: DSSS / b – mode


Plot 1: TX mode, lowest channel, up to 25 GHz

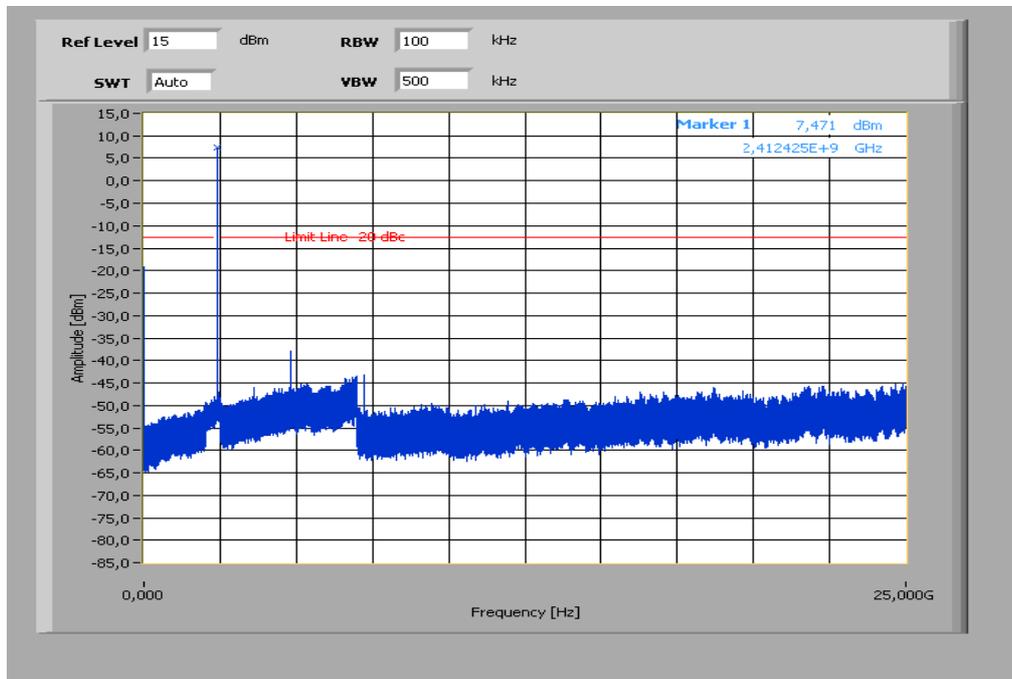

Plot 2: TX mode, middle channel, up to 25 GHz

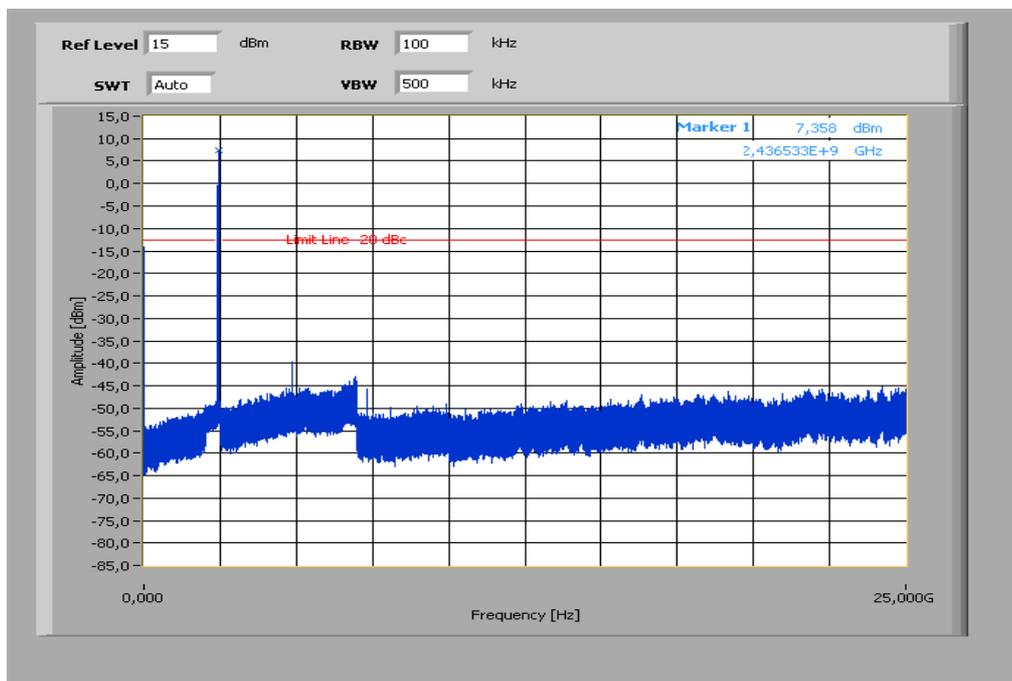


Plot 3: TX mode, highest channel, up to 25 GHz

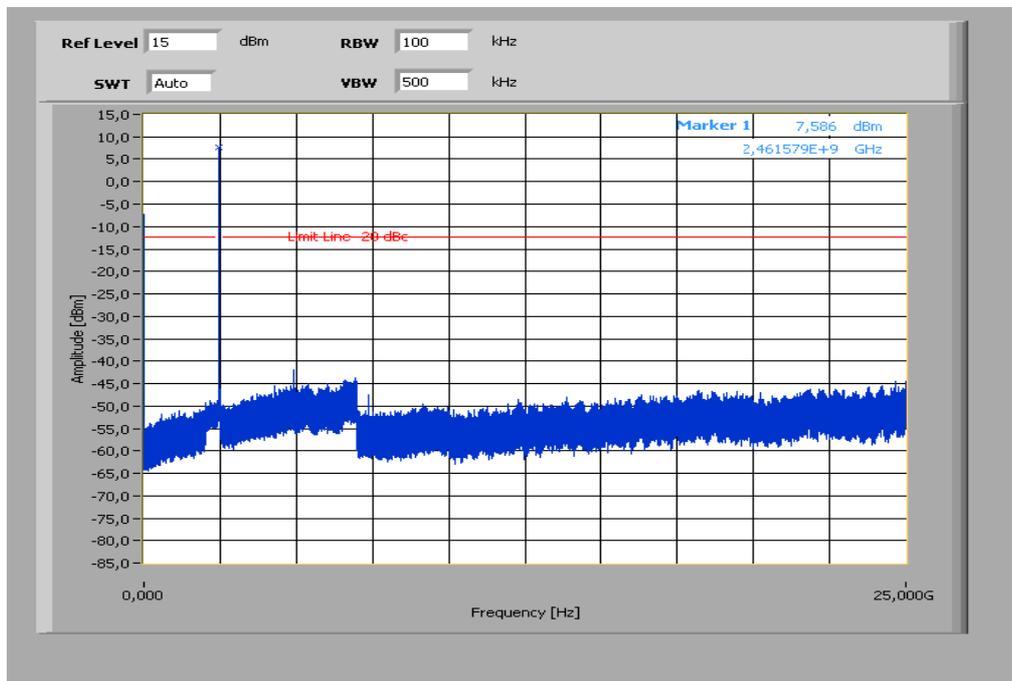


Plots: OFDM / g – mode


Plot 1: TX mode, lowest channel, up to 25 GHz

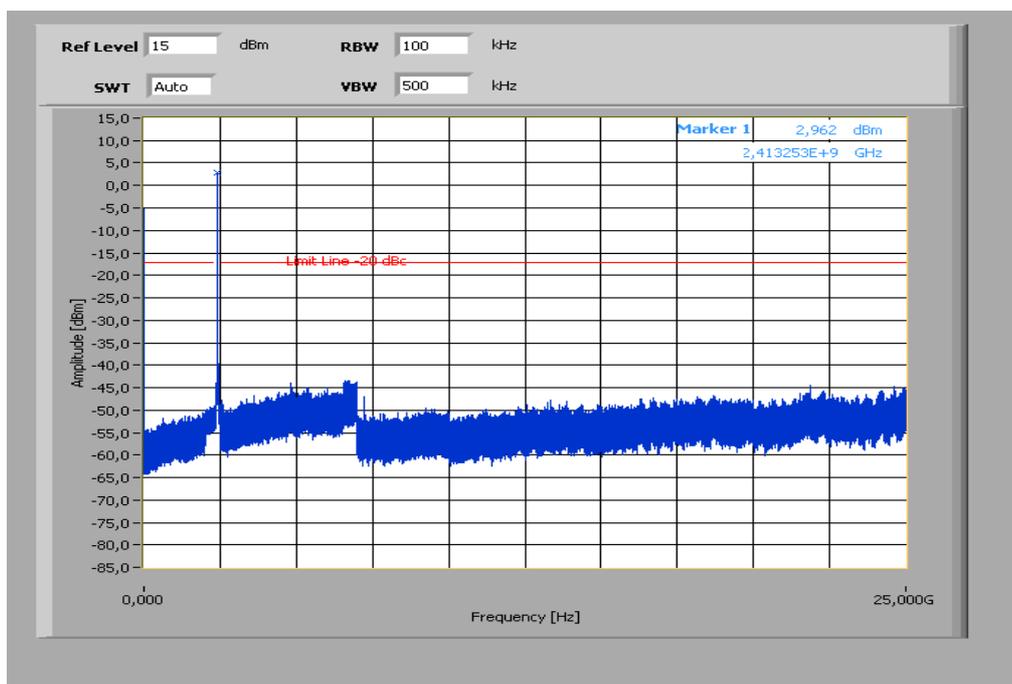

Plot 2: TX mode, middle channel, up to 25 GHz

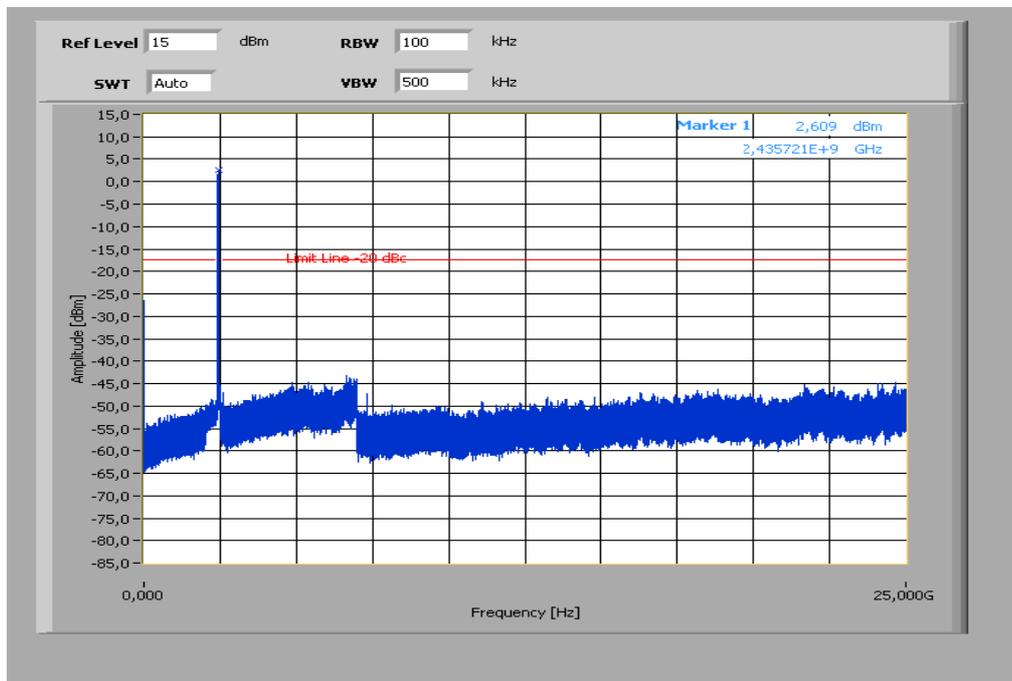


Plot 3: TX mode, highest channel, up to 25 GHz

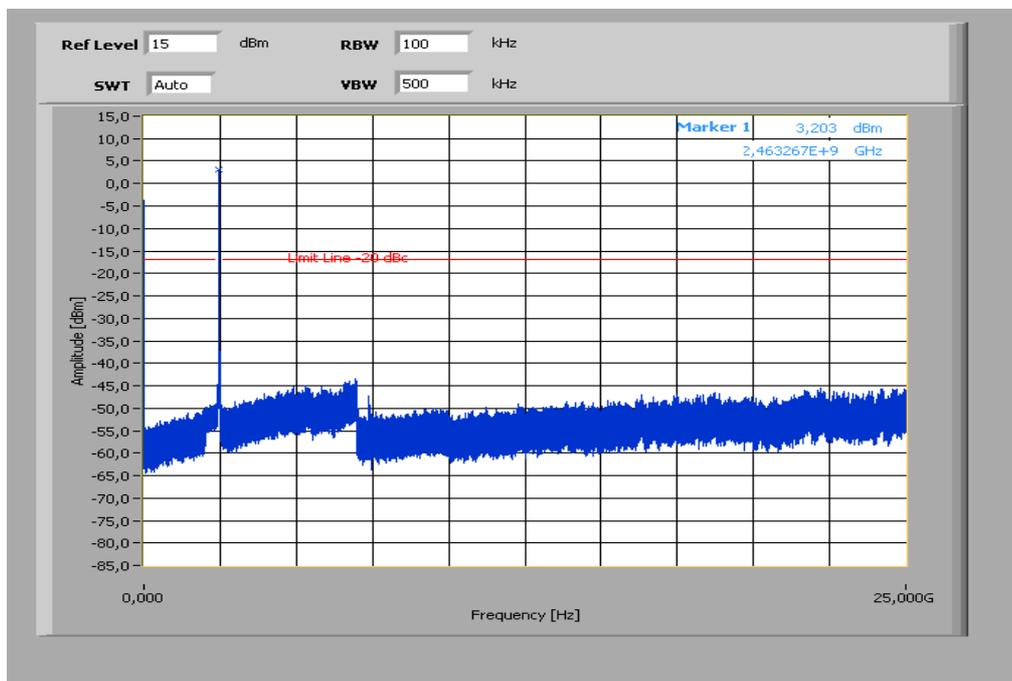


Plots: OFDM / n – mode


Plot 1: TX mode, lowest channel, up to 25 GHz

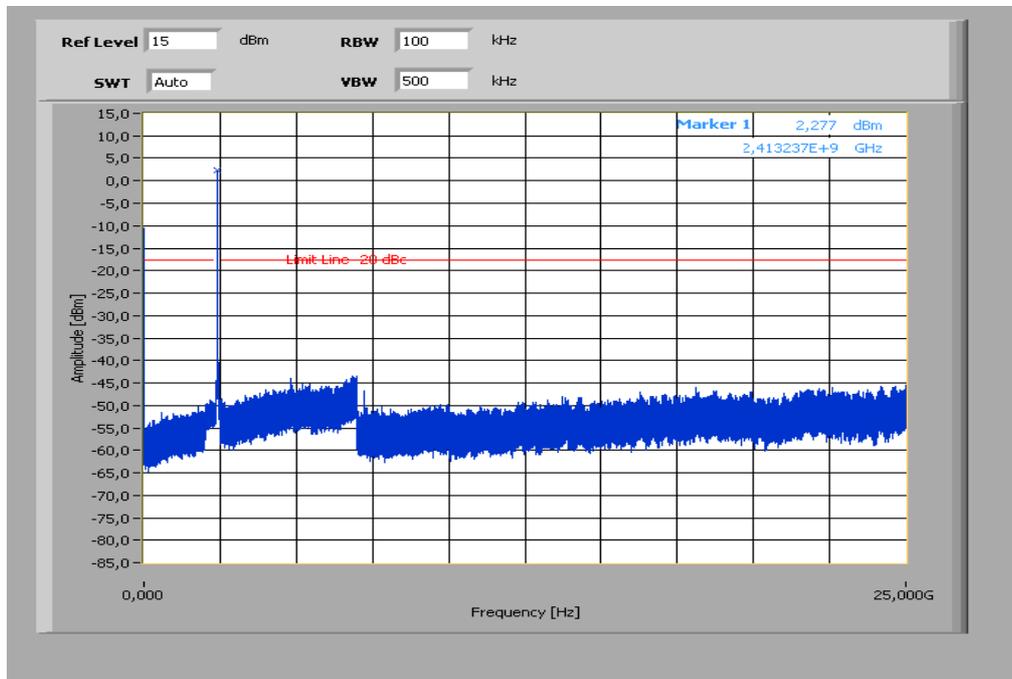

Plot 2: TX mode, middle channel, up to 25 GHz

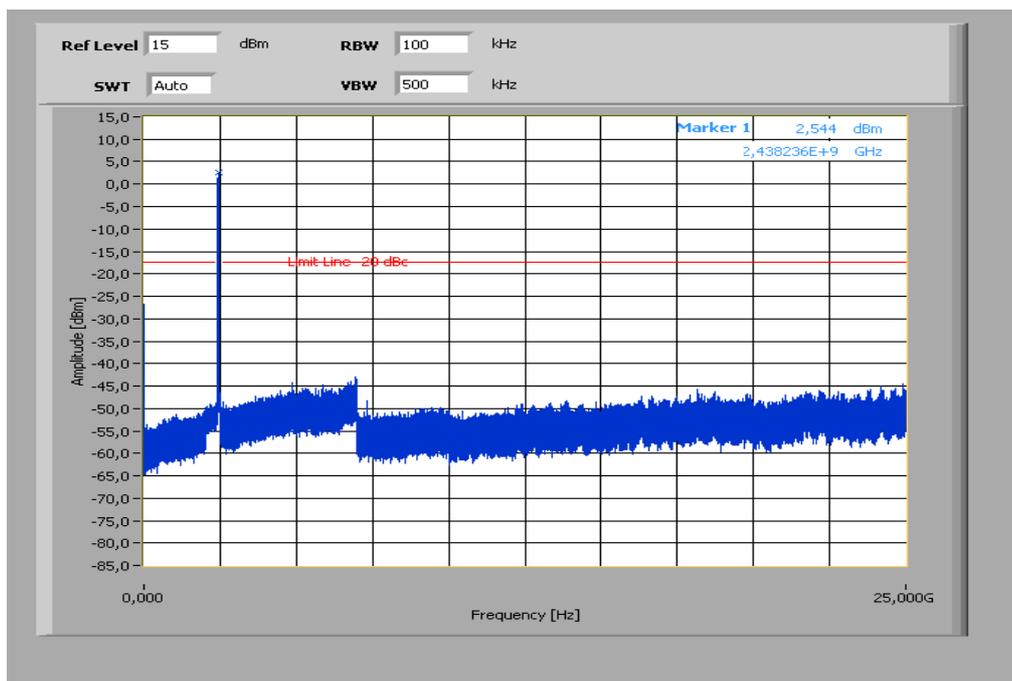

Plot 3: TX mode, highest channel, up to 25 GHz

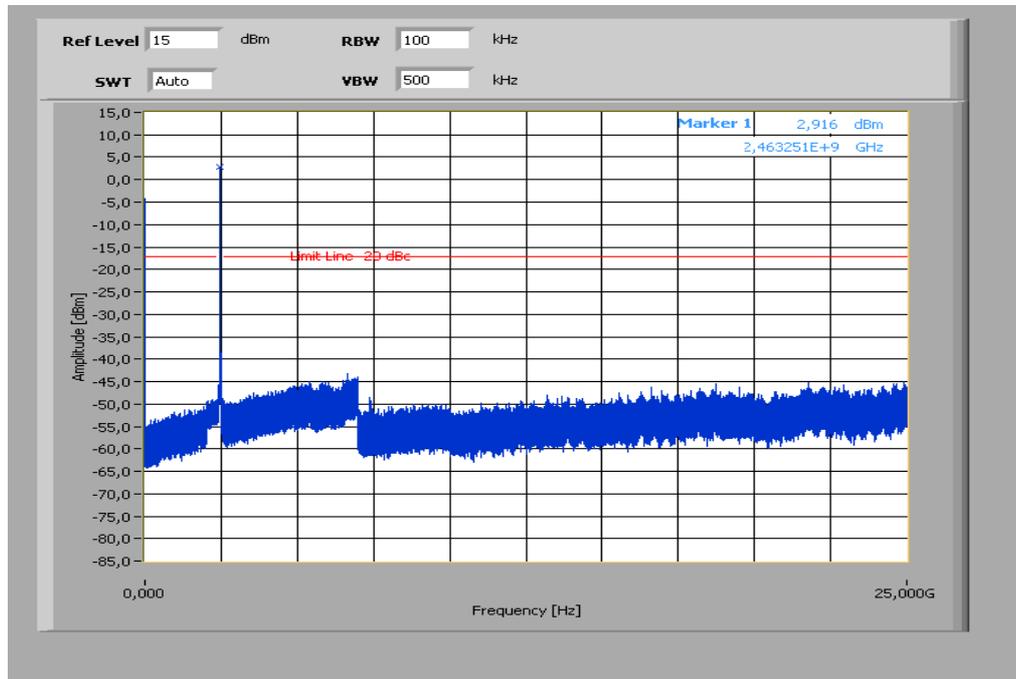

9.10 TX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in transmit mode. The measurement is performed at channel 1, 6 and 11. The measurement is repeated for all modulations.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold
Measured Modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input checked="" type="checkbox"/> OFDM n – mode

The modulation with the highest output power was used to perform the transmitter spurious emissions. If spurious were detected a re-measurement was performed on the detected frequency with each modulation.

Limits:

FCC		IC
CFR Part 15.247(d)		RSS 210, Issue 8, A 8.5
TX Spurious Emissions Radiated		
<p>In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).</p>		
§15.209		
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance
30 - 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3

Results: DSSS / b – mode

TX Spurious Emissions Radiated [dB μ V/m]								
DSSS – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
3612.2	1 MHz / 1 MHz PP	52.76 (v) 51.74 (h)	3656	1 MHz / 1 MHz PP	51.71 (v) 51.33 (h)	3707	1 MHz / 1 MHz PP	51.66
4824	1 MHz / 1 MHz PP	47.41 (v) 49.60 (h)	4874	1 MHz / 1 MHz PP	49.99 (v) 51.22 (h)	7386	1 MHz / 10 Hz PP	49.29
7236	1 MHz / 10 Hz PP	45.92 (v) 46.76 (h)	7312	1 MHz / 10 Hz PP	46.14 (v) 47.77 (h)	For emissions above 12.75 GHz, please take a look at the plots.		
For emissions above 12.75 GHz, please take a look at the plots.			For emissions above 12.75 GHz, please take a look at the plots.					
Measurement uncertainty			± 3 dB					

Result: The measurement is passed.

Results: OFDM / g – mode

TX Spurious Emissions Radiated [dB μ V/m]								
OFDM – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
1500	1 MHz / 1 MHz PP	37.26	3656	1 MHz / 1 MHz PP	50.68	3707	1 MHz / 1 MHz PP	50.29
1737	1 MHz / 1 MHz PP	46.98	4874	-/-	-/-	7386	1 MHz / 10 Hz PP	44.89
3617.8	1 MHz / 1 MHz PP	46.72	7312	1 MHz / 1 MHz PP	52.69	For emissions above 12.75 GHz, please take a look at the plots.		
4824	-/-	-/-	For emissions above 12.75 GHz, please take a look at the plots.					
7236	1 MHz / 10 Hz PP	45.84						
For emissions above 12.75 GHz, please take a look at the plots.								
Measurement uncertainty			± 3 dB					

Result: The measurement is passed.

Results: OFDM / n – mode

TX Spurious Emissions Radiated [dB μ V/m]								
OFDM – mode								
2412 MHz			2437 MHz			2462 MHz		
F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]	F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.			For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
3612	1 MHz / 1 MHz PP	45.98	3656	1 MHz / 1 MHz PP	50.22	3693	1 MHz / 1 MHz PP	50.00
7236	1 MHz / 10 Hz PP	45.82	7312	1 MHz / 1 MHz PP	51.89	7386	1 MHz / 10 Hz PP	46.65
For emissions above 12.75 GHz, please take a look at the plots.			For emissions above 12.75 GHz, please take a look at the plots.			For emissions above 12.75 GHz, please take a look at the plots.		
Measurement uncertainty			± 3 dB					

Result: The measurement is passed.

Plots: DSSS / b – mode

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 class B @ 10 m
 Operating Conditions: W-Lan 802.11b, channel 1 + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange **Step Size** **Detectors** **IF BW** **Meas. Time** **Preamp**
 30 MHz - 2 GHz 60 kHz QPK 120 kHz 1 s 20 dB

FCC_10m(B)_5

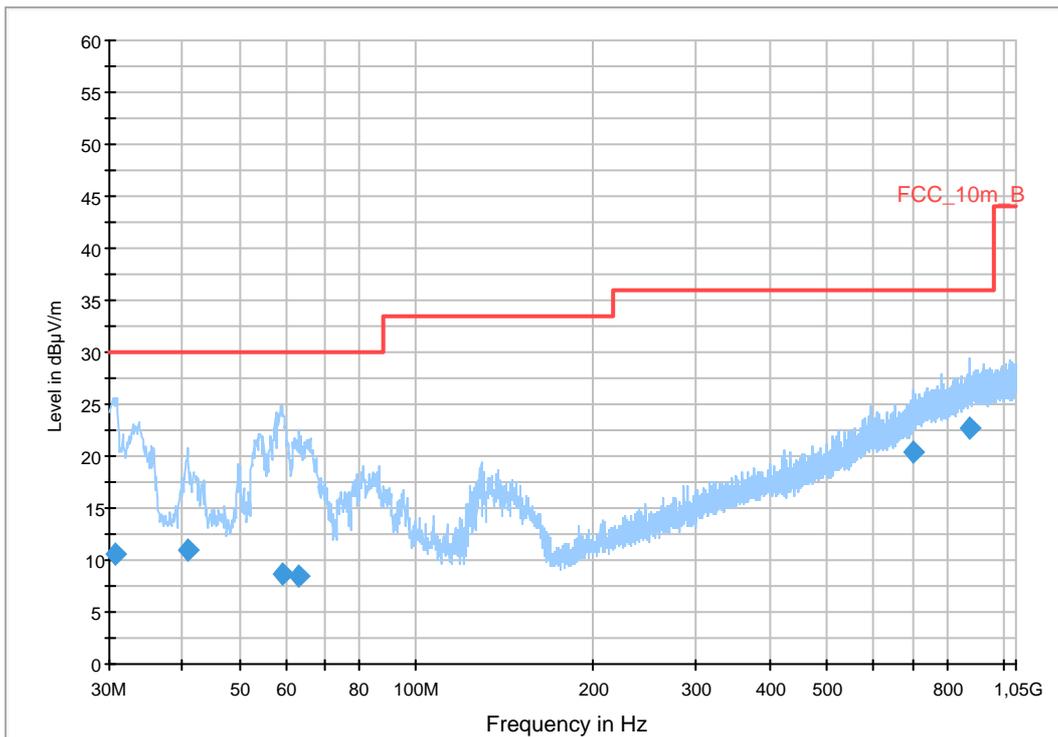

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
30.840000	10.6	1000.0	120.000	270.0	V	39.0	12.6	19.4	30.0	
40.800000	10.9	1000.0	120.000	196.0	V	39.0	13.4	19.1	30.0	
59.040000	8.7	1000.0	120.000	270.0	V	39.0	11.9	21.3	30.0	
63.240000	8.5	1000.0	120.000	270.0	V	54.0	10.8	21.5	30.0	
704.400000	20.3	1000.0	120.000	187.0	V	150.0	22.6	15.7	36.0	
878.160000	22.7	1000.0	120.000	98.0	V	177.0	24.9	13.3	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical polarization

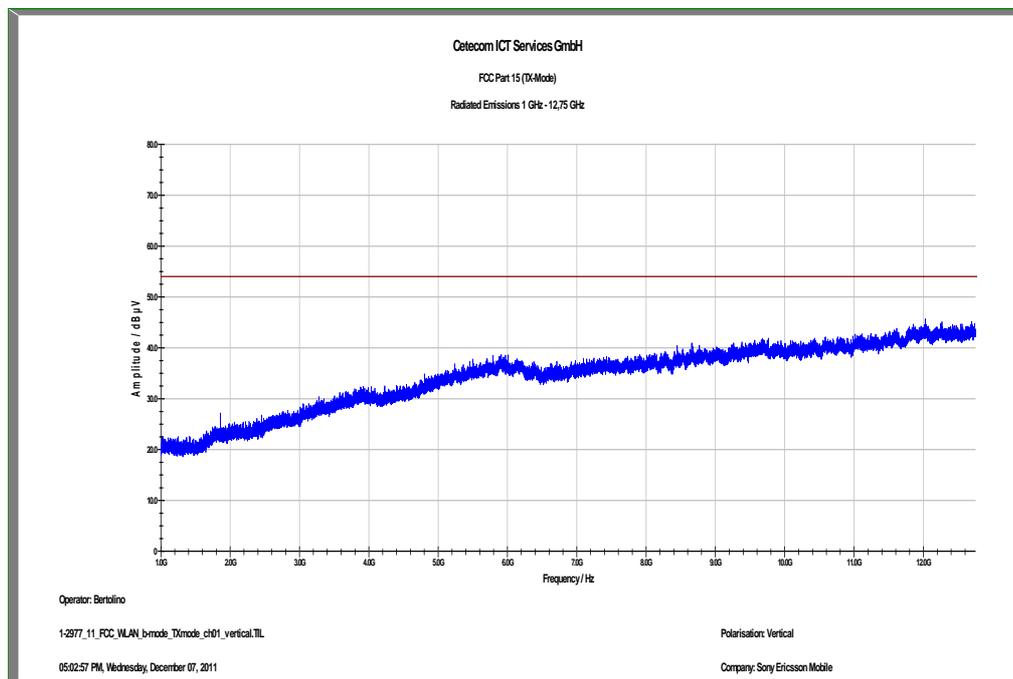


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 1 GHz to 12.75 GHz, horizontal polarization

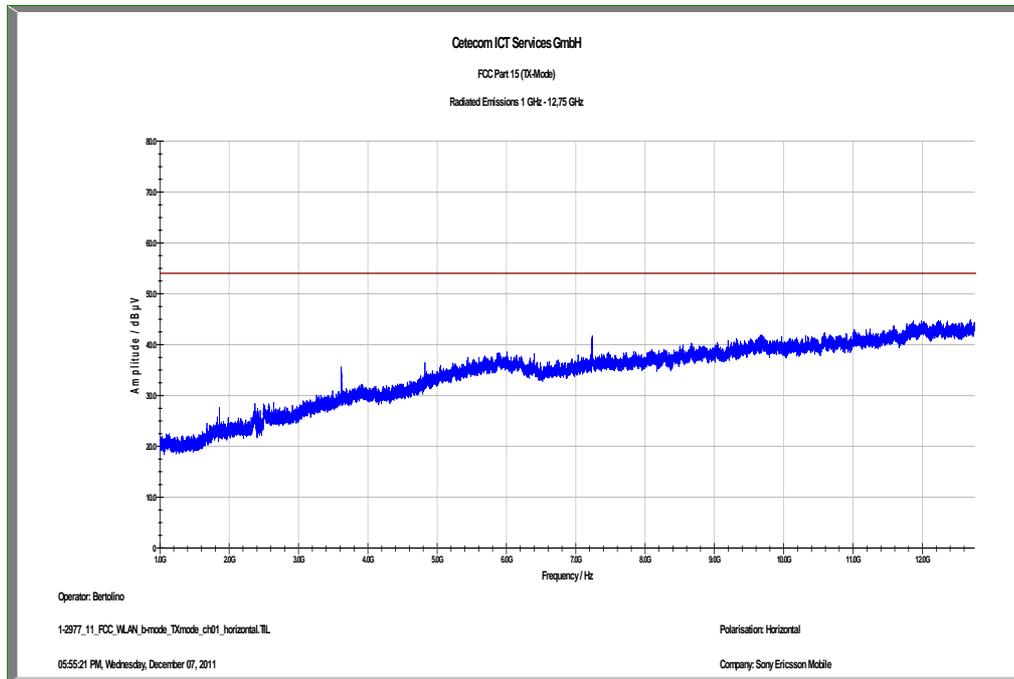


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

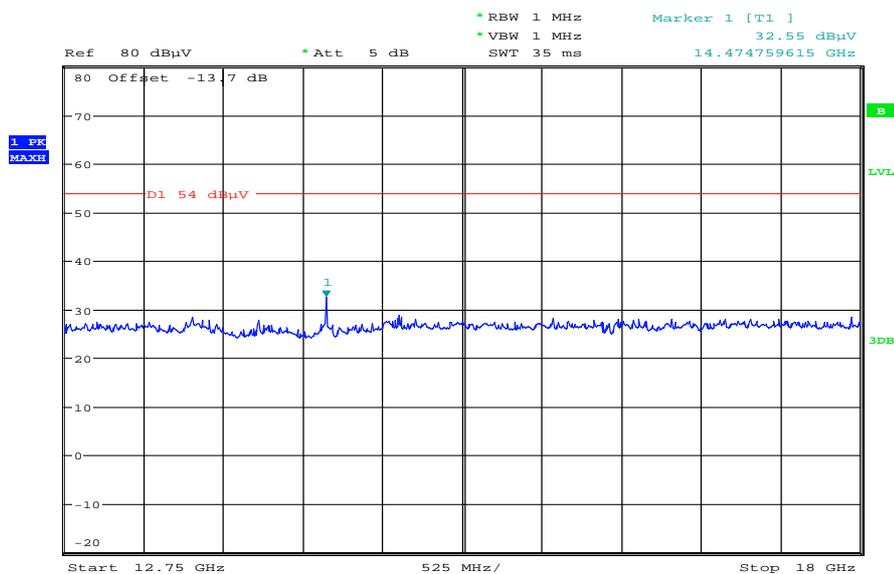

Date: 7.DEC.2011 14:49:29

Plot 5: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

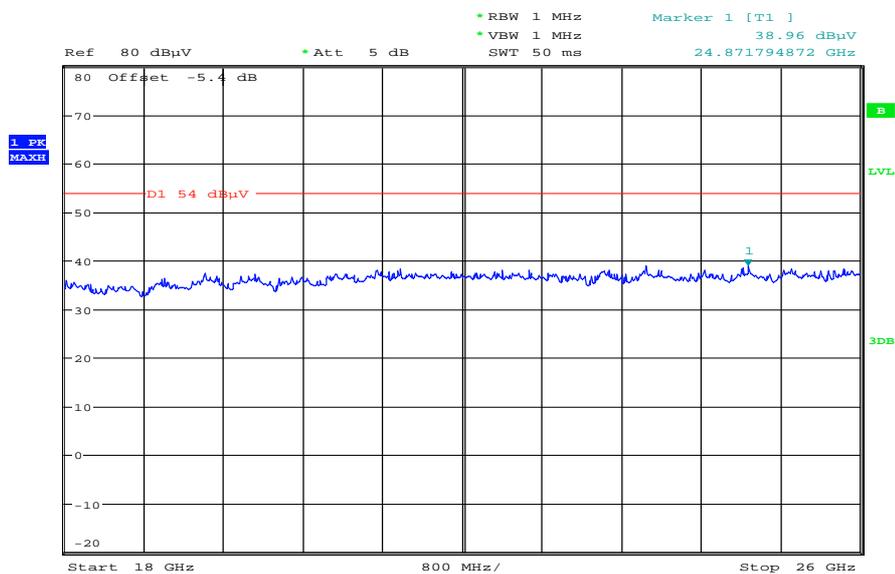

Date: 7.DEC.2011 16:02:27

Plot 6: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 B class B @ 10 m
 Operating Conditions: W-Lan 802.11b, channel 6 + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

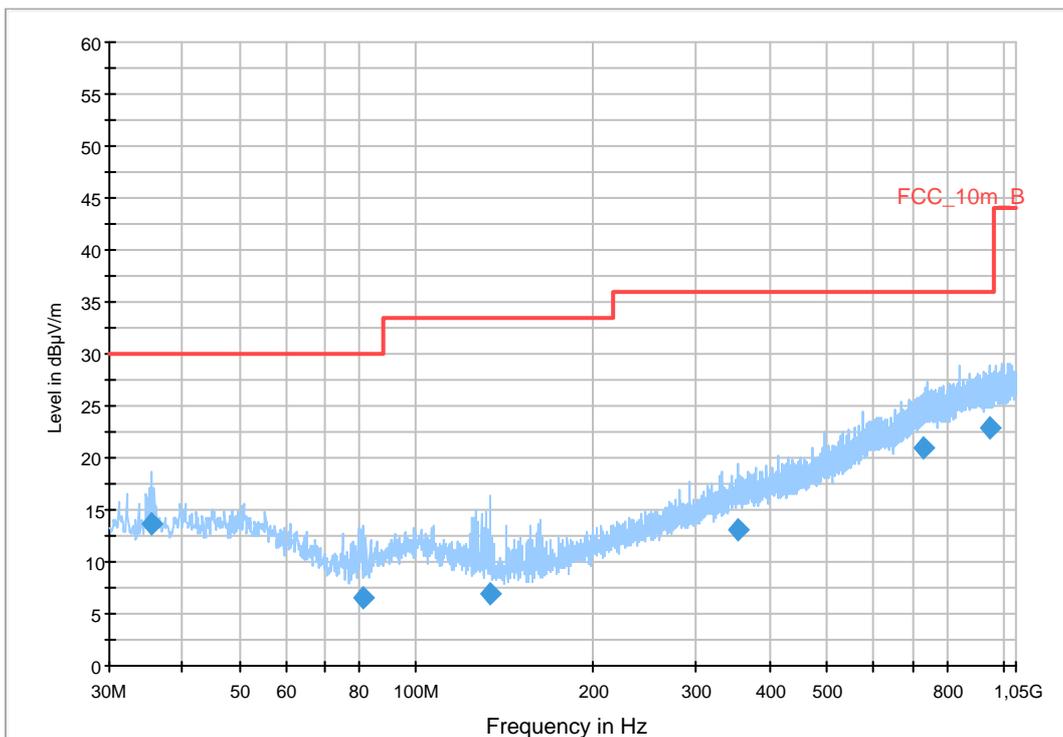

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.400000	13.7	1000.0	120.000	270.0	V	215.0	13.1	16.3	30.0	
81.120000	6.4	1000.0	120.000	208.0	V	152.0	9.2	23.6	30.0	
133.320000	6.9	1000.0	120.000	123.0	V	249.0	9.2	26.6	33.5	
352.440000	13.0	1000.0	120.000	123.0	H	28.0	16.1	23.0	36.0	
730.800000	20.9	1000.0	120.000	270.0	V	-2.0	23.2	15.1	36.0	
946.680000	22.9	1000.0	120.000	204.0	H	124.0	25.3	13.1	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 7: Middle channel, 1 GHz to 12.75 GHz, vertical polarization

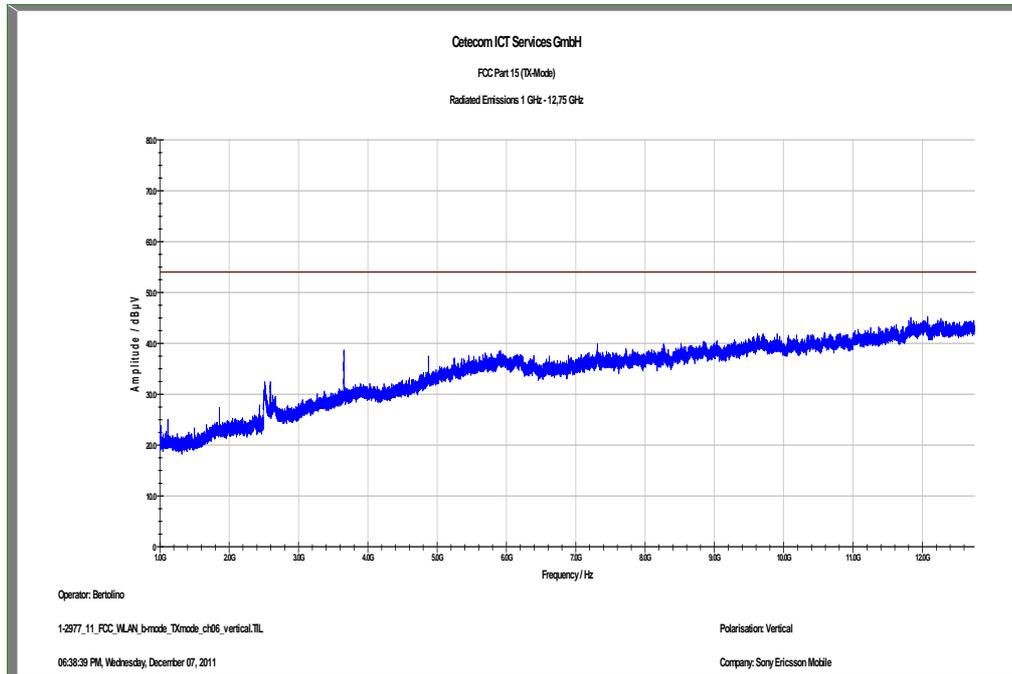


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 8: Middle channel, 1 GHz to 12.75 GHz, horizontal polarization

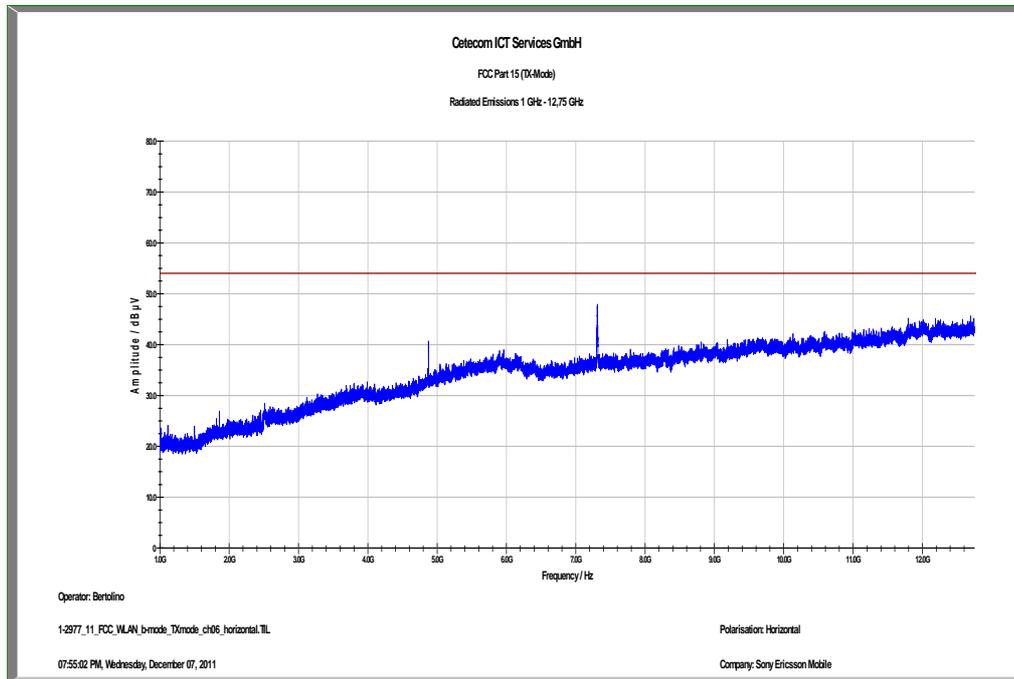


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 9: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

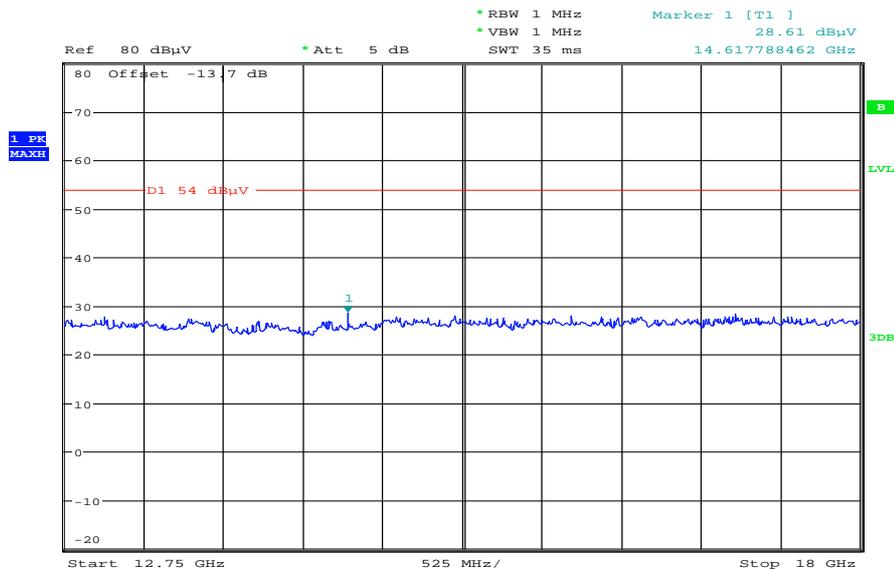

Date: 7.DEC.2011 14:52:54

Plot 10: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

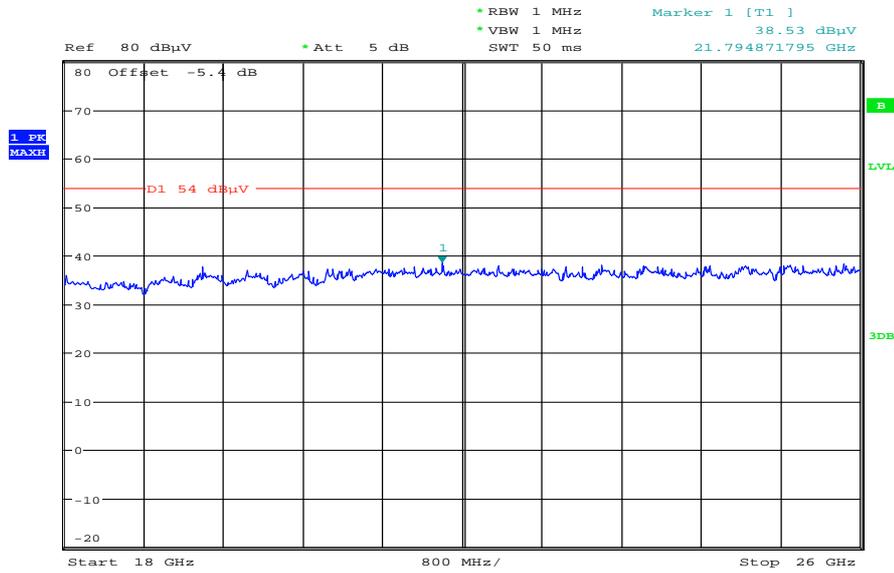

Date: 7.DEC.2011 16:04:28

Plot 11: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: charging + W-LAN mode b CH 11
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

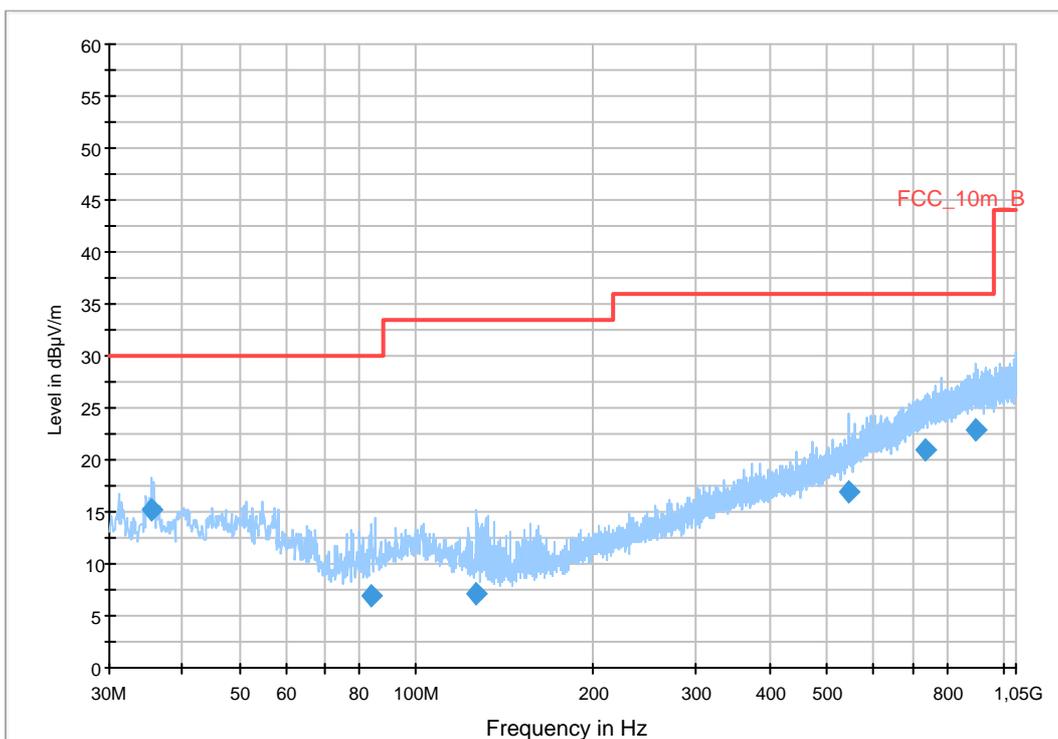

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.400000	15.2	1000.0	120.000	196.0	V	45.0	13.1	14.8	30.0	
84.120000	7.0	1000.0	120.000	175.0	V	99.0	9.7	23.0	30.0	
126.840000	7.1	1000.0	120.000	165.0	V	245.0	9.7	26.4	33.5	
543.720000	16.9	1000.0	120.000	270.0	V	-2.0	19.3	19.1	36.0	
734.160000	21.0	1000.0	120.000	109.0	V	45.0	23.3	15.0	36.0	
898.680000	22.8	1000.0	120.000	270.0	H	182.0	25.2	13.2	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 12: Highest channel, 1 GHz to 12.75 GHz, vertical polarization

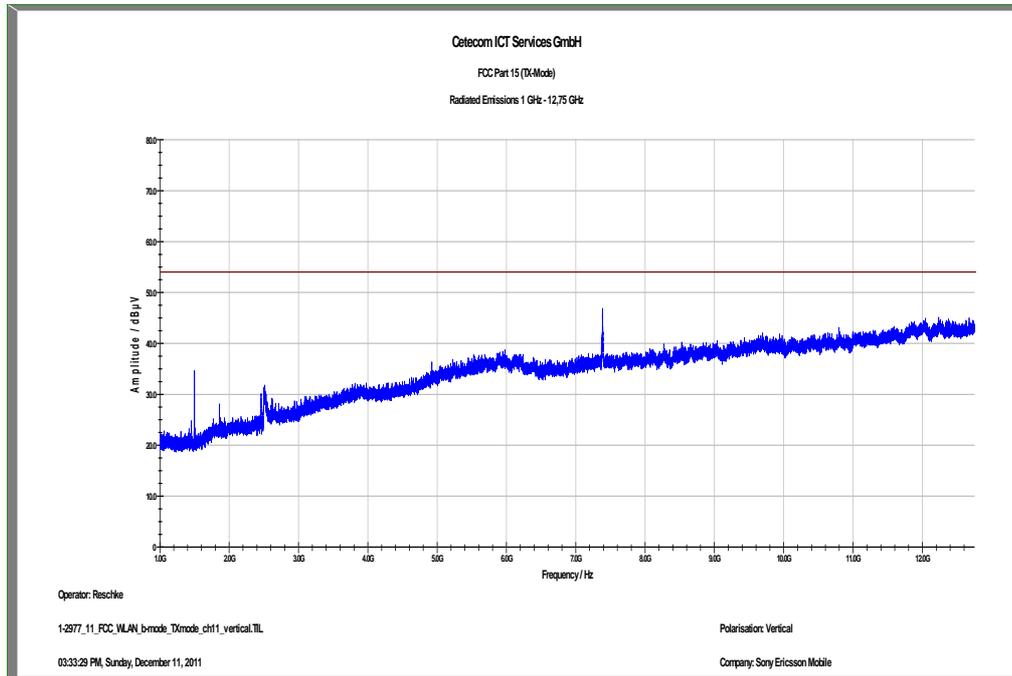

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 15: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

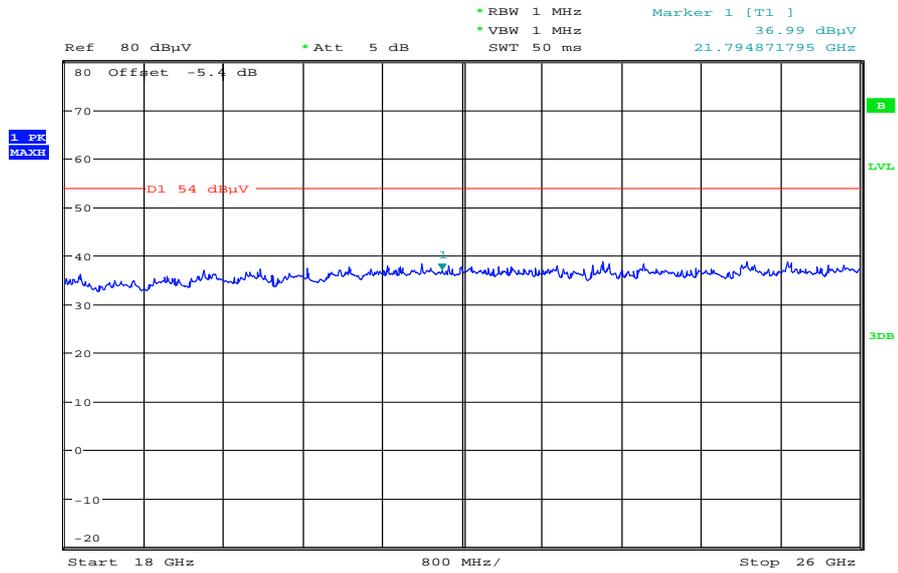

Date: 7.DEC.2011 16:07:27

Plots: OFDM / g – mode

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: charging + W-LAN mode g CH 1
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

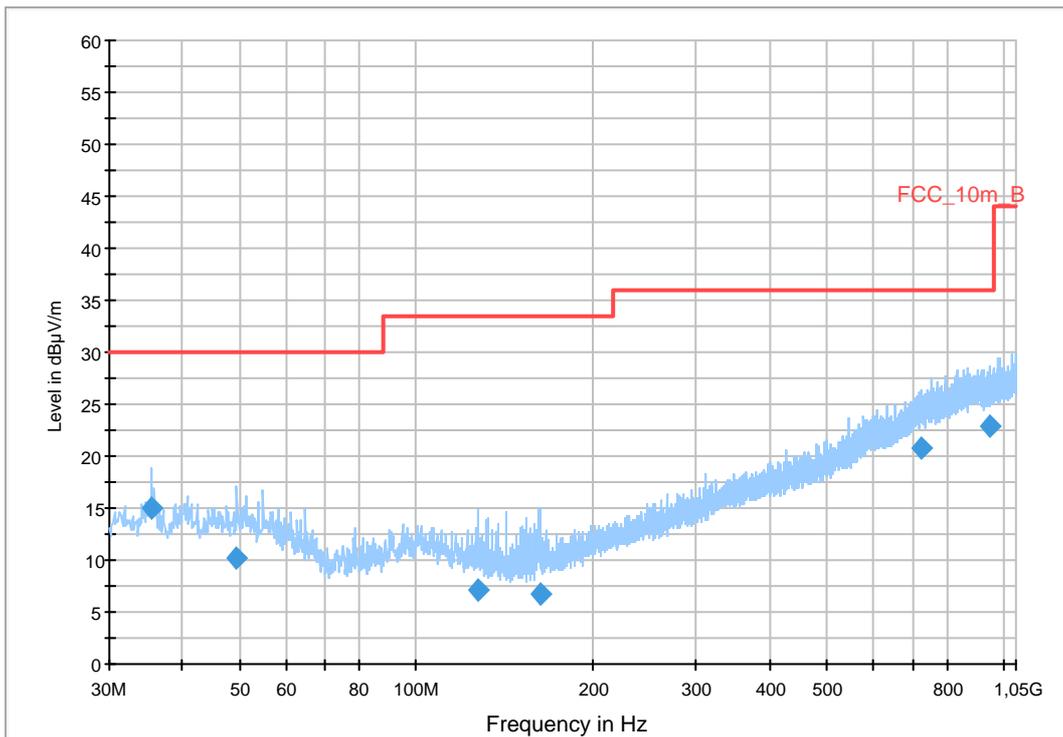

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.400000	15.0	1000.0	120.000	207.0	V	312.0	13.1	15.0	30.0	
49.440000	10.2	1000.0	120.000	137.0	V	162.0	13.4	19.8	30.0	
127.320000	7.1	1000.0	120.000	105.0	V	292.0	9.6	26.4	33.5	
162.240000	6.7	1000.0	120.000	106.0	V	-2.0	9.3	26.8	33.5	
725.640000	20.8	1000.0	120.000	112.0	H	-2.0	23.1	15.2	36.0	
948.360000	22.9	1000.0	120.000	270.0	H	162.0	25.3	13.1	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical polarization

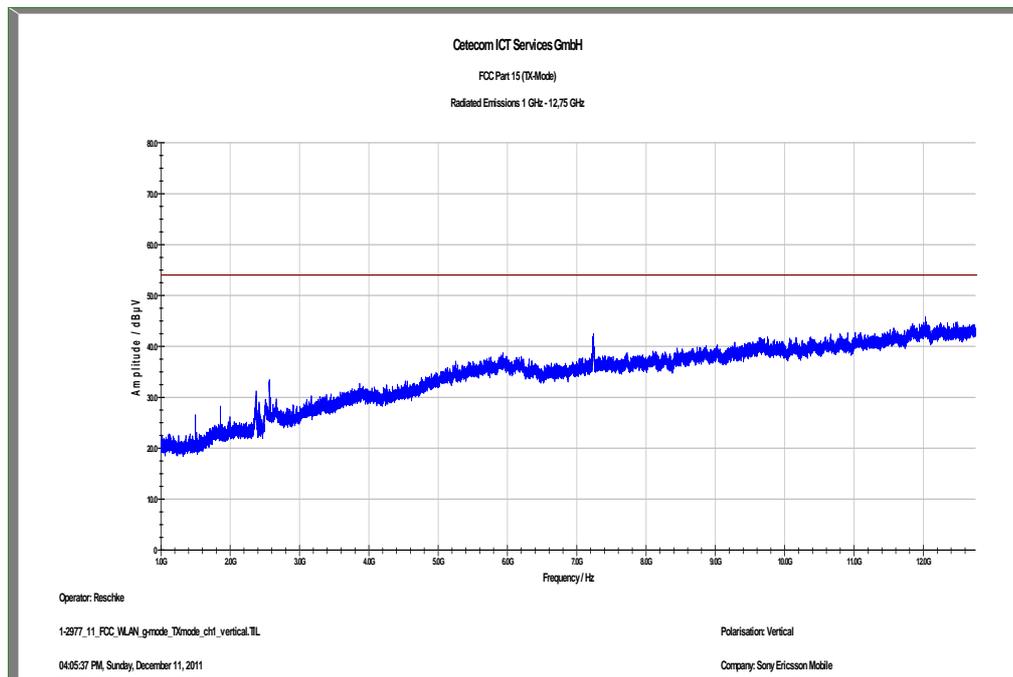


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 1 GHz to 12.75 GHz, horizontal polarization

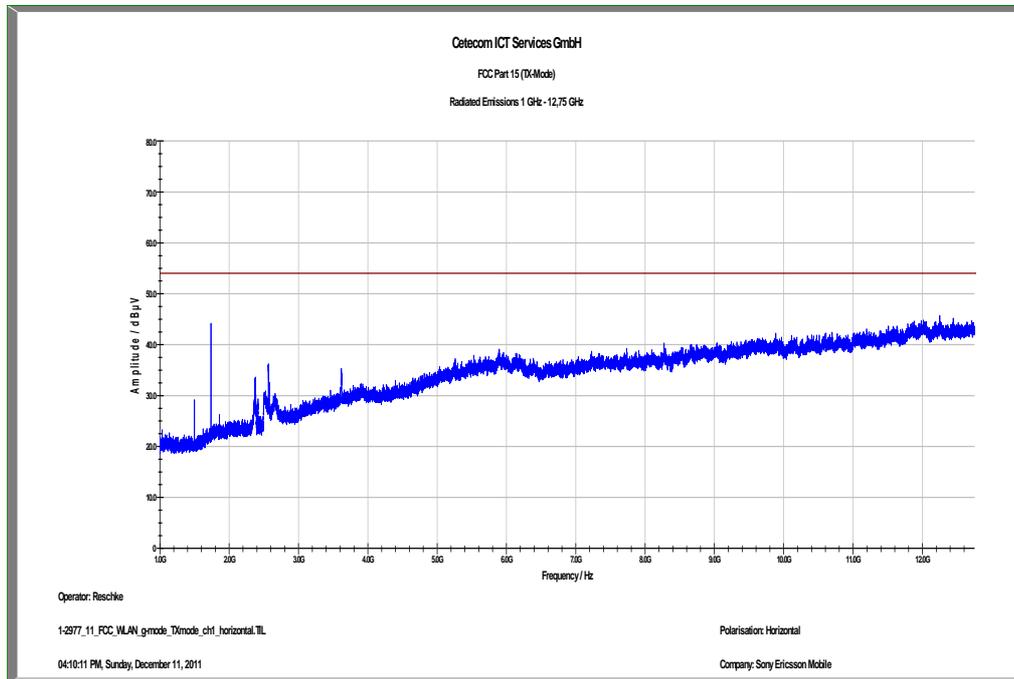


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

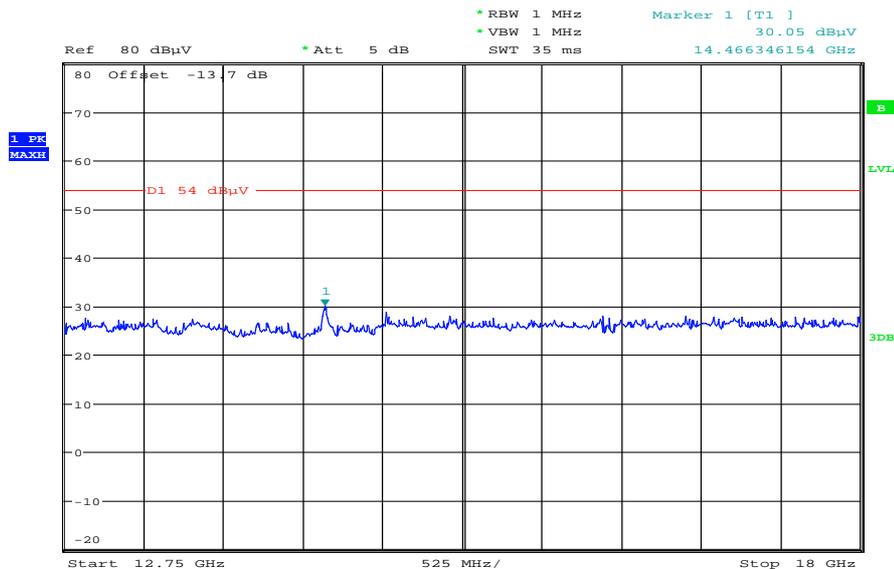

Date: 7.DEC.2011 15:18:32

Plot 5: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

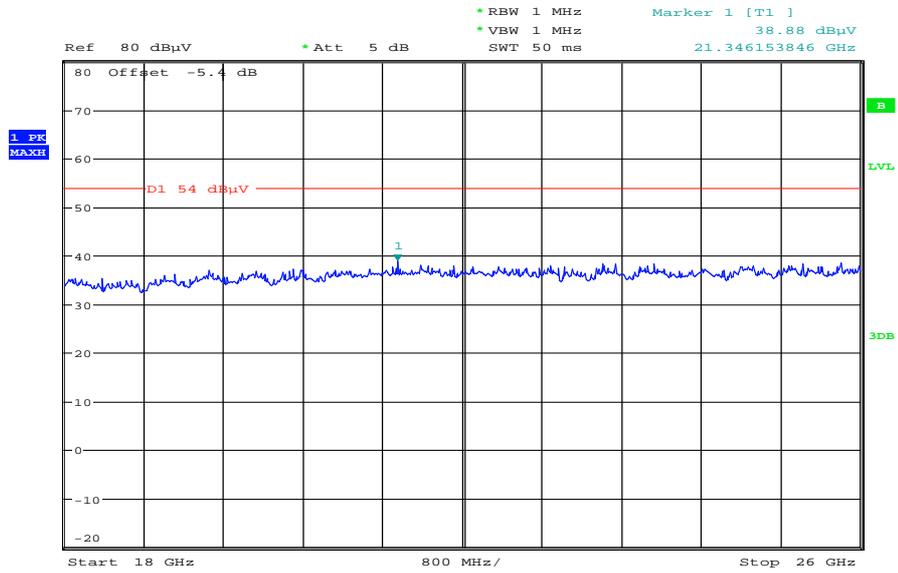

Date: 7.DEC.2011 16:09:28

Plot 6: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: charging + W-LAN mode g CH 6
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

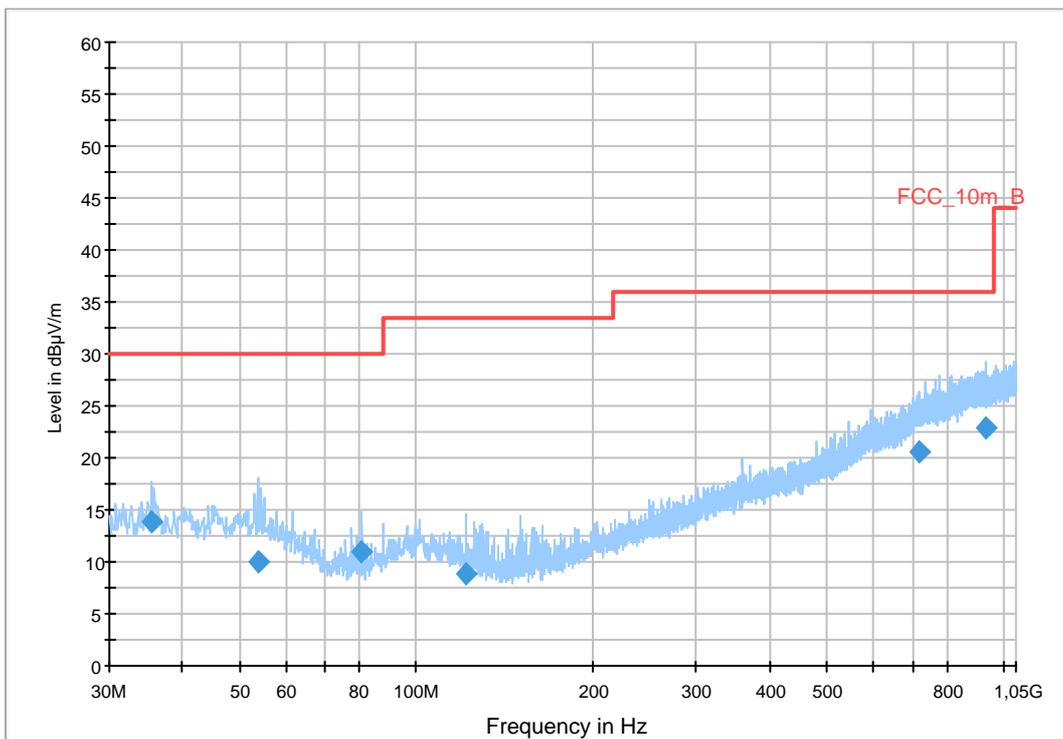

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.400000	13.9	1000.0	120.000	270.0	V	198.0	13.1	16.1	30.0	
53.640000	10.0	1000.0	120.000	106.0	V	-2.0	13.0	20.0	30.0	
80.760000	10.9	1000.0	120.000	270.0	V	84.0	9.2	19.1	30.0	
121.800000	8.9	1000.0	120.000	143.0	V	295.0	10.1	24.6	33.5	
718.080000	20.7	1000.0	120.000	270.0	V	162.0	22.9	15.4	36.0	
934.440000	22.9	1000.0	120.000	270.0	V	-2.0	25.3	13.1	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 7: Middle channel, 1 GHz to 12.75 GHz, vertical polarization

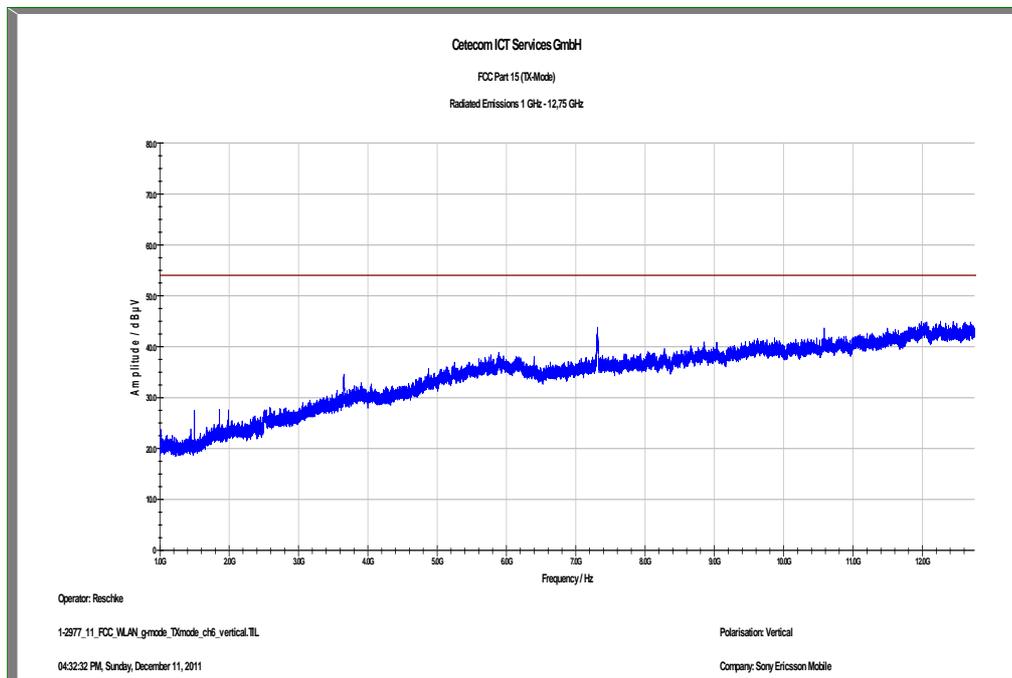

The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 10: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

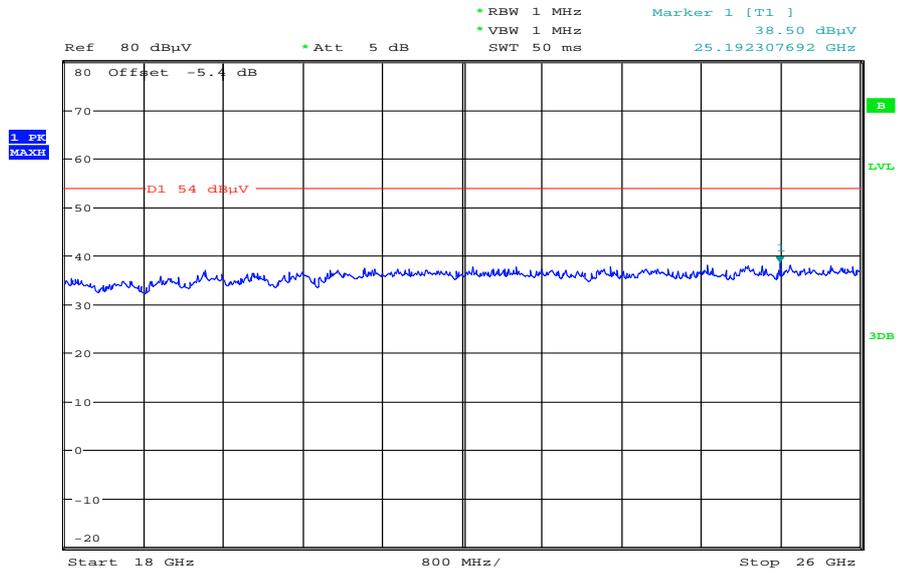

Date: 7.DEC.2011 16:11:30

Plot 11: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT:	AC Adaptor
Serial Number:	CB511VCDAY
Test Description:	FCC part 15 C class B @ 10 m
Operating Conditions:	charging + W-LAN mode g CH 11
Operator Name:	Wolsdorfer
Comment:	AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup:	Electric Field (NOS)
Receiver:	[ESCI 3]
Level Unit:	dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

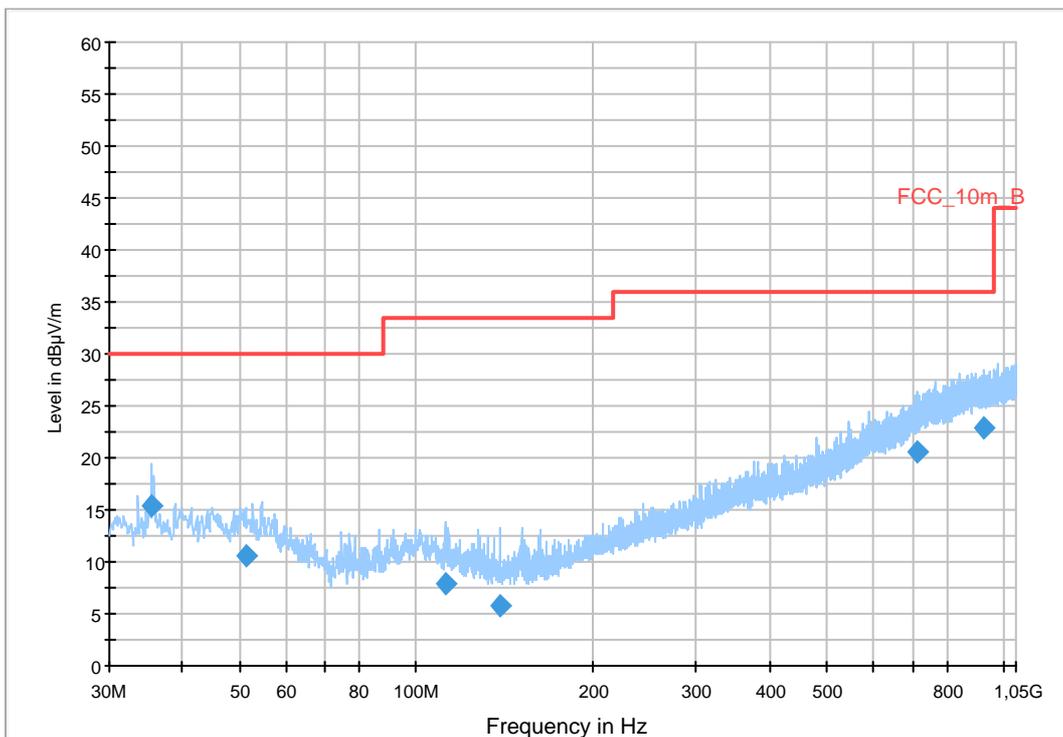

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.400000	15.4	1000.0	120.000	216.0	V	271.0	13.1	14.6	30.0	
51.240000	10.6	1000.0	120.000	194.0	H	254.0	13.2	19.4	30.0	
111.840000	7.9	1000.0	120.000	270.0	V	246.0	10.9	25.6	33.5	
138.840000	5.7	1000.0	120.000	270.0	V	254.0	8.7	27.8	33.5	
714.960000	20.6	1000.0	120.000	270.0	V	23.0	22.9	15.4	36.0	
928.920000	22.8	1000.0	120.000	243.0	H	23.0	25.3	13.2	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 12: Highest channel, 1 GHz to 12.75 GHz, vertical polarization

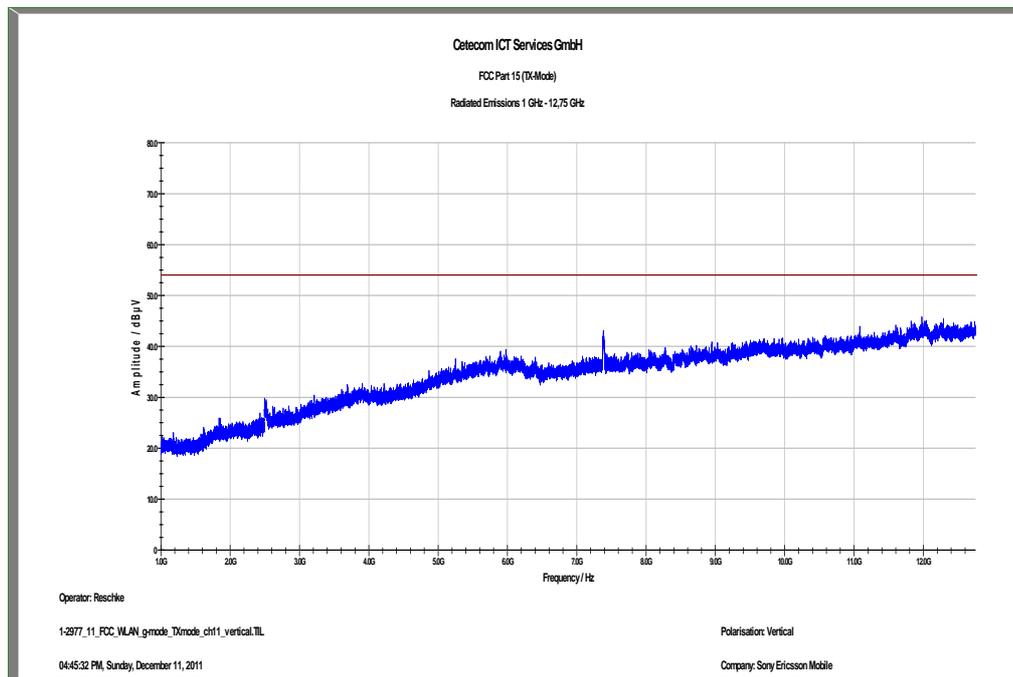


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 13: Highest channel, 1 GHz to 12.75 GHz, horizontal polarization

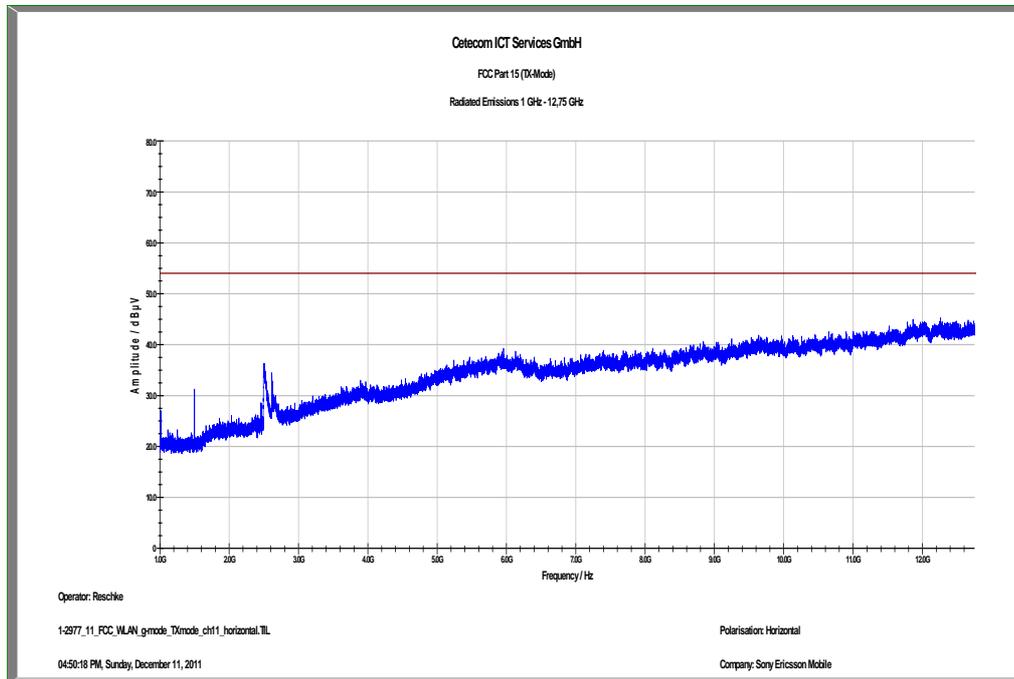


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 14: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

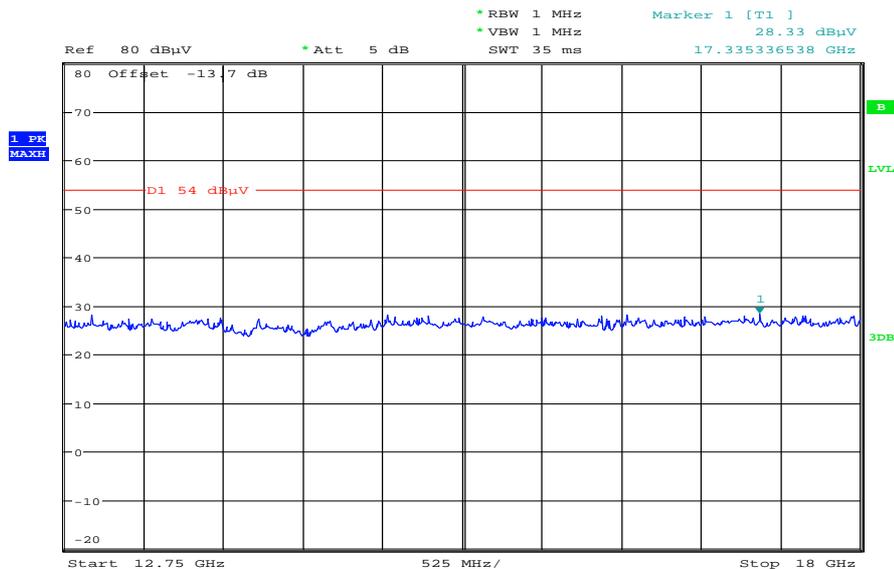

Date: 7.DEC.2011 15:22:26

Plot 15: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

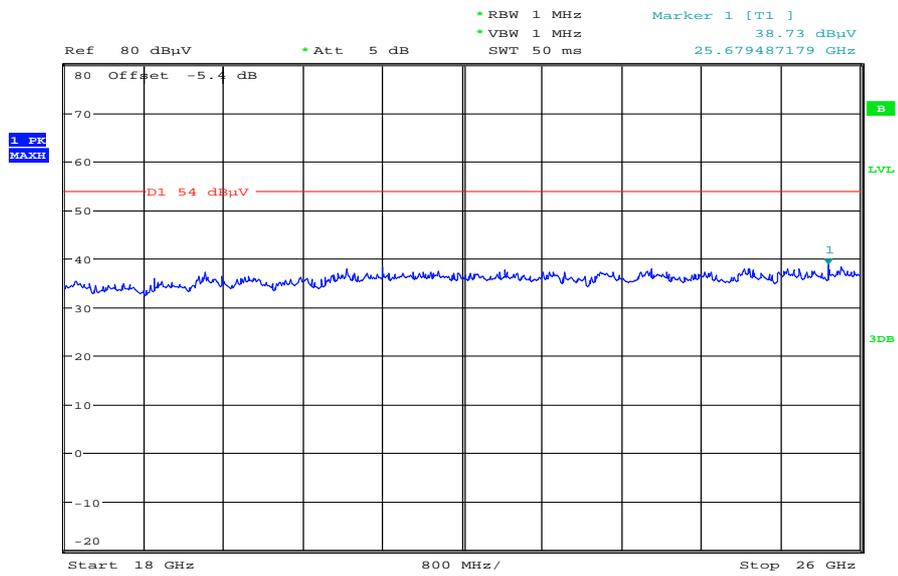

Date: 7.DEC.2011 16:13:02

Plots: OFDM / n – mode

Plot 1: Lowest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: charging + W-LAN mode n CH 1
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

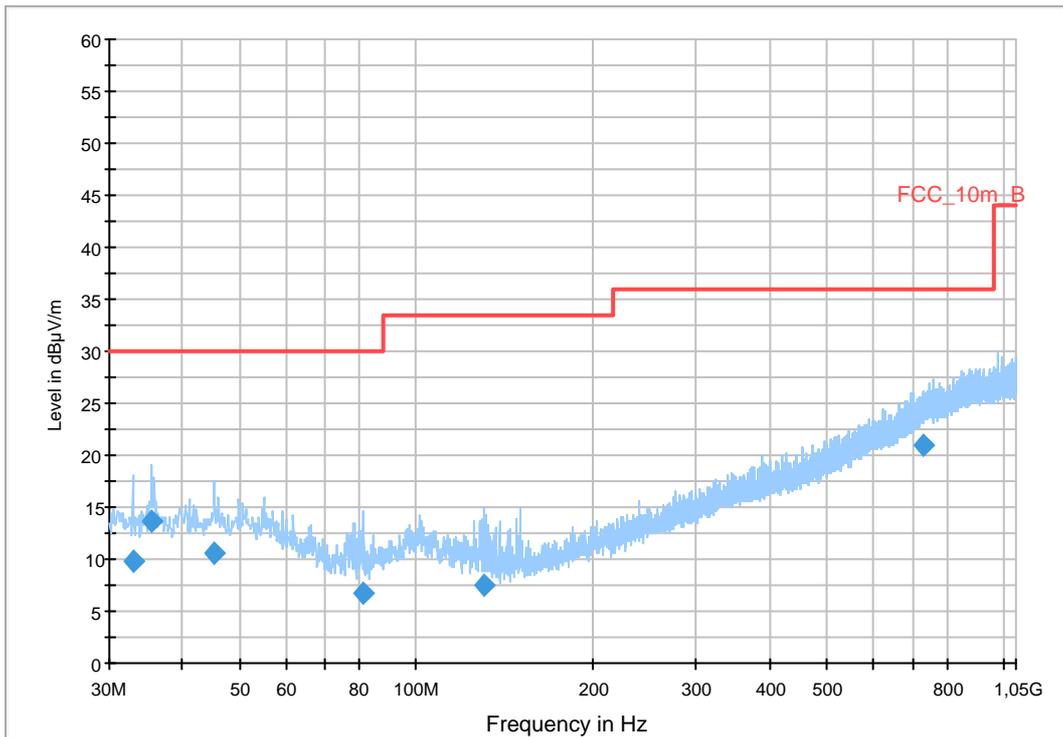

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
32.880000	9.8	1000.0	120.000	270.0	V	22.0	12.8	20.2	30.0	
35.400000	13.7	1000.0	120.000	270.0	V	256.0	13.1	16.3	30.0	
45.240000	10.6	1000.0	120.000	232.0	V	54.0	13.3	19.4	30.0	
81.120000	6.8	1000.0	120.000	123.0	V	103.0	9.2	23.2	30.0	
130.800000	7.5	1000.0	120.000	105.0	V	288.0	9.3	26.0	33.5	
731.640000	21.0	1000.0	120.000	270.0	H	46.0	23.2	15.0	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESC1 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 2: Lowest channel, 1 GHz to 12.75 GHz, vertical polarization

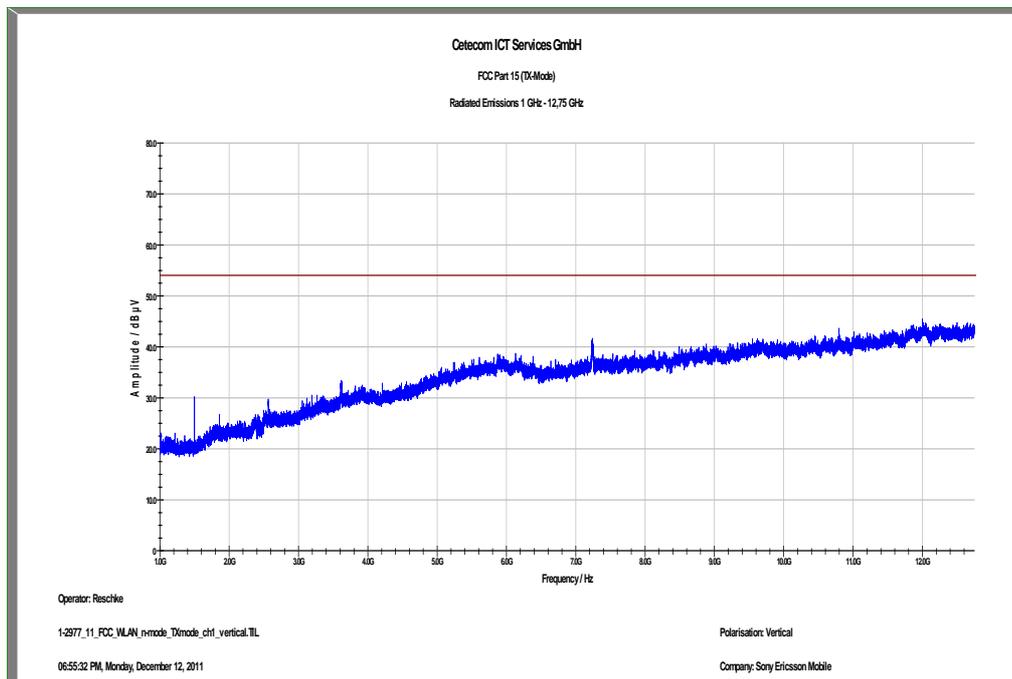


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Lowest channel, 1 GHz to 12.75 GHz, horizontal polarization

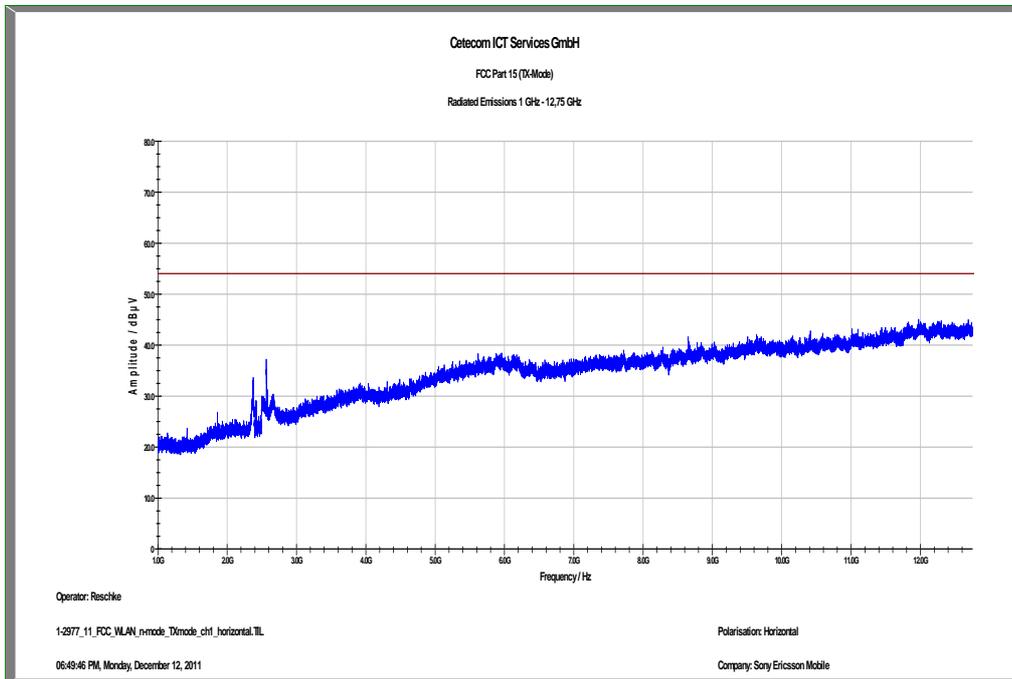


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 4: Lowest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

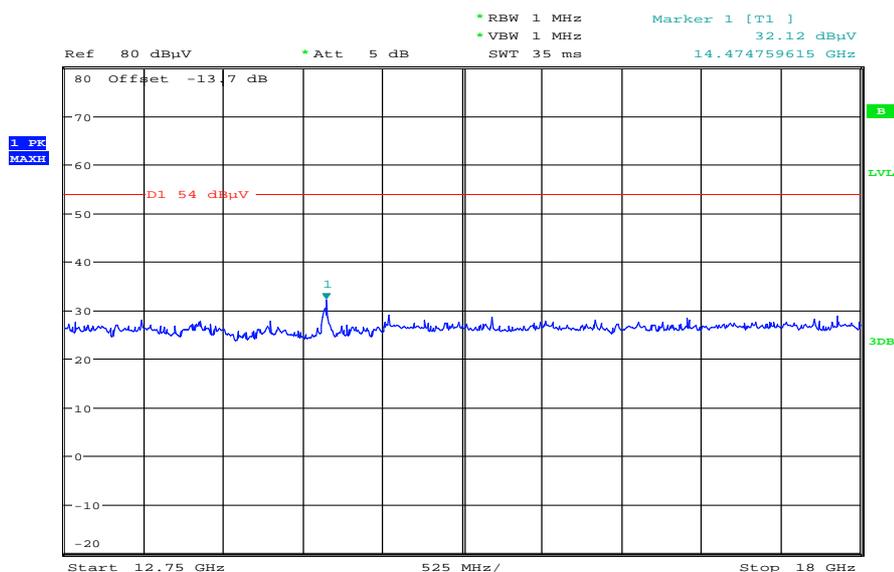

Date: 7.DEC.2011 15:26:33

Plot 5: Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

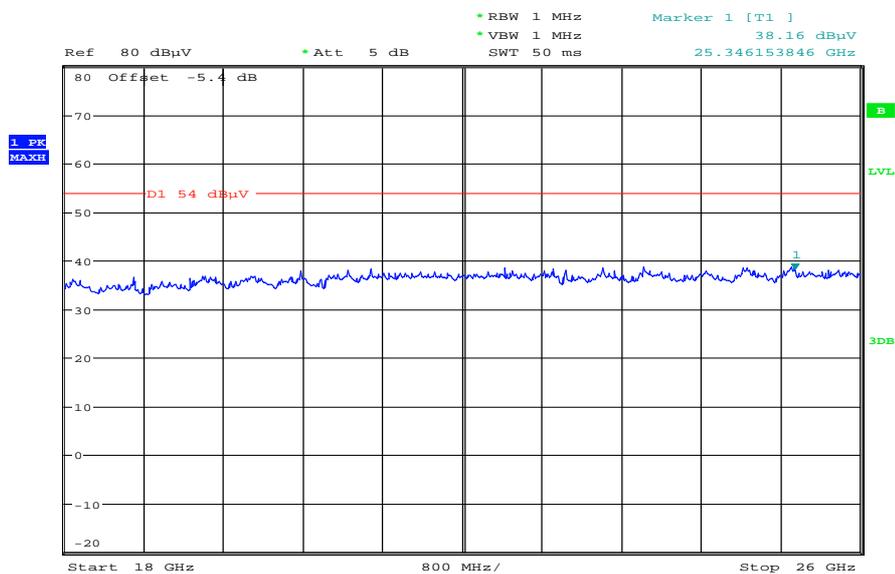

Date: 7.DEC.2011 16:18:38

Plot 6: Middle channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: charging + W-LAN mode n CH 6
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

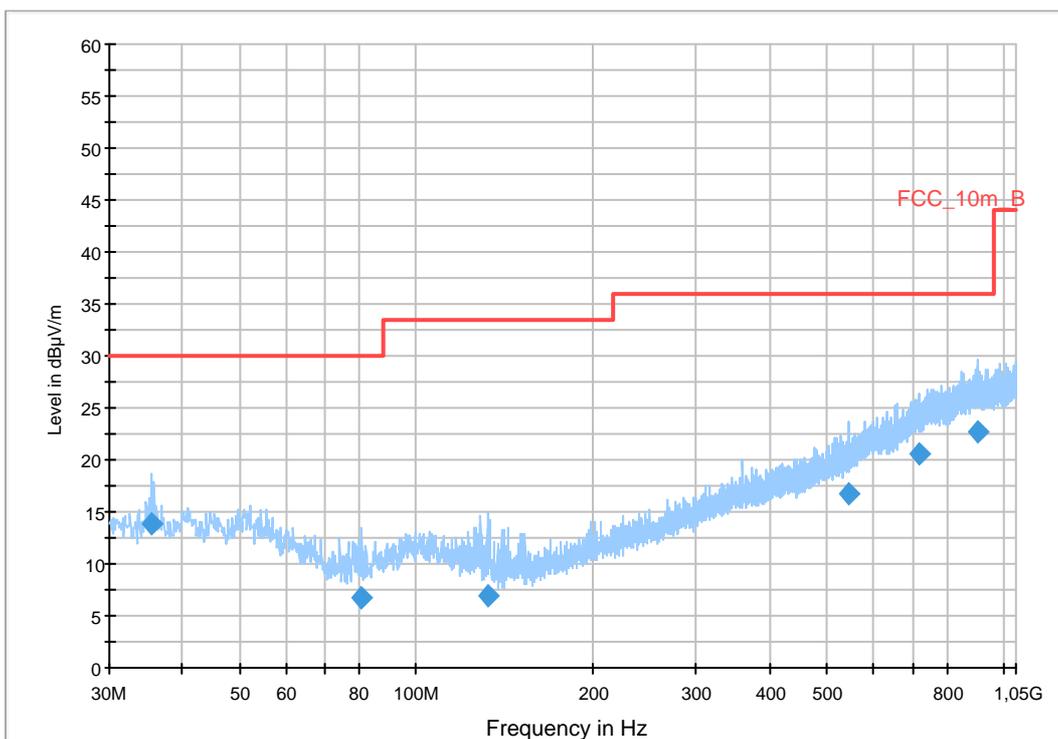

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.400000	13.8	1000.0	120.000	270.0	V	29.0	13.1	16.2	30.0	
80.760000	6.7	1000.0	120.000	270.0	V	-2.0	9.2	23.3	30.0	
132.720000	6.9	1000.0	120.000	132.0	V	321.0	9.2	26.6	33.5	
546.480000	16.7	1000.0	120.000	270.0	H	153.0	19.3	19.3	36.0	
717.240000	20.6	1000.0	120.000	155.0	V	45.0	22.9	15.4	36.0	
904.560000	22.8	1000.0	120.000	98.0	H	29.0	25.2	13.2	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESC1 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 7: Middle channel, 1 GHz to 12.75 GHz, vertical polarization

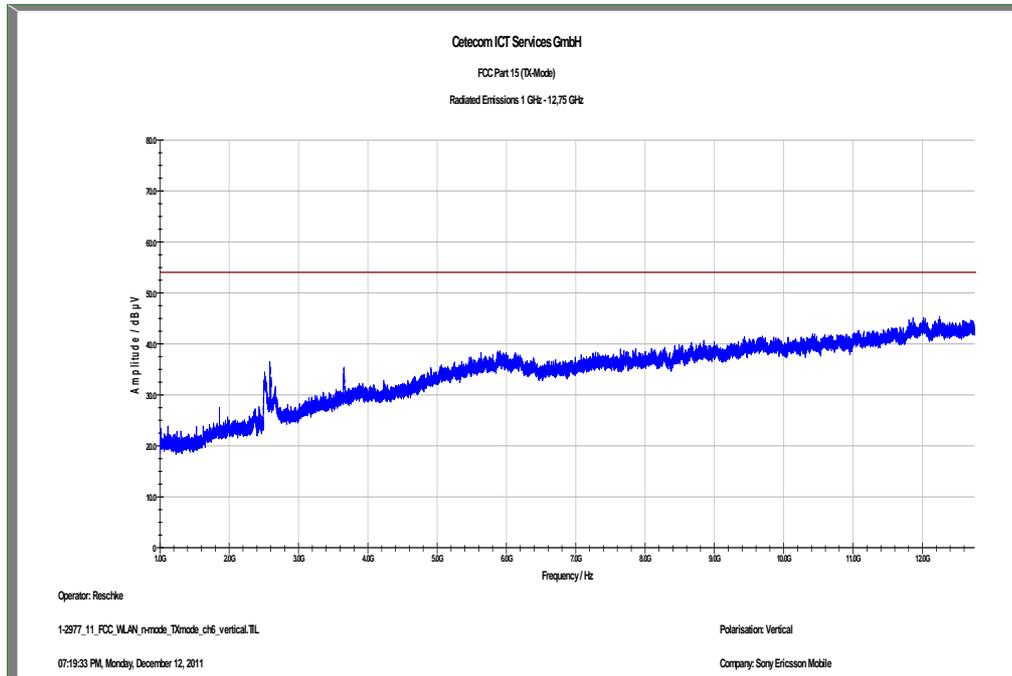


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 8: Middle channel, 1 GHz to 12.75 GHz, horizontal polarization

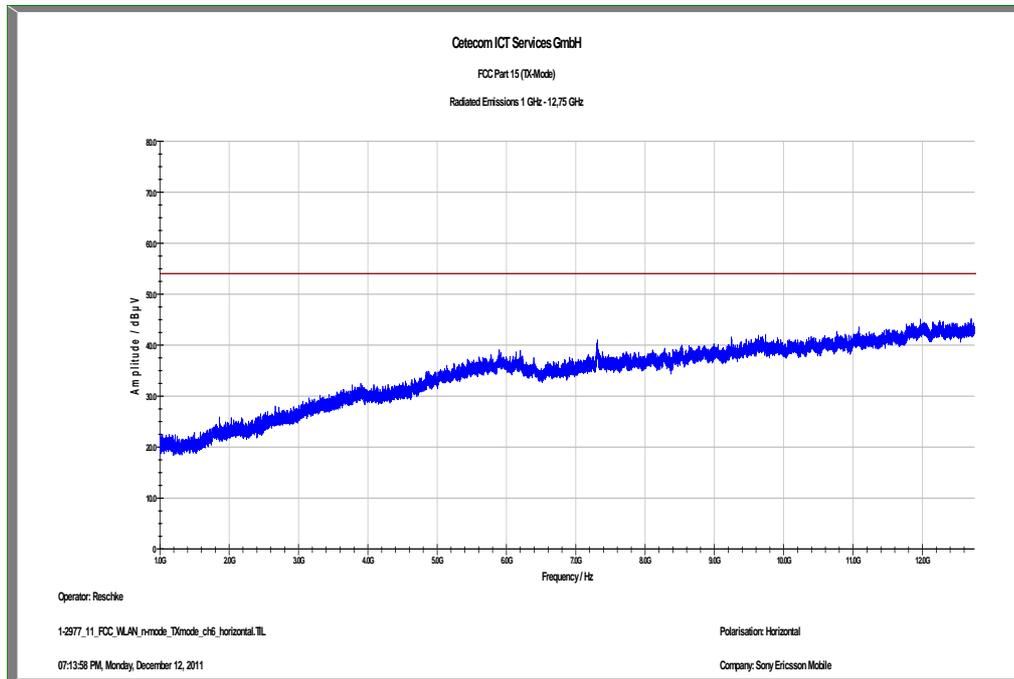


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 9: Middle channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

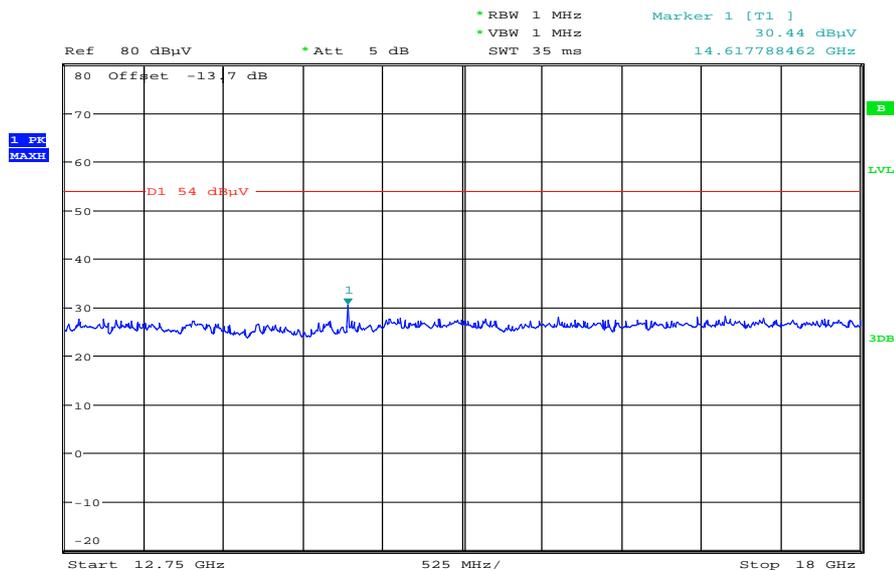

Date: 7.DEC.2011 15:30:54

Plot 10: Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

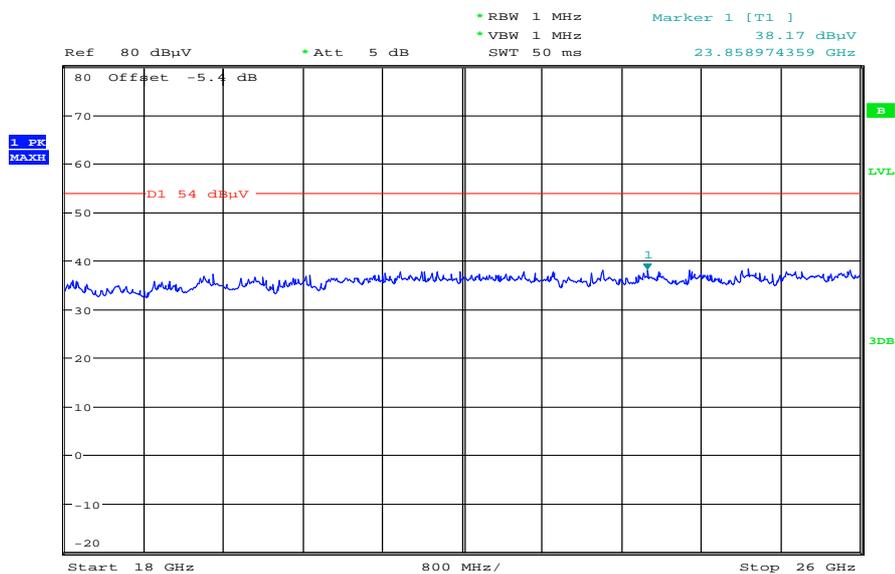

Date: 7.DEC.2011 16:20:21

Plot 11: Highest channel, 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: charging + W-LAN mode n CH 11
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

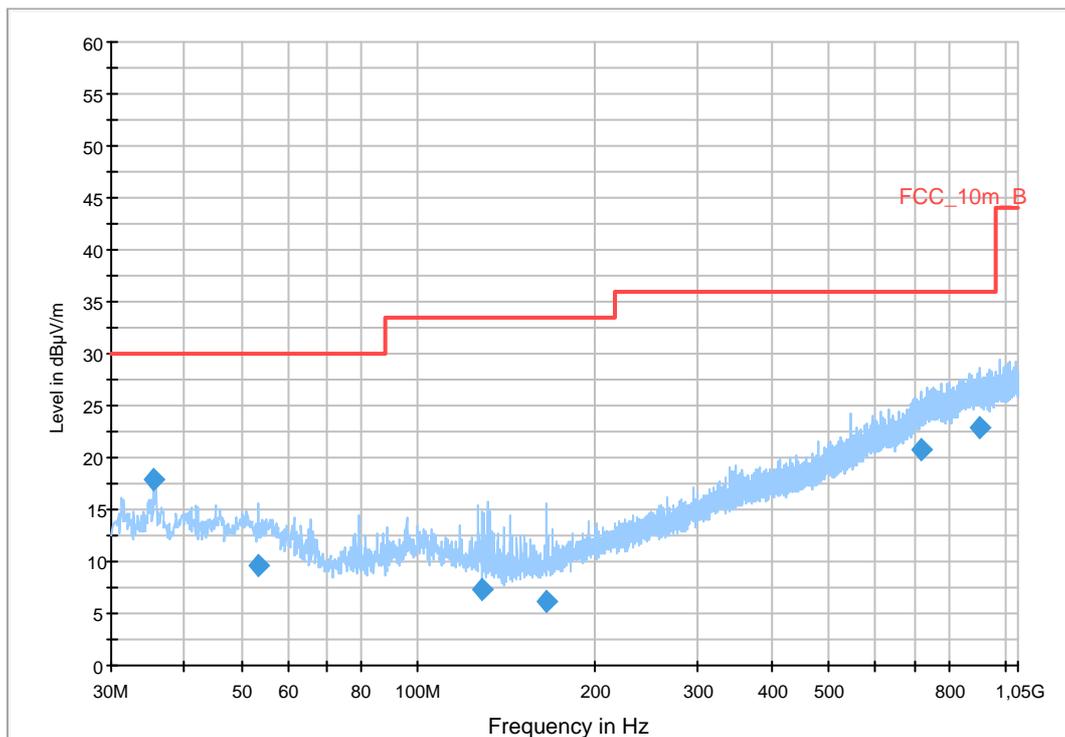

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.400000	17.9	1000.0	120.000	98.0	V	10.0	13.1	12.1	30.0	
53.400000	9.5	1000.0	120.000	270.0	V	253.0	13.0	20.5	30.0	
128.280000	7.3	1000.0	120.000	98.0	V	253.0	9.5	26.2	33.5	
165.120000	6.2	1000.0	120.000	155.0	V	52.0	9.5	27.3	33.5	
721.320000	20.7	1000.0	120.000	124.0	H	179.0	23.0	15.3	36.0	
907.200000	22.8	1000.0	120.000	250.0	V	159.0	25.2	13.2	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESCI 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12


EMC 32 Version 8.10.00

Plot 12: Highest channel, 1 GHz to 12.75 GHz, vertical polarization

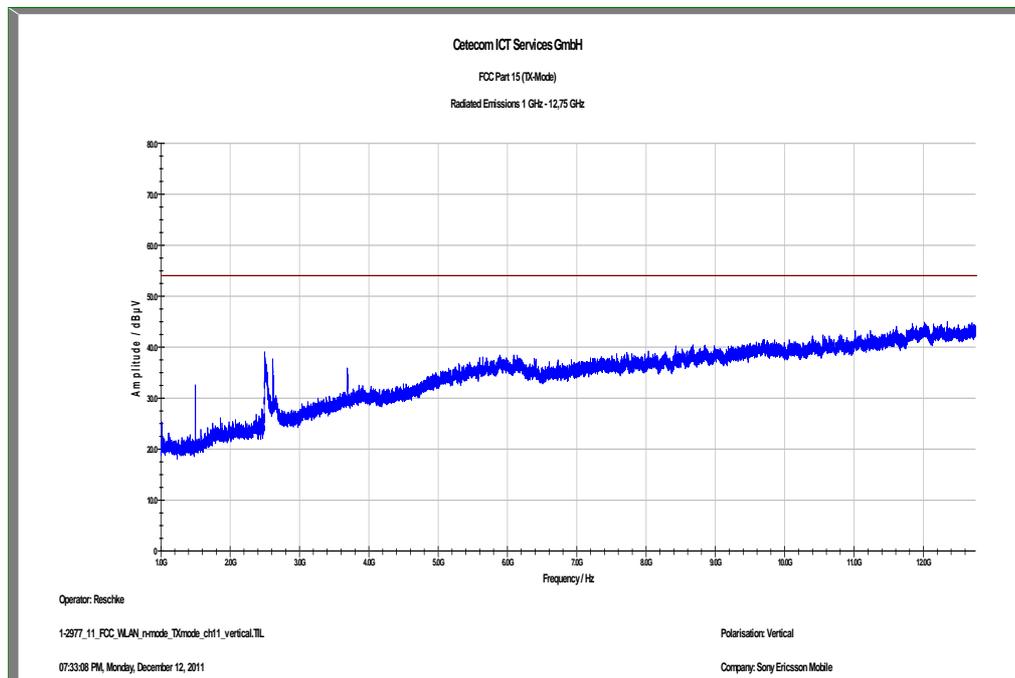


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 13: Highest channel, 1 GHz to 12.75 GHz, horizontal polarization

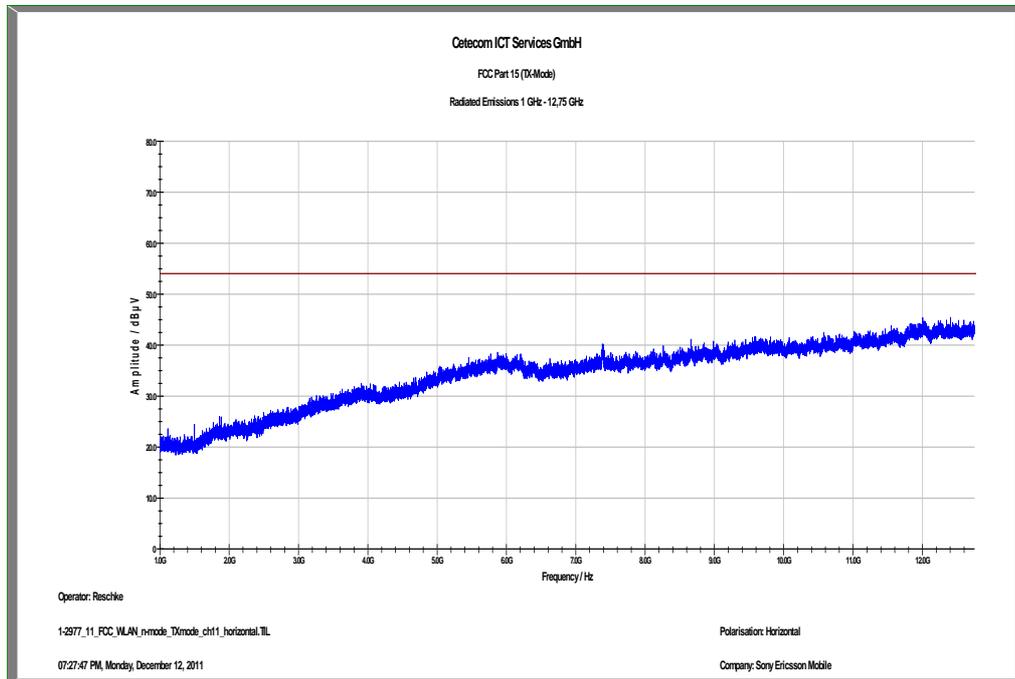


The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 14: Highest channel, 12.75 GHz to 18 GHz, vertical & horizontal polarization

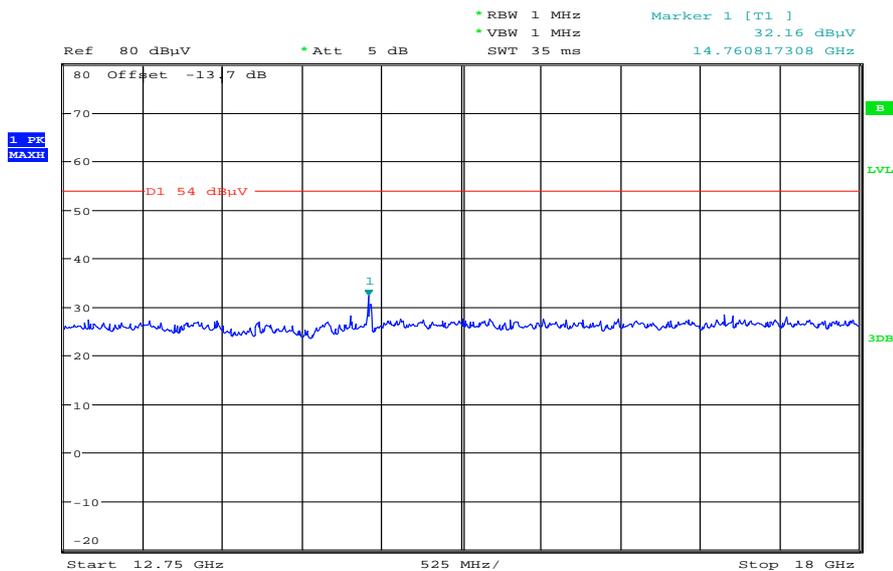

Date: 7.DEC.2011 15:35:28

Plot 15: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

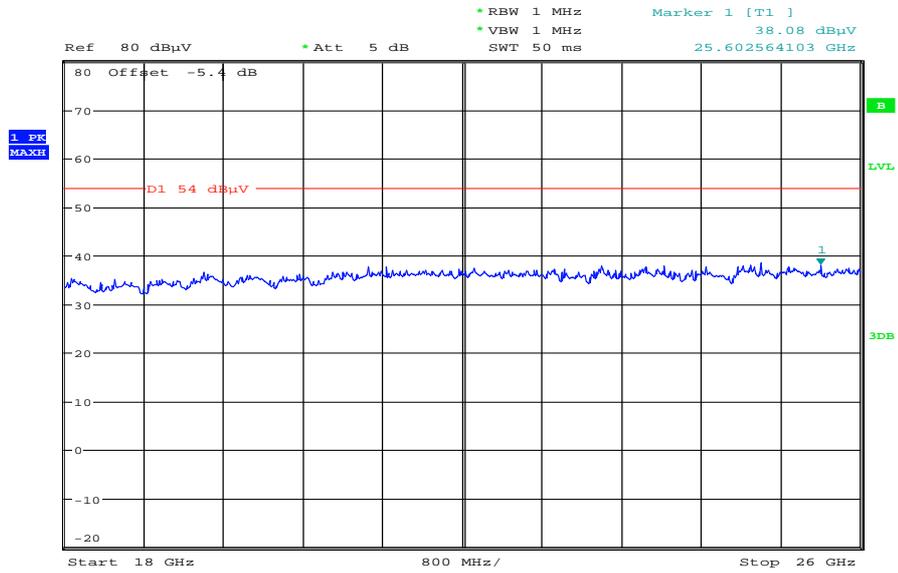

Date: 7.DEC.2011 16:22:05

9.11 RX spurious emissions radiated

Description:

Measurement of the radiated spurious emissions in idle/receive mode. The results are valid for both modes.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	Sweep: 100 kHz Remeasurement: 10 Hz
Resolution bandwidth:	F < 1 GHz: 100 kHz F > 1 GHz: 1 MHz
Span:	30 MHz to 26 GHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.109		RSS Gen, Issue 2, 4.10	
RX Spurious Emissions Radiated			
Frequency (MHz)	Field Strength (dB μ V/m)	Measurement distance	
30 - 88	30.0	10	
88 – 216	33.5	10	
216 – 960	36.0	10	
Above 960	54.0	3	

Results:

RX Spurious Emissions Radiated [dB μ V/m]		
F [MHz]	Detector	Level [dB μ V/m]
For emissions below 1 GHz, please take a look at the table below the 1 GHz plot.		
1324	1 MHz / 1 MHz PP	34.48
1501	1 MHz / 1 MHz PP	38.89
2473	1 MHz / 1 MHz PP	40.08
For emissions above 12.75 GHz, please take a look at the plots.		
Measurement uncertainty	± 3 dB	

Result: The measurement is passed.

Plots: RX / Idle – mode

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization

Common Information


EUT: AAD-3880120-AV
 Serial Number: CB511VCDAY
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: charging + W-LAN idle
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC_10m(B)_5

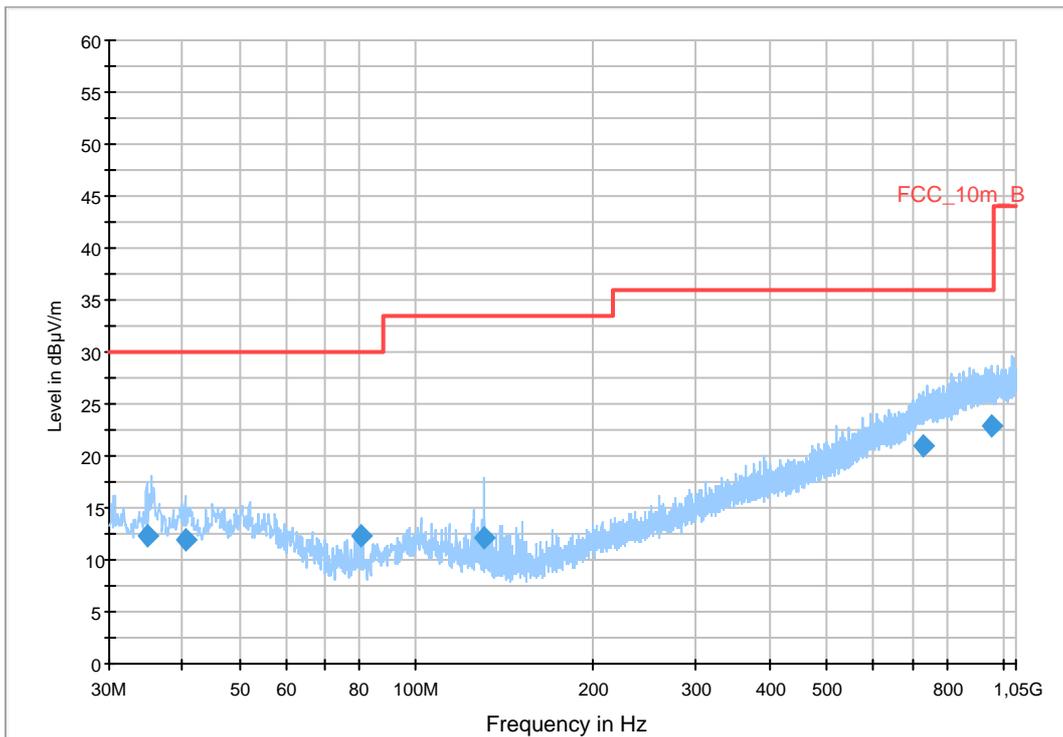

Final Result 1


Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
34.800000	12.4	1000.0	120.000	270.0	V	16.0	13.0	17.6	30.0	
40.440000	11.9	1000.0	120.000	257.0	V	24.0	13.4	18.1	30.0	
80.280000	12.3	1000.0	120.000	258.0	V	330.0	9.1	17.7	30.0	
130.680000	12.1	1000.0	120.000	156.0	V	278.0	9.4	21.4	33.5	
732.000000	21.0	1000.0	120.000	270.0	H	175.0	23.2	15.0	36.0	
953.520000	22.9	1000.0	120.000	174.0	V	88.0	25.4	13.1	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]


Subrange 1	
Frequency Range:	30 MHz - 2 GHz
Receiver:	Receiver [ESC1 3] @ GPIB0 (ADR 20), SN 100083/003, FW 4.42
Signal Path:	without Notch FW 1.0
Antenna:	VULB 9163 SN 9163-295, FW --- Correction Table (vertical): VULP6113 Correction Table (horizontal): VULP6113 Correction Table (vertical): Cable_EN_1GHz (1005) Correction Table (horizontal): Cable_EN_1GHz (1005)
Antenna Tower:	Tower [EMCO 2090 Antenna Tower] @ GPIB0 (ADR 8), FW REV 3.12
Turntable:	Turntable [EMCO Turntable] @ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.10.00


Plot 2: 1 GHz to 12.75 GHz, vertical polarization

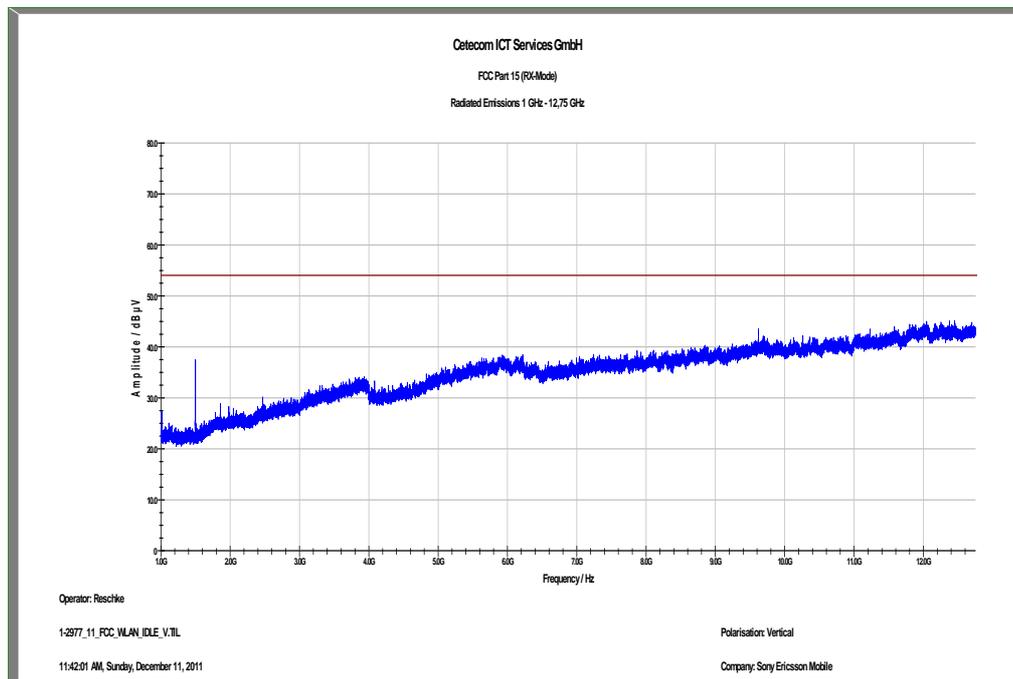

Plot 3: 1 GHz to 12.75 GHz, horizontal polarization

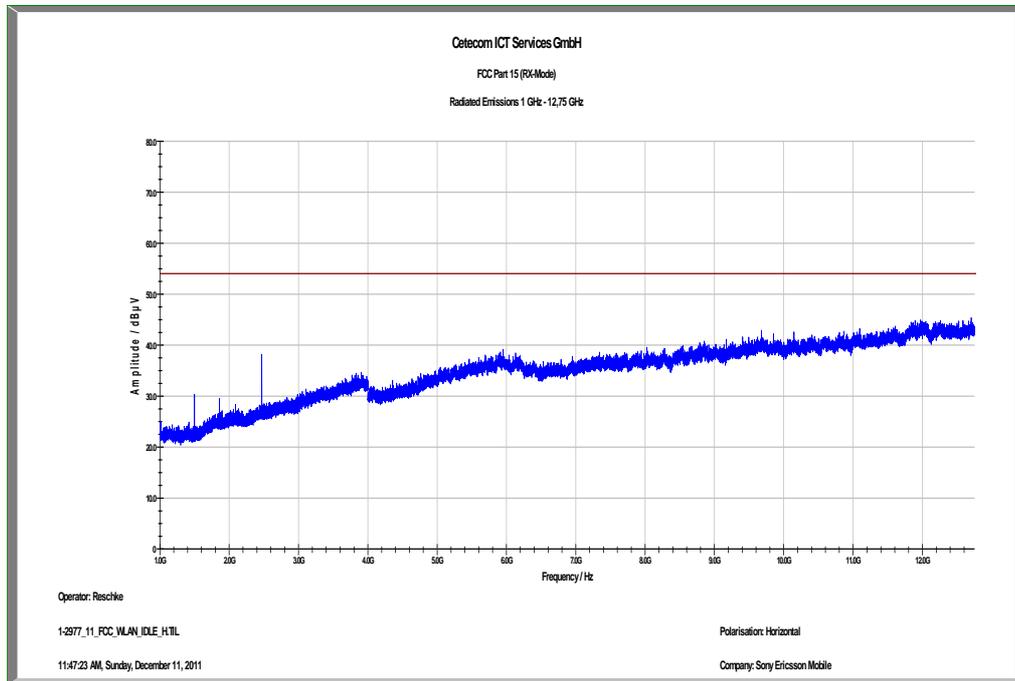


Plot 4: 12.75 GHz to 18 GHz, vertical & horizontal polarization

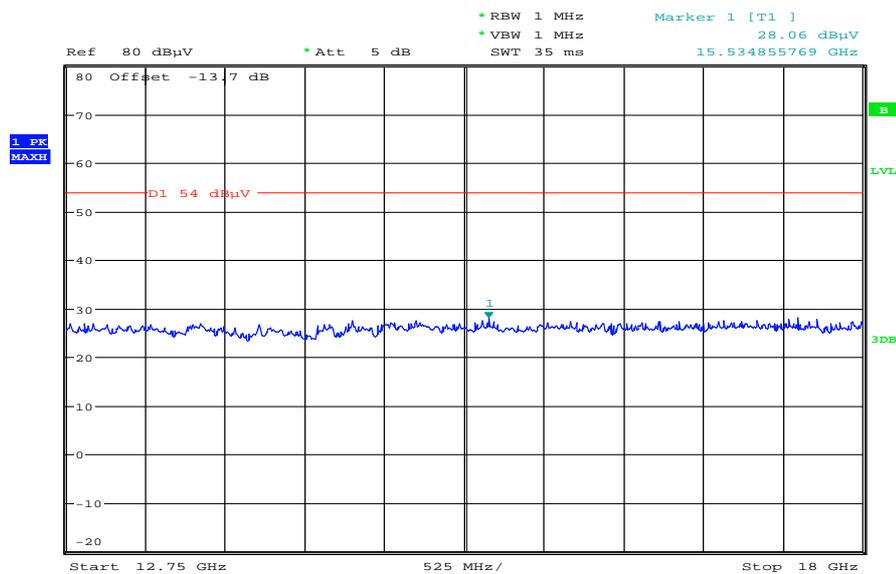

Date: 7.DEC.2011 15:58:30

Plot 5: 18 GHz to 26 GHz, vertical & horizontal polarization

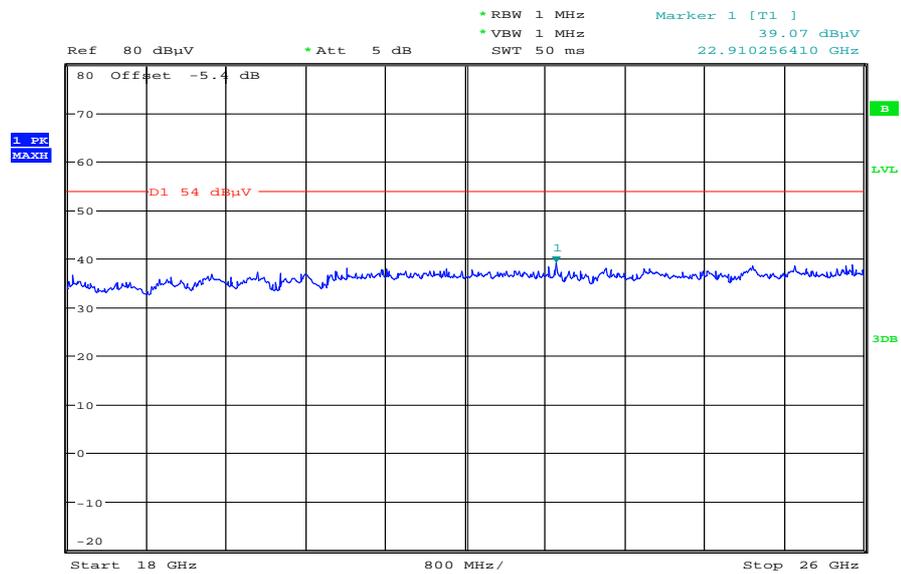

Date: 7.DEC.2011 15:52:06

9.12 TX spurious emissions radiated < 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is representative for all channels and modes. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector:	Peak / Quasi Peak
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.209(a)		RSS –Gen	
TX Spurious Emissions Radiated < 30 MHz			
Frequency (MHz)	Field Strength (dBµV/m)	Measurement distance	
0.009 – 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	


Results:

TX Spurious Emissions Radiated < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No critical peaks found.		
Measurement uncertainty	± 3 dB	


Result: The measurement is passed.

Plots: DSSS / b – mode


Plot 1: Lowest channel, 9 kHz to 30 MHz

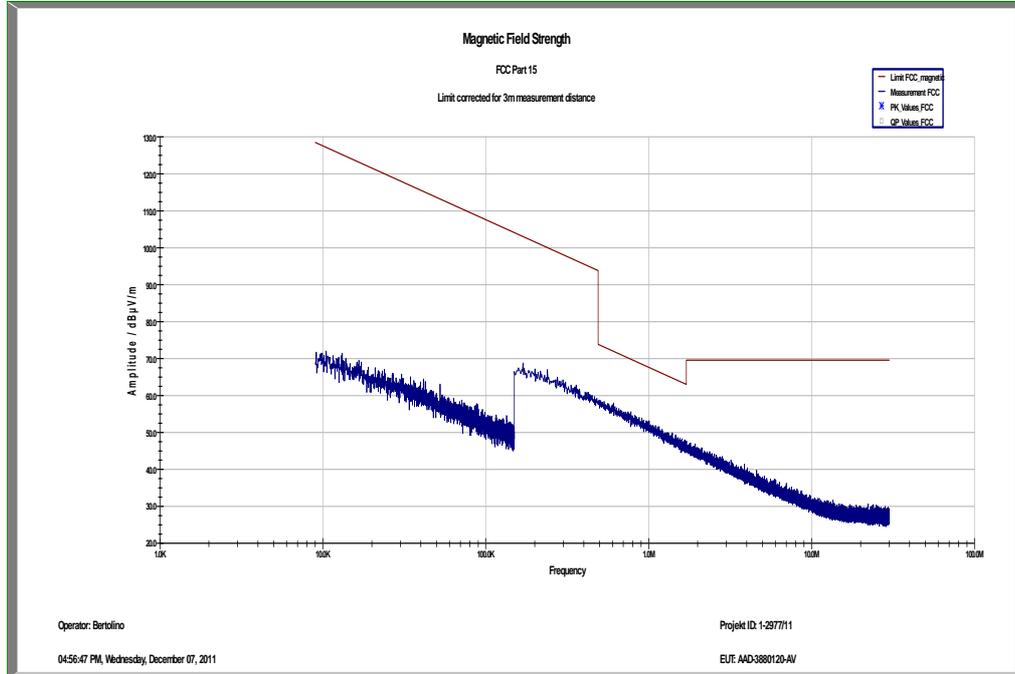

Plot 2: Middle channel, 9 kHz to 30 MHz

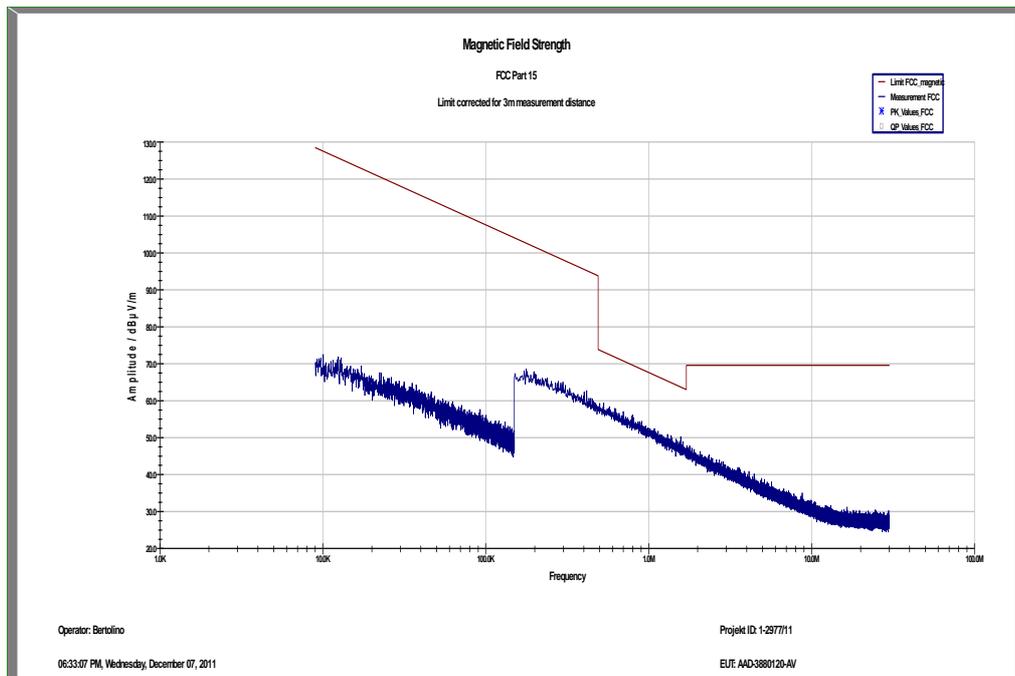


Plot 3: Highest channel, 9 kHz to 30 MHz

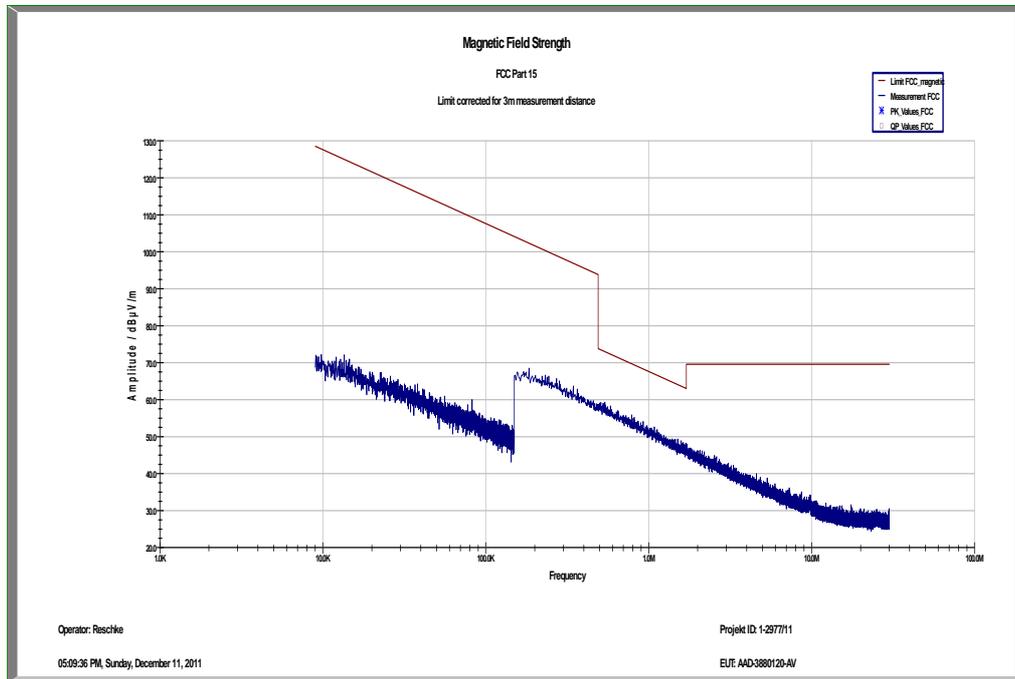


Plots: OFDM / g – mode


Plot 1: Lowest channel, 9 kHz to 30 MHz

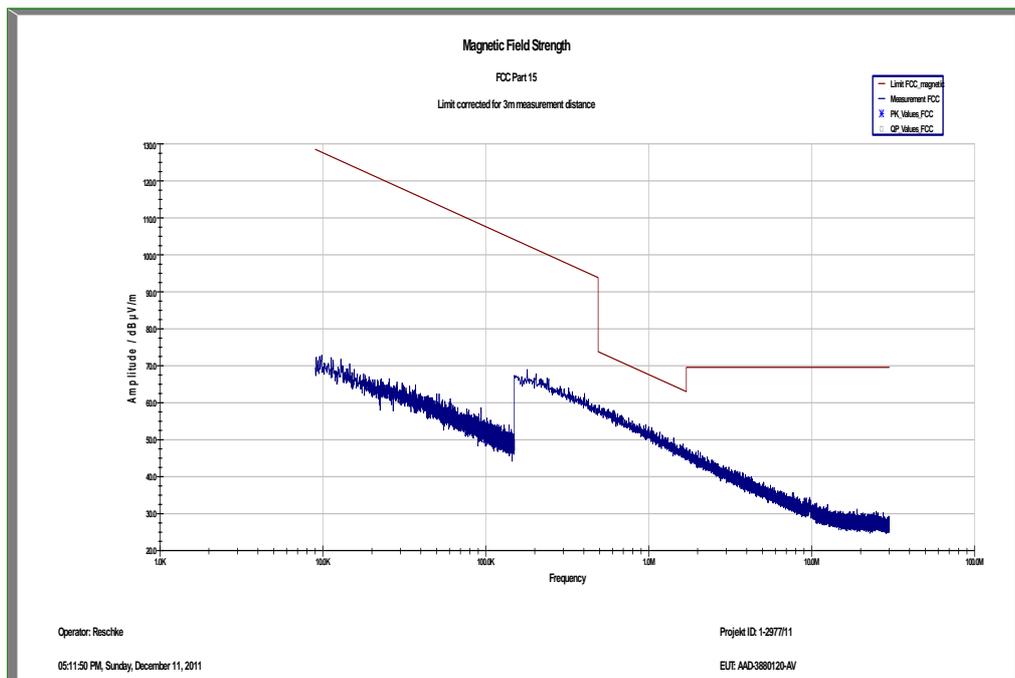

Plot 2: Middle channel, 9 kHz to 30 MHz

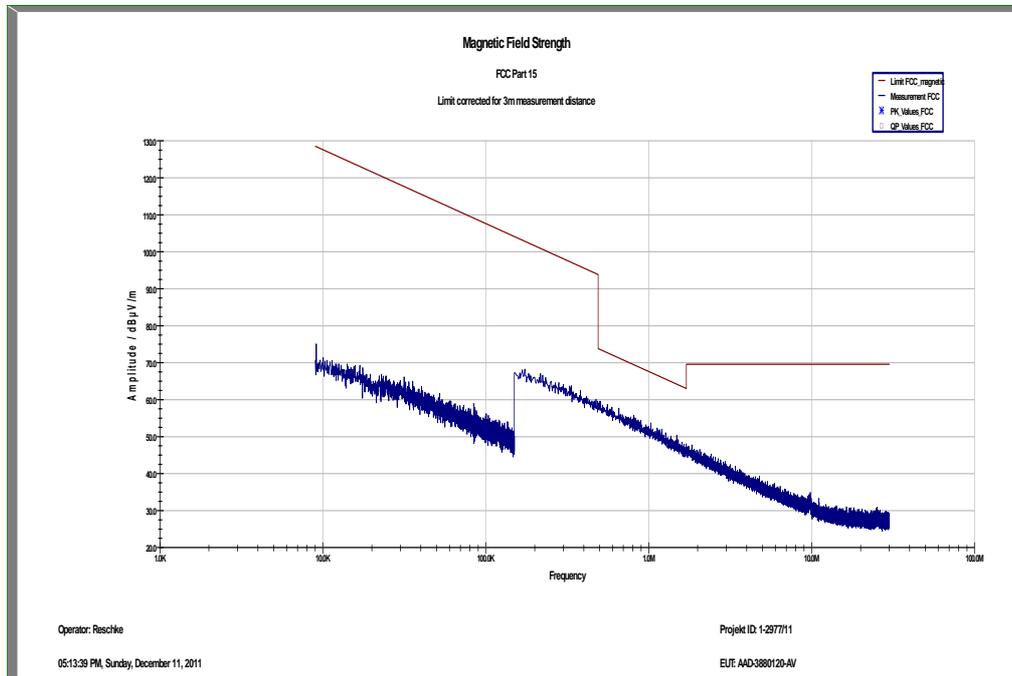


Plot 3: Highest channel, 9 kHz to 30 MHz

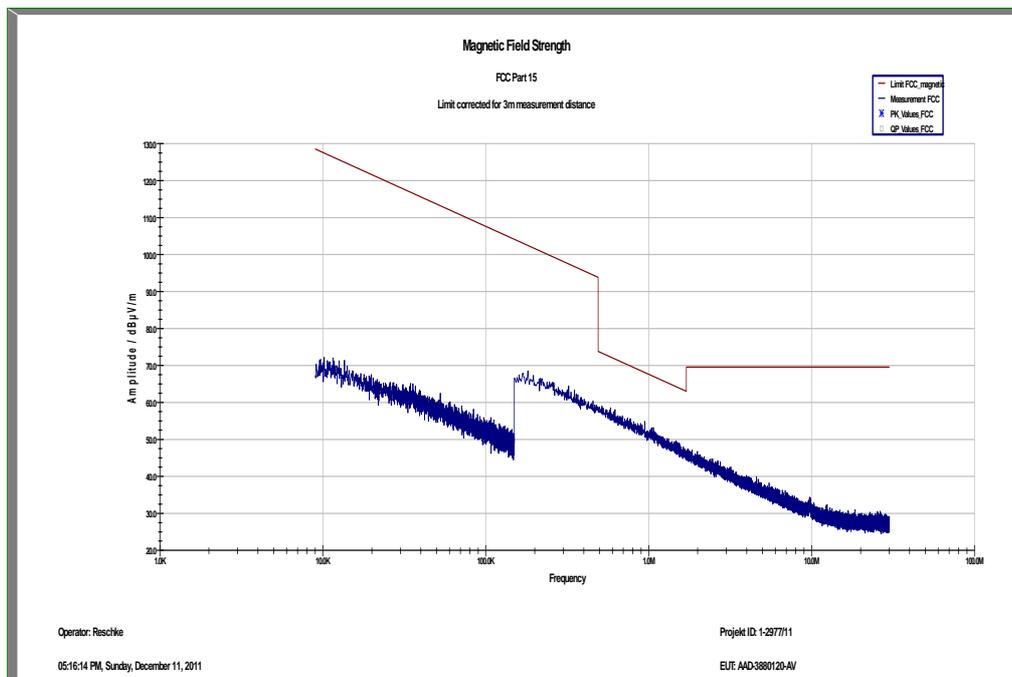


Plots: OFDM / n – mode


Plot 1: Lowest channel, 9 kHz to 30 MHz

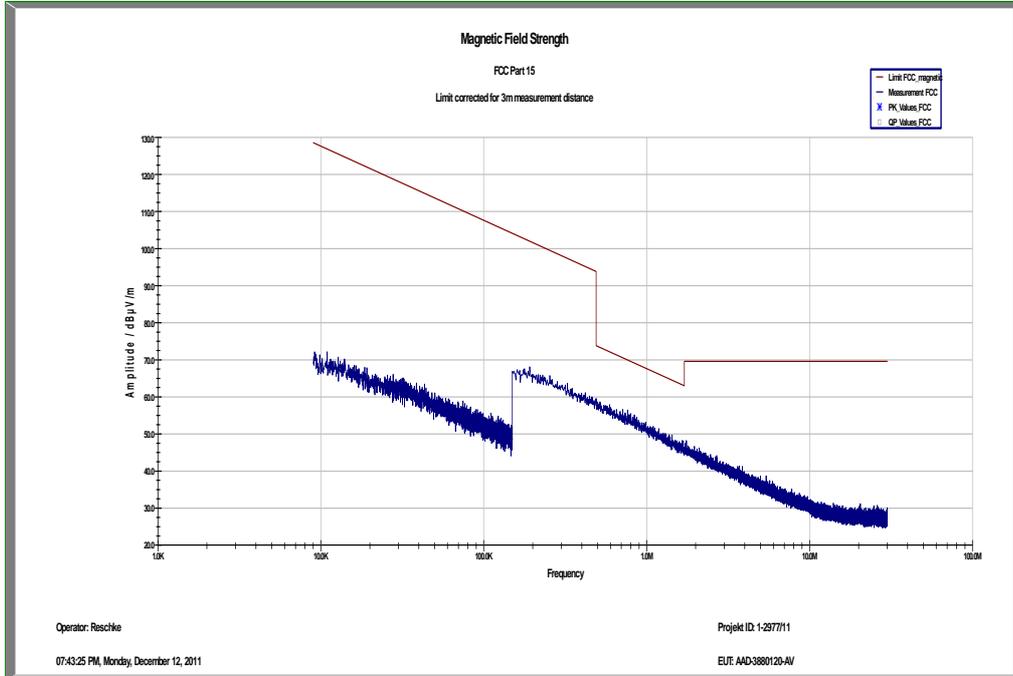

Plot 2: Middle channel, 9 kHz to 30 MHz

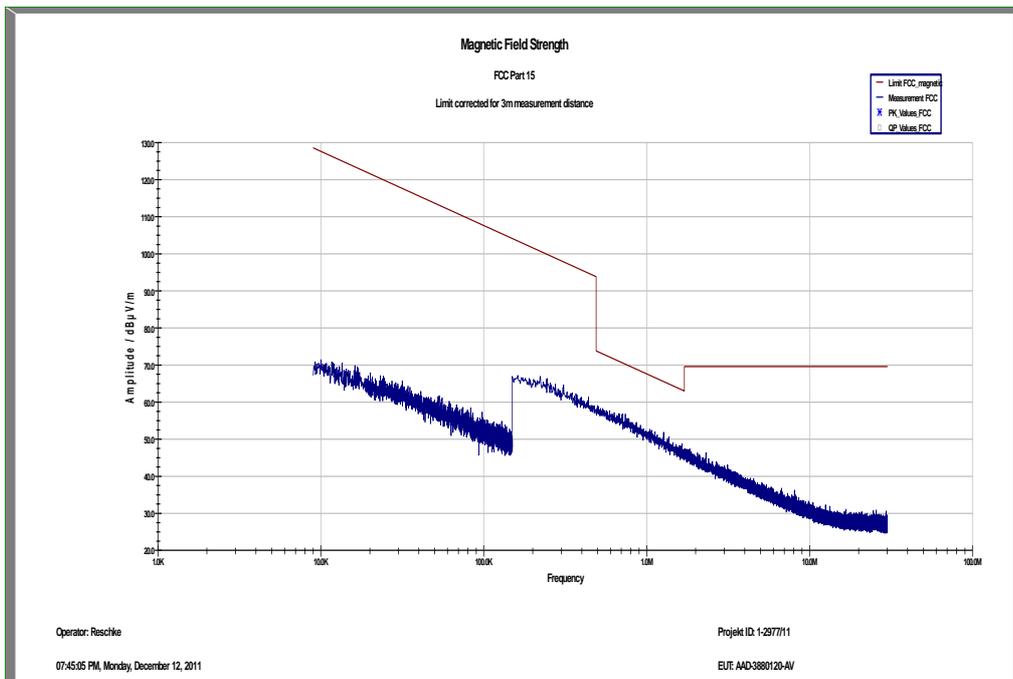


Plot 3: Highest channel, 9 kHz to 30 MHz

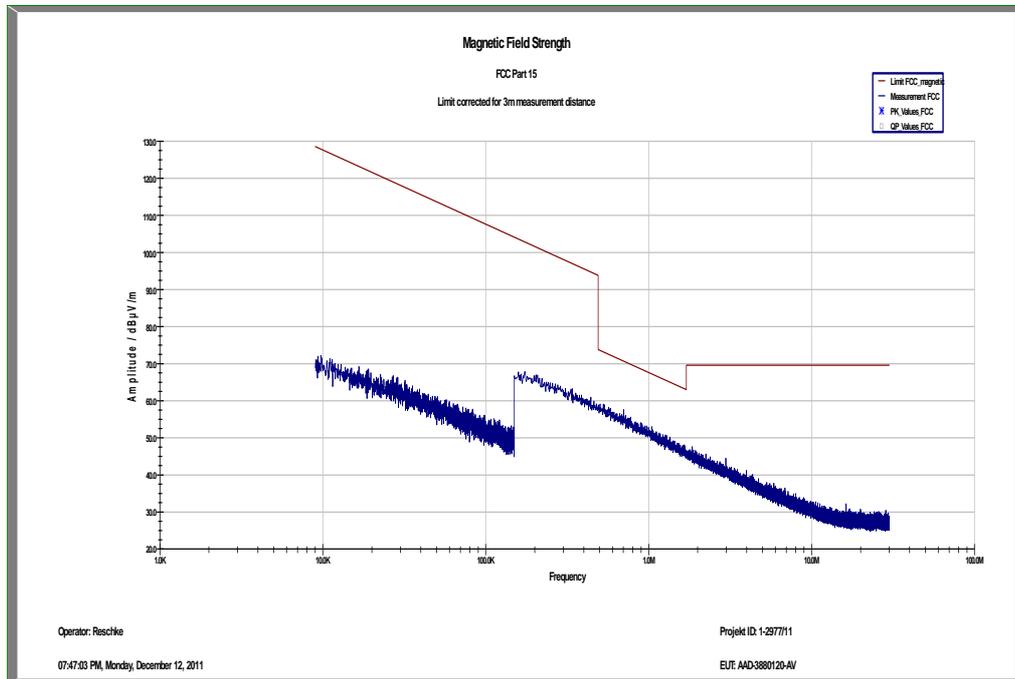

Plots: RX / Idle – mode

Plot 1: 9 kHz to 30 MHz

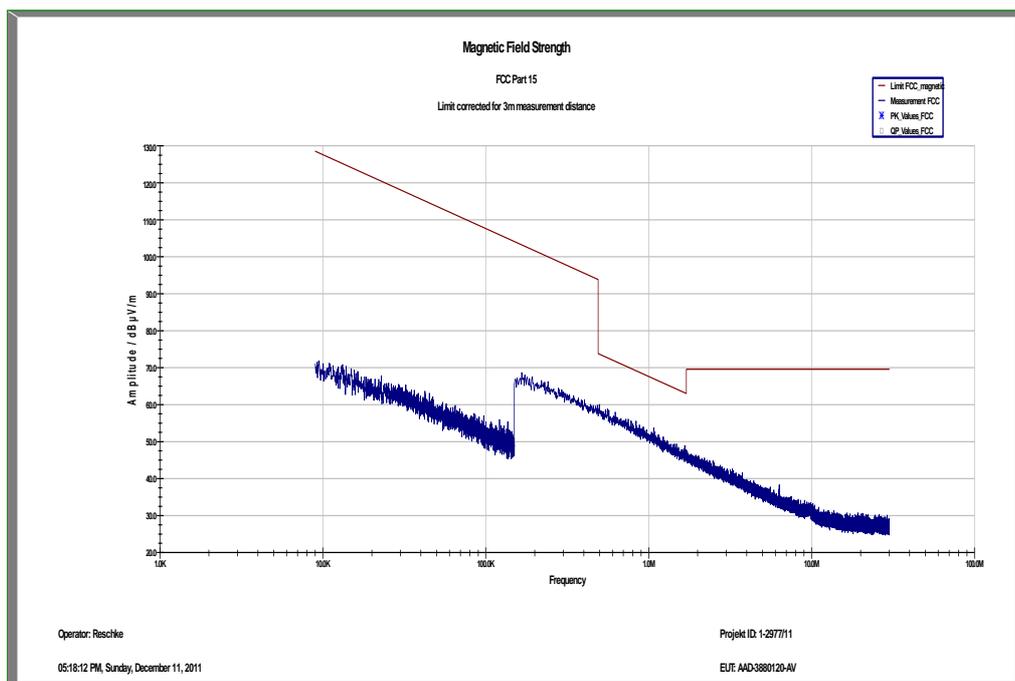

9.13 TX spurious emissions conducted < 30 MHz

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to channel 6. This measurement is repeated for DSSS and OFDM modulation. If critical peaks are found channel 1 and channel 11 will be measured too. The measurement is performed with the data rate producing the highest output power. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part 15.207(a)		ICES-003, Issue 4	
TX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	

*Decreases with the logarithm of the frequency


Results:

TX Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No critical peaks found.		
Measurement uncertainty	± 3 dB	


Result: The measurement is passed.

Plots:


Plot 1: DSSS / b – mode, 9 kHz to 30 MHz, phase line

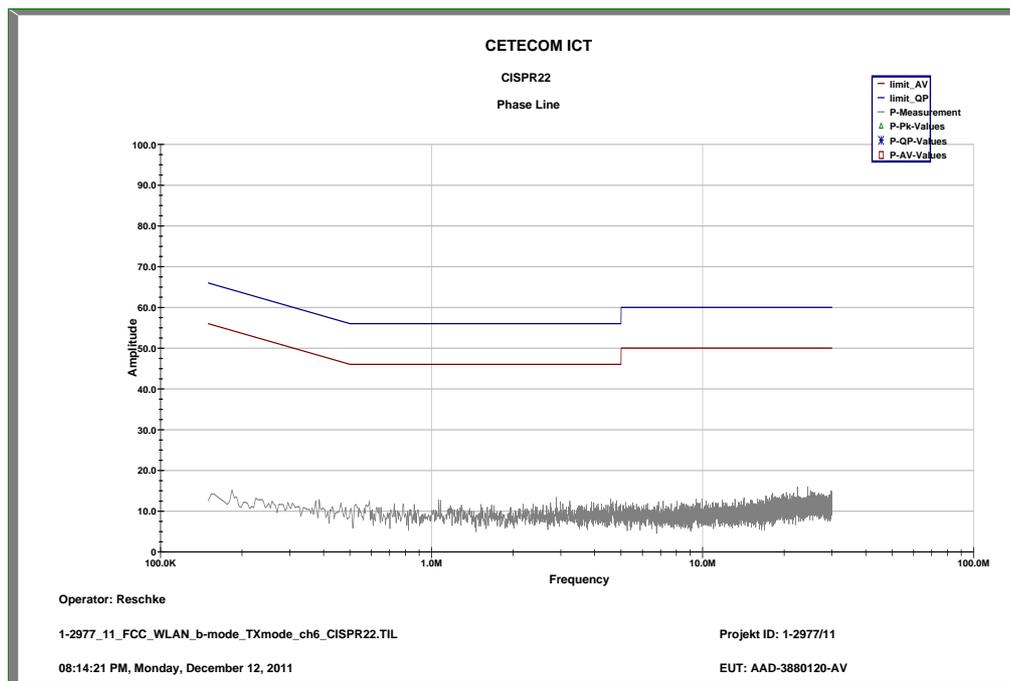


Plot 2: DSSS / b – mode, 9 kHz to 30 MHz, neutral line

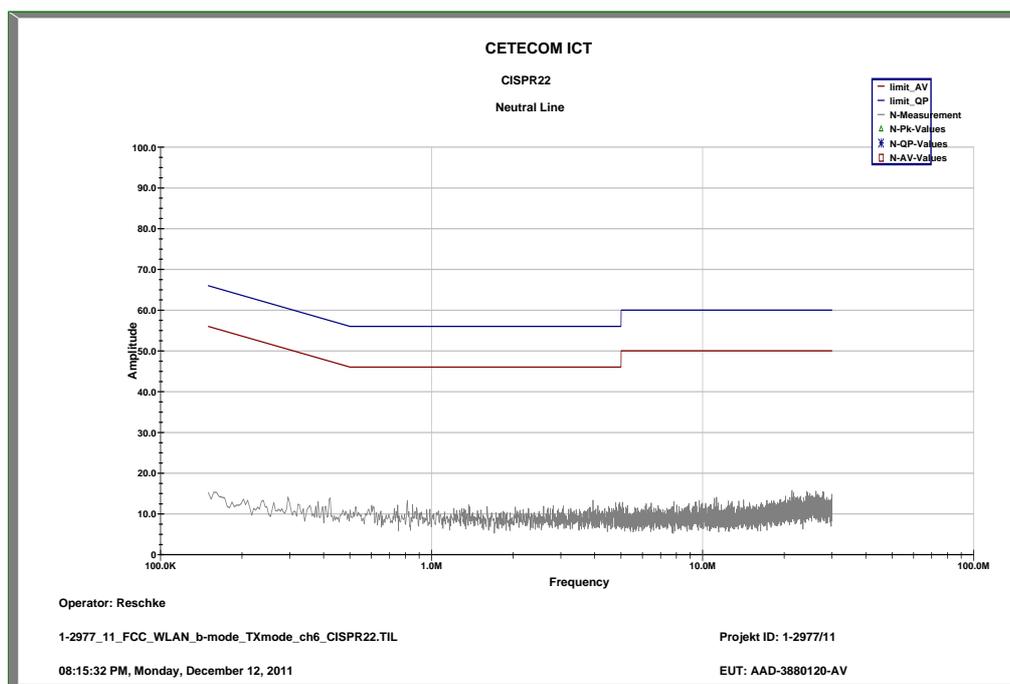


Plot 3: OFDM / g – mode, 9 kHz to 30 MHz, phase line

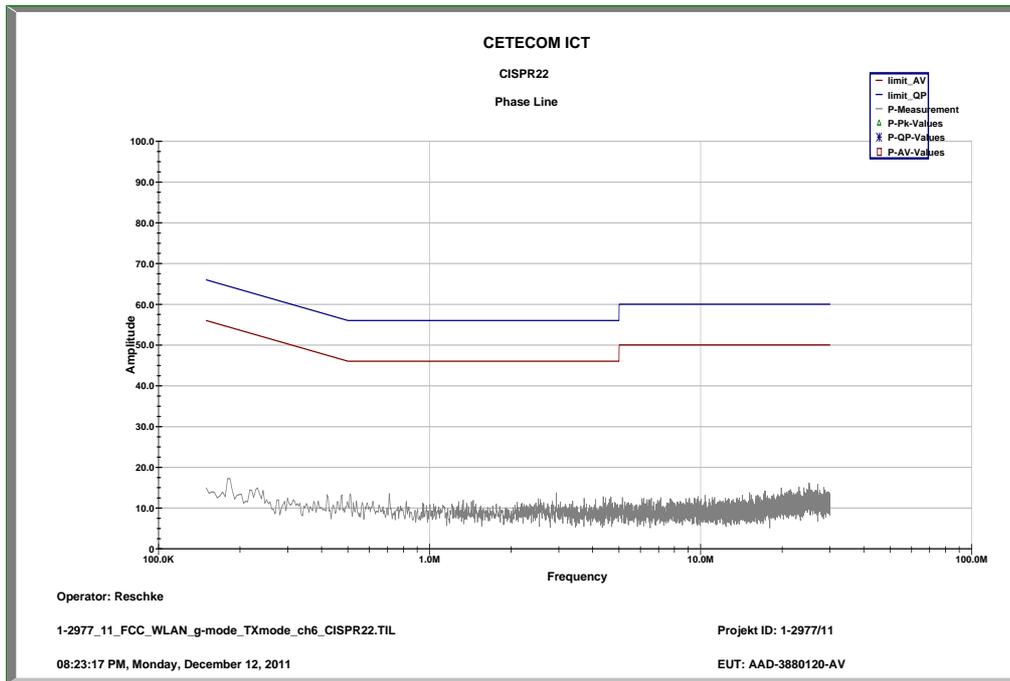


Plot 4: OFDM / g – mode, 9 kHz to 30 MHz, neutral line

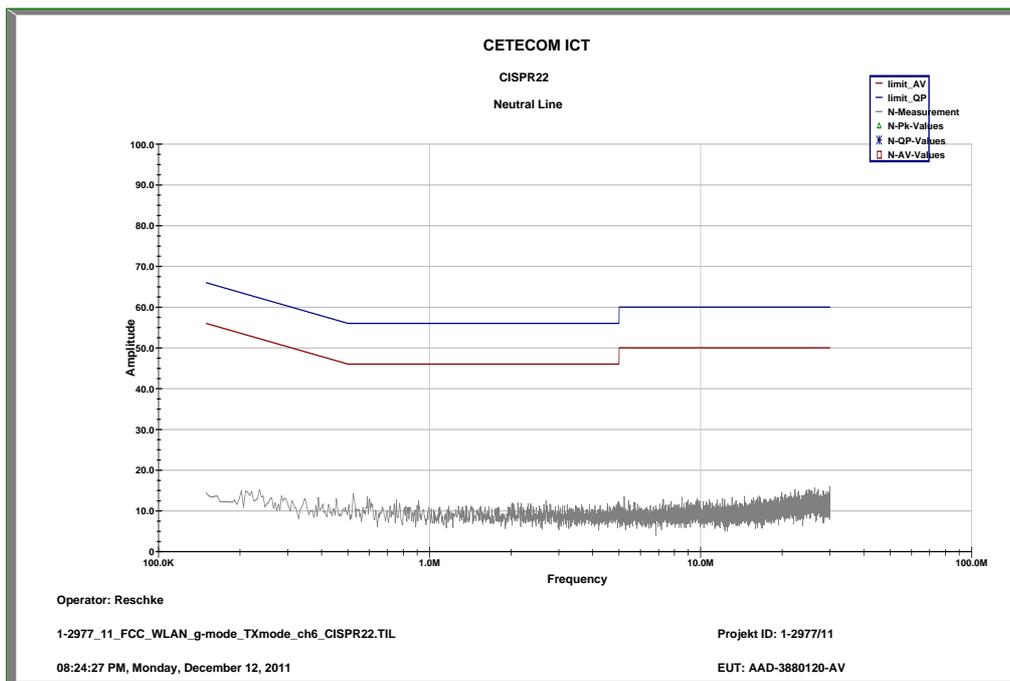


Plot 5: OFDM / n – mode, 9 kHz to 30 MHz, phase line

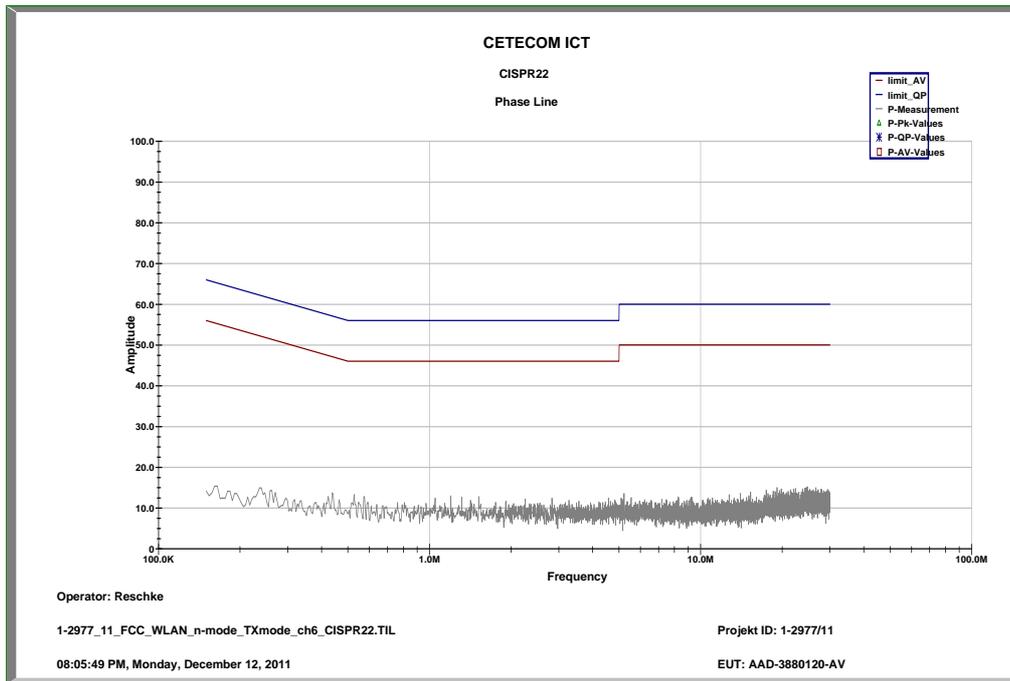


Plot 6: OFDM / n – mode, 9 kHz to 30 MHz, neutral line

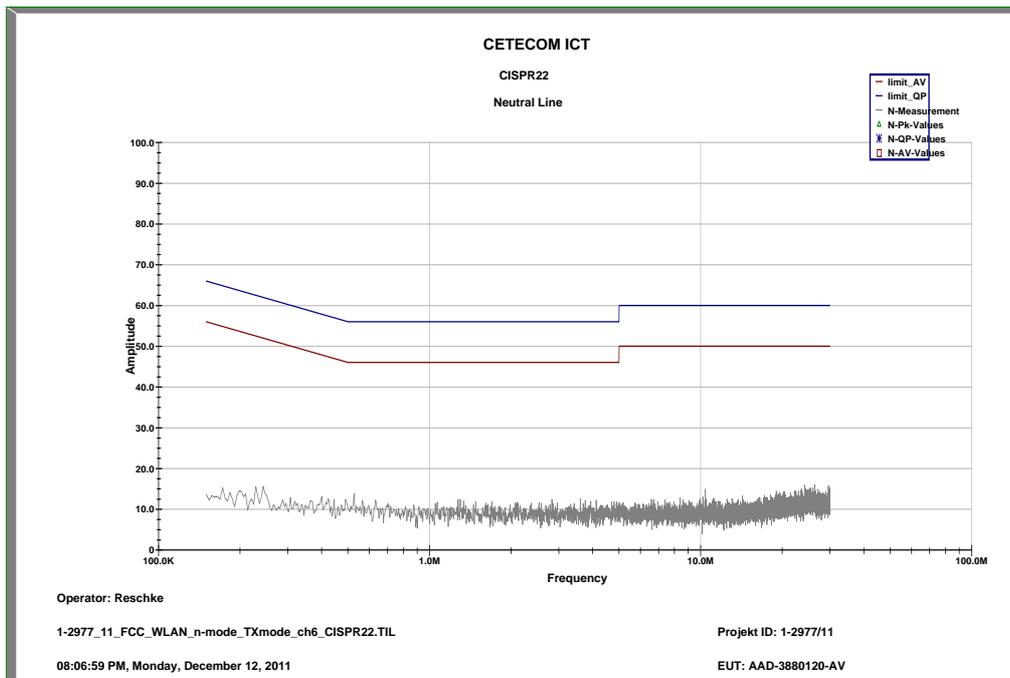

Plot 7: RX / Idle – mode, 9 kHz to 30 MHz, phase line

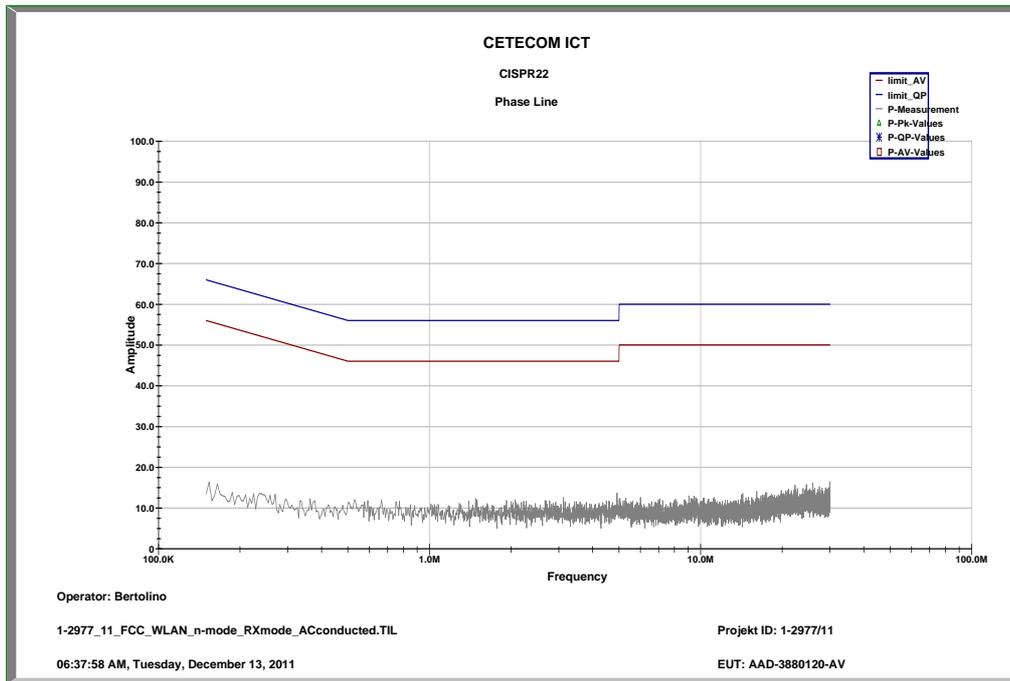

Plot 8: RX / Idle – mode, 9 kHz to 30 MHz, neutral line

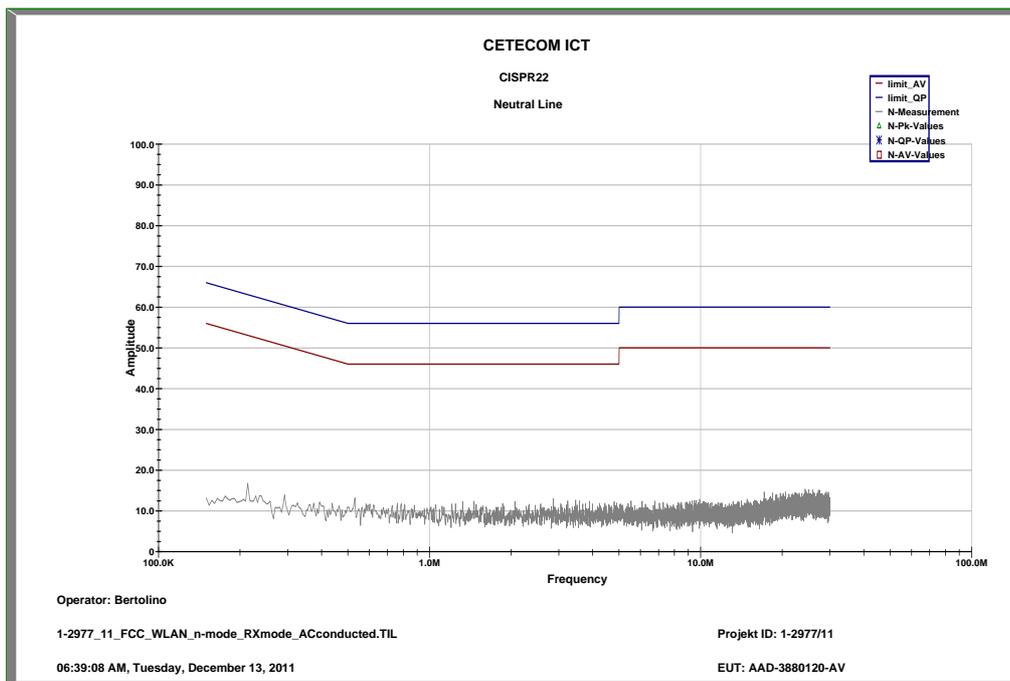

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B5979	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	05.01.2011	05.01.2013
5	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	k	14.07.2011	14.07.2013
6	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k	01.04.2010	01.04.2012
11	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	10.01.2011	10.01.2013
12	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
13	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	viKI!	11.05.2011	11.05.2013
14	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
15	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
16	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
17	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
18	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
19	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
20	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
21	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
22	n. a.	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
23	n. a.	TILE-Software Emission	Quantum Change, Modell TILE-ICS/FULL	EMCO	none	300003451	ne		
24	n. a.	PSA Spectrum Analyzer 3 Hz - 26.5 GHz	E4440A	Agilent Technologies	MY48250080	300003812	k	08.09.2010	08.09.2012
25	n. a.	RF Filter Section 9kHz - 1GHz	N9039A	Agilent Technologies	MY48260003	300003825	viKI!	08.09.2010	08.09.2012
26	n. a.	TRILOG	VULB9163	Schwarzbeck	371	300003854	viKI!	14.10.2011	14.10.2014

		Broadband Test-Antenna 30 MHz - 3 GHz							
27	n. a.	Netzgerät	E3634A	Agilent Technologies	MY40011505	300003742	k	12.01.2011	12.01.2013
28	n. a.	Spectrumanalyser	FSV30	R&S	100763	300003950	k	12.01.2011	12.01.2012

Agenda: Kind of Calibration

- | | | | |
|------|--|-----|--|
| k | calibration / calibrated | EK | limited calibration |
| ne | not required (k, ev, izw, zw not required) | zw | cyclical maintenance (external cyclical maintenance) |
| ev | periodic self verification | izw | internal cyclical maintenance |
| Ve | long-term stability recognized | g | blocked for accredited testing |
| vlk! | Attention: extended calibration interval | *) | next calibration ordered / currently in progress |
| NK! | Attention: not calibrated | | |

11 Observations

No observations exceeding those reported with the single test cases have been made.

Annex D Document history

Version	Applied changes	Date of release
1.0	Initial release	2011-12-15

Annex E Further information

Glossary

AVG	-	Average
DUT	-	Device under test
EMC	-	Electromagnetic Compatibility
EN	-	European Standard
EUT	-	Equipment under test
ETSI	-	European Telecommunications Standard Institute
FCC	-	Federal Communication Commission
FCC ID	-	Company Identifier at FCC
HW	-	Hardware
IC	-	Industry Canada
Inv. No.	-	Inventory number
N/A	-	Not applicable
PP	-	Positive peak
QP	-	Quasi peak
S/N	-	Serial number
SW	-	Software

Annex F Accreditation Certificate



Front side of the certificate



Back side of the certificate

Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

http://www.cetecom.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKS_Akkredi_Urk_EN17025-En_incl_Annex.pdf