

## **APPENDIX A: SAR TEST DATA**

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Right Head, Touch, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.778 mW/g; SAR(10 g) = 0.577 mW/g**

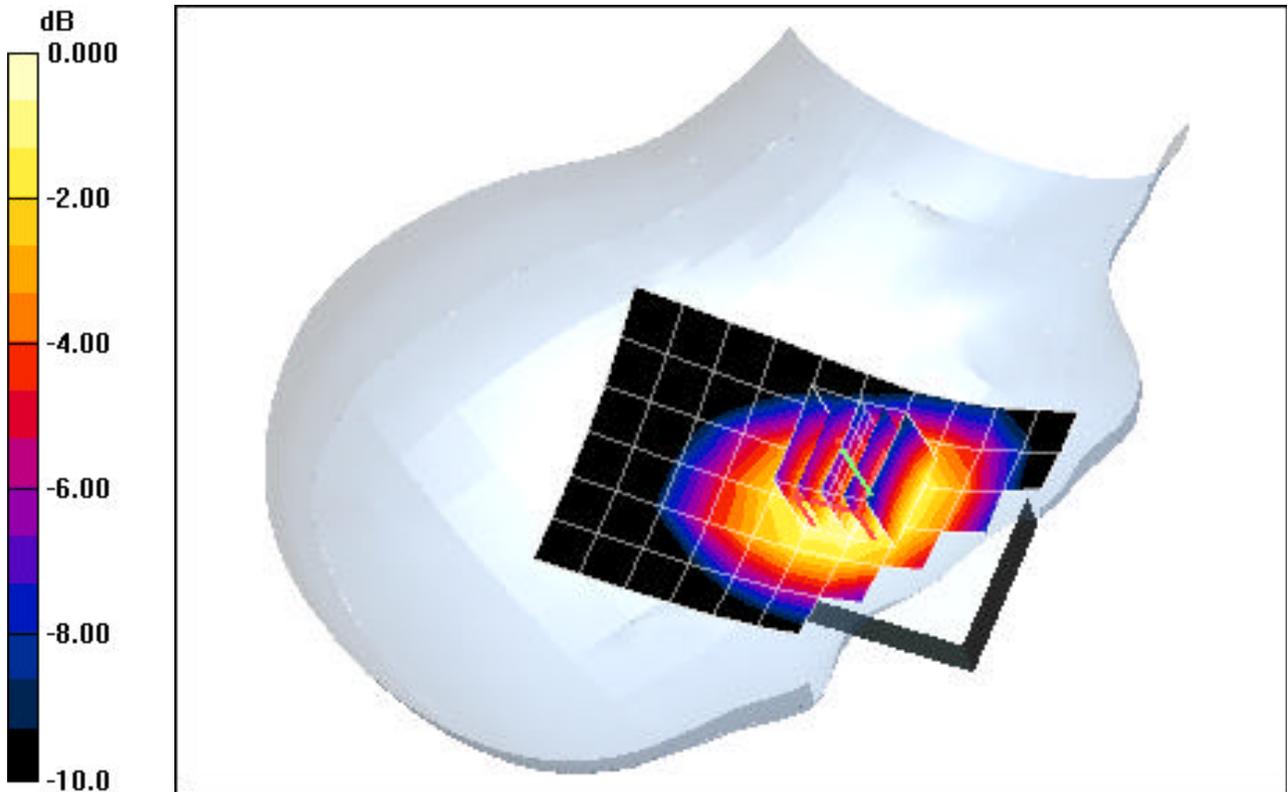

0 dB = 0.871mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Right Head, Tilt, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.8 V/m

Peak SAR (extrapolated) = 0.591 W/kg

**SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.352 mW/g**

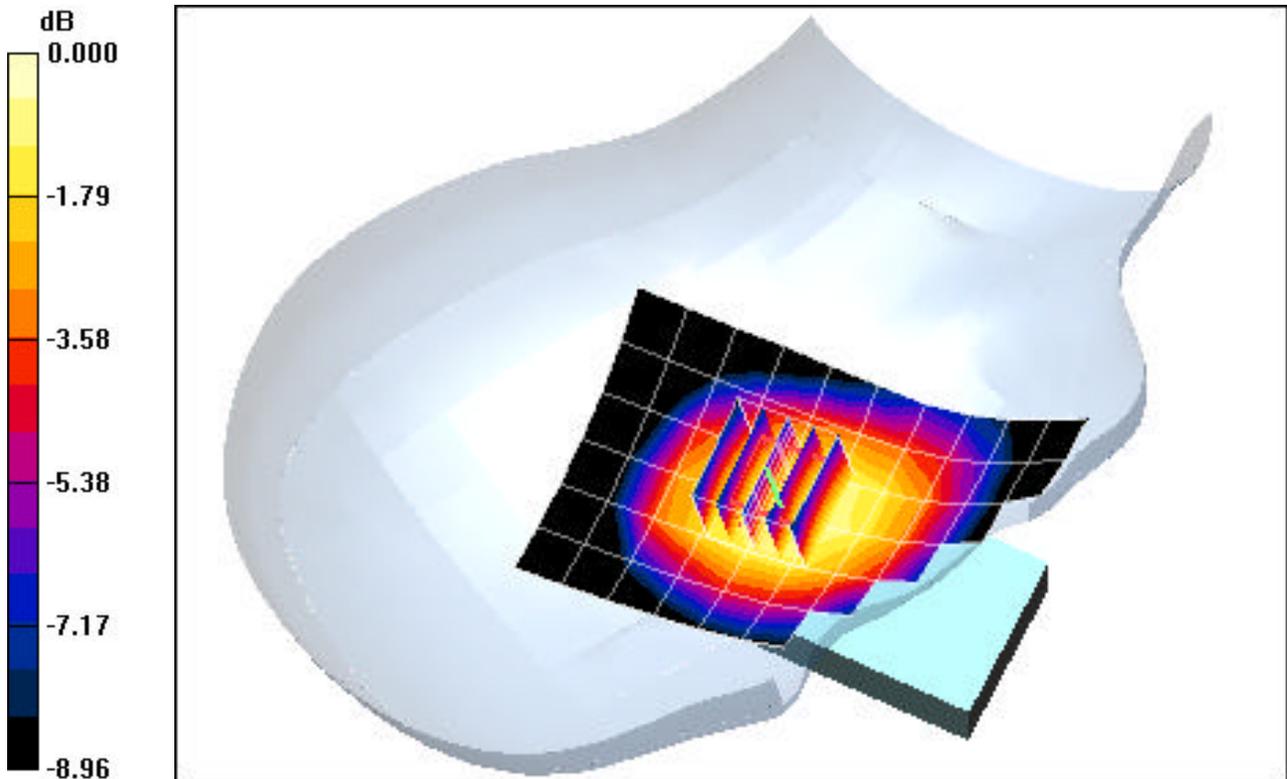

0 dB = 0.523mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Left Head, Touch, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.1 V/m

Peak SAR (extrapolated) = 0.907 W/kg

**SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.525 mW/g**

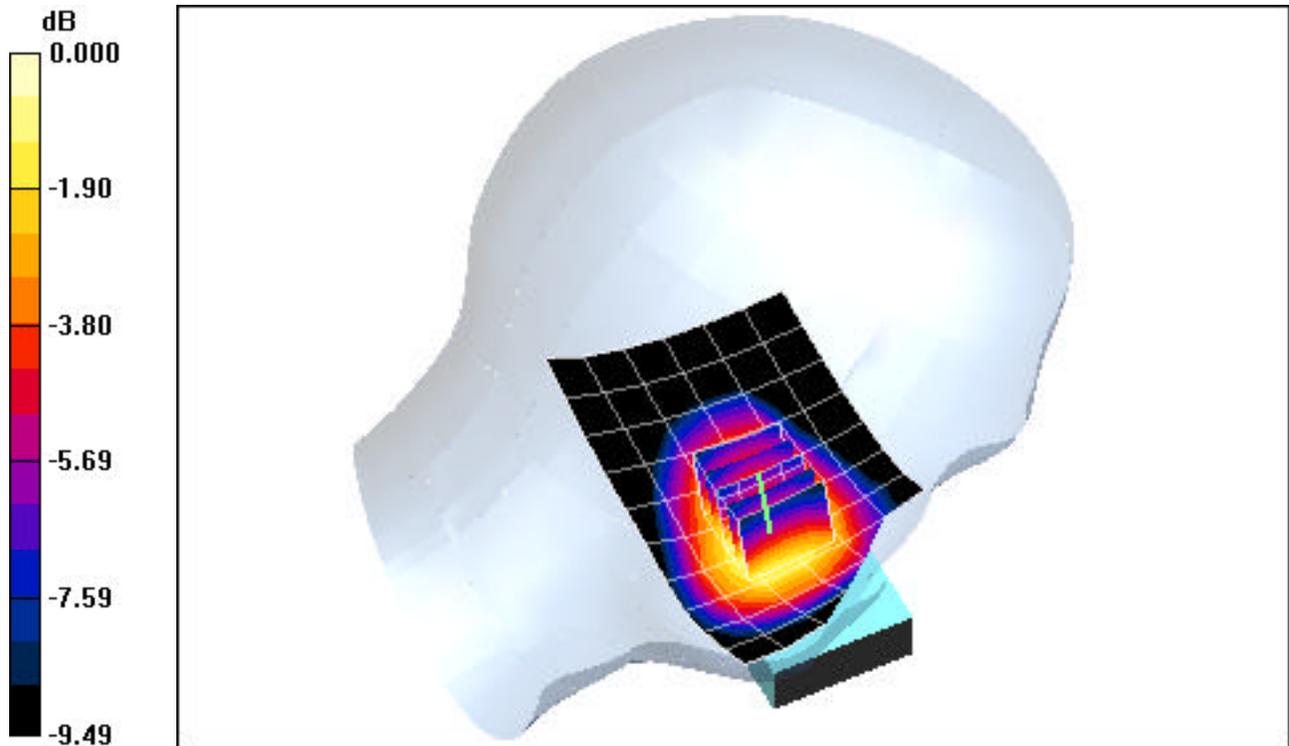

0 dB = 0.799mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Left Head, Tilt, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.5 V/m

Peak SAR (extrapolated) = 0.519 W/kg

**SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.307 mW/g**

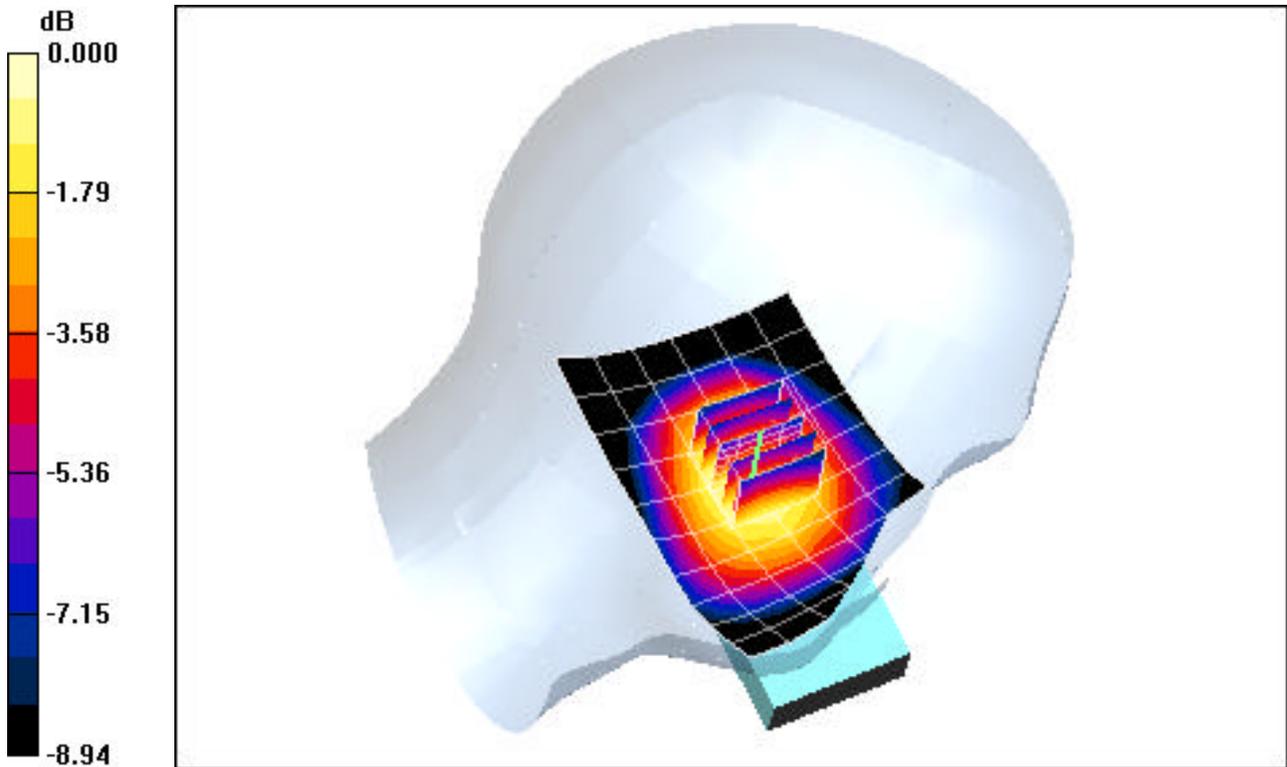

0 dB = 0.447mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Right Head, Touch, Mid ch, Standard Battery, Slide Out**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.08 V/m

Peak SAR (extrapolated) = 0.739 W/kg

**SAR(1 g) = 0.589 mW/g; SAR(10 g) = 0.438 mW/g**

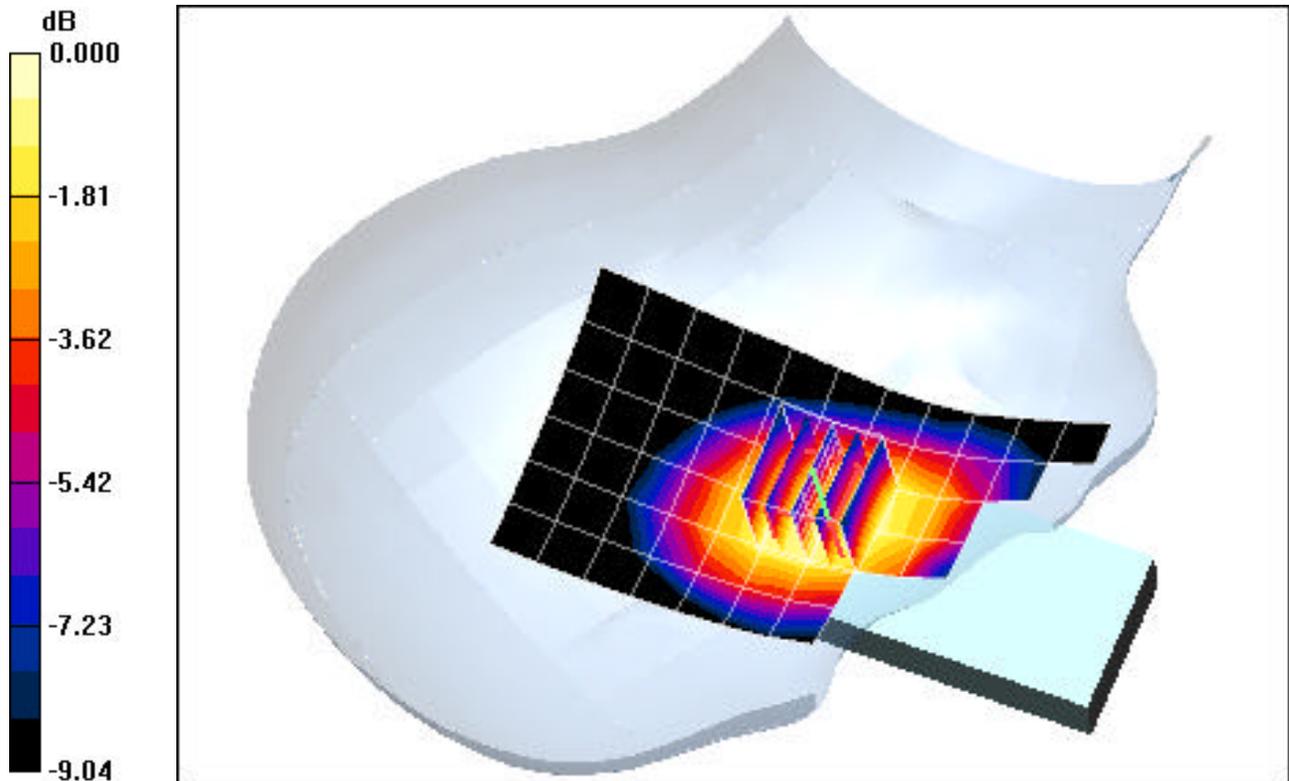

0 dB = 0.649mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Right Head, Tilt, Mid ch, Standard Battery, Slide Out**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.3 V/m

Peak SAR (extrapolated) = 0.411 W/kg

**SAR(1 g) = 0.329 mW/g; SAR(10 g) = 0.247 mW/g**

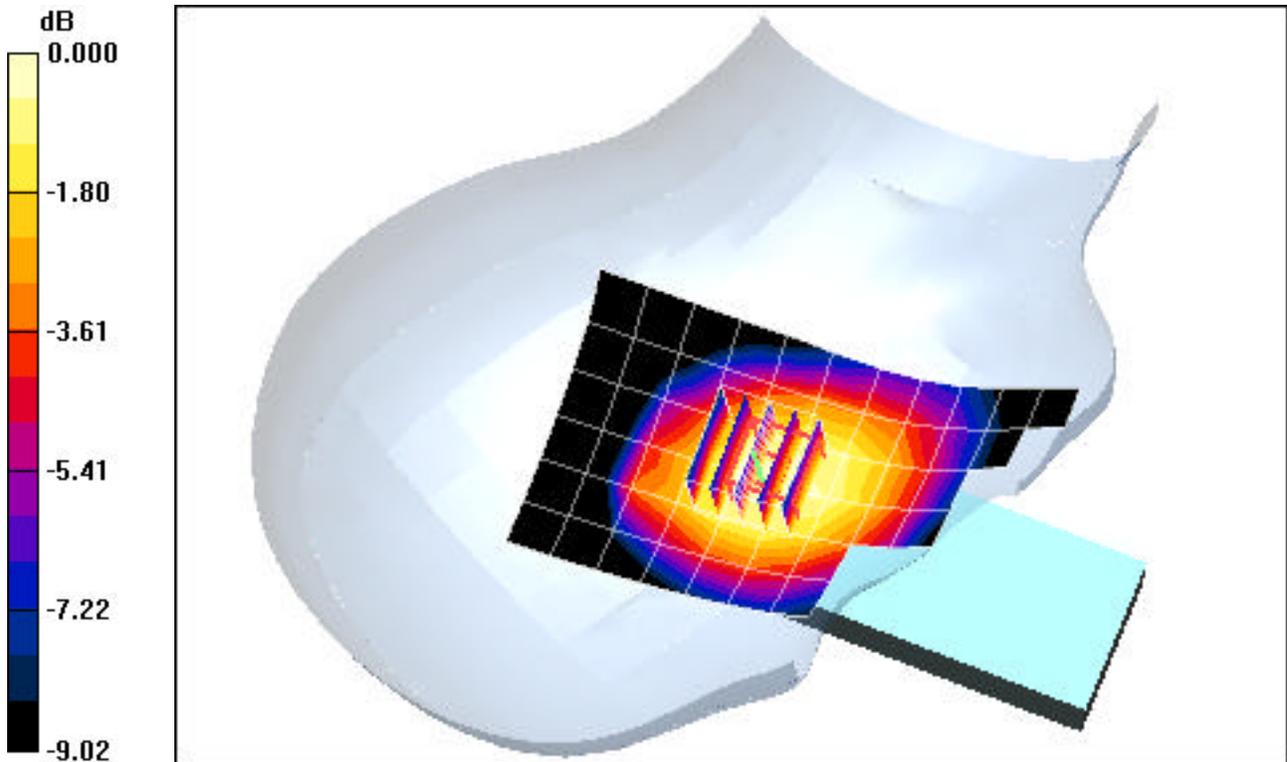

0 dB = 0.362mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Left Head, Touch, Mid ch, Standard Battery, Slide Out**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.24 V/m

Peak SAR (extrapolated) = 0.753 W/kg

**SAR(1 g) = 0.605 mW/g; SAR(10 g) = 0.444 mW/g**

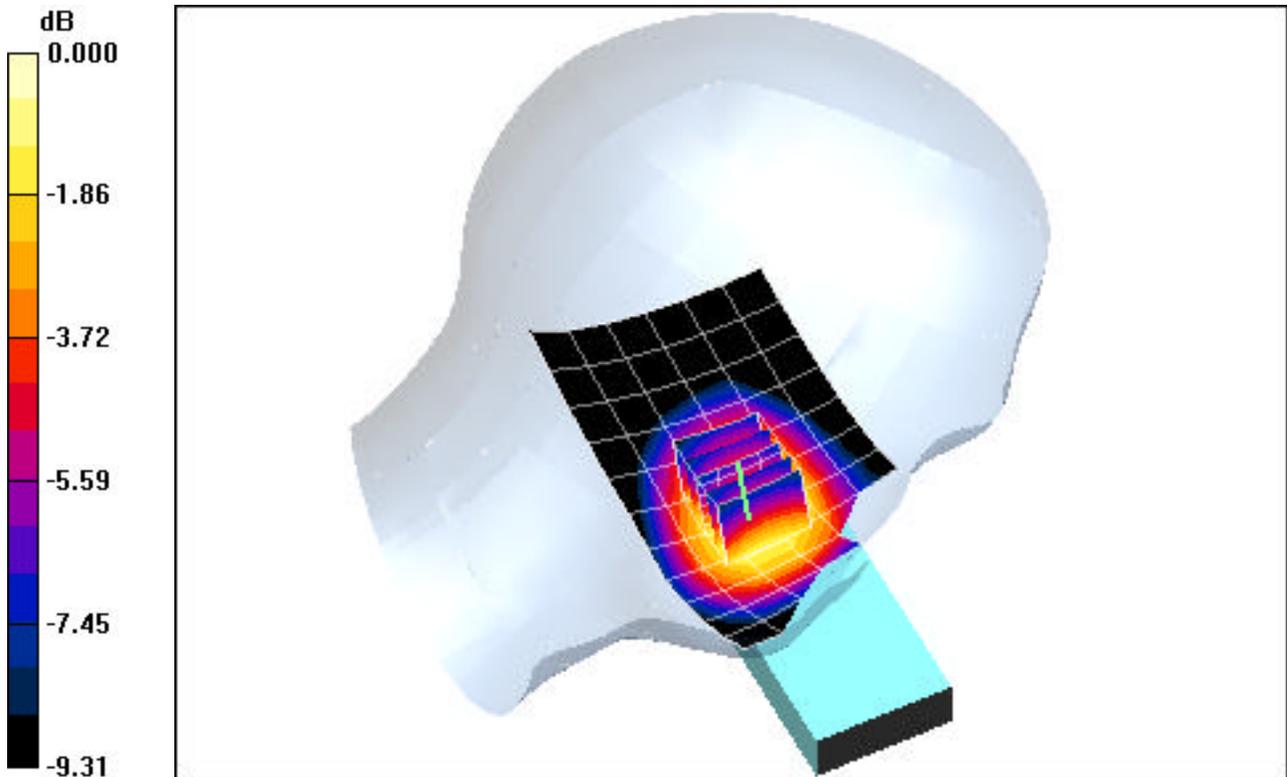

0 dB = 0.678mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Left Head, Tilt, Mid ch, Standard Battery, Slide Out**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.3 V/m

Peak SAR (extrapolated) = 0.384 W/kg

**SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.232 mW/g**

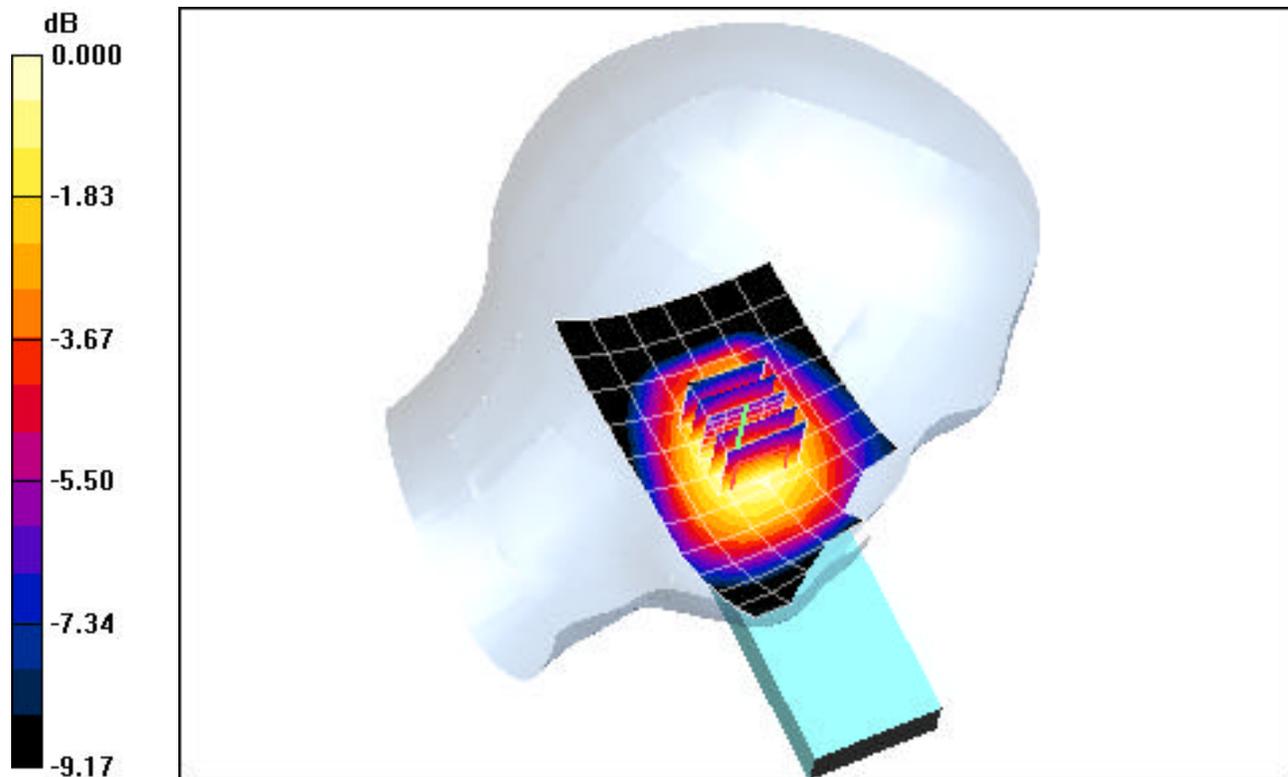

0 dB = 0.341mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Right Head, Touch, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.31 V/m

Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.194 mW/g**

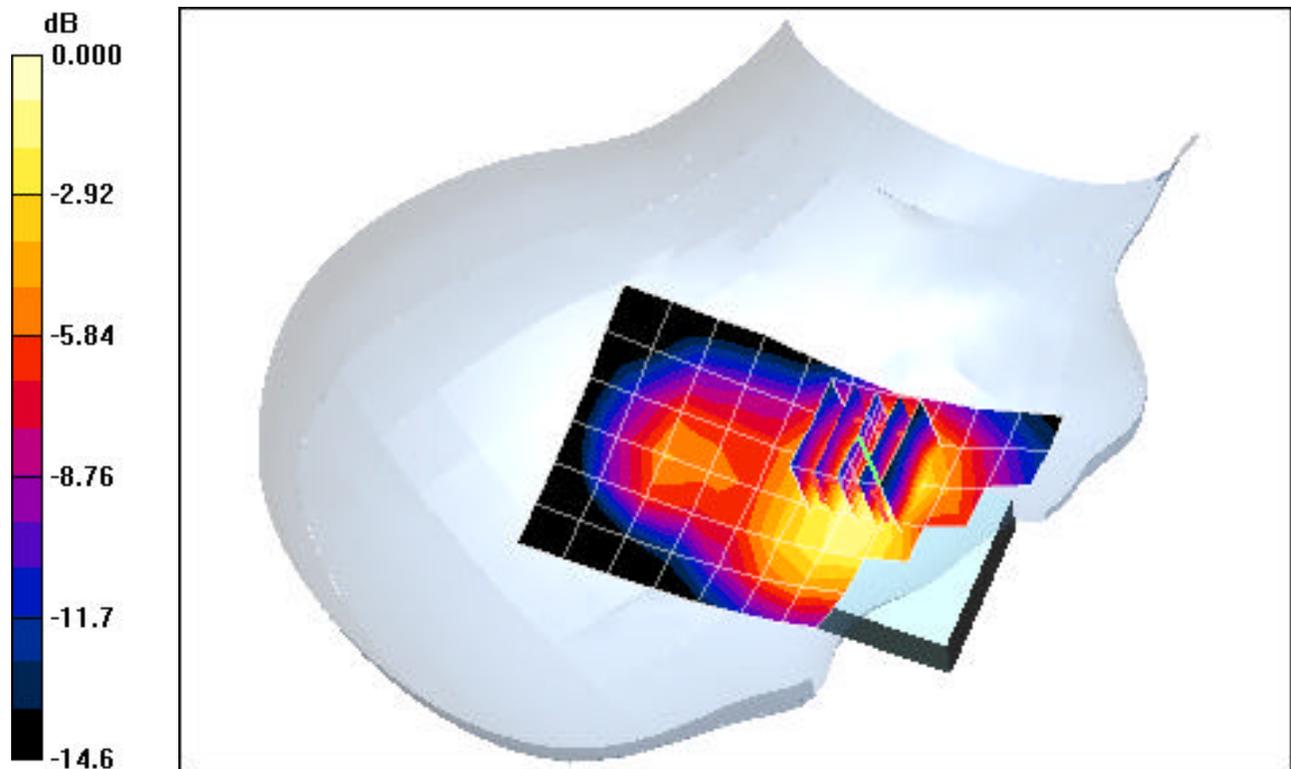

0 dB = 0.375mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Right Head, Tilt, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.8 V/m

Peak SAR (extrapolated) = 0.301 W/kg

**SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.111 mW/g**

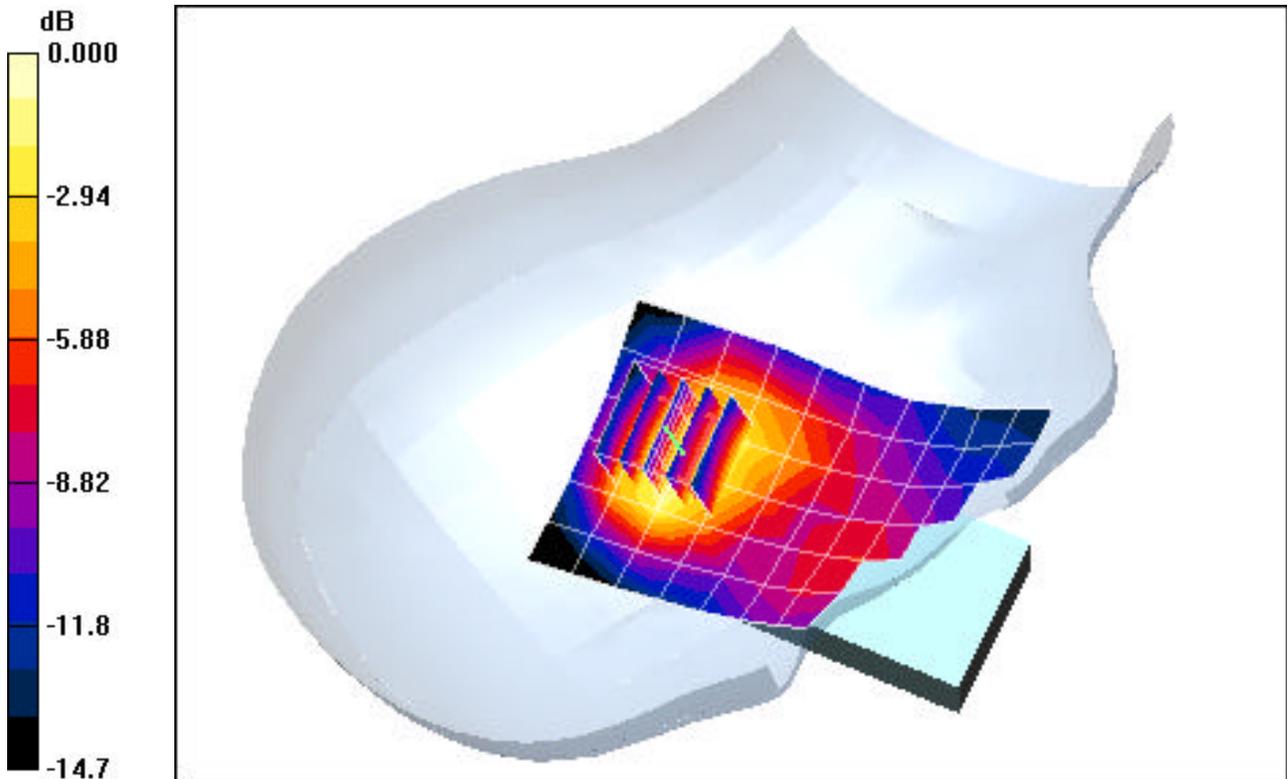

0 dB = 0.216mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Left Head, Touch, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.50 V/m

Peak SAR (extrapolated) = 0.433 W/kg

**SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.163 mW/g**

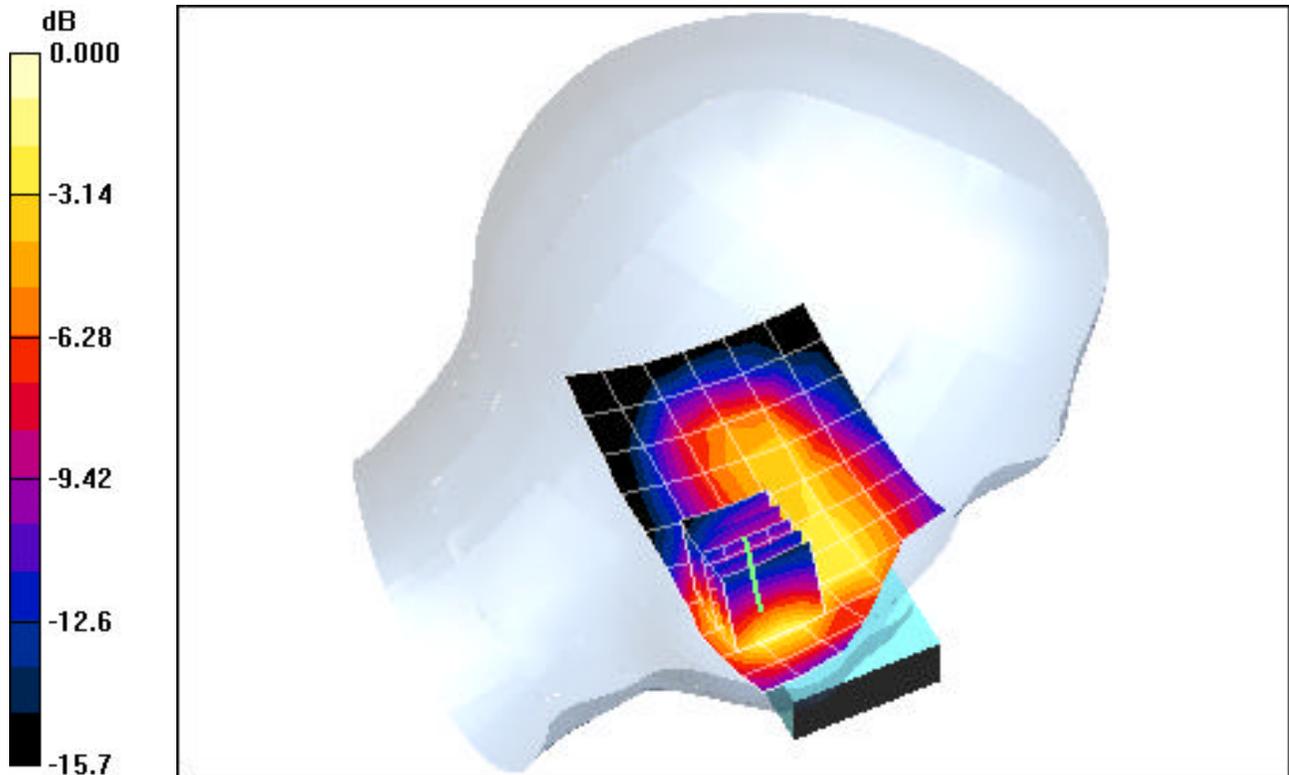

0 dB = 0.323mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Left Head, Tilt, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.8 V/m

Peak SAR (extrapolated) = 0.317 W/kg

**SAR(1 g) = 0.202 mW/g; SAR(10 g) = 0.123 mW/g**

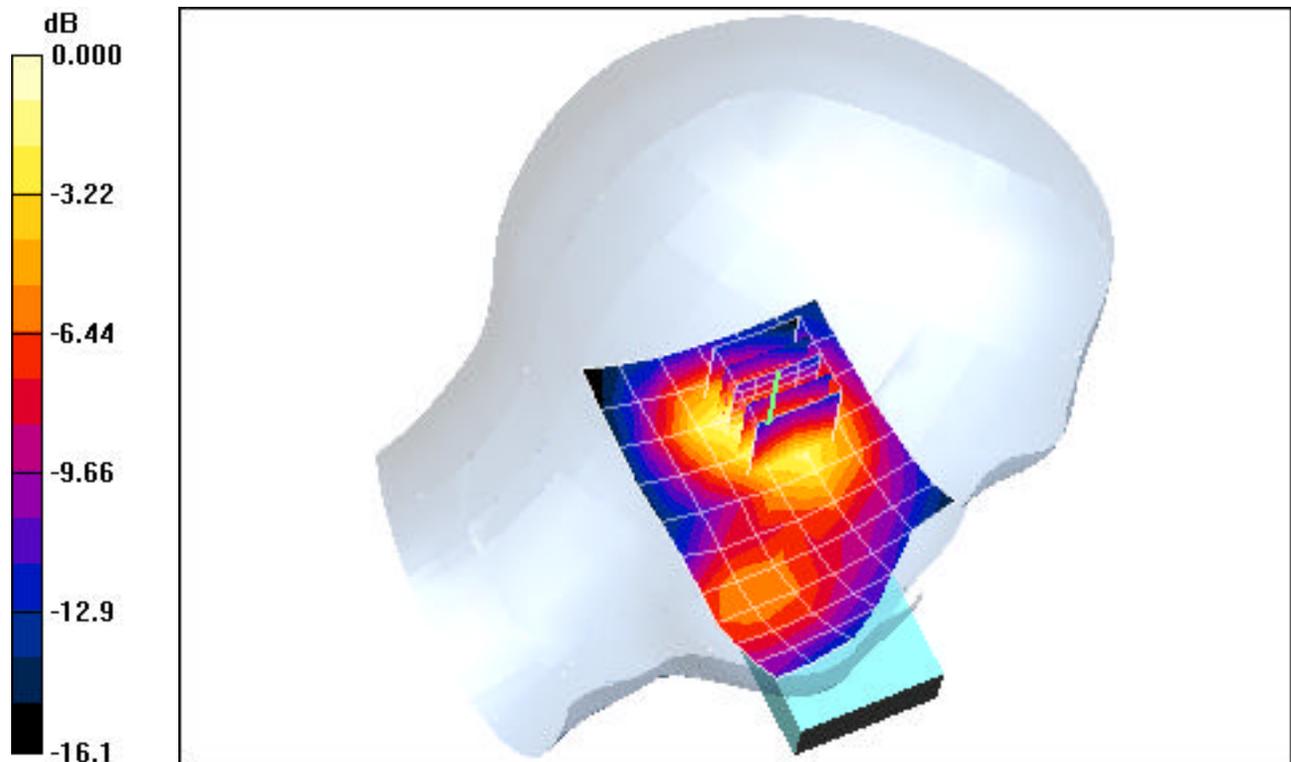

0 dB = 0.238mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Right Head, Touch, Mid ch, Standard Battery, Slide Out**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.10 V/m

Peak SAR (extrapolated) = 0.223 W/kg

**SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.082 mW/g**

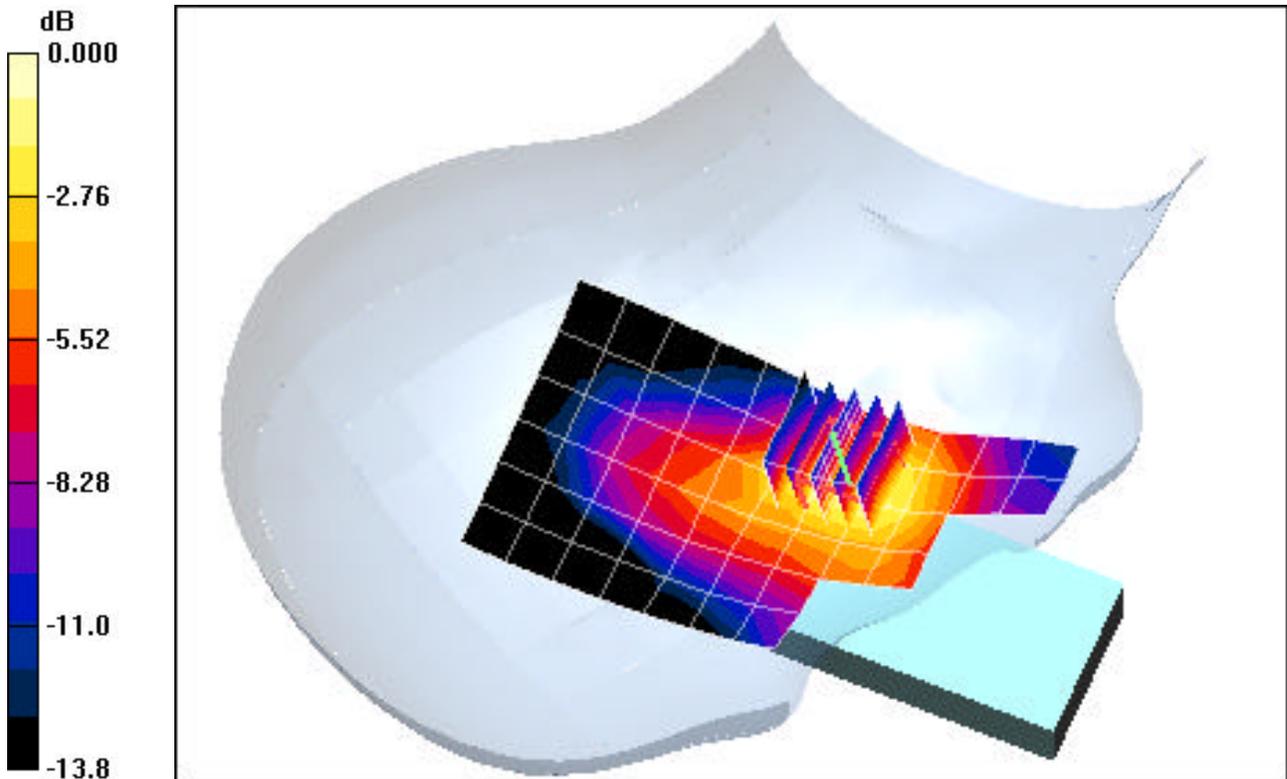

0 dB = 0.165mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Right Head, Tilt, Mid ch, Standard Battery, Slide Out**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.20 V/m

Peak SAR (extrapolated) = 0.123 W/kg

**SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.050 mW/g**

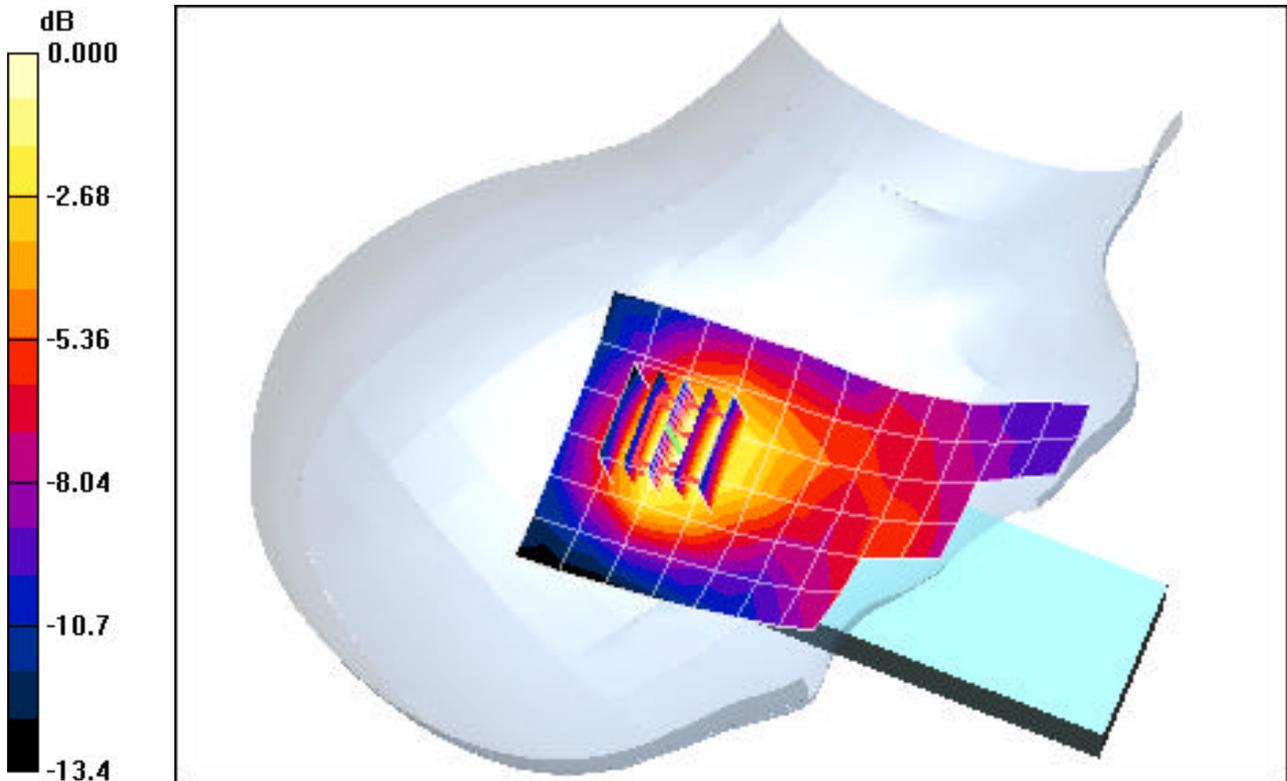

0 dB = 0.095mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Left Head, Touch, Mid ch, Standard Battery, Slide Out**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.33 V/m

Peak SAR (extrapolated) = 0.143 W/kg

**SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.063 mW/g**

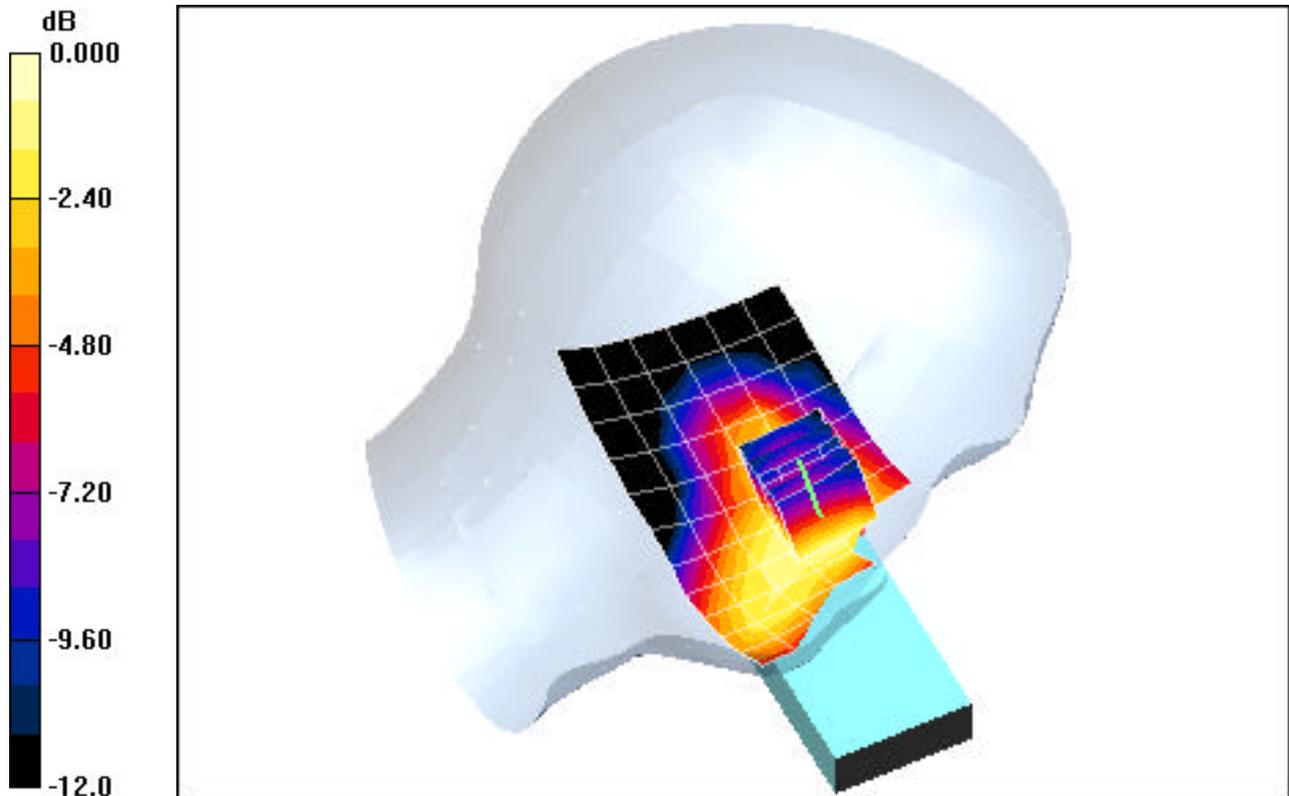

0 dB = 0.111mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Left Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Left Head, Tilt, Mid ch, Standard Battery, Slide Out**


**Area Scan (7x14x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.39 V/m

Peak SAR (extrapolated) = 0.140 W/kg

**SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.056 mW/g**

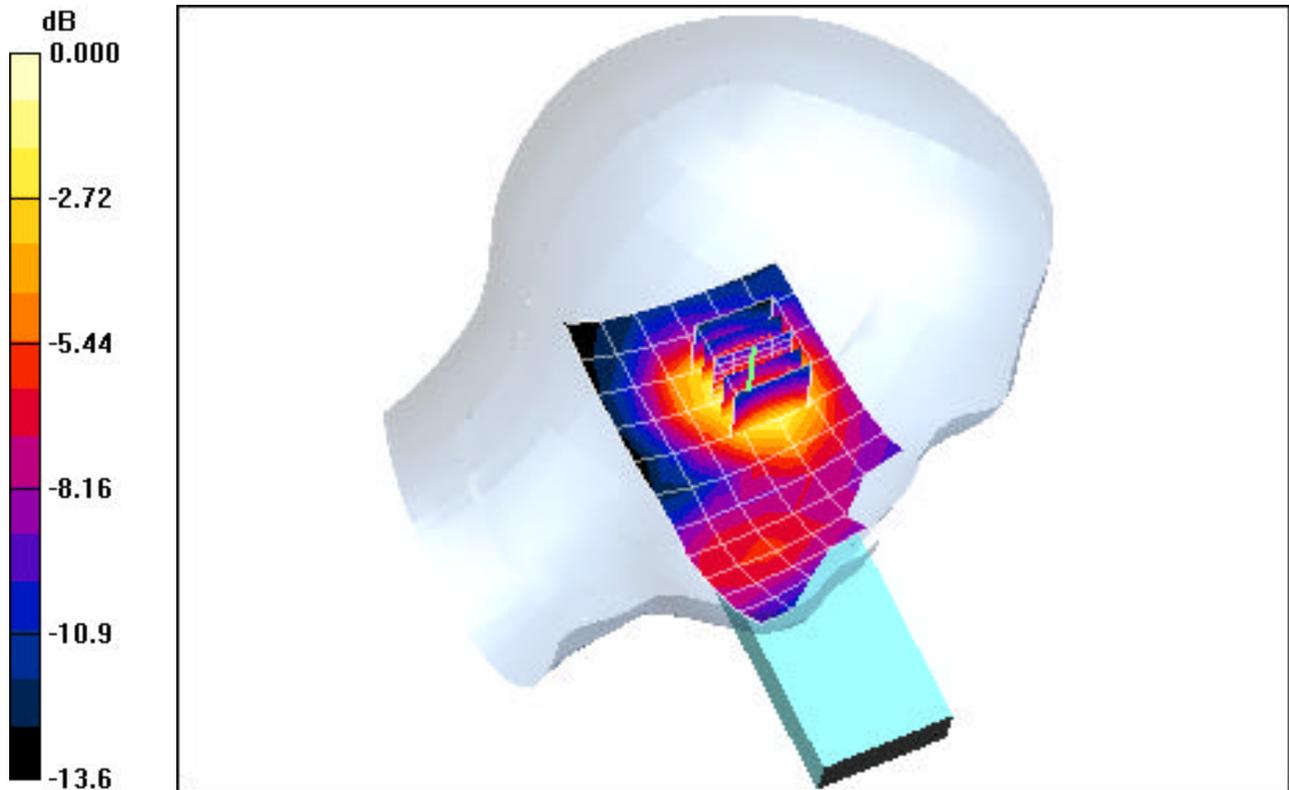

0 dB = 0.105mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Muscle ( $\sigma = 1.01$  mho/m,  $\epsilon_r = 55.91$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-07-2009; Ambient Temp: 23.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(8.13, 8.13, 8.13); Calibrated: 8/26/2008  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE3 Sn455; Calibrated: 10/17/2008  
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114  
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Body SAR, Back Side, Mid ch, Standard Battery, RC3/SO32**

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.3 V/m  
Peak SAR (extrapolated) = 1.03 W/kg  
**SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.524 mW/g**

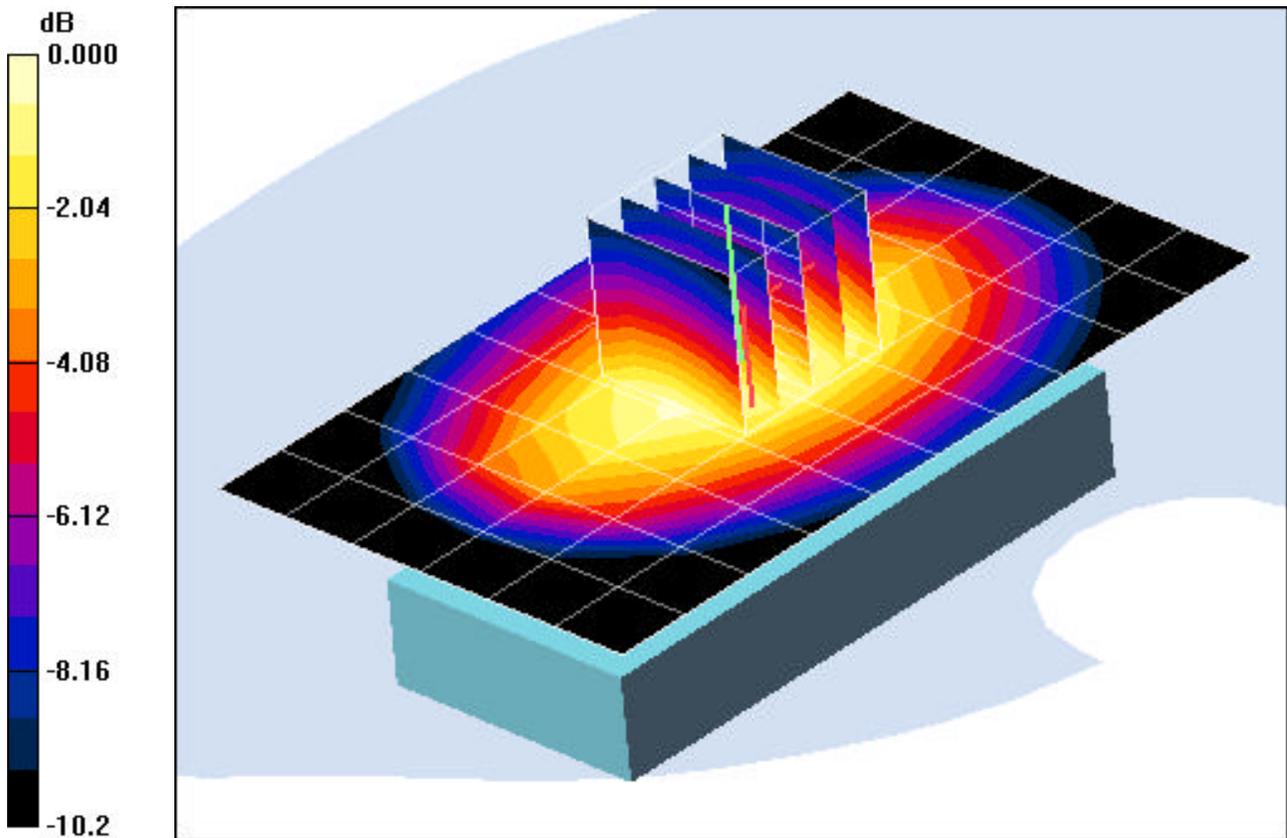

0 dB = 0.847mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Muscle ( $\sigma = 1.01$  mho/m,  $\epsilon_r = 55.91$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-07-2009; Ambient Temp: 23.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(8.13, 8.13, 8.13); Calibrated: 8/26/2008  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE3 Sn455; Calibrated: 10/17/2008  
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114  
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Body SAR, Front Side, Mid ch, Standard Battery, RC3/SO32**

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 23.1 V/m  
Peak SAR (extrapolated) = 0.669 W/kg  
**SAR(1 g) = 0.502 mW/g; SAR(10 g) = 0.364 mW/g**

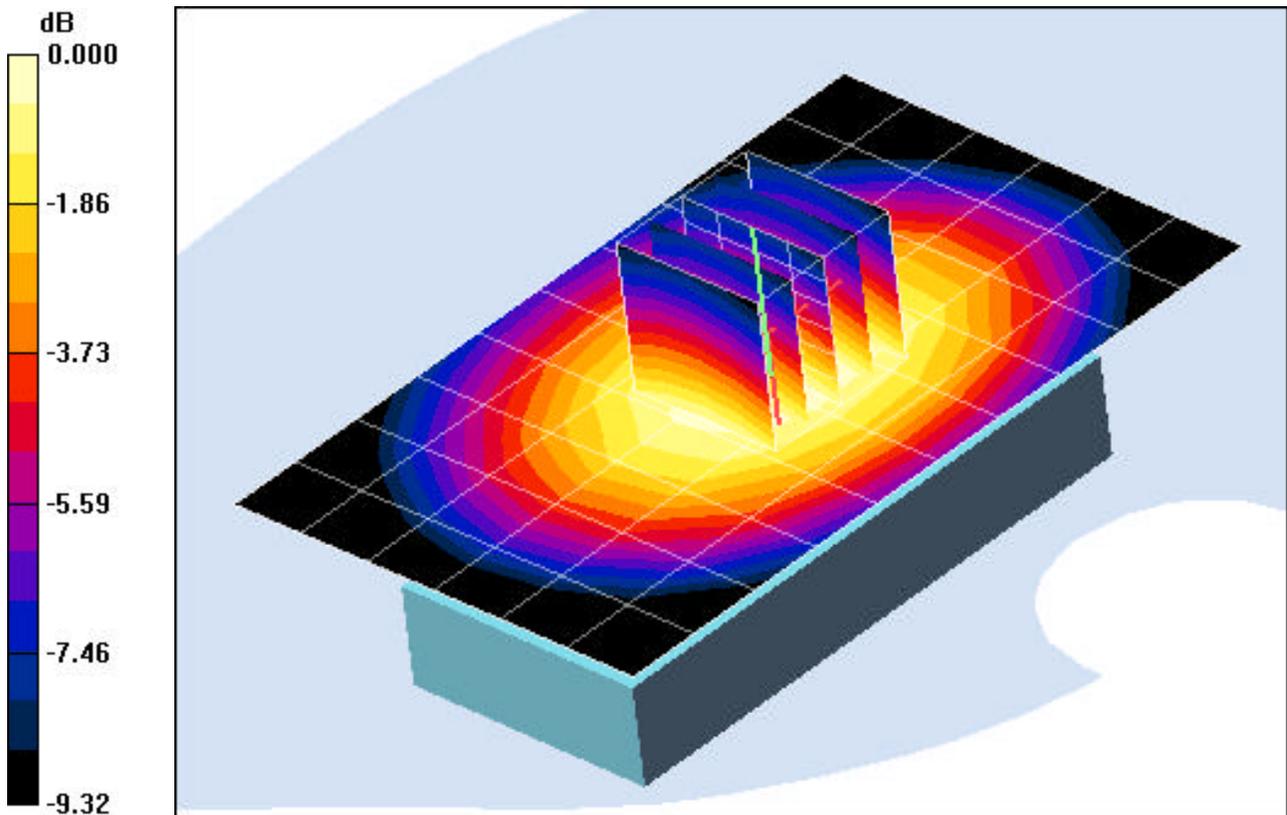

0 dB = 0.562mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Muscle ( $\sigma = 1.01$  mho/m,  $\epsilon_r = 55.91$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-07-2009; Ambient Temp: 23.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(8.13, 8.13, 8.13); Calibrated: 8/26/2008  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE3 Sn455; Calibrated: 10/17/2008  
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114  
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Body SAR, Back Side, Mid ch, Standard Battery, RC3/SO55**

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.9 V/m  
Peak SAR (extrapolated) = 0.990 W/kg  
**SAR(1 g) = 0.718 mW/g; SAR(10 g) = 0.498 mW/g**

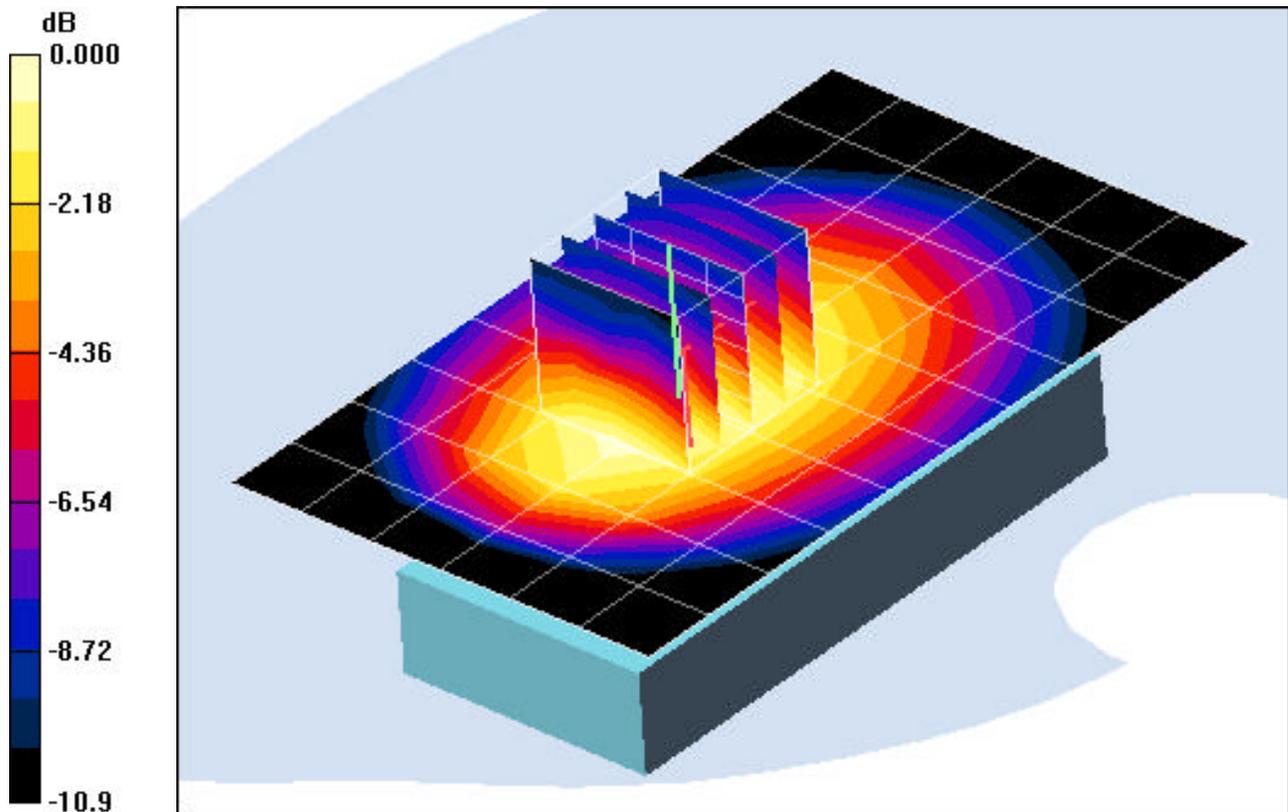

0 dB = 0.815mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Muscle ( $\sigma = 1.01$  mho/m,  $\epsilon_r = 55.91$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-07-2009; Ambient Temp: 23.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(8.13, 8.13, 8.13); Calibrated: 8/26/2008  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE3 Sn455; Calibrated: 10/17/2008  
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114  
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Body SAR, Front Side, Mid ch, Standard Battery, RC3/SO55**

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.5 V/m  
Peak SAR (extrapolated) = 0.631 W/kg  
**SAR(1 g) = 0.477 mW/g; SAR(10 g) = 0.346 mW/g**

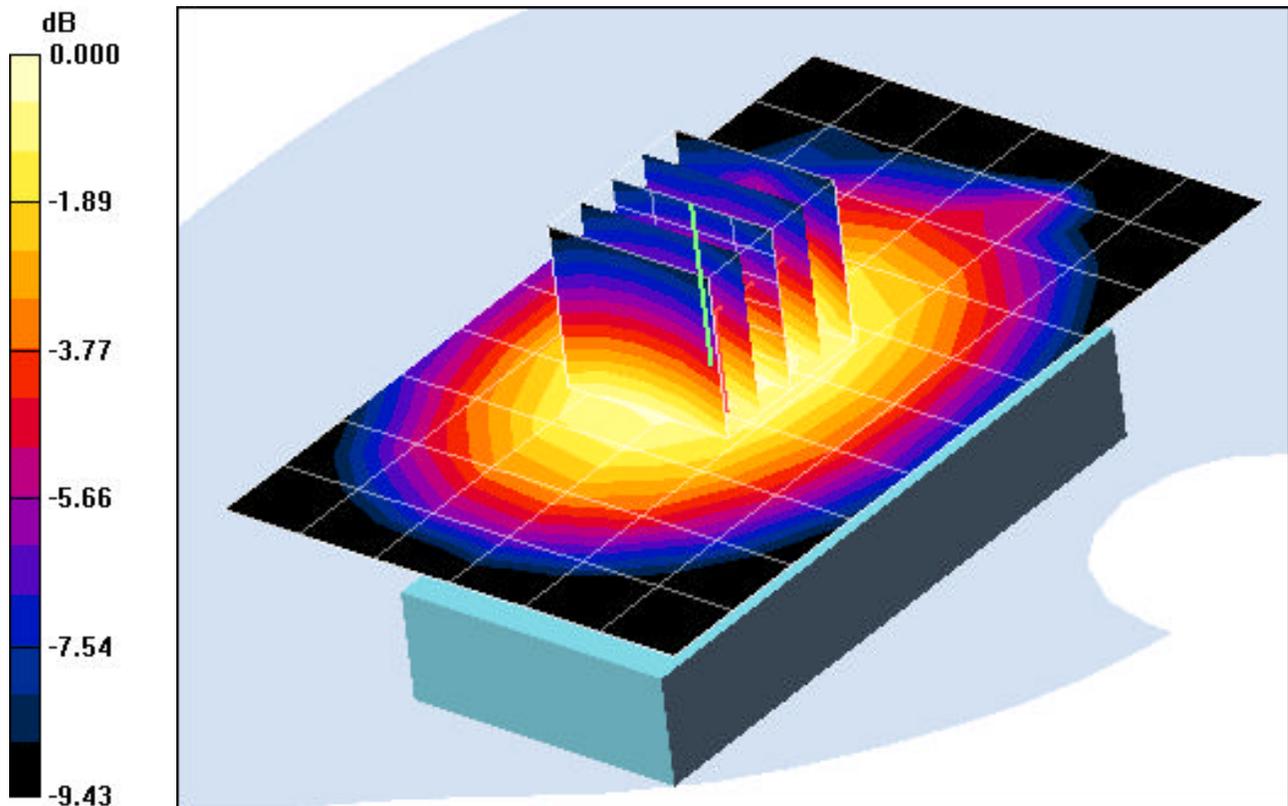

0 dB = 0.531mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900 GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Muscle ( $\sigma = 1.59$  mho/m,  $\epsilon_r = 55.03$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-06-2009; Ambient Temp: 23.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.7, 6.7, 6.7); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Body SAR, Back Side, Mid ch, Standard Battery, 2 Slot**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m

Peak SAR (extrapolated) = 0.854 W/kg

**SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.303 mW/g**

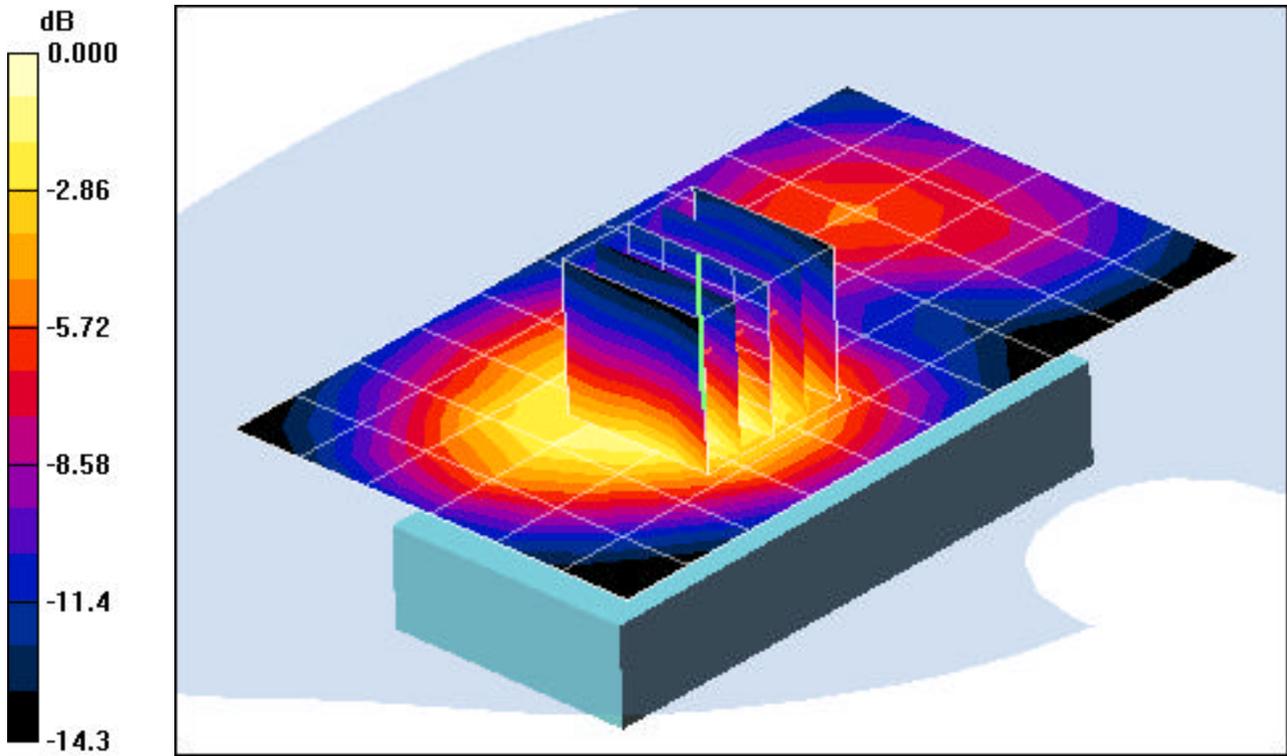

0 dB = 0.617mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900 GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Muscle ( $\sigma = 1.59$  mho/m,  $\epsilon_r = 55.03$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-06-2009; Ambient Temp: 23.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.7, 6.7, 6.7); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Body SAR, Back Side, Mid ch, Standard Battery, 1 Slot**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.38 V/m

Peak SAR (extrapolated) = 0.534 W/kg

**SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.190 mW/g**

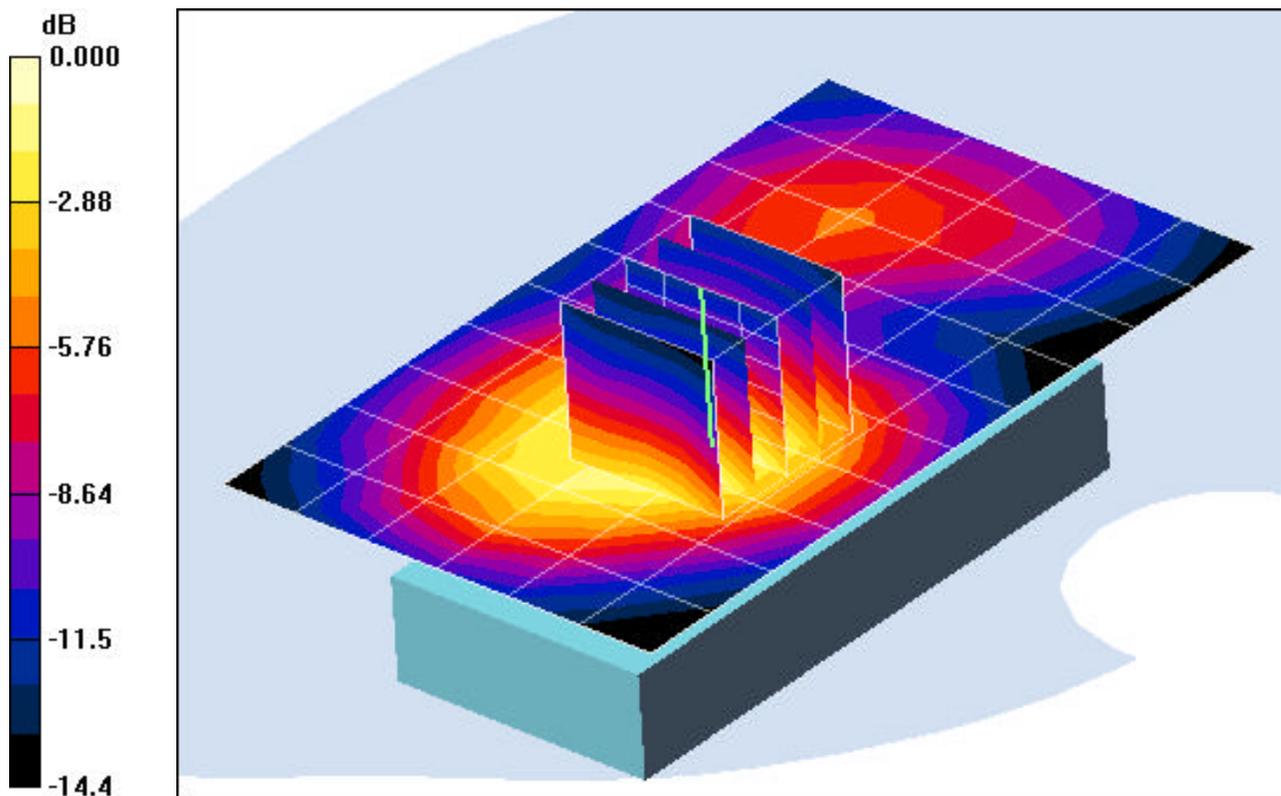

0 dB = 0.387mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900 GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Muscle ( $\sigma = 1.59$  mho/m,  $\epsilon_r = 55.03$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-06-2009; Ambient Temp: 23.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.7, 6.7, 6.7); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Body SAR, Front Side, Mid ch, Standard Battery, 2 Slot**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.56 V/m

Peak SAR (extrapolated) = 0.442 W/kg

**SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.174 mW/g**

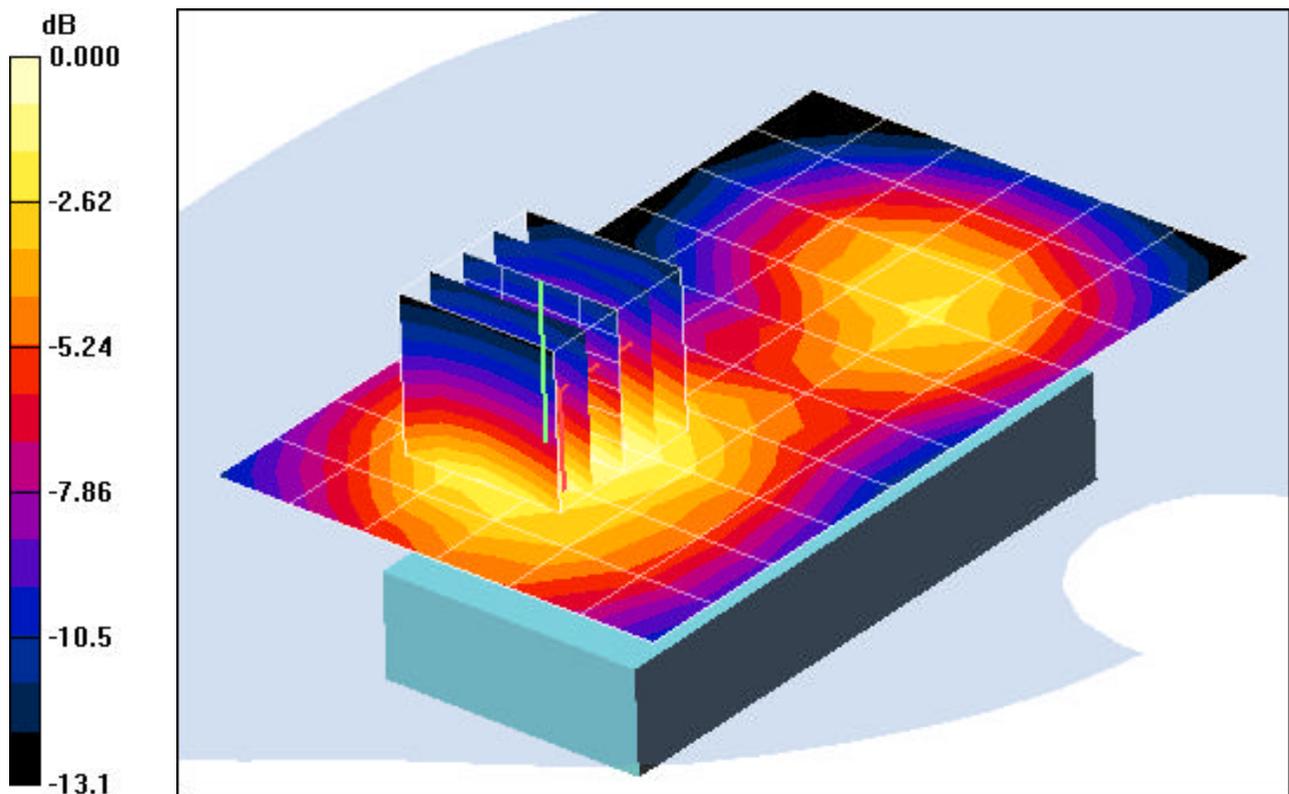

0 dB = 0.333mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**

Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Right Head, Touch, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.0 V/m

Peak SAR (extrapolated) = 1.03 W/kg

**SAR(1 g) = 0.778 mW/g; SAR(10 g) = 0.577 mW/g**

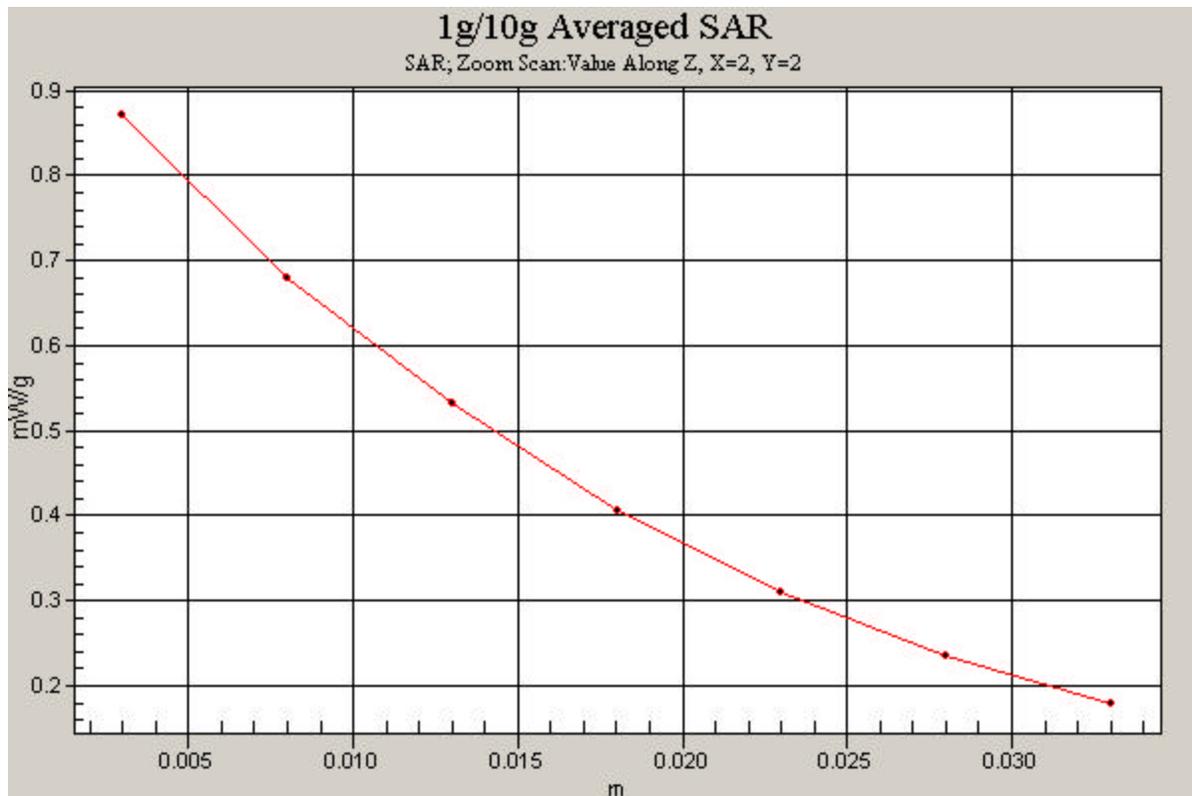

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-016**


Communication System: Cellular CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1  
Medium: 835 Muscle ( $\sigma = 1.01$  mho/m,  $\epsilon_r = 55.91$ ,  $\rho = 1000$  kg/m<sup>3</sup>)  
Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-07-2009; Ambient Temp: 23.6°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN3561; ConvF(8.13, 8.13, 8.13); Calibrated: 8/26/2008  
Sensor-Surface: 3mm (Mechanical Surface Detection)  
Electronics: DAE3 Sn455; Calibrated: 10/17/2008  
Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114  
Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: Cellular CDMA, Body SAR, Back Side, Mid ch, Standard Battery, RC3/SO32**

**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 28.3 V/m  
Peak SAR (extrapolated) = 1.03 W/kg  
**SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.524 mW/g**

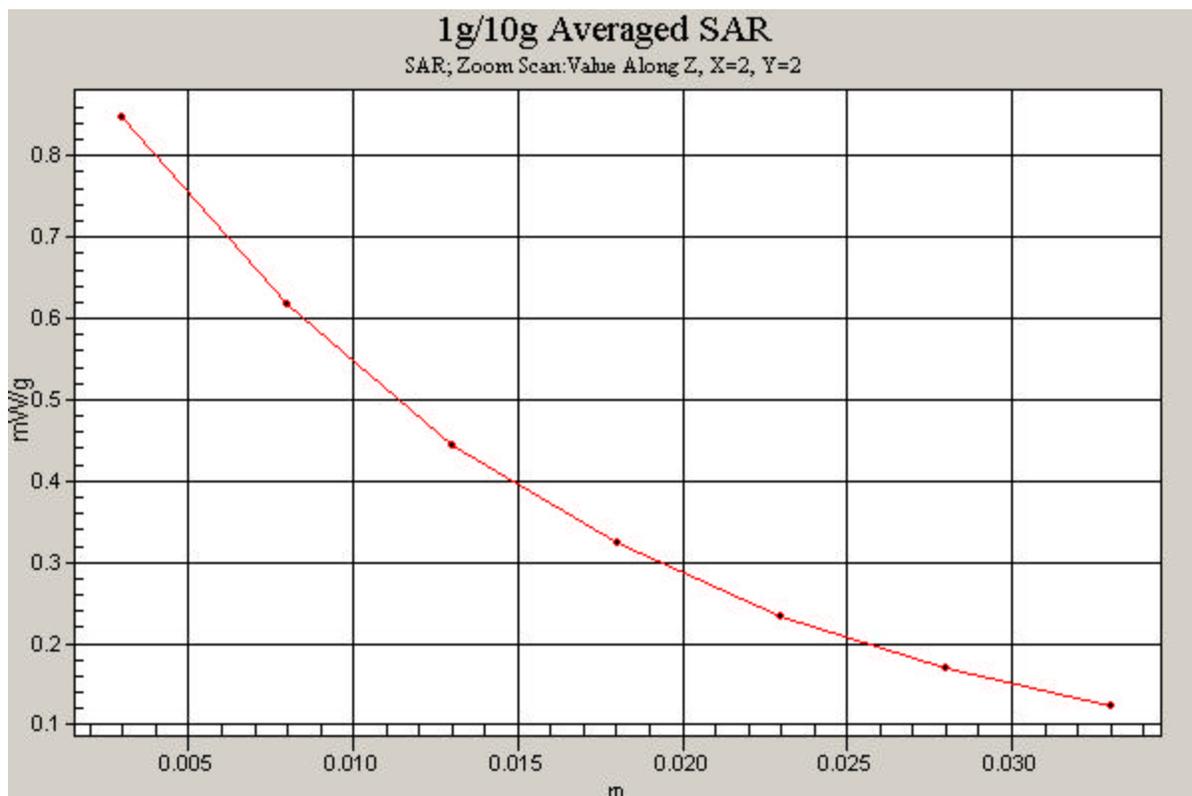

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Right Section

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Right Head, Touch, Mid ch, Standard Battery, Slide In**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.31 V/m

Peak SAR (extrapolated) = 0.489 W/kg

**SAR(1 g) = 0.321 mW/g; SAR(10 g) = 0.194 mW/g**

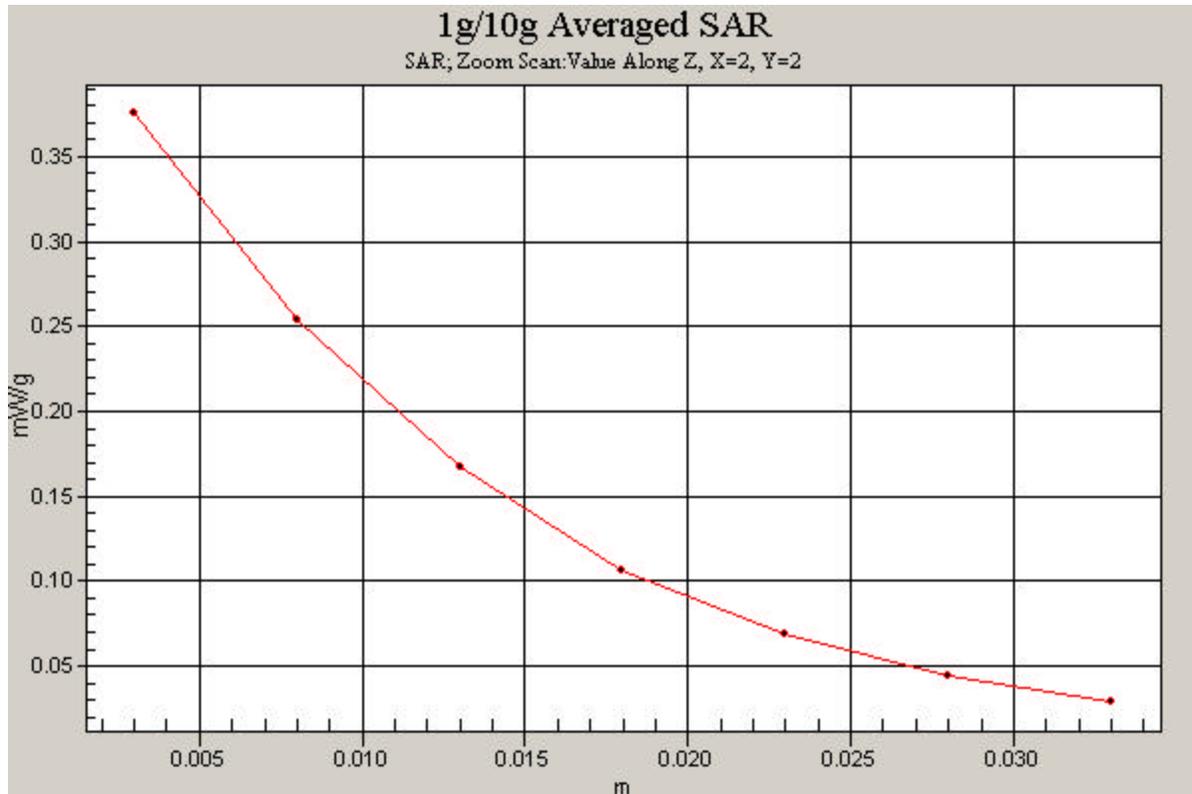

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: PTX-932; Type: Cellular CDMA/PCS GSM Phone with Bluetooth; S/N: K932-FP2-M-017**

Communication System: GSM1900 GPRS; 2 Tx slots; Frequency: 1880 MHz; Duty Cycle: 1:4.15

Medium: 1900 Muscle ( $\sigma = 1.59$  mho/m,  $\epsilon_r = 55.03$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-06-2009; Ambient Temp: 23.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3561; ConvF(6.7, 6.7, 6.7); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

**Mode: PCS GSM, Body SAR, Front Side, Mid ch, Standard Battery, 2 Slot**


**Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m;

Peak SAR (extrapolated) = 0.854 W/kg

**SAR(1 g) = 0.514 mW/g; SAR(10 g) = 0.303 mW/g**

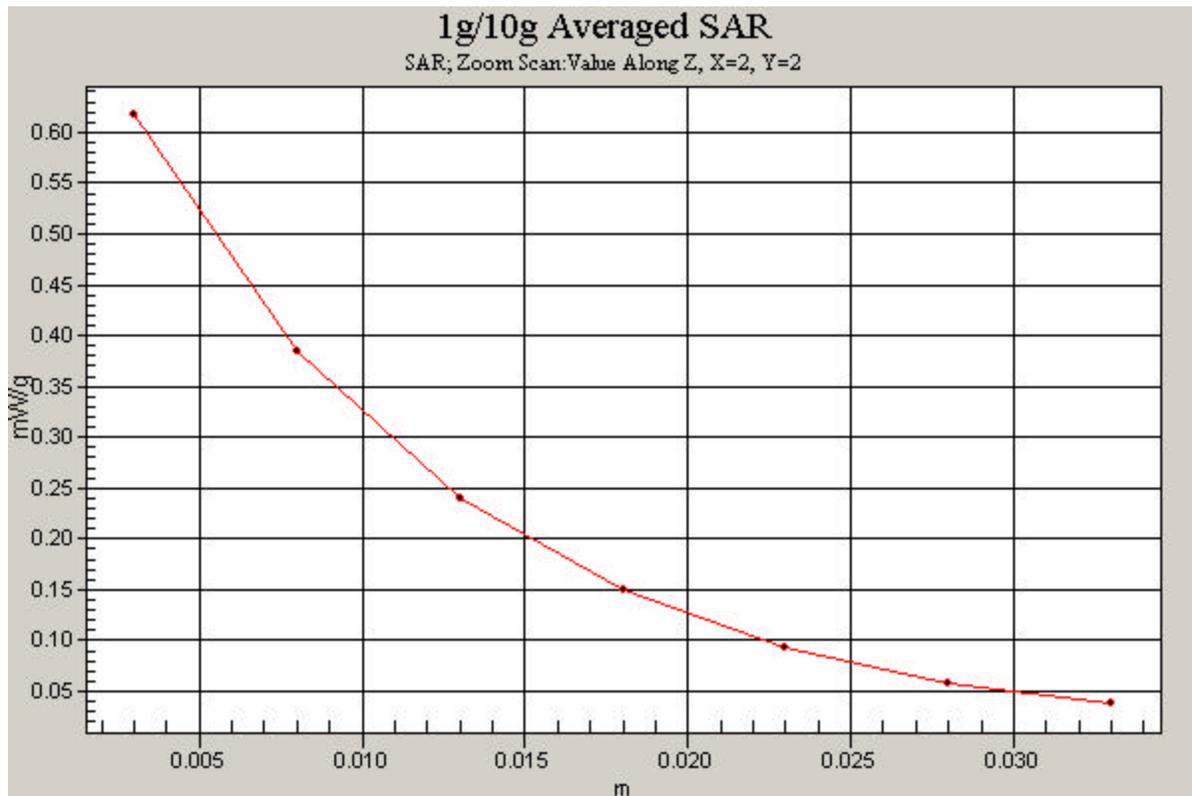

## **APPENDIX B: DIPOLE VALIDATION**

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: 1900MHz SAR Validation Dipole; Type: D1900V2; Serial: 5d080**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: 1900 Brain ( $\sigma = 1.46$  mho/m,  $\epsilon_r = 40.78$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.0 cm

Test Date: 01-06-2009; Ambient Temp: 23.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN3561; ConvF(7.01, 7.01, 7.01); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Sub; Type: SAM 4.0; Serial: TP-1357

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

## 1900MHz Dipole Validation


**Area Scan (5x7x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

**SAR(1 g) = 3.88 mW/g; SAR(10 g) = 1.96 mW/g**

Deviation = + 2.92 %

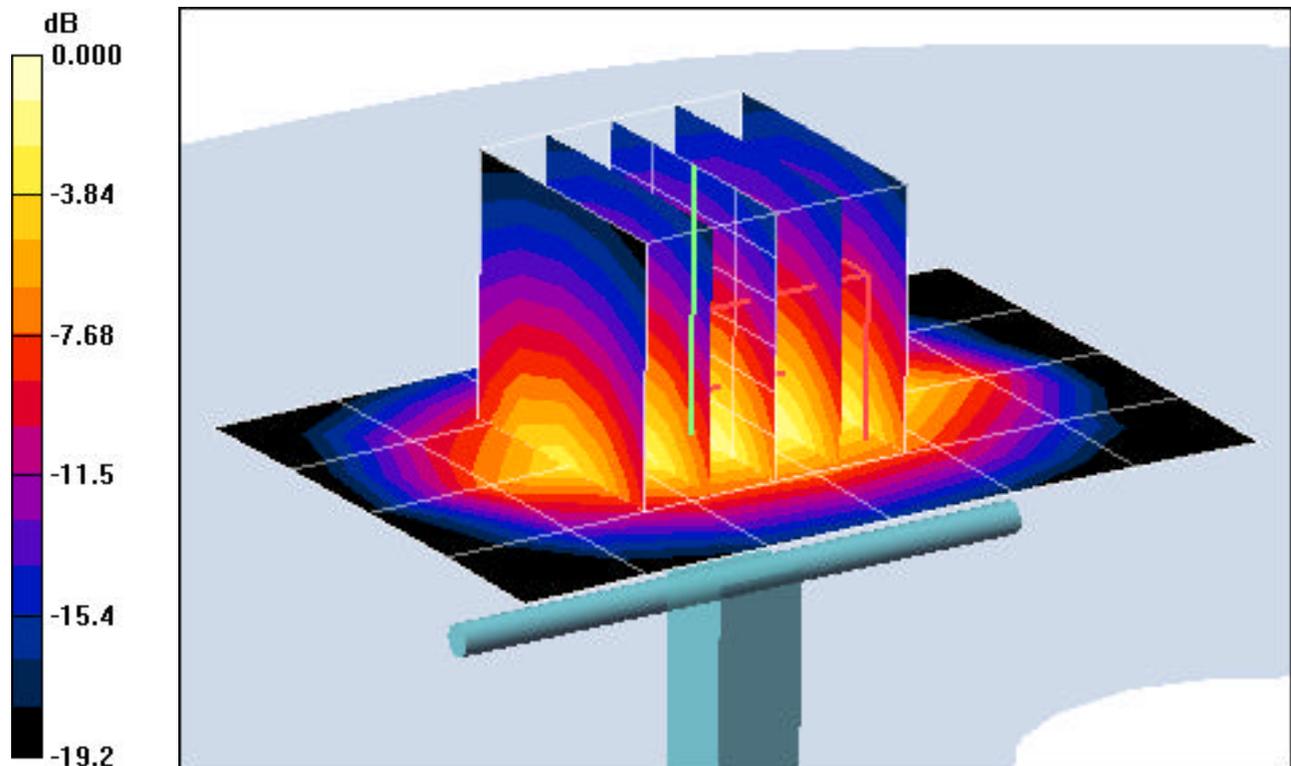

0 dB = 4.92mW/g

# PCTEST ENGINEERING LABORATORY, INC.

**DUT: 835MHz SAR Validation Dipole; Type: D835V2; Serial: 4d026**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: 835 Brain ( $\sigma = 0.88$  mho/m,  $\epsilon_r = 40.4$ ,  $\rho = 1000$  kg/m<sup>3</sup>)

Phantom section: Flat Section; Space: 1.5 cm

Test Date: 01-07-2009; Ambient Temp: 23.8°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN3561; ConvF(8.22, 8.22, 8.22); Calibrated: 8/26/2008

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE3 Sn455; Calibrated: 10/17/2008

Phantom: SAM Main; Type: SAM 4.0; Serial: TP-1114

Measurement SW: DASY4, V4.7 Build 71; Postprocessing SW: SEMCAD, V1.8 Build 172

## 835MHz Dipole Validation


**Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Input Power = 20.0 dBm (100 mW)

**SAR(1 g) = 0.976 mW/g; SAR(10 g) = 0.635 mW/g**

Deviation = + 8.32 %

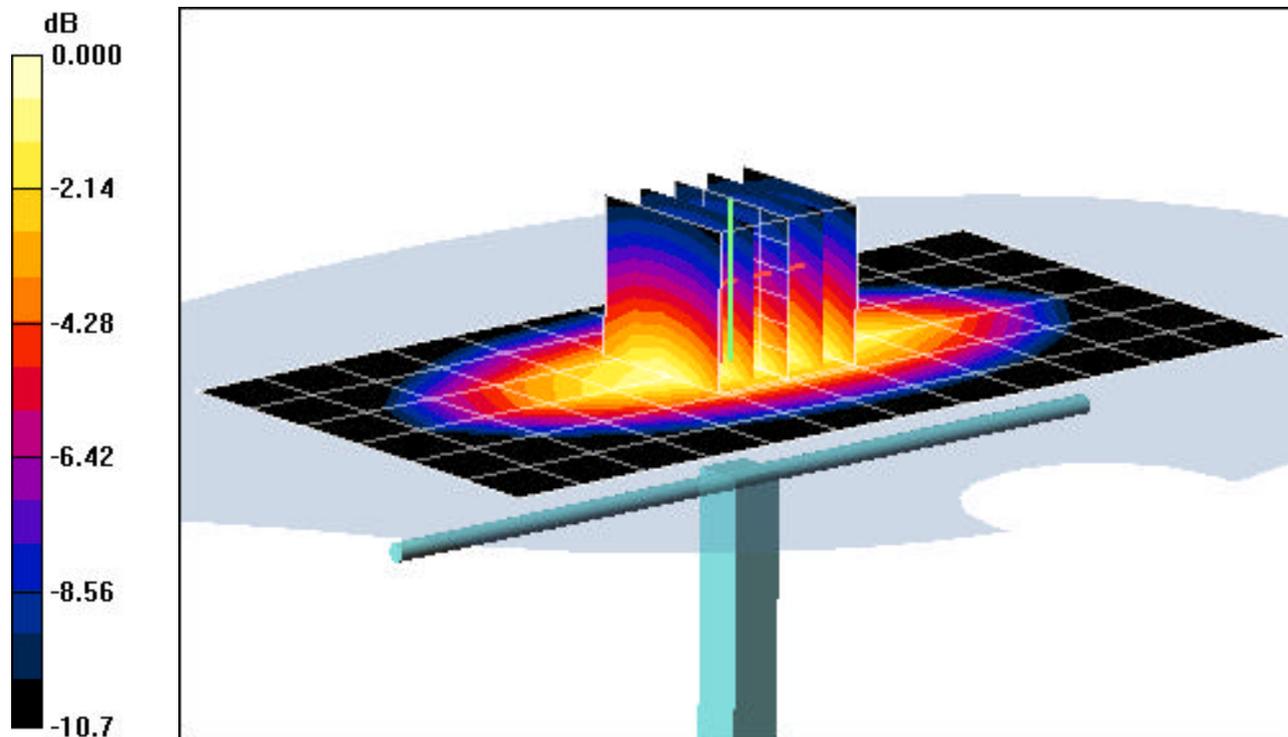

0 dB = 1.15mW/g

## **APPENDIX C: PROBE CALIBRATION**



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **PC Test**

Certificate No: **EX3-3561\_Aug08**

**CALIBRATION CERTIFICATE**

Object **EX3DV4 - SN:3561**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-14.v3 and QA CAL-23.v3  
Calibration procedure for dosimetric E-field probes**

Calibration date: **August 26, 2008**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41495277	1-Apr-08 (No. 217-00788)	Apr-09
Power sensor E4412A	MY41498087	1-Apr-08 (No. 217-00788)	Apr-09
Reference 3 dB Attenuator	SN: S5054 (3c)	1-Jul-08 (No. 217-00865)	Jul-09
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-08 (No. 217-00787)	Apr-09
Reference 30 dB Attenuator	SN: S5129 (30b)	1-Jul-08 (No. 217-00866)	Jul-09
Reference Probe ES3DV2	SN: 3013	2-Jan-08 (No. ES3-3013_Jan08)	Jan-09
DAE4	SN: 660	3-Sep-07 (No. DAE4-660_Sep07)	Sep-08

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-07)	In house check: Oct-09
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-07)	In house check: Oct-08

	Name	Function	Signature
Calibrated by:	Katja Pokovic	Technical Manager	
Approved by:	Niels Kuster	Quality Manager	

Issued: August 26, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below *ConvF*).
- NORM(f)<sub>x,y,z</sub>** = NORM<sub>x,y,z</sub> \* *frequency\_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV4

## SN:3561

Manufactured:	February 14, 2005
Last calibrated:	August 30, 2007
Recalibrated:	August 26, 2008

Calibrated for DASYS Systems

(Note: non-compatible with DASYS2 system!)

## DASY - Parameters of Probe: EX3DV4 SN:3561

### Sensitivity in Free Space<sup>A</sup>

NormX	<b>0.43</b> ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP X	<b>84</b> mV
NormY	<b>0.48</b> ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Y	<b>87</b> mV
NormZ	<b>0.43</b> ± 10.1%	$\mu\text{V}/(\text{V}/\text{m})^2$	DCP Z	<b>90</b> mV

### Diode Compression<sup>B</sup>

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

### Boundary Effect

**TSL**                      **835 MHz**      **Typical SAR gradient: 5 % per mm**

Sensor Center to Phantom Surface Distance		<b>2.0 mm</b>	<b>3.0 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	8.9	4.7
SAR <sub>be</sub> [%]	With Correction Algorithm	0.6	0.3

**TSL**                      **1810 MHz**      **Typical SAR gradient: 10 % per mm**

Sensor Center to Phantom Surface Distance		<b>2.0 mm</b>	<b>3.0 mm</b>
SAR <sub>be</sub> [%]	Without Correction Algorithm	7.8	3.9
SAR <sub>be</sub> [%]	With Correction Algorithm	0.8	0.1

### Sensor Offset

Probe Tip to Sensor Center                      **1.0 mm**


**The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.**

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Page 8).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.




# Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

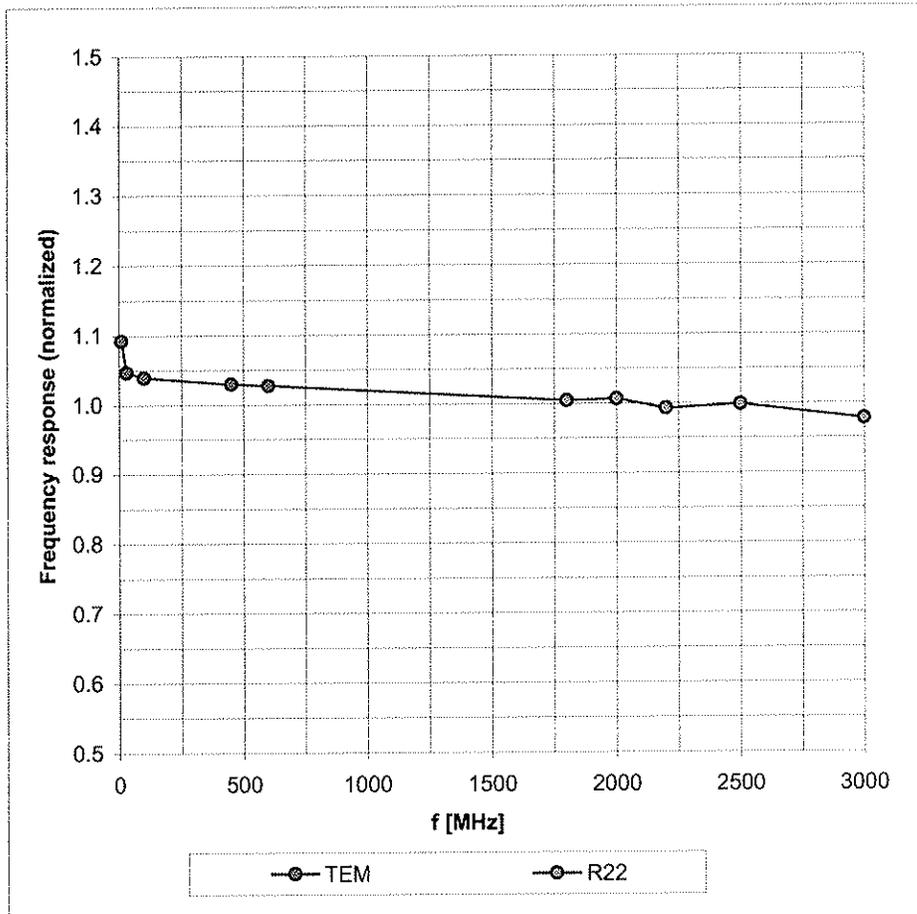


Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)

### Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

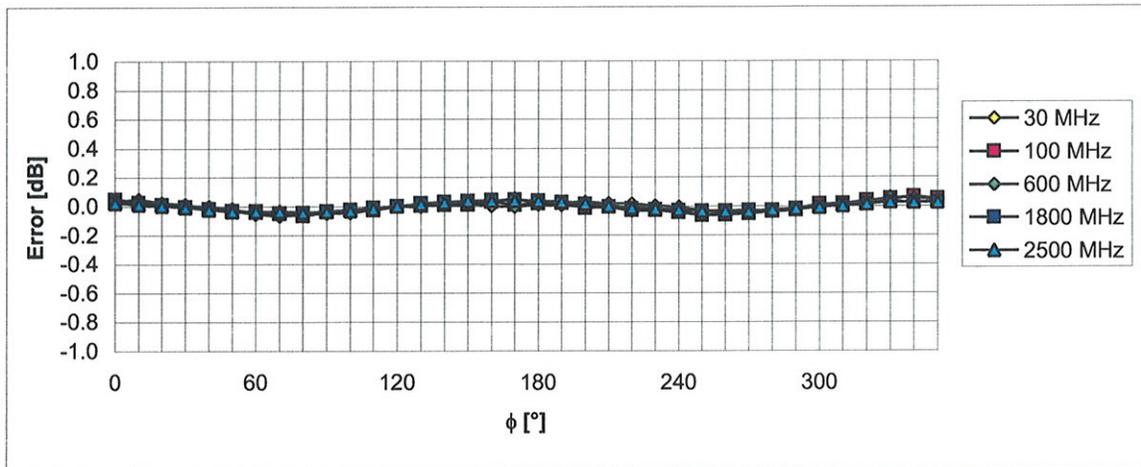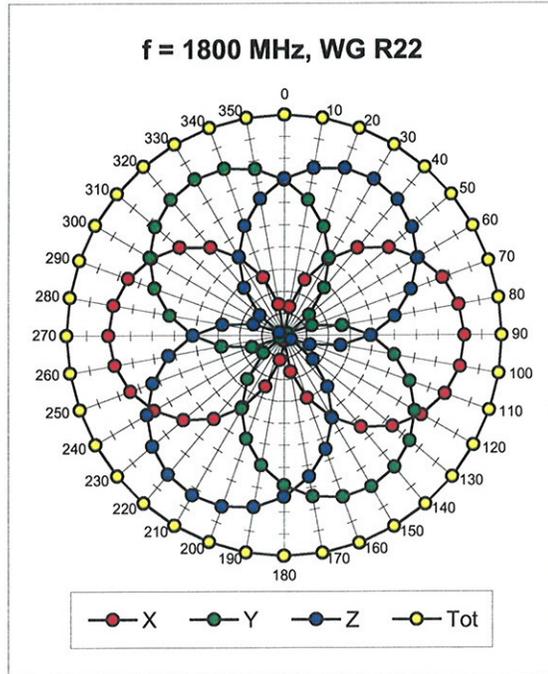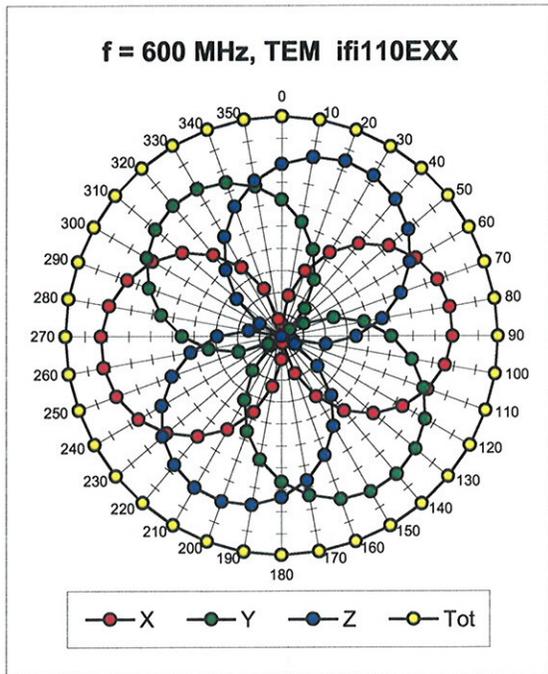

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)

## Dynamic Range $f(\text{SAR}_{\text{head}})$ (Waveguide R22, $f = 1800 \text{ MHz}$ )

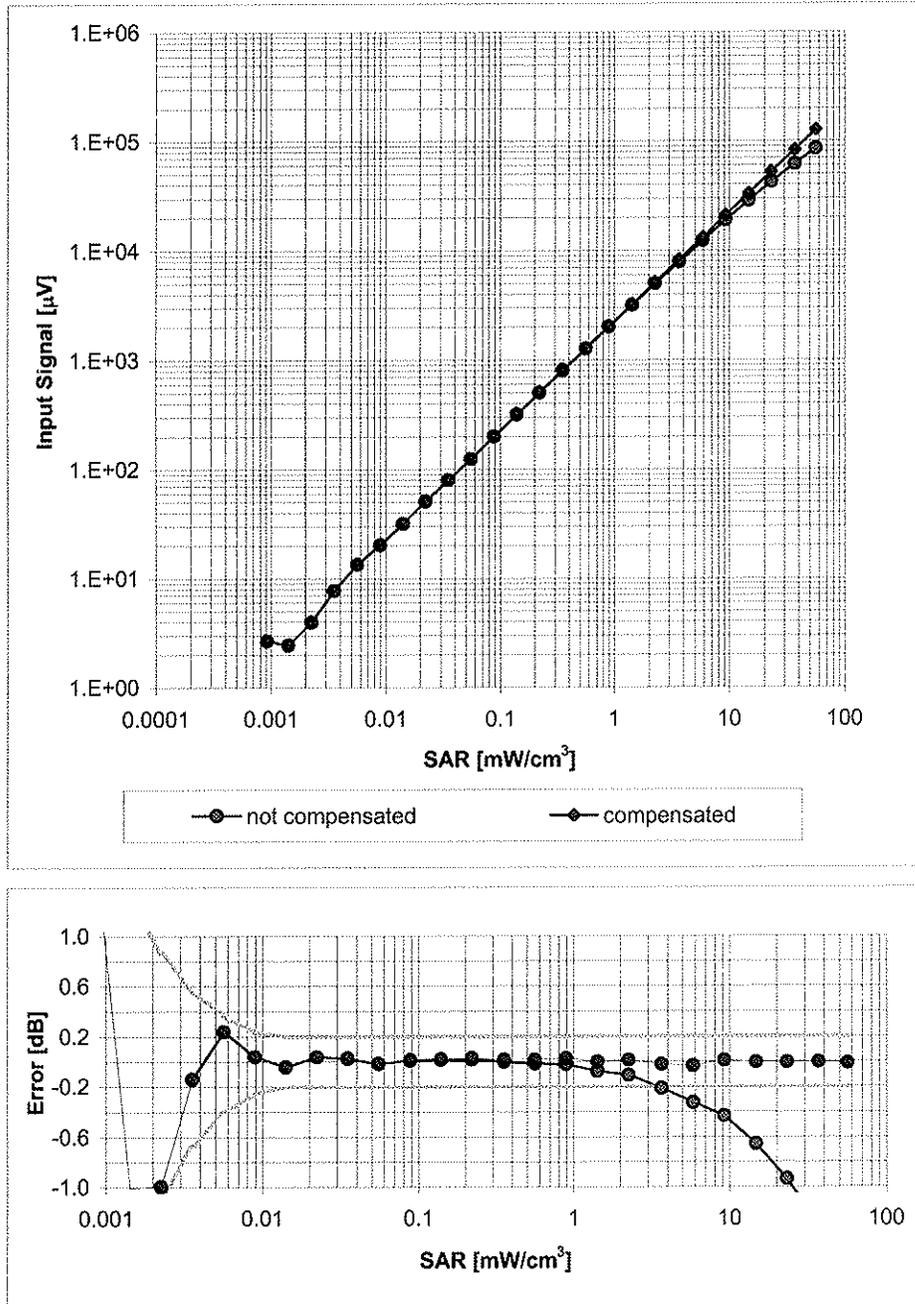

**Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )**


## Conversion Factor Assessment

f [MHz]	Validity [MHz] <sup>c</sup>	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
835	± 50 / ± 100	Head	41.5 ± 5%	0.90 ± 5%	0.50	0.75	8.22 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.50	0.70	7.01 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.66	0.63	6.38 ± 11.0% (k=2)
2600	± 50 / ± 100	Head	39.0 ± 5%	1.96 ± 5%	0.63	0.67	6.41 ± 11.0% (k=2)
4950	± 50 / ± 100	Head	36.3 ± 5%	4.40 ± 5%	0.43	1.60	4.84 ± 13.1% (k=2)
5200	± 50 / ± 100	Head	36.0 ± 5%	4.66 ± 5%	0.40	1.60	4.51 ± 13.1% (k=2)
5300	± 50 / ± 100	Head	35.9 ± 5%	4.76 ± 5%	0.40	1.60	4.29 ± 13.1% (k=2)
5500	± 50 / ± 100	Head	35.6 ± 5%	4.96 ± 5%	0.45	1.60	4.15 ± 13.1% (k=2)
5600	± 50 / ± 100	Head	35.5 ± 5%	5.07 ± 5%	0.45	1.60	3.97 ± 13.1% (k=2)
5800	± 50 / ± 100	Head	35.3 ± 5%	5.27 ± 5%	0.45	1.60	4.09 ± 13.1% (k=2)
835	± 50 / ± 100	Body	55.2 ± 5%	0.97 ± 5%	0.50	0.80	8.13 ± 11.0% (k=2)
1640	± 50 / ± 100	Body	53.8 ± 5%	1.40 ± 5%	0.50	0.75	7.33 ± 11.0% (k=2)
1810	± 50 / ± 100	Body	53.3 ± 5%	1.52 ± 5%	0.70	0.65	6.70 ± 11.0% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.80	0.66	6.16 ± 11.0% (k=2)
2600	± 50 / ± 100	Body	52.5 ± 5%	2.16 ± 5%	0.76	0.69	6.22 ± 11.0% (k=2)
4950	± 50 / ± 100	Body	49.4 ± 5%	5.01 ± 5%	0.45	1.75	4.23 ± 13.1% (k=2)
5200	± 50 / ± 100	Body	49.0 ± 5%	5.30 ± 5%	0.50	1.75	3.96 ± 13.1% (k=2)
5300	± 50 / ± 100	Body	48.5 ± 5%	5.42 ± 5%	0.50	1.75	3.83 ± 13.1% (k=2)
5500	± 50 / ± 100	Body	48.6 ± 5%	5.65 ± 5%	0.50	1.75	3.69 ± 13.1% (k=2)
5600	± 50 / ± 100	Body	48.5 ± 5%	5.77 ± 5%	0.50	1.75	3.73 ± 13.1% (k=2)
5800	± 50 / ± 100	Body	48.2 ± 5%	6.00 ± 5%	0.45	1.75	3.65 ± 13.1% (k=2)

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

# Deviation from Isotropy in HSL

Error ( $\phi, \vartheta$ ),  $f = 900$  MHz

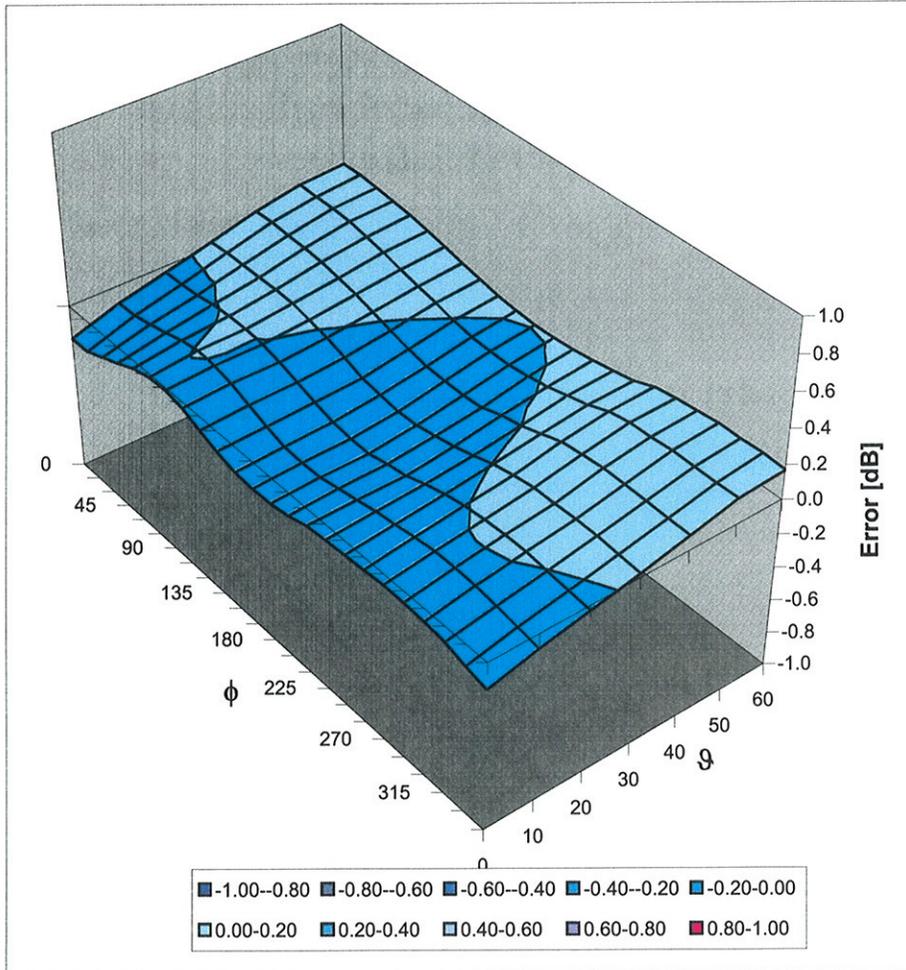

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )