



PCTEST ENGINEERING LABORATORY, INC.

6660-B Dobbin Road, Columbia, MD 21045 USA
Tel. 410.290.6652 / Fax 410.290.6554
http://www.pctestlab.com



CERTIFICATE OF COMPLIANCE FCC PART 15.239 Certification

Applicant Name:
SONY ERICSSON MOBILE COMMUNICATION INC.
7001 Development Drive
Research Triangle Park, NC 27709
USA

Date of Testing:
October 30, 2008
Test Site/Location:
PCTEST Lab. Columbia, MD, USA
Test Report Serial No.:
0810211554.PY7


FCC ID:	PY7A6880001
APPLICANT:	SONY ERICSSON MOBILE COMMUNICATION INC.

Model(s): PTX-931
EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter
Trade Name: SONY ERICSSON
Frequency Range: 88.2 – 95.0 MHz
FCC Classification: Low Power Communications Device Transmitter (DXX)
FCC Rule Part(s): Part 15 Subpart C (15.239)

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4-2003.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

PCTEST certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 862.


 Randy Ortanez
 President




FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 1 of 19	


TABLE OF CONTENTS

FCC PART 15.239 MEASUREMENT REPORT.....		3
1.0 INTRODUCTION.....		4
1.1 EVALUATION PROCEDURE.....		4
1.2 SCOPE.....		4
1.3 PCTEST LAB FACILITY LOCATION		4
2.0 PRODUCT INFORMATION		5
2.1 EQUIPMENT DESCRIPTION.....		5
2.2 EMI SUPPRESSION DEVICE(S)/MODIFICATIONS.....		5
3.0 DESCRIPTION OF TEST		6
3.1 CONDUCTED EMISSIONS.....		6
3.2 RADIATED EMISSIONS		7
4.0 ANTENNA REQUIREMENTS.....		8
5.0 TEST EQUIPMENT CALIBRATION DATA.....		9
6.0 TEST RESULTS		10
6.1 20DB BANDWIDTH MEASUREMENT.....		11
6.2 FIELD STRENGTH MEASUREMENTS		13
6.3 NUMBER OF CHANNELS (TUNING RANGE).....		14
6.4 RADIATED SPURIOUS MEASUREMENTS		15
RADIATED SPURIOUS MEASUREMENTS (CONT.)		16
RADIATED SPURIOUS MEASUREMENTS (CONT.)		17
6.5 LINE-CONDUCTED TEST DATA.....		18
7.0 CONCLUSION		19

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 2 of 19	



MEASUREMENT REPORT




FCC Part 15.239

A. § 2.1033 General Information

APPLICANT: SONY ERICSSON MOBILE COMMUNICATION INC.
APPLICANT ADDRESS: 7001 Development Drive
 Research Triangle Park, NC 27709, USA
TEST SITE: PCTEST ENGINEERING LABORATORY, INC.
TEST SITE ADDRESS: 6660-B Dobbin Road, Columbia, MD 21045 USA
FCC RULE PART(S): Part 15 Subpart C (15.239)
MODEL NAME: PTX-931
FCC ID: PY7A6880001
Test Device Serial No.: SS0ER000261 84 Production Pre-Production Engineering
FCC CLASSIFICATION: Low Power Communications Device Transmitter (DXX)
Method/System: Part 15 Subpart C (15.239)
DATE(S) OF TEST: October 30, 2008
TEST REPORT S/N: 0810211554.PY7

A.1 Test Facility / Accreditations

Measurements were performed at PCTEST Engineering Lab located in Columbia, MD 21045, U.S.A.



- PCTEST facility is an FCC registered (PCTEST Reg. No. 90864) test facility with the site description report on file and has met all the requirements specified in Section 2.948 of the FCC Rules and Industry Canada (IC-2451).
- PCTEST Lab is accredited to ISO 17025 by U.S. National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP Lab code: 100431-0) in EMC, FCC and Telecommunications.
- PCTEST Lab is accredited to ISO 17025-2005 by the American Association for Laboratory Accreditation (A2LA) in Specific Absorption Rate (SAR) testing, Hearing Aid Compatibility (HAC) testing, CTIA Test Plans, and wireless testing for FCC and Industry Canada Rules.
- PCTEST Lab is a recognized U.S. Conformity Assessment Body (CAB) in EMC and R&TTE (n.b. 0982) under the U.S.-EU Mutual Recognition Agreement (MRA).
- PCTEST TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC Guide 65 by the American National Standards Institute (ANSI) in all scopes of FCC Rules and Industry Canada Standards (RSS).
- PCTEST facility is an IC registered (IC-2451) test laboratory with the site description on file at Industry Canada.
- PCTEST is a CTIA Authorized Test Laboratory (CATL) for AMPS, CDMA, and EvDO wireless devices and for Over-the-Air (OTA) Antenna Performance testing for AMPS, CDMA, GSM, GPRS, EGPRS, UMTS (W-CDMA), CDMA 1xEVDO, and CDMA 1xRTT.

FCC ID: PY7A6880001	FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 3 of 19	

1.0 INTRODUCTION

1.1 Evaluation Procedure

The measurement procedure described in the American National Standard for Methods of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C63.4-2003) and FCC Section 15.239 were used in the measurement of the **Sony Ericsson Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter FCC ID: PY7A6880001**.

Deviation from measurement procedure.....None.

1.2 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission.

1.3 PCTEST Lab Facility Location

The map at the right shows the location of the PCTEST LABORATORY, its proximity to the FCC Laboratory, the Columbia vicinity are, the Baltimore-Washington Intern'l (BWI) airport, the city of Baltimore and the Washington, DC area. (see Figure 1.3-1).

These measurement tests were conducted at the PCTEST Engineering Laboratory, Inc. facility in New Concept Business Park, Guilford Industrial Park, Columbia, Maryland. The site address is 6660-B Dobbin Road, Columbia, MD 21045. The test site is one of the highest points in the Columbia area with an elevation of 390 feet above mean sea level. The site coordinates are 39° 11'15" N latitude and 76° 49'38" W longitude. The facility is 1.5 miles North of the FCC laboratory, and the ambient signal and ambient signal strength are approximately equal to those of the FCC laboratory. There are no FM or TV transmitters within 15 miles of the site. The detailed description of the measurement facility was found to be in compliance with the requirements of § 2.948 according to ANSI C63.4-2003 on January 27, 2006 and Industry Canada.

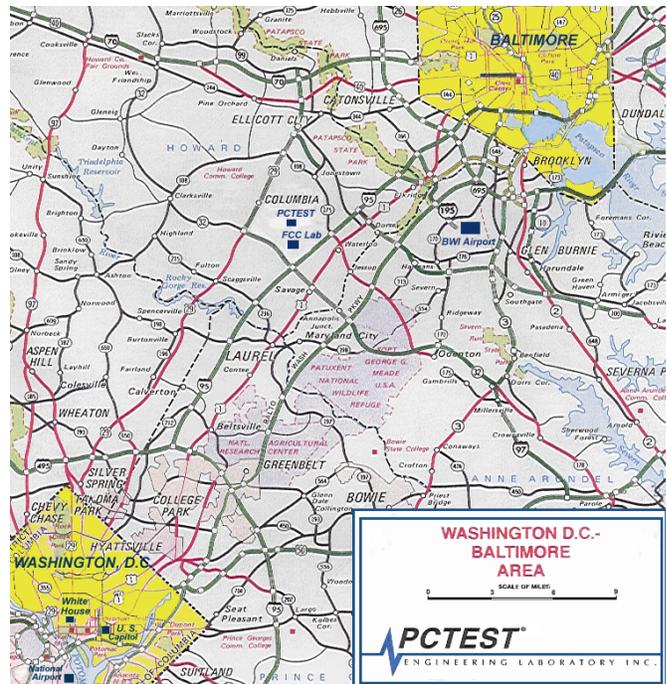


Figure 1.3-1. Map of the Greater Baltimore and Metropolitan Washington, D.C. area

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter		Page 4 of 19

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **Sony Ericsson Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter FCC ID: PY7A6880001**. This test report covers the results of testing for the FM Transmitter portion only. Other functions are covered under separate test reports.

- Operating Frequency: 88.2 – 95.0 MHz
- The EUT consisted of the following component(s):

Manufacturer / Description	FCC ID	Serial Number
Sony Ericsson Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	PY7A6880001	SS0ER000261 84

Table 2-1. EUT Equipment Description

2.2 EMI Suppression Device(s)/Modifications

EMI suppression device(s) added and/or modifications made during testing.

- None

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 5 of 19	

3.0 DESCRIPTION OF TEST

3.1 Conducted Emissions

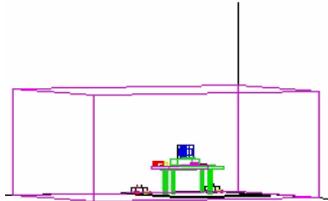


Figure 3.1-1. Shielded Enclosure Line-Conducted Test Facility

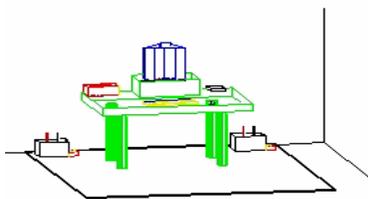


Figure 3.1-2. Line Conducted Emission Test Set-Up

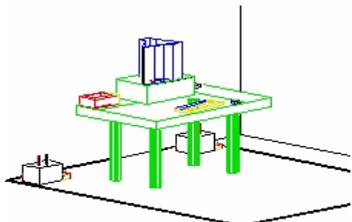


Figure 3.1-3. Wooden Table & Bonded LISNs

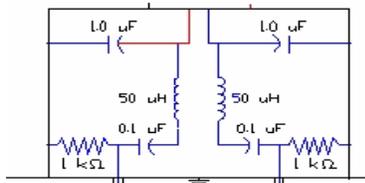


Figure 3.1-4. LISN Schematic Diagram

The line-conducted facility is located inside a 16'x20'x10' shielded enclosure, manufactured by Ray Proof Series 81 (see Figure 3.1-1). The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the sidewall of the shielded room (see Figure 3.1-2). Solar Electronics and EMCO Model 3725/2 (10kHz-30MHz) 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room (See Figure 3.1-3). The EUT is powered from the Solar LISN and the support equipment is powered from the EMCO LISN. Power to the LISNs are filtered by a high-current high-insertion loss Ray Proof power line filter (100dB 14Hz-10GHz). The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure. All electrical cables are shielded by braided tinned copper zipper tubing with an inner diameter of ½". If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the Solar LISN. The LISN schematic diagram is shown (See Figure 3.1-4). All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to CISPR quasi-peak and average mode. The bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each EME emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit B. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator.

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter		Page 6 of 19

3.2 Radiated Emissions

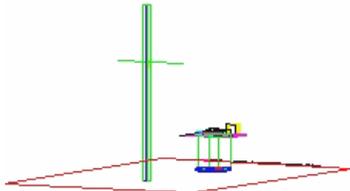


Figure 3.2-1. 3-Meter Test Site

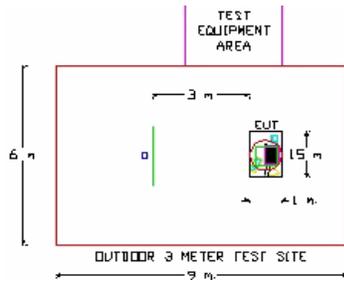


Figure 3.2-2. Dimensions of Outdoor Test Site

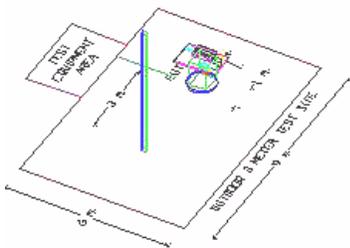


Figure 3.2-3. Turntable and System Setup

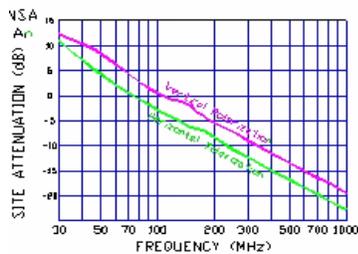


Figure 3.2-4. Normalized Site Attenuation Curves (H&V)

Preliminary measurements were made indoors at 1-meter using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequency producing the maximum EME. Appropriate precaution was taken to ensure that all EME from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, and turntable azimuth with respect to the antenna was noted for each frequency found. The spectrum was scanned from 30 to 200 MHz using a bi-conical antenna and from 200 to 1000 MHz using a log-spiral antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used.

Final measurements were made outdoors at 3-meter test range using Roberts™ Dipole antennas or horn antennas (see Figure 3.2-1). The test equipment was placed on a wooden and plastic bench situated on a 1.5m x 2m area adjacent to the measurement area (see Figure 3.2-2). Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The detector function was set to CISPR quasi-peak mode and the bandwidth of the spectrum analyzer was set to 100kHz for frequencies below 1GHz or 1MHz for frequencies above 1GHz. Above 1GHz the detector function was set to average mode (RBW = 1MHz, VBW = 10Hz).

The half-wave dipole antenna was tuned to the frequency found during preliminary radiated measurements. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1 x 1.5 meter table (see Figure 3.2-3). The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each EME emission. The turntable containing the system was rotated and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by: varying the mode of operation or resolution; clock or data exchange speed; scrolling H pattern to the EUT and/or support equipment, and powering the monitor from the floor mounted outlet box and the computer aux AC outlet, if applicable; and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Exhibit B. Each EME reported was calibrated using the Agilent E8257D (250kHz – 20GHz) PSG Signal Generator. The Theoretical Normalized Site Attenuation Curves for both horizontal and vertical polarization are shown in Figure 3.2-4.

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter		Page 7 of 19

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

Antenna Construction:

- The Sony Ericsson Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter FCC ID: PY7A6880001 contains an internal antenna.

Conclusion:

The **Sony Ericsson Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter FCC ID: PY7A6880001** unit complies with the requirement of §15.203.

FCC ID: PY7A6880001	 FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		 Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 8 of 19

5.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST).

Manufacturer	Model	Description	Calibration Date	Cal Interval	Calibration Due	Serial No.
-	No.165	(30MHz - 1000MHz) RG58 Coax Cable	N/A		N/A	N/A
-	No.166	(1000-26500MHz) Microwave RF Cable	N/A		N/A	N/A
-	No.167	(100kHz - 100MHz) RG58 Coax Cable	N/A		N/A	N/A
Agilent	11713A	Attenuation/Switch Driver	12/13/07	Annual	12/13/08	3439A02645
Agilent	8447D	Broadband Amplifier	N/A		N/A	1937A03348
Agilent	8447D	Broadband Amplifier	N/A		N/A	2443A01900
Agilent	8449B	(1-26.5GHz) Pre-Amplifier	12/13/07	Annual	12/12/08	3008A00985
Agilent	85650A	Quasi-Peak Adapter	3/13/08	Annual	3/13/09	2043A00301
Agilent	8566B	(100Hz-22GHz) Spectrum Analyzer	12/13/07	Annual	12/13/08	3638A08713
Agilent	8566B	Opt. 462 Impulse Bandwidth	12/13/07	Annual	12/12/08	3701A22204
Agilent	8591A	(9kHz-1.8GHz) Spectrum Analyzer	8/19/08	Annual	8/19/09	3144A02458
Agilent	E4407B	ESA Spectrum Analyzer	3/13/08	Annual	3/13/09	US39210313
Agilent	E4448A	(3Hz-50GHz) Spectrum Analyzer	1/24/08	Annual	1/24/09	US42510244
Agilent	E8257D	(250kHz-20GHz) Signal Generator	3/8/07	Biennial	3/8/09	MY45470194
Compliance Design	Roberts	Dipole Set	11/9/07	Biennial	11/8/09	146
Compliance Design	Roberts	Dipole Set	11/9/07	Biennial	11/8/09	147
Emco	6502	Active Loop Antenna (10k - 30 MHz)	11/6/07	Annual	11/5/08	267
Emco	3121C-DB4	Dipole Antenna	1/23/07	Biennial	1/22/09	00023951
Pasternack	PE7000-6	6 dB Attenuator	N/A		N/A	
Solar Electronics	8012-50-R-24-BNC	LISN	11/8/07	Biennial	11/8/09	0310233
Sunol	JB5	Bi-Log 3m Antenna (>1GHz)	5/25/07	Biennial	5/24/09	A051107

Table 5.0. Annual Test Equipment Calibration Schedule

FCC ID: PY7A6880001	 FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter		Page 9 of 19

6.0 TEST RESULTS

Summary

The intentional radiator has been bench tested to demonstrate compliance with the relevant FCC performance and procedural standards. The volume was set to maximum with the cell phone software playing the MP3 file and the FM transmitter was transmitting at full power on the selected frequency. The frequencies tested are high (95.0MHz), middle (91.6MHz) and low (88.2MHz) of the allocated band. Final system data was gathered in a mode that tended to maximize emissions by varying the orientation of the EUT, orientation of antenna and I/O cabling, antenna search height, and antenna polarization. The unit was tested at the lowest, highest and mid frequency of operation in three orthogonal positions with the worst case reported.

Method/System: FM Transmitter

FCC Part Section(s)	RSS Section	Test Description	Test Limit	Test Condition	Test Result
<u>TRANSMITTER MODE (TX)</u>					
15.239(a)	RSS-210 [A.2.8]	20dB Bandwidth	< 200 kHz	Radiated	PASS
15.239(b)	RSS-210 [A.2.8]	Field Strength	< 250 uV/m @ 3 meters		PASS
15.239(a)	RSS-210 [A.2.8]	Number of Channels	100 Channels		PASS
15.205 15.209	RSS-210 [A.2.8]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	< FCC 15.209 limits or < RSS-210 table 3 limits Emissions in restricted bands must meet the radiated limits detailed in 15.209		PASS
15.207	RSS-Gen [7.2.2]	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits or < RSS-Gen table 2 limits	Line Conducted	PASS
<u>RF EXPOSURE (SAR OR MPE)</u>					
2.1093 / 2.1091	RSS-102	SAR Test	1.6 W/kg (SAR Limit)	3 Channels	PASS

Table 6.0. Summary of Test Results

FCC ID: PY7A6880001	 FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)			Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 10 of 19	


6.1 20dB Bandwidth Measurement

§15.239(a); RSS-210

The bandwidth at 20dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the receive antenna while the EUT is operating in transmission mode at the appropriate frequencies. For maximum power and bandwidth the volume was set to maximum with the cell phone software playing the MP3 file. **The maximum permissible 20dB bandwidth is 200 kHz.**


FREQUENCY (kHz)	20db BW (kHz)	Limit (kHz)	Results
88.2	88.75	200	Pass
91.6	88.75	200	Pass
95.0	88.75	200	Pass

Table 6.1. Occupied Bandwidth Measurements

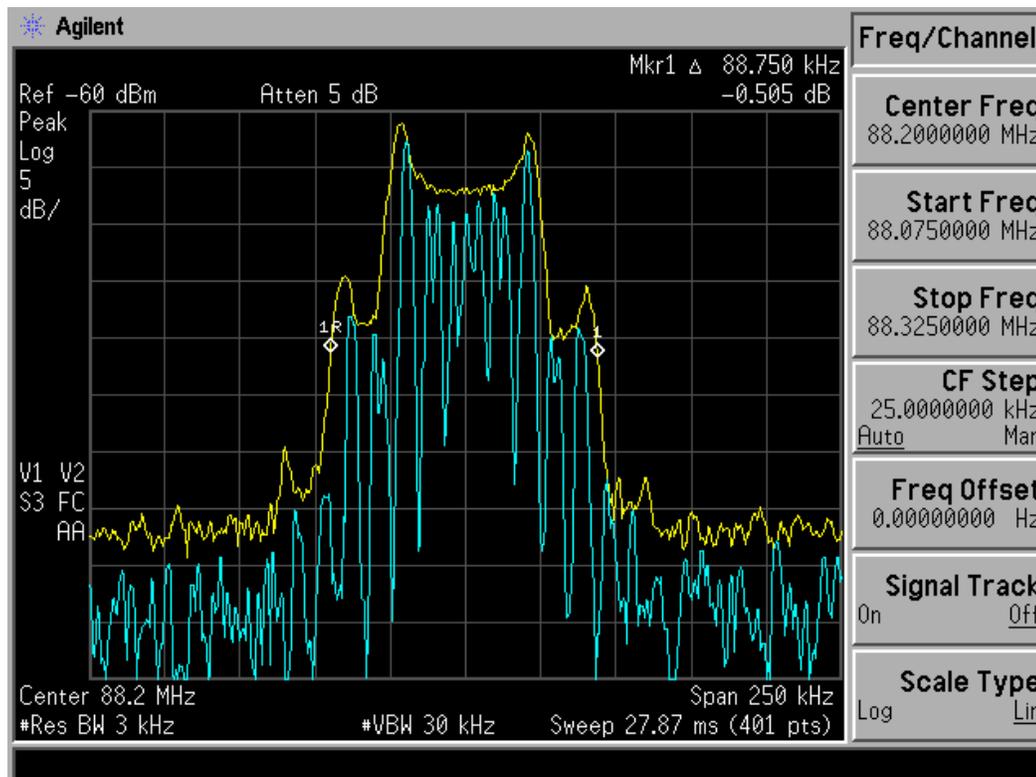


Plot 6.1.1. 20dB Bandwidth Plot (Low Channel: 88.2MHz)

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter		Page 11 of 19

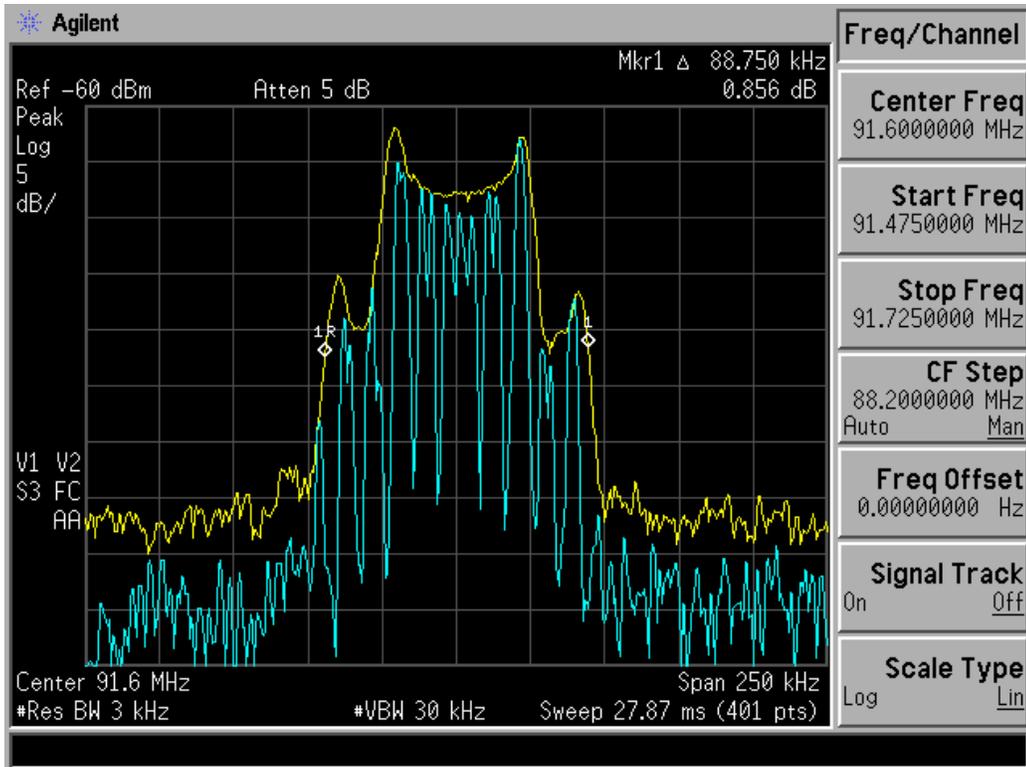

Plot 6.1.2. 20dB Bandwidth Plot (Mid Channel: 91.6MHz)

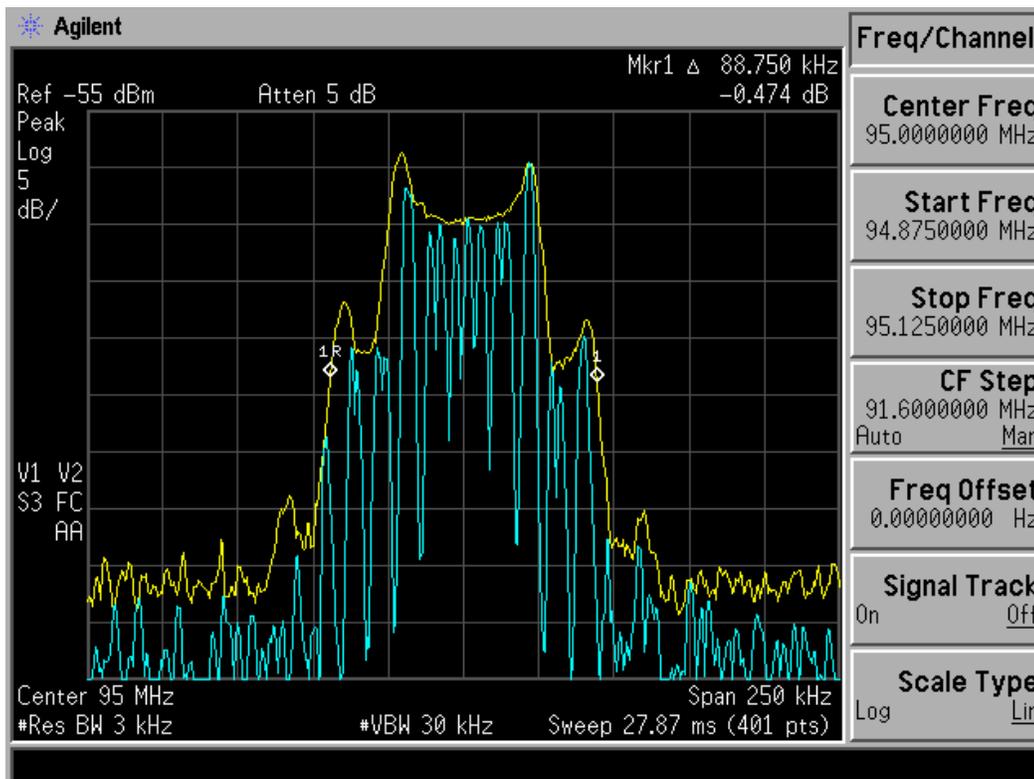

Plot 6.1.3. 20dB Bandwidth Plot (High Channel: 95MHz)

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter		Page 12 of 19

6.2 Field Strength Measurements

§15.239; RSS-210

Note:

The unit was tested with the lowest, highest and mid channels. Three orthogonal positions were tested with the worst case levels reported.

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
88.20	-78.00	11.14	H	1.6	230	40.13	101.56	-7.83
88.20	-78.70	11.14	V	1.2	290	39.43	93.70	-8.53
91.60	-76.66	11.42	H	1.7	240	41.76	122.49	-6.20
91.60	-75.86	11.42	V	1.2	294	42.56	134.31	-5.40
95.00	-75.50	11.95	H	1.7	230	43.45	148.80	-4.51
95.00	-75.40	11.95	V	1.3	230	43.55	150.53	-4.41

Table 6.2. Field Strength Measurements at 3 meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the nominal DC voltage or/and a new/fully re-charged battery.
3. Levels recorded in the above table are average measurements.

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 13 of 19	

6.3 Number of Channels (Tuning Range)

§15.239 (a); RSS-210

Measurement is made while EUT is operating in transmitting mode.

Ch.	Frequency (MHz)
Low	88.2
	...
Mid	91.6
	...
Hi	95.0

Table 6.3. Frequency/ Channel Operations

FCC ID: PY7A6880001	 FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		 Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 14 of 19

6.4 Radiated Spurious Measurements

§15.205 / §15.209; RSS-210

Mode: TX

Measurement Distance: 3 Meters

Operating Frequency: 88.2MHz

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
176.40	-103.35	14.41	V	1.2	290	18.06	8.00	-25.46
264.60	-126.10	14.58	V	1.3	290	-4.52	0.59	-50.54
352.80	-126.13	17.57	V	1.3	290	-1.56	0.84	-47.58
441.00	-126.15	19.54	V	1.3	290	0.39	1.05	-45.64
529.20	-126.12	21.18	V	1.3	290	2.05	1.27	-43.97
617.40	-126.02	22.63	V	1.3	290	3.61	1.52	-42.41

Table 6.4.1 Radiated Spurious Measurements at 3-meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the nominal DC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. < -135 dBm is below the analyzer measurement floor level.

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 15 of 19	

Radiated Spurious Measurements (cont.)

§15.205 / §15.209; RSS-210

Mode: TX

Measurement Distance: 3 Meters

Operating Frequency: 91.6MHz

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
183.20	-104.01	14.45	V	1.3	294	17.45	7.45	-26.07
274.80	-127.57	15.05	V	1.3	294	-5.53	0.53	-51.55
366.40	-127.37	17.90	V	1.3	294	-2.47	0.75	-48.49
458.00	-127.22	19.87	V	1.3	294	-0.35	0.96	-46.37
549.60	-127.03	21.53	V	1.3	294	1.51	1.19	-44.51
641.20	-126.81	22.99	V	1.3	294	3.18	1.44	-42.84

Table 6.4.2. Radiated Spurious Measurements at 3-meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the nominal DC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. < -135 dBm is below the analyzer measurement floor level.

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 16 of 19	

Radiated Spurious Measurements (cont.)

§15.205 / §15.209; RSS-210

Mode: TX

Measurement Distance: 3 Meters

Operating Frequency: 95.0MHz

Frequency [MHz]	Level [dBm]	AFCL [dB]	Pol [H/V]	Height [m]	Azimuth [degrees]	Field Strength [dBμV/m]	Field Strength [μV/m]	Margin [dB]
190.00	-103.50	14.49	V	1.3	230	17.99	7.94	-25.53
285.00	-127.55	15.50	V	1.3	230	-5.04	0.56	-51.07
380.00	-127.35	18.22	V	1.3	230	-2.12	0.78	-48.14
475.00	-127.20	20.19	V	1.3	230	-0.01	1.00	-46.03
570.00	-126.97	21.88	V	1.3	230	1.90	1.24	-44.12
665.00	-126.75	23.33	V	1.3	230	3.58	1.51	-42.44

Table 6.4.3 Radiated Spurious Measurements at 3-meters

NOTES:

1. The antenna is manipulated through typical positions, polarity and length during the testing.
2. The EUT is supplied with the nominal DC voltage or/and a new/fully re-charged battery.
3. The spectrum is measured from 9kHz up to the 10th harmonic and the worst-case emissions are reported.
4. < -135 dBm is below the analyzer measurement floor level.

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 17 of 19	


6.5 Line-Conducted Test Data

§15.207; RSS-Gen (7.2.2)

PCTEST Engineering Laboratory Inc.

Company : Sony Ericsson Mobile, Inc.
 Model Number : PTX-931
 FCC ID Code : PY7A688001
 Standard : FCC Part 15C, 15.207

Power Source : AC120V/60Hz
 Tested Date : 10/30/2008
 Note : Tested with FM Transmitter ON

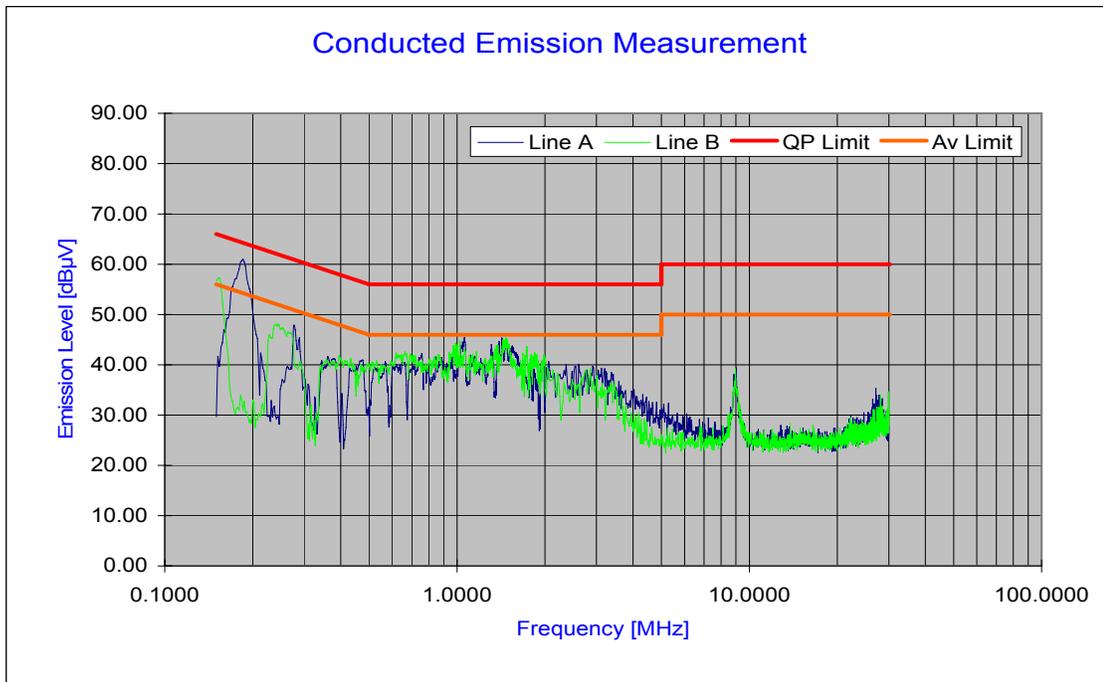

Ver.1.1 ©PCTEST 2006.08

No.	Line	Frequency [MHz]	Factor [dB]	QP [dBµV]	Limit [dBµV]	Margin [dB]	Average [dBµV]	Limit [dBµV]	Margin [dB]
1	A	0.168	8.09	43.62	65.05	-21.43	31.20	55.05	-23.85
2	A	0.424	7.65	32.88	60.88	-28.00	25.25	50.88	-25.63
3	A	0.747	7.37	31.16	56.00	-24.84	18.72	46.00	-27.28
4	A	1.072	7.32	33.80	56.00	-22.20	18.55	46.00	-27.45
5	A	1.296	7.33	36.64	56.00	-19.36	18.45	46.00	-27.55
6	A	1.311	7.34	38.49	56.00	-17.51	18.66	46.00	-27.34
7	A	1.386	7.34	29.48	56.00	-26.52	18.58	46.00	-27.42
8	A	1.427	7.35	40.31	56.00	-15.69	18.65	46.00	-27.35
9	A	1.448	7.35	38.44	56.00	-17.56	20.37	46.00	-25.63
10	A	1.583	7.36	26.89	56.00	-29.11	18.54	46.00	-27.46
11	B	0.150	8.20	46.80	66.00	-19.20	34.53	56.00	-21.47
12	B	0.981	7.33	25.09	56.00	-30.91	18.48	46.00	-27.52
13	B	1.012	7.32	34.30	56.00	-21.70	18.63	46.00	-27.37
14	B	1.024	7.32	38.98	56.00	-17.02	31.76	46.00	-14.24
15	B	1.168	7.32	26.52	56.00	-29.48	18.71	46.00	-27.29
16	B	1.346	7.34	27.63	56.00	-28.37	18.55	46.00	-27.45
17	B	1.365	7.34	24.91	56.00	-31.09	18.59	46.00	-27.41
18	B	1.367	7.34	27.56	56.00	-28.44	18.93	46.00	-27.07
19	B	1.473	7.35	31.87	56.00	-24.13	21.58	46.00	-24.42
20	B	1.734	7.37	32.87	56.00	-23.13	18.67	46.00	-27.33

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)		Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter		Page 18 of 19

7.0 CONCLUSION

The data collected relate only the item(s) tested and show that the **Sony Ericsson Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter FCC ID: PY7A6880001** is in compliance with Part 15 Subpart C (15.239) of the FCC Rules.

FCC ID: PY7A6880001		FCC Pt. 15.239 FM TRANSMITTER TEST REPORT (CERTIFICATION)	 Reviewed by: Quality Manager
Test Report S/N: 0810211554.PY7	Test Dates: October 30, 2008	EUT Type: Cellular CDMA Phone with Bluetooth, RFID and FM Transmitter	Page 19 of 19