



## Accredited testing-laboratory

**DAR registration number: DAT-P-176/94-D1**

**Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97**

**Recognized by the Federal Communications Commission**

**Anechoic chamber registration no.: 90462 (FCC)**

**Anechoic chamber registration no.: 3463A-1 (IC)**

**Certification ID: DE 0001**

**Accreditation ID: DE 0002**

**Accredited Bluetooth® Test Facility (BQTF)**

*The Bluetooth word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by Cetecom ICT is under license*

**Test report no. : 2-4883-05-03-A/08**  
**Type identification : FAD-3022019-BV**  
**Applicant : Sony Ericsson Mobile Communications AB**  
**FCC ID : PY7F3022019**  
**IC Certification No : 4170B-F3022019**  
**Test standards : 47 CFR Part 15**  
**RSS - 210 Issue 7**

## Table of contents

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>General information</b> .....  | <b>3</b>  |
|          | Notes .....   | 3         |
|          | Testing laboratory .....  | 4         |
|          | Details of applicant.....   | 4         |
|          | Application details.....  | 4         |
| <b>2</b> | <b>Test standard/s:</b> .....   | <b>5</b>  |
| <b>3</b> | <b>Technical tests</b> .....  | <b>6</b>  |
|          | Details of manufacturer .....   | 6         |
|          | 3.1.1 Test item.....  | 6         |
|          | 3.1.2 Additional EUT information For IC Canada (appendix 2).....                      | 7         |
|          | 3.1.3 EUT operating modes.....  | 8         |
|          | 3.1.4 Extreme conditions testing values .....   | 8         |
| <b>4</b> | <b>Summary of Measurement Results and list of all performed test cases</b> .....      | <b>9</b>  |
| <b>5</b> | <b>RF measurement testing</b> .....   | <b>10</b> |
|          | 5.1 Description of test set-up.....   | 10        |
|          | 5.1.1 Radiated measurements.....  | 10        |
|          | 5.1.2 Conducted measurements.....   | 10        |
|          | 5.2 Referenced documents .....  | 11        |
|          | 5.3 Additional comments .....   | 11        |
|          | 5.4 Antenna gain .....  | 11        |
|          | 5.5 Carrier frequency separation §15.247(a)(1) .....                                  | 12        |
|          | 5.6 Number of hopping channels §15.247(a)(1).....                                     | 13        |
|          | 5.7 Time of occupancy (dwell time) §15.247(a)(1)(iii).....                            | 14        |
|          | 5.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan) §15.247(e) ..... | 15        |
|          | 5.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a)(1).....           | 16        |
|          | 5.10 Maximum output power (conducted) § 15.247 (b)(1) .....                           | 21        |
|          | 5.11 Max. peak output power (radiated) § 15.247 (b)(1) .....                          | 26        |
|          | 5.12 Band-edge compliance of conducted emissions §15.247 (d) .....                    | 27        |
|          | 5.13 Band-edge compliance of radiated emissions §15.205.....                          | 34        |
|          | 5.14 Spurious Emissions - conducted (Transmitter) § 15.247 (c)(1).....                | 43        |
|          | 5.15 Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c)(1).....         | 49        |
|          | 5.16 Spurious Emissions - radiated (Receiver) § 15.109.....                           | 57        |
|          | 5.17 Spurious Emissions < 30 MHz - Transmitter radiated § 15.209 .....                | 61        |
|          | 5.18 Conducted Emissions <30 MHz § 15.107/207 .....                                   | 62        |
| <b>6</b> | <b>Test equipment and ancillaries used for tests</b> .....                            | <b>63</b> |
| <b>7</b> | <b>Photographs of the Test Set-up</b> .....   | <b>69</b> |
| <b>8</b> | <b>Photographs of the EUT</b> .....   | <b>72</b> |

## 1 General information


### Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalisations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM ICT Services GmbH.

#### Test laboratory manager:

|                   |                   |   |
|-------------------|-------------------|---|
| <b>2008-02-13</b> | <b>Stefan Bös</b> |  |
| Date              | Name              | Signature   |

#### Technical responsibility for area of testing:

|                   |                   |  |
|-------------------|-------------------|--|
| <b>2008-02-13</b> | <b>Harro Ames</b> |  |
| Date              | Name              | Signature  |

## Testing laboratory

CETECOM ICT Services GmbH

Untertürkheimer Straße 6 - 10

66117 Saarbrücken

Germany

Phone: + 49 681 5 98 - 0

Fax: + 49 681 5 98 - 9075

e-mail: info@ICT.cetecom.de

Internet: http://www.cetecom-ict.de

State of accreditation: The test laboratory (area of testing) is accredited according to  
DIN EN ISO/IEC 17025  
DAR registration number: DAT-P-176/94-D1

Accredited by: Federal Motor Transport Authority (KBA)  
DAR registration number: KBA-P 00070-97

Testing location, if different from CETECOM ICT Services GmbH:

Name :  
Street :  
Town :  
Country :  
Phone :  
Fax :

## Details of applicant

|                   |   |
|-------------------|---|
| <b>Name:</b>      | <b>Sony Ericsson Mobile Communications AB</b> |
| <b>Street:</b>    | <b>Torshamnsgatan 27</b>                      |
| <b>Town:</b>      | <b>164 94 Kista</b>                           |
| <b>Country:</b>   | <b>Sweden</b>                                 |
| <b>Telephone:</b> | <b>+46 46 19 40 00</b>                        |
| <b>Fax:</b>       | <b>+46 (0) 8 404 3430</b>                     |
| <b>Contact:</b>   | <b>Kenth Skoglund</b>                         |
| <b>E-mail:</b>    | <b>kenth.skoglund@sonyericsson.com</b>        |
| <b>Telephone:</b> | <b>+46 (0) 70 320 7056</b>                    |

## Application details

|  |                   |
|--|-------------------|
| <b>Date of receipt of order:</b>                         | <b>2008-01-24</b> |
| <b>Date of receipt of test item:</b>                     | <b>2008-02-04</b> |
| <b>Date of start test:</b>                               | <b>2008-02-04</b> |
| <b>Date of end test:</b>                                 | <b>2008-02-13</b> |
| <b>Persons(s) who have been present during the test:</b> |                   |

---

## 2 Test standard/s:

|                   |         |   |
|-------------------|---------|---|
| 47 CFR Part 15    | 2007-09 | Title 47 of the Code of Federal Regulations; Chapter I-<br>Federal Communications Commission<br>subchapter A - general, Part 15-Radio frequency devices                             |
| RSS - 210 Issue 7 | 2007-06 | Spectrum Management and Telecommunications - Radio<br>Standards Specification<br>Low-power Licence-exempt Radiocommunication Devices (All<br>Frequency Bands): Category I Equipment |

### 3 Technical tests

#### Details of manufacturer

|          |  |
|----------|--|
| Name:    | Sony Ericsson Mobile Communications AB |
| Street:  | Nya Vattentorget                       |
| Town:    | 22188 Lund                             |
| Country: | Sweden                                 |

#### 3.1.1 Test item

|                      |  |
|----------------------|--|
| Kind of test item    | : GSM Mobile Phone 900/1800/1900/BT/WLAN             |
| Type identification  | : FAD-3022019-BV                                     |
| S/N serial number    | : CB5A0M8JNH (radiated)<br>CB5A0M8JPF (conducted)    |
| HW hardware status   | : AP1.1  |
| SW software status   | : R6G803   |
| Frequency Band [MHz] | : ISM 2.400 - 2.483,5                                |
| Type of Modulation   | : FHSS   |
| Number of channels   | : 79   |
| Antenna              | : Integrated antenna                                 |
| Power Supply         | : 3.8 V DC by Li-Ion Battery BST-33 and power supply |
| Temperature Range    | : -20 °C to 55 °C                                    |

Max. power radiated: 0.84 dBm

Max. power conducted: 1.34 dBm

FCC ID: PY7F3022019

IC: 4170B-F3022019

**3.1.2 Additional EUT information For IC Canada (appendix 2)**

|   |  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
|---|--|-------------------|----------------|----------------|--------------------|----------------|---------------|------|--|--|-------------------|----------------|-------------------|--------------------|----------------|-------------------|------|--|--|-------------------|----------------|---------------|--------------------|----------------|---------------|
| IC Registration Number:                               | <b>4170B-F3022019</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Model Name:   | <b>FAD-3022019-BV</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Manufacturer (complete Address):                      | <b>Sony Ericsson Mobile Communications AB<br/>Nya Vattentorget<br/>22188 Lund<br/>Sweden</b>   |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Tested to Radio Standards Specification (RSS) No.:    | <b>RSS-210 Issue 7</b>   |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Open Area Test Site Industry Canada Number:           | <b>IC 3463A-1</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Frequency Range (or fixed frequency) [MHz]:           | <b>2400 – 2483.5 MHz</b>   |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| RF: Power [W] (max):                                  | <table border="0"> <tr> <td><b>Rad. EIRP:</b></td> <td><b>1.17 mW</b></td> <td><b>GFSK</b></td> </tr> <tr> <td><b>Conducted :</b></td> <td><b>1.31 mW</b></td> <td><b>GFSK</b></td> </tr> <tr> <td><br/></td> <td></td> <td></td> </tr> <tr> <td><b>Rad. EIRP:</b></td> <td><b>1.14 mW</b></td> <td><b>Pi/4 DQPSK</b></td> </tr> <tr> <td><b>Conducted :</b></td> <td><b>1.27 mW</b></td> <td><b>Pi/4 DQPSK</b></td> </tr> <tr> <td><br/></td> <td></td> <td></td> </tr> <tr> <td><b>Rad. EIRP:</b></td> <td><b>1.21 mW</b></td> <td><b>8 DPSK</b></td> </tr> <tr> <td><b>Conducted :</b></td> <td><b>1.36 mW</b></td> <td><b>8 DPSK</b></td> </tr> </table> | <b>Rad. EIRP:</b> | <b>1.17 mW</b> | <b>GFSK</b>    | <b>Conducted :</b> | <b>1.31 mW</b> | <b>GFSK</b>   | <br> |  |  | <b>Rad. EIRP:</b> | <b>1.14 mW</b> | <b>Pi/4 DQPSK</b> | <b>Conducted :</b> | <b>1.27 mW</b> | <b>Pi/4 DQPSK</b> | <br> |  |  | <b>Rad. EIRP:</b> | <b>1.21 mW</b> | <b>8 DPSK</b> | <b>Conducted :</b> | <b>1.36 mW</b> | <b>8 DPSK</b> |
| <b>Rad. EIRP:</b>                                     | <b>1.17 mW</b>   | <b>GFSK</b>       |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>Conducted :</b>                                    | <b>1.31 mW</b>   | <b>GFSK</b>       |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <br>  |  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>Rad. EIRP:</b>                                     | <b>1.14 mW</b>   | <b>Pi/4 DQPSK</b> |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>Conducted :</b>                                    | <b>1.27 mW</b>   | <b>Pi/4 DQPSK</b> |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <br>  |  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>Rad. EIRP:</b>                                     | <b>1.21 mW</b>   | <b>8 DPSK</b>     |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>Conducted :</b>                                    | <b>1.36 mW</b>   | <b>8 DPSK</b>     |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Antenna Type:   | <b>Integrated antenna</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Occupied Bandwidth (99% BW) [kHz]:                    | <table border="0"> <tr> <td><b>926</b></td> <td><b>GFSK</b></td> </tr> <tr> <td><b>1335</b></td> <td><b>Pi/4 DQPSK</b></td> </tr> <tr> <td><b>1269</b></td> <td><b>8 DPSK</b></td> </tr> </table>  | <b>926</b>        | <b>GFSK</b>    | <b>1335</b>    | <b>Pi/4 DQPSK</b>  | <b>1269</b>    | <b>8 DPSK</b> |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>926</b>  | <b>GFSK</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>1335</b>   | <b>Pi/4 DQPSK</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>1269</b>   | <b>8 DPSK</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Type of Modulation:                                   | <b>GFSK ; Pi/4 DQPSK ; 8 DPSK</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Emission Designator (TRC-43):                         | <table border="0"> <tr> <td><b>926KFXD</b></td> <td><b>(FHSS)</b></td> </tr> <tr> <td><b>1M34FXD</b></td> <td><b>(FHSS)</b></td> </tr> <tr> <td><b>1M27FXD</b></td> <td><b>(FHSS)</b></td> </tr> </table>  | <b>926KFXD</b>    | <b>(FHSS)</b>  | <b>1M34FXD</b> | <b>(FHSS)</b>      | <b>1M27FXD</b> | <b>(FHSS)</b> |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>926KFXD</b>  | <b>(FHSS)</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>1M34FXD</b>  | <b>(FHSS)</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| <b>1M27FXD</b>  | <b>(FHSS)</b>  |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Transmitter Spurious (worst case) [ $\mu$ V/m in 3m]: | <b>Nothing found</b>   |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |
| Receiver Spurious (worst case) [ $\mu$ V/m in 3m]:    | <b>Nothing found</b>   |                   |                |                |                    |                |               |      |  |  |                   |                |                   |                    |                |                   |      |  |  |                   |                |               |                    |                |               |

ATTESTATION: I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned departmental standard(s), and that the radio equipment identified in this application has been subject to all applicable test conditions specified in the departmental standards and all of the requirements of the standards have been met.

Signature:



Date: 2008-02-13

Test engineer: Stefan Bös

### 3.1.3 EUT operating modes

| EUT operating mode no. *) | Description of operating modes | Additional information                         |
|---------------------------|--------------------------------|--|
| Op. 0                     | Normal mode                    | Normal temperature and power source conditions |
| Op. 1                     |                                | low temperature, low power source conditions   |
| Op. 2                     |                                | low temperature, high power source conditions  |
| Op. 3                     |                                | high temperature, low power source conditions  |
| Op. 4                     |                                | high temperature, high power source conditions |

\*) EUT operating mode no. is used to simplify the test plan

### 3.1.4 Extreme conditions testing values

| Description          | Shortcut         | Unit | Value      |
|----------------------|------------------|------|------------|
| Nominal Temperature  | T <sub>nom</sub> | °C   | <b>23</b>  |
| Nominal Humidity     | H <sub>nom</sub> | %    | <b>56</b>  |
| Nominal Power Source | V <sub>nom</sub> | V    | <b>3.8</b> |

Type of power source: **DC**

Deviations from these values are reported in chapter 2

#### 4 Summary of Measurement Results and list of all performed test cases

- No deviations from the technical specifications were ascertained
- There were deviations from the technical specifications ascertained

| TC identifier | Description                          | verdict | date | Remark |
|---------------|--------------------------------------|---------|------|--------|
| RF-Testing    | FCC Part 15 §15.247 - CANADA RSS-210 |         |      |        |

| Test Specification Clause | Test Case  | Modulation                   | Pass              | Fail | N/A | Not performed |
|---------------------------|--|------------------------------|-------------------|------|-----|---------------|
| None                      | Antenna Gain   | GFSK                         | Yes               |      |     |               |
| §15.247(a1)               | Carrier frequency separation                                     | GFSK                         | Yes               |      |     |               |
| §15.247(a1)               | Number of hopping channels                                       | GFSK                         | Yes               |      |     |               |
| §15.247(a)(1)(iii)        | Time of occupancy (dwell time)                                   | --                           | Yes               |      |     |               |
| §15.247(e)                | Power Spectral density (Hybrid system in Inquiry mode/Page scan) | --                           |                   |      | Yes |               |
| §15.247(a)(1)             | Spectrum Bandwidth of a FHSS System / 20dB Bandwith              | GFSK<br>Pi/4 DQPSK<br>8 DPSK | Yes<br>Yes<br>Yes |      |     |               |
| § 15.247 (b)(1)           | Maximum output power (conducted)                                 | GFSK<br>Pi/4 DQPSK<br>8 DPSK | Yes<br>Yes<br>Yes |      |     |               |
| § 15.247 (b)(1)           | Max. peak output power (radiated)                                | GFSK                         | Yes               |      |     |               |
| § 15.247 (d)              | Band-edge compliance of conducted emissions                      | Widest modulation            | Yes               |      |     |               |
| § 15.205                  | Band-edge compliance of radiated emissions                       | Widest modulation            | Yes               |      |     |               |
| § 15.247 (d)              | Spurious Emission - conducted (Transmitter)                      | GFSK                         | Yes               |      |     |               |
| § 15.247 (d)              | Spurious Emission - radiated (Transmitter) >30 MHz               | GFSK                         | Yes               |      |     |               |
| § 15.109                  | Spurious Emissions - radiated (Receiver)                         | GFSK                         | Yes               |      |     |               |
| § 15.209                  | Spurious Emissions - radiated (Transmitter) <30 MHz              | GFSK                         | Yes               |      |     |               |
| § 15.107/207              | Conducted Emissions <30 MHz                                      | GFSK                         | Yes               |      |     |               |

## 5 RF measurement testing

### 5.1 Description of test set-up

#### 5.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 clause 15 and ANSI C63.4-2003 clause 4.1.5. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003 clause 4.2.

Antennas are confirmed with ANSI C63.2-1996 item 15.

9 kHz - 150 kHz: Quasi Peak measurement, 200 Hz Bandwidth, passive loop antenna.

150 kHz - 30 MHz: Quasi Peak measurement, 9 kHz Bandwidth, passive loop antenna.

30 MHz - 200 MHz: Quasi Peak measurement, 120 kHz Bandwidth, biconical antenna

200MHz - 1GHz: Quasi Peak measurement, 120 kHz Bandwidth, log periodic antenna


>1GHz: Average, RBW 1MHz, VBW 10 Hz, waveguide horn

All measurements are done in accordance with the Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems DA 00-705 and Appendix A "BLUETOOTH APPROVALS"

The EUT is powered by an external power supply with nominal voltage. The signalling is performed from outside the chamber with a signalling unit (CMU200 or other) by air link using signalling antenna.

#### 5.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). One of the signal path is connected to the communication base Station (CMU200 or other), the other one is connected to the spectrum analyzer. The specific losses for both signal paths are first checked within a calibration. The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, signalling unit and the spectrum analyzer are impedance matched on 50 Ohm.

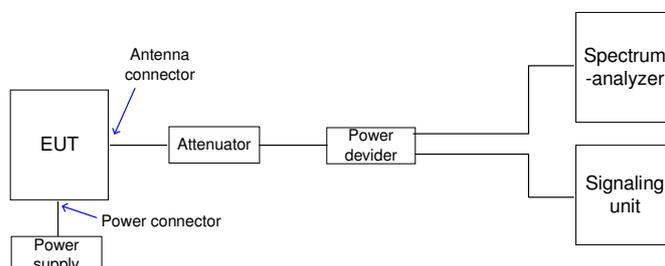

## 5.2 Referenced documents

None

## 5.3 Additional comments

--

## 5.4 Antenna gain


The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

|                       | low channel | mid channel | high channel |
|-----------------------|-------------|-------------|--------------|
| Conducted power [dBm] | 1.12        | 1.17        | 1.00         |
| Radiated power [dBm]  | 0.62        | 0.67        | 0.56         |
| Gain [dBi]            | -0.50       | -0.50       | -0.44        |

**5.5 Carrier frequency separation §15.247(a)(1)**

Modulation: GFSK

Plot 1 of 1:

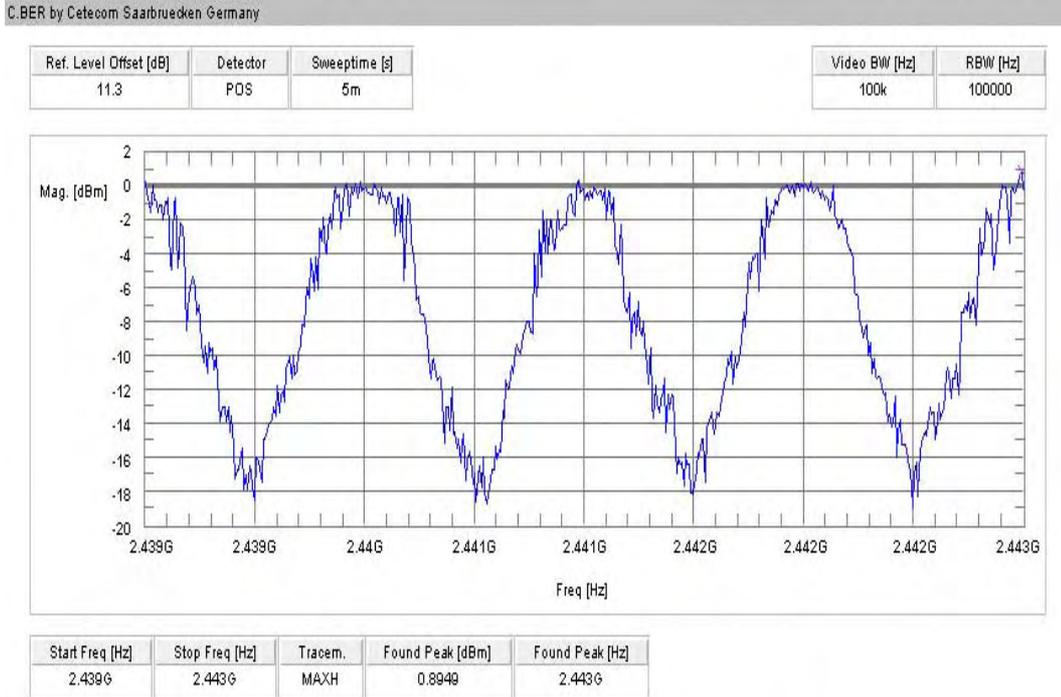

Result: Channel separation is: ~ 1 MHz


Limits:

|                                   |   |
|-----------------------------------|---|
| Under normal test conditions only | Minimum 25 kHz or 20 dB Bandwidth of the hopping system |
|-----------------------------------|---|


**5.6 Number of hopping channels §15.247(a)(1)**

Modulation: GFSK

Plot 1 of 2:

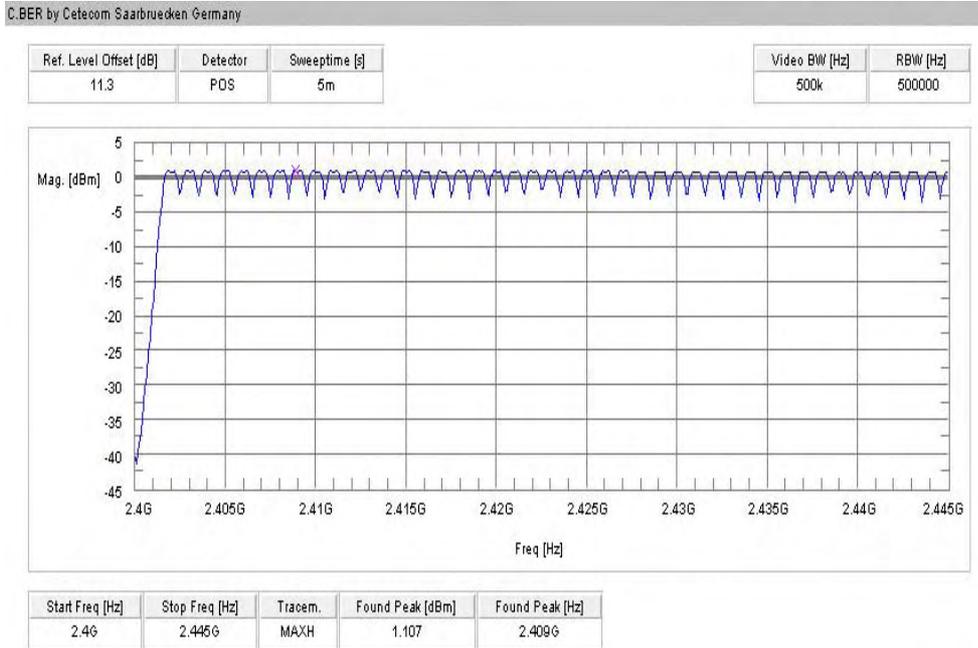

Plot 2 of 2:

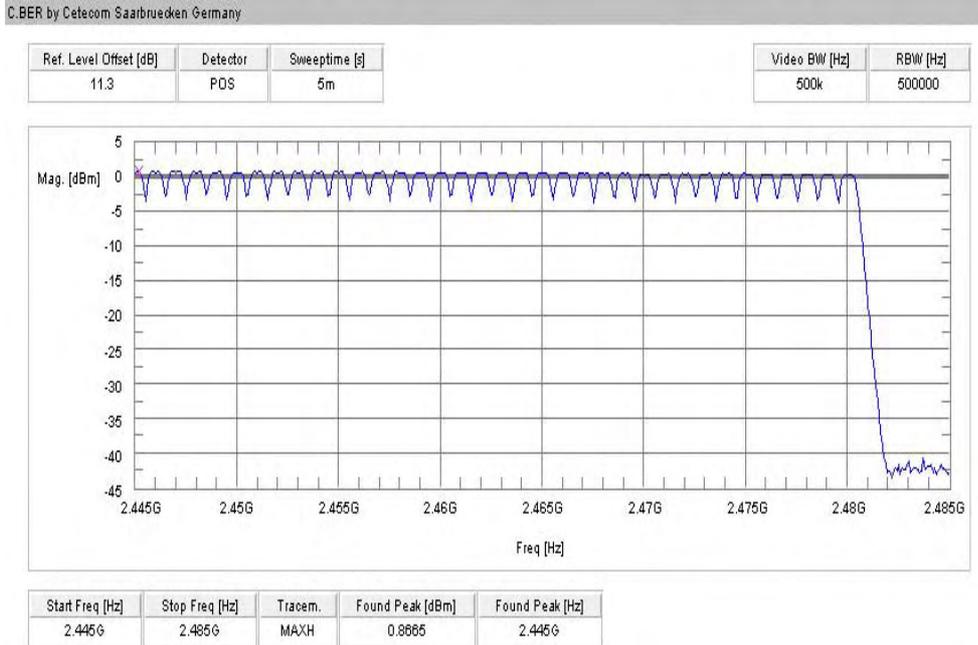

Result : The number of hopping channels is: 79

Limits :

|                                   |                                      |
|-----------------------------------|--------------------------------------|
| Under normal test conditions only | at least 15 non-overlapping channels |
|-----------------------------------|--------------------------------------|

---

## 5.7 Time of occupancy (dwell time) §15.247(a)(1)(iii)

For Bluetooth devices:

The dwell time of 0.4 s within a 31.6 second period in data mode is independent from the packet type (packet length). The calculation for a 31.6 second period is as follows:

Dwell time = time slot length \* hop rate / number of hopping channels \* 31.6 s

Example for a DH1 packet (with a maximum length of one time slot)

Dwell time =  $625 \mu\text{s} * 1600 \text{ 1/s} / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

For multi-slot packet the hopping is reduced according to the length of the packet.

Example for a DH5 packet (with a maximum length of five time slots)

Dwell time =  $5 * 625 \mu\text{s} * 1600 * 1/5 * 1/s / 79 * 31.6 \text{ s} = 0.4 \text{ s}$  (in a 31.6 s period)

This is according to the Bluetooth Core Specification V 1.1 & V 1.2 & V2.0 (+ critical errata) for all Bluetooth devices.

Therefore, all Bluetooth devices comply with the FCC dwell time requirement in the data mode.

This was checked during the Bluetooth Qualification tests.

The Dwell time in hybrid mode is approximately 2.6 ms (in a 12.8s period)

---

**5.8 Power Spectral density (Hybrid system in Inquiry mode/Page scan)  
§15.247(e)**

Plot 1 of 1:

**Not applicable**


Result: Power density: - dBm/Hz = - dBm / 3 kHz  
Correction factor from dBm/Hz to dBm / 3 kHz is +34,8 dB

Limits :


|                                   |   |
|-----------------------------------|---|
| Under normal test conditions only | For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission |
|-----------------------------------|---|

5.9 Spectrum Bandwidth of a FHSS System / 20dB Bandwidth §15.247(a)(1)


Plot 1 GFSK

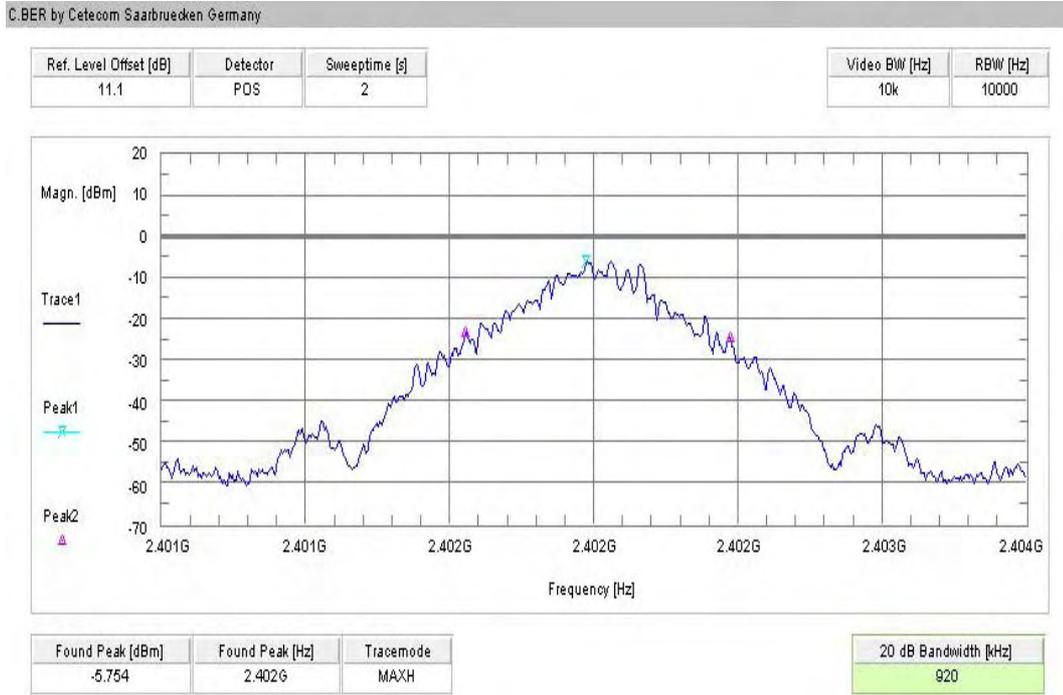


Plot 2 GFSK

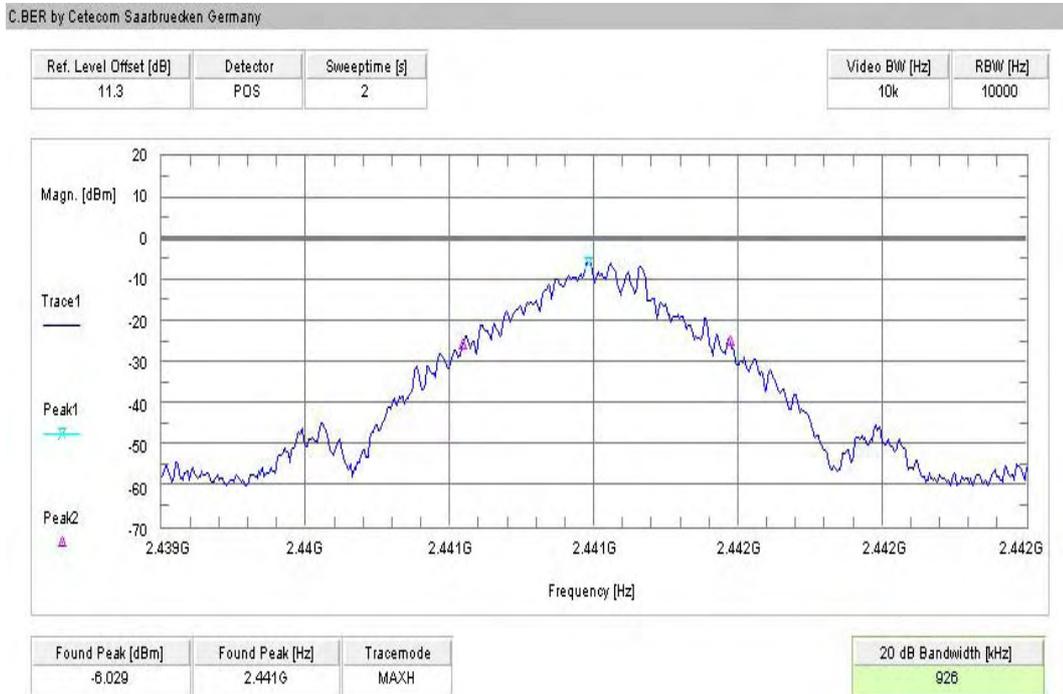

## Plot 3 GFSK

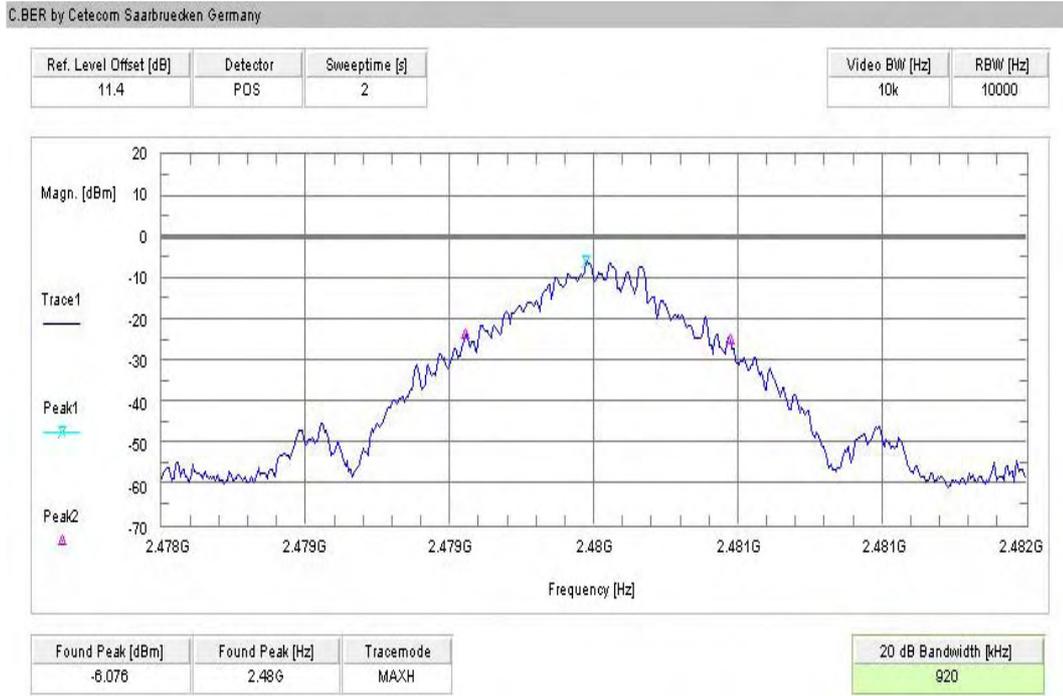

## Plot 4 $\pi/4$ DQPSK

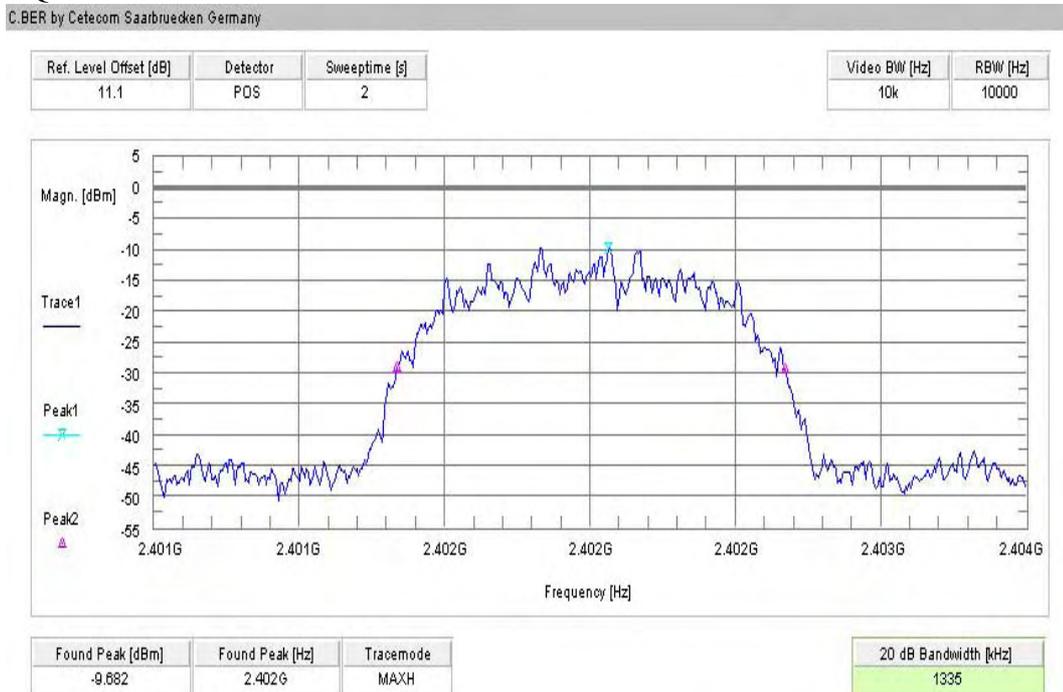


## Plot 5 $\pi/4$ DQPSK

C.BER by Cetecom Saarbruecken Germany

| Ref. Level Offset [dB] | Detector | Sweeptime [s] |
|------------------------|----------|---------------|
| 11.3                   | POS      | 2             |

| Video BW [Hz] | RBW [Hz] |
|---------------|----------|
| 10k           | 10000    |

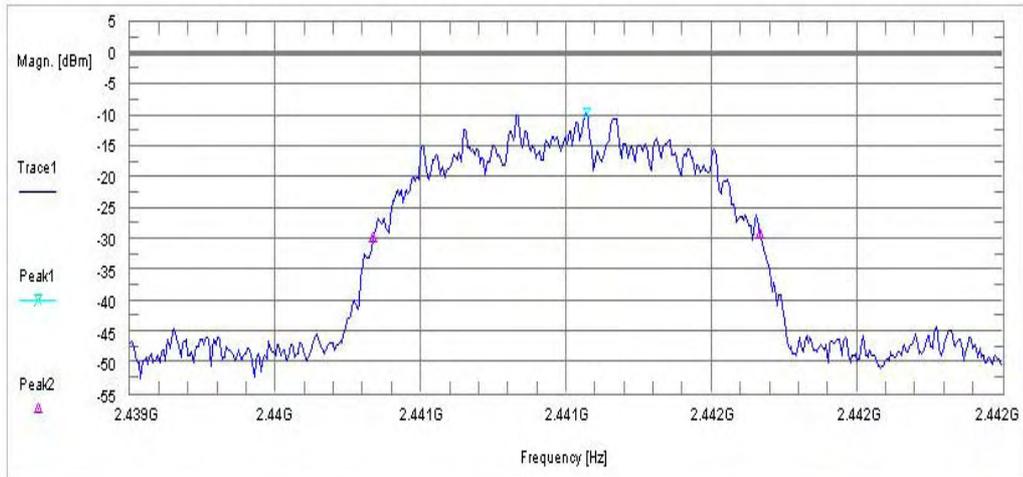

| Found Peak [dBm] | Found Peak [Hz] | Tracemode |
|------------------|-----------------|-----------|
| -9.812           | 2.4416          | MAXH      |


| 20 dB Bandwidth [kHz] |
|-----------------------|
| 1329                  |

## Plot 6 $\pi/4$ DQPSK

C.BER by Cetecom Saarbruecken Germany

| Ref. Level Offset [dB] | Detector | Sweeptime [s] |
|------------------------|----------|---------------|
| 11.4                   | POS      | 2             |


| Video BW [Hz] | RBW [Hz] |
|---------------|----------|
| 10k           | 10000    |

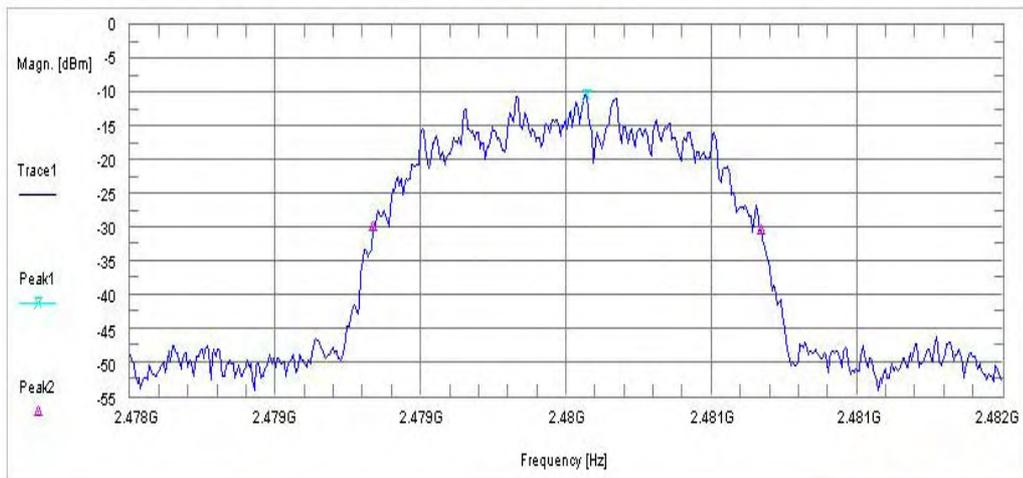


| Found Peak [dBm] | Found Peak [Hz] | Tracemode |
|------------------|-----------------|-----------|
| -10.39           | 2.48G           | MAXH      |

| 20 dB Bandwidth [kHz] |
|-----------------------|
| 1336                  |


## Plot 7 8DPSK

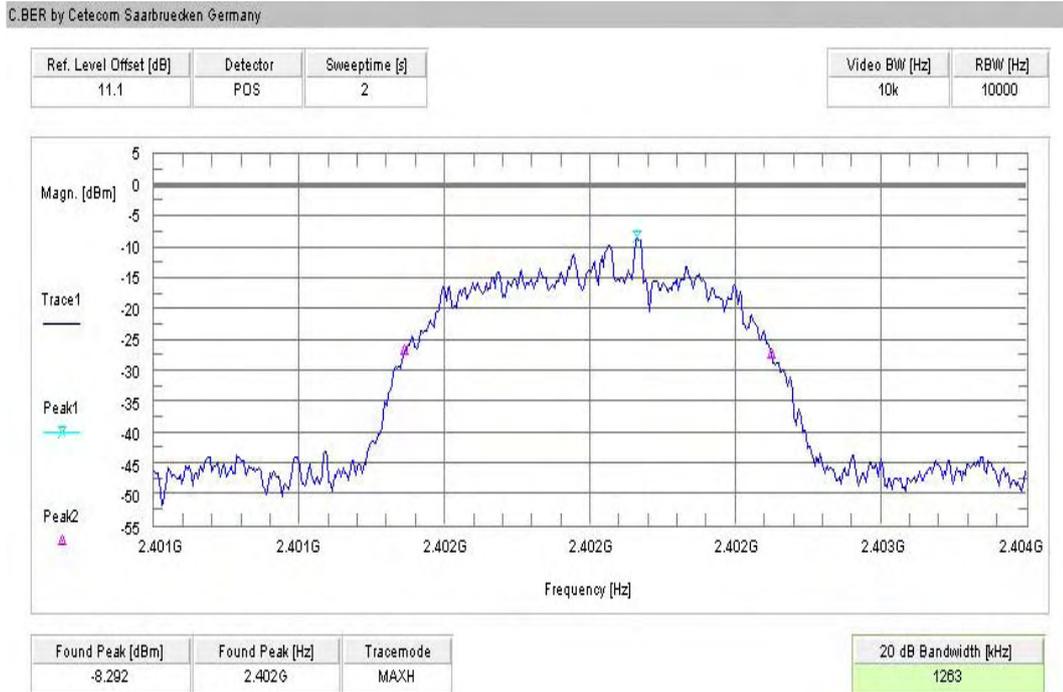

## Plot 8 8DPSK

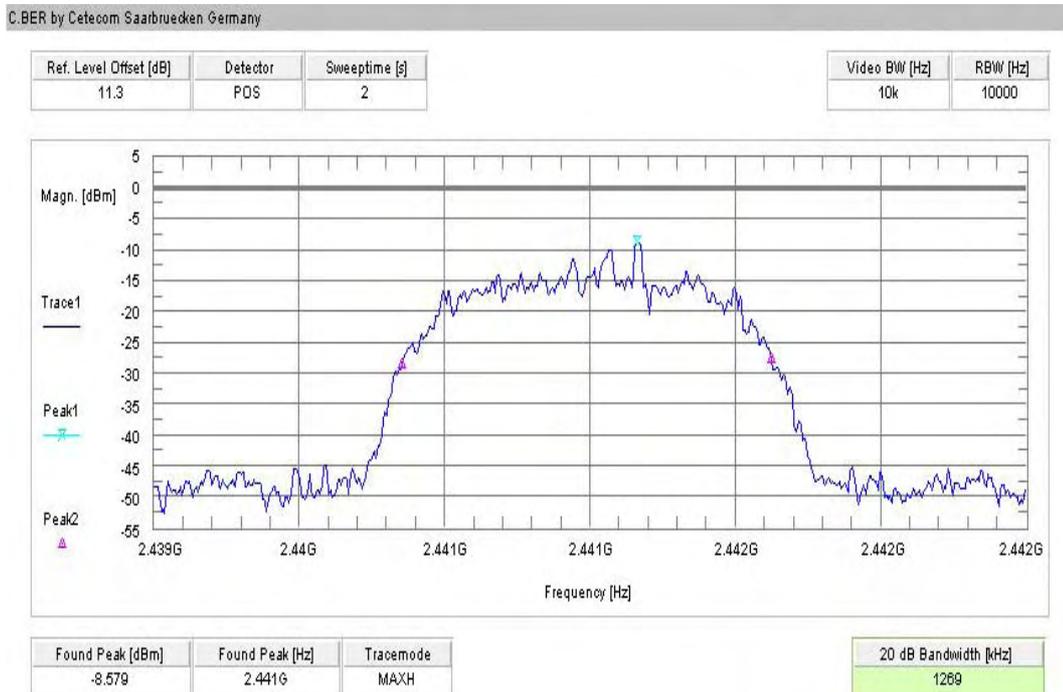

Plot 9 8DPSK

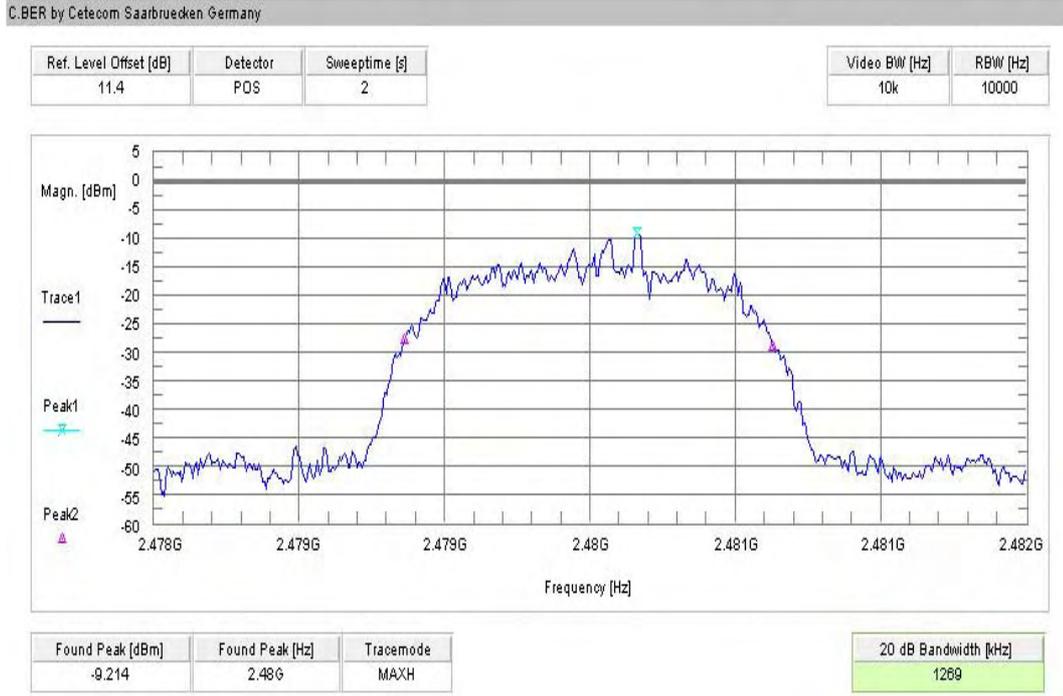

RESULTS:

| Modulation              | 20 dB BANDWIDTH [kHz] |             |             |
|-------------------------|-----------------------|-------------|-------------|
|                         | 2402                  | 2441        | 2480        |
| Frequency [MHz]         |                       |             |             |
| <i>GFSK</i>             | 920                   | <b>926</b>  | 920         |
| <i>Pi/4 DQPSK</i>       | <b>1335</b>           | 1329        | <b>1335</b> |
| <i>8DPSK</i>            | 1263                  | <b>1269</b> | <b>1269</b> |
| Measurement uncertainty | ±1kHz                 |             |             |


RBW / VBW as provided in the „Measurement Guidelines“ (DA 00-705, March 30, 2000)  
 RBW: 10 kHz / VBW 10 kHz

Limits:


|                                   |  |
|-----------------------------------|--|
| Under normal test conditions only | GFSK < 1000 kHz<br>Pi/4 DQPSK < 1500 kHz<br>8DPSK < 1500 kHz |
|-----------------------------------|--|

**5.10 Maximum output power (conducted) § 15.247 (b)(1)**


Plot 1 GFSK

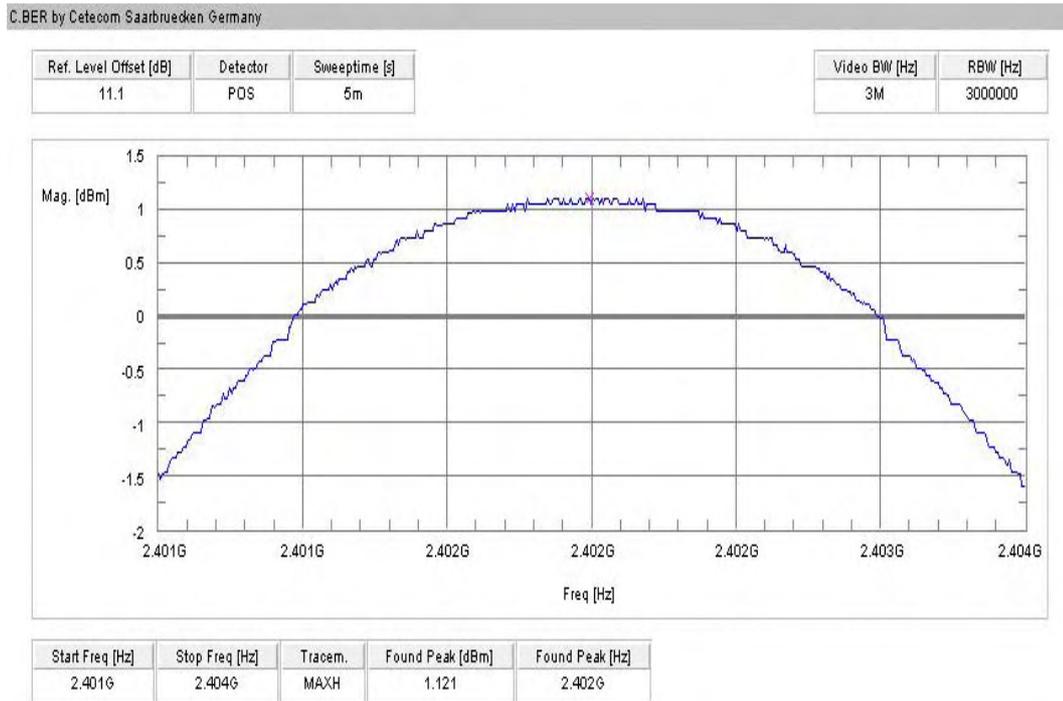


Plot 2 GFSK

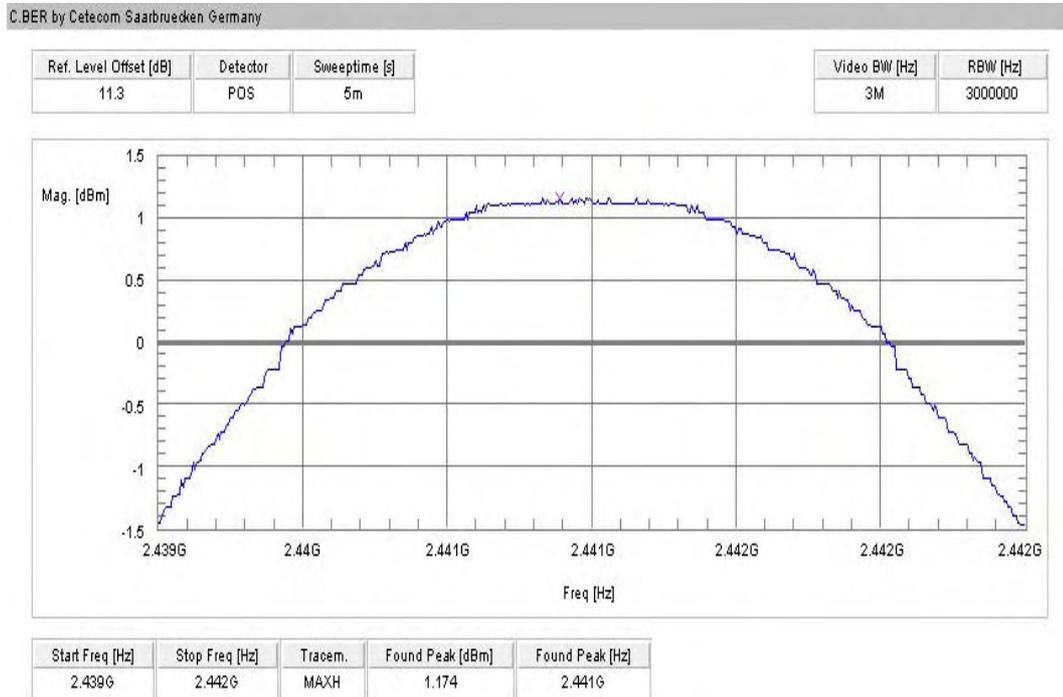

## Plot 3 GFSK

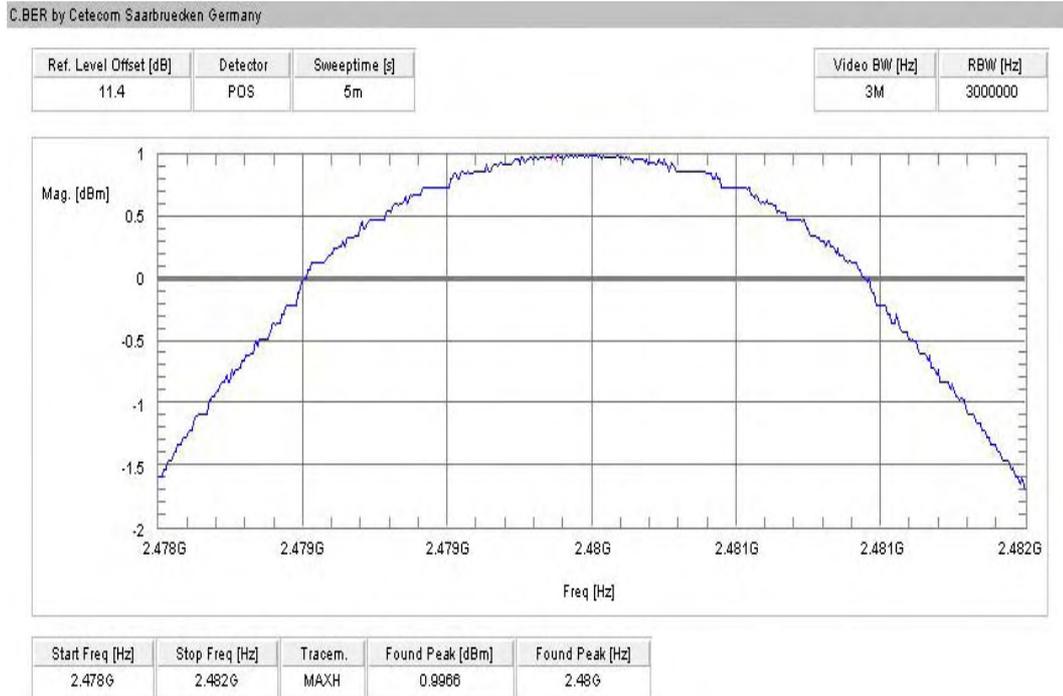

## Plot 4 $\pi/4$ DQPSK

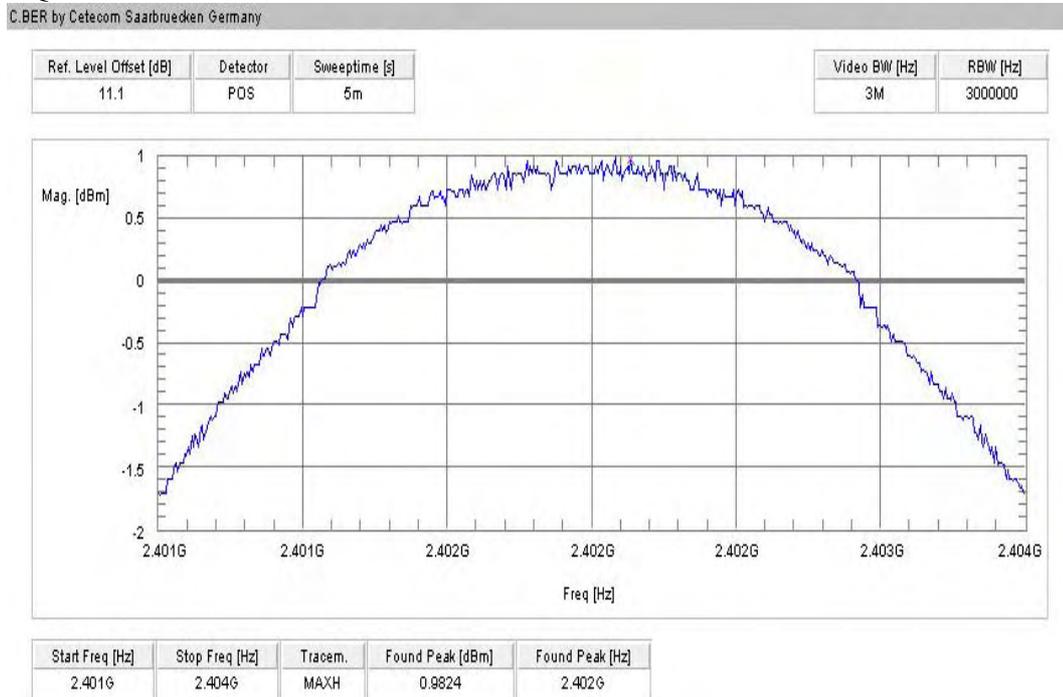


## Plot 5 $\pi/4$ DQPSK

C.BER by Cetecom Saarbruecken Germany

| Ref. Level Offset [dB] | Detector | Sweeptime [s] |
|------------------------|----------|---------------|
| 11.3                   | POS      | 5m            |

| Video BW [Hz] | RBW [Hz] |
|---------------|----------|
| 3M            | 3000000  |

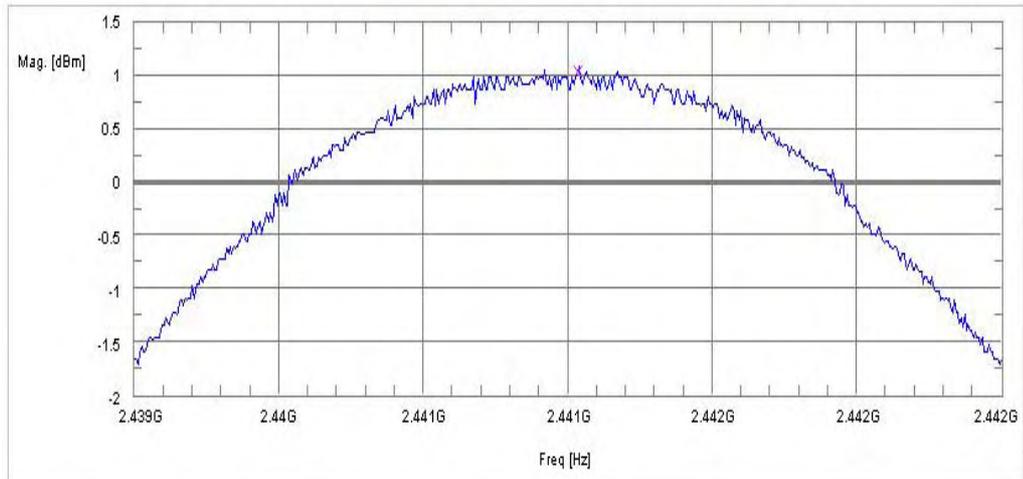


| Start Freq [Hz] | Stop Freq [Hz] | Tracem. | Found Peak [dBm] | Found Peak [Hz] |
|-----------------|----------------|---------|------------------|-----------------|
| 2.439G          | 2.442G         | MAXH    | 1.054            | 2.441G          |

## Plot 6 $\pi/4$ DQPSK

C.BER by Cetecom Saarbruecken Germany

| Ref. Level Offset [dB] | Detector | Sweeptime [s] |
|------------------------|----------|---------------|
| 11.4                   | POS      | 5m            |

| Video BW [Hz] | RBW [Hz] |
|---------------|----------|
| 3M            | 3000000  |

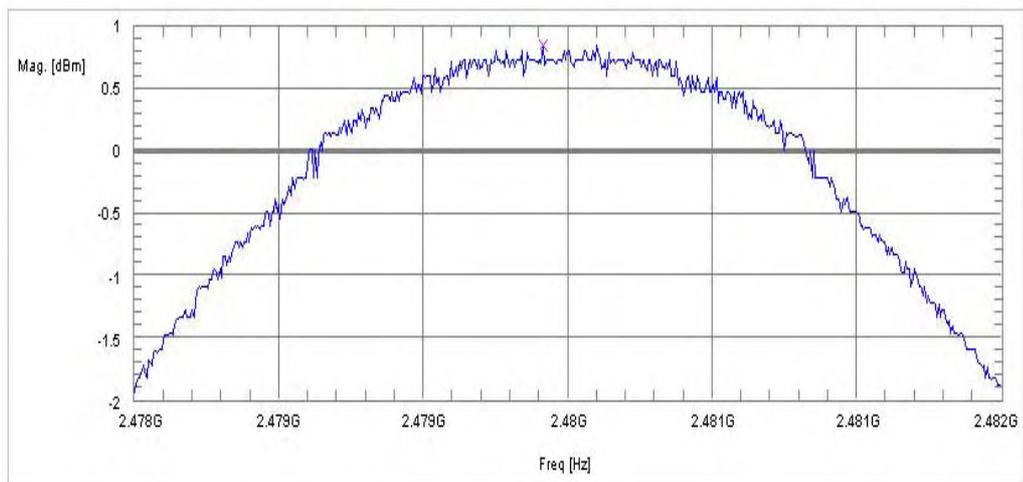


| Start Freq [Hz] | Stop Freq [Hz] | Tracem. | Found Peak [dBm] | Found Peak [Hz] |
|-----------------|----------------|---------|------------------|-----------------|
| 2.478G          | 2.482G         | MAXH    | 0.8542           | 2.48G           |


## Plot 7 8DPSK



## Plot 8 8DPSK

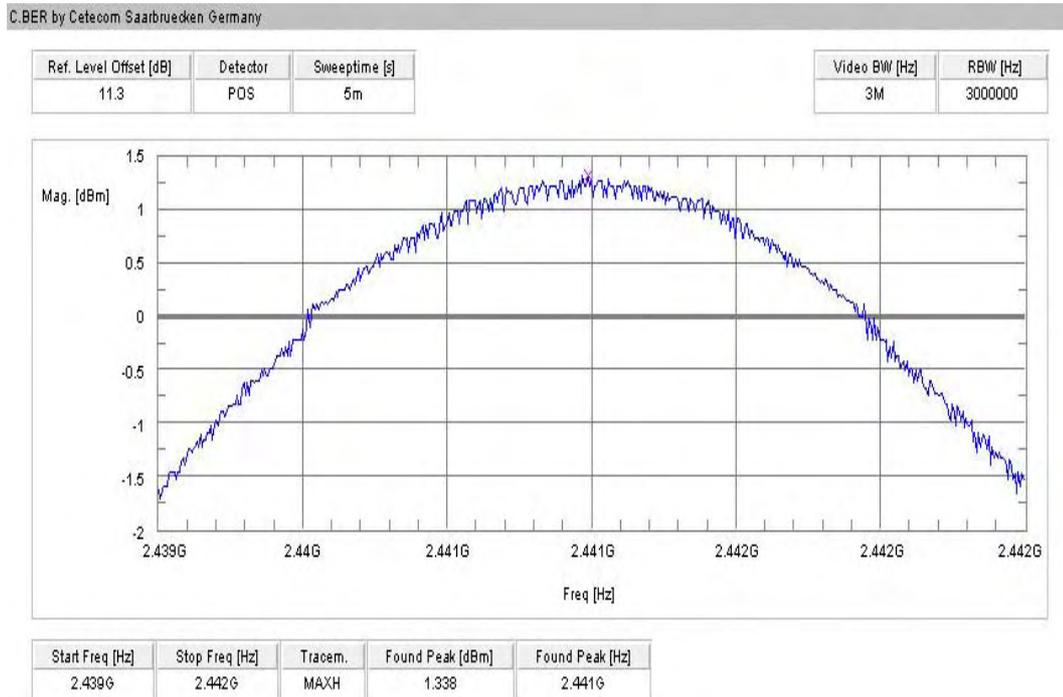

## Plot 9 8DPSK

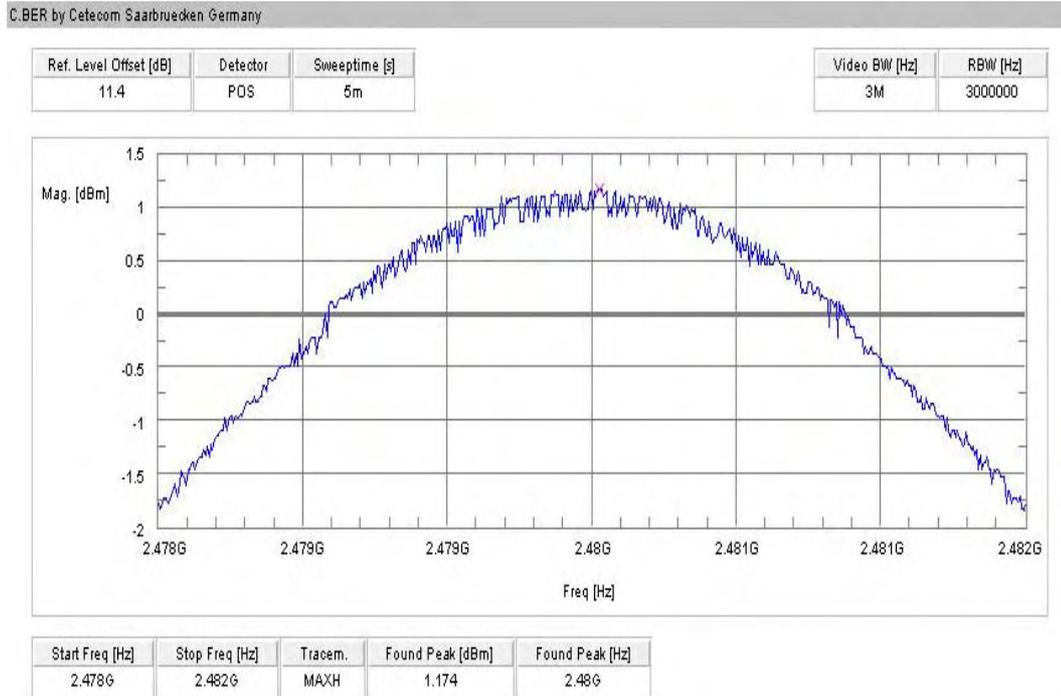

### Results:

| Modulation              | Max. peak output power [dBm] |             |      |
|-------------------------|------------------------------|-------------|------|
|                         | 2402                         | 2441        | 2480 |
| Frequency [MHz]         |                              |             |      |
| <i>GFSK</i>             | 1.12                         | 1.17        | 1.00 |
| <i>Pi/4 DQPSK</i>       | 0.98                         | 1.05        | 0.85 |
| <i>8DPSK</i>            | 1.21                         | <b>1.34</b> | 1.17 |
| Measurement uncertainty | ±2dB                         |             |      |

RBW / VBW: 3 MHz

### Limits:

|  |               |
|--|---------------|
| Under normal test conditions only, for frequency range 2400-2483.5 MHz | Max. 1.0 Watt |
|--|---------------|

**5.11 Max. peak output power (radiated) § 15.247 (b)(1)**

Modulation: GFSK

Results:

| Test conditions         |                  | Max. peak output power EIRP [dBm] |             |      |
|-------------------------|------------------|-----------------------------------|-------------|------|
| Frequency [MHz]         |                  | 2402                              | 2442        | 2480 |
| T <sub>nom</sub>        | V <sub>nom</sub> | 0.62                              | <b>0.67</b> | 0.56 |
| Measurement uncertainty |                  | ±3dB                              |             |      |

Modulation: Pi/4 DQPSK

Results:

| Test conditions         |                  | Max. peak output power EIRP [dBm] |      |      |
|-------------------------|------------------|-----------------------------------|------|------|
| Frequency [MHz]         |                  | 2402                              | 2442 | 2480 |
| T <sub>nom</sub>        | V <sub>nom</sub> | 0.48                              | 0.55 | 0.41 |
| Measurement uncertainty |                  | ±3dB                              |      |      |

Modulation: 8 DPSK

Results:

| Test conditions         |                  | Max. peak output power EIRP [dBm] |             |      |
|-------------------------|------------------|-----------------------------------|-------------|------|
| Frequency [MHz]         |                  | 2402                              | 2442        | 2480 |
| T <sub>nom</sub>        | V <sub>nom</sub> | 0.71                              | <b>0.84</b> | 0.73 |
| Measurement uncertainty |                  | ±3dB                              |             |      |

RBW / VBW: 3 MHz


Measured at a distance of 3m

Limits:


|  |               |
|--|---------------|
| Under normal test conditions only, for frequency range 2400-2483.5 MHz | Max. 1.0 Watt |
|--|---------------|

**5.12 Band-edge compliance of conducted emissions §15.247 (d)**

Plot 1 (GFSK, hopping off, lower band-edge):

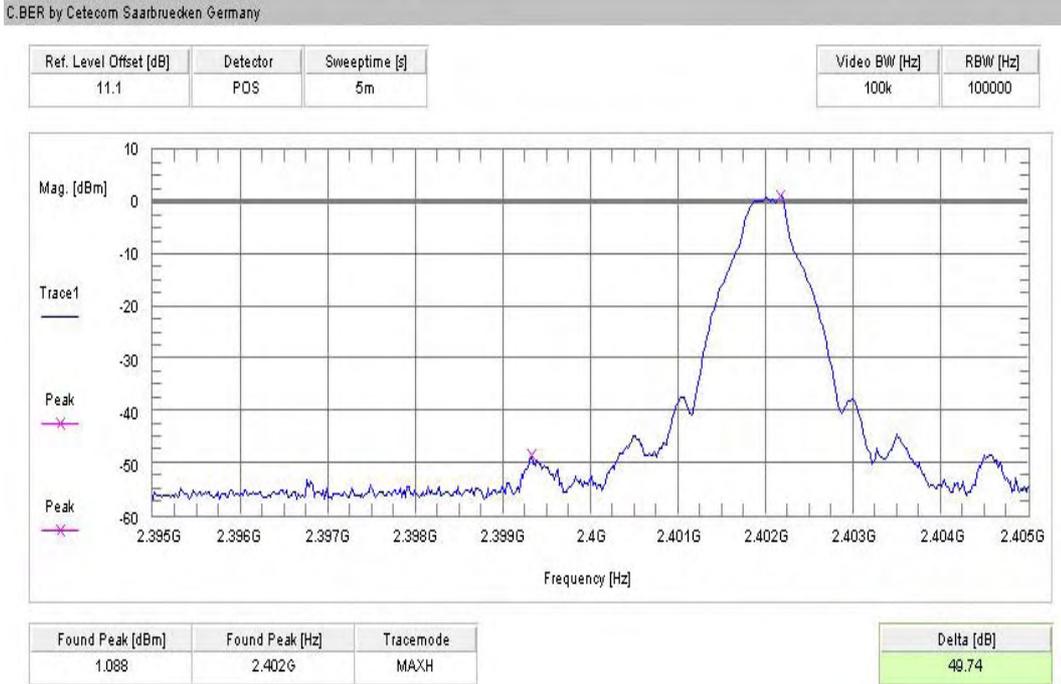


Plot 2 (GFSK, hopping on, lower band-edge):

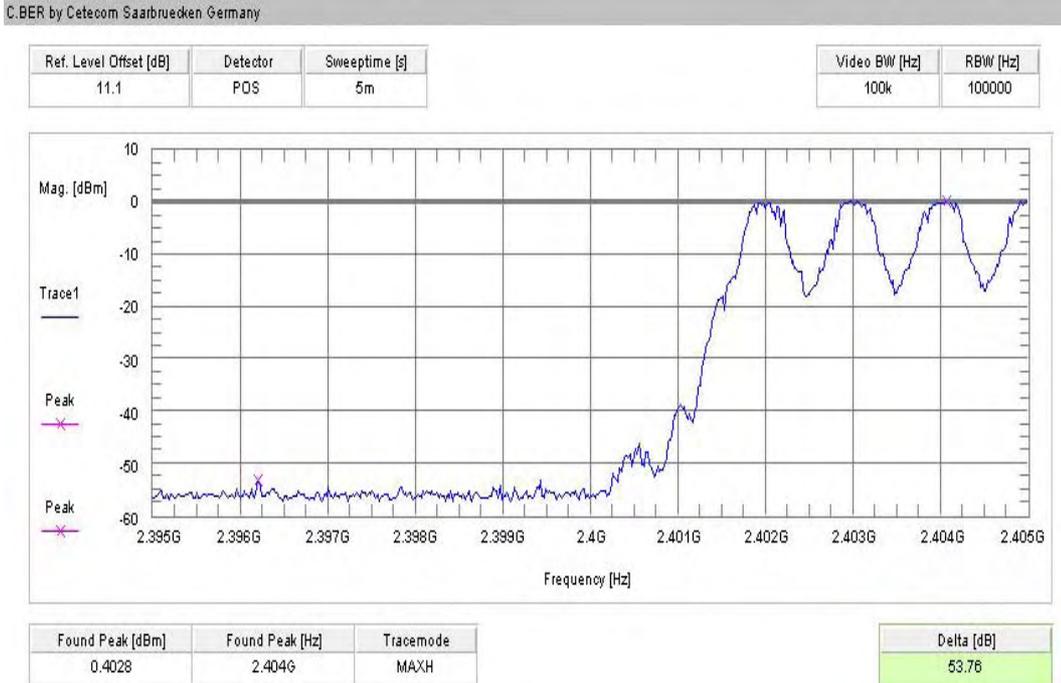


### Plot 3 (GFSK, hopping off, upper band-edge):

C.BER by Cetecom Saarbruecken Germany

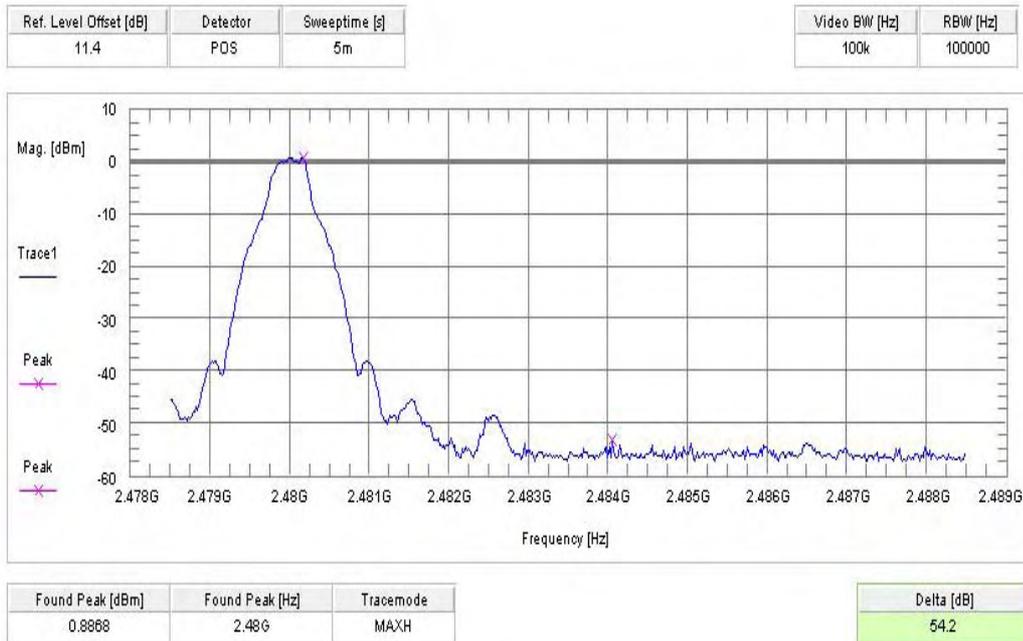


### Plot 4 (GFSK, hopping on, upper band-edge):


C.BER by Cetecom Saarbruecken Germany

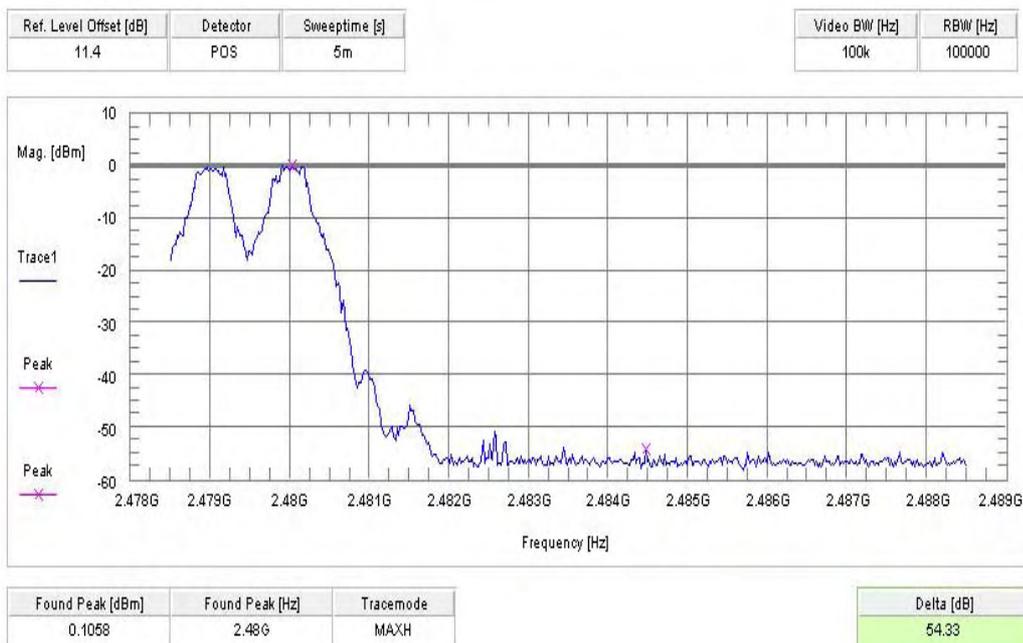


Plot 5 ( $\pi/4$ DQPSK, hopping off, lower band-edge):

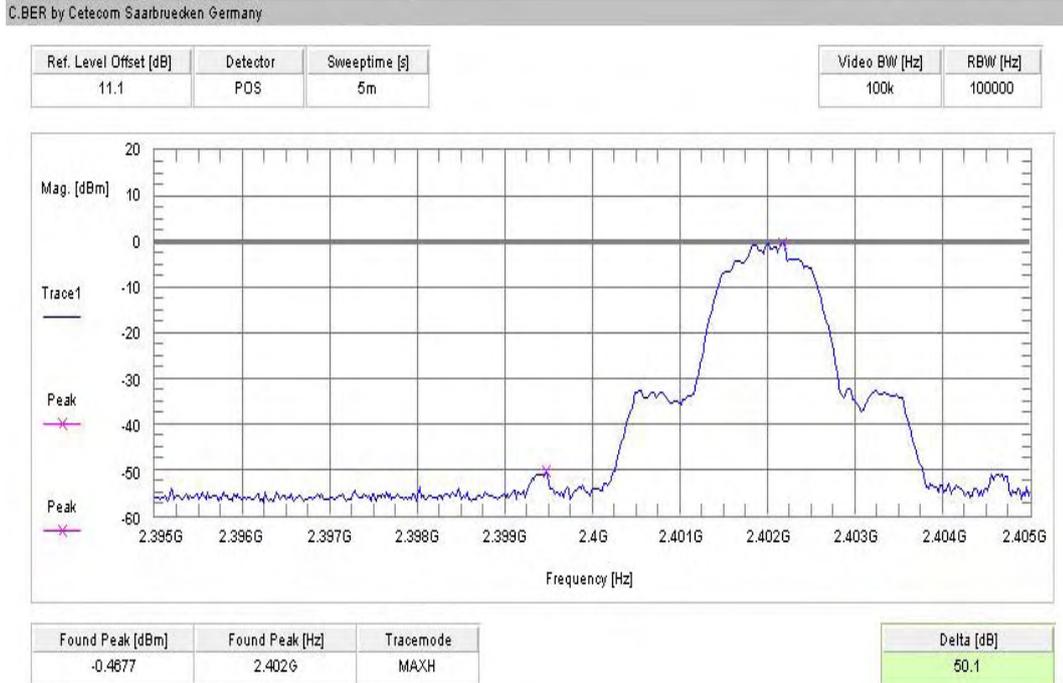


Plot 6 ( $\pi/4$ DQPSK, hopping on, lower band-edge):

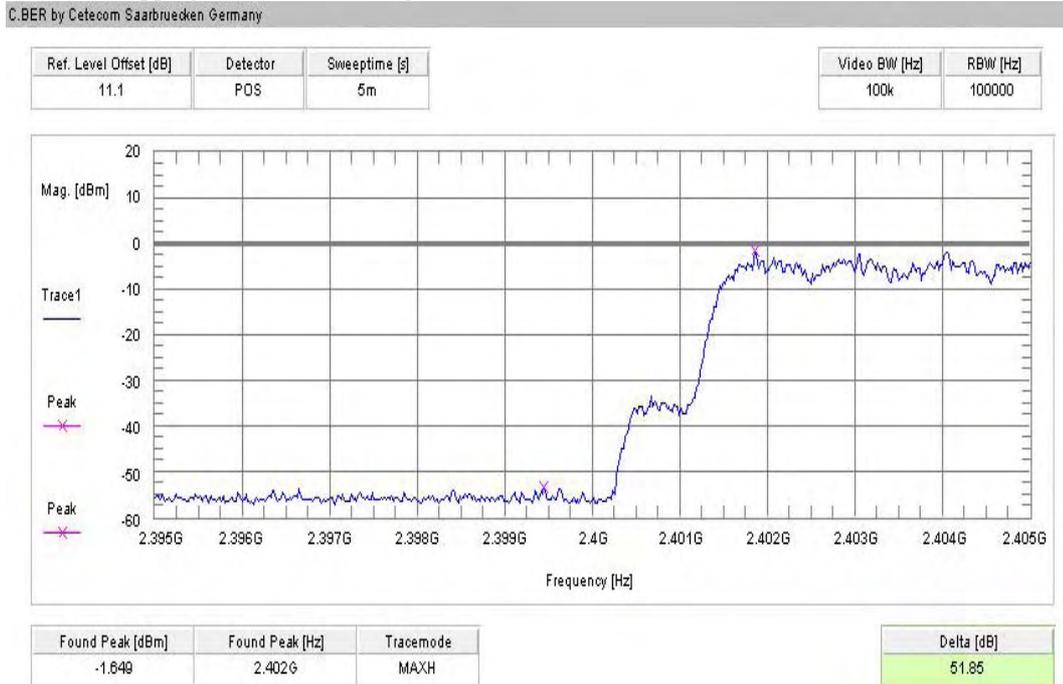

Plot 7 ( $\pi/4$ DQPSK, hopping off, upper band-edge):

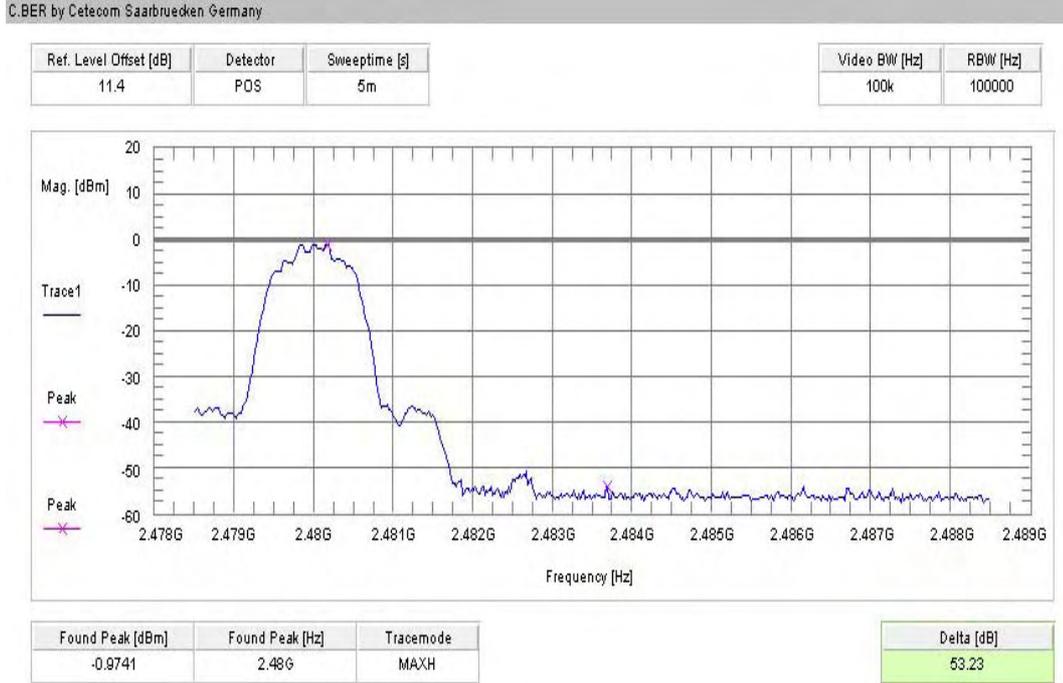


Plot 8 ( $\pi/4$ DQPSK, hopping on, upper band-edge):

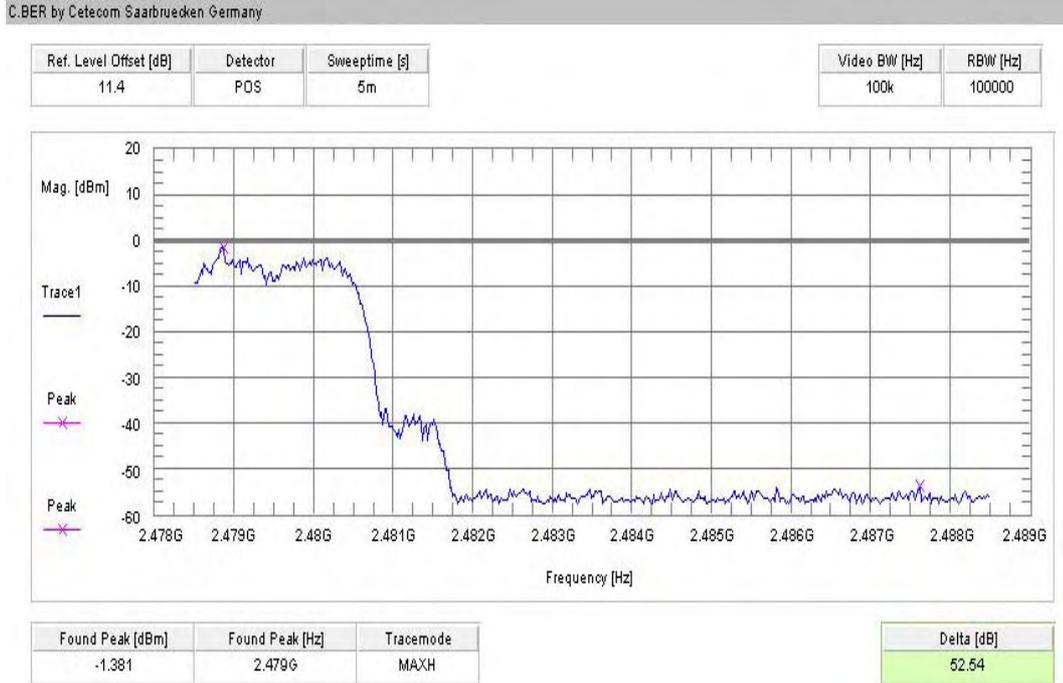


### Plot 9 (8DPSK, hopping off, lower band-edge):

C.BER by Cetecom Saarbruecken Germany

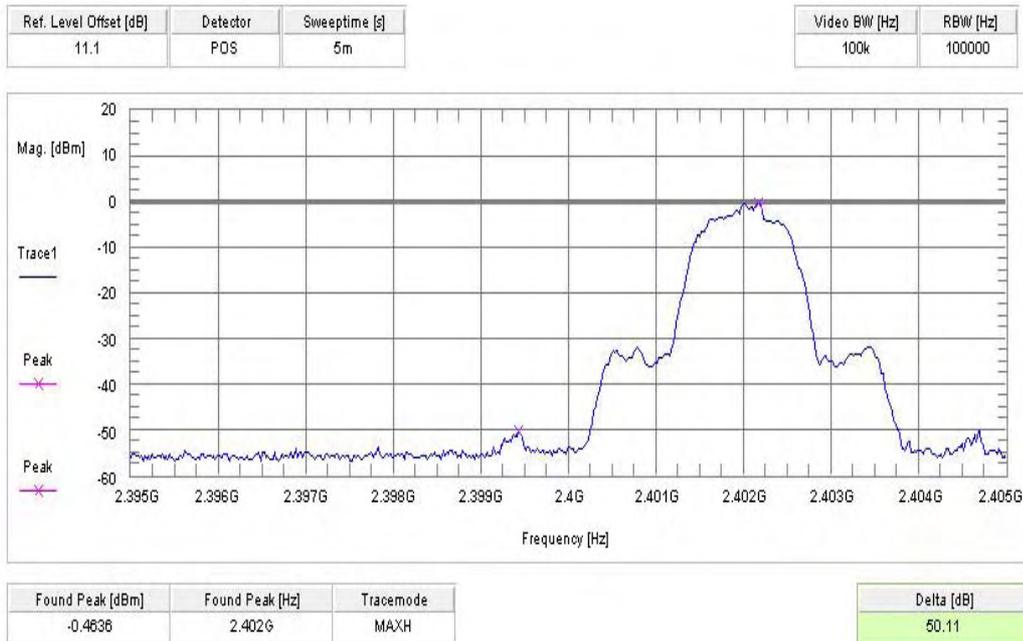

### Plot 10 (8DPSK, hopping on, lower band-edge):


C.BER by Cetecom Saarbruecken Germany

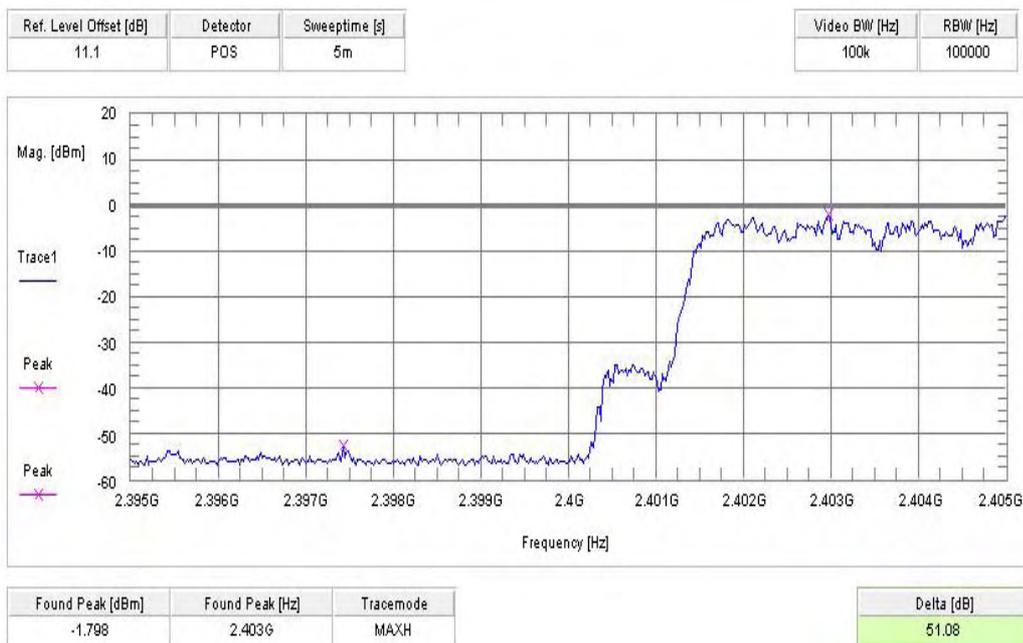

### Plot 11 (8DPSK, hopping off, upper band-edge):

C.BER by Cetecom Saarbruecken Germany

|                        |          |               |               |          |
|------------------------|----------|---------------|---------------|----------|
| Ref. Level Offset [dB] | Detector | Sweeptime [s] | Video BW [Hz] | RBW [Hz] |
| 11.4                   | POS      | 5m            | 100k          | 100000   |

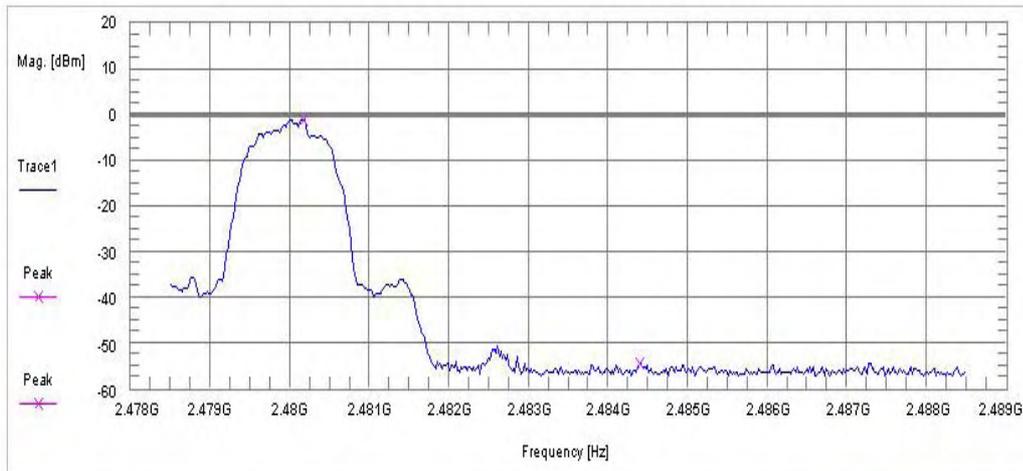


|                  |                 |           |            |
|------------------|-----------------|-----------|------------|
| Found Peak [dBm] | Found Peak [Hz] | Tracemode | Delta [dB] |
| -0.9639          | 2.48G           | MAXH      | 53.48      |

### Plot 12 (8DPSK, hopping on, upper band-edge):

C.BER by Cetecom Saarbruecken Germany

|                        |          |               |               |          |
|------------------------|----------|---------------|---------------|----------|
| Ref. Level Offset [dB] | Detector | Sweeptime [s] | Video BW [Hz] | RBW [Hz] |
| 11.4                   | POS      | 5m            | 100k          | 100000   |

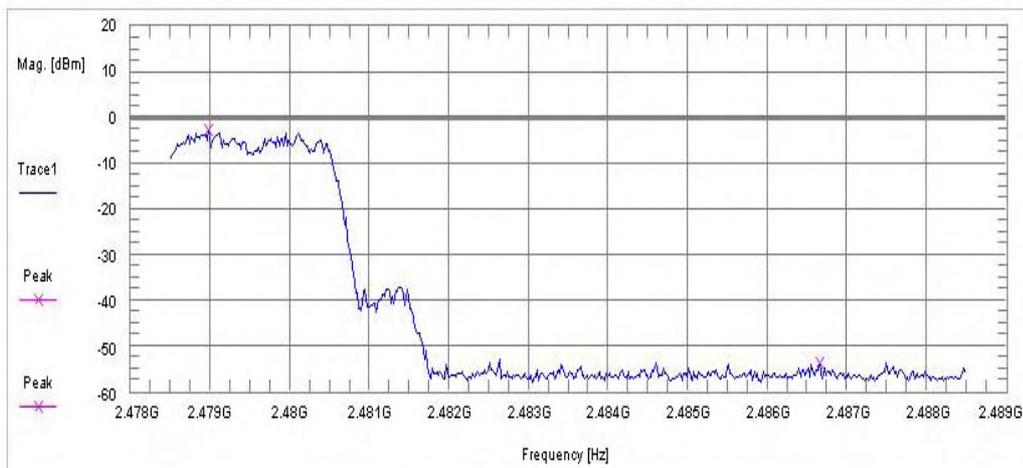

|                  |                 |           |            |
|------------------|-----------------|-----------|------------|
| Found Peak [dBm] | Found Peak [Hz] | Tracemode | Delta [dB] |
| -2.874           | 2.479G          | MAXH      | 50.8       |

Results:


| SZENARIO                     | DELTA VALUE [DB] |
|------------------------------|------------------|
| hopping off, lower band-edge | > 20 dB          |
| hopping on, lower band-edge  | > 20 dB          |
| hopping off, upper band-edge | > 20 dB          |
| hopping on, upper band-edge  | > 20 dB          |
| Measurement uncertainty      | ±1,5dB           |

Limits:

|                                   |  |
|-----------------------------------|--|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 5.205(c)). |
|-----------------------------------|--|


**5.13 Band-edge compliance of radiated emissions §15.205**

Plot 1: GFSK / Max field strength in 3m distance (single frequency)

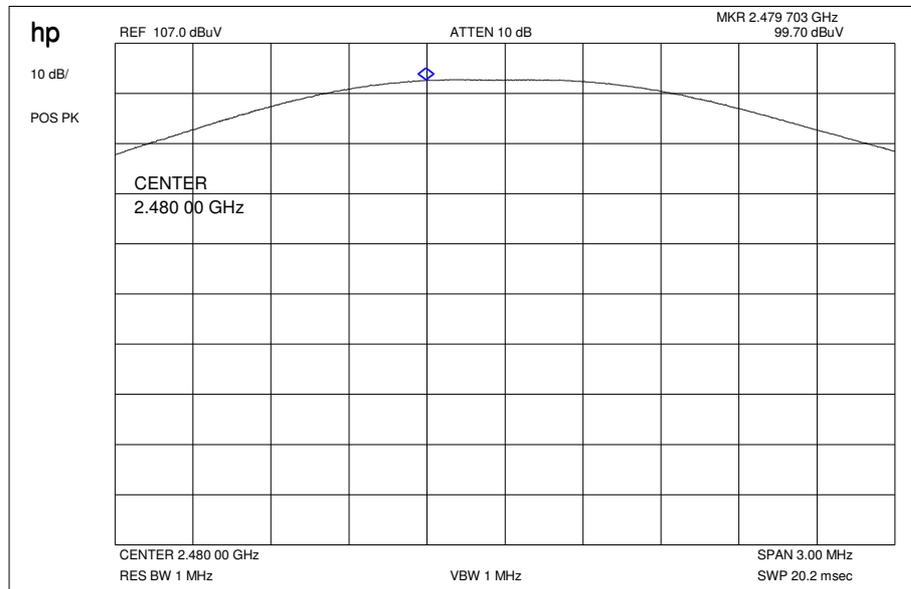

Result: 99.70 dB $\mu$ V/m

Plot 2: GFSK / Marker-Delta Method (single carrier)

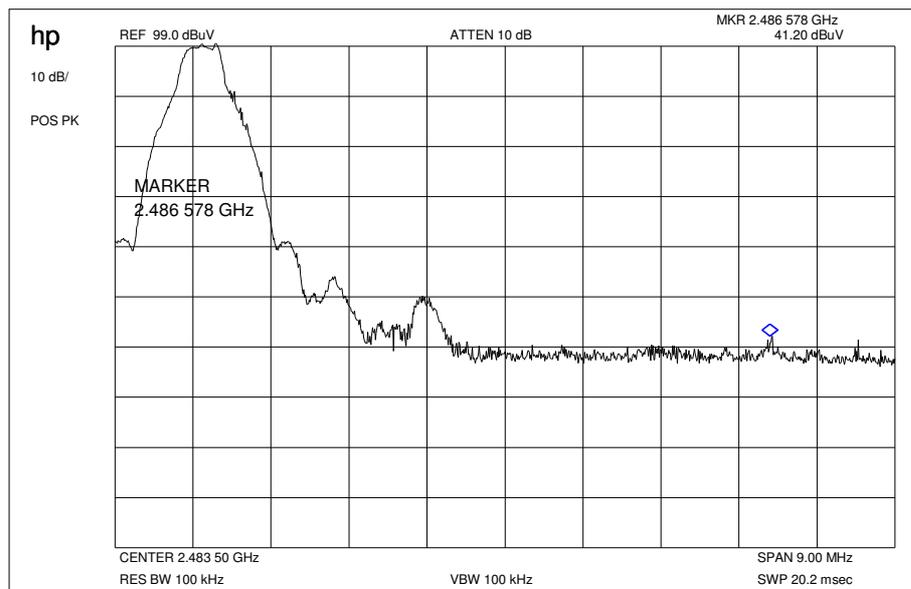


Result:

Marker-Delta-Value: 57.80 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 3: GFSK / Marker-Delta Method (hopping)

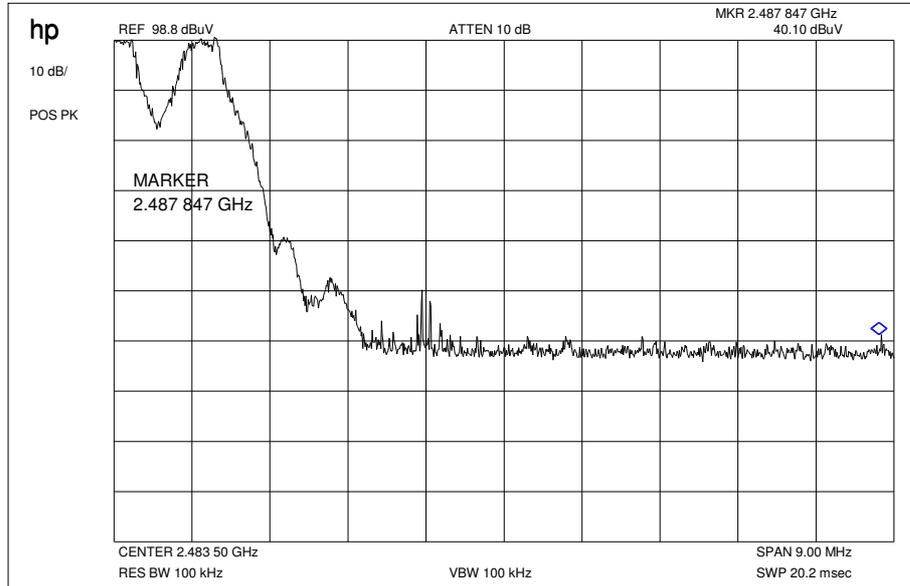


Result:


Marker-Delta-Value: 58.70 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 4: GFSK / Restricted Bands low

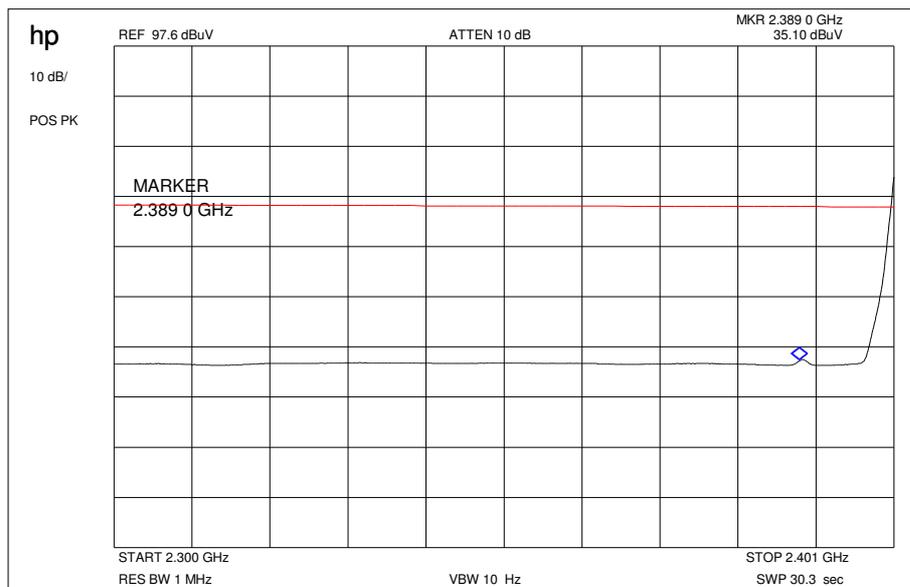

Plot 5: GFSK / Restricted Bands high

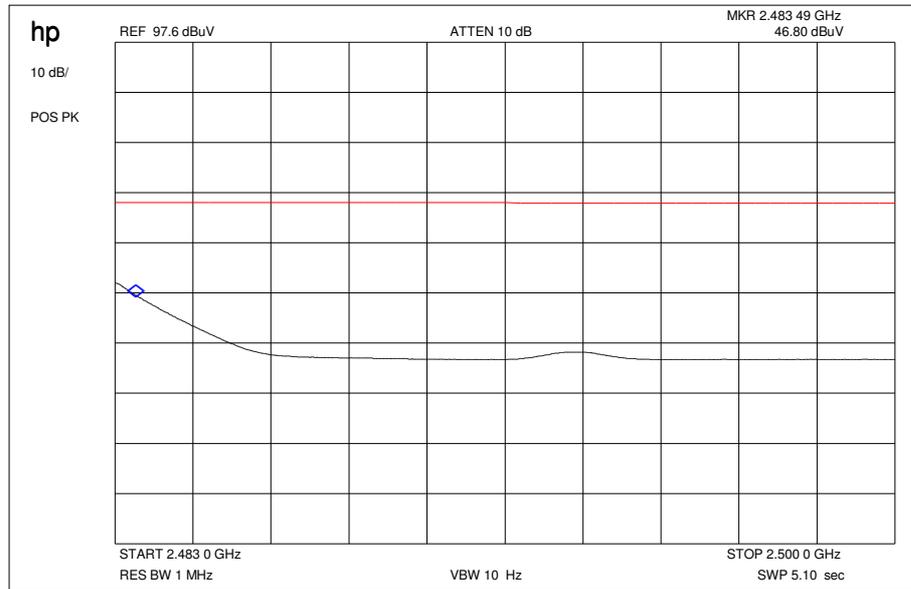


Results & Limits: GFSK

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.


| high channel       | setup  | measured value (3m)                                  | correction factor (3m)                                | calculated value (3m)  |
|--------------------|--|--|---|--|
| Max. peak value    | 1 MHz RBW<br>1 MHz VBW                       | 99.70 dB $\mu$ V/m                                   | -1.97 dB  | 97.73 dB $\mu$ V/m   |
| Max. average value | Calculated with duty cycle correction factor | 97.73 dB $\mu$ V/m peak                              | -1.07dB duty cycle correction factor (worst case DH5) | 96.66 dB $\mu$ V/m   |
| Delta value        | Peak 100 kHz RBW/VBW                         | 57.80 dB (single carrier)<br>58.70 dB (hopping mode) | -   | -  |
| Value at band edge | limit 54 dB $\mu$ V/m                        |  |   | 38.86 dB $\mu$ V/m (single carrier)<br>37.96 dB $\mu$ V/m (hopping mode) |
| Statement:         |  |  |   | Complies   |

Plot 6:  $\pi/4$  DQPSK / Max field strength in 3m distance (single frequency)

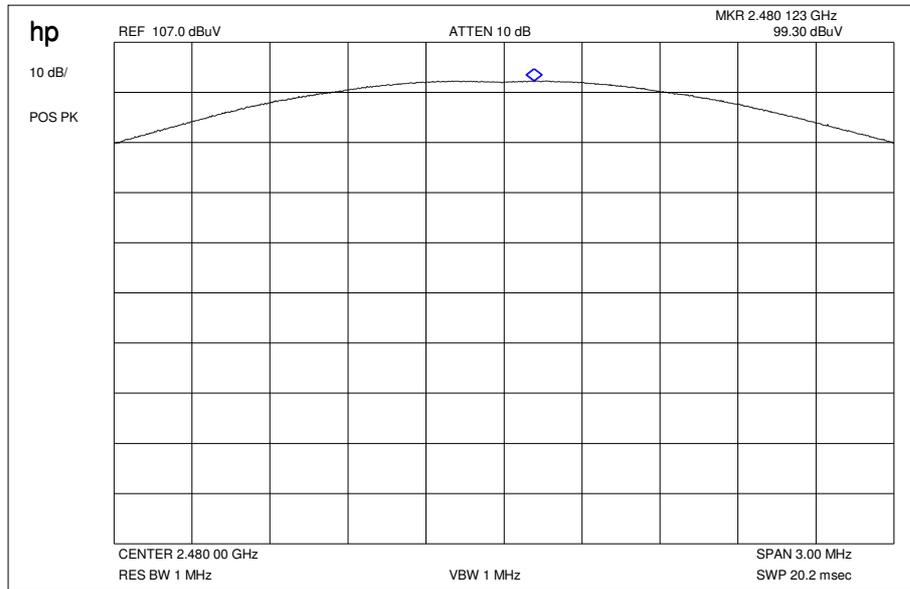

Result: 99.30 dB $\mu$ V/m

Plot 7:  $\pi/4$  DQPSK / Marker-Delta Method (single carrier)

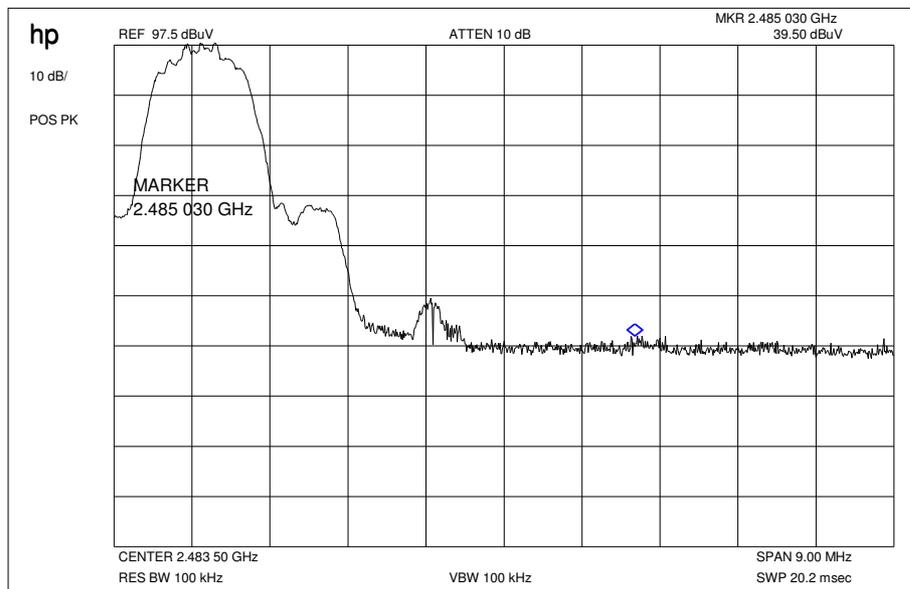


Result:

Marker-Delta-Value: 58.00 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 8:  $\pi/4$  DQPSK / Marker-Delta Method (hopping)

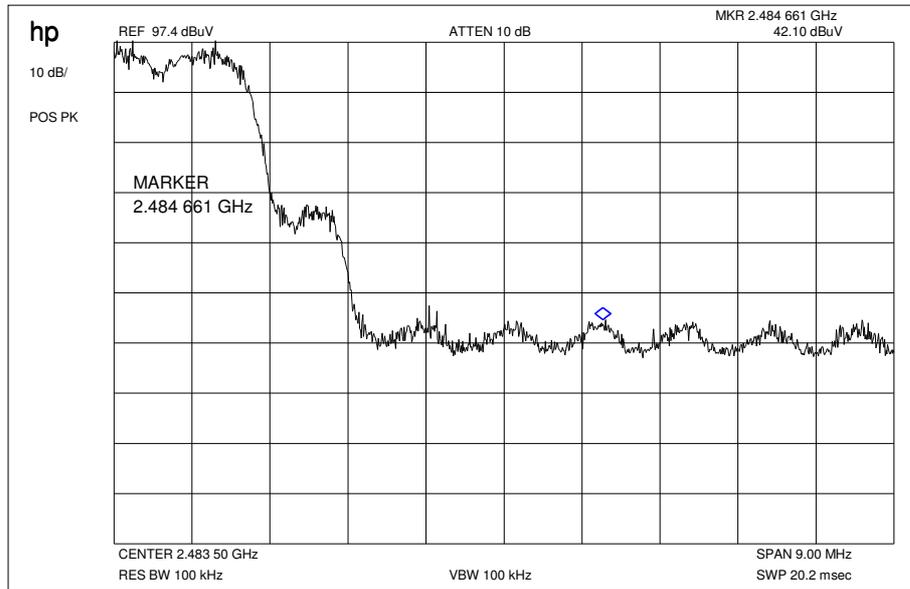


Result:


Marker-Delta-Value: 55.30 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 9:  $\pi/4$  DQPSK / Restricted Bands low

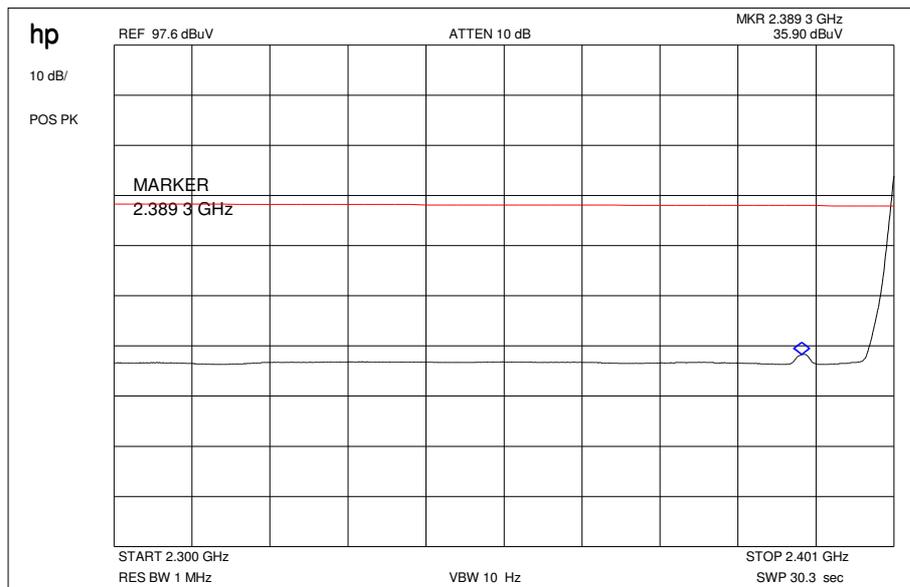

Plot 10:  $\pi/4$  DQPSK / Restricted Bands high

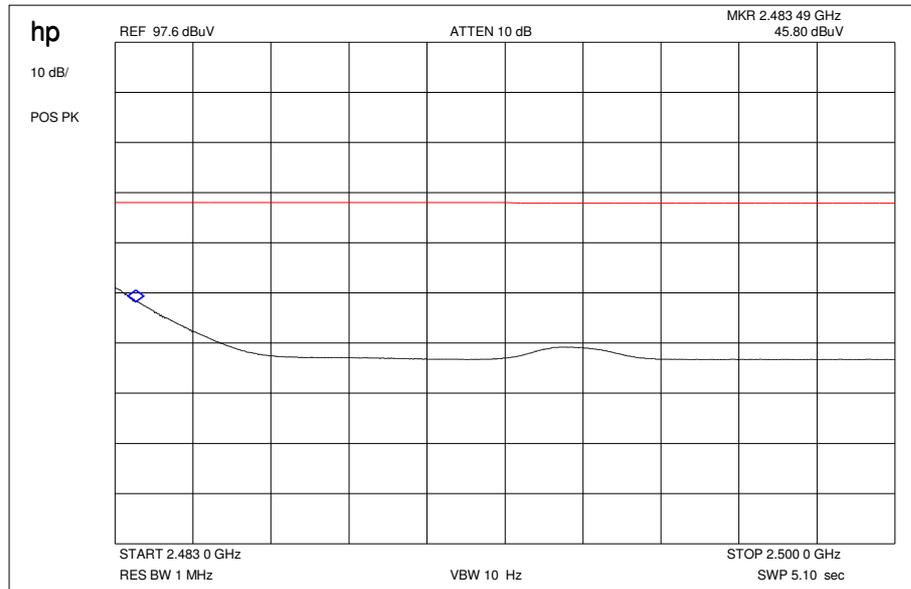


Results & Limits:  $\pi/4$  DQPSK

Radiated field strength

The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.


| high channel       | setup  | measured value (3m)                                  | correction factor (3m)                                | calculated value (3m)  |
|--------------------|--|--|---|--|
| Max. peak value    | 1 MHz RBW<br>1 MHz VBW                       | 99.30 dB $\mu$ V/m                                   | -1.97 dB  | 97.33 dB $\mu$ V/m   |
| Max. average value | Calculated with duty cycle correction factor | 97.33 dB $\mu$ V/m peak                              | -1.07dB duty cycle correction factor (worst case DH5) | 96.26 dB $\mu$ V/m   |
| Delta value        | Peak 100 kHz RBW/VBW                         | 58.00 dB (single carrier)<br>55.30 dB (hopping mode) | -   | -  |
| Value at band edge | limit 54 dB $\mu$ V/m                        |  |   | 38.26 dB $\mu$ V/m (single carrier)<br>40.96 dB $\mu$ V/m (hopping mode) |
| Statement:         |  |  |   | Complies   |

Plot 11: 8DPSK / Max field strength in 3m distance (single frequency)

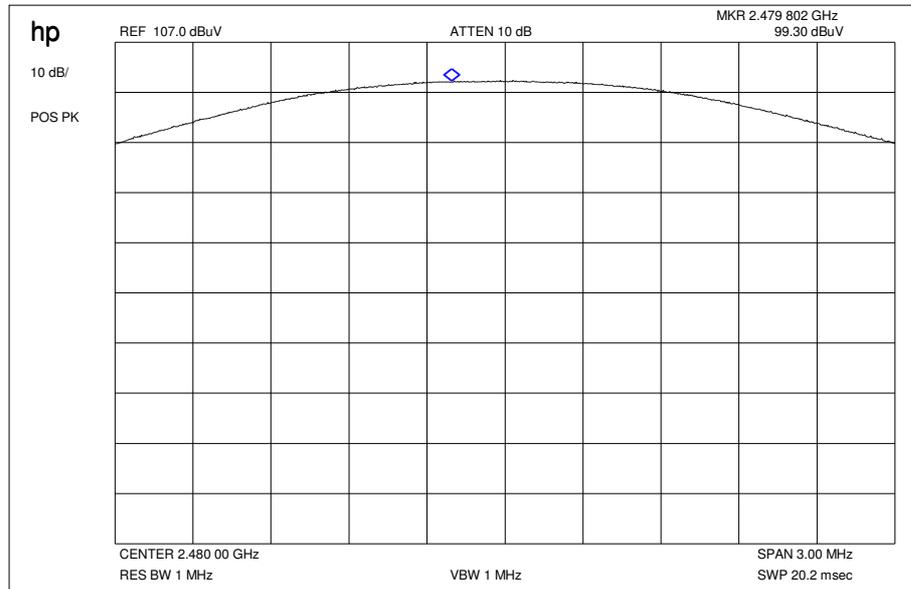

Result: 99.30 dB $\mu$ V/m

Plot 12: 8DPSK / Marker-Delta Method (single carrier)

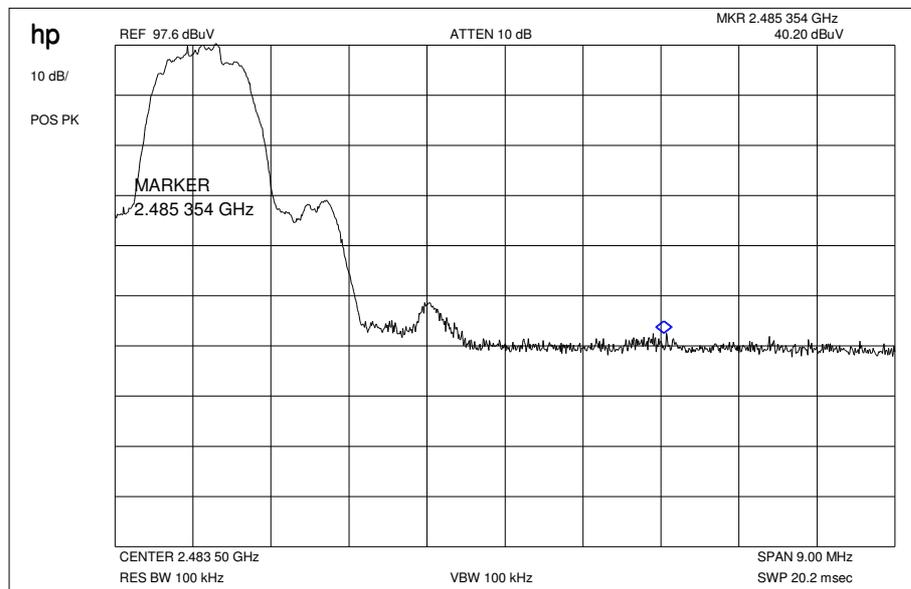


Result:

Marker-Delta-Value: 57.40 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 13: 8DPSK / Marker-Delta Method (hopping)

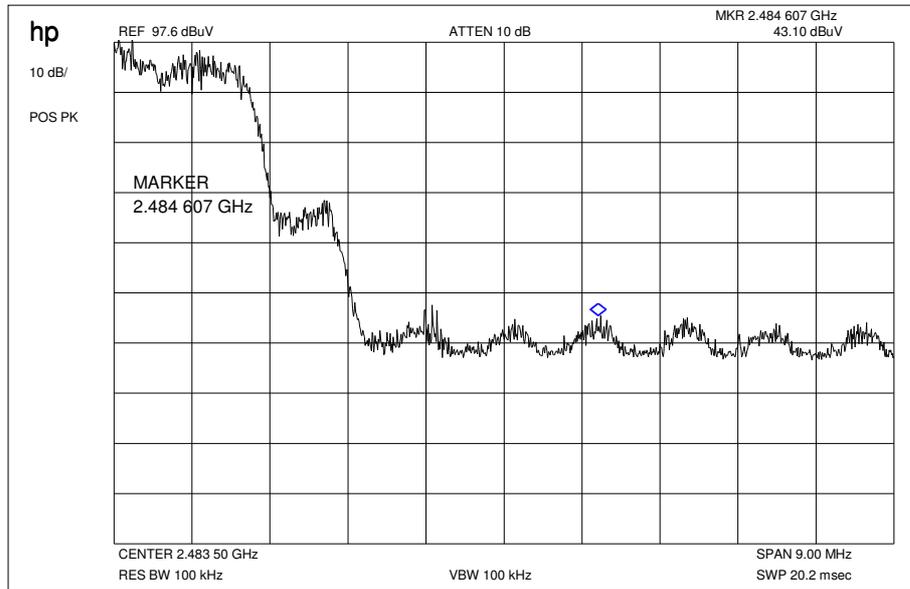


Result:


Marker-Delta-Value: 54.50 dB

This measurement was made to show that the behaviour of the system is conform to FCC 15.205 (restricted bands)

Plot 14: 8DPSK / Restricted Bands low

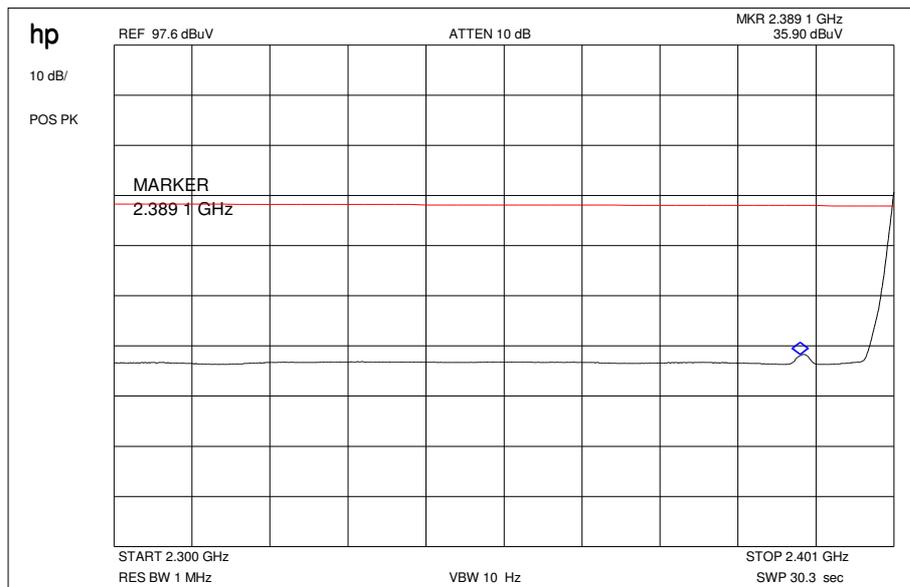

Plot 15: 8DPSK / Restricted Bands high

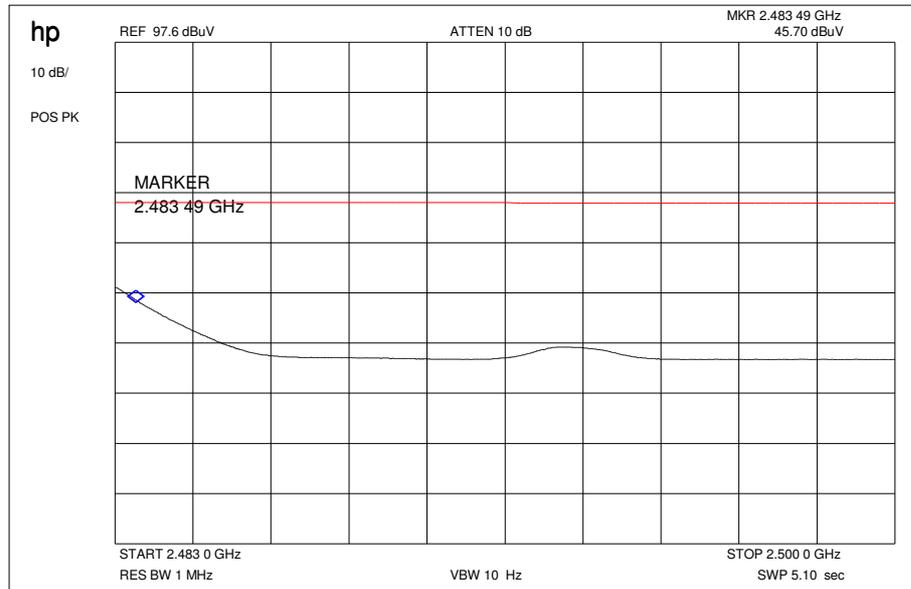

Results & Limits: 8DPSK

Radiated field strength


The field strength was measured with an EMI measuring receiver and 1 MHz RBW / VBW for peak and with 1MHz RBW / 10Hz VBW for average at a distance of 3m.

| high channel       | setup  | measured value (3m)                                  | correction factor (3m)                                | calculated value (3m)  |
|--------------------|--|--|---|--|
| Max. peak value    | 1 MHz RBW<br>1 MHz VBW                       | 99.30 dB $\mu$ V/m                                   | -1.97 dB  | 97.33 dB $\mu$ V/m   |
| Max. average value | Calculated with duty cycle correction factor | 97.33 dB $\mu$ V/m peak                              | -1.07dB duty cycle correction factor (worst case DH5) | 96.26 dB $\mu$ V/m   |
| Delta value        | Peak 100 kHz RBW/VBW                         | 57.40 dB (single carrier)<br>54.50 dB (hopping mode) | -   | -  |
| Value at band edge | limit 54 dB $\mu$ V/m                        |  |   | 38.86 dB $\mu$ V/m (single carrier)<br>41.76 dB $\mu$ V/m (hopping mode) |
| Statement:         |  |  |   | Complies   |


**5.14 Spurious Emissions - conducted (Transmitter) § 15.247 (c)(1)**

Modulation: GFSK


Plot 1 of 3: lowest channel

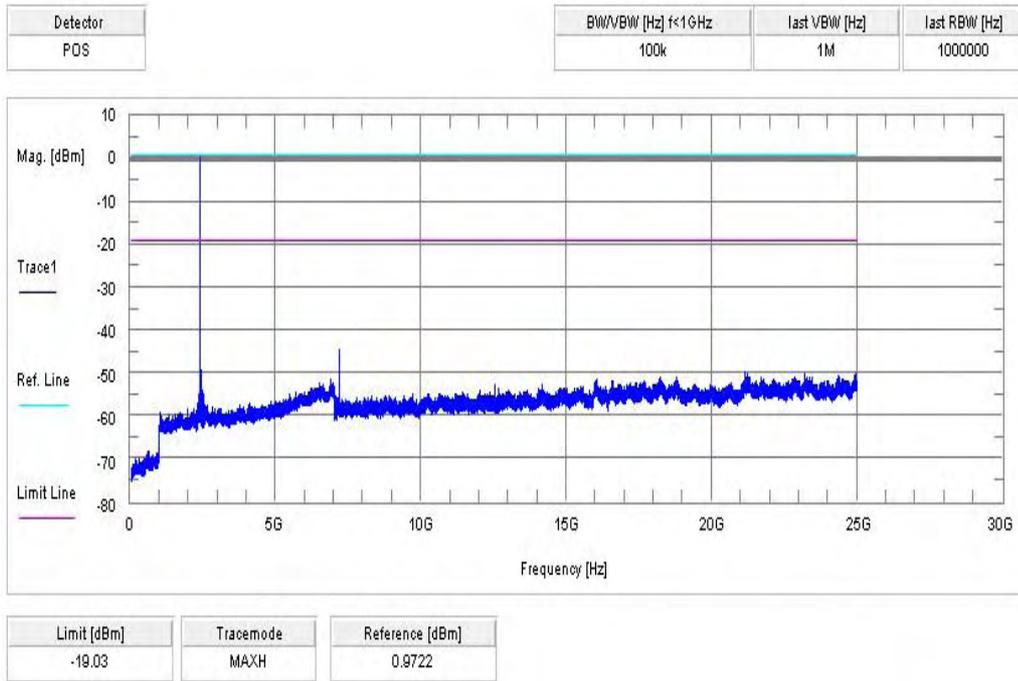

Plot 2 of 3: middle channel

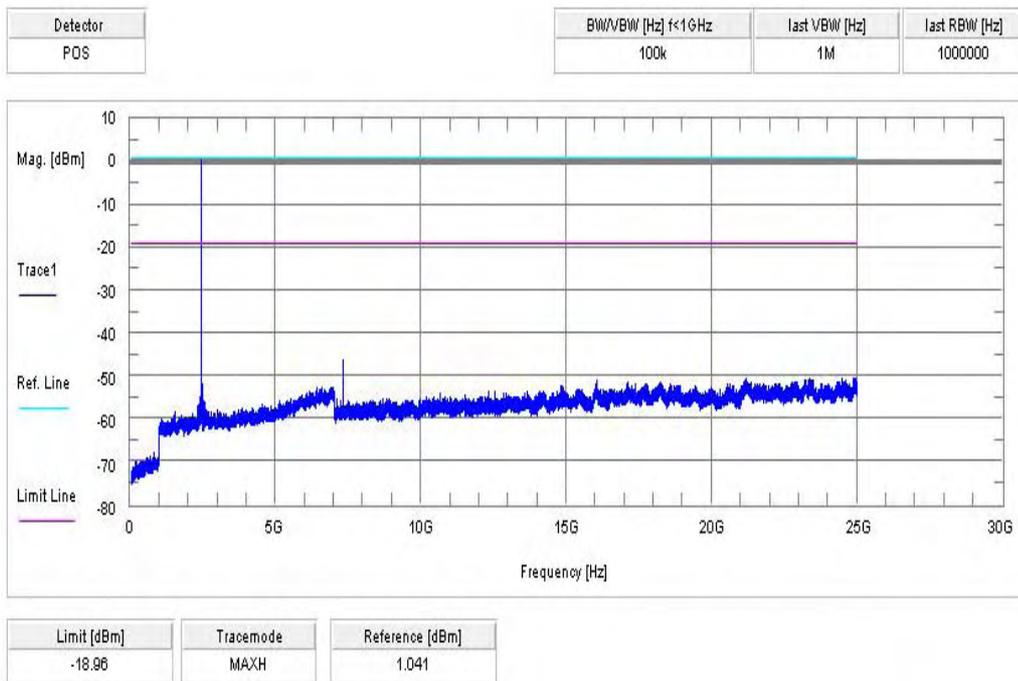

Plot 3 of 3: highest channel

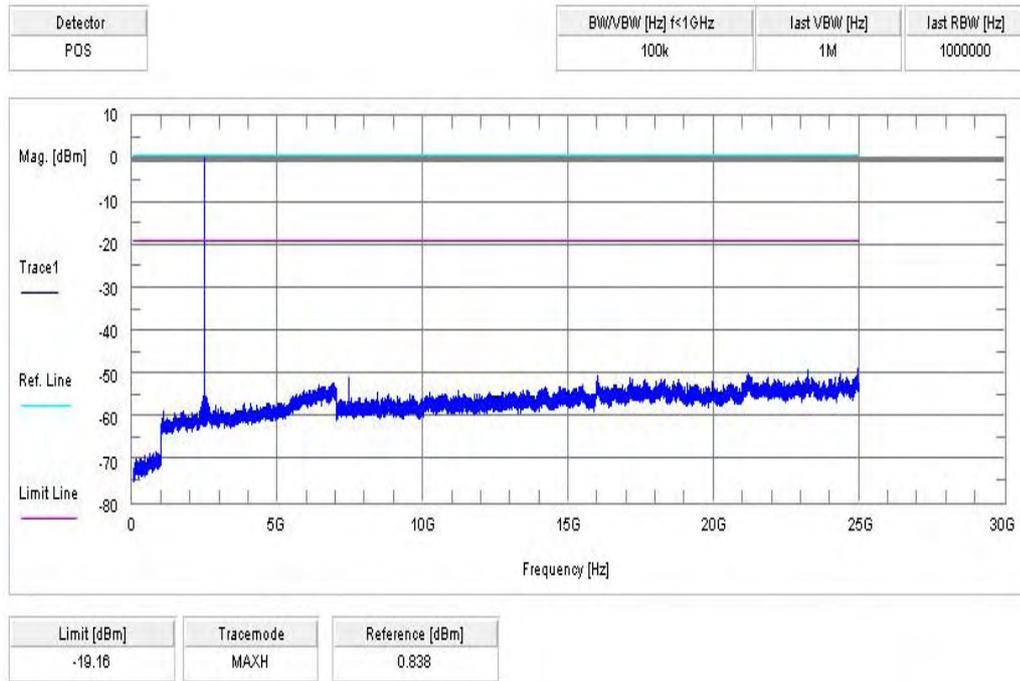

Result & Limits:

| Emission Limitation     |  |                             |                                   |  |                     |
|-------------------------|--|-----------------------------|-----------------------------------|--|---------------------|
| f [MHz]                 |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                    |  | 0.97                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| 2441                    |  | 1.04                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| 2480                    |  | 0.84                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| Measurement uncertainty |  | ± 3dB                       |                                   |  |                     |


F < 1 GHz: RBW: 100 kHz VBW: 100 kHz  
 F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

|                                   |  |
|-----------------------------------|--|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
|-----------------------------------|--|


Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

Modulation:  $\pi/4$  DQPSK


Plot 1 of 3: lowest channel

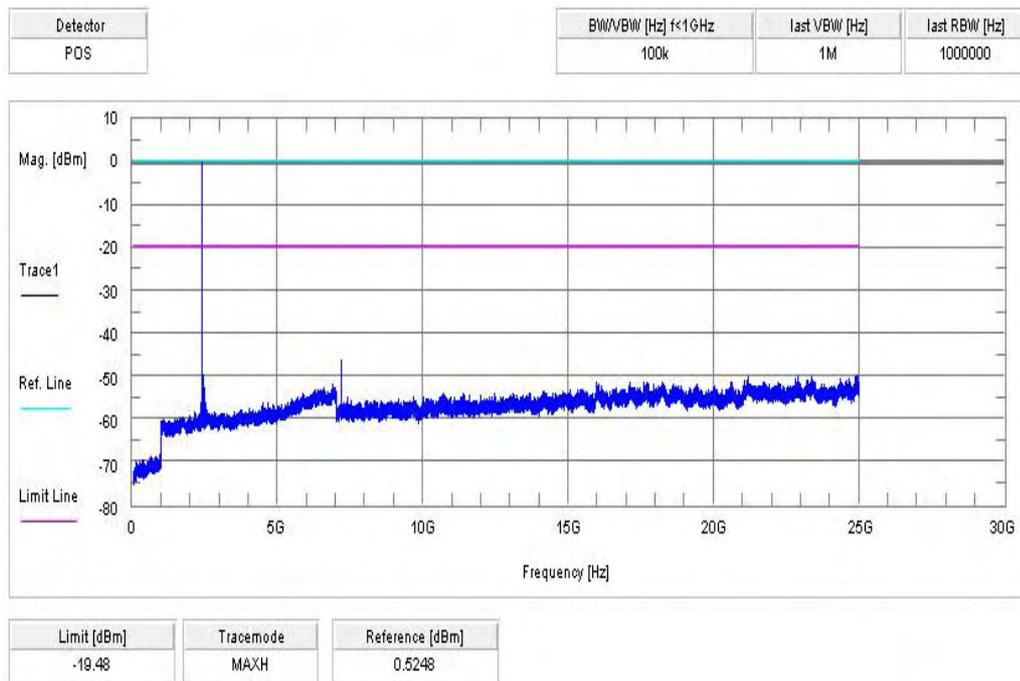

Plot 2 of 3: middle channel

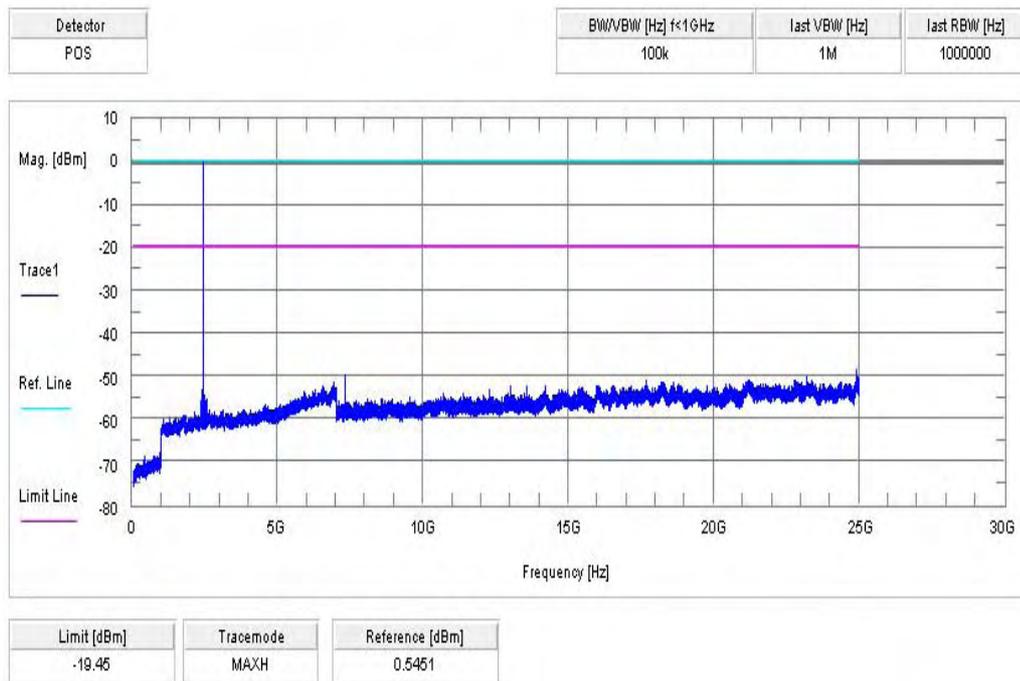

Plot 3 of 3: highest channel

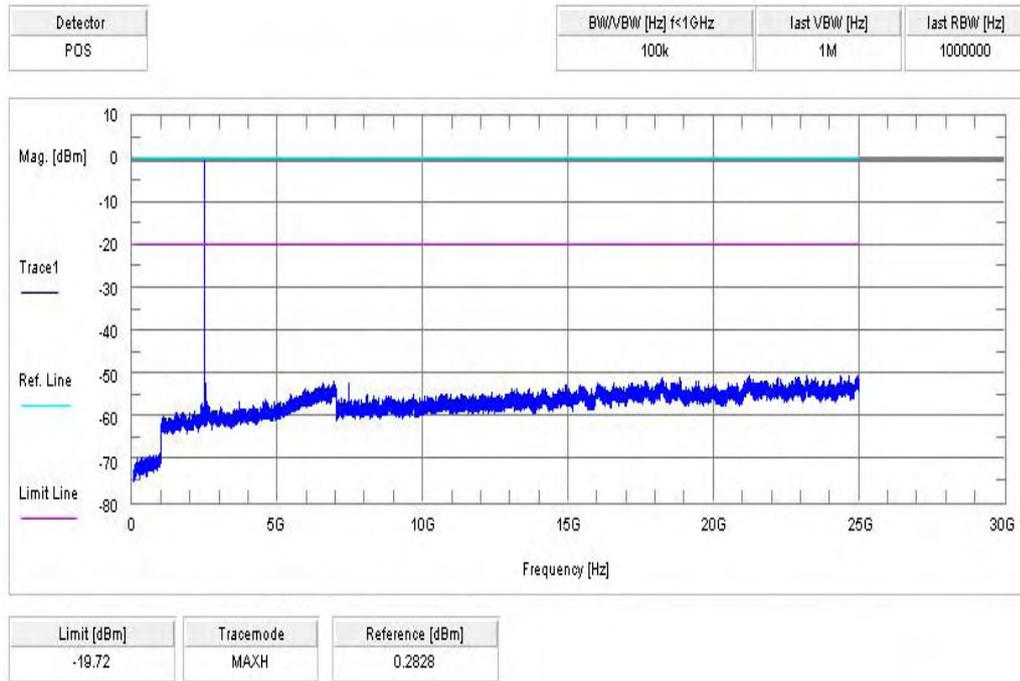

Result & Limits:

| Emission Limitation     |  |                             |                                   |  |                     |
|-------------------------|--|-----------------------------|-----------------------------------|--|---------------------|
| f [MHz]                 |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                    |  | 0.52                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| 2441                    |  | 0.55                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| 2480                    |  | 0.28                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| Measurement uncertainty |  | ± 3dB                       |                                   |  |                     |


F < 1 GHz: RBW: 100 kHz VBW: 100 kHz  
 F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

|                                   |  |
|-----------------------------------|--|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
|-----------------------------------|--|


Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

Modulation: 8DPSK


Plot 1 of 3: lowest channel

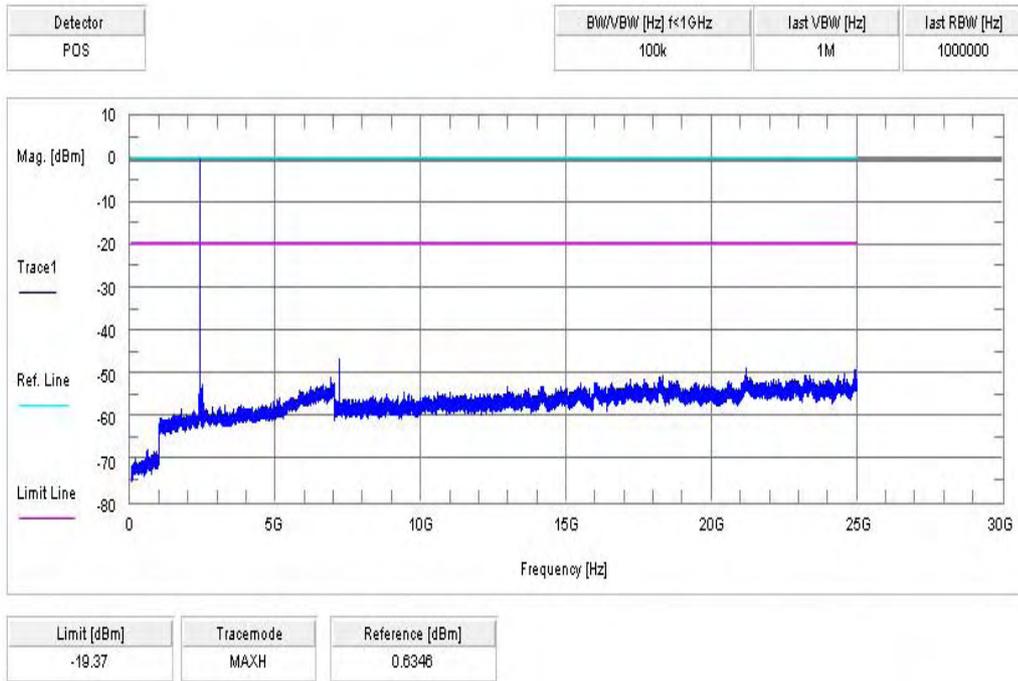

Plot 2 of 3: middle channel

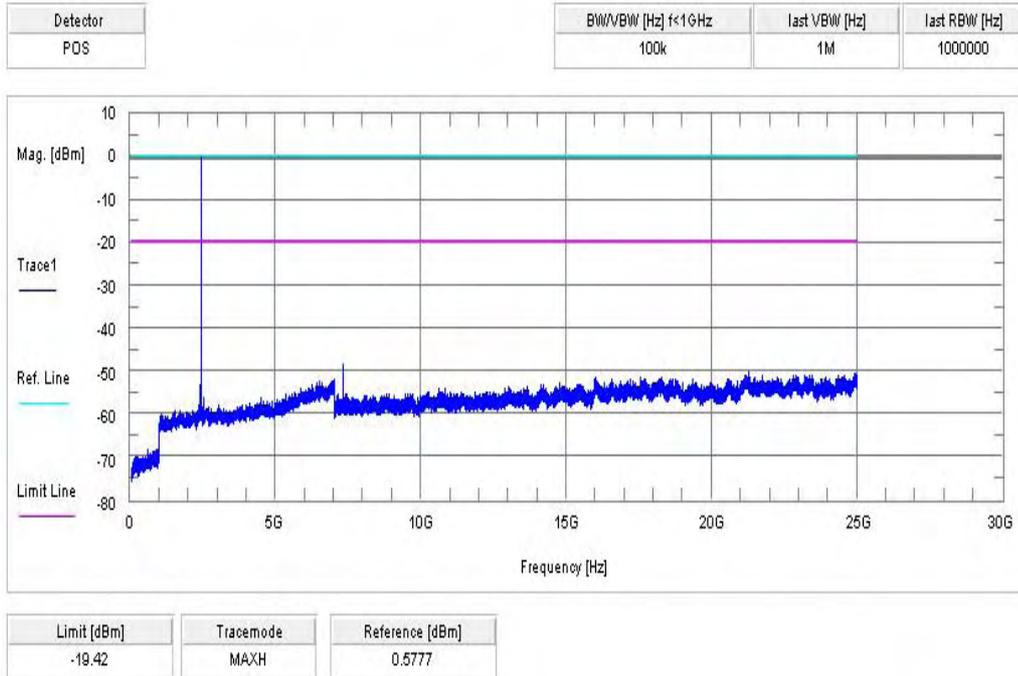

Plot 3 of 3: highest channel

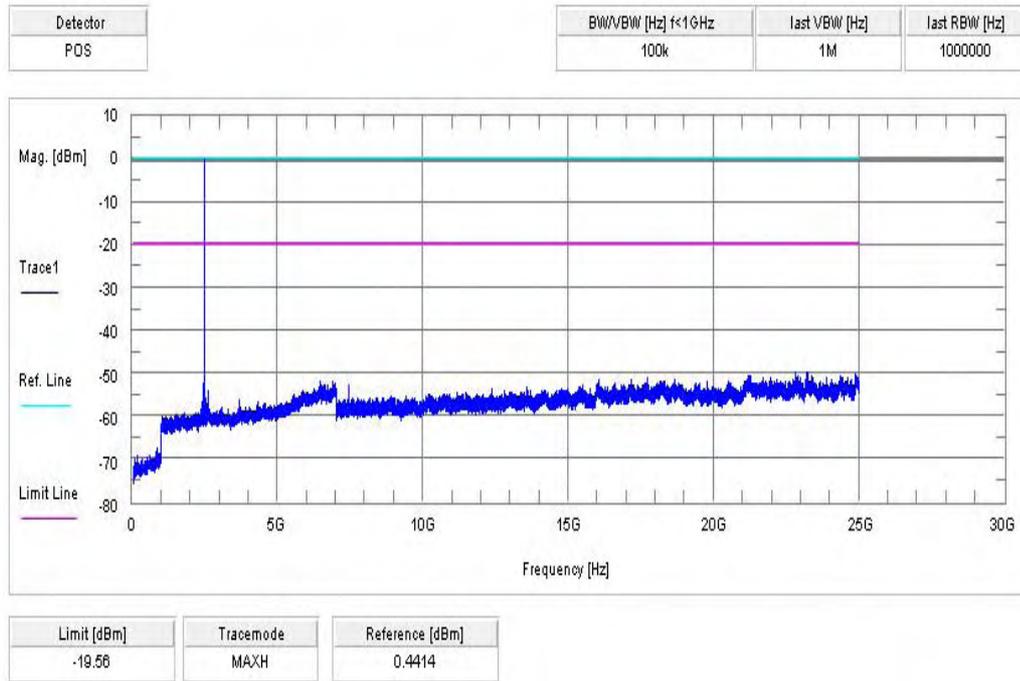

Result & Limits:

| Emission Limitation     |  |                             |                                   |  |                     |
|-------------------------|--|-----------------------------|-----------------------------------|--|---------------------|
| f [MHz]                 |  | amplitude of emission [dBm] | limit max. allowed emission power | actual attenuation below frequency of operation [dB] | results             |
| 2402                    |  | 0.63                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| 2441                    |  | 0.58                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| 2480                    |  | 0.44                        | 30 dBm                            |  | Operating frequency |
| No critical peaks found |  |                             | -20 dBc                           |  | complies            |
|                         |  |                             |                                   |  | complies            |
| Measurement uncertainty |  | ± 3dB                       |                                   |  |                     |

F < 1 GHz: RBW: 100 kHz VBW: 100 kHz  
 F > 1 GHz: RBW: 1 MHz VBW: 1 MHz

|                                   |  |
|-----------------------------------|--|
| Under normal test conditions only | In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). |
|-----------------------------------|--|

Note: For emissions that fall into restricted bands you find the radiated emissions later in the report.

**5.15 Spurious Emissions > 30 MHz- radiated (Transmitter) § 15.247 (c)(1)**

Valid for all modes. Plots show the worst case.

Plot: 0.03 - 1 GHz vertical/horizontal (lowest channel)

**Information**


EUT: 1202-566.1C(1 (FAD-3022019-BV) + CAA 0002002-BV  
 Serial Number: CB5AoM8JNH + 458B 06W03  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: BT connection Channel 0  
 Operator Name: Folz  
 Comment: Powered with AC 115 V/ 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: EMI radiated\Electric Field (NOS)  
 Level Unit: dBµV/m

**Subrange**                      **Detectors**                      **IF Bandwidth**                      **Meas. Time**                      **Receiver**  
 30MHz - 1GHz                      QuasiPeak                      120kHz                      15s                      Receiver

**FCC\_10m\_FCCLIMIT(B)**

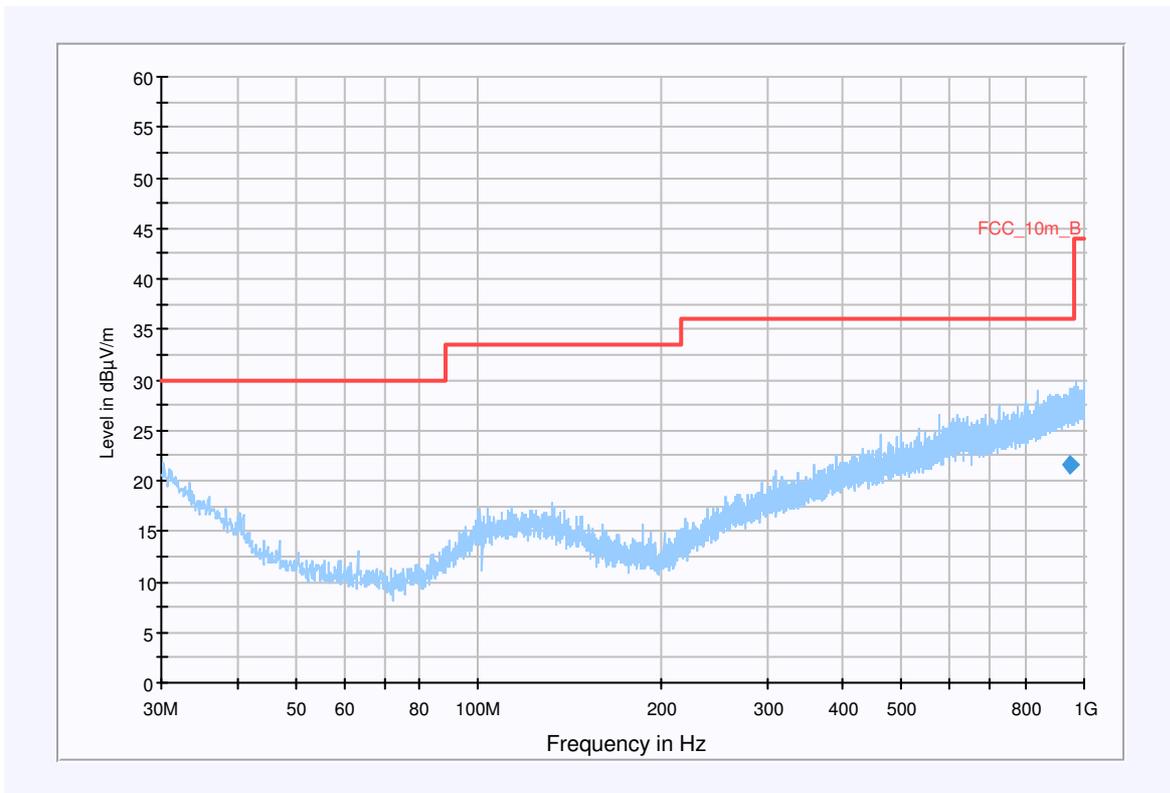

**Final Measurement Detector 1**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Antenna height (cm) | Polarity | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|---------------------|----------|--------------------------|------------|-------------|----------------|---------|
| 951.081950      | 21.6               | 15000.000       | 120.000         | 400.0               | V        | 50.0                     | 24.6       | 14.4        | 36.0           |         |

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]  
@ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch  
FW 1.0

Antenna: Chase Broadband BiLog Antenna CBL 6112  
SN 2110, FW A, CAL 07.01.2009  
Correction Table (vertical): Chase Broadband BiLog Antenna CBL 6112  
Correction Table (horizontal): Chase Broadband BiLog Antenna CBL 6112

Antenna Tower: Correction Table: Cabel with switch (1007)  
Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12


Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9)

Plot: 1 - 4 GHz vertical/horizontal (lowest channel)

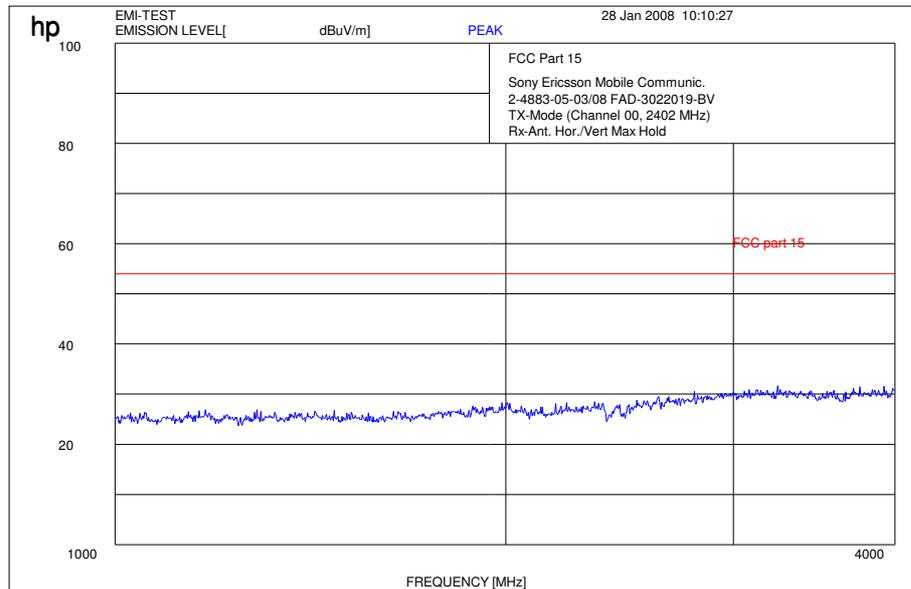


Carrier suppressed with a rejection filter

Plot: 4 - 12 GHz vertical/horizontal (lowest channel)

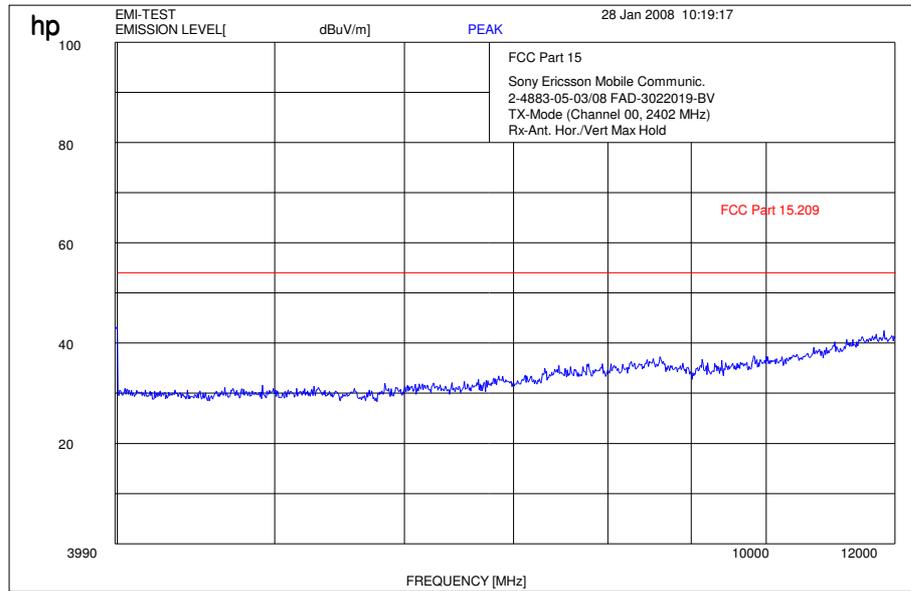

Plot: 12 - 25 GHz vertical/horizontal (valid for all channels and modes)

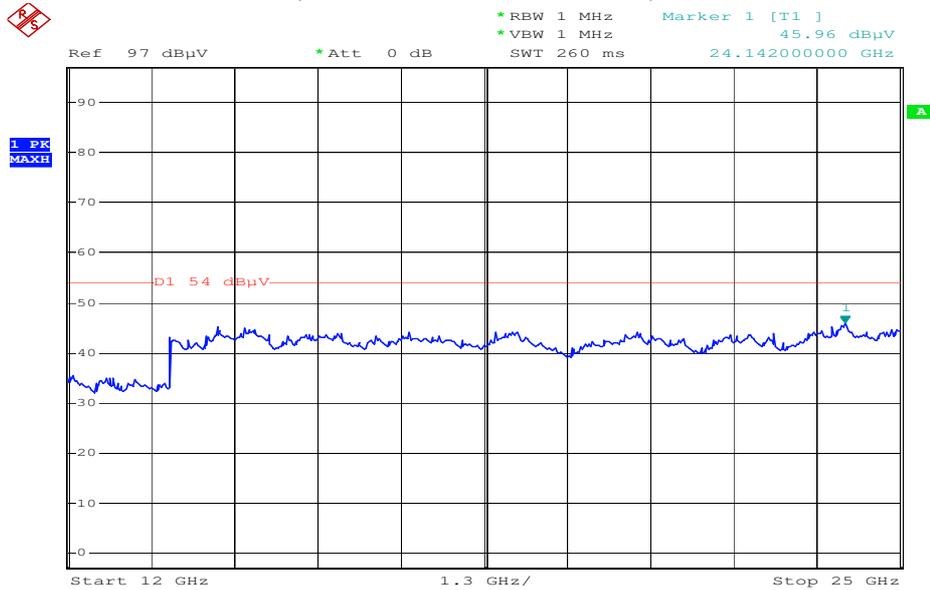

Date: 31.JAN.2008 14:47:49

Plot: 0.03 - 1 GHz vertical/horizontal (middle channel)

**Information**


EUT: 1202-566.1C/! (FAD-3022019-BV) + CAA 0002002-BV  
 Serial Number: CB5A0M8JNH + 458B 06W03  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: BT connection channel 39  
 Operator Name: Folz  
 Comment: Powered with AC 115V/ 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: EMI radiated\Electric Field (NOS)  
 Level Unit: dBμV/m

| Subrange     | Detectors | IF Bandwidth | Meas. Time | Receiver |
|--------------|-----------|--------------|------------|----------|
| 30MHz - 1GHz | QuasiPeak | 120kHz       | 15s        | Receiver |


**FCC\_10m\_1GHz (B)**

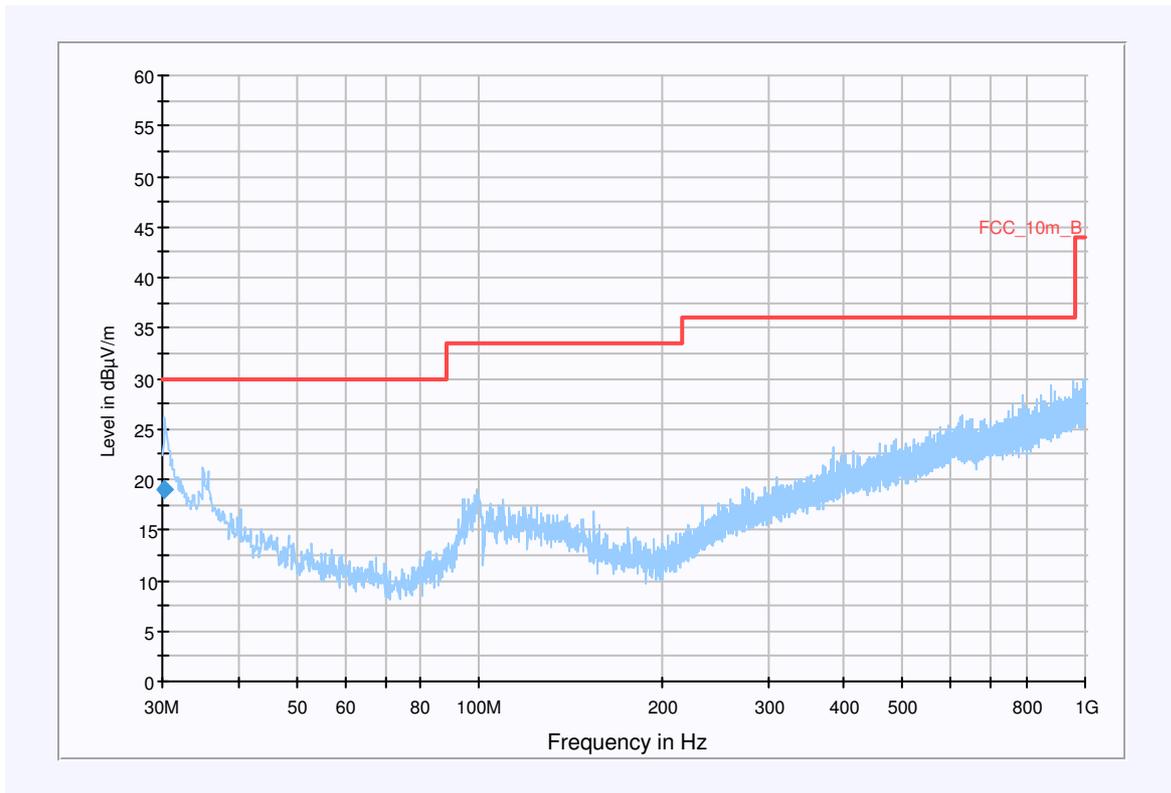

**Final Measurement Detector 1**


| Frequency (MHz) | QuasiPeak (dBμV/m) | Meas. Time (ms) | Bandwidth (kHz) | Antenna height (cm) | Polarity | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|---------------------|----------|--------------------------|------------|-------------|----------------|---------|
| 30.133115       | 18.9               | 15000.000       | 120.000         | 132.0               | V        | 226.0                    | 18.0       | 11.1        | 30.0           |         |

Plot: 1 - 4 GHz vertical/horizontal (middle channel)

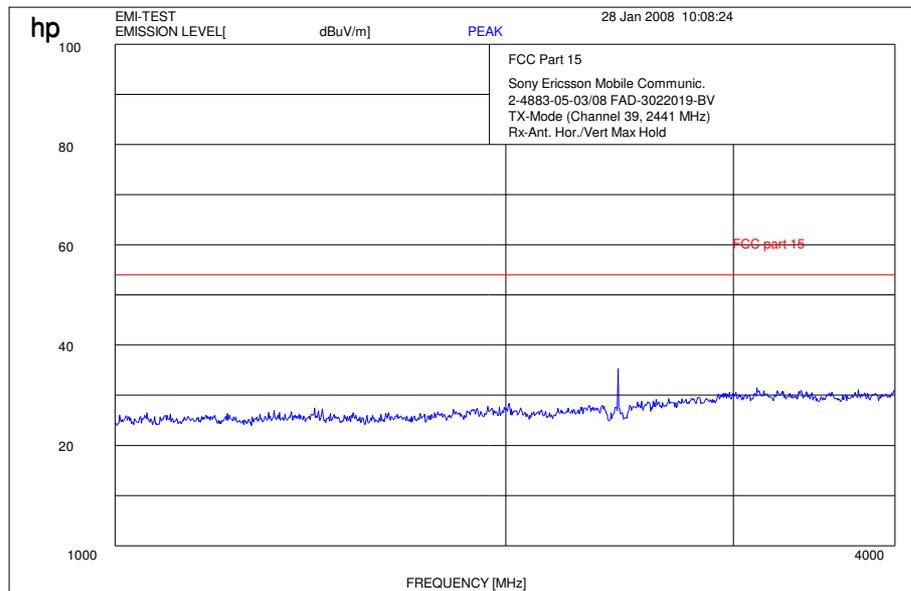

Carrier suppressed with a rejection filter

Plot: 4 - 12 GHz vertical/horizontal (middle channel)

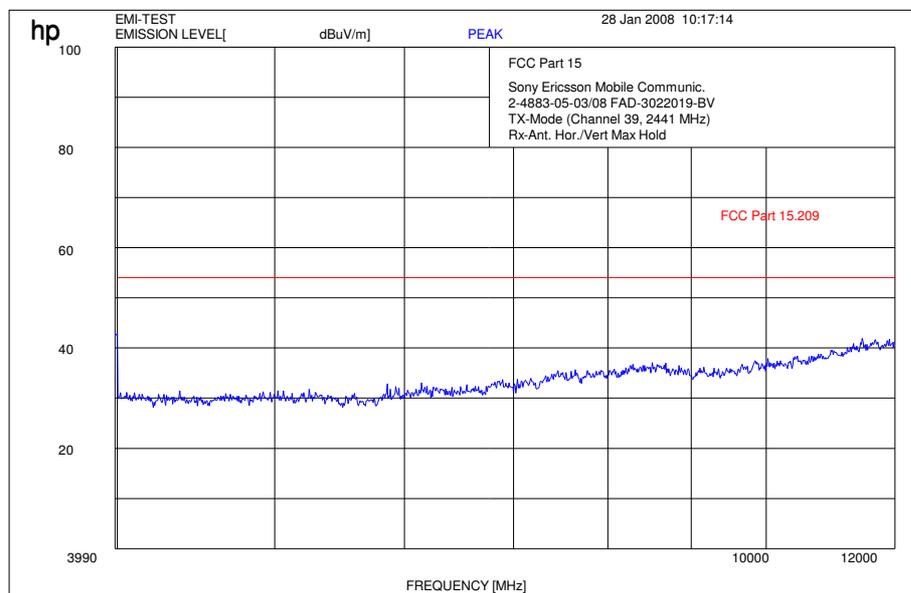

Plot: 0.03 - 1 GHz vertical/horizontal (highest channel)

**Information**


EUT: 1202-566.1C/! (FAD-3022019-BV) + CAA 0002002-BV  
 Serial Number: CB5A0M8JNH + 458B 06W03  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: BT connection channel 78  
 Operator Name: Folz  
 Comment: Powered with AC 115V/ 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: EMI radiated\Electric Field (NOS)  
 Level Unit: dBμV/m

**Subrange**                      **Detectors**                      **IF Bandwidth**                      **Meas. Time**                      **Receiver**  
 30MHz - 1GHz                      QuasiPeak                      120kHz                      15s                      Receiver


**FCC\_10m\_1GHz (B)**

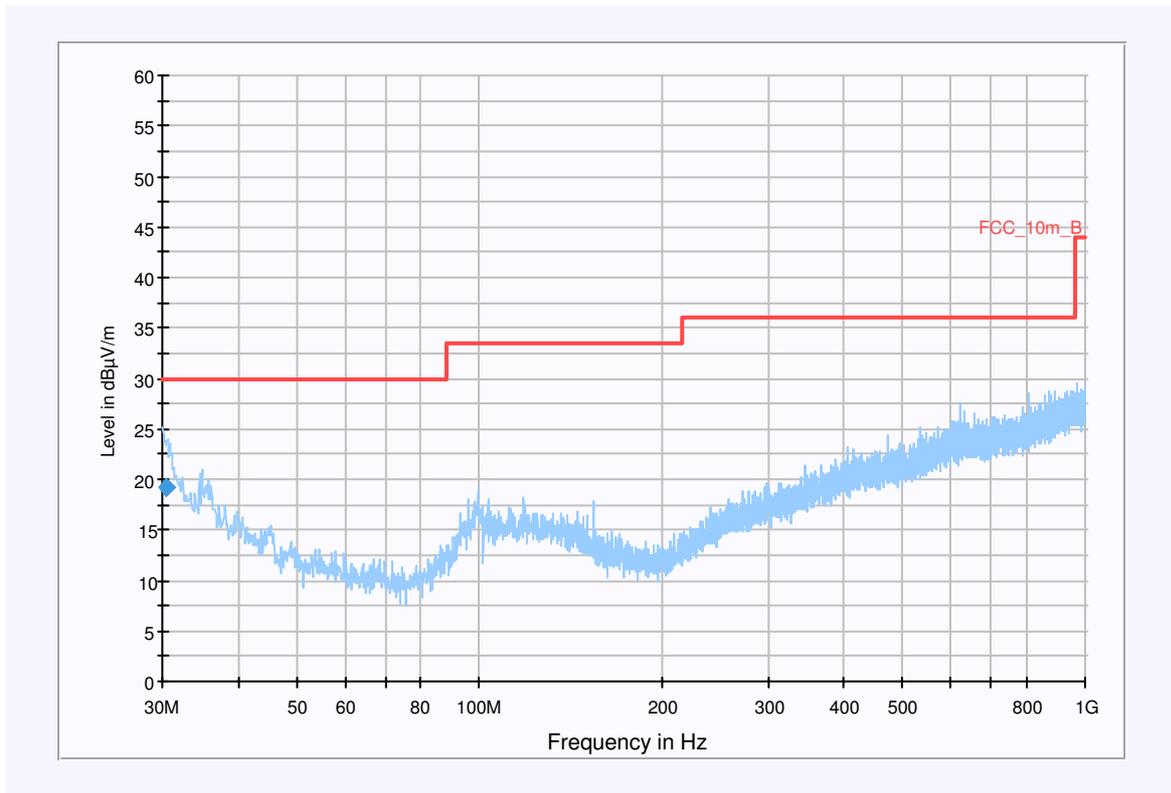

**Final Measurement Detector 1**


| Frequency (MHz) | QuasiPeak (dBμV/m) | Meas. Time (ms) | Bandwidth (kHz) | Antenna height (cm) | Polarity | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dBμV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|---------------------|----------|--------------------------|------------|-------------|----------------|---------|
| 30.526650       | 19.3               | 15000.000       | 120.000         | 100.0               | V        | 3.0                      | 17.8       | 10.7        | 30.0           |         |

Plot: 1 - 4 GHz vertical/horizontal (highest channel)

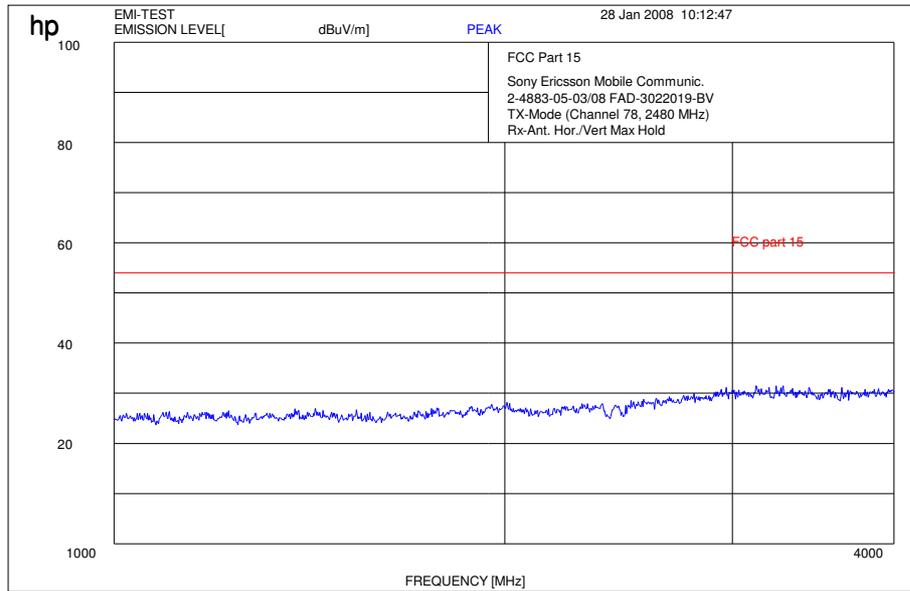

Carrier suppressed with a rejection filter

Plot: 4 - 12 GHz vertical/horizontal (highest channel)

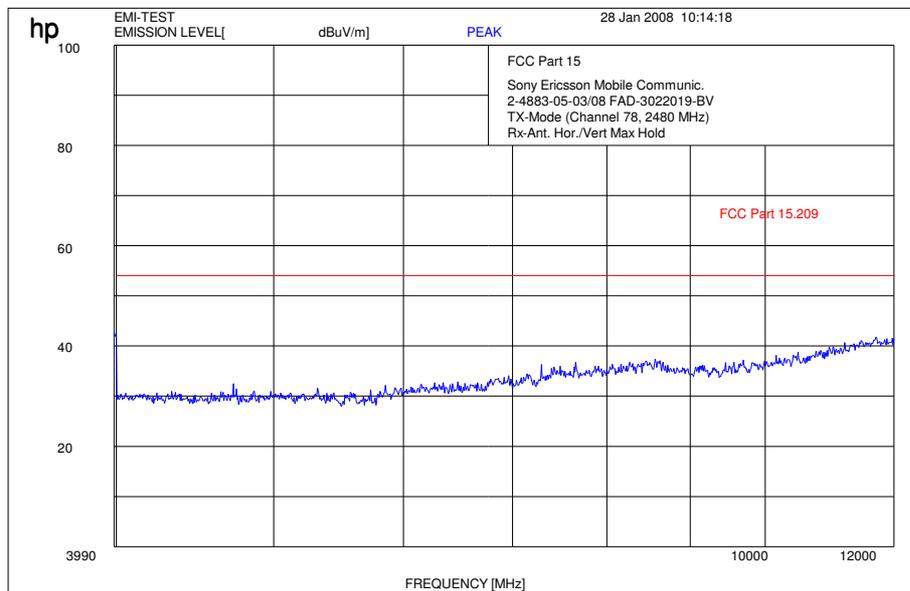

Results:

| SPURIOUS EMISSIONS LEVEL (dB $\mu$ V/m) |          |                      |                         |          |                      |                         |          |                      |
|---|----------|----------------------|-------------------------|----------|----------------------|-------------------------|----------|----------------------|
| 2402 MHz                                |          |                      | 2441 MHz                |          |                      | 2480 MHz                |          |                      |
| F [MHz]                                 | Detector | Level [dB $\mu$ V/m] | F [MHz]                 | Detector | Level [dB $\mu$ V/m] | F [MHz]                 | Detector | Level [dB $\mu$ V/m] |
| No critical peaks found                 |          |                      | No critical peaks found |          |                      | No critical peaks found |          |                      |
|   |          |                      |                         |          |                      |                         |          |                      |
|   |          |                      |                         |          |                      |                         |          |                      |
|   |          |                      |                         |          |                      |                         |          |                      |
|   |          |                      |                         |          |                      |                         |          |                      |
| Measurement uncertainty                 |          |                      | ±3 dB                   |          |                      |                         |          |                      |

f < 1 GHz : RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

Limits: § 15.247 (c)

In any 100 kHz bandwidth outside the frequency band at least 20dB below the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Limits: § 15.209

| Frequency [MHz] | Field strength [ $\mu$ V/m] | Measurement distance (m) |
|-----------------|-----------------------------|--------------------------|
| 30 - 88         | 100 (40 dB $\mu$ V/m)       | 3                        |
| 88 - 216        | 150 (43.5 dB $\mu$ V/m)     | 3                        |
| 216 - 960       | 200 (46 dB $\mu$ V/m)       | 3                        |
| above 960       | 500 (54 dB $\mu$ V/m)       | 3                        |

**5.16 Spurious Emissions - radiated (Receiver) § 15.109**

Plot: 0.03 - 1 GHz vertical/horizontal (receiver)

**Information**


EUT: 1202-566.1C/! (FAD-3022019-BV) + CAA 0002002-BV  
 Serial Number: CB5A0M8JNH + 458B 06W03  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: BT receive  
 Operator Name: Folz  
 Comment: Powered with AC 115V/ 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: EMI radiated\Electric Field (NOS)  
 Level Unit: dBµV/m

| Subrange     | Detectors | IF Bandwidth | Meas. Time | Receiver |
|--------------|-----------|--------------|------------|----------|
| 30MHz - 1GHz | QuasiPeak | 120kHz       | 15s        | Receiver |

**FCC\_10m\_1GHz (B)**

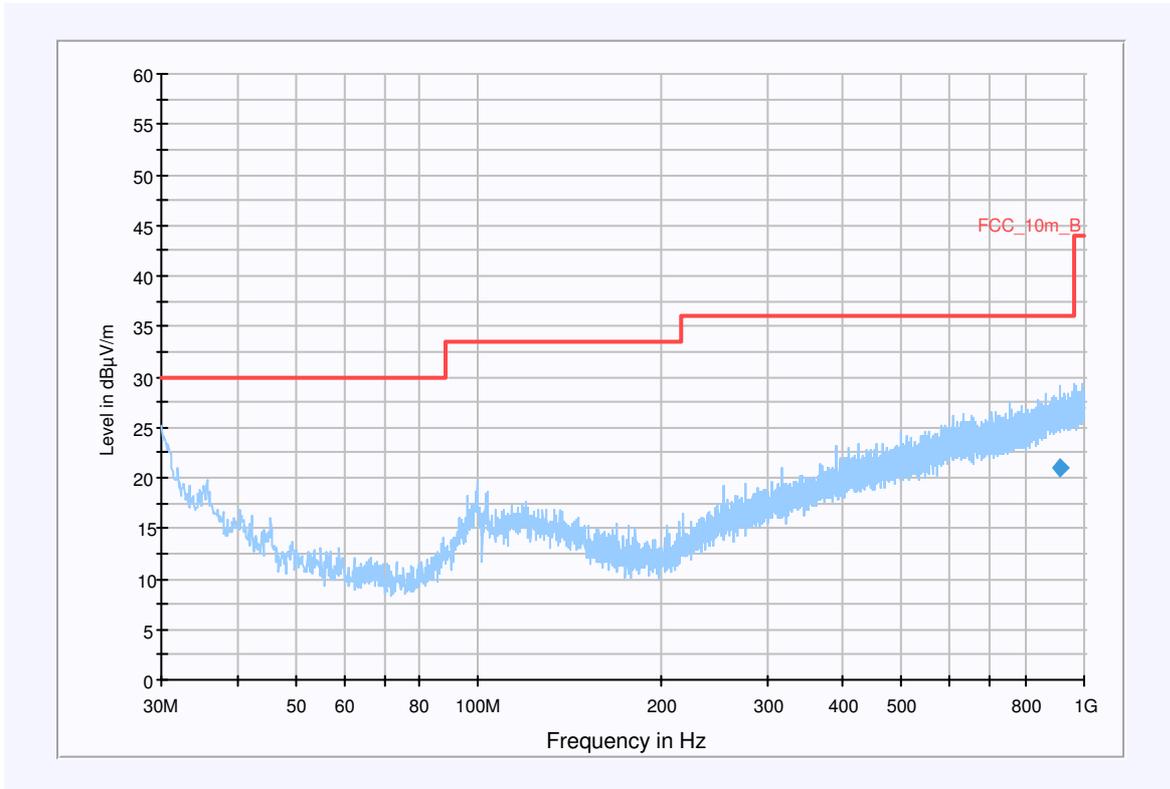

**Final Measurement Detector 1**

| Frequency (MHz) | QuasiPeak (dBµV/m) | Meas. Time (ms) | Bandwidth (kHz) | Antenna height (cm) | Polarity | Turntable position (deg) | Corr. (dB) | Margin (dB) | Limit (dBµV/m) | Comment |
|-----------------|--------------------|-----------------|-----------------|---------------------|----------|--------------------------|------------|-------------|----------------|---------|
| 914.938950      | 21.0               | 15000.000       | 120.000         | 100.0               | H        | 319.0                    | 24.2       | 15.0        | 36.0           |         |

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30MHz - 2GHz

Receiver: Receiver [ESCI 3]  
@ GPIB0 (ADR 20), SN 100083/003, FW 3.32, CAL 07.01.2009


Signal Path: without Notch  
FW 1.0

Antenna: Chase Broadband BiLog Antenna CBL 6112  
SN 2110, FW A, CAL 07.01.2009  
Correction Table (vertical): Chase Broadband BiLog Antenna CBL 6112  
Correction Table (horizontal): Chase Broadband BiLog Antenna CBL 6112


Antenna Tower: Correction Table: Cabel with switch (1007)  
Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9)


Plot: 1 - 4 GHz vertical/horizontal (receiver)

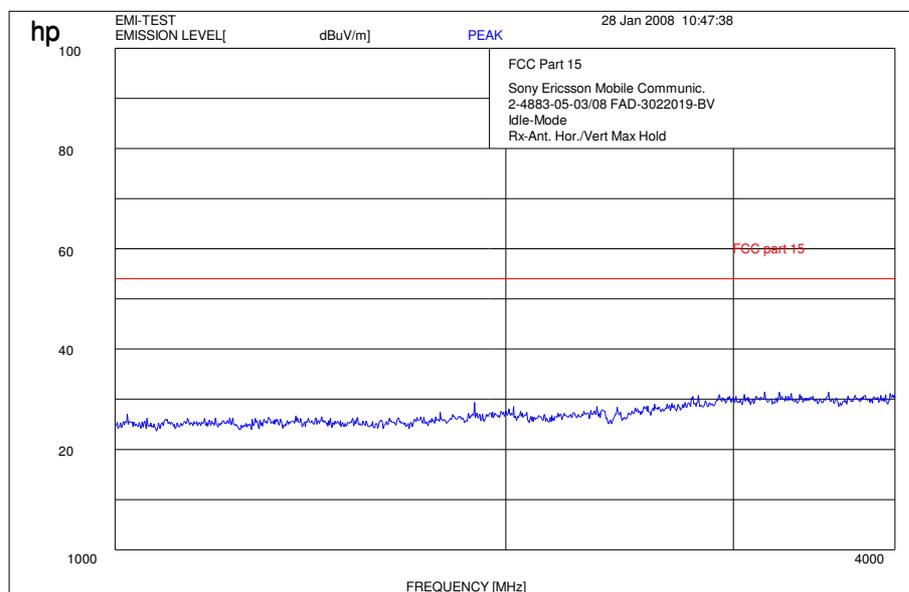

Plot: 4 - 12 GHz vertical/horizontal (receiver)

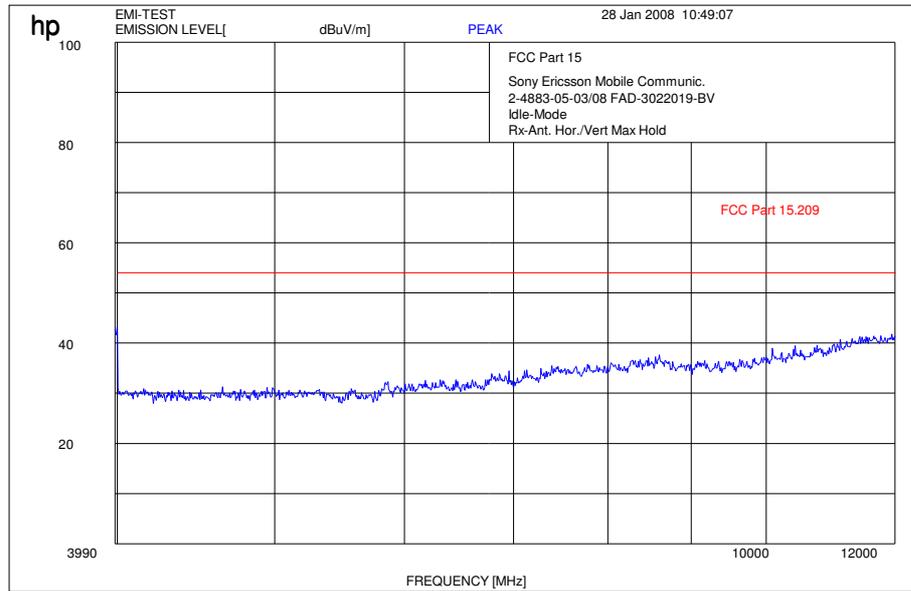

Plot: 12 - 25 GHz vertical/horizontal (receiver)

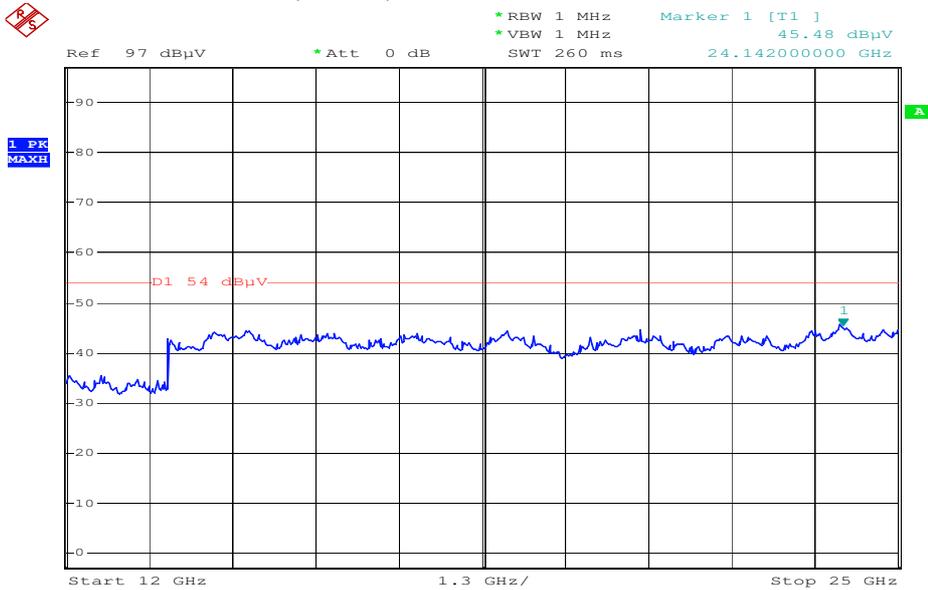

Date: 31.JAN.2008 14:47:05

| Spurious Emissions level [dB $\mu$ V/m] |          |                      |
|---|----------|----------------------|
| f[MHz]                                  | Detector | Level [dB $\mu$ V/m] |
| No critical peaks found                 |          |                      |
|   |          |                      |
|   |          |                      |
|   |          |                      |
|   |          |                      |
|   |          |                      |
|   |          |                      |
|   |          |                      |
|   |          |                      |
|   |          |                      |
| Measurement uncertainty                 |          | ±3 dB                |

f < 1 GHz: RBW/VBW: 100 kHz

f ≥ 1GHz : RBW/VBW: 1 MHz

See above plots

Measurement distance see table

Limits: § 15.109


| Frequency (MHz) | Field strength ( $\mu$ V/m) | Measurement distance (m) |
|-----------------|-----------------------------|--------------------------|
| 30 - 88         | 100 (40 dB $\mu$ V/m)       | 3                        |
| 88 - 216        | 150 (43.5 dB $\mu$ V/m)     | 3                        |
| 216 - 960       | 200 (46 dB $\mu$ V/m)       | 3                        |
| above 960       | 500 (54 dB $\mu$ V/m)       | 3                        |

**5.17 Spurious Emissions < 30 MHz - Transmitter radiated § 15.209**

Measured at 10 m distance.

Values recalculated with 40 dB/decade according to FCC rules.

Plot 1:

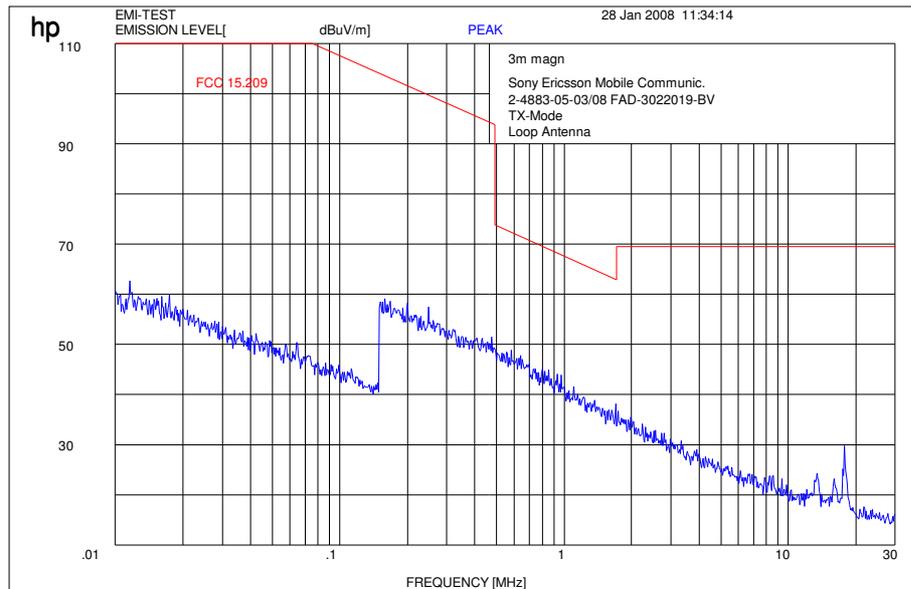


Limits:

| Frequency (MHz) | Field strength ( $\mu\text{V}/\text{m}$ ) | Measurement distance (m) |
|-----------------|---|--------------------------|
| 0.009 – 0.490   | 2400/F(kHz)                               | 300                      |
| 0.490 – 1.705   | 24000/F(kHz)                              | 30                       |
| 1.705 – 30.0    | 30 / 29.5 dB $\mu\text{V}/\text{m}$       | 30                       |


**5.18 Conducted Emissions <30 MHz § 15.107/207**

Valid for all modes. Plots show the worst case.

Plot 1:

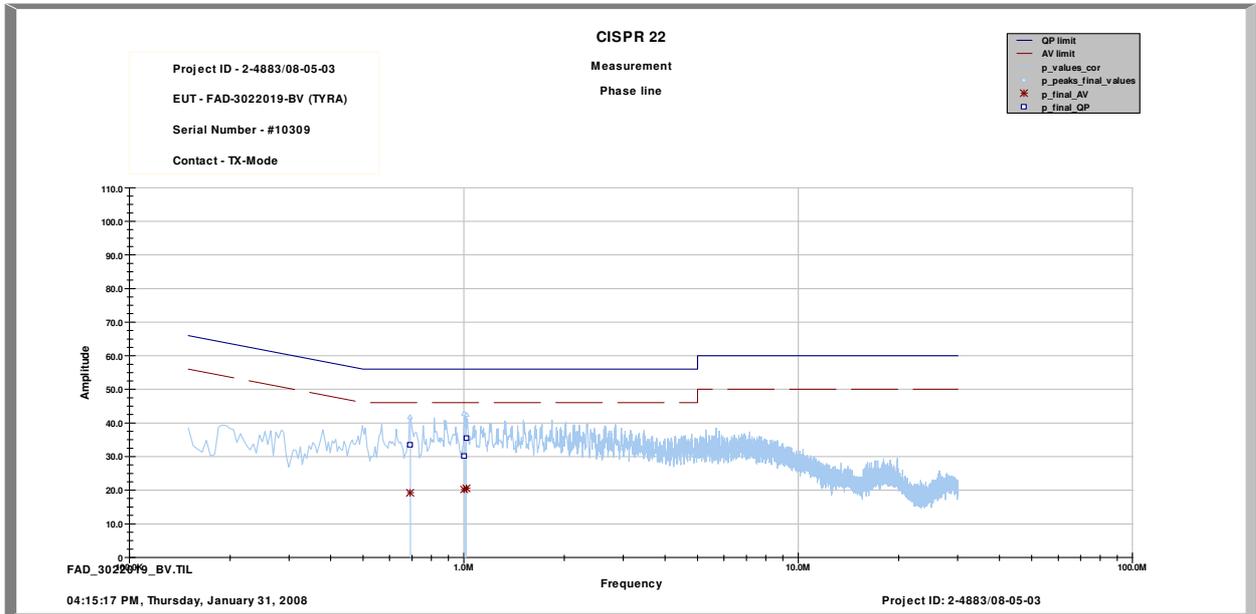

Plot 2:

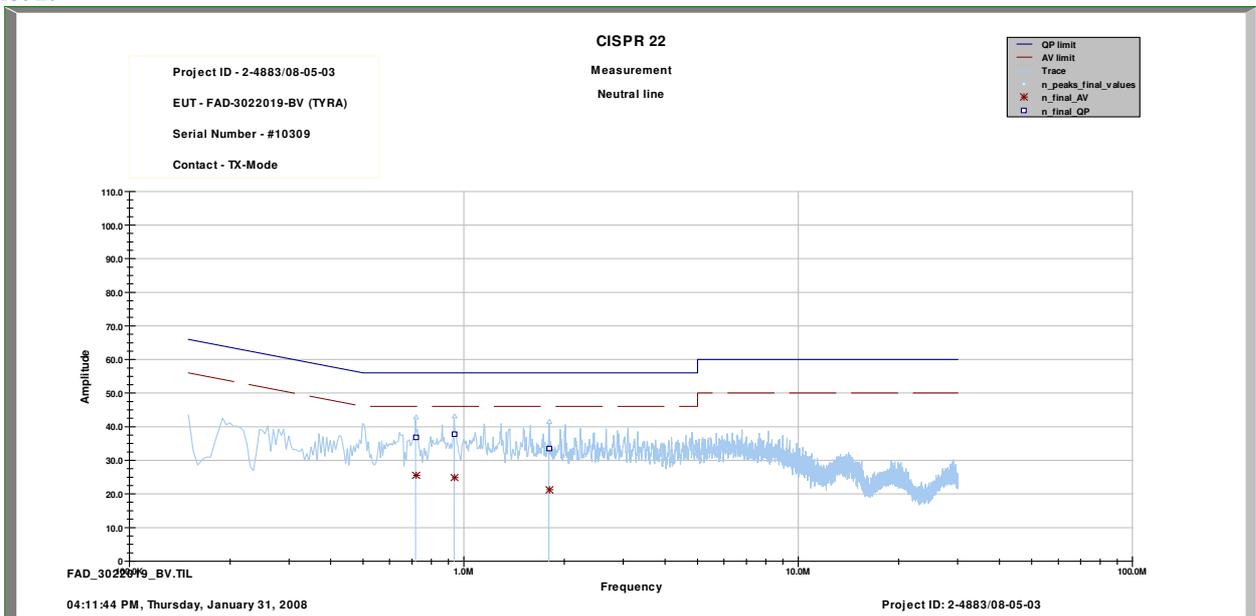

Limits :

|                                   |           |
|-----------------------------------|-----------|
| Under normal test conditions only | See plots |
|-----------------------------------|-----------|

## 6 Test equipment and ancillaries used for tests

To simplify the identification on each page of the test equipment used, on each page of the test report, each item of test equipment and ancillaries such as cables are identified (numbered) by the Test Laboratory, below.

### *Anechoic chamber C:*

| No | Equipment/Type                   | Manuf.     | Serial Nr.       | Inv. No. Cetecom | Last Calibration                   | Frequency (months) | Next Calibration |
|----|----------------------------------|------------|------------------|------------------|------------------------------------|--------------------|------------------|
| 1  | Anechoic chamber                 | MWB        | 87400/02         | 300000996        | Monthly verification               |                    |                  |
| 2  | System-Rack 85900                | HP I.V.    | *                | 300000222        | n.a.                               |                    |                  |
| 3  | Measurement System 1             |            |                  |                  |                                    |                    |                  |
| 4  | Spektrum Analyzer 8566B          | HP         | 2747A05306       | 300001000        | 05.10.2006                         | 24                 | 05.10.2008       |
| 5  | Spektrum Analyzer Display 85662A | HP         | 2816A16541       | 300002297        | 05.10.2006                         | 24                 | 05.10.2008       |
| 6  | Quasi-Peak-Adapter 85650A        | HP         | 2811A01131       | 300000999        | 05.10.2006                         | 24                 | 05.10.2008       |
| 7  | RF-Preselector 85685A            | HP         | 2837A00779       | 300000218        | 08.11.2006                         | 24                 | 08.11.2008       |
| 8  | PC Vectra VL                     | HP         |                  | 300001688        | n.a.                               |                    |                  |
| 9  | Software EMI                     | HP         |                  | 300000983        | n.a.                               |                    |                  |
| 10 | Measurement System 2             |            |                  |                  |                                    |                    |                  |
| 11 | FSP 30                           | R&S        | 100623           | ICT 300003464    | 05.10.2007                         | 24                 | 15.10.2009       |
| 12 | PC                               | F+W        |                  |                  | n.a.                               |                    |                  |
| 13 | TILE                             | TILE       |                  |                  | n.a.                               |                    |                  |
| 14 | Biconical antenna                | EMCO       | S/N: 860 942/003 |                  | Monthly verification (System cal.) |                    |                  |
| 15 | Log. Period. Antenna 3146        | EMCO       | 2130             | 300001603        | Monthly verification (System cal.) |                    |                  |
| 16 | Double Ridged Antenna HP 3115P   | EMCO       | 3088             | 300001032        | Monthly verification (System cal.) |                    |                  |
| 17 | Active Loop Antenna 6502         | EMCO       | 2210             | 300001015        | Monthly verification (System cal.) |                    |                  |
| 18 | Power Supply 6032A               | HP         | 2818A03450       | 300001040        | 12.05.2007                         | 36                 | 12.05.2010       |
| 19 | Busisolator                      | Kontron    |                  | 300001056        | n.a.                               |                    |                  |
| 20 | Leitungsteiler 11850C            | HP         |                  | 300000997        | Monthly verification (System cal.) |                    |                  |
| 21 | Power attenuator 8325            | Byrd       | 1530             | 300001595        | Monthly verification (System cal.) |                    |                  |
| 22 | Band reject filter WRCG1855/1910 | Wainwright | 7                | 300003350        | Monthly verification (System cal.) |                    |                  |
| 23 | Band reject filter WRCG2400/2483 | Wainwright | 11               | 300003351        | Monthly verification (System cal.) |                    |                  |
|    |                                  |            |                  |                  |                                    |                    |                  |

*System Rack Room 005 :*

| No | Equipment/Type   | Manuf. | Serial Nr.  | Inv. No. Cetecom | Last Calibration | Frequency (months) | Next Calibration |
|----|------------------|--------|-------------|------------------|------------------|--------------------|------------------|
| 1  | FSP 30           | R&S    |             | 300003575        | 02.04.2007       | 24                 | 02.04.2009       |
| 2  | CBT              | R&S    | 100313      | 300003516        | 24.10.2006       | 24                 | 24.10.2008       |
| 3  | Switch Matrix    | HP     |             | 300000929        | n.a.             |                    |                  |
| 4  | Power Supply     | HP     | 3041A00544  | 300002270        | 13.05.2007       | 36                 | 13.05.2010       |
| 5  | Signal Generator | R&S    | 836206/0092 | 300002680        | 30.05.2007       | 36                 | 30.05.2010       |
|    |                  |        |             |                  |                  |                    |                  |
|    |                  |        |             |                  |                  |                    |                  |

*Signalling Units:*

| No | Equipment/Type | Manuf. | Serial Nr. | Inv. No. Cetecom | Last Calibration | Frequency (months) | Next Calibration |
|----|----------------|--------|------------|------------------|------------------|--------------------|------------------|
| 1  | CBT            | R&S    | 100313     | 300003516        | 24.10.2006       | 24                 | 24.10.2008       |
| 2  | CBT            | R&S    | 100185     | 300003416        | 21.02.2006       | 24                 | 21.02.2008       |
| 3  | CMU-200        | R&S    | 103992     | 300003231        | 27.04.2007       | 12                 | 27.04.2008       |
| 4  | CMU-200        | R&S    | 106240     | 300003321        | 02.05.2006       | 24                 | 02.05.2008       |
|    |                |        |            |                  |                  |                    |                  |

*SRD Laboratory Room 002:*

| No | Equipment/Type                  | Manuf. | Serial Nr.     | Inv. No. Cetecom | Last Calibration | Frequency (months) | Next Calibration |
|----|---------------------------------|--------|----------------|------------------|------------------|--------------------|------------------|
| 1  | System Controller PSM 12        | R&S    | 835259/007     | 3000002681-00xx  | n.a.             |                    |                  |
| 2  | Memory Extension PSM-K10        | R&S    | To 1           | 3000002681       | n.a.             |                    |                  |
| 3  | Operating Software PSM-B2       | R&S    | To 1           | 3000002681       | n.a.             |                    |                  |
| 4  | 19" Monitor                     |        | 22759020-ED    | 3000002681       | n.a.             |                    |                  |
| 5  | Mouse                           |        | LZE 0095/6639  | 3000002681       | n.a.             |                    |                  |
| 6  | Keyboard                        |        | G00013834L 461 | 3000002681       | n.a.             |                    |                  |
| 7  | Spectrum Analyser FSIQ 26       | R&S    | 835540/018     | 3000002681-0005  | 01.08.2006       | 24                 | 01.08.2008       |
| 8  | Tracking Generator FSIQ-B10     | R&S    | 835107/015     | 3000002681       | s.No.7           |                    |                  |
| 10 | RF-Generator SMIQ03 (B1 Signal) | R&S    | 835541/056     | 3000002681-0002  | 01.08.2006       | 36                 | 01.08.2009       |
| 11 | Modulation Coder SMIQ-B20       | R&S    | To 10          | 3000002681       | s.No.10          |                    |                  |
| 12 | Data Generator SMIQ-B11         | R&S    | To 10          | 3000002681       | s.No.10          |                    |                  |
| 13 | RF Rear Connection SMIQ-B19     | R&S    | To 10          | 3000002681       | s.No.10          |                    |                  |
| 14 | Fast CPU SM-B50                 | R&S    | To 10          | 3000002681       | s.No.10          |                    |                  |
| 15 | FM Modulator SM-B5              | R&S    | 835676/033     | 3000002681       | s.No.10          |                    |                  |
| 16 | RF-Generator SMIQ03 (B2 Signal) | R&S    | 835541/055     | 3000002681-0001  | 01.08.2006       | 36                 | 01.08.2009       |
| 17 | Modulation Coder SMIQ-B20       | R&S    | To 16          | 3000002681       | s.No.16          |                    |                  |
| 18 | Data Generator SMIQ-B11         | R&S    | To 16          | 3000002681       | s.No.16          |                    |                  |

|    |   |                |                |                 |            |    |            |
|----|---|----------------|----------------|-----------------|------------|----|------------|
| 19 | RF Rear Connection SMIQ-B19                 | R&S            | To 16          | 3000002681      | s.No.16    |    |            |
| 20 | Fast CPU SM-B50                             | R&S            | To 16          | 3000002681      | s.No.16    |    |            |
| 21 | FM Modulator SM-B5                          | R&S            | 836061/022     | 3000002681      | s.No.16    |    |            |
| 22 | RF-Generator SMP03 (B3 Signal)              | R&S            | 835133/011     | 3000002681-0003 | 01.08.2006 | 36 | 01.08.2009 |
| 23 | Attenuator SMP-B15                          | R&S            | 835136/014     | 3000002681      | S.No.22    |    |            |
| 24 | RF Rear Connection SMP-B19                  | R&S            | 834745/007     | 3000002681      | S.No.22    |    |            |
| 25 | Power Meter NRVD                            | R&S            | 835430/044     | 3000002681-0004 | 01.08.2006 | 24 | 01.08.2008 |
| 26 | Power Sensor NRVD-Z1                        | R&S            | 833894/012     | 3000002681-0013 | 01.08.2006 | 24 | 01.08.2008 |
| 27 | Power Sensor NRVD-Z1                        | R&S            | 833894/011     | 3000002681-0010 | 01.08.2006 | 24 | 01.08.2008 |
| 28 | Rubidium Standard RUB                       | R&S            |                | 3000002681-0009 | 01.08.2006 | 24 | 01.08.2008 |
| 29 | Switching and Signal Conditioning Unit SSCU | R&S            | 338864/003     | 3000002681-0006 | 01.08.2006 | 24 | 01.08.2008 |
| 30 | Laser Printer HP Deskjet 2100               | HP             | N/A            | 3000002681-0011 | n.a.       |    |            |
| 31 | 19" Rack                                    | R&S            | 11138363000004 | 3000002681      | n.a.       |    |            |
| 32 | RF-cable set                                | R&S            | N/A            | 3000002681      | n.a.       |    |            |
| 33 | IEEE-cables                                 | R&S            | N/A            | 3000002681      | n.a.       |    |            |
| 34 | Sampling System FSIQ-B70                    | R&S            | 835355/009     | 3000002681      | s.No.7     |    |            |
| 35 | RSP programmable attenuator                 | R&S            | 834500/010     | 3000002681-0007 | 01.08.2006 | 24 | 01.08.2008 |
| 36 | Signalling Unit                             | R&S            | 838312/011     | 3000002681      | n.a.       |    |            |
| 37 | NGPE programmable Power Supply for EUT      | R&S            | 192.033.41     | 3000002681      |            |    |            |
| 38 | Climatic box VT 4002                        | Heraeus Vötsch | 58566046820010 | 300003019       | 11.05.2007 | 24 | 11.05.2009 |
| 39 | Signaling Unit CMU200                       | R&S            | 832221/0055    | 300002862       | 12.01.2006 | 24 | 12.01.2008 |
| 40 | Power Splitter 6005-3                       | Inmet Corp.    | none           | 300002841       | 23.12.2006 | 24 | 23.12.2008 |
| 41 | SMA Cables SPS-1151-985-SPS                 | Insulated Wire | different      | different       | n.a.       |    |            |
| 42 | CBT32 with EDR Signaling Unit               | R&S            |                |                 |            |    |            |
| 43 | Coupling unit                               | Narda          | N/A            | --              | n.a.       |    |            |
| 44 | 2xSwitch Matrix PSU                         | R&S            | 872584/021     | 300001329       | n.a.       |    |            |
| 45 | RF-cable set                                | R&S            | N/A            | different       | n.a.       |    |            |
| 46 | IEEE-cables                                 | R&S            | N/A            | --              | n.a.       |    |            |
|    |   |                |                |                 |            |    |            |

Anmerkung: 3000002681-00xx als Systeme inventarisiert

**SRD Laboratory Room 005:**

| No | Equipment/Type                   | Manuf. | Serial Nr. | Inv. No. Cetecom | Last Calibration | Frequency (months) | Next Calibration |
|----|----------------------------------|--------|------------|------------------|------------------|--------------------|------------------|
| 1  | Spektrum Analyzer 8566B          | HP     | 2747A05275 | 300000219        | 08.11.2006       | 24                 | 08.11.2008       |
| 2  | Spektrum Analyzer Display 85662A | HP     | 2816A16497 | 300001690        | 08.11.2006       | 24                 | 08.11.2008       |
| 3  | Quasi-Peak-Adapter 85650A        | HP     | 2811A01135 | 300000216        | 08.11.2006       | 24                 | 08.11.2008       |
| 4  | Power Supply                     | Heiden | 003202     | 300001187        | 12.05.2007       | 36                 | 12.05.2010       |
| 5  | Power Supply                     | Heiden | 1701       | 300001392        | 12.05.2007       | 36                 | 12.05.2010       |
|    |                                  |        |            |                  |                  |                    |                  |

**C.BER Bluetooth Rack Room AC2:**

| No | Equipment/Type   | Manufact. | Inv. No. Cetecom | Last Calibration                | Frequency (months) | Next Calibration |
|----|--|-----------|------------------|---------------------------------|--------------------|------------------|
| 1  | System Controller with XP Prof. & C.BER Control Software | F&W       | 300003580        | na                              |                    |                  |
| 2  | GPIB to USB Converter                                    | Agilent   | 300003426        | na                              |                    |                  |
| 3  | Spectrum Analyser FSIQ26                                 | R&S       | 300002681-005    | 1.08.2006                       | 24                 | 1.08.2008        |
|    | Sampling System FSIQ-B70                                 | R&S       | 300002681-005    | 1.08.2006                       | 24                 | 1.08.2008        |
|    | Tracking Generator FSIQ-B10 for FSIQ26                   | R&S       | 300002681-005    | 1.08.2006                       | 24                 | 1.08.2008        |
| 4  | RF-Generator SMIQ03 (Interferer Signal)                  | R&S       | 300002681-001    | 1.08.2006                       | 24                 | 1.08.2008        |
|    | Modulation Coder SMIQ-B20                                | R&S       | 300002681-001    | 1.08.2006                       | 24                 | 1.08.2008        |
|    | Data Generator SMIQ-B11                                  | R&S       | 300002681-001    | 1.08.2006                       | 24                 | 1.08.2008        |
|    | RF Rear Connection SMIQ-B19                              | R&S       | 300002681-001    | 1.08.2006                       | 24                 | 1.08.2008        |
|    | Fast CPU SM-B50  | R&S       | 300002681-001    | 1.08.2006                       | 24                 | 1.08.2008        |
|    | FM Modulator SM-B5                                       | R&S       | 300002681-001    | 1.08.2006                       | 24                 | 1.08.2008        |
| 5  | Rubidium Standard RUB                                    | R&S       | 300002681-009    | 1.08.2006                       | 24                 | 1.08.2008        |
| 6  | Switching Unit 3488A including 2 44476A cards            | HP        | 300000926        | Verified with path compensation |                    |                  |
|    | 44472A VHF switch  | HP        | 300000926        | Verified with path compensation |                    |                  |
| 7  | Signalling Unit: CBT with EDR                            | R&S       | 300003416        | 24.06.2006                      | 24                 | 24.06.2008       |
| 8  | RF-cable set   | different | no               | Verified with path compensation |                    |                  |
| 9  | IEEE-cables  | R&S       | no               | na                              |                    |                  |
| 10 | NGPE programmable Power Supply for EUT                   | R&S       | 400000078        | 1.08.2006                       | 24                 | 1.08.2008        |
| 11 | Coupling Unit 4324-2                                     | Narda     | no               | Verified with path compensation |                    |                  |
| 12 | Climatic Chamber VT4002                                  | Voetch    | 300003019        | 11.05.2207                      | 24                 | 11.05.2009       |
| 13 | 6 dB Attenuator 1W                                       | Narda     | no               | Verified with path compensation |                    |                  |
| 14 | DCBlocker 30 MHz to 12.75 GHz 1W                         | Narda     | no               | Verified with path compensation |                    |                  |

*Anechoic chamber F:*

| No.  | Instrument/Ancillary                    | Manufacturer            | Type                        | Serial-No.         | Internal identification |
|--|---|-------------------------|-----------------------------|--------------------|-------------------------|
| <b>Radiated emission in chamber F</b>              |   |                         |                             |                    |                         |
| F-1  | Control Computer                        | F+W                     |                             | FW0502032          | 300003303               |
| F-2  | Bilog antenna                           | Chase                   | CBL 6112A                   | 2110               | 300000573               |
| F-3a   | Amplifier                               | Veritech Microwave Inc. | 0518C-138                   | - / -              | - / -                   |
| F-4b   | Switch                                  | HP                      | 3488A                       | - / -              | 300000368               |
| F-5  | EMI Test receiver                       | R&S                     | ESCI                        | 100083             | 300003312               |
| F-6  | Turntable Controller                    | EMCO                    | 1061 3M                     | 1218               | 300000661               |
| F-7  | Tower Controller                        | EMCO                    | 1051 Controller             | 1262               | 300000625               |
| F-8  | Tower                                   | EMCO                    | 1051 Tower                  | 1262               | 300000625               |
| F-9  | Ultra Notch-Filter Rejected band Ch. 62 | WRCD                    |                             | 9                  |                         |
| <b>Radiated immunity in chamber F</b>              |   |                         |                             |                    |                         |
| F-10   | Control Computer                        | F+W                     |                             | FW0502032          | 300003303               |
| F-11   | Signal Generator                        | R&S                     | SML 03                      | 102519             | 300003407               |
| F-12   | RF-Amplifier                            | ar                      | 50W1000                     | 12932              | 300001438               |
| F-13   | Directional Coupler                     | ar                      | DC 3010                     | 12708              | 300001428               |
| F-14   | Logper Antenna                          | R&S                     | HL023A1                     | 323704/016         | 300001476               |
| F-15   | RF-Amplifier                            | ar                      | 60S1G3                      | 313649             | 300003410               |
| F-16   | Directional Coupler                     | ar                      | DC7144A                     | 312786             | 300003411               |
| F-17   | Horn Antenna                            | ar                      | AT 4002                     | 19739              | 300000633               |
| F-18   | Power Meter                             | R&S                     | NRV                         | 860327/024         | F033                    |
| F-19   | Power sensor                            | R&S                     | URV5-Z2                     | 839080/005         | 300002844.02            |
| F-20   | Power sensor                            | R&S                     | URV5-Z2                     | 830755/057         | F032                    |
| <b>Harmonics and flicker in front of chamber F</b> |   |                         |                             |                    |                         |
| F-21   | Flicker and Harmonics Test System       | Spitzenberger & Spies   | PHE4500/B I<br>PHE4500/B II | B5983<br>B5984     | 300000210               |
| F-22   | Control Unit                            | Spitzenberger & Spies   | STE                         | B5980              | 300000210               |
| F-23   | Power Amplifier                         | Spitzenberger & Spies   | EP 4500/B                   | B5976              | 300000210               |
| F-24   | Conect Panel                            | Spitzenberger & Spies   | Conect panel                | B5982              | 300000210               |
| F-25   | Power Supply                            | Spitzenberger & Spies   | NT-EP 4500                  | B3977              | 300000210               |
| F-26   | Additional transformer                  | Spitzenberger & Spies   | UT-EP 4500                  | B5978              | 300000210               |
| F-27   | Analyzer Reference System               | Spitzenberger & Spies   | ARS 16/1                    | A3509 07/0<br>0205 | 300003314               |
| F-26   | Power Supply                            | Hewlett Packard         | 6032 A                      | 2920 A 04466       | 300000580               |

*OTA chamber:*

| No | Equipment                            | Type                              | Manuf.         | Serial Nr.   | Inv. No. Cetecom | Last Calib.                            | Freq. months | Next Calib. |
|----|--------------------------------------|-----------------------------------|----------------|--------------|------------------|--|--------------|-------------|
| 1  | Splitter                             | 15542                             | Mini Circuits  | 15542        | 400000086        | Verified with path compensation        |              |             |
| 2  | Splitter                             | 42000                             | Anaren         | 4730         | 400000085        | Verified with path compensation        |              |             |
| 3  | Cable N-Con. 15m                     | Aircell 7                         | Aircell        | --           | 400000087        | Verified with path compensation        |              |             |
| 4  | CTIA-Chamber                         | AMS 8500                          | ETS-Lindgren   | --           | 300003327-0000   | Verified with chamber and ripple tests |              |             |
| 5  | CTIA-Chamber - Positioning Equipment | --                                | EMCO           | --           | 300003328-0000   | na                                     |              |             |
| 6  | CTIA-Chamber – Software EMQuest      | --                                | EMCO           | --           | 300003328-0001   | na                                     |              |             |
| 7  | CTIA-Chamber - Antennas              | Double Ridged Horn, Dipoles/Loops | EMCO           | --           | 300003328-0002   | na                                     |              |             |
| 8  | Power supply 0-50V                   | 6633A                             | HP Meßtechnik  | 2851A-01222  | 300001530        | 12.5.07                                | 24           | 12.5.09     |
| 9  | MP5 Five-Beam-Laser                  | MP5                               | CST/berger     |              | 400000088        | na                                     |              |             |
| 10 | Mount kit for Laptop                 | --                                | EMCO           |              | 300003295        | na                                     |              |             |
| 15 | Antenna for signalling               | 3102 L Conical log spir           | EMCO           | 40953        | 300003296        | na                                     |              |             |
| 16 | Cable SMA-Con. 15m                   | KK-MF141-15                       | Huber & Suhner |              | 400000090        | Verified with path compensation        |              |             |
| 17 | Cables                               | --                                | Huber & Suhner | different    | 400000083        | Verified with path compensation        |              |             |
| 18 | Limiting Amplifier                   | LA 02-801                         | JCA Tech.      | 101          | 300003341        | na                                     |              |             |
| 19 | Spectrum Analyzer                    | FSP-7                             | R&S            | 100289       | 300003282        | 12.5.07                                | 24           | 12.5.09     |
| 20 | Switch Unit                          | TS-RSP                            | R&S            | 100155       | 300003281        | Verified with path compensation        |              |             |
| 21 | Step Attenuator 0 ...139.9 dB        | RSP                               | R&S            | 860712002    | 400000079        | Verified with path compensation        |              |             |
| 22 | Signalgenerator                      | SMIQ03B                           | R&S            | 836206 /0091 | 300002679        | 1.6.07                                 | 36           | 1.6.10      |
| 23 | Universal Communication Tester       | CMU 200                           | R&S            | 106240       | 300003321        | 2.5.07                                 | 24           | 2.5.09      |
| 24 | Hygro-Thermometer                    | -/-, 5-45°C, 20-100%rF            | Thies Clima    | -/-          | 400000089        | 27.4.07                                | 12           | 27.4.08     |