

Company Internal
SPECIFICATION

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEM/BML/T (Blanche Johnson)

Checked

No.

1202-4648

Date

2007-07-02

Rev

1

Reference

Marking Drawing PC300 Type FAD-3231011- BV**General information**

All bar codes, when applicable, are according to Ericsson corporate standard 102 01–109 Uen. All bar codes shall fulfill minimum print quality C according to ANSI X3.182-1990 as stated in Ericsson corporate standard 102 01–1003 Uen.

Label

The label shall be 1200-4723

Placing

The label shall be placed on the back of the PC card according to McKinley PC Card Assy drawing number 1201-4716.

The Core Unit Product Labels should be marked as described below.

**Company Internal
SPECIFICATION**

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEM/BML/T (Blanche Johnson)

Checked

No.

1202-4648

Date

2007-07-02

Rev

1

Reference


Print layout

Lines:

1a

2a

3a

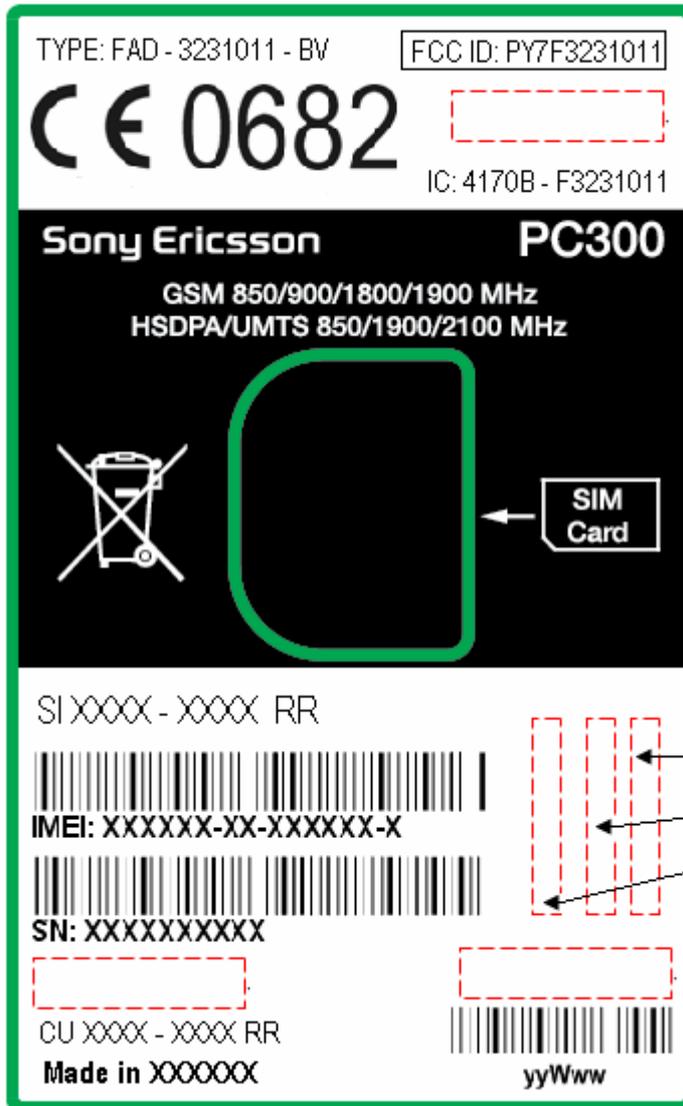

Lines:

1b

2b

3b

4

5

6

7

8

9a

10a

11a

14

13

12

9b

10b

11b

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEM/BML/T (Blanche Johnson)

Checked

Company Internal
SPECIFICATION

No.

1202-4648

Date

2007-07-02

Rev

1

Reference

Line	Definition	Format
1a	Type number	The type number is FAD-3231011-BV and shall be printed "TYPE FAD-3231011-BV".
1b	FCC approval marking	FCC approval marking: consists of the text: FCC ID: PY7F3231011 Within a frame with height > 1.5 mm.
2a	Approval marks (1,2)	1. CE Marking. According to 1424 - SVF 930 52. 2. The Notified Body number. It shall be 0682 . The print size (height) for the notified body number and the corresponding approval marks shall be minimum 5 mm. This is a regulatory requirement.
2b	Country approval mark 1	Left blank – space for country approval mark (The Australian A-tick symbol and text will be placed here once approvals are gained)
3a	Country approval mark 2	Left blank – space for country approval mark
3b	Industry Canada marking	Industry Canada approval marking: consists of text: IC: 4170B-F3231011
4	Sales Item Number	Actual Sales Item number including Revision state (e.g. 1200-8416.1) and shall be printed. "SI XXXX-XXXX. R"
5	IMEI number as bar code	See below for definition of IMEI-number. The bar code shall only contain the digits of the IMEI number (no -). Height 3.0 mm.
6	IMEI number as characters	The IMEI number has format: TAC - SNR - CD TAC = First eight digits of the Type Approval code after assignment from the Notified Body: refer to table 1 below.

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEM/BML/T (Blanche Johnson)

Checked

**Company Internal
SPECIFICATION**

No.

1202-4648

Date

2007-07-02

Rev

1

Reference

SNR = A serial number from 000 000 to 999 999 according to factory allocation: **refer to table 1 below.**

CD = A check digit, from 0-9, calculated according to the Luhn formula (ISO/IEC 7812), GSM 02.16.

7	Serial number as bar code	According to Ericsson corporate standard 102 01 - 109. Height 3.0 mm
8	Serial number as characters	According to Ericsson group standard 0012-101.
<p>Sony Ericsson group factory number system according to Sony Ericsson corporate standard 1120-101 Factory codes:</p> <p>Flextronics (Malaysia) = BD3</p>		
9a	Country approval mark 3	Left blank – space for country approval mark
9b	Country approval mark 4	Left blank – space for country approval mark
10a	PC Card Core Unit Number	<p>Actual PC Card Assembly Number including Revision state and shall be printed.</p> <p style="text-align: center;">“CU XXXX–XXXX. R”</p>
10b	Production Week as bar code	Height 3.0 mm
11a	Marking of origin	<p>Marking of origin shall be printed</p> <p>“Made in xxxxx”</p> <p>“xxxxx” = Actual country of production in English</p>
11b	Production week	The production week shall be given as yyWww (yy = year, ww = week)
12	Country approval mark 5	Left blank – space for country approval mark
13	Country approval mark 6	Left blank – space for country approval mark
14	Country approval mark 7	Left blank – space for country approval mark



Company Internal SPECIFICATION

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEM/BML/T (Blanche Johnson)

Checked

No.

1202-4648

Date

2007-07-02

Rev

1

Reference

Table 1 To be completed following Type Approval

<u>Core Unit</u>	<u>IMEI TAC code</u>	<u>IMEI SNR</u>	<u>Allocated factory</u>
	???????	???????????????	BD3

Printing regulations

- Font face: OCR-B
- Type size: min. 1.3 mm
- Line spacing: min. 0.3 mm
- Trade mark height: min. 3 mm
- Approval marks height: min. 5 mm
- Colour: Black
- Margins: 2.0mm clear margin on Left & Right edges
0.5mm clear margin on Top & Bottom edges