

**Company Internal
SPECIFICATION**

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEKI/BMD/TP (Pam Wood)

Checked

No.

1204-9596

Date

2008-1-02

Rev

2

Reference

Marking Drawing MD300 Type FAD-3232021- BV

General information

All bar codes, when applicable, are according to Ericsson corporate standard 102 01–109 Uen. All bar codes shall fulfill minimum print quality C according to ANSI X3.182-1990 as stated in Ericsson corporate standard 102 01–1003 Uen. No bar codes are allowed to be closer to a label edge than 3 mm (quiet zone!).

Label


The label shall be 39mm (L) x 23mm (H)

Placing

The label shall be placed on the back of the PC card according to MD300 PC Card Assy drawing number 12034-6121

The Core Unit Product Labels should be marked as described below.

Print layout (for illustration purposes only-not to scale)

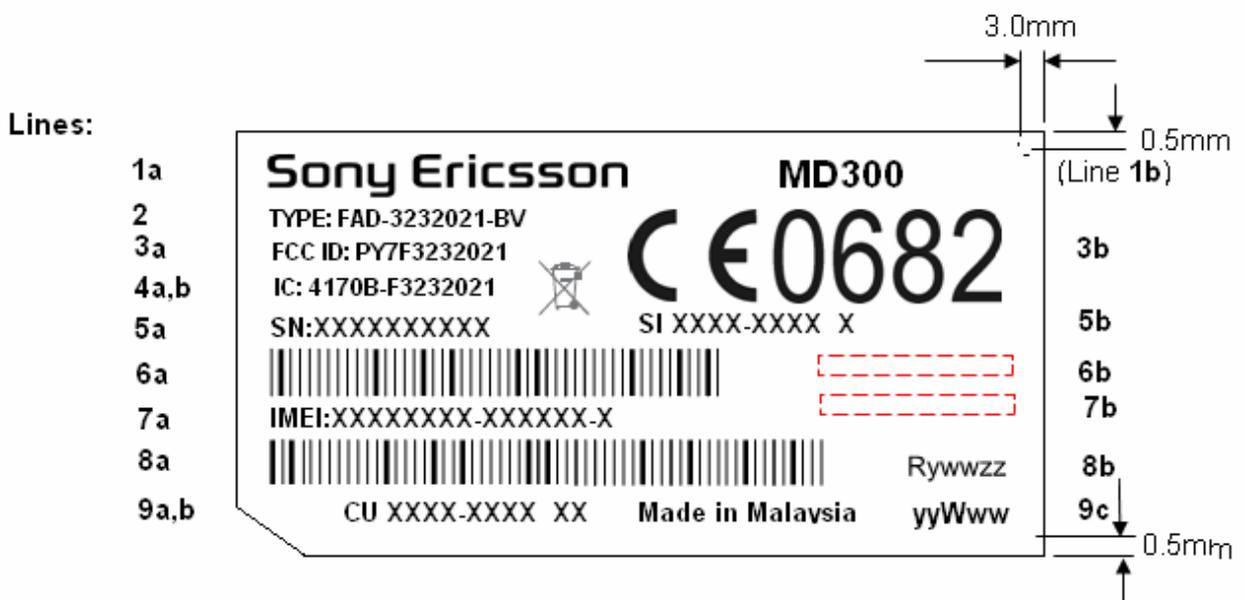



Company Internal SPECIFICATION

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEKI/BMD/TP (Pam Wood)

Checked

No.

1204-9596

Date

2008-1-02

Rev

2

Reference

Line	Definition	Format
1a	Sony Ericsson trademark	Sony Ericsson and the Sony Ericsson trademark shall be according to the corporate standard 190 89-EN/LZT 108 5347. Height min. 2.0 mm.
1b	Model Name	"MD300" Text height min.1.5 mm.
2	Type number	The type number is FAD-3232021-BV and shall be printed "TYPE FAD-3232021-BV".
3a	FCC approval marking	FCC approval marking: consists of the text: FCC ID: PY7F3232021
3b	Approval marks (1,2)	1. CE Marking. According to 1424 - SVF 930 52. 2. The Notified Body number. It shall be 0682 . The print size (height) for the notified body number and the corresponding approval marks shall be minimum 5 mm. This is a regulatory requirement.
4a	Industry Canada marking	Industry Canada approval marking: consists of text: IC: 4170B-F3232021
4b	Trash can logo	
5a	Serial number as characters	According to Ericsson group standard 0012-101. Sony Ericsson group factory number system according to Sony Ericsson corporate standard 1120-101 Factory codes:
5b	Sales Item Number	Flextronics (Malaysia) = BD3 Actual Sales Item number including Revision state (e.g. 1204-8375.1) and shall be printed. "SI XXXX-XXXX. R"
6a	Serial number as bar code	According to Ericsson corporate standard 102 01 - 109. Height 3.0 mm
6b	Country approval mark 1	Left blank – space for country approval mark

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEKI/BMD/TP (Pam Wood)

Checked

**Company Internal
SPECIFICATION**

No.

1204-9596

Date

2008-1-02

Rev

2

Reference

Line	Definition	Format
7a	IMEI number as characters	<p>The IMEI number has format: TAC - SNR - CD</p> <p>TAC = First eight digits of the Type Approval code after assignment from the Notified Body: refer to table 1 below.</p> <p>SNR = A serial number from 000 000 to 999 999 according to factory allocation: refer to table 1 below.</p> <p>CD = A check digit, from 0-9, calculated according to the Luhn formula (ISO/IEC 7812), GSM 02.16.</p>
7b	Country approval mark 2	Left blank – space for country approval mark
8a	IMEI number as bar code	The bar code shall only contain the digits of the IMEI number (no -). Height 3.0 mm.
8b	Repair year/week/revision re-work code	For service use only.
9a	PC Card Core Unit Number	Actual PC Card Assembly Number including Revision state and shall be printed. "CU XXXX–XXXX. R"
9b	Marking of origin	Marking of origin shall be printed "Made in xxxxx" "xxxxx" = Actual country of production in English
9c	Production week	The production week shall be given as yyWww (yy = year, ww = week)

**Company Internal
SPECIFICATION**

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEKI/BMD/TP (Pam Wood)

Checked

No.

1204-9596

Date

2008-1-02

Rev

2

Reference

Table 1 To be completed when production numbers available

<u>Core Unit</u>	<u>IMEI TAC code</u>	<u>IMEI SNR</u>	<u>Allocated factory</u>
1200-4721	XXXXXXXX		FSA

Printing regulations

Font face:	OCR-B
Type size:	min. 1.3 mm
Line spacing:	min. 0.3 mm
Trade mark height:	min. 3 mm
Approval marks height:	min. 5 mm
Colour:	Black
Margins:	3.0mm clear margin on Left & Right edges 0.5mm clear margin on Top & Bottom edges

Print layout for prototypes

Line 3a is replaced with alternative text shown below. Type size min. 5 mm.

PROTOTYPE EP1
PROTOTYPE EP2
PROTOTYPE FP1 etc

Note: Refer to build Exemption and/or the Build Entry Request (BER) for the proper naming convention for the prototype Build.

Line 3b is left blank.

Line 4a is left blank

Line 7a and 8a: IMEI-numbers as characters and IMEI-numbers as barcode shall be filled with the **test** IMEI number.

**Company Internal
SPECIFICATION**

Prepared (also subject responsible if other)

SEKI/BMD/TP Pam Wood

Approved

SEKI/BMD/TP (Pam Wood)

Checked

No.

1204-9596

Date

2008-1-02

Rev

2

Reference

The test IMEI number is in the following ranges:

00440107092400 to - 00440107094899

Line 10 is added with text 'PROTOTYPE' "NOT TYPE APPROVED". Text height min. 2 mm.

Lines:

- 1a
- 2
- 3a
- 4a,b
- 5a
- 6a
- 7a
- 8a
- 9a,b
- 10

