


TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station

To: FCC Part 22: 2004 (Subpart H)

Test Report Serial No:
RFI\MPTE1\RP70868JD05A

<p>This Test Report Is Issued Under The Authority Of Andrew Brown, Operations Manager:</p> <div style="text-align: center; margin-top: 20px;">  </div>	
<p>Tested By: Fara Razally</p> <div style="text-align: center; margin-top: 20px;">  </div>	<p>Checked By: Tony Henriques</p> <div style="text-align: center; margin-top: 20px;">  </div>
<p>Report Copy No:</p> <p>PDF01</p>	
<p>Issue Date: 29 April 2005</p>	<p>Test Dates: 28 February 2005 to 22 March 2005</p>

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields. Furthermore, the date of creation must match the issue date stated above.

This report may be copied in full. The results in this report apply only to the sample(s) tested.

RFI Global Services Ltd

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire RG23 8BG

Telephone: +44 (0)1256 312000 Facsimile: +44 (0)1256 312001

Email: info@rfi-global.com Website: www.rfi-global.com

Registered in England and Wales. Company number: 2117901

RFI GLOBAL SERVICES LTD

TEST REPORT

S.No. RFI\MPTE1\RP70868JD05A

Page 2 of 50

Issue Date: 29 April 2005

**Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station**

To: FCC Part 22: 2004 (Subpart H)

This page has been left intentionally blank.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

Table of Contents

1. Client Information.....4
2. Equipment Under Test (EUT)5
3. Test Results8
4. Deviations from the Test Specification9
5. Operation of the EUT During Testing10
6. Summary of Test Results11
7. Measurements, Examinations and Derived Results12
8. Measurement Uncertainty35
9. Measurement Methods36
Appendix 1. Test Equipment Used46
Appendix 2. Test Configuration Drawings47

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station

To: FCC Part 22: 2004 (Subpart H)

1. Client Information

Company Name:	Sony Ericsson Mobile Communications AB
Address:	1 Lakeside Road Aerospace Centre Farnborough Hampshire GU14 6XP
Contact Name:	Mr M Bower

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification of Equipment Under Test (EUT)

Brand Name:	Sony Ericsson
Model Name or Number:	GC89
Serial Number:	00460101298862
FCC ID Number:	PY7FF051011
Country of Manufacture:	None Stated
Date of Receipt:	28 February 2005

2.2. Accessories

The following accessories were supplied with the EUT:

Description:	Stick Antenna
Brand Name:	Sony Ericsson
Model Name or Number:	None Stated
Serial Number:	None Stated
Connected to Port:	RF Antenna Port

2.3. Description of EUT

The equipment under test is a dual band (GSM 850 & PCS 1900) Mobile station (PCMCIA Card) incorporating WLAN technologies.

2.4. Modifications Incorporated in EUT

During the course of testing the EUT was not modified.

Test of: Sony Ericsson Mobile Communications AB

GC89 Mobile Station

To: FCC Part 22: 2004 (Subpart H)

2.5. Additional Information Related to Testing

Power Supply Requirement:	3.6 V DC supplied via PCMCIA interface of host PC		
Intended Operating Environment:	Within GSM network coverage		
Equipment Category:	Mobile Station (PCMCIA Card)		
Type of Unit:	Transceiver		
Transmit Frequency Range:	824.2 MHz to 848.8 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	128	824.2
	Middle	190	836.6
	Top	251	848.8
Receive Frequency Range:	824.2 MHz to 848.8 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	128	869.2
	Middle	190	881.6
	Top	251	893.8
Maximum Power Output (ERP)	33.5 dBm		

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

2.6. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	Laptop PC
Brand Name:	Compaq
Model Name or Number:	EVO N610C
Serial Number:	N610CP180X430VC25X0L
Connected to Port:	PCMCIA

Description:	Laptop PC
Brand Name:	Dell
Model Name or Number:	Latitude D600
Serial Number:	CN-0D2125-48643-4CB-6452
Connected to Port:	PCMCIA

Description:	Laptop PC
Brand Name:	Sony
Model Name or Number:	PCG-651M
Serial Number:	28377050 5101146
Connected to Port:	PCMCIA

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

3. Test Results

Reference:	FCC Part 22: 2004 Subpart H (Cellular Radiotelephone Service)
Title:	Code of Federal Regulations, Part 22 (47CFR22) Personal Communication Services.

3.1. Methods and Procedures

The methods and procedures used were as detailed in:

ANSI/TIA-603-B-2003

Land Mobile Communications Equipment, Measurements and performance Standards

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2003)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

3.2. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station

To: FCC Part 22: 2004 (Subpart H)

4. Deviations from the Test Specification

None.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

5. Operation of the EUT during Testing

5.1. Operating Modes

The EUT was tested in the following operating modes, unless otherwise stated.

Preliminary radiated emissions and AC conducted scans were performed on the EUT fitted and operating in each of the three host notebook PCs stated in section 2.6 of this report. The combination that exhibited the worse case mode of operation was then used to perform final measurements. This was found to be with the EUT fitted and operating in the Compaq EVO notebook PC.

Additionally preliminary radiated emissions scans were performed on the EUT with the accessory stated in section 2.2 of this report connected and then disconnected. The combination that exhibited the worst case mode of operation was then used to perform final measurements. In both transmit and idle mode this was to be with the EUT fitted with the external antenna.

Transmitter Modes:

For carrier output power, occupied bandwidth and final transmitter radiated measurements, testing was performed at full power on top, middle and bottom channels of the assigned frequency block. For frequency stability testing, measurements were performed at full power on top, middle and bottom channels of the assigned frequency block. All transmitter radiated spurious pre-scan tests were performed at full power on the top channel of the assigned frequency block. Final measurements were then performed on the top, middle and bottom channels if an emission was identified.

Receiver/Idle Modes:

Testing was performed with the call terminated from the GSM Test Simulator and the phone left in its Idle mode.

5.2. Configuration and Peripherals

The EUT was tested in the following configuration:

Plugged into the PCMCIA port of the established worst case host notebook PC (Compaq EVO).

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

6. Summary of Test Results

Range of Measurements	Specification Reference	Port Type	Compliance Status
Receiver/Idle AC Conducted Spurious Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2004 Section 15.107	AC Mains	Complied
Receiver/Idle Radiated Emissions	C.F.R. 47 FCC Part 15: 2004 Section 15.109	Enclosure	Complied
Transmitter Carrier Output Power	C.F.R. 47 FCC Part 2: 2004 Section 2.1046(a)	Antenna Terminals	Complied
Transmitter Effective Radiated Power (ERP)	C.F.R. 47 FCC Part 22: 2004 Section 22.913(a)	Antenna	Complied
Transmitter Frequency Stability (Temperature Variation)	C.F.R. 47 FCC Part 22: 2004 Section 22.355	Antenna Terminals	Complied
Transmitter Frequency Stability (Voltage Variation)	C.F.R. 47 FCC Part 22: 2004 Section 22.355	Antenna Terminals	Complied
Transmitter Occupied Bandwidth	C.F.R. 47 FCC Part 22: 2004 Section 2.1049	Antenna Terminals	Complied
Transmitter Out of Band Conducted Emissions	C.F.R. 47 FCC Part 22: 2004 Section 2.1051/22.917	Antenna Terminals	Complied
Transmitter Band Edge Conducted Emissions	C.F.R. 47 FCC Part 22: 2004 Section 2.1051/22.917	Antenna Terminals	Complied
Transmitter Out of Band Radiated Emissions	C.F.R. 47 FCC Part 22: 2004 Section 2.1053/22.917	Antenna	Complied
Transmitter Band Edge Radiated Emissions	C.F.R. 47 FCC Part 22: 2004 Section 2.1053/22.917	Antenna	Complied

6.1. Location of Tests

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

7. Measurements, Examinations and Derived Results

7.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

7.2. Test Results

7.2.1. Receiver/Idle Mode AC Conducted Spurious Emissions: Section 15.107

The EUT was configured as for ac conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum emission levels on the ac mains line of the EUT.

Results:

Quasi-Peak Detector Measurements on Live and Neutral Lines


Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.19403	Neutral	54.25	63.86	9.61	Complied
0.25801	Neutral	48.13	61.50	13.37	Complied
0.32218	Neutral	42.87	59.65	16.78	Complied
0.38521	Neutral	36.80	58.17	21.37	Complied
0.44916	Live	33.88	56.89	23.01	Complied
19.29677	Live	35.10	60.00	24.90	Complied

Average Detector Measurements on Live and Neutral Lines

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.19403	Neutral	41.14	53.86	12.72	Complied
0.25801	Neutral	36.06	51.50	15.44	Complied
0.32218	Neutral	31.85	49.65	17.80	Complied
0.38521	Neutral	28.42	48.17	19.75	Complied
0.44916	Live	24.00	46.89	22.89	Complied
19.29677	Neutral	30.02	50.00	19.98	Complied

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

Idle Mode AC Conducted Spurious Emissions: Section 15.107 (Continued)

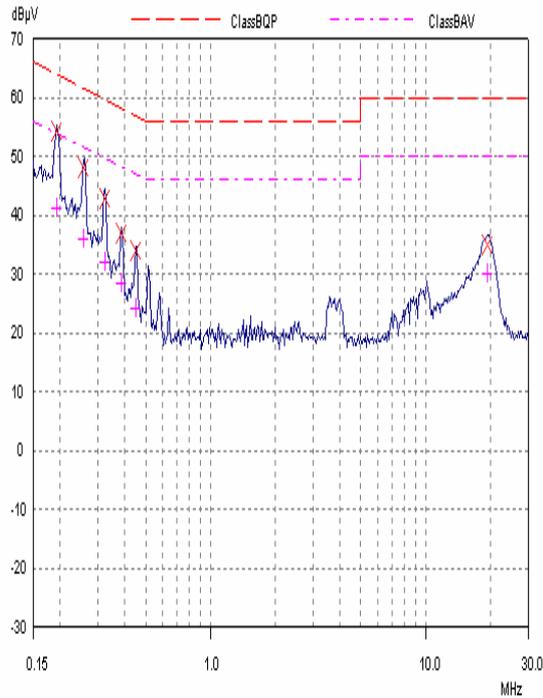

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)


7.2.2. Receiver/Idle Mode Radiated Spurious Emissions: Section 15.109 - Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)

The EUT was configured as for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum receiver or standby radiated emission levels.

Results:

Frequency (MHz)	Antenna Polarity	Quasi Peak Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
57.510	Vert	33.8	40.0	6.2	Complied
132.855	Horiz	42.1	43.5	1.4	Complied
256.244	Vert	40.1	46.0	5.9	Complied
533.110	Vert	42.4	46.0	3.6	Complied
797.900	Horiz	43.8	46.0	2.2	Complied
912.155	Vert	44.5	46.0	1.5	Complied

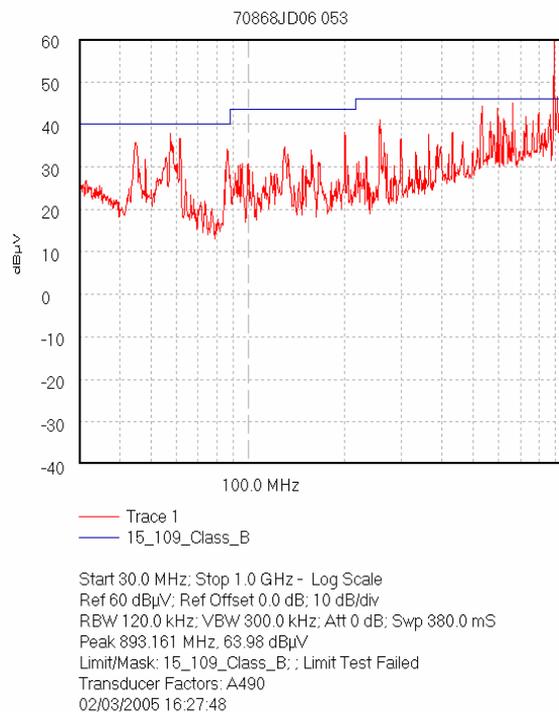

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sony Ericsson Mobile Communications AB

GC89 Mobile Station

To: FCC Part 22: 2004 (Subpart H)

7.2.3. Receiver/Idle Mode Radiated Spurious Emissions: Section 15.109 - Electric Field Strength Measurements (Frequency Range: 1 to 25 GHz)**Results:****Peak Level**


Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1066.260	Horiz	32.6	21.8	6.5	60.9	74.0	13.1	Complied
1093.355	Horiz	21.7	21.8	6.5	50.0	74.0	24.0	Complied
1196.050	Horiz	23.4	20.8	6.5	50.7	74.0	23.3	Complied
3282.268	Horiz	32.0	21.4	11.3	67.4	74.0	6.6	Complied

Average Level


Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Antenna Factor (dB)	Cable Loss (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1066.260	Horiz	9.3	21.8	6.5	37.6	54.0	16.4	Complied
1093.355	Horiz	11.7	21.8	6.5	40.0	54.0	14.0	Complied
1196.050	Horiz	11.2	20.8	6.5	38.5	54.0	15.5	Complied
3282.268	Horiz	11.0	21.4	11.3	43.7	54.0	10.3	Complied

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)


Receiver/Idle Mode Radiated Spurious Emissions: Section 15.109 (Continued)

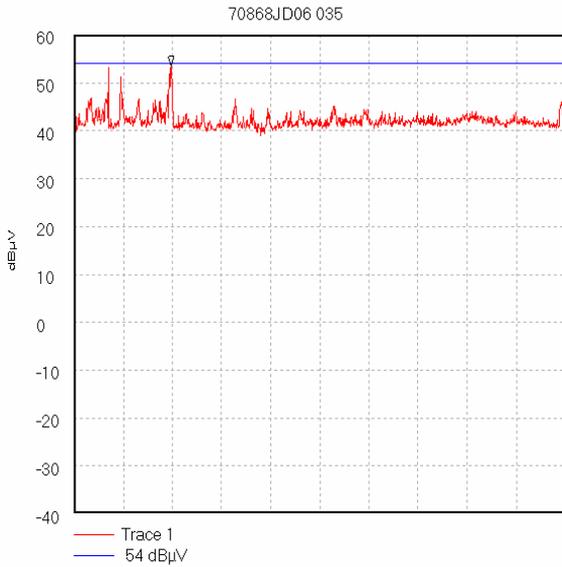


Start 1.0 GHz; Stop 2.0 GHz
 Ref 60 dBµV; Ref Offset 0.0 dB; 10 dB/div
 RBW 1000.0 kHz; VBW 3.0 MHz; Att 0 dB; Swp 20.0 mS
 Peak 1.198 GHz, 53.56 dBµV
 Display Line: 54 dBµV; ; Limit Test Passed
 02/03/2005 12:13:16

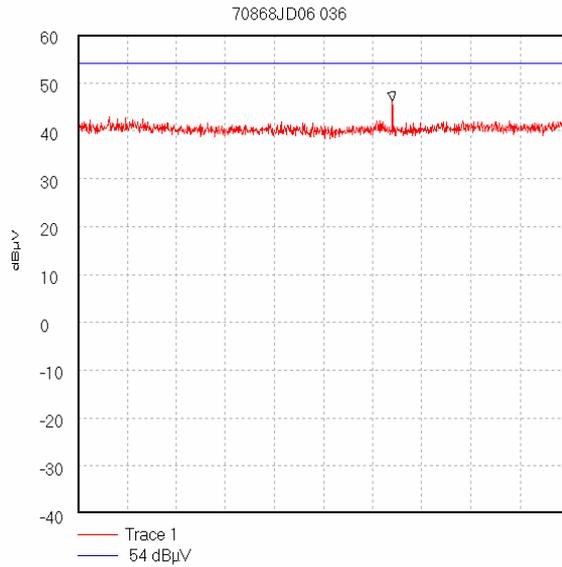

Start 2.0 GHz; Stop 4.0 GHz
 Ref 60 dBµV; Ref Offset 0.0 dB; 10 dB/div
 RBW 1000.0 kHz; VBW 3.0 MHz; Att 0 dB; Swp 20.0 mS
 Peak 3.28 GHz, 46.29 dBµV
 Display Line: 54 dBµV; ; Limit Test Passed
 02/03/2005 14:04:54

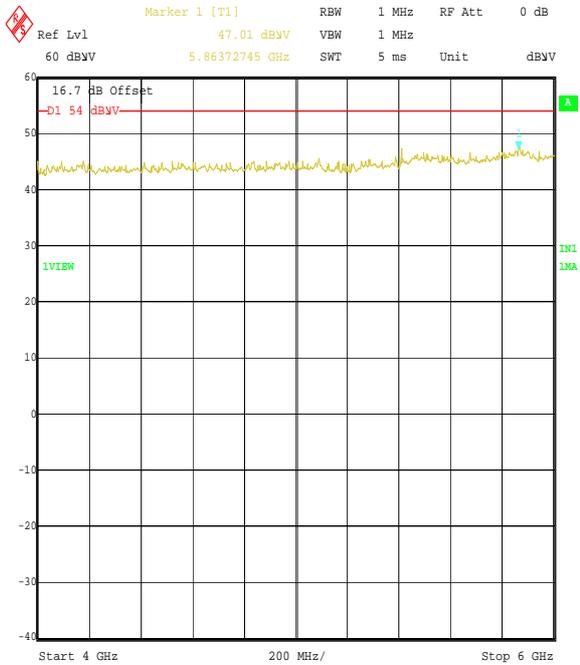


Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Idle Mode Radiated Spurious Emissions
 Date: 21.MAR.2005 13:08:22

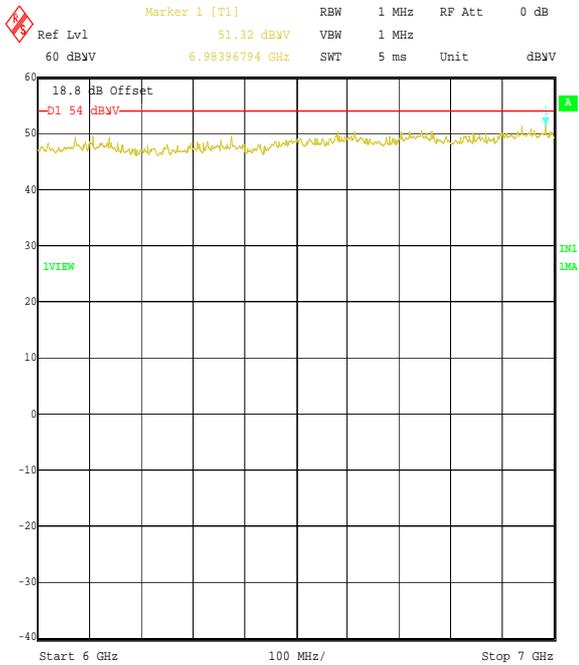


Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Idle Mode Radiated Spurious Emissions
 Date: 21.MAR.2005 13:18:58

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)


Receiver/Idle Mode Radiated Spurious Emissions: Section 15.109 (Continued)

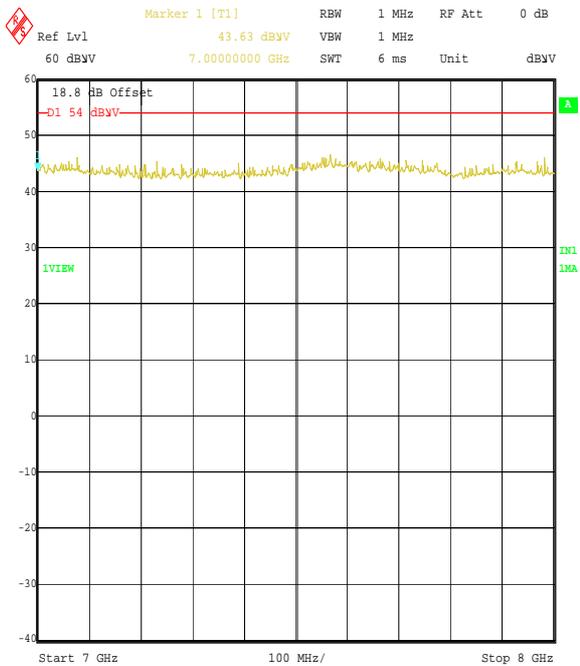


Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Idle Mode Radiated Spurious Emissions
 Date: 21.MAR.2005 13:20:05

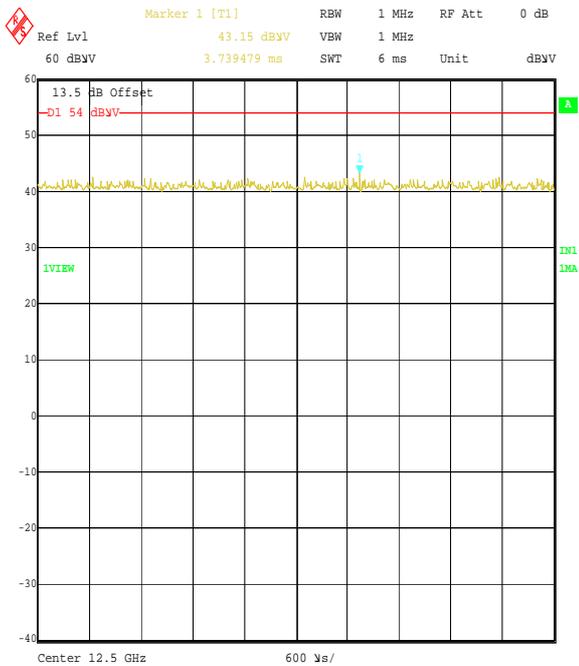

Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Idle Mode Radiated Spurious Emissions
 Date: 21.MAR.2005 13:23:57

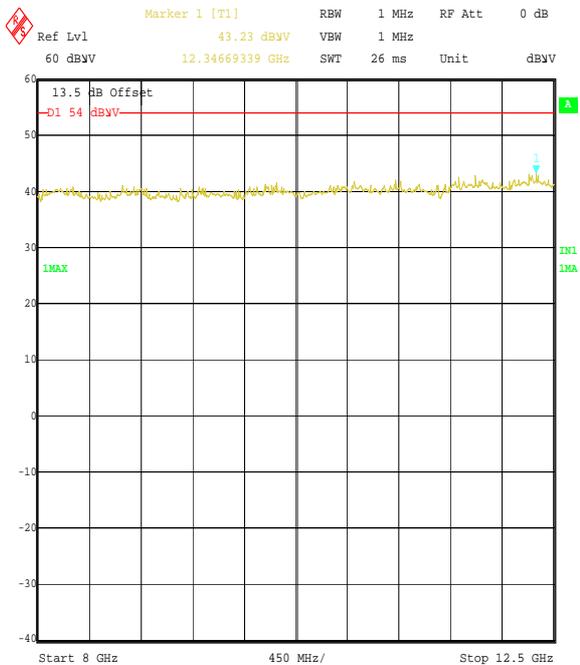


Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Idle Mode Radiated Spurious Emissions
 Date: 21.MAR.2005 12:23:37

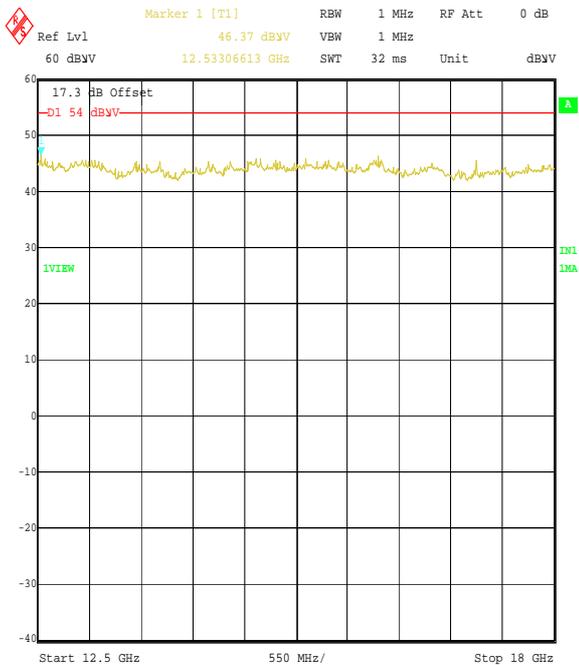

Title: 70868 Sony Ericsson Mobile GC89
 Comment A: Idle Mode Radiated Spurious Emissions
 Date: 21.MAR.2005 13:32:48

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

Receiver/Idle Mode Radiated Spurious Emissions: Section 15.109 (Continued)

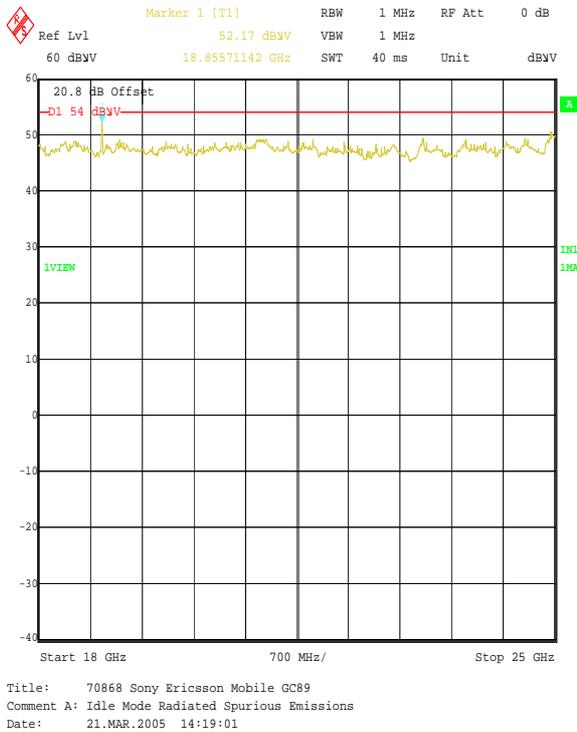

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

7.2.4. Transmitter Carrier Output Power: Section 2.1046(a)

The EUT was configured as for conducted RF output power as described in section 9 of this report.

Tests were performed to identify the EUT's maximum conducted transmit power.

Results:

Channel	Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	824.2	32.1	38.4	6.3	Complied
Middle	836.6	32.6	38.4	5.8	Complied
Top	848.8	32.2	38.4	6.2	Complied

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station

To: FCC Part 22: 2004 (Subpart H)

7.2.5. Transmitter Effective Radiated Power (ERP): Section 22.913(a)

The EUT was configured as for effective radiated power as described in section 9 of this report.

Tests were performed to identify the maximum effective radiated power (ERP).

Results:

Channel	Frequency (MHz)	ERP (dBm)	ERP Limit (dBm)	Margin (dB)	Result
Bottom	824.2	33.5	38.4	4.9	Complied
Middle	836.6	32.6	38.4	5.8	Complied
Top	848.8	32.8	38.4	5.6	Complied

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

7.2.6. Transmitter Frequency Stability (Temperature Variation): Section 22.355

The EUT was configured as for frequency stability measurements as described in section 9 of this report.

Tests were performed to identify the maximum frequency error of the EUT with variations in ambient temperature.

Results:

Bottom Channel (824.2 MHz)

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	824.199973	-27	0.033	2.5	2.467	Complied
-20	824.199969	-31	0.038	2.5	2.462	Complied
-10	824.199972	-28	0.034	2.5	2.466	Complied
0	824.199972	-28	0.034	2.5	2.466	Complied
10	824.199979	-21	0.025	2.5	2.475	Complied
20	824.199980	-20	0.024	2.5	2.476	Complied
30	824.199976	-24	0.029	2.5	2.471	Complied
40	824.199976	-24	0.029	2.5	2.471	Complied
50	824.199977	-23	0.028	2.5	2.472	Complied

Top Channel (848.8 MHz)

Temperature (°C)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
-30	848.799965	-35	0.041	2.5	2.459	Complied
-20	848.799969	-31	0.037	2.5	2.463	Complied
-10	848.799979	-21	0.025	2.5	2.475	Complied
0	848.799971	-29	0.034	2.5	2.466	Complied
10	848.799968	-32	0.038	2.5	2.462	Complied
20	848.799977	-23	0.027	2.5	2.473	Complied
30	848.799974	-26	0.031	2.5	2.469	Complied
40	848.799974	-26	0.031	2.5	2.469	Complied
50	848.799970	-30	0.035	2.5	2.465	Complied

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

7.2.7. Transmitter Frequency Stability (Voltage Variation): Section 22.355

The EUT was configured as for frequency stability measurements as described in section 9 of this report.

Tests were performed to identify the maximum frequency error of the EUT with variations in nominal operating voltage.

Results:

Bottom Channel (824.2 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
93.5	824.199972	-28	0.034	2.5	2.466	Complied
126.5	824.199976	-24	0.032	2.5	2.468	Complied

Top Channel (848.8 MHz)

Supply Voltage (V)	Measured Frequency (MHz)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)	Margin (ppm)	Result
93.5	848.799970	-30	0.035	2.5	2.465	Complied
126.5	848.799976	-24	0.028	2.5	2.472	Complied

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

7.2.8. Transmitter Occupied Bandwidth: Section 2.1049

The EUT was configured as for occupied bandwidth measurements as described in section 9 of this report.


Tests were performed to identify the maximum bandwidth occupied by the fundamental frequency of the EUT.

Results:


Channel	Frequency (MHz)	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Occupied Bandwidth (kHz)
Bottom	824.2	3.0	10.0	242.481
Middle	836.6	3.0	10.0	242.485
Top	848.8	3.0	10.0	240.481

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)


Transmitter Occupied Bandwidth: Section 2.1049 (Continued)

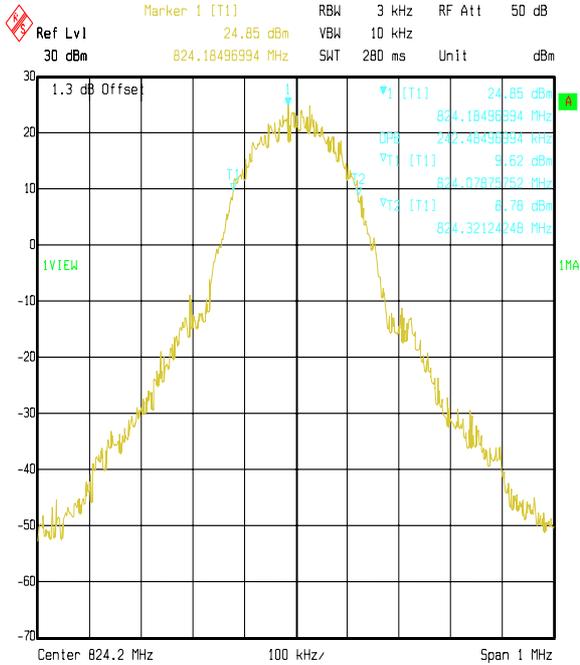

Title: 70868 Sony Ericsson Mobile GC89
 Comment A: Transmitter Occupied Bandwidth Bottom Channel
 Date: 15.MAR.2005 17:06:57

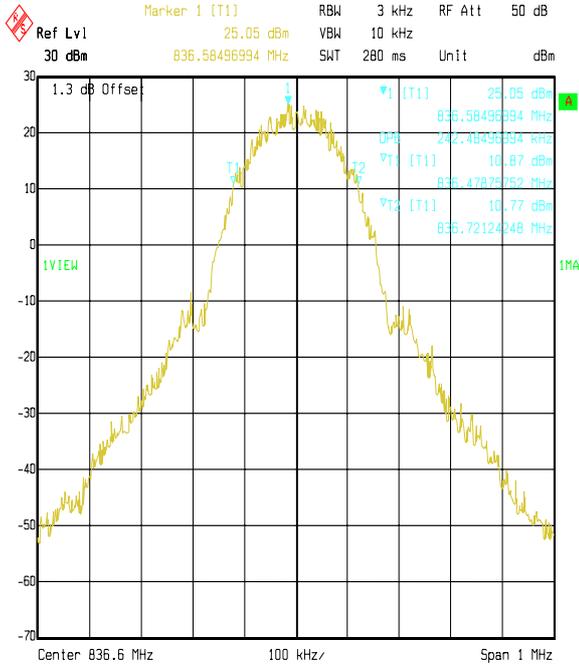

Title: 70868 Sony Ericsson Mobile GC89
 Comment A: Transmitter Occupied Bandwidth Middle Channel
 Date: 15.MAR.2005 17:02:05

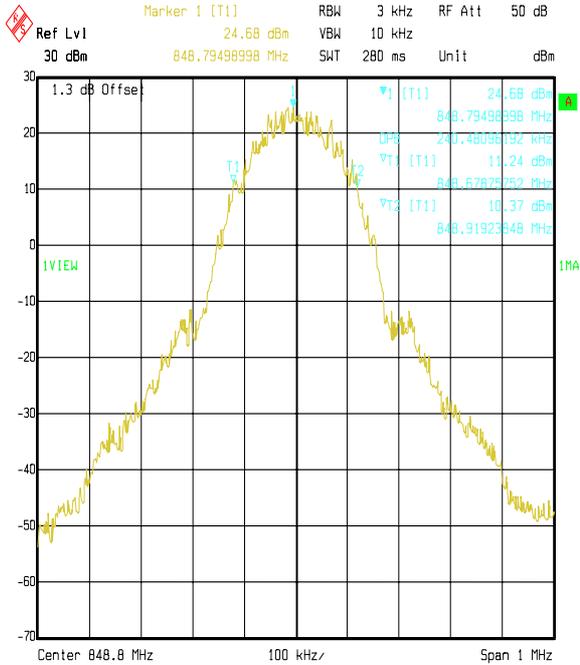

Title: 70868 Sony Ericsson Mobile GC89
 Comment A: Transmitter Occupied Bandwidth Top Channel
 Date: 15.MAR.2005 17:03:15

Note: The occupied bandwidth is measured using the internal OBW function of the measurement analyser. The analyser automatically configures the measurement bandwidths to make an accurate measurement. The results can be observed in the right hand corner of the graphs.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

7.2.9. Transmitter Out of Band Conducted Emissions: Section 2.1051 & 22.917

The EUT was configured as for transmitter conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum transmitter conducted emission levels.

Results:

Bottom Channel

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1648.525	-21.4	-13.0	8.4	Complied

Middle Channel


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1673.312	-20.6	-13.0	7.6	Complied

Top Channel


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1697.457	-18.7	-13.0	5.7	Complied

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)


Transmitter Out of Band Conducted Emissions: Section 2.1051 & 22.917 (Continued)

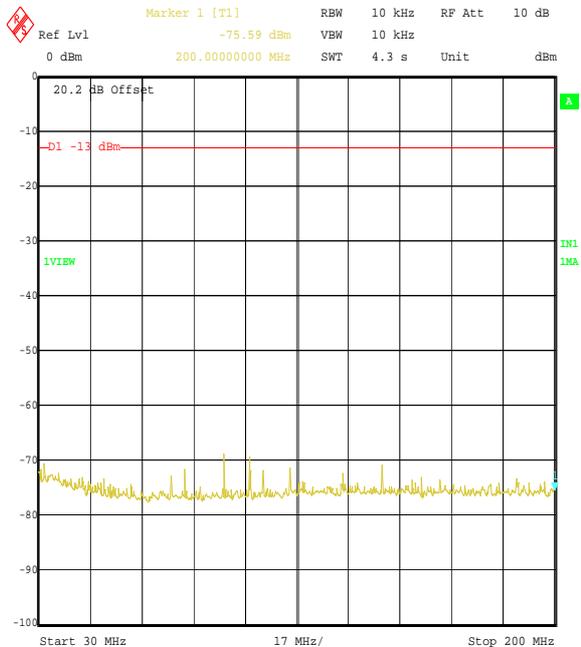


Title: 70868JD05 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Conducted Spurious Emissions Top Channel FCC Par
 t 22
 Date: 22.MAR.2005 20:32:35

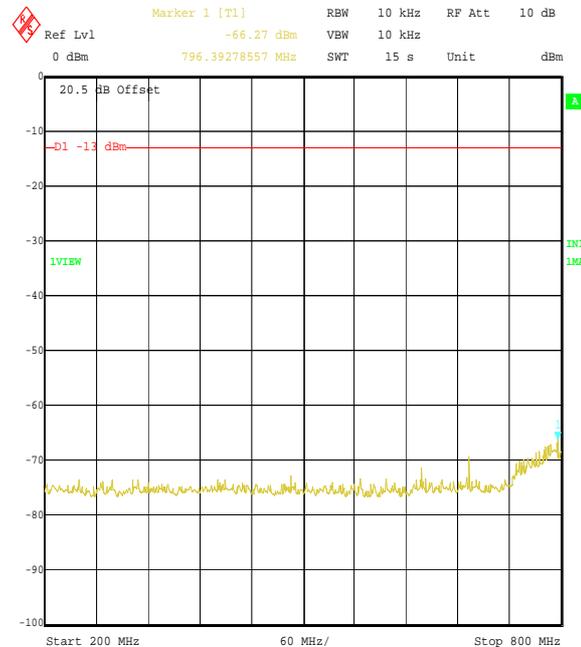

Title: 70868JD05 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Conducted Spurious Emissions Top Channel FCC Par
 t 22
 Date: 22.MAR.2005 20:36:31

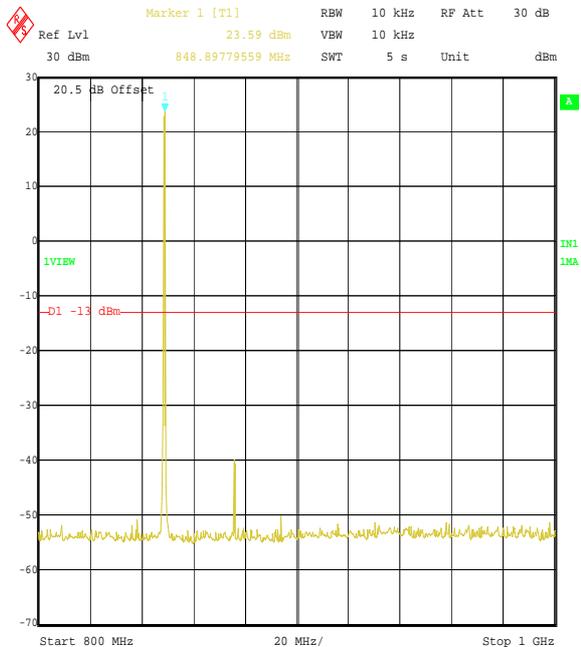


Title: 70868JD05 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Conducted Spurious Emissions Top Channel FCC Par
 t 22
 Date: 22.MAR.2005 20:38:23

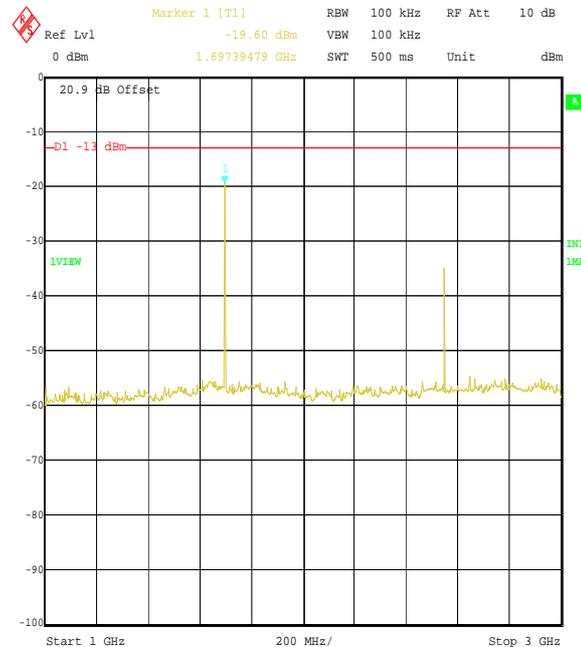


Title: 70868JD05 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Conducted Spurious Emissions Top Channel FCC Par
 t 22
 Date: 22.MAR.2005 20:45:36

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)

Transmitter Out of Band Conducted Emissions: Section 2.1051 & 22.917 (Continued)

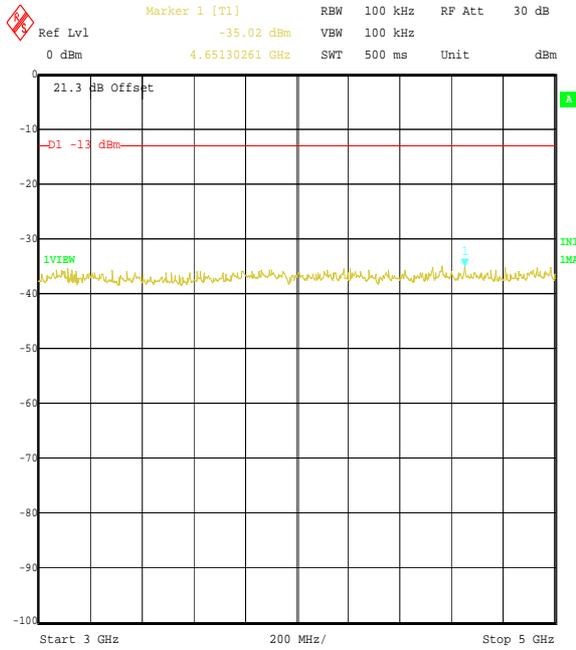

Title: 70868JD05 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Conducted Spurious Emissions Top Channel FCC Par
 t 22
 Date: 22.MAR.2005 20:42:04

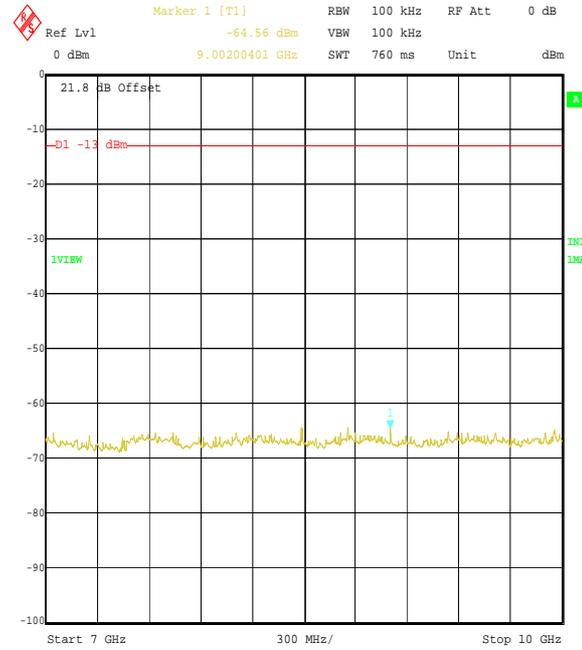

Title: 70868JD05 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Conducted Spurious Emissions Top Channel FCC Par
 t 22
 Date: 22.MAR.2005 21:04:36

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)

7.2.10. Transmitter Conducted Emissions at Band Edges: Section 2.1053 & 22.917

The EUT was configured as for transmitter conducted emission testing described in section 9 of this report.

Tests were performed to identify the maximum emissions level at the band edges of the frequency block that the EUT will operate over.


Results:

Bottom Band Edge


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-14.5	-13.0	1.5	Complied

Top Band Edge

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
849	-20.1	-13.0	7.1	Complied

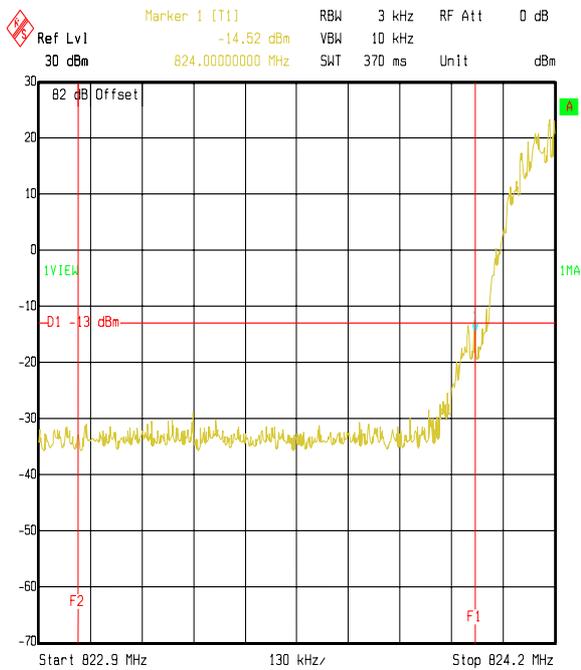

Title: Transmitter Radiated Band Edges Bottom Band
 Comment A: 70868JD05 Sony Ericsson Mobiles GC89 FCC Part 22
 Date: 14.APR.2005 19:11:40

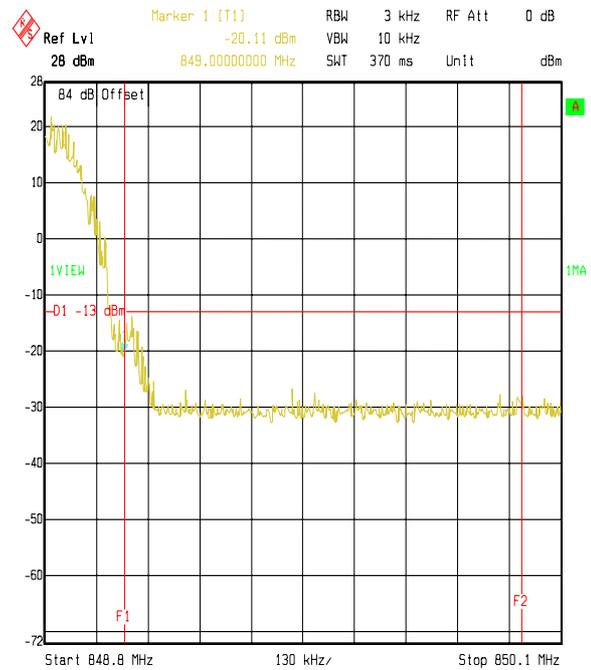

Title: Transmitter Radiated Band Edges Top Band
 Comment A: 70868JD05 Sony Ericsson Mobiles GC89 FCC Part 22
 Date: 14.APR.2005 19:08:03

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

7.2.11. Transmitter Out of Band Radiated Emissions: Section 2.1053 & 22.917

The EUT was configured as for transmitter radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:

Bottom Channel

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1648.453	-21.9	-13.0	8.9	Complied
2472.661	-35.5	-13.0	22.5	Complied

Middle Channel


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1673.108	-19.3	-13.0	6.3	Complied
2509.935	-31.6	-13.0	18.6	Complied

Top Channel


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
1697.454	-20.7	-13.0	7.7	Complied
2546.512	-31.4	-13.0	18.4	Complied

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)


Transmitter Out of Band Radiated Emissions: Section 2.1053 & 22.917 (Continued)

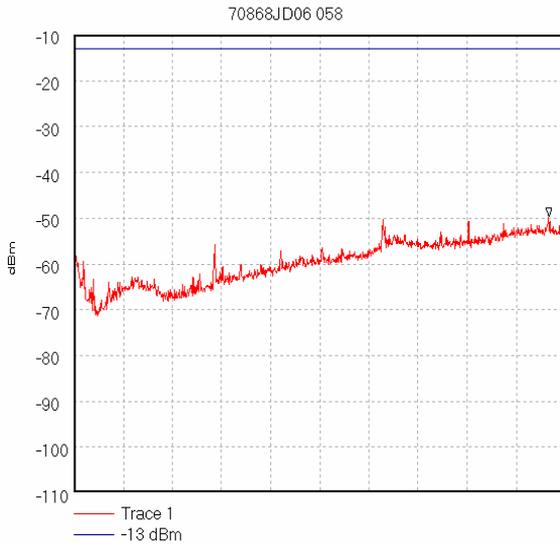


Start 30.0 MHz; Stop 824.0 MHz
 Ref -10 dBm; Ref Offset 9.6 dB; 10 dB/div
 RBW 100.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 520.0 mS
 Peak 797.533 MHz, -49.74 dBm
 Display Line: -13 dBm; Limit Test Passed
 Transducer Factors: A490
 02/03/2005 16:49:20

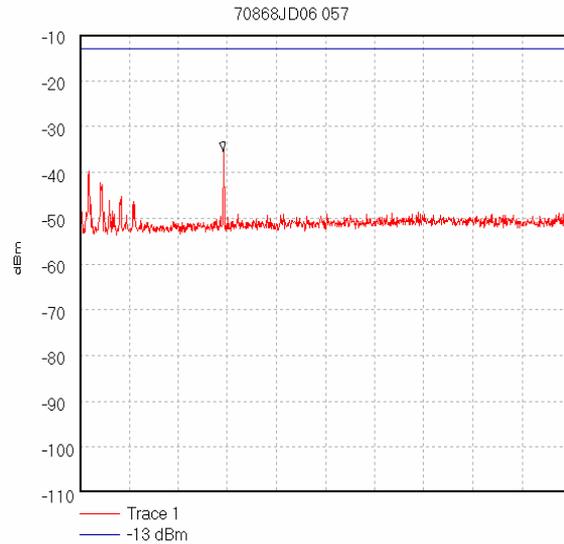

Start 850.0 MHz; Stop 1.0 GHz
 Ref -10 dBm; Ref Offset 9.6 dB; 10 dB/div
 RBW 100.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 100.0 mS
 Marker 893.833 MHz, -35.36 dBm
 Display Line: -13 dBm; Limit Test Passed
 Transducer Factors: A490
 02/03/2005 16:47:58

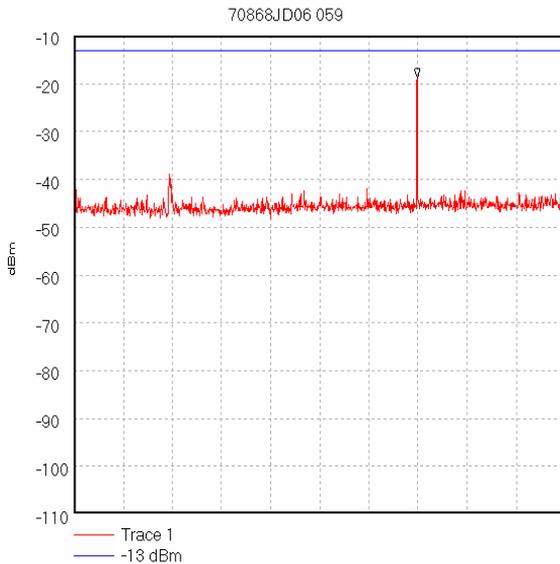

Start 1.0 GHz; Stop 2.0 GHz
 Ref -10 dBm; Ref Offset 9.6 dB; 10 dB/div
 RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS
 Peak 1.699 GHz, -18.76 dBm
 Display Line: -13 dBm; Limit Test Passed
 02/03/2005 16:56:02

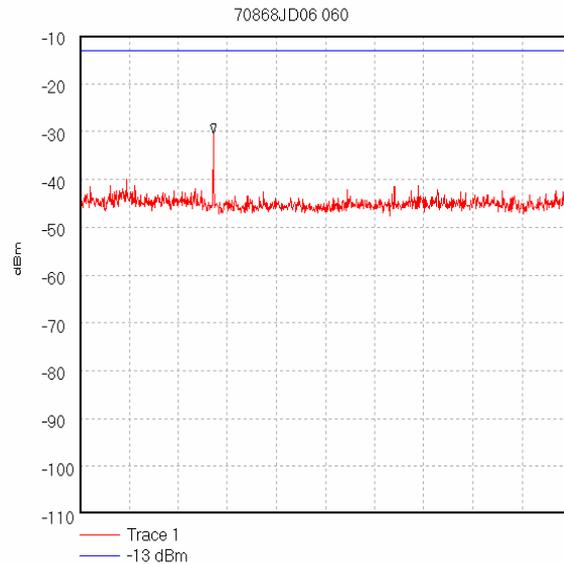


Start 2.0 GHz; Stop 4.0 GHz
 Ref -10 dBm; Ref Offset 9.6 dB; 10 dB/div
 RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS
 Peak 2.544 GHz, -30.46 dBm
 Display Line: -13 dBm; Limit Test Passed
 02/03/2005 17:09:16


Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)


Transmitter Out of Band Radiated Emissions: Section 2.1053 & 22.917 (Continued)

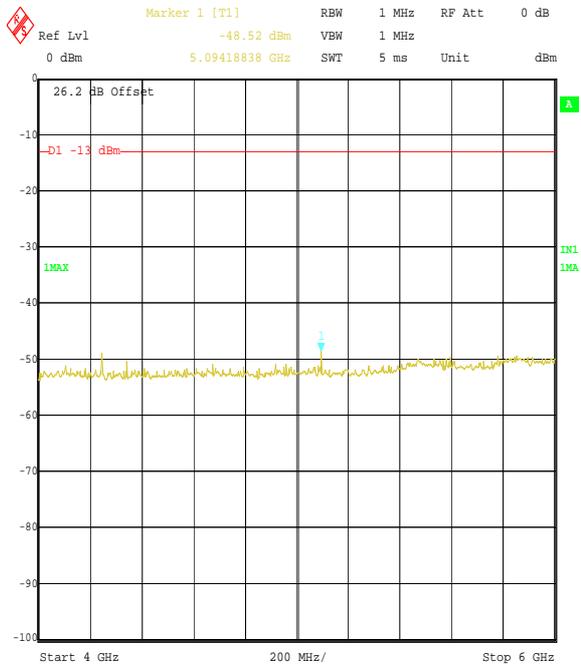


Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Radiated Spurious Emissions Top Channel
 Date: 21.MAR.2005 11:11:01

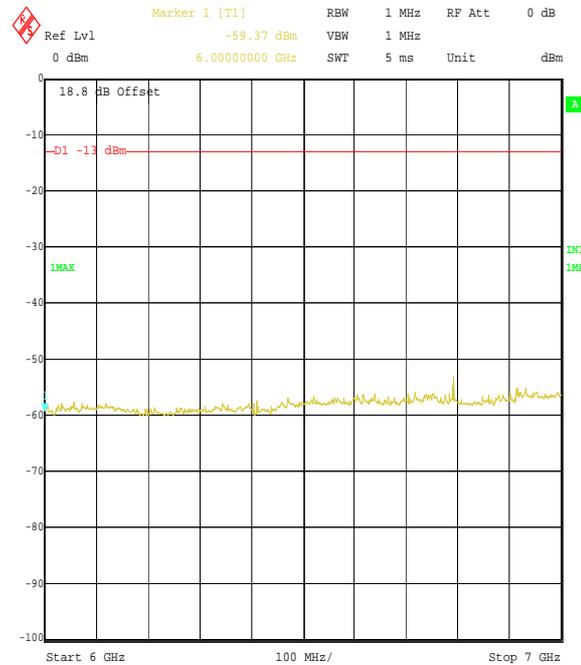

Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Radiated Spurious Emissions Top Channel
 Date: 21.MAR.2005 11:18:23

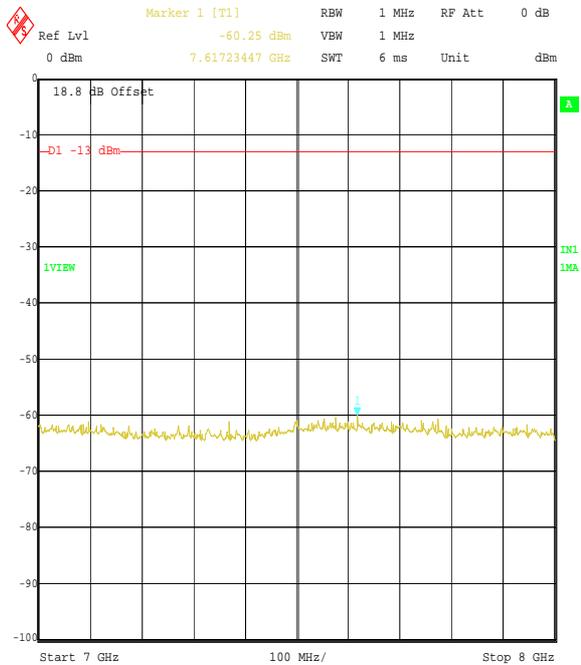

Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Radiated Spurious Emissions Top Channel
 Date: 21.MAR.2005 11:24:38

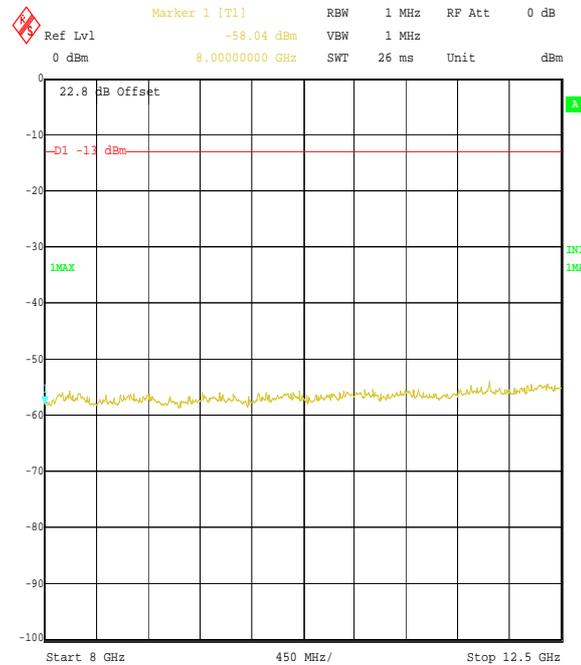


Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Radiated Spurious Emissions Top Channel
 Date: 21.MAR.2005 11:30:19


Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)

Transmitter Out of Band Radiated Emissions: Section 2.1053 & 22.917 (Continued)

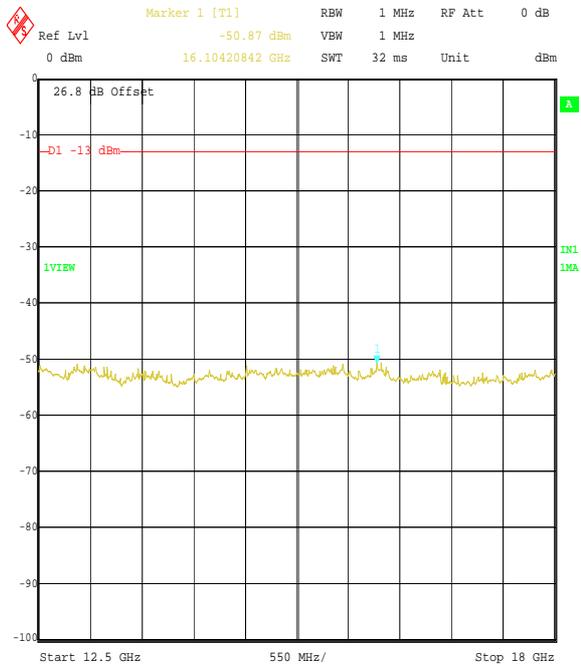

Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Radiated Spurious Emissions Top Channel
 Date: 21.MAR.2005 11:35:37

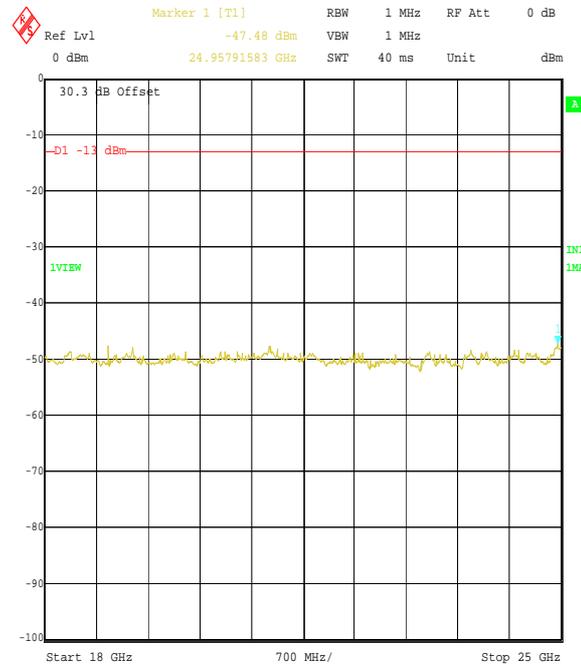

Title: 70868 Sony Ericsson Mobile GC89 FCC Part 22
 Comment A: Transmitter Radiated Spurious Emissions Top Channel
 Date: 21.MAR.2005 11:38:33

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)

7.2.12. Transmitter Radiated Emissions at Band Edges: Section 2.1053/22.917

The EUT was configured as for transmitter radiated emission testing described in section 9 of this report.

Tests were performed to identify the maximum emission level at the band edges of the frequency block that the EUT will operate over.


Results:

Bottom Band Edge


Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
824	-14.5	-13.0	1.5	Complied

Top Band Edge

Frequency (MHz)	Peak Emission Level (dBm)	Limit (dBm)	Margin (dB)	Result
849	-20.1	-13.0	7.1	Complied

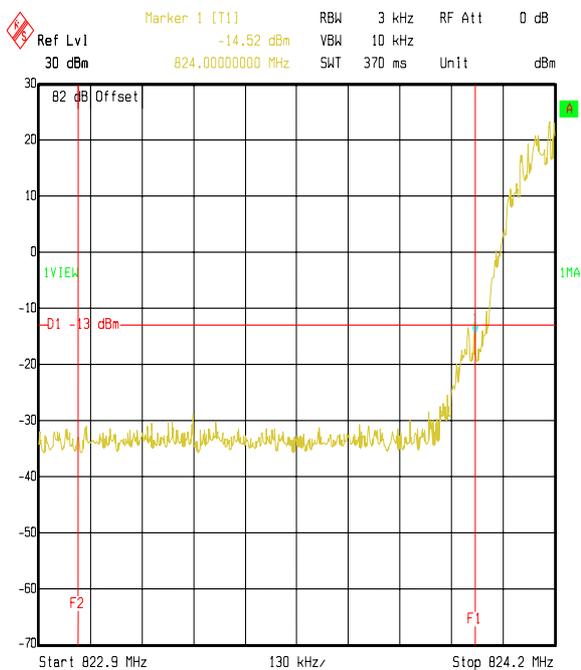

Title: Transmitter Radiated Band Edges Bottom Band
 Comment A: 70868JD05 Sony Ericsson Mobiles GC89 FCC Part 22
 Date: 14.APR.2005 19:11:40

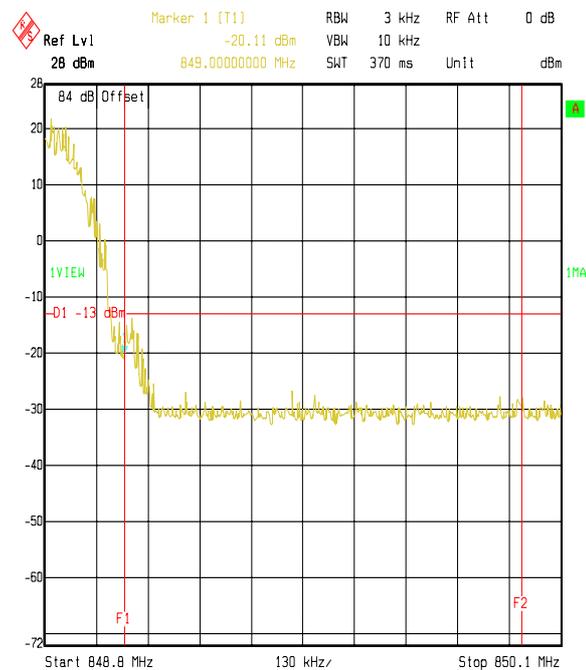

Title: Transmitter Radiated Band Edges Top Band
 Comment A: 70868JD05 Sony Ericsson Mobiles GC89 FCC Part 22
 Date: 14.APR.2005 19:08:03

Test of: **Sony Ericsson Mobile Communications AB**
GC89 Mobile Station
 To: **FCC Part 22: 2004 (Subpart H)**

8. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Carrier Output Power	Not applicable	95%	±0.46 dB
Conducted Emissions	9 kHz to 26 GHz	95%	±1.2 dB
Conducted Emissions Antenna Port	30 MHz to 40 GHz	95%	±1.2 dB
Effective Radiated Power (ERP)	Not applicable	95%	±1.78 dB
Frequency Stability	Not applicable	95%	±20 Hz
Minimum Bandwidth	Not applicable	95%	±0.12%
Occupied Bandwidth	824 to 849 MHz	95%	± 0.12%
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	±5.26 dB
Radiated Spurious Emissions	1 GHz to 26 GHz	95%	±4.2 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

9. Measurement Methods

9.1. Conducted Output Power

The EUT was connected to a spectrum analyser and to a GSM test set via suitable cables, RF attenuators and combiners.

The connection was made to the EUT either via an antenna port or by antenna terminals made available by the client.

The total loss of the cables, attenuators and combiner were measured and entered as a reference level offset into the measuring receiver to correct for the losses.

The EUT was set to the required channel and the transmitter set to operate at full power.

A marker was set to the maximum indicated peak and the conducted power was recorded.

This test was performed on the bottom, middle and top channels.

The test equipment settings for conducted antenna port measurements were as follows:

Receiver Function	Setting
Detector Type:	Peak
Mode:	Max Hold
Bandwidth:	≥ Emission Bandwidth
Amplitude Range:	100 dB
Step Size:	Continuous sweep
Sweep Time:	Coupled

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

9.2. Effective Radiated Power (ERP)

ERP measurements were performed in accordance with the standard, against appropriate limits.

The ERP was measured with the EUT arranged on a non-conducting turntable on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4. The transmitter was fitted with an integral antenna; as such all radiated tests were performed with the unit operating into the integral antenna.

The level of the ERP was measured using a spectrum analyser.

The test antenna was positioned in the horizontal plane. The EUT was oriented in the X plane. The test antenna was then raised and lowered until a maximum peak was observed. The turntable was then rotated through 360 degrees and the maximum peak reading obtained. The height search was then repeated to take into consideration the new angular position of the turntable. The maximum reading observed was then recorded. This procedure was then repeated with the EUT oriented in the Y and Z planes. The highest reading taken in all 3 planes was recorded. The entire procedure was then repeated with the test antenna set in the vertical polarity.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a substitution antenna. For ERP measurements a dipole antenna was used. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The ERP was calculated as:-

$$\text{ERP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

Effective Radiated Power (ERP) (Continued)

Circumstances where the signal generator could not produce the desired power substitution was performed with the signal generator set to 0 dBm. The radiated signal was maximised as previously described. The level indicated on the measuring receiver was noted. The delta between this level and the maximum level for the EUT was calculated and also noted. The ERP of the signal generator was calculated using the above formulae. The recorded delta was added to the calculated ERP to obtain the substituted EUT ERP.

$$\text{Delta (dB)} = \text{EUT} - \text{SG}$$

Where :

EUT = spectrum analyser indicated EUT raw level

SG = spectrum analyser indicated signal generator raw level

The signal generator actual ERP is calculated as:

$$\text{ERP SG} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

The EUT ERP is calculated as:

$$\text{ERP EUT} = \text{ERP SG} + \text{Delta.}$$

The test equipment settings for ERP measurements were as follows:

Receiver Function	Setting
Detector Type:	Peak
Mode:	Not applicable
Bandwidth:	≥ Emission Bandwidth
Amplitude Range:	100 dB
Sweep Time:	Coupled

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

9.3. FCC Part 2.1055: Frequency Stability

The EUT was situated within an environmental test chamber and connected directly to the GSM test set via an access port.

Measurements were performed with the EUT operating under extremes of temperature in 10 degree increments within the range -30 to 50 °C.

Measurements were also performed at voltage extremes between the declared nominal supply voltage and at the declared endpoint voltage (for hand carried battery operated equipment) or by varying the primary supply voltage from 85% to 115% of the nominal value for all other equipment types.

The requirement was to determine the frequency stability of the device under specified environmental operating conditions.

Measurements were made on the top and bottom channels.

The EUT was switched off for a minimum of 30 minutes between each stage of testing while the environmental chamber stabilised at the next temperature within the stated temperature range.

The frequency error measured was converted to an error in ppm using the following formula as defined by TIA_EIA_603A :-

$$\text{ppm error} = \left(\frac{MCF_{\text{MHz}}}{ACF_{\text{MHz}}} - 1 \right) * 10^6$$

where MCF_{MHz} is the measured carrier frequency in MHz
 ACF_{MHz} is the assigned carrier frequency in MHz

The measured ppm had to be less than the relevant limits in order to comply.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

9.4. Occupied Bandwidth

The EUT was connected to a spectrum analyser enabled with an occupied bandwidth function and a GSM test set via a bi-directional coupler to its antenna port.

Measurements were performed to determine the occupied bandwidth in accordance with FCC Part 2.1049. The occupied bandwidth was measured from the fundamental emission at the bottom, middle and top channels.

The occupied bandwidth was measured using the built in occupied bandwidth function of the Rohde and Schwarz FSEB or ESIB spectrum analyser. It was set to measure the bandwidth where 99% of the signal power was contained. The analyser settings were set as per those outlined in the spectrum analyser user manual for this measurement, i.e., $RBW \geq 1\%$ of occupied bandwidth. A value of 3 kHz was used.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

9.5. Transmitter Conducted Emissions Measurements:

Spurious emission measurements at the antenna port were performed from the lowest declared frequency to 10 times the highest EUT fundamental frequency.

A measuring receiver was connected to the antenna port of the EUT via a suitable cable and RF attenuator. The total loss of both the cable and the attenuator were measured and entered as a reference level offset into the measuring receiver to correct for the losses.

The limit in the standard states that emissions shall be attenuated by at least $43 + 10 \log(P)$ dB below the transmitter power (P), where (P) is the maximum measured fundamental power for the channel under test. This limit always reduces to -13 dBm therefore, the limit line presented on the accompanying plots is set to -13 dBm.

The frequency band described above was investigated with the transmitter operating at full power on the top, bottom and middle channels. Any spurious observed were then recorded and compared to the -13 dBm limit. The requirement is for the emission to be less than -13 dBm. The margin between emission and limit is recorded and should always be positive to indicate compliance.

It should be noted that FCC Part 22.917 states that the 1st MHz band immediately adjacent to the applicants declared frequency block may be measured using a resolution bandwidth of at least 1% of the emission bandwidth. This bandwidth was found to be 3 kHz

The test equipment settings for conducted antenna port measurements were as follows:

Receiver Function	Settings
Detector Type:	Peak
Mode:	Max Hold
Bandwidth:	100 kHz >1 GHz
Bandwidth:	10 kHz <1 GHz
Amplitude Range:	100 dB
Step Size:	Continuous sweep
Sweep Time:	Coupled

The resolution bandwidth used for measurements in the 1 MHz blocks either side of the declared operating frequency block were set as described in the procedure above.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

9.6. AC Mains Conducted Emissions

AC mains conducted emission measurements were performed in accordance with the standard, against appropriate limits for each detector function.

The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane. The EUT was powered with 110V 60 Hz AC mains supplied via a line impedance stabilisation network (LISN).

Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)/Average
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz*	9 kHz*
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	> 1 s
Observation Time:	Not applicable	> 15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Test of: **Sony Ericsson Mobile Communications AB**
GC89 Mobile Station
To: **FCC Part 22: 2004 (Subpart H)**

9.7. Transmitter Radiated Emissions

Radiated emission measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial pre-scans covering the entire measurement band from the lowest generated frequency declared up to 10 times the highest fundamental frequency. The scans were performed within a screened chamber in order to identify frequencies on which the EUT was generating spurious. This procedure identified the frequencies from the EUT, which required further examination. Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. A limit line was set to the specification limit by characterising the screen room using a known signal source set at exactly the same location as the EUT. The signal source was derived from either a horn antenna or a dipole dependant on the frequency band under investigation. Any levels within 20 dB of this limit were measured where possible, on occasion; the receiver noise floor came within the 20 dB boundary. On these occasions, the system noise floor may have been recorded.

An open area test site using the appropriate test distance and measuring receiver with a peak detector was used for final measurements at each frequency recorded in the screen room.

The levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m in the vertical polarisation. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT. The procedure was repeated for the horizontal polarisation.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a substitution antenna. For EIRP measurements a horn antenna whose gain was based on an isotropic antenna was used, ERP measurements were done using a dipole. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The radiated power was calculated as:-

$$\text{EIRP/ERP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

Transmitter Radiated Emissions (Continued)

The limit in the standard states that emissions shall be attenuated by at least $43+10 \log (P)$ dB below the transmitter power (P), where (P) is the maximum measured fundamental power for the channel under test. This limit always reduces to -13dBm therefore, the limit line presented on the accompanying plots is set to -13dBm.

Any spurious measured were then compared to the -13dBm limit. The requirement is for the emission to be less than -13dBm. The margin between emission and limit is recorded and should always be positive to indicate compliance.

It should be noted that FCC Part 22.917 states that the 1st MHz band immediately adjacent to the applicants declared frequency block may be measured using a resolution bandwidth of at least 1% of the emission bandwidth. This bandwidth was found by calculating 1% of the bandwidth measured in the transmitter occupied bandwidth section of this report. The next largest available bandwidth above this calculated figure was, therefore, used i.e. 3 kHz.

Test of: **Sony Ericsson Mobile Communications AB**
GC89 Mobile Station
 To: **FCC Part 22: 2004 (Subpart H)**

9.8. Receiver Radiated Emissions

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial pre-scans covering the entire measurement band from the lowest generated frequency declared up to the upper frequency detailed in Section 15.33(b) were performed within a screened chamber in order to identify frequencies on which the EUT was generating interference. This determined the frequencies from the EUT, which required further examination. In order to minimise the time taken for the swept measurements, a peak detector was used in conjunction with the appropriate detector measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and for the duty cycle of the EUT.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. A limit line was set to the specification limit. Levels within 20dB of this limit were measured where possible, on occasion, the receiver noise floor came within the 20dB boundary. On these occasions, the system noise floor may have been recorded.

An open area test site using the appropriate test distance and measuring receiver with a quasi peak detector was used for measurements below 1000 MHz, for measurements above 1000 MHz average and peak detectors were used.

For the final measurements the EUT was arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4.

On the open area test site, at each frequency where a signal was found, the levels were maximised by initially rotating the turntable through 360° and then varying the antenna height between 1 m and 4 m in the horizontal polarisation. At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT. The procedure was repeated for the vertical polarisation.

The final field strength was determined as the indicated level in dB μ V plus cable loss and antenna factor.

The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements <1GHz	Final Measurements ≥1 GHz
Detector Type:	Peak	Quasi-Peak (CISPR)	Peak/Average
Mode:	Max Hold	Not applicable	Not applicable
Bandwidth:	(120 kHz <1GHz) (1MHz ≥1GHz)	120 kHz	1 MHz (If applicable)
Amplitude Range:	60 dB	20 dB	20 dB (typical)
Step Size:	Continuous sweep	Not applicable	Not applicable
Sweep Time:	Coupled	Not applicable	Not applicable

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.
A027	Horn Antenna	Eaton	9188-2	301
A031	Horn Antenna	Eaton	91889-2	557
A032	Horn Antenna	EMCO	3115	2874
A059	Log Periodic Antenna	EMCO	3146	8902-2378
A1069	LISN	Rohde & Schwarz	ESH3-Z5	837469/012
A1256	Power supply	Farnell	11E30/1B	000378
A1361	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	A1361-20112003
A1428	Attenuator	Narda	3292-1	02439
A254	Horn Antenna	Flann	14240-20	139
A428	Horn Antenna	Flann	12240-20	134
A429	Horn Antenna	Flann	16240-20	561
A430	Horn Antenna	Flann	18240-20	425
A436	Horn Antenna	Flann	20240-20	330
A490	Bilog Antenna	Chase	CBL6111A	1590
E013	PCN Environmental Chamber	Sanyo	ATMOS	None
G013	SMHU Signal Generator	Rohde & Schwarz	SMHU	894 055/003
M028	Spectrum Analyser	Rohde & Schwarz	FSB	860 001/009 (RU); 860 161/007 (DU)
M1123	Power Meter	Boonton	4531	138201
M1124	Spectrum Analyser	Rohde & Schwarz	ESIB26	100046K
M1138	Radio Communications Tester	Rohde & Schwarz	CMU 200	836202/093
M127	Spectrum Analyser	Rohde & Schwarz	FSEB 30	842 659/016
M128	DVM	Fluke	76	65340273
M505/ M506	Spectrum Analyser	Rohde & Schwarz	ESBI	825316/010(DU); 827060/004(RU)
S003	Power Control	Zen	E08	736699
S011	D.C. PSU	INSTEK	PR-3010H	9401270
S202	Site 2	RFI	2	S202-15011990

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.

Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station
To: FCC Part 22: 2004 (Subpart H)


Appendix 2. Test Configuration Drawings

This appendix contains the following drawings:

Drawing Reference Number	Title
DRG\70868JD05\EMICON	Test configuration for measurement of conducted emissions.
DRG\70868JD05\EMIRAD	Test configuration for measurement of radiated emissions.


Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)

DRG\70868JD05\EMICON

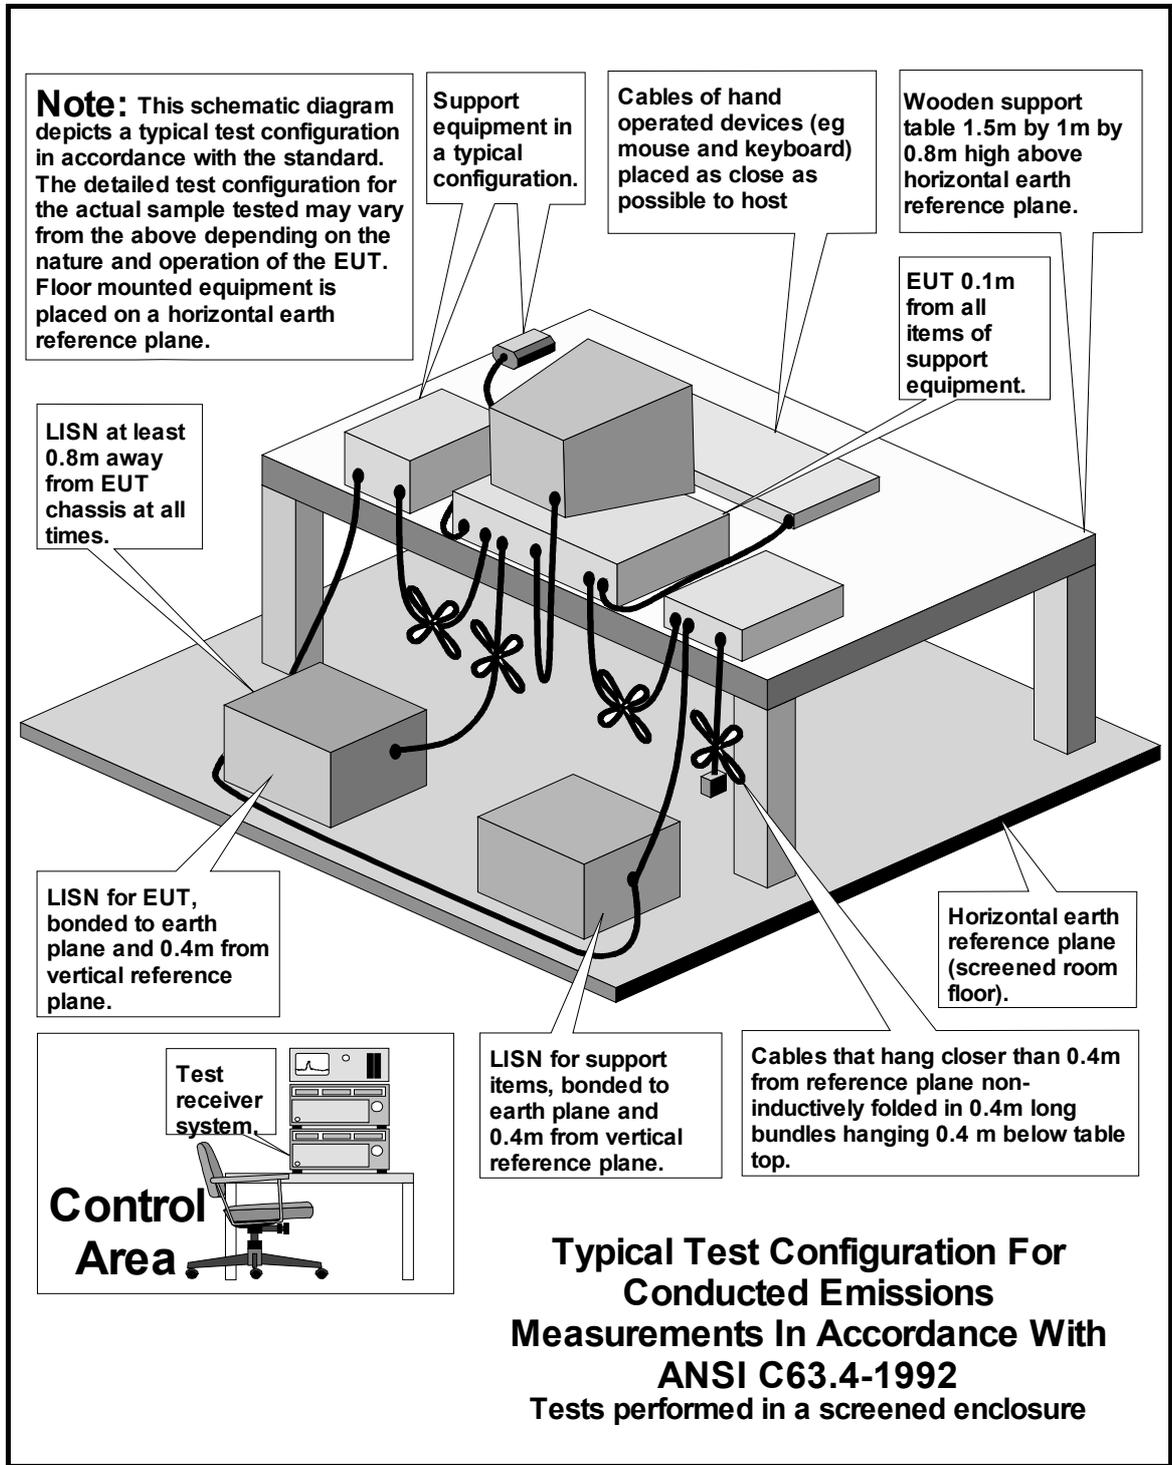

Test of: Sony Ericsson Mobile Communications AB
 GC89 Mobile Station
 To: FCC Part 22: 2004 (Subpart H)

DRG\70868JD05\EMIRAD

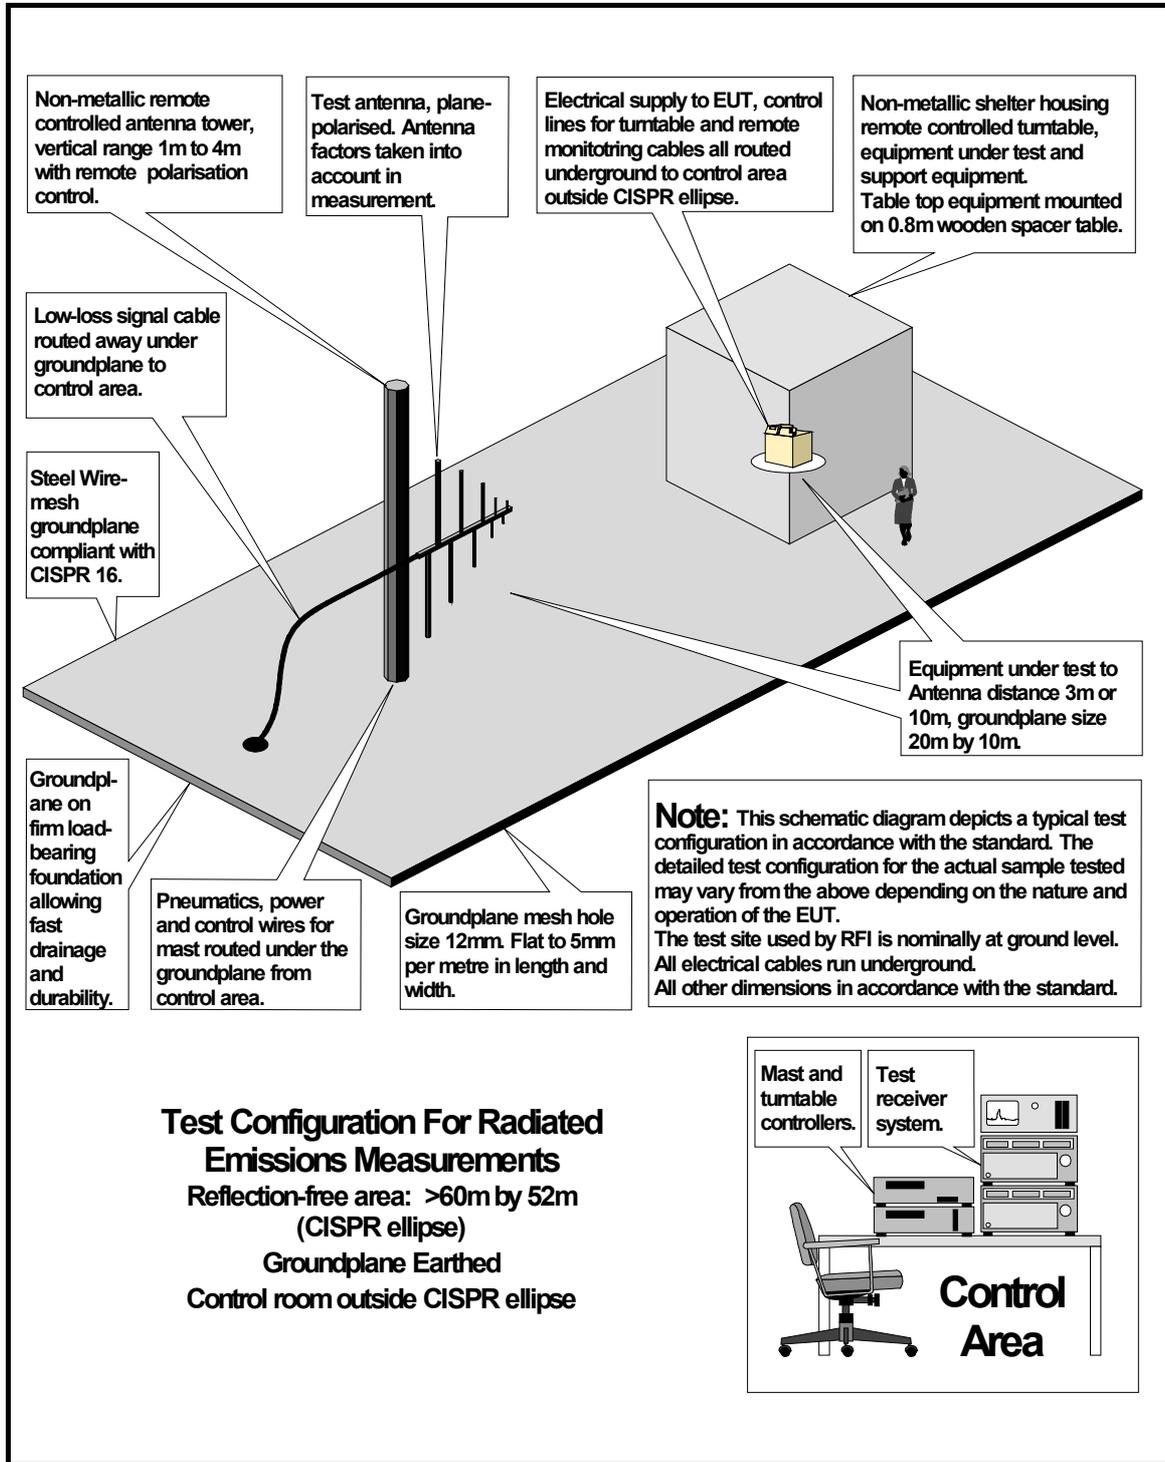

RFI GLOBAL SERVICES LTD

TEST REPORT

S.No. RFI\MPTE1\RP70868JD05A

Page 50 of 50

Issue Date: 29 April 2005

**Test of: Sony Ericsson Mobile Communications AB
GC89 Mobile Station**

To: FCC Part 22: 2004 (Subpart H)

This page has been left intentionally blank.
