**TEST REPORT**Deutsche  
Akkreditierungsstelle  
D-PL-12076-01-01

Test report no.: 1-4254/12-19-03-D

**Testing Laboratory****CETECOM ICT Services GmbH**  
Untertuerheimer Strasse 6 – 10  
66117 Saarbruecken/Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <http://www.cetecom-ict.de>  
e-mail: [info@ict.cetecom.de](mailto:info@ict.cetecom.de)**Accredited Test Laboratory:**The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS) The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01  
Area of Testing: Radio/Satellite Communications**Applicant****Sony Mobile Communications AB**  
Nya Vattentomet  
22188 Lund/SWEDEN  
Phone: +46 46 19 30 00  
Fax: +46 46 19 32 95  
Contact: Håkan Sjöberg  
e-mail: [hakan.sjoberg@sonymobile.com](mailto:hakan.sjoberg@sonymobile.com)  
Phone: +46 46 19 35 59**Manufacturer****Sony Mobile Communications AB**  
Nya Vattentomet  
22188 Lund/SWEDEN**Test Standard/s**47 CFR Part 15 Title 47 of the Code of Federal Regulations, Chapter 1  
Part 15 – Radio frequency devices  
RSS-Gen Issue 3 General Requirements and Information for the Certification of Radio Apparatus  
For further applied test standards please refer to section 3 of this test report.**Test Item****Kind of test item:** GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDV/FDDVI/FDDXIX; HSPA; LTE Band 1; BT3.1; WLAN a/b/g/n; AGPS; RFID, FM RX  
**Model name:** PM-0000-BV  
**FCC ID:** PY7PM-0000  
**IC:** 4170-PM-0000  
**Frequency [MHz]:** GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz  
UMTS: 826.4 – 846.6 MHz  
**Technology tested:** GSM, UMTS  
**Antenna:** Integrated PCB antenna  
**Power Supply:** 3.7 V DC by Li-Polymer battery  
**Temperature Range:** -30°C to +60°C**Test report authorised:**2012-05-22 Stefan Bös  
Senior Testing Manager**Test performed:**

2012-05-22 Andreas Luckenbill

## 1 Table of contents

1	Table of contents .....	2
2	General Information .....	3
2.1	Notes and disclaimer .....	3
2.2	Application details.....	3
3	Test standard/s .....	3
4	Test Environment .....	4
5	Test item .....	4
6	Test Laboratories sub-contracted .....	4
7	Summary of Measurement Results .....	5
7.1	Receiver.....	5
8	Measurement Results .....	6
8.1	RX Spurious Emissions Conducted < 30 MHz .....	6
8.2	Spurious Emissions Radiated – Receiver Mode .....	8
9	Test equipment and ancillaries used for tests .....	14
10	Observations .....	15
Annex A	Photographs of the test setup.....	16
Annex B	External photographs of the EUT.....	20
Annex C	Internal photographs of the EUT .....	26
Annex D	Document history .....	34
Annex E	Further information.....	34
Annex F	Accreditation Certificate .....	35

## 2 General Information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

### 2.2 Application details

Date of receipt of order:	2012-03-27
Date of receipt of test item:	2012-04-11
Start of test:	2012-04-12
End of test:	2012-05-22
Person(s) present during the test:	-/-

## 3 Test standard/s

Test Standard	Test Standard Description
47 CFR Part 15	Title 47 of the Code of Federal Regulations, Chapter 1 Part 15 – Radio frequency devices
RSS-Gen Issue 3	General Requirements and Information for the Certification of Radio Apparatus

#### 4 Test Environment

Temperature:	$T_{nom}$	+22 °C during room temperature tests
	$T_{max}$	+60 °C during high temperature tests
	$T_{min}$	-30 °C during low temperature tests
Relative humidity:		41 %
Air pressure:		not relevant for this kind of testing
Power supply:	$V_{nom}$	3.7 V DC by Li-Polymer battery
	$V_{max}$	4.4 V
	$V_{min}$	3.5 V

#### 5 Test item

Kind of test item	:	<b>GSM Mobile Phone GPRS/EGPRS 850/900/1800/1900; UMTS FDDI/FDDV/FDDVI/FDDXIX; HSPA; LTE Band 1; BT3.1; WLAN a/b/g/n; AGPS; RFID, FM R</b>
Type identification	:	<b>PM-0000-BV</b>
S/N serial number	:	<b>Radiated units: CB5A1JYNE8; CB5A1JYNDZ Conducted units: CB5A1JYNFP; CB5A1JYNCU</b>
HW hardware status	:	<b>AP1</b>
SW software status	:	<b>7.0.A.0.474</b>
Frequency Band [MHz]	:	<b>GSM: 824.2 – 848.8 MHz, 1850.2 – 1909.8 MHz UMTS: 826.4 – 846.6 MHz</b>
Type of Modulation	:	<b>GMSK, 8-PSK, QPSK, 16QAM</b>
Antenna	:	<b>Integrated PCB antenna</b>
Power Supply	:	<b>3.7 V DC by Li-Polymer battery</b>
Temperature Range	:	<b>-30 °C to +60 °C</b>

#### 6 Test Laboratories sub-contracted

None

## 7 Summary of Measurement Results

- No deviations from the technical specifications were ascertained  
 There were deviations from the technical specifications ascertained

TC identifier	Description	verdict	date	Remark
RF-Testing	CFR Part 15.107, 15.109 ICES-003, Issue 4	passed	2012-06-14	-/-

### 7.1 Receiver

Test Case	temperature conditions	power source voltages	Pass	Fail	NA	NP	Remark
RX-Spurious Emissions Conducted < 30 MHz	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

**Note:**

NA = Not applicable; NP = Not performed

## 8 Measurement Results

### 8.1 RX Spurious Emissions Conducted < 30 MHz

**Description:**

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. The EUT is set to Idle mode. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

**Measurement:**

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

**Limits:**

FCC		IC	
CFR Part 15.107(a)		ICES-003, Issue 4	
RX Spurious Emissions Conducted < 30 MHz			
Frequency (MHz)	Quasi-Peak (dBµV/m)	Average (dBµV/m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	


\*Decreases with the logarithm of the frequency

**Result:**


RX Spurious Emissions Conducted < 30 MHz [dBµV/m]		
F [MHz]	Detector	Level [dBµV/m]
No peaks detected!		
Measurement uncertainty	± 3 dB	

**Result: Passed**

Plot 1: 9 kHz to 30 MHz / Phase Line

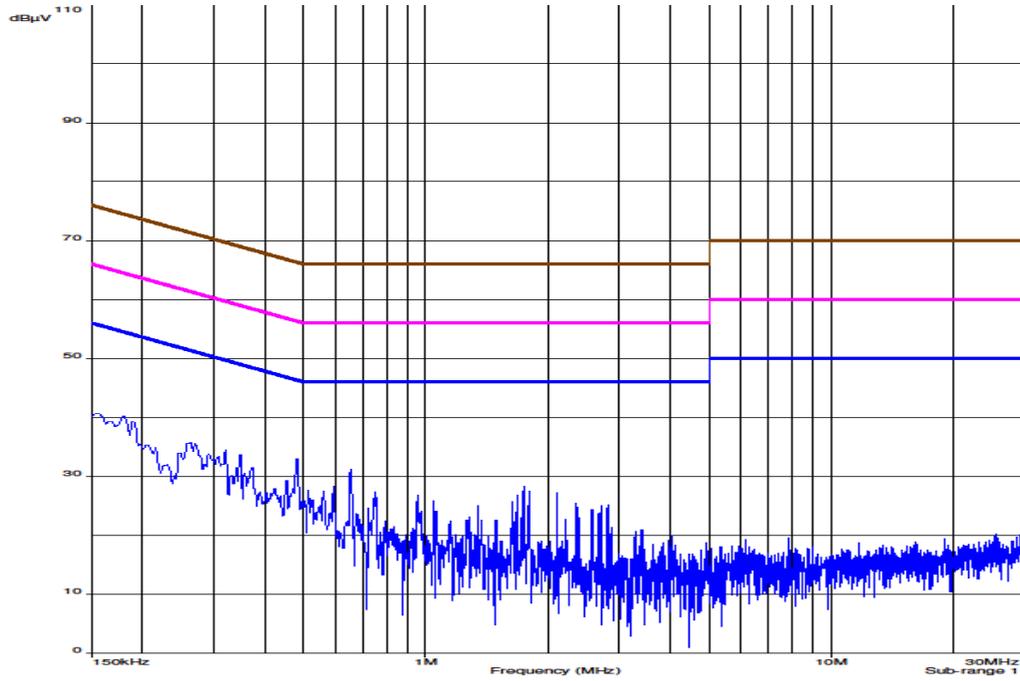

Plot 2: 9 kHz to 30 MHz / Neutral Line

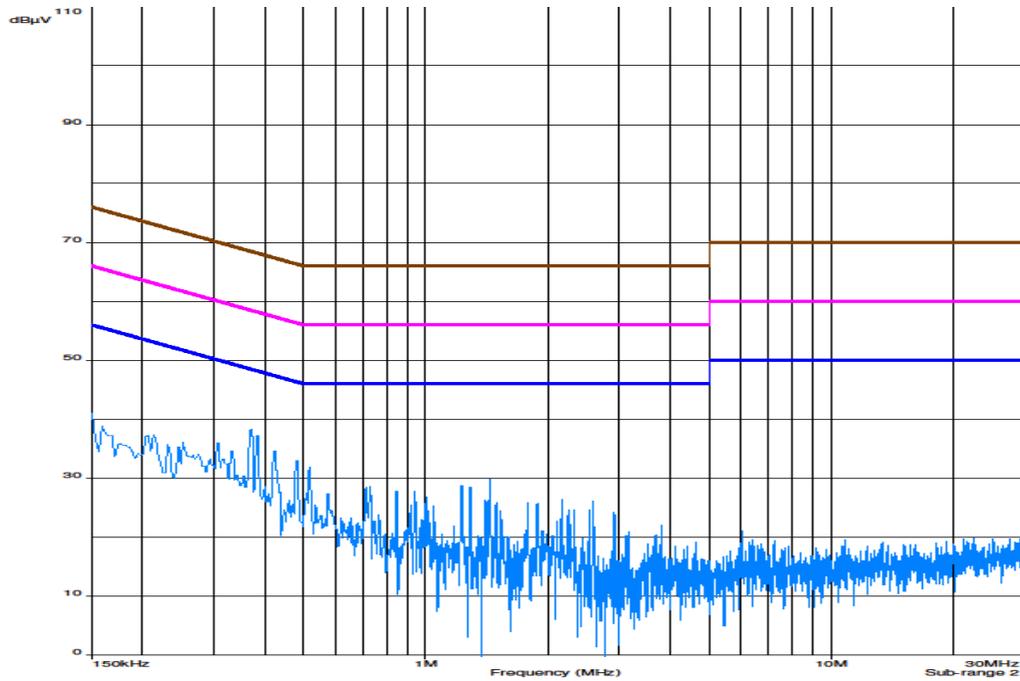

## 8.2 Spurious Emissions Radiated – Receiver Mode

### Description:

The measurement was performed in worst case. The EUT was not connected to the CMU 200. So the EUT performs a network search. In this mode all oscillators are active.

### Measurement:

Measurement parameters	
Detector:	Below 1 GHz Peak / QuasiPeak Above 1 GHz Peak / Average
Sweep time:	2 sec
Video bandwidth:	Below 1 GHz 100 kHz Above 1 GHz 1 MHz
Resolution bandwidth:	1 MHz
Span:	100 MHz Steps
Trace-Mode:	Max Hold

### Limits:

FCC		IC
CFR Part 15.109 CFR Part 2.1053		RSS Gen, Issue 2, Section 4.10 ICES-003 Issue 4
Spurious Emissions Radiated – Receiver Mode		
Frequency (MHz)	Field Strength (dB $\mu$ V/m)	Measurement distance (m)
30 – 88	30.0	10
88 - 216	33.5	10
216 – 960	36.0	10
Above 960	54.0	3


### Results:

Spurious Emission Level (dB $\mu$ V/m)		
Frequency (MHz)	Detector	Level (dB $\mu$ V/m)
No peaks detected!		
Measurement uncertainty		$\pm$ 3dB

**Result: Passed**

**Plots:**

**Plot 1: Receiver mode up to 30 MHz**

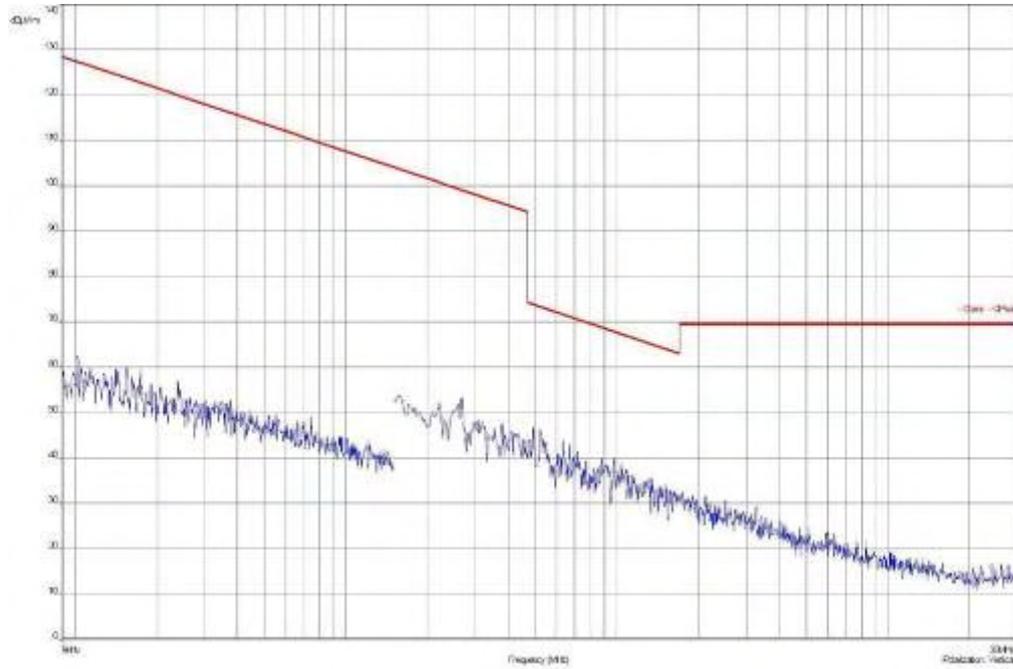

Plot 2: Receiver mode (30 MHz – 1 GHz)

**Common Information**


EUT: PM-0000-BV  
 Serial Number: CB5A1JYNDZ | IMEI: 00440245-009349-1  
 Test Description: FCC part 15 class B @ 10 m  
 Operating Conditions: GSM idle + charging  
 Operator Name: Hennemann  
 Comment: AC: 115 V / 60 Hz

**Scan Setup: STAN\_Fin [EMI radiated]**

Hardware Setup: Electric Field (NOS)  
 Receiver: [ESCI 3]  
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB


FCC\_10m(B)\_3

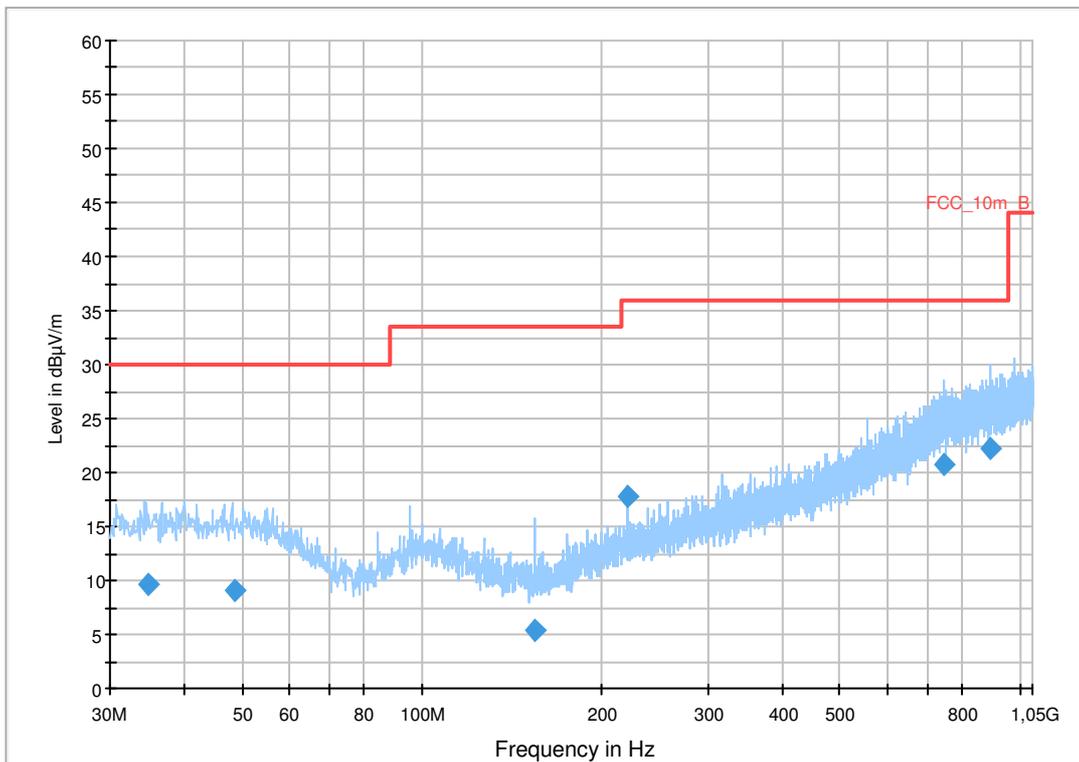


**Final Result 1**

Frequency (MHz)	Quasi Peak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polariza	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
34.770150	9.7	1000.0	120.00	163.0	H	350.0	13.0	20.3	30.0	
48.445950	9.2	1000.0	120.00	122.0	H	261.0	13.3	20.8	30.0	
154.156350	5.3	1000.0	120.00	170.0	V	100.0	9.0	28.2	33.5	
219.980250	17.8	1000.0	120.00	98.0	V	81.0	12.4	18.2	36.0	
746.046000	20.7	1000.0	120.00	170.0	H	190.0	23.6	15.3	36.0	
895.144050	22.2	1000.0	120.00	170.0	H	280.0	25.1	13.8	36.0	

Plot 2: Receiver mode (1 MHz – 12.75 GHz)

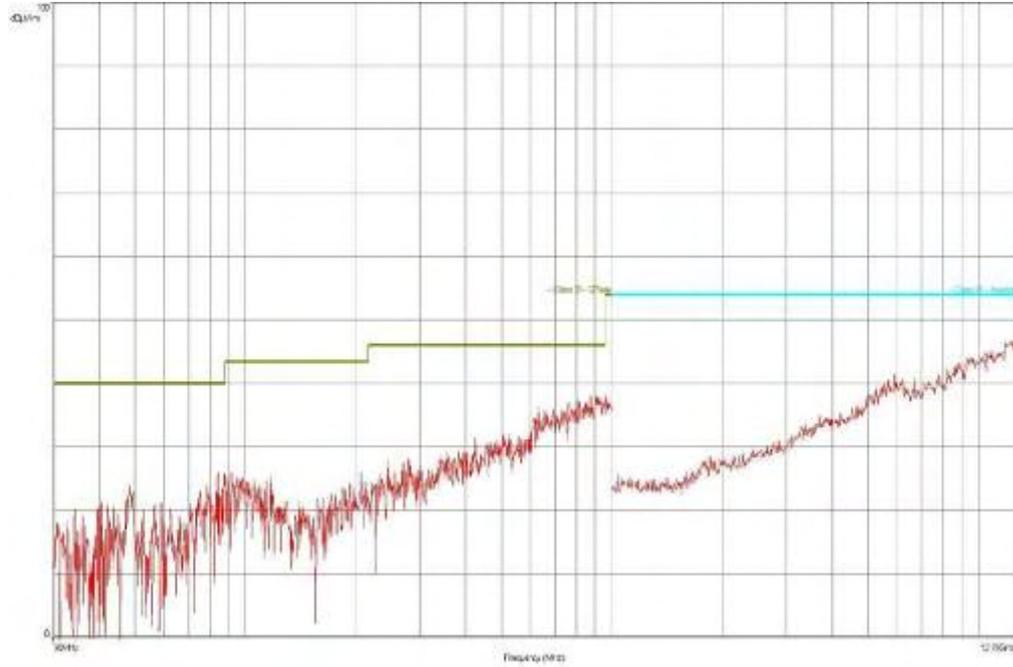

Plot 3: Receiver mode (12.75 GHz – 25 GHz)

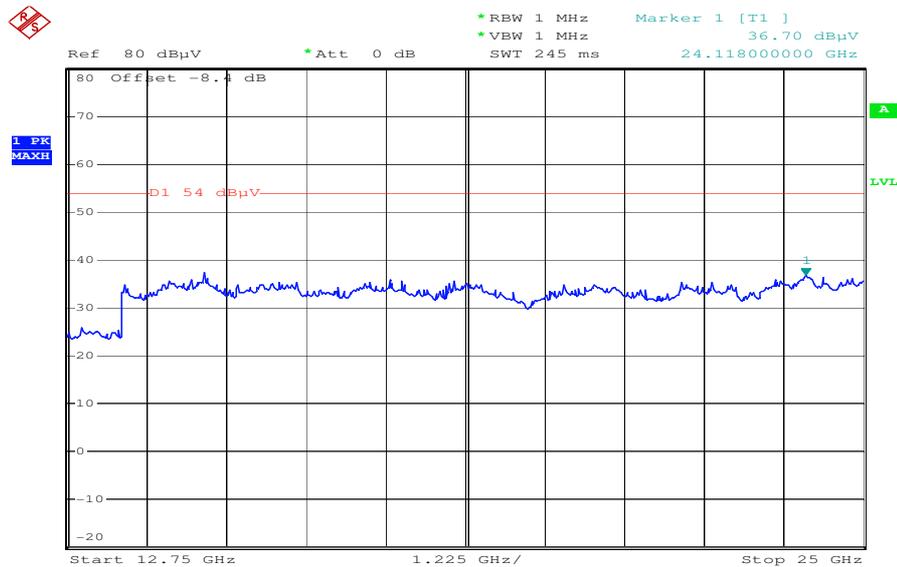

Date: 17.APR.2012 13:12:19

**Plot 4:** GSM idle, transmit HDMI data via docking station

### Common Information


EUT: PM-0000-BV  
Serial Number: CBA1JYNDZ 00440245-009349-1  
Test Description: FCC part 15 B class B @ 10 m  
Operating Conditions: GSM idle, HDMI traffic via docking station AI-0610 + charging  
Operator Name: Wolsdorfer  
Comment: AC 115 V / 60 Hz

### Scan Setup: STAN\_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)  
Receiver: [ESC1 3]  
Level Unit: dB $\mu$ V/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

FCC\_10m(B)

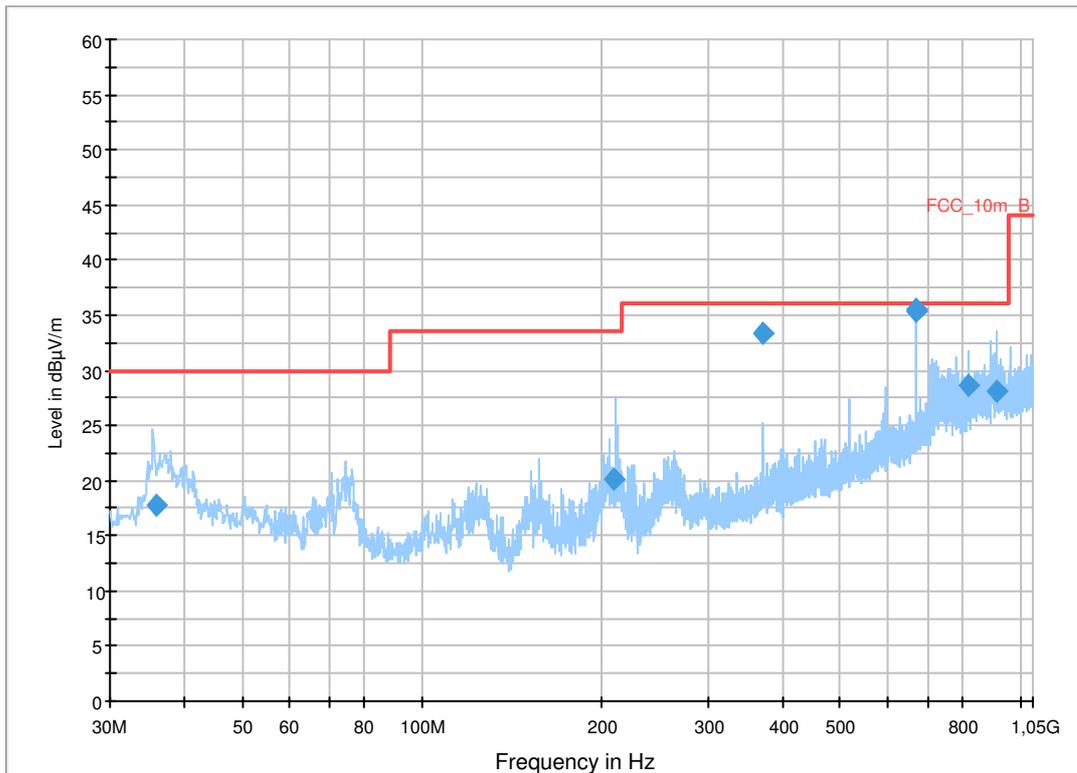

## Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
35.778300	17.8	1000.0	120.000	100.0	V	213.0	13.1	12.2	30.0	
209.712300	20.1	1000.0	120.000	348.0	H	84.0	12.0	13.4	33.5	
371.259750	33.4	1000.0	120.000	100.0	V	176.0	16.4	2.6	36.0	
668.257650	35.5	1000.0	120.000	146.0	H	90.0	21.6	0.5	36.0	
668.257650	35.4	1000.0	120.000	146.0	H	90.0	21.6	0.6	36.0	
816.799650	28.6	1000.0	120.000	100.0	H	90.0	24.1	7.4	36.0	
...	...	...	...	...	...	...	...	...	...	...

## Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]  
@ GPIB0 (ADR 20), SN 100083/003, FW 4.42

Signal Path: without Notch  
FW 1.0

Antenna: VULB 9163  
SN 9163-295, FW ---  
Correction Table (vertical): VULP6113  
Correction Table (horizontal): VULP6113  
Correction Table (vertical): Cable\_EN\_1GHz (1005)  
Correction Table (horizontal): Cable\_EN\_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]  
@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]  
@ GPIB0 (ADR 9), FW REV 3.12

## 9 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	45	Switch-Unit	3488A	HP Meßtechnik	2719A14505	300000368	g		
2	50	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP Meßtechnik	2920A04466	300000580	ne		
3	n. a.	software	SPS_PHE 1.4f	Spitzberger & Spieß	B5981; 5D1081;B5979	300000210	ne		
4	n. a.	EMI Test Receiver	ESCI 1166.5950.03	R&S	100083	300003312	k	04.01.2012	04.01.2014
5	n. a.	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0205	300003314	k	14.07.2011	14.07.2013
6	n. a.	Amplifier	JS42-00502650-28-5A	MITEQ	1084532	300003379	ev		
7	n. a.	Antenna Tower	Model 2175	ETS-LINDGREN	64762	300003745	izw		
8	n. a.	Positioning Controller	Model 2090	ETS-LINDGREN	64672	300003746	izw		
9	n. a.	Turntable Interface-Box	Model 105637	ETS-LINDGREN	44583	300003747	izw		
10	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	295	300003787	k		
11	n. a.	Spectrum-Analyzer	FSU26	R&S	200809	300003874	k	06.01.2012	06.01.2014
12	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
13	n. a.	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	8812-3088	300001032	vIKI!	11.05.2011	11.05.2013
14	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
15	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996		23.03.2009	
16	n. a.	Relais Matrix	3488A	HP Meßtechnik	2719A15013	300001156	ne		
17	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
18	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
19	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
20	n. a.	Switch / Control Unit	3488A	HP	2605e08770	300001443	ne		
21	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
22	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vIKI!	14.10.2011	14.10.2014
23	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	3000042xx	k	19.12.2011	19.12.2012

24	CR 79	Std. Gain Horn Antenna 26.5-40.0 GHz	V637	Narda	7911	300001751	ne		
25	n. a.	Spectrum Analyzer 9kHz to 30GHz - 140..+30dBm	FSP30	R&S	100886	300003575	k	07.09.2010	07.09.2012

**Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

## 10 Observations

No observations exceeding those reported with the single test cases have been made.

## Annex F Accreditation Certificate



Deutsche Akkreditierungsstelle GmbH  
German Accreditation Body

Entrusted according to Section 8 subsection 1, AkkStelleG in connection with Section 1, subsection 3, AkkStelleG DV  
Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition

### Accreditation



The Deutsche Akkreditierungsstelle GmbH (German Accreditation Body) attests that the testing laboratory

CETECOM ICT Services GmbH  
Unbertürlicher Straße 6-10  
66117 Saarbrücken

is competent under the terms of DIN EN ISO/IEC 17025:2005 to carry out tests in the following fields:

Wired communications and DCF

Acoustic

Radio

Short Range Devices (SRD)

RFID

WLAN and Richtfunk

Mobile radio (GSM / GPRS), Over the Air (OTA) Performance

Electromagnetic Compatibility (EMC) incl. Automotive

Product safety

SAR and Hearing Aid Compatibility (HAC)

Environmental simulation

Smart Card Terminals

Bluetooth

Wi-Fi-Services

The accreditation certificate shall only apply in connection with the notice of accreditation of 13.04.2011 with the accreditation number D-PL-12076-01 and is valid until 03.09.2014. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 82 pages.

Registration number of the certificate: D-PL-12076-01-01

Frankfurt am Main, 13.04.2011

Dipl.-Ing. (FH) Ralf Kasper  
Head of Department 2

This document is a translation. The definitive version is the original as per accreditation certificate.  
-----

Front side of certificate

Deutsche Akkreditierungsstelle GmbH

Office Berlin  
Sohlenerstr. 39  
10117 Berlin

Office Frankfurt am Main  
Gartenstraße 6  
60594 Frankfurt am Main

Office Braunschweig  
Bundesallee 100  
38116 Braunschweig

The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate designations of the cover sheet by the conformity assessment body mentioned above.

No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.

The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2635) and the Regulation (EC) No. 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 16). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.

The up-to-date state of membership can be retrieved from the following websites:  
EA: [www.european-accreditation.org](http://www.european-accreditation.org)  
ILAC: [www.ilac.org](http://www.ilac.org)  
IAF: [www.iafno.com](http://www.iafno.com)

Back side of certificate

### Note:

The current certificate including annex is published on our website (see link below) or may be received from CETECOM ICT Services on request.

[http://www.cetecom.com/fileadmin/de/CETECOM\\_D\\_Saarbruecken/accreditations\\_Jan\\_2010/DAKKS\\_Akkredi\\_Urk\\_EN17025-En\\_incl\\_Annex.pdf](http://www.cetecom.com/fileadmin/de/CETECOM_D_Saarbruecken/accreditations_Jan_2010/DAKKS_Akkredi_Urk_EN17025-En_incl_Annex.pdf)