

**TEST REPORT  
FROM  
RFI GLOBAL SERVICES LTD**

Test of: ST27i

To: OET Bulletin 65 Supplement C: (2001-01)  
and RSS-102 Issue 4 March 2010

Test Report Serial No:  
RFI-SAR-RP87695JD02A V2.0

This Test Report Is Issued Under The Authority  
Of Chris Guy, Head of Global Approvals:



(APPROVED SIGNATORY)

Checked By: Richelieu Quol



(APPROVED SIGNATORY)

Issue Date: 01 June 2012

Test Dates: 02 May to 13 May 2012

This report is issued in portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may not be reproduced other than in full, except with the prior written approval of RFI Global Services Ltd. The results in this report apply only to the sample(s) tested.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by RFI Global Services Ltd. is under license. Other trademarks and trade names are those of their respective owners.

This page has been left intentionally blank.

---

## TABLE OF CONTENTS

1. Customer Information .....	4
2. Equipment Under Test (EUT) .....	5
3. Test Specification, Methods and Procedures .....	11
4. Deviations from the Test Specification.....	13
5. Operation and Configuration of the EUT during Testing .....	14
6. Summary of Test Results .....	16
7. Measurements, Examinations and Derived Results .....	18
8. Measurement Uncertainty .....	36
Appendix 1. Test Equipment Used.....	43
Appendix 2. Measurement Methods.....	48
Appendix 3. SAR Distribution Scans .....	50
Appendix 4. Photographs .....	118
Appendix 5. System Check .....	152
Appendix 6. Simulated Tissues .....	160

**1. Customer Information**

<b>Company Name:</b>	Sony Mobile Communications AB
<b>Address:</b>	Nya Vattentorget 22188 Lund Sweden

## 2. Equipment Under Test (EUT)

### 2.1. Identification of Equipment Under Test (EUT)

<b>Description:</b>	Mobile Handset
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	ST27i
<b>Serial Number:</b>	CB5A1JZ6RY
<b>Type Number:</b>	PM-0090-BV
<b>IMEI Number:</b>	00440214-464621-7
<b>Hardware Version Number:</b>	AP1
<b>Software Version Number:</b>	6.0.B.3.20
<b>Hardware Revision of GSM Module:</b>	None Specified
<b>Software Revision of GSM Module:</b>	None Specified
<b>FCC ID Number:</b>	PY7PM-0090
<b>IC Number:</b>	4170B-PM-0090
<b>Country of Manufacture:</b>	China
<b>Date of Receipt:</b>	25 April 2012

#### Note(s):

This sample was used to perform WWAN 2G and 3G Head SAR evaluation measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna < 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

<b>Description:</b>	Mobile Handset
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	ST27i
<b>Serial Number:</b>	CB5A1JZ6S5
<b>Type Number:</b>	PM-0090-BV
<b>IMEI Number:</b>	00440214-464620-9
<b>Hardware Version Number:</b>	AP1
<b>Software Version Number:</b>	6.0.B.3.20
<b>Hardware Revision of GSM Module:</b>	None Specified
<b>Software Revision of GSM Module:</b>	None Specified
<b>FCC ID Number:</b>	PY7PM-0090
<b>IC Number:</b>	4170B-PM-0090
<b>Country of Manufacture:</b>	China
<b>Date of Receipt:</b>	25 April 2012

#### Note(s):

This sample was used to perform WWAN 2G and 3 G Body SAR evaluations only. The sample supports simultaneous transmission with the WWAN and WLAN antenna < 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

### Identification of Equipment Under Test (EUT) (Continued)

<b>Description:</b>	Mobile Handset
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	Xperia GO (ST27i)
<b>Serial Number:</b>	CB5A1JZ6Q3
<b>Type Number:</b>	PM-0090-BV
<b>IMEI Number:</b>	00440214-464614-2
<b>Hardware Version Number:</b>	AP1
<b>Software Version Number:</b>	s_atp_lotus_0_0_95_4
<b>Hardware Revision of GSM Module:</b>	None Specified
<b>Software Revision of GSM Module:</b>	None Specified
<b>FCC ID Number:</b>	PY7PM-0090
<b>IC Number</b>	4170B-PM-0090
<b>Country of Manufacture:</b>	China
<b>Date of Receipt:</b>	25 April 2012

#### Note(s):

This sample was used to perform WLAN SAR evaluation and conducted power measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna > 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01".

In order to perform conducted power measurement this sample back cover was removed and replaced with a modified back cover to allow for this. The detail below are for the modified back cover:

<b>Serial Number (Conducted Cover):</b>	CB5A1JZ8MF
<b>IMEI Number (Conducted Cover):</b>	00440214-501742-6

**Identification of Equipment Under Test (EUT) (Continued)**

<b>Description:</b>	Mobile Handset
<b>Brand Name:</b>	Sony
<b>Model Name or Number:</b>	Xperia GO (ST27i)
<b>Serial Number (Original Cover):</b>	CB5A1JZ6QZ
<b>Type Number:</b>	PM-0090-BV
<b>IMEI Number (Original Cover):</b>	00440214-464611-8
<b>Hardware Version Number:</b>	AP1
<b>Software Version Number:</b>	6.0.B.3.20
<b>Hardware Revision of GSM Module:</b>	None Specified
<b>Software Revision of GSM Module:</b>	None Specified
<b>FCC ID Number:</b>	PY7PM-0090
<b>IC Number:</b>	4170B-PM-0090
<b>Country of Manufacture:</b>	China
<b>Date of Receipt:</b>	25 April 2012

**Note(s):**

This sample was used to perform WWAN SAR conducted power measurements only. The sample supports simultaneous transmission with the WWAN and WLAN antenna > 5 cm apart. Wireless Personal Hotspot is also supported and was evaluated as per KDB 941225 D06 "Hot Spot SAR v01"

In order to perform conducted power measurement this sample back cover was removed and replaced with a modified back cover to allow for this. The detail below are for the modified back cover:

<b>Serial Number (Conducted Cover):</b>	CB5A1JZ8PC
<b>IMEI Number (Conducted Cover):</b>	00440214-501569-3

## 2.2. Description of EUT

The Equipment Under Test is a Smart Mobile Phone with GSM 2G Quad Band, 3G Dual band and Wi-Fi. The EUT has GPRS Class 33, UMTS FDD I and VIII With HSPA, WLAN 802.11 b/g/n and Bluetooth mode capabilities.

## 2.3. Modifications Incorporated in the EUT

EUT (IMEI: 00440214-464621-7) was setup for WWAN SAR Head only.

EUT (IMEI: 00440214-464620-9) was setup for WWAN SAR Body test only.

EUT (IMEI: 00440214-464611-8) with Back Cover (IMEI: 00440214-501569-3) was setup for WWAN conducted power measurements only.

EUT (IMEI: 00440214-464614-2) was setup for WLAN SAR test only.

EUT (IMEI: 00440214-464614-2) with Back Cover (IMEI: 00440214-501742-6) was setup for WLAN conducted power measurements only.

## 2.4. Accessories

The following accessories were supplied with the EUT during testing:

<b>Description:</b>	Personal Hands-Free Kit (PHF)
<b>Brand Name:</b>	Sony Ericsson
<b>Model Name or Number:</b>	MH750
<b>Serial Number:</b>	12060C160061850
<b>Cable Length and Type:</b>	~1.2m
<b>Country of Manufacture:</b>	China
<b>Connected to Port</b>	3.5mm Audio Jack

## 2.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

<b>Description:</b>	Wireless Communication Test Set
<b>Brand Name:</b>	Agilent
<b>Model Name or Number:</b>	8960 Series 10
<b>Serial Number:</b>	GB46311280
<b>Cable Length and Type:</b>	~4.0m Utiflex Cable
<b>Connected to Port:</b>	RF (Input / Output) Air Link

<b>Description:</b>	Wireless Communication Test Set
<b>Brand Name:</b>	Agilent
<b>Model Name or Number:</b>	8960 Series 10
<b>Serial Number:</b>	MY50261230
<b>Cable Length and Type:</b>	~4.0m Utiflex Cable
<b>Connected to Port:</b>	RF (Input / Output) Air Link

## 2.6. Additional Information Related to Testing

<b>Equipment Category</b>	GSM/GPRS/EDGE850, EGSM/GPRS/EDGE900, DCS/GPRS/EDGE1800, PCS1900/GPRSEDGE1900, UMTS FDD I, VIII WiFi802.11 b/g/n, Bluetooth.		
<b>Type of Unit</b>	Portable Transceiver		
<b>Intended Operating Environment:</b>	Within GSM, UMTS and WiFi Coverage		
<b>Transmitter Maximum Output Power Characteristics:</b>	GSM850	Communication Test Set was configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5.	
	PCS1900	Communication Test Set was configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0.	
	WiFi802.11b/g/n	Communication Test S/W was configured to allow the EUT to transmit at a maximum power of up to 15.1 dBm.	
	Bluetooth	<10 dBm	
<b>Transmitter Frequency Range:</b>	GSM850	824 to 849 MHz	
	PCS1900	1850 to 1910 MHz	
	WiFi802.11b/g/n	2412 to 2462 MHz	
<b>Transmitter Frequency Allocation of EUT When Under Test:</b>	<b>Channel Number</b>	<b>Channel Description</b>	<b>Frequency (MHz)</b>
	128	Low	824.2
	190	Middle	836.6
	251	High	848.8
	512	Low	1850.2
	661	Middle	1880
	810	High	1909.8
	1	Low	2412
	6	Middle	2437
	11	High	2462
<b>Modulation(s):</b>	GMSK (GSM/ GPRS): 217 Hz DBPSK, CCK (WiFi): 0 Hz		
<b>Modulation Scheme (Crest Factor):</b>	GSMK (GSM): 8.3 GMSK (GPRS): 2.67 DBPSK, CCK (WiFi): 1		
<b>Antenna Type:</b>	Internal integral		
<b>Antenna Length:</b>	Unknown		
<b>Number of Antenna Positions:</b>	2 fixed (GSM and WiFi) Integral antenna		
<b>Power Supply Requirement:</b>	3.7V		
<b>Battery Type(s):</b>	Li-ion		

### 3. Test Specification, Methods and Procedures

#### 3.1. Test Specification

<b>Reference:</b>	OET Bulletin 65 Supplement C: (2001-01)
<b>Title:</b>	Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
<b>Purpose of Test:</b>	To determine whether the equipment met the basic restrictions as defined in OET Bulletin 65 Supplement C: (2001-01) using the SAR averaging method as described in the test specification above.
<b>Reference:</b>	RSS-102 Issue 4 March 2010
<b>Title:</b>	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)
<b>Purpose of Test:</b>	To determine whether the equipment met the basic restrictions as defined in RSS-102 Issue 4 March 2010 using the SAR averaging method as described in the test specification above.

### 3.2. Methods and Procedures Reference Documentation

The methods and procedures used were as detailed in:

Federal Communications Commission, "Evaluating compliance with FCC Guidelines for human exposure to radio frequency electromagnetic fields", OET Bulletin 65 Supplement C, FCC, Washington, D.C, 20554, 2001.

Thomas Schmid, Oliver Egger and Neils Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transaction on microwave theory and techniques, Vol. 44, pp. 105-113, January 1996.

Neils Kuster, Ralph Kastle and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with know precision", IEICE Transactions of communications, Vol. E80-B, No.5, pp. 645-652, May 1997.

EN 62209-1: 2006

Title: Basic standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz).

EN 62209-2:2010

Human exposure to radio frequency fields from handheld and body mounted wireless communication devices — Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) (IEC 62209-2:2010)

KDB 248227 D01 "SAR measurements for 802.11a/b/g v01r02"

KDB 447498 D01 "Mobile Portable RF Exposure v04"

KDB 648474 D01 SAR Handsets Multi Xmitter and Ant v01r05"

KDB 941225 D03 " SAR Test Reduction GSM/GPRS/EDGE v01"

KDB 941225 D06 "Hot Spot SAR v01"

The version of DASY system used by RFI for SAR measurements is v4.7.

The SAR probe for the DASY v4.4 and higher has a validity of +/- 100 MHz from the spot frequency at which the system is calibrated.

The system validation performed at 900 MHz is valid for 800 MHz to 1000 MHz which covers the 850 MHz band. The probe calibration for SN3814 and SN: 1528 was performed at the spot frequencies of 750 MHz and 900 MHz. The SAR software selects the conversion factor based on the following attributes; 1. The operating frequency 2. The measured permittivity imported to the software and 3. The measured conductivity imported to the software.

The 900 MHz system check is applicable for the 850 band as this is within 100 MHz of the of the 850 MHz spot frequency.

As per FCC KDB pub 450824 for SAR probe calibration; The following procedures are recommended for DUT measurements at 150 MHz to 3 GHz to minimize probe calibration and tissue dielectric parameter discrepancies. Measurements exceeding 50 % of these intervals, in this case +/- 50 MHz, EUT frequency greater than or equal to 300 MHz, shall apply method 1 of the steps.

1) When the actual tissue dielectric parameters used for probe calibration are available the differences for relative permittivity and conductivity between probe calibration and routine measurements should each be less than or equal to 5 % while also satisfying the required +/- 5 % tolerances in target dielectric parameters.

The simulation liquid used satisfies both 835 MHz and 900 MHz target values for all channels in the GSM850 band. The SAR probe coverage and conversion factor has been calibrated to ensure this condition is met and the appropriate conversion factor is used in the frequency range for up to +/- 100 MHz.

### 3.3. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

#### 4. Deviations from the Test Specification

Test was performed as per KDB 648474 D01 "SAR Handsets Multi Xmitter and Ant v01r05", KDB 941225 D01/D03 " SAR Test Reduction GSM/GPRS/EDGE v01", KDB 941225 D01 "SAR test for 3G v02", KDB 248227 D01 "SAR measurements for 802.11a/b/g v01r02" and KDB 941225 D06 "Hot Spot SAR v01" according to the handset procedures in IEEE Std 1528-2003 and OET Bulletin 65 Supplement C 01-01. The assessment for Personal Wireless Hotspot was also evaluated as per the FCC KDB 941225 D06 "Hot Spot SAR v01".

For technologies bands supporting personal hotspot mode, SAR was evaluated on all the sides and surfaces within 25mm of the transmitting antenna (WWAN or WLAN) as per FCC KDB 941225 D06 "Hot Spot SAR v01".

SAR test was performed in the middle channels for WWAN and WLAN. The worst case configuration for both Head and Body test was evaluated in the low and high channels.

Simultaneous transmission was not evaluated as the sum of the individual SAR for WWAN and WLAN was < 1.6 W/kg.

GPRS class33 / EDGE class 33 uplink setup of 1-uplink; 2-uplink, 3-uplink and 4-uplink were all evaluated to find the setting with the highest power reference point (unit v/m) as per the DASY4 system. 3-uplink was found to give the highest power reference point measurement on the DASY4 system (unit v/m). All settings were performed with the device in a fixed position rear facing phantom at 0mm separation to ensure there were no positioning errors. The following values were measured relative to the uplink settings:

<b>GPRS Mode</b>	<b>GPRS850 Power (v/m)</b>	<b>GPRS1900 Power (v/m)</b>
1 uplink	25.15	11.08
2 uplink	25.07	11.2
<b>3 uplink</b>	<b>26.11</b>	<b>11.67</b>
4 uplink	25.43	11.36
<b>EDGE Mode</b>	<b>EDGE850 Power (v/m)</b>	<b>EDGE1900 Power (v/m)</b>
1 uplink	25.14	11.06
2 uplink	25.1	11.19
<b>3 uplink</b>	<b>26.12</b>	<b>11.64</b>
4 uplink	25.4	11.3

Note: Power reference point measurements are from the DASY4 system and used to check the device power drift although the units are v/m. For informational purpose to ensure the worst case uplink time slot is also verified by the DASY4 SAR system, this was use as per above comment at a fixed point.

## 5. Operation and Configuration of the EUT during Testing

### 5.1. Operating Modes

The EUT was tested in the following operating mode(s) unless otherwise stated:

- GSM850 – Voice allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5.
- GPRS/EDGE850 – Data allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 5. Tested using 3 Uplink time slots with CS1 and MCS4 for GPRS and EDGE respectively.
- PCS1900 – Voice allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0.
- GPRS/EDGE1900 – Data allocated mode with Communication Test Set configured to allow the EUT to transmit at a maximum power using Power Control Level (PCL) setting of 0. Tested using 3 Uplink time slots with CS1 and MCS4 for GPRS and EDGE respectively.

GSM85 – Power Table Settings used for Test Set	
Power Control Level PCL	Nominal Power (dBm)
0 ... 2	39
3	37
4	35
<b>5</b>	<b>33</b>
6	31
7	29
8	27
9	25
10	23
11	21
12	19
13	17
14	15
15	13
16	11
17	9
18	7
19 ... 31	5

PCS1900 – Power Table Settings used for Test Set	
Power Control Level PCL	Nominal Power (dBm)
22 ... 29	Reserved
30	33
31	32
<b>0</b>	<b>30</b>
1	28
2	26
3	24
4	22
5	20
6	18
7	16
8	14
9	12
10	10
11	8
12	6
13	4
14	2
15	0
16 ... 21	Reserved

- WiFi802.11b/g/n Data allocated mode using 'HyperTerminal' software to excise mode 'b', 'g' and 'n', with maximum power of up to 15.1dBm for 'b' mode and 14.9dBm for 'g' and 15.0dBm for 'n' modes.

## 5.2. Configuration and Peripherals

The EUT was tested in the following configuration(s) unless otherwise stated:

- Test performed with the EUT in a Standalone Battery Powered configuration.
- GPRS class 33 uplink setup of 1-uplink, 2-uplink, 3-uplink and 4-uplink were all evaluated to find the setting with the highest power reference measurements. 3-uplink was found to give the highest power reference measurement on the DASY4 system. All testing were performed with the device in a fixed position to ensure there were no positioning errors.
- The applied configurations for body-worn orientations where the corresponding edge(s) is closest to the user with the most conservative exposure condition were all evaluated at 10 mm from the body as Personal Hotspot mode was supported. Therefore SAR test at 15 mm for configuration that overlapped with the Personal hotspot configuration were not evaluated.

### Head Configuration

- a) The handset was placed in a normal operating position with the centre of the ear-piece aligned with the ear canal on the phantom.
- b) With the ear-piece touching the phantom the centre line of the handset was aligned with an imaginary plane (X and Y axis) consisting of three lines connecting both ears and the mouth.
- c) For the cheek position the handset was gradually moved towards the cheek until any point of the mouth-piece or keypad touched the cheek.
- d) For the tilted position the EUT was positioned as for the cheek position, and then the horizontal angle was increased by fifteen degrees (the phone keypad was moved away from the cheek by fifteen degrees).
- e) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- f) The device was keyed to operate continuously in the transmit mode for the duration of the test.
- g) The location of the maximum spatial SAR distribution (hot spot) was determined relative to the handset and its antenna.
- h) The EUT was transmitting at full power throughout the duration of the test powered by a fully charged battery.

### Body Configuration

- a) The EUT was placed in a normal operating position where the centre of EUT was aligned with the centre reference point on the flat section of the 'SAM' phantom.
- b) With the EUT touching the phantom at an imaginary centre line. The EUT was aligned with a marked plane (X and Y axis) consisting of two lines.
- c) For the touch-safe position the handset was gradually moved towards the flat section of the 'SAM' phantom until any point of the EUT touched the phantom.
- d) For position(s) greater than 0mm separation the EUT was positioned as per the touch-safe position, and then the vertical height was decreased/adjusted as required.
- e) SAR measurements were evaluated at maximum power and the unit was operated for an appropriate period prior to the evaluation in order to minimise the drift.
- f) The device was keyed to operate continuously in the transmit mode for the duration of the test.
- g) The location of the maximum spatial SAR distribution (hot spot) was determined relative to the handset and its antenna.
- h) The EUT was transmitting at full power throughout the duration of the test powered by a fully charged battery.

## 6. Summary of Test Results

Test Name	Specification Reference	Result
Specific Absorption Rate-GSM 850 Head Configuration 1g	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GPRS 850 Hotspot Mode Configuration 1g MPR Enabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-EDGE850 Hotspot Mode Configuration 1g MPR Enabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GSM 850 Body-worn Configuration 1g MPR Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-EDGE850 Body-worn Configuration 1g MPR Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-PCS 1900 Head Configuration 1g	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GPRS 1900 Hotspot Mode Configuration 1g MPR Enabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-EDGE1900 Hotspot Mode Configuration 1g MPR Enabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-PCS 1900 Body-worn Configuration 1g MPR Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-GPRS 1900 Body-worn Configuration 1g MPR Disabled	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-Wi-Fi 2450 Head Configuration 1g	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied
Specific Absorption Rate-Wi-Fi 2450 Hotspot Configuration 1g	OET Bulletin 65 Supplement C: (2001-01) RSS-102 Issue 4 March 2010	Complied

**SAR Individual Transmitter Evaluation**

device, mode	Frequency, (MHz)	Phantom Configuration	P <sub>x</sub> (mW)	P <sub>REF</sub> (mW)	single SAR, W/kg	Remarks
WWAN, GSM	850	Rear	2239	60/f	0.806	Routine Evaluation
WWAN, GSM	1900	Touch Left	1175	60/f	1.03	Routine Evaluation
WLAN, WiFi802.11b/g	2450	Touch Right	32	60/f	0.172	Routine Evaluation
BT, Bluetooth	2400	-	~10	12	:=0	{P <sub>BT</sub> ≤ 2P <sub>REF</sub> } {d <sub>WWAN, BT</sub> > 5cm}

**Note(s):**

1. Simultaneous transmission was not evaluated as the sum of the individual SAR for WWAN and WLAN was < 1.6 W/kg.
2. Bluetooth transmitter thresholds output power "P<sub>Ref</sub> = 12 mW as listed in KDB 648474.
3. P<sub>x</sub>: power level measured by RFI.
4. Single SAR value measured by RFI.
5. The "Antenna-to-Antenna distance and Antenna-to-User distance were provided by the customer.

**SAR Simultaneous Transmitter Evaluation**

(x,y)	D(x,y) cm	L(x,y) cm	SPLSR <sub>xy</sub>	Sim-Tx SAR	Remarks
(WWAN <sub>GSM</sub> , BT)	<5	N/A	N/A	N/A	{no stand-alone SAR for BT}
(WWAN <sub>GSM</sub> , Wi-Fi)	<5	N/A	N/A	N/A	{Σ <sub>WWAN, WLAN</sub> < 1.6 W/kg}

**6.1. Location of Tests**

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG United Kingdom

## 7. Measurements, Examinations and Derived Results

### 7.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

**7.2. Test Results**

For All SAR measurement in this report the SAR limit tested to is 1.6 W/kg

**7.2.1. Specific Absorption Rate - GSM 850 Head Configuration 1g****Test Summary:**

Tissue Volume:	1g
Maximum Level (W/kg):	0.579

**Environmental Conditions:**

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	24.0 to 24.0

**Results:**

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR	Measured Level (W/kg)	Note(s)	Modulation
Touch	Left	190	24.5	N/A	0.447	1	GMSK
Tilt	Left	190	24.5	N/A	0.311	1	GMSK
Touch	Right	190	24.5	N/A	0.430	1	GMSK
Tilt	Right	190	24.5	N/A	0.326	1	GMSK
Touch	Left	128	24.5	N/A	0.357	1	GMSK
Touch	Left	251	24.5	N/A	0.579	1	GMSK

**Note(s);**

1. Voice

### 7.2.2. Specific Absorption Rate - GPRS 850 Hotspot Mode Configuration 1g Power Reduction Enabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.432

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	23.0 to 23.0

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Front of EUT Facing Phantom	Flat (SAM)	190	21.7	3.1	0.331	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	190	21.7	3.1	0.432	1, 2	GMSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	190	21.7	3.1	0.212	1, 2	GMSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	190	21.7	3.1	0.224	1, 2	GMSK
Bottom of EUT Facing Phantom	Flat (SAM)	190	21.7	3.1	0.064	1, 2	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

### 7.2.3. Specific Absorption Rate - EDGE 850 Hotspot Mode Configuration 1g Power Reduction Enabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.542

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	23.0 to 23.0

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Back of EUT Facing Phantom	Flat (SAM)	190	21.7	3.1	0.451	1, 2, 3, 4	GMSK
Back of EUT Facing Phantom	Flat (SAM)	128	21.7	3.1	0.340	1, 2, 3, 4	GMSK
Back of EUT Facing Phantom	Flat (SAM)	251	21.7	3.1	0.542	1, 2, 3, 4	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.
3. Back surface of EUT (Back of EUT Facing phantom) configuration from GPRS is used on EDGE body.
4. SAR measurements performed using GMSK as per FCC KDB to minimize SAR measurement error due to higher peak-to-average (PAR) power ratios inherent in 8-PSK. MCS4 was used on the GSM communication test set to achieve this.

#### 7.2.4. Specific Absorption Rate GSM 850 Body-Worn Configuration 1g Power Reduction Disabled Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.514

#### Environmental Conditions:

Temperature Variation in Lab (°C):	24.0 to 24.0
Temperature Variation in Liquid (°C):	22.1 to 22.1

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Back of EUT Facing Phantom	Flat (SAM)	190	24.5	0	0.514	1, 2	GMSK

#### Note(s):

1. Voice - SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
2. Back surface of EUT (Back of EUT Facing phantom) configuration from GPRS is used on GSM body

### 7.2.5. Specific Absorption Rate - EDGE850 Body-Worn Configuration 1g Power Reduction Disabled Test Summary:

**Tissue Volume:** 1g

**Maximum Level (W/kg):** 0.806

#### Environmental Conditions:

**Temperature Variation in Lab (°C):** 23.0 to 23.0

**Temperature Variation in Liquid (°C):** 23.0 to 23.0

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Back of EUT Facing Phantom	Flat (SAM)	190	24.8	0	0.602	1, 2, 3, 4	GMSK
Back of EUT Facing Phantom	Flat (SAM)	128	24.8	0	0.427	1, 2, 3, 4	GMSK
Back of EUT Facing Phantom	Flat (SAM)	251	24.8	0	0.806	1, 2, 3, 4	GMSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	251	24.8	0	0.684	1, 2, 3, 4	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots. Mode test as EDGE give a higher value of SAR for 10mm separation than GPRS.
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
3. Back surface of EUT (Back of EUT Facing phantom) Configuration (with power reduction enabled) on EDGE/GPRS body is used on EDGE body (with power reduction disabled).
4. SAR measurements performed using GMSK as per FCC KDB to minimize SAR measurement error due to higher peak-to-average (PAR) power ratios inherent in 8-PSK. MCS4 was used on the GSM communication test set to achieve this

### 7.2.6. Specific Absorption Rate - PCS 1900 Head Configuration 1g Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	1.030

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	21.9 to 21.9

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Touch	Left	661	21.7	N/A	0.997	1	GMSK
Touch	Left	512	21.7	N/A	0.980	1	GMSK
Touch	Left	810	21.7	N/A	1.030	1	GMSK
Tilt	Left	661	21.7	N/A	0.367	1	GMSK
Touch	Right	661	21.7	N/A	0.591	1	GMSK
Tilt	Right	661	21.7	N/A	0.400	1	GMSK

#### Note(s):

1. Voice

### 7.2.7. Specific Absorption Rate- GPRS 1900 Hotspot Mode Configuration 1g Power Reduction Enabled Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.623

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	22.3 to 22.3

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Front of EUT Facing Phantom	Flat (SAM)	661	18.5	3.4	0.356	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	661	18.5	3.4	0.623	1, 2	GMSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	661	18.5	3.4	0.127	1, 2	GMSK
Right Hand Side of EUT Facing Phantom	Flat (SAM)	661	18.5	3.4	0.078	1, 2	GMSK
Bottom of EUT Facing Phantom	Flat (SAM)	661	18.5	3.4	0.411	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	512	18.4	3.4	0.556	1, 2	GMSK
Back of EUT Facing Phantom	Flat (SAM)	810	18.7	3.4	0.594	1, 2	GMSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	661	18.5	3.4	0.622	1, 2	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.

### 7.2.8. Specific Absorption Rate - EDGE1900 Hotspot Mode Configuration 1g Power Reduction Enabled Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.563

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	21.9 to 21.9

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Back of EUT Facing Phantom	Flat (SAM)	661	18.5	3.4	0.563	1, 2, 3, 4	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.
3. Back surface of EUT (Back of EUT Facing phantom) configuration from GPRS is used on EDGE body.
4. SAR measurements performed using GMSK as per FCC KDB to minimize SAR measurement error due to higher peak-to-average (PAR) power ratios inherent in 8-PSK. MCS4 was used on the GSM communication test set to achieve this..

### 7.2.9. Specific Absorption Rate - PCS 1900 Body-Worn Configuration 1g Power Reduction Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.275

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	21.9 to 21.9

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Back of EUT Facing Phantom	Flat (SAM)	661	21.7	N/A	0.275	1, 2	GMSK

#### Note(s):

1. Voice - SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
2. Back surface of EUT (Back of EUT Facing phantom) configuration from GPRS is used on PCS body

### 7.2.10. Specific Absorption Rate - GPRS 1900 Body-Worn Configuration 1g Power Reduction Disabled

#### Test Summary:

Tissue Volume:	1g
Maximum Level (W/kg):	0.624

#### Environmental Conditions:

Temperature Variation in Lab (°C):	23.0 to 23.0
Temperature Variation in Liquid (°C):	22.3 to 22.3

#### Results:

EUT Position	Phantom Configuration	Channel Number	Uplink Measured Burst Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Back of EUT Facing Phantom	Flat (SAM)	661	21.9	N/A	0.604	1, 2, 3	GMSK
Back of EUT Facing Phantom	Flat (SAM)	512	21.8	N/A	0.575	1, 2, 3	GMSK
Back of EUT Facing Phantom	Flat (SAM)	810	22.1	N/A	0.624	1, 2, 3	GMSK

#### Note(s):

1. Data - SAR measurements were performed using 3 uplink timeslots. Mode test as GPRS give a higher value of SAR for 10mm separation than EDGE
2. SAR measurements were performed with the closest edge of the EUT at a separation distance of 15mm from the 'SAM' phantom flat section.
3. Back surface of EUT (Back of EUT Facing phantom) Configuration (with power reduction enabled) on EDGE/GPRS body is used on GPRS body (with power reduction disabled).

### 7.2.11.Specific Absorption Rate - Wi-Fi 2450 Head Configuration 1g Test Summary:

**Tissue Volume:** 1g

**Maximum Level (W/kg):** 0.172

#### Environmental Conditions:

**Temperature Variation in Lab (°C):** 24.0 to 24.0

**Temperature Variation in Liquid (°C):** 22.8 to 22.8

#### Results:

EUT Position	Phantom Configuration	Channel Number	Measured Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Modulation
Touch	Left	6	15.1	N/A	0.072	1	DBPSK
Tilt	Left	6	15.1	N/A	0.012	1	DBPSK
Touch	Right	6	15.1	N/A	0.129	1	DBPSK
Tilt	Right	6	15.1	N/A	0.036	1	DBPSK
Touch	Right	6	14.8	N/A	0.087	2	BPSK
Touch	Right	6	14.6	N/A	0.090	3	BPSK
Touch	Right	1	14.8	N/A	0.098	1	DBPSK
Touch	Right	11	14.7	N/A	0.172	1	DBPSK

#### Note(s):

1. 802.11b 1Mbps
2. 802.11g 6Mbps
3. 802.11n 6.5Mbps

### 7.2.12. Specific Absorption Rate - Wi-Fi 2450 Hotspot Mode Configuration 1g Test Summary:

Tissue Volume: 1g

Maximum Level (W/kg): 0.137

#### Environmental Conditions:

Temperature Variation in Lab (°C): 24.0 to 24.0

Temperature Variation in Liquid (°C): 22.8 to 22.8

#### Results:

EUT Position	Phantom Configuration	Channel Number	Measured Avg. Power (dBm)	MPR (dB)	Measured Level (W/kg)	Note(s)	Result
Front of EUT Facing Phantom	Flat (SAM)	6	15.1	N/A	0.019	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	6	15.1	N/A	0.102	1, 2	DBPSK
Left Hand Side of EUT Facing Phantom	Flat (SAM)	6	15.1	N/A	0.066	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	6	14.8	N/A	0.079	1, 3	BPSK
Back of EUT Facing Phantom	Flat (SAM)	6	14.6	N/A	0.077	1, 4	BPSK
Back of EUT Facing Phantom	Flat (SAM)	1	14.8	N/A	0.095	1, 2	DBPSK
Back of EUT Facing Phantom	Flat (SAM)	11	14.7	N/A	0.137	1, 2	DBPSK
Back of EUT Facing Phantom With PHF	Flat (SAM)	11	14.7	N/A	0.126	1, 2	DBPSK

#### Note(s):

1. EUT Supports Hotspot; SAR measurements were performed with the closest edge of the EUT at a separation distance of 10mm from the 'SAM' phantom flat section.
2. 802.11b 1Mbps
3. 802.11g 6Mbps
4. 802.11n 6.5Mbps

### 7.2.13. Conducted Average Power Measurement 2G: Power Reduction Disabled GSM850

Channel Number	Frequency (MHZ)	Power before Test (dBm)	Uplink Meas. Burst Avg. Power (dBm)	Note
128	824.2	33.5	24.5	Conducted
190	836.6	33.5	24.5	Conducted
251	848.8	33.5	24.5	Conducted

#### GPRS850 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	33.5	30.6	29.1	27.7	Conducted, GMSK
190	836.6	33.5	30.6	29.1	27.7	Conducted, GMSK
251	848.8	33.5	30.6	29.1	27.7	Conducted, GMSK

#### GPRS850 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	24.5	24.6	<b>24.8</b>	24.7	Conducted, GMSK
190	836.6	24.5	24.6	<b>24.8</b>	24.7	Conducted, GMSK
251	848.8	24.5	24.6	<b>24.8</b>	24.7	Conducted, GMSK

#### EGPRS850 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	33.5	30.6	29.1	27.7	Conducted, GMSK
190	836.6	33.5	30.6	29.1	27.7	Conducted, GMSK
251	848.8	33.5	30.6	29.1	27.7	Conducted, GMSK

#### EGPRS850 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	24.5	24.6	<b>24.8</b>	24.7	Conducted, GMSK
190	836.6	24.5	24.6	<b>24.8</b>	24.7	Conducted, GMSK
251	848.8	24.5	24.6	<b>24.8</b>	24.7	Conducted, GMSK

#### Note:

##### Scale factor for uplink time slot:

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03$  dB
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02$  dB
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26$  dB
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01$  dB

### 7.2.14. Conducted Average Power Measurement 2G: Power Reduction Enabled GPRS850 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	30.4	27.5	26.0	24.5	Conducted, GMSK
190	836.6	30.4	27.5	26.0	24.5	Conducted, GMSK
251	848.8	30.4	27.5	26.0	24.5	Conducted, GMSK

### GPRS850 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	21.4	21.5	<b>21.7</b>	21.5	Conducted, GMSK
190	836.6	21.4	21.5	<b>21.7</b>	21.5	Conducted, GMSK
251	848.8	21.4	21.5	<b>21.7</b>	21.5	Conducted, GMSK

### EGPRS850 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	30.4	27.5	26.0	24.5	Conducted, GMSK
190	836.6	30.4	27.5	26.0	24.5	Conducted, GMSK
251	848.8	30.4	27.5	26.0	24.5	Conducted, GMSK

### EGPRS850 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
128	824.2	21.4	21.5	<b>21.7</b>	21.5	Conducted, GMSK
190	836.6	21.4	21.5	<b>21.7</b>	21.5	Conducted, GMSK
251	848.8	21.4	21.5	<b>21.7</b>	21.5	Conducted, GMSK

### Note:

#### Scale factor for uplink time slot:

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03$  dB
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02$  dB
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26$  dB
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01$  dB

### 7.2.15. Conducted Average Power Measurement 2G: Power Reduction Disabled PCS1900

Channel Number	Frequency (MHZ)	GSM TX Power before Test (dBm)	Uplink Meas. Burst Avg. Power (dBm)	Note
512	1850.2	30.7	21.7	Conducted
661	1880.0	30.7	21.7	Conducted
810	1909.8	30.7	21.7	Conducted

#### GPRS1900 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	30.7	27.6	26.1	24.6	Conducted, GMSK
661	1880.0	30.6	27.6	26.2	24.7	Conducted, GMSK
810	1909.8	30.6	27.7	26.4	24.9	Conducted, GMSK

#### GPRS1900 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	21.7	21.6	21.8	21.6	Conducted, GMSK
661	1880.0	21.6	21.6	21.9	21.7	Conducted, GMSK
810	1909.8	21.6	21.7	22.1	21.9	Conducted, GMSK

#### EGPRS1900 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	30.7	27.6	26.1	24.6	Conducted, GMSK
661	1880.0	30.6	27.6	26.2	24.7	Conducted, GMSK
810	1909.8	30.6	27.7	26.4	24.9	Conducted, GMSK

#### EGPRS1900 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	21.7	21.6	21.8	21.6	Conducted, GMSK
661	1880.0	21.6	21.6	21.9	21.7	Conducted, GMSK
810	1909.8	21.6	21.7	22.1	21.9	Conducted, GMSK

#### Note:

##### Scale factor for uplink time slot:

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03 \text{ dB}$
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02 \text{ dB}$
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26 \text{ dB}$
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01 \text{ dB}$

### 7.2.16. Conducted Average Power Measurement 2G: Power Reduction Enabled GPRS1900 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	27.3	24.2	22.7	21.2	Conducted, GMSK
661	1880.0	27.3	24.3	22.8	21.3	Conducted, GMSK
810	1909.8	27.4	24.5	23.0	21.5	Conducted, GMSK

### GPRS1900 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	18.3	18.2	<b>18.4</b>	18.2	Conducted, GMSK
661	1880.0	18.3	18.3	18.5	18.3	Conducted, GMSK
810	1909.8	18.4	18.5	<b>18.7</b>	18.5	Conducted, GMSK

### EGPRS1900 - Measured Average Power Without consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	27.3	24.2	22.7	21.2	Conducted, GMSK
661	1880.0	27.3	24.3	22.8	21.3	Conducted, GMSK
810	1909.8	27.4	24.5	23.0	21.5	Conducted, GMSK

### EGPRS1900 - Calculated Value With consideration for Uplink time slots:

Channel Number	Frequency (MHZ)	Power before Test (dBm) 1Uplink	Power before Test (dBm) 2Uplink	Power before Test (dBm) 3Uplink	Power before Test (dBm) 4Uplink	Note
512	1850.2	18.3	18.2	<b>18.4</b>	18.2	Conducted, GMSK
661	1880.0	18.3	18.3	18.5	18.3	Conducted, GMSK
810	1909.8	18.4	18.5	<b>18.7</b>	18.5	Conducted, GMSK

### Note:

#### Scale factor for uplink time slot:

- 1 Uplink: time slot ratio = 8:1 =>  $10 \cdot \log(8/1) = 9.03$  dB
- 2 Uplink: time slot ratio = 8:2 =>  $10 \cdot \log(8/2) = 6.02$  dB
- 3 Uplink: time slot ratio = 8:3 =>  $10 \cdot \log(8/3) = 4.26$  dB
- 4 Uplink: time slot ratio = 8:4 =>  $10 \cdot \log(8/4) = 3.01$  dB

### 7.2.17. Conducted Power Measurements Wi-Fi 802.11b/g/n (FCC Channels) 802.11b/g

Channel Number	Frequency (MHZ)	TX Power before Test (dBm)	Note
1	2412.0	14.8	<b>2.4GHz 802.11b</b> (1Mbps)
6	2437.0	15.1	
11	2462.0	<b>14.7</b>	
1	2412.0	13.7	<b>2.4GHz 802.11b</b> (11Mbps)
6	2437.0	14.0	
11	2462.0	13.8	
1	2412.0	14.4	<b>2.4GHz 802.11g</b> (6Mbps)
6	2437.0	14.8	
11	2462.0	<b>14.9</b>	
1	2412.0	11.5	<b>2.4GHz 802.11g</b> (54Mbps)
6	2437.0	11.9	
11	2462.0	12.0	

### 802.11n

Channel Number	Frequency (MHZ)	TX Power before Test (dBm)	Note
1	2412.0	14.2	<b>2.4GHz 802.11n</b> (MCS0 6.5Mbps)
6	2437.0	14.6	
11	2462.0	<b>15.0</b>	
1	2412.0	11.4	<b>2.4GHz 802.11n</b> (MCS7 65Mbps)
6	2437.0	11.8	
11	2462.0	<b>12.0</b>	

## 8. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Test Name	Confidence Level	Calculated Uncertainty
Specific Absorption Rate-GSM 850 Head Configuration 1g	95%	19.94
Specific Absorption Rate-GSM/GPRS/EDGE850 Body Configuration 1g	95%	20.07
Specific Absorption Rate-PCS 1900 Head Configuration 1g	95%	20.72
Specific Absorption Rate-PCS / GPRS/EDGE1900 Body Configuration 1g	95%	20.00
Specific Absorption Rate-Wi-Fi 2450 Head Configuration 1g	95%	19.47
Specific Absorption Rate-Wi-Fi 2450 Body Configuration 1g	95%	19.90

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

**8.1. Specific Absorption Rate Uncertainty - GSM 850 / UMTS FDD V Head Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.400	2.400	normal (k=1)	1.0000	1.0000	2.400	2.400	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.920	4.920	normal (k=1)	1.0000	0.6400	3.149	3.149	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.970	4.970	normal (k=1)	1.0000	0.6000	2.982	2.982	5
	Combined standard uncertainty			t-distribution			10.17	10.17	>250
	Expanded uncertainty			k = 1.96			19.94	19.94	>250

**8.2. Specific Absorption Rate-GSM/GPRS/EDGE850/UMTS FDD V 850 Body Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration /Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.900	2.900	normal (k=1)	1.0000	1.0000	2.900	2.900	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.690	4.690	normal (k=1)	1.0000	0.6400	3.002	3.002	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.860	4.860	normal (k=1)	1.0000	0.6000	2.916	2.916	5
	Combined standard uncertainty			t-distribution			10.24	10.24	>250
	Expanded uncertainty			k = 1.96			20.07	20.07	>250

### 8.3. Specific Absorption Rate-PCS 1900 Head Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with Regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	3.800	3.800	normal (k=1)	1.0000	1.0000	3.800	3.800	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.900	4.900	normal (k=1)	1.0000	0.6400	3.136	3.136	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.880	4.880	normal (k=1)	1.0000	0.6000	2.928	2.928	5
	Combined standard uncertainty			t-distribution			10.57	10.57	>200
	Expanded uncertainty			k = 1.96			20.72	20.72	>200

8.4. Specific Absorption Rate-PCS / GPRS/EDGE1900 Body Configuration 1g									
Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	1.730	1.730	Rectangular	1.7321	1.0000	0.999	0.999	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.500	2.500	normal (k=1)	1.0000	1.0000	2.500	2.500	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.940	4.940	normal (k=1)	1.0000	0.6400	3.162	3.162	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.980	4.980	normal (k=1)	1.0000	0.6000	2.988	2.988	5
	Combined standard uncertainty			t-distribution			10.20	10.20	>250
	Expanded uncertainty			k = 1.96			20.00	20.00	>250

**8.5. Specific Absorption Rate-Wi-Fi 2450 Head Configuration 1g**

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.000	2.000	normal (k=1)	1.0000	1.0000	2.000	2.000	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.410	4.410	normal (k=1)	1.0000	0.6400	2.822	2.822	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.930	4.930	normal (k=1)	1.0000	0.6000	2.958	2.958	5
	Combined standard uncertainty			t-distribution			9.93	9.93	>300
	Expanded uncertainty			k = 1.96			19.47	19.47	>300

### 8.6. Specific Absorption Rate-Wi-Fi 2450 Head Configuration 1g

Type	Source of uncertainty	+ Value	- Value	Probability Distribution	Divisor	C <sub>i</sub> (10g)	Standard Uncertainty		U <sub>i</sub> or U <sub>eff</sub>
							+ u (%)	- u (%)	
B	Probe calibration	6.000	6.000	normal (k=1)	1.0000	1.0000	6.000	6.000	∞
B	Axial Isotropy	0.250	0.250	normal (k=1)	1.0000	1.0000	0.250	0.250	∞
B	Hemispherical Isotropy	1.300	1.300	normal (k=1)	1.0000	1.0000	1.300	1.300	∞
B	Spatial Resolution	0.500	0.500	Rectangular	1.7321	1.0000	0.289	0.289	∞
B	Boundary Effect	0.769	0.769	Rectangular	1.7321	1.0000	0.444	0.444	∞
B	Linearity	0.600	0.600	Rectangular	1.7321	1.0000	0.346	0.346	∞
B	Detection Limits	0.200	0.200	Rectangular	1.7321	1.0000	0.115	0.115	∞
B	Readout Electronics	0.160	0.160	normal (k=1)	1.0000	1.0000	0.160	0.160	∞
B	Response Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	Integration Time	0.000	0.000	Rectangular	1.7321	1.0000	0.000	0.000	∞
B	RF Ambient conditions	3.000	3.000	Rectangular	1.7321	1.0000	1.732	1.732	∞
B	Probe Positioner Mechanical Restrictions	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Probe Positioning with regard to Phantom Shell	2.850	2.850	Rectangular	1.7321	1.0000	1.645	1.645	∞
B	Extrapolation and integration / Maximum SAR evaluation	5.080	5.080	Rectangular	1.7321	1.0000	2.933	2.933	∞
A	Test Sample Positioning	2.570	2.570	normal (k=1)	1.0000	1.0000	2.570	2.570	10
A	Device Holder uncertainty	0.154	0.154	normal (k=1)	1.0000	1.0000	0.154	0.154	10
B	Phantom Uncertainty	4.000	4.000	Rectangular	1.7321	1.0000	2.309	2.309	∞
B	Drift of output power	5.000	5.000	Rectangular	1.7321	1.0000	2.887	2.887	∞
B	Liquid Conductivity (target value)	5.000	5.000	Rectangular	1.7321	0.6400	1.848	1.848	∞
A	Liquid Conductivity (measured value)	4.900	4.900	normal (k=1)	1.0000	0.6400	3.136	3.136	5
B	Liquid Permittivity (target value)	5.000	5.000	Rectangular	1.7321	0.6000	1.732	1.732	∞
A	Liquid Permittivity (measured value)	4.920	4.920	normal (k=1)	1.0000	0.6000	2.952	2.952	5
	Combined standard uncertainty			t-distribution			10.15	10.15	>250
	Expanded uncertainty			k = 1.96			19.90	19.90	>250

## Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A034	Narda 20W Termination	Narda	374BNM	8706	Calibrated as part of system	-
A1097	SMA Directional Coupler	MiDISCO	MDC6223-30	None	Calibrated as part of system	-
A1137	3dB Attenuator	Narda	779	04690	Calibrated as part of system	-
A1174	Dielectric Probe Kit	Agilent Technologies	85070C	Us99360072	Calibrated before use	-
A1328	Handset Positioner	Schmid & Partner Engineering AG	Modification	SD 000 H01 DA	-	-
A1182	Handset Positioner	Schmid & Partner Engineering AG	V3.0	None	-	-
A1184	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	394	26 Jan 2012	12
A2110	Data Acquisition Electronics	Schmid & Partner Engineering AG	DAE3	431	04 May 2011	12
A1235	900 MHz Dipole Kit	Schmid & Partner Engineering AG	D900V2	124	09 Feb 2011	24
A1237	1900 MHz Dipole Kit	Schmid & Partner Engineering AG	D1900V2	540	08 Feb 2011	24
A1322	2450 MHz Dipole Kit	Schmid & Partner Engineering AG	D2450V2	725	08 Feb 2011	24
A1238	SAM Phantom	Schmid & Partner Engineering AG	SAM b	001	Calibrated before use	-
A2077	Probe	Schmid & Partner Engineering AG	ET3 DV4	3814	22 Sep 2011	12
A1185	Probe	Schmid & Partner Engineering AG	ET3 DV6	1528	18 Jul 2011	12
A1497	Amplifier	Mini-Circuits	zhl-42w (sma)	e020105	Calibrated as part of system	-
A1566	SAM Phantom	Schmid & Partner Engineering AG	SAM a	002	Calibrated before use	-
A2125	SAM Phantom	Schmid & Partner Engineering AG	SAM b (Site 57)	TP-1031	Calibrated before use	-
A2124	SAM Phantom	Schmid & Partner Engineering AG	SAM a (Site 57)	TP-1030	Calibrated before use	-

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Last Calibrated	Cal. Interval (Months)
A1990	Digital Camera	Samsung	E515	A23WC90 8A05431K	-	-
A215	20 dB Attenuator	Narda	766-20	9402	Calibrated as part of system	-
A1531	Antenna	AARONIA AG	7025	02458	-	-
C1145	Cable	Rosenberger MICRO-COAX	FA147A F003003030	41843-1	Calibrated as part of system	-
C1146	Cable	Rosenberger MICRO-COAX	FA147A F030003030	41752-1	Calibrated as part of system	-
G0528	Robot Power Supply	Schmid & Partner Engineering AG	DASY4	None	Calibrated before use	-
GO591	Robot Power Supply	Schmid & Partner Engineering AG	DASY4	None	Calibrated before use	-
G087	PSU	Thurlby Thandar	CPX200	100701	Calibrated before use	-
M1047	Robot Arm	Staubli	RX908 L	F00/SD8 9A1/A/01	Calibrated before use	-
M1653	Robot Arm	Staubli	RX908 L	F01/5J8 6A1/C/01	Calibrated before use	-
M1159	Signal Generator	Agilent Technologies	E8241A	US42110332	Internal Checked 14 Apr 2012	4
M1071	Spectrum Analyzer	Agilent	HP8590E	3647U00514	(Monitoring use only)	-
M1044	Diode Power Sensor	Rohde & Schwarz	NRV-Z1	893350/019	26 May 2011	12
M265	Diode Power Sensor	Rohde & Schwarz	NRV-Z1	893350/017	26 May 2011	12
M263	Dual Channel Power Meter	Rohde & Schwarz	NRVD	826558/004	25 May 2011	12
M509	Thermometer	Testo 110 Immersion Probe & Thermometer	Testo 110	03100047	25 May 2011	12
M1270	Digital Thermometer	RS	N/A	N/A	Internal Checked 13 May 2011	12
S256	SAR Lab	RFI	Site 56	N/A	Calibrated before use	-

**A.1.1. Calibration Certificates**

This section contains the calibration certificates and data for the Probe(s) and Dipole(s) used, which are not included in the total number of pages for this report.

The following information is justification to why the listed dipoles calibration period has been extended. This address FCC KDB 450824 D02

Cal Date	Dipole Calibration History									
	Dipole SN: 124, Frequency 900 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)
09-Feb-11	11.00	7.01	-21.60	48.90	-8.20	11.10	7.14	-20.20	46.10	-8.60
23-Aug-07	10.20	6.56	-21.20	48.60	-8.50	10.50	6.89	-20.20	45.40	-8.10
31-Aug-05	10.60	6.78	-24.70	49.10	-5.70	10.50	6.77	-18.90	44.90	-8.90
13-May-03	10.60	6.76	-24.00	50.30	-6.40	11.00	7.12	-20.60	46.20	-8.20
03-Aug-01	11.28	7.16	-25.40	50.80	-5.60	Dipole calibrated for Head only				
Standard Deviation	0.42	0.23	1.88	0.96	1.38	0.32	0.18	0.74	0.61	0.37
Mean Value	10.74	6.85	23.38			10.78	6.98	19.98		
Relative standard deviation %	3.87%	3.41%	8.04%			2.97%	2.58%	3.71%		

Cal Date	Dipole Calibration History									
	Dipole SN: 540, Frequency 1900 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real (Ω)	Imaginary (Ω)
08-Feb-11	40.30	21.00	-27.60	50.50	4.20	40.70	21.60	-23.10	45.60	5.00
26-Jun-09	40.30	21.10	-30.00	48.50	2.70	40.90	21.50	-24.30	44.90	2.80
11-Jun-07	36.10	19.30	-25.40	51.90	5.10	38.00	20.70	-25.30	47.70	4.80
14-Jun-05	38.1	19.90	-25.40	51.90	5.20	39.10	20.70	-24.00	48.10	5.90
04-Jun-03	41.20	21.20	-28.50	50.30	3.80	Dipole calibrated for Head only				
Standard Deviation	2.08	0.85	2.00	1.40	1.03	1.38	0.49	0.91	1.56	1.31
Mean Value	39.20	20.50	27.38			39.68	21.13	24.18		
Relative standard deviation %	5.30%	4.15%	7.31%			3.47%	2.33%	3.75%		

Cal Date	Dipole Calibration History									
	Dipole SN: 725, Frequency 2450 MHz									
	Head Parameters					Body Parameters				
	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real ( $\Omega$ )	Imaginary ( $\Omega$ )	1g (W/Kg)	10g (W/Kg)	Return loss (dB)	Real ( $\Omega$ )	Imaginary ( $\Omega$ )
08-Feb-11	52.90	24.70	-20.50	45.60	7.90	51.90	24.10	-20.20	49.50	9.70
08-Jan-09	52.10	24.30	-23.70	54.40	5.30	52.20	24.70	-23.40	49.00	6.70
17-Jan-07	53.30	24.80	-22.10	52.40	7.70	53.30	24.50	-21.80	47.80	7.70
04-Jan-05	54.5	24.70	-22.30	53.50	7.20	52.90	24.50	-22.20	48.50	7.50
17-Jan-03	54.70	24.50	-22.60	53.00	7.00	52.10	24.10	-21.70	49.00	8.10
<b>Standard Deviation</b>	<b>1.10</b>	<b>0.20</b>	<b>1.15</b>	<b>3.53</b>	<b>1.03</b>	<b>0.59</b>	<b>0.27</b>	<b>1.15</b>	<b>0.64</b>	<b>1.11</b>
<b> Mean Value </b>	<b>53.50</b>	<b>24.60</b>	<b>22.24</b>			<b>52.48</b>	<b>24.38</b>	<b>21.86</b>		
<b>Relative standard deviation %</b>	<b>2.05%</b>	<b>0.81%</b>	<b>5.18%</b>			<b>1.13%</b>	<b>1.10%</b>	<b>5.25%</b>		

Note:

1. SAR lab has more than one dipole, the 900 MHz calibration gap is 24 months from 2007 and a second dipole was use after this period.
2. The dipole history shows that the measured SAR relative standard deviation was all less than 10% for the calibration period. The return loss relative standard deviation was all less than 10%. And the real and imaginary impedance standard deviation is within 5 ( $\Omega$ ).

### **A.1.2. Calibration Certificates**

This section contains the calibration certificates and data for the Probe(s) and Dipole(s) used, which are not included in the total number of pages for this report.

ASSET #1235 Checked by *KA*  
21/02/2011

**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RFI**

Certificate No: **D900V2-124\_Feb11**

## CALIBRATION CERTIFICATE

Object **D900V2 - SN: 124**

Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits**

Calibration date: **February 09, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

	<b>Name</b>	<b>Function</b>	<b>Signature</b>
Calibrated by:	Dimce Iliev	Laboratory Technician	<i>D. Iliev</i>
Approved by:	Katja Pokovic	Technical Manager	<i>K. Pokovic</i>

Issued: February 9, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- d) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.

## Measurement Conditions

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY5	V52.6
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V4.9	
<b>Distance Dipole Center - TSL</b>	15 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	900 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.2 °C	41.5	0.97 mho/m
<b>Measured Head TSL parameters</b>	(22.0 $\pm$ 0.2) °C	40.3 $\pm$ 6 %	0.95 mho/m $\pm$ 6 %
<b>Head TSL temperature during test</b>	(21.5 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	Condition	
SAR measured	250 mW input power	2.72 mW / g
SAR normalized	normalized to 1W	10.9 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>11.0 mW /g <math>\pm</math> 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	1.74 mW / g
SAR normalized	normalized to 1W	6.96 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>7.01 mW /g <math>\pm</math> 16.5 % (k=2)</b>

## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.0	1.05 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.6 ± 6 %	1.05 mho/m ± 6 %
Body TSL temperature during test	(21.8 ± 0.2) °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.79 mW / g
SAR normalized	normalized to 1W	11.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>11.1 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.79 mW / g
SAR normalized	normalized to 1W	7.16 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>7.14 mW / g ± 16.5 % (k=2)</b>

## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	48.9 $\Omega$ - 8.2 j $\Omega$
Return Loss	- 21.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.1 $\Omega$ - 8.6 j $\Omega$
Return Loss	- 20.2 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.409 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	July 04, 2001

## DASY5 Validation Report for Head TSL

Date/Time: 09.02.2011 11:44:15

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:124**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used:  $f = 900$  MHz;  $\sigma = 0.95$  mho/m;  $\epsilon_r = 40.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.88, 5.88, 5.88); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.560 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 4.135 W/kg

**SAR(1 g) = 2.72 mW/g; SAR(10 g) = 1.74 mW/g**


Maximum value of SAR (measured) = 3.183 mW/g

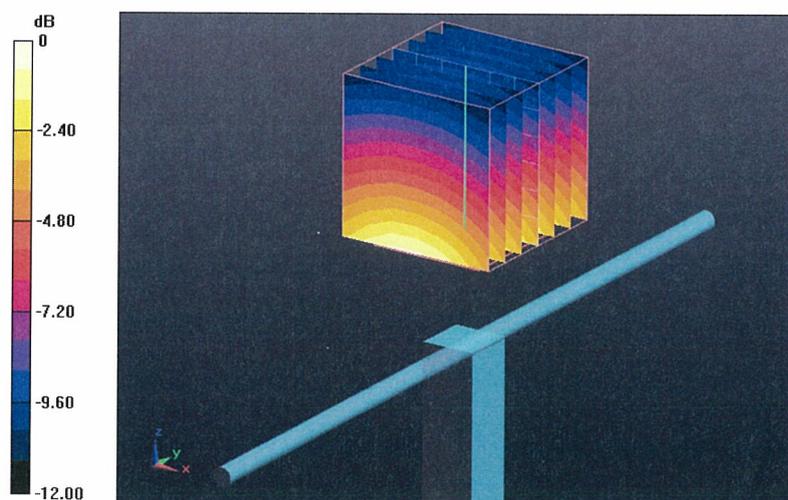

# Impedance Measurement Plot for Head TSL


9 Feb 2011 10:21:37  
 [CH1] S11 1 U FS 2: 48.854  $\Omega$  -8.1758  $\Omega$  21.630 pF 900.000 000 MHz

\*  
 Del  
 Cor  
 Avg  
 16  
 ↑

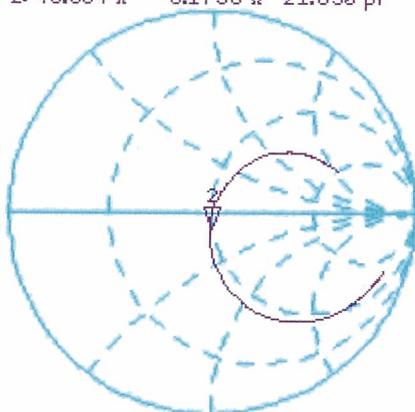

CH2 S11 LOG 5 dB/REF -20 dB 2: -21.595 dB 900.000 000 MHz

Cor  
 Avg  
 16  
 ↑

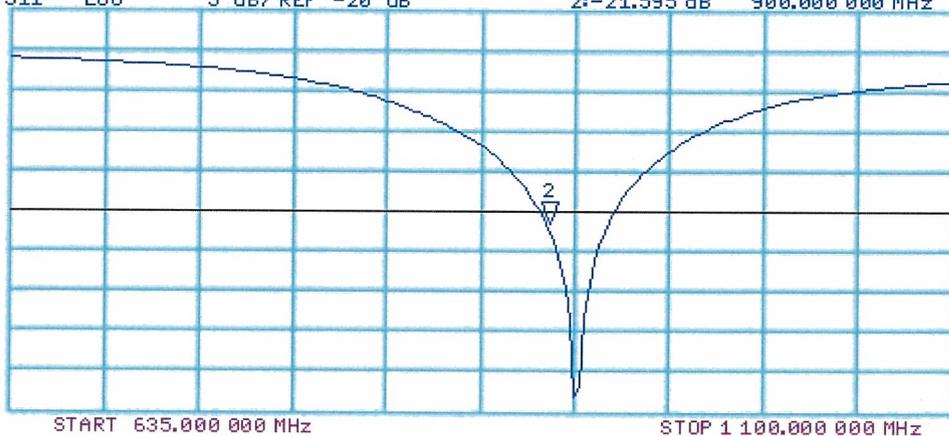

# DASY5 Validation Report for Body TSL

Date/Time: 09.02.2011 14:54:48

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 900 MHz; Type: D900V2; Serial: D900V2 - SN:124**

Communication System: CW; Frequency: 900 MHz; Duty Cycle: 1:1

Medium: M900

Medium parameters used:  $f = 900 \text{ MHz}$ ;  $\sigma = 1.05 \text{ mho/m}$ ;  $\epsilon_r = 53.6$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.81, 5.81, 5.81); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)



**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.520 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 4.203 W/kg

**SAR(1 g) = 2.79 mW/g; SAR(10 g) = 1.79 mW/g**

Maximum value of SAR (measured) = 3.271 mW/g

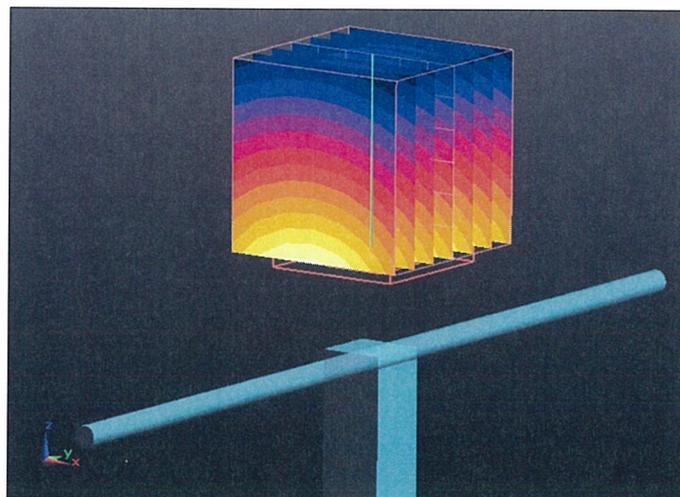


0 dB = 3.270mW/g

# Impedance Measurement Plot for Body TSL

9 Feb 2011 14:24:47  
[CH1] S11 1 U FS 2: 46.072  $\Omega$  -8.6230  $\Omega$  20.500 pF 900.000 000 MHz

\*  
Del  
Cor

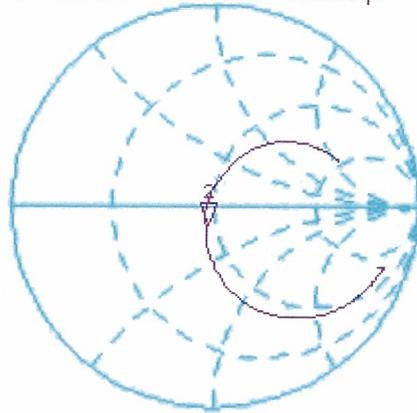

Avg  
16  
↑

CH2 S11 LOG 5 dB/REF -20 dB 2: -20.156 dB 900.000 000 MHz

Cor

Avg  
16  
↑

